Salesforce Field Reference Guide

Salesforce, Spring '23

@salesforcedocs

Last updated: February 3, 2023

© Copyright 2000–2023 Salesforce, Inc. All rights reserved. Salesforce is a registered trademark of Salesforce, Inc., as are other names and marks. Other marks appearing herein may be trademarks of their respective owners.

CONTENTS

Fields Reference Introduction 1
AIApplication 3
AIApplicationConfig 4
AIFeatureExtractor 5
AIInsightAction 6
AIInsightFeedback 7
AIInsightReason 8
AIInsightValue 9
AIPredictionEvent 10
AIRecordInsight 11
AIScoringStatusEvent 12
AISentimentResult 13
AISentimentResultShare 15
AIUsecaseDefinition 16
AIUsecaseFieldMapping 18
AIUsecaseModel 19
AcceptedEventRelation 20
Account 21
AccountAccountRelation 23
AccountAccountRelationFeed 24
AccountAccountRelationHistory 25
AccountAccountRelationShare 26
AccountBrand 27
AccountBrandShare 29
AccountCleanInfo 30

AccountContactRelation 35
AccountContactRole 36
AccountFeed 37
AccountForecast 38
AccountForecastAdjustment 39
AccountForecastFeed 40
AccountForecastHistory 41
AccountForecastPeriodMetric 42
AccountForecastShare 43
AccountHistory 44
AccountPartner 45
AccountProductForecast 46
AccountProductPeriodForecast 48
AccountRelationship 50
AccountRelationshipFeed 51
AccountRelationshipHistory 52
AccountRelationshipShare 53
AccountRelationshipShareRule 54
AccountShare 55
Accreditation 56
AccreditationFeed 58
AccreditationHistory 59
AccreditationShare 60
ActionLinkGroupTemplate 61
ActionLinkTemplate 62
ActionPlan 63
ActionPlanFeed 64
ActionPlanItem 65

ActionPlanShare 66
ActionPlanTemplate 67
ActionPlanTemplateItem 68
ActionPlanTemplateItemValue 69
ActionPlanTemplateShare 70
ActionPlanTemplateVersion 71
ActionVisibility 72
ActionVisibilityFeed 73
ActionVisibilityHistory 74
ActionVisibilityShare 75
ActiveFeatureLicenseMetric 76
ActivePermSetLicenseMetric 77
ActiveProfileMetric 78
ActivityHistory 79
ActivityTiming 81
ActivityTimingFeed 83
ActivityTimingHistory 84
ActivityTimingShare 85
AdditionalNumber 86
Address 87
AdvAccountForecastFact 89
AdvAccountForecastFactFeed 91
AdvAccountForecastFactHistory 92
AdvAccountForecastFactShare 93
AdvAccountForecastPeriod 94
AdvAccountForecastSet 95
AdvAcctForecastAdjPeriod 97
AdvAcctForecastDimSource 98

AdvAcctForecastDimension 99
AdvAcctForecastFactAdj 100
AdvAcctForecastFactAdjShare 101
AdvAcctForecastMeasureDef 102
AdvAcctForecastPeriodGroup 103
AdvAcctForecastSetPartner 104
AdvAcctForecastSetPartnerFeed 105
AdvAcctForecastSetPartnerHistory 106
AdvAcctForecastSetPartnerShare 107
AdvAcctForecastSetUse 108
AdvAcctForecastSetUseFeed 109
AdvAcctForecastSetUseHistory 110
AdvAcctForecastSetUseShare 111
AdvAcctFrcstDisplayGroup 112
AdvAcctFrcstDplyGroupItem 113
AgentWork 114
AgentWorkShare 116
AgentWorkSkill 117
AirTravelEmssnFctr 118
AirTravelEmssnFctrFeed 120
AirTravelEmssnFctrHistory 121
AirTravelEmssnFctrShare 122
AirTravelEnrgyUse 123
AirTravelEnrgyUseFeed 125
AirTravelEnrgyUseHistory 126
AirTravelEnrgyUseShare 127
AllergyIntolerance 128
AllergyIntoleranceFeed 130

AllergyIntoleranceHistory 131
AllergyIntoleranceShare 132
AlternativePaymentMethod 133
AlternativePaymentMethodShare 135
AnalyticsLicensedAsset 136
Announcement 137
AnnualEmssnInventory 138
AnnualEmssnInventoryFeed 146
AnnualEmssnInventoryHistory 147
AnnualEmssnInventoryShare 148
AnnualEmssnRdctnTarget 149
AnnualEmssnRdctnTargetFeed 151
AnnualEmssnRdctnTargetHistory 152
ApexClass 153
ApexComponent 154
ApexLog 155
ApexPage 156
ApexPageInfo 157
ApexTestQueueItem 158
ApexTestResult 159
ApexTestResultLimits 160
ApexTestRunResult 162
ApexTestSuite 164
ApexTrigger 165
ApexTypeImplementor 166
ApiAnomalyEvent 167
ApiAnomalyEventStore 168
ApiAnomalyEventStoreFeed 170

ApiEvent . . . 171
ApiEventStream . . . 173
AppAnalyticsQueryRequest . . . 175
AppDefinition . . . 177
AppExtension . . . 178
AppMenuItem . . . 179
AppTabMember . . . 181
ApplicationCase . . . 182
ApplicationCaseFeed . . . 183
ApplicationCaseHistory . . . 184
AppointmentAssignmentPolicy . . . 185
AppointmentInvitation . . . 186
AppointmentInvitationFeed . . . 187
AppointmentInvitationHistory . . . 188
AppointmentInvitationShare . . . 189
AppointmentInvitee . . . 190
AppointmentScheduleAggr . . . 191
AppointmentScheduleLog . . . 192
AppointmentSchedulingPolicy . . . 193
AppointmentTopicTimeSlot . . . 195
AppointmentTopicTimeSlotFeed . . . 196
AppointmentTopicTimeSlotHistory . . . 197
ApptBookingConfig . . . 198
ApptBookingUrlConfig . . . 199
ApptBundleAggrDurDnscale . . . 200
ApptBundleAggrDurDnscaleFeed . . . 201
ApptBundleAggrPolicy . . . 202
ApptBundleAggrPolicyFeed . . . 203

ApptBundleConfig 204
ApptBundleConfigFeed 205
ApptBundleConfigHistory 206
ApptBundleConfigShare 207
ApptBundlePolicy 208
ApptBundlePolicyFeed 209
ApptBundlePolicyShare 210
ApptBundlePolicySvcTerr 211
ApptBundlePolicySvcTerrFeed 212
ApptBundlePropagatePolicy 213
ApptBundlePropagatePolicyFeed 214
ApptBundleRestrictPolicy 215
ApptBundleRestrictPolicyFeed 216
ApptBundleSortPolicy 217
ApptBundleSortPolicyFeed 218
Assessment 219
AssessmentFeed 220
AssessmentHistory 221
AssessmentIndDefinedValue 222
AssessmentIndDefinedValueHistory 223
AssessmentIndValue 224
AssessmentIndValueHistory 225
AssessmentIndValueShare 226
AssessmentIndicatorDefinition 227
AssessmentIndicatorDefinitionFeed 228
AssessmentIndicatorDefinitionHistory 229
AssessmentIndicatorDefinitionShare 230
AssessmentQuestion 231

AssessmentQuestionAssignment 232
AssessmentQuestionAssignmentFeed 233
AssessmentQuestionAssignmentHistory 234
AssessmentQuestionAssignmentShare 235
AssessmentQuestionFeed 236
AssessmentQuestionHistory 237
AssessmentQuestionResponse 238
AssessmentQuestionResponseFeed 240
AssessmentQuestionResponseHistory 241
AssessmentQuestionResponseShare 242
AssessmentQuestionSet 243
AssessmentQuestionSetFeed 244
AssessmentQuestionSetHistory 245
AssessmentQuestionSetShare 246
AssessmentQuestionShare 247
AssessmentQuestionVersion 248
AssessmentQuestionVersionFeed 249
AssessmentQuestionVersionHistory 250
AssessmentShare 251
AssessmentTask 252
AssessmentTaskContentDocument 253
AssessmentTaskContentDocumentFeed 254
AssessmentTaskContentDocumentHistory 255
AssessmentTaskDefinition 256
AssessmentTaskDefinitionFeed 257
AssessmentTaskDefinitionHistory 258
AssessmentTaskDefinitionShare 259
AssessmentTaskFeed 260

AssessmentTaskHistory 261
AssessmentTaskIndDefinition 262
AssessmentTaskIndDefinitionFeed 263
AssessmentTaskIndDefinitionHistory 264
AssessmentTaskOrder 265
AssessmentTaskOrderFeed 266
AssessmentTaskOrderHistory 267
AssessmentTaskShare 268
Asset 269
AssetAction 271
AssetActionSource 273
AssetDowntimePeriod 274
AssetDowntimePeriodFeed 275
AssetDowntimePeriodHistory 276
AssetFeed 277
AssetHistory 278
AssetRelationship 279
AssetRelationshipFeed 280
AssetRelationshipHistory 281
AssetShare 282
AssetStatePeriod 283
AssetTokenEvent 284
AssetWarranty 285
AssetWarrantyFeed 287
AssetWarrantyHistory 288
AssignedResource 289
AssignedResourceFeed 290
AssignmentRule 291

AssociatedLocation 292
AssociatedLocationHistory 293
AsyncApexJob 294
AsyncOperationLog 295
AttachedContentDocument 296
AttachedContentNote 297
Attachment 298
Audience 299
AuraDefinition 300
AuraDefinitionBundle 301
AuraDefinitionBundleInfo 302
AuraDefinitionInfo 303
AuthApplicationAsset 304
AuthApplicationAssetFeed 305
AuthApplicationAssetHistory 306
AuthApplicationAssetShare 307
AuthApplicationPlace 308
AuthApplicationPlaceFeed 309
AuthApplicationPlaceHistory 310
AuthApplicationPlaceShare 311
AuthConfig 312
AuthConfigProviders 313
AuthFormRequestRecord 314
AuthFormRequestRecordFeed 315
AuthFormRequestRecordHistory 316
AuthLocationAccessSchedule 317
AuthLocationAccessScheduleFeed 318
AuthLocationAccessScheduleHistory 319

AuthLocationAccessScheduleShare 320
AuthProvider 321
AuthSession 323
AuthorNote 324
AuthorNoteFeed 325
AuthorNoteHistory 326
AuthorNoteShare 327
AuthorizationForm 328
AuthorizationFormConsent 329
AuthorizationFormConsentHistory 330
AuthorizationFormConsentShare 331
AuthorizationFormDataUse 332
AuthorizationFormDataUseHistory 333
AuthorizationFormDataUseShare 334
AuthorizationFormHistory 335
AuthorizationFormShare 336
AuthorizationFormText 337
AuthorizationFormTextFeed 338
AuthorizationFormTextHistory 339
AuthorizedInsuranceLine 340
AuthorizedInsuranceLineFeed 341
AuthorizedInsuranceLineHistory 342
AuthorizedInsuranceLineShare 343
Award 344
AwardFeed 345
AwardHistory 346
AwardShare 347
BackgroundOperation 348

Banker . . . 350
BankerFeed . . . 351
BankerHistory . . . 352
BankerShare . . . 353
BatchApexErrorEvent . . . 354
BatchCalcJobDefinitionView . . . 355
BatchJob . . . 356
BatchJobFeed . . . 357
BatchJobHistory . . . 358
BatchJobPart . . . 359
BatchJobPartFailedRecord . . . 360
BatchJobPartFailedRecordFeed . . . 361
BatchJobPartFailedRecordHistory . . . 362
BatchJobPartFeed . . . 363
BatchJobPartHistory . . . 364
BatchJobShare . . . 365
BatchJobStatusChangedEvent . . . 366
BatchProcessJobDefView . . . 367
Benefit . . . 368
BenefitAction . . . 369
BenefitActionParameter . . . 370
BenefitActionParameterValue . . . 371
BenefitParameterValue . . . 372
BenefitType . . . 373
BenefitTypeShare . . . 374
BldgEnrgyIntensity . . . 375
BldgEnrgyIntensityFeed . . . 377
BldgEnrgyIntensityHistory . . . 378

BldgEnrgyIntensityShare 379
BldgEnrgyIntensityVal 380
BldgEnrgyIntensityValFeed 381
BldgEnrgyIntensityValHistory 382
BldgSizeCategory 383
BldgSizeCategoryFeed 384
BldgSizeCategoryHistory 385
BldgSizeCategoryShare 386
BoardCertification 387
BoardCertificationFeed 389
BoardCertificationHistory 390
BoardCertificationShare 391
BranchUnit 392
BranchUnitBusinessMember 393
BranchUnitBusinessMemberFeed 394
BranchUnitBusinessMemberHistory 395
BranchUnitCustomer 396
BranchUnitCustomerFeed 397
BranchUnitCustomerHistory 398
BranchUnitFeed 399
BranchUnitHistory 400
BranchUnitRelatedRecord 401
BranchUnitShare 402
BrandTemplate 403
BriefcaseAssignment 404
BriefcaseDefinition 405
BriefcaseRule 406
BriefcaseRuleFilter 407

BulkApiResultEvent 408
BulkApiResultEventStore 409
BundledCareFeeAgreement 410
BundledCareFeeAgreementFeed 411
BundledCareFeeAgreementHistory 412
BusRegAuthTypeDependency 413
BusRegAuthTypeDependencyFeed 414
BusRegAuthTypeDependencyHistory 415
BusRegAuthTypeDependencyShare 416
BusRegAuthorizationType 417
BusRegAuthorizationTypeFeed 418
BusRegAuthorizationTypeHistory 419
BusinessBrand 420
BusinessBrandShare 421
BusinessHours 422
BusinessLicense 424
BusinessLicenseApplication 426
BusinessLicenseApplicationFeed 428
BusinessLicenseApplicationHistory 429
BusinessLicenseApplicationShare 430
BusinessLicenseFeed 431
BusinessLicenseHistory 432
BusinessLicenseShare 433
BusinessMilestone 434
BusinessMilestoneFeed 435
BusinessMilestoneHistory 436
BusinessMilestoneShare 437
BusinessProcess 438

BusinessProcessDefinition 439
BusinessProcessFeedback 440
BusinessProcessGroup 441
BusinessProfile 442
BusinessProfileFeed 443
BusinessProfileHistory 444
BusinessType 445
BusinessTypeFeed 446
BusinessTypeHistory 447
BusinessTypeShare 448
BuyerAccount 449
BuyerAccountFeed 450
BuyerAccountHistory 451
BuyerAccountShare 452
BuyerGroupPricebook 453
BuyerGroupPricebookFeed 454
CalcProcStepRelationship 455
CalcProcStepRelationshipFeed 456
CalcProcStepRelationshipHistory 457
CalculationMatrix 458
CalculationMatrixColumn 459
CalculationMatrixColumnFeed 460
CalculationMatrixColumnHistory 461
CalculationMatrixFeed 462
CalculationMatrixHistory 463
CalculationMatrixRow 464
CalculationMatrixRowFeed 465
CalculationMatrixRowHistory 466

CalculationMatrixShare 467
CalculationMatrixVersion 468
CalculationMatrixVersionFeed 470
CalculationMatrixVersionHistory 471
CalculationProcedure 472
CalculationProcedureFeed 473
CalculationProcedureHistory 474
CalculationProcedureShare 475
CalculationProcedureStep 476
CalculationProcedureStepFeed 478
CalculationProcedureStepHistory 479
CalculationProcedureVariable 480
CalculationProcedureVariableFeed 481
CalculationProcedureVariableHistory 482
CalculationProcedureVersion 483
CalculationProcedureVersionFeed 484
CalculationProcedureVersionHistory 485
Calendar 486
CalendarView 487
CalendarViewShare 488
CallCenter 489
CallCoachingMediaProvider 490
Campaign 491
CampaignFeed 493
CampaignHistory 494
CampaignInfluenceModel 495
CampaignMember 496
CampaignMemberStatus 498

CampaignShare 499
CapitationCareFeeAgreement 500
CapitationCareFeeAgreementFeed 501
CapitationCareFeeAgreementHistory 502
CardPaymentMethod 503
CareBarrier 506
CareBarrierDeterminant 507
CareBarrierDeterminantFeed 508
CareBarrierDeterminantHistory 509
CareBarrierDeterminantShare 510
CareBarrierFeed 511
CareBarrierHistory 512
CareBarrierShare 513
CareBarrierType 514
CareBarrierTypeFeed 515
CareBarrierTypeHistory 516
CareBarrierTypeShare 517
CareBenefitVerifyRequest 518
CareBenefitVerifyRequestFeed 519
CareBenefitVerifyRequestHistory 520
CareBenefitVerifySettings 521
CareDeterminant 522
CareDeterminantFeed 523
CareDeterminantHistory 524
CareDeterminantShare 525
CareDeterminantType 526
CareDeterminantTypeFeed 527
CareDeterminantTypeHistory 528

CareDeterminantTypeShare 529
CareDiagnosis 530
CareDiagnosisFeed 532
CareDiagnosisHistory 533
CareFeeScheduleItem 534
CareFeeScheduleItemFeed 535
CareFeeScheduleItemHistory 536
CareInterventionType 537
CareInterventionTypeFeed 538
CareInterventionTypeHistory 539
CareInterventionTypeShare 540
CareLimitType 541
CareMetricTarget 542
CareMetricTargetFeed 543
CareMetricTargetHistory 544
CareMetricTargetShare 545
CareObservation 546
CareObservationComponent 549
CareObservationComponentFeed 551
CareObservationComponentHistory 552
CareObservationFeed 553
CareObservationHistory 554
CareObservationShare 555
CarePerformer 556
CarePerformerFeed 557
CarePerformerHistory 558
CarePgmProvHealthcareProvider 559
CarePgmProvHealthcareProviderFeed 560

CarePgmProvHealthcareProviderHistory 561
CarePreauth 562
CarePreauthFeed 563
CarePreauthHistory 564
CarePreauthItem 565
CarePreauthItemFeed 566
CarePreauthItemHistory 567
CarePreauthItemShare 568
CarePreauthShare 569
CareProgram 570
CareProgramCampaign 571
CareProgramCampaignFeed 572
CareProgramCampaignHistory 573
CareProgramEligibilityRule 574
CareProgramEligibilityRuleFeed 575
CareProgramEligibilityRuleHistory 576
CareProgramEligibilityRuleShare 577
CareProgramEnrollee 578
CareProgramEnrolleeFeed 579
CareProgramEnrolleeHistory 580
CareProgramEnrolleeProduct 581
CareProgramEnrolleeProductFeed 582
CareProgramEnrolleeProductHistory 583
CareProgramEnrolleeProductShare 584
CareProgramEnrollmentCard 585
CareProgramEnrollmentCardFeed 586
CareProgramEnrollmentCardHistory 587
CareProgramEnrollmentCardShare 588

CareProgramFeed 589
CareProgramGoal 590
CareProgramGoalFeed 591
CareProgramGoalHistory 592
CareProgramGoalShare 593
CareProgramHistory 594
CareProgramProduct 595
CareProgramProductFeed 596
CareProgramProductHistory 597
CareProgramProductShare 598
CareProgramProvider 599
CareProgramProviderFeed 600
CareProgramProviderHistory 601
CareProgramProviderShare 602
CareProgramShare 603
CareProgramTeamMember 604
CareProgramTeamMemberFeed 605
CareProgramTeamMemberHistory 606
CareProviderAdverseAction 607
CareProviderAdverseActionFeed 609
CareProviderAdverseActionHistory 610
CareProviderAdverseActionShare 611
CareProviderFacilitySpecialty 612
CareProviderFacilitySpecialtyFeed 613
CareProviderFacilitySpecialtyHistory 614
CareProviderFacilitySpecialtyShare 615
CareProviderSearchConfig 616
CareProviderSearchableField 617

CareProviderSearchableFieldFeed 619
CareProviderSearchableFieldHistory 620
CareProviderSearchableFieldShare 621
CareRegisteredDevice 622
CareRegisteredDeviceFeed 624
CareRegisteredDeviceHistory 625
CareRequest 626
CareRequestConfiguration 631
CareRequestDrug 632
CareRequestDrugFeed 635
CareRequestDrugHistory 636
CareRequestExtension 637
CareRequestExtensionFeed 639
CareRequestExtensionHistory 640
CareRequestFeed 641
CareRequestHistory 642
CareRequestItem 643
CareRequestItemFeed 646
CareRequestItemHistory 647
CareRequestReviewer 648
CareRequestReviewerFeed 649
CareRequestReviewerHistory 650
CareSpecialty 651
CareSpecialtyFeed 652
CareSpecialtyHistory 653
CareSpecialtyShare 654
CareSpecialtyTaxonomy 655
CareSpecialtyTaxonomyFeed 656

CareSpecialtyTaxonomyHistory 657
CareSystemFieldMapping 658
CareTaxonomy 659
CareTaxonomyFeed 660
CareTaxonomyHistory 661
CareTaxonomyShare 662
CartCheckoutSession 663
CartDeliveryGroup 664
CartItem 666
CartItemPriceAdjustment 668
CartTax 670
CartValidationOutput 671
Case 672
CaseArticle 674
CaseComment 675
CaseContactRole 676
CaseFeed 677
CaseGatewayRequest 678
CaseHistory 679
CaseMilestone 680
CaseRelatedIssue 682
CaseRelatedIssueFeed 683
CaseRelatedIssueHistory 684
CaseShare 685
CaseSolution 686
CaseStatus 687
CaseSubjectParticle 688
CaseTeamMember 689

CaseTeamRole 690
CaseTeamTemplate 691
CaseTeamTemplateMember 692
CaseTeamTemplateRecord 693
CategorizedCareFeeAgreement 694
CategorizedCareFeeAgreementFeed 695
CategorizedCareFeeAgreementHistory 696
CategoryData 697
CategoryNode 698
CategoryNodeLocalization 699
ChangeRequest 700
ChangeRequestFeed 702
ChangeRequestHistory 703
ChangeRequestRelatedIssue 704
ChangeRequestRelatedIssueFeed 705
ChangeRequestRelatedIssueHistory 706
ChangeRequestShare 707
ChannelProgram 708
ChannelProgramFeed 709
ChannelProgramHistory 710
ChannelProgramLevel 711
ChannelProgramLevelFeed 712
ChannelProgramLevelHistory 713
ChannelProgramLevelShare 714
ChannelProgramMember 715
ChannelProgramMemberFeed 716
ChannelProgramMemberHistory 717
ChannelProgramMemberShare 718

ChannelProgramShare 719
ChatterActivity 720
ChatterExtension 721
ChatterExtensionConfig 722
Claim 723
ClaimCoverage 726
ClaimCoverageFeed 727
ClaimCoverageHistory 728
ClaimCoverageShare 729
ClaimFeed 730
ClaimHistory 731
ClaimItem 732
ClaimItemFeed 734
ClaimItemHistory 735
ClaimParticipant 736
ClaimParticipantFeed 737
ClaimParticipantHistory 738
ClaimPaymentSummary 739
ClaimPaymentSummaryFeed 740
ClaimPaymentSummaryHistory 741
ClaimShare 742
ClaimTeamMember 743
ClaimTeamMemberFeed 744
ClaimTeamMemberHistory 745
ClientBrowser 746
ClinicalAlert 747
ClinicalAlertFeed 749
ClinicalAlertHistory 750

ClinicalAlertShare 751
ClinicalDetectedIssue 752
ClinicalDetectedIssueDetail 753
ClinicalDetectedIssueDetailFeed 754
ClinicalDetectedIssueDetailHistory 755
ClinicalDetectedIssueFeed 756
ClinicalDetectedIssueHistory 757
ClinicalDetectedIssueShare 758
ClinicalEncounter 759
ClinicalEncounterDiagnosis 761
ClinicalEncounterDiagnosisFeed 762
ClinicalEncounterDiagnosisHistory 763
ClinicalEncounterFacility 764
ClinicalEncounterFacilityFeed 765
ClinicalEncounterFacilityHistory 766
ClinicalEncounterFeed 767
ClinicalEncounterHistory 768
ClinicalEncounterIdentifier 769
ClinicalEncounterIdentifierFeed 770
ClinicalEncounterIdentifierHistory 771
ClinicalEncounterProvider 772
ClinicalEncounterProviderFeed 773
ClinicalEncounterProviderHistory 774
ClinicalEncounterReason 775
ClinicalEncounterReasonFeed 776
ClinicalEncounterReasonHistory 777
ClinicalEncounterShare 778
ClinicalEncounterSvcRequest 779

ClinicalEncounterSvcRequestFeed 780
ClinicalEncounterSvcRequestHistory 781
ClinicalServiceRequest 782
ClinicalServiceRequestDetail 784
ClinicalServiceRequestDetailFeed 785
ClinicalServiceRequestDetailHistory 786
ClinicalServiceRequestFeed 787
ClinicalServiceRequestHistory 788
ClinicalServiceRequestShare 789
CodeSet 790
CodeSetBundle 791
CodeSetBundleHistory 793
CodeSetBundleShare 794
CodeSetFeed 795
CodeSetHistory 796
CodeSetShare 797
CollaborationGroup 798
CollaborationGroupFeed 800
CollaborationGroupMember 801
CollaborationGroupMemberRequest 802
CollaborationGroupRecord 803
CollaborationInvitation 804
CollaborationRoom 805
ColorDefinition 806
CombinedAttachment 807
CommSubscription 808
CommSubscriptionChannelType 809
CommSubscriptionChannelTypeFeed 810

CommSubscriptionChannelTypeHistory 811
CommSubscriptionChannelTypeShare 812
CommSubscriptionConsent 813
CommSubscriptionConsentFeed 815
CommSubscriptionConsentHistory 816
CommSubscriptionConsentShare 817
CommSubscriptionFeed 818
CommSubscriptionHistory 819
CommSubscriptionShare 820
CommSubscriptionTiming 821
CommSubscriptionTimingFeed 822
CommSubscriptionTimingHistory 823
CommerceDiagnosticEvent 824
CommerceEntitlementBuyerGroup 826
CommerceEntitlementPolicy 827
CommerceEntitlementPolicyFeed 828
CommerceEntitlementPolicyHistory 829
CommerceEntitlementPolicyShare 830
CommerceEntitlementProduct 831
Community 832
ComplaintCase 833
ComplaintCaseFeed 834
ComplaintCaseHistory 835
ComplaintCaseShare 836
ConcurLongRunApexErrEvent 837
ConnectedApplication 838
Contact 839
ContactCleanInfo 842

ContactEncounter 845
ContactEncounterFeed 846
ContactEncounterHistory 847
ContactEncounterParticipant 848
ContactEncounterParticipantFeed 849
ContactEncounterParticipantHistory 850
ContactEncounterShare 851
ContactFeed 852
ContactHistory 853
ContactPointAddress 854
ContactPointAddressHistory 856
ContactPointAddressShare 857
ContactPointConsent 858
ContactPointConsentHistory 859
ContactPointConsentShare 860
ContactPointEmail 861
ContactPointEmailHistory 863
ContactPointEmailShare 864
ContactPointPhone 865
ContactPointPhoneHistory 867
ContactPointPhoneShare 868
ContactPointTypeConsent 869
ContactPointTypeConsentHistory 871
ContactPointTypeConsentShare 872
ContactRequest 873
ContactRequestShare 874
ContactShare 875
ContentAsset 876

ContentBody 877
ContentDistribution 878
ContentDistributionView 880
ContentDocument 881
ContentDocumentFeed 883
ContentDocumentHistory 884
ContentDocumentLink 885
ContentDocumentSubscription 886
ContentFolder 887
ContentFolderItem 888
ContentFolderLink 889
ContentFolderMember 890
ContentNote 891
ContentNotification 892
ContentTagSubscription 893
ContentUserSubscription 894
ContentVersion 895
ContentVersionComment 897
ContentVersionHistory 898
ContentVersionRating 899
ContentWorkspace 900
ContentWorkspaceDoc 901
ContentWorkspaceMember 902
ContentWorkspacePermission 903
ContentWorkspaceSubscription 904
ContextParamMap 905
Contract 906
ContractContactRole 908

ContractFeed 909
ContractGroupPlan 910
ContractGroupPlanFeed 912
ContractGroupPlanGroupClass 913
ContractGroupPlanGroupClassFeed 914
ContractGroupPlanGroupClassHistory 915
ContractGroupPlanGroupClassShare 916
ContractGroupPlanHistory 917
ContractHistory 918
ContractLineItem 919
ContractLineItemFeed 921
ContractLineItemHistory 922
ContractPaymentAgreement 923
ContractPaymentAgreementFeed 924
ContractPaymentAgreementHistory 925
ContractStatus 926
Conversation 927
ConversationContextEntry 928
ConversationEntry 929
ConversationParticipant 931
CorsWhitelistEntry 932
Coupon 933
CouponFeed 934
CouponHistory 935
CouponShare 936
CourseOffering 937
CourseOfferingFeed 938
CourseOfferingHistory 939

CourseOfferingShare 940
CoverageBenefit 941
CoverageBenefitFeed 944
CoverageBenefitHistory 945
CoverageBenefitItem 946
CoverageBenefitItemFeed 948
CoverageBenefitItemHistory 949
CoverageBenefitItemLimit 950
CoverageBenefitItemLimitFeed 951
CoverageBenefitItemLimitHistory 952
CoverageBenefitItemShare 953
CoverageBenefitShare 954
CrbnCreditAlloc 955
CrbnCreditAllocFeed 957
CrbnCreditAllocHistory 958
CrbnCreditAllocItem 959
CrbnCreditAllocItemFeed 960
CrbnCreditAllocItemHistory 961
CrbnCreditAllocShare 962
CrbnCreditDistribution 963
CrbnCreditDistributionFeed 964
CrbnCreditDistributionHistory 965
CrbnCreditDistributionShare 966
CrbnCreditProject 967
CrbnCreditProjectFeed 969
CrbnCreditProjectHistory 970
CrbnCreditProjectShare 971
CrbnEmssnScopeAlloc 972

CrbnEmssnScopeAllocFeed 973
CrbnEmssnScopeAllocHistory 974
CrbnEmssnScopeAllocShare 975
CrbnEmssnScopeAllocVal 976
CrbnEmssnScopeAllocValFeed 977
CrbnEmssnScopeAllocValHistory 978
CredentialStuffingEvent 979
CredentialStuffingEventStore 980
CredentialStuffingEventStoreFeed 982
CreditMemo 983
CreditMemoFeed 985
CreditMemoHistory 986
CreditMemoLine 987
CreditMemoLineFeed 989
CreditMemoLineHistory 990
CreditMemoShare 991
CronJobDetail 992
CronTrigger 993
CspTrustedSite 994
CustomBrand 995
CustomBrandAsset 996
CustomHelpMenuItem 997
CustomHelpMenuSection 998
CustomHttpHeader 999
CustomNotificationType 1000
CustomPermission 1001
CustomPermissionDependency 1002
Customer 1003

CustomerProperty 1004
CustomerPropertyFeed 1007
CustomerPropertyHistory 1008
CustomerPropertyShare 1009
CustomerShare 1010
DandBCompany 1011
Dashboard 1016
DashboardComponent 1018
DashboardComponentFeed 1019
DashboardFeed 1020
DataAssessmentFieldMetric 1021
DataAssessmentMetric 1022
DataAssessmentValueMetric 1023
DataIntegrationRecordPurchasePermission 1024
DataObjectDataChgEvent 1025
DataObjectMetadataChgEvent 1026
DataUseLegalBasis 1027
DataUseLegalBasisHistory 1028
DataUseLegalBasisShare 1029
DataUsePurpose 1030
DataUsePurposeHistory 1031
DataUsePurposeShare 1032
DatacloudCompany 1033
DatacloudContact 1035
DatacloudDandBCompany 1036
DatacloudOwnedEntity 1041
DatacloudPurchaseUsage 1042
DatasetExport 1043

DatasetExportEvent 1044
DatasetExportPart 1045
DecisionTable 1046
DecisionTableDatasetLink 1047
DecisionTableParameter 1048
DecisionTblDatasetParameter 1049
DeclinedEventRelation 1050
DelegatedAccount 1051
DelegatedAccountFeed 1052
DelegatedAccountHistory 1053
DelegatedAccountShare 1054
DeleteEvent 1055
DiagnosticSummary 1056
DiagnosticSummaryDetail 1058
DiagnosticSummaryDetailFeed 1059
DiagnosticSummaryDetailHistory 1060
DiagnosticSummaryFeed 1061
DiagnosticSummaryHistory 1062
DiagnosticSummaryShare 1063
DigitalSignature 1064
DigitalWallet 1065
DistributorAuthorization 1067
DistributorAuthorizationFeed 1068
DistributorAuthorizationHistory 1069
DistributorAuthorizationShare 1070
Document 1071
DocumentAttachmentMap 1073
DocumentChecklistItem 1074

DocumentChecklistItemFeed 1075
DocumentChecklistItemHistory 1076
DocumentChecklistItemShare 1077
DocumentEnvelope 1078
DocumentEnvelopeFeed 1079
DocumentEnvelopeHistory 1080
DocumentEnvelopeShare 1081
DocumentGenerationProcess 1082
DocumentGenerationProcessShare 1083
DocumentRecipient 1084
DocumentRecipientFeed 1086
DocumentRecipientShare 1087
DocumentTemplate 1088
DocumentTemplateFeed 1090
DocumentTemplateHistory 1091
DocumentTemplateShare 1092
DocumentType 1093
Domain 1094
DomainSite 1095
DuplicateRecordItem 1096
DuplicateRecordSet 1097
DuplicateRule 1098
ESignatureConfig 1099
ESignatureEnvelopeConfig 1100
ElectricityEmssnFctrSet 1101
ElectricityEmssnFctrSetFeed 1105
ElectricityEmssnFctrSetHistory 1106
ElectricityEmssnFctrSetShare 1107

ElectronicMediaGroup 1108
ElectronicMediaGroupHistory 1109
ElectronicMediaGroupShare 1110
ElectronicMediaUse 1111
EmailDomainFilter 1112
EmailDomainKey 1113
EmailMessage 1114
EmailMessageRelation 1116
EmailRelay 1117
EmailServicesAddress 1118
EmailServicesFunction 1119
EmailStatus 1121
EmailTemplate 1122
EmbeddedServiceDetail 1124
EmbeddedServiceLabel 1126
EmissionsActivity 1127
EmissionsActivityFeed 1128
EmissionsActivityHistory 1129
EmissionsActivityShare 1130
EmissionsForecastFact 1131
EmissionsForecastFactFeed 1134
EmissionsForecastFactHistory 1135
EmissionsForecastFactShare 1136
EmssnRdctnCommitment 1137
EmssnRdctnCommitmentFeed 1139
EmssnRdctnCommitmentHistory 1140
EmssnRdctnCommitmentShare 1141
EmssnReductionTarget 1142

EmssnReductionTargetFeed 1144
EmssnReductionTargetHistory 1145
EmssnReductionTargetShare 1146
EngagementAttendee 1147
EngagementAttendeeFeed 1148
EngagementAttendeeHistory 1149
EngagementChannelType 1150
EngagementChannelTypeFeed 1151
EngagementChannelTypeHistory 1152
EngagementChannelTypeShare 1153
EngagementChannelWorkType 1154
EngagementChannelWorkTypeFeed 1155
EngagementChannelWorkTypeHistory 1156
EngagementInteraction 1157
EngagementInteractionFeed 1159
EngagementInteractionHistory 1160
EngagementInteractionShare 1161
EngagementTopic 1162
EngagementTopicFeed 1163
EngagementTopicHistory 1164
EnhancedLetterhead 1165
EnhancedLetterheadFeed 1166
EnrollmentEligibilityCriteria 1167
EnrollmentEligibilityCriteriaFeed 1168
EnrollmentEligibilityCriteriaHistory 1169
EnrollmentEligibilityCriteriaShare 1170
Entitlement 1171
EntitlementContact 1173

EntitlementFeed 1174
EntitlementHistory 1175
EntitlementTemplate 1176
EntityMilestone 1177
EntityMilestoneFeed 1179
EntityMilestoneHistory 1180
EntitySubscription 1181
EnvironmentalRisk 1182
EnvironmentalRiskFeed 1183
EnvironmentalRiskHistory 1184
EnvironmentalRiskShare 1185
Event 1186
EventBusSubscriber 1188
EventFeed 1189
EventLogFile 1190
EventRelation 1191
EventRelayConfig 1192
EventRelayFeedback 1193
Examination 1194
ExaminationFeed 1195
ExaminationHistory 1196
ExaminationShare 1197
Expense 1198
ExpenseFeed 1200
ExpenseHistory 1201
ExpenseReport 1202
ExpenseReportEntry 1203
ExpenseReportEntryFeed 1204

ExpenseReportEntryHistory 1205
ExpenseReportFeed 1206
ExpenseReportHistory 1207
ExpenseReportShare 1208
ExpenseShare 1209
ExpressionFilter 1210
ExpressionFilterCriteria 1211
ExpressionSet 1212
ExpressionSetFeed 1213
ExpressionSetHistory 1214
ExpressionSetShare 1215
ExpressionSetVersion 1216
ExpressionSetVersionFeed 1218
ExpressionSetVersionHistory 1219
ExpsSetObjectAliasFieldVw 1220
ExternalAccountHierarchy 1221
ExternalAccountHierarchyFeed 1222
ExternalAccountHierarchyHistory 1223
ExternalAccountHierarchyShare 1224
ExternalDataSource 1225
ExternalDataUserAuth 1226
ExternalSocialAccount 1227
FeeScheduleDefinition 1229
FeeScheduleDefinitionFeed 1230
FeeScheduleDefinitionHistory 1231
FeeScheduleDefinitionShare 1232
FeedAttachment 1233
FeedComment 1234

FeedItem 1235
FeedLike 1237
FeedPollChoice 1238
FeedPollVote 1239
FeedRevision 1240
FeedTrackedChange 1241
FieldPermissions 1242
FieldSecurityClassification 1243
FieldServiceMobileSettings 1244
FieldServiceOrgSettings 1247
FinancialDeal 1248
FinancialDealAsset 1250
FinancialDealAssetFeed 1252
FinancialDealAssetHistory 1253
FinancialDealBid 1254
FinancialDealBidFeed 1255
FinancialDealBidHistory 1256
FinancialDealFeed 1257
FinancialDealHistory 1258
FinancialDealParty 1259
FinancialDealPartyFeed 1260
FinancialDealPartyHistory 1261
FinancialDealPartyShare 1262
FinancialDealProduct 1263
FinancialDealProductFeed 1264
FinancialDealProductHistory 1265
FinancialDealProductShare 1266
FinancialDealShare 1267

FiscalYearSettings 1268
FlexQueueItem 1269
FlowDefinitionView 1270
FlowExecutionErrorEvent 1272
FlowInterview 1274
FlowInterviewShare 1275
FlowOrchestrationEvent 1276
FlowOrchestrationInstance 1277
FlowOrchestrationInstanceShare 1278
FlowOrchestrationStageInstance 1279
FlowOrchestrationStageInstanceShare 1280
FlowOrchestrationStepInstance 1281
FlowOrchestrationStepInstanceShare 1282
FlowOrchestrationWorkItem 1283
FlowOrchestrationWorkItemShare 1284
FlowRecordRelation 1285
FlowStageRelation 1286
FlowTestResult 1287
FlowTestResultShare 1288
FlowTestView 1289
FlowVariableView 1290
FlowVersionView 1291
Folder 1292
FolderedContentDocument 1293
ForecastingAdjustment 1294
ForecastingColumnDefinition 1295
ForecastingColumnDefinitionLocalization 1296
ForecastingDisplayedFamily 1297

ForecastingFact 1298
ForecastingFilter 1299
ForecastingFilterCondition 1300
ForecastingItem 1301
ForecastingOwnerAdjustment 1303
ForecastingQuota 1304
ForecastingShare 1305
ForecastingSourceDefinition 1306
ForecastingType 1307
ForecastingTypeSource 1308
ForecastingUserPreference 1309
FormulaFunction 1310
FormulaFunctionAllowedType 1311
FormulaFunctionCategory 1312
FrgtHaulingEmssnFctr 1313
FrgtHaulingEmssnFctrFeed 1314
FrgtHaulingEmssnFctrHistory 1315
FrgtHaulingEmssnFctrShare 1316
FrgtHaulingEnrgyUse 1317
FrgtHaulingEnrgyUseFeed 1319
FrgtHaulingEnrgyUseHistory 1320
FrgtHaulingEnrgyUseShare 1321
GeneratedWaste 1322
GeneratedWasteFeed 1324
GeneratedWasteHistory 1325
GeneratedWasteShare 1326
GenericVisitTask 1327
GenericVisitTaskContext 1328

GenericVisitTaskContextFeed 1329
GenericVisitTaskContextHistory 1330
GenericVisitTaskContextShare 1331
GenericVisitTaskFeed 1332
GenericVisitTaskHistory 1333
GenericVisitTaskShare 1334
GnrcVstKeyPerformanceInd 1335
GnrcVstKeyPerformanceIndFeed 1337
GnrcVstKeyPerformanceIndHistory 1338
GnrcVstTaskContextRelation 1339
GnrcVstTaskContextRelationFeed 1340
GnrcVstTaskContextRelationHistory 1341
GroundTravelEmssnFctr 1342
GroundTravelEmssnFctrFeed 1343
GroundTravelEmssnFctrHistory 1344
GroundTravelEmssnFctrShare 1345
GroundTravelEnrgyUse 1346
GroundTravelEnrgyUseFeed 1348
GroundTravelEnrgyUseHistory 1349
GroundTravelEnrgyUseShare 1350
Group 1351
GroupCensus 1352
GroupCensusFeed 1354
GroupCensusHistory 1355
GroupCensusMember 1356
GroupCensusMemberFeed 1358
GroupCensusMemberHistory 1359
GroupCensusMemberPlan 1360

GroupCensusMemberPlanFeed 1361
GroupCensusMemberPlanHistory 1362
GroupCensusShare 1363
GroupClass 1364
GroupClassContribution 1365
GroupClassContributionHistory 1366
GroupClassHistory 1367
GroupMember 1368
GtwyProvPaymentMethodType 1369
GuestBuyerProfile 1370
HealthCareDiagnosis 1371
HealthCareDiagnosisHistory 1373
HealthCareDiagnosisShare 1374
HealthCareProcedure 1375
HealthCareProcedureHistory 1376
HealthCareProcedureShare 1377
HealthCondition 1378
HealthConditionDetail 1380
HealthConditionDetailFeed 1381
HealthConditionDetailHistory 1382
HealthConditionFeed 1383
HealthConditionHistory 1384
HealthConditionShare 1385
HealthScore 1386
HealthScoreActionLog 1387
HealthScoreActionLogFeed 1389
HealthScoreActionLogHistory 1390
HealthScoreFeed 1391

HealthScoreHistory 1392
HealthcareFacility 1393
HealthcareFacilityFeed 1394
HealthcareFacilityHistory 1395
HealthcareFacilityNetwork 1396
HealthcareFacilityNetworkFeed 1398
HealthcareFacilityNetworkHistory 1399
HealthcareFacilityNetworkShare 1400
HealthcarePayerNetwork 1401
HealthcarePayerNetworkFeed 1402
HealthcarePayerNetworkHistory 1403
HealthcarePayerNetworkShare 1404
HealthcarePractitionerFacility 1405
HealthcarePractitionerFacilityFeed 1407
HealthcarePractitionerFacilityHistory 1408
HealthcarePractitionerFacilityShare 1409
HealthcareProvider 1410
HealthcareProviderFeed 1412
HealthcareProviderHistory 1413
HealthcareProviderNpi 1414
HealthcareProviderNpiFeed 1415
HealthcareProviderNpiHistory 1416
HealthcareProviderNpiShare 1417
HealthcareProviderShare 1418
HealthcareProviderSpecialty 1419
HealthcareProviderSpecialtyFeed 1420
HealthcareProviderSpecialtyHistory 1421
HealthcareProviderSpecialtyShare 1422

HealthcareProviderTaxonomy 1423
HealthcareProviderTaxonomyFeed 1424
HealthcareProviderTaxonomyHistory 1425
HealthcareProviderTaxonomyShare 1426
Holiday 1427
HotelStayEmssnFctr 1428
HotelStayEmssnFctrFeed 1429
HotelStayEmssnFctrHistory 1430
HotelStayEmssnFctrShare 1431
HotelStayEnrgyUse 1432
HotelStayEnrgyUseFeed 1434
HotelStayEnrgyUseHistory 1435
HotelStayEnrgyUseShare 1436
IconDefinition 1437
Idea 1438
IdeaComment 1440
Identifier 1441
IdentifierFeed 1442
IdentifierHistory 1443
IdentityDocument 1444
IdentityDocumentHistory 1445
IdentityDocumentShare 1446
IdentityProviderEventStore 1447
IdentityVerificationEvent 1448
IdentityVerificationProcDef 1450
IdentityVerificationProcDtl 1451
IdentityVerificationProcFld 1453
IdpEventLog 1454

IframeWhiteListUrl 1455
Image 1456
ImageFeed 1457
ImageHistory 1458
ImageShare 1459
Incident 1460
IncidentFeed 1462
IncidentHistory 1463
IncidentShare 1464
Individual 1465
IndividualApplication 1467
IndividualApplicationFeed 1469
IndividualApplicationHistory 1470
IndividualApplicationShare 1471
IndividualHistory 1472
IndividualShare 1473
InflationRate 1474
InflationRateFeed 1475
InflationRateHistory 1476
InflationRateShare 1477
InfoAuthRequestForm 1478
InfoAuthRequestFormFeed 1479
InfoAuthRequestFormHistory 1480
InfoAuthorizationRequest 1481
InfoAuthorizationRequestFeed 1483
InfoAuthorizationRequestHistory 1484
InfoAuthorizationRequestShare 1485
InsPolicyTransactionDetail 1486

InsPolicyTransactionDetailFeed 1487
InsPolicyTransactionDetailHistory 1488
InspectionAssessmentInd 1489
InspectionAssessmentIndFeed 1490
InspectionAssessmentIndHistory 1491
InspectionType 1492
InspectionTypeFeed 1493
InspectionTypeHistory 1494
InspectionTypeShare 1495
InsuranceContract 1496
InsuranceContractFeed 1497
InsuranceContractHistory 1498
InsuranceContractShare 1499
InsurancePolicy 1500
InsurancePolicyAsset 1504
InsurancePolicyAssetFeed 1506
InsurancePolicyAssetHistory 1507
InsurancePolicyAssetShare 1508
InsurancePolicyCoverage 1509
InsurancePolicyCoverageFeed 1511
InsurancePolicyCoverageHistory 1512
InsurancePolicyFeed 1513
InsurancePolicyHistory 1514
InsurancePolicyParticipant 1515
InsurancePolicyParticipantFeed 1517
InsurancePolicyParticipantHistory 1518
InsurancePolicyShare 1519
InsurancePolicySurcharge 1520

InsurancePolicySurchargeFeed 1521
InsurancePolicySurchargeHistory 1522
InsurancePolicyTransaction 1523
InsurancePolicyTransactionFeed 1524
InsurancePolicyTransactionHistory 1525
InsuranceProfile 1526
InsuranceProfileFeed 1528
InsuranceProfileHistory 1529
InternalOrganizationUnit 1530
InternalOrganizationUnitHistory 1531
InternalOrganizationUnitShare 1532
Invoice 1533
InvoiceFeed 1535
InvoiceHistory 1536
InvoiceLine 1537
InvoiceLineFeed 1539
InvoiceLineHistory 1540
InvoiceShare 1541
JobProfile 1542
JobProfileFeed 1543
JobProfileHistory 1544
JobProfileShare 1545
JournalReason 1546
JournalSubType 1547
JournalSubTypeHistory 1548
JournalType 1549
JournalTypeHistory 1550
JournalTypeShare 1551

KnowledgeArticle 1552
KnowledgeArticleVersion 1553
KnowledgeArticleVersionHistory 1555
KnowledgeArticleViewStat 1556
KnowledgeArticleVoteStat 1557
Knowledge__DataCategorySelection 1558
Knowledge__Feed 1559
Knowledge__ka 1560
Knowledge__kav 1561
KnowledgeableUser 1563
Lead 1564
LeadCleanInfo 1566
LeadFeed 1570
LeadHistory 1571
LeadShare 1572
LeadStatus 1573
LegalEntity 1574
LegalEntityFeed 1576
LegalEntityHistory 1577
LegalEntityShare 1578
LightningExitByPageMetrics 1579
LightningExperienceTheme 1580
LightningOnboardingConfig 1581
LightningToggleMetrics 1582
LightningUriEvent 1583
LightningUriEventStream 1585
LightningUsageByAppTypeMetrics 1587
LightningUsageByBrowserMetrics 1588

LightningUsageByFlexiPageMetrics 1589
LightningUsageByPageMetrics 1591
LinkedArticle 1593
LinkedArticleFeed 1594
LinkedArticleHistory 1595
ListEmail 1596
ListEmailIndividualRecipient 1598
ListEmailRecipientSource 1599
ListEmailShare 1600
ListViewChart 1601
ListViewChartInstance 1602
ListViewEvent 1603
ListViewEventStream 1605
LiveAgentSession 1607
LiveAgentSessionHistory 1609
LiveAgentSessionShare 1610
LiveChatBlockingRule 1611
LiveChatButton 1612
LiveChatButtonDeployment 1614
LiveChatButtonSkill 1615
LiveChatDeployment 1616
LiveChatObjectAccessConfig 1617
LiveChatObjectAccessDefinition 1618
LiveChatSensitiveDataRule 1619
LiveChatTranscript 1620
LiveChatTranscriptEvent 1622
LiveChatTranscriptFeed 1623
LiveChatTranscriptHistory 1624

LiveChatTranscriptShare 1625
LiveChatTranscriptSkill 1626
LiveChatUserConfig 1627
LiveChatUserConfigProfile 1629
LiveChatUserConfigUser 1630
LiveChatVisitor 1631
LoanApplicant 1632
LoanApplicantAddress 1634
LoanApplicantAddressFeed 1636
LoanApplicantAddressHistory 1637
LoanApplicantAsset 1638
LoanApplicantAssetHistory 1639
LoanApplicantDeclaration 1640
LoanApplicantDeclarationFeed 1642
LoanApplicantDeclarationHistory 1643
LoanApplicantDeclarationShare 1644
LoanApplicantEmployment 1645
LoanApplicantEmploymentFeed 1647
LoanApplicantEmploymentHistory 1648
LoanApplicantEmploymentShare 1649
LoanApplicantFeed 1650
LoanApplicantHistory 1651
LoanApplicantIncome 1652
LoanApplicantIncomeFeed 1653
LoanApplicantIncomeHistory 1654
LoanApplicantIncomeShare 1655
LoanApplicantLiability 1656
LoanApplicantLiabilityHistory 1657

LoanApplicantShare 1658
LoanApplicationAsset 1659
LoanApplicationAssetFeed 1661
LoanApplicationAssetHistory 1662
LoanApplicationAssetShare 1663
LoanApplicationFinancial 1664
LoanApplicationFinancialFeed 1667
LoanApplicationFinancialHistory 1668
LoanApplicationLiability 1669
LoanApplicationLiabilityFeed 1671
LoanApplicationLiabilityHistory 1672
LoanApplicationLiabilityShare 1673
LoanApplicationProperty 1674
LoanApplicationPropertyFeed 1676
LoanApplicationPropertyHistory 1677
LoanApplicationTitleHolder 1678
LoanApplicationTitleHolderFeed 1679
LoanApplicationTitleHolderHistory 1680
Location 1681
LocationFeed 1682
LocationGroup 1683
LocationGroupAssignment 1684
LocationGroupFeed 1685
LocationGroupHistory 1686
LocationGroupShare 1687
LocationHistory 1688
LocationShare 1689
LocationTrustMeasure 1690

LocationTrustMeasureShare 1691
LoginAsEvent 1692
LoginAsEventStream 1693
LoginEvent 1694
LoginEventStream 1696
LoginGeo 1698
LoginHistory 1699
LoginIp 1701
LogoutEvent 1702
LookedUpFromActivity 1703
LoyaltyAggrPointExprLedger 1705
LoyaltyLedger 1706
LoyaltyMemberCurrency 1707
LoyaltyMemberCurrencyFeed 1709
LoyaltyMemberCurrencyHistory 1710
LoyaltyMemberTier 1711
LoyaltyMemberTierHistory 1712
LoyaltyMembershipLifecycle 1713
LoyaltyMembershipLifecycleHistory 1714
LoyaltyPartnerProduct 1715
LoyaltyPartnerProductHistory 1716
LoyaltyPgmEngmtAttrProm 1717
LoyaltyPgmEngmtAttrPromHistory 1718
LoyaltyPgmEngmtAttribute 1719
LoyaltyPgmEngmtAttributeHistory 1720
LoyaltyPgmGroupMbrRlnsp 1721
LoyaltyPgmGroupMbrRlnspHistory 1722
LoyaltyPgmMbrAttributeVal 1723

LoyaltyPgmMbrAttributeValHistory 1724
LoyaltyPgmMbrPromEligView 1725
LoyaltyPgmPartnerCurrency 1727
LoyaltyPgmPartnerCurrencyHistory 1728
LoyaltyPgmPartnerPromotion 1729
LoyaltyPgmPartnerPromotionHistory 1730
LoyaltyPgmPtnrLdgrSummary 1731
LoyaltyPgmPtnrPrepaidPack 1732
LoyaltyPgmPtnrPrepaidPackHistory 1733
LoyaltyProgram 1734
LoyaltyProgramBadge 1735
LoyaltyProgramBadgeHistory 1736
LoyaltyProgramCurrency 1737
LoyaltyProgramFeed 1738
LoyaltyProgramHistory 1739
LoyaltyProgramMbrPromotion 1740
LoyaltyProgramMbrPromotionHistory 1741
LoyaltyProgramMember 1742
LoyaltyProgramMemberBadge 1744
LoyaltyProgramMemberBadgeHistory 1745
LoyaltyProgramMemberCase 1746
LoyaltyProgramMemberCaseHistory 1747
LoyaltyProgramMemberCaseShare 1748
LoyaltyProgramMemberHistory 1749
LoyaltyProgramMemberMerge 1750
LoyaltyProgramMemberMergeShare 1751
LoyaltyProgramMemberShare 1752
LoyaltyProgramPartner 1753

LoyaltyProgramPartnerHistory 1755
LoyaltyProgramPartnerLedger 1756
LoyaltyProgramPartnerShare 1757
LoyaltyProgramProcess 1758
LoyaltyProgramProcessHistory 1759
LoyaltyProgramProcessShare 1760
LoyaltyProgramShare 1761
LoyaltyProgramWidget 1762
LoyaltyProgramWidgetShare 1763
LoyaltyTier 1764
LoyaltyTierBenefit 1765
LoyaltyTierGroup 1766
LoyaltyTierHistory 1767
MLField 1768
MLPredictionDefinition 1769
MLRecommendationDefinition 1770
Macro 1771
MacroHistory 1772
MacroInstruction 1773
MacroShare 1774
MacroUsage 1775
MacroUsageShare 1776
MailmergeTemplate 1777
MaintenanceAsset 1778
MaintenanceAssetFeed 1779
MaintenanceAssetHistory 1780
MaintenancePlan 1781
MaintenancePlanFeed 1783

MaintenancePlanHistory 1784
MaintenancePlanShare 1785
MaintenanceWorkRule 1786
MaintenanceWorkRuleFeed 1787
MaintenanceWorkRuleHistory 1788
MaintenanceWorkRuleShare 1789
ManagedContent 1790
ManagedContentChannel 1791
ManagedContentInfo 1792
ManagedContentSpace 1793
ManagedContentVariant 1794
ManufacturingProgram 1795
ManufacturingProgramFeed 1796
ManufacturingProgramHistory 1797
ManufacturingProgramShare 1798
MatchingRule 1799
MatchingRuleItem 1800
MedReconRecommendation 1801
MedReconRecommendationFeed 1802
MedReconRecommendationHistory 1803
MedReconStmtRecommendation 1804
MedReconStmtRecommendationFeed 1805
MedReconStmtRecommendationHistory 1806
Medication 1807
MedicationDispense 1808
MedicationDispenseFeed 1810
MedicationDispenseHistory 1811
MedicationDispenseShare 1812

MedicationFeed 1813
MedicationHistory 1814
MedicationReconciliation 1815
MedicationReconciliationFeed 1816
MedicationReconciliationHistory 1817
MedicationReconciliationShare 1818
MedicationRequest 1819
MedicationRequestFeed 1821
MedicationRequestHistory 1822
MedicationRequestShare 1823
MedicationShare 1824
MedicationStatement 1825
MedicationStatementDetail 1827
MedicationStatementDetailFeed 1828
MedicationStatementDetailHistory 1829
MedicationStatementFeed 1830
MedicationStatementHistory 1831
MedicationStatementShare 1832
MedicinalIngredient 1833
MedicinalIngredientFeed 1834
MedicinalIngredientHistory 1835
MedicinalIngredientShare 1836
MemberBenefit 1837
MemberBenefitHistory 1838
MemberPlan 1839
MemberPlanFeed 1841
MemberPlanHistory 1842
MemberPlanShare 1843

MessagingChannel 1844
MessagingChannelSkill 1846
MessagingConfiguration 1847
MessagingDeliveryError 1848
MessagingEndUser 1849
MessagingEndUserHistory 1850
MessagingEndUserShare 1851
MessagingLink 1852
MessagingSession 1853
MessagingSessionFeed 1855
MessagingSessionHistory 1856
MessagingSessionShare 1857
MessagingTemplate 1858
MfgProgramCpntFrcstFact 1859
MfgProgramCpntFrcstFactFeed 1861
MfgProgramCpntFrcstFactHistory 1862
MfgProgramCpntFrcstFactShare 1863
MfgProgramForecastFact 1864
MfgProgramForecastFactFeed 1866
MfgProgramForecastFactHistory 1867
MfgProgramForecastFactShare 1868
MfgProgramTemplate 1869
MfgProgramTemplateItem 1870
MfgProgramVariantFrcstFact 1871
MfgProgramVariantFrcstFactFeed 1873
MfgProgramVariantFrcstFactHistory 1874
MfgProgramVariantFrcstFactShare 1875
MilestoneType 1876

MobileSettingsAssignment 1877
MsgChannelLanguageKeyword 1878
MultipartyInfoAuthRequest 1879
MultipartyInfoAuthRequestFeed 1880
MultipartyInfoAuthRequestHistory 1881
MultipartyInfoAuthRequestShare 1882
MutingPermissionSet 1883
MyDomainDiscoverableLogin 1899
Name 1900
NamedCredential 1901
NavigationLinkSet 1902
NavigationMenuItem 1903
NavigationMenuItemLocalization 1904
Network 1905
NetworkActivityAudit 1908
NetworkAffinity 1909
NetworkDiscoverableLogin 1910
NetworkFeedResponseMetric 1911
NetworkHeadlessFgtPwd 1912
NetworkMember 1913
NetworkMemberGroup 1915
NetworkModeration 1916
NetworkPageOverride 1917
NetworkReferencedObject 1918
NetworkSelfRegistration 1919
NetworkUserHistoryRecent 1920
Note 1921
NoteAndAttachment 1922

OauthCustomScope 1923
OauthCustomScopeApp 1924
OauthToken 1925
ObjectDataImport 1926
ObjectDataImportReference 1927
ObjectDataImportShare 1928
ObjectPermissions 1929
OcrDocumentScanResult 1930
OcrDocumentScanResultFeed 1931
OcrDocumentScanResultHistory 1932
OcrSampleDocument 1933
OcrSampleDocumentField 1934
OcrSampleDocumentPage 1935
OcrTargetObjFieldMapping 1936
OcrTargetObject 1937
OcrTemplate 1938
OcrTemplateSampleDocument 1939
OmniDataPack 1940
OmniDataPackFeed 1941
OmniDataPackShare 1942
OmniDataTransform 1943
OmniDataTransformItem 1945
OmniDataTransformShare 1947
OmniInteractionAccessConfig 1948
OmniInteractionConfig 1950
OmniProcess 1951
OmniProcessAsmtQuestionVer 1953
OmniProcessAsmtQuestionVerFeed 1954

OmniProcessAsmtQuestionVerHistory 1955
OmniProcessAsmtQuestionVerShare 1956
OmniProcessCompilation 1957
OmniProcessElement 1958
OmniProcessFeed 1960
OmniProcessShare 1961
OmniProcessTransientData 1962
OmniProcessTransientDataFeed 1963
OmniProcessTransientDataShare 1964
OmniScriptSavedSession 1965
OmniScriptSavedSessionFeed 1967
OmniScriptSavedSessionShare 1968
OmniSupervisorConfig 1969
OmniSupervisorConfigGroup 1970
OmniSupervisorConfigProfile 1971
OmniSupervisorConfigQueue 1972
OmniSupervisorConfigSkill 1973
OmniSupervisorConfigUser 1974
OmniUiCard 1975
OmniUiCardFeed 1977
OmniUiCardShare 1978
OpenActivity 1979
OperatingHours 1981
OperatingHoursFeed 1982
OperatingHoursHoliday 1983
OperatingHoursHolidayFeed 1984
Opportunity 1985
OpportunityCompetitor 1987

OpportunityContactRole 1988
OpportunityFeed 1989
OpportunityFieldHistory 1990
OpportunityHistory 1991
OpportunityLineItem 1992
OpportunityLineItemSchedule 1993
OpportunityPartner 1994
OpportunityShare 1995
OpportunityStage 1996
OpportunityTeamMember 1997
Order 1998
OrderFeed 2000
OrderHistory 2001
OrderItem 2002
OrderItemFeed 2003
OrderItemHistory 2004
OrderShare 2005
OrderStatus 2006
OrgDeleteRequest 2007
OrgDeleteRequestShare 2008
OrgWideEmailAddress 2009
Organization 2010
OtherEmssnFctrSet 2013
OtherEmssnFctrSetFeed 2014
OtherEmssnFctrSetHistory 2015
OtherEmssnFctrSetItem 2016
OtherEmssnFctrSetItemFeed 2018
OtherEmssnFctrSetItemHistory 2019

OtherEmssnFctrSetShare 2020
OutgoingEmail 2021
OutgoingEmailRelation 2022
OwnedContentDocument 2023
OwnerChangeOptionInfo 2024
PackageLicense 2025
Participant 2026
ParticipantRole 2027
Partner 2028
PartnerFundAllocation 2029
PartnerFundAllocationFeed 2030
PartnerFundAllocationHistory 2031
PartnerFundAllocationShare 2032
PartnerFundClaim 2033
PartnerFundClaimFeed 2034
PartnerFundClaimHistory 2035
PartnerFundClaimShare 2036
PartnerFundRequest 2037
PartnerFundRequestFeed 2038
PartnerFundRequestHistory 2039
PartnerFundRequestShare 2040
PartnerMarketingBudget 2041
PartnerMarketingBudgetFeed 2042
PartnerMarketingBudgetHistory 2043
PartnerMarketingBudgetShare 2044
PartnerRole 2045
PartyConsent 2046
PartyConsentFeed 2047

PartyConsentHistory 2048
PartyConsentShare 2049
PartyRoleRelation 2050
PartyRoleRelationFeed 2051
PartyRoleRelationHistory 2052
PartyRoleRelationShare 2053
PatientHealthReaction 2054
PatientHealthReactionFeed 2055
PatientHealthReactionHistory 2056
PatientImmunization 2057
PatientImmunizationFeed 2059
PatientImmunizationHistory 2060
PatientImmunizationProtocol 2061
PatientImmunizationProtocolFeed 2063
PatientImmunizationProtocolHistory 2064
PatientImmunizationProtocolShare 2065
PatientImmunizationShare 2066
PatientMedicalProcedure 2067
PatientMedicalProcedureDetail 2069
PatientMedicalProcedureDetailFeed 2070
PatientMedicalProcedureDetailHistory 2071
PatientMedicalProcedureFeed 2072
PatientMedicalProcedureHistory 2073
PatientMedicalProcedureShare 2074
PatientMedicationDosage 2075
PatientMedicationDosageFeed 2077
PatientMedicationDosageHistory 2078
PaymentAuthAdjustment 2079

PaymentFeed 2081
PaymentGateway 2082
PaymentGatewayLog 2083
PaymentGatewayProvider 2085
PaymentGroup 2086
PaymentLineInvoice 2087
PaymentMethod 2088
PcmtEmssnFctrSet 2090
PcmtEmssnFctrSetFeed 2091
PcmtEmssnFctrSetHistory 2092
PcmtEmssnFctrSetItem 2093
PcmtEmssnFctrSetItemFeed 2094
PcmtEmssnFctrSetItemHistory 2095
PcmtEmssnFctrSetShare 2096
PendingServiceRouting 2097
PendingServiceRoutingInteractionInfo 2099
PendingServiceRoutingShare 2100
PercentileBsdCareFeeAgreement 2101
PercentileBsdCareFeeAgreementFeed 2102
PercentileBsdCareFeeAgreementHistory 2103
Period 2104
PermissionSet 2105
PermissionSetAssignment 2122
PermissionSetLicense 2123
PermissionSetLicenseAssign 2140
PermissionSetTabSetting 2141
PersonAccountOwnerPowerUser 2142
PersonEducation 2143

PersonEducationFeed 2145
PersonEducationHistory 2146
PersonEducationShare 2147
PersonExamination 2148
PersonExaminationFeed 2149
PersonExaminationHistory 2150
PersonExaminationShare 2151
PersonLanguage 2152
PersonLanguageFeed 2153
PersonLanguageHistory 2154
PersonLanguageShare 2155
PersonLifeEvent 2156
PersonLifeEventFeed 2158
PersonLifeEventHistory 2159
PersonLifeEventShare 2160
PersonName 2161
PersonNameFeed 2163
PersonNameHistory 2164
PersonNameShare 2165
PersonalizationTargetInfo 2166
PgmRebateTypBnftMapping 2167
PgmRebateTypBnftMappingFeed 2168
PgmRebateTypBnftMappingHistory 2169
PicklistValueInfo 2170
PlanBenefit 2171
PlanBenefitFeed 2173
PlanBenefitHistory 2174
PlanBenefitItem 2175

PlanBenefitItemFeed 2177
PlanBenefitItemHistory 2178
PlanBenefitItemShare 2179
PlanBenefitShare 2180
PlatformAction 2181
PlatformEventUsageMetric 2183
PlatformStatusAlertEvent 2184
Polygon 2185
PolygonFeed 2186
PolygonHistory 2187
PolygonShare 2188
PortalDelegablePermissionSet 2189
PreliminaryApplicationRef 2190
PreliminaryApplicationRefFeed 2191
PreliminaryApplicationRefHistory 2192
PreliminaryApplicationRefShare 2193
PresenceConfigDeclineReason 2194
PresenceDeclineReason 2195
PresenceUserConfig 2196
PresenceUserConfigProfile 2198
PresenceUserConfigUser 2199
PreventiveCareAgreement 2200
PreventiveCareAgreementFeed 2201
PreventiveCareAgreementHistory 2202
PriceAdjustmentSchedule 2203
PriceAdjustmentScheduleShare 2204
PriceAdjustmentTier 2205
Pricebook2 2206

Pricebook2History 2207
PricebookEntry 2208
PricebookEntryAdjustment 2209
PricebookEntryHistory 2210
Problem 2211
ProblemFeed 2213
ProblemHistory 2214
ProblemShare 2215
ProcessDefinition 2216
ProcessException 2217
ProcessExceptionEvent 2218
ProcessExceptionShare 2219
ProcessInstance 2220
ProcessInstanceHistory 2221
ProcessInstanceNode 2222
ProcessInstanceStep 2223
ProcessInstanceWorkitem 2224
ProcessNode 2225
Producer 2226
ProducerCommission 2227
ProducerCommissionFeed 2229
ProducerCommissionHistory 2230
ProducerCommissionShare 2231
ProducerFeed 2232
ProducerHistory 2233
ProducerShare 2234
Product2 2235
Product2Feed 2236

Product2History 2237
ProductAttribute 2238
ProductAttributeSet 2239
ProductAttributeSetItem 2240
ProductAttributeSetProduct 2241
ProductAvailabilityProjection 2242
ProductAvailabilityProjectionFeed 2243
ProductAvailabilityProjectionHistory 2244
ProductAvailabilityProjectionShare 2245
ProductCatalog 2246
ProductCatalogFeed 2247
ProductCatalogHistory 2248
ProductCatalogShare 2249
ProductCategory 2250
ProductCategoryFeed 2251
ProductCategoryHistory 2252
ProductCategoryProduct 2253
ProductCategoryProductHistory 2254
ProductConsumed 2255
ProductConsumedFeed 2257
ProductConsumedHistory 2258
ProductEmissionsFactor 2259
ProductEmissionsFactorFeed 2260
ProductEmissionsFactorHistory 2261
ProductEmissionsFactorShare 2262
ProductEntitlementTemplate 2263
ProductFulfillmentLocation 2264
ProductFulfillmentLocationFeed 2265

ProductFulfillmentLocationHistory 2266
ProductFulfillmentLocationShare 2267
ProductItem 2268
ProductItemFeed 2269
ProductItemHistory 2270
ProductItemShare 2271
ProductItemTransaction 2272
ProductItemTransactionFeed 2273
ProductItemTransactionHistory 2274
ProductMedia 2275
ProductMediaHistory 2276
ProductRelatedMaterial 2277
ProductRelatedMaterialFeed 2279
ProductRelatedMaterialHistory 2280
ProductRelatedMaterialShare 2281
ProductRequest 2282
ProductRequestFeed 2284
ProductRequestHistory 2285
ProductRequestLineItem 2286
ProductRequestLineItemFeed 2288
ProductRequestLineItemHistory 2289
ProductRequestShare 2290
ProductRequired 2291
ProductRequiredFeed 2292
ProductRequiredHistory 2293
ProductServiceCampaign 2294
ProductServiceCampaignFeed 2295
ProductServiceCampaignHistory 2296

ProductServiceCampaignItem 2297
ProductServiceCampaignItemFeed 2298
ProductServiceCampaignItemHistory 2299
ProductServiceCampaignItemStatus 2300
ProductServiceCampaignShare 2301
ProductServiceCampaignStatus 2302
ProductTransfer 2303
ProductTransferFeed 2305
ProductTransferHistory 2306
ProductTransferShare 2307
ProductWarrantyTerm 2308
ProductWarrantyTermFeed 2309
ProductWarrantyTermHistory 2310
Profile 2311
ProfileSkill 2327
ProfileSkillEndorsement 2328
ProfileSkillEndorsementFeed 2329
ProfileSkillEndorsementHistory 2330
ProfileSkillFeed 2331
ProfileSkillHistory 2332
ProfileSkillShare 2333
ProfileSkillUser 2334
ProfileSkillUserFeed 2335
ProfileSkillUserHistory 2336
ProgramRebateTypPayoutSrc 2337
ProgramRebateTypPayoutSrcFeed 2338
ProgramRebateTypPayoutSrcHistory 2339
ProgramRebateType 2340

ProgramRebateTypeBenefit 2342
ProgramRebateTypeBenefitFeed 2343
ProgramRebateTypeBenefitHistory 2344
ProgramRebateTypeFeed 2345
ProgramRebateTypeFilter 2346
ProgramRebateTypeFilterFeed 2347
ProgramRebateTypeFilterHistory 2348
ProgramRebateTypeHistory 2349
ProgramRebateTypePayout 2350
ProgramRebateTypePayoutFeed 2351
ProgramRebateTypePayoutHistory 2352
ProgramRebateTypeProduct 2353
ProgramRebateTypeProductFeed 2354
ProgramRebateTypeProductHistory 2355
ProgramRebateTypeReference 2356
ProgramRebateTypeReferenceFeed 2357
ProgramRebateTypeReferenceHistory 2358
ProgramRebateTypeReferenceShare 2359
ProgramRebateTypeShare 2360
Promotion 2361
PromotionFeed 2363
PromotionHistory 2364
PromotionLoyaltyPtnrProdt 2365
PromotionLoyaltyPtnrProdtFeed 2366
PromotionLoyaltyPtnrProdtHistory 2367
PromotionMarketSegment 2368
PromotionMarketSegmentFeed 2369
PromotionMarketSegmentHistory 2370

PromotionQualifierFeed 2371
PromotionQualifierHistory 2372
PromotionSegment 2373
PromotionSegmentBuyerGroupFeed 2374
PromotionSegmentBuyerGroupHistory 2375
PromotionSegmentFeed 2376
PromotionSegmentHistory 2377
PromotionSegmentSalesStoreFeed 2378
PromotionSegmentSalesStoreHistory 2379
PromotionSegmentShare 2380
PromotionShare 2381
PromotionTargetFeed 2382
PromotionTargetHistory 2383
Prompt 2384
PromptAction 2385
PromptActionShare 2386
PromptError 2387
PromptErrorShare 2388
PromptLocalization 2389
PromptVersion 2390
PromptVersionLocalization 2393
ProviderNetworkContract 2394
ProviderNetworkContractFeed 2395
ProviderNetworkContractHistory 2396
ProviderNetworkTier 2397
ProviderNetworkTierFeed 2398
ProviderNetworkTierHistory 2399
PublicComplaint 2400

PublicComplaintFeed 2402
PublicComplaintHistory 2403
PublicComplaintShare 2404
PurchaseQuantityRuleFeed 2405
PurchaseQuantityRuleHistory 2406
PurchaseQuantityRuleShare 2407
PurchaserPlan 2408
PurchaserPlanAssn 2410
PurchaserPlanAssnFeed 2411
PurchaserPlanAssnHistory 2412
PurchaserPlanAssnShare 2413
PurchaserPlanFeed 2414
PurchaserPlanHistory 2415
PurchaserPlanShare 2416
PushTopic 2417
Question 2418
QuestionDataCategorySelection 2420
QuestionReportAbuse 2421
QuestionSubscription 2422
QueueRoutingConfig 2423
QueueSobject 2424
QuickText 2425
QuickTextHistory 2426
QuickTextShare 2427
QuickTextUsage 2428
QuickTextUsageShare 2429
Quote 2430
QuoteDocument 2433

QuoteFeed 2434
QuoteHistory 2435
QuoteLineItem 2436
QuoteLineItemGroupClass 2438
QuoteLineItemGroupClassFeed 2439
QuoteLineItemGroupClassHistory 2440
QuoteLineItemHistory 2441
QuoteShare 2442
RebateClaim 2443
RebateClaimFeed 2445
RebateClaimHistory 2446
RebateClaimShare 2447
RebateMemberAggregateItem 2448
RebateMemberAggregateItemFeed 2449
RebateMemberAggregateItemHistory 2450
RebateMemberAggregateItemShare 2451
RebateMemberProductAggregate 2452
RebateMemberProductAggregateFeed 2454
RebateMemberProductAggregateHistory 2455
RebateMemberProductAggregateShare 2456
RebatePayment 2457
RebatePaymentFeed 2458
RebatePaymentHistory 2459
RebatePaymentShare 2460
RebatePayoutAdjustment 2461
RebatePayoutAdjustmentFeed 2462
RebatePayoutAdjustmentHistory 2463
RebateProgram 2464

RebateProgramFeed 2465
RebateProgramHistory 2466
RebateProgramMember 2467
RebateProgramMemberFeed 2468
RebateProgramMemberHistory 2469
RebateProgramMemberPayout 2470
RebateProgramMemberPayoutFeed 2471
RebateProgramMemberPayoutHistory 2472
RebateProgramMemberShare 2473
RebateProgramPayoutPeriod 2474
RebateProgramPayoutPeriodFeed 2475
RebateProgramPayoutPeriodHistory 2476
RebateProgramShare 2477
ReceivedDocument 2478
ReceivedDocumentFeed 2479
ReceivedDocumentHistory 2480
ReceivedDocumentShare 2481
RecentlyViewed 2482
Recommendation 2483
RecommendationResponse 2484
RecordAction 2486
RecordActionHistory 2487
RecordAlert 2488
RecordAlertFeed 2489
RecordAlertHistory 2490
RecordAlertShare 2491
RecordType 2492
RecordTypeLocalization 2493

RecordsetFilterCriteria 2494
RecordsetFilterCriteriaFeed 2495
RecordsetFilterCriteriaHistory 2496
RecordsetFilterCriteriaRule 2497
RecordsetFilterCriteriaShare 2498
RedirectWhitelistUrl 2499
RefrigerantEmssnFctr 2500
RefrigerantEmssnFctrFeed 2501
RefrigerantEmssnFctrHistory 2502
RefrigerantEmssnFctrShare 2503
Refund 2504
RefundLinePayment 2506
RegAuthorizationTypeProduct 2508
RegAuthorizationTypeProductFeed 2509
RegAuthorizationTypeProductHistory 2510
RegAuthorizationTypeProductShare 2511
RegisteredExternalService 2512
RegulatoryAuthority 2513
RegulatoryAuthorityFeed 2514
RegulatoryAuthorityHistory 2515
RegulatoryAuthorityShare 2516
RegulatoryAuthorizationType 2517
RegulatoryAuthorizationTypeFeed 2518
RegulatoryAuthorizationTypeHistory 2519
RegulatoryAuthorizationTypeShare 2520
RegulatoryCode 2521
RegulatoryCodeFeed 2522
RegulatoryCodeHistory 2523

RegulatoryCodeViolation 2524
RegulatoryCodeViolationFeed 2526
RegulatoryCodeViolationHistory 2527
RegulatoryCodeViolationShare 2528
RegulatoryTrxnFee 2529
RegulatoryTrxnFeeFeed 2530
RegulatoryTrxnFeeHistory 2531
RegulatoryTrxnFeeItem 2532
RegulatoryTrxnFeeItemFeed 2533
RegulatoryTrxnFeeItemHistory 2534
RegulatoryTrxnFeeShare 2535
RelatedListColumnDefinition 2536
RelatedListDefinition 2537
RemoteKeyCalloutEvent 2538
RentalCarEmssnFctr 2539
RentalCarEmssnFctrFeed 2540
RentalCarEmssnFctrHistory 2541
RentalCarEmssnFctrShare 2542
RentalCarEnrgyUse 2543
RentalCarEnrgyUseFeed 2545
RentalCarEnrgyUseHistory 2546
RentalCarEnrgyUseShare 2547
Reply 2548
ReplyReportAbuse 2549
Report 2550
ReportAnomalyEvent 2551
ReportAnomalyEventStore 2552
ReportAnomalyEventStoreFeed 2553

ReportEvent 2554
ReportEventStream 2556
ReportFeed 2558
ReputationLevel 2559
ReputationLevelLocalization 2560
ReputationPointsRule 2561
ResidentialLoanApplication 2562
ResidentialLoanApplicationFeed 2565
ResidentialLoanApplicationHistory 2566
ResidentialLoanApplicationShare 2567
ResourceAbsence 2568
ResourceAbsenceFeed 2570
ResourceAbsenceHistory 2571
ResourcePreference 2572
ResourcePreferenceFeed 2573
ResourcePreferenceHistory 2574
ReturnOrder 2575
ReturnOrderFeed 2577
ReturnOrderHistory 2578
ReturnOrderLineItem 2579
ReturnOrderLineItemFeed 2581
ReturnOrderLineItemHistory 2582
ReturnOrderShare 2583
SalesAgreement 2584
SalesAgreementFeed 2586
SalesAgreementHistory 2587
SalesAgreementProduct 2588
SalesAgreementProductFeed 2590

SalesAgreementProductHistory 2591
SalesAgreementProductSchedule 2592
SalesAgreementProductScheduleFeed 2594
SalesAgreementProductScheduleHistory 2595
SalesAgreementShare 2596
SalesStoreCatalog 2597
SamlSsoConfig 2598
SchedulingConstraint 2600
SchedulingConstraintShare 2601
SchedulingObjective 2602
SchedulingRule 2603
SchedulingRuleParameter 2604
Scontrol 2605
ScontrolLocalization 2606
Scope3CrbnFtprnt 2607
Scope3CrbnFtprntFeed 2610
Scope3CrbnFtprntHistory 2611
Scope3CrbnFtprntShare 2612
Scope3EmssnSrc 2613
Scope3EmssnSrcFeed 2615
Scope3EmssnSrcHistory 2616
Scope3EmssnSrcShare 2617
Scope3PcmtItem 2618
Scope3PcmtItemFeed 2620
Scope3PcmtItemHistory 2621
Scope3PcmtSummary 2622
Scope3PcmtSummaryFeed 2625
Scope3PcmtSummaryHistory 2626

Scope3PcmtSummaryShare 2627
Scorecard 2628
ScorecardAssociation 2629
ScorecardMetric 2630
ScorecardShare 2631
SearchPromotionRule 2632
SecuritiesHolding 2633
SecuritiesHoldingFeed 2635
SecuritiesHoldingHistory 2636
SecuritiesHoldingShare 2637
SecurityCustomBaseline 2638
Seller 2639
SellerHistory 2640
SellerShare 2641
SerializedProduct 2642
SerializedProductFeed 2643
SerializedProductHistory 2644
SerializedProductShare 2645
ServiceAppointment 2646
ServiceAppointmentFeed 2648
ServiceAppointmentHistory 2649
ServiceAppointmentShare 2650
ServiceAppointmentStatus 2651
ServiceChannel 2652
ServiceChannelStatus 2654
ServiceChannelStatusField 2655
ServiceContract 2656
ServiceContractFeed 2658

ServiceContractHistory 2659
ServiceContractShare 2660
ServiceCrew 2661
ServiceCrewFeed 2662
ServiceCrewHistory 2663
ServiceCrewMember 2664
ServiceCrewMemberFeed 2665
ServiceCrewMemberHistory 2666
ServiceCrewShare 2667
ServicePresenceStatus 2668
ServiceReport 2669
ServiceReportHistory 2670
ServiceReportLayout 2671
ServiceResource 2672
ServiceResourceCapacity 2674
ServiceResourceCapacityFeed 2675
ServiceResourceCapacityHistory 2676
ServiceResourceFeed 2677
ServiceResourceHistory 2678
ServiceResourcePreference 2679
ServiceResourcePreferenceFeed 2680
ServiceResourcePreferenceHistory 2681
ServiceResourcePreferenceShare 2682
ServiceResourceShare 2683
ServiceResourceSkill 2684
ServiceResourceSkillFeed 2685
ServiceResourceSkillHistory 2686
ServiceSetupProvisioning 2687

ServiceTerritory 2688
ServiceTerritoryFeed 2690
ServiceTerritoryHistory 2691
ServiceTerritoryLocation 2692
ServiceTerritoryLocationFeed 2693
ServiceTerritoryLocationHistory 2694
ServiceTerritoryMember 2695
ServiceTerritoryMemberFeed 2697
ServiceTerritoryMemberHistory 2698
ServiceTerritoryShare 2699
ServiceTerritoryWorkType 2700
ServiceTerritoryWorkTypeFeed 2701
ServiceTerritoryWorkTypeHistory 2702
SessionHijackingEvent 2703
SessionHijackingEventStore 2705
SessionHijackingEventStoreFeed 2707
SessionPermSetActivation 2708
SetupAuditTrail 2709
SetupEntityAccess 2710
SharedSavingPaymentAgreement 2711
SharedSavingPaymentAgreementFeed 2712
SharedSavingPaymentAgreementHistory 2713
Shift 2714
ShiftEngagementChannel 2716
ShiftEngagementChannelFeed 2717
ShiftEngagementChannelHistory 2718
ShiftFeed 2719
ShiftHistory 2720

ShiftPattern 2721
ShiftPatternEntry 2722
ShiftPatternEntryFeed 2723
ShiftPatternEntryHistory 2724
ShiftPatternFeed 2725
ShiftPatternHistory 2726
ShiftPatternShare 2727
ShiftShare 2728
ShiftStatus 2729
ShiftTemplate 2730
ShiftTemplateShare 2731
ShiftWorkTopic 2732
ShiftWorkTopicFeed 2733
ShiftWorkTopicHistory 2734
Shipment 2735
ShipmentFeed 2737
ShipmentHistory 2738
ShipmentItem 2739
ShipmentItemFeed 2740
ShipmentItemHistory 2741
ShipmentShare 2742
SignatureTask 2743
SignatureTaskFeed 2744
SignatureTaskHistory 2745
SignatureTaskLineItem 2746
SignatureTaskLineItemFeed 2747
SignatureTaskLineItemHistory 2748
Site 2749

SiteDetail 2751
SiteFeed 2752
SiteHistory 2753
SiteRedirectMapping 2754
Skill 2755
SkillProfile 2756
SkillRequirement 2757
SkillRequirementFeed 2758
SkillRequirementHistory 2759
SkillUser 2760
SlaProcess 2761
SocialPersona 2762
SocialPersonaHistory 2764
SocialPost 2765
SocialPostFeed 2768
SocialPostHistory 2769
SocialPostShare 2770
Solution 2771
SolutionFeed 2772
SolutionHistory 2773
SolutionStatus 2774
Stamp 2775
StampAssignment 2776
StandardCareFeeAgreement 2777
StandardCareFeeAgreementFeed 2778
StandardCareFeeAgreementHistory 2779
StaticResource 2780
StnryAssetAnnualFact 2781

StnryAssetAnnualFactFeed 2782
StnryAssetAnnualFactHistory 2783
StnryAssetCrbnFtprnt 2784
StnryAssetCrbnFtprntFeed 2789
StnryAssetCrbnFtprntHistory 2790
StnryAssetCrbnFtprntItm 2791
StnryAssetCrbnFtprntItmFeed 2793
StnryAssetCrbnFtprntItmHistory 2794
StnryAssetCrbnFtprntShare 2795
StnryAssetEnrgyUse 2796
StnryAssetEnrgyUseFeed 2800
StnryAssetEnrgyUseHistory 2801
StnryAssetEnrgyUseShare 2802
StnryAssetEnvrSrc 2803
StnryAssetEnvrSrcFeed 2805
StnryAssetEnvrSrcHistory 2806
StnryAssetEnvrSrcShare 2807
StnryAssetWaterActvty 2808
StnryAssetWaterActvtyFeed 2810
StnryAssetWaterActvtyHistory 2811
StnryAssetWaterActvtyShare 2812
StnryAssetWaterFtprnt 2813
StnryAssetWaterFtprntFeed 2816
StnryAssetWaterFtprntHistory 2817
StnryAssetWaterFtprntShare 2818
StnryAssetWtrFtprntItm 2819
StnryAssetWtrFtprntItmFeed 2820
StnryAssetWtrFtprntItmHistory 2821

StoreIntegratedService 2822
StreamingChannel 2823
StreamingChannelShare 2824
Supplier 2825
SupplierFeed 2826
SupplierHistory 2827
SupplierProduct 2828
SupplierProductFeed 2829
SupplierProductHistory 2830
SupplierProductShare 2831
Survey 2832
SurveyEmailBranding 2833
SurveyEngagementContext 2834
SurveyEngagementContextShare 2835
SurveyFeed 2836
SurveyInvitation 2837
SurveyInvitationShare 2839
SurveyPage 2840
SurveyQuestion 2841
SurveyQuestionChoice 2842
SurveyQuestionResponse 2843
SurveyQuestionScore 2844
SurveyResponse 2845
SurveyShare 2847
SurveySubject 2848
SurveyVersion 2849
SurveyVersionAddlInfo 2850
SustainabilityCredit 2851

SustainabilityCreditFeed 2853
SustainabilityCreditHistory 2854
SustainabilityCreditShare 2855
SustainabilityPurchase 2856
SustainabilityPurchaseFeed 2858
SustainabilityPurchaseHistory 2859
SustainabilityPurchaseShare 2860
SustainabilityScorecard 2861
SustainabilityScorecardFeed 2864
SustainabilityScorecardHistory 2865
SustainabilityScorecardShare 2866
SustainabilityUom 2867
SvcCatalogRequest 2868
SvcCatalogRequestShare 2869
Swarm 2870
SwarmFeed 2871
SwarmHistory 2872
SwarmMember 2873
SwarmMemberFeed 2874
SwarmMemberHistory 2875
SwarmMemberShare 2876
SwarmShare 2877
TabDefinition 2878
TagCategory 2879
TagCategoryFeed 2880
TagCategoryHistory 2881
TagCategoryShare 2882
Task 2883

TaskFeed 2885
TaskPriority 2886
TaskStatus 2887
TaxEngine 2888
TaxEngineInteractionLog 2890
TaxEngineProvider 2892
TestSuiteMembership 2893
ThirdPartyAccountLink 2894
ThreatDetectionFeedback 2895
ThreatDetectionFeedbackFeed 2896
TimeSheet 2897
TimeSheetEntry 2898
TimeSheetEntryFeed 2899
TimeSheetEntryHistory 2900
TimeSheetFeed 2901
TimeSheetHistory 2902
TimeSheetShare 2903
TimeSlot 2904
TimelineObjectDefinition 2905
Topic 2906
TopicAssignment 2907
TopicFeed 2908
TopicLocalization 2909
TopicUserEvent 2910
TrainingCourseParticipant 2911
TrainingCourseParticipantFeed 2912
TrainingCourseParticipantHistory 2913
TrainingCourseParticipantShare 2914

TransactionJournal 2915
TransactionSecurityPolicy 2918
Translation 2919
TrnCourse 2920
TrnCourseFeed 2921
TrnCourseHistory 2922
TrnCourseShare 2923
UiFormulaCriterion 2924
UiFormulaRule 2925
UndecidedEventRelation 2926
UnitOfMeasure 2927
UnitOfMeasureConversion 2928
UnitOfMeasureConversionFeed 2929
UnitOfMeasureConversionHistory 2930
UnitOfMeasureConversionShare 2931
UnitOfMeasureShare 2932
UriEvent 2933
UriEventStream 2934
User 2935
UserAppInfo 2942
UserAppMenuCustomization 2943
UserAppMenuCustomizationShare 2944
UserAppMenuItem 2945
UserConfigTransferButton 2946
UserConfigTransferSkill 2947
UserCustomBadge 2948
UserCustomBadgeLocalization 2949
UserEmailPreferredPerson 2950

UserEmailPreferredPersonShare 2951
UserEsignVendorIdentifier 2952
UserEsignVendorIdentifierFeed 2953
UserEsignVendorIdentifierHistory 2954
UserEsignVendorIdentifierShare 2955
UserFeed 2956
UserLicense 2957
UserListView 2958
UserListViewCriterion 2959
UserLogin 2960
UserPackageLicense 2961
UserPermissionAccess 2962
UserPreference 2978
UserProvAccount 2979
UserProvAccountStaging 2980
UserProvMockTarget 2981
UserProvisioningConfig 2982
UserProvisioningLog 2983
UserProvisioningRequest 2984
UserProvisioningRequestShare 2985
UserRecordAccess 2986
UserRole 2987
UserServicePresence 2988
UserServicePresenceShare 2989
UserShare 2990
UserTeamMember 2991
VehicleAssetCrbnFtprnt 2992
VehicleAssetCrbnFtprntFeed 2994

VehicleAssetCrbnFtprntHistory 2995
VehicleAssetCrbnFtprntShare 2996
VehicleAssetEmssnSrc 2997
VehicleAssetEmssnSrcFeed 2999
VehicleAssetEmssnSrcHistory 3000
VehicleAssetEmssnSrcShare 3001
VehicleAssetEnrgyUse 3002
VehicleAssetEnrgyUseFeed 3005
VehicleAssetEnrgyUseHistory 3006
VehicleAssetEnrgyUseShare 3007
VendorCallCenterStatusMap 3008
VerificationHistory 3009
ViolationEnforcementAction 3010
ViolationEnforcementActionFeed 3011
ViolationEnforcementActionHistory 3012
ViolationType 3013
ViolationTypeAssessmentInd 3014
ViolationTypeAssessmentIndFeed 3015
ViolationTypeAssessmentIndHistory 3016
ViolationTypeFeed 3017
ViolationTypeHistory 3018
ViolationTypeShare 3019
Visit 3020
VisitFeed 3022
VisitHistory 3023
VisitShare 3024
VisitedParty 3025
VisitedPartyFeed 3026

VisitedPartyHistory 3027
Visitor 3028
VisitorFeed 3029
VisitorHistory 3030
VisualforceAccessMetrics 3031
VoiceCall 3032
VoiceCallFeed 3034
VoiceCallRecording 3035
VoiceCallShare 3036
VoiceVendorInfo 3037
Vote 3038
Voucher 3039
VoucherDefinition 3041
VoucherDefinitionHistory 3043
VoucherDefinitionShare 3044
VoucherHistory 3045
VoucherShare 3046
WarrantyTerm 3047
WarrantyTermFeed 3049
WarrantyTermHistory 3050
WarrantyTermShare 3051
WasteFootprint 3052
WasteFootprintFeed 3054
WasteFootprintHistory 3055
WasteFootprintItem 3056
WasteFootprintItemFeed 3057
WasteFootprintItemHistory 3058
WasteFootprintShare 3059

WaveAutoInstallRequest 3060
WebCart 3061
WebCartAdjustmentGroup 3063
WebCartHistory 3064
WebCartShare 3065
WebLink 3066
WebLinkLocalization 3068
WebStore 3069
WebStoreCatalog 3071
WebStoreCatalogHistory 3072
WebStorePricebook 3073
WebStorePricebookFeed 3074
WebStoreShare 3075
Wishlist 3076
WishlistItem 3077
WishlistShare 3078
WorkAccess 3079
WorkAccessShare 3080
WorkBadge 3081
WorkBadgeDefinition 3082
WorkBadgeDefinitionFeed 3083
WorkBadgeDefinitionHistory 3084
WorkBadgeDefinitionShare 3085
WorkOrder 3086
WorkOrderFeed 3088
WorkOrderHistory 3089
WorkOrderLineItem 3090
WorkOrderLineItemFeed 3092

WorkOrderLineItemHistory 3093
WorkOrderLineItemStatus 3094
WorkOrderShare 3095
WorkOrderStatus 3096
WorkPlan 3097
WorkPlanFeed 3098
WorkPlanHistory 3099
WorkPlanSelectionRule 3100
WorkPlanSelectionRuleFeed 3101
WorkPlanSelectionRuleHistory 3102
WorkPlanSelectionRuleShare 3103
WorkPlanShare 3104
WorkPlanTemplate 3105
WorkPlanTemplateEntry 3106
WorkPlanTemplateEntryFeed 3107
WorkPlanTemplateEntryHistory 3108
WorkPlanTemplateFeed 3109
WorkPlanTemplateHistory 3110
WorkPlanTemplateShare 3111
WorkStep 3112
WorkStepFeed 3114
WorkStepHistory 3115
WorkStepStatus 3116
WorkStepTemplate 3117
WorkStepTemplateFeed 3118
WorkStepTemplateHistory 3119
WorkStepTemplateShare 3120
WorkThanks 3121

WorkThanksShare 3122
WorkType 3123
WorkTypeCareSpecialty 3124
WorkTypeCareSpecialtyFeed 3125
WorkTypeCareSpecialtyHistory 3126
WorkTypeCodeSetBundle 3127
WorkTypeCodeSetBundleFeed 3128
WorkTypeCodeSetBundleHistory 3129
WorkTypeFeed 3130
WorkTypeGroup 3131
WorkTypeGroupFeed 3132
WorkTypeGroupHistory 3133
WorkTypeGroupMember 3134
WorkTypeGroupMemberFeed 3135
WorkTypeGroupMemberHistory 3136
WorkTypeGroupShare 3137
WorkTypeHistory 3138
WorkTypeShare 3139
WorkerCompCoverageClass 3140
WorkerCompCoverageClassFeed 3141
WorkerCompCoverageClassHistory 3142
WorkerCompCoverageClassShare 3143
WstDispoEmssnFctrSet 3144
WstDispoEmssnFctrSetFeed 3145
WstDispoEmssnFctrSetHistory 3146
WstDispoEmssnFctrSetItm 3147
WstDispoEmssnFctrSetItmFeed 3148
WstDispoEmssnFctrSetItmHistory 3149

WstDispoEmssnFctrSetShare 3150

FIELDS REFERENCE INTRODUCTION

This guide lists important details for standard objects in Salesforce.

- All the fields
- The data type for each field
- Any applicable size restrictions for each field

Use this guide along with these other resources:

- The Object Reference for Salesforce and Lightning Platform, which provides the primary information about the objects and how they are used in the Salesforce APIs.
- Salesforce Help, which describes how the objects are used in the Salesforce user interface.

Depending on your org settings and Salesforce Edition, some of these objects and fields might not be available.

The columns in this guide are:

`Field Label`	How the field is displayed in the user interface in areas such as record detail pages, search results, and list views.
`API Field Name`	The name of the field, as represented in the Salesforce APIs.
`Type`	The data type of a field. For more information, see Primitive Data Types and Field Types in the *Object Reference*.
`Digits`	The maximum number of digits in the field.
`Length`	The maximum number of characters in the field. For example, the Shipping Zip/Postal Code field on the Account object has a length of 20. You can't set it to a value longer than 20 characters.
`Precision`	The maximum total number of digits in the number, including digits both to the left and right of the decimal point. For example, 12345.67 has a precision of seven, five for the numbers to the left of the decimal place and two for the numbers to the right.
`Scale`	The number of digits to the right of the decimal place. A scale of two means that two digits to the right of the decimal place are displayed.

Note: Not all fields have information in every column. For example, a picklist field does not have a precision or scale.

Terminology in the API versus the User Interface

Some places in the user interface, such as the New Custom Field screen, use different terminology. On that screen, **length** refers to the number of digits to the left of the decimal place and **decimal places** refers to the number of digits to the right.

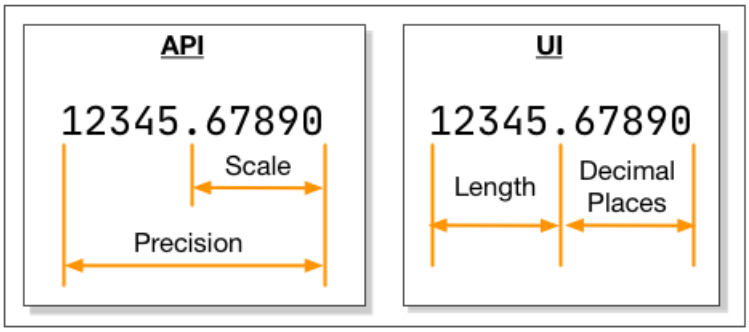

AIAPPLICATION

Represents an AI application such as Einstein Prediction Builder.

For more information, see AIApplication in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	AI Application ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	App Type	picklist		255		

AIAPPLICATIONCONFIG

Additional prediction information related to an AI application.

For more information, see AIApplicationConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	AI Application config Id	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

AIFEATUREEXTRACTOR

Represents information about the feature extractor that's used to extract the input data required for making predictions.

For more information, see AIFeatureExtractor in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AiUsecaseModelId	AI Usecase Model ID	reference		18		
BatchInputSourceIdentifier	Batch Input Source Identifier	string		255		
ClassName	Class Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
FeatureInputType	Feature Input Type	picklist		255		
Id	AI Feature Extractor ID	id		18		
InputContext	Input Context	textarea		131072		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

AIINSIGHTACTION

Represents an Einstein prediction insight action.

For more information, see AIInsightAction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionId`	Action ID	reference		18		
`ActionName`	Action Name	picklist		255		
`AiRecordInsightId`	AI Record Insight ID	reference		18		
`Confidence`	Confidence	double			4	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	AI Insight Action ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Action Type	picklist		255		

AIINSIGHTFEEDBACK

Represents an Einstein prediction insight feedback.

For more information, see AIInsightFeedback in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActualValue`	Actual Value	string		255		
`AiFeedback`	AI Insight Feedback	picklist		255		
`AiInsightFeedbackType`	AI Insight Feedback Type	picklist		255		
`AiRecordInsightId`	AI Record Insight ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	AI Insight Feedback ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`Rank`	Rank	int	9			
`SystemModstamp`	System Modstamp	datetime				
`ValueId`	AI Insight Value ID or AI Insight Action ID	reference		18		

AIINSIGHTREASON

Represents an Einstein prediction insight reason.

For more information, see AIInsightReason in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AiInsightValueId`	AI Insight Value ID	reference		18		
`Contribution`	Contribution	double			4	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeatureType`	Feature Type	picklist		255		
`FeatureValue`	Feature Value	string		255		
`FieldName`	Field Name	string		255		
`FieldValue`	Field Value	string		255		
`Id`	AI Insight Reason ID	id		18		
`Intensity`	Intensity	double			4	2
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`Operator`	Operator	picklist		255		
`ReasonLabelKey`	Reason Label Key	string		255		
`RelatedInsightReasonId`	AI Insight Reason ID	reference		18		
`SortOrder`	Sort Order	int	8			
`SystemModstamp`	System Modstamp	datetime				
`Variance`	Variance	double			4	2

AIINSIGHTVALUE

Represents an Einstein prediction insight value.

For more information, see AIInsightValue in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AiInsightActionId`	AI Insight Action ID	reference		18		
`AiRecordInsightId`	AI Record Insight ID	reference		18		
`Confidence`	Confidence	double			5	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Field`	Field	picklist		255		
`FieldValueLowerBound`	Field Value Lower Bound	textarea		131072		
`FieldValueUpperBound`	Field Value Upper Bound	textarea		131072		
`Id`	AI Insight Value ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SobjectLookupValueId`	sObject Lookup Value ID	reference		18		
`SobjectType`	sObject Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	textarea		131072		
`ValueType`	Value Type	picklist		255		

AIPREDICTIONEVENT

Notifies subscribers when an Einstein feature, such as Prediction Builder or Case Classification, has written prediction results back to a target object and AI prediction field.

For more information, see AIPredictionEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Confidence`	AI Insight Value Confidence	double			5	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventUuid`	Event UUID	string		36		
`FieldName`	AI Predicted Field API Name	string		255		
`HasError`	AI Has Error	boolean				
`InsightId`	AI Record Insight ID	string		18		
`PredictionEntityId`	AI Insight Value ID	string		80		
`ReplayId`	Replay ID	string		1000		
`TargetId`	AI Predicted Object ID	string		18		

AIRECORDINSIGHT

Represents an Einstein prediction insight.

For more information, see AIRecordInsight in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AiApplicationId	AI Application ID	reference		18		
Confidence	Confidence	double			4	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	AI Record Insight ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MlPredictionDefinitionId	ML Prediction Definition ID	reference		18		
ModelId	AI Model ID	reference		18		
Name	Name	string		255		
PredictionField	Prediction Field	string		250		
RunGuid	Run GUID	string		250		
RunStartTime	Run Start Time	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetField	Target Field	picklist		255		
TargetId	Target ID	reference		18		
TargetSobjectType	Target sObject Type	picklist		255		
Type	Type	picklist		255		
ValidUntil	Valid Until	datetime				

AISCORINGSTATUSEVENT

Notifies subscribers when the scoring job started by the /services/data/{release version}/connect/aiaccelerator/predictions REST request, executed in asynchronous mode, is complete.

For more information, see AIScoringStatusEvent in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AiScoringRequestResponse	AI Scoring Request Response	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EventUuid	Event Uuid	string		36		
PrimaryResponseRecordList	Primary Response Record List	textarea		32000		
ReplayId	Replay Id	string		1000		
SecondaryResponseRecordList	Secondary Response Record List	textarea		32000		
Status	Status	picklist		255		
StatusDescription	Status Description	string		255		

AISENTIMENTRESULT

Represents the outcome of the sentiment analysis performed on a text field of a Salesforce object by a third-party service provider.

For more information, see AISentimentResult in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Sentiment Analysis Result ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MixedConfidenceScore	Mixed Confidence Score	double			18	5
Name	Name	string		255		
NegativeConfidenceScore	Negative Confidence Score	double			18	5
NeutralConfidenceScore	Neutral Confidence Score	double			18	5
OverallSentimentScore	Overall Sentiment Score	double			18	5
OverallSentimentType	Overall Sentiment Type	picklist		255		
OwnerId	Owner ID	reference		18		
PositiveConfidenceScore	Positive Confidence Score	double			18	5
Response	Response	textarea		131072		
ServiceType	Service Type	picklist		255		
SourceObjectId	Source Object ID	reference		18		
SourceObjectType	Source Object Type	picklist		255		
SourceTextField	Source Text Field	picklist		255		
SourceTextLanguage	Source Text Language	picklist		255		
Status	Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

AISENTIMENTRESULTSHARE

Sharing for AISentimentResult.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AIUSECASEDEFINITION

Represents a collection of fields to set up the use case for which real-time predictions are to be made.

For more information, see AIUsecaseDefinition in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CreatorType`	Creator Type	picklist		255		
`DeveloperName`	Name	string		80		
`Id`	AI Usecase Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`MaximumInsightCount`	Maximum Insight Count	int	9			
`MaximumRecommendationCount`	Maximum Recommendation Count	int	9			
`MaximumSuggestionCount`	Maximum Recommendation Count	int	9			
`NamespacePrefix`	Namespace Prefix	string		15		
`PrimaryResponseObject`	Primary Response Object	picklist		255		
`RecommendationResponseObject`	Recommendation Response Object	picklist		255		
`RecommendationSource`	Recommendation Source	picklist		255		
`SecondaryResponseObject`	Secondary Response Object	picklist		255		
`ShouldSaveFeatures`	Save Features	boolean				
`ShouldSaveInsights`	Save Insights	boolean				
`ShouldSaveRecommendation`	Save Recommendation	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShouldSaveRequestResponse	Save Request Response	boolean				
ShouldSaveScore	Save Score	boolean				
ShouldSaveSuggestions	Save Suggestions	boolean				
SuggestionImpactMinimumPct	Suggestion Impact Minimum Pct	int	9			
SystemModstamp	System Modstamp	datetime				
UsecaseName	Use Case Name	string		255		

AIUSECASEFIELDMAPPING

Represents information about the field mapping that's used to save extracted features, prediction scores, insights about the predictions, and suggestions to improve the prediction scores.

For more information, see AIUsecaseFieldMapping in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AiUsecaseDefinitionId`	AI Usecase Definition ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	AI Usecase Field Mapping ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MappedFieldName`	Mapped Field Name	string		255		
`MappedFieldType`	Mapped Field Type	picklist		255		
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`ResponseFieldName`	Response Field Name	string		255		
`ResponseObject`	Response Object	string		255		
`SequenceNumber`	Sequence Number	int	9			
`SystemModstamp`	System Modstamp	datetime				

AIUSECASEMODEL

Represents information about the machine learning models that generate predictions for your use case.

For more information, see AIUsecaseModel in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AiFeatureExtractorId`	AI Feature Extractor ID	reference		18		
`AiUsecaseDefinitionId`	AI Usecase Definition ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	AI Usecase Model ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`PredictionDefinition`	Prediction Definition	string		255		
`PredictionPlatform`	Prediction Platform	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ACCEPTEDEVENTRELATION

Represents event participants (invitees or attendees) with the status `Accepted` for a given event.

For more information, see AcceptedEventRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventId`	Event ID	reference		18		
`Id`	Event Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RelationId`	Relation ID	reference		18		
`RespondedDate`	Response Date	datetime				
`Response`	Response	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	string		50		

ACCOUNT

Represents an individual account, which is an organization or person involved with your business (such as customers, competitors, and partners).

For more information, see Account in the *Consumer Goods Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountSource	Account Source	picklist		255		
AnnualRevenue	Annual Revenue	currency			18	0
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Billing Geocode Accuracy	picklist		40		
BillingLatitude	Billing Latitude	double			18	15
BillingLongitude	Billing Longitude	double			18	15
BillingPostalCode	Billing Zip/Postal Code	string		20		
BillingState	Billing State/Province	string		80		
BillingStreet	Billing Street	textarea		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Account Description	textarea		32000		
Fax	Account Fax	phone		40		
Id	Account ID	id		18		
Industry	Industry	picklist		255		
IsDeleted	Deleted	boolean				
Jigsaw	Data.com Key	string		20		
JigsawCompanyId	Jigsaw Company ID	string		20		
LastActivityDate	Last Activity	date				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MasterRecordId	Master Record ID	reference		18		
Name	Account Name	string		255		
NumberOfEmployees	Employees	int	8			
OwnerId	Owner ID	reference		18		
ParentId	Parent Account ID	reference		18		
Phone	Account Phone	phone		40		
PhotoUrl	Photo URL	url		255		
ShippingAddress	Shipping Address	address				
ShippingCity	Shipping City	string		40		
ShippingCountry	Shipping Country	string		80		
ShippingGeocodeAccuracy	Shipping Geocode Accuracy	picklist		40		
ShippingLatitude	Shipping Latitude	double			18	15
ShippingLongitude	Shipping Longitude	double			18	15
ShippingPostalCode	Shipping Zip/Postal Code	string		20		
ShippingState	Shipping State/Province	string		80		
ShippingStreet	Shipping Street	textarea		255		
SicDesc	SIC Description	string		80		
SystemModstamp	System Modstamp	datetime				
Type	Account Type	picklist		255		
Website	Website	url		255		

ACCOUNTACCOUNTRELATION

Represents a relationship between accounts, such as a relationship between a business account and a household account.

For more information, see AccountAccountRelation in the *Financial Services Cloud Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
HierarchyType	Hierarchy Type	picklist		255		
Id	Account Account Relationship ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Account Relationship Id	string		255		
OwnerId	Owner ID	reference		18		
PartyRoleRelationId	Party Role Relationship ID	reference		18		
RelatedAccountId	Related Account ID	reference		18		
RelatedInverseRecordId	Related Inverse Record ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

ACCOUNTACCOUNTRELATIONFEED

Feed tracking for AccountAccountRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ACCOUNTACCOUNTRELATIONHISTORY

History for tracked fields of AccountAccountRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountAccountRelationId	Account Account Relationship ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Account Account Relationship History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACCOUNTACCOUNTRELATIONSHARE

Sharing for AccountAccountRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ACCOUNTBRAND

Represents the brand details of a Partner Account.

For more information, see AccountBrand in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Address	Address	address				
City	City	string		40		
CompanyName	Company Name	string		255		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Email	Email	email		80		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Account Brand Id	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LogoId	Asset File ID	reference		18		
LogoUrl	Logo URL	url		1000		
Longitude	Longitude	double			18	15
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Phone	Phone	phone		40		
PostalCode	Zip/Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
State	State/Province	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
Website	Website	url		255		

ACCOUNTBRANDSHARE

Sharing for AccountBrand.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACCOUNTCLEANINFO

Stores the metadata Data.com Clean uses to determine an account record's clean status. AccountCleanInfo helps you automate the cleaning or related processing of account records.

For more information, see AccountCleanInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AccountSite	Account Site	string		80		
Address	Address	address				
AnnualRevenue	Annual Revenue	currency			18	0
City	City	string		40		
CleanedByJob	Cleaned by Job	boolean				
CleanedByUser	Cleaned by User	boolean				
CompanyName	Company Name	string		255		
CompanyStatusDataDotCom	Company Status per Data.com	picklist		255		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DandBCompanyDunsNumber	D&B Company D-U-N-S Number	string		9		
DataDotComId	Data.com ID	string		20		
Description	Description	textarea		32000		
DunsNumber	D-U-N-S Number	string		9		
DunsRightMatchConfidence	DUNSRight™ Match Confidence	int	9			
DunsRightMatchGrade	DUNSRight™ Match Grade	string		255		
Fax	Fax	phone		40		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Account Clean Info ID	id		18		
Industry	Industry	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
IsDifferentAccountSite	Account Site is Different	boolean				
IsDifferentAnnualRevenue	Annual Revenue is Different	boolean				
IsDifferentCity	City is Different	boolean				
IsDifferentCompanyName	Company Name is Different	boolean				
IsDifferentCountry	Country is Different	boolean				
IsDifferentCountryCode	Country Code is Different	boolean				
IsDifferentDandBCompanyDunsNumber	D&B Company D-U-N-S Number is Different	boolean				
IsDifferentDescription	Description is Different	boolean				
IsDifferentDunsNumber	D-U-N-S Number is Different	boolean				
IsDifferentFax	Fax is Different	boolean				
IsDifferentIndustry	Industry is Different	boolean				
IsDifferentNaicsCode	NAICS Code is Different	boolean				
IsDifferentNaicsDescription	NAICS Description is Different	boolean				
IsDifferentNumberOfEmployees	Number of Employees is Different	boolean				
IsDifferentOwnership	Ownership is Different	boolean				
IsDifferentPhone	Phone is Different	boolean				
IsDifferentPostalCode	ZIP is Different	boolean				
IsDifferentSic	SIC Code is Different	boolean				
IsDifferentSicDescription	SIC Description is Different	boolean				
IsDifferentState	State is Different	boolean				
IsDifferentStateCode	State Code is Different	boolean				
IsDifferentStreet	Street is Different	boolean				
IsDifferentTickerSymbol	Ticker Symbol is Different	boolean				
IsDifferentTradestyle	Tradestyle is Different	boolean				
IsDifferentWebsite	Website is Different	boolean				
IsDifferentYearStarted	Year Started is Different	boolean				
IsFlaggedWrongAccountSite	Account Site is Flagged Wrong	boolean				
IsFlaggedWrongAddress	Address is Flagged Wrong	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsFlaggedWrongAnnualRevenue	Annual Revenue is Flagged Wrong	boolean				
IsFlaggedWrongCompanyName	Company Name is Flagged Wrong	boolean				
IsFlaggedWrongDescription	Description is Flagged Wrong	boolean				
IsFlaggedWrongDunsNumber	D-U-N-S Number is Flagged Wrong	boolean				
IsFlaggedWrongFax	Fax is Flagged Wrong	boolean				
IsFlaggedWrongIndustry	Industry is Flagged Wrong	boolean				
IsFlaggedWrongNaicsCode	NAICS Code is Flagged Wrong	boolean				
IsFlaggedWrongNaicsDescription	NAICS Description is Flagged Wrong	boolean				
IsFlaggedWrongNumberOfEmployees	Number of Employees is Flagged Wrong	boolean				
IsFlaggedWrongOwnership	Ownership is Flagged Wrong	boolean				
IsFlaggedWrongPhone	Phone is Flagged Wrong	boolean				
IsFlaggedWrongSic	SIC Code is Flagged Wrong	boolean				
IsFlaggedWrongSicDescription	SIC Description is Flagged Wrong	boolean				
IsFlaggedWrongTickerSymbol	Ticker Symbol is Flagged Wrong	boolean				
IsFlaggedWrongTradestyle	Tradestyle is Flagged Wrong	boolean				
IsFlaggedWrongWebsite	Website is Flagged Wrong	boolean				
IsFlaggedWrongYearStarted	Year Started is Flagged Wrong	boolean				
IsInactive	Company Status in Salesforce	boolean				
IsReviewedAccountSite	Account Site is Reviewed	boolean				
IsReviewedAddress	Address is Reviewed	boolean				
IsReviewedAnnualRevenue	Annual Revenue is Reviewed	boolean				
IsReviewedCompanyName	Company Name is Reviewed	boolean				
IsReviewedDandBCompanyDunsNumber	D&B Company D-U-N-S Number is Reviewed	boolean				
IsReviewedDescription	Description is Reviewed	boolean				
IsReviewedDunsNumber	D-U-N-S Number is Reviewed	boolean				
IsReviewedFax	Fax is Reviewed	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsReviewedIndustry	Industry is Reviewed	boolean				
IsReviewedNaicsCode	NAICS Code is Reviewed	boolean				
IsReviewedNaicsDescription	NAICS Description is Reviewed	boolean				
IsReviewedNumberOfEmployees	Number of Employees is Reviewed	boolean				
IsReviewedOwnership	Ownership is Reviewed	boolean				
IsReviewedPhone	Phone is Reviewed	boolean				
IsReviewedSic	SIC Code is Reviewed	boolean				
IsReviewedSicDescription	SIC Description is Reviewed	boolean				
IsReviewedTickerSymbol	Ticker Symbol is Reviewed	boolean				
IsReviewedTradestyle	Tradestyle is Reviewed	boolean				
IsReviewedWebsite	Website is Reviewed	boolean				
IsReviewedYearStarted	Year Started is Reviewed	boolean				
LastMatchedDate	Last Matched Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastStatusChangedById	User ID	reference		18		
LastStatusChangedDate	Last Status Changed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
NaicsCode	NAICS Code	string		8		
NaicsDescription	NAICS Description	string		120		
Name	Account Clean Info Name	string		255		
NumberOfEmployees	Number of Employees	int	8			
Ownership	Ownership	picklist		40		
Phone	Phone	phone		40		
PostalCode	Zip	string		20		
Sic	SIC Code	string		20		
SicDescription	SIC Description	string		80		
State	State	string		80		
Street	Street	textarea		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TickerSymbol	Ticker Symbol	string		20		
Tradestyle	Tradestyle	string		255		
Website	Website	url		255		
YearStarted	Year Started	string		12		

ACCOUNTCONTACTRELATION

Represents a relationship between a contact and one or more accounts.

For more information, see AccountContactRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Account Contact Relationship ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsDirect`	Direct	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Roles`	Roles	multipicklist		4099	0	
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				

ACCOUNTCONTACTROLE

Represents the role that a Contact plays on an Account.

For more information, see AccountContactRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contact Role ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Role`	Role	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

ACCOUNTFEED

Feed tracking for Account.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ACCOUNTFORECAST

Represents the rolling forecast record of a particular account. The forecast is prepared using data directly from sales agreements, orders, and opportunities.

For more information, see AccountForecast in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultAccountGrowthPercentage	Default Account Growth Percentage	percent			5	2
DefaultMarketGrowthPercentage	Default Market Growth Percentage	percent			5	2
EndDate	End Date	date				
Id	Account Forecast ID	id		18		
IsCalculationInProgress	Calculation In Progress	boolean				
IsDeleted	Deleted	boolean				
LastCalculatedDate	Recalculation Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalAdjustedRevenue	Total Adjusted Revenue	currency			18	0
TotalRevenue	Total Revenue	currency			18	0

ACCOUNTFORECASTADJUSTMENT

Represents the manual adjustments made to forecast values for a particular account.

For more information, see AccountForecastAdjustment in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountProdPeriodForecastId	Account Product Period Forecast ID	reference		18		
AdjustedById	User ID	reference		18		
AdjustedByName	Adjusted By Name	string		80		
AdjustmentComments	Adjustment Comments	textarea		2000		
AdjustmentType	Adjustment Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FromValue	From Value	double			18	0
Id	AccountForecastAdjustment ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				
ToValue	To Value	double			18	0

ACCOUNTFORECASTFEED

Feed tracking for AccountForecast.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACCOUNTFORECASTHISTORY

History for tracked fields of AccountForecast.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountForecastId	Account Forecast ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Account Forecast History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACCOUNTFORECASTPERIODMETRIC

Represents records of account metrics which vary by period but are not specific for a product.

For more information, see AccountForecastPeriodMetric in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountForecastId	Account Forecast ID	reference		18		
AccountGrowthPercentage	Account Growth Percentage	percent			5	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Account Forecast Period Metric ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MarketGrowthPercentage	Market Growth Percentage	percent			5	2
Name	Name	string		255		
PeriodId	Period ID	reference		18		
SystemModstamp	System Modstamp	datetime				

ACCOUNTFORECASTSHARE

Sharing for AccountForecast.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACCOUNTHISTORY

History for tracked fields of Account.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Account History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACCOUNTPARTNER

This object represents a partner relationship between two Account records. An AccountPartner record is created automatically when a Partner record is created for a partner relationship between two accounts.

For more information, see AccountPartner in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountFromId`	Account ID	reference		18		
`AccountToId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Account Partner ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityId`	Opportunity ID	reference		18		
`ReversePartnerId`	Reverse Partner ID	reference		18		
`Role`	Role	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ACCOUNTPRODUCTFORECAST

Represents the cumulative values for planned quantities, opportunities, and orders of a sales agreement for a given product across all periods in that rolling time period.

For more information, see AccountProductForecast in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountForecastId	Account Forecast ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Account Product Forecast ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsProductInvalidForAccountForecast	Product Not Valid For Account Forecasting	boolean				
IsSystemGenerated	System Generated	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ProductId	Product ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalAdjustedForecastedQuantity	Total Adjusted Forecasted Quantity	double			18	0
TotalAdjustedForecastedRevenue	Total Adjusted Forecasted Revenue	currency			18	0
TotalCurrentOrdersQuantity	Total Current Orders Quantity	double			18	0
TotalCurrentOrdersRevenue	Total Current Orders Revenue	currency			18	0
TotalForecastedQuantity	Total Forecasted Quantity	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalForecastedRevenue	Total Forecasted Revenue	currency			18	0
TotalOpportunityQuantity	Total Opportunity Quantity	double			18	0
TotalOpportunityRevenue	Total Opportunity Revenue	currency			18	0
TotalPastOrdersQuantity	Total Last Year's Orders Quantity	double			18	0
TotalPastOrdersRevenue	Total Last Year's Orders Revenue	currency			18	0
TotalSalesAgreementPlannedQuantity	Total Sales Agreement Planned Quantity	double			18	0
TotalSalesAgreementPlannedRevenue	Total Sales Agreement Planned Revenue	currency			18	0

ACCOUNTPRODUCTPERIODFORECAST

Represents the quantity and revenue information of opportunities, sales agreements, orders, and resultant forecasted quantities for a product in a particular time period of the forecast rolling period. Other than the fields AdjustedForecastQuantity and AdjustedForecastRevenue, no other fields of this object can be updated.

For more information, see AccountProductPeriodForecast in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccForecastPeriodMetricId	Account Forecast Period Metric ID	reference		18		
AccountProductForecastId	Account Product Forecast ID	reference		18		
AdjustedForecastedQuantity	Adjusted Forecasted Quantity	double			18	0
AdjustedForecastedRevenue	Adjusted Forecasted Revenue	currency			18	0
AdjustmentComments	Adjustment Comments	textarea		2000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentOrdersQuantity	Current Orders Quantity	double			18	0
CurrentOrdersRevenue	Current Orders Revenue	currency			18	0
ForecastedQuantity	Forecasted Quantity	double			18	0
ForecastedRevenue	Forecasted Revenue	currency			18	0
Id	Account Product Period Forecast ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastCalculatedDate	Last Calculated Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OpportunityQuantity	Opportunity Quantity	double			18	0
OpportunityRevenue	Opportunity Revenue	currency			18	0
PastOrdersQuantity	Last Year's Orders Quantity	double			18	0
PastOrdersRevenue	Last Year's Orders Revenue	currency			18	0
PeriodId	Period ID	reference		18		
SalesAgreementPlannedQuantity	Sales Agreement Planned Quantity	double			18	0
SalesAgreementPlannedRevenue	Sales Agreement Planned Revenue	currency			18	0
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

ACCOUNTRELATIONSHIP

Represents a relationship of a given type between two accounts.

For more information, see AccountRelationship in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountFromId	Account From ID	reference		18		
AccountToId	Account To ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Account Relationship ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Account Relationship Type	picklist		40		

ACCOUNTRELATIONSHIPFEED

Feed tracking for AccountRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACCOUNTRELATIONSHIPHISTORY

History for tracked fields of AccountRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountRelationshipId	Account Relationship ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Account Relationship History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACCOUNTRELATIONSHIPSHARE

Sharing for AccountRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACCOUNTRELATIONSHIPSHARERULE

Represents the rule that determines which object records are shared, how they are shared, the account relationship type that shares the records, and the level of access granted to the records. This object is available in API version 45.0 and later.

For more information, see AccountRelationshipShareRule in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Access Level	picklist		255		
`AccountToCriteriaField`	Account To Criteria Field	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	Developer Name	string		80		
`EntityType`	Object Type	picklist		255		
`Id`	Account Relationship Data Sharing Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`StaticFormulaCriteria`	Static Formula Criteria	string		1333		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Account Relationship Type	picklist		40		

ACCOUNTSHARE

Represents a sharing entry on an Account.

For more information, see AccountShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountAccessLevel`	Account Access	picklist		40		
`AccountId`	Account ID	reference		18		
`CaseAccessLevel`	Case Access	picklist		40		
`ContactAccessLevel`	Contact Access	picklist		40		
`Id`	Account Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityAccessLevel`	Opportunity Access	picklist		40		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ACCREDITATION

Represents the professional accreditations of a facility. For example, a joint commission accredits a facility as a general acute care hospital.

For more information, see Accreditation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AccreditationRating	Accreditation Rating	picklist		40		
AccreditingBody	Accrediting Body	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Accreditation ID	id		18		
IsDeleted	Deleted	boolean				
LastFullSurveyDate	Last Full Survey Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastOnsiteSurveyDate	Last On-site Survey Date	date				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Accreditation Name	string		255		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SubType	Sub-Type	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

ACCREDITATIONFEED

Feed tracking for Accreditation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACCREDITATIONHISTORY

History for tracked fields of Accreditation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccreditationId	Accreditation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Accreditation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACCREDITATIONSHARE

Sharing for Accreditation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACTIONLINKGROUPTEMPLATE

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking on an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed. Every action link belongs to an action link group and action links within the group are mutually exclusive.

For more information, see ActionLinkGroupTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`ExecutionsAllowed`	Executions Allowed	picklist		255		
`HoursUntilExpiration`	Hours until Expiration	int	9			
`Id`	Action Link Group Template ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPublished`	Published	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

ACTIONLINKTEMPLATE

Action link templates let you reuse action link definitions and package and distribute action links. An action link is a button on a feed element. Clicking an action link can take a user to another Web page, initiate a file download, or invoke an API call to an external server or Salesforce. Use action links to integrate Salesforce and third-party services into the feed.

For more information, see ActionLinkTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionLinkGroupTemplateId	Action Link Group Template ID	reference		18		
ActionUrl	Action URL	textarea		32000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Headers	HTTP Headers	textarea		32000		
Id	Action Link Template ID	id		18		
IsConfirmationRequired	Confirmation Required	boolean				
IsDeleted	Deleted	boolean				
IsGroupDefault	Default Link in Group	boolean				
Label	Label	string		255		
LabelKey	Label Key	string		128		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LinkType	Action Type	picklist		255		
Method	HTTP Method	picklist		255		
Position	Position	int	9			
RequestBody	HTTP Request Body	textarea		32000		
SystemModstamp	System Modstamp	datetime				
UserAlias	Custom User Alias	string		128		
UserVisibility	User Visibility	picklist		255		

ACTIONPLAN

Represents the instance of an action plan, a set of tasks created from an action plan template.

For more information, see ActionPlan in the *Emergency Response Management for Public Sector Admin Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionPlanState	Status	picklist		40		
ActionPlanTemplateVersionId	Action Plan Template Version ID	reference		18		
ActionPlanType	Action Plan Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Action Plan ID	id		18		
IsDeleted	Deleted	boolean				
IsUsingHolidayHours	Skip Nonwork Days For Tasks	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RecordCreationType	Record Creation Type	picklist		255		
RecurringScheduleId	Recurrence Schedule ID	reference		18		
ScheduleFrequency	Schedule Frequency	string		50		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				
TargetId	Target Record ID	reference		18		

ACTIONPLANFEED

Feed tracking for ActionPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACTIONPLANITEM

Represents the instance of an action plan item.

For more information, see ActionPlanItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionPlanId`	Action Plan ID	reference		18		
`ActionPlanTemplateItemId`	Action Plan Template Item ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DependencyStatus`	Dependency Status	picklist		255		
`DisplayOrder`	Display Order	int	9			
`Id`	Action Plan Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsRequired`	Required	boolean				
`ItemId`	Action Plan Item ID	reference		18		
`ItemState`	Action Plan Item State	picklist		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Action Plan Item Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

ACTIONPLANSHARE

Sharing for ActionPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACTIONPLANTEMPLATE

Represents the instance of an action plan template.

For more information, see ActionPlanTemplate in the *Emergency Response Management for Public Sector Admin Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionPlanType	Action Plan Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Action Plan Template ID	id		18		
IsAdHocItemCreationEnabled	Let users add items to action plans	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetEntityType	Target Object	picklist		255		
UniqueName	Unique Name	string		80		

ACTIONPLANTEMPLATEITEM

Represents the instance of an item on an action plan template version.

For more information, see ActionPlanTemplateItem in the *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionPlanTemplateVersionId	Action Plan Template Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DisplayOrder	Display Order	int	9			
Id	Action Plan Template Item ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsRequired	Required	boolean				
ItemEntityType	Item Entity Type	picklist		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Item Name	string		255		
SystemModstamp	System Modstamp	datetime				
UniqueName	Unique Name	string		80		

ACTIONPLANTEMPLATEITEMVALUE

Represents the value associated with an action plan template item.

For more information, see ActionPlanTemplateItemValue in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionPlanTemplateItemId	Action Plan Template Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Action Plan Template Item Value ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
ItemEntityFieldName	Field Name	picklist		255		
ItemEntityType	Item Entity Type	picklist		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Item Value Name	string		255		
SystemModstamp	System Modstamp	datetime				
ValueFormula	Field Value - Dynamic	string		255		
ValueLiteral	Field Value - Static	textarea		32000		

ACTIONPLANTEMPLATESHARE

Sharing for ActionPlanTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ACTIONPLANTEMPLATEVERSION

Represents the version of an action plan template.

For more information, see ActionPlanTemplateVersion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionPlanTemplateId`	Action Plan Template ID	reference		18		
`ActivationDateTime`	Activation Date	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Action Plan Template Version ID	id		18		
`InactivationDateTime`	Inactivation Date	datetime				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Version Name	string		255		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Version`	Version Number	int	2			

ACTIONVISIBILITY

This object serves as a junction to connect Account or Contact to other objects so that information in those other object can be used to define visibility rules for actions in the Dynamic Actions for Unified Health Scoring component.

For more information, see ActionVisibility in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HealthScoreId	Health Score ID	reference		18		
Id	Action Visibility ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Action Visibility Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

ACTIONVISIBILITYFEED

Feed tracking for ActionVisibility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACTIONVISIBILITYHISTORY

History for tracked fields of ActionVisibility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionVisibilityId	Action Visibility ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Action Visibility History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACTIONVISIBILITYSHARE

Sharing for ActionVisibility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ACTIVEFEATURELICENSEMETRIC

Represents the number of active, assigned, and purchased feature licenses in the org.

For more information, see ActiveFeatureLicenseMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActiveUserCount`	Active User Count	int	9			
`AssignedUserCount`	Assigned User Count	int	9			
`FeatureType`	Primary Grain	picklist		40		
`Id`	Active Feature License Metric ID	id		18		
`MetricsDate`	Metrics Date	date				
`SystemModstamp`	System Modstamp	datetime				
`TotalLicenseCount`	Total License Count	int	9			

ACTIVEPERMSETLICENSEMETRIC

Represents the number of active, assigned, and purchased permission set licenses in the org.

For more information, see ActivePermSetLicenseMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActiveUserCount`	Active User Count	int	9			
`AssignedUserCount`	Assigned User Count	int	9			
`DeveloperName`	Permission Set License Developer Name	string		255		
`Id`	Active Permission Set License Metric ID	id		18		
`MasterLabel`	Permission Set License Master Label	string		255		
`MetricsDate`	Metrics Date	date				
`PermissionSetLicenseId`	Permission Set License ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TotalLicenses`	Total License Count	int	9			

ACTIVEPROFILEMETRIC

Represents the profile associated with the active, assigned, and purchased user licenses.

For more information, see ActiveProfileMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActiveUserCount`	Active User Count	int	9			
`AssignedUserCount`	Assigned User Count	int	9			
`Id`	Active Profile Metric ID	id		18		
`MetricsDate`	Metrics Date	date				
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserLicenseId`	User License ID	reference		18		

ACTIVITYHISTORY

This read-only object is displayed in a related list of closed activities—past events and closed tasks—related to an object. It includes activities for all contacts related to the object. ActivityHistory fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

For more information, see ActivityHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ActivityDate`	Date	date				
`ActivityDateTime`	Time	datetime				
`ActivitySubtype`	Activity Subtype	picklist		40		
`ActivityType`	Type	picklist		40		
`AlternateDetailId`	Email Message ID	reference		18		
`CallDisposition`	Call Result	string		255		
`CallDurationInSeconds`	Call Duration	int	8			
`CallObject`	Call Object Identifier	string		255		
`CallType`	Call Type	picklist		40		
`CompletedDateTime`	Completed Date/Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Comments	textarea		32000		
`DurationInMinutes`	Duration	int	9			
`EndDateTime`	End	datetime				
`Id`	Activity ID	id		18		
`IsAllDayEvent`	All-Day Event	boolean				
`IsClosed`	Closed	boolean				
`IsDeleted`	Deleted	boolean				
`IsHighPriority`	High Priority	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsReminderSet	Reminder Set	boolean				
IsTask	Task	boolean				
IsVisibleInSelfService	Public	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Location	Location	string		80		
OwnerId	Assigned To ID	reference		18		
Priority	Priority	picklist		20		
ReminderDateTime	Reminder Date/Time	datetime				
StartDateTime	Start	datetime				
Status	Status	picklist		255		
Subject	Subject	combobox		80		
SystemModstamp	System Modstamp	datetime				
WhatId	Related To ID	reference		18		
WhoId	Name ID	reference		18		

ACTIVITYTIMING

Represents detailed information about an activity that's repeated in regular intervals over a period of time.

For more information, see ActivityTiming in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityCountPerRepetition	Activity Count in Repetition Cycle	double			18	2
ActivityDuration	Activity Duration	double			18	2
ActivityDurationUnitId	Unit of Measure ID	reference		18		
ActivityTime	Activity Time	multipicklist		4099	0	
ActivityTimeOffset	Activity Time Offset	int	9			
CountInPeriod	Activity Count in Period	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Activity Timing ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaxActivityCountPerRepetition	Maximum Activity Count in Repetition Cycle	int	9			
MaxActivityDuration	Maximum Activity Duration	double			18	2
MaxCountInPeriod	Maximum Activity Count in Period	int	9			
MaxRepetitionCycleLength	Maximum Repetition Cycle Length	double			18	2
Name	Name	string		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PeriodEndDateTime	Period End Date	datetime				
PeriodLength	Period Length	int	9			
PeriodLengthLowerLimit	Period Length Lower Limit	double			18	2
PeriodLengthUnitId	Unit of Measure ID	reference		18		
PeriodLengthUpperLimit	Period Length Upper Limit	double			18	2
PeriodStartDateTime	Period Start Date	datetime				
RepetitionCycleLength	Repetition Cycle Length	double			18	2
RepetitionCycleUnitId	Unit of Measure ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				
TimingCodeId	Code Set ID	reference		18		
UsageType	Usage Type	picklist		255		
WeeklyActivityTimeId	Operating Hour ID	reference		18		

ACTIVITYTIMINGFEED

Feed tracking for ActivityTiming.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ACTIVITYTIMINGHISTORY

History for tracked fields of ActivityTiming.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityTimingId	Activity Timing ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Activity Timing History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ACTIVITYTIMINGSHARE

Sharing for ActivityTiming.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ADDITIONALNUMBER

Represents an optional additional number for a call center. This additional number is visible in the call center's phone directory.

For more information, see AdditionalNumber in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CallCenterId`	Call Center ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Additional Directory Number ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`Phone`	Phone	phone		40		
`SystemModstamp`	System Modstamp	datetime				

ADDRESS

Represents a mailing, billing, or home address.

For more information, see Address in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *Salesforce Health Cloud Developer Guide*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Address`	Address	address				
`AddressType`	Address Type	picklist		40		
`City`	City	string		40		
`Country`	Country	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DrivingDirections`	Driving Directions	string		1000		
`GeocodeAccuracy`	Geocode Accuracy	picklist		255		
`Id`	Address ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Latitude`	Latitude	double			18	15
`LocationType`	Location Type	picklist		40		
`Longitude`	Longitude	double			18	15
`Name`	Name	string		255		
`ParentId`	Parent ID	reference		18		
`PostalCode`	Zip/Postal Code	string		20		
`State`	State/Province	string		80		
`Street`	Address	textarea		255		
`SystemModstamp`	System Modstamp	datetime				

Address

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TimeZone	Time Zone	picklist		255		

ADVACCOUNTFORECASTFACT

Represents information about the generated advanced account forecast records.

For more information, see AdvAccountForecastFact in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AdvAcctForecastSetPartnerId	Advanced Account Forecast Set Partner ID	reference		18		
AdvAcctForecastSetUseId	Advanced Account Forecast Set Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ForecastedQuantity	Forecasted Quantity	double			18	6
ForecastedRevenue	Forecasted Revenue	currency			14	2
Id	Advanced Account Forecast Fact ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LastYearOrderQuantity	Last Year Order Quantity	double			18	6
LastYearOrderRevenue	Last Year Order Revenue	currency			14	2
Name	Name	string		255		
OpportunityQuantity	Opportunity Quantity	double			18	6
OpportunityRevenue	Opportunity Revenue	currency			14	2
OrderQuantity	Order Quantity	double			18	6
OrderRevenue	Order Revenue	currency			14	2
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PeriodId	Period ID	reference		18		
PeriodStartDate	Period Start Date	date				
ProductId	Product ID	reference		18		
SalesAgreementQuantity	Sales Agreement Quantity	double			18	6
SalesAgreementRevenue	Sales Agreement Revenue	currency			14	2
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

ADVACCOUNTFORECASTFACTFEED

Feed tracking for AdvAccountForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ADVACCOUNTFORECASTFACTHISTORY

History for tracked fields of AdvAccountForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAccountForecastFactId	Advanced Account Forecast Fact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Advanced Account Forecast Fact History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ADVACCOUNTFORECASTFACTSHARE

Sharing for AdvAccountForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ADVACCOUNTFORECASTPERIOD

Represents information about the periods for which advanced account forecasting is applied.

For more information, see AdvAccountForecastPeriod in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DisplayDuration`	Display Duration	int	9			
`ForecastPeriodGroupId`	Advanced Account Forecast Period Group ID	reference		18		
`Id`	Advanced Account Forecast Period ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SequenceNumber`	Sequence Number	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		

ADVACCOUNTFORECASTSET

Represents a collection of fields to set up an advanced account forecast set.

For more information, see AdvAccountForecastSet in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountFieldName`	Custom Field Definition ID	picklist		255		
`CalculationFrequency`	Calculation Frequency	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Name	string		80		
`ForecastFactObjectName`	Custom Object Definition ID	picklist		255		
`ForecastPeriodGroupId`	Advanced Account Forecast Period Group ID	reference		18		
`ForecastQuantityFieldName`	Custom Field Definition ID	picklist		255		
`ForecastRevenueFieldName`	Custom Field Definition ID	picklist		255		
`ForecastSetFieldName`	Custom Field Definition ID	picklist		255		
`ForecastSetName`	Forecast Set Name	string		80		
`ForecastStatusFieldName`	Custom Field Definition ID	picklist		255		
`GenerationDpeDefNameId`	Batch Calculation Job Definition ID	reference		18		
`Id`	Advanced Account Forecast Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`PeriodFieldName`	Custom Field Definition ID	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RecalculateDpeDefNameId	Batch Calculation Job Definition ID	reference		18		
RegenerationDpeDefNameId	Batch Calculation Job Definition ID	reference		18		
RolloverDpeDefNameId	Batch Calculation Job Definition ID	reference		18		
RolloverFrequency	Rollover Frequency	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

ADVACCTFORECASTADJPERIOD

Represents details about the adjustment period of the advanced account forecast values.

For more information, see AdvAcctForecastAdjPeriod in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdjustmentDayCount`	Adjustment Day Count	int	9			
`AdvAccountForecastSetId`	Advanced Account Forecast Set ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Frequency`	Frequency	picklist		255		
`Id`	Advanced Account Forecast Adjustment Period ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProfileId`	Profile ID	reference		18		
`StartDay`	Start Day	int	9			
`SystemModstamp`	System Modstamp	datetime				

ADVACCTFORECASTDIMSOURCE

Represents information about the dimensions that can be used by advanced account forecast sets to generate advanced account forecast records.

For more information, see AdvAcctForecastDimSource in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAcctForecastDimSrcName	Name	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
Id	Advanced Account Forecast Dimension Source ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
SourceObjectName	Custom Object Definition ID	picklist		255		
SystemModstamp	System Modstamp	datetime				

ADVACCTFORECASTDIMENSION

Represents information about the dimensions selected for an advanced account forecast set.

For more information, see AdvAcctForecastDimension in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAcctForecastDimName	Name	string		80		
AdvAcctForecastDimSourceId	Advanced Account Forecast Dimension Source ID	reference		18		
AdvAcctForecastSetId	Advanced Account Forecast Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DimensionFieldName	Custom Field Definition ID	picklist		255		
HierarchySequenceNumber	Hierarchy Sequence Number	int	9			
Id	Advanced Account Forecast Dimension ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
SystemModstamp	System Modstamp	datetime				

ADVACCTFORECASTFACTADJ

Represents information about adjustments made to advanced account forecast fact records.

For more information, see AdvAcctForecastFactAdj in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustedById	User ID	reference		18		
AdvAcctForecastFactId	Advanced Account Forecast Fact ID	reference		18		
Comment	Comment	textarea		2000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Advanced Account Forecast Fact Adjustment ID	id		18		
InitialValue	Initial Value	double			18	6
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UpdatedValue	Updated Value	double			18	6

ADVACCTFORECASTFACTADJSHARE

Sharing for AdvAcctForecastFactAdj.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ADVACCTFORECASTMEASUREDEF

Represents information about the measures to be displayed in the advanced account forecasts grid for the forecast set.

For more information, see AdvAcctForecastMeasureDef in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAccountForecastSetId	Advanced Account Forecast Set ID	reference		18		
AdvAcctForecastMeasureDefName	Name	string		80		
AggregationType	Aggregation Type	picklist		255		
ComputationMethod	Computation Method	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ForecastDataMeasureName	Forecast Data Measure Name	string		80		
ForecastMeasureName	Forecast Measure Name	string		80		
ForecastMeasureType	Forecast Measure Type	picklist		255		
Id	Advanced Account Forecast Measure Definition ID	id		18		
IsAdjustmentTracked	Track Adjustments	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
SystemModstamp	System Modstamp	datetime				

ADVACCTFORECASTPERIODGROUP

Represents information about advanced account forecast period records. This is the parent object of all the related advanced account forecast period records.

For more information, see AdvAcctForecastPeriodGroup in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`ForecastPeriodGroupName`	Name	string		80		
`Id`	Advanced Account Forecast Period Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`StartPeriod`	Start Period	int	9			
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ADVACCTFORECASTSETPARTNER

Represents a junction between an advanced account forecast set and an account.

For more information, see AdvAcctForecastSetPartner in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalReferenceNumber`	External Reference Number	string		80		
`Id`	Advanced Account Forecast Set Partner ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastCalculationDate`	Last Calculation Date	date				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ADVACCTFORECASTSETPARTNERFEED

Feed tracking for AdvAcctForecastSetPartner.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ADVACCTFORECASTSETPARTNERHISTORY

History for tracked fields of AdvAcctForecastSetPartner.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAcctForecastSetPartnerId	Advanced Account Forecast Set Partner ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Advanced Account Forecast Set Partner History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ADVACCTFORECASTSETPARTNERSHARE

Sharing for AdvAcctForecastSetPartner.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ADVACCTFORECASTSETUSE

Represents a junction between an advanced account forecast set and another object whose record serves as the context for generating forecasts. For example, a manufacturing program or a Sustainability Cloud object's record can be the context for generating forecasts.

For more information, see AdvAcctForecastSetUse in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalReferenceNumber`	External Reference Number	string		80		
`ForecastContextId`	Forecast Context ID	reference		18		
`Id`	Advanced Account Forecast Set Use ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastCalculationDate`	Last Calculation Date	date				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ADVACCTFORECASTSETUSEFEED

Feed tracking for AdvAcctForecastSetUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ADVACCTFORECASTSETUSEHISTORY

History for tracked fields of AdvAcctForecastSetUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAcctForecastSetUseId	Advanced Account Forecast Set Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Advanced Account Forecast Set Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ADVACCTFORECASTSETUSESHARE

Sharing for AdvAcctForecastSetUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ADVACCTFRCSTDISPLAYGROUP

Represents information about the groups for the advanced account forecast set measures or dimensions.

For more information, see AdvAcctFrcstDisplayGroup in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAccountForecastSetId	Advanced Account Forecast Set ID	reference		18		
AdvAcctFrcstDisplayGroupName	Group Name	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
GroupType	Group Type	picklist		255		
Id	Advanced Account Forecast Display Group ID	id		18		
IsDefault	Default	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
SystemModstamp	System Modstamp	datetime				
UserProfileId	Profile ID	reference		18		

ADVACCTFRCSTDPLYGROUPITEM

Represents information about the items associated with a display group for an advanced account forecast set.

For more information, see AdvAcctFrcstDplyGroupItem in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAcctFrcstDisplayGroupId	Advanced Account Forecast Display Group ID	reference		18		
AdvAcctFrcstDplyGroupItemName	Item Name	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DisplayOrder	Display Order	int	9			
Id	Advanced Account Forecast Display Group Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MeasureReferenceId	Advanced Account Forecast Measure Definition ID	reference		18		
SystemModstamp	System Modstamp	datetime				

AGENTWORK

Represents a work assignment that's been routed to an agent.

For more information, see AgentWork in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcceptDateTime	Accept Date	datetime				
ActiveTime	Active Time	int	9			
AcwExtensionCount	After Conversation Work Extension Count	int	9			
AcwExtensionDuration	After Conversation Work Extension Duration	int	9			
AfterConversationActualTime	After Conversation Work Actual Time	int	9			
AgentCapacityWhenDeclined	Agent Capacity when Declined	double			10	2
AssignedDateTime	Assign Date	datetime				
BotId	Bot ID	reference		18		
CancelDateTime	Cancel Date	datetime				
CapacityModel	Capacity Model Type	picklist		255		
CapacityPercentage	Percentage of Capacity	percent			5	2
CapacityWeight	Units of Capacity	double			10	2
CloseDateTime	Close Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeclineDateTime	Decline Date	datetime				
DeclineReason	Decline Reason	string		200		
HandleTime	Handle Time	int	9			
Id	Agent Work ID	id		18		
IsDeleted	Deleted	boolean				
IsOwnerChangeInitiated	Is Owner Change Initiated	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsPreferredUserRequired	Is Preferred User Required	boolean				
IsStatusChangeInitiated	Is Status Change Initiated	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
OriginalGroupId	Group ID	reference		18		
OriginalQueueId	Queue ID	reference		18		
OwnerId	Owner ID	reference		18		
PendingServiceRoutingId	Pending Service Routing ID	reference		18		
PreferredUserId	User ID	reference		18		
PushTimeout	Push Time-Out	int	9			
PushTimeoutDateTime	Push Time-Out Date	datetime				
RequestDateTime	Request Date	datetime				
RoutingModel	Routing Model	picklist		255		
RoutingPriority	Routing Priority	int	9			
RoutingType	Routing Type	picklist		255		
ServiceChannelId	Service Channel ID	reference		18		
ShouldSkipCapacityCheck	Should Skip Capacity Check	boolean				
SpeedToAnswer	Speed To Answer	int	9			
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
WorkItemId	WorkItem ID	reference		18		

AGENTWORKSHARE

Sharing for AgentWork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AGENTWORKSKILL

Represents a skill used to route a work assignment to an agent. AgentWorkSkill is used for reporting and represents the result of a routing decision.

For more information, see AgentWorkSkill in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AgentWorkId	Agent Work ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Agent Work Skill ID	id		18		
IsAdditionalSkill	Is Additional Skill	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
SkillId	Skill ID	reference		18		
SkillLevel	SkillLevel	double			4	2
SkillPriority	Skill Priority	int	9			
SystemModstamp	System Modstamp	datetime				
WasDropped	Was Dropped	boolean				

AIRTRAVELEMSSNFCTR

Represents the emissions factors for scope 3 commercial air travel.

For more information, see AirTravelEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Ch4PsgrKmLongHaulInKgCo2e	CH4/Passenger-km for Long-Haul (kg CO2e)	double			18	7
Ch4PsgrKmMediumHaulInKgCo2e	CH4/Passenger-km for Medium-Haul (kg CO2e)	double			18	7
Ch4PsgrKmShortHaulInKgCo2e	CH4/Passenger-km for Short-Haul (kg CO2e)	double			18	7
Ch4PsgrMileLongHaulInKgCo2e	CH4/Passenger-mile for Long-Haul (kg CO2e)	double			18	7
Ch4PsgrMileMediumHaulInKgCo2e	CH4/Passenger-mile for Medium-Haul (kg CO2e)	double			18	7
Ch4PsgrMileShortHaulInKgCo2e	CH4/Passenger-mile for Short-Haul (kg CO2e)	double			18	7
Co2PsgrKmLongHaulInKg	CO2/Passenger-km for Long-Haul (kg)	double			18	7
Co2PsgrKmMediumHaulInKg	CO2/Passenger-km for Medium-Haul (kg)	double			18	7
Co2PsgrKmShortHaulInKg	CO2/Passenger-km for Short-Haul (kg)	double			18	7
Co2PsgrMileLongHaulInKg	CO2/Passenger-mile for Long-Haul (kg)	double			18	7
Co2PsgrMileMediumHaulInKg	CO2/Passenger-mile for Medium-Haul (kg)	double			18	7
Co2PsgrMileShortHaulInKg	CO2/Passenger-mile for Short-Haul (kg)	double			18	7
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DistanceUnit	Distance Unit	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
Id	Air Travel Emissions Factor ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LongHaulMinimumDistance	Long-Haul Minimum Distance	double			18	1
MediumHaulMaximumDistance	Medium-Haul Maximum Distance	double			18	1
N2oPsgrKmLongHaulInKgCo2e	N2O/Passenger-km for Long-Haul (kg CO2e)	double			18	7
N2oPsgrKmMediumHaulInKgCo2e	N2O/Passenger-km for Medium-Haul (kg CO2e)	double			18	7
N2oPsgrKmShortHaulInKgCo2e	N2O/Passenger-km for Short-Haul (kg CO2e)	double			18	7
N2oPsgrMileLongHaulInKgCo2e	N2O/Passenger-mile for Long-Haul (kg CO2e)	double			18	7
N2oPsgrMileMediumHaulInKgCo2e	N2O/Passenger-mile for Medium-Haul (kg CO2e)	double			18	7
N2oPsgrMileShortHaulInKgCo2e	N2O/Passenger-mile for Short-Haul (kg CO2e)	double			18	7
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ShortHaulMaximumDistance	Short-Haul Maximum Distance	double			18	1
SystemModstamp	System Modstamp	datetime				

AIRTRAVELEMSSNFCTRFEED

Feed tracking for AirTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AIRTRAVELEMSSNFCTRHISTORY

History for tracked fields of AirTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AirTravelEmssnFctrId`	Air Travel Emissions Factor ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Air Travel Emissions Factor History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

AIRTRAVELEMSSNFCTRSHARE

Sharing for AirTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AIRTRAVELENRGYUSE

Represents the energy consumption related to air travel.

For more information, see AirTravelEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AirTravelEmssnFctrId	Air Travel Emissions Factor ID	reference		18		
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
Ch4PassengerKmInKgCo2e	CH4/Passenger-km (kg CO2e)	double			18	7
Ch4PassengerMileInKgCo2e	CH4/Passenger-mile (kg CO2e)	double			18	7
Co2PassengerKmInKg	CO2/Passenger-km (kg)	double			18	7
Co2PassengerMileInKg	CO2/Passenger-mile (kg)	double			18	7
CostCenter	Cost Center	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DestinationCity	Destination City	string		255		
DestinationCountry	Destination Country	picklist		255		
EndDate	End Date	date				
HaulLength	Haul Length	string		24		
Id	Air Travel Energy Use ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oPassengerKmInKgCo2e	N2O/Passenger-km (kg CO2e)	double			18	7
N2oPassengerMileInKgCo2e	N2O/Passenger-mile (kg CO2e)	double			18	7
Name	Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		
Scope3EmissionsInTco2e	Scope 3 Emissions (tCO2e)	double			18	4
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
SegmentDistance	Segment Distance	double			18	1
SegmentDistanceInMiles	Segment Distance (Miles)	double			18	1
SegmentDistanceUnit	Segment Distance Unit	picklist		255		
SourceCity	Source City	string		255		
SourceCountry	Source Country	picklist		255		
StartDate	Start Date	date				
SuplScope3Emissions	Supplemental Scope 3 Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TravelerBaseCity	Traveler Base City	string		255		
TravelerBaseCountry	Traveler Base Country	picklist		255		
TravelerName	Traveler Name	string		255		
VendorProvidedEmissionsInTco2e	Vendor-Provided Emissions (tCO2e)	double			16	6

AIRTRAVELENRGYUSEFEED

Feed tracking for AirTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AIRTRAVELENRGYUSEHISTORY

History for tracked fields of AirTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AirTravelEnrgyUseId	Air Travel Energy Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Air Travel Energy Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AIRTRAVELENRGYUSESHARE

Sharing for AirTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ALLERGYINTOLERANCE

Represents a clinical assessment of a patient's allergy or intolerance.

For more information, see AllergyIntolerance in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssertionSourceId	Assertion Source ID	reference		18		
Category	Category	multipicklist		4099	0	
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CodeId	Code Set Bundle ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Allergy Intolerance ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastOccurrenceDateTime	Last Occurrence Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OnsetEndDateTime	Onset End Date	datetime				
OnsetStartDateTime	Onset Start Date	datetime				
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
RecordCreationDateTime	Record Creation Date	datetime				
RecordCreatorId	Record Creator ID	reference		18		
Severity	Severity	picklist		40		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
VerificationStatus	Verification Status	picklist		40		

ALLERGYINTOLERANCEFEED

Feed tracking for AllergyIntolerance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ALLERGYINTOLERANCEHISTORY

History for tracked fields of AllergyIntolerance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllergyIntoleranceId	Allergy Intolerance ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Allergy Intolerance History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ALLERGYINTOLERANCESHARE

Sharing for AllergyIntolerance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ALTERNATIVEPAYMENTMETHOD

Represents a payment method that doesn't have a defined Commerce Orders entity such as CardPaymentMethod or DigitalWallet. Common examples of alternative payment methods for Commerce Orders include CashOnDeliver, Klarna, and Direct Debit. `AlternativePaymentMethod` functions the same as any other type of payment method for processing transactions in the payment gateway.

For more information, see AlternativePaymentMethod in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`AlternativePaymentMethodNumber`	Alternative Payment Method Number	string		255		
`AuditEmail`	Audit Email	email		80		
`Comments`	Comments	textarea		1000		
`CompanyName`	Company Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Email`	Registered Email	email		80		
`GatewayToken`	Gateway Token	encryptedstring		255		
`GatewayTokenDetails`	Gateway Token Details	textarea		1000		
`Id`	Alternative Payment Method ID	id		18		
`IpAddress`	IP Address	string		39		
`IsAutoPayEnabled`	Auto Pay	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MacAddress`	MAC Address	string		32		
`NickName`	Nickname	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
PaymentGatewayId	Payment Gateway ID	reference		18		
PaymentMethodAddress	Payment Method Address	address				
PaymentMethodCity	City	string		40		
PaymentMethodCountry	Country	string		80		
PaymentMethodGeocodeAccuracy	GeoCode Accuracy	picklist		255		
PaymentMethodLatitude	Latitude	double			18	15
PaymentMethodLongitude	Longitude	double			18	15
PaymentMethodPostalCode	Postal Code	string		20		
PaymentMethodState	State	string		80		
PaymentMethodStreet	Street	textarea		255		
Phone	Phone	phone		40		
ProcessingMode	Processing Mode	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

ALTERNATIVEPAYMENTMETHODSHARE

Sharing for AlternativePaymentMethod.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ANALYTICSLICENSEDASSET

Represents a licensed Analytics asset.

For more information, see AnalyticsLicensedAsset in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConsumerNamespace`	Consumer Namespace	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Analytics Licensed Asset ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LicenseType`	License Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ANNOUNCEMENT

Represents a Chatter group announcement.

For more information, see Announcement in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpirationDate`	Expiration Date	datetime				
`FeedItemId`	Feed Item ID	reference		18		
`Id`	Announcement ID	id		18		
`IsArchived`	Is Announcement Archived	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`SendEmails`	Send Emails on Announcement	boolean				
`SystemModstamp`	System Modstamp	datetime				

ANNUALEMSSNINVENTORY

Represents information about a company's total carbon emissions for a particular year in metric tonnes of CO2e (tCO2e). These emissions are the sum of all the emissions in scope 1, scope 2, and scope 3 greenhouse gas categories.

For more information, see AnnualEmssnInventory in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNameId	Account ID	reference		18		
AllocScope1And2Emssn	Allocated Scope 1 And 2 Emissions (tCO2e)	double			18	2
AllocScope1EmissionsInTco2e	Allocated Scope 1 Emissions (tCO2e)	double			18	2
AllocScope2EmssnInTco2e	Allocated Scope 2 Emissions (tCO2e)	double			18	2
AllocScope3EmssnInTco2e	Allocated Scope 3 Emissions (tCO2e)	double			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EnergyUsageCmclBldOverride	Energy Usage in Commercial Buildings Override (Kwh)	double			18	2
EnergyUsageCommercialBld	Energy Usage in Commercial Buildings (Kwh)	double			18	2
EnergyUsageDataCenters	Energy Usage in Data Centers (Kwh)	double			18	2
EnergyUsageDataCtrOverride	Energy Usage in Data Centers Override (Kwh)	double			18	2
FinalEmssnInTco2e	Final Emissions (tCO2e)	double			18	2
FinalScope1EmssnInTco2e	Final Scope 1 Emissions (tCO2e)	double			18	2
FinalScope2EmssnInTco2e	Final Scope 2 Emissions (tCO2e)	double			18	2
FinalScope3EmssnInTco2e	Final Scope 3 Emissions (tCO2e)	double			18	2
FnlScp1And2EmssnInTco2e	Final Scope 1 And 2 Emissions (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Id	Annual Emissions Inventory ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RenewableEnergyUsagePctCmclBld	Renewable Energy Usage Percentage in Commercial Buildings	percent			18	2
RenewableEnergyUsagePctDataCtr	Renewable Energy Usage Percentage in Data Centers	percent			18	2
RenewableEnrgyPctCmclBldOvride	Renewable Energy Usage Percentage in Commercial Buildings Override	percent			18	2
RenewableEnrgyPctDataCtrOvride	Renewable Energy Usage Percentage in Data Centers Override	percent			18	2
Scope1EmissionsDataCenters	Scope 1 Emissions from Data Centers (tCO2e)	double			18	2
Scope1EmissionsFleetVehicles	Scope 1 Emissions from Fleet Vehicles (tCO2e)	double			18	2
Scope1EmissionsPrivateJets	Scope 1 Emissions from Private Jets (tCO2e)	double			18	2
Scope1EmssnCmclBldOverride	Scope 1 Emissions from Commercial Buildings Override (tCO2e)	double			18	2
Scope1EmssnCommercialBuildings	Scope 1 Emissions from Commercial Buildings (tCO2e)	double			18	2
Scope1EmssnDataCentersOverride	Scope 1 Emissions from Data Centers Override (tCO2e)	double			18	2
Scope1EmssnPrivateJetsOverride	Scope 1 Emissions from Private Jets Override (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope2EmissionsFleetVehicles	Scope 2 Emissions from Fleet Vehicles (tCO2e)	double			18	2
Scope2EmissionsPrivateJets	Scope 2 Emissions from Private Jets (tCO2e)	double			18	2
Scope2LocBasedEmssnCmclBld	Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e)	double			18	2
Scope2LocBasedEmssnDataCtr	Scope 2 Location-Based Emissions from Data Centers (tCO2e)	double			18	2
Scope2MarketBasedEmssnCmclBld	Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e)	double			18	2
Scope2MarketBasedEmssnDataCtr	Scope 2 Market-Based Emissions from Data Centers (tCO2e)	double			18	2
Scope3EmissionsBusinessTravel	Scope 3 Emissions from Business Travel (tCO2e)	double			18	2
Scope3EmissionsCapitalGoods	Scope 3 Emissions from Capital Goods (tCO2e)	double			18	2
Scope3EmissionsDataCenters	Scope 3 Emissions from Data Centers (tCO2e)	double			18	2
Scope3EmissionsFleetVehicles	Scope 3 Emissions from Fleet Vehicles (tCO2e)	double			18	2
Scope3EmissionsFranchises	Scope 3 Emissions from Franchises (tCO2e)	double			18	2
Scope3EmissionsInvestments	Scope 3 Emissions from Investments (tCO2e)	double			18	2
Scope3EmissionsPctCapitalGoods	Scope 3 Emissions Percentage from Capital Goods	percent			18	2
Scope3EmissionsPctFranchises	Scope 3 Emissions Percentage from Franchises	percent			18	2
Scope3EmissionsPctInvestments	Scope 3 Emissions Percentage from Investments	percent			18	2
Scope3EmissionsPercentage	Scope 3 Emissions Percentage	percent			18	2
Scope3EmissionsPrivateJets	Scope 3 Emissions from Private Jets (tCO2e)	double			18	2
Scope3EmissionsWasteGenInOper	Scope 3 Emissions from Waste Generated in Operations (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmssnCapitalGoodsOvride	Scope 3 Emissions from Capital Goods Override (tCO2e)	double			18	2
Scope3EmssnCmclBldOverride	Scope 3 Emissions from Commercial Buildings Override (tCO2e)	double			18	2
Scope3EmssnCommercialBuildings	Scope 3 Emissions from Commercial Buildings (tCO2e)	double			18	2
Scope3EmssnDataCentersOverride	Scope 3 Emissions from Data Centers Override (tCO2e)	double			18	2
Scope3EmssnEmpCommutingOvride	Scope 3 Emissions from Employee Commuting Override (tCO2e)	double			18	2
Scope3EmssnEmployeeCommuting	Scope 3 Emissions from Employee Commuting (tCO2e)	double			18	2
Scope3EmssnFranchisesOverride	Scope 3 Emissions from Franchises Override (tCO2e)	double			18	2
Scope3EmssnInvestmentsOverride	Scope 3 Emissions from Investments Override (tCO2e)	double			18	2
Scope3EmssnPctBusinessTravel	Scope 3 Emissions Percentage from Business Travel	percent			18	2
Scope3EmssnPctDnstrmTrnspDstr	Scope 3 Emissions Percentage from Downstream Transportation and Distribution	percent			18	2
Scope3EmssnPctEmpCommuting	Scope 3 Emissions Percentage from Employee Commuting	percent			18	2
Scope3EmssnPctUpstrmLeasedAsst	Scope 3 Emissions Percentage from Upstream Leased Assets	percent			18	2
Scope3EmssnPctUseOfSoldPrdct	Scope 3 Emissions Percentage from Use of Sold Products	percent			18	2
Scope3EmssnUseOfSoldProducts	Scope 3 Emissions from Use of Sold Products (tCO2e)	double			18	2
Scope3UncategorizedEmissions	Scope 3 Uncategorized Emissions (tCO2e)	double			18	2
Scp1EmssnFleetVehiclesOverride	Scope 1 Emissions from Fleet Vehicles Override (tCO2e)	double			18	2
Scp1EmssnWstGenInTco2e	Scope 1 Emissions from Waste Generated (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scp1EmssnWstGenOvrideInTco2e	Scope 1 Emissions from Waste Generated Override (tCO2e)	double			18	2
Scp2EmssnFleetVehiclesOverride	Scope 2 Emissions from Fleet Vehicles Override (tCO2e)	double			18	2
Scp2EmssnPrivateJetsOverride	Scope 2 Emissions from Private Jets Override (tCO2e)	double			18	2
Scp2LocBsdEmssnCmclBldOverride	Scope 2 Location-Based Emissions from Commercial Buildings Override (tCO2e)	double			18	2
Scp2LocBsdEmssnDataCtrOvride	Scope 2 Location-Based Emissions from Data Centers Override (tCO2e)	double			18	2
Scp2MktBsdEmssnCmclBldOverride	Scope 2 Market-Based Emissions from Commercial Buildings Override (tCO2e)	double			18	2
Scp2MktBsdEmssnDataCtrOverride	Scope 2 Market-Based Emissions from Data Centers Override (tCO2e)	double			18	2
Scp3EmssnBusinessTravelOvride	Scope 3 Emissions from Business Travel Override (tCO2e)	double			18	2
Scp3EmssnDnstrmLeasedAssets	Scope 3 Emissions from Downstream Leased Assets (tCO2e)	double			18	2
Scp3EmssnDnstrmLeasedAstOvride	Scope 3 Emissions from Downstream Leased Assets Override (tCO2e)	double			18	2
Scp3EmssnDnstrmTrnspDstrOvride	Scope 3 Emissions from Downstream Transportation and Distribution Override (tCO2e)	double			18	2
Scp3EmssnDownstreamTrnspDstr	Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e)	double			18	2
Scp3EmssnEolSoldPrdctOvride	Scope 3 Emissions from End-of-Life Treatment of Sold Products Override (tCO2e)	double			18	2
Scp3EmssnEolTreatOfSoldPrdct	Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scp3EmssnFleetVehiclesOverride	Scope 3 Emissions from Fleet Vehicles Override (tCO2e)	double			18	2
Scp3EmssnFuelEnergyActivity	Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e)	double			18	2
Scp3EmssnFuelEnrgyActvtyOvride	Scope 3 Emissions from Fuel and Energy-Related Activity Override (tCO2e)	double			18	2
Scp3EmssnPctDnstrmLeasedAssets	Scope 3 Emissions Percentage from Downstream Leased Assets	percent			18	2
Scp3EmssnPctEolTreatSoldPrdct	Scope 3 Emissions Percentage from End-of-Life Treatment of Sold Products	percent			18	2
Scp3EmssnPctFuelEnrgyActivity	Scope 3 Emissions Percentage from Fuel and Energy-Related Activity	percent			18	2
Scp3EmssnPctProcSoldProducts	Scope 3 Emissions Percentage from Processing of Sold Products	percent			18	2
Scp3EmssnPctPurchGoodsAndSrvcs	Scope 3 Emissions Percentage from Purchased Goods and Services	percent			18	2
Scp3EmssnPctUpstrmTrnspDstr	Scope 3 Emissions Percentage from Upstream Transportation and Distribution	percent			18	2
Scp3EmssnPctWasteGenInOper	Scope 3 Emissions Percentage from Waste Generated in Operations	percent			18	2
Scp3EmssnPrivateJetsOverride	Scope 3 Emissions from Private Jets Override (tCO2e)	double			18	2
Scp3EmssnProcSoldPrdctOverride	Scope 3 Emissions from Processing of Sold Products Override (tCO2e)	double			18	2
Scp3EmssnProcSoldProducts	Scope 3 Emissions from Processing of Sold Products (tCO2e)	double			18	2
Scp3EmssnPurchGoodsAndServices	Scope 3 Emissions from Purchased Goods and Services (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scp3EmssnPurchGoodsSrvcsOvride	Scope 3 Emissions from Purchased Goods and Services Override (tCO2e)	double			18	2
Scp3EmssnUpstreamLeasedAssets	Scope 3 Emissions from Upstream Leased Assets (tCO2e)	double			18	2
Scp3EmssnUpstreamTrnspDstr	Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e)	double			18	2
Scp3EmssnUpstrmLeasedAstOvride	Scope 3 Emissions from Upstream Leased Assets Override (tCO2e)	double			18	2
Scp3EmssnUpstrmTrnspDstrOvride	Scope 3 Emissions from Upstream Transportation and Distribution Override (tCO2e)	double			18	2
Scp3EmssnUseOfSoldPrdctOvride	Scope 3 Emissions from Use of Sold Products Override (tCO2e)	double			18	2
Scp3EmssnWasteGenInOperOvride	Scope 3 Emissions from Waste Generated in Operations Override (tCO2e)	double			18	2
Scp3UncategorizedEmssnOverride	Scope 3 Uncategorized Emissions Override (tCO2e)	double			18	2
Scp3UncatgEmssnPct	Scope 3 Uncategorized Emissions Percentage	percent			18	2
SupplementalScope3EmissionsPct	Supplemental Scope 3 Emissions Percentage	percent			18	2
SystemModstamp	System Modstamp	datetime				
TotalAllocEmissionsInTco2e	Total Allocated Emissions (tCO2e)	double			18	2
TotalEmissions	Total Emissions (tCO2e)	double			18	2
TotalScope1And2Emissions	Total Scope 1 and 2 Emissions (tCO2e)	double			18	2
TotalScope1Emissions	Total Scope 1 Emissions (tCO2e)	double			18	2
TotalScope1EmissionsOverride	Total Scope 1 Emissions Override (tCO2e)	double			18	2
TotalScope2Emissions	Total Scope 2 Emissions (tCO2e)	double			18	2
TotalScope2EmissionsOverride	Total Scope 2 Emissions Override (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalScope3Emissions	Total Scope 3 Emissions (tCO2e)	double			18	2
TotalScope3EmissionsOverride	Total Scope 3 Emissions Override (tCO2e)	double			18	2
TotalSuplScope3EmssnOverride	Total Supplemental Scope 3 Emissions Override (tCO2e)	double			18	2
TotalSuplScp3Emissions	Total Supplemental Scope 3 Emissions (tCO2e)	double			18	2
UniqueIdx	Unique Index	string		255		
Year	Year	picklist		255		

ANNUALEMSSNINVENTORYFEED

Feed tracking for AnnualEmssnInventory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ANNUALEMSSNINVENTORYHISTORY

History for tracked fields of AnnualEmssnInventory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Annual Emissions Inventory History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ANNUALEMSSNINVENTORYSHARE

Sharing for AnnualEmssnInventory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ANNUALEMSSNRDCTNTARGET

Represents information about the emissions reduction target set by a company for a particular year.

For more information, see AnnualEmssnRdctnTarget in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionsReductionPercentage	Emissions Reduction Percentage	percent			18	2
EmssnIntensityReductionPct	Emissions Intensity Reduction Percentage	percent			18	2
Id	Annual Emissions Reduction Target ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Annual Emissions Reduction Target Name	string		255		
OtherTargetKpiChangePercentage	Other Target KPI Change Percentage	percent			18	2
OtherTargetKpiInTargetYear	Other Target KPI in Target Year	double			18	2
ParentTargetId	Emissions Reduction Target ID	reference		18		
Scope3GhgCatgTgtEmssnRdctn	Scope 3 GHG Category Target Emissions Reduction	double			18	2
Scope3GhgCatgTgtEmssnRdctnPct	Scope 3 GHG Category Target Emissions Reduction Percentage	percent			18	2
SystemModstamp	System Modstamp	datetime				
TargetEmissions	Target Emissions (tC02e)	double			18	2
TargetEmissionsIntensity	Target Emissions Intensity	double			13	3

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TargetYear	Target Year	picklist		255		

ANNUALEMSSNRDCTNTARGETFEED

Feed tracking for AnnualEmssnRdctnTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ANNUALEMSSNRDCTNTARGETHISTORY

History for tracked fields of AnnualEmssnRdctnTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEmssnRdctnTargetId	Annual Emissions Reduction Target ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Annual Emissions Reduction Target History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

APEXCLASS

Represents an Apex class.

For more information, see ApexClass in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`Body`	Body	textarea		1000000		
`BodyCrc`	Body CRC	double			18	0
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Class ID	id		18		
`IsValid`	Is Valid	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LengthWithoutComments`	Size Without Comments	int	9			
`Name`	Name	string		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

APEXCOMPONENT

Represents a definition for a custom component that can be used in a Visualforce page alongside standard components such as `<apex:relatedList>` and `<apex:dataTable>`

For more information, see ApexComponent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`ControllerKey`	Controller Key	string		255		
`ControllerType`	Controller Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		4000		
`Id`	Component ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Markup`	Markup	textarea		1048576		
`MasterLabel`	Label	string		80		
`Name`	Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

APEXLOG

Represents a debug log containing information about a transaction, including information about Apex, Visualforce, and workflow and validation rules.

For more information, see ApexLog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Application`	Application	string		64		
`DurationMilliseconds`	Duration (ms)	int	9			
`Id`	Log ID	id		18		
`LastModifiedDate`	Date	datetime				
`Location`	Location	picklist		40		
`LogLength`	Log Size (bytes)	int	9			
`LogUserId`	Log User ID	reference		18		
`Operation`	Operation	string		128		
`Request`	Request Type	string		16		
`RequestIdentifier`	Request ID	string		84		
`StartTime`	Start Time	datetime				
`Status`	Status	string		255		
`SystemModstamp`	System Modstamp	datetime				

APEXPAGE

Represents a single Visualforce page.

For more information, see ApexPage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`ControllerKey`	Controller Key	string		255		
`ControllerType`	Controller Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		4000		
`Id`	Page ID	id		18		
`IsAvailableInTouch`	Available for Lightning Experience, Experience Builder sites, and the mobile app	boolean				
`IsConfirmationTokenRequired`	Require CSRF protection on GET requests	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Markup`	Markup	textarea		1048576		
`MasterLabel`	Label	string		80		
`Name`	Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

APEXPAGEINFO

Represents metadata about a single Visualforce page.

For more information, see ApexPageInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexPageId`	Apex Page ID	string		18		
`ApiVersion`	API Version	double			18	1
`Description`	Description	textarea		1333		
`DurableId`	Durable ID	string		255		
`Id`	Entity Id	id		18		
`IsAvailableInTouch`	Is Available In Touch	boolean				
`IsShowHeader`	Show Header	string		80		
`MasterLabel`	Master Label	string		80		
`Name`	Name	string		80		
`NameSpacePrefix`	Name Space Prefix	string		512		

APEXTESTQUEUEITEM

Represents a single Apex class in the Apex job queue.

For more information, see ApexTestQueueItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExtendedStatus`	Status Detail	string		1000		
`Id`	Apex Test Queue Item ID	id		18		
`ParentJobId`	Apex Job ID	reference		18		
`ShouldSkipCodeCoverage`	Should Skip Code Coverage	boolean				
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`TestRunResultId`	ApexTestRunResult ID	reference		18		

APEXTESTRESULT

Represents the result of an Apex test method execution.

For more information, see ApexTestResult in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`ApexLogId`	Log ID	reference		18		
`ApexTestRunResultId`	ApexTestRunResult ID	reference		18		
`AsyncApexJobId`	Apex Job ID	reference		18		
`Id`	Apex Test Result ID	id		18		
`Message`	Error Message	string		4000		
`MethodName`	Method Name	string		255		
`Outcome`	Pass/Fail	picklist		40		
`QueueItemId`	Apex Test Queue Item ID	reference		18		
`RunTime`	Run Time	int	9			
`StackTrace`	Stack Trace	string		4000		
`SystemModstamp`	System Modstamp	datetime				
`TestTimestamp`	Time Started	datetime				

APEXTESTRESULTLIMITS

Captures the Apex test limits used for a particular test method execution. An instance of this object is associated with each ApexTestResult record.

For more information, see ApexTestResultLimits in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexTestResultId`	Apex Test Result ID	reference		18		
`AsyncCalls`	Total number of async calls	int	9			
`Callouts`	Total number of callouts	int	9			
`Cpu`	Maximum CPU time on the Salesforce servers	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Dml`	Total number of DML statements issued	int	9			
`DmlRows`	Total number of records processed as a result of DML statements	int	9			
`Email`	Total number of sendEmail methods allowed	int	9			
`Id`	ApexTestResultLimits ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LimitContext`	LimitContext	string		255		
`LimitExceptions`	LimitExceptions	string		255		
`MobilePush`	Maximum number of push notification method calls allowed per Apex transaction	int	9			
`QueryRows`	Total number of records retrieved by SOQL queries	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Soql`	Total number of SOQL queries issued	int	9			
`Sosl`	Total number of SOSL queries issued	int	9			
`SystemModstamp`	System Modstamp	datetime				

APEXTESTRUNRESULT

Contains summary information about all the test methods that were run in a particular Apex job.

For more information, see ApexTestRunResult in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AsyncApexJobId	Apex Job ID	reference		18		
ClassesCompleted	Number of classes completed in this test run	int	9			
ClassesEnqueued	Number of classes enqueued in this test run	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndTime	End time of the test run	datetime				
Id	ApexTestRunResult ID	id		18		
IsAllTests	allTests	boolean				
IsDeleted	Deleted	boolean				
JobName	Name of the job	string		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MethodsCompleted	Number of methods completed in this test run	int	9			
MethodsEnqueued	Number of methods enqueued in this test run	int	9			
MethodsFailed	Number of methods failed in this test run	int	9			
Source	Client that kicked off the test run	string		255		
StartTime	Start time of the test run	datetime				
Status	Status of the test run	picklist		255		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`TestTime`	Time(ms) actually spent running tests	int	9			
`UserId`	User ID	reference		18		

APEXTESTSUITE

Represents a suite of Apex classes to include in a test run. A TestSuiteMembership object associates each class with the suite.

For more information, see ApexTestSuite in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Test Suite ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`TestSuiteName`	Test Suite Name	string		255		

APEXTRIGGER

Represents an Apex trigger.

For more information, see ApexTrigger in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`Body`	Body	textarea		1000000		
`BodyCrc`	Body CRC	double			18	0
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Trigger ID	id		18		
`IsValid`	Is Valid	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LengthWithoutComments`	Size Without Comments	int	9			
`Name`	Name	string		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`TableEnumOrId`	Custom Object Definition ID	picklist		40		
`UsageAfterDelete`	AfterDelete	boolean				
`UsageAfterInsert`	AfterInsert	boolean				
`UsageAfterUndelete`	AfterUndelete	boolean				
`UsageAfterUpdate`	AfterUpdate	boolean				
`UsageBeforeDelete`	BeforeDelete	boolean				
`UsageBeforeInsert`	BeforeInsert	boolean				
`UsageBeforeUpdate`	BeforeUpdate	boolean				
`UsageIsBulk`	IsBulk	boolean				

APEXTYPEIMPLEMENTOR

Represents Apex classes that directly or indirectly implement an interface. Using a SOQL query this object gets information about public or global classes and only global classes for installed managed packages.

For more information, see ApexTypeImplementor in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`ClassName`	Class Name	string		81		
`ClassNamespacePrefix`	Class Namespace Prefix	string		15		
`DurableId`	Durable ID	string		255		
`Id`	Apex Type Implementor ID	id		18		
`InterfaceApexClassId`	Class ID	reference		18		
`InterfaceName`	Interface Name	string		81		
`InterfaceNamespacePrefix`	Interface Namespace Prefix	string		15		
`IsConcrete`	Is Concrete	boolean				

APIANOMALYEVENT

Track anomalies in how users make API calls.

For more information, see ApiAnomalyEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`EventUuid`	Event UUID	string		36		
`LoginKey`	Login Key	string		24		
`Operation`	Operation	string		255		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`QueriedEntities`	Queried Entities	string		1000		
`ReplayId`	Replay ID	string		1000		
`RequestIdentifier`	Request Identifier	string		255		
`RowsProcessed`	Rows Processed	double			18	0
`Score`	Score	double			12	6
`SecurityEventData`	Event Data	textarea		10000		
`SessionKey`	Session Key	string		24		
`SourceIp`	Source IP Address	string		255		
`Summary`	Summary	textarea		1000		
`Uri`	Uri	string		255		
`UserAgent`	User Agent	string		1000		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

APIANOMALYEVENTSTORE

Tracks anomalies in how users make API calls. ApiAnomalyEventStore is an object that stores the event data of ApiAnomalyEvent. This object is available in API version 50.0 and later.

For more information, see ApiAnomalyEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiAnomalyEventNumber`	Event Name	string		255		
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`Id`	API Anomaly Event Store ID	id		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoginKey`	Login Key	string		24		
`Operation`	Operation	string		255		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`QueriedEntities`	Queried Entities	textarea		1000		
`RequestIdentifier`	Request Identifier	string		255		
`RowsProcessed`	Rows Processed	double			18	0
`Score`	Score	double			12	6
`SecurityEventData`	Event Data	textarea		10000		
`SessionKey`	Session Key	string		24		
`SourceIp`	Source IP Address	string		255		
`Summary`	Summary	textarea		1000		
`SystemModstamp`	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Uri	Uri	string		255		
UserAgent	User Agent	textarea		1000		
UserId	User ID	reference		18		
Username	Username	string		255		

APIANOMALYEVENTSTOREFEED

Feed tracking for ApiAnomalyEventStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APIEVENT

Tracks these user-initiated read-only API calls: `query()`, `queryMore()`, and `count()`. Captures API requests through SOAP API, REST API, and Bulk API for the Enterprise and Partner WSDLs. Tooling API calls and API calls originating from a Salesforce mobile app aren't captured.

For more information, see ApiEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdditionalInfo`	Additional Information	string		10000		
`ApiType`	API Type	string		80		
`ApiVersion`	API Version	double			18	0
`Application`	Application	string		255		
`Client`	Client	string		255		
`ConnectedAppId`	Connected App ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTime`	Elapsed Time	int	9			
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`Id`	API Event ID	id		18		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`Operation`	Operation	picklist		255		
`Platform`	Platform	string		255		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`QueriedEntities`	Queried Entities	string		1000		
`Query`	Query	string		10000		
`Records`	Records	json		250000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEventIdentifier	Related Event Identifier	string		80		
RowsProcessed	Rows Processed	double			18	0
RowsReturned	Rows Returned	double			18	0
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserAgent	User Agent	string		1000		
UserId	User ID	reference		18		
Username	Username	string		255		

APIEVENTSTREAM

Tracks these user-initiated read-only API calls: `query()`, `queryMore()`, and `count()`. Captures API requests through SOAP API, REST API, and Bulk API for the Enterprise and Partner WSDLs. Tooling API calls and API calls originating from a Salesforce mobile app aren't captured.

For more information, see ApiEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdditionalInfo`	Additional Information	string		10000		
`ApiType`	API Type	string		80		
`ApiVersion`	API Version	double			18	0
`Application`	Application	string		255		
`Client`	Client	string		255		
`ConnectedAppId`	Connected Application ID	string		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTime`	Elapsed Time	int	9			
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`EventUuid`	Event UUID	string		36		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`Operation`	Operation	picklist		255		
`Platform`	Platform	string		255		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`QueriedEntities`	Queried Entities	string		1000		
`Query`	Query	textarea		20000		
`Records`	Records	json		250000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
RowsProcessed	Rows Processed	double			18	0
RowsReturned	Rows Returned	double			18	0
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserAgent	User Agent	string		1000		
UserId	User ID	reference		18		
Username	Username	string		255		

APPANALYTICSQUERYREQUEST

Represents a request for AppExchange App Analytics data.

For more information, see AppAnalyticsQueryRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AvailableSince	Available Since	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Data Type	picklist		255		
DownloadExpirationTime	Download Expiration Time	datetime				
DownloadSize	Download File Size	long	18			
DownloadUrl	Download URL	textarea		8096		
EndTime	End Time	datetime				
ErrorMessage	Error Message	string		255		
FileCompression	File Compression	picklist		255		
FileType	File Type	picklist		255		
Id	App Analytics Query Request ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Number	string		255		
OrganizationIds	Organization IDs	string		255		
PackageIds	Package IDs	string		255		
QuerySubmittedTime	Query Submitted Time	datetime				
RequestState	Request State	picklist		255		
StartTime	Start Time	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

APPDEFINITION

Represents the metadata of an app and its navigation items. Metadata is returned only for apps that the current user can access.

For more information, see AppDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Description`	Description	string		255		
`DeveloperName`	Developer Name	string		80		
`DurableId`	Durable ID	string		255		
`HeaderColor`	Header Color	string		20		
`Id`	App Definition ID	id		18		
`IsLargeFormFactorSupported`	Is Large Form Factor Supported	boolean				
`IsMediumFormFactorSupported`	Is Medium Form Factor Supported	boolean				
`IsNavAutoTempTabsDisabled`	Is Navigation Menu Automatically Create Temporary Tabs Disabled	boolean				
`IsNavPersonalizationDisabled`	Is Navigation Menu Personalization Disabled	boolean				
`IsNavTabPersistenceDisabled`	Is Clearing Workspace Tabs Enabled	boolean				
`IsOverrideOrgTheme`	Is Org Theme Overridden	boolean				
`IsSmallFormFactorSupported`	Is Small Form Factor Supported	boolean				
`Label`	Label	string		1000		
`LogoUrl`	Logo URL	url		255		
`MasterLabel`	Master Label	string		40		
`NamespacePrefix`	Namespace Prefix	string		15		
`NavType`	Navigation Type	picklist		255		
`UiType`	UI Type	picklist		255		
`UtilityBar`	Utility Bar Name	string		80		

APPEXTENSION

Represents a connection between the Field Service mobile app and another app, typically for passing record data to the Salesforce mobile app or other apps.

For more information, see AppExtension in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppExtensionLabel	Label	string		255		
AppExtensionName	Name	string		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FieldServiceMobileSettingsId	Field Service Mobile Settings ID	reference		18		
Id	App Extension ID	id		18		
InstallationUrl	Installation URL	string		255		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LaunchValue	Launch Value	string		255		
ScopedToObjectTypes	Scoped To Object Types	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

APPMENUITEM

Represents the organization's default settings for items in the app menu or App Launcher.

For more information, see AppMenuItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApplicationId`	Application ID	reference		18		
`CanvasAccessMethod`	The configured access method for the canvas application	picklist		255		
`CanvasEnabled`	Is this a canvas-enabled application	boolean				
`CanvasOptions`	The options to hide publisher header or publisher share button	string		255		
`CanvasReferenceId`	The identifier used to render the canvas application.	string		18		
`CanvasSelectedLocations`	The selected/supported locations of the canvas application	string		255		
`CanvasUrl`	The canvas url for the canvas application	url		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		250		
`IconUrl`	Icon Url	url		255		
`Id`	AppMenuItem ID	id		18		
`InfoUrl`	Info URL	url		255		
`IsAccessible`	Is Accessible	boolean				
`IsDeleted`	Deleted	boolean				
`IsRegisteredDeviceOnly`	App requires a registered mobile device	boolean				
`IsUsingAdminAuthorization`	IsUsingAdminAuthorization	boolean				
`IsVisible`	Is Visible	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Label	Label	string		250		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LogoUrl	Logo Image URL	url		255		
MobileAppBinaryId	ID for the related mobile app binary	string		255		
MobileAppInstallUrl	URL to install the mobile app	url		255		
MobileAppInstalledDate	Date the mobile app was most recently installed	datetime				
MobileAppInstalledVersion	Most recently installed version of the mobile app	string		255		
MobileAppVer	Version of the mobile app	string		255		
MobileDeviceType	Type of mobile device	string		255		
MobileMinOsVer	Minimum required mobile device OS version	string		255		
MobilePlatform	Mobile device OS platform	picklist		255		
MobileStartUrl	Mobile Start Url	url		255		
Name	Developer Name	string		80		
NamespacePrefix	Namespace Prefix	string		80		
SortOrder	Sort Order	int	9			
StartUrl	Start Url	url		255		
SystemModstamp	System Modstamp	datetime				
Type	App Type	picklist		255		
UserSortOrder	User Sort Order	int	9			

APPTABMEMBER

Represents the list of tabs for each of the available apps.

For more information, see AppTabMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppDefinitionId`	App Definition ID	string		512		
`DurableId`	Durable ID	string		255		
`Id`	App Tab Member ID	id		18		
`SortOrder`	Sort Order	int	9			
`TabDefinitionId`	Tab Definition ID	string		512		
`WorkspaceDriverField`	Workspace Driver Field	string		30		

APPLICATIONCASE

This junction object stores a relationship between Case and IndividualApplication.

For more information, see ApplicationCase in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicationId	Individual Application ID	reference		18		
CaseId	Case ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Application Case ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Application Case Name	string		255		
SystemModstamp	System Modstamp	datetime				

APPLICATIONCASEFEED

Feed tracking for ApplicationCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPLICATIONCASEHISTORY

History for tracked fields of ApplicationCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicationCaseId	Application Case ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Application Case History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

APPOINTMENTASSIGNMENTPOLICY

Stores information about resource assignment rules.

For more information, see AppointmentAssignmentPolicy in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Appointment Assignment Policy ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		80		
`PolicyApplicableDuration`	Utilization Calculation Frequency	picklist		255		
`PolicyType`	Policy Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UtilizationFactor`	Utilization Count Type	picklist		255		

APPOINTMENTINVITATION

Represents information about an appointment invitation that's created for customers who can use it for booking appointments.

For more information, see AppointmentInvitation in the *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentTopicId	Appointment Topic ID	reference		18		
AppointmentTopicType	Appointment Topic Type	string		50		
BookingEndDate	Booking End Date	date				
BookingStartDate	Booking Start Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Invitation ID	id		18		
InvitationIdentifier	Invitation Identifier	string		36		
InvitationNumber	Invitation Number	string		255		
InvitationUrl	Invitation URL	url		255		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
ServiceTerritoryId	Territory ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UrlExpiryDate	URL Expiration Date	date				

APPOINTMENTINVITATIONFEED

Feed tracking for AppointmentInvitation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPOINTMENTINVITATIONHISTORY

History for tracked fields of AppointmentInvitation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentInvitationId	Appointment Invitation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Appointment Invitation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

APPOINTMENTINVITATIONSHARE

Sharing for AppointmentInvitation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

APPOINTMENTINVITEE

Represents information about the participant and resources required for creating an appointment invitation URL.

For more information, see AppointmentInvitee in the *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentInvitationId	Appointment Invitation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Invitee ID	id		18		
IsDeleted	Deleted	boolean				
IsRequiredResource	Required Resource	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Appointment Invitee Number	string		255		
ParticipantServiceResourceId	Resource ID	reference		18		
SystemModstamp	System Modstamp	datetime				

APPOINTMENTSCHEDULEAGGR

Records the utilization of a service resource, by date, for the Load Balancing appointment assignment policy.

For more information, see AppointmentScheduleAggr in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentDate	Appointment Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Schedule Aggregate ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
ResourceUtilizationCount	Resource Utilization Count	int	9			
ServiceResourceId	Resource ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalResourceUtilization	Total Resource Utilization	double			18	2
UsageType	Usage Type	picklist		255		

APPOINTMENTSCHEDULELOG

Stores service appointments of each service Resource.

For more information, see AppointmentScheduleLog in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentDate	Appointment Date	date				
AppointmentScheduleAggrId	Appointment Schedule Aggregate ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Schedule Log ID	id		18		
IsDeleted	Deleted	boolean				
IsUsedForResourceUtilization	Used for Resource Utilization	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
RelatedRecordId	Related Record ID	reference		18		
ResourceUtilization	Resource Utilization	double			18	2
ServiceResourceId	Resource ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UsageType	Usage Type	picklist		255		

APPOINTMENTSCHEDULINGPOLICY

Represents a set of rules for scheduling appointments using Salesforce Scheduler.

For more information, see AppointmentSchedulingPolicy in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentStartTimeInterval	Appointment Start Time Interval	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Developer Name	string		80		
ExtCalEventHandlerId	Class ID	reference		18		
Id	Appointment Scheduling Policy ID	id		18		
IsDeleted	Deleted	boolean				
IsOrgDefault	Is Default	boolean				
IsSvcTerrOpHoursWithShiftsUsed	Use service territory's operating hours with shifts	boolean				
IsSvcTerritoryMemberShiftUsed	Use service territory member's shift	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Name	string		80		
ShouldConsiderCalendarEvents	Check Salesforce Calendar for Resource Availability	boolean				
ShouldEnforceExcludedResource	Ignore Excluded Service Resources	boolean				
ShouldEnforceRequiredResource	Include Only Required Service Resources	boolean				
ShouldMatchSkill	Match Skills	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShouldMatchSkillLevel	Match Skill Levels	boolean				
ShouldRespectVisitingHours	Enforce Account's Visiting Hours	boolean				
ShouldUsePrimaryMembers	Include Primary Service Territory Members	boolean				
ShouldUseSecondaryMembers	Include Secondary Service Territory Members	boolean				
SystemModstamp	System Modstamp	datetime				

APPOINTMENTTOPICTIMESLOT

Junction object that is a lookup to a work type or a work type group for a time slot.

For more information, see AppointmentTopicTimeSlot in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentTopicTimeSlotKey	Appointment Topic Time Slot Key	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Topic Time Slot ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TimeSlotId	Time Slot ID	reference		18		
WorkTypeGroupId	Work Type Group ID	reference		18		
WorkTypeId	Work Type ID	reference		18		

APPOINTMENTTOPICTIMESLOTFEED

Feed tracking for AppointmentTopicTimeSlot.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPOINTMENTTOPICTIMESLOTHISTORY

History for tracked fields of AppointmentTopicTimeSlot.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentTopicTimeSlotId	Appointment Topic Time Slot ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Appointment Topic Time Slot History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

APPTBOOKINGCONFIG

Represents a collection of fields to set up appointment scheduling.

For more information, see ApptBookingConfig in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`AssignedProviderRole`	Assigned Provider Role	string		80		
`AttendanceThresholdPct`	Attendance Threshold Percent	double			18	1
`BestTimeSlotsDefinition`	Best Time Slots Definition	string		18		
`CanCreateDuplicateRecord`	Create Duplicate Patient Record	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Intelligent Appointment Management Configuration ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsSingleSourceSystem`	Use Single Source System	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamedCredentialId`	Named Credential ID	reference		18		
`ServiceApptRecordTypeName`	Service Appointment Record Type Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

APPTBOOKINGURLCONFIG

Represents a collection of fields to set up the URL paths for appointment scheduling endpoints.

For more information, see ApptBookingUrlConfig in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdditionalHeaders`	Additional Headers	textarea		131072		
`ApptBookingConfigId`	Intelligent Appointment Management Configuration ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`EndpointName`	Endpoint Name	picklist		255		
`Id`	Intelligent Appointment Management URL Configuration ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				
`UrlPath`	URL Path	string		80		

APPTBUNDLEAGGRDURDNSCALE

Sums the duration of the bundle members, reduced by a predefined percentage.

For more information, see ApptBundleAggrDurDnscale in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BundleAggregationPolicyId	Appointment Bundle Aggregation Policy ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FromBundleMemberNumber	From Bundle Member Number	int	9			
Id	Appointment Bundle Aggregation Duration Downscale ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PercentageOfReduction	Percentage of Reduction	int	9			
SystemModstamp	System Modstamp	datetime				

APPTBUNDLEAGGRDURDNSCALEFEED

Feed tracking for ApptBundleAggrDurDnscale.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLEAGGRPOLICY

Policy that defines how the property values of the bundle members are aggregated and assigned to the bundle.

For more information, see ApptBundleAggrPolicy in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AggregationAction	Aggregation Action	picklist		255		
AggregationFieldType	Aggregation Field Type	picklist		255		
BundleFieldName	Bundle's Target Field	picklist		255		
BundlePolicyId	Appointment Bundle Policy ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FilterCriteriaId	Recordset Filter Criteria ID	reference		18		
Id	Appointment Bundle Aggregation Policy ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

APPTBUNDLEAGGRPOLICYFEED

Feed tracking for ApptBundleAggrPolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLECONFIG

Represents the general parameters that define the behavior of the bundle.

For more information, see ApptBundleConfig in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Appointment Bundle Config ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`StatusOnRemovalFromBundle`	Status on Removal from Bundle	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

APPTBUNDLECONFIGFEED

Feed tracking for ApptBundleConfig.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLECONFIGHISTORY

History for tracked fields of ApptBundleConfig.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApptBundleConfigId	Appointment Bundle Config ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Appointment Bundle Config History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

APPTBUNDLECONFIGSHARE

Sharing for ApptBundleConfig.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

APPTBUNDLEPOLICY

Policy that defines how the bundling of service appointments should be handled.

For more information, see ApptBundlePolicy in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Bundle Policy ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Priority	Priority	int	9			
SystemModstamp	System Modstamp	datetime				

APPTBUNDLEPOLICYFEED

Feed tracking for ApptBundlePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLEPOLICYSHARE

Sharing for ApptBundlePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

APPTBUNDLEPOLICYSVCTERR

Represents a link between the BundlePolicy and the ServiceTerritory.

For more information, see ApptBundlePolicySvcTerr in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BundlePolicyId`	Appointment Bundle Policy ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Appointment Bundle Policy Service Territory ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ServiceTerritoryId`	Territory ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

APPTBUNDLEPOLICYSVCTERRFEED

Feed tracking for ApptBundlePolicySvcTerr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLEPROPAGATEPOLICY

Policy that defines which property values are inherited from the bundle to the bundle members or are assigned as constant values in the bundle members.

For more information, see ApptBundlePropagatePolicy in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BundlePolicyId`	Appointment Bundle Policy ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Appointment Bundle Propagation Policy ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

APPTBUNDLEPROPAGATEPOLICYFEED

Feed tracking for ApptBundlePropagatePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLERESTRICTPOLICY

Policy that defines the restrictions that are considered while forming a bundle.

For more information, see ApptBundleRestrictPolicy in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BundlePolicyId`	Appointment Bundle Policy ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Appointment Bundle Restriction Policy ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

APPTBUNDLERESTRICTPOLICYFEED

Feed tracking for ApptBundleRestrictPolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

APPTBUNDLESORTPOLICY

Policy that defines the properties by which the bundle members are sorted within the bundle. Can also be used in the automatic mode for determining the order of the automatic selection of bundle members.

For more information, see ApptBundleSortPolicy in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BundlePolicyId	Appointment Bundle Policy ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Appointment Bundle Sort Policy ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SortDirection	Sort Direction	picklist		255		
SortOrder	Sort Order	int	9			
SortType	Sort Type	picklist		255		
SystemModstamp	System Modstamp	datetime				

APPTBUNDLESORTPOLICYFEED

Feed tracking for ApptBundleSortPolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENT

Stores the header data for an assessment.

For more information, see Assessment in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AssessmentRating	Assessment Rating	picklist		40		
AssessmentStatus	Assessment Status	picklist		40		
CaseId	Case ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDateTime	Effective Date	datetime				
ExpirationDateTime	Expiration Date	datetime				
Id	Assessment ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OmniProcessId	Omni Process ID	reference		18		
OwnerId	Owner ID	reference		18		
ParentId	Assessment ID	reference		18		
SystemModstamp	System Modstamp	datetime				

ASSESSMENTFEED

Feed tracking for Assessment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTHISTORY

History for tracked fields of Assessment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentId	Assessment ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTINDDEFINEDVALUE

Stores the list of acceptable values which are defined as part of assessment indicator definition for a single and multi select question.

For more information, see AssessmentIndDefinedValue in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndicatorDefinitionId	Assessment Indicator Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Assessment Indicator Defined Value ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SequenceNumber	Sequence Number	int	9			
SystemModstamp	System Modstamp	datetime				
Value	Value	string		255		

ASSESSMENTINDDEFINEDVALUEHISTORY

History for tracked fields of AssessmentIndDefinedValue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndDefinedValueId	Assessment Indicator Defined Value ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Indicator Defined Value History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTINDVALUE

Stores the list of target or captured values which are defined as part of assessment indicator definition for a single and multi select question.

For more information, see AssessmentIndValue in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndDefinedValueId	Assessment Indicator Defined Value ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Assessment Indicator Value ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SourceObjectId	SourceObject ID	reference		18		
SystemModstamp	System Modstamp	datetime				

ASSESSMENTINDVALUEHISTORY

History for tracked fields of AssessmentIndValue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssessmentIndValueId`	Assessment Indicator Value ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Assessment Indicator Value History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ASSESSMENTINDVALUESHARE

Sharing for AssessmentIndValue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTINDICATORDEFINITION

Define parameters that act as markers of compliance for inspections.

For more information, see AssessmentIndicatorDefinition in the *Automotive Cloud Developer Guide*, *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Indicator Field Type	picklist		255		
`Description`	Description	textarea		1000		
`Id`	Assessment Indicator Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

ASSESSMENTINDICATORDEFINITIONFEED

Feed tracking for AssessmentIndicatorDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTINDICATORDEFINITIONHISTORY

History for tracked fields of AssessmentIndicatorDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndicatorDefinitionId	Assessment Indicator Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Indicator Definition History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTINDICATORDEFINITIONSHARE

Sharing for AssessmentIndicatorDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTQUESTION

Stores the questions required for an assessment.

For more information, see AssessmentQuestion in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveVersionId	Assessment Question Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Data Type	picklist		255		
Description	Description	textarea		1000		
DeveloperName	Developer Name	string		80		
FormulaResponseDataType	Formula Response Data Type	picklist		255		
Id	Assessment Question ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Namespace	Namespace	string		15		
OwnerId	Owner ID	reference		18		
QuestionCategory	Category	picklist		40		
QuestionText	Question Text	textarea		1000		
RelatedQuestionId	Assessment Question ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UniqueIndex	Unique Index	string		100		

ASSESSMENTQUESTIONASSIGNMENT

Represents a junction between an assessment question set and an assessment question.

For more information, see AssessmentQuestionAssignment in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssessmentQuestionId`	Assessment Question ID	reference		18		
`AssessmentQuestionSetId`	Assessment Question Set ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Assessment Question Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

ASSESSMENTQUESTIONASSIGNMENTFEED

Feed tracking for AssessmentQuestionAssignment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTQUESTIONASSIGNMENTHISTORY

History for tracked fields of AssessmentQuestionAssignment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionAssignmentId	Assessment Question Assignment ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Question Assignment History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTQUESTIONASSIGNMENTSHARE

Sharing for AssessmentQuestionAssignment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTQUESTIONFEED

Feed tracking for AssessmentQuestion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTQUESTIONHISTORY

History for tracked fields of AssessmentQuestion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionId	Assessment Question ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Question History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTQUESTIONRESPONSE

Stores the responses submitted to an assessment.

For more information, see AssessmentQuestionResponse in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentId	Assessment ID	reference		18		
AssessmentQuestionId	Assessment Question Version ID	reference		18		
ChoiceValue	Choice Value	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrencyValue	Currency Value	currency			18	0
DateTimeValue	DateTime Value	datetime				
DateValue	Date Value	date				
DecimalResponseValue	Decimal Response Value	double			12	2
Id	Assessment Question Response ID	id		18		
IntegerResponseValue	Integer Response Value	int	9			
IsDeleted	Deleted	boolean				
IsTrueOrFalseValue	Boolean Value	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentAsmtQuestionVersionId	Assessment Question Version ID	reference		18		
ResponseText	Response Text	textarea		32000		
ResponseType	Response Type	string		50		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ResponseValue	Response Value	textarea		32000		
SystemModstamp	System Modstamp	datetime				
TimeValue	Time Value	time				

ASSESSMENTQUESTIONRESPONSEFEED

Feed tracking for AssessmentQuestionResponse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTQUESTIONRESPONSEHISTORY

History for tracked fields of AssessmentQuestionResponse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionResponseId	Assessment Question Response ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Question Response History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTQUESTIONRESPONSESHARE

Sharing for AssessmentQuestionResponse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTQUESTIONSET

Container object for assessment questions.

For more information, see AssessmentQuestionSet in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Assessment Question Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`Namespace`	Namespace	string		15		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UniqueIndex`	Unique Index	string		100		

ASSESSMENTQUESTIONSETFEED

Feed tracking for AssessmentQuestionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTQUESTIONSETHISTORY

History for tracked fields of AssessmentQuestionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionSetId	Assessment Question Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Question Set History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTQUESTIONSETSHARE

Sharing for AssessmentQuestionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTQUESTIONSHARE

Sharing for AssessmentQuestion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTQUESTIONVERSION

Stores the question versions for the assessment questions.

For more information, see AssessmentQuestionVersion in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivationDateTime	Activation Date	datetime				
AdditionalInformation	Additional Information	textarea		32000		
AssessmentQuestionId	Assessment Question ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Data Type	picklist		255		
DeactivationDateTime	Deactivation Date	datetime				
Description	Description	textarea		1000		
HelpText	Help Text	string		255		
Id	Assessment Question Version ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsOptionSourceResponseValue	Option Source Response Value	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
QuestionText	Question Text	textarea		1000		
ResponseValues	Response Values	textarea		32000		
Status	Status	string		10		
SystemModstamp	System Modstamp	datetime				
VersionNumber	Version Number	int	9			

ASSESSMENTQUESTIONVERSIONFEED

Feed tracking for AssessmentQuestionVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSESSMENTQUESTIONVERSIONHISTORY

History for tracked fields of AssessmentQuestionVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionVersionId	Assessment Question Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Question Version History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTSHARE

Sharing for Assessment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTTASK

Perform tasks in inspections to capture information.

For more information, see AssessmentTask in the *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskDefinitionId	Assessment Task Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created	datetime				
Description	Description	textarea		1000		
EndTime	End Time	datetime				
Id	Assessment Task ID	id		18		
IsDeleted	Deleted	boolean				
IsRequired	Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Visit ID	reference		18		
SequenceNumber	Sequence	int	9			
StartTime	Start Time	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TaskDefinitionId	TaskDefinition ID	reference		18		
TaskType	Task Type	picklist		255		

ASSESSMENTTASKCONTENTDOCUMENT

Associate content documents to visits.

For more information, see AssessmentTaskContentDocument in the *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskId	Assessment Task ID	reference		18		
ContentContextId	ContentContext ID	reference		18		
ContentDocumentId	ContentDocument ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created	datetime				
Id	Assessment Task Content Document ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

ASSESSMENTTASKCONTENTDOCUMENTFEED

Feed tracking for AssessmentTaskContentDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTTASKCONTENTDOCUMENTHISTORY

History for tracked fields of AssessmentTaskContentDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskContentDocumentId	Assessment Task Content Document ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Task Content Document History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTTASKDEFINITION

Associate an assessment task with an assessment indicator definition.

For more information, see AssessmentTaskDefinition in the *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Assessment Task Definition Description	textarea		1000		
`Id`	Assessment Task Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TaskType`	Assessment Task Definition Task Type	picklist		255		

ASSESSMENTTASKDEFINITIONFEED

Feed tracking for AssessmentTaskDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTTASKDEFINITIONHISTORY

History for tracked fields of AssessmentTaskDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskDefinitionId	Assessment Task Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Task Definition History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTTASKDEFINITIONSHARE

Sharing for AssessmentTaskDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSESSMENTTASKFEED

Feed tracking for AssessmentTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTTASKHISTORY

History for tracked fields of AssessmentTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskId	Assessment Task ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Task History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTTASKINDDEFINITION

Associate an assessment indicator definition with an assessment task definition.

For more information, see AssessmentTaskIndDefinition in the *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndDefinitionId	Assessment Indicator Definition ID	reference		18		
AssessmentTaskDefinitionId	Assessment Task Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Assessment Task Indicator Definition ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

ASSESSMENTTASKINDDEFINITIONFEED

Feed tracking for AssessmentTaskIndDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTTASKINDDEFINITIONHISTORY

History for tracked fields of AssessmentTaskIndDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskIndDefinitionId	Assessment Task Indicator Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Task Indicator Definition History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTTASKORDER

Define an order activity that the sales rep can perform during a visit to the stores.

For more information, see AssessmentTaskOrder in the *Consumer Goods Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskId	Assessment Task ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Assessment Task Order ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OrderId	Order ID	reference		18		
SystemModstamp	System Modstamp	datetime				

ASSESSMENTTASKORDERFEED

Feed tracking for AssessmentTaskOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSESSMENTTASKORDERHISTORY

History for tracked fields of AssessmentTaskOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentTaskOrderId	Assessment Task Order ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Assessment Task Order History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSESSMENTTASKSHARE

Sharing for AssessmentTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ASSET

Represents an item of commercial value, such as a product sold by your company or a competitor, that a customer has purchased.

For more information, see Asset in the *Consumer Goods Cloud Developer Guide*, *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Address	Address	address				
AssetLevel	Asset Level	int	9			
AssetProvidedById	Asset Provided By ID	reference		18		
AssetServicedById	Asset Serviced By ID	reference		18		
City	City	string		40		
ContactId	Contact ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
GeocodeAccuracy	Geocode Accuracy	picklist		40		
Id	Asset ID	id		18		
InstallDate	Install Date	date				
IsCompetitorProduct	Competitor Asset	boolean				
IsDeleted	Deleted	boolean				
IsInternal	Internal Asset	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Longitude	Longitude	double			18	15
Name	Asset Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Parent Asset ID	reference		18		
PostalCode	Postal Code	string		20		
Price	Price	currency			18	0
Product2Id	Product ID	reference		18		
ProductCode	Product Code	string		255		
PurchaseDate	Purchase Date	date				
Quantity	Quantity	double			12	2
RootAssetId	Root Asset ID	reference		18		
SerialNumber	Serial Number	string		80		
State	State	string		80		
Status	Status	picklist		255		
StockKeepingUnit	Product SKU	string		180		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
UsageEndDate	Usage End Date	date				

ASSETACTION

Represents a change made to a lifecycle-managed asset. The fields can't be edited.

For more information, see AssetAction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionDate	Action Date	datetime				
ActualTaxChange	Change in Actual Tax	currency			18	2
AdjustmentAmountChange	Change in Adjustment Amount	currency			18	2
Amount	Amount	currency			18	2
AssetActionNumber	Name	string		255		
AssetId	Asset ID	reference		18		
Category	Category (Deprecated)	picklist		40		
CategoryEnum	Business Category	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EstimatedTaxChange	Change in Estimated Tax	currency			18	2
Id	Asset Action ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MrrChange	Change in Monthly Recurring Revenue	currency			18	2
ProductAmountChange	Change in Product Amount	currency			18	2
QuantityChange	Change in Quantity	double			14	2
SubtotalChange	Change in Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalAmount	Total Amount	currency			18	2
TotalCancellationsAmount	Total Cancellations Amount	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalCrossSellsAmount	Total Cross-Sells Amount	currency			18	2
TotalDownsellsAmount	Total Downsells Amount	currency			18	2
TotalInitialSaleAmount	Total Initial Sale Amount	currency			18	2
TotalMrr	Total Monthly Recurring Revenue	currency			18	2
TotalOtherAmount	Total Other Amount	currency			18	2
TotalQuantity	Total Quantity	double			14	2
TotalRenewalsAmount	Total Renewals Amount	currency			18	2
TotalTermsAndConditionsAmount	Total Terms And Conditions Changes Amount	currency			18	2
TotalTransfersAmount	Total Transfers Amount	currency			18	2
TotalUpsellsAmount	Total Upsells Amount	currency			18	2
Type	Type	picklist		255		

ASSETACTIONSOURCE

Represents an optional way to record what transactions caused changes to lifecycle-managed assets. Use it to trace financial and other information about asset actions. This object supports Salesforce order products and work order line items, and transaction IDs from other systems. The fields can't be edited.

For more information, see AssetActionSource in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualTax	Actual Tax	currency			18	2
AdjustmentAmount	Adjustment Amount	currency			18	2
AssetActionId	Asset Action ID	reference		18		
AssetActionSourceNumber	Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	datetime				
EstimatedTax	Estimated Tax	currency			18	2
ExternalReference	External Reference	string		255		
ExternalReferenceDataSource	External Reference Data Source	string		255		
Id	Asset Action Source ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ProductAmount	Product Amount	currency			18	2
Quantity	Quantity	double			14	2
ReferenceEntityItemId	Reference Entity Item ID	reference		18		
StartDate	Start Date	datetime				
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TransactionDate	Transaction Date	datetime				

ASSETDOWNTIMEPERIOD

Represents a period during which an asset is not able to perform as expected. Downtime periods include planned activities, such as maintenance, and unplanned events, such as mechanical breakdown.

For more information, see AssetDowntimePeriod in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetDowntimePeriodNumber	Asset Downtime Period Number	string		255		
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DowntimeType	Downtime Type	picklist		255		
EndTime	End Date	datetime				
Id	Asset Downtime Period ID	id		18		
IsDeleted	Deleted	boolean				
IsExcluded	Outside Uptime Calculation Period	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
StartTime	Start Date	datetime				
SystemModstamp	System Modstamp	datetime				

ASSETDOWNTIMEPERIODFEED

Feed tracking for AssetDowntimePeriod.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSETDOWNTIMEPERIODHISTORY

History for tracked fields of AssetDowntimePeriod.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetDowntimePeriodId	Asset Downtime Period ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Asset Downtime Period History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSETFEED

Feed tracking for Asset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSETHISTORY

History for tracked fields of Asset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Asset History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSETRELATIONSHIP

Represents a non-hierarchical relationship between assets due to replacement, upgrade, or other circumstances.

For more information, see AssetRelationship in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
AssetRelationshipNumber	Asset Relationship Number	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FromDate	From Date	datetime				
Id	Asset Relationship ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
RelatedAssetId	Asset ID	reference		18		
RelationshipType	Relationship Type	picklist		40		
SystemModstamp	System Modstamp	datetime				
ToDate	To Date	datetime				

ASSETRELATIONSHIPFEED

Feed tracking for AssetRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ASSETRELATIONSHIPHISTORY

History for tracked fields of AssetRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetRelationshipId	Asset Relationship ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Asset Relationship History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSETSHARE

Represents a sharing entry on an Asset.

For more information, see AssetShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssetAccessLevel`	Asset Access	picklist		40		
`AssetId`	Asset ID	reference		18		
`Id`	Asset Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ASSETSTATEPERIOD

Represents a time span when an asset has the same quantity, amount, and monthly recurring revenue (MRR). An asset has as many asset state periods as there are changes to it (asset actions) during its lifecycle. The dashboard and related pages show the current asset state period. The fields can't be edited.

For more information, see AssetStatePeriod in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Amount`	Amount	currency			18	2
`AssetId`	Asset ID	reference		18		
`AssetStatePeriodNumber`	Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	datetime				
`Id`	Asset State Period ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Mrr`	Monthly Recurring Revenue	currency			18	2
`Quantity`	Quantity	double			14	2
`StartDate`	Start Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

ASSETTOKENEVENT

An event related to the AssetTokenEvent object.

For more information, see AssetTokenEvent in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActorTokenPayload`	Actor Token Payload	textarea		6000		
`AssetId`	Asset ID	reference		18		
`AssetName`	Asset Name	string		255		
`AssetSerialNumber`	Asset Serial Number	string		255		
`ConnectedAppId`	Connected App ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeviceId`	Device ID	string		255		
`DeviceKey`	Device Key	textarea		2000		
`EventUuid`	Event UUID	string		36		
`Expiration`	Expiration	datetime				
`Name`	Name	string		255		
`ReplayId`	Replay ID	string		1000		
`UserId`	User ID	reference		18		

ASSETWARRANTY

Defines the warranty terms applicable to an asset along with any exclusions and extensions.

For more information, see AssetWarranty in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
AssetWarrantyNumber	Asset Warranty Number	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
ExchangeType	Exchange Type	picklist		40		
Exclusions	Exclusions	textarea		32000		
ExpensesCovered	Expenses Covered	percent			5	2
ExpensesCoveredEndDate	Expenses Covered End Date	date				
Id	Asset Warranty ID	id		18		
IsDeleted	Deleted	boolean				
IsTransferable	Transferable	boolean				
LaborCovered	Labor Covered	percent			5	2
LaborCoveredEndDate	Labor Covered End Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
PartsCovered	Parts Covered	percent			5	2
PartsCoveredEndDate	Parts Covered End Date	date				
Pricebook2Id	Price Book ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`WarrantyTermId`	Warranty Term ID	reference		18		
`WarrantyType`	Warranty Type	picklist		40		

ASSETWARRANTYFEED

Feed tracking for AssetWarranty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSETWARRANTYHISTORY

History for tracked fields of AssetWarranty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetWarrantyId	Asset Warranty ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Asset Warranty History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASSIGNEDRESOURCE

Represents a service resource who is assigned to a service appointment in Field Service and Lightning Scheduler. Assigned resources appear in the Assigned Resources related list on service appointments.

For more information, see AssignedResource in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActualTravelTime`	Actual Travel Time (Minutes)	double			18	2
`AssignedResourceNumber`	Assigned Resource Number	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EstimatedTravelTime`	Estimated Travel Time (Minutes)	double			18	2
`Id`	Assigned Resource ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ServiceAppointmentId`	Service Appointment ID	reference		18		
`ServiceCrewId`	Service Crew ID	reference		18		
`ServiceResourceId`	Service Resource ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

ASSIGNEDRESOURCEFEED

Feed tracking for AssignedResource.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ASSIGNMENTRULE

Represents an assignment rule associated with a Case or Lead.

For more information, see AssignmentRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Active`	Active	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Rule ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		120		
`SobjectType`	SObject Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

ASSOCIATEDLOCATION

Represents a link between an account and a location in Field Service. You can associate multiple accounts with one location. For example, a shopping center location may have multiple customer accounts.

For more information, see AssociatedLocation in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActiveFrom`	Active From	datetime				
`ActiveTo`	Active To	datetime				
`AssociatedLocationNumber`	Associated Location Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Associated Location ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationId`	Location ID	reference		18		
`ParentRecordId`	Account Name ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		40		

ASSOCIATEDLOCATIONHISTORY

History for tracked fields of AssociatedLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssociatedLocationId	Associated Location ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Associated Location History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ASYNCAPEXJOB

Represents an individual Apex sharing recalculation job, a batch Apex job, a method with the `future` annotation, or a job that implements `Queueable`. Use this object to query Apex batch jobs in your organization.

For more information, see AsyncApexJob in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`CompletedDate`	Completion Date	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CronTriggerId`	Scheduled Job ID	reference		18		
`ExtendedStatus`	Status Detail	string		255		
`Id`	Apex Job ID	id		18		
`JobItemsProcessed`	Batches Processed	int	9			
`JobType`	Job Type	picklist		40		
`LastProcessed`	Last ID processed and committed	string		15		
`LastProcessedOffset`	Offset of last ID processed and committed	int	9			
`MethodName`	Apex Method	string		255		
`NumberOfErrors`	Failures	int	9			
`ParentJobId`	Apex Job ID	reference		18		
`Status`	Status	picklist		40		
`TotalJobItems`	Total Batches	int	9			

ASYNCOPERATIONLOG

Represents an async operations log containing progress and status information about external synchronizations to the Omnichannel Inventory service.

For more information, see AsyncOperationLog in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AsyncOperationNumber	Async Operation Number	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Error	Error	string		255		
ExternalReference	External Reference	string		255		
FinishedAt	Finished At	datetime				
Id	Async Operation Log ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastStatusUpdateAt	Last Status Update At	datetime				
LastViewedDate	Last Viewed Date	datetime				
Request	Request	textarea		131072		
Response	Response	textarea		131072		
StartedAt	Started At	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

ATTACHEDCONTENTDOCUMENT

This read-only object contains all `ContentDocument` objects associated with an object.

For more information, see AttachedContentDocument in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentSize`	Content Size	int	9			
`ContentUrl`	Content URL	url		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created	datetime				
`ExternalDataSourceName`	External Data Source	string		80		
`ExternalDataSourceType`	Class ID	picklist		80		
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		20		
`Id`	Content Document Link Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Content Modified Date	datetime				
`LinkedEntityId`	Parent ID	reference		18		
`SharingOption`	Prevent others from sharing and unsharing	picklist		40		
`Title`	Title	string		255		

ATTACHEDCONTENTNOTE

This read-only object contains all ContentNote objects associated with an object.

For more information, see AttachedContentNote in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentSize`	Content Size	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created	datetime				
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		20		
`Id`	Note Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Content Modified Date	datetime				
`LinkedEntityId`	Parent ID	reference		18		
`TextPreview`	Text Preview	string		255		
`Title`	Title	string		255		

ATTACHMENT

Represents a file that a User has uploaded and attached to a parent object.

For more information, see Attachment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Body`	Body	base64				
`BodyLength`	Body Length	int	8			
`ContentType`	Content Type	string		120		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		500		
`Id`	Attachment ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrivate`	Private	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	File Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

AUDIENCE

Represents an audience that is defined by criteria and can be assigned and used for targeting in an Experience Cloud site.

For more information, see Audience in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AudienceName	Audience Name	string		80		
ContainerId	Container ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DeveloperName	Name	string		80		
FormulaFilterType	Formula Filter Type	picklist		255		
Id	Audience ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
SystemModstamp	System Modstamp	datetime				

AURADEFINITION

Represents an Aura component definition, such as component markup, a client-side controller, or an event.

For more information, see AuraDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuraDefinitionBundleId`	Lightning Definition Bundle ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefType`	Definition Type	picklist		255		
`Format`	Format	picklist		255		
`Id`	Lightning Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Source`	Source	textarea		1000000		
`SystemModstamp`	System Modstamp	datetime				

AURADEFINITIONBUNDLE

Represents a Lightning Aura component definition bundle, such as a component or application bundle. A bundle contains a Lightning Aura component definition and all its related resources.

For more information, see AuraDefinitionBundle in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Name	string		80		
`Id`	Lightning Definition Bundle ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

AURADEFINITIONBUNDLEINFO

For internal use only.

For more information, see AuraDefinitionBundleInfo in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	1
`AuraDefinitionBundleId`	Lightning Definition Bundle ID	string		18		
`DeveloperName`	Bundle Name	string		80		
`DurableId`	Durable ID	string		255		
`Id`	Lightning Definition Bundle ID	id		18		
`NamespacePrefix`	Namespace Prefix	string		15		

AURADEFINITIONINFO

For internal use only.

For more information, see AuraDefinitionInfo in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuraDefinitionBundleInfoId`	Lightning Definition Bundle ID	string		100		
`AuraDefinitionId`	Lightning Definition ID	string		18		
`DefType`	Definition Type	picklist		255		
`DeveloperName`	Bundle Name	string		80		
`DurableId`	Durable ID	string		255		
`Format`	Format	picklist		255		
`Id`	Lightning Definition ID	id		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`Source`	Source	textarea		1000000		

AUTHAPPLICATIONASSET

Information related to the association between an Asset and the Application for the license of an Asset.

For more information, see AuthApplicationAsset in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Authorization Application Asset ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LicensePermitNameId	Business License ID	reference		18		
Name	Authorization Application Asset ID	string		255		
OwnerId	Owner ID	reference		18		
RgltyAuthApplicationId	Application ID	reference		18		
SystemModstamp	System Modstamp	datetime				

AUTHAPPLICATIONASSETFEED

Feed tracking for AuthApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AUTHAPPLICATIONASSETHISTORY

History for tracked fields of AuthApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthApplicationAssetId	Authorization Application Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Application Asset History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHAPPLICATIONASSETSHARE

Sharing for AuthApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHAPPLICATIONPLACE

For more information, see AuthApplicationPlace in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationId	Authorization ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Authorization Application Place ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Authorization Application Place ID	string		255		
OwnerId	Owner ID	reference		18		
PlaceId	Place ID	reference		18		
RgltyAuthApplicationId	Regulatory Authorization Application ID	reference		18		
SystemModstamp	System Modstamp	datetime				

AUTHAPPLICATIONPLACEFEED

Feed tracking for AuthApplicationPlace.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AUTHAPPLICATIONPLACEHISTORY

History for tracked fields of AuthApplicationPlace.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthApplicationPlaceId	Authorization Application Place ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Application Place History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHAPPLICATIONPLACESHARE

Sharing for AuthApplicationPlace.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHCONFIG

Represents authentication options for an org with a My Domain configured, an Experience Cloud site, or a custom domain.

For more information, see AuthConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthOptionsAuthProvider	AuthProvider	boolean				
AuthOptionsCertificate	Certificate	boolean				
AuthOptionsSaml	Saml	boolean				
AuthOptionsUsernamePassword	UsernamePassword	boolean				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
Id	Authentication Configuration ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				
Type	Authentication Configuration Type	picklist		255		
Url	URL	string		240		

AUTHCONFIGPROVIDERS

Represents an authentication provider that's configured in an organization. This object is a child of the AuthConfig object.

For more information, see AuthConfigProviders in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthConfigId`	Authentication Configuration ID	reference		18		
`AuthProviderId`	Authentication Provider ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Auth Config Provider ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

AUTHFORMREQUESTRECORD

Junction between an Authorization Request and the Salesforce record that is being authorized. For example. the actual financial Salesforce records shared with third parties or any Salesforce record being shared as a result of the consent request.

For more information, see AuthFormRequestRecord in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Authorizable Form Request Record ID	id		18		
`InfoAuthRequestFormId`	Info Auth Request Form ID	reference		18		
`InfoAuthorizationRequestId`	Info Authorization Request ID	reference		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`RelatedRecordId`	Related Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

AUTHFORMREQUESTRECORDFEED

Feed tracking for AuthFormRequestRecord.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

AUTHFORMREQUESTRECORDHISTORY

History for tracked fields of AuthFormRequestRecord.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthFormRequestRecordId	Authorizable Form Request Record ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorizable Form Request Record History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHLOCATIONACCESSSCHEDULE

Represents the operating hours during a specified period in which authorization is valid for a place.

For more information, see AuthLocationAccessSchedule in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthApplPlaceId	Authorization Application Place ID	reference		18		
AuthEndDate	Authorization End Date	date				
AuthStartDate	Authorization Start Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Authorization Location Access Schedule ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WorkDay	Work Day	multipicklist		4099	0	
WorkEndTime	Work End Time	time				
WorkStartTime	Work Start Time	time				

AUTHLOCATIONACCESSSCHEDULEFEED

Feed tracking for AuthLocationAccessSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AUTHLOCATIONACCESSSCHEDULEHISTORY

History for tracked fields of AuthLocationAccessSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthLocationAccessScheduleId	Authorization Location Access Schedule ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Location Access Schedule History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHLOCATIONACCESSSCHEDULESHARE

Sharing for AuthLocationAccessSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHPROVIDER

Represents an authentication provider (auth provider). An auth provider lets users log in to your Salesforce org from an external service provider, such as Facebook, Google, or GitHub. Available in API version 27.0 and later.

For more information, see AuthProvider in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppleTeam`	Apple Team	string		12		
`AuthorizeUrl`	Authorize Endpoint URL	url		1024		
`ConsumerKey`	Consumer Key	string		256		
`ConsumerSecret`	Consumer Secret	string		100		
`CreatedDate`	Created Date	datetime				
`CustomMetadataTypeRecord`	Custom Metadata Type Record	string		15		
`DefaultScopes`	Default Scopes	string		256		
`DeveloperName`	URL Suffix	string		32		
`EcKey`	Elliptic Curve Key	string		30		
`ErrorUrl`	Custom Error URL	string		500		
`ExecutionUserId`	User ID	reference		18		
`FriendlyName`	Name	string		32		
`IconUrl`	Icon URL	url		1024		
`Id`	Auth. Provider ID	id		18		
`IdTokenIssuer`	Token Issuer	string		1024		
`LinkKickoffUrl`	Existing User Linking URL	url		255		
`LogoutUrl`	Custom Logout URL	url		1500		
`OauthKickoffUrl`	OAuth-Only Initialization URL	url		255		
`OptionsIncludeOrgIdInId`	Include identity organization's Organization ID for third-party account linkage	boolean				
`OptionsIsMuleSoftEU`	isMuleSoftEU	boolean				
`OptionsIsMuleSoftUS`	isMuleSoftUS	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsSendAccessTokenInHeader	Send access token in header	boolean				
OptionsSendClientCredentialsInHeader	Send client credentials in header	boolean				
OptionsSendSecretInApis	Include Consumer Secret in SOAP API Responses	boolean				
PluginId	Class ID	reference		18		
ProviderType	Provider Type	picklist		40		
RegistrationHandlerId	Class ID	reference		18		
SsoKickoffUrl	Single Sign-On Initialization URL	url		255		
TokenUrl	Token Endpoint URL	url		1024		
UserInfoUrl	User Info Endpoint URL	url		1024		

AUTHSESSION

The AuthSession object represents an individual user session in your organization.

For more information, see AuthSession in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created	datetime				
`Id`	Auth Session ID	id		18		
`IsCurrent`	Current Session	boolean				
`LastModifiedDate`	Updated	datetime				
`LoginGeoId`	Login Geo Data ID	reference		18		
`LoginHistoryId`	Login History ID	reference		18		
`LoginType`	Login	picklist		40		
`LogoutUrl`	Logout URL	string		1500		
`NumSecondsValid`	Valid For	int	9			
`ParentId`	Auth Session ID	reference		18		
`SessionSecurityLevel`	Session Security Level	picklist		40		
`SessionType`	Session Type	picklist		40		
`SourceIp`	Source IP	string		39		
`UserType`	User Type	picklist		40		
`UsersId`	User ID	reference		18		

AUTHORNOTE

Stores notes associated with different types of records along with information about the author of the note and the time the note was authored. The author isn't necessarily the person who created a record. The author is the person who provided the information in the note.

For more information, see AuthorNote in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorId	Author ID	reference		18		
AuthorName	Author Name	string		255		
AuthoredDateTime	Authored Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Author Note ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NoteText	Note Text	textarea		32000		
OwnerId	Owner ID	reference		18		
ParentRecordId	ParentRecord ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

AUTHORNOTEFEED

Feed tracking for AuthorNote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

AUTHORNOTEHISTORY

History for tracked fields of AuthorNote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorNoteId	Author Note ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Author Note History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORNOTESHARE

Sharing for AuthorNote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHORIZATIONFORM

Represents the specific version and effective dates of a form that is associated with consent, such as a privacy policy or terms and conditions.

For more information, see AuthorizationForm in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefaultAuthFormTextId`	Default Authorization Form Text ID	reference		18		
`EffectiveFromDate`	Effective From Date	date				
`EffectiveToDate`	Effective To Date	date				
`Id`	Authorization Form ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsSignatureRequired`	Is Signature Required	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RevisionNumber`	Revision Number	string		10		
`SystemModstamp`	System Modstamp	datetime				

AUTHORIZATIONFORMCONSENT

Represents the date and way in which a user consented to an authorization form.

For more information, see AuthorizationFormConsent in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormTextId	Authorization Form Text ID	reference		18		
ConsentCapturedDateTime	Consent Captured Date Time	datetime				
ConsentCapturedSource	Consent Captured Source	string		255		
ConsentCapturedSourceType	Consent Captured Source Type	picklist		255		
ConsentGiverId	Consent Giver ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DocumentVersionId	ContentVersion ID	reference		18		
Id	Authorization Form Consent ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

AUTHORIZATIONFORMCONSENTHISTORY

History for tracked fields of AuthorizationFormConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormConsentId	Authorization Form Consent ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Form Consent History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORIZATIONFORMCONSENTSHARE

Sharing for AuthorizationFormConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHORIZATIONFORMDATAUSE

Represents the data use consented to in an authorization form.

For more information, see AuthorizationFormDataUse in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormId	Authorization Form ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Data Use Purpose ID	reference		18		
Id	Authorization Form Data Use ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

AUTHORIZATIONFORMDATAUSEHISTORY

History for tracked fields of AuthorizationFormDataUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormDataUseId	Authorization Form Data Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Form Data Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORIZATIONFORMDATAUSESHARE

Sharing for AuthorizationFormDataUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHORIZATIONFORMHISTORY

History for tracked fields of AuthorizationForm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormId	Authorization Form ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Form History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORIZATIONFORMSHARE

Sharing for AuthorizationForm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AUTHORIZATIONFORMTEXT

Represents an authorization form's text and language settings.

For more information, see AuthorizationFormText in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormId	Authorization Form ID	reference		18		
ContentDocumentId	Content Document ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FullAuthorizationFormUrl	Full Authorization Form Url	string		255		
Id	Authorization Form Text ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Locale	Locale	picklist		255		
LocaleSelection	Locale	picklist		255		
Name	Name	string		255		
SummaryAuthFormText	Summary Auth Form Text	string		255		
SystemModstamp	System Modstamp	datetime				

AUTHORIZATIONFORMTEXTFEED

Feed tracking for AuthorizationFormText.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

AUTHORIZATIONFORMTEXTHISTORY

History for tracked fields of AuthorizationFormText.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormTextId	Authorization Form Text ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorization Form Text ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORIZEDINSURANCELINE

Represents the insurance lines that an insurance company is authorized to sell.

For more information, see AuthorizedInsuranceLine in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Country`	Country	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Authorized Insurance Line ID	id		18		
`InsuranceLine`	Insurance Line	picklist		40		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LegalEntityId`	Legal Entity ID	reference		18		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

AUTHORIZEDINSURANCELINEFEED

Feed tracking for AuthorizedInsuranceLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

AUTHORIZEDINSURANCELINEHISTORY

History for tracked fields of AuthorizedInsuranceLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizedInsuranceLineId	Authorized Insurance Line ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Authorized Insurance Line History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AUTHORIZEDINSURANCELINESHARE

Sharing for AuthorizedInsuranceLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

AWARD

Represents a person's or organization's professional awards.

For more information, see Award in the *Financial Services Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AwardDate	Award Date	datetime				
AwardedBy	Awarded By	string		255		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Award ID	id		18		
Identifier	Identifier	string		255		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Award Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
VerificationStatus	Verification Status	picklist		40		
VerifiedDate	Verified On	datetime				

AWARDFEED

Feed tracking for Award.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

AWARDHISTORY

History for tracked fields of Award.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AwardId	Award ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Award History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

AWARDSHARE

Sharing for Award.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BACKGROUNDOPERATION

Represents a background operation in an asynchronous job queue.

For more information, see BackgroundOperation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Error	Error Message	string		255		
ExecutionGroup	Execution Group	string		255		
ExpiresAt	Expires	datetime				
FinishedAt	Finished	datetime				
GroupLeaderId	Background Operation ID	reference		18		
Id	Background Operation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
NumFollowers	Num Followers	int	9			
ParentKey	Parent Key	string		255		
ProcessAfter	Process After	datetime				
RetryBackoff	Retry Backoff	int	9			
RetryCount	Retry Count	int	9			
RetryLimit	Retry Limit	int	9			
SequenceGroup	Sequence Group	string		255		
SequenceNumber	Sequence Number	int	9			
StartedAt	Started	datetime				
Status	Status	picklist		255		
SubmittedAt	Submitted	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
Timeout	Timeout	int	9			
Type	Type	picklist		255		
WorkerUri	Worker URI	string		255		

BANKER

Represents a business unit member who is assigned the banker role for a branch unit.

For more information, see Banker in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrentBranchId`	Branch Unit ID	reference		18		
`CurrentBranchStartTime`	Current Branch Start Time	datetime				
`Description`	Description	string		255		
`Id`	Banker ID	id		18		
`IsDeleted`	Deleted	boolean				
`JobCode`	Job Code	string		100		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Level`	Level	picklist		40		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserOrContactId`	User or Contact ID	reference		18		

BANKERFEED

Feed tracking for Banker.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BANKERHISTORY

History for tracked fields of Banker.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BankerId	Banker ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Banker History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BANKERSHARE

Sharing for Banker.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BATCHAPEXERROREVENT

An event related to the BatchApexErrorEvent object.

For more information, see BatchApexErrorEvent in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AsyncApexJobId	Async Apex Job ID	string		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DoesExceedJobScopeMaxLength	Item Values Max Length Exceeded	boolean				
EventUuid	Event UUID For Platform Event	string		36		
ExceptionType	Exception Type Thrown	string		200		
JobScope	Items In Failed Batch	textarea		40000		
Message	Exception Message	string		5000		
Phase	Phase	string		8		
ReplayId	Replay ID For Platform Event	string		1000		
RequestId	Jetty Request ID	string		18		
StackTrace	Error Stack Trace	string		5000		

BATCHCALCJOBDEFINITIONVIEW

Represents the details of a Data Processing Engine definition. The definition can also be a file-based definition that is available in your Salesforce org.

For more information, see BatchCalcJobDefinitionView in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Description`	Description	string		255		
`DurableId`	Durable ID	string		255		
`Id`	Batch Calculation Job Definition View ID	id		18		
`InstalledPackageName`	Package Name	string		240		
`IsActive`	Active	boolean				
`IsTemplate`	Template	boolean				
`LastModifiedBy`	Last Modified By	string		255		
`LastModifiedDate`	Last Modified Date	datetime				
`ManageableState`	Package State	picklist		255		
`MasterLabel`	Job Name	string		255		
`Name`	API Name	string		255		
`NamespacePrefix`	Namespace	string		255		
`ProcessType`	Process Type	picklist		255		

BATCHJOB

Represents an instance of a batch job that is either running and has been run.

For more information, see BatchJob in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchJobDefinitionId	Batch Job Definition ID	reference		18		
BatchJobDefinitionName	Batch Job Definition Name	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndTime	End Time	datetime				
ErrorDescription	Error Description	string		1333		
ExternalReference	External Reference	string		255		
Id	Run ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProcessGroup	Group	string		80		
RetryCount	Retry Count	int	9			
RuntimeParameter	Runtime Parameter	textarea		100000		
StartTime	Start Time	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

BATCHJOBFEED

Feed tracking for BatchJob.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BATCHJOBHISTORY

History for tracked fields of BatchJob.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchJobId	Run ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Batch Job History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BATCHJOBPART

Represents one part of a batch job.

For more information, see BatchJobPart in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchJobId	Run ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndTime	End Date	datetime				
ErrorDescription	Error	string		1333		
FailedRecordCount	Total Failure	int	9			
Id	Batch Job Part ID	id		18		
InputRecordCount	Input Record	int	9			
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
OutputRecordCount	Output Record	int	9			
ParentBatchJobPartId	Batch Job Part ID	reference		18		
RetryCount	Retry Count	int	9			
StartTime	Start Date	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Node	picklist		255		

BATCHJOBPARTFAILEDRECORD

Represents records that a batch job part couldn't successfully process.

For more information, see BatchJobPartFailedRecord in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BatchJobId`	Run ID	reference		18		
`BatchJobPartId`	Batch Job Part ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ErrorDescription`	Error	string		1333		
`Id`	Batch Job Part Failed Record ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`Record`	Record	string		100		
`ResubmittedBatchJobId`	Run ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

BATCHJOBPARTFAILEDRECORDFEED

Feed tracking for BatchJobPartFailedRecord.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BATCHJOBPARTFAILEDRECORDHISTORY

History for tracked fields of BatchJobPartFailedRecord.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchJobPartFailedRecordId	Batch Job Part Failed Record ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Batch Job Part Failed Record History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BATCHJOBPARTFEED

Feed tracking for BatchJobPart.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BATCHJOBPARTHISTORY

History for tracked fields of BatchJobPart.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BatchJobPartId`	Batch Job Part ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Batch Job Part History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BATCHJOBSHARE

Sharing for BatchJob.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BATCHJOBSTATUSCHANGEDEVENT

Notifies subscribers of when a batch job is completed in a flow.

For more information, see BatchJobStatusChangedEvent in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BatchJob`	Batch Job	string		20		
`BatchJobDefinition`	Batch Job Definition	string		20		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDateTime`	End Date Time	datetime				
`EventUuid`	Event UUID	string		36		
`ReplayId`	Replay ID	string		1000		
`StartDateTime`	Start Date Time	datetime				
`Status`	Status	picklist		255		

BATCHPROCESSJOBDEFVIEW

Represents the details of a Batch Job definition. The definition can also be file-based definitions that are available in your Salesforce org.

For more information, see BatchProcessJobDefView in the *Data Processing Engine, Batch Management, and Monitor Workflow Services Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Durable ID	string		255		
`Id`	Batch Process Job Definition View ID	id		18		
`IsActive`	Active	boolean				
`Label`	Label	string		255		
`Name`	Name	string		255		
`NamespacePrefix`	Namespace	string		255		
`ProcessDefinition`	Process Definition	textarea		32000		
`ProcessGroup`	Group	string		80		
`SourceObjectName`	Source Object Name	string		80		
`Type`	Type	string		255		
`TypeInstance`	Type Instance	string		80		

BENEFIT

Represents information about benefits associated with the loyalty program. Benefits are mapped to the members based on the tier or other program rules.

For more information, see Benefit in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BenefitActionId`	Benefit Action ID	reference		18		
`BenefitTypeId`	Benefit Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Benefit ID	id		18		
`ImageUrl`	Image URL	url		1000		
`IsActive`	Active	boolean				
`IsBenefitSelectionAllowed`	Benefit Selection Allowed	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Benefit Name	string		255		
`PrioritySequence`	Priority Sequence	int	9			
`SystemModstamp`	System Modstamp	datetime				
`UnitId`	Unit of Measure ID	reference		18		
`Value`	Value	double			18	0

BENEFITACTION

Represents details of an action that can be triggered for a benefit.

For more information, see BenefitAction in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
DeveloperName	Name	string		80		
FlowDefinition	Interaction Definition ID	picklist		255		
FlowInstance	Flow Instance	string		80		
Id	Benefit Action ID	id		18		
IsActive	Active	boolean				
IsBenefitExpirationAllowed	Allow Benefit Expiration	boolean				
IsBenefitUpdateAllowed	Allow Benefit Update	boolean				
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
MemberBenefitVariableName	Member Benefit Variable Name	string		80		
NamespacePrefix	Namespace Prefix	string		15		
ProcessType	Process Type	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

BENEFITACTIONPARAMETER

Represents the flow input parameters to be used in a benefit action.

For more information, see BenefitActionParameter in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BenefitActionId`	Benefit Action ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	DataType	picklist		255		
`DeveloperName`	Object Name	string		80		
`Id`	Benefit Action Parameter ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`ObjectName`	Object Name	string		80		
`PicklistName`	Picklist Name	string		80		
`SystemModstamp`	System Modstamp	datetime				

BENEFITACTIONPARAMETERVALUE

Represents the pre-defined values for a benefit action parameter

For more information, see BenefitActionParameterValue in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BenefitActionParameterId`	Benefit Action Parameter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Benefit Action Parameter Value ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParameterValue`	Parameter Value	string		255		
`SystemModstamp`	System Modstamp	datetime				

BENEFITPARAMETERVALUE

Represents the runtime value of a parameter that's used when executing a flow for benefit action.

For more information, see BenefitParameterValue in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BenefitActionParameterId`	Benefit Action Parameter ID	reference		18		
`BenefitId`	Benefit ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Benefit Parameter Value ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Benefit Parameter Value Name	string		255		
`ParameterValue`	Parameter Value	string		255		
`SystemModstamp`	System Modstamp	datetime				

BENEFITTYPE

Represents information about the type of benefits such as Support Benefits available to the loyalty program member.

For more information, see BenefitType in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		80		
`Id`	Benefit Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramId`	Loyalty Program ID	reference		18		
`Name`	Benefit Type Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProcessType`	Process Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

BENEFITTYPESHARE

Sharing for BenefitType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BLDGENRGYINTENSITY

Represents the average energy intensity by fuel type across a set of buildings. You can derive this data from published sources. Alternatively, you can do so by using energy use records as the data source and then setting up a window of time with some characteristics of the building size and type.

For more information, see BldgEnrgyIntensity in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEnergyIntensityInKwhM2	Annual Energy Intensity (kWh/m2)	double			13	3
AnnualEnergyIntensityInKwhSqft	Annual Energy Intensity (kWh/sqft)	double			13	3
AreSysGenEnrgyUseRecIncluded	System Generated Energy Use Records Included	boolean				
AveragePowerUsageEffectiveness	Average Power Usage Effectiveness	double			11	3
AveragingWindowEndDate	Averaging Window End Date	date				
AveragingWindowStartDate	Averaging Window Start Date	date				
BldgEnergyIntensityIdentifier	Building Energy Intensity ID	textarea		32000		
BuildingAssetType	Building Asset Type	string		255		
BuildingSize	Building Size	string		255		
BuildingSizeCategoryId	Building Size Category ID	reference		18		
BusinessRegion	Business Region	string		255		
Country	Country	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	string		4		
Id	Building Energy Intensity ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastCalculatedDate	Last Calculated Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaximumBuildingSizeInM2	Maximum Building Size (m2)	double			18	5
MaximumBuildingSizeInSqft	Maximum Building Size (Sqft)	double			18	5
MinimumBuildingSizeInM2	Minimum Building Size (m2)	double			18	5
MinimumBuildingSizeInSqft	Minimum Building Size (Sqft)	double			18	5
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RegionalDivision	Regional Division	picklist		255		
State	State	string		255		
SystemModstamp	System Modstamp	datetime				

BLDGENRGYINTENSITYFEED

Feed tracking for BldgEnrgyIntensity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BLDGENRGYINTENSITYHISTORY

History for tracked fields of BldgEnrgyIntensity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BldgEnrgyIntensityId	Building Energy Intensity ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Building Energy Intensity History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BLDGENRGYINTENSITYSHARE

Sharing for BldgEnrgyIntensity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BLDGENRGYINTENSITYVAL

Represents the calculated average energy intensity for an individual fuel type across a set of buildings. Each record stores the fuel use intensity as a function of the floor area of the occupied space of that building.

For more information, see BldgEnrgyIntensityVal in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualIntensityValueInKwhM2	Annual Intensity Value (kWh/m2)	double			13	3
AnnualIntensityValueInKwhSqft	Annual Intensity Value (kWh/sqft)	double			13	3
BuildingEnergyIntensityId	Building Energy Intensity ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EnergyUseRecordCount	Energy Use Record Count	double			5	0
FuelType	Fuel Type	picklist		255		
Id	Building Energy Intensity Value ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NumberOfDaysUsedForCalc	Number of Days Used For Calculation	double			5	0
SystemModstamp	System Modstamp	datetime				

BLDGENRGYINTENSITYVALFEED

Feed tracking for BldgEnrgyIntensityVal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BLDGENRGYINTENSITYVALHISTORY

History for tracked fields of BldgEnrgyIntensityVal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BldgEnrgyIntensityValId	Building Energy Intensity Value ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Building Energy Intensity Value History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BLDGSIZECATEGORY

Represents the building size filter criteria for the building energy intensity records. The building size filter criteria are stored as a range of floor area sizes from a minimum size to a maximum size, in units of sqft or m^2. The records can have overlapping minimum-maximum ranges.

For more information, see BldgSizeCategory in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Building Size Category ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MaximumSize`	Maximum Size	double			18	0
`MaximumSizeInSqft`	Maximum Size (sqft)	double			18	0
`MinimumSize`	Minimum Size	double			18	0
`MinimumSizeInSqft`	Minimum Size (sqft)	double			18	0
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SizeUnit`	Size Unit	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

BLDGSIZECATEGORYFEED

Feed tracking for BldgSizeCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BLDGSIZECATEGORYHISTORY

History for tracked fields of BldgSizeCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BldgSizeCategoryId`	Building Size Category ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Building Size Category History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BLDGSIZECATEGORYSHARE

Sharing for BldgSizeCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BOARDCERTIFICATION

Represents the practitioner's board certifications such as being board-certified in cardiology and cardiovascular disease.

For more information, see BoardCertification in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BoardName	Board Name	string		255		
CertificationType	Certification Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentCertificationDate	Current Certification Date	date				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
ExpirationDate	Expiration Date	date				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Board Certification ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Board Certification Name	string		255		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TerminationDate	Termination Date	date				
TerminationReason	Termination Reason	string		255		

BOARDCERTIFICATIONFEED

Feed tracking for BoardCertification.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BOARDCERTIFICATIONHISTORY

History for tracked fields of BoardCertification.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BoardCertificationId	Board Certification ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Board Certification History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BOARDCERTIFICATIONSHARE

Sharing for BoardCertification.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BRANCHUNIT

Represents details about a branch of an organization.

For more information, see BranchUnit in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BranchCode	Branch Code	string		100		
BranchManagerId	Branch Manager ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Branch Unit ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
Name	Name	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
OperationalState	Operational State	picklist		40		
OwnerId	Owner ID	reference		18		
ParentBranchUnitId	Branch Unit ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

BRANCHUNITBUSINESSMEMBER

Represents a user or contact who can perform a specific role for a branch.

For more information, see BranchUnitBusinessMember in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BranchUnitId`	Branch Unit ID	reference		18		
`BusinessUnitMemberId`	Business Unit Member ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Branch Unit Business Member ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				

BRANCHUNITBUSINESSMEMBERFEED

Feed tracking for BranchUnitBusinessMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BRANCHUNITBUSINESSMEMBERHISTORY

History for tracked fields of BranchUnitBusinessMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BranchUnitBusinessMemberId	Branch Unit Business Member ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Branch Unit Business Member History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BRANCHUNITCUSTOMER

Represents a customer account that is assigned to or attributed to a branch unit.

For more information, see BranchUnitCustomer in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AssociationLevel	Association Level	picklist		40		
BranchUnitId	Branch Unit ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Branch Unit Customer ID	id		18		
IsDeleted	Deleted	boolean				
LastInteractionDate	Last Interaction Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

BRANCHUNITCUSTOMERFEED

Feed tracking for BranchUnitCustomer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BRANCHUNITCUSTOMERHISTORY

History for tracked fields of BranchUnitCustomer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BranchUnitCustomerId`	Branch Unit Customer ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Branch Unit Customer History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BRANCHUNITFEED

Feed tracking for BranchUnit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BRANCHUNITHISTORY

History for tracked fields of BranchUnit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BranchUnitId`	Branch Unit ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Branch Unit History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BRANCHUNITRELATEDRECORD

Represents a record such as a case or account that is associated with or attributed to a branch unit.

For more information, see BranchUnitRelatedRecord in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BranchUnitId	Branch Unit ID	reference		18		
BusinessUnitMemberId	Business Member ID	reference		18		
Comment	Comment	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Branch Unit Related Record ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Reason	Reason	picklist		40		
RelatedObjectName	Related Object Name	picklist		255		
RelatedRecordAssocCriteriaId	Related Record Association ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				

BRANCHUNITSHARE

Sharing for BranchUnit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BRANDTEMPLATE

Letterhead for HTML EmailTemplate.

For more information, see BrandTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		1000		
`DeveloperName`	Letterhead Unique Name	string		80		
`Id`	Letterhead ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Brand Template Name	string		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	textarea		32000		

BRIEFCASEASSIGNMENT

Represents the assignment of a briefcase definition to selected users and user groups.

For more information, see BriefcaseAssignment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BriefcaseId`	Briefcase Definition ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Briefcase Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`UserOrGroupId`	User or Group ID	reference		18		

BRIEFCASEDEFINITION

Represents a briefcase definition. A briefcase makes selected records available for users to view when they're offline in the Salesforce Field Service mobile app for iOS and Android.

For more information, see BriefcaseDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1024		
`DeveloperName`	Name	string		80		
`Id`	Briefcase Definition ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

BRIEFCASERULE

Represents a rule that specifies records for a briefcase definition.

For more information, see BriefcaseRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BriefcaseId`	Briefcase Definition ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FilterLogic`	Filter Logic	string		255		
`Id`	Briefcase Rule ID	id		18		
`IsAscendingOrder`	Ascending	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OrderBy`	Order By	picklist		255		
`ParentRuleId`	Briefcase Rule ID	reference		18		
`QueryScope`	Scope	picklist		255		
`RecordLimit`	Limit	int	9			
`RelationshipField`	Custom Field Definition ID	picklist		255		
`RelationshipType`	Relationship Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TargetEntity`	Target Object	picklist		255		

BRIEFCASERULEFILTER

Represents a filter criteria for a briefcase rule.

For more information, see BriefcaseRuleFilter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BriefcaseRuleId`	Briefcase Rule ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FilterOperator`	Operator	picklist		255		
`FilterSeqNumber`	Filter Sequence Number	int	9			
`FilterValue`	Value	string		255		
`Id`	Briefcase Rule Filter ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`TargetEntityField`	Field	picklist		255		

BULKAPIRESULTEVENT

Tracks when a user downloads the results of a Bulk API or Bulk API 2.0 request.

For more information, see BulkApiResultEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`EventUuid`	Event UUID	string		36		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`Query`	Query	string		10000		
`RelatedEventIdentifier`	Related Event Identifier	string		80		
`ReplayId`	Replay ID	string		1000		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

BULKAPIRESULTEVENTSTORE

Tracks when a user downloads the results of a Bulk API request. BulkApiResultEventStore is a big object that stores the event data of BulkApiResultEvent. This object is available in API version 50.0 and later.

For more information, see BulkApiResultEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`Id`	Bulk API Result Event Store ID	id		18		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`Query`	Query	string		10000		
`RelatedEventIdentifier`	Related Event Identifier	string		80		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

BUNDLEDCAREFEEAGREEMENT

Specifies the payment terms for contracts of Bundled Care Fee Agreement.

For more information, see BundledCareFeeAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BasicTierPrice	Basic Tier Price	currency			18	2
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Bundled Care Fee Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MidTierPrice	Mid Tier Price	currency			18	2
Name	Name	string		255		
PremiumTierPrice	Premium Tier Price	currency			18	2
ProcedureBundleCodeId	Code Set Bundle ID	reference		18		
ProcedureBundleDescription	Procedure Bundle Description	textarea		32000		
ProcedureBundleItemList	Procedure Bundle Item List	string		80		
SystemModstamp	System Modstamp	datetime				

BUNDLEDCAREFEEAGREEMENTFEED

Feed tracking for BundledCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BUNDLEDCAREFEEAGREEMENTHISTORY

History for tracked fields of BundledCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BundledCareFeeAgreementId	Bundled Care Fee Agreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Bundled Care Fee Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BUSREGAUTHTYPEDEPENDENCY

Information related to the association of permit to permit dependency in a given business context.

For more information, see BusRegAuthTypeDependency in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DependentBusRegAuthId`	Child Business Regulatory Authorization Type ID	reference		18		
`Id`	Business Regulatory Authorization Type Dependency ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentBusRegAuthId`	Parent Business Regulatory Authorization Type ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

BUSREGAUTHTYPEDEPENDENCYFEED

Feed tracking for BusRegAuthTypeDependency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BUSREGAUTHTYPEDEPENDENCYHISTORY

History for tracked fields of BusRegAuthTypeDependency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusRegAuthTypeDependencyId`	Business Regulatory Authorization Type Dependency ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Business Regulatory Authorization Type Dependency History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BUSREGAUTHTYPEDEPENDENCYSHARE

Sharing for BusRegAuthTypeDependency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUSREGAUTHORIZATIONTYPE

Represents the association between authorization activity and license or permit type.

For more information, see BusRegAuthorizationType in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessTypeIdentifierId`	Business Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Business Regulatory Authorization Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`RegAuthTypeIdentifierId`	Regulatory Authorization Type ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

BUSREGAUTHORIZATIONTYPEFEED

Feed tracking for BusRegAuthorizationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BUSREGAUTHORIZATIONTYPEHISTORY

History for tracked fields of BusRegAuthorizationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusRegAuthorizationTypeId	Business Regulatory Authorization Type ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Business Regulatory Authorization Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BUSINESSBRAND

Represents a unique brand for a business that belongs to a parent entity.

For more information, see BusinessBrand in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Business Brand ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OrgId`	Org Id	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentId`	Business Brand ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

BUSINESSBRANDSHARE

Sharing for BusinessBrand.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUSINESSHOURS

Specifies the business hours of your support organization. Escalation rules are run only during these hours.

For more information, see BusinessHours in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FridayEndTime	Friday End	time				
FridayStartTime	Friday Start	time				
Id	Business Hours ID	id		18		
IsActive	Active	boolean				
IsDefault	Default Business Hours	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MondayEndTime	Monday End	time				
MondayStartTime	Monday Start	time				
Name	Business Hours Name	string		80		
SaturdayEndTime	Saturday End	time				
SaturdayStartTime	Saturday Start	time				
SundayEndTime	Sunday End	time				
SundayStartTime	Sunday Start	time				
SystemModstamp	System Modstamp	datetime				
ThursdayEndTime	Thursday End	time				
ThursdayStartTime	Thursday Start	time				
TimeZoneSidKey	Time Zone	picklist		40		
TuesdayEndTime	Tuesday End	time				
TuesdayStartTime	Tuesday Start	time				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
WednesdayEndTime	Wednesday End	time				
WednesdayStartTime	Wednesday Start	time				

BUSINESSLICENSE

Represents an authorization issued by a regulatory agency.

For more information, see BusinessLicense in the *Emergency Response Management for Public Health Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, *Financial Services Cloud Developer Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Business License ID	id		18		
Identifier	Identifier	string		255		
IsActive	IsActive	boolean				
IsDeleted	Deleted	boolean				
IsPrimaryLicense	Primary license	boolean				
IssueDate	Issue Date	date				
Issuer	Issuer	string		255		
JurisdictionCountry	Jurisdiction Country	string		255		
JurisdictionOther	Jurisdiction Other	string		255		
JurisdictionState	Jurisdiction State	string		255		
JurisdictionType	Jurisdiction Type	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LicenseClass	License Class	picklist		40		
LicenseNumber	License Number	string		255		
LineOfAuthority	Line Of Authority	picklist		40		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PeriodEnd	Period End	datetime				
PeriodStart	Period Start	datetime				
ResidenceStatus	Residence Status	picklist		40		
SourceSystemUpdateDate	Source System Updated Date	date				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
VerificationStatus	Verification Status	picklist		40		
VerifiedDate	Verified On	date				

BUSINESSLICENSEAPPLICATION

Represents an application form submitted by a business owner. This object is available in API version 49.0 and later.

For more information, see BusinessLicenseApplication in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AmountPaid	Amount Paid	currency			18	0
ApplicantId	Contact ID	reference		18		
ApplicationCaseId	Case ID	reference		18		
ApplicationCategory	Application Tier	picklist		40		
ApplicationType	Application Type	picklist		40		
AppliedDate	Applied Date	datetime				
ApprovedDate	Approved Date	datetime				
BusinessTypeId	Business Type ID	reference		18		
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Business License Application ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Updated	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LicensePermitNameId	Business License ID	reference		18		
LicenseTypeId	Regulatory Authorization Type ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Application ID	string		255		
OwnerId	Owner ID	reference		18		
PaymentDate	Payment Date	datetime				
PrimaryOwnerId	Contact ID	reference		18		
RequirementsCompleteDate	Requirements Complete Date	datetime				
SavedApplicationRefId	Preliminary Application Reference ID	reference		18		
SiteAddress	Site Address	address				
SiteCity	Site Address City	string		40		
SiteCountry	Site Address Country	string		80		
SiteGeocodeAccuracy	Site Address Geocode Accuracy	picklist		255		
SiteLatitude	Site Address Latitude	double			18	15
SiteLongitude	Site Address Longitude	double			18	15
SitePostalCode	Site Address Postal Code	string		20		
SiteState	Site Address State	string		80		
SiteStreet	Site Address Street	textarea		255		
Status	Application Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
WasReturned	Returned to Applicant	boolean				

BUSINESSLICENSEAPPLICATIONFEED

Feed tracking for BusinessLicenseApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BUSINESSLICENSEAPPLICATIONHISTORY

History for tracked fields of BusinessLicenseApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessLicenseApplicationId	Business License Application ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Business License Application History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BUSINESSLICENSEAPPLICATIONSHARE

Sharing for BusinessLicenseApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUSINESSLICENSEFEED

Feed tracking for BusinessLicense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BUSINESSLICENSEHISTORY

History for tracked fields of BusinessLicense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessLicenseId	Business License ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Business License History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

BUSINESSLICENSESHARE

Sharing for BusinessLicense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUSINESSMILESTONE

Represents the milestones of a business, such as acquisition, market listing, and expansion.

For more information, see BusinessMilestone in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpirationDate	Expiration Date	datetime				
ExpirationDescription	Expiration Description	textarea		32000		
Id	Business Milestone ID	id		18		
IsDeleted	Deleted	boolean				
IsExpired	Expired	boolean				
IsTentative	Tentative	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MilestoneDate	Milestone Date	datetime				
MilestoneDescription	Milestone Description	textarea		32000		
MilestoneSiteId	Location ID	reference		18		
MilestoneType	Milestone Type	picklist		40		
Name	Milestone Name	string		255		
OwnerId	Owner ID	reference		18		
PrimaryAccountId	Account ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

BUSINESSMILESTONEFEED

Feed tracking for BusinessMilestone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BUSINESSMILESTONEHISTORY

History for tracked fields of BusinessMilestone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessMilestoneId`	Business Milestone ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Business Milestone History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BUSINESSMILESTONESHARE

Sharing for BusinessMilestone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUSINESSPROCESS

Represents a business process.

For more information, see BusinessProcess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Business Process ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`TableEnumOrId`	Entity Enumeration Or ID	picklist		40		

BUSINESSPROCESSDEFINITION

Setup object that stores information about stages in a customer lifecycle map. The stages are associated with surveys and questions created using Salesforce Surveys.

For more information, see BusinessProcessDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessProcessGroupId`	Business Process Group ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Object Name	string		80		
`Id`	Business Process Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`ProcessDescription`	Description	textarea		4000		
`SequenceNumber`	Sequence Number	int	9			
`SystemModstamp`	System Modstamp	datetime				

BUSINESSPROCESSFEEDBACK

Setup object that stores information about the survey and the question associated with each stage in a customer lifecycle map. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys.

For more information, see BusinessProcessFeedback in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionName	Feedback Collection Method Name	string		255		
ActionParam	Feedback Collection Method Parameter	string		255		
ActionType	Feedback Collection Method	picklist		255		
BusinessProcessDefinitionId	Business Process Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Business Process Feedback ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
SystemModstamp	System Modstamp	datetime				

BUSINESSPROCESSGROUP

Setup object that stores information about customer lifecycle maps. Customer lifecycle maps are used to track the scores provided by customers across their lifecycle using Salesforce Surveys.

For more information, see BusinessProcessGroup in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomerSatisfactionMetric`	Customer Satisfaction Metric	picklist		255		
`Description`	Description	textarea		4000		
`DeveloperName`	Name	string		80		
`Id`	Business Process Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

BUSINESSPROFILE

Represents details about the business on the license or permit application.

For more information, see BusinessProfile in the *Emergency Response Management for Public Sector Admin Guide*, *Financial Services Cloud Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ConsecWorkersCompCoverage	Consecutive Years of Workers' Compensation Coverage	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditTypesUsed	Credit Types Used	int	9			
HasDishonoredPolicies	Dishonored Policies	boolean				
HasSufferedBankruptcy	Suffered Bankruptcy	boolean				
HasUncorrectedSafetyViolations	Uncorrected Safety Violations	boolean				
Id	Business Profile ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				
WorkersCompClaims	Workers' Compensation Claims	int	9			
WorkersCompMedicalClaims	Workers' Compensation Medical Claims	int	9			

BUSINESSPROFILEFEED

Feed tracking for BusinessProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BUSINESSPROFILEHISTORY

History for tracked fields of BusinessProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessProfileId`	Business Profile ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Business Profile History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BUSINESSTYPE

Represents a category of any activity (business or individual), such as healthcare, restaurant, or retail. This object is available in API version 49.0 and later.

For more information, see BusinessType in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityCode	Activity Code	string		255		
AuthorizationActivityType	Authorization Activity Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Business Type ID	id		18		
Industry	Industry	picklist		40		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

BUSINESSTYPEFEED

Feed tracking for BusinessType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

BUSINESSTYPEHISTORY

History for tracked fields of BusinessType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessTypeId`	Business Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Business Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BUSINESSTYPESHARE

Sharing for BusinessType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUYERACCOUNT

Represents an account that is enabled as a buyer for Lightning B2B Commerce.

For more information, see BuyerAccount in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AvailableCredit	Available Balance	currency			18	2
BuyerId	Account ID	reference		18		
BuyerStatus	Buyer Status	picklist		40		
CommerceType	Commerce Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditLimit	Credit Balance	currency			18	2
CreditStatus	Credit Rating/Status	picklist		40		
CurrentBalance	Current Balance	currency			18	2
Id	Buyer Account ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MaximumOrderLimit	Maximum Order Limit	currency			18	2
MayEdit	May Edit	boolean				
MinimumOrderLimit	Minimum Order Limit	currency			18	2
Name	Buyer Account Name	string		255		
OwnerId	Owner ID	reference		18		
PayerId	Account ID	reference		18		
SendToId	Account ID	reference		18		
SystemModstamp	System Modstamp	datetime				

BUYERACCOUNTFEED

Feed tracking for BuyerAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

BUYERACCOUNTHISTORY

History for tracked fields of BuyerAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BuyerAccountId`	Buyer Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Buyer Account History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

BUYERACCOUNTSHARE

Sharing for BuyerAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

BUYERGROUPPRICEBOOK

Represents a buyer group price book used in Lightning B2B Commerce.

For more information, see BuyerGroupPricebook in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BuyerGroupId`	Buyer Group ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Buyer Group Price Book ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Buyer Group Price Book Name	string		255		
`Pricebook2Id`	Price Book ID	reference		18		
`Priority`	Priority	int	9			
`SystemModstamp`	System Modstamp	datetime				

BUYERGROUPPRICEBOOKFEED

Feed tracking for BuyerGroupPricebook.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCPROCSTEPRELATIONSHIP

Defines a parent-child relationship between two Expression Set Steps in an Expression Set Version. The label for this object is Expression Set Step Relationship.

For more information, see CalcProcStepRelationship in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalcProcStepId`	Calculation Procedure Step ID	reference		18		
`CalcProcVersionId`	Calculation Procedure Version ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Expression Set Step Relationship ID	id		18		
`IsDeleted`	Deleted	boolean				
`Label`	Label	string		80		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`Namespace`	Namespace	string		255		
`ParentCalcProcStepId`	Calculation Procedure Step ID	reference		18		
`Priority`	Priority	int	9			
`RelationshipType`	Relationship Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

CALCPROCSTEPRELATIONSHIPFEED

Feed tracking for CalcProcStepRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCPROCSTEPRELATIONSHIPHISTORY

History for tracked fields of CalcProcStepRelationship.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalcProcStepRelationshipId`	Expression Set Step Relationship ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Expression Set Step Relationship History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONMATRIX

Matches input values to a table row and returns the row's output values. The label for this object is Decision Matrix.

For more information, see CalculationMatrix in the *Industries Common Resources Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DecisionMatrixDefinitionId	Decision Matrix Definition ID	reference		18		
DecisionMatrixType	Decision Matrix Type	picklist		255		
Description	Description	textarea		32768		
GroupKey	Group Key	string		255		
Id	Decision Matrix ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MigrationStatus	Migration Status	textarea		32000		
Name	Name	string		255		
Namespace	Namespace	string		255		
OwnerId	Owner ID	reference		18		
SubGroupKey	Sub Group Key	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		
UniqueName	Unique Name	string		80		

CALCULATIONMATRIXCOLUMN

Defines a column in a Decision Matrix. The label for this object is Decision Matrix Column.

For more information, see CalculationMatrixColumn in the *Industries Common Resources Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiName	API Name	string		80		
CalculationMatrixId	Decision Matrix ID	reference		18		
ColumnType	Column Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Data Type	picklist		255		
DisplaySequence	Display Sequence	int	9			
Id	Decision Matrix Column ID	id		18		
IsDeleted	Deleted	boolean				
IsWildcardColumn	Wildcard Column	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
Namespace	Namespace	string		255		
RangeValues	Range Values	textarea		32768		
SystemModstamp	System Modstamp	datetime				
WildcardColumnValue	Wildcard Column Value	string		255		

CALCULATIONMATRIXCOLUMNFEED

Feed tracking for CalculationMatrixColumn.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONMATRIXCOLUMNHISTORY

History for tracked fields of CalculationMatrixColumn.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationMatrixColumnId`	Decision Matrix Column ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Decision Matrix Column History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONMATRIXFEED

Feed tracking for CalculationMatrix.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONMATRIXHISTORY

History for tracked fields of CalculationMatrix.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationMatrixId`	Decision Matrix ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Decision Matrix History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONMATRIXROW

Defines a row in a Decision Matrix. The label for this object is Decision Matrix Row.

For more information, see CalculationMatrixRow in the *Industries Common Resources Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationMatrixVersionId`	Decision Matrix Version ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDateTime`	End Date Time	datetime				
`Id`	Decision Matrix Row ID	id		18		
`InputData`	Input Data	textarea		131072		
`IsDeleted`	Deleted	boolean				
`IsVersionEnabled`	Version Enabled	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	HashKey	string		255		
`Namespace`	Namespace	string		255		
`OutputData`	Output Data	textarea		131072		
`StartDateTime`	Start Date Time	datetime				
`SystemModstamp`	System Modstamp	datetime				

CALCULATIONMATRIXROWFEED

Feed tracking for CalculationMatrixRow.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONMATRIXROWHISTORY

History for tracked fields of CalculationMatrixRow.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationMatrixRowId`	Decision Matrix Row ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Decision Matrix Row History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONMATRIXSHARE

Sharing for CalculationMatrix.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CALCULATIONMATRIXVERSION

Defines a version of a Decision Matrix. The label for this object is Decision Matrix Version.

For more information, see CalculationMatrixVersion in the *Industries Common Resources Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiName	API Name	string		80		
CalculationMatrixId	Decision Matrix ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DecisionMatrixDefinitionVerId	DecisionMatrixDefinitionVersion ID	reference		18		
EndDateTime	End Date Time	datetime				
GroupKey	Group Key	string		255		
GroupKeyValue	Group Key Value	string		255		
Id	Decision Matrix Version ID	id		18		
IsDeleted	Deleted	boolean				
IsEnabled	Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LoadProcessStatus	Load Process Status	picklist		255		
MatrixType	Matrix Type	string		255		
Name	Name	string		255		
Namespace	Namespace	string		255		
Rank	Rank	int	9			
StartDateTime	Start Date Time	datetime				
SubGroupKey	Sub Group Key	string		255		
SubGroupKeyValue	Sub Group Key Value	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
VersionNumber	Version Number	int	9			

CALCULATIONMATRIXVERSIONFEED

Feed tracking for CalculationMatrixVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONMATRIXVERSIONHISTORY

History for tracked fields of CalculationMatrixVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculationMatrixVersionId	Decision Matrix Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Decision Matrix Version History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CALCULATIONPROCEDURE

Performs a series of calculations using matrix lookups and user-defined variables and constants. The label for this object is Expression Set.

For more information, see CalculationProcedure in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Calculation Procedure ID	id		18		
`InputVariablesMetadata`	Input Variables Metadata	textarea		131072		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MigrationStatus`	Migration Status	textarea		32000		
`Name`	Name	string		255		
`Namespace`	Namespace	string		255		
`OutputVariablesMetadata`	Output Variables Metadata	textarea		131072		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UniqueName`	Unique Name	string		80		

CALCULATIONPROCEDUREFEED

Feed tracking for CalculationProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONPROCEDUREHISTORY

History for tracked fields of CalculationProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationProcedureId`	Calculation Procedure ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Calculation Procedure History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONPROCEDURESHARE

Sharing for CalculationProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CALCULATIONPROCEDURESTEP

Defines a step in an Expression Set. The label for this object is Expression Set Step.

For more information, see CalculationProcedureStep in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculationMatrixId	Decision Matrix ID	reference		18		
CalculationMatrixType	Decision Matrix Type	string		255		
CalculationProcedure	Expression Set	string		255		
CalculationProcedureVersionId	Calculation Procedure Version ID	reference		18		
ConditionsConvertedText	Conditions Converted Text	textarea		131072		
ConditionsExpressionText	Conditions Expression Text	textarea		131072		
ConditionsUiFormattedText	Conditions UI Formatted Text	textarea		131072		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DecisionTableId	Decision Table ID	reference		18		
Description	Description	string		255		
FormulaConvertedText	Formula Converted Text	textarea		131072		
FormulaExpressionText	Formula Expression Text	textarea		131072		
FormulaUiFormattedText	Formula UI Formatted Text	textarea		131072		
Id	Calculation Procedure Step ID	id		18		
InputVariablesFormatText	Input Variables Format Text	textarea		131072		
IsConditionalStep	Conditional Step	boolean				
IsDeleted	Deleted	boolean				
IsResultIncluded	Result Included	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Namespace	Namespace	string		255		
OutputVariablesFormatText	Output Variables Format Text	textarea		131072		
OutputVariablesMappingText	Output Variables Mapping Text	textarea		131072		
ReferenceProcedureId	Calculation Procedure ID	reference		18		
ReturnMessageValueSet	Return Message Value Set	textarea		131072		
Stage	Stage	picklist		255		
StageStepSequence	Stage Step Sequence	int	9			
StepType	Step Type	picklist		255		
SystemModstamp	System Modstamp	datetime				

CALCULATIONPROCEDURESTEPFEED

Feed tracking for CalculationProcedureStep.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONPROCEDURESTEPHISTORY

History for tracked fields of CalculationProcedureStep.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationProcedureStepId`	Calculation Procedure Step ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Calculation Procedure Step History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CALCULATIONPROCEDUREVARIABLE

Defines a variable in an Expression Set. The label for this object is Expression Set Variable.

For more information, see CalculationProcedureVariable in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiName	API Name	string		255		
CalculationMatrixName	Decision Matrix Name	string		255		
CalculationProcedureVersionId	Calculation Procedure Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Data Type	picklist		255		
DefaultValue	Default Value	string		255		
DisplayName	Display Name	string		255		
Id	Calculation Procedure Variable ID	id		18		
IsDeleted	Deleted	boolean				
IsEditable	Editable	boolean				
IsUserDefined	User Defined	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
Namespace	Namespace	string		255		
Precision	Precision	int	9			
SystemModstamp	System Modstamp	datetime				
UiDisplayOrder	UI Display Order	int	9			

CALCULATIONPROCEDUREVARIABLEFEED

Feed tracking for CalculationProcedureVariable.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONPROCEDUREVARIABLEHISTORY

History for tracked fields of CalculationProcedureVariable.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculationProcedureVariableId	Calculation Procedure Variable ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Calculation Procedure Variable History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CALCULATIONPROCEDUREVERSION

Defines a version of an Expression Set. The label for this object is Expression Set Version.

For more information, see CalculationProcedureVersion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculationProcedureId	Calculation Procedure ID	reference		18		
Constants	Constants	textarea		131072		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EndDateTime	End Date Time	datetime				
Id	Calculation Procedure Version ID	id		18		
IsDeleted	Deleted	boolean				
IsEnabled	Enabled	boolean				
IsLoopingEnabled	Looping Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastSimulatedVariablesInput	Last Simulated Variables Input	textarea		131072		
LoopEnd	Loop End	textarea		255		
LoopIncrement	Loop Increment	textarea		255		
LoopStart	Loop Start	textarea		255		
Name	Version Name	string		255		
Namespace	Namespace	string		255		
Rank	Rank	int	9			
StartDateTime	Start Date Time	datetime				
SystemModstamp	System Modstamp	datetime				
VersionNumber	Version Number	int	9			

CALCULATIONPROCEDUREVERSIONFEED

Feed tracking for CalculationProcedureVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CALCULATIONPROCEDUREVERSIONHISTORY

History for tracked fields of CalculationProcedureVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculationProcedureVersionId	Calculation Procedure Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Calculation Procedure Version History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CALENDAR

Represents a calendar. This can be a default user calendar, public calendar, resource calendar, or holiday calendar.

For more information, see Calendar in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Calendar ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Calendar Name	string		80		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Calendar Type	picklist		40		
`UserId`	User ID	reference		18		

CALENDARVIEW

These calendars can be created and assigned to users other than the creator. Available calendars include object, shared, public, resource, and user list calendars. Object calendars represent a calendar based on a Salesforce object, either standard or custom.

For more information, see CalendarView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Color`	Color	string		6		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DateHandlingType`	Date Handling Type	picklist		255		
`DisplayField`	Display Field	string		255		
`EndField`	End Field	string		255		
`FillPattern`	Fill Pattern	string		50		
`Id`	Calendar ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsDisplayed`	Is Displayed	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ListViewFilterId`	List View ID	reference		18		
`Name`	Calendar Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PublisherId`	Publisher ID	reference		18		
`SobjectType`	sObject Type	picklist		255		
`StartField`	Start Field	string		255		
`SystemModstamp`	System Modstamp	datetime				

CALENDARVIEWSHARE

Sharing for CalendarView.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CALLCENTER

Represents a call center, which is a logical representation of a single computer-telephony integration (CTI) system instance in an organization.

For more information, see CallCenter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdapterUrl`	CTI Adapter URL	string		2000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomSettings`	Custom Settings	string		3000		
`Id`	Call Center ID	id		18		
`InternalName`	Internal Name	string		240		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Version`	Version	double			18	3

CALLCOACHINGMEDIAPROVIDER

Represents the media provider for call recordings.

For more information, see CallCoachingMediaProvider in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	CallCoachingMediaProvider ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProviderDescription`	Provider Description	string		255		
`ProviderName`	Provider Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

CAMPAIGN

Represents and tracks a marketing campaign, such as a direct mail promotion, webinar, or trade show.

For more information, see Campaign in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualCost	Actual Cost in Campaign	currency			18	0
AmountAllOpportunities	Value Opportunities in Campaign	currency			18	0
AmountWonOpportunities	Value Won Opportunities in Campaign	currency			18	0
BudgetedCost	Budgeted Cost in Campaign	currency			18	0
CampaignMemberRecordTypeId	Record Type ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EndDate	End Date	date				
ExpectedResponse	Expected Response (%)	percent			10	2
ExpectedRevenue	Expected Revenue in Campaign	currency			18	0
Id	Campaign ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastActivityDate	Last Activity	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		80		
NumberOfContacts	Contacts in Campaign	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
NumberOfConvertedLeads	Converted Leads in Campaign	int	9			
NumberOfLeads	Leads in Campaign	int	9			
NumberOfOpportunities	Opportunities in Campaign	int	9			
NumberOfResponses	Responses in Campaign	int	9			
NumberOfWonOpportunities	Won Opportunities in Campaign	int	9			
NumberSent	Num Sent in Campaign	double			18	0
OwnerId	Owner ID	reference		18		
ParentId	Parent Campaign ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

CAMPAIGNFEED

Feed tracking for Campaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CAMPAIGNHISTORY

History for tracked fields of Campaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CampaignId`	Campaign ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Campaign Field History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAMPAIGNINFLUENCEMODEL

This read-only object represents a campaign influence model in Customizable Campaign Influence. Use campaign influence models to group `CampaignInfluence` records created by a specific set of triggers and workflows that you define. The Primary Campaign Source influence model is the default model.

For more information, see CampaignInfluenceModel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Unique Name	string		80		
`Id`	Campaign Influence Model ID	id		18		
`IsActive`	Active	boolean				
`IsDefaultModel`	Default Model	boolean				
`IsDeleted`	Deleted	boolean				
`IsModelLocked`	Locked	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Model Name	string		80		
`ModelDescription`	Model Description	string		255		
`ModelType`	Model Type	picklist		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`RecordPreference`	Record Preference	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

CAMPAIGNMEMBER

Represents the association between a campaign and either a lead or a contact.

For more information, see CampaignMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CampaignId`	Campaign ID	reference		18		
`City`	City	string		40		
`CompanyOrAccount`	Company (Account)	string		255		
`ContactId`	Contact ID	reference		18		
`Country`	Country	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`DoNotCall`	Do Not Call	boolean				
`Email`	Email	email		80		
`Fax`	Fax	phone		40		
`FirstName`	First Name	string		40		
`FirstRespondedDate`	First Responded Date	date				
`HasOptedOutOfEmail`	Email Opt Out	boolean				
`HasOptedOutOfFax`	Fax Opt Out	boolean				
`HasResponded`	Responded	boolean				
`Id`	Campaign Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastName`	Last Name	string		80		
`LeadId`	Lead ID	reference		18		
`LeadOrContactId`	Related Record ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LeadOrContactOwnerId	Related Record Owner ID	reference		18		
LeadSource	Lead Source	picklist		255		
MobilePhone	Mobile	phone		40		
Name	Name	string		255		
Phone	Phone	phone		40		
PostalCode	Zip/Postal Code	string		20		
Salutation	Salutation	picklist		255		
State	State/Province	string		80		
Status	Status	picklist		40		
Street	Street	string		255		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		128		
Type	Type	string		40		

CAMPAIGNMEMBERSTATUS

One or more member status values defined for a campaign.

For more information, see CampaignMemberStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CampaignId`	Campaign ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`HasResponded`	Responded	boolean				
`Id`	Campaign Member Status ID	id		18		
`IsDefault`	Is Default	boolean				
`IsDeleted`	Deleted	boolean				
`Label`	Member Status	string		765		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

CAMPAIGNSHARE

Represents a sharing entry on a Campaign.

For more information, see CampaignShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CampaignAccessLevel`	Campaign Access	picklist		40		
`CampaignId`	Campaign ID	reference		18		
`Id`	Campaign Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

CAPITATIONCAREFEEAGREEMENT

Specifies the payment terms for contracts of Capitation Care Fee Agreement type.

For more information, see CapitationCareFeeAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Capitation Care Fee Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberAgeRangeLowerLimit	Member Age Range Lower Limit	int	9			
MemberAgeRangeUpperLimit	Member Age Range Upper Limit	int	9			
MonthlyBalanceFee	Monthly Balance Fee	currency			18	0
MonthlyFee	Monthly Fee	currency			18	0
MonthlyWithheldPercentage	Monthly Withheld Percentage	percent			5	2
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

CAPITATIONCAREFEEAGREEMENTFEED

Feed tracking for CapitationCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAPITATIONCAREFEEAGREEMENTHISTORY

History for tracked fields of CapitationCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CapitationCareFeeAgreementId	Capitation Care Fee Agreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Capitation Care Fee AgreementHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CARDPAYMENTMETHOD

References a credit card or debit card payment method. This entity implements the PaymentMethod entity interface.

For more information, see CardPaymentMethod in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AuditEmail	Audit Email	email		80		
AutoCardType	Auto Card Type	string		20		
CardBin	Card BIN	int	6			
CardCategory	Card Category	picklist		255		
CardHolderFirstName	Card Holder First Name	string		255		
CardHolderLastName	Card Holder Last Name	string		255		
CardHolderName	Card Holder Name	string		255		
CardLastFour	Card Last Four	int	4			
CardPaymentMethodNumber	Card Payment Method Number	string		255		
CardType	Card Type	picklist		40		
CardTypeCategory	Card Type Category	picklist		255		
Comments	Comments	textarea		1000		
CompanyName	Company Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DisplayCardNumber	Display Card Number	string		20		
Email	Registered Card Email	email		80		
ExpiryMonth	Expiry Month	int	2			
ExpiryYear	Expiry Year	int	4			
GatewayDate	Gateway Date	datetime				
GatewayResultCode	Gateway Result Code	string		64		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
GatewayResultCodeDescription	Gateway Result Code Description	string		255		
GatewayToken	GatewayToken	string		255		
GatewayTokenDetails	Gateway Token Details	textarea		1000		
GatewayTokenEncrypted	Gateway Token Encrypted	encryptedstring		255		
Id	Card Payment Method ID	id		18		
InputCardNumber	Input Card Number	string		20		
IpAddress	IP Address	string		39		
IsAutoPayEnabled	Auto Pay	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MacAddress	MAC Address	string		32		
NickName	Nickname	string		255		
PaymentGatewayId	Payment Gateway ID	reference		18		
PaymentMethodAddress	Payment Method Address	address				
PaymentMethodCity	City	string		40		
PaymentMethodCountry	Country	string		80		
PaymentMethodGeocodeAccuracy	GeoCode Accuracy	picklist		255		
PaymentMethodLatitude	Latitude	double			18	15
PaymentMethodLongitude	Longitude	double			18	15
PaymentMethodPostalCode	Postal Code	string		20		
PaymentMethodState	State	string		80		
PaymentMethodStreet	Street	textarea		255		
Phone	Phone	phone		40		
ProcessingMode	Processing Mode	picklist		255		
SfResultCode	Salesforce Result Code	picklist		255		
StartMonth	Start Month	int	2			
StartYear	Start Year	int	4			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

CAREBARRIER

Represents the circumstances or obstacles affecting a patient or member.

For more information, see CareBarrier in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareBarrierTypeId	Care Barrier Type ID	reference		18		
CaseId	Case ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Care Barrier ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
Priority	Priority	picklist		40		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREBARRIERDETERMINANT

Represents the relationship of a barrier to a determinant for a patient or member.

For more information, see CareBarrierDeterminant in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareBarrierId`	Care Barrier ID	reference		18		
`CareDeterminantId`	Care Determinant ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Barrier Determinant ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CAREBARRIERDETERMINANTFEED

Feed tracking for CareBarrierDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREBARRIERDETERMINANTHISTORY

History for tracked fields of CareBarrierDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareBarrierDeterminantId	Care Barrier Determinant ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Barrier Determinant History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREBARRIERDETERMINANTSHARE

Sharing for CareBarrierDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREBARRIERFEED

Feed tracking for CareBarrier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREBARRIERHISTORY

History for tracked fields of CareBarrier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareBarrierId	Care Barrier ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Barrier History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREBARRIERSHARE

Sharing for CareBarrier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREBARRIERTYPE

Represents the standard, defined list of barriers maintained by an organization.

For more information, see CareBarrierType in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Code	Code	string		40		
CodeType	Code Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DiagnosisCodeSetId	Diagnosis Code Set ID	reference		18		
HealthCareDiagnosisId	Healthcare Diagnosis ID	reference		18		
Id	Care Barrier Type ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

CAREBARRIERTYPEFEED

Feed tracking for CareBarrierType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREBARRIERTYPEHISTORY

History for tracked fields of CareBarrierType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareBarrierTypeId`	Care Barrier Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Barrier Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREBARRIERTYPESHARE

Sharing for CareBarrierType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREBENEFITVERIFYREQUEST

Request for verification of benefits.

For more information, see CareBenefitVerifyRequest in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CaseId	Case ID	reference		18		
CoverageBenefitId	Coverage Benefit ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Benefit Verify Request ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberPlanId	Member Plan ID	reference		18		
Name	Care Benefit Verify Request Name	string		255		
RequestDate	Request Date	datetime				
RequestedById	User ID	reference		18		
ResponseBody	Response Body	base64				
ResponseContentType	Response Content Type	picklist		255		
ResponseLength	Response Length	int	9			
ResponseName	Response Name	string		40		
Status	Status	picklist		255		
StatusReason	Status Reason	textarea		16000		
SystemModstamp	System Modstamp	datetime				

CAREBENEFITVERIFYREQUESTFEED

Feed tracking for CareBenefitVerifyRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREBENEFITVERIFYREQUESTHISTORY

History for tracked fields of CareBenefitVerifyRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareBenefitVerifyRequestId	Care Benefit Verify Request ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Benefit Verify Request History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREBENEFITVERIFYSETTINGS

Configuration settings for benefit verification requests.

For more information, see CareBenefitVerifySettings in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CodeSetType	Code Set Type	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultNpi	Default NPI	string		80		
DeveloperName	Name	string		80		
GeneralPlanServiceTypeCode	General Plan Service Type Code	string		80		
Id	Care Benefit Verification Settings ID	id		18		
IsDefault	Default	boolean				
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
OrganizationName	Organization Name	string		80		
ServiceApexClassId	Class ID	reference		18		
ServiceNamedCredentialId	Named Credential ID	reference		18		
ServiceTypeSourceSystem	Service Type Source System	string		255		
SystemModstamp	System Modstamp	datetime				
UriPath	Care Benefit Verification URI Path	textarea		2048		

CAREDETERMINANT

Represents the determinants of health for a patient such as availability of safe housing, adequate employment, or local food markets.

For more information, see CareDeterminant in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareDeterminantTypeId`	Care Determinant Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Determinant ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PatientId`	Account ID	reference		18		
`Priority`	Priority	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CAREDETERMINANTFEED

Feed tracking for CareDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREDETERMINANTHISTORY

History for tracked fields of CareDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareDeterminantId	Care Determinant ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Determinant History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREDETERMINANTSHARE

Sharing for CareDeterminant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREDETERMINANTTYPE

Represents the standard, defined list of determinants of health maintained by an organization, including the domain and type.

For more information, see CareDeterminantType in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Domain	Domain	picklist		40		
Id	Care Determinant Type ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

CAREDETERMINANTTYPEFEED

Feed tracking for CareDeterminantType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREDETERMINANTTYPEHISTORY

History for tracked fields of CareDeterminantType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareDeterminantTypeId`	Care Determinant Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Determinant Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREDETERMINANTTYPESHARE

Sharing for CareDeterminantType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREDIAGNOSIS

Represents the details of a diagnosis including code type, name, and description. One or more care diagnoses can be associated with a care request.

For more information, see CareDiagnosis in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareRequestCaseId	Case ID	reference		18		
CareRequestId	Care Request ID	reference		18		
CodeDescription	Code Description	string		255		
CodeType	Code Type	picklist		40		
CodeTypeIdentifier	Code Type ID	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DiagnosisCodeId	Healthcare Diagnosis ID	reference		18		
DiagnosisCodeSetId	diagnosis codeset ID	reference		18		
DischargeCode	Discharge Code	string		32		
DischargeCodeDescription	Discharge Code Description	string		255		
DischargeCodeType	Discharge Code Type	picklist		40		
DischargeCodeTypeIdentifier	Discharge Code Type ID	string		255		
DischargeDiagnosisCodeId	Healthcare Diagnosis ID	reference		18		
DischargeDiagnosisEffectiveDate	Discharge Diagnosis Effective Date	date				
DischargeDiagnosisEndDate	Discharge Diagnosis End Date	date				
DischrgeDiagnosisCodeSetId	discharge diagnosis codeset ID	reference		18		
EffectiveDate	Effective Date	date				
EndDate	End Date	date				
HealthConditionId	Health Condition ID	reference		18		
Id	Care Diagnosis ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
IsDischargeDiagnosisPrimary	Primary Discharge Diagnosis	boolean				
IsModifiedDiagnosisPrimary	Modified Primary Diagnosis	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ModifiedCode	Modified Code	string		32		
ModifiedCodeDescription	Modified Code Description	string		255		
ModifiedCodeType	Modified Code Type	picklist		40		
ModifiedCodeTypeIdentifier	Modified Code Type ID	string		255		
ModifiedDiagnosisCodeId	Healthcare Diagnosis ID	reference		18		
ModifiedDiagnosisCodeSetId	modified diagnosis codeset ID	reference		18		
ModifiedEffectiveDate	Modified Effective Date	date				
ModifiedEndDate	Modified End Date	date				
Name	Name	string		255		
PresentOnAdmission	Present On Admission	picklist		40		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

CAREDIAGNOSISFEED

Feed tracking for CareDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREDIAGNOSISHISTORY

History for tracked fields of CareDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareDiagnosisId	Care Diagnosis ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Diagnosis History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREFEESCHEDULEITEM

Stores procedure level fees for a fee schedule definition.

For more information, see CareFeeScheduleItem in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareFeeScheduleItemKey	Care Fee Schedule Item Key	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FacilityPrice	Facility Price	currency			18	0
FeeScheduleDefinitionId	Fee Schedule Definition ID	reference		18		
Id	Care Fee Schedule Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NonFacilityPrice	Non-Facility Price	currency			18	0
ProcedureCodeDescription	Procedure Code Description	string		255		
ProcedureCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				

CAREFEESCHEDULEITEMFEED

Feed tracking for CareFeeScheduleItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREFEESCHEDULEITEMHISTORY

History for tracked fields of CareFeeScheduleItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareFeeScheduleItemId	Care Fee Schedule Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Fee Schedule ItemHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREINTERVENTIONTYPE

Represents the standard, defined list of interventions maintained by an organization.

For more information, see CareInterventionType in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Code	Code	string		40		
CodeType	Code Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
HealthCareProcedureId	Health Care Procedure ID	reference		18		
Id	Care Intervention Type ID	id		18		
InterventionType	Intervention Type	picklist		40		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProcedureCodeSetId	Procedure Code Set ID	reference		18		
SystemModstamp	System Modstamp	datetime				

CAREINTERVENTIONTYPEFEED

Feed tracking for CareInterventionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREINTERVENTIONTYPEHISTORY

History for tracked fields of CareInterventionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareInterventionTypeId`	Care Intervention Type ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Intervention Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREINTERVENTIONTYPESHARE

Sharing for CareInterventionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CARELIMITTYPE

Defines the characteristics of limits on benefit provision.

For more information, see CareLimitType in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Care Limit Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LimitType`	Limit Type	string		255		
`MasterLabel`	Label	string		80		
`MetricType`	Metric Type	picklist		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CAREMETRICTARGET

Represents the expected care metrics at org level and patient level.

For more information, see CareMetricTarget in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CodeId	Code Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Care Metric Target ID	id		18		
IsDeleted	Deleted	boolean				
IsOutcomePositive	Outcome positive	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LowerLimit	Lower Limit	double			18	6
Name	Name	string		255		
NumericValue	Numeric Value	double			18	6
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		
UnitOfMeasureId	Unit of Measure ID	reference		18		
UpperLimit	Upper Limit	double			18	6

CAREMETRICTARGETFEED

Feed tracking for CareMetricTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREMETRICTARGETHISTORY

History for tracked fields of CareMetricTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareMetricTargetId	Care Metric Target ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Metric Target History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREMETRICTARGETSHARE

Sharing for CareMetricTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREOBSERVATION

Represents the observed values for care metrics originating from external systems that contain biometric data

For more information, see CareObservation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalCode1Id	Code Set ID	reference		18		
AdditionalCode2Id	Code Set ID	reference		18		
BasedOnId	Based On ID	reference		18		
BaselineUnitId	Unit of Measure ID	reference		18		
BaselineValueText	Baseline Value Text	string		255		
BodySiteId	Code Set Bundle ID	reference		18		
Category	Category	picklist		40		
CodeId	Code Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DerivationSourceId	Derivation Source ID	reference		18		
DeviceId	Asset ID	reference		18		
EffectiveDateTime	Effective Date and Time	datetime				
EncounterId	Clinical Encounter ID	reference		18		
EndDateTime	End Date Time	datetime				
ExpectedValueId	Care Metric Target ID	reference		18		
HasMetExpectedValue	Met expected value	boolean				
Id	Care Observation ID	id		18		
IdentifierId	Identifier ID	reference		18		
IsDeleted	Deleted	boolean				
IsMonitoredRemotely	Monitored remotely	boolean				
IsObserved	Observed	boolean				
IsOutcomePositive	Outcome positive	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IssuedDateTime	Issued Date Time	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LowerBaselineValue	Lower Baseline Value	double			18	2
MethodId	Code Set Bundle ID	reference		18		
Name	Name	string		255		
NumericValue	Numeric Value	double			18	6
ObservationEndTime	Observation End Time	datetime				
ObservationStartTime	Observation Start Time	datetime				
ObservationStatus	Observation Status	picklist		40		
ObservedSubjectId	Account ID	reference		18		
ObservedValueCodeId	Code Set Bundle ID	reference		18		
ObservedValueDenominator	Observed Value Denominator	double			6	2
ObservedValueNumerator	Observed Value Numerator	double			6	2
ObservedValueText	Observed Value Text	string		255		
ObservedValueType	Observed Value Type	picklist		255		
ObservedValueUnitId	Unit of Measure ID	reference		18		
ObserverId	Observer ID	reference		18		
OwnerId	Owner ID	reference		18		
PartOfId	Part Of ID	reference		18		
PatientSpecimenId	Code Set Bundle ID	reference		18		
ProcessingResult	Processing Result	picklist		255		
RelatedObservationId	Care Observation ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				
UnitOfMeasureId	Unit of Measure ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UpperBaselineValue	Upper Baseline Value	double			18	2
ValueInterpretation	Value Interpretation	picklist		40		

CAREOBSERVATIONCOMPONENT

Represents information about a component of a care observation.

For more information, see CareObservationComponent in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BaselineUnitId`	Unit of Measure ID	reference		18		
`BaselineValueText`	Baseline Value Text	string		255		
`CareObservationId`	Care Observation ID	reference		18		
`ComponentTypeCodeId`	Code Set Bundle ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Observation Component ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsObserved`	Observed	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LowerBaselineValue`	Lower Baseline Value	double			18	0
`MissingDataReason`	Missing Data Reason	string		255		
`Name`	Name	string		255		
`NumericValue`	Numeric Value	double			18	6
`ObservationEndDateTime`	Observation End Time	datetime				
`ObservationStartDateTime`	Observation Start Time	datetime				
`ObservedValueCodeId`	Code Set Bundle ID	reference		18		
`ObservedValueDenominator`	Observed Value Denominator	double			6	2
`ObservedValueNumerator`	Observed Value Numerator	double			6	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ObservedValueText	Observed Value Text	string		255		
ObservedValueUnitId	Unit of Measure ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UpperBaselineValue	Upper Baseline Value	double			18	0
ValueInterpretation	Value Interpretation	picklist		40		
ValueType	Value Type	picklist		255		

CAREOBSERVATIONCOMPONENTFEED

Feed tracking for CareObservationComponent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREOBSERVATIONCOMPONENTHISTORY

History for tracked fields of CareObservationComponent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareObservationComponentId	Care Observation Component ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Observation Component History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREOBSERVATIONFEED

Feed tracking for CareObservation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREOBSERVATIONHISTORY

History for tracked fields of CareObservation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareObservationId`	Care Observation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Observation History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREOBSERVATIONSHARE

Sharing for CareObservation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPERFORMER

Represents the person performing care in observations, procedure, and immunizations. This person may be a physician, the patient's contact, or anyone who administered any sort of care to the patient in the context of the concerned care event.

For more information, see CarePerformer in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AffiliatedOrganizationId	Account ID	reference		18		
CareSpecialtyId	Care Specialty ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Performer ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentRecordId	Parent Record ID	reference		18		
PersonId	Person ID	reference		18		
RoleId	Role ID	reference		18		
SystemModstamp	System Modstamp	datetime				

CAREPERFORMERFEED

Feed tracking for CarePerformer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPERFORMERHISTORY

History for tracked fields of CarePerformer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarePerformerId	Care Performer ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Performer History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPGMPROVHEALTHCAREPROVIDER

Represents a junction object identifying the primary healthcare professional associated with a care program provider and to look up all healthcare professionals for care program providers.

For more information, see CarePgmProvHealthcareProvider in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareProgramProviderId`	Care Program Provider ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveFrom`	Effective From	date				
`EffectiveTo`	Effective To	date				
`HealthcareProviderId`	Healthcare Provider ID	reference		18		
`Id`	Care Program Healthcare Provider ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimaryProvider`	Primary Provider	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Care Provider Association Name	string		255		
`SourceSystem`	Source System	string		255		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`SystemModstamp`	System Modstamp	datetime				

CAREPGMPROVHEALTHCAREPROVIDERFEED

Feed tracking for CarePgmProvHealthcareProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPGMPROVHEALTHCAREPROVIDERHISTORY

History for tracked fields of CarePgmProvHealthcareProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarePgmProvHealthcareProviderId	Care Program Healthcare Provider ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Healthcare Provider History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPREAUTH

Represents the details of preauthorizations for care under a member's plan.

For more information, see CarePreauth in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Care Preauth ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberPlanId	Member Plan ID	reference		18		
Name	Name	string		255		
Notes	Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PayerId	Account ID	reference		18		
PreauthIdentifier	Preauth Identifier	string		64		
ReferringPhysician	Referring Physician	string		64		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPREAUTHFEED

Feed tracking for CarePreauth.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPREAUTHHISTORY

History for tracked fields of CarePreauth.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarePreauthId	Care Preauth ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Preauth History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPREAUTHITEM

Represents the details of items included in a preauthorization for care under a member's plan.

For more information, see CarePreauthItem in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarePreauthId	Care Preauth ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndingServiceCode	Ending Service Code	string		64		
Id	Care Preauth Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Laterality	Laterality	picklist		40		
Name	Name	string		255		
Notes	Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PreauthitemSequence	Preauth Item Sequence	int	9			
Quantity	Quantity	int	9			
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
StartingServiceCode	Starting Service Code	string		64		
SystemModstamp	System Modstamp	datetime				
Unit	Unit	string		64		

CAREPREAUTHITEMFEED

Feed tracking for CarePreauthItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPREAUTHITEMHISTORY

History for tracked fields of CarePreauthItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarePreauthItemId	Care Preauth Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Preauth Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPREAUTHITEMSHARE

Sharing for CarePreauthItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPREAUTHSHARE

Sharing for CarePreauth.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAM

Represents a set of activities, such as a patient therapy, financial assistance, education, wellness, or fitness plan, offered to participants by an employer or insurer.

For more information, see CareProgram in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BudgetAmount	Budget Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EndDate	End Date	date				
Id	Care Program ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentProgramId	Care Program ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SponsorId	Account ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROGRAMCAMPAIGN

Represents a relationship between the Care Program object and the Campaign object.

For more information, see CareProgramCampaign in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CampaignId	Campaign ID	reference		18		
CareProgramId	Care Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Program Campaign ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

CAREPROGRAMCAMPAIGNFEED

Feed tracking for CareProgramCampaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMCAMPAIGNHISTORY

History for tracked fields of CareProgramCampaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramCampaignId	Care Program Campaign ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Campaign History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMELIGIBILITYRULE

Represents a rule defining the criteria for patient care program enrollment eligibility. This entity creates an association between Care Program and an Enrollment Eligibility Criteria.

For more information, see CareProgramEligibilityRule in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramId	Care Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EligibilityCriteriaId	Enrollment Eligibility Criteria ID	reference		18		
Id	Care Program Eligibility Rule ID	id		18		
IsDeleted	Deleted	boolean				
IsRequired	Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROGRAMELIGIBILITYRULEFEED

Feed tracking for CareProgramEligibilityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMELIGIBILITYRULEHISTORY

History for tracked fields of CareProgramEligibilityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEligibilityRuleId	Care Program Eligibility Rule ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Eligibility Rule History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMELIGIBILITYRULESHARE

Sharing for CareProgramEligibilityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMENROLLEE

Represents a participant enrolled in a care program.

For more information, see CareProgramEnrollee in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CareProgramId	Care Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Program Enrollee ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadId	Lead ID	reference		18		
Name	Name	string		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		

CAREPROGRAMENROLLEEFEED

Feed tracking for CareProgramEnrollee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMENROLLEEHISTORY

History for tracked fields of CareProgramEnrollee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEnrolleeId	Care Program Enrollee ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Enrollee History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMENROLLEEPRODUCT

Represents the affiliation between a care program enrollee and a care program product, a care program provider, or both.

For more information, see CareProgramEnrolleeProduct in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEnrolleeId	Care Program Enrollee ID	reference		18		
CareProgramProductId	Care Program Product ID	reference		18		
CareProgramProviderId	Care Program Provider ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Program Enrollee Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROGRAMENROLLEEPRODUCTFEED

Feed tracking for CareProgramEnrolleeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMENROLLEEPRODUCTHISTORY

History for tracked fields of CareProgramEnrolleeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEnrolleeProductId	Care Program Enrollee Product ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Enrollee Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMENROLLEEPRODUCTSHARE

Sharing for CareProgramEnrolleeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMENROLLMENTCARD

Represents a care program membership card that includes a membership number or enrollment code.

For more information, see CareProgramEnrollmentCard in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CardNumber`	Card Number	string		255		
`CareProgramEnrolleeId`	Care Program Enrollee ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Program Enrollment Card ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SourceSystem`	Source System	string		255		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CAREPROGRAMENROLLMENTCARDFEED

Feed tracking for CareProgramEnrollmentCard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMENROLLMENTCARDHISTORY

History for tracked fields of CareProgramEnrollmentCard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEnrollmentCardId	Care Program Enrollment Card ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Enrollment Card History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMENROLLMENTCARDSHARE

Sharing for CareProgramEnrollmentCard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMFEED

Feed tracking for CareProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMGOAL

Represents a business or clinical goal related to a care program.

For more information, see CareProgramGoal in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramId	Care Program ID	reference		18		
CompletionDate	Completion Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DueDate	Due Date	date				
Id	Care Program Goal ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		40		
ProgressPercentage	Progress Percentage	percent			3	0
SequenceNumber	Sequence Number	double			18	0
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
StartDate	Start Date	date				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROGRAMGOALFEED

Feed tracking for CareProgramGoal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMGOALHISTORY

History for tracked fields of CareProgramGoal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareProgramGoalId`	Care Program Goal ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Program Goal History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREPROGRAMGOALSHARE

Sharing for CareProgramGoal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMHISTORY

History for tracked fields of CareProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramId	Care Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMPRODUCT

Represents the affiliation between a care program and a care program product, care program provider, or both.

For more information, see CareProgramProduct in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Availability`	Availability	picklist		40		
`CareProgramId`	Care Program ID	reference		18		
`CareProgramPrice`	Care Program Price	currency			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Program Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProductId`	Product ID	reference		18		
`SourceSystem`	Source System	string		255		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CAREPROGRAMPRODUCTFEED

Feed tracking for CareProgramProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMPRODUCTHISTORY

History for tracked fields of CareProgramProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramProductId	Care Program Product ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROGRAMPRODUCTSHARE

Sharing for CareProgramProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMPROVIDER

Represents a business account that is the service provider for a care program product.

For more information, see CareProgramProvider in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CareProgramContactId`	Contact ID	reference		18		
`CareProgramProductId`	Care Program Product ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Program Provider ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Role`	Role	picklist		40		
`SourceSystem`	Source System	string		255		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CAREPROGRAMPROVIDERFEED

Feed tracking for CareProgramProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMPROVIDERHISTORY

History for tracked fields of CareProgramProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareProgramProviderId`	Care Program Provider ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Program Provider History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREPROGRAMPROVIDERSHARE

Sharing for CareProgramProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMSHARE

Sharing for CareProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROGRAMTEAMMEMBER

Represents a person who delivers services under a program, such as a program manager or care coordinator.

For more information, see CareProgramTeamMember in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CareProgramId	Care Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Care Program Team Member ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Role	Role	picklist		40		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		

CAREPROGRAMTEAMMEMBERFEED

Feed tracking for CareProgramTeamMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROGRAMTEAMMEMBERHISTORY

History for tracked fields of CareProgramTeamMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramTeamMemberId	Care Program Team Member ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Program Team Member History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROVIDERADVERSEACTION

Captures adverse actions against the provider, such as malpractice lawsuits or revoked licences.

For more information, see CareProviderAdverseAction in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AccreditationId	Accreditation ID	reference		18		
ActionIssueDate	Action Issue Date	date				
ActionType	Type	picklist		40		
BoardCertificationId	Board Certification ID	reference		18		
BusinessLicenseId	Business License ID	reference		18		
CaseNumber	Case Number	string		255		
CourtSentence	Court Sentence	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Care Provider Adverse Action ID	id		18		
IncidentDate	Incident Date	date				
IncidentReportedDate	Incident Reported Date	date				
InsurancePolicyNumber	Insurance Policy Number	string		255		
InsuranceProviderName	Insurance Provider Name	string		255		
IsDeleted	Deleted	boolean				
Jurisdiction	Jurisdiction	string		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PenaltyAmount	Penalty Amount	currency			18	2
PractitionerId	Contact ID	reference		18		
RegulatoryBody	Regulatory Body	string		255		
RegulatoryBodyType	Regulatory Body Type	picklist		40		
ReportingEntity	Reporting Entity	string		255		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROVIDERADVERSEACTIONFEED

Feed tracking for CareProviderAdverseAction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROVIDERADVERSEACTIONHISTORY

History for tracked fields of CareProviderAdverseAction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProviderAdverseActionId	Care Provider Adverse Action ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Provider Adverse Action History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROVIDERADVERSEACTIONSHARE

Sharing for CareProviderAdverseAction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROVIDERFACILITYSPECIALTY

Represents all the specialties that the practitioner provides at a given location. For example, a physician who is board-certified in both spine and neuro may provide spine services at one location and neuro services at another.

For more information, see CareProviderFacilitySpecialty in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Care Provider Facility Specialty ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsPrimarySpecialty	Primary Specialty	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Provider Facility Specialty Name	string		255		
OwnerId	Owner ID	reference		18		
PractitionerFacilityId	Healthcare Practitioner Facility ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SpecialtyId	Care Specialty ID	reference		18		
SpecialtyRole	Specialty Role	picklist		40		
SystemModstamp	System Modstamp	datetime				

CAREPROVIDERFACILITYSPECIALTYFEED

Feed tracking for CareProviderFacilitySpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROVIDERFACILITYSPECIALTYHISTORY

History for tracked fields of CareProviderFacilitySpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProviderFacilitySpecialtyId	Care Provider Facility Specialty ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Provider Facility Specialty History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROVIDERFACILITYSPECIALTYSHARE

Sharing for CareProviderFacilitySpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREPROVIDERSEARCHCONFIG

Represents fields that can appear in provider search results.

For more information, see CareProviderSearchConfig in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Care Provider Search Config ID	id		18		
`IsActive`	IsActive	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MappedObject`	Mapped Object	picklist		255		
`MasterLabel`	Label	string		80		
`SourceField`	Source Field	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TargetField`	Target Field	string		255		

CAREPROVIDERSEARCHABLEFIELD

This object holds denormalized data from certain fields in the Provider data model.

For more information, see CareProviderSearchableField in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CertificationType`	Certification Type	textarea		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EducationType`	Education Type	textarea		4000		
`FacilityAddress`	Address	address				
`FacilityCity`	Facility City	string		40		
`FacilityCountry`	Facility Country	string		80		
`FacilityGeocodeAccuracy`	Facility Geocode Accuracy	picklist		255		
`FacilityId`	Account ID	reference		18		
`FacilityLatitude`	Facility Latitude	double			18	15
`FacilityLongitude`	Facility Longitude	double			18	15
`FacilityName`	Facility Name	string		255		
`FacilityPhone`	Facility Phone	phone		40		
`FacilityPostalCode`	Facility Postal Code	string		20		
`FacilityState`	Facility State	string		80		
`FacilityStreet`	Facility Street	textarea		255		
`GenderRestriction`	Gender Restriction	string		255		
`Id`	Care Provider Search Data ID	id		18		
`IsAcceptingNewPatients`	Accepts new patients	boolean				
`IsDeleted`	Deleted	boolean				
`IsHandicapAccess`	Accessible	boolean				
`IsUpdateNeeded`	Update Needed	boolean				
`LanguagesSpoken`	Languages Spoken	textarea		4000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Care Provider Searchable Field Name	string		255		
NationalProviderIdentifier	National Provider Identifier	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
OwnerId	Owner ID	reference		18		
PhotoUrl	Photo URL	string		255		
PlanType	Plan Type	textarea		4000		
ProviderId	Healthcare Provider ID	reference		18		
ProviderName	Provider Name	string		255		
ProviderType	Provider Type	string		255		
Specialty	Specialty	textarea		4000		
SubSpecialty	Subspecialty	textarea		4000		
SyncLogRecord	Provider Search Sync Log ID	string		25		
SystemModstamp	System Modstamp	datetime				
UniqueKey	Unique Key	string		255		

CAREPROVIDERSEARCHABLEFIELDFEED

Feed tracking for CareProviderSearchableField.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREPROVIDERSEARCHABLEFIELDHISTORY

History for tracked fields of CareProviderSearchableField.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProviderSearchableFieldId	Care Provider Search Data ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Provider Searchable Field History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREPROVIDERSEARCHABLEFIELDSHARE

Sharing for CareProviderSearchableField.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CAREREGISTEREDDEVICE

Represents a device or device registration information for a patient or a care program enrollee.

For more information, see CareRegisteredDevice in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareProgramEnrolleeId	Care Program Enrollee ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeviceId	Asset ID	reference		18		
DeviceTypeId	Code Set ID	reference		18		
Id	Care Registered Device ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Care Registered Device Name	string		255		
NameType	Name Type	multipicklist		4099	0	
PatientId	Account ID	reference		18		
RegistrationDate	Registration Date	datetime				
SafetyInformation	Safety Information	textarea		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		255		
SupportContactDetail	Support Contact Details	textarea		2000		
SystemModstamp	System Modstamp	datetime				
UniqueDeviceId1	Unique Device ID 1	string		60		
UniqueDeviceId1Issuer	Unique Device ID 1 Issuer	url		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UniqueDeviceId2	Unique Device ID 2	string		60		
UniqueDeviceId2Issuer	Unique Device ID 2 Issuer	url		1000		
UniqueDeviceId3	Unique Device ID 3	string		60		
UniqueDeviceId3Issuer	Unique Device ID 3 Issuer	url		1000		

CAREREGISTEREDDEVICEFEED

Feed tracking for CareRegisteredDevice.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREGISTEREDDEVICEHISTORY

History for tracked fields of CareRegisteredDevice.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareRegisteredDeviceId`	Care Registered Device ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Registered Device History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREREQUEST

Represents the general details of a care-related request including member information, admission date, decision reason, and so on. A single request can contain multiple diagnoses, services, or drugs. Care requests include preauthorizations for drugs and services, admission notifications, concurrent review of admissions, appeals, complaints, and grievances.

For more information, see CareRequest in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcknowledgementLetterSentDate	Acknowledgement Letter Sent Date	datetime				
ActualAdmissionDate	Actual Admission Date	datetime				
ActualDischargeDate	Actual Discharge Date	datetime				
AdmissionNotes	Admission Notes	textarea		32000		
AdmissionSource	Admission Source	picklist		40		
AdmissionType	Admission Type	picklist		40		
AorReceivedDate	AOR Received Date	datetime				
AorRequestedDate	AOR Requested Date	datetime				
AppealRequestReasonType	Appeal Request Reason Type	picklist		40		
AppointedRepVerbalContactDate	Appointed Rep Verbal Contact Date	datetime				
AppointedRepWrittenContactDate	Appointed Rep Written Contact Date	datetime				
AppointedRepresentativeId	Account ID	reference		18		
ApprovedLengthOfStay	Approved Length of Stay	int	9			
ApprovedLevelOfCare	Approved Level of Care	picklist		40		
CareRequestCaseId	Case ID	reference		18		
ClaimNumber	Claim Number	string		32		
ClinicalCaseType	Clinical Case Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CriteriaMet	Criteria Met	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CumulativeLengthOfStay	Cumulative Length of Stay	int	9			
CurrentLevelOfCare	Current Level of Care	picklist		40		
DecisionDate	Decision Date	datetime				
DecisionDaysRemaining	Decision Days Remaining	int	9			
DecisionLetter	Decision Letter	textarea		32000		
DecisionNotes	Decision Notes	textarea		32000		
DecisionReason	Decision Reason	picklist		40		
DecisionReasonDescription	Decision Reason Description	textarea		32000		
DeniedLengthOfStay	Denied Length of Stay	int	9			
DeniedLevelOfCare	Denied Level of Care	picklist		40		
DispositionNotes	Disposition Notes	textarea		32000		
DueDate	Due Date	datetime				
EffectiveFrom	Effective From	datetime				
EffectiveTo	Effective To	datetime				
ExpirationDate	Expiration Date	datetime				
ExtensionRequestReceivedDate	Extension Request Received Date	datetime				
ExternalComplaintIdentifier	External Complaint ID	string		255		
FacilityRecordNumber	Facility Record Number	string		32		
FacilityRoomBedType	Facility Room Bed Type	picklist		40		
FacilityRoomNumber	Facility Room Number	string		32		
FinalLevelOfCare	Final Level of Care	picklist		40		
FirstReviewerId	User ID	reference		18		
FirstReviewerNotes	First Reviewer Notes	textarea		32000		
GeneralPractitionerId	Contact ID	reference		18		
GeneralPractitionerVerbalNotifiedDate	General Practitioner Verbal Notification Date	datetime				
GeneralPractitionerWrittenNotifiedDate	General Practitioner Written Notification Date	datetime				
GrievanceType	Grievance Type	picklist		40		
Id	Care Request ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
InfoReceivedDate	Info Received Date	datetime				
InfoRequestedDate	Info Requested Date	datetime				
InitialDenialNotificationDate	Initial Denial Notification Date	date				
InitialDenialNotificationTime	Initial Denial Notification Time	time				
IsDeleted	Deleted	boolean				
IsExtendedRequest	Extended Request	boolean				
IsReadmission	Readmission	boolean				
IsServiceOrMedicationReceived	Service or Medication Received	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicalDirectorId	User ID	reference		18		
MedicalDirectorNotes	Medical Director Notes	textarea		32000		
MemberCondition	Member Condition	textarea		255		
MemberContactDateTime	Member Contact Date	datetime				
MemberDateOfBirth	Member Date of Birth	date				
MemberFirstName	Member First Name	string		40		
MemberGender	Member Gender	picklist		40		
MemberGroupNumber	Member Group Number	string		64		
MemberId	Account ID	reference		18		
MemberIdentificationNumber	Member ID	string		64		
MemberLastName	Member Last Name	string		80		
MemberPrimaryPlanId	Member Plan ID	reference		18		
MemberPrognosis	Member Prognosis	picklist		40		
MemberSecondaryPlanId	Member Plan ID	reference		18		
MemberStatus	Member Status	textarea		255		
MemberVerbalNotificationDate	Member Verbal Notification Date	datetime				
MemberWrittenNotificationDate	Member Written Notification Date	datetime				
ModificationDate	Modification Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ModifiedLengthOfStay	Modified Length of Stay	int	9			
ModifiedLevelOfCare	Modified Level of Care	picklist		40		
Name	Name	string		255		
NextReviewDate	Next Review Date	datetime				
OriginalDenialMedicalDirectorId	User ID	reference		18		
ParProvider	Par Provider	picklist		40		
PlaceOfService	Place of Service	picklist		40		
PractitionerContactDateTime	Practitioner Contact Date	datetime				
QuantityType	Quantity Type	picklist		40		
ReceivedDate	Received Date	datetime				
ReconsiderationDenialNotificationDate	Reconsideration Denial Notification Date	date				
ReconsiderationDenialNotificationTime	Reconsideration Denial Notification Time	time				
ReferenceCareRequestCaseId	Case ID	reference		18		
ReferenceCaseNumber	Reference Case Number	string		32		
ReopenReason	Reopen Reason	picklist		40		
ReopenReasonDescription	Reopen Reason Description	textarea		32000		
ReopenedDate	Reopened Date	datetime				
RequestPractitionerVerbalNotifiedDate	Requesting Practitioner Verbal Notification Date	datetime				
RequestPractitionerWrittenNotifiedDate	Requesting Practitioner Written Notification Date	datetime				
RequestedDate	Requested Date	datetime				
RequestedLengthOfStay	Requested Length of Stay	int	9			
RequestedLevelOfCare	Requested Level of Care	picklist		40		
RequesterType	Requester Type	picklist		40		
RequestingPractitionerId	Contact ID	reference		18		
RequestingPractitionerLicense	Requesting Practitioner License	picklist		40		
RequestingPractitionerSpecialty	Requesting Practitioner Specialty	picklist		40		
ResolutionDate	Resolution Date	datetime				
ResolutionLetterSentDate	Resolution Letter Sent Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ResolutionNotes	Resolution Notes	textarea		32000		
ReviewDate	Review Date	datetime				
RootCauseNotes	Root Cause Notes	textarea		32000		
ScheduledAdmissionDate	Scheduled Admission Date	datetime				
ScheduledDischargeDate	Scheduled Discharge Date	datetime				
ServiceDate	Service Date	date				
ServicingFacilityId	Account ID	reference		18		
ServicingPractitionerId	Contact ID	reference		18		
ServicingPractitionerLicense	Servicing Practitioner License	picklist		40		
ServicingPractitionerSpecialty	Servicing Practitioner Specialty	picklist		40		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

CAREREQUESTCONFIGURATION

Represents the details for a record type such as service request, drug request, or admission request. One or more record types can be associated with a care request.

For more information, see CareRequestConfiguration in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareRequestRecordType`	Care Request Record Type	string		255		
`CareRequestRecords`	Care Request Records	multipicklist		4099	0	
`CareRequestType`	Care Request Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Care Request Configuration ID	id		18		
`IsActive`	Active	boolean				
`IsDefaultRecordType`	Default record type	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CAREREQUESTDRUG

Represents the details of a requested drug including name, strength, frequency, and instructions for administration. One or more drug requests can be associated with a care request.

For more information, see CareRequestDrug in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApprovedUnits	Approved Units	int	9			
AuthApprovalIdentifier	Authorization Approval Identifier	string		255		
AuthorizationRefIdentifier	Authorization Reference Identifier	string		255		
CareRequestCaseId	Case ID	reference		18		
CareRequestId	Care Request ID	reference		18		
ClinicalDetermination	Clinical Determination	picklist		40		
ClinicalDeterminationNote	Clinical Determination Note	textarea		32000		
ClinicalDeterminationReasonId	Code Set ID	reference		18		
Code	Code	string		32		
CodeType	Code Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DaysSupply	Days Supply	int	9			
DecisionDate	Decision Date	datetime				
DeniedUnits	Denied Units	int	9			
DispenserAddress	Dispenser Address	address				
DispenserCity	Dispenser City	string		40		
DispenserCountry	Dispenser Country	string		80		
DispenserFaxNumber	Dispenser Fax Number	phone		40		
DispenserGeocodeAccuracy	Dispenser Geocode Accuracy	picklist		255		
DispenserIdentifier	Dispenser ID	string		32		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
DispenserLatitude	Dispenser Latitude	double			18	15
DispenserLongitude	Dispenser Longitude	double			18	15
DispenserName	Dispenser Name	string		255		
DispenserPhoneNumber	Dispenser Phone Number	phone		40		
DispenserPostalCode	Dispenser Postal Code	string		20		
DispenserState	Dispenser State	string		80		
DispenserStreet	Dispenser Street	textarea		255		
DispenserTaxIdentifier	Dispenser Tax ID	string		32		
DispenserVerbalNotificationDateTime	Dispenser Verbal Notification Date	datetime				
DispenserWrittenNotificationDateTime	Dispenser Written Notification Date	datetime				
DispensingPharmacyId	Dispensing Pharmacy ID	reference		18		
Dose	Dose	string		255		
DrugAdministrationSetting	Drug Administration Setting	picklist		40		
Frequency	Frequency	string		255		
Id	Care Request Drug ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicationCodeId	Medication ID	reference		18		
MedicationRefObjectId	Medication Reference Object ID	reference		18		
ModifiedCode	Modified Code	string		32		
ModifiedCodeType	Modified Code Type	picklist		40		
ModifiedDaysSupply	Modified Days Supply	int	9			
ModifiedDose	Modified Dose	string		255		
ModifiedFrequency	Modified Frequency	string		255		
ModifiedName	Modified Name	string		255		
ModifiedSig	Modified Sig	textarea		32000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ModifiedStrength	Modified Strength	string		255		
ModifiedTherapyDuration	Modified Therapy Duration	int	9			
ModifiedUnits	Modified Units	int	9			
Name	Name	string		255		
PrescriptionDate	Prescription Date	date				
PrescriptionFillDate	Prescription Fill Date	date				
PrescriptionFills	Prescription Fill	int	9			
PrescriptionNumber	Prescription Number	string		32		
Priority	Priority	picklist		40		
RequestType	Request Type	picklist		40		
ServiceCategory	Service Category	string		255		
ServiceCategoryCode	Service Category Code	string		32		
ServicingFacilityId	Servicing Facility ID	reference		18		
ServicingProviderId	Healthcare Provider ID	reference		18		
Sig	Sig	textarea		32000		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
StatusReason	Status Reason	picklist		40		
Strength	Strength	string		255		
SystemModstamp	System Modstamp	datetime				
TherapyDuration	Therapy Duration	int	9			
Units	Units	int	9			

CAREREQUESTDRUGFEED

Feed tracking for CareRequestDrug.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREQUESTDRUGHISTORY

History for tracked fields of CareRequestDrug.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareRequestDrugId	Care Request Drug ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Request Drug History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREREQUESTEXTENSION

Represents extra details for a care request such as the subscriber details for the member's health plan, home healthcare status, and ambulance transportation details.

For more information, see CareRequestExtension in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AmbulanceTransportReason	Ambulance Transport Reason	picklist		40		
AmbulanceTransportType	Ambulance Transport Type	picklist		40		
AppealEffectuationDateTime	Appeal Effectuation Date	datetime				
AuthorizationRefIdentifier	Authorization Reference Identifier	string		255		
CareRequestCaseId	Case ID	reference		18		
CareRequestId	Care Request ID	reference		18		
CaseSubStatus	Case Sub Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DocumentAttachmentStatus	Document Attachment Status	picklist		40		
HealthcareProviderId	Healthcare Provider ID	reference		18		
HomeHealthCertificationEndDate	Home Health Certification End Date	date				
HomeHealthCertificationStartDate	Home Health Certification Start Date	date				
HomeHealthStartDate	Home Health Start Date	date				
Id	Care Request Extension ID	id		18		
IndependentReviewDetermination	Independent Review Determination	picklist		40		
IndependentReviewDeterminationDate	Independent Review Determination Date	datetime				
IndependentReviewSubmissionDate	Independent Review Submission Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
IsIndependentReviewRequired	Independent Review Required	boolean				
IsMedicareCoverage	Medicare Coverage	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NursingHomeResidentialStatus	Nursing Home Residential Status	picklist		40		
PriorDischargeStatus	Prior Discharge Status	picklist		40		
ReopenDecisionDateTime	Reopen Decision Date	datetime				
ReopenRequestOutcome	Reopen Request Outcome	picklist		40		
ReopenRequestType	Reopen Request Type	picklist		40		
ReopenedById	User ID	reference		18		
RequestExtensionReason	Request Extension Reason	textarea		32000		
RequestExtnDecisionDateTime	Request Extension Decision Date	datetime				
RequestOutcome	Request Outcome	picklist		40		
RequestOutcomeDesc	Request Outcome Description	textarea		32000		
RequestType	Request Type	picklist		40		
RequestingProviderId	Healthcare Provider ID	reference		18		
ResolutionDescription	Resolution Description	textarea		32000		
ServiceLevel	Service Level	picklist		40		
ServiceType	Service Type	string		255		
ServicingFacilityId	Servicing Facility ID	reference		18		
ServicingProviderId	Healthcare Provider ID	reference		18		
SubscriberId	Account ID	reference		18		
SubscriberMemberIdentifier	Subscriber Member ID	string		64		
SystemModstamp	System Modstamp	datetime				
TotalAmbulanceTransportDistance	Total Ambulance Transport Distance	double			5	2
UnitofMeasureId	Unit of Measure ID	reference		18		

CAREREQUESTEXTENSIONFEED

Feed tracking for CareRequestExtension.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREQUESTEXTENSIONHISTORY

History for tracked fields of CareRequestExtension.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareRequestExtensionId`	Care Request Extension ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Request Extension History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CAREREQUESTFEED

Feed tracking for CareRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREQUESTHISTORY

History for tracked fields of CareRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareRequestId	Care Request ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Request History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREREQUESTITEM

Represents the details of a care service request, including name, modifiers, and the effective date. One or more care service requests can be associated with a care request.

For more information, see CareRequestItem in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AmbulanceTransportDistance	Ambulance Transport Distance	double			7	2
AmbulanceTransportReason	Ambulance Transport Reason	picklist		40		
AmbulanceTransportType	Ambulance Transport Type	picklist		40		
ApprovedLengthOfStay	Approved Length of Stay	int	9			
ApprovedLevelOfCare	Approved Level of Care	picklist		40		
ApprovedQuantity	Approved Quantity	int	9			
ApprovedServiceEndDate	Approved Service End Date	date				
ApprovedServiceStartDate	Approved Service Start Date	date				
AuthApprovalIdentifier	Authorization Approval Identifier	string		255		
AuthorizationRefIdentifier	Authorization Reference Identifier	string		255		
CareRequestCaseId	Case ID	reference		18		
CareRequestId	Care Request ID	reference		18		
ClinicalDetermination	Clinical Determination	picklist		40		
ClinicalDeterminationNotes	Clinical Determination Notes	textarea		4000		
ClinicalDeterminationReasonId	Code Set ID	reference		18		
ClinicalServiceRequestId	Clinical Service Request ID	reference		18		
CodeDescription	Code Description	string		255		
CodeType	Code Type	picklist		40		
CodeTypeIdentifier	Code Type ID	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CumulativeLengthOfStay	Cumulative Length of Stay	int	9			
CurrentLevelOfCare	Current Level of Care	picklist		40		
DecisionDate	Decision Date	datetime				
DeniedLevelOfCare	Denied Level of Care	picklist		40		
DeniedQuantity	Denied Quantity	int	9			
EffectiveDate	Effective Date	date				
EndDate	End Date	date				
FreeFormProcedureDescription	Free Form Procedure Description	textarea		255		
Id	Care Request Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ModifiedCodeDescription	Modified Code Description	string		255		
ModifiedCodeIdentifier	Modified Code	string		32		
ModifiedCodeType	Modified Code Type	picklist		40		
ModifiedCodeTypeIdentifier	Modified Code Type ID	string		255		
ModifiedEffectiveDate	Modified Effective Date	date				
ModifiedEndDate	Modified End Date	date				
ModifiedLevelOfCare	Modified Level of Care	picklist		40		
ModifiedModifier	Modified Modifier	string		32		
ModifiedModifierDescription	Modified Modifier Description	string		255		
ModifiedProcedureCodeId	Health Care Procedure ID	reference		18		
ModifiedProcedureCodeSetId	Modified Procedure Code Set ID	reference		18		
ModifiedQuantity	Modified Quantity	int	9			
Modifier	Modifier	string		32		
Modifier2	Modifier 2	string		32		
Modifier2Description	Modifier 2 Description	string		255		
Modifier3	Modifier 3	string		32		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Modifier3Description	Modifier 3 Description	string		255		
Modifier4	Modifier 4	string		32		
Modifier4Description	Modifier 4 Description	string		255		
ModifierCodeSetId	Modifier Code Set ID	reference		18		
ModifierDescription	Modifier Description	string		255		
Name	Name	string		255		
Priority	Priority	picklist		40		
ProcedureCodeId	Health Care Procedure ID	reference		18		
ProcedureCodeSetId	Procedure Code Set ID	reference		18		
Quantity	Quantity	int	9			
QuantityType	Quantity Type	picklist		40		
ReasonCodeId	Reason Code ID	reference		18		
RequestType	Request Type	picklist		40		
RequestedLengthOfStay	Requested Length of Stay	int	9			
RequestedLevelOfCare	Requested Level of Care	picklist		40		
RequestedServiceEndDate	Requested Service End Date	date				
RequestedServiceStartDate	Requested Service Start Date	date				
ServiceCategory	Service Category	string		64		
ServiceCategoryCode	Service Category Code	string		64		
ServicingFacilityId	Servicing Facility ID	reference		18		
ServicingProviderId	Healthcare Provider ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
StatusReason	Status Reason	picklist		40		
SystemModstamp	System Modstamp	datetime				
TransportLocationId	Account ID	reference		18		

CAREREQUESTITEMFEED

Feed tracking for CareRequestItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREQUESTITEMHISTORY

History for tracked fields of CareRequestItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareRequestItemId	Care Request Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Request Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CAREREQUESTREVIEWER

Represents the details of a care request reviewer including name, reviewer type, status of the care request at the end of the review, the reviewer's notes, and date of review. A care request, care request item, care request drug, or care diagnosis can be associated with a care request reviewer.

For more information, see CareRequestReviewer in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareRequestCaseId`	Case ID	reference		18		
`CareRequestReferenceId`	Care Request Reference ID	reference		18		
`ContentDocumentId`	ContentDocument ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Request Reviewer ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Care Request Reviewer Name	string		255		
`ReviewDate`	Review Date	datetime				
`ReviewerId`	Reviewer ID	reference		18		
`ReviewerNotes`	Reviewer Notes	textarea		32000		
`ReviewerType`	Reviewer Type	picklist		40		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CAREREQUESTREVIEWERFEED

Feed tracking for CareRequestReviewer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CAREREQUESTREVIEWERHISTORY

History for tracked fields of CareRequestReviewer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareRequestReviewerId`	Care Request Reviewer ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Request Reviewer History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CARESPECIALTY

Represents a listing of provider specialty codes and descriptions. For example, `02 - Physician/General Surgery`.

For more information, see CareSpecialty in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`EffectiveFrom`	Effective From	date				
`EffectiveTo`	Effective To	date				
`Id`	Care Specialty ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SpecialtyCode`	Specialty Code	string		18		
`SpecialtyType`	Specialty Type	picklist		40		
`SpecialtyUsage`	Specialty Usage	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CARESPECIALTYFEED

Feed tracking for CareSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CARESPECIALTYHISTORY

History for tracked fields of CareSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareSpecialtyId	Care Specialty ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Specialty History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CARESPECIALTYSHARE

Sharing for CareSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CARESPECIALTYTAXONOMY

The junction object between CareSpecialty and CareTaxonomy.

For more information, see CareSpecialtyTaxonomy in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareSpecialtyId`	Care Specialty ID	reference		18		
`CareTaxonomyId`	Care Taxonomy ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Care Specialty Taxonomy ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

CARESPECIALTYTAXONOMYFEED

Feed tracking for CareSpecialtyTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CARESPECIALTYTAXONOMYHISTORY

History for tracked fields of CareSpecialtyTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareSpecialtyTaxonomyId	Care Specialty Taxonomy ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Care Specialty Taxonomy History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CARESYSTEMFIELDMAPPING

Represents a mapping from source system fields to Salesforce target entities and attributes.

For more information, see CareSystemFieldMapping in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`ExternalIdField`	External ID Field	string		255		
`Id`	Care System Field Mapping ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`Role`	Role	picklist		255		
`SourceSystem`	Source System	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TargetObject`	Target Object	string		255		

CARETAXONOMY

Represents a static list of taxonomy codes.

For more information, see CareTaxonomy in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Care Taxonomy ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentTaxonomyId	Care Taxonomy ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TaxonomyCode	Taxonomy Code	string		18		
TaxonomyType	Taxonomy Type	picklist		40		

CARETAXONOMYFEED

Feed tracking for CareTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CARETAXONOMYHISTORY

History for tracked fields of CareTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareTaxonomyId`	Care Taxonomy ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Care Taxonomy History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CARETAXONOMYSHARE

Sharing for CareTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CARTCHECKOUTSESSION

Represents a checkout session used in Lightning B2B Commerce checkout.

For more information, see CartCheckoutSession in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BackgroundOperationId	Background Operation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Cart Checkout Session ID	id		18		
IsArchived	Is Archived	boolean				
IsDeleted	Deleted	boolean				
IsError	Is Error	boolean				
IsLocked	Is Locked	boolean				
IsProcessing	Is Processing	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MayEdit	May Edit	boolean				
Name	Name	string		255		
NextState	Next State	string		30		
OrderId	Order ID	reference		18		
OrderReferenceNumber	Order Reference Number	string		19		
State	State	string		30		
SystemModstamp	System Modstamp	datetime				
WebCartId	Cart ID	reference		18		

CARTDELIVERYGROUP

Represents shipping information for the delivery of items in an order against a store built with B2B Commerce on Lightning Experience.

For more information, see CartDeliveryGroup in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CartId	Cart ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeliverToAddress	Delivery Address	address				
DeliverToCity	City	string		40		
DeliverToCountry	Country	string		80		
DeliverToGeocodeAccuracy	Geocode Accuracy	picklist		255		
DeliverToLatitude	Latitude	double			18	15
DeliverToLongitude	Longitude	double			18	15
DeliverToName	Deliver To Name	string		255		
DeliverToPostalCode	Zip	string		20		
DeliverToState	State/Province	string		80		
DeliverToStreet	Street	textarea		255		
DesiredDeliveryDate	Desired Delivery Date	datetime				
GrandTotalAmount	Grand Total Amount	currency			18	2
Id	Cart Delivery Group ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MayEdit	May Edit	boolean				
Name	Name	string		255		
ShippingInstructions	Shipping Instructions	textarea		2000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TotalAdjustmentAmount	Total Adjustment Amount	currency			18	2
TotalAdjustmentTaxAmount	Total Adjustment Tax Amount	currency			18	2
TotalAmount	Total Amount	currency			18	2
TotalChargeAmount	Total Charge Amount	currency			18	2
TotalChargeTaxAmount	Total Charge Tax Amount	currency			18	2
TotalProductAmount	Total Product Amount	currency			18	2
TotalProductTaxAmount	Total Product Tax Amount	currency			18	2
TotalTaxAmount	Total Tax Amount	currency			18	2

CARTITEM

Represents an item in a `WebCart` that's active in a store built with B2B Commerce on Lightning Experience. Cart item can be of type `Product` or `Charge`.

For more information, see CartItem in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdjustmentAmount`	Adjustment Amount quantity based	currency			18	2
`AdjustmentTaxAmount`	Adjustment Tax Amount	currency			18	2
`CartDeliveryGroupId`	Cart Delivery Group ID	reference		18		
`CartId`	Cart ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DistributedAdjustmentAmount`	Distributed Promotions Total	currency			18	2
`DistributedAdjustmentTaxAmount`	Distributed Promotions Tax Adjustment	currency			18	2
`Id`	Cart Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`ItemizedAdjustmentAmount`	Item Promotions Total	currency			18	2
`ItemizedAdjustmentTaxAmount`	Item Promotions Tax Adjustment	currency			18	2
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ListPrice`	List Price	currency			18	2
`MayEdit`	May Edit	boolean				
`Name`	Cart Item Name	string		255		
`Product2Id`	Product ID	reference		18		
`Quantity`	Quantity	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SalesPrice	Sales Price	currency			18	2
Sku	SKU	string		255		
SystemModstamp	System Modstamp	datetime				
TotalAdjustmentAmount	All Adjustments Total	currency			18	2
TotalAmount	Total Amount	currency			18	2
TotalLineAmount	Total Line Amount	currency			18	2
TotalLineTaxAmount	Total Line Tax Amount	currency			18	2
TotalListPrice	Total List Price	currency			18	2
TotalPrice	Total Price	currency			18	2
TotalPriceAfterAllAdjustments	Total Adjusted Price	currency			18	2
TotalPromoAdjustmentAmount	Item Promotions Plus Distributed Promotions Total	currency			18	2
TotalPromoAdjustmentTaxAmount	Item Promotions Tax Adjustment Plus Distributed Tax Adjustment	currency			18	2
TotalTaxAmount	Total Tax Amount	currency			18	2
Type	Type	picklist		255		
UnitAdjustedPrice	Unit Adjusted Price	currency			18	2
UnitAdjustmentAmount	Unit Adjustment Amount	currency			18	2

CARTITEMPRICEADJUSTMENT

Price adjustment for a cart item.

For more information, see CartItemPriceAdjustment in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentAmountScope	Adjustment Amount Scope	picklist		255		
AdjustmentBasisReferenceId	Coupon ID	reference		18		
AdjustmentSource	Adjustment Source	picklist		255		
AdjustmentTargetType	Target Type for the Adjustment	picklist		255		
AdjustmentType	Adjustment Type	picklist		255		
AdjustmentValue	Adjustment Value	double			18	2
CartItemId	Cart Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Cart Item Price Adjustment ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MayEdit	May Edit	boolean				
Name	Cart Item Price Adjustment Name	string		255		
PriceAdjustmentCauseId	Promotion ID	reference		18		
Priority	Priority Order for Adjustments	int	9			
SystemModstamp	System Modstamp	datetime				
TotalAmount	Total Amount	currency			18	2
TotalTax	Total Tax	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
WebCartAdjustmentGroupId	Cart Adjustment Group ID	reference		18		

CARTTAX

Represents taxes for a line item in a `WebCart` that's active in a store built with B2B Commerce on Lightning Experience.

For more information, see CartTax in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AdjustmentTargetType`	Target Type for the Adjustment	picklist		255		
`Amount`	Amount	currency			18	2
`CartId`	Cart ID	reference		18		
`CartItemId`	Cart Item ID	reference		18		
`CartItemPriceAdjustmentId`	Cart Item Price Adjustment ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		2000		
`Id`	Cart Tax ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Cart Tax Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TaxCalculationDate`	Tax Calculation Date	date				
`TaxRate`	Tax Rate	percent			5	2
`TaxType`	Tax Type	picklist		255		

CARTVALIDATIONOUTPUT

Associate errors to cart entities, such as cart line items, delivery groups, and the like, in a store built with B2B Commerce on Lightning Experience. An example error is "Out of stock."

For more information, see CartValidationOutput in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BackgroundOperationId`	Background Operation ID	reference		18		
`CartId`	Cart ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Cart Validation Output ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsDismissed`	Is Dismissed	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Level`	Level	picklist		255		
`MayEdit`	May Edit	boolean				
`Message`	Message	string		255		
`Name`	Cart Validation Output	string		255		
`RelatedEntityId`	Cart Delivery Group ID or Cart Item ID or Web Cart ID	reference		18		
`RelatedEntityPrefix`	Related Entity Prefix	string		3		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		

CASE

Represents a case, which is a customer issue or problem.

For more information, see Case in the *Object Reference for the Salesforce Platform*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CaseNumber	Case Number	string		30		
ClosedDate	Closed Date	datetime				
Comments	Internal Comments	textarea		4000		
ContactEmail	Contact Email	email		80		
ContactFax	Contact Fax	phone		40		
ContactId	Contact ID	reference		18		
ContactMobile	Contact Mobile	phone		40		
ContactPhone	Contact Phone	phone		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Case ID	id		18		
IsClosed	Closed	boolean				
IsDeleted	Deleted	boolean				
IsEscalated	Escalated	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MasterRecordId	Master Record ID	reference		18		
Origin	Case Origin	picklist		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ParentId	Parent Case ID	reference		18		
Priority	Priority	picklist		255		
Reason	Case Reason	picklist		255		
Status	Status	picklist		255		
Subject	Subject	string		255		
SuppliedCompany	Company	string		80		
SuppliedEmail	Email Address	email		80		
SuppliedName	Name	string		80		
SuppliedPhone	Phone	string		40		
SystemModstamp	System Modstamp	datetime				
Type	Case Type	picklist		255		

CASEARTICLE

Represents the association between a Case and a KnowledgeArticle.

For more information, see CaseArticle in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ArticleLanguage`	Language	picklist		40		
`ArticleVersionNumber`	Version Number	int	6			
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Article ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsSharedByEmail`	Is Shared by Email	boolean				
`KnowledgeArticleId`	Article ID	reference		18		
`KnowledgeArticleVersionId`	Knowledge Article Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CASECOMMENT

Represents a comment that provides additional information about the associated Case.

For more information, see CaseComment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommentBody`	Body	textarea		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Comment ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPublished`	Published	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CASECONTACTROLE

Represents the role that a given Contact plays on a Case.

For more information, see CaseContactRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CasesId`	Case ID	reference		18		
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contact Role ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Role`	Role	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

CASEFEED

Feed tracking for Case.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CASEGATEWAYREQUEST

Holds the JSON output from the Financial Services Cloud flows and serves as an endpoint for integration with backend systems. It records the data interchange between the integrated systems.

For more information, see CaseGatewayRequest in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Gateway Request ID	id		18		
`IntegrationPayload`	Integration Payload	textarea		32000		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SourceSystem`	Source System	string		255		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`StatusCode`	Status Code	string		100		
`StatusMessage`	Status Message	string		255		
`SystemModstamp`	System Modstamp	datetime				

CASEHISTORY

Represents historical information about changes that have been made to the associated Case.

For more information, see CaseHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Case History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CASEMILESTONE

Represents a milestone (required step in a customer support process) on a Case.

For more information, see CaseMilestone in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActualElapsedTimeInDays`	Actual Elapsed Time (Days)	double			6	2
`ActualElapsedTimeInHrs`	Actual Elapsed Time (Hours)	double			6	2
`ActualElapsedTimeInMins`	Actual Elapsed Time (Mins)	int	9			
`BusinessHoursId`	Business Hours ID	reference		18		
`CaseId`	Case ID	reference		18		
`CompletionDate`	Completion Date	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTimeInDays`	Elapsed Time (Days)	double			6	2
`ElapsedTimeInHrs`	Elapsed Time (Hours)	double			6	2
`ElapsedTimeInMins`	Elapsed Time (Mins)	int	9			
`Id`	Case Milestone ID	id		18		
`IsCompleted`	Completed	boolean				
`IsDeleted`	Deleted	boolean				
`IsViolated`	Violation	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MilestoneTypeId`	Milestone Type ID	reference		18		
`StartDate`	Start Date	datetime				
`StoppedTimeInDays`	Stopped Time (Days)	double			6	2
`StoppedTimeInHrs`	Stopped Time (Hours)	double			6	2
`StoppedTimeInMins`	Stopped Time (Mins)	int	9			
`SystemModstamp`	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TargetDate	Target Date	datetime				
TargetResponseInDays	Target Response (Days)	double			6	2
TargetResponseInHrs	Target Response (Hours)	double			6	2
TargetResponseInMins	Target Response (Mins)	int	9			
TimeRemainingInDays	Time Remaining (Days)	double			6	2
TimeRemainingInHrs	Time Remaining (Hour:Min)	string		10		
TimeRemainingInMins	Time Remaining (Min:Sec)	string		10		
TimeSinceTargetInDays	Time Since Target (Days)	double			6	2
TimeSinceTargetInHrs	Time Since Target (Hour:Min)	string		10		
TimeSinceTargetInMins	Time Since Target (Min:Sec)	string		10		

CASERELATEDISSUE

This object acts as a junction between a customer issue (Case) and the Incident or Problem that represents an associated service failure.

For more information, see CaseRelatedIssue in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Related Issue ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Case Related Issue Number	string		255		
`RelatedEntityType`	Related Issue Type	picklist		255		
`RelatedIssueId`	Related Issue ID	reference		18		
`RelationshipType`	Relationship Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CASERELATEDISSUEFEED

Feed tracking for CaseRelatedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CASERELATEDISSUEHISTORY

History for tracked fields of CaseRelatedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CaseRelatedIssueId	Case Related Issue ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Case Related Issue History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CASESHARE

Represents a sharing entry on a Case.

For more information, see CaseShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseAccessLevel`	Case Access	picklist		40		
`CaseId`	Case ID	reference		18		
`Id`	Case Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

CASESOLUTION

Represents the association between a Case and a Solution.

For more information, see CaseSolution in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Solution ID	id		18		
`IsDeleted`	Deleted	boolean				
`SolutionId`	Solution ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CASESTATUS

Represents the status of a Case, such as New, On Hold, or In Process.

For more information, see CaseStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Case Status Value ID	id		18		
`IsClosed`	Is Closed	boolean				
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

CASESUBJECTPARTICLE

Represents the Social Business Rules custom format for the **Case Subject** field on cases created from inbound social posts.

For more information, see CaseSubjectParticle in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Case Subject Particle Id	id		18		
`Index`	Index	int	9			
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				
`TextField`	Freeform Text Field	string		255		
`Type`	Type	picklist		255		

CASETEAMMEMBER

Represents a case team member, who works with a team of other users to help resolve a case.

For more information, see CaseTeamMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Team Member Id	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MemberId`	Member ID	reference		18		
`ParentId`	Case ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TeamRoleId`	Team Role ID	reference		18		
`TeamTemplateId`	Team Template ID	reference		18		
`TeamTemplateMemberId`	Team Template Member ID	reference		18		

CASETEAMROLE

Represents a case team role. Every case team member has a role on a case, such as “Customer Contact” or “Case Manager.”

For more information, see CaseTeamRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Access Level	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Team Role Id	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`PreferencesVisibleInCSP`	Visible in Customer Portal	boolean				
`SystemModstamp`	System Modstamp	datetime				

CASETEAMTEMPLATE

Represents a predefined case team, which is a group of users that helps resolve a case.

For more information, see CaseTeamTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		300		
`Id`	Team Template Id	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`SystemModstamp`	System Modstamp	datetime				

CASETEAMTEMPLATEMEMBER

Represents a member on a predefined case team, which is a group of users that helps resolve cases.

For more information, see CaseTeamTemplateMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Team Template Member Id	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MemberId`	Member ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TeamRoleId`	Team Role ID	reference		18		
`TeamTemplateId`	Team Template ID	reference		18		

CASETEAMTEMPLATERECORD

The CaseTeamTemplateRecord object is a linking object between the Case and CaseTeamTemplate objects. To assign a predefined case team to a case (customer inquiry), create a CaseTeamTemplateRecord record and point the `ParentId` to the case and the `TeamTemplateId` to the predefined case team.

For more information, see CaseTeamTemplateRecord in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Predefined Team Record Id	id		18		
`ParentId`	Case ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TeamTemplateId`	Team Template ID	reference		18		

CATEGORIZEDCAREFEEAGREEMENT

Specifies the payment terms for contracts of Categorized Care Fee Agreement.

For more information, see CategorizedCareFeeAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CategorizedCareFeeAgreeKey	Categorized Care Fee Agreement Key	string		255		
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Categorized Care Fee Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineofBusiness	Line of Business	picklist		40		
Name	Name	string		255		
PricingInformation	Pricing Information	string		255		
ProcedureCategory	Procedure Category	string		255		
SystemModstamp	System Modstamp	datetime				

CATEGORIZEDCAREFEEAGREEMENTFEED

Feed tracking for CategorizedCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CATEGORIZEDCAREFEEAGREEMENTHISTORY

History for tracked fields of CategorizedCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CategorizedCareFeeAgreementId	Categorized Care Fee Agreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Categorized Care Fee Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CATEGORYDATA

Represents a logical grouping of Solution records.

For more information, see CategoryData in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CategoryNodeId`	Category Node ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Category Data ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RelatedSobjectId`	sObject ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CATEGORYNODE

Represents a tree of Solution categories.

For more information, see CategoryNode in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Category Node ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		40		
`ParentId`	Parent Category Node ID	reference		18		
`SortOrder`	Sort Order	int	8			
`SortStyle`	Subcategory Sort Style	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CATEGORYNODELOCALIZATION

When the Translation Workbench is enabled for your organization, the CategoryNodeLocalization object provides the translation of the label of a solution category.

For more information, see CategoryNodeLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CategoryNodeId`	Category Node ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Category Node Localization ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	string		1000		

CHANGEREQUEST

Represents a decision to implement a formal request for a change (RFC).

For more information, see ChangeRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessJustification	Business Justification	textarea		32000		
BusinessReason	Business Reason	picklist		40		
Category	Category	picklist		40		
ChangeRequestNumber	Change Request Number	string		255		
ChangeType	Type of Change	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created On	datetime				
Description	Description	textarea		32000		
EstimatedEndTime	End Time (Estimated)	datetime				
EstimatedStartTime	Start Time (Estimated)	datetime				
FinalReviewDateTime	Reviewed On	datetime				
FinalReviewNotes	Final Review Notes	textarea		32000		
Id	Change Request ID	id		18		
Impact	Impact	picklist		40		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified On	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		40		
RemediationPlan	Remediation Plan	textarea		32000		
ReviewerId	User ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RiskImpactAnalysis	Impact Analysis	textarea		32000		
RiskLevel	Risk Level	picklist		40		
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		
Subject	Subject	string		255		
SystemModstamp	System Modstamp	datetime				

CHANGEREQUESTFEED

Feed tracking for ChangeRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CHANGEREQUESTHISTORY

History for tracked fields of ChangeRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChangeRequestId`	Change Request ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Change Request History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CHANGEREQUESTRELATEDISSUE

This object acts as a junction between a Change Request and an Incident or a Problem that represents a service failure.

For more information, see ChangeRequestRelatedIssue in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChangeRequestId`	Change Request ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Change Request Related Issue ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Change Request Related Issue Number	string		255		
`RelatedEntityType`	Related Issue Type	picklist		255		
`RelatedIssueId`	Related Issue ID	reference		18		
`RelationshipType`	Relationship Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CHANGEREQUESTRELATEDISSUEFEED

Feed tracking for ChangeRequestRelatedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CHANGEREQUESTRELATEDISSUEHISTORY

History for tracked fields of ChangeRequestRelatedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ChangeRequestRelatedIssueId	Change Request Related Issue ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Change Request Related Issue History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CHANGEREQUESTSHARE

Sharing for ChangeRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CHANNELPROGRAM

Represents a channel program that vendors use to market and sell their products through channel partners.

For more information, see ChannelProgram in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Channel Program ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CHANNELPROGRAMFEED

Feed tracking for ChannelProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CHANNELPROGRAMHISTORY

History for tracked fields of ChannelProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ChannelProgramId	Channel Program ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Channel Program History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CHANNELPROGRAMLEVEL

Represents a level, based on member experience, in a channel program.

For more information, see ChannelProgramLevel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Channel Program Level ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProgramId`	Channel Program ID	reference		18		
`Rank`	Rank	int	9			
`SystemModstamp`	System Modstamp	datetime				

CHANNELPROGRAMLEVELFEED

Feed tracking for ChannelProgramLevel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CHANNELPROGRAMLEVELHISTORY

History for tracked fields of ChannelProgramLevel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChannelProgramLevelId`	Channel Program Level ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Channel Program Level History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CHANNELPROGRAMLEVELSHARE

Sharing for ChannelProgramLevel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CHANNELPROGRAMMEMBER

Represents a partner who is a member of a channel program.

For more information, see ChannelProgramMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Channel Program Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LevelId`	Channel Program Level ID	reference		18		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PartnerId`	Account ID	reference		18		
`ProgramId`	Channel Program ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CHANNELPROGRAMMEMBERFEED

Feed tracking for ChannelProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CHANNELPROGRAMMEMBERHISTORY

History for tracked fields of ChannelProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChannelProgramMemberId`	Channel Program Member ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Channel Program Member History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CHANNELPROGRAMMEMBERSHARE

Sharing for ChannelProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CHANNELPROGRAMSHARE

Sharing for ChannelProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CHATTERACTIVITY

ChatterActivity represents the number of posts and comments made by a user and the number of comments and likes on posts and comments received by the same user.

For more information, see ChatterActivity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommentCount`	Comment Count	int	9			
`CommentReceivedCount`	Comment Received Count	int	9			
`Id`	Chatter Activity ID	id		18		
`InfluenceRawRank`	Influence Raw Rank	int	9			
`LikeReceivedCount`	Like Received Count	int	9			
`NetworkId`	Network ID	reference		18		
`ParentId`	Parent ID	reference		18		
`PostCount`	Post Count	int	9			
`SystemModstamp`	System Modstamp	datetime				

CHATTEREXTENSION

Represents a Rich Publisher App that's integrated with the Chatter publisher.

For more information, see ChatterExtension in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CompositionComponentEnumOrId	Lightning Definition Bundle ID	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DeveloperName	Name	string		80		
ExtensionName	Name	string		32		
HeaderText	Header Text	string		255		
HoverText	Hover Text	string		255		
IconId	Asset File ID	reference		18		
Id	Extension ID	id		18		
IsDeleted	Deleted	boolean				
IsProtected	Protected Component	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
RenderComponentEnumOrId	Lightning Definition Bundle ID	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

CHATTEREXTENSIONCONFIG

Configuration for the Chatter extension for Experience Cloud sites.

For more information, see ChatterExtensionConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CanCreate`	Can Create	boolean				
`CanRead`	Can Read	boolean				
`ChatterExtensionId`	Chatter Extension ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Chatter Extension Configuration ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`Position`	Position	int	9			
`SystemModstamp`	System Modstamp	datetime				

CLAIM

Represents the types of claims, such as life, auto, or home.

For more information, see Claim in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActualAmount	Actual Amount	currency			18	2
ApprovedAmount	Approved Amount	currency			18	2
AssessmentDate	Assessment Date	datetime				
CaseId	Case ID	reference		18		
ClaimReason	Claim Reason	string		255		
ClaimReasonType	Claim Reason Type	picklist		40		
ClaimType	Claim Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EstimatedAmount	Estimated Amount	currency			18	2
FinalizedDate	Finalized Date	datetime				
FnolChannel	FNOL Channel	picklist		40		
Id	Claim ID	id		18		
IncidentId	Incident ID	reference		18		
IncidentSite	Incident Site	address				
IncidentSiteCity	Incident Site City	string		40		
IncidentSiteCountry	Incident Site Country	string		80		
IncidentSiteGeocodeAccuracy	Incident Site Geocode Accuracy	picklist		255		
IncidentSiteLatitude	Incident Site Latitude	double			18	15
IncidentSiteLongitude	Incident Site Longitude	double			18	15
IncidentSitePostalCode	Incident Site Postal Code	string		20		
IncidentSiteState	Incident Site State	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IncidentSiteStreet	Incident Site Street	textarea		255		
InitiationDate	Initiation Date	datetime				
InsuredAssetId	Insurance Policy Asset ID	reference		18		
IsAuthoritiesNotified	Authorities Notified	boolean				
IsClosed	Closed	boolean				
IsDeleted	Deleted	boolean				
IsDrivable	Drivable	boolean				
IsInhabitable	Inhabitable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LossDate	Loss Date	datetime				
LossType	Loss Type	picklist		40		
Name	Claim Number	string		255		
OwnerId	Owner ID	reference		18		
PolicyNumberId	Insurance Policy ID	reference		18		
RenewalChannel	Renewal Channel	picklist		40		
RepairShop	Repair Shop	string		100		
RepairShopLocation	Repair Shop Location	textarea		32000		
ReportDate	Report Date	datetime				
ReportNumber	Report Number	string		100		
ReportingAuthority	Reporting Authority	string		100		
Severity	Severity	picklist		40		
SourceId	Source ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
Summary	Summary	textarea		32000		
SystemModstamp	System Modstamp	datetime				

Claim

Field Name	Field Label	Type	Digits	Length	Precision	Scale
VisitDate	Visit Date	datetime				
VisitSite	Visit Site	textarea		32000		

CLAIMCOVERAGE

Represents the insurance policy coverage for a claim. This object stores the information about financial activities related to the claim, including payouts and reserves.

For more information, see ClaimCoverage in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClaimId	Claim ID	reference		18		
ClaimItemId	Claim Item ID	reference		18		
ClaimParticipantId	Claim Participant ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
ExpenseReserveAmount	Expense Reserve Amount	currency			18	2
Id	Claim Coverage ID	id		18		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
InternalReserveMode	Internal Reserve Mode	picklist		255		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LossReserveAmount	Loss Reserve Amount	currency			18	2
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CLAIMCOVERAGEFEED

Feed tracking for ClaimCoverage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMCOVERAGEHISTORY

History for tracked fields of ClaimCoverage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClaimCoverageId	Claim Coverage ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Claim Coverage History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLAIMCOVERAGESHARE

Sharing for ClaimCoverage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CLAIMFEED

Feed tracking for Claim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMHISTORY

History for tracked fields of Claim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClaimId`	Claim ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Claim History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLAIMITEM

Represents claim items (such as collision damage, roadside assistance, rental care) and their coverage details.

For more information, see ClaimItem in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Category	Category	picklist		40		
ClaimId	Claim ID	reference		18		
ClaimParticipantId	Claim Participant ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentAddress	Current Address	address				
CurrentCity	Current City	string		40		
CurrentCountry	Current Country	string		80		
CurrentGeocodeAccuracy	Current Geocode Accuracy	picklist		255		
CurrentLatitude	Current Latitude	double			18	15
CurrentLongitude	Current Longitude	double			18	15
CurrentPostalCode	Current Postal Code	string		20		
CurrentState	Current State	string		80		
CurrentStreet	Current Street	textarea		255		
Description	Description	textarea		32000		
Id	Claim Item ID	id		18		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

CLAIMITEMFEED

Feed tracking for ClaimItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMITEMHISTORY

History for tracked fields of ClaimItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClaimItemId	Claim Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Claim Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLAIMPARTICIPANT

A junction object that associates the Claim object with the Account object. This object represents the participants of a claim. Claim participants include insured, claimants, and witnesses.

For more information, see ClaimParticipant in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClaimId	Claim ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Claim Participant ID	id		18		
InsurancePolicyParticipantId	Insurance Policy Participant ID	reference		18		
IsDeleted	Deleted	boolean				
IsInjured	Injured	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParticipantAccountId	Account ID	reference		18		
ParticipantContactId	Contact ID	reference		18		
Roles	Roles	multipicklist		4099	0	
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

CLAIMPARTICIPANTFEED

Feed tracking for ClaimParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMPARTICIPANTHISTORY

History for tracked fields of ClaimParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClaimParticipantId`	Claim Participant ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Claim Participant History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLAIMPAYMENTSUMMARY

Represents the amount of money that's paid to a claimant or claim participant to cover a claim.

For more information, see ClaimPaymentSummary in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CancellationDate	Cancellation Date	datetime				
ClaimId	Claim ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Claim Payment Summary ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PaymentAmount	Payment Amount	currency			18	2
PaymentDate	Payment Date	date				
PaymentIdentifier	Payment Identifier	string		255		
PaymentStatus	Payment Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CLAIMPAYMENTSUMMARYFEED

Feed tracking for ClaimPaymentSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMPAYMENTSUMMARYHISTORY

History for tracked fields of ClaimPaymentSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClaimPaymentSummaryId`	Claim Payment Summary ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Claim Payment Summary History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLAIMSHARE

Sharing for Claim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CLAIMTEAMMEMBER

Represents a user who is a part of the claim team.

For more information, see ClaimTeamMember in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClaimId`	Claim ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Claim Team Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`Role`	Role	multipicklist		4099	0	
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

CLAIMTEAMMEMBERFEED

Feed tracking for ClaimTeamMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLAIMTEAMMEMBERHISTORY

History for tracked fields of ClaimTeamMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClaimTeamMemberId`	Claim Team Member ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Claim Team Member History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLIENTBROWSER

Represents a cookie added to the browser upon login, and also includes information about the browser application where the cookie was inserted.

For more information, see ClientBrowser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`FullUserAgent`	Full User Agent	string		1024		
`Id`	Client Browser ID	id		18		
`LastUpdate`	Last Update	datetime				
`ProxyInfo`	Proxy Info	string		1024		
`UsersId`	User ID	reference		18		

CLINICALALERT

Represents a warning or notification of significance related to different healthcare entities. The subject of the alert may be a patient, a location, a provider, a procedure, or even a medication.

For more information, see ClinicalAlert in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Categories`	Categories	multipicklist		4099	0	
`CodeDescription`	Code Description	string		255		
`CodeId`	Code Set Bundle ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	datetime				
`Id`	Clinical Alert ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RaisedById`	Raised By ID	reference		18		
`RelatedEncounterId`	Clinical Encounter ID	reference		18		
`SourceSystem`	Source System	string		64		
`SourceSystemIdentifier`	Source System ID	string		255		
`SourceSystemModified`	Source System Modified	datetime				
`StartDate`	Start Date	datetime				
`Status`	Status	picklist		40		
`SubjectId`	Subject ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

CLINICALALERTFEED

Feed tracking for ClinicalAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALALERTHISTORY

History for tracked fields of ClinicalAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalAlertId`	Clinical Alert ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Clinical Alert History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLINICALALERTSHARE

Sharing for ClinicalAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CLINICALDETECTEDISSUE

Represents information about a detected issue resulting from a clinical activity.

For more information, see ClinicalDetectedIssue in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CategoryCodeId	Category Code ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Clinical Detected Issue ID	id		18		
IdentificationEndDateTime	Identification End Date	datetime				
IdentificationStartDateTime	Identification Start Date	datetime				
IdentifiedById	Identified By ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
ReferenceUri	Reference Uri	textarea		32000		
SeverityLevel	Severity Level	picklist		40		
SourceSysModifiedDateTime	Source System Modified Date	datetime				
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

CLINICALDETECTEDISSUEDETAIL

Represents additional information about a clinical detected issue.

For more information, see ClinicalDetectedIssueDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalDetectedIssueId	Clinical Detected Issue ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DetailCodeId	Detail Code ID	reference		18		
DetailRecordId	Detail Record ID	reference		18		
DetailType	Detail Type	picklist		40		
Id	Clinical Detected Issue Detail ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MitigationAuthorId	Mitigation Author ID	reference		18		
MitigationAuthoringDateTime	Mitigation Authoring Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

CLINICALDETECTEDISSUEDETAILFEED

Feed tracking for ClinicalDetectedIssueDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALDETECTEDISSUEDETAILHISTORY

History for tracked fields of ClinicalDetectedIssueDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalDetectedIssueDetailId`	Clinical Detected Issue Detail ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Clinical Detected Issue Detail History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLINICALDETECTEDISSUEFEED

Feed tracking for ClinicalDetectedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALDETECTEDISSUEHISTORY

History for tracked fields of ClinicalDetectedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalDetectedIssueId`	Clinical Detected Issue ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Clinical Detected Issue History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLINICALDETECTEDISSUESHARE

Sharing for ClinicalDetectedIssue.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CLINICALENCOUNTER

For more information, see ClinicalEncounter in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdmissionSource	Admission Source	picklist		40		
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DestinationFacilityId	Healthcare Facility ID	reference		18		
DestinationOrganizationId	Account ID	reference		18		
DietPreference	Diet Preference	multipicklist		4099	0	
DischargeDispositionId	Code Set Bundle ID	reference		18		
Duration	Duration	double			6	2
DurationUnitId	Unit of Measure ID	reference		18		
EndDate	End Date	datetime				
FacilityId	Healthcare Facility ID	reference		18		
Id	Clinical Encounter ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
PreAdmissionIdentifierId	Clinical Encounter Identifier ID	reference		18		
PreviousFacilityId	Healthcare Facility ID	reference		18		
PreviousOrganizationId	Account ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PriorityId	Code Set Bundle ID	reference		18		
ReadmissionCodeId	Code Set Bundle ID	reference		18		
RelatedClinicalEncounterId	Clinical Encounter ID	reference		18		
ServiceType	Service Type	picklist		40		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SpecialCourtesy	Special Courtesy	picklist		40		
StartDate	Start Date	datetime				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TypeId	Code Set Bundle ID	reference		18		

CLINICALENCOUNTERDIAGNOSIS

Represents a diagnosis related to a clinical encounter. This object is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterDiagnosis in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DiagnosisId`	Diagnosis ID	reference		18		
`DiagnosisRank`	Diagnosis Rank	double			2	0
`Id`	Clinical Encounter Diagnosis ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`UsageTypeId`	Code Set Bundle ID	reference		18		

CLINICALENCOUNTERDIAGNOSISFEED

Feed tracking for ClinicalEncounterDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERDIAGNOSISHISTORY

History for tracked fields of ClinicalEncounterDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterDiagnosisId	Clinical Encounter Diagnosis ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Diagnosis History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALENCOUNTERFACILITY

Represents information about the different facilities involved in an encounter, the time spent at those facilies, and other relevant details. This is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterFacility in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Duration`	Duration	double			6	2
`DurationUnitId`	Unit of Measure ID	reference		18		
`EndDate`	End Date	datetime				
`FacilityId`	Healthcare Facility ID	reference		18		
`FacilityTypeId`	Code Set Bundle ID	reference		18		
`Id`	Clinical Encounter Facility ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`StartDate`	Start Date	datetime				
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CLINICALENCOUNTERFACILITYFEED

Feed tracking for ClinicalEncounterFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERFACILITYHISTORY

History for tracked fields of ClinicalEncounterFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterFacilityId	Clinical Encounter Facility ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Facility History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALENCOUNTERFEED

Feed tracking for ClinicalEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERHISTORY

History for tracked fields of ClinicalEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Clinical Encounter History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CLINICALENCOUNTERIDENTIFIER

Represents the identifier information for a clinical encounter. This object is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterIdentifier in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveDate`	Effective Date	datetime				
`EndDate`	End Date	datetime				
`Id`	Clinical Encounter Identifier ID	id		18		
`IdTypeId`	ID Type ID	reference		18		
`IdUsageType`	ID Usage Type ID	picklist		40		
`IdValue`	ID Value	string		255		
`IsDeleted`	Deleted	boolean				
`IssuingAuthorityId`	Account ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SourceSystem`	Source System	string		255		
`SystemModstamp`	System Modstamp	datetime				

CLINICALENCOUNTERIDENTIFIERFEED

Feed tracking for ClinicalEncounterIdentifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERIDENTIFIERHISTORY

History for tracked fields of ClinicalEncounterIdentifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterIdentifierId	Clinical Encounter Identifier ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Identifier History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALENCOUNTERPROVIDER

Represents the providers involved in an encounter. This object is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterProvider in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Duration	Duration	double			6	2
DurationUnitId	Unit of Measure ID	reference		18		
EndDate	End Date	datetime				
Id	Clinical Encounter Provider ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PractitionerId	Healthcare Provider ID	reference		18		
PractitionerTypeId	Code Set Bundle ID	reference		18		
StartDate	Start Date	datetime				
SystemModstamp	System Modstamp	datetime				

CLINICALENCOUNTERPROVIDERFEED

Feed tracking for ClinicalEncounterProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERPROVIDERHISTORY

History for tracked fields of ClinicalEncounterProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterProviderId	Clinical Encounter Provider ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Provider History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALENCOUNTERREASON

Represents the reasons for why the encounter was required. This object is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterReason in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Clinical Encounter Reason ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ReasonCodeId`	Code Set Bundle ID	reference		18		
`ReasonReferenceId`	Reason Reference ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CLINICALENCOUNTERREASONFEED

Feed tracking for ClinicalEncounterReason.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERREASONHISTORY

History for tracked fields of ClinicalEncounterReason.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterReasonId	Clinical Encounter Reason ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Reason History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALENCOUNTERSHARE

Sharing for ClinicalEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CLINICALENCOUNTERSVCREQUEST

Represents the service requests related to a clinical encounter. This object is a child object of ClinicalEncounter.

For more information, see ClinicalEncounterSvcRequest in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalEncounterId`	Clinical Encounter ID	reference		18		
`ClinicalServiceRequestId`	Clinical Service Request ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Clinical Encounter Svc Request ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

CLINICALENCOUNTERSVCREQUESTFEED

Feed tracking for ClinicalEncounterSvcRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALENCOUNTERSVCREQUESTHISTORY

History for tracked fields of ClinicalEncounterSvcRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalEncounterSvcRequestId	Clinical Encounter Svc Request ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Encounter Svc Request History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALSERVICEREQUEST

Represents requests for a procedure or diagnostic service that needs to be planned, proposed, or performed as part of the patient's healthcare.

For more information, see ClinicalServiceRequest in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BodySiteId	Code Set Bundle ID	reference		18		
CategoryId	Code Set Bundle ID	reference		18		
ConditionId	Health Condition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateSigned	Date Signed	datetime				
DiagnosticReportId	Clinical Encounter Diagnosis ID	reference		18		
EncounterId	Clinical Encounter ID	reference		18		
EndDate	End Date	datetime				
FacilityCodeId	Code Set Bundle ID	reference		18		
FacilityId	Healthcare Facility ID	reference		18		
HasPrerequisites	Has Prerequisites	boolean				
Id	Clinical Service Request ID	id		18		
IsDeleted	Deleted	boolean				
IsIgnored	Ignore Request	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ObservationId	Care Observation ID	reference		18		
OriginalRequestId	Clinical Service Request ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
PatientInstruction	Patient Instructions	textarea		32000		
PerformerId	Performer ID	reference		18		
PerformerTypeId	Code Set Bundle ID	reference		18		
PrerequisiteCodeId	Code Set Bundle ID	reference		18		
Priority	Priority ID	picklist		40		
QuantityDenominator	Quantity Denominator	double			6	2
QuantityNumerator	Quantity Numerator	double			6	2
QuantityNumeratorUnitId	Unit of Measure ID	reference		18		
QuantityType	Quantity Type	picklist		255		
ReasonCodeId	Code Set Bundle ID	reference		18		
RequestCodeId	Code Set Bundle ID	reference		18		
RequesterId	Requester ID	reference		18		
ServiceRequestGroupIdentifierId	Identifier ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
StartDate	Start Date	datetime				
Status	Status ID	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type ID	picklist		40		

CLINICALSERVICEREQUESTDETAIL

Associates records from different objects to a clinical service request record to add more information to it. This is a multi-object junction object.

For more information, see ClinicalServiceRequestDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ClinicalServiceRequestId`	Clinical Service Request ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DetailCodeId`	Detail Code ID	reference		18		
`DetailRecordId`	Detail Record ID	reference		18		
`DetailType`	Detail Type	picklist		40		
`Id`	Clinical Service Request Detail ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

CLINICALSERVICEREQUESTDETAILFEED

Feed tracking for ClinicalServiceRequestDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALSERVICEREQUESTDETAILHISTORY

History for tracked fields of ClinicalServiceRequestDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalServiceRequestDetailId	Clinical Service Request Detail ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Service Request Detail History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALSERVICEREQUESTFEED

Feed tracking for ClinicalServiceRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CLINICALSERVICEREQUESTHISTORY

History for tracked fields of ClinicalServiceRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClinicalServiceRequestId	Clinical Service Request ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Clinical Service Request History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CLINICALSERVICEREQUESTSHARE

Sharing for ClinicalServiceRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CODESET

Represents various industry defined codes in the context of their systems and versions of those systems. These codes are used in all sorts of digital records.

For more information, see CodeSet in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Code	Code	string		255		
CodeDescription	Code Description	textarea		32000		
CodeSetKey	Code Set Key	string		255		
CodeSetType	Code Set Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Code Set ID	id		18		
IsActive	Active	boolean				
IsCustomCode	Custom Code	boolean				
IsDeleted	Deleted	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SourceSystem	Source System	string		255		
StartDate	Effective Date	date				
SystemModstamp	System Modstamp	datetime				
SystemVersion	System Version	string		255		

CODESETBUNDLE

Represents a group of code sets across multiple systems and versions. All of these code sets refer to the same conceptual entity.

For more information, see CodeSetBundle in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CodeSet10Id	Code Set ID	reference		18		
CodeSet11Id	Code Set ID	reference		18		
CodeSet12Id	Code Set ID	reference		18		
CodeSet13Id	Code Set ID	reference		18		
CodeSet14Id	Code Set ID	reference		18		
CodeSet15Id	Code Set ID	reference		18		
CodeSet1Id	Code Set ID	reference		18		
CodeSet2Id	Code Set ID	reference		18		
CodeSet3Id	Code Set ID	reference		18		
CodeSet4Id	Code Set ID	reference		18		
CodeSet5Id	Code Set ID	reference		18		
CodeSet6Id	Code Set ID	reference		18		
CodeSet7Id	Code Set ID	reference		18		
CodeSet8Id	Code Set ID	reference		18		
CodeSet9Id	Code Set ID	reference		18		
CodeSetBundleKey	Code Set Bundle Key	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Code Set Bundle ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	multipicklist		4099	0	

CODESETBUNDLEHISTORY

History for tracked fields of CodeSetBundle.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CodeSetBundleId`	Code Set Bundle ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Code Set Bundle History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CODESETBUNDLESHARE

Sharing for CodeSetBundle.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CODESETFEED

Feed tracking for CodeSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CODESETHISTORY

History for tracked fields of CodeSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CodeSetId`	Code Set ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Code Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CODESETSHARE

Sharing for CodeSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COLLABORATIONGROUP

Represents a Chatter group.

For more information, see CollaborationGroup in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnouncementId	Announcement ID	reference		18		
BannerPhotoUrl	Banner Photo Url	url		1024		
CanHaveGuests	Allow customers	boolean				
CollaborationType	Access Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
FullPhotoUrl	Url for full-sized Photo	url		1024		
GroupEmail	Group Email	email		1000		
HasPrivateFieldsAccess	Has Private Fields Access	boolean				
Id	Group Id	id		18		
InformationBody	Information	textarea		4000		
InformationTitle	Information Title	string		30		
IsArchived	Archive	boolean				
IsAutoArchiveDisabled	Disable automatic archiving	boolean				
IsBroadcast	Broadcast Only	boolean				
LastFeedModifiedDate	Last Feed Modified Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MediumPhotoUrl	Url for medium profile photo	url		1024		
MemberCount	Member Count	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Name`	Name	string		40		
`NetworkId`	Network ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`SmallPhotoUrl`	Photo	url		1024		
`SystemModstamp`	System Modstamp	datetime				

COLLABORATIONGROUPFEED

Feed tracking for CollaborationGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COLLABORATIONGROUPMEMBER

Represents a member of a Chatter group.

For more information, see CollaborationGroupMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CollaborationGroupId`	CollaborationGroup ID	reference		18		
`CollaborationRole`	Group Member Role	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Group Member Id	id		18		
`LastFeedAccessDate`	Last Feed Access Date	datetime				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MemberId`	Member ID	reference		18		
`NetworkId`	Network ID	reference		18		
`NotificationFrequency`	Notification Frequency	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

COLLABORATIONGROUPMEMBERREQUEST

Represents a request to join a private Chatter group.

For more information, see CollaborationGroupMemberRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CollaborationGroupId`	CollaborationGroup ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Group Member Request Id	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RequesterId`	User ID	reference		18		
`ResponseMessage`	Response Message	string		255		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

COLLABORATIONGROUPRECORD

Represents the records associated with Chatter groups.

For more information, see CollaborationGroupRecord in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CollaborationGroupId`	Chatter Group ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Group Record ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`RecordId`	Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COLLABORATIONINVITATION

Represents an invitation to join Chatter, either directly or through a group.

For more information, see CollaborationInvitation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Chatter Invitation Id	id		18		
`InvitedUserEmail`	Invited Email	string		240		
`InvitedUserEmailNormalized`	Invited Email (Normalized)	email		80		
`InviterId`	Inviter User ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Modified Date	datetime				
`OptionalMessage`	Optional Message	string		255		
`ParentId`	Parent ID	reference		18		
`SharedEntityId`	Shared Entity ID	reference		18		
`Status`	Invitation Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

COLLABORATIONROOM

Represents a collaboration room, which links Salesforce to a Slack channel used by applications with specific use cases, such as swarming or reporting.

For more information, see CollaborationRoom in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Collaboration Room ID	id		18		
`IsArchived`	Is archived	boolean				
`IsAutoJoin`	Is auto-join	boolean				
`IsDeleted`	Deleted	boolean				
`IsExternal`	Is external	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Room Name	string		255		
`PlatformKey`	Room ID	string		254		
`SystemModstamp`	System Modstamp	datetime				
`TeamKey`	Team ID	string		254		

COLORDEFINITION

Represents the color-related metadata for a custom tab.

For more information, see ColorDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Color`	Color	string		255		
`Context`	Context	string		255		
`DurableId`	Color Definition Durable ID	string		255		
`Id`	Color Definition ID	id		18		
`TabDefinitionId`	Tab Definition ID	string		512		
`Theme`	Theme	string		255		

COMBINEDATTACHMENT

This read-only object contains all notes, attachments, Google Docs, documents uploaded to libraries in Salesforce CRM Content, and files added to Chatter that are associated with a record.

For more information, see CombinedAttachment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentSize`	Content Size	int	9			
`ContentUrl`	Content URL	url		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created	datetime				
`ExternalDataSourceName`	External Data Source	string		80		
`ExternalDataSourceType`	Class ID	picklist		80		
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		30		
`Id`	Combined Attachment Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Content Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RecordType`	Type	string		30		
`SharingOption`	Prevent others from sharing and unsharing	picklist		40		
`Title`	Title	string		255		

COMMSUBSCRIPTION

Represents a customer's subscription preferences for a specific communication.

For more information, see CommSubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataUsePurposeId`	Data Use Purpose ID	reference		18		
`Id`	Communication Subscription ID	id		18		
`IsDefault`	Is Default	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COMMSUBSCRIPTIONCHANNELTYPE

Represents the engagement channel through which you can reach a customer for a communication subscription.

For more information, see CommSubscriptionChannelType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommunicationSubscriptionId	Communication Subscription ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Communication Subscription ID	reference		18		
EngagementChannelTypeId	Engagement Channel Type ID	reference		18		
Id	Communication Subscription Channel Type ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

COMMSUBSCRIPTIONCHANNELTYPEFEED

Feed tracking for CommSubscriptionChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COMMSUBSCRIPTIONCHANNELTYPEHISTORY

History for tracked fields of CommSubscriptionChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommSubscriptionChannelTypeId	Communication Subscription Channel Type ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Communication Subscription Channel Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COMMSUBSCRIPTIONCHANNELTYPESHARE

Sharing for CommSubscriptionChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COMMSUBSCRIPTIONCONSENT

Represents a customer's consent to a communication subscription.

For more information, see CommSubscriptionConsent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessBrandId	Business Brand ID	reference		18		
CommSubscriptionChannelTypeId	Communication Subscription Channel Type ID	reference		18		
ConsentCapturedDateTime	Consent Captured Date Time	datetime				
ConsentCapturedSource	Consent Captured Source	string		255		
ConsentGiverId	Consent Giver ID	reference		18		
ContactPointId	Contact Point ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Data Use Purpose ID	reference		18		
EffectiveFromDate	Effective From	date				
EffectiveToDate	Effective To	date				
EngagementChannelTypeId	Engagement Channel Type ID	reference		18		
Id	Communication Subscription Consent ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartyId	Individual ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PartyRoleId	Party Role ID	reference		18		
PrivacyConsentStatus	Privacy Consent Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

COMMSUBSCRIPTIONCONSENTFEED

Feed tracking for CommSubscriptionConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COMMSUBSCRIPTIONCONSENTHISTORY

History for tracked fields of CommSubscriptionConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommSubscriptionConsentId	Communication Subscription Consent ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Communication Subscription Consent History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COMMSUBSCRIPTIONCONSENTSHARE

Sharing for CommSubscriptionConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COMMSUBSCRIPTIONFEED

Feed tracking for CommSubscription.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COMMSUBSCRIPTIONHISTORY

History for tracked fields of CommSubscription.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommSubscriptionId`	Communication Subscription ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Communication Subscription History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

COMMSUBSCRIPTIONSHARE

Sharing for CommSubscription.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COMMSUBSCRIPTIONTIMING

Represents a customer's timing preferences for receiving a communication subscription.

For more information, see CommSubscriptionTiming in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommSubscriptionConsentId	Communication Subscription Consent ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Communication Subscription Timing ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Offset	Offset	double			18	0
PreferredTimeEnd	Preferred Time End	time				
PreferredTimeStart	Preferred Time Start	time				
PreferredTimeZone	Preferred Time Zone	picklist		255		
SystemModstamp	System Modstamp	datetime				
Unit	Unit	picklist		255		

COMMSUBSCRIPTIONTIMINGFEED

Feed tracking for CommSubscriptionTiming.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COMMSUBSCRIPTIONTIMINGHISTORY

History for tracked fields of CommSubscriptionTiming.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommSubscriptionTimingId	Communication Subscription Timing ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Communication Subscription Timing History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COMMERCEDIAGNOSTICEVENT

Tracks checkout, pricing, search, and other activity within your Commerce implementation to monitor events and diagnose issues.

For more information, see CommerceDiagnosticEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
B2bEdition	B2B Edition	string		50		
B2bVersion	B2B Version	string		50		
BrowserDeviceType	Browser Device Type	int	9			
ContextId	Context ID	string		32		
ContextId2	Second Context ID	string		32		
ContextMap	Context Map	string		1024		
CorrelationId	Correlation ID	string		32		
Count	Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveAccountId	Effective Account ID	string		32		
ErrorCode	Error Code	string		50		
ErrorMessage	Error Message	string		512		
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventUuid	Event UUID	string		36		
IsRetry	Is Retry	boolean				
Operation	Operation	string		50		
OperationStage	Operation Stage	string		50		
OperationState	Operation State	string		50		
OperationStatus	Operation Status	string		50		
OperationTime	Operation Elapsed Time	int	9			
OsVersion	OS Version	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
ServiceName	Service Name	string		50		
UserId	User ID	reference		18		
Username	Username	string		80		
WebStoreId	Store ID	string		32		
WebStoreType	Store Type	string		50		

COMMERCEENTITLEMENTBUYERGROUP

Represents the entitlement policy for a buyer group.

For more information, see CommerceEntitlementBuyerGroup in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BuyerGroupId`	Buyer Group ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Entitlement Buyer Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Name	string		255		
`PolicyId`	Entitlement Policy ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COMMERCEENTITLEMENTPOLICY

Represents an entitlement policy, which determines what products and prices a user can see.

For more information, see CommerceEntitlementPolicy in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CanViewPrice	View prices in catalog	boolean				
CanViewProduct	View products	boolean				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Entitlement Policy ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

COMMERCEENTITLEMENTPOLICYFEED

Feed tracking for CommerceEntitlementPolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COMMERCEENTITLEMENTPOLICYHISTORY

History for tracked fields of CommerceEntitlementPolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommerceEntitlementPolicyId	Entitlement Policy ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Entitlement Policy History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COMMERCEENTITLEMENTPOLICYSHARE

Represents the entitlement rule for sharing products and prices with users other than the owner.

For more information, see CommerceEntitlementPolicyShare in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

COMMERCEENTITLEMENTPRODUCT

Represents the entitlement policy for a product.

For more information, see CommerceEntitlementProduct in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Entitlement Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Name	string		255		
`PolicyId`	Entitlement Policy ID	reference		18		
`ProductId`	Product ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COMMUNITY

Represents a zone that contains Idea or Question objects.

For more information, see Community in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Zone ID	id		18		
`IsActive`	Active	boolean				
`IsPublished`	Show In Portal	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`NetworkId`	Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COMPLAINTCASE

For more information, see ComplaintCase in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Complaint Case ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PublicComplaintId`	Public Complaint ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

COMPLAINTCASEFEED

Feed tracking for ComplaintCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

COMPLAINTCASEHISTORY

History for tracked fields of ComplaintCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ComplaintCaseId`	Complaint Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Complaint Case History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

COMPLAINTCASESHARE

Sharing for ComplaintCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONCURLONGRUNAPEXERREVENT

Notifies subscribers of errors that occur when a Salesforce org exceeds the concurrent long-running Apex limit. If a high volume of these events occur concurrently in an org, we may rate limit the events based on resource availability. Event log files, which are the predecessor of Real-time Event Monitoring, provide a list of Apex-related events. For more information, see Apex-related EventLogFile events.

For more information, see ConcurLongRunApexErrEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`CurrentValue`	Current Value	int	9			
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`EventUuid`	Event UUID	string		36		
`LimitValue`	Limit Value	int	9			
`LoginKey`	Login Key	string		24		
`Quiddity`	Quiddity	string		50		
`ReplayId`	Replay ID	string		1000		
`RequestId`	Jetty Request ID	string		18		
`RequestUri`	Request URI	string		5000		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

CONNECTEDAPPLICATION

Represents a connected app and its details; all fields are read-only.

For more information, see ConnectedApplication in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Connected App ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MobileSessionTimeout	Lock App After	picklist		40		
MobileStartUrl	Mobile Start URL	url		2400		
Name	Connected App Name	string		80		
OptionsAllowAdminApprovedUsersOnly	AllowAdminApprovedUsersOnly	boolean				
OptionsAllowExpiredUvidJWT	AllowExpiredUvidJWT	boolean				
OptionsCodeCredentialGuestEnabled	CodeCredentialGuestEnabled	boolean				
OptionsFullContentPushNotifications	FullContentPushNotifications	boolean				
OptionsHasSessionLevelPolicy	HasSessionLevelPolicy	boolean				
OptionsIsInternal	isInternal	boolean				
OptionsRefreshTokenValidityMetric	RefreshTokenValidityMetric	boolean				
PinLength	PIN Length	picklist		40		
RefreshTokenValidityPeriod	Refresh Token Policy:	int	9			
StartUrl	Start URL	url		2400		
SystemModstamp	System Modstamp	datetime				
UvidTimeout	Uvid Timeout	picklist		40		

CONTACT

Represents a contact, which is a person associated with an account.

For more information, see Contact in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AssistantName	Assistant's Name	string		40		
AssistantPhone	Asst. Phone	phone		40		
Birthdate	Birthdate	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Department	Department	string		80		
Description	Contact Description	textarea		32000		
Email	Email	email		80		
EmailBouncedDate	Email Bounced Date	datetime				
EmailBouncedReason	Email Bounced Reason	string		255		
Fax	Business Fax	phone		40		
FirstName	First Name	string		40		
HomePhone	Home Phone	phone		40		
Id	Contact ID	id		18		
IndividualId	Individual ID	reference		18		
IsDeleted	Deleted	boolean				
IsEmailBounced	Is Email Bounced	boolean				
Jigsaw	Data.com Key	string		20		
JigsawContactId	Jigsaw Contact ID	string		20		
LastActivityDate	Last Activity	date				
LastCURequestDate	Last Stay-in-Touch Request Date	datetime				
LastCUUpdateDate	Last Stay-in-Touch Save Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		80		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadSource	Lead Source	picklist		255		
MailingAddress	Mailing Address	address				
MailingCity	Mailing City	string		40		
MailingCountry	Mailing Country	string		80		
MailingGeocodeAccuracy	Mailing Geocode Accuracy	picklist		40		
MailingLatitude	Mailing Latitude	double			18	15
MailingLongitude	Mailing Longitude	double			18	15
MailingPostalCode	Mailing Zip/Postal Code	string		20		
MailingState	Mailing State/Province	string		80		
MailingStreet	Mailing Street	textarea		255		
MasterRecordId	Master Record ID	reference		18		
MobilePhone	Mobile Phone	phone		40		
Name	Full Name	string		121		
OtherAddress	Other Address	address				
OtherCity	Other City	string		40		
OtherCountry	Other Country	string		80		
OtherGeocodeAccuracy	Other Geocode Accuracy	picklist		40		
OtherLatitude	Other Latitude	double			18	15
OtherLongitude	Other Longitude	double			18	15
OtherPhone	Other Phone	phone		40		
OtherPostalCode	Other Zip/Postal Code	string		20		
OtherState	Other State/Province	string		80		
OtherStreet	Other Street	textarea		255		
OwnerId	Owner ID	reference		18		
Phone	Business Phone	phone		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PhotoUrl	Photo URL	url		255		
ReportsToId	Reports To ID	reference		18		
Salutation	Salutation	picklist		40		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		128		

CONTACTCLEANINFO

Stores the metadata Data.com Clean uses to determine a contact record's clean status. Helps you automate the cleaning or related processing of contact records. ContactCleanInfo includes a number of bit vector fields.

For more information, see ContactCleanInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
City	City	string		40		
CleanedByJob	Cleaned by Job	boolean				
CleanedByUser	Cleaned by User	boolean				
ContactId	Contact ID	reference		18		
ContactStatusDataDotCom	Contact Status per Data.com	picklist		255		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataDotComId	Data.com ID	string		20		
Email	Email	email		80		
FirstName	First Name	string		255		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Contact Clean Info ID	id		18		
IsDeleted	Deleted	boolean				
IsDifferentCity	City is Different	boolean				
IsDifferentCountry	Country is Different	boolean				
IsDifferentCountryCode	Country Code is Different	boolean				
IsDifferentEmail	Email is Different	boolean				
IsDifferentFirstName	First Name is Different	boolean				
IsDifferentLastName	Last Name is Different	boolean				
IsDifferentPhone	Phone is Different	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDifferentPostalCode	ZIP is Different	boolean				
IsDifferentState	State is Different	boolean				
IsDifferentStateCode	State Code is Different	boolean				
IsDifferentStreet	Street is Different	boolean				
IsDifferentTitle	Title is Different	boolean				
IsFlaggedWrongAddress	Address is Flagged Wrong	boolean				
IsFlaggedWrongEmail	Email is Flagged Wrong	boolean				
IsFlaggedWrongName	Name is Flagged Wrong	boolean				
IsFlaggedWrongPhone	Phone is Flagged Wrong	boolean				
IsFlaggedWrongTitle	Title is Flagged Wrong	boolean				
IsInactive	Contact Status in Salesforce	boolean				
IsReviewedAddress	Address is Reviewed	boolean				
IsReviewedEmail	Email is Reviewed	boolean				
IsReviewedName	Name is Reviewed	boolean				
IsReviewedPhone	Phone is Reviewed	boolean				
IsReviewedTitle	Title is Reviewed	boolean				
LastMatchedDate	Last Matched Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		255		
LastStatusChangedById	User ID	reference		18		
LastStatusChangedDate	Last Status Changed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
Name	Contact Clean Info Name	string		255		
Phone	Phone	phone		40		
PostalCode	Zip	string		20		
State	State	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Title`	Title	string		128		

CONTACTENCOUNTER

Represents a period of time during which two or more people were in close proximity to each other.

For more information, see ContactEncounter in the *Emergency Response Management for Public Health Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualParticipantCount	Actual Participant Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		65535		
EncounterDuration	Encounter Duration (in minutes)	int	9			
EstimatedParticipantCount	Estimated Participant Count	int	9			
Id	Contact Encounter ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
StartTime	Start Time	datetime				
SystemModstamp	System Modstamp	datetime				

CONTACTENCOUNTERFEED

Feed tracking for ContactEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTACTENCOUNTERHISTORY

History for tracked fields of ContactEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactEncounterId`	Contact Encounter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contact Encounter History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTACTENCOUNTERPARTICIPANT

Represents a person who was present during a contact encounter.

For more information, see ContactEncounterParticipant in the *Emergency Response Management for Public Health Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Age	Age	int	3			
ContactEncounterId	Contact Encounter ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EncounterDuration	Encounter Duration (in minutes)	int	9			
Id	Contact Encounter Participant ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadId	Lead ID	reference		18		
Name	Name	string		255		
StartTime	Start Time	datetime				
SystemModstamp	System Modstamp	datetime				

CONTACTENCOUNTERPARTICIPANTFEED

Feed tracking for ContactEncounterParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTACTENCOUNTERPARTICIPANTHISTORY

History for tracked fields of ContactEncounterParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactEncounterParticipantId	Contact Encounter Participant ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Contact Encounter Participant History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CONTACTENCOUNTERSHARE

Sharing for ContactEncounter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTFEED

Feed tracking for Contact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTACTHISTORY

History for tracked fields of Contact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contact History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTACTPOINTADDRESS

Represents a contact's billing or shipping address, which is associated with an individual or person account.

For more information, see ContactPointAddress in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActiveFromDate`	Active from Date	date				
`ActiveToDate`	Active to Date	date				
`Address`	Address	address				
`AddressType`	Address Type	picklist		40		
`BestTimeToContactEndTime`	Best time to contact end time	time				
`BestTimeToContactStartTime`	Best time to contact start time	time				
`BestTimeToContactTimezone`	Best time to contact time zone	picklist		255		
`City`	City	string		40		
`ContactPointPhoneId`	Contact Point Phone ID	reference		18		
`Country`	Country	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`GeocodeAccuracy`	Shipping Geocode Accuracy	picklist		255		
`Id`	Contact Point Address ID	id		18		
`IsDefault`	Is Default Address	boolean				
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Is Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Latitude`	Latitude	double			18	15
`Longitude`	Longitude	double			18	15

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Parent ID	reference		18		
PostalCode	Zip/Postal Code	string		20		
PreferenceRank	Preference Rank	int	9			
State	State/Province	string		80		
Street	Address	textarea		255		
SystemModstamp	System Modstamp	datetime				
UsageType	Usage Type	picklist		40		

CONTACTPOINTADDRESSHISTORY

History for tracked fields of ContactPointAddress.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactPointAddressId`	Contact Point Address ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contact Point Address History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTACTPOINTADDRESSSHARE

Sharing for ContactPointAddress.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTPOINTCONSENT

Represents a customer's consent to be contacted via a specific contact point, such as an email address or phone number.

For more information, see ContactPointConsent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessBrandId	Business Brand ID	reference		18		
CaptureContactPointType	Capture Contact Point Type	picklist		255		
CaptureDate	Capture Date	datetime				
CaptureSource	Capture Source	string		255		
ContactPointId	Contact Point ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Data Use Purpose ID	reference		18		
DoubleConsentCaptureDate	Double Consent Capture Date	datetime				
EffectiveFrom	Effective From	datetime				
EffectiveTo	Effective To	datetime				
Id	Contact Point Consent ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartyId	Individual ID	reference		18		
PartyRoleId	Party Role ID	reference		18		
PrivacyConsentStatus	Privacy Consent Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

CONTACTPOINTCONSENTHISTORY

History for tracked fields of ContactPointConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactPointConsentId	Contact Point Consent ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Contact Point Consent History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CONTACTPOINTCONSENTSHARE

Sharing for ContactPointConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTPOINTEMAIL

Represents a contact's email, which is associated with an individual or person account.

For more information, see ContactPointEmail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveFromDate	Active from Date	date				
ActiveToDate	Active to Date	date				
BestTimeToContactEndTime	Best time to contact end time	time				
BestTimeToContactStartTime	Best time to contact start time	time				
BestTimeToContactTimezone	Best time to contact time zone	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmailAddress	Email address	email		80		
EmailDomain	Email domain	string		250		
EmailLatestBounceDateTime	Email latest bounce date time	datetime				
EmailLatestBounceReasonText	Email latest bounce reason text	string		250		
EmailMailBox	Email mail box	string		250		
Id	Contact Point Email ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimary	Is Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Parent ID	reference		18		
PreferenceRank	Preference Rank	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
UsageType	Usage Type	picklist		40		

CONTACTPOINTEMAILHISTORY

History for tracked fields of ContactPointEmail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactPointEmailId`	Contact Point Email ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contact Point Email History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTACTPOINTEMAILSHARE

Sharing for ContactPointEmail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTPOINTPHONE

Represents a contact's phone number, which is associated with an individual or person account.

For more information, see ContactPointPhone in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveFromDate	Active from Date	date				
ActiveToDate	Active to Date	date				
AreaCode	Area code	string		30		
BestTimeToContactEndTime	Best time to contact end time	time				
BestTimeToContactStartTime	Best time to contact start time	time				
BestTimeToContactTimezone	Best time to contact time zone	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExtensionNumber	Extension number	string		30		
FormattedInternationalPhoneNumber	Formatted international phone number	string		250		
FormattedNationalPhoneNumber	Formatted national phone number	string		250		
Id	Contact Point Phone ID	id		18		
IsBusinessPhone	Is business phone	boolean				
IsDeleted	Deleted	boolean				
IsFaxCapable	Is fax capable	boolean				
IsPersonalPhone	Is personal phone	boolean				
IsPrimary	Is Primary	boolean				
IsSmsCapable	Is SMS capable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Parent ID	reference		18		
PhoneType	Phone Type	picklist		255		
PreferenceRank	Preference Rank	int	9			
SystemModstamp	System Modstamp	datetime				
TelephoneNumber	Telephone number	phone		40		
UsageType	Usage Type	picklist		40		

CONTACTPOINTPHONEHISTORY

History for tracked fields of ContactPointPhone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactPointPhoneId`	Contact Point Phone ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contact Point Phone History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTACTPOINTPHONESHARE

Sharing for ContactPointPhone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTPOINTTYPECONSENT

Represents consent for a contact point type, such as email or phone.

For more information, see ContactPointTypeConsent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessBrandId	Business Brand ID	reference		18		
CaptureContactPointType	Capture Contact Point Type	picklist		255		
CaptureDate	Capture Date	datetime				
CaptureSource	Capture Source	string		255		
ContactPointType	Contact Point Type ID	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Data Use Purpose ID	reference		18		
DoubleConsentCaptureDate	Double Consent Capture Date	datetime				
EffectiveFrom	Effective From	datetime				
EffectiveTo	Effective To	datetime				
EngagementChannelTypeId	Engagement Channel Type ID	reference		18		
Id	Contact Point Type Consent ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartyId	Party ID	reference		18		
PartyRoleId	Party Role ID	reference		18		
PrivacyConsentStatus	Privacy Consent Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

CONTACTPOINTTYPECONSENTHISTORY

History for tracked fields of ContactPointTypeConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactPointTypeConsentId	Contact Point Type Consent ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Contact Point Type Consent History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CONTACTPOINTTYPECONSENTSHARE

Sharing for ContactPointTypeConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CONTACTREQUEST

Represents a customer's request for support to get back to them about an issue.

For more information, see ContactRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contact Request ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Contact Request Number	string		255		
`OwnerId`	Owner ID	reference		18		
`PreferredChannel`	Preferred Channel	picklist		40		
`PreferredPhone`	Preferred Phone Number	phone		40		
`RequestDescription`	Request Description	textarea		32000		
`RequestReason`	Request Reason	picklist		40		
`Status`	Request Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`WhatId`	Related To ID	reference		18		
`WhoId`	Requestor ID	reference		18		

CONTACTREQUESTSHARE

Represents a list of access levels to a ContactRequest with an explanation of the access level.

For more information, see ContactRequestShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

CONTACTSHARE

Represents a list of access levels to a Contact along with an explanation of the access level. For example, if you have access to a record because you own it, the `ContactAccessLevel` is `All` and `RowCause` is Owner.

For more information, see ContactShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactAccessLevel`	Contact Access	picklist		40		
`ContactId`	Contact ID	reference		18		
`Id`	Contact Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

CONTENTASSET

Represents a Salesforce file that has been converted to an asset file in a custom app in Lightning Experience. Use asset files for org setup and configuration. Asset files can be packaged and referenced by other components.

For more information, see ContentAsset in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Unique Name	string		80		
`Id`	Asset File ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsVisibleByExternalUsers`	Let unauthenticated users see this asset file	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CONTENTBODY

Represents the body of a file in Salesforce CRM Content or Salesforce Files

For more information, see ContentBody in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Content Body ID	id		18		

CONTENTDISTRIBUTION

Represents information about sharing a document externally.

For more information, see ContentDistribution in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContentDocumentId	ContentDocument ID	reference		18		
ContentDownloadUrl	File Download Link	string		256		
ContentVersionId	ContentVersion ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DistributionPublicUrl	External Link	string		256		
ExpiryDate	Expiration Date	datetime				
FirstViewDate	First Viewed	datetime				
Id	Content Delivery ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastViewDate	Last Viewed	datetime				
Name	Content Delivery Name	string		100		
OwnerId	Owner ID	reference		18		
Password	Password	string		36		
PdfDownloadUrl	PDF Download Link	string		256		
PreferencesAllowOriginalDownload	Allow Download in Original Format	boolean				
PreferencesAllowPDFDownload	Allow Download as PDF	boolean				
PreferencesAllowViewInBrowser	Allow View in the Browser	boolean				
PreferencesExpires	Content Delivery Expires	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PreferencesLinkLatestVersion	Content Delivery Opens Latest Version	boolean				
PreferencesNotifyOnVisit	Notify Me of First View or Download	boolean				
PreferencesNotifyRndtnComplete	Email when Preview Images are Ready	boolean				
PreferencesPasswordRequired	Require Password to Access Content	boolean				
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
ViewCount	View Count	int	9			

CONTENTDISTRIBUTIONVIEW

Represents information about views of a shared document.

For more information, see ContentDistributionView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	View Date	datetime				
`DistributionId`	Content Delivery ID	reference		18		
`Id`	Content Delivery View ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsDownload`	File Downloaded	boolean				
`IsInternal`	Internal View	boolean				
`ParentViewId`	Content Delivery View ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CONTENTDOCUMENT

Represents a document that has been uploaded to a library in Salesforce CRM Content or Salesforce Files. This object is available in versions 17.0 and later for Salesforce CRM Content.

For more information, see ContentDocument in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ArchivedById	User ID	reference		18		
ArchivedDate	Archived Date	date				
ContentAssetId	Asset File ID	reference		18		
ContentModifiedDate	Content Modified Date	datetime				
ContentSize	Size	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created	datetime				
Description	Description	textarea		1000		
FileExtension	File Extension	string		40		
FileType	File Type	string		20		
Id	ContentDocument ID	id		18		
IsArchived	Is Archived	boolean				
IsDeleted	Is Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LatestPublishedVersionId	Latest Published Version ID	reference		18		
OwnerId	Owner ID	reference		18		
ParentId	Parent ID	reference		18		
PublishStatus	Publish Status	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SharingOption	Prevent others from sharing and unsharing	picklist		40		
SharingPrivacy	File Privacy on Records	picklist		40		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		

CONTENTDOCUMENTFEED

Feed tracking for ContentDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTENTDOCUMENTHISTORY

Represents the history of a document.

For more information, see ContentDocumentHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Content Document ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTENTDOCUMENTLINK

Represents the link between a Salesforce CRM Content document, Salesforce file, or ContentNote and where it's shared. A file can be shared with other users, groups, records, and Salesforce CRM Content libraries.

For more information, see ContentDocumentLink in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`Id`	ContentDocumentLink ID	id		18		
`IsDeleted`	Is Deleted	boolean				
`LinkedEntityId`	Linked Entity ID	reference		18		
`ShareType`	Share Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`Visibility`	Visibility	picklist		40		

CONTENTDOCUMENTSUBSCRIPTION

Represents a subscription for a user following or commenting on a file in a library.

For more information, see ContentDocumentSubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	Document ID	reference		18		
`Id`	ContentDocumentSubscription ID	id		18		
`IsCommentSub`	Is Comment Subscription	boolean				
`IsDocumentSub`	Is Document Subscription	boolean				
`UserId`	User ID	reference		18		

CONTENTFOLDER

Represents a folder in a content library for adding files.

For more information, see ContentFolder in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeaturedMediaId`	Asset File ID	reference		18		
`Id`	Content Folder ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`ParentContentFolderId`	Parent Content Folder ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CONTENTFOLDERITEM

Represents a file (ContentDocument) or folder (ContentFolder) that resides in a ContentFolder in a ContentWorkspace.

For more information, see ContentFolderItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentSize`	Size	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		20		
`Id`	Content Folder Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsFolder`	Is Folder	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentContentFolderId`	Parent Content Folder ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		

CONTENTFOLDERLINK

Defines the association between a library and its root folder.

For more information, see ContentFolderLink in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentFolderId`	Content Folder ID	reference		18		
`EnableFolderStatus`	Enable Folder Status	picklist		40		
`Id`	Content Folder Link ID	id		18		
`IsDeleted`	Is Deleted	boolean				
`ParentEntityId`	Parent Entity ID	reference		18		

CONTENTFOLDERMEMBER

Defines the association between a file and a folder.

For more information, see ContentFolderMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChildRecordId`	Child Record ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Content Folder Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentContentFolderId`	Parent Content Folder ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CONTENTNOTE

Represents a note created with the enhanced note taking tool, released in Winter '16.

For more information, see ContentNote in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Content`	Content	base64				
`ContentModifiedDate`	Content Modified Date	datetime				
`ContentSize`	Content Size	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created	datetime				
`FileExtension`	File Extension	string		20		
`FileType`	File Type	string		20		
`Id`	Note Id	id		18		
`IsDeleted`	Deleted	boolean				
`IsReadOnly`	Is Read Only	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LatestContentId`	Content Body ID	reference		18		
`LatestPublishedVersionId`	ContentVersion ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`SharingPrivacy`	Note Privacy on Records	picklist		40		
`TextPreview`	Text Preview	string		255		
`Title`	Title	string		255		

CONTENTNOTIFICATION

Represents a notification for a file.

For more information, see ContentNotification in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EntityIdentifierId`	Entity ID	reference		18		
`EntityType`	Entity Type	string		20		
`Id`	ContentNotification ID	id		18		
`Nature`	Nature	string		20		
`Subject`	Subject	textarea		333		
`Text`	Text	textarea		666		
`UsersId`	User ID	reference		18		

CONTENTTAGSUBSCRIPTION

Represents a subscription for a user following a tag on a file.

For more information, see ContentTagSubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	ContentTagSubscription ID	id		18		
`UserId`	User ID	reference		18		

CONTENTUSERSUBSCRIPTION

Represents a subscription for a user following another user.

For more information, see ContentUserSubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	ContentUserSubscription ID	id		18		
`SubscribedToUserId`	User ID	reference		18		
`SubscriberUserId`	User ID	reference		18		

CONTENTVERSION

Represents a specific version of a document in Salesforce CRM Content or Salesforce Files.

For more information, see ContentVersion in the *Consumer Goods Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Checksum	Checksum	string		50		
ContentBodyId	Content Body ID	reference		18		
ContentDocumentId	ContentDocument ID	reference		18		
ContentLocation	Content Location	picklist		40		
ContentModifiedById	User ID	reference		18		
ContentModifiedDate	Content Modified Date	datetime				
ContentSize	Size	int	9			
ContentUrl	Content URL	url		1333		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
ExternalDataSourceId	External Data Source ID	reference		18		
ExternalDocumentInfo1	External Document Info1	string		1000		
ExternalDocumentInfo2	External Document Info2	string		1000		
FeaturedContentBoost	Featured Content Boost	int	9			
FeaturedContentDate	Featured Content Date	date				
FileExtension	File Extension	string		40		
FileType	File Type	string		20		
FirstPublishLocationId	First Publish Location ID	reference		18		
Id	ContentVersion ID	id		18		
IsAssetEnabled	Asset File Enabled	boolean				
IsDeleted	Is Deleted	boolean				
IsEncrypted	Is Encrypted	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsLatest	Is Latest	boolean				
IsMajorVersion	Major Version	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
NegativeRatingCount	Negative Rating Count	int	9			
NetworkId	Network ID	reference		18		
Origin	Content Origin	picklist		40		
OwnerId	Owner ID	reference		18		
PathOnClient	Path On Client	string		500		
PositiveRatingCount	Positive Rating Count	int	9			
PublishStatus	Publish Status	picklist		40		
RatingCount	Rating Count	int	9			
ReasonForChange	Reason For Change	string		1000		
SharingOption	Prevent others from sharing and unsharing	picklist		40		
SharingPrivacy	File Privacy on Records	picklist		40		
SystemModstamp	System Modstamp	datetime				
TagCsv	Tags	textarea		2000		
TextPreview	Text Preview	string		255		
Title	Title	string		255		
VersionData	Version Data	base64				
VersionDataUrl	Version Data URL	string		255		
VersionNumber	Version Number	string		20		

CONTENTVERSIONCOMMENT

Represents a comment on a version of a file.

For more information, see ContentVersionComment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentVersionId`	ContentVersion ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	ContentVersionComment ID	id		18		
`UserComment`	Version Comment	textarea		2000		

CONTENTVERSIONHISTORY

Represents the history of a specific version of a document.

For more information, see ContentVersionHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentVersionId`	ContentVersion ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Content Version ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTENTVERSIONRATING

Represents a rating on a version of a file.

For more information, see ContentVersionRating in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentVersionId`	Version ID	reference		18		
`Id`	ContentVersionRating ID	id		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Rating`	Rating	int	9			
`UserComment`	User Comment	textarea		1000		
`UserId`	User ID	reference		18		

CONTENTWORKSPACE

Represents a content library.

For more information, see ContentWorkspace in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultRecordTypeId	Record Type ID	reference		18		
Description	Description	textarea		500		
DeveloperName	Unique Name	string		80		
Id	Library ID	id		18		
IsRestrictContentTypes	Restrict Record Types	boolean				
IsRestrictLinkedContentTypes	Restrict Linked Record Types	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastWorkspaceActivityDate	Last Activity	datetime				
Name	Name	string		255		
NamespacePrefix	Namespace Prefix	string		15		
RootContentFolderId	Content Folder ID	reference		18		
ShouldAddCreatorMembership	Add Creator Membership	boolean				
SystemModstamp	System Modstamp	datetime				
TagModel	Tag Model	picklist		40		
WorkspaceImageId	Asset File ID	reference		18		
WorkspaceType	Library Type	picklist		40		

CONTENTWORKSPACEDOC

Represents a link between a document and a public library in Salesforce CRM Content.

For more information, see ContentWorkspaceDoc in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentWorkspaceId`	Library ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Library Document ID	id		18		
`IsDeleted`	Is Deleted	boolean				
`IsOwner`	Is Owning Library	boolean				
`SystemModstamp`	System Modstamp	datetime				

CONTENTWORKSPACEMEMBER

Represents a member of a content library.

For more information, see ContentWorkspaceMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentWorkspaceId`	Library ID	reference		18		
`ContentWorkspacePermissionId`	Library Permission ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Library Member ID	id		18		
`MemberId`	Member ID	reference		18		
`MemberType`	Member Type	picklist		40		

CONTENTWORKSPACEPERMISSION

Represents a library permission.

For more information, see ContentWorkspacePermission in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		2000		
Id	Library Permission ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
PermissionsAddComment	Add Comment	boolean				
PermissionsAddContent	Add Content	boolean				
PermissionsAddContentOBO	Add Content on Behalf of Others	boolean				
PermissionsArchiveContent	Archive Content	boolean				
PermissionsChatterSharing	Attach or Share Content	boolean				
PermissionsDeleteContent	Delete Content	boolean				
PermissionsDeliverContent	Deliver Content	boolean				
PermissionsFeatureContent	Feature Content	boolean				
PermissionsManageWorkspace	Manage Library	boolean				
PermissionsModifyComments	Modify Comments	boolean				
PermissionsOrganizeFileAndFolder	Organize File and Content Folder	boolean				
PermissionsTagContent	Tag Content	boolean				
PermissionsViewComments	View Comment	boolean				
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

CONTENTWORKSPACESUBSCRIPTION

Represents a subscription for a user following a library.

For more information, see ContentWorkspaceSubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentWorkspaceId`	Workspace ID	reference		18		
`Id`	ContentWorkspaceSubscription ID	id		18		
`UserId`	User ID	reference		18		

CONTEXTPARAMMAP

Represents optional context data for a Conversation or a ConversationParticipant.

For more information, see ContextParamMap in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContextEntityId`	Context Entity ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Context Param Map ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MapKey`	Map Key	string		255		
`MapValue`	Map Value	string		1333		
`SystemModstamp`	System Modstamp	datetime				

CONTRACT

Represents a contract (a business agreement) associated with an Account.

For more information, see Contract in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActivatedById	Activated By ID	reference		18		
ActivatedDate	Activated Date	datetime				
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Billing Geocode Accuracy	picklist		40		
BillingLatitude	Billing Latitude	double			18	15
BillingLongitude	Billing Longitude	double			18	15
BillingPostalCode	Billing Zip/Postal Code	string		20		
BillingState	Billing State/Province	string		80		
BillingStreet	Billing Street	textarea		255		
CompanySignedDate	Company Signed Date	date				
CompanySignedId	Company Signed By ID	reference		18		
ContractNumber	Contract Number	string		30		
ContractTerm	Contract Term	int	4			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomerSignedDate	Customer Signed Date	date				
CustomerSignedId	Customer Signed By ID	reference		18		
CustomerSignedTitle	Customer Signed Title	string		40		
Description	Description	textarea		32000		
EndDate	Contract End Date	date				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Id	Contract ID	id		18		
IsDeleted	Deleted	boolean				
LastActivityDate	Last Activity	date				
LastApprovedDate	Last Approved Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerExpirationNotice	Owner Expiration Notice	picklist		40		
OwnerId	Owner ID	reference		18		
ShippingAddress	Shipping Address	address				
ShippingCity	Shipping City	string		40		
ShippingCountry	Shipping Country	string		80		
ShippingGeocodeAccuracy	Shipping Geocode Accuracy	picklist		40		
ShippingLatitude	Shipping Latitude	double			18	15
ShippingLongitude	Shipping Longitude	double			18	15
ShippingPostalCode	Shipping Zip/Postal Code	string		20		
ShippingState	Shipping State/Province	string		80		
ShippingStreet	Shipping Street	textarea		255		
SpecialTerms	Special Terms	textarea		4000		
StartDate	Contract Start Date	date				
Status	Status	picklist		100		
StatusCode	Status Category	picklist		40		
SystemModstamp	System Modstamp	datetime				

CONTRACTCONTACTROLE

Represents the role that a given Contact plays on a Contract.

For more information, see ContractContactRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactId`	Contact ID	reference		18		
`ContractId`	Contract ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contact Role ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Role`	Role	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

CONTRACTFEED

Feed tracking for Contract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTRACTGROUPPLAN

Represents a set of plans as part of the contract between the insurance carrier and the group. This set of plans corresponds to the plans included in the quote (as Quote Line Items). Child object of Contract.

For more information, see ContractGroupPlan in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContractGroupParentPlanId	Contract Group Plan ID	reference		18		
ContractId	Contract ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	Effective End Date	datetime				
EffectiveStartDate	Effective Start Date	datetime				
EligibilityCriteria	Eligibility Criteria	string		255		
EnrollmentEndDate	Enrollment End Date	date				
EnrollmentRatingType	Enrollment Rating Type	picklist		255		
EnrollmentStartDate	Enrollment Start Date	date				
EnrollmentWaitingPeriod	Enrollment Waiting Period	int	9			
GroupNumber	Group Number	string		255		
Id	Contract Group Plan ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OriginalContractPlanId	Contract Group Plan ID	reference		18		
PricingStructure	Pricing Structure	textarea		131072		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProductNumber	Product Number	int	9			
QuoteLineItemId	Quote Line Item ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
UnitPrice	Unit Price	currency			18	0
UsageType	Usage Type	picklist		255		

CONTRACTGROUPPLANFEED

Feed tracking for ContractGroupPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTRACTGROUPPLANGROUPCLASS

Represents the association of a Contract Group Plan to a Group Class. Use this entity to define group classes and group class contributions at the contract group plan level.

For more information, see ContractGroupPlanGroupClass in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractGroupPlanId`	Contract Group Plan ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`GroupClassId`	Group Class ID	reference		18		
`Id`	Contract Group Plan Group Class ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CONTRACTGROUPPLANGROUPCLASSFEED

Feed tracking for ContractGroupPlanGroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTRACTGROUPPLANGROUPCLASSHISTORY

History for tracked fields of ContractGroupPlanGroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContractGroupPlanGroupClassId	Contract Group Plan Group Class ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Contract Group Plan Group Class History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CONTRACTGROUPPLANGROUPCLASSSHARE

Sharing for ContractGroupPlanGroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

CONTRACTGROUPPLANHISTORY

History for tracked fields of ContractGroupPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractGroupPlanId`	Contract Group Plan ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contract Group Plan History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTRACTHISTORY

History for tracked fields of Contract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractId`	Contract ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contract History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTRACTLINEITEM

Represents a product covered by a service contract (customer support agreement).

For more information, see ContractLineItem in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
EndDate	End Date	date				
Id	Contract Line Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineItemNumber	Line Item Number	string		255		
ListPrice	List Price	currency			18	2
LocationId	Location ID	reference		18		
ParentContractLineItemId	Contract Line Item ID	reference		18		
PricebookEntryId	Price Book Entry ID	reference		18		
Product2Id	Product ID	reference		18		
Quantity	Quantity	double			12	2
RootContractLineItemId	Contract Line Item ID	reference		18		
ServiceContractId	Service Contract ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2
UnitPrice	Sales Price	currency			18	2

CONTRACTLINEITEMFEED

Feed tracking for ContractLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTRACTLINEITEMHISTORY

History for tracked fields of ContractLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractLineItemId`	Contract Line Item ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Contract Line Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CONTRACTPAYMENTAGREEMENT

Stores information about the contract payment agreement associated with a contract.

For more information, see ContractPaymentAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AgreementType	Agreement Type	picklist		40		
ContractId	Contract ID	reference		18		
ContractPaymentAgreementKey	Contract Payment Agreement Key	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EligibleProcedureCodeList	Eligible Procedure Code List	textarea		32000		
EndDateTime	End Date	datetime				
FeeScheduleDefinitionId	Fee Schedule Definition ID	reference		18		
Id	ContractPaymentAgreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineofBusiness	Line of Business	picklist		40		
Name	Name	string		255		
StandardFeeCalculationPercentage	Standard Fee Calculation Percentage	percent			5	2
StartDateTime	Start Date	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

CONTRACTPAYMENTAGREEMENTFEED

Feed tracking for ContractPaymentAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CONTRACTPAYMENTAGREEMENTHISTORY

History for tracked fields of ContractPaymentAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Contract Payment Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CONTRACTSTATUS

Represents the status of a Contract, such as Draft, InApproval, Activated, Terminated, or Expired.

For more information, see ContractStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contract Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

CONVERSATION

Represents a conversation between an end user and an agent.

For more information, see Conversation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConversationChannelId`	Conversation Channel ID	reference		18		
`ConversationIdentifier`	Conversation Identifier	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndTime`	Conversation End time	datetime				
`Id`	Conversation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Conversation Name	string		30		
`StartTime`	Conversation Start time	datetime				

CONVERSATIONCONTEXTENTRY

Represents the context of a message or an event in the chat history between an agent and a messaging user.

For more information, see ConversationContextEntry in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ConversationContextEntryName	Conversation Context Entry Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomDetailContextKey	Key	textarea		131072		
CustomDetailContextValue	Value	textarea		131072		
Id	Conversation Context Entry ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Chat Transcript ID	reference		18		
SystemModstamp	System Modstamp	datetime				

CONVERSATIONENTRY

Represents a message or an event in the chat history between an agent and a messaging user.

For more information, see ConversationEntry in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActorId	Actor ID	reference		18		
ActorName	Actor Name	string		650		
ActorType	Actor Type	picklist		40		
ClientDuration	ClientDuration	int	9			
ClientTimestamp	ClientTimestamp	datetime				
ConversationEntityId	Conversation ID	reference		18		
ConversationId	Conversation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EntryEndTime	Entry End Time	datetime				
EntryTime	Entry Start Time	datetime				
EntryTimeMilliSecs	Entry Time Milli Seconds(last 3 digits)	int	9			
EntryType	Entry Type	picklist		40		
HasAttachments	Has Attachments	boolean				
Id	Conversation Entry ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Message	Message	textarea		131072		
MessageDeliverTime	Message Deliver Time	datetime				
MessageIdentifier	Message ID	string		36		
MessageReadTime	Message Read Time	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MessageSendTime	Message Send Time	datetime				
MessageStatus	Message Status	picklist		40		
MessageStatusCode	Message Status Code	string		25		
Seq	Sequence	int	9			
ServerReceivedTimestamp	ServerReceivedTimestamp	datetime				
SystemModstamp	System Modstamp	datetime				

CONVERSATIONPARTICIPANT

Represents an active participant in a conversation. A new ConversationParticipant record is created each time a participant joins a conversation.

For more information, see ConversationParticipant in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppType	App Type	string		255		
ConversationId	Conversation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Conversation Participant ID	id		18		
IsDeleted	Deleted	boolean				
JoinedTime	Joined Time	datetime				
LastActiveTime	Last Active Time	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LeftTime	Left Time	datetime				
Name	Conversation Participant Name	string		30		
ParticipantContext	Participant Context	string		255		
ParticipantDisplayName	Participant Display Name	string		255		
ParticipantEntityId	ParticipantEntity ID	reference		18		
ParticipantKey	Participant Key	string		120		
ParticipantRole	Participant Role	string		36		

CORSWHITELISTENTRY

Represents an entry in the cross-origin resource sharing (CORS) allowlist. Origins included in the allowlist can request REST resources from that Salesforce org.

For more information, see CorsWhitelistEntry in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	CORS Allowed Origin List ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`UrlPattern`	Origin URL Pattern	string		255		

COUPON

A coupon associated with a promotion.

For more information, see Coupon in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CouponCode	Coupon Code	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
EndDateTime	End DateTime	datetime				
Id	Coupon ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Coupon Number	string		255		
OwnerId	Owner ID	reference		18		
PromotionId	Promotion ID	reference		18		
StartDateTime	Start DateTime	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

COUPONFEED

Feed tracking for Coupon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COUPONHISTORY

History for tracked fields of Coupon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CouponId`	Coupon ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Coupon History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

COUPONSHARE

Sharing for Coupon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COURSEOFFERING

Represents an instance of a training course with location and date details of training courses

For more information, see CourseOffering in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CourseNameId	Course Name ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
EndDate	End Date	datetime				
Id	Course Offering ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
StartDate	Start Date	datetime				
SystemModstamp	System Modstamp	datetime				

COURSEOFFERINGFEED

Feed tracking for CourseOffering.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

COURSEOFFERINGHISTORY

History for tracked fields of CourseOffering.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CourseOfferingId`	Course Offering ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Course Offering History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

COURSEOFFERINGSHARE

Sharing for CourseOffering.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COVERAGEBENEFIT

Represents the benefits provided to a covered member by a purchaser's plan.

For more information, see CoverageBenefit in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitNotes	Benefit Notes	textarea		32000		
BenefitPeriodEndDate	Benefit Period End Date	date				
BenefitPeriodStartDate	Benefit Period Start Date	date				
CoinsuranceNotes	Coinsurance Notes	textarea		32000		
CopayNotes	Copay Notes	textarea		32000		
CoverageType	Coverage Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeductibleNotes	Deductible Notes	textarea		32000		
Disclaimer	Disclaimers	string		255		
EmergencyDepartmentCopay	Emergency Department Copay	currency			18	2
FamilyInNetworkDeductibleApplied	Family In-Network Deductible Applied	currency			18	2
FamilyInNetworkDeductibleLimit	Family In-Network Deductible Limit	currency			18	2
FamilyInNetworkDeductibleRemaining	Family In-Network Deductible Remaining	currency			18	2
FamilyInNetworkOutofPocketApplied	Family In-Network Out-of-Pocket Applied	currency			18	2
FamilyInNetworkOutofPocketLimit	Family In-Network Out-of-Pocket Limit	currency			18	2
FamilyInNetworkOutofPocketRemaining	Family In-Network Out-of-Pocket Remaining	currency			18	2
FamilyOutofNetworkDeductibleApplied	Family Out-of-Network Deductible Applied	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
FamilyOutofNetworkDeductibleLimit	Family Out-of-Network Deductible Limit	currency			18	2
FamilyOutofNetworkDeductibleRemaining	Family Out-of-Network Deductible Remaining	currency			18	2
FamilyOutofNetworkOutofPocketApplied	Family Out-of-Network Out-of-Pocket Applied	currency			18	2
FamilyOutofNetworkOutofPocketLimit	Family Out-of-Network Out-of-Pocket Limit	currency			18	2
FamilyOutofNetworkOutofPocketRemaining	Family Out-of-Network Out-of-Pocket Remaining	currency			18	2
Id	Coverage Benefit ID	id		18		
InNetworkCoinsuranceAmount	In-Network Coinsurance (Amount)	currency			18	2
InNetworkCoinsurancePercentage	In-Network Coinsurance (Percentage)	percent			3	0
InNetworkLifetimeMaximum	In-Network Lifetime Maximum	currency			18	2
IndividualInNetworkDeductibleApplied	Individual In-Network Deductible Applied	currency			18	2
IndividualInNetworkDeductibleLimit	Individual In-Network Deductible Limit	currency			18	2
IndividalInNetworkDeductibleRemaining	Individual In-Network Deductible Remaining	currency			18	2
IndividalInNetworkOutofPocketApplied	Individual In-Network Out-of-Pocket Applied	currency			18	2
IndividualInNetworkOutofPocketLimit	Individual In-Network Out-of-Pocket Limit	currency			18	2
IndividalInNetworkOutofPocketRemaining	Individual In-Network Out-of-Pocket Remaining	currency			18	2
IndividalOutofNetworkDeductibleApplied	Individual Out-of-Network Deductible Applied	currency			18	2
IndividalOutofNetworkDeductibleLimit	Individual Out-of-Network Deductible Limit	currency			18	2
IndividalOutofNetworkDeductibleRemain	Individual Out-of-Network Deductible Remaining	currency			18	2
IndividalOutofNetworkOutofPocketApplied	Individual Out-of-Network Out-of-Pocket Applied	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IndividualOutofNetworkOutofPocketLimit	Individual Out-of-Network Out-of-Pocket Limit	currency			18	2
IndividualOutofNetworkOutofPocketRemain	Individual Out-of-Network Out-of-Pocket Remaining	currency			18	2
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LifetimeMaximumNotes	Lifetime Maximum Notes	textarea		32000		
MemberId	Account ID	reference		18		
MemberPlanId	Member Plan ID	reference		18		
Name	Name	string		255		
OutofNetworkCoinsuranceAmount	Out-of-Network Coinsurance (Amount)	currency			18	2
OutofNetworkCoinsurancePercentage	Out-of-Network Coinsurance (Percentage)	percent			3	0
OutofNetworkLifetimeMaximum	Out-of-Network Lifetime Maximum	currency			18	2
OutofPocketNotes	Out-of-Pocket Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PrimaryCareCopay	Primary Care Copay	currency			18	2
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SpecialistCopay	Specialist Copay	currency			18	2
SystemModstamp	System Modstamp	datetime				
UrgentCareCopay	Urgent Care Copay	currency			18	2
VerificationDate	Verification Date	datetime				

COVERAGEBENEFITFEED

Feed tracking for CoverageBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COVERAGEBENEFITHISTORY

History for tracked fields of CoverageBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CoverageBenefitId`	Coverage Benefit ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Coverage Benefit History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

COVERAGEBENEFITITEM

Specific service covered by the insurance plan.

For more information, see CoverageBenefitItem in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitCategory	Benefit Category	string		64		
CodeSetServiceTypeId	Code Set ID	reference		18		
CoverageBenefitId	Coverage Benefit ID	reference		18		
CoverageLevel	Coverage Level	string		64		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DoesDeductibleApply	Deductible Applies	boolean				
Id	Coverage Benefit Item ID	id		18		
InNetworkCoverage	In-Network Coverage	textarea		32000		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsInPlanNetwork	In-Plan Network	boolean				
IsPreauthorizationRequired	Requires Preauthorization	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberId	Account ID	reference		18		
Name	Name	string		255		
Notes	Notes	textarea		32000		
OutofNetworkCoverage	Out-of-Network Coverage	textarea		32000		
OwnerId	Owner ID	reference		18		
ServiceType	Service Type	string		64		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ServiceTypeCode	Service Type Code	string		64		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				
TimePeriod	Time Period	string		64		

COVERAGEBENEFITITEMFEED

Feed tracking for CoverageBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COVERAGEBENEFITITEMHISTORY

History for tracked fields of CoverageBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CoverageBenefitItemId	Coverage Benefit Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Coverage Benefit Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COVERAGEBENEFITITEMLIMIT

Allows you to track details associated with a specific benefit as it relates to expenditures, limits, coverage levels, eligibility, and exclusion.

For more information, see CoverageBenefitItemLimit in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllowedLimit	Allowed Limit	string		255		
AppliedLimit	Applied Limit	string		255		
CareLimitTypeId	Care Limit Type ID	reference		18		
CoverageBenefitItemId	Coverage Benefit Item ID	reference		18		
CoverageLevel	Coverage Level	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Coverage Benefit Item Limit ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LimitNotes	Limit Notes	textarea		32000		
Name	Coverage Benefit Item Limit Name	string		255		
NetworkType	Network Type	picklist		255		
PriorityOrder	Priority Order	double			18	0
SystemModstamp	System Modstamp	datetime				
TermType	Term Type	picklist		40		

COVERAGEBENEFITITEMLIMITFEED

Feed tracking for CoverageBenefitItemLimit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

COVERAGEBENEFITITEMLIMITHISTORY

History for tracked fields of CoverageBenefitItemLimit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CoverageBenefitItemLimitId	Coverage Benefit Item Limit ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Coverage Benefit Item Limit History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

COVERAGEBENEFITITEMSHARE

Sharing for CoverageBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

COVERAGEBENEFITSHARE

Sharing for CoverageBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRBNCREDITALLOC

Represents information about how the carbon credits are allocated by an organization to offset their emissions.

For more information, see CrbnCreditAlloc in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllocatedCarbonCrCost	Allocated Carbon Credits Cost	currency			18	2
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Carbon Credit Allocation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NetEmissionsInTco2e	Net Emissions (tCO2e)	double			18	2
NetScope1EmssnInTco2e	Net Scope 1 Emissions (tCO2e)	double			18	2
NetScope2EmssnInTco2e	Net Scope 2 Emissions (tCO2e)	double			18	2
NetScope3EmssnInTco2e	Net Scope 3 Emissions (tCO2e)	double			18	2
OwnerId	Owner ID	reference		18		
Scp1CrbnCrAllocInTco2e	Scope 1 Carbon Credit Allocation (tCO2e)	double			18	2
Scp2CrbnCrAllocInTco2e	Scope 2 Carbon Credit Allocation (tCO2e)	double			18	2
Scp3CrbnCrAllocInTco2e	Scope 3 Carbon Credit Allocation (tCO2e)	double			18	2
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalCrbnCrAllocInTco2e	Total Carbon Credits Allocated (tCO2e)	double			18	2
TotalEmssnInTco2e	Total Emissions (tCO2e)	double			18	2
TotalScope1EmssnInTco2e	Total Scope 1 Emissions (tCO2e)	double			18	2
TotalScope2EmssnInTco2e	Total Scope 2 Emissions (tCO2e)	double			18	2
TotalScope3EmssnInTco2e	Total Scope 3 Emissions (tCO2e)	double			18	2
Year	Year	picklist		255		

CRBNCREDITALLOCFEED

Feed tracking for CrbnCreditAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNCREDITALLOCHISTORY

History for tracked fields of CrbnCreditAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CrbnCreditAllocId	Carbon Credit Allocation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Carbon Credit Allocation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CRBNCREDITALLOCITEM

Represents information about carbon credit allocation and emissions related to each emission activity.

For more information, see CrbnCreditAllocItem in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnCreditAllocId`	Carbon Credit Allocation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmissionsActivityId`	Emissions Activity ID	reference		18		
`Id`	Carbon Credit Allocation Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`NetEmssnInTco2e`	Net Emissions (tCO2e)	double			18	2
`SystemModstamp`	System Modstamp	datetime				
`TotalCrbnCrAllocInTco2e`	Total Carbon Credits Allocated (tCO2e)	double			18	2
`TotalEmssnInTco2e`	Total Emissions (tCO2e)	double			18	2

CRBNCREDITALLOCITEMFEED

Feed tracking for CrbnCreditAllocItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNCREDITALLOCITEMHISTORY

History for tracked fields of CrbnCreditAllocItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnCreditAllocItemId`	Carbon Credit Allocation Item ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Carbon Credit Allocation Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CRBNCREDITALLOCSHARE

Sharing for CrbnCreditAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRBNCREDITDISTRIBUTION

Represents a junction between the sustainability credit and carbon credit allocation objects. To offset emissions for carbon credit allocation items, specify the emissions activity on this junction object.

For more information, see CrbnCreditDistribution in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnCrAllocDate`	Carbon Credit Allocation Date	date				
`CrbnCreditAllocId`	Carbon Credit Allocation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmissionsActivityId`	Emissions Activity ID	reference		18		
`Id`	Carbon Credit Distribution ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SustainabilityCreditId`	Sustainability Credit ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TotalCrbnCrAllocCost`	Total Carbon Credits Allocation Cost	currency			18	2
`TotalCrbnCrAllocInTco2e`	Total Carbon Credits Allocated (tCO2e)	double			18	2

CRBNCREDITDISTRIBUTIONFEED

Feed tracking for CrbnCreditDistribution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNCREDITDISTRIBUTIONHISTORY

History for tracked fields of CrbnCreditDistribution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnCreditDistributionId`	Carbon Credit Distribution ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Carbon Credit Distribution History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CRBNCREDITDISTRIBUTIONSHARE

Sharing for CrbnCreditDistribution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRBNCREDITPROJECT

Represents information about the environmental project that generates carbon credits by removing greenhouse gasses or preventing a certain quantity of greenhouse gasses from being released.

For more information, see CrbnCreditProject in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalBenefits	Additional Benefits	multipicklist		4099	0	
Country	Country	picklist		255		
CrbnCrMethodology	Carbon Credit Methodology	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		4000		
DeveloperAccountId	Supplier ID	reference		18		
ExternalIdentifier	External Identifier	string		80		
FundedBy	Funded By	string		255		
Id	Carbon Credit Project ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MitigationType	Mitigation Type	picklist		40		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProjRegistryIdentifier	Project Registry Identifier	string		80		
ProjectType	Project Type	picklist		40		
ProjectUrl	Project URL	url		255		
Region	Region	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
StandardsAgencyName	Standards Agency Name	picklist		40		
SystemModstamp	System Modstamp	datetime				
TotalCrbnCrAllocInTco2e	Total Carbon Credits Allocated (tCO2e)	double			18	2
TotalCrbnCrAvlInTco2e	Total Carbon Credits Available (tCO2e)	double			18	2
TotalCrbnCrPurchInTco2e	Total Carbon Credits Purchased (tCO2e)	double			18	0
TotalSpend	Total Spend	currency			18	0
VerifiedBy	Verified By	string		255		
VoluntaryRegistryName	Voluntary Registry Name	string		80		

CRBNCREDITPROJECTFEED

Feed tracking for CrbnCreditProject.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNCREDITPROJECTHISTORY

History for tracked fields of CrbnCreditProject.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CrbnCreditProjectId	Carbon Credit Project ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Carbon Credit Project History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

CRBNCREDITPROJECTSHARE

Sharing for CrbnCreditProject.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRBNEMSSNSCOPEALLOC

Represents the allocation of fuel consumption for different scope emissions. For an energy use record, tCO_2e is calculated and the results are classified as either Scope 1, Scope 2, or Scope 3 emission values. Each individual fuel type has its own scope allocation record. To put the tCO2e result in the correct scope, the energy use record points to the scope allocation record.

For more information, see CrbnEmssnScopeAlloc in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Carbon Emissions Scope Allocation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CRBNEMSSNSCOPEALLOCFEED

Feed tracking for CrbnEmssnScopeAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNEMSSNSCOPEALLOCHISTORY

History for tracked fields of CrbnEmssnScopeAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnEmssnScopeAllocId`	Carbon Emissions Scope Allocation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Carbon Emissions Scope Allocation History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CRBNEMSSNSCOPEALLOCSHARE

Sharing for CrbnEmssnScopeAlloc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRBNEMSSNSCOPEALLOCVAL

Represents the scope allocation by fuel type.

For more information, see CrbnEmssnScopeAllocVal in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CrbnEmssnScopeAllocId	Carbon Emissions Scope Allocation ID	reference		18		
CrbnEmssnScopeAllocValFuelTypeRefId	Fuel Type ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FuelType	Fuel Type	picklist		255		
FuelTypeAllocation	Fuel Type Allocation	picklist		255		
Id	Carbon Emissions Scope Allocation Value ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

CRBNEMSSNSCOPEALLOCVALFEED

Feed tracking for CrbnEmssnScopeAllocVal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CRBNEMSSNSCOPEALLOCVALHISTORY

History for tracked fields of CrbnEmssnScopeAllocVal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CrbnEmssnScopeAllocValId`	Carbon Emissions Scope Allocation Value ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Carbon Emissions Scope Allocation Value History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CREDENTIALSTUFFINGEVENT

Tracks when a user successfully logs into Salesforce during an identified credential stuffing attack. Credential stuffing refers to large-scale automated login requests using stolen user credentials.

For more information, see CredentialStuffingEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AcceptLanguage`	Accept-Language Header	string		255		
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`EventUuid`	Event UUID	string		36		
`LoginKey`	Login Key	string		24		
`LoginType`	Login Type	picklist		255		
`LoginUrl`	Login URL	string		255		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`ReplayId`	Replay ID	string		1000		
`Score`	Score	double			12	6
`SessionKey`	Session Key	string		24		
`SourceIp`	Source IP Address	string		255		
`Summary`	Summary	textarea		1000		
`UserAgent`	User Agent	textarea		1000		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

CREDENTIALSTUFFINGEVENTSTORE

Tracks when a user successfully logs into Salesforce during an identified credential stuffing attack. Credential stuffing refers to large-scale automated login requests using stolen user credentials.

For more information, see CredentialStuffingEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcceptLanguage	Accept-Language Header	string		255		
CreatedDate	Created Date	datetime				
CredentialStuffingEventNumber	Event Name	string		255		
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event ID	string		80		
Id	Credential Stuffing Event Store ID	id		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoginKey	Login Key	string		24		
LoginType	Login Type	picklist		255		
LoginUrl	Login URL	string		255		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
Score	Score	double			12	6
SessionKey	Session Key	string		24		
SourceIp	Source IP Address	string		255		
Summary	Summary	textarea		1000		
SystemModstamp	System Modstamp	datetime				
UserAgent	User Agent	textarea		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

CREDENTIALSTUFFINGEVENTSTOREFEED

Feed tracking for CredentialStuffingEventStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CREDITMEMO

Represents a document that is used to adjust or rectify errors made in an invoice. The invoice has already been processed and sent to a customer.

For more information, see CreditMemo in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppType	App Type	picklist		255		
Balance	Balance	currency			18	2
BillToContactId	Contact ID	reference		18		
BillingAccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreationMode	Creation Mode	picklist		255		
CreditDate	Credit Date	date				
CreditMemoNumber	Credit Memo Number	string		10		
Description	Description	string		255		
DocumentNumber	Document Number	string		255		
ExternalReference	External Reference	string		255		
ExternalReferenceDataSource	External Reference Data Source	string		255		
Id	Credit Memo ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
ReferenceEntityId	ReferenceEntity ID	reference		18		
Status	Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TotalAdjustmentAmount	Total Adjustment Amount	currency			18	2
TotalAdjustmentAmountWithTax	Total Adjustment Amount with Tax	currency			18	2
TotalAdjustmentTaxAmount	Total Adjustment Tax Amount	currency			18	2
TotalAmount	Total Amount	currency			18	2
TotalAmountWithTax	Total with Tax	currency			18	2
TotalChargeAmount	Total Charges	currency			18	2
TotalChargeAmountWithTax	Total Charge Amount with Tax	currency			18	2
TotalChargeTaxAmount	Total Charge Tax Amount	currency			18	2
TotalTaxAmount	Total Tax	currency			18	2

CREDITMEMOFEED

Feed tracking for CreditMemo.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CREDITMEMOHISTORY

History for tracked fields of CreditMemo.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CreditMemoId`	Credit Memo ID	reference		18		
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Credit Memo History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CREDITMEMOLINE

Represents a partial or full application of a credit memo's balance against an invoice or invoice line.

For more information, see CreditMemoLine in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentAmount	Adjustment Amount	currency			18	2
AdjustmentAmountWithTax	Adjustment Amount with Tax	currency			18	2
AdjustmentTaxAmount	Adjustment Tax Amount	currency			18	2
ChargeAmount	Charge Amount	currency			18	2
ChargeAmountWithTax	Charge Amount with Tax	currency			18	2
ChargeTaxAmount	Charge Tax Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditMemoId	Credit Memo ID	reference		18		
Description	Description	string		255		
EndDate	End Date	date				
Id	Credit Memo Line ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LineAmount	Line Amount	currency			18	2
Name	Name	string		255		
Product2Id	Product ID	reference		18		
ReferenceEntityItemId	ReferenceEntityItem ID	reference		18		
ReferenceEntityItemType	Reference Entity Item Type	picklist		40		
ReferenceEntityItemTypeCode	Reference Entity Item Type Code	picklist		255		
RelatedLineId	Credit Memo Line ID	reference		18		
StartDate	Start Date	date				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Status	Status	string		50		
SystemModstamp	System Modstamp	datetime				
TaxAmount	Tax Amount	currency			18	2
TaxCode	Tax Code	string		255		
TaxEffectiveDate	Tax Effective Date	date				
TaxName	Tax Name	string		255		
TaxRate	Tax Rate	percent			3	0
Type	Type	picklist		255		

CREDITMEMOLINEFEED

Feed tracking for CreditMemoLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

CREDITMEMOLINEHISTORY

History for tracked fields of CreditMemoLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CreditMemoLineId`	Credit Memo Line ID	reference		18		
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Credit Memo Line History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CREDITMEMOSHARE

Sharing for CreditMemo.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CRONJOBDETAIL

Contains details about the associated scheduled job, such as the job's name and type.

For more information, see CronJobDetail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Job ID	id		18		
`JobType`	Type	picklist		40		
`Name`	Job Name	string		255		

CRONTRIGGER

Contains schedule information for a scheduled job. CronTrigger is similar to a cron job on UNIX systems. This object is available in API version 17.0 and later.

For more information, see CronTrigger in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CronExpression`	Cron Expression	string		255		
`CronJobDetailId`	Job ID	reference		18		
`EndTime`	End Time	datetime				
`Id`	Scheduled Job ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`NextFireTime`	Next Run Time	datetime				
`OwnerId`	User ID	reference		18		
`PreviousFireTime`	Previous Run Time	datetime				
`StartTime`	Start Time	datetime				
`State`	Job State	string		16		
`TimeZoneSidKey`	Java Time Zone Id	picklist		40		
`TimesTriggered`	Job Fired Count	int	9			

CSPTRUSTEDSITE

Represents a CSP Trusted Site. The Lightning Component framework uses Content Security Policy (CSP) to impose restrictions on content. The main objective is to help prevent cross-site scripting (XSS) and other code injection attacks. To use third-party APIs that make requests to an external (non-Salesforce) server or to use a WebSocket connection, add a CSP Trusted Site.

For more information, see CspTrustedSite in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Context`	Context	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Trusted Site Name	string		80		
`EndpointUrl`	Trusted Site URL	string		255		
`Id`	Trusted Site ID	id		18		
`IsActive`	Active	boolean				
`IsApplicableToConnectSrc`	Allow site for connect-src	boolean				
`IsApplicableToFontSrc`	Allow site for font-src	boolean				
`IsApplicableToFrameSrc`	Allow site for frame-src	boolean				
`IsApplicableToImgSrc`	Allow site for img-src	boolean				
`IsApplicableToMediaSrc`	Allow site for media-src	boolean				
`IsApplicableToStyleSrc`	Allow site for style-src	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CUSTOMBRAND

Represents a custom branding and color scheme.

For more information, see CustomBrand in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Custom Brand ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Modified Date	datetime				
`ParentId`	Branded Entity ID	reference		18		

CUSTOMBRANDASSET

Represents a branding element in a custom branding scheme. For example, a color, logo image, header image, or footer text.

For more information, see CustomBrandAsset in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssetCategory`	Asset Category	picklist		40		
`AssetSourceId`	Asset source ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomBrandId`	Custom Brand ID	reference		18		
`Id`	Custom Brand Asset ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Modified Date	datetime				
`TextAsset`	Text Asset	string		333		

CUSTOMHELPMENUITEM

Represents the items within a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources.

For more information, see CustomHelpMenuItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Custom Help Menu Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LinkUrl`	Link Url	url		1000		
`MasterLabel`	Item Label	string		100		
`ParentId`	Custom Help Menu Section ID	reference		18		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

CUSTOMHELPMENUSECTION

Represents a section of the Lightning Experience help menu that the admin added to display custom, org-specific help resources.

For more information, see CustomHelpMenuSection in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Custom Help Menu Section ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Section Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CUSTOMHTTPHEADER

Represents a custom HTTP header that provides context information from Salesforce such as region, org details, or the role of the person viewing the external object.

For more information, see CustomHttpHeader in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`HeaderFieldName`	Header Field Name	string		255		
`HeaderFieldValue`	Header Field Value	string		1000		
`Id`	Custom HTTP Header ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CUSTOMNOTIFICATIONTYPE

Stores information about custom notification types.

For more information, see CustomNotificationType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomNotifTypeName	Name	string		80		
Description	Description	textarea		255		
Desktop	Desktop	boolean				
DeveloperName	Name	string		80		
Id	Custom Notification Type Id	id		18		
IsDeleted	Deleted	boolean				
IsSlack	Slack	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
Mobile	Mobile	boolean				
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				

CUSTOMPERMISSION

Represents a permission created to control access to a custom process or app, such as sending email.

For more information, see CustomPermission in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Name	string		80		
`Id`	Custom Permission ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLicensed`	License Required	boolean				
`IsProtected`	Protected Component	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

CUSTOMPERMISSIONDEPENDENCY

Represents the dependency between two custom permissions when one custom permission requires that you enable another custom permission.

For more information, see CustomPermissionDependency in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomPermissionId`	Custom Permission ID	reference		18		
`Id`	Custom Permission Dependency ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RequiredCustomPermissionId`	Custom Permission ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

CUSTOMER

Represents the customer role of an individual with respect to a particular company or organization.

For more information, see Customer in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomerStatusType`	Customer Status Type	picklist		255		
`Id`	Customer ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PartyId`	Individual ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TotalLifeTimeValue`	Total Life Time Value	int	9			

CUSTOMERPROPERTY

Represents the insurable and insured properties of a customer.

For more information, see CustomerProperty in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
AnnualMileage	Expected Annual Mileage	int	9			
AssetId	Asset ID	reference		18		
BathroomCount	Number of Bathrooms	double			18	0
BedroomCount	Number of Bedrooms	double			18	0
BuiltUpArea	Built-Up Area	string		100		
CeilingType	Ceiling Type	picklist		40		
City	City	string		40		
ConstructionClass	Construction Class	picklist		40		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DaysDrivenTowork	Days Driven to Work (One Way)	int	9			
Description	Description	textarea		32000		
DwellingType	Dwelling Type	picklist		40		
EngineDisplacementVolume	Engine Displacement Volume	int	9			
FactoryPrice	Factory Price	currency			18	2
FairMarketValue	Fair Market Value	currency			18	2
FinancingType	Financing Type	picklist		40		
FloorCount	Number of Floors	int	9			
FloorType	Floor Type	picklist		40		
FoundationType	Foundation Type	picklist		40		
FuelType	Fuel Type	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
GarageSpaceCount	Number of Parking Spaces in Garage	int	9			
GarageType	Garage Type	picklist		40		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
GrossVehicleWeight	Gross Vehicle Weight	int	9			
Id	Customer Property ID	id		18		
IsBasementIncluded	Includes Basement	boolean				
IsChimneyIncluded	Includes Chimney	boolean				
IsDeleted	Deleted	boolean				
IsPassedSmogCheck	Passed Smog Check	boolean				
IsSwimmingPoolIncluded	Includes Swimming Pool	boolean				
KitchenCount	Number of Kitchens	double			18	0
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LeasePeriod	Lease Period	int	9			
LienHolderName	Lien Holder Name	string		255		
LoadCapacity	Load Capacity	string		255		
Longitude	Longitude	double			18	15
LotArea	Lot Area	string		100		
Make	Make	string		255		
MakeYear	Make Year	int	9			
MilesDrivenToWork	Miles Driven to Work (One way)	int	9			
ModelName	Model Name	string		255		
Name	Name	string		255		
OdometerReading	Odometer Reading	int	9			
OwnerId	Owner ID	reference		18		
PassengerSeatCapacity	Passenger Seat Capacity	int	9			
PostalCode	Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PrimaryOwnerId	Account ID	reference		18		
PrimaryUse	Primary Use	picklist		40		
PurchaseDate	Purchase Date	date				
PurchasePrice	Purchase Price	currency			18	2
RegistrationNumber	Registration Number	string		255		
RegistrationType	Registration Type	picklist		40		
RoofType	Roof Type	picklist		40		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
State	State	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
TransmissionType	Transmission Type	picklist		40		
Vin	VIN	string		255		
YearBuilt	Year Built	int	9			

CUSTOMERPROPERTYFEED

Feed tracking for CustomerProperty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

CUSTOMERPROPERTYHISTORY

History for tracked fields of CustomerProperty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomerPropertyId`	Customer Property ID	reference		18		
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Customer Property History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

CUSTOMERPROPERTYSHARE

Sharing for CustomerProperty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

CUSTOMERSHARE

Sharing for Customer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DANDBCOMPANY

Represents a Dun & Bradstreet® company record, which is associated with an account added from Data.com.

For more information, see DandBCompany in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Primary Address	address				
City	City	string		40		
CompanyCurrencyIsoCode	Local Currency ISO Code	picklist		255		
Country	Country	string		80		
CountryAccessCode	International Dialing Code	string		4		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrencyCode	Local Currency Code	picklist		255		
Description	Company Description	textarea		32000		
DomesticUltimateBusinessName	Domestic Ultimate Business Name	string		255		
DomesticUltimateDunsNumber	Domestic Ultimate D-U-N-S Number	string		9		
DunsNumber	D-U-N-S Number	string		9		
EmployeeQuantityGrowthRate	Employee Growth	double			18	6
EmployeesHere	Number of Employees - Location	double			18	0
EmployeesHereReliability	Number of Employees - Location Indicator	picklist		255		
EmployeesTotal	Number of Employees - Total	double			18	0
EmployeesTotalReliability	Number of Employees - Total Indicator	picklist		255		
FamilyMembers	Number of Business Family Members	int	5			
Fax	Facsimile Number	phone		40		
FifthNaics	Fifth NAICS Code	string		6		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
FifthNaicsDesc	Fifth NAICS Description	string		120		
FifthSic	Fifth SIC Code	string		4		
FifthSic8	Fifth SIC8 Code	string		8		
FifthSic8Desc	Fifth SIC8 Description	string		80		
FifthSicDesc	Fifth SIC Description	string		80		
FipsMsaCode	FIPS MSA Code	string		5		
FipsMsaDesc	FIPS MSA Code Description	string		255		
FortuneRank	Fortune 1000 Rank	int	4			
FourthNaics	Fourth NAICS Code	string		6		
FourthNaicsDesc	Fourth NAICS Description	string		120		
FourthSic	Fourth SIC Code	string		4		
FourthSic8	Fourth SIC8 Code	string		8		
FourthSic8Desc	Fourth SIC8 Description	string		80		
FourthSicDesc	Fourth SIC Description	string		80		
GeoCodeAccuracy	Geocode Accuracy	picklist		255		
GeocodeAccuracyStandard	Geocode Accuracy	picklist		255		
GlobalUltimateBusinessName	Global Ultimate Business Name	string		255		
GlobalUltimateDunsNumber	Global Ultimate D-U-N-S Number	string		9		
GlobalUltimateTotalEmployees	Number of Employees - Global	double			18	0
Id	D&B Company ID	id		18		
ImportExportAgent	Import/Export	picklist		255		
IncludedInSnP500	S&P 500	string		10		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	string		11		
LegalStatus	Legal Structure	picklist		255		
LocationStatus	Location Type	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Longitude	Longitude	string		11		
MailingAddress	Mailing Address	address				
MailingCity	Mailing City	string		40		
MailingCountry	Mailing Country	string		80		
MailingGeocodeAccuracy	Mailing Geocode Accuracy	picklist		255		
MailingPostalCode	Mailing Postal Code	string		20		
MailingState	Mailing State	string		80		
MailingStreet	Mailing Street Address	textarea		255		
MarketingPreScreen	Delinquency Risk	picklist		255		
MarketingSegmentationCluster	Marketing Segmentation Cluster	picklist		255		
MinorityOwned	Minority-Owned Indicator	picklist		255		
Name	Primary Business Name	string		255		
NationalId	National Identification Number	string		255		
NationalIdType	National Identification System	picklist		255		
OutOfBusiness	Out Of Business Indicator	picklist		255		
OwnOrRent	Location Ownership Indicator	picklist		255		
ParentOrHqBusinessName	Parent Company Business Name	string		255		
ParentOrHqDunsNumber	Parent Company D-U-N-S Number	string		9		
Phone	Telephone Number	phone		40		
PostalCode	Postal Code	string		20		
PremisesMeasure	Location Size	int	9			
PremisesMeasureReliability	Location Size Accuracy	string		64		
PremisesMeasureUnit	Location Size Unit of Measure	string		64		
PrimaryNaics	Primary NAICS Code	string		6		
PrimaryNaicsDesc	Primary NAICS Description	string		120		
PrimarySic	Primary SIC Code	string		4		
PrimarySic8	Primary SIC8 Code	string		8		
PrimarySic8Desc	Primary SIC8 Description	string		80		
PrimarySicDesc	Primary SIC Description	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PriorYearEmployees	Prior Year Number of Employees - Total	int	9			
PriorYearRevenue	Prior Year Revenue	double			18	0
PublicIndicator	Ownership Type Indicator	picklist		255		
SalesTurnoverGrowthRate	Annual Revenue Growth	double			18	6
SalesVolume	Annual Sales Volume	double			18	0
SalesVolumeReliability	Annual Sales Volume Indicator	picklist		255		
SecondNaics	Second NAICS Code	string		6		
SecondNaicsDesc	Second NAICS Description	string		120		
SecondSic	Second SIC Code	string		4		
SecondSic8	Second SIC8 Code	string		8		
SecondSic8Desc	Second SIC8 Description	string		80		
SecondSicDesc	Second SIC Description	string		80		
SixthNaics	Sixth NAICS Code	string		6		
SixthNaicsDesc	Sixth NAICS Description	string		120		
SixthSic	Sixth SIC Code	string		4		
SixthSic8	Sixth SIC8 Code	string		8		
SixthSic8Desc	Sixth SIC8 Description	string		80		
SixthSicDesc	Sixth SIC Description	string		80		
SmallBusiness	Small Business Indicator	picklist		255		
State	State	string		80		
StockExchange	Stock Exchange	string		16		
StockSymbol	Ticker Symbol	string		6		
Street	Street Address	textarea		255		
Subsidiary	Subsidiary Indicator	picklist		255		
SystemModstamp	System Modstamp	datetime				
ThirdNaics	Third NAICS Code	string		6		
ThirdNaicsDesc	Third NAICS Description	string		120		
ThirdSic	Third SIC Code	string		4		
ThirdSic8	Third SIC8 Code	string		8		
ThirdSic8Desc	Third SIC8 Description	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ThirdSicDesc	Third SIC Description	string		80		
TradeStyle1	Primary Tradestyle	string		255		
TradeStyle2	Second Tradestyle	string		255		
TradeStyle3	Third Tradestyle	string		255		
TradeStyle4	Fourth Tradestyle	string		255		
TradeStyle5	Fifth Tradestyle	string		255		
URL	URL	url		255		
UsTaxId	US Tax ID Number	string		9		
WomenOwned	Woman-Owned Indicator	picklist		255		
YearStarted	Year Started	string		4		

DASHBOARD

Represents a dashboard, which shows data from custom reports as visual components. Access is read-only.

For more information, see Dashboard in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BackgroundDirection	Background Fade Direction	picklist		40		
BackgroundEnd	Ending Color	int	9			
BackgroundStart	Starting Color	int	9			
ChartTheme	Chart Background	picklist		40		
ColorPalette	Color Palette	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DashboardResultRefreshedDate	Last refreshed for this user	string		256		
DashboardResultRunningUser	Running as	string		256		
Description	Description	string		255		
DeveloperName	Dashboard Unique Name	string		80		
FolderId	Folder ID	reference		18		
FolderName	Folder Name	string		256		
Id	Dashboard ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeftSize	Left Size	picklist		40		
MiddleSize	Middle Size	picklist		40		
NamespacePrefix	Namespace Prefix	string		15		
RightSize	Right Size	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RunningUserId	Running User ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TextColor	Text Color	int	9			
Title	Title	string		80		
TitleColor	Title Color	int	9			
TitleSize	Title Size	int	9			
Type	Dashboard Running User	picklist		40		

DASHBOARDCOMPONENT

Represents a dashboard component, which can be a chart, metric, table, or gauge on a dashboard. Access is read-only.

For more information, see DashboardComponent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CustomReportId`	Report ID	reference		18		
`DashboardId`	Dashboard ID	reference		18		
`Id`	Dashboard Component ID	id		18		
`Name`	Dashboard Component Name	string		80		

DASHBOARDCOMPONENTFEED

Feed tracking for DashboardComponent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DASHBOARDFEED

Feed tracking for Dashboard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DATAASSESSMENTFIELDMETRIC

Represents summary statistics for matched, blank, and differing fields in account records of an org compared to records in Data.com.

For more information, see DataAssessmentFieldMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataAssessmentMetricId`	Data Assessment Metric ID	reference		18		
`FieldName`	Field Name	string		255		
`Id`	Data Assessment Field Metric ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Data Assessment Field Metric	string		255		
`NumMatchedBlanks`	Number of Matched Records that have blanks for this field	int	9			
`NumMatchedDifferent`	Number of Matched Records that have different value for this field than Data.com	int	9			
`NumMatchedInSync`	Number of Matched Records that have the same value for this field as Data.com	int	9			
`NumUnmatchedBlanks`	Number of Unmatched Records that have blanks for this field	int	9			
`SystemModstamp`	System Modstamp	datetime				

DATAASSESSMENTMETRIC

Represents a summary of statistics for fields matched and unmatched in your account records with Data.com account records.

For more information, see DataAssessmentMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Data Assessment Metric ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Data Assessment Metric	string		255		
`NumDuplicates`	Number of Duplicates	int	9			
`NumMatched`	Number of Matched Records	int	9			
`NumMatchedDifferent`	Number of Matched Records with different field values	int	9			
`NumProcessed`	Number of Processed Records	int	9			
`NumTotal`	Total Number of Records to access	int	9			
`NumUnmatched`	Number of Unmatched Records	int	9			
`SystemModstamp`	System Modstamp	datetime				

DATAASSESSMENTVALUEMETRIC

Summarizes the number of fields matched for your account records with Data.com account records.

For more information, see DataAssessmentValueMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataAssessmentFieldMetricId`	Data Assessment Field Metric ID	reference		18		
`FieldValue`	Field Value	string		255		
`Id`	Data Assessment Field Value Metric ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Data Assessment Field Value Metric	string		255		
`SystemModstamp`	System Modstamp	datetime				
`ValueCount`	Number of times this value appears in this field	int	9			

DATAINTEGRATIONRECORDPURCHASEPERMISSION

Indicates Lightning Data purchase credits that a Salesforce admin has granted to users.

For more information, see DataIntegrationRecordPurchasePermission in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalObject`	Custom Object Definition ID	picklist		255		
`Id`	DataIntegrationRecordPurchasePermission ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		
`UserRecordPurchaseLimit`	User Record Purchase Limit	int	9			

DATAOBJECTDATACHGEVENT

Notifies subscribers of an action within Customer Data Platform.

For more information, see DataObjectDataChgEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionDeveloperName`	Action identifier	string		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventCreationDateTime`	Event creation time	datetime				
`EventPrompt`	Trigger (Insert/Update/Delete/Action) that caused this event	picklist		255		
`EventPublishDateTime`	Event published time	datetime				
`EventSchemaVersion`	Schema version	string		4000		
`EventType`	Type of Customer Data Platform Event	string		4000		
`EventUuid`	EventUuid	string		36		
`Offset`	Event offset for the events triggered per action configured per tenant	string		4000		
`PayloadCurrentValue`	Current data	textarea		128000		
`PayloadMetadata`	Metadata JSON with additional information about the payload	textarea		128000		
`PayloadPrevValue`	Previous data	textarea		128000		
`PayloadSchema`	Schema for event payload	textarea		128000		
`ReplayId`	ReplayId	string		1000		
`SourceObjectDeveloperName`	Source entity developer name	string		4000		

DATAOBJECTMETADATACHGEVENT

Notifies subscribers of a metadata change within Customer Data Platform for these objects: Data Lake, Data Model, and Calculated Insight.

For more information, see DataObjectMetadataChgEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrentValue`	Current metadata	textarea		128000		
`EventCreationDate`	Event creation time	datetime				
`EventPublishDate`	Event published time	datetime				
`EventType`	Type of Customer Data Platform Event	string		4000		
`EventUuid`	EventUuid	string		36		
`PreviousValue`	Previous metadata	textarea		128000		
`ReplayId`	ReplayId	string		1000		
`SchemaVersion`	Schema version	string		4000		
`SourceTableDeveloperName`	Source entity developer name	string		4000		
`Trigger`	Trigger (Insert/Update/Delete) that caused this event	string		4000		

DATAUSELEGALBASIS

Represents the legal basis for contacting a customer, such as billing or contract.

For more information, see DataUseLegalBasis in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Data Use Legal Basis ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Source	Source	string		255		
SystemModstamp	System Modstamp	datetime				

DATAUSELEGALBASISHISTORY

History for tracked fields of DataUseLegalBasis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
DataUseLegalBasisId	Data Use Legal Basis ID	reference		18		
Field	Changed Field	picklist		255		
Id	Data Use Legal Basis History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

DATAUSELEGALBASISSHARE

Sharing for DataUseLegalBasis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DATAUSEPURPOSE

Represents the reason for contacting a prospect or customer, such as for billing, marketing, or surveys

For more information, see DataUsePurpose in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CanDataSubjectOptOut	Can Data Subject Opt Out	boolean				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Data Use Purpose ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsReadOnly	Is Read Only	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LegalBasisId	Legal Basis ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PurposeId	Purpose ID	reference		18		
SystemModstamp	System Modstamp	datetime				

DATAUSEPURPOSEHISTORY

History for tracked fields of DataUsePurpose.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`DataUsePurposeId`	Data Use Purpose ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Data Use Purpose History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

DATAUSEPURPOSESHARE

Sharing for DataUsePurpose.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DATACLOUDCOMPANY

Represents the fields for Data.com company records.

For more information, see DatacloudCompany in the *Data.com API Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveContacts	Active Contacts	int	9			
AnnualRevenue	Annual Revenue	currency			18	2
City	City	string		255		
CompanyId	Data.com Company ID	string		25		
Country	Country/Territory	string		50		
CountryCode	Country/Territory	picklist		255		
Description	Company Synopsis	string		400		
DunsNumber	Duns Number	string		128		
EmployeeQuantityGrowthRate	Employee Quantity Growth Rate	double			18	6
ExternalId	Data.com Company ID	string		255		
Fax	Fax Number	phone		40		
FortuneRank	Fortune Rank	int	9			
FullAddress	Address	string		255		
Id	System ID	id		18		
IncludedInSnP500	Included In S&P 500	string		10		
Industry	Industry	string		128		
IsInCrm	In CRM	boolean				
IsInactive	Inactive Status	boolean				
IsOwned	Owned	boolean				
NaicsCode	NAICS Code	string		128		
NaicsDesc	NAICS Description	string		128		
Name	Company Name	string		128		
NumberOfEmployees	Employee Count	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Ownership	Ownership Status	string		16		
Phone	Phone Number	phone		40		
PremisesMeasure	Premises Area Measurement	int	9			
PremisesMeasureReliability	Premises Area Measurement Reliability Text	string		64		
PremisesMeasureUnit	Premises Area Unit of Measurement	string		64		
PriorYearEmployees	Prior Year Employee	int	9			
PriorYearRevenue	Prior Year Revenue	currency			18	0
SalesTurnoverGrowthRate	Sales Turnover Growth Rate	double			18	6
Sic	SIC Code	string		128		
SicCodeDesc	Industry Codes	string		255		
SicDesc	SIC Description	string		128		
Site	Location Type	picklist		255		
State	State	string		50		
StateCode	State	picklist		255		
Street	Street Address	string		255		
TickerSymbol	Stock Ticker Symbol	string		16		
TradeStyle	Trade Style	string		128		
UpdatedDate	Updated Date	datetime				
Website	Company or Website	url		255		
YearStarted	Company Founding Date	string		4		
Zip	Zip	string		32		

DATACLOUDCONTACT

The fields and properties for Data.com contact records.

For more information, see DatacloudContact in the *Data.com API Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`City`	City	string		255		
`CompanyId`	Company Id	string		25		
`CompanyName`	Company	string		128		
`ContactId`	Data.com Contact ID	string		25		
`Country`	Country/Territory	string		50		
`Department`	Department	picklist		255		
`Email`	Email	email		80		
`ExternalId`	Data.com Contact ID	string		255		
`FirstName`	First name	string		128		
`Id`	System ID	id		18		
`IsInCrm`	In CRM	boolean				
`IsInactive`	Inactive Status	boolean				
`IsOwned`	Owned	boolean				
`LastName`	Last name	string		128		
`Level`	Level	picklist		255		
`Phone`	Phone	phone		40		
`State`	State	string		50		
`Street`	Street Address	string		255		
`Title`	Title	string		128		
`UpdatedDate`	Updated Date	datetime				
`Zip`	ZIP code	string		32		

DATACLOUDDANDBCOMPANY

Represents a set of read-only fields that are used to return D&B company data from Data.com API calls.

For more information, see DatacloudDandBCompany in the *Data.com API Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
City	City	string		255		
CompanyCurrencyIsoCode	Local Currency ISO Code	picklist		255		
CompanyId	D&B Company ID	string		25		
Country	Country	string		50		
CountryAccessCode	International Dialing Code	string		4		
CountryCode	Country Code	string		50		
CurrencyCode	Local Currency Code	picklist		255		
Description	Company Description	string		1000		
DomesticUltimateBusinessName	Domestic Ultimate Business Name	string		255		
DomesticUltimateDunsNumber	Domestic Ultimate D-U-N-S Number	string		9		
DunsNumber	D-U-N-S Number	string		9		
EmployeeQuantityGrowthRate	Employee Quantity Growth Rate	double			18	6
EmployeesHere	Number of Employees - Location	double			18	0
EmployeesHereReliability	Number of Employees - Location Indicator	picklist		255		
EmployeesTotal	Number of Employees - Total	double			18	0
EmployeesTotalReliability	Number of Employees - Total Indicator	picklist		255		
ExternalId	D&B Company ID	string		255		
FamilyMembers	Number of Business Family Members	int	5			
Fax	Facsimile Number	phone		40		
FifthNaics	Fifth NAICS Code	string		6		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
FifthNaicsDesc	Fifth NAICS Description	string		120		
FifthSic	Fourth SIC Description	string		4		
FifthSic8	Fifth SIC8 Code	string		8		
FifthSic8Desc	Fifth SIC8 Description	string		80		
FifthSicDesc	Fifth SIC Description	string		80		
FipsMsaCode	FIPS MSA Code	string		5		
FipsMsaDesc	FIPS MSA Code Description	string		255		
FortuneRank	Fortune Rank	int	9			
FourthNaics	Fourth NAICS Code	string		6		
FourthNaicsDesc	Fourth NAICS Description	string		120		
FourthSic	Fourth SIC Code	string		4		
FourthSic8	Fourth SIC8 Code	string		8		
FourthSic8Desc	Fourth SIC8 Description	string		80		
FourthSicDesc	Fourth SIC Description	string		80		
FullAddress	Address	string		255		
GeoCodeAccuracy	Geocode Accuracy	picklist		255		
GlobalUltimateBusinessName	Global Ultimate Business Name	string		255		
GlobalUltimateDunsNumber	Global Ultimate D-U-N-S Number	string		9		
GlobalUltimateTotalEmployees	Number of Employees - Global	double			18	0
Id	D&B Company ID	id		18		
ImportExportAgent	Import/Export	picklist		255		
IncludedInSnP500	Included In S&P 500	string		10		
Industry	Industry	string		80		
IsInCrm	In CRM	boolean				
IsOwned	Owned Status	boolean				
IsParent	Parent	boolean				
Latitude	Latitude	string		11		
LegalStatus	Legal Structure	picklist		255		
LocationStatus	Location Type	picklist		255		
Longitude	Longitude	string		11		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MailingCity	Mailing City	string		255		
MailingCountry	Mailing Country	string		50		
MailingCountryCode	Mailing Country Code	string		50		
MailingState	Mailing State	string		50		
MailingStateCode	Mailing State Code	string		50		
MailingStreet	Mailing Street Address	string		255		
MailingZip	Mailing Postal Code	string		32		
MarketingPreScreen	Delinquency Risk	picklist		255		
MarketingSegmentationCluster	Marketing Segmentation Cluster	picklist		255		
MinorityOwned	Minority-Owned Indicator	picklist		255		
Name	D&B Company Name	string		255		
NationalId	National Identification Number	string		255		
NationalIdType	National Identification System	picklist		255		
OutOfBusiness	Out Of Business Indicator	picklist		255		
OwnOrRent	Location Ownership Indicator	picklist		255		
ParentOrHqBusinessName	Parent Company Business Name	string		255		
ParentOrHqDunsNumber	Parent Company D-U-N-S Number	string		9		
Phone	Telephone Number	phone		40		
PremisesMeasure	Premises Area Measurement	int	9			
PremisesMeasureReliability	Premises Area Measurement Reliability Text	string		64		
PremisesMeasureUnit	Premises Area Unit of Measurement	string		64		
PrimaryNaics	Primary NAICS Code	string		6		
PrimaryNaicsDesc	Primary NAICS Description	string		120		
PrimarySic	Primary SIC Code	string		4		
PrimarySic8	SIC8 Code	string		8		
PrimarySic8Desc	SIC8 Description	string		80		
PrimarySicDesc	Primary SIC Description	string		80		
PriorYearEmployees	Prior Year Employee	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PriorYearRevenue	Prior Year Revenue	double			18	0
PublicIndicator	Ownership Type Indicator	picklist		255		
Revenue	Revenue	double			18	0
SalesTurnoverGrowthRate	Sales Turnover Growth Rate	double			18	6
SalesVolume	Annual Sales Volume	double			18	2
SalesVolumeReliability	Annual Sales Volume Indicator	picklist		255		
SecondNaics	Second NAICS Code	string		6		
SecondNaicsDesc	Second NAICS Description	string		120		
SecondSic	Second SIC Code	string		4		
SecondSic8	Second SIC8 Code	string		8		
SecondSic8Desc	Second SIC8 Description	string		80		
SecondSicDesc	Second SIC Description	string		80		
SicCodeDesc	Industry Codes	string		255		
SixthNaics	Sixth NAICS Code	string		6		
SixthNaicsDesc	Sixth NAICS Description	string		120		
SixthSic	Sixth SIC Code	string		4		
SixthSic8	Sixth SIC8 Code	string		8		
SixthSic8Desc	Sixth SIC8 Description	string		80		
SixthSicDesc	Sixth SIC Description	string		80		
SmallBusiness	Small Business Indicator	picklist		255		
State	State	string		50		
StateCode	State Code	string		50		
StockExchange	Stock Exchange	string		16		
StockSymbol	Ticker Symbol	string		6		
Street	Street Address	string		255		
Subsidiary	Subsidiary Indicator	picklist		255		
ThirdNaics	Third NAICS Code	string		6		
ThirdNaicsDesc	Third NAICS Description	string		120		
ThirdSic	Third SIC Code	string		4		
ThirdSic8	Third SIC8 Code	string		8		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ThirdSic8Desc	Third SIC8 Description	string		80		
ThirdSicDesc	Third SIC Description	string		80		
TradeStyle1	Primary Tradestyle	string		255		
TradeStyle2	Second Tradestyle	string		255		
TradeStyle3	Third Tradestyle	string		255		
TradeStyle4	Fourth Tradestyle	string		255		
TradeStyle5	Fifth Tradestyle	string		255		
URL	URL	url		255		
UsTaxId	US Tax ID Number	string		9		
WomenOwned	Woman-Owned Indicator	picklist		255		
YearStarted	Year Started	string		4		
Zip	Postal Code	string		32		

DATACLOUDOWNEDENTITY

Represents fields in the DatacloudOwnedEntity object. The DatacloudOwnedEntity object tracks user-purchased records.

For more information, see DatacloudOwnedEntity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataDotComKey`	Data.com key	string		25		
`DatacloudEntityType`	Data.com Object Type	picklist		255		
`Id`	Data.com Owned Entity ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Description	string		255		
`PurchaseType`	Data.com Purchase Type	picklist		255		
`PurchaseUsageId`	Data.com Usage ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

DATACLOUDPURCHASEUSAGE

Represents an object used to identify and track Data.com record purchases. This object is available in API version 30.0 or later.

For more information, see DatacloudPurchaseUsage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DatacloudEntityType	Data.com Object Type	picklist		255		
Description	Description	string		255		
Id	Data.com Usage ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Sequence ID	string		255		
PurchaseType	Data.com Purchase Type	picklist		255		
SystemModstamp	System Modstamp	datetime				
Usage	Purchase Count	double			18	0
UserId	User ID	reference		18		
UserType	Data.com Usage Type	picklist		255		

DATASETEXPORT

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExport acts as the header and includes the JSON schema.

For more information, see DatasetExport in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CompressedMetadataLength`	Compressed Metadata Length	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Dataset Export ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Metadata`	Metadata	base64				
`MetadataLength`	Metadata Length	int	9			
`Owner`	Owner	string		18		
`PublisherInfo`	Publisher Info	string		1000		
`PublisherType`	Publisher Type	picklist		255		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

DATASETEXPORTEVENT

Notifies subscribers on the export of an Analytics dataset.

For more information, see DatasetExportEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataflowInstanceId`	Dataflow Instance Id	string		18		
`DatasetExportId`	Dataset Export ID	string		18		
`EventUuid`	Event UUID	string		36		
`Message`	Message	string		255		
`Owner`	Owner	string		18		
`PublisherInfo`	Publisher Info	string		1000		
`PublisherType`	Publisher Type	picklist		255		
`ReplayId`	Replay ID	string		1000		
`Status`	Status	picklist		255		

DATASETEXPORTPART

Represents a dataset exported from CRM Analytics. When a dataset is exported, the data is converted into a .csv file and the schema is stored in a separate JSON file. These files are stored in two objects: DatasetExport and DatasetExportPart. DatasetExportPart contains parts of the .csv file.

For more information, see DatasetExportPart in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CompressedDataFileLength	Compressed Data File Length	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataFile	Data File	base64				
DataFileLength	Data File Length	int	9			
DatasetExportId	Dataset Export ID	reference		18		
Id	Dataset Export Part ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Owner	Owner	string		18		
PartNumber	Part Number	int	9			
SystemModstamp	System Modstamp	datetime				

DECISIONTABLE

Represents the information about a decision table. Use an input fields criteria to define when a decision table must provide outcomes.

For more information, see DecisionTable in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConditionCriteria`	Condition Criteria	string		255		
`ConditionType`	Condition Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	API Name	string		80		
`Id`	Decision Table ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastSyncDate`	Last Refreshed Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SetupName`	Name	string		120		
`SourceObject`	Source Object	string		120		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

DECISIONTABLEDATASETLINK

Represents a dataset link associated with a decision table. Use dataset links in a decision table to select multiple source objects whose field values the decision table must evaluate and provide outcomes for.

For more information, see DecisionTableDatasetLink in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DecisionTableId`	Decision Table ID	reference		18		
`Description`	Description	textarea		1000		
`DeveloperName`	Name	string		80		
`Id`	Decision Table Payload ID	id		18		
`IsDefault`	Is Default	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SetupName`	Name	string		120		
`SourceObject`	Source Object	string		120		
`SystemModstamp`	System Modstamp	datetime				

DECISIONTABLEPARAMETER

Represents an input or output field in a decision table. An input field is a field in the business rule object or custom metadata type that contains values used by the decision table to evaluate field values. An output field is a field in the business rule object or custom metadata type that contains the values provided as outcomes for a rule.

For more information, see DecisionTableParameter in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DecisionTableId`	Decision Table ID	reference		18		
`FieldName`	Attribute	string		120		
`Id`	Decision Table Parameter ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsGroupByField`	Group By Field	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Operator`	Operator	picklist		255		
`Sequence`	Sequence	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Usage`	Type	picklist		255		

DECISIONTBLDATASETPARAMETER

Represents the mapping between the decision table input fields and the fields of the different source objects in the dataset link. This mapping allows the decision table to know which field values from the source objects must be evaluated by the input fields of the decision table.

For more information, see DecisionTblDatasetParameter in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DatasetFieldName`	Dataset Field Name	string		120		
`DatasetSourceObject`	Dataset Source Object	string		120		
`DecisionTableDatasetLinkId`	Decision Table Payload ID	reference		18		
`DecisionTableParameterId`	Decision Table Parameter ID	reference		18		
`Id`	Decision Table Dataset Parameter ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

DECLINEDEVENTRELATION

Represents event participants (invitees or attendees) with the status `Declined` for a given event.

For more information, see DeclinedEventRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventId`	Event ID	reference		18		
`Id`	Event Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RelationId`	Relation ID	reference		18		
`RespondedDate`	Response Date	datetime				
`Response`	Response	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	string		50		

DELEGATEDACCOUNT

Represents the external managed account.

For more information, see DelegatedAccount in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessManageUsers	Allows user to manage users in delegated accounts	boolean				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	External Managed Account ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManagedById	User ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentId	Account ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TargetId	Account ID	reference		18		

DELEGATEDACCOUNTFEED

Feed tracking for DelegatedAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DELEGATEDACCOUNTHISTORY

History for tracked fields of DelegatedAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`DelegatedAccountId`	External Managed Account ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	External Managed Account History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

DELEGATEDACCOUNTSHARE

Sharing for DelegatedAccount.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DELETEEVENT

Represents a record that has been soft deleted.

For more information, see DeleteEvent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DeletedById`	Owner ID	reference		18		
`DeletedDate`	Deleted Date	datetime				
`Id`	Delete Event ID	id		18		
`Record`	Record ID	string		18		
`RecordName`	Record Name	string		255		
`SobjectName`	Type	string		40		
`SystemModstamp`	System Modstamp	datetime				

DIAGNOSTICSUMMARY

Represents the findings, interpretations, and summaries of tests performed on patients.

For more information, see DiagnosticSummary in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AttachmentLanguage	Attachment Language	string		255		
AuthenticatorId	Authenticator ID	reference		18		
BasedOnId	Based On ID	reference		18		
CareObservationId	Care Observation ID	reference		18		
Category	Category	multipicklist		4099	0	
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CodeId	Code Set Bundle ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustodianId	Account ID	reference		18		
DocumentFormatCodeId	Code Set ID	reference		18		
DocumentSecurityCodeId	Code Set Bundle ID	reference		18		
DocumentStage	Document Stage	picklist		40		
DocumentTypeCodeId	Code Set Bundle ID	reference		18		
EffectiveEndDateTime	Effective End Date	datetime				
EffectiveStartDateTime	Effective Start Date	datetime				
Id	Diagnostic Summary ID	id		18		
ImageComments1	Image Comments 1	string		255		
ImageComments2	Image Comments 2	string		255		
ImageComments3	Image Comments 3	string		255		
ImageComments4	Image Comments 4	string		255		
ImageComments5	Image Comments 5	string		255		
ImageUrl1	Image URL 1	url		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ImageUrl2	Image URL 2	url		255		
ImageUrl3	Image URL 3	url		255		
ImageUrl4	Image URL 4	url		255		
ImageUrl5	Image URL 5	url		255		
InterpretedById	Care Performer ID	reference		18		
IsDeleted	Deleted	boolean				
IssuedById	Care Performer ID	reference		18		
IssuedDateTime	Date Issued	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
ReportAttachmentId	Attachment ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
Summary	Summary	string		255		
SummaryCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UsageType	Usage Type	picklist		255		

DIAGNOSTICSUMMARYDETAIL

Represents additional information associated with document reference-type DiagnosticSummary records. This additional information may be related documents, authors, or related encounters.

For more information, see DiagnosticSummaryDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DetailRecordId`	Detail Record ID	reference		18		
`DetailType`	Detail Type	picklist		255		
`DiagnosticSummaryId`	Diagnostic Summary ID	reference		18		
`DocumentRelationType`	Document Relation Type	picklist		40		
`Id`	Diagnostic Summary Detail ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

DIAGNOSTICSUMMARYDETAILFEED

Feed tracking for DiagnosticSummaryDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DIAGNOSTICSUMMARYDETAILHISTORY

History for tracked fields of DiagnosticSummaryDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
DiagnosticSummaryDetailId	Diagnostic Summary Detail ID	reference		18		
Field	Changed Field	picklist		255		
Id	Diagnostic Summary Detail History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

DIAGNOSTICSUMMARYFEED

Feed tracking for DiagnosticSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DIAGNOSTICSUMMARYHISTORY

History for tracked fields of DiagnosticSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
DiagnosticSummaryId	Diagnostic Summary ID	reference		18		
Field	Changed Field	picklist		255		
Id	Diagnostic Summary History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

DIAGNOSTICSUMMARYSHARE

Sharing for DiagnosticSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DIGITALSIGNATURE

Represents a signature captured on a service report in field service.

For more information, see DigitalSignature in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DigitalSignatureNumber`	Signature Number	string		255		
`DocumentBody`	Digital Signature Body	base64				
`DocumentContentType`	Digital Signature Content Type	picklist		255		
`DocumentLength`	Digital Signature Length	int	9			
`DocumentName`	Signature Document Name	string		40		
`Id`	Digital Signature ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent Record ID	reference		18		
`Place`	Place	string		255		
`SignatureType`	Type	picklist		40		
`SignedBy`	Signed By	string		255		
`SignedDate`	Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

DIGITALWALLET

The digital wallet entity represents a customer's digital wallet service. Commerce Payments can use a digital wallet as a payment source when processing payments through a payment gateway.

For more information, see DigitalWallet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AuditEmail	Audit Email	email		80		
Comments	Comments	textarea		1000		
CompanyName	Company Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Customer	Customer ID	string		255		
DigitalWalletNumber	Digital Wallet Number	string		255		
Email	Registered Email	email		80		
GatewayToken	Gateway Token	string		255		
GatewayTokenDetails	Gateway Token Details	textarea		1000		
GatewayTokenEncrypted	Gateway Token Encrypted	encryptedstring		255		
Id	Digital Wallet ID	id		18		
IpAddress	IP Address	string		39		
IsAutoPayEnabled	Auto Pay	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MacAddress	MAC Address	string		32		
NickName	Nickname	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PaymentGatewayId	Payment Gateway ID	reference		18		
PaymentMethodAddress	Payment Method Address	address				
PaymentMethodCity	City	string		40		
PaymentMethodCountry	Country	string		80		
PaymentMethodGeocodeAccuracy	GeoCode Accuracy	picklist		255		
PaymentMethodLatitude	Latitude	double			18	15
PaymentMethodLongitude	Longitude	double			18	15
PaymentMethodPostalCode	Postal Code	string		20		
PaymentMethodState	State	string		80		
PaymentMethodStreet	Street	textarea		255		
Phone	Phone	phone		40		
ProcessingMode	Processing Mode	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

DISTRIBUTORAUTHORIZATION

Represents the official authorization from an insurance company granting a distributor the permission to act as its agent.

For more information, see DistributorAuthorization in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AuthorizedInsuranceLineId	Authorized Insurance Line ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	date				
ExpirationDate	Expiration Date	date				
Id	Distributor Authorization ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LicenseId	Business License ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TerminationCause	Termination Cause	string		255		

DISTRIBUTORAUTHORIZATIONFEED

Feed tracking for DistributorAuthorization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DISTRIBUTORAUTHORIZATIONHISTORY

History for tracked fields of DistributorAuthorization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
DistributorAuthorizationId	Distributor Authorization ID	reference		18		
Field	Changed Field	picklist		255		
Id	Distributor Authorization History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

DISTRIBUTORAUTHORIZATIONSHARE

Sharing for DistributorAuthorization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENT

Represents a file that a user has uploaded. Unlike Attachment records, documents are not attached to a parent object.

For more information, see Document in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorId	Author ID	reference		18		
Body	Body	base64				
BodyLength	Body Length	int	8			
ContentType	MIME Type	string		120		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
DeveloperName	Document Unique Name	string		80		
FolderId	Folder ID	reference		18		
Id	Document ID	id		18		
IsBodySearchable	Document Content Searchable	boolean				
IsDeleted	Deleted	boolean				
IsInternalUseOnly	Internal Use Only	boolean				
IsPublic	Externally Available	boolean				
Keywords	Keywords	string		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Document Name	string		255		
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				
Type	File Extension	string		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Url	Url	string		255		

DOCUMENTATTACHMENTMAP

Maps the relationship between an EmailTemplate and its attachment, which is stored as a Document.

For more information, see DocumentAttachmentMap in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DocumentId`	Document ID	reference		18		
`DocumentSequence`	Attachment Sequence	int	9			
`Id`	Document Entity Map Id	id		18		
`ParentId`	Entity ID	reference		18		

DOCUMENTCHECKLISTITEM

Represents a checklist item for a documentation file upload.

For more information, see DocumentChecklistItem in the *Financial Services Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Document Checklist Item ID	id		18		
Instruction	Instructions	textarea		32000		
IsAccepted	Accepted	boolean				
IsDeleted	Deleted	boolean				
IsFrozen	Frozen	boolean				
IsRequired	Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentRecordId	ParentRecord ID	reference		18		
ReceivedDocumentId	Received Document ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TransformationInfo	Transformation Info	textarea		10240		
UploadedById	User ID	reference		18		
WhoId	Who ID	reference		18		

DOCUMENTCHECKLISTITEMFEED

Feed tracking for DocumentChecklistItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DOCUMENTCHECKLISTITEMHISTORY

History for tracked fields of DocumentChecklistItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`DocumentChecklistItemId`	Document Checklist Item ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Document Checklist Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

DOCUMENTCHECKLISTITEMSHARE

Sharing for DocumentChecklistItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENTENVELOPE

The container for a document that is routed for signatures.

For more information, see DocumentEnvelope in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeliveredDateTime	Delivered Date Time	datetime				
EnvelopeIdentifier	Envelope Identifier	string		80		
EnvelopeMessageContent	Envelope Message	textarea		32768		
EnvelopeSubject	Envelope Subject	string		1000		
EnvelopeUri	Envelope URI	string		255		
FinalStatusDateTime	Final Status Date Time	datetime				
FinalStatusReason	Final Status Reason	string		1000		
Id	Document Envelope ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastSyncDateTime	Last Sync Date Time	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ReferenceObjectId	ReferenceObject ID	reference		18		
Status	Status	picklist		40		
StatusChangeDateTime	Status Change Date Time	datetime				
SystemModstamp	System Modstamp	datetime				
Vendor	Vendor	picklist		255		

DOCUMENTENVELOPEFEED

Feed tracking for DocumentEnvelope.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DOCUMENTENVELOPEHISTORY

History for tracked fields of DocumentEnvelope.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`DocumentEnvelopeId`	Document Envelope ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Document EnvelopeHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

DOCUMENTENVELOPESHARE

Sharing for DocumentEnvelope.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENTGENERATIONPROCESS

Supports server-side document generation requests and responses.

For more information, see DocumentGenerationProcess in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Document Generation Process ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ReferenceObject`	Reference Object	string		18		
`RequestText`	Request Text	string		255		
`ResponseText`	Response Text	string		255		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TokenData`	Token Data	textarea		131072		
`Type`	Type	picklist		255		

DOCUMENTGENERATIONPROCESSSHARE

Sharing for DocumentGenerationProcess.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENTRECIPIENT

Connects a Service Report to a Digital Signature.

For more information, see DocumentRecipient in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeliveredDateTime	Delivered Date Time	datetime				
DocumentAccessKey	Document Access Key	string		80		
DocumentId	Document ID	reference		18		
DocumentRecipient	Name	string		255		
Email	Email	email		80		
FinalStatusDateTime	Final Status Date Time	datetime				
Id	Document Recipient ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LegalName	Legal Name	string		255		
LocaleCode	Locale Code	picklist		255		
OwnerId	Owner ID	reference		18		
RecipientId	Recipient ID	reference		18		
RecipientName	Recipient Name	string		255		
RecipientSequence	Recipient Sequence	int	9			
RoutingOrder	Routing Order	int	9			
Status	Status	picklist		255		
StatusReason	Status Reason	textarea		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

DOCUMENTRECIPIENTFEED

Feed tracking for DocumentRecipient.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

DOCUMENTRECIPIENTSHARE

Sharing for DocumentRecipient.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENTTEMPLATE

Represents information about dynamic document generation.

For more information, see DocumentTemplate in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomClassName	Custom Class Name	string		80		
DefaultFontStyle	Default Font Style	textarea		32768		
DocumentConversionResourceName	Document Conversion Resource Name	string		255		
DocumentGenerationMechanism	Document Generation Mechanism	picklist		255		
ExtractOmniDataTransformName	Extract Omni Data Transform Name	string		255		
GlobalKey	Global Key	string		255		
HasBatchableSection	Batchable Section Available	boolean				
Id	Document Template ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsSectionProcessed	Section Processed	boolean				
LastEmbeddedImplSectionKey	Last Embedded Template Section Key	string		4		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MapperOmniDataTransformName	Mapper Omni Data Transform Name	string		255		
Name	Name	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
SectionHeaderFontStyle	Section Header Font Style	textarea		32768		
SectionHeaderFontStyleValue	Section Header Font Style Value	textarea		32768		
ShouldDisplayUnmappedToken	Display Unmapped Token	boolean				
ShouldExtractEmbeddedImplToken	Extract Embedded Template Token	boolean				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetTokenItemObject	Target Token Item Object	multipicklist		4099	0	
TargetTokenObject	Target Token Object	multipicklist		4099	0	
TokenList	Token List	textarea		131072		
TokenMappingMethodType	Token Mapping Method Type	picklist		255		
TokenMappingType	Token Mapping Type	picklist		255		
Type	Type	picklist		255		
VersionNumber	Version	int	9			
XmlRelationshipMetadata	Xml Relationship Metadata	textarea		131072		

DOCUMENTTEMPLATEFEED

Feed tracking for DocumentTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

DOCUMENTTEMPLATEHISTORY

History for tracked fields of DocumentTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`DocumentTemplateId`	Document Template ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Document TemplateHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

DOCUMENTTEMPLATESHARE

Sharing for DocumentTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

DOCUMENTTYPE

Represents the type of file being uploaded or attached.

For more information, see DocumentType in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Name	string		80		
`Id`	Document Type ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

DOMAIN

Read-only object that represents a custom Web address assigned to a site in your organization.

For more information, see Domain in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CnameTarget`	CNAME Target	string		765		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Domain`	Domain Name	string		765		
`DomainType`	Domain Type	picklist		40		
`HttpsOption`	Current HTTPS Option	picklist		40		
`Id`	Domain ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OptionsHstsPreload`	Allow Strict Transport Security preloading	boolean				
`SystemModstamp`	System Modstamp	datetime				

DOMAINSITE

Read-only junction object that joins together the Site and Domain objects.

For more information, see DomainSite in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DomainId`	Domain ID	reference		18		
`Id`	Custom URL ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PathPrefix`	Path	string		255		
`SiteId`	Site ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

DUPLICATERECORDITEM

Represents an individual record that's part of a duplicate record set. Use this object to create custom report types.

For more information, see DuplicateRecordItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DuplicateRecordSetId`	Duplicate Record Set ID	reference		18		
`Id`	Duplicate Record Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Duplicate Record Item Name	string		255		
`RecordId`	Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

DUPLICATERECORDSET

Represents a group of records that have been identified as duplicates. Each duplicate record set contains one or more duplicate record items. Use this object to create custom report types and view the results of duplicate jobs.

For more information, see DuplicateRecordSet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DuplicateRuleId`	Duplicate Rule ID	reference		18		
`Id`	Duplicate Record Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Duplicate Record Set Name	string		255		
`RecordCount`	Record Count	int	9			
`SystemModstamp`	System Modstamp	datetime				

DUPLICATERULE

Represents a duplicate rule for detecting duplicate records.

For more information, see DuplicateRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Object Name	string		80		
`Id`	Duplicate Rule ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MasterLabel`	Rule Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SobjectSubtype`	Object Subtype	picklist		255		
`SobjectType`	Custom Object Definition ID	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

ESIGNATURECONFIG

The settings for integrating with external eSignature providers.

For more information, see ESignatureConfig in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ConfigType	Config Type	picklist		255		
ConfigValue	Config Value	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DeveloperName	Name	string		80		
GroupType	Config Group	picklist		255		
Id	Electronic Signature Config ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				
Vendor	Vendor	picklist		255		

ESIGNATUREENVELOPECONFIG

The notification-specific settings for integrating with external eSignature providers.

For more information, see ESignatureEnvelopeConfig in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
ExpirationPeriod	Expiration Period	int	9			
ExpirationWarningPeriod	Expiration Warning Period	int	9			
FirstReminderPeriod	First Reminder Period	int	9			
Id	Electronic Signature Envelope Config ID	id		18		
IsDeleted	Deleted	boolean				
IsExpirationEnabled	Expiration Enabled	boolean				
IsReminderEnabled	Reminder Enabled	boolean				
IsVendorDefaultNtfcnEnabled	Vendor Default Notification Enabled	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
ReminderIntervalPeriod	Reminder Interval Period	int	9			
SystemModstamp	System Modstamp	datetime				
TargetObjectName	Target Object Name	picklist		255		
Vendor	Vendor	picklist		255		
VendorAccountIdentifier	Vendor Account Identifier	string		255		

ELECTRICITYEMSSNFCTRSET

Represents the factors that are used to convert electricity usage into CO_2e, CO_2, CH_4, and N_2O values. This record holds data on the breakdown of sources of electricity by fuel type (grid mixes).

For more information, see ElectricityEmssnFctrSet in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Ch4EmissionRate	CH4 Emissions Rate	double			18	6
Ch4EmissionRateInTgwh	CH4 Emissions Rate (tonnes/GWh)	double			18	6
Ch4EmissionRateUnit	CH4 Emissions Rate Unit	picklist		255		
City	City	string		255		
Co2EmissionRate	CO2 Emissions Rate	double			18	6
Co2EmissionRateInTmwh	CO2 Emissions Rate (tonnes/MWh)	double			18	6
Co2EmissionRateUnit	CO2 Emissions Rate Unit	picklist		255		
Co2eEmissionRate	CO2e Emissions Rate	double			18	6
Co2eEmissionRateInTmwh	CO2e Emissions Rate (tonnes/MWh)	double			18	6
Co2eEmissionRateUnit	CO2e Emissions Rate Unit	picklist		255		
Country	Country	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
GenlConversionFctrRevisionDate	Emissions Factor Revision Date	date				
GridSubregion	Grid Subregion	string		255		
Id	Electricity Emissions Factor Set ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocBasedGeothermalMixPct	Location-Based Geothermal Mix Percentage	percent			18	2
LocBasedOtherFossilFuelMixPct	Location-Based Other Fossil Fuel Mix Percentage	percent			18	2
LocBasedRenewableEnergyPct	Location-Based Renewable Energy Percentage	percent			18	2
LocBsdRenewableEnrgyNonHydro	Location-Based Renewable Energy Excluding Hydroelectricity Percentage	percent			18	2
LocationBasedBiomassMixPct	Location-Based Biomass Mix Percentage	percent			18	2
LocationBasedCoalMixPct	Location-Based Coal Mix Percentage	percent			18	2
LocationBasedGasMixPct	Location-Based Gas Mix Percentage	percent			18	2
LocationBasedHydroMixPct	Location-Based Hydroelectricity Mix Percentage	percent			18	2
LocationBasedMixPct	Location-Based Mix Percentage	percent			18	2
LocationBasedNuclearMixPct	Location-Based Nuclear Mix Percentage	percent			18	2
LocationBasedOilMixPct	Location-Based Oil Mix Percentage	percent			18	2
LocationBasedOtherFuelMixPct	Location-Based Other Fuel Mix Percentage	percent			18	2
LocationBasedSolarMixPct	Location-Based Solar Mix Percentage	percent			18	2
LocationBasedWindMixPct	Location-Based Wind Mix Percentage	percent			18	2
MarketBasedBiomassMixPct	Market-Based Biomass Mix Percentage	percent			18	2
MarketBasedCoalMixPct	Market-Based Coal Mix Percentage	percent			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MarketBasedGasMixPct	Market-Based Gas Mix Percentage	percent			18	2
MarketBasedHydroMixPct	Market-Based Hydroelectric Mix Percentage	percent			18	2
MarketBasedMixPct	Market-Based Mix Percentage	percent			18	2
MarketBasedNuclearMixPct	Market-Based Nuclear Mix Percentage	percent			18	2
MarketBasedOilMixPct	Market-Based Oil Mix Percentage	percent			18	2
MarketBasedOtherFuelMixPct	Market-Based Other Fuel Mix Percentage	percent			18	2
MarketBasedSolarMixPct	Market-Based Solar Mix Percentage	percent			18	2
MarketBasedWindMixPct	Market-Based Wind Mix Percentage	percent			18	2
MktBasedGeothermalMixPct	Market-Based Geothermal Mix Percentage	percent			18	2
MktBasedOtherFossilFuelMixPct	Market-Based Other Fossil Fuel Mix Percentage	percent			18	2
MktBasedRenewableEnergyPct	Market-Based Renewable Energy Percentage	percent			18	2
MktBsdCo2eEmissionRate	Market-Based CO2e Emissions Rate	double			18	6
MktBsdCo2eEmissionRateInTmwh	Market-Based CO2e Emissions Rate (tonnes/MWh)	double			18	6
MktBsdCo2eEmissionRateUnit	Market-Based CO2e Emissions Rate Unit	picklist		255		
MktBsdRenewableEnrgyNonHydro	Market-Based Renewable Energy Excluding Hydroelectricity Percentage	percent			18	2
N2oEmissionRate	N2O Emissions Rate	double			18	6
N2oEmissionRateInTgwh	N2O Emissions Rate (tonnes/GWh)	double			18	6
N2oEmissionRateUnit	N2O Emissions Rate Unit	picklist		255		
Name	Name	string		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PostalCodeSet	Postal Code Set	textarea		32768		
State	State	string		255		
SystemModstamp	System Modstamp	datetime				

ELECTRICITYEMSSNFCTRSETFEED

Feed tracking for ElectricityEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ELECTRICITYEMSSNFCTRSETHISTORY

History for tracked fields of ElectricityEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ElectricityEmssnFctrSetId`	Electricity Emissions Factor Set ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Electricity Emissions Factor Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ELECTRICITYEMSSNFCTRSETSHARE

Sharing for ElectricityEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ELECTRONICMEDIAGROUP

Represents the type of media that you can associate with a product or category.

For more information, see ElectronicMediaGroup in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Developer Name	string		120		
`Id`	Electronic Media Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Electronic Media Group Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UsageType`	Usage Type	picklist		255		

ELECTRONICMEDIAGROUPHISTORY

History for tracked fields of ElectronicMediaGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
ElectronicMediaGroupId	Electronic Media Group ID	reference		18		
Field	Changed Field	picklist		255		
Id	Electronic Media Group History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ELECTRONICMEDIAGROUPSHARE

Sharing for ElectronicMediaGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ELECTRONICMEDIAUSE

Represents the usage of media.

For more information, see ElectronicMediaUse in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ElectronicMediaGroupId`	Electronic Media Group ID	reference		18		
`ElectronicMediaId`	ElectronicMedia ID	reference		18		
`Id`	Electronic Media Use ID	id		18		
`ImplementorType`	Implementor Type	string		255		
`SortOrder`	Sort Order	int	9			

EMAILDOMAINFILTER

Represents a filter that determines whether an email relay is restricted to a specific list of domains.

For more information, see EmailDomainFilter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmailRelayId`	Email Relay ID	reference		18		
`FromDomain`	Sender Domain	textarea		4000		
`Id`	Email Domain Filter ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PriorityNumber`	Priority	int	9			
`SystemModstamp`	System Modstamp	datetime				
`ToDomain`	Recipient Domain	textarea		4000		

EMAILDOMAINKEY

Represents a domain key for an organization's domain, used to authenticate outbound email that Salesforce sends on the organization's behalf.

For more information, see EmailDomainKey in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AlternatePublicKey	Alternate Public Key	textarea		32000		
AlternateSelector	Alternate Selector	string		63		
AlternateTxtRecordName	Alternate TXT Record Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Domain	Domain	string		255		
DomainMatch	Domain Match	picklist		255		
Id	Email Domain Key ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
KeySize	Key Size	int	9			
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
PublicKey	Public Key	textarea		32000		
Selector	Selector	string		63		
SystemModstamp	System Modstamp	datetime				
TxtRecordName	TXT Record Name	string		255		
TxtRecordsPublishState	TXT Record Status	picklist		255		

EMAILMESSAGE

Represents an email in Salesforce.

For more information, see EmailMessage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityId	Activity ID	reference		18		
BccAddress	BCC Address	string		4000		
CcAddress	CC Address	string		4000		
ClientThreadIdentifier	Client Thread ID	string		765		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmailTemplateId	Email Template ID	reference		18		
FirstOpenedDate	First Opened	datetime				
FromAddress	From Address	email		1000		
FromName	From Name	string		1000		
HasAttachment	Has Attachment	boolean				
Headers	Headers	textarea		32000		
HtmlBody	HTML Body	textarea		32000		
Id	Email Message ID	id		18		
Incoming	Is Incoming	boolean				
IsBounced	Bounced?	boolean				
IsClientManaged	Is Client Managed	boolean				
IsDeleted	Deleted	boolean				
IsExternallyVisible	Is Externally Visible	boolean				
IsOpened	Opened?	boolean				
IsTracked	Is Tracked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastOpenedDate	Last Opened	datetime				
MessageDate	Message Date	datetime				
MessageIdentifier	Message ID	string		765		
Name	Email Message Name	string		255		
ParentId	Case ID	reference		18		
RelatedToId	Related To ID	reference		18		
ReplyToEmailMessageId	Email Message ID	reference		18		
Status	Status	picklist		40		
Subject	Subject	string		3000		
SystemModstamp	System Modstamp	datetime				
TextBody	Text Body	textarea		32000		
ThreadIdentifier	Thread ID	string		765		
ToAddress	To Address	string		4000		
ValidatedFromAddress	From	picklist		255		

EMAILMESSAGERELATION

Represents the relationship between an email and contacts, leads, and users.

For more information, see EmailMessageRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmailMessageId`	Email Message ID	reference		18		
`Id`	Email Message Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`RelationAddress`	Relation Address	string		255		
`RelationId`	Relation ID	reference		18		
`RelationObjectType`	Relation Object Type	string		50		
`RelationType`	Relation Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

EMAILRELAY

Represents the configuration for sending an email relay. An email relay routes email sent from Salesforce through your company's email servers.

For more information, see EmailRelay in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthType	Auth Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Host	Host	string		255		
Id	Email Relay ID	id		18		
IsDeleted	Deleted	boolean				
IsRequireAuth	Enable SMTP Auth	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Password	Password	encryptedstring		100		
Port	Port	picklist		255		
SystemModstamp	System Modstamp	datetime				
TlsSetting	TLS Setting	picklist		255		
Username	Username	string		100		

EMAILSERVICESADDRESS

An email service address.

For more information, see EmailServicesAddress in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthorizedSenders`	Accept Email From	textarea		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Email Address Name	string		25		
`EmailDomainName`	Email address domain	string		255		
`FunctionId`	Service ID	reference		18		
`Id`	Address ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LocalPart`	Email address	string		64		
`RunAsUserId`	User ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

EMAILSERVICESFUNCTION

An email service.

For more information, see EmailServicesFunction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AddressInactiveAction	Deactivated Email Address Action	picklist		40		
ApexClassId	Class ID	reference		18		
AttachmentOption	Accept Attachments	picklist		40		
AuthenticationFailureAction	Unauthenticated sender action	picklist		40		
AuthorizationFailureAction	Unauthorized sender action	picklist		40		
AuthorizedSenders	Accept Email From	textarea		4000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ErrorRoutingAddress	Route Error Emails to This Email Address	email		270		
FunctionInactiveAction	Deactivated Email Service Action	picklist		40		
FunctionName	Email Service Name	string		64		
Id	Service ID	id		18		
IsActive	Active	boolean				
IsAuthenticationRequired	Advanced Email Security Settings	boolean				
IsErrorRoutingEnabled	Enable Error Routing	boolean				
IsTextAttachmentsAsBinary	Convert Text Attachments to Binary Attachments	boolean				
IsTlsRequired	TLS Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
OverLimitAction	Over email rate limit action	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

EMAILSTATUS

Represents the status of email sent.

For more information, see EmailStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmailTemplateName`	Email Template Name	string		80		
`FirstOpenDate`	Date Opened	datetime				
`Id`	Email Status ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastOpenDate`	Last Opened	datetime				
`TaskId`	Activity ID	reference		18		
`TimesOpened`	# Times Opened	int	9			
`WhoId`	Name ID	reference		18		

EMAILTEMPLATE

Represents a template for an email, mass email, list email, or Sales Engagement email. Supported in first-generation managed packages only.

For more information, see EmailTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiVersion	API Version	double			18	1
Body	Email Body	textarea		384000		
BrandTemplateId	Letterhead ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		4000		
DeveloperName	Template Unique Name	string		80		
Encoding	Encoding	picklist		40		
EnhancedLetterheadId	Enhanced Letterhead ID	reference		18		
FolderId	Folder ID	reference		18		
FolderName	Folder Name	string		256		
HtmlValue	HTML Value	textarea		384000		
Id	Email Template ID	id		18		
IsActive	Available For Use	boolean				
IsBuilderContent	Made in Email Template Builder	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastUsedDate	Last Used Date	datetime				
Markup	Markup	textarea		1048576		
Name	Email Template Name	string		80		
NamespacePrefix	Namespace Prefix	string		15		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEntityType	Custom Object Definition ID	picklist		40		
Subject	Subject	string		1000		
SystemModstamp	System Modstamp	datetime				
TemplateStyle	Style	picklist		40		
TemplateType	Template Type	picklist		40		
TimesUsed	Times Used	int	9			
UiType	UI Type	picklist		40		

EMBEDDEDSERVICEDETAIL

Represents a metadata catalog object that exposes fields from the underlying Embedded Service setup objects defined in each EmbeddedServiceConfig deployment for guest users. Guest users don't have direct access to the Embedded Service setup objects.

For more information, see EmbeddedServiceDetail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AvatarImg	Avatar Image URL	string		255		
ContrastInvertedColor	Contrast Inverted Color	string		255		
ContrastPrimaryColor	Contrast Primary Color	string		255		
CustomMinimizedComponent	Custom Minimized Component Developer Name	string		18		
CustomPrechatComponent	Custom Prechat Component Developer Name	string		18		
DurableId	Embedded Service Durable ID	string		255		
FieldServiceConfirmCardImg	Field Service Confirmation Card Image URL	string		255		
FieldServiceHomeImg	Field Service Home Image URL	string		255		
FieldServiceLogoImg	Field Service Logo Image URL	string		255		
Font	Font	string		255		
FontSize	Font Size	picklist		255		
Height	Height	int	9			
Id	Embedded Service ID	id		18		
IsFieldServiceEnabled	Enabled	boolean				
IsLiveAgentEnabled	Enabled	boolean				
IsOfflineCaseEnabled	Offline Case Enabled	boolean				
IsPrechatEnabled	Pre-Chat Enabled	boolean				
IsQueuePositionEnabled	Queue Position Enabled	boolean				
NavBarColor	NavBar Color	string		255		
NavBarTextColor	NavBar Text Color	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OfflineCaseBackgroundImg	Offline Case Background Image URL	string		255		
PrechatBackgroundImg	Pre-Chat Background Image URL	string		255		
PrimaryColor	Primary Color	string		255		
SecondaryColor	Secondary Color	string		255		
SecondaryNavBarColor	Secondary NavBar Color	string		255		
ShouldHideAuthDialog	Hide Authentication Dialog	boolean				
ShouldShowExistingAppointment	Show Existing Appointment	boolean				
ShouldShowNewAppointment	Show New Appointment	boolean				
Site	Site	string		18		
SmallCompanyLogoImg	Small Company Logo Image URL	string		255		
WaitingStateBackgroundImg	Waiting State Background Image URL	string		255		
Width	Width	int	9			

EMBEDDEDSERVICELABEL

Represents a customized label in Embedded Chat or embedded Appointment Management.

For more information, see EmbeddedServiceLabel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CustomLabelName`	Custom Label Name	string		80		
`DurableId`	Embedded Service Label Durable ID	string		255		
`EmbeddedServiceConfigDeveloperName`	Embedded Service Config Developer Name	string		80		
`Id`	Embedded Service Label ID	id		18		
`LabelKey`	Label Key	picklist		255		

EMISSIONSACTIVITY

Represents a company's emission generating activities and the greenhouse gas categories that are used to aggregate emissions for these activities.

For more information, see EmissionsActivity in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataSourceType`	DataSource Type	picklist		255		
`EmissionsScopeCategory`	Emissions Scope Category	picklist		255		
`Id`	Emissions Activity ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

EMISSIONSACTIVITYFEED

Feed tracking for EmissionsActivity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

EMISSIONSACTIVITYHISTORY

History for tracked fields of EmissionsActivity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EmissionsActivityId	Emissions Activity ID	reference		18		
Field	Changed Field	picklist		255		
Id	Emissions Activity History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

EMISSIONSACTIVITYSHARE

Sharing for EmissionsActivity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EMISSIONSFORECASTFACT

Represents information about the time periods, measures, and dimensions used to forecast the emissions of a company. The emissions forecast of the company is generated based on its business measures such as revenue or employee count, and the actual emissions data from previous years.

For more information, see EmissionsForecastFact in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActualEmissions	Actual Emissions (tCO2e)	double			18	2
ActualEmissionsIntensity	Actual Emissions Intensity	double			18	2
ActualEnergyConsumption	Actual Energy Consumption (kWh)	double			18	2
ActualLocationBasedEmissions	Actual Location-Based Emissions (tCO2e)	double			18	2
ActualMarketBasedEmissions	Actual Market-Based Emissions (tCO2e)	double			18	2
ActualRenewableEnergyCnsmpPct	Actual Renewable Energy Consumption Percentage	double			18	2
AdvAcctForecastSetPartnerId	Advanced Account Forecast Set Partner ID	reference		18		
CarbonCreditCost	Carbon Credits Cost (USD per tCO2e)	double			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionsActivityId	Emissions Activity ID	reference		18		
FinalForecastedEmissions	Final Forecasted Emissions (tCO2e)	double			18	2
ForcstEmssnIntensityRdctnPct	Forecasted Emissions Intensity Reduction Percentage	percent			18	2
ForcstRenewableEnergyCnsmpPct	Forecasted Renewable Energy Consumption Percentage	percent			5	2
ForecastedEmissions	Forecasted Emissions (tCO2e)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ForecastedEmissionsIntensity	Forecasted Emissions Intensity	double			18	2
ForecastedEmissionsOverride	Forecasted Emissions Override (tCO2e)	double			18	2
ForecastedEnergyConsumption	Forecasted Energy Consumption (kWh)	double			18	2
ForecastedLocationBasedEmssn	Forecasted Location-Based Emissions (tCO2e)	double			18	2
ForecastedMarketBasedEmssn	Forecasted Market-Based Emissions (tCO2e)	double			18	2
Headcount	Headcount	double			18	2
Id	Emissions Forecast Fact ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NetEmissionsForecast	Net Emissions Forecast (tCO2e)	double			18	2
OtherApplnForecastedEmissions	Other Application Forecasted Emissions (tCo2e)	double			18	2
OwnerId	Owner ID	reference		18		
PeriodId	Period ID	reference		18		
PlannedCarbonCredits	Planned Carbon Credits (tCO2e)	double			18	2
PlannedCarbonCreditsInvst	Planned Carbon Credits Investment	currency			18	2
PlnOperationalEmissionsRdctn	Planned Operational Emissions Reduction (tCO2e)	double			18	2
PlnSupplierEmissionsRdctn	Planned Supplier Emissions Reduction (tCO2e)	double			18	2
ProcurementSpend	Procurement Spend	currency			18	2
RequiredCarbonCredits	Required Carbon Credits (tCO2e)	double			18	2
RequiredCarbonCreditsInvst	Required Carbon Credits Investment	currency			18	2
Revenue	Revenue	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetCompensatedEmissions	Target Compensated Emissions (tCO2e)	double			18	2
TargetEmissions	Target Emissions (tCO2e)	double			18	2
TargetRenewableEnergyPct	Target Renewable Energy Percentage	double			18	2
TotalFloorArea	Total Floor Area (sqft)	double			18	2

EMISSIONSFORECASTFACTFEED

Feed tracking for EmissionsForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

EMISSIONSFORECASTFACTHISTORY

History for tracked fields of EmissionsForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EmissionsForecastFactId	Emissions Forecast Fact ID	reference		18		
Field	Changed Field	picklist		255		
Id	Emissions Forecast Fact History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

EMISSIONSFORECASTFACTSHARE

Sharing for EmissionsForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EMSSNRDCTNCOMMITMENT

Represents information about a company's commitment to reducing its carbon emissions. This commitment is in line with the Paris Agreement's goal to achieve a low-carbon future. For example, companies sign the Business Ambition for 1.5°C commitment letter and commit to set emission reduction targets to limit temperature rise to 1.5°C above pre-industrial levels.

For more information, see EmssnRdctnCommitment in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApprovalDate	Approval Date	date				
CommitmentLetterId	ContentDocument ID	reference		18		
CommitmentProgram	Commitment Program	picklist		255		
CommitmentType	Commitment Type	picklist		255		
CompanyBusinessRegion	Company Business Region	picklist		40		
CompanyEmployeeCount	Company Employee Count	int	9			
CompanySector	Company Sector	multipicklist		4099	0	
CompanyType	Company Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomCommitmentProgram	Custom Commitment Program	string		255		
CustomCommitmentType	Custom Commitment Type	string		255		
Id	Emissions Reduction Commitment ID	id		18		
IsDeleted	Deleted	boolean				
IsSmallandMediumEnterprise	Small and medium enterprise	boolean				
IsTargetUsedForForecasting	Target used for forecasting	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
PrimaryContactId	Contact ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetSettingDueDate	Target Setting Due Date	date				

EMSSNRDCTNCOMMITMENTFEED

Feed tracking for EmssnRdctnCommitment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

EMSSNRDCTNCOMMITMENTHISTORY

History for tracked fields of EmssnRdctnCommitment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EmssnRdctnCommitmentId	Emissions Reduction Commitment ID	reference		18		
Field	Changed Field	picklist		255		
Id	Emissions Reduction Commitment History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

EMSSNRDCTNCOMMITMENTSHARE

Sharing for EmssnRdctnCommitment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EMSSNREDUCTIONTARGET

Represents information about the science-based or non-science-based target set by a company to fulfill its emissions reduction commitment. This target indicates the company's emissions reduction goal. A company's emissions reduction goal could be to reduce carbon emissions or increase renewable energy for reaching a target metric tonnes of CO2e (tCO2e) within a specific timeframe.

For more information, see EmssnReductionTarget in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AbsoluteContractionPercentage	Absolute Contraction Percentage	picklist		255		
ActivityUnit	Activity Unit	picklist		255		
AnnualEmissionsInventoryId	Annual Emissions Inventory ID	reference		18		
BaseYear	Base Year	double			4	0
BaseYearActivity	Base Year Activity	double			18	2
BaseYearEmissionIntensity	Base Year Emissions Intensity	double			13	3
BaseYearEmissions	Base Year Emissions	double			18	2
BusinessLine	Business Line	string		80		
BusinessRegion	Business Region	picklist		40		
Category	Category	picklist		255		
Country	Country	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomAbsoluteContractionPct	Custom Absolute Contraction Percentage	percent			18	2
CustomTargetSettingMethod	Custom Target Setting Method	string		80		
CustomTargetType	Custom Target Type	string		80		
Description	Description	string		255		
EmissionsActivityId	Emissions Activity ID	reference		18		
EmssnRdctnCommitmentId	Emissions Reduction Commitment ID	reference		18		
Id	Emissions Reduction Target ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Level	Level	picklist		255		
Name	Name	string		255		
OtherTargetKpi	Other Target KPI	picklist		40		
OtherTargetKpiChangePercentage	Other Target KPI Change Percentage	percent			18	2
OtherTargetKpiInBaseYear	Other Target KPI in Base Year	double			18	2
OtherTargetKpiInTargetYear	Other Target KPI in Target Year	double			18	2
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TargetEmissionsCalculator	Target Emissions Calculator	picklist		255		
TargetEmssnChangePercentage	Target Emissions Change Percentage	percent			18	2
TargetEmssnIntensityChangePct	Target Emissions Intensity Change Percentage	percent			18	2
TargetSettingMethod	Target Setting Method	picklist		255		
TargetType	Target Type	picklist		255		
TargetYear	Target Year	picklist		255		
TargetYearActivity	Target Year Activity	double			18	2
TargetYearEmissions	Target Year Emissions	double			18	2
TargetYearEmissionsIntensity	Target Year Emissions Intensity	double			13	3
TargetYearOutputCalcType	Target Year Output Calculation Type	picklist		255		

EMSSNREDUCTIONTARGETFEED

Feed tracking for EmssnReductionTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

EMSSNREDUCTIONTARGETHISTORY

History for tracked fields of EmssnReductionTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EmssnReductionTargetId`	Emissions Reduction Target ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Emissions Reduction Target History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EMSSNREDUCTIONTARGETSHARE

Sharing for EmssnReductionTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ENGAGEMENTATTENDEE

Represents information about an attendee of an engagement. For example, when a customer initiates an engagement interaction by calling a service representative to inquire about an insurance claim, this object stores information about the customer and the service representative.

For more information, see EngagementAttendee in the *Industries Common Resources Developer Guide*, *Manufacturing Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDateTime	End Date Time	datetime				
EngagementId	Engagement ID	reference		18		
ExternalAttendeeId	External Attendee ID	reference		18		
Id	Engagement Attendee ID	id		18		
InternalAttendeeId	Internal Attendee ID	reference		18		
IsAuthenticated	Is Authenticated	boolean				
IsDeleted	Deleted	boolean				
IsVerified	Is Verified	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		30		
OwnerId	Owner ID	reference		18		
Role	Role	picklist		255		
StartDateTime	Start Date Time	datetime				
SystemModstamp	System Modstamp	datetime				
VerificationTime	Verification Time	datetime				

ENGAGEMENTATTENDEEFEED

Feed tracking for EngagementAttendee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENGAGEMENTATTENDEEHISTORY

History for tracked fields of EngagementAttendee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EngagementAttendeeId`	Engagement Attendee ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Engagement Attendee History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENGAGEMENTCHANNELTYPE

Represents a channel through which a customer can be reached for communication.

For more information, see EngagementChannelType in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactPointType`	Contact Point Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Engagement Channel Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

ENGAGEMENTCHANNELTYPEFEED

Feed tracking for EngagementChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENGAGEMENTCHANNELTYPEHISTORY

History for tracked fields of EngagementChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EngagementChannelTypeId`	Engagement Channel Type ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Engagement Channel Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENGAGEMENTCHANNELTYPESHARE

Sharing for EngagementChannelType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ENGAGEMENTCHANNELWORKTYPE

Represents the relationship between an Engagement Channel Type object and a Work Type object for Salesforce Scheduler.

For more information, see EngagementChannelWorkType in the *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AreAllEngmtChnlSupported`	All Engagement Channels Supported	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EngagementChannelTypeId`	Engagement Channel Type ID	reference		18		
`Id`	Engagement Channel Work Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Engagement Channel Work Type Number	string		255		
`SystemModstamp`	System Modstamp	datetime				
`WorkTypeId`	Work Type ID	reference		18		

ENGAGEMENTCHANNELWORKTYPEFEED

Feed tracking for EngagementChannelWorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENGAGEMENTCHANNELWORKTYPEHISTORY

History for tracked fields of EngagementChannelWorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EngagementChannelWorkTypeId	Engagement Channel Work Type ID	reference		18		
Field	Changed Field	picklist		255		
Id	Engagement Channel Work Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ENGAGEMENTINTERACTION

Represents information about an interaction between a service representative or any other specialist in an organization and the organization's customer. Engagement interactions can be initiated through communication channels and can cover one or more topics. For example, a customer can initiate an engagement interaction by calling a service representative to inquire about an insurance claim.

For more information, see EngagementInteraction in the *Industries Common Resources Developer Guide*, *Manufacturing Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AttendeeVerificationTime	Attendee Verification Time	datetime				
CommunicationChannel	Communication Channel	picklist		255		
ContextId	Context ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Duration	Duration	string		4000		
EndDateTime	End Date Time	datetime				
ExternalIdentifier	External Identifier	string		255		
Id	Engagement Interaction ID	id		18		
InitiatingAttendeeId	InitiatingAttendee ID	reference		18		
IsAttendeeAuthenticated	Is Attendee Authenticated	boolean				
IsAttendeeVerified	Is Attendee Verified	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MappedState	Mapped State	picklist		40		
Name	Name	string		30		
OwnerId	Owner ID	reference		18		
Reason	Reason	string		765		
Sentiment	Sentiment	picklist		255		
StartDateTime	Start Date Time	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Status`	Status	picklist		100		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		

ENGAGEMENTINTERACTIONFEED

Feed tracking for EngagementInteraction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENGAGEMENTINTERACTIONHISTORY

History for tracked fields of EngagementInteraction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EngagementInteractionId`	Engagement Interaction ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Engagement Interaction History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENGAGEMENTINTERACTIONSHARE

Sharing for EngagementInteraction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
EngagementInteractionAccessLevel	Engagement Interaction Access	picklist		40		
EngagementInteractionId	Engagement Interaction ID	reference		18		
Id	Engagement InteractionShare ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ENGAGEMENTTOPIC

Represents information about the topics discussed by a customer and other attendees during an engagement. For example, when a customer initiates an engagement interaction by calling a service representative to inquire about an insurance claim, the topic of the engagement is Claim.

For more information, see EngagementTopic in the *Industries Common Resources Developer Guide*, *Manufacturing Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EngagementId`	Engagement ID	reference		18		
`Id`	Engagement Topic ID	id		18		
`InteractionSummary`	Interaction Summary	string		765		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentTopicId`	Engagement Topic ID	reference		18		
`ProcessFailureReason`	Process Failure Reason	picklist		255		
`ProcessName`	Process Name	string		255		
`ProcessStatus`	Process Status	picklist		255		
`ProcessType`	Process Type	picklist		40		
`RelatedPersonId`	RelatedPerson ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TopicId`	Topic ID	reference		18		

ENGAGEMENTTOPICFEED

Feed tracking for EngagementTopic.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENGAGEMENTTOPICHISTORY

History for tracked fields of EngagementTopic.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EngagementTopicId	Engagement Topic ID	reference		18		
Field	Changed Field	picklist		255		
Id	Engagement Topic History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ENHANCEDLETTERHEAD

Represents an enhanced letterhead that can be associated with a Lightning email template that doesn't use the Salesforce Merge Language (SML).

For more information, see EnhancedLetterhead in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Enhanced Letterhead ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LetterheadFooter`	Footer	textarea		32000		
`LetterheadHeader`	Header	textarea		32000		
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

ENHANCEDLETTERHEADFEED

Feed tracking for EnhancedLetterhead.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENROLLMENTELIGIBILITYCRITERIA

Represents criteria that defines patient enrollment eligibility for one or more care programs.

For more information, see EnrollmentEligibilityCriteria in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Enrollment Eligibility Criteria ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

ENROLLMENTELIGIBILITYCRITERIAFEED

Feed tracking for EnrollmentEligibilityCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENROLLMENTELIGIBILITYCRITERIAHISTORY

History for tracked fields of EnrollmentEligibilityCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
EnrollmentEligibilityCriteriaId	Enrollment Eligibility Criteria ID	reference		18		
Field	Changed Field	picklist		255		
Id	Enrollment Eligibility Criteria History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

ENROLLMENTELIGIBILITYCRITERIASHARE

Sharing for EnrollmentEligibilityCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ENTITLEMENT

Represents the customer support an account or contact is eligible to receive.

For more information, see Entitlement in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AssetId	Asset ID	reference		18		
BusinessHoursId	Business Hours ID	reference		18		
CasesPerEntitlement	Cases Per Entitlement	int	9			
ContractLineItemId	Contract Line Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Entitlement ID	id		18		
IsDeleted	Deleted	boolean				
IsPerIncident	Per Incident	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
Name	Entitlement Name	string		255		
RemainingCases	Remaining Cases	int	9			
RemainingWorkOrders	Remaining Work Orders	int	9			
ServiceContractId	Service Contract ID	reference		18		
SlaProcessId	Entitlement Process ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SvcApptBookingWindowsId	Operating Hour ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
WorkOrdersPerEntitlement	Work Orders Per Entitlement	int	9			

ENTITLEMENTCONTACT

Represents a Contact eligible to receive customer support via an Entitlement.

For more information, see EntitlementContact in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EntitlementId`	Entitlement ID	reference		18		
`Id`	Entitlement Contact ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Entitlement Contact	string		255		
`SystemModstamp`	System Modstamp	datetime				

ENTITLEMENTFEED

Feed tracking for Entitlement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENTITLEMENTHISTORY

History for tracked fields of Entitlement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EntitlementId`	Entitlement ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Entitlement History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENTITLEMENTTEMPLATE

Represents predefined terms of customer support for a product (Product2).

For more information, see EntitlementTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessHoursId`	Business Hours ID	reference		18		
`CasesPerEntitlement`	Cases Per Entitlement	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Entitlement Template ID	id		18		
`IsPerIncident`	Per Incident	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Entitlement Template Name	string		120		
`NamespacePrefix`	Namespace Prefix	string		15		
`SlaProcessId`	Entitlement Process ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Term`	Term (Days)	int	9			
`Type`	Type	picklist		255		

ENTITYMILESTONE

Represents a required step in a customer support process on a work order. The Salesforce user interface uses the term “object milestone.

For more information, see EntityMilestone in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualElapsedTimeInDays	Actual Elapsed Time (Days)	double			6	2
ActualElapsedTimeInHrs	Actual Elapsed Time (Hours)	double			6	2
ActualElapsedTimeInMins	Actual Elapsed Time (Mins)	int	9			
BusinessHoursId	Business Hours ID	reference		18		
CompletionDate	Completion Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ElapsedTimeInDays	Elapsed Time (Days)	double			6	2
ElapsedTimeInHrs	Elapsed Time (Hours)	double			6	2
ElapsedTimeInMins	Elapsed Time (Mins)	int	9			
Id	Object Milestone ID	id		18		
IsCompleted	Completed	boolean				
IsDeleted	Deleted	boolean				
IsViolated	Violation	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MilestoneTypeId	Milestone Type ID	reference		18		
Name	Object Milestone Name	string		255		
ParentEntityId	ID	reference		18		
SlaProcessId	Entitlement Process ID	reference		18		
StartDate	Start Date	datetime				
StoppedTimeInDays	Stopped Time (Days)	double			6	2
StoppedTimeInHrs	Stopped Time (Hours)	double			6	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
StoppedTimeInMins	Stopped Time (Mins)	int	9			
SystemModstamp	System Modstamp	datetime				
TargetDate	Target Date	datetime				
TargetResponseInDays	Target Response (Days)	double			6	2
TargetResponseInHrs	Target Response (Hours)	double			6	2
TargetResponseInMins	Target Response (Mins)	int	9			
TimeRemainingInDays	Time Remaining (Days)	double			6	2
TimeRemainingInHrs	Time Remaining (Hour:Min)	string		10		
TimeRemainingInMins	Time Remaining (Min:Sec)	string		10		
TimeSinceTargetInDays	Time Since Target (Days)	double			6	2
TimeSinceTargetInHrs	Time Since Target (Hour:Min)	string		10		
TimeSinceTargetInMins	Time Since Target (Min:Sec)	string		10		

ENTITYMILESTONEFEED

Feed tracking for EntityMilestone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ENTITYMILESTONEHISTORY

History for tracked fields of EntityMilestone.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EntityMilestoneId`	Object Milestone ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Object Milestone History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENTITYSUBSCRIPTION

Represents a subscription for a user following a record or another user.

For more information, see EntitySubscription in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Entity Subscription ID	id		18		
`IsDeleted`	Deleted	boolean				
`NetworkId`	Network ID	reference		18		
`ParentId`	Parent ID	reference		18		
`SubscriberId`	Subscriber ID	reference		18		

ENVIRONMENTALRISK

Represents information about the risk that the environmental resources create for an organization.

For more information, see EnvironmentalRisk in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Aquifer`	Aquifer	string		80		
`BaselineStress`	Baseline Stress	picklist		255		
`BusinessQuantifiedRisk`	Business Quantified Risk	currency			12	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`Id`	Environmental Risk ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MajorBasin`	Major Basin	string		80		
`MinorBasin`	Minor Basin	string		80		
`Name`	Name	string		255		
`OverallRisk`	Overall Risk	picklist		255		
`OwnerId`	Owner ID	reference		18		
`RiskType`	Risk Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UpdateYear`	Update Year	picklist		255		

ENVIRONMENTALRISKFEED

Feed tracking for EnvironmentalRisk.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

ENVIRONMENTALRISKHISTORY

History for tracked fields of EnvironmentalRisk.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EnvironmentalRiskId`	Environmental Risk ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Environmental Risk History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

ENVIRONMENTALRISKSHARE

Sharing for EnvironmentalRisk.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EVENT

Represents an event in the calendar. In the user interface, event and task records are collectively referred to as activities.

For more information, see Event in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ActivityDate`	Due Date Only	date				
`ActivityDateTime`	Due Date Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`DurationInMinutes`	Duration	int	8			
`EndDate`	End Date	date				
`EndDateTime`	End Date Time	datetime				
`EventSubtype`	Event Subtype	picklist		40		
`GroupEventType`	Group Event Type	picklist		40		
`Id`	Activity ID	id		18		
`IsAllDayEvent`	All-Day Event	boolean				
`IsArchived`	Archived	boolean				
`IsChild`	Is Child	boolean				
`IsDeleted`	Deleted	boolean				
`IsGroupEvent`	Is Group Event	boolean				
`IsPrivate`	Private	boolean				
`IsRecurrence`	Create Recurring Series of Events	boolean				
`IsRecurrence2`	Repeat	boolean				
`IsRecurrence2Exception`	Is Exception	boolean				
`IsRecurrence2Exclusion`	Historical Event, Not Following Recurrence	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsReminderSet	Reminder Set	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Location	Location	string		255		
OwnerId	Assigned To ID	reference		18		
Recurrence2PatternStartDate	Recurrence Pattern Start Date	datetime				
Recurrence2PatternText	Recurrence Pattern	textarea		512		
Recurrence2PatternTimeZone	Recurrence Pattern Time Zone Reference	string		255		
Recurrence2PatternVersion	Pattern Version	picklist		40		
RecurrenceActivityId	Recurrence Activity ID	reference		18		
RecurrenceDayOfMonth	Recurrence Day of Month	int	9			
RecurrenceDayOfWeekMask	Recurrence Day of Week Mask	int	9			
RecurrenceEndDateOnly	Recurrence End	date				
RecurrenceInstance	Recurrence Instance	picklist		40		
RecurrenceInterval	Recurrence Interval	int	9			
RecurrenceMonthOfYear	Recurrence Month of Year	picklist		40		
RecurrenceStartDateTime	Recurrence Start	datetime				
RecurrenceTimeZoneSidKey	Recurrence Time Zone	picklist		40		
RecurrenceType	Recurrence Type	picklist		40		
ReminderDateTime	Reminder Date/Time	datetime				
ShowAs	Show Time As	picklist		40		
StartDateTime	Start Date Time	datetime				
Subject	Subject	combobox		255		
SystemModstamp	System Modstamp	datetime				
WhatId	Related To ID	reference		18		
WhoId	Name ID	reference		18		

EVENTBUSSUBSCRIBER

Represents a trigger, process, or flow that's subscribed to a platform event or a change data capture event. Doesn't include CometD subscribers.

For more information, see EventBusSubscriber in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ExternalId`	External ID	string		255		
`Id`	Event ID	id		18		
`LastError`	Last Error Message	string		255		
`Name`	Subscriber Name	string		80		
`Position`	Position	int	9			
`Retries`	Retry Attempts	int	9			
`Status`	Status	picklist		255		
`Tip`	Tip	int	9			
`Topic`	Topic	string		80		
`Type`	Type	string		80		

EVENTFEED

Feed tracking for Event.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EVENTLOGFILE

Represents event log files for event monitoring. The event monitoring product gathers information about your Salesforce org's operational events, which you can use to analyze usage trends and user behavior.

For more information, see EventLogFile in the *Hourly Event Monitoring (Pilot) Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	API Version	double			18	1
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventType`	Event Type	picklist		255		
`Id`	Event Log File ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LogDate`	Log Date	datetime				
`LogFile`	Log File	base64				
`LogFileContentType`	Log File Content Type	string		255		
`LogFileFieldNames`	Log File Field Names	string		1333		
`LogFileFieldTypes`	Log File Field Types	string		1333		
`LogFileLength`	Log File Length	double			18	0
`SystemModstamp`	System Modstamp	datetime				

EVENTRELATION

Represents a person (a user, lead, or contact) or a resource (such as a conference room) invited to an event. This object lets you add or remove invitees from an event and use the API to manage invitees' responses to invitations. If Shared Activities is enabled, EventRelation can also represent other objects that are related to an event. EventRelation does not support triggers, workflow, or data validation rules.

For more information, see EventRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventId`	Event ID	reference		18		
`Id`	Event Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RelationId`	Relation ID	reference		18		
`RespondedDate`	Response Date	datetime				
`Response`	Response	string		255		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

EVENTRELAYCONFIG

Represents the configuration of an event relay, which relays platform events and change data capture events from Salesforce to Amazon EventBridge.

For more information, see EventRelayConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DestinationResourceName`	Destination Resource Name	string		255		
`DeveloperName`	Name	string		80		
`EventChannel`	Platform Event Channel ID	picklist		255		
`Id`	Event Relay Config ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`RelayOption`	Event Relay Config Option	textarea		4000		
`State`	Event Relay Config State	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

EVENTRELAYFEEDBACK

Represents execution state information about an event relay from Salesforce to Amazon EventBridge for platform events and change data capture events. Query this object to get information such as the event relay status and any error message.

For more information, see EventRelayFeedback in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ErrorCode`	Error Code	string		128		
`ErrorIdentifier`	Error Identifier	string		255		
`ErrorMessage`	Error Message	textarea		1024		
`ErrorTime`	Error Time	datetime				
`EventRelayConfigId`	Event Relay Config ID	reference		18		
`EventRelayNumber`	Event Relay Feedback Name	string		255		
`Id`	Event Relay Feedback ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastRelayedEventTime`	Last Relayed Event Timestamp	datetime				
`RemoteResource`	Remote Resource	string		255		
`Status`	Current Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

EXAMINATION

Represents examinations authorized by a government authority that qualify a license/permit.

For more information, see Examination in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Examination ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

EXAMINATIONFEED

Feed tracking for Examination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

EXAMINATIONHISTORY

History for tracked fields of Examination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
ExaminationId	Examination ID	reference		18		
Field	Changed Field	picklist		255		
Id	Examination History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

EXAMINATIONSHARE

Sharing for Examination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EXPENSE

Represents an expense linked to a work order. Service resource technicians can log expenses, such as tools or travel costs.

For more information, see Expense in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Amount	Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
ExpenseEndDate	End Date	date				
ExpenseNumber	Expense Name	string		255		
ExpenseStartDate	Start Date	date				
ExpenseType	Expense Type	picklist		40		
Id	Expense ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
Quantity	Quantity	double			12	2
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
TotalPrice	Total Price	currency			18	2
TransactionDate	Transaction Date	date				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UnitPrice	Unit Price	currency			18	2
WorkOrderId	Work Order ID	reference		18		

EXPENSEFEED

Feed tracking for Expense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXPENSEHISTORY

History for tracked fields of Expense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ExpenseId`	Expense ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Expense History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EXPENSEREPORT

Represents a report that summarizes expenses.

For more information, see ExpenseReport in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`ExpenseReportNumber`	Expense Report Number	string		255		
`Id`	Expense Report ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		120		
`TotalExpenseAmount`	Total Expense Amount	currency			18	2

EXPENSEREPORTENTRY

Represents an entry in an expense report.

For more information, see ExpenseReportEntry in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Amount`	Amount	currency			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpenseId`	Expense ID	reference		18		
`ExpenseReportEntryNumber`	Expense Report Entry Number	string		255		
`ExpenseReportId`	Expense Report ID	reference		18		
`ExpenseType`	Expense Type	picklist		40		
`Id`	Expense Report Entry ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		
`TransactionDate`	Transaction Date	date				

EXPENSEREPORTENTRYFEED

Feed tracking for ExpenseReportEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXPENSEREPORTENTRYHISTORY

History for tracked fields of ExpenseReportEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ExpenseReportEntryId`	Expense Report Entry ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Expense Report Entry History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EXPENSEREPORTFEED

Feed tracking for ExpenseReport.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXPENSEREPORTHISTORY

History for tracked fields of ExpenseReport.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
ExpenseReportId	Expense Report ID	reference		18		
Field	Changed Field	picklist		255		
Id	Expense Report History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

EXPENSEREPORTSHARE

Sharing for ExpenseReport.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EXPENSESHARE

Sharing for Expense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EXPRESSIONFILTER

Represents a logical expression that's used to control the execution of macro instructions.

For more information, see ExpressionFilter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContextId`	Macro Instruction ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FilterConditionLogic`	FilterConditionLogic	string		255		
`FilterDescription`	FilterDescription	string		255		
`Id`	ExpressionFilter ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	ExpressionFilter Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

EXPRESSIONFILTERCRITERIA

Represents a condition in an expression that's used to control the execution of macro instructions.

For more information, see ExpressionFilterCriteria in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpressionFilterId`	ExpressionFilter ID	reference		18		
`FilterTarget`	FilterTarget	string		255		
`FilterTargetValue`	Context	string		255		
`Id`	ExpressionFilterCriteria ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	ExpressionFilterCriteria Name	string		255		
`Operation`	Operation	picklist		255		
`SortOrder`	SortOrder	int	8			
`SystemModstamp`	System Modstamp	datetime				

EXPRESSIONSET

Represents information about an expression set. An expression set performs a series of calculations using lookups and user-defined variables and constants.

For more information, see ExpressionSet in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	API Name	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`ExpressionSetDefinitionId`	ExpressionSetDefinition ID	reference		18		
`Id`	ExpressionSet ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UsageType`	Usage Type	picklist		255		

EXPRESSIONSETFEED

Feed tracking for ExpressionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXPRESSIONSETHISTORY

History for tracked fields of ExpressionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ExpressionSetId`	ExpressionSet ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Expression Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EXPRESSIONSETSHARE

Sharing for ExpressionSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EXPRESSIONSETVERSION

Represents information about a specific version of an expression set.

For more information, see ExpressionSetVersion in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiName	API Name	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EndDateTime	End Date Time	datetime				
ExpressionSetDefinitionVerId	ExpressionSetDefinitionVersion ID	reference		18		
ExpressionSetId	ExpressionSet ID	reference		18		
Id	ExpressionSetVersion ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsLoopingEnabled	Looping Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LatestSimulationResult	Latest Simulation Result	textarea		131072		
LoopEndVariableName	Loop End Variable Name	textarea		255		
LoopIncrementVariableName	Loop Increment Variable Name	textarea		255		
LoopStartVariableName	Loop Start Variable Name	textarea		255		
Name	Version Name	string		255		
Rank	Rank	int	9			
ShouldShowExplExternally	Show Explanation Externally	boolean				
StartDateTime	Start Date Time	datetime				
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
VersionNumber	Version Number	int	9			

EXPRESSIONSETVERSIONFEED

Feed tracking for ExpressionSetVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXPRESSIONSETVERSIONHISTORY

History for tracked fields of ExpressionSetVersion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ExpressionSetVersionId`	ExpressionSetVersion ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Expression Set Version History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EXPSSETOBJECTALIASFIELDVW

Represents the virtual object that provides a consolidated view of source object and its alias, and the source object fields and their aliases that are used in an expression set. This object is used to check the permission level required to access the underlying object fields associated with their field aliases.

For more information, see ExpsSetObjectAliasFieldVw in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	External Id	string		255		
`ExpsSetDefVerVarField`	Expression Set Definition Version Variable Field	string		18		
`FieldAlias`	Field Alias	string		255		
`Id`	Expression Set Object Alias Field View Id	id		18		
`InstalledPackageName`	Installed Package Name	string		240		
`LastModifiedBy`	Last Modified By	string		255		
`LastModifiedDate`	Last Modified Date	datetime				
`ManageableState`	Manageable State	picklist		255		
`NamespacePrefix`	Namespace Prefix	string		255		
`ObjectAlias`	Object Alias	string		255		
`ObjectApiName`	Object API Name	string		80		
`SourceFieldDataType`	Source Field Data Type	picklist		255		
`SourceFieldDecimalScale`	Source Field Decimal Scale	int	9			
`SourceFieldName`	Source Field Name	string		255		
`UsageType`	Usage Type	picklist		255		

EXTERNALACCOUNTHIERARCHY

Represents the external account hierarchy, which works like a role-based hierarchy. Use ExternalAccountHierarchy to allow partner and customer users to share data with other external accounts in their hierarchy.

For more information, see ExternalAccountHierarchy in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`HierarchyType`	Hierarchy Type	picklist		255		
`Id`	External Account Hierarchy ID	id		18		
`IsAccessibleToParent`	Is Accessible to Parent	boolean				
`IsActive`	Is Hierarchy Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentId`	External Account Hierarchy ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

EXTERNALACCOUNTHIERARCHYFEED

Feed tracking for ExternalAccountHierarchy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

EXTERNALACCOUNTHIERARCHYHISTORY

Represents the history of changes to values in the fields of an external account hierarchy.

For more information, see ExternalAccountHierarchyHistory in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`ExternalAccountHierarchyId`	External Account Hierarchy ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	External Account Hierarchy History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

EXTERNALACCOUNTHIERARCHYSHARE

Sharing for ExternalAccountHierarchy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

EXTERNALDATASOURCE

Represents an external data source, which defines connection details for integration with data and content that are stored outside the Salesforce org.

For more information, see ExternalDataSource in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthProviderId`	Auth. Provider ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomConfiguration`	Custom Configuration	textarea		4000		
`DeveloperName`	Name	string		80		
`Endpoint`	URL	textarea		1000		
`Id`	External Data Source ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsWritable`	Writable External Objects	boolean				
`Language`	Master Language	picklist		40		
`LargeIconId`	Static Resource ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	External Data Source	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`PrincipalType`	Identity Type	picklist		255		
`Protocol`	Authentication Protocol	picklist		255		
`Repository`	Default External Repository	string		255		
`SmallIconId`	Static Resource ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Class ID	picklist		255		

EXTERNALDATAUSERAUTH

Stores authentication settings for a Salesforce user to access an external system. The external system must be defined in an external data source or a named credential that's configured to use per-user authentication.

For more information, see ExternalDataUserAuth in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthProviderId`	Auth. Provider ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalDataSourceId`	External Data Source ID	reference		18		
`Id`	External Data User Authentication ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Password`	Password	textarea		6000		
`Protocol`	Authentication Protocol	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

EXTERNALSOCIALACCOUNT

Represents a managed social media account on a social network such as Facebook or Twitter.

For more information, see ExternalSocialAccount in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthorizedBy`	Authorized by	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataSourceId`	Data Source Id	string		255		
`DefaultResponseAccountId`	Managed Social Account ID	reference		18		
`DeveloperName`	Name	string		80		
`ExternalAccountId`	External Account Id	string		255		
`ExternalPictureURL`	Provider External Picture URL	url		255		
`Id`	Managed Social Account ID	id		18		
`IsActive`	Is Active Account	boolean				
`IsAuthenticated`	Is Account Authenticated	boolean				
`IsCaseCreationEnabled`	Is Case Creation Enabled	boolean				
`IsDataSourceActive`	Active Data Source	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`ProfileUrl`	Profile URL	url		255		
`Provider`	Social Network	picklist		255		
`ProviderUserId`	Provider User Id	string		255		
`RuleId`	Rule Id	string		255		
`SocialPropertyId`	Social Property Id	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TopicId	Topic Profile Id	string		255		
UniqueName	Unique Name	string		255		
Username	Username	string		255		

FEESCHEDULEDEFINITION

Stores fee schedule information for contracts of Standard Care Fee Agreement types.

For more information, see FeeScheduleDefinition in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EffectiveEndDateTime	Effective End Date	datetime				
EffectiveStartDateTime	Effective Start Date	datetime				
FeeScheduleDefinitionKey	Fee Schedule Definition Key	string		255		
Id	Fee Schedule Definition ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

FEESCHEDULEDEFINITIONFEED

Feed tracking for FeeScheduleDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FEESCHEDULEDEFINITIONHISTORY

History for tracked fields of FeeScheduleDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`FeeScheduleDefinitionId`	Fee Schedule Definition ID	reference		18		
`Field`	Changed Field	picklist		255		
`Id`	Fee Schedule Definition History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

FEESCHEDULEDEFINITIONSHARE

Sharing for FeeScheduleDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FEEDATTACHMENT

Represents an attachment to a feed item, such as a file attachment or a link. Use FeedAttachment to add various attachments to one feed item.

For more information, see FeedAttachment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`FeedEntityId`	Feed Entity ID	reference		18		
`Id`	Feed Attachment ID	id		18		
`IsDeleted`	Deleted	boolean				
`RecordId`	Attachment Record ID	reference		18		
`Title`	Feed Attachment Title	string		255		
`Type`	Feed Attachment Type	picklist		40		
`Value`	Feed Attachment Value	string		1000		

FEEDCOMMENT

Represents a comment added to a feed by a user.

For more information, see FeedComment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommentBody	Comment Body	textarea		10000		
CommentType	Comment Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FeedItemId	Feed Item ID	reference		18		
HasEntityLinks	Has entity links	boolean				
Id	Feed Comment ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
IsVerified	Is a Verified Comment	boolean				
LastEditById	Last Edit By ID	reference		18		
LastEditDate	Last Edit Date	datetime				
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
Revision	Revision	int	9			
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
ThreadChildrenCount	Thread Children Count	int	9			
ThreadLastUpdatedDate	Thread Last Updated Date	datetime				
ThreadLevel	Thread Level	int	9			
ThreadParentId	Feed Comment ID	reference		18		

FEEDITEM

FeedItem represents an entry in the feed, such as changes in a record feed, including text posts, link posts, and content posts.

For more information, see FeedItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HasContent	Has Content	boolean				
HasFeedEntity	Has Feed Entity Attachment	boolean				
HasLink	Has Link	boolean				
HasVerifiedComment	Has Verified Comment	boolean				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsClosed	Is Closed	boolean				
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastEditById	Last Edit By ID	reference		18		
LastEditDate	Last Edit Date	datetime				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
Revision	Revision	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		
`Type`	Feed Item Type	picklist		40		
`Visibility`	Visibility	picklist		40		

FEEDLIKE

Indicates that a user has liked a feed item.

For more information, see FeedLike in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeedEntityId`	Feed Item ID	reference		18		
`FeedItemId`	Feed Item ID	reference		18		
`Id`	Feed Like ID	id		18		
`InsertedById`	InsertedBy ID	reference		18		
`IsDeleted`	Deleted	boolean				

FEEDPOLLCHOICE

Shows the choices for a poll posted in the feed.

For more information, see FeedPollChoice in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChoiceBody`	ChoiceBody	textarea		100		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeedItemId`	Feed Item ID	reference		18		
`Id`	Feed Poll Choice ID	id		18		
`IsDeleted`	Deleted	boolean				
`Position`	Position	int	9			

FEEDPOLLVOTE

Shows how users voted on a poll posted in the feed.

For more information, see FeedPollVote in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChoiceId`	Feed Poll Choice ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeedItemId`	Feed Item ID	reference		18		
`Id`	Feed Poll Vote ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedDate`	Last Modified Date	datetime				

FEEDREVISION

Holds the revision history of a specific feed item or comment, including a list of attributes that changed for each revision.

For more information, see FeedRevision in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Action	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EditedAttribute`	Edited Attribute	picklist		40		
`FeedEntityId`	Feed Entity ID	reference		18		
`Id`	Feed Revision ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsValueRichText`	Is Value RichText	boolean				
`OriginNetworkId`	Network ID	reference		18		
`Revision`	Revision	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	textarea		10000		

FEEDTRACKEDCHANGE

Represents an individual field change or set of field changes. A FeedTrackedChange is a child object of a record feed, such as AccountFeed.

For more information, see FeedTrackedChange in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`FeedItemId`	Feed Item ID	reference		18		
`FieldName`	Field	string		120		
`Id`	Feed Tracked Change ID	id		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

FIELDPERMISSIONS

Represents the enabled field permissions for the parent PermissionSet.

For more information, see FieldPermissions in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Field`	Field Name	picklist		40		
`Id`	Field Permissions ID	id		18		
`ParentId`	Parent ID	reference		18		
`PermissionsEdit`	Edit Field	boolean				
`PermissionsRead`	Read Field	boolean				
`SobjectType`	SObject Type Name	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

FIELDSECURITYCLASSIFICATION

Represents a field's data sensitivity value selected from the SecurityClassification picklist.

For more information, see FieldSecurityClassification in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Field Security Classification ID	id		18		
`IsHighRiskLevel`	High-Risk Level	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

FIELDSERVICEMOBILESETTINGS

Represents a configuration of settings that control the Field Service iOS and Android mobile app experience.

For more information, see FieldServiceMobileSettings in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AscAutomaticMode	Mode	picklist		255		
AscCancellationTimerInSec	Cancellation or Dismissal Timer in Seconds	int	9			
AscCompletedStatus	"Completed" Status	picklist		40		
AscOnSiteStatus	"Onsite" Status	picklist		40		
AscRadiusInMeters	Radius in Meters	int	9			
AscTimeLimitationInMin	Time Limit in Minutes	int	9			
AscTravelStatus	"Traveling" Status	picklist		40		
BgGeoLocationAccuracy	Geolocation Accuracy (Background Mode)	picklist		255		
BgGeoLocationMinUpdateFreqMins	Geolocation Update Frequency in Minutes (Background Mode)	int	9			
BrandInvertedColor	Brand Inverted Color	string		7		
ContrastInvertedColor	Contrast Inverted Color	string		7		
ContrastPrimaryColor	Contrast Primary Color	string		7		
ContrastQuaternaryColor	Contrast Quaternary Color	string		7		
ContrastQuinaryColor	Contrast Quinary Color	string		7		
ContrastSecondaryColor	Contrast Secondary Color	string		7		
ContrastTertiaryColor	Contrast Tertiary Color	string		7		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultListViewDeveloperName	Default List View Developer Name	string		255		
DeveloperName	Developer Name	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
FeedbackPrimaryColor	Feedback Primary Color	string		7		
FeedbackSecondaryColor	Feedback Secondary Color	string		7		
FeedbackSelectedColor	Feedback Selected Color	string		7		
FutureDaysInDatePicker	Future Days in the Date Picker	int	9			
GeoLocationAccuracy	Geolocation Accuracy	picklist		255		
GeoLocationMinUpdateFreqMins	Geolocation Update Frequency in Minutes	int	9			
Id	Field Service Mobile Settings ID	id		18		
IsAssignmentNotification	Send appointment notifications on assignment	boolean				
IsDefault	Default	boolean				
IsDeleted	Deleted	boolean				
IsDispatchNotification	Send appointment notifications on dispatch	boolean				
IsLimitedLocTrackingEnabled	Enable Limited Tracking	boolean				
IsScheduleViewResourceAbsences	Display resource absences in the Schedule page	boolean				
IsSendLocationHistory	Collect service resource geolocation history	boolean				
IsShowEditFullRecord	Enable full edit on records	boolean				
IsTimeSheetEnabled	Enable mobile time sheets	boolean				
IsTimeZoneEnabled	Collect time zones for time sheet entries	boolean				
IsUseSalesforceMobileActions	Use Salesforce mobile actions	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
MetadataCacheTimeDays	Metadata Cache Time in Days	int	9			
NavbarBackgroundColor	Navbar Background Color	string		7		
NavbarInvertedColor	Navbar Inverted Color	string		7		
PastDaysInDatePicker	Past Days in the Date Picker	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PrimaryBrandColor	Primary Brand Color	string		7		
QuickStatusChangeFlowName	Flow Name	string		255		
RecordDataCacheTimeMins	Record Data Cache Time in Minutes	int	9			
SecondaryBrandColor	Secondary Brand Color	string		7		
SystemModstamp	System Modstamp	datetime				
TimeIntervalSetupMins	Picklist Time Interval in Minutes	picklist		255		
UpdateScheduleTimeMins	Schedule Update Frequency in Minutes	int	9			

FIELDSERVICEORGSETTINGS

Represents the org settings for Field Service, such as Appointment Assistant settings.

For more information, see FieldServiceOrgSettings in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApptAssistantExpiration`	Appointment Assistant Expiration	int	9			
`ApptAssistantInfoUrl`	Estimated Arrival Time URL	string		255		
`ApptAssistantRadiusUnit`	Appointment Assistant Radius Unit	picklist		255		
`ApptAssistantRadiusValue`	Appointment Assistant Radius Value	int	9			
`ApptAssistantStatus`	Status Update	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeepLinkPublicSecurityKey`	Deep Link Public Security Key	textarea		4000		
`DeveloperName`	Name	string		80		
`EncryptionInfo`	Encryption Info	textarea		10000		
`Id`	Field Service Org Settings ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`MobileFeedbackEmails`	Mobile Feedback Email	textarea		4000		
`SystemModstamp`	System Modstamp	datetime				

FINANCIALDEAL

Represents the deal that the financial institution is working on.

For more information, see FinancialDeal in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ClosеProbability	Close Probability	percent			3	0
ConfidentialityType	Confidentiality Type	picklist		40		
ConflictStatus	Conflict Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
ExpectedCloseDate	Expected Close Date	date				
FinancialDealCode	Financial Deal Code	string		255		
FinancialDealType	Financial Deal Type	picklist		40		
Id	Financial Deal ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MandatedDate	Mandated Date	date				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentFinancialDealId	Financial Deal ID	reference		18		
ReceivedFee	Received Fee	currency			18	2
Role	Role	picklist		40		
Stage	Stage	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TotalExpectedFee	Total Expected Fee	currency			18	2
TotalExpense	Total Expense	currency			18	2
TransactionValue	Transaction Value	currency			18	2

FINANCIALDEALASSET

Represents the assets included in the financial deal.

For more information, see FinancialDealAsset in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
AssetId	Asset ID	reference		18		
AssetType	Asset Type	picklist		40		
City	City	string		40		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FinancialDealId	Financial Deal ID	reference		18		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Financial Deal Asset ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
Name	Name	string		255		
PostalCode	Postal Code	string		20		
State	State	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
UnitCount	Unit Count	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UnitOfMeasureId	Unit of Measure ID	reference		18		

FINANCIALDEALASSETFEED

Feed tracking for FinancialDealAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FINANCIALDEALASSETHISTORY

History for tracked fields of FinancialDealAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FinancialDealAssetId	Financial Deal Asset ID	reference		18		
Id	Financial Deal Asset History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FINANCIALDEALBID

Represents the bids placed by financial deal parties in the financial deal.

For more information, see FinancialDealBid in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BidAmount	Bid Amount	currency			18	2
BidDate	Bid Date	date				
BidRound	Bid Round	string		8		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FinancialDealId	Financial Deal ID	reference		18		
FinancialDealPartyId	Financial Deal Party ID	reference		18		
Id	Financial Deal Bid ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

FINANCIALDEALBIDFEED

Feed tracking for FinancialDealBid.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FINANCIALDEALBIDHISTORY

History for tracked fields of FinancialDealBid.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FinancialDealBidId	Financial Deal Bid ID	reference		18		
Id	Financial Deal Bid History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FINANCIALDEALFEED

Feed tracking for FinancialDeal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FINANCIALDEALHISTORY

History for tracked fields of FinancialDeal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`FinancialDealId`	Financial Deal ID	reference		18		
`Id`	Financial Deal History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

FINANCIALDEALPARTY

Represents the parties, such as partners and competitors, that are involved in the deal.

For more information, see FinancialDealParty in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FinancialDealId	Financial Deal ID	reference		18		
Id	Financial Deal Party ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastStageChangeDate	Last Stage Change Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartyId	Account ID	reference		18		
PartyRole	Party Role	picklist		40		
PartyType	Party Type	picklist		255		
Stage	Stage	picklist		40		
SystemModstamp	System Modstamp	datetime				

FINANCIALDEALPARTYFEED

Feed tracking for FinancialDealParty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FINANCIALDEALPARTYHISTORY

History for tracked fields of FinancialDealParty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FinancialDealPartyId	Financial Deal Party ID	reference		18		
Id	Financial Deal Party History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FINANCIALDEALPARTYSHARE

Sharing for FinancialDealParty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FINANCIALDEALPRODUCT

Represents the products (services) offered by the bank in the deal.

For more information, see FinancialDealProduct in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Fee	Fee	currency			18	2
FinancialDealId	Financial Deal ID	reference		18		
Id	Financial Deal Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProductId	Product ID	reference		18		
SystemModstamp	System Modstamp	datetime				

FINANCIALDEALPRODUCTFEED

Feed tracking for FinancialDealProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

FINANCIALDEALPRODUCTHISTORY

History for tracked fields of FinancialDealProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FinancialDealProductId	Financial Deal Product ID	reference		18		
Id	Financial Deal Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FINANCIALDEALPRODUCTSHARE

Sharing for FinancialDealProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FINANCIALDEALSHARE

Sharing for FinancialDeal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FISCALYEARSETTINGS

Settings to define a custom or standard fiscal year for your organization. This object has a parent-child relationship with the Period object.

For more information, see FiscalYearSettings in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Description`	Description	string		255		
`EndDate`	End Date	date				
`Id`	Fiscal Year Settings ID	id		18		
`IsStandardYear`	Is Standard Year	boolean				
`Name`	Name	string		80		
`PeriodId`	Period ID	reference		18		
`PeriodLabelScheme`	Period Name Scheme	picklist		40		
`PeriodPrefix`	Period Prefix	picklist		255		
`QuarterLabelScheme`	Quarter Name Scheme	picklist		40		
`QuarterPrefix`	Quarter Prefix	picklist		255		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				
`WeekLabelScheme`	Week Name Scheme	picklist		40		
`WeekStartDay`	Week Start Day	int	9			
`YearType`	Year Type	picklist		40		

FLEXQUEUEITEM

Represents an asynchronous Apex job in the Apex flex queue. Provides information about the job type and flex queue position of the AsyncApexJob.

For more information, see FlexQueueItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AsyncApexJobId`	Apex Job ID	reference		18		
`FlexQueueItemId`	Flex Queue Item Id	string		255		
`Id`	Flex Queue Item Id	id		18		
`JobPosition`	Job Position	int	9			
`JobType`	Job Type	picklist		255		

FLOWDEFINITIONVIEW

Represents the description of a flow definition.

For more information, see FlowDefinitionView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveVersionId	Active Flow Version API Name or ID	string		255		
ApiName	Flow API Name	string		255		
Builder	Built with	string		255		
Description	Flow Description	string		255		
DurableId	Durable ID	string		255		
Environments	Environments	multipicklist		4099	0	
HasAsyncAfterCommitPath	Has Asynchronous After Commit Path	boolean				
Id	Flow Definition View ID	id		18		
InstalledPackageName	Package Name	string		240		
IsActive	Active	boolean				
IsOutOfDate	Is Using an Older Version	boolean				
IsOverridable	Overridable	boolean				
IsSwingFlow	Is Swing Flow	boolean				
IsTemplate	Template	boolean				
Label	Flow Label	string		255		
LastModifiedBy	Last Modified By	string		255		
LastModifiedDate	Last Modified Date	datetime				
LatestVersionId	Latest Flow Version API Name or ID	string		255		
ManageableState	Package State	picklist		255		
NamespacePrefix	Flow Namespace	string		255		
OverriddenById	Flow Definition View ID	string		512		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OverriddenFlowId	Flow Definition View ID	string		512		
ProcessType	Process Type	picklist		255		
RecordTriggerType	Record Trigger Type	picklist		255		
SourceTemplateId	Flow Definition View ID	string		512		
TriggerObjectOrEventId	Entity Definition ID	string		512		
TriggerObjectOrEventLabel	Triggering Object or Platform Event Label	string		255		
TriggerOrder	Trigger Order	int	9			
TriggerType	Trigger	picklist		255		
VersionNumber	Version Number	int	9			

FLOWEXECUTIONERROREVENT

Notifies subscribers of errors related to screen flow executions. Messages for this platform event aren't published for autolaunched flows or processes.

For more information, see FlowExecutionErrorEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContextObject	Context Object	string		255		
ContextRecordId	Context Record ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ElementApiName	Flow Element API Name	string		80		
ElementType	Flow Element Type	string		50		
ErrorId	Flow Error ID	string		50		
ErrorMessage	Flow Error Message	string		1000		
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventType	Flow Event Type	string		40		
EventUuid	Event UUID	string		36		
ExtendedErrorCode	Extended Error Code	string		255		
FlowApiName	Flow API Name	string		255		
FlowExecutionEndDate	Flow Execution End Date	datetime				
FlowExecutionStartDate	Flow Execution Start Date	datetime				
FlowNamespace	Flow Namespace	string		15		
FlowVersionId	Flow Version ID	string		255		
FlowVersionNumber	Flow Version Number	int	9			
InterviewBatchId	Flow Interview Batch ID	string		40		
InterviewGuid	Flow Interview Guid	string		255		
InterviewRequestId	Flow Interview Request ID	string		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
InterviewStartDate	Flow Interview Start Date	datetime				
InterviewStartedById	Flow Interview Started By ID	reference		18		
ProcessType	Process Type	string		40		
RelatedRecordId	Related Record ID	string		18		
ReplayId	Replay ID	string		1000		
StageQualifiedApiName	Flow Stage Qualified Api Name	string		360		
UserId	User ID	reference		18		
Username	Username	string		80		

FLOWINTERVIEW

Represents a flow interview. A *flow interview* is a running instance of a flow.

For more information, see FlowInterview in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrentElement`	Current Element	string		100		
`FlowVersionViewId`	Flow Version View ID	string		512		
`Guid`	Flow Interview Guid	string		255		
`Id`	Flow Interview ID	id		18		
`InterviewLabel`	Interview Label	string		1000		
`InterviewStatus`	Interview Status	picklist		255		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PauseLabel`	Pause Reason	string		1000		
`SystemModstamp`	System Modstamp	datetime				
`WasPausedFromScreen`	Was Paused From Screen	boolean				

FLOWINTERVIEWSHARE

Represents a sharing entry on a FlowInterview.

For more information, see FlowInterviewShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

FLOWORCHESTRATIONEVENT

Notifies subscribers that a paused instance of an orchestration is ready to be resumed.

For more information, see FlowOrchestrationEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventPayload`	Event Payload	textarea		32768		
`EventUuid`	Event UUID	string		36		
`OrchestrationInstanceId`	Orchestration Run ID	string		18		
`ReplayId`	Replay ID	string		1000		
`StepInstanceId`	Orchestration Step Run ID	string		18		
`StepStatus`	Step Status	picklist		255		

FLOWORCHESTRATIONINSTANCE

Represents a run-time instance of an orchestration.

For more information, see FlowOrchestrationInstance in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Orchestration Run ID	id		18		
InterviewId	Interview ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OrchestrationDeveloperName	Orchestration Developer Name	string		80		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

FLOWORCHESTRATIONINSTANCESHARE

Sharing for FlowOrchestrationInstance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FLOWORCHESTRATIONSTAGEINSTANCE

Represents a run-time instance of a stage in a run-time instance of an orchestration.

For more information, see FlowOrchestrationStageInstance in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Orchestration Stage Run ID	id		18		
`IsDeleted`	Deleted	boolean				
`Label`	Label	string		80		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OrchestrationInstanceId`	Orchestration Run ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`Position`	Position	int	9			
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

FLOWORCHESTRATIONSTAGEINSTANCESHARE

Sharing for FlowOrchestrationStageInstance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FLOWORCHESTRATIONSTEPINSTANCE

Represents a run-time instance of a step in a run-time instance of a stage of a run-time instance of an orchestration.

For more information, see FlowOrchestrationStepInstance in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Orchestration Step Run ID	id		18		
`IsDeleted`	Deleted	boolean				
`Label`	Label	string		80		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OrchestrationInstanceId`	Orchestration Run ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`StageInstanceId`	Orchestration Stage Run ID	reference		18		
`Status`	Status	picklist		255		
`StepType`	Step Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

FLOWORCHESTRATIONSTEPINSTANCESHARE

Sharing for FlowOrchestrationStepInstance.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FLOWORCHESTRATIONWORKITEM

Represents a work item associated with a run-time instance of an interactive step in a run-time instance of an orchestration.

For more information, see FlowOrchestrationWorkItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssigneeId	Assignee ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Orchestration Work Item ID	id		18		
IsDeleted	Deleted	boolean				
Label	Step	string		80		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RelatedRecordId	Context Record ID	reference		18		
ScreenFlow	Screen Flow ID	picklist		255		
ScreenFlowInputs	Screen Flow Inputs	textarea		32768		
Status	Status	picklist		255		
StepInstanceId	Orchestration Step Run ID	reference		18		
SystemModstamp	System Modstamp	datetime				

FLOWORCHESTRATIONWORKITEMSHARE

Sharing for FlowOrchestrationWorkItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FLOWRECORDRELATION

Represents a relationship between a record and a flow interview. When a flow interview is paused, Salesforce uses the $Flow.CurrentRecord global variable in the flow to associate the interview with a record.

For more information, see FlowRecordRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Flow Record Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`ParentId`	Flow Interview ID	reference		18		
`RelatedRecordId`	Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

FLOWSTAGERELATION

Represents a relationship between a paused flow interview and its stages. When a flow interview is paused, Salesforce creates a FlowStageRelation record for each stage that's set to the `$Flow.CurrentStage` or `$Flow.ActiveStages` global variable.

For more information, see FlowStageRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FlexIndex`	Flex Index	string		255		
`Id`	Flow Interview Stage Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`ParentId`	Flow Interview ID	reference		18		
`StageLabel`	Stage Label	string		1000		
`StageOrder`	Stage Order	int	9			
`StageType`	Stage Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

FLOWTESTRESULT

Represents the results for a flow test associated with a flow version.

For more information, see FlowTestResult in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FlowDefinitionViewId`	Flow Definition View ID	string		512		
`FlowTestViewId`	Flow Test View ID	string		512		
`FlowVersionNumber`	Flow Version Number	int	9			
`FlowVersionViewId`	Flow Version View ID	string		512		
`Id`	Flow Test Result ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Result`	Result	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TestEndDateTime`	Test End Date and Time	datetime				
`TestStartDateTime`	Test Start Date and Time	datetime				

FLOWTESTRESULTSHARE

Sharing for FlowTestResult.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FLOWTESTVIEW

Represents the description of a flow test associated with a flow definition.

For more information, see FlowTestView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	User ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DurableId`	Durable ID	string		255		
`FlowDefinitionViewId`	Flow Definition View ID	string		512		
`FlowTestApiName`	Flow Test API Name	string		255		
`FlowTestLabel`	Flow Test Label	string		255		
`Id`	Flow Test View ID	id		18		
`LastModifiedById`	User ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				

FLOWVARIABLEVIEW

Represents a variable within the flow version.

For more information, see FlowVariableView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Variable API Name	string		255		
`DataType`	Variable Data Type	string		255		
`Description`	Variable Description	string		255		
`DurableId`	Durable ID	string		255		
`FlowVersionViewId`	Flow Version View ID	string		512		
`Id`	Flow Variable View ID	id		18		
`IsCollection`	Variable allows multiple values (collection)	boolean				
`IsInput`	Variable is available for input	boolean				
`IsOutput`	Variable is available for output	boolean				
`ObjectType`	Record Variable Object	string		255		

FLOWVERSIONVIEW

Represents the version of a flow definition.

For more information, see FlowVersionView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	Api Version	double			18	0
`ApiVersionRuntime`	Api Version Runtime	double			18	0
`Description`	Version Description	string		255		
`DurableId`	Durable ID	string		255		
`FlowDefinitionViewId`	Flow Definition View ID	string		512		
`Id`	Flow Version View ID	id		18		
`IsSwingFlow`	Is Swing Flow	boolean				
`IsTemplate`	Is Template	boolean				
`Label`	Version Label	string		255		
`LastModifiedDate`	Last Modified Date	datetime				
`ProcessType`	Process Type	picklist		255		
`RunInMode`	Run in Mode	picklist		255		
`Status`	Version Status	picklist		255		
`VersionNumber`	Version Number	int	9			

FOLDER

Represents a repository for a Dashboard, Document, EmailTemplate, Macro, QuickText, or Report. Only one type of item can be contained in a folder.

For more information, see Folder in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessType`	Access Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Folder Unique Name	string		80		
`Id`	Folder ID	id		18		
`IsReadonly`	Read Only	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		40		
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Folder ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		40		

FOLDEREDCONTENTDOCUMENT

Represents the relationship between a parent and child ContentFolderItem in a ContentWorkspace.

For more information, see FolderedContentDocument in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentSize`	Size	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		20		
`Id`	Content Folder Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsFolder`	Is Folder	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentContentFolderId`	Parent Content Folder ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		

FORECASTINGADJUSTMENT

This object represents an individual forecast manager's adjustment for a subordinate's or child territory's forecast via a ForecastingItem.

For more information, see ForecastingAdjustment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustedAmount	Adjusted Amount	currency			18	0
AdjustedQuantity	Adjusted Quantity	double			12	2
AdjustmentNote	Adjustment Note	textarea		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ForecastCategoryName	Forecast Category	picklist		255		
ForecastingItemCategory	Forecasting Item Category	picklist		255		
ForecastingItemId	Forecasting Item ID	reference		18		
ForecastingTypeId	Forecasting Type ID	reference		18		
Id	ForecastingAdjustment ID	id		18		
IsAmount	Is Amount	boolean				
IsQuantity	Is Quantity	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
OwnerId	Owner ID	reference		18		
PeriodId	Period ID	reference		18		
ProductFamily	Product Family	picklist		255		
StartDate	Period Start Date	date				
SystemModstamp	System Modstamp	datetime				

FORECASTINGCOLUMNDEFINITION

Represents a custom calculated column in a forecast type.

For more information, see ForecastingColumnDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`ForecastingTypeId`	Forecasting Type ID	reference		18		
`Formula`	Formula for calculated column	string		255		
`Id`	Forecasting Item Pivot Field Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Calculated column header label displayed in forecasting grid UI	string		80		
`ResultField`	Field containing the value of the formula result	string		40		
`SystemModstamp`	System Modstamp	datetime				

FORECASTINGCOLUMNDEFINITIONLOCALIZATION

Represents the translated value of a custom calculated column label when the Translation Workbench is enabled for your organization.

For more information, see ForecastingColumnDefinitionLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

FORECASTINGDISPLAYEDFAMILY

Represents the table in Forecasts Settings where an admin selects the product families that users can forecast on in Lightning Experience.

For more information, see ForecastingDisplayedFamily in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DisplayPosition`	Display Position	int	9			
`Id`	Forecasting Displayed Family ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProductFamily`	Product Family	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

FORECASTINGFACT

This is a read-only object linking a ForecastingItem with its opportunities, such as opportunities that share the same owner or forecast category and have a closing date within the period of the forecasting item.

For more information, see ForecastingFact in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ForecastCategoryName`	Forecast Category	picklist		255		
`ForecastedObjectId`	ForecastedObject ID	reference		18		
`ForecastingItemId`	Forecasting Item ID	reference		18		
`ForecastingTypeId`	Forecasting Type ID	reference		18		
`Id`	Forecasting Fact ID	id		18		
`OpportunityId`	Opportunity ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`PeriodId`	Period ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetValue`	Target Value	double			12	2

FORECASTINGFILTER

Represents the custom filter for including or excluding data from opportunity forecasts.

For more information, see ForecastingFilter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`FilterLogic`	Filter Logic	string		255		
`ForecastingTypeId`	Forecasting Type ID	reference		18		
`ForecastingTypeSourceId`	Forecasting Type Source ID	reference		18		
`Id`	Forecasting Filter ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				

FORECASTINGFILTERCONDITION

Represents the custom filter condition logic for including or excluding data from opportunity forecasts.

For more information, see ForecastingFilterCondition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`FieldName`	Field Name	string		255		
`ForecastingFilterId`	Forecasting Filter ID	reference		18		
`Id`	Forecasting Filter Condition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`Operation`	Operation	picklist		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	string		255		

FORECASTINGITEM

This is a read-only object used for individual forecast amounts. Users see amounts based on their perspectives and forecast roles.

For more information, see ForecastingItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AmountWithoutAdjustments	Amount Without Adjustments	currency			18	0
AmountWithoutManagerAdjustment	Amount Without Manager Adjustment	currency			18	0
AmountWithoutOwnerAdjustment	Amount Without Owner Adjustments	currency			18	0
ForecastAmount	Forecast Amount	currency			18	0
ForecastCategoryName	Forecast Category	picklist		255		
ForecastQuantity	Forecast Quantity	double			12	2
ForecastingItemCategory	Forecasting Item Category	picklist		255		
ForecastingTypeId	Forecasting Type ID	reference		18		
HasAdjustment	Has Adjustment	boolean				
HasOwnerAdjustment	Has Owner Adjustment	boolean				
Id	Forecasting Item ID	id		18		
IsAmount	Is Amount	boolean				
IsQuantity	Is Quantity	boolean				
IsUpToDate	Is up to date	boolean				
OwnerId	Owner ID	reference		18		
OwnerOnlyAmount	Owner Only Amount	currency			18	0
OwnerOnlyQuantity	Owner Only Quantity	double			12	2
ParentForecastingItemId	Forecasting Item ID	reference		18		
PeriodId	Period ID	reference		18		
ProductFamily	Product Family	picklist		255		
QuantityWithoutAdjustments	Quantity Without Adjustments	double			12	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
QuantityWithoutManagerAdjustment	Quantity Without Manager Adjustment	double			12	2
QuantityWithoutOwnerAdjustment	Quantity Without Owner Adjustment	double			12	2
SubordinateOverrides	Subordinate Overrides	int	9			
SystemModstamp	System Modstamp	datetime				

FORECASTINGOWNERADJUSTMENT

This object represents an individual forecast user's adjustment of their *own* forecast, including territory forecasts they own, via a ForecastingItem.

For more information, see ForecastingOwnerAdjustment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ForecastCategoryName	Forecast Category	picklist		40		
ForecastOwnerId	User ID	reference		18		
ForecastingItemCategory	Forecasting Item Category	picklist		40		
ForecastingItemId	Forecasting Item ID	reference		18		
ForecastingTypeId	Forecasting Type ID	reference		18		
Id	ForecastingAdjustment ID	id		18		
IsAmount	Is Amount	boolean				
IsDeleted	Deleted	boolean				
IsQuantity	Is Quantity	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
OwnerAdjustedAmount	Owner Adjusted Amount	currency			18	0
OwnerAdjustedQuantity	Owner Adjusted Quantity	double			12	2
OwnerAdjustmentNote	Owner Adjustment Note	textarea		255		
PeriodId	Period ID	reference		18		
ProductFamily	Product Family	picklist		40		
StartDate	Period Start Date	date				
SystemModstamp	System Modstamp	datetime				

FORECASTINGQUOTA

This object represents an individual user's or territory's quota for a specified time period.

For more information, see ForecastingQuota in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ForecastingTypeId`	Forecasting Type ID	reference		18		
`Id`	ForecastingQuota ID	id		18		
`IsAmount`	Is Amount	boolean				
`IsQuantity`	Is Quantity	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PeriodId`	Period ID	reference		18		
`ProductFamily`	Product Family	picklist		255		
`QuotaAmount`	Quota Amount	currency			18	0
`QuotaOwnerId`	Owner ID	reference		18		
`QuotaQuantity`	Quota Quantity	double			12	2
`StartDate`	Quota Month	date				
`SystemModstamp`	System Modstamp	datetime				

FORECASTINGSHARE

Represents forecasts shared between a forecast manager and a user.

For more information, see ForecastingShare in the *Delegating Forecast Management with Forecast Sharing - API Only (PILOT) Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Forecasting Share Access Level	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Forecasting Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
RoleType	Role Type	picklist		255		
SharedForecastManagerRoleId	SharedForecastManagerRole ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UserOrGroupId	User ID	reference		18		

FORECASTINGSOURCEDEFINITION

Represents the object, measure, date type, and hierarchy that a forecast uses to project sales.

For more information, see ForecastingSourceDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CategoryField`	Custom Field Definition ID	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DateField`	Custom Field Definition ID	picklist		255		
`DeveloperName`	Name	string		80		
`FamilyField`	Custom Field Definition ID	picklist		255		
`Id`	Forecasting Source Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`MeasureField`	Custom Field Definition ID	picklist		255		
`SourceObject`	Custom Object Definition ID	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Territory2Field`	Custom Field Definition ID	picklist		255		
`UserField`	Custom Field Definition ID	picklist		255		

FORECASTINGTYPE

This object is used to identify the forecast type associated with `ForecastingAdjustment`, `ForecastingOwnerAdjustment`, `ForecastingQuota`, `ForecastingFact`, and `ForecastingItem` objects.

For more information, see ForecastingType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CanDisplayQuotas`	Can Display Quotas	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DateType`	Date Type	picklist		255		
`DeveloperName`	API Name	string		80		
`HasProductFamily`	Has Product Family	boolean				
`Id`	Forecasting Type ID	id		18		
`IsActive`	Is Active	boolean				
`IsAmount`	Is Amount	boolean				
`IsDeleted`	Deleted	boolean				
`IsPlatformType`	Is Platform Type	boolean				
`IsQuantity`	Is Quantity	boolean				
`Language`	Master Language	picklist		40		
`LastActivatedDate`	Last Activated Date	datetime				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`RoleType`	Role Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

FORECASTINGTYPESOURCE

Maps a forecasting source definition to a forecast type.

For more information, see ForecastingTypeSource in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
ForecastingSourceDefinitionId	Forecasting Source Definition ID	reference		18		
ForecastingTypeId	Forecasting Type ID	reference		18		
Id	Forecasting Type Source ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
ParentSourceDefinitionId	Forecasting Source Definition ID	reference		18		
RelationField	Custom Field Definition ID	picklist		255		
SourceGroup	Source Group	int	9			
SystemModstamp	System Modstamp	datetime				

FORECASTINGUSERPREFERENCE

Represents the forecasting selections that a user has made, such as display options, date range, forecasting type, and currency.

For more information, see ForecastingUserPreference in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ExternalId	External ID	string		255		
ForecastingDisplayedTypeId	Forecasting Type ID	reference		18		
ForecastingPeriodDuration	Period Duration	int	9			
ForecastingPeriodType	Period Type	picklist		255		
ForecastingStartPeriod	Period Start	int	9			
ForecastingViewCurrency	Viewing Currency	string		40		
Id	Forecasting User Preference ID	id		18		
IsForecastingHideZeroRows	Hide Zero Rows	boolean				
IsForecastingShowQuantity	Show Quantity	boolean				
IsHideForecastingGuidedTour	Hide Guided Tour	boolean				
IsHideForecastingQuotaColumn	Hide Quota Column	boolean				
IsShowForecastingChangeSignals	Show Change Signals	boolean				
IsShowForecastingQuotaAttainment	Show Quota Attainment	boolean				

FORMULAFUNCTION

Represents a function used when building a formula, including examples and uses.

For more information, see FormulaFunction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CategoryId`	Formula Function Category ID	string		80		
`Description`	Description	string		255		
`DurableId`	Formula Function Durable ID	string		255		
`ExampleString`	Example String	string		255		
`Id`	Formula Function ID	id		18		
`Label`	Label	string		80		
`Name`	Name	string		80		

FORMULAFUNCTIONALLOWEDTYPE

Represents the functions that are supported in the given formula context.

For more information, see FormulaFunctionAllowedType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Formula Function Allowed Type Durable ID	string		255		
`FunctionId`	Formula Function ID	string		80		
`Id`	Formula Function Allowed Type ID	id		18		
`Type`	Type	picklist		255		

FORMULAFUNCTIONCATEGORY

Represents the category to which a formula belongs when building a formula.

For more information, see FormulaFunctionCategory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Formula Function Category Durable ID	string		255		
`Id`	Formula Function Category ID	id		18		
`Label`	Label	string		80		
`Name`	Name	string		80		

FRGTHAULINGEMSSNFCTR

Represents the emissions factors for scope 3 freight hauling.

For more information, see FrgtHaulingEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Ch4EmissionsFactor	CH4 Emissions Factor	double			16	6
Ch4EmissionsFactorUnit	CH4 Emissions Factor Unit	picklist		255		
Co2EmissionsFactor	CO2 Emissions Factor	double			16	6
Co2EmissionsFactorUnit	CO2 Emissions Factor Unit	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
FreightHaulingMode	Freight Hauling Mode	picklist		40		
Id	Freight Hauling Emissions Factor ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionsFactor	N2O Emissions Factor	double			16	6
N2oEmissionsFactorUnit	N2O Emissions Factor Unit	picklist		255		
Name	Name	string		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

FRGTHAULINGEMSSNFCTRFEED

Feed tracking for FrgtHaulingEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

FRGTHAULINGEMSSNFCTRHISTORY

History for tracked fields of FrgtHaulingEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FrgtHaulingEmssnFctrId	Freight Hauling Emissions Factor ID	reference		18		
Id	Freight Hauling Emissions Factor History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FRGTHAULINGEMSSNFCTRSHARE

Sharing for FrgtHaulingEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

FRGTHAULINGENRGYUSE

Represents the energy consumption related to freight hauling.

For more information, see FrgtHaulingEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
Ch4EmissionsInKg	CH4 Emissions (kg)	double			18	8
Co2EmissionsInKg	CO2 Emissions (kg)	double			18	8
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Distance	Distance	double			18	2
DistanceUnit	Distance Unit	picklist		255		
EndDate	End Date	date				
FreightHaulingMode	Freight Hauling Mode	picklist		40		
FrgtHaulingEmssnFctrId	Freight Hauling Emissions Factor ID	reference		18		
Id	Freight Hauling Energy Use ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionsInKg	N2O Emissions (kg)	double			18	8
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Scope3Category	Scope 3 Category	picklist		255		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmissionsInTco2e	Scope 3 Emissions (tCO2e)	double			18	4
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
StartDate	Start Date	date				
SuplScope3Emissions	Supplemental Scope 3 Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Weight	Weight	double			18	1
WeightUnit	Weight Unit	picklist		255		

FRGTHAULINGENRGYUSEFEED

Feed tracking for FrgtHaulingEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

FRGTHAULINGENRGYUSEHISTORY

History for tracked fields of FrgtHaulingEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
FrgtHaulingEnrgyUseId	Freight Hauling Energy Use ID	reference		18		
Id	Freight Hauling Energy Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

FRGTHAULINGENRGYUSESHARE

Sharing for FrgtHaulingEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GENERATEDWASTE

Represents the information on the waste generated in operations, the waste generated while treating end-of-life products that were sold, and so on.

For more information, see GeneratedWaste in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DisposalSiteType	Disposal Site Type	picklist		255		
DisposalType	Disposal Type	picklist		40		
DisposedWasteQuantity	Disposed Waste Quantity	double			18	5
DisposedWasteQuantityUnit	Disposed Waste Quantity Unit	picklist		255		
DisposedWasteQuantityinTonnes	Disposed Waste Quantity in Tonnes	double			18	5
EndDate	End Date	date				
Id	Generated Waste ID	id		18		
IsDeleted	Deleted	boolean				
IsHazardous	Hazardous	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Scope1EmissionsInTco2e	Scope 1 Emissions (tCO2e)	double			18	5
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
Scp3DnstrmEndLifeSoldPrdct	Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e)	double			18	5
Scp3UpstrmWstGenInOper	Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e)	double			18	5
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SuplScope1EmissionsInTco2e	Supplemental Scope 1 Emissions (tCO2e)	double			18	5
SuplScp3DnstrmEndLifeSoldPrdct	Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e)	double			18	5
SuplScp3UpstrmWstGenInOper	Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e)	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WasteFootprintId	Waste Footprint ID	reference		18		
WasteType	Waste Type	picklist		40		
WstDispoEmssnFctrId	Waste Disposal Emissions Factor ID	reference		18		

GENERATEDWASTEFEED

Feed tracking for GeneratedWaste.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

GENERATEDWASTEHISTORY

History for tracked fields of GeneratedWaste.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
GeneratedWasteId	Generated Waste ID	reference		18		
Id	Generated Waste History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

GENERATEDWASTESHARE

Sharing for GeneratedWaste.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GENERICVISITTASK

Represents information about a task that can be performed during a visit.

For more information, see GenericVisitTask in the *Automotive Cloud Developer Guide*, and *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefinitionReferenceId	Generic Visit Task ID	reference		18		
Description	Description	textarea		1000		
EndDateTime	End Date Time	datetime				
Id	Generic Visit Task ID	id		18		
IsDefinition	Is Definition	boolean				
IsDeleted	Deleted	boolean				
IsRequired	Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Sequence	Sequence	int	9			
StartDateTime	Start Date Time	datetime				
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		
SystemModstamp	System Modstamp	datetime				
VisitId	Visit ID	reference		18		

GENERICVISITTASKCONTEXT

Represents the context or purpose for a generic visit task.

For more information, see GenericVisitTaskContext in the *Automotive Cloud Developer Guide*, and *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContextId	Context ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefinitionReferenceId	Generic Visit Task Context ID	reference		18		
Description	Description	textarea		1000		
EndDateTime	End Date Time	datetime				
Id	Generic Visit Task Context ID	id		18		
IsDefinition	Is Definition	boolean				
IsDeleted	Deleted	boolean				
IsRequired	Required	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
StartDateTime	Start Date Time	datetime				
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		
SystemModstamp	System Modstamp	datetime				
VisitId	Visit ID	reference		18		

GENERICVISITTASKCONTEXTFEED

Feed tracking for GenericVisitTaskContext.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GENERICVISITTASKCONTEXTHISTORY

History for tracked fields of GenericVisitTaskContext.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
GenericVisitTaskContextId	Generic Visit Task Context ID	reference		18		
Id	Generic Visit Task Context History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

GENERICVISITTASKCONTEXTSHARE

Sharing for GenericVisitTaskContext.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GENERICVISITTASKFEED

Feed tracking for GenericVisitTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GENERICVISITTASKHISTORY

History for tracked fields of GenericVisitTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
GenericVisitTaskId	Generic Visit Task ID	reference		18		
Id	Generic Visit Task History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

GENERICVISITTASKSHARE

Sharing for GenericVisitTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GNRCVSTKEYPERFORMANCEIND

Represents the key performance indicators that can be recorded while performing a task during a visit. You can compare the expected and actual metric values with the key performance indicator records.

For more information, see GnrcVstKeyPerformanceInd in the *Automotive Cloud Developer Guide*, and *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualBooleanValue	Actual Boolean Value	picklist		255		
ActualDateTimeValue	Actual Date Time Value	datetime				
ActualDecimalValue	Actual Decimal Value	double			18	0
ActualIntegerValue	Actual Integer Value	int	9			
ActualStringValue	Actual String Value	textarea		1000		
AssessmentIndDefinitionId	Assessment Indicator Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefinitionReferenceId	Definition Reference ID	reference		18		
ExpectedBooleanValue	Expected Boolean Value	picklist		255		
ExpectedDateTimeValue	Expected Date Time Value	datetime				
ExpectedDecimalValue	Expected Decimal Value	double			18	0
ExpectedIntegerValue	Expected Integer Value	int	9			
ExpectedStringValue	Expected String Value	textarea		1000		
Id	Generic Visit Key Performance Indicator ID	id		18		
IsDefinition	Is Definition	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		255		
SequenceNumber	Sequence	int	9			
SystemModstamp	System Modstamp	datetime				
UnitOfMeasure	Unit Of Measure	picklist		40		
VisitTaskContextId	Generic Visit Task Context ID	reference		18		

GNRCVSTKEYPERFORMANCEINDFEED

Feed tracking for GnrcVstKeyPerformanceInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GNRCVSTKEYPERFORMANCEINDHISTORY

History for tracked fields of GnrcVstKeyPerformanceInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
GnrcVstKeyPerformanceIndId	Generic Visit Key Performance Indicator ID	reference		18		
Id	Generic Visit Key Performance Indicator History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

GNRCVSTTASKCONTEXTRELATION

Represents common attributes used for a visit task and a visit task context.

For more information, see GnrcVstTaskContextRelation in the *Automotive Cloud Developer Guide*, and *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Generic Visit Task Context Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`VisitTaskContextId`	Generic Visit Task Context ID	reference		18		
`VisitTaskContextSequence`	Sequence	int	9			
`VisitTaskId`	Generic Visit Task ID	reference		18		

GNRCVSTTASKCONTEXTRELATIONFEED

Feed tracking for GnrcVstTaskContextRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GNRCVSTTASKCONTEXTRELATIONHISTORY

History for tracked fields of GnrcVstTaskContextRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
GnrcVstTaskContextRelationId	Generic Visit Task Context Relation ID	reference		18		
Id	Generic Visit Task Context Relation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

GROUNDTRAVELEMSSNFCTR

Represents the emissions factors for scope 3 ground travel.

For more information, see GroundTravelEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrencyCode	Currency Code	picklist		255		
DistanceUnit	Distance Unit	picklist		255		
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
Id	Ground Travel Emissions Factor ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PersCarEmssnInKgCo2eDstnUnit	Personal Car Emissions (kg CO2e/Distance Unit)	double			18	7
SystemModstamp	System Modstamp	datetime				
TaxiEmssnInKgCo2eDstnUnit	Taxi Emissions (kg CO2e/Distance Unit)	double			18	7
TaxiRateForDstnUnit	Taxi Rate (Cost/Distance Unit)	double			18	2
TrainEmssnInKgCo2eDstnUnit	Train Emissions (kg CO2e/Distance Unit)	double			18	7
TrainRateForDstnUnit	Train Rate (Cost/Distance Unit)	double			18	2

GROUNDTRAVELEMSSNFCTRFEED

Feed tracking for GroundTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

GROUNDTRAVELEMSSNFCTRHISTORY

History for tracked fields of GroundTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroundTravelEmssnFctrId`	Ground Travel Emissions Factor ID	reference		18		
`Id`	Ground Travel Emissions Factor History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUNDTRAVELEMSSNFCTRSHARE

Sharing for GroundTravelEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GROUNDTRAVELENRGYUSE

Represents the energy consumption related to ground travel.

For more information, see GroundTravelEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
CostCenter	Cost Center	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrencyCode	Currency Code	picklist		255		
Distance	Distance	double			18	2
DistanceUnit	Distance Unit	picklist		255		
EndDate	End Date	date				
ExpenseType	Expense Type	picklist		255		
GroundTravelEmssnFctrId	Ground Travel Emissions Factor ID	reference		18		
Id	Ground Travel Energy Use ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PcmtEmssnFctrSetItemId	Procurement Emissions Factor Set Item ID	reference		18		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmissionsInTco2e	Scope 3 Emissions (tCO2e)	double			18	4
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
StartDate	Start Date	date				
SuplScope3Emissions	Supplemental Scope 3 Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TravelerName	Traveler Name	string		255		
TripCost	Trip Cost	double			18	2

GROUNDTRAVELENRGYUSEFEED

Feed tracking for GroundTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

GROUNDTRAVELENRGYUSEHISTORY

History for tracked fields of GroundTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroundTravelEnrgyUseId`	Ground Travel Energy Use ID	reference		18		
`Id`	Ground Travel Energy Use History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUNDTRAVELENRGYUSESHARE

Sharing for GroundTravelEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GROUP

A set of User records.

For more information, see Group in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Developer Name	string		80		
DoesIncludeBosses	Include Bosses	boolean				
DoesSendEmailToMembers	Send Email to Members	boolean				
Email	Email	email		255		
Id	Group ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		40		
OwnerId	Owner ID	reference		18		
RelatedId	Related ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

GROUPCENSUS

Represents a snapshot of statistics about eligible members (employees or members) of a group (employer or association) and their legal dependents. Use this entity in quoting, rating, and the subsequent enrollment process. Child object of employer or group Account.

For more information, see GroupCensus in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	Effective End Date	datetime				
EffectiveStartDate	Effective Start Date	datetime				
ExternalIdentifier	External Identifier	string		50		
FullTimeMemberCount	Full Time Member Count	int	9			
Id	Group Census ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadId	Lead ID	reference		18		
MbrWithMoreThan1ChldCount	Member With More Than One Child Count	int	9			
MbrWithMoreThan2ChldCount	Member With More Than Two Children Count	int	9			
MbrWithoutDependentCount	Member Without Dependent Count	int	9			
MemberOptOutCount	Member Opt Out Count	int	9			
MemberWithDependentCount	Member With Dependent Count	int	9			
MemberWithOneChildCount	Member With One Child Count	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MemberWithSpouseCount	Member With Spouse Count	int	9			
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartTimeMemberCount	Part Time Member Count	int	9			
SourceSystemName	Source System Name	string		50		
SourceSystemType	Source System Type	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalDependents	Total Dependents	int	9			
TotalMemberPlusDependent	Total Members Plus Dependents	int	9			
TotalMembers	Total Members	int	9			
Type	Type	picklist		255		
UsageType	Usage Type	picklist		255		

GROUPCENSUSFEED

Feed tracking for GroupCensus.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GROUPCENSUSHISTORY

History for tracked fields of GroupCensus.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroupCensusId`	Group Census ID	reference		18		
`Id`	Group Census History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUPCENSUSMEMBER

Represents personal information about a member, for example employee or association member, or their dependents. GroupCensusMember is used to estimate the insurance plan cost for the group. This object is also used in the enrollment process to retrieve the member and dependent details. Child object of GroupCensus.

For more information, see GroupCensusMember in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Address	Address	address				
AnnualEligibleSalary	Annual Eligible Salary	currency			18	2
Birthdate	Birthdate	date				
City	City	string		40		
ContactId	Contact ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DependentCount	Dependent Count	int	9			
Email	Email	email		80		
FirstName	First Name	string		50		
FullTimeEquivalent	Full Time Equivalent	double			2	1
Gender	Gender	picklist		40		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
GroupCensusId	Group Census ID	reference		18		
GroupClassId	Group Class ID	reference		18		
Id	Group Census Member ID	id		18		
IsDeleted	Deleted	boolean				
IsOptOutAllPlans	Is Opt-out All Plans	boolean				
IsPortalUser	Is Portal User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
JoinDate	Join Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Lastname	Last Name	string		50		
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
MemberKey	Member Key	string		50		
MemberType	Member Type	picklist		40		
Name	Name	string		255		
OptOutPlanTypes	Opt-out Plan Types	multipicklist		4099	0	
PhoneNumber	Phone Number	phone		40		
PostalCode	Postal Code	string		20		
PrimaryGroupCensusMemberId	Group Census Member ID	reference		18		
PrimaryMemberCategory	Primary Member Category	picklist		40		
PrimaryMemberSource	Primary Member Source	string		255		
RelationshipToPrimaryMember	Relationship to Primary Member	picklist		40		
SmokerStatus	Smoker Status	picklist		40		
SourceSystemIdentifier	Source System Identifier	string		255		
State	State	string		80		
Status	Status	picklist		255		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				

GROUPCENSUSMEMBERFEED

Feed tracking for GroupCensusMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GROUPCENSUSMEMBERHISTORY

History for tracked fields of GroupCensusMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroupCensusMemberId`	Group Census Member ID	reference		18		
`Id`	Group Census Member History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUPCENSUSMEMBERPLAN

Represents the association of GroupCensusMember and ContractGroupPlan. Use this entity when census data includes previous member enrollment plan details and new member plan details. You can populate GroupCensusMemberPlan by reading the enrollment census in the enrollment services before creating insurance policies.

For more information, see GroupCensusMemberPlan in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractGroupPlanId`	Contract Group Plan ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`GroupCensusMemberId`	Group Census Member ID	reference		18		
`Id`	Group Census Member Plan ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

GROUPCENSUSMEMBERPLANFEED

Feed tracking for GroupCensusMemberPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

GROUPCENSUSMEMBERPLANHISTORY

History for tracked fields of GroupCensusMemberPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroupCensusMemberPlanId`	Group Census Member Plan ID	reference		18		
`Id`	Group Census Member Plan History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUPCENSUSSHARE

Sharing for GroupCensus.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

GROUPCLASS

Represents the classification of group members that receive similar benefits. Example classes include executives, union, and office workers. Child object of employer or group Account.

For more information, see GroupClass in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Category	Category	picklist		40		
Code	Code	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EffectiveEndDate	Effective End Date	date				
EffectiveStartDate	Effective Start Date	date				
Id	Group Class ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentGroupClassId	Group Class ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UsageType	Usage Type	picklist		255		

GROUPCLASSCONTRIBUTION

Represents employer or group contributions for GroupClass members and their dependents on a per product category such as medical, dental, or vision. Child object of GroupClass.

For more information, see GroupClassContribution in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Amount	Amount	currency			18	0
ContractGroupPlanId	Contract Group Plan ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	Effective End Date	date				
EffectiveStartDate	Effective Start Date	date				
GroupBenefitProductCategory	Group Benefit Product Category	picklist		40		
GroupClassId	Group Class ID	reference		18		
Id	Group Class Contribution ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberType	Member Type	picklist		255		
Name	Name	string		255		
Percentage	Percentage	percent			3	0
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

GROUPCLASSCONTRIBUTIONHISTORY

History for tracked fields of GroupClassContribution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroupClassContributionId`	Group Class Contribution ID	reference		18		
`Id`	Group Class Contribution History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUPCLASSHISTORY

History for tracked fields of GroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`GroupClassId`	Group Class ID	reference		18		
`Id`	Group Class History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

GROUPMEMBER

Represents a User or Group that is a member of a public group.

For more information, see GroupMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`GroupId`	Group ID	reference		18		
`Id`	Group Member ID	id		18		
`SystemModstamp`	System Modstamp	datetime				
`UserOrGroupId`	User/Group ID	reference		18		

GTWYPROVPAYMENTMETHODTYPE

The gateway provider payment method type allows integrators and payment providers to choose an active payment to receive an order's payment data rather than allowing the Salesforce Order Management platform to select a default payment method.

For more information, see GtwyProvPaymentMethodType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		255		
GtwyProviderPaymentMethodType	Gateway Provider Payment Method Type	string		60		
Id	Gateway Provider Payment Method Type ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MasterLabel	Label	string		255		
NamespacePrefix	Namespace Prefix	string		15		
PaymentGatewayProviderId	Payment Gateway Provider ID	reference		18		
PaymentMethodType	Payment Method Type	picklist		255		
RecordTypeId	Record Type ID	reference		18		
SystemModstamp	System Modstamp	datetime				

GUESTBUYERPROFILE

Represents a store's guest buyer profile, which allows unauthenticated buyers to browse the store.

For more information, see GuestBuyerProfile in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Guest Buyer Profile ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Guest Buyer Profile Name	string		255		
SystemModstamp	System Modstamp	datetime				

HEALTHCAREDIAGNOSIS

Represents information related to industry-standard healthcare diagnosis codes.

For more information, see HealthCareDiagnosis in the *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Category	Category	picklist		40		
Code	Code	string		32		
CodeDescription	Description	string		255		
CodeType	Code Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	date				
EndDate	End Date	date				
Gender	Gender	picklist		40		
Id	Healthcare Diagnosis ID	id		18		
IsActive	Active	boolean				
IsComplicationOrComorbidity	Complication or Comorbidity	boolean				
IsDeleted	Deleted	boolean				
IsHospitalAcquiredCondition	Hospital Acquired Condition	boolean				
IsMajorComplicationOrComorbidity	Major Complication or Comorbidity	boolean				
IsPresentOnAdmissionExempt	Present on Admission Exemption	boolean				
IsPrimaryDiagnosis	Primary Diagnosis Only	boolean				
IsUnacceptablePrincipalDxIpAdmit	Unacceptable Principal Dx IP Admit	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

HEALTHCAREDIAGNOSISHISTORY

History for tracked fields of HealthCareDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthCareDiagnosisId	Healthcare Diagnosis ID	reference		18		
Id	Healthcare Diagnosis History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREDIAGNOSISSHARE

Sharing for HealthCareDiagnosis.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPROCEDURE

Represents information related to industry-standard healthcare procedure codes.

For more information, see HealthCareProcedure in the *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		40		
`Code`	Code	string		32		
`CodeDescription`	Description	string		255		
`CodeShortDescription`	Short Description	string		255		
`CodeType`	Code Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveDate`	Effective Date	date				
`EndDate`	End Date	date				
`Id`	Health Care Procedure ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

HEALTHCAREPROCEDUREHISTORY

History for tracked fields of HealthCareProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthCareProcedureId	Health Care Procedure ID	reference		18		
Id	Healthcare Procedure History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPROCEDURESHARE

Sharing for HealthCareProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCONDITION

Represents a clinical condition, problem, or any clinically relevant occurrence that is a matter of concern.

For more information, see HealthCondition in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AbatementEndDateTime	Abatement Period End	datetime				
AbatementStartDateTime	Abatement Period Start	datetime				
AssertionSourceId	Assertion Source ID	reference		18		
ClinicalEncounterId	Clinical Encounter ID	reference		18		
ConditionCodeId	Code Set Bundle ID	reference		18		
ConditionStatus	Condition Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DiagnosticStatus	Diagnostic Status	picklist		40		
Id	Health Condition ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OnsetEndDateTime	Onset Period End	datetime				
OnsetStartDateTime	Onset Period Start	datetime				
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
RecordCreationDateTime	Record Creation Time	datetime				
RecordCreatorId	Record Creator ID	reference		18		
Severity	Severity	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SiteId	Code Set Bundle ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
StageId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

HEALTHCONDITIONDETAIL

This child object is used to associate body site and laterality codes to HealthCondition records.

For more information, see HealthConditionDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DetailCodeId	Detail Code ID	reference		18		
DetailType	Detail Type	picklist		40		
HealthConditionId	Health Condition ID	reference		18		
Id	Health Condition Detail ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

HEALTHCONDITIONDETAILFEED

Feed tracking for HealthConditionDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCONDITIONDETAILHISTORY

History for tracked fields of HealthConditionDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`HealthConditionDetailId`	Health Condition Detail ID	reference		18		
`Id`	Health Condition Detail History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

HEALTHCONDITIONFEED

Feed tracking for HealthCondition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCONDITIONHISTORY

History for tracked fields of HealthCondition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthConditionId	Health Condition ID	reference		18		
Id	Health Condition History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCONDITIONSHARE

Sharing for HealthCondition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHSCORE

Represents a subject's score for a specific score category.

For more information, see HealthScore in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentScore	Current Score	double			10	4
CurrentScoreDate	Current Score Date	datetime				
Id	Health Score ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Health Score Name	string		255		
PreviousScore	Previous Score	double			10	4
PreviousScoreDate	Previous Score Date	datetime				
ScoreAndDate	Score and Date	string		255		
ScoreCategoryId	Score Category ID	reference		18		
ScoreChangePercent	Score Change Percent	percent			5	2
ScoredAccountId	Account ID	reference		18		
ScoredContactId	Contact ID	reference		18		
ScoredLeadId	Lead ID	reference		18		
SubjectId	Subject ID	reference		18		
SystemModstamp	System Modstamp	datetime				

HEALTHSCOREACTIONLOG

Represents the log of actions triggered from the Dynamic Actions for Unified Health Scoring component in the Unified Health Scoring feature.

For more information, see HealthScoreActionLog in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionDate	Action Date	datetime				
ActionDescription	Action Description	string		255		
ActionIconUrl	Action Icon Url	string		255		
ActionLabel	Action Label	string		255		
ActionName	Action Name	string		255		
ActionStatus	Action Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Health Score Action Log ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Health Score Action Log Name	string		255		
PerformedById	User ID	reference		18		
Score	Score	double			10	4
ScoreCategoryId	Score Category ID	reference		18		
SubjectId	Subject ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TargetAccountId	Account ID	reference		18		
TargetContactId	Contact ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TargetLeadId	Lead ID	reference		18		

HEALTHSCOREACTIONLOGFEED

Feed tracking for HealthScoreActionLog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHSCOREACTIONLOGHISTORY

History for tracked fields of HealthScoreActionLog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthScoreActionLogId	Health Score Action Log ID	reference		18		
Id	Health Score Action Log History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHSCOREFEED

Feed tracking for HealthScore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHSCOREHISTORY

History for tracked fields of HealthScore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`HealthScoreId`	Health Score ID	reference		18		
`Id`	Health Score History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

HEALTHCAREFACILITY

Represents a healthcare facility and all its related details. These details may be physical, functional, geographic, or business details.

For more information, see HealthcareFacility in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AvailabilityExceptions	Availability Exceptions	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FacilityTypeId	Code Set Bundle ID	reference		18		
Id	Healthcare Facility ID	id		18		
IsAlwaysOpen	Always open	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LicensedBedCount	Licensed Bed Count	int	9			
LocationId	Location ID	reference		18		
LocationType	Location Type	picklist		40		
Name	Name	string		255		
ParentHealthcareFacilityId	Healthcare Facility ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

HEALTHCAREFACILITYFEED

Feed tracking for HealthcareFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREFACILITYHISTORY

History for tracked fields of HealthcareFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareFacilityId	Healthcare Facility ID	reference		18		
Id	Healthcare Facility History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREFACILITYNETWORK

Represents a junction object identifying the insurance network that a location or business entity is a part of. Network participation records are also stored in this object.

For more information, see HealthcareFacilityNetwork in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
GenderRestriction	Gender Restriction	picklist		40		
HealthcareFacilityId	Healthcare Facility ID	reference		18		
HealthcareProviderId	Healthcare Provider ID	reference		18		
HighestValidAge	Highest Valid Age	int	3			
Id	Healthcare Facility Network ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LowestValidAge	Lowest Valid Age	int	3			
Name	Facility Network Name	string		255		
OwnerId	Owner ID	reference		18		
PanelLimit	Panel Limit	double			18	0
PanelStatus	Panel Status	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PayerNetworkId	Healthcare Payer Network ID	reference		18		
PractitionerFacilityId	Healthcare Practitioner Facility ID	reference		18		
PractitionerId	Contact ID	reference		18		
ProviderNetworkContractId	Provider Network Contract ID	reference		18		
ProviderNetworkTierId	Provider Network Tier ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

HEALTHCAREFACILITYNETWORKFEED

Feed tracking for HealthcareFacilityNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREFACILITYNETWORKHISTORY

History for tracked fields of HealthcareFacilityNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareFacilityNetworkId	Healthcare Facility Network ID	reference		18		
Id	Healthcare Facility Network History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREFACILITYNETWORKSHARE

Sharing for HealthcareFacilityNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPAYERNETWORK

Represents an insurance network group. For example, an insurance company's exclusive provider organization (EPO) plans.

For more information, see HealthcarePayerNetwork in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Code	Code	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Healthcare Payer Network ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineofBusiness	Line of Business	picklist		40		
Name	Payer Network Name	string		255		
NetworkType	Network Type	picklist		40		
OwnerId	Owner ID	reference		18		
ParentPayerNetworkId	Healthcare Payer Network ID	reference		18		
PayerId	Account ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SystemModstamp	System Modstamp	datetime				

HEALTHCAREPAYERNETWORKFEED

Feed tracking for HealthcarePayerNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPAYERNETWORKHISTORY

History for tracked fields of HealthcarePayerNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`HealthcarePayerNetworkId`	Healthcare Payer Network ID	reference		18		
`Id`	Healthcare Payer Network History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

HEALTHCAREPAYERNETWORKSHARE

Sharing for HealthcarePayerNetwork.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPRACTITIONERFACILITY

Represents the different locations in which a practitioner provides services.

For more information, see HealthcarePractitionerFacility in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`AvailabilityExceptions`	Availability Exceptions	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveFrom`	Effective From	date				
`EffectiveTo`	Effective To	date				
`GenderRestriction`	Gender Restriction	picklist		40		
`Has24x7Service`	24x7 Support	boolean				
`HealthcareFacilityId`	Healthcare Facility ID	reference		18		
`HealthcareProviderId`	Healthcare Provider ID	reference		18		
`HighestValidAge`	Highest Valid Age	int	3			
`Id`	Healthcare Practitioner Facility ID	id		18		
`InitialStartDate`	Initial Start Date	date				
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsDirectoryPrint`	Directory Print Indicator	boolean				
`IsPrimaryCarePhysician`	Primary Care Physician	boolean				
`IsPrimaryFacility`	Primary Facility	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LowestValidAge	Lowest Valid Age	int	3			
Name	Practitioner Facility Name	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SsaCountyCode	SSA/County Code	string		10		
SystemModstamp	System Modstamp	datetime				
TerminationDate	Termination Date	date				
TerminationReason	Termination Reason	picklist		40		
TerminationRequestedById	User ID	reference		18		

HEALTHCAREPRACTITIONERFACILITYFEED

Feed tracking for HealthcarePractitionerFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPRACTITIONERFACILITYHISTORY

History for tracked fields of HealthcarePractitionerFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcarePractitionerFacilityId	Healthcare Practitioner Facility ID	reference		18		
Id	Healthcare Practitioner Facility History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPRACTITIONERFACILITYSHARE

Sharing for HealthcarePractitionerFacility.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPROVIDER

Represents business-level details about the healthcare organization or the practitioner.

For more information, see HealthcareProvider in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CaqhIdentifier	CAQH Identifier	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
EhrSystem	EHR System	textarea		32000		
HasCarrierContract	Use CMS MA Contract Amendment	boolean				
Id	Healthcare Provider ID	id		18		
InitialStartDate	Initial Start Date	date				
IsDeleted	Deleted	boolean				
IsNotSearchable	Exclude from search	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Healthcare Provider Name	string		255		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
ProviderClass	Provider Class	picklist		40		
ProviderType	Provider Type	picklist		40		
ReferredByContactId	Contact ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TerminationDate	Termination Date	date				
TerminationReason	Termination Reason	string		255		
TotalLicensedBeds	Total Licensed Bed	int	7			

HEALTHCAREPROVIDERFEED

Feed tracking for HealthcareProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPROVIDERHISTORY

History for tracked fields of HealthcareProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Healthcare Provider History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPROVIDERNPI

Represents identifiers from the National Provider Identifier that are assigned to every facility and licensed practitioner in the United States. Also includes NPI assigned date, primary mailing address on file, and so on.

For more information, see HealthcareProviderNpi in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Healthcare Provider NPI ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Npi	NPI	string		15		
NpiType	NPI Type	picklist		40		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

HEALTHCAREPROVIDERNPIFEED

Feed tracking for HealthcareProviderNpi.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPROVIDERNPIHISTORY

History for tracked fields of HealthcareProviderNpi.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareProviderNpiId	Healthcare Provider NPI ID	reference		18		
Id	Healthcare Provider NPI History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPROVIDERNPISHARE

Sharing for HealthcareProviderNpi.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPROVIDERSHARE

Sharing for HealthcareProvider.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPROVIDERSPECIALTY

Represents specialties for a practitioner or a provider service organization. A provider can have multiple specialties such as `anesthesiology` and `cardiovascular`.

For more information, see HealthcareProviderSpecialty in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveFrom`	Effective From	date				
`EffectiveTo`	Effective To	date				
`Id`	Healthcare Provider Specialty ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsPrimarySpecialty`	Primary Specialty	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Specialty Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PractitionerId`	Contact ID	reference		18		
`SourceSystem`	Source System	string		64		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`SpecialtyId`	Care Specialty ID	reference		18		
`SpecialtyRole`	Specialty Role	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

HEALTHCAREPROVIDERSPECIALTYFEED

Feed tracking for HealthcareProviderSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPROVIDERSPECIALTYHISTORY

History for tracked fields of HealthcareProviderSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareProviderSpecialtyId	Healthcare Provider Specialty ID	reference		18		
Id	Healthcare Provider Specialty History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPROVIDERSPECIALTYSHARE

Sharing for HealthcareProviderSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HEALTHCAREPROVIDERTAXONOMY

Represents taxonomy or subspecialty codes for a practitioner or facility. A provider or facility can have multiple taxonomies.

For more information, see HealthcareProviderTaxonomy in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Healthcare Provider Taxonomy ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsPrimaryTaxonomy	Primary Taxonomy	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Taxonomy Name	string		255		
OwnerId	Owner ID	reference		18		
PractitionerId	Contact ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				
TaxonomyId	Care Taxonomy ID	reference		18		

HEALTHCAREPROVIDERTAXONOMYFEED

Feed tracking for HealthcareProviderTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

HEALTHCAREPROVIDERTAXONOMYHISTORY

History for tracked fields of HealthcareProviderTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HealthcareProviderTaxonomyId	Healthcare Provider Taxonomy ID	reference		18		
Id	Healthcare Provider Taxonomy History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HEALTHCAREPROVIDERTAXONOMYSHARE

Sharing for HealthcareProviderTaxonomy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HOLIDAY

Represents a period of time during which your customer support team is unavailable. Business hours and escalation rules associated with business hours are suspended during any holidays with which they are affiliated.

For more information, see Holiday in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActivityDate`	Holiday Date	date				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		100		
`EndTimeInMinutes`	End Time In Minutes From Midnight	int	9			
`Id`	Holiday ID	id		18		
`IsAllDay`	All Day	boolean				
`IsRecurrence`	Recurring Holiday	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Holiday Name	string		80		
`RecurrenceDayOfMonth`	Recurrence Day of Month	int	9			
`RecurrenceDayOfWeekMask`	Recurrence Day of Week Mask	int	9			
`RecurrenceEndDateOnly`	Recurrence End	date				
`RecurrenceInstance`	Recurrence Instance	picklist		40		
`RecurrenceInterval`	Recurrence Interval	int	9			
`RecurrenceMonthOfYear`	Recurrence Month of Year	picklist		40		
`RecurrenceStartDate`	Recurrence Start	date				
`RecurrenceType`	Recurrence Type	picklist		40		
`StartTimeInMinutes`	Start Time In Minutes From Midnight	int	9			
`SystemModstamp`	System Modstamp	datetime				

HOTELSTAYEMSSNFCTR

Represents the emissions factors for scope 3 hotel stay.

For more information, see HotelStayEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
HotelStayEmssnInKgCo2eNight	Hotel Stay Emissions (kg CO2e/Night)	double			18	2
Id	Hotel Stay Emissions Factor ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

HOTELSTAYEMSSNFCTRFEED

Feed tracking for HotelStayEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

HOTELSTAYEMSSNFCTRHISTORY

History for tracked fields of HotelStayEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HotelStayEmssnFctrId	Hotel Stay Emissions Factor ID	reference		18		
Id	Hotel Stay Emissions Factor History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HOTELSTAYEMSSNFCTRSHARE

Sharing for HotelStayEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

HOTELSTAYENRGYUSE

Represents the energy consumption related to hotel stay.

For more information, see HotelStayEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
CostCenter	Cost Center	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmissionFctrKgCo2eRoomPerNight	Emissions Factor/Room per Night (kg CO2e)	double			18	2
EndDate	End Date	date				
HotelCity	Hotel City	string		18		
HotelCountry	Hotel Country	picklist		255		
HotelName	Hotel Name	string		255		
HotelStayEmssnFctrId	Hotel Stay Emissions Factor ID	reference		18		
Id	Hotel Stay Energy Use ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RoomCount	Number of Rooms	double			18	0
RoomType	Room Type	string		255		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmissionsInTco2e	Scope 3 Emissions (tCO2e)	double			18	4
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
StartDate	Start Date	date				
StayNightsCount	Number of Nights	double			18	0
SuplScope3Emissions	Supplemental Scope 3 Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TravelerName	Traveler Name	string		255		

HOTELSTAYENRGYUSEFEED

Feed tracking for HotelStayEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

HOTELSTAYENRGYUSEHISTORY

History for tracked fields of HotelStayEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
HotelStayEnrgyUseId	Hotel Stay Energy Use ID	reference		18		
Id	Hotel Stay Energy Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

HOTELSTAYENRGYUSESHARE

Sharing for HotelStayEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ICONDEFINITION

Represents the icon-related metadata for a custom tab.

For more information, see IconDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentType`	Content Type	string		255		
`DurableId`	Icon Definition Durable ID	string		255		
`Height`	Height	int	9			
`Id`	Icon Definition ID	id		18		
`TabDefinitionId`	Tab Definition ID	string		512		
`Theme`	Theme	string		255		
`Url`	URL	string		255		
`Width`	Width	int	9			

IDEA

Represents an idea on which users are allowed to comment and vote, for example, a suggestion for an enhancement to an existing product or process.

For more information, see Idea in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Body	Idea Body	textarea		32000		
Categories	Categories	multipicklist		4099	7	
CommunityId	Zone ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreatorFullPhotoUrl	Url of Creator's Profile Photo	string		255		
CreatorName	Name of Creator	string		121		
CreatorSmallPhotoUrl	Url of Creator's Thumbnail Photo	string		255		
Id	Idea ID	id		18		
IsDeleted	Deleted	boolean				
IsHtml	IsHtml	boolean				
IsMerged	Is Merged	boolean				
LastCommentDate	Last Idea Comment Date	datetime				
LastCommentId	Idea Comment ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
NumComments	Number of Comments	int	9			
ParentIdeaId	Idea ID	reference		18		
RecordTypeId	Record Type ID	reference		18		
Status	Status	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
VoteScore	Vote Score	double			18	4
VoteTotal	Vote Total	double			18	0

IDEACOMMENT

Represents a comment that a user has submitted in response to an idea.

For more information, see IdeaComment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommentBody`	Comment Body	textarea		4000		
`CommunityId`	Zone ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CreatorFullPhotoUrl`	Url of Creator's Profile Photo	string		255		
`CreatorName`	Name of Creator	string		121		
`CreatorSmallPhotoUrl`	Url of Creator's Thumbnail Photo	string		255		
`Id`	Idea Comment ID	id		18		
`IdeaId`	Idea ID	reference		18		
`IsDeleted`	Deleted	boolean				
`IsHtml`	IsHtml	boolean				
`SystemModstamp`	System Modstamp	datetime				
`UpVotes`	Up Votes	int	9			

IDENTIFIER

Represents identifier information for multiple objects.

For more information, see Identifier in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	datetime				
EndDate	End Date	datetime				
Id	Identifier ID	id		18		
IdTypeId	Id Type ID	reference		18		
IdUsageType	ID Usage Type	picklist		40		
IdValue	ID Value	string		255		
IdentifierKey	Identifier Key	string		255		
IsDeleted	Deleted	boolean				
IssuingAuthorityId	Account ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentRecordId	ParentRecord ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

IDENTIFIERFEED

Feed tracking for Identifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

IDENTIFIERHISTORY

History for tracked fields of Identifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Identifier History ID	id		18		
`IdentifierId`	Identifier ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

IDENTITYDOCUMENT

Represents information about documents used to identify Financial Services Cloud clients.

For more information, see IdentityDocument in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpirationDate`	Expiration Date	date				
`Id`	Identity Document ID	id		18		
`IdDocumentType`	Document Type	picklist		40		
`IsDeleted`	Deleted	boolean				
`IssueDate`	Issue Date	date				
`IssuingAuthority`	Issuing Authority/Country	string		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Document Number	string		255		
`OwnerId`	Owner ID	reference		18		
`RelatedLegalEntityId`	Related Legal Entity ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`VerifiedById`	User ID	reference		18		
`VerifiedOn`	Verified On	datetime				

IDENTITYDOCUMENTHISTORY

History for tracked fields of IdentityDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Identity Document History ID	id		18		
`IdentityDocumentId`	Identity Document ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

IDENTITYDOCUMENTSHARE

Sharing for IdentityDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

IDENTITYPROVIDEREVENTSTORE

Tracks problems and successes with inbound SAML or OpenID Connect authentication requests from another app provider. It also records outbound SAML responses when Salesforce is acting as an identity provider.

For more information, see IdentityProviderEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppId`	Connected App ID	reference		18		
`AuthSessionId`	Auth Session ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ErrorCode`	Status	picklist		255		
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`HasLogoutUrl`	Has Logout URL	boolean				
`Id`	Identity Provider Event Store ID	id		18		
`IdentityUsed`	Identity Used	string		765		
`InitiatedBy`	Usage Type	picklist		255		
`SamlEntityUrl`	Entity ID	string		1500		
`SsoType`	SSO Type	picklist		255		
`UserId`	User ID	reference		18		

IDENTITYVERIFICATIONEVENT

Tracks user identity verification events in your org.

For more information, see IdentityVerificationEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Activity`	User Activity	picklist		255		
`City`	City	string		200		
`Country`	Country	string		200		
`CountryIso`	Country Code	string		3		
`CreatedDate`	Created Date	datetime				
`EventDate`	Event Date	datetime				
`EventGroup`	Verification Attempt	string		255		
`EventIdentifier`	Event Identifier	string		80		
`Id`	Identity Verification Event ID	id		18		
`Latitude`	Latitude	double			9	6
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`Longitude`	Longitude	double			9	6
`Policy`	Triggered By	picklist		255		
`PostalCode`	PostalCode	string		20		
`Remarks`	Activity Message	string		255		
`ResourceId`	Connected App ID	reference		18		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`Status`	Status	picklist		255		
`Subdivision`	Subdivision	string		200		
`UserId`	User ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Username`	Username	string		80		
`VerificationMethod`	Method	picklist		255		

IDENTITYVERIFICATIONPROCDEF

Represents the definition of the identity verification process. Available in API version 54.0 and later.

For more information, see IdentityVerificationProcDef in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Identity Verification Process Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SearchLayoutType`	Search Layout Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

IDENTITYVERIFICATIONPROCDTL

Used to configure the search function as well as the minimum number of verifiers for the identity verification process. Available in API version 54.0 and later.

For more information, see IdentityVerificationProcDtl in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApexClassId	Class ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataSourceType	Data Source Type	picklist		255		
DeveloperName	Name	string		80		
Id	Identity Verification Process Detail ID	id		18		
IdentityVerificationProcDefId	Identity Verification Process Definition ID	reference		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsRetryAllowedAfterLimit	Retry Allowed After Limit	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LinkedIdVerfProcessDetId	Identity Verification Process Detail ID	reference		18		
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
ObjectName	Object Name	string		80		
OptionalVerifiersMinVerfCount	Optional Verifiers Minimum Verification Count	int	9			
RetryLimit	Retry Limit	int	9			
SearchFilter	Search Filter	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SearchRecordUniqueIdField	Search Record Unique ID Field	string		255		
SearchResultSortBy	Search Result Sort By	string		255		
SearchSequenceNumber	Search Sequence Number	int	9			
SearchType	Search Type	picklist		255		
SystemModstamp	System Modstamp	datetime				

IDENTITYVERIFICATIONPROCFLD

Used to configure the questions or criteria for verifying the identity of a caller. Available in API version 54.0 and later.

For more information, see IdentityVerificationProcFld in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomFieldLabel	Custom Field Label	string		255		
DataSourceType	Data Source Type	picklist		255		
DeveloperName	Name	string		80		
FieldDataType	Field Data Type	picklist		255		
FieldName	Field Name	string		255		
FieldType	Field Type	picklist		255		
FieldValueFormula	Field Value Formula	string		255		
Id	Identity Verification Process Field ID	id		18		
IdentityVerificationProcDtlId	Identity Verification Process Detail ID	reference		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsManualInput	Manual Input	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
SequenceNumber	Sequence Number	int	9			
SystemModstamp	System Modstamp	datetime				

IDPEVENTLOG

Represents the Identity Provider Event Log. This log records both problems and successes with inbound SAML or OpenID Connect authentication requests from another app provider. It also records outbound SAML responses when Salesforce is acting as an identity provider.

For more information, see IdpEventLog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppId`	Connected App ID	reference		18		
`AuthSessionId`	Auth Session ID	reference		18		
`ErrorCode`	Status	picklist		40		
`Id`	Event Log Entry ID	id		18		
`IdentityUsed`	Identity Used	string		765		
`InitiatedBy`	Usage Type	picklist		40		
`OptionsHasLogoutUrl`	Has Logout URL	boolean				
`SamlEntityUrl`	Entity ID	string		1500		
`SsoType`	SSO Type	picklist		40		
`Timestamp`	Timestamp	datetime				
`UserId`	User ID	reference		18		

IFRAMEWHITELISTURL

Represents a list of trusted external domains that you allow to frame your Embedded Service, Surveys, and Visualforce pages.

For more information, see IframeWhiteListUrl in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Context`	IFrame Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Iframe Trusted Url ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`Url`	Domain	string		255		

IMAGE

Represents the details of an image.

For more information, see Image in the *Consumer Goods Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AlternateText	Accessibility Text	string		255		
CapturedAngle	Camera Angle	string		8		
ContentDocumentId	ContentDocument ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Image ID	id		18		
ImageClass	Category	picklist		255		
ImageClassObjectType	Image Type	picklist		255		
ImageViewType	Image Orientation	string		80		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Url	URL	url		1000		

IMAGEFEED

Feed tracking for Image.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

IMAGEHISTORY

History for tracked fields of Image.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Image History ID	id		18		
`ImageId`	Image ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

IMAGESHARE

Sharing for Image.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INCIDENT

An Incident is any unplanned business interruption that has wide-sweeping impacts and requires an urgent fix. This object contains the details of the incident, documenting the history of the incident from registration to closure.

For more information, see Incident in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessHoursId	Business Hours ID	reference		18		
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DetectedDateTime	Detected Date Time	datetime				
EndDateTime	End Date Time	datetime				
EntitlementId	Entitlement ID	reference		18		
Id	Incident ID	id		18		
Impact	Impact	picklist		40		
IncidentNumber	Incident Number	string		255		
IsClosed	Incident Closed	boolean				
IsDeleted	Deleted	boolean				
IsMajorIncident	Major Incident	boolean				
IsStopped	Incident Paused	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MilestoneStatus	Milestone Status	string		30		
OwnerId	Owner ID	reference		18		
ParentIncidentId	Parent Incident ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Priority	Priority	picklist		40		
PriorityOverrideReason	Priority Override Reason	string		255		
ReportedMethod	Reported Method	picklist		40		
ResolutionDateTime	Resolution Date Time	datetime				
ResolutionSummary	Resolution Summary	textarea		32000		
ResolvedById	User ID	reference		18		
SlaExitDate	Entitlement Process End Time	datetime				
SlaStartDate	Entitlement Process Start Time	datetime				
StartDateTime	Start Date Time	datetime				
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		
StopStartDate	Incident Paused Since	datetime				
SubCategory	Sub Category	picklist		40		
Subject	Subject	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
Urgency	Urgency	picklist		40		

INCIDENTFEED

Feed tracking for Incident.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INCIDENTHISTORY

History for tracked fields of Incident.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Incident History ID	id		18		
`IncidentId`	Incident ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INCIDENTSHARE

Sharing for Incident.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INDIVIDUAL

Represents a customer's data privacy and protection preferences. Data privacy records based on the Individual object store your customers' preferences. Data privacy records are associated with related leads, contacts, person accounts, and users.

For more information, see Individual in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BirthDate	Birth Date	date				
CanStorePiiElsewhere	OK to Store PII Data Elsewhere	boolean				
ChildrenCount	Number of Children	int	9			
ConsumerCreditScore	Consumer Credit Score	int	9			
ConsumerCreditScoreProviderName	Consumer Credit Score Provider Name	string		255		
ConvictionsCount	Conviction Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeathDate	Death Date	date				
FirstName	First Name	string		40		
HasOptedOutGeoTracking	Block Geolocation Tracking	boolean				
HasOptedOutProcessing	Don't Process	boolean				
HasOptedOutProfiling	Don't Profile	boolean				
HasOptedOutSolicit	Don't Market	boolean				
HasOptedOutTracking	Don't Track	boolean				
Id	Individual ID	id		18		
IndividualsAge	Individual's Age	picklist		255		
InfluencerRating	Influencer Rating	int	9			
IsDeleted	Deleted	boolean				
IsHomeOwner	Is Homeowner	boolean				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		80		
LastViewedDate	Last Viewed Date	datetime				
MasterRecordId	Master Record ID	reference		18		
MilitaryService	Military Service	picklist		255		
Name	Name	string		121		
Occupation	Occupation	string		150		
OwnerId	Owner ID	reference		18		
Salutation	Salutation	picklist		40		
SendIndividualData	Export Individual's Data	boolean				
ShouldForget	Forget this Individual	boolean				
SystemModstamp	System Modstamp	datetime				
Website	Website	url		255		

INDIVIDUALAPPLICATION

Represents an application form submitted by an individual.

For more information, see IndividualApplication in the *Emergency Response Management for Public Health Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AmountPaid	Amount Paid	currency			18	0
ApplicationCaseId	Case ID	reference		18		
ApplicationCategory	Application Tier	picklist		40		
ApplicationType	Application Type	picklist		40		
AppliedDate	Applied Date	datetime				
ApprovedDate	Approved Date	datetime				
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Individual Application ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LicensePermitNameId	Business License ID	reference		18		
Name	Application ID	string		255		
OwnerId	Owner ID	reference		18		
PaymentDate	Payment Date	datetime				
RequirementsCompleteDate	Requirements Complete Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Status`	Application Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`WasReturned`	Returned to Applicant	boolean				

INDIVIDUALAPPLICATIONFEED

Feed tracking for IndividualApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INDIVIDUALAPPLICATIONHISTORY

History for tracked fields of IndividualApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Individual Application History ID	id		18		
`IndividualApplicationId`	Individual Application ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INDIVIDUALAPPLICATIONSHARE

Sharing for IndividualApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INDIVIDUALHISTORY

Represents the history of changes to values in the fields of a data privacy record, based on the Individual object.

For more information, see IndividualHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Individual History ID	id		18		
`IndividualId`	Individual ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INDIVIDUALSHARE

Represents a list of access levels to a data privacy record along with an explanation of the access level. For example, if you have access to a record because you own it, the `IndividualAccessLevel` is `All` and `RowCause` is Owner.

For more information, see IndividualShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Individual Share ID	id		18		
`IndividualAccessLevel`	Individual Access Level	picklist		40		
`IndividualId`	Individual ID	reference		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Apex Sharing Reason ID	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

INFLATIONRATE

Represents the inflation rates that are used to adjust currency values from one year to another.

For more information, see InflationRate in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalendarYear`	Calendar Year	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrencyCode`	Currency Code	picklist		255		
`DataSource`	Data Source	string		255		
`Id`	Inflation Rate ID	id		18		
`InflationRate`	Inflation Rate	percent			18	4
`InflationRateUniqKeyIdentifier`	Inflation Rate Unique Key Identifier	string		255		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

INFLATIONRATEFEED

Feed tracking for InflationRate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

INFLATIONRATEHISTORY

History for tracked fields of InflationRate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Inflation Rate History ID	id		18		
`InflationRateId`	Inflation Rate ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INFLATIONRATESHARE

Sharing for InflationRate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INFOAUTHREQUESTFORM

Tracks the individual Authorization Form Texts that belong to an Authorization Request. For example, consent on GDPR privacy policy document and consent on mortgage loan rate lock fee document.

For more information, see InfoAuthRequestForm in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationFormTextId	Authorization Form Text ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Info Authorization Request Form ID	id		18		
InfoAuthorizationRequestId	Info Authorization Request ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LatestAuthFormConsentId	Latest Authorization Form Consent ID	reference		18		
LatestResponseDateTime	Latest Response Date Time	datetime				
Name	Name	string		255		
ResponseStatus	Response Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

INFOAUTHREQUESTFORMFEED

Feed tracking for InfoAuthRequestForm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INFOAUTHREQUESTFORMHISTORY

History for tracked fields of InfoAuthRequestForm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Info Authorization Request Form History ID	id		18		
`InfoAuthRequestFormId`	Info Authorization Request Form ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INFOAUTHORIZATIONREQUEST

Tracks a request for authorization on a Data Use Purpose. For example, consent request to share the documents required to open a financial account and share loan rate lock disclosure to the external customer.

For more information, see InfoAuthorizationRequest in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommunicationType`	Communication Type	picklist		255		
`ConsenterId`	Consenter ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataUsePurposeId`	Data Use Purpose ID	reference		18		
`ExpirationDateTime`	Expiration Date Time	datetime				
`Id`	Info Authorization Request ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Locale`	Locale	picklist		255		
`MultipartyInfoAuthRequestId`	Multiparty Information Authorization Request ID	reference		18		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PertainsToId`	Pertains To ID	reference		18		
`RequestedDateTime`	Requested Date Time	datetime				
`RequesterId`	Requester ID	reference		18		
`ResponseStatus`	Response Status	picklist		255		
`SourceRecordId`	Source Record ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

INFOAUTHORIZATIONREQUESTFEED

Feed tracking for InfoAuthorizationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INFOAUTHORIZATIONREQUESTHISTORY

History for tracked fields of InfoAuthorizationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Info Authorization Request History ID	id		18		
InfoAuthorizationRequestId	Info Authorization Request ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INFOAUTHORIZATIONREQUESTSHARE

Sharing for InfoAuthorizationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INSPOLICYTRANSACTIONDETAIL

Represents the details of an insurance policy transaction.

For more information, see InsPolicyTransactionDetail in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Insurance Policy Transaction Detail ID	id		18		
`InsurancePolicyTransactionId`	Insurance Policy Transaction ID	reference		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ReferenceObjectId`	Reference Object ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

INSPOLICYTRANSACTIONDETAILFEED

Feed tracking for InsPolicyTransactionDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSPOLICYTRANSACTIONDETAILHISTORY

History for tracked fields of InsPolicyTransactionDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Transaction Detail History ID	id		18		
InsPolicyTransactionDetailId	Insurance Policy Transaction Detail ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSPECTIONASSESSMENTIND

For more information, see InspectionAssessmentInd in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndDefinitionId	Assessment Indicator Definition ID	reference		18		
AssessmentTaskId	Assessment Task ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateTimeFieldResponse	DateTime Field Response	datetime				
DecimalFieldResponse	Decimal Field Response	double			18	5
DisplayOrder	Display Order	int	9			
Id	Inspection Assessment Indicator ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NumberFieldResponse	Number Field Response	int	9			
PercentageFieldResponse	Percentage Field Response	percent			5	2
Result	Assessment Question Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TextFieldResponse	Text Field Response	string		255		

INSPECTIONASSESSMENTINDFEED

Feed tracking for InspectionAssessmentInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

INSPECTIONASSESSMENTINDHISTORY

History for tracked fields of InspectionAssessmentInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Inspection Assessment Indicator History ID	id		18		
`InspectionAssessmentIndId`	Inspection Assessment Indicator ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INSPECTIONTYPE

For more information, see InspectionType in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Inspection Type ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

INSPECTIONTYPEFEED

Feed tracking for InspectionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

INSPECTIONTYPEHISTORY

History for tracked fields of InspectionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Inspection Type History ID	id		18		
`InspectionTypeId`	Inspection Type ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INSPECTIONTYPESHARE

Sharing for InspectionType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INSURANCECONTRACT

Represents insurance-specific contract information. Extension of Contract object, specifically for the insurance industry.

For more information, see InsuranceContract in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BrokerageAgencyId	Producer ID	reference		18		
BusinessLicenseId	Business License ID	reference		18		
ContractId	Contract ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EnrollmentCensusId	Group Census ID	reference		18		
EnrollmentEndDate	Enrollment End Date	date				
EnrollmentStartDate	Enrollment Start Date	date				
EnrollmentWaitingPeriod	Enrollment Waiting Period	int	9			
Id	Insurance Contract ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProducerId	Producer ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UnderwriterId	User ID	reference		18		

INSURANCECONTRACTFEED

Feed tracking for InsuranceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCECONTRACTHISTORY

History for tracked fields of InsuranceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Contract History ID	id		18		
InsuranceContractId	Insurance Contract ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCECONTRACTSHARE

Sharing for InsuranceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INSURANCEPOLICY

Represents a type of insurance policy. Available with the Provider Network Management permission set license.

For more information, see InsurancePolicy in the *Financial Services Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuditTerm	Audit Term	picklist		40		
CancellationDate	Cancellation Date	datetime				
CancellationReason	Cancellation Reason	textarea		32000		
CancellationReasonType	Cancellation Reason Type	picklist		40		
CashSurrenderValue	Cash Surrender Value	currency			18	2
ChangeSubtype	Change Subtype	picklist		40		
ChangeType	Change Type	picklist		40		
ContractGroupPlanId	Contract Group Plan ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateRenewed	Date Renewed	datetime				
Discount	Discount	double			18	0
EffectiveDate	Effective Date	datetime				
ExpirationDate	Expiration Date	datetime				
FinalRenewalDate	Final Renewal Date	datetime				
FnolChannel	FNOL Channel	picklist		40		
GrossWrittenPremium	Gross Written Premium	currency			18	2
HasAnyAutoCoverage	Has Any Auto coverage	boolean				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Insurance Policy ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsLoanEligibile	Eligible for loan	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsRenewedPolicy	Renewed Policy	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Policy Number	string		255		
NameInsuredId	Account ID	reference		18		
OriginalEffectiveDate	Original Effective Date	datetime				
OriginalExpirationDate	Original Expiration Date	datetime				
OriginalPolicyId	Insurance Policy ID	reference		18		
OwnerId	Owner ID	reference		18		
PaidToDate	Paid To Date	date				
ParentPolicyId	Insurance Policy ID	reference		18		
PaymentDueDate	Payment Due Date	datetime				
PlanTier	Plan Tier	picklist		40		
PlanType	Plan Type	picklist		40		
PolicyDescription	Policy Description	textarea		32000		
PolicyName	Policy Name	string		255		
PolicyTerm	Policy Term	picklist		40		
PolicyType	Policy Type	picklist		40		
PremiumAmount	Premium Amount	currency			18	2
PremiumCalculationMethod	Premium Calculation Method	picklist		40		
PremiumFrequency	Premium Frequency	picklist		40		
PremiumPaymentType	Premium Payment Type	picklist		40		
PreviousPremium	Previous Premium	currency			18	2
PreviousRenewalDate	Previous Renewal Date	datetime				
PriorPolicyId	Insurance Policy ID	reference		18		
ProducerId	Producer ID	reference		18		
ProductId	Product ID	reference		18		
ReferencePolicyNumber	Reference Policy Number	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RenewalChannel	Renewal Channel	picklist		40		
RenewalDate	Renewal Date	datetime				
SaleDate	Sale Date	datetime				
ServicingOffice	Servicing Office	address				
ServicingOfficeCity	Servicing Office City	string		40		
ServicingOfficeCountry	Servicing Office Country	string		80		
ServicingOfficeGeocodeAccuracy	Servicing Office Geocode Accuracy	picklist		255		
ServicingOfficeLatitude	Servicing Office Latitude	double			18	15
ServicingOfficeLongitude	Servicing Office Longitude	double			18	15
ServicingOfficePostalCode	Servicing Office Postal Code	string		20		
ServicingOfficeState	Servicing Office State	string		80		
ServicingOfficeStreet	Servicing Office Street	textarea		255		
SourceOpportunityId	Opportunity ID	reference		18		
SourceQuoteId	Quote ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
StandardFeeAmount	Standard Fee	currency			18	2
StandardPremiumAmount	Standard Premium	currency			18	2
StandardTaxAmount	Standard Tax	currency			18	2
Status	Status	picklist		40		
Substatus	Substatus	picklist		40		
SystemModstamp	System Modstamp	datetime				
TaxesSurcharges	Taxes and Surcharges	currency			18	2
TermFeeAmount	Term Fee	currency			18	2
TermPremiumAmount	Term Premium	currency			18	2
TermTaxAmount	Term Tax	currency			18	2
TotalCommissionAmount	Total Commission Amount	currency			18	2
TotalStandardAmount	Total Standard Amount	currency			18	2
TotalSumInsured	Sum Insured	currency			18	2
UnderwritingEntityId	Legal Entity ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UniversalPolicyNumber	Universal Policy Number	string		255		

INSURANCEPOLICYASSET

Represents the customer property insured through the insurance policy.

For more information, see InsurancePolicyAsset in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetName	Asset Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomerPropertyId	Customer Property ID	reference		18		
Id	Insurance Policy Asset ID	id		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PrimaryPolicyParticipantId	Insurance Policy Participant ID	reference		18		
RelatedInsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
StandardFeeAmount	Standard Fee	currency			18	2
StandardPremiumAmount	Standard Premium	currency			18	2
StandardTaxAmount	Standard Tax	currency			18	2
SystemModstamp	System Modstamp	datetime				
TermFeeAmount	Term Fee	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TermPremiumAmount	Term Premium	currency			18	2
TermTaxAmount	Term Tax	currency			18	2
TotalStandardAmount	Total Standard Amount	currency			18	2
TotalTermAmount	Total Term Amount	currency			18	2

INSURANCEPOLICYASSETFEED

Feed tracking for InsurancePolicyAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYASSETHISTORY

History for tracked fields of InsurancePolicyAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Asset History ID	id		18		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPOLICYASSETSHARE

Sharing for InsurancePolicyAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INSURANCEPOLICYCOVERAGE

A junction object that associates the InsurancePolicy object with the ProductCoverage object.

For more information, see InsurancePolicyCoverage in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitPaymentFrequency	Benefit Payment Frequency	picklist		40		
Category	Category	picklist		40		
CategoryCode	Category Code	string		255		
CategoryGroup	Category Group	picklist		40		
CategoryGroupType	Category Group Type	picklist		40		
CoverageName	Coverage Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeathBenefitOptionType	Death Benefit Option Type	picklist		40		
DeductibleAmount	Deductible Amount	currency			18	2
Description	Description	textarea		32000		
Discount	Discount	currency			18	2
EffectiveDate	Effective Date	datetime				
ExpirationDate	Expiration Date	datetime				
Id	Insurance Policy Coverage ID	id		18		
IncomeOptionType	Income Option Type	picklist		40		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LimitAmount	Limit Amount	currency			18	2
LimitDate	Limit Date	date				
LimitPercentage	Limit Percentage	percent			3	0
LimitRange	Limit Range	picklist		40		
Name	Name	string		255		
PremiumAmount	Premium Amount	currency			18	2
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
StandardFeeAmount	Standard Fee	currency			18	2
StandardPremiumAmount	Standard Premium	currency			18	2
StandardTaxAmount	Standard Tax	currency			18	2
SystemModstamp	System Modstamp	datetime				
TermFeeAmount	Term Fee	currency			18	2
TermPremiumAmount	Term Premium	currency			18	2
TermTaxAmount	Term Tax	currency			18	2
TotalStandardAmount	Total Standard Amount	currency			18	2

INSURANCEPOLICYCOVERAGEFEED

Feed tracking for InsurancePolicyCoverage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYCOVERAGEHISTORY

History for tracked fields of InsurancePolicyCoverage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Coverage History ID	id		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPOLICYFEED

Feed tracking for InsurancePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYHISTORY

History for tracked fields of InsurancePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy History ID	id		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPOLICYPARTICIPANT

A junction object that associates the InsurancePolicy object with the Account object. This object represents the participants of an insurance policy. Insurance policy participants include policy owners and beneficiaries.

For more information, see InsurancePolicyParticipant in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BeneficiarySharePercentage	Beneficiary Share Percentage	percent			3	0
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	datetime				
ExpirationDate	Expiration Date	datetime				
Id	Insurance Policy Participant ID	id		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsActiveParticipant	Active Participant	boolean				
IsDeleted	Deleted	boolean				
IsMinorBeneficiary	Minor Beneficiary	boolean				
IsPolicyholder	Policy holder	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LegalGuardianId	Account ID	reference		18		
Name	Name	string		255		
PrimaryParticipantAccountId	Account ID	reference		18		
PrimaryParticipantContactId	Contact ID	reference		18		
RelatedParticipantAccountId	Account ID	reference		18		
RelatedParticipantContactId	Contact ID	reference		18		
RelationshipToInsured	Relationship to Insured	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Role	Role	multipicklist		4099	0	
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System ID	string		255		
StandardFeeAmount	Standard Fee	currency			18	2
StandardPremiumAmount	Standard Premium	currency			18	2
StandardTaxAmount	Standard Tax	currency			18	2
SystemModstamp	System Modstamp	datetime				
TermFeeAmount	Term Fee	currency			18	2
TermPremiumAmount	Term Premium	currency			18	2
TermTaxAmount	Term Tax	currency			18	2
TotalStandardAmount	Total Standard Amount	currency			18	2
TotalTermAmount	Total Term Amount	currency			18	2

INSURANCEPOLICYPARTICIPANTFEED

Feed tracking for InsurancePolicyParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYPARTICIPANTHISTORY

History for tracked fields of InsurancePolicyParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Participant History ID	id		18		
InsurancePolicyParticipantId	Insurance Policy Participant ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPOLICYSHARE

Sharing for InsurancePolicy.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

INSURANCEPOLICYSURCHARGE

Represents the charges calculated for an insurance policy and its related assets, coverages, and participants in a region.

For more information, see InsurancePolicySurcharge in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicableObjectType	Surcharged Item	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Insurance Policy Surcharge ID	id		18		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
InsurancePolicyParticipantId	Insurance Policy Participant ID	reference		18		
InsurancePolicyTransactionId	Insurance Policy Transaction ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SurchargeAmount	Surcharge Amount	currency			18	2
SystemModstamp	System Modstamp	datetime				

INSURANCEPOLICYSURCHARGEFEED

Feed tracking for InsurancePolicySurcharge.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYSURCHARGEHISTORY

History for tracked fields of InsurancePolicySurcharge.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Surcharge History ID	id		18		
InsurancePolicySurchargeId	Insurance Policy Surcharge ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPOLICYTRANSACTION

Represents a transaction related to a change that affects the premium of an insurance policy, such as an endorsement, renewal, or cancellation.

For more information, see InsurancePolicyTransaction in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Insurance Policy Transaction ID	id		18		
`InsurancePolicyId`	Insurance Policy ID	reference		18		
`InsurancePolicyVersionId`	Insurance Policy ID	reference		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ParentTransactionId`	Insurance Policy Transaction ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TotalTransactionAmount`	Total Transaction Amount	currency			18	2
`TransactionAmount`	Transaction Amount	currency			18	2
`TransactionEffectiveDate`	Transaction Effective Date	datetime				
`TransactionFeeAmount`	Transaction Fee	currency			18	2
`TransactionNumber`	Transaction Number	string		255		
`TransactionPostedDate`	Transaction Posted Date	datetime				
`TransactionTaxAmount`	Transaction Tax	currency			18	2
`Type`	Type	picklist		40		

INSURANCEPOLICYTRANSACTIONFEED

Feed tracking for InsurancePolicyTransaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPOLICYTRANSACTIONHISTORY

History for tracked fields of InsurancePolicyTransaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Insurance Policy Transaction History ID	id		18		
InsurancePolicyTransactionId	Insurance Policy Transaction ID	reference		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

INSURANCEPROFILE

Represents the insurance-related attributes for the insured member.

For more information, see InsuranceProfile in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Insurance Profile ID	id		18		
IsAlcoholAbuser	Alcohol Abuse	boolean				
IsAlcoholConsumer	Consumes Alcohol	boolean				
IsDeleted	Deleted	boolean				
IsDrugAbuser	Drug Abuse	boolean				
IsGoodDriver	Good Driver	boolean				
IsGoodStudent	Good Student	boolean				
IsHighRiskOccupation	High Risk Occupation	boolean				
IsLicenseSuspended	License suspended	boolean				
IsTobaccoConsumer	Consumes Tobacco	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MajorCitationCount	Major Citation Count	int	9			
MinorCitationCount	Minor Citation Count	int	9			
Name	Name	string		255		
NumberOfAccidents	Number of Accidents	int	9			
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

INSURANCEPROFILEFEED

Feed tracking for InsuranceProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

INSURANCEPROFILEHISTORY

History for tracked fields of InsuranceProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Insurance Profile History ID	id		18		
`InsuranceProfileId`	Insurance Profile ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INTERNALORGANIZATIONUNIT

Represents an organization that an Employee belongs to.

For more information, see InternalOrganizationUnit in the *Object Reference for the Salesforce Platform*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		80		
Id	Internal Organization Unit ID	id		18		
IsDeleted	Deleted	boolean				
IsParentCompany	Parent Company	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OrganizationCode	Organization Code	string		40		
OrganizationName	Organization Name	string		80		
OwnerId	Owner ID	reference		18		
ParentOrganizationId	Internal Organization Unit ID	reference		18		
SystemModstamp	System Modstamp	datetime				

INTERNALORGANIZATIONUNITHISTORY

History for tracked fields of InternalOrganizationUnit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Internal Organization Unit History ID	id		18		
`InternalOrganizationUnitId`	Internal Organization Unit ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INTERNALORGANIZATIONUNITSHARE

Sharing for InternalOrganizationUnit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

INVOICE

Represents a financial document describing the total amount a buyer must pay for goods or services provided.

For more information, see Invoice in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BillToContactId	Contact ID	reference		18		
BillingAccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DocumentNumber	Document Number	string		255		
DueDate	Due Date	date				
GroupingKey	Grouping Key	string		255		
Id	Invoice ID	id		18		
InvoiceDate	Invoice Date	date				
InvoiceNumber	Invoice Number	string		10		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
ReferenceEntityId	ReferenceEntity ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalAdjustmentAmount	Total Adjustment Amount	currency			18	2
TotalAdjustmentAmountWithTax	Total Adjustment Amount with Tax	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalAdjustmentTaxAmount	Total Adjustment Tax Amount	currency			18	2
TotalAmount	Total Amount	currency			18	2
TotalAmountWithTax	Total with Tax	currency			18	2
TotalChargeAmount	Total Charges	currency			18	2
TotalChargeAmountWithTax	Total Charge Amount with Tax	currency			18	2
TotalChargeTaxAmount	Total Charge Tax Amount	currency			18	2
TotalTaxAmount	Total Tax	currency			18	2

INVOICEFEED

Feed tracking for Invoice.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

INVOICEHISTORY

History for tracked fields of Invoice.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Invoice History ID	id		18		
`InvoiceId`	Invoice ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INVOICELINE

Represents the amount that a buyer must pay for a product, service, or fee. Invoice lines are created based on the amount of an order line.

For more information, see InvoiceLine in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentAmount	Adjustment Amount	currency			18	2
AdjustmentAmountWithTax	Adjustment Amount with Tax	currency			18	2
AdjustmentTaxAmount	Adjustment Tax Amount	currency			18	2
ChargeAmount	Charge Amount	currency			18	2
ChargeAmountWithTax	Charge Amount with Tax	currency			18	2
ChargeTaxAmount	Charge Tax Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
GroupReferenceEntityItemId	GroupReferenceEntityItem ID	reference		18		
Id	Invoice Line ID	id		18		
InvoiceId	Invoice ID	reference		18		
InvoiceLineEndDate	Invoice Line End Date	date				
InvoiceLineStartDate	Invoice Line Start Date	date				
InvoiceStatus	Status	string		50		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LineAmount	Line Amount	currency			18	2
Name	Name	string		255		
Product2Id	Product ID	reference		18		
Quantity	Quantity	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ReferenceEntityItemId	ReferenceEntityItem ID	reference		18		
ReferenceEntityItemType	Reference Entity Item Type	picklist		40		
ReferenceEntityItemTypeCode	Reference Entity Item Type Code	picklist		255		
RelatedLineId	Invoice Line ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TaxAmount	Tax Amount	currency			18	2
TaxCode	Tax Code	string		255		
TaxEffectiveDate	Tax Effective Date	date				
TaxName	Tax Name	string		255		
TaxRate	Tax Rate	percent			3	0
Type	Type	picklist		255		
UnitPrice	Unit Price	currency			18	2

INVOICELINEFEED

Feed tracking for InvoiceLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

INVOICELINEHISTORY

History for tracked fields of InvoiceLine.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Invoice Line History ID	id		18		
`InvoiceLineId`	Invoice Line ID	reference		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

INVOICESHARE

Sharing for Invoice.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

JOBPROFILE

Represents a job profile used for shift scheduling.

For more information, see JobProfile in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`Id`	Job Profile ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Job Profile Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

JOBPROFILEFEED

Feed tracking for JobProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

JOBPROFILEHISTORY

History for tracked fields of JobProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Job Profile History ID	id		18		
`IsDeleted`	Deleted	boolean				
`JobProfileId`	Job Profile ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

JOBPROFILESHARE

Sharing for JobProfile.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

JOURNALREASON

Represents a view that specifies the reason for the action that created a transaction journal.

For more information, see JournalReason in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Journal Reason ID	id		18		
`IsActive`	Is Active	picklist		40		
`JournalReasonType`	Journal Reason Type	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SystemModstamp`	System Modstamp	datetime				

JOURNALSUBTYPE

Represents the subcategory of transaction journal.

For more information, see JournalSubType in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Journal SubType ID	id		18		
`IsDeleted`	Deleted	boolean				
`JournalTypeId`	Journal Type ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

JOURNALSUBTYPEHISTORY

History for tracked fields of JournalSubType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Journal SubType History ID	id		18		
IsDeleted	Deleted	boolean				
JournalSubTypeId	Journal SubType ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

JOURNALTYPE

Represents the category of transactions. For example: accrual, redemption.

For more information, see JournalType in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Journal Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProcessType`	Industry Name	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

JOURNALTYPEHISTORY

History for tracked fields of JournalType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Journal Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`JournalTypeId`	Journal Type ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

JOURNALTYPESHARE

Sharing for JournalType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

KNOWLEDGEARTICLE

Provides read-only access to an article and the ability to delete the primary article.

For more information, see KnowledgeArticle in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ArchivedById`	User ID	reference		18		
`ArchivedDate`	Archived Date	datetime				
`ArticleNumber`	Article Number	string		30		
`CaseAssociationCount`	Case Association Count	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FirstPublishedDate`	First Published Date	datetime				
`Id`	Knowledge Article ID	id		18		
`IsDeleted`	Is Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastPublishedDate`	Last Published Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MasterLanguage`	Language	picklist		40		
`MigratedToFromArticle`	Mapping info between old Article and migrated Article	string		15		
`SystemModstamp`	System Modstamp	datetime				
`TotalViewCount`	Total View Count	int	9			

KNOWLEDGEARTICLEVERSION

Provides a global view of standard article fields across all types of articles depending on their version.

For more information, see KnowledgeArticleVersion in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ArchivedById	User ID	reference		18		
ArchivedDate	Archived Date	datetime				
ArticleArchivedById	User ID	reference		18		
ArticleArchivedDate	Article Archived Date	datetime				
ArticleCaseAttachCount	Article Case Association Count	int	9			
ArticleCreatedById	User ID	reference		18		
ArticleCreatedDate	Article Created Date	datetime				
ArticleMasterLanguage	Article Primary Language	picklist		40		
ArticleNumber	Article Number	string		30		
ArticleTotalViewCount	Article Total View Count	int	9			
AssignedById	User ID	reference		18		
AssignedToId	Assigned To	reference		18		
AssignmentDate	Assignment Date	datetime				
AssignmentDueDate	Assignment Due Date	datetime				
AssignmentNote	Assignment Note	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FirstPublishedDate	First Published Date	datetime				
Id	Knowledge Article Version ID	id		18		
IsDeleted	Is Deleted	boolean				
IsLatestVersion	Is Latest Version	boolean				
IsMasterLanguage	Is Primary Language	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsOutOfDate	Out of Date	boolean				
IsVisibleInApp	Visible In Internal App	boolean				
IsVisibleInCsp	Visible to Customer	boolean				
IsVisibleInPkb	Visible In Public Knowledge Base	boolean				
IsVisibleInPrm	Visible to Partner	boolean				
KnowledgeArticleId	Knowledge Article ID	reference		18		
Language	Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastPublishedDate	Last Published Date	datetime				
MasterVersionId	Knowledge Article Version ID	reference		18		
MigratedToFromArticleVersion	Mapping info between old Article Version and migrated Article Version	string		15		
OwnerId	Owner ID	reference		18		
PublishStatus	Publication Status	picklist		40		
SourceId	Source	reference		18		
Summary	Summary	textarea		1000		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
TranslationCompletedDate	Translation Completed Date	datetime				
TranslationExportedDate	Translation Exported Date	datetime				
TranslationImportedDate	Translation Imported Date	datetime				
UrlName	URL Name	string		255		
ValidationStatus	Validation Status	picklist		255		
VersionNumber	Version Number	int	6			

KNOWLEDGEARTICLEVERSIONHISTORY

Enables read-only access to the full history of an article.

For more information, see KnowledgeArticleVersionHistory in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`EventType`	Event Type	picklist		40		
`FieldName`	Custom Field Definition ID	picklist		255		
`Id`	Entity Version History ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Language	picklist		40		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ParentId`	Knowledge Article ID	reference		18		
`ParentSobjectType`	Parent SObject Type Name	picklist		40		
`VersionId`	Version ID	reference		18		
`VersionNumber`	Version Number	int	6			

KNOWLEDGEARTICLEVIEWSTAT

Provides statistics on the number of views for the specified article across all article types.

For more information, see KnowledgeArticleViewStat in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Channel`	Channel	picklist		40		
`Id`	View Stat ID	id		18		
`IsDeleted`	Deleted	boolean				
`NormalizedScore`	Score	double			18	4
`ParentId`	Knowledge Article ID	reference		18		
`ViewCount`	Total Views	int	9			

KNOWLEDGEARTICLEVOTESTAT

Provides the weighted rating for the specified article on a scale of 1 to 5 across all article types.

For more information, see KnowledgeArticleVoteStat in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Channel`	Channel	picklist		40		
`Id`	Vote Stat ID	id		18		
`IsDeleted`	Deleted	boolean				
`NormalizedScore`	Score	double			18	4
`ParentId`	Knowledge Article ID	reference		18		

KNOWLEDGE__DATACATEGORYSELECTION

Represents a data category that classifies an article

For more information, see Knowledge__DataCategorySelection in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataCategoryGroupName`	Selected Data Category Group's Developer Name	datagroupreference	0	80	0	0
`DataCategoryName`	Selected Data Category's Developer Name	datagroupreference	0	80	0	0
`Id`	Entity Data Category Selection ID	id		18		
`IsDeleted`	Deleted	boolean				
`ParentId`	Knowledge Article Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

KNOWLEDGE__FEED

Represents the feed for a knowledge article.

For more information, see Knowledge__Feed in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

KNOWLEDGE__KA

Provides access to the concrete object that represents a Knowledge article, the parent object for article versions.

For more information, see Knowledge__ka in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ArchivedById`	User ID	reference		18		
`ArchivedDate`	Archived Date	datetime				
`ArticleNumber`	Article Number	string		30		
`CaseAssociationCount`	Case Association Count	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FirstPublishedDate`	First Published Date	datetime				
`Id`	Knowledge Article ID	id		18		
`IsDeleted`	Is Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastPublishedDate`	Last Published Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MasterLanguage`	Language	picklist		40		
`MigratedToFromArticle`	Mapping info between old Article and migrated Article	string		15		
`SystemModstamp`	System Modstamp	datetime				
`TotalViewCount`	Total View Count	int	9			

KNOWLEDGE__KAV

Provides access to the concrete object that represents a Knowledge article version.

For more information, see Knowledge__kav in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ArchivedById	User ID	reference		18		
ArchivedDate	Archived Date	datetime				
ArticleArchivedById	User ID	reference		18		
ArticleArchivedDate	Article Archived Date	datetime				
ArticleCaseAttachCount	Article Case Association Count	int	9			
ArticleCreatedById	User ID	reference		18		
ArticleCreatedDate	Article Created Date	datetime				
ArticleMasterLanguage	Article Primary Language	picklist		40		
ArticleNumber	Article Number	string		30		
ArticleTotalViewCount	Article Total View Count	int	9			
AssignedById	User ID	reference		18		
AssignedToId	Assigned To	reference		18		
AssignmentDate	Assignment Date	datetime				
AssignmentDueDate	Assignment Due Date	datetime				
AssignmentNote	Assignment Note	textarea		1000		
Chat_Answer__c	Chat Answer	textarea		255		
Content__c	Content	textarea		32768		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DigitalEngagementResponse__c	Digital Engagement Response	string		255		
FirstPublishedDate	First Published Date	datetime				
Id	Knowledge Article Version ID	id		18		
InternalNotes__c	Internal Notes	textarea		32768		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Is Deleted	boolean				
IsLatestVersion	Is Latest Version	boolean				
IsMasterLanguage	Is Primary Language	boolean				
IsOutOfDate	Out of Date	boolean				
IsVisibleInApp	Visible In Internal App	boolean				
IsVisibleInCsp	Visible to Customer	boolean				
IsVisibleInPkb	Visible In Public Knowledge Base	boolean				
IsVisibleInPrm	Visible to Partner	boolean				
KnowledgeArticleId	Knowledge Article ID	reference		18		
Language	Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastPublishedDate	Last Published Date	datetime				
MasterVersionId	Knowledge Article Version ID	reference		18		
MigratedToFromArticleVersion	Mapping info between old Article Version and migrated Article Version	string		15		
OwnerId	Owner ID	reference		18		
PublishStatus	Publication Status	picklist		40		
Question__c	Question	textarea		32768		
RecordTypeId	Record Type ID	reference		18		
SourceId	Source	reference		18		
Summary	Summary	textarea		1000		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
TranslationCompletedDate	Translation Completed Date	datetime				
TranslationExportedDate	Translation Exported Date	datetime				
TranslationImportedDate	Translation Imported Date	datetime				
UrlName	URL Name	string		255		
ValidationStatus	Validation Status	picklist		255		
VersionNumber	Version Number	int	6			

KNOWLEDGEABLEUSER

Represents a user identified as knowledgeable about a specific topic, and ranks them relative to other knowledgeable users.

For more information, see KnowledgeableUser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Knowledgeable User ID	id		18		
`NetworkId`	Network ID	reference		18		
`RawRank`	Rank	int	9			
`SystemModstamp`	System Modstamp	datetime				
`TopicId`	Topic ID	reference		18		
`UserId`	User ID	reference		18		

LEAD

Represents a prospect or lead.

For more information, see Lead in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
AnnualRevenue	Annual Revenue	currency			18	0
City	City	string		40		
Company	Company	string		255		
ConvertedAccountId	Converted Account ID	reference		18		
ConvertedContactId	Converted Contact ID	reference		18		
ConvertedDate	Converted Date	date				
ConvertedOpportunityId	Converted Opportunity ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Email	Email	email		80		
EmailBouncedDate	Email Bounced Date	datetime				
EmailBouncedReason	Email Bounced Reason	string		255		
FirstName	First Name	string		40		
GeocodeAccuracy	Geocode Accuracy	picklist		40		
Id	Lead ID	id		18		
IndividualId	Individual ID	reference		18		
Industry	Industry	picklist		255		
IsConverted	Converted	boolean				
IsDeleted	Deleted	boolean				
IsUnreadByOwner	Unread By Owner	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Jigsaw	Data.com Key	string		20		
JigsawContactId	Jigsaw Contact ID	string		20		
LastActivityDate	Last Activity	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		80		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LeadSource	Lead Source	picklist		255		
Longitude	Longitude	double			18	15
MasterRecordId	Master Record ID	reference		18		
Name	Full Name	string		121		
NumberOfEmployees	Employees	int	8			
OwnerId	Owner ID	reference		18		
Phone	Phone	phone		40		
PhotoUrl	Photo URL	url		255		
PostalCode	Zip/Postal Code	string		20		
Rating	Rating	picklist		255		
Salutation	Salutation	picklist		40		
State	State/Province	string		80		
Status	Status	picklist		255		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		128		
Website	Website	url		255		

LEADCLEANINFO

Stores the metadata Data.com Clean uses to determine a lead record's clean status. Helps you automate the cleaning or related processing of lead records.

For more information, see LeadCleanInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
AnnualRevenue	Annual Revenue	currency			18	0
City	City	string		40		
CleanedByJob	Cleaned by Job	boolean				
CleanedByUser	Cleaned by User	boolean				
CompanyDunsNumber	Company D-U-N-S Number	string		9		
CompanyName	Company Name	string		255		
ContactStatusDataDotCom	Contact Status per Data.com	picklist		255		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DandBCompanyDunsNumber	D&B Company D-U-N-S Number	string		9		
DataDotComCompanyId	Data.com Company ID	string		20		
DataDotComId	Data.com ID	string		20		
Email	Email	email		80		
FirstName	First Name	string		255		
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Lead Clean Info ID	id		18		
Industry	Industry	picklist		40		
IsDeleted	Deleted	boolean				
IsDifferentAnnualRevenue	Annual Revenue is Different	boolean				
IsDifferentCity	City is Different	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDifferentCompanyDunsNumber	Company D-U-N-S Number is Different	boolean				
IsDifferentCompanyName	Company Name is Different	boolean				
IsDifferentCountry	Country is Different	boolean				
IsDifferentCountryCode	Country Code is Different	boolean				
IsDifferentDandBCompanyDunsNumber	D&B Company D-U-N-S Number is Different	boolean				
IsDifferentEmail	Email is Different	boolean				
IsDifferentFirstName	First Name is Different	boolean				
IsDifferentIndustry	Industry is Different	boolean				
IsDifferentLastName	Last Name is Different	boolean				
IsDifferentNumberOfEmployees	Number of Employees is Different	boolean				
IsDifferentPhone	Phone is Different	boolean				
IsDifferentPostalCode	ZIP is Different	boolean				
IsDifferentState	State is Different	boolean				
IsDifferentStateCode	State Code is Different	boolean				
IsDifferentStreet	Street is Different	boolean				
IsDifferentTitle	Title is Different	boolean				
IsFlaggedWrongAddress	Address is Flagged Wrong	boolean				
IsFlaggedWrongAnnualRevenue	Annual Revenue is Flagged Wrong	boolean				
IsFlaggedWrongCompanyDunsNumber	Company D-U-N-S Number is Flagged Wrong	boolean				
IsFlaggedWrongCompanyName	Company Name is Flagged Wrong	boolean				
IsFlaggedWrongEmail	Email is Flagged Wrong	boolean				
IsFlaggedWrongIndustry	Industry is Flagged Wrong	boolean				
IsFlaggedWrongName	Name is Flagged Wrong	boolean				
IsFlaggedWrongNumberOfEmployees	Number of Employees is Flagged Wrong	boolean				
IsFlaggedWrongPhone	Phone is Flagged Wrong	boolean				
IsFlaggedWrongTitle	Title is Flagged Wrong	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsInactive	Contact Status in Salesforce	boolean				
IsReviewedAddress	Address is Reviewed	boolean				
IsReviewedAnnualRevenue	Annual Revenue is Reviewed	boolean				
IsReviewedCompanyDunsNumber	Company D-U-N-S Number is Reviewed	boolean				
IsReviewedCompanyName	Company Name is Reviewed	boolean				
IsReviewedDandBCompanyDunsNumber	D&B Company D-U-N-S Number is Reviewed	boolean				
IsReviewedEmail	Email is Reviewed	boolean				
IsReviewedIndustry	Industry is Reviewed	boolean				
IsReviewedName	Name is Reviewed	boolean				
IsReviewedNumberOfEmployees	Number of Employees is Reviewed	boolean				
IsReviewedPhone	Phone is Reviewed	boolean				
IsReviewedTitle	Title is Reviewed	boolean				
LastMatchedDate	Last Matched Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		255		
LastStatusChangedById	User ID	reference		18		
LastStatusChangedDate	Last Status Changed Date	datetime				
Latitude	Latitude	double			18	15
LeadId	Lead ID	reference		18		
Longitude	Longitude	double			18	15
Name	Lead Clean Info Name	string		255		
NumberOfEmployees	Number of Employees	int	8			
Phone	Phone	phone		40		
PostalCode	Zip	string		20		
State	State	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Title`	Title	string		128		

LEADFEED

Feed tracking for Lead.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LEADHISTORY

History for tracked fields of Lead.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Lead History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LeadId`	Lead ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LEADSHARE

Represents a sharing entry on a Lead.

For more information, see LeadShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Lead Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LeadAccessLevel`	Lead Access	picklist		40		
`LeadId`	Lead ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

LEADSTATUS

Represents the status of a Lead, such as Open, Qualified, or Converted.

For more information, see LeadStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Lead Status Value ID	id		18		
`IsConverted`	Is Converted	boolean				
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

LEGALENTITY

Represents the way an organization is structured. An organization can be a single legal entity or it can comprise more than one legal entity.

For more information, see LegalEntity in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CompanyName	Company Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Legal Entity ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LegalEntityAddress	Address	address				
LegalEntityCity	City	string		40		
LegalEntityCountry	Country	string		80		
LegalEntityGeocodeAccuracy	Geocode Accuracy	picklist		255		
LegalEntityLatitude	Latitude	double			18	15
LegalEntityLongitude	Longitude	double			18	15
LegalEntityPostalCode	Postal Code	string		20		
LegalEntityState	State	string		80		
LegalEntityStreet	Street	textarea		255		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

LEGALENTITYFEED

Feed tracking for LegalEntity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LEGALENTITYHISTORY

History for tracked fields of LegalEntity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Legal Entity History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LegalEntityId`	Legal Entity ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LEGALENTITYSHARE

Sharing for LegalEntity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LIGHTNINGEXITBYPAGEMETRICS

.Represents standard pages users switched from Lightning Experience to Salesforce most frequently.

For more information, see LightningExitByPageMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Lightning Exit By Page Metrics ID	id		18		
`MetricsDate`	Metrics Date	date				
`PageName`	Page Name	string		40		
`RecordCount`	Record Count	int	9			
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

LIGHTNINGEXPERIENCETHEME

Represents information for a theme in Lightning Experience.

For more information, see LightningExperienceTheme in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefaultBrandingSetId`	Branding Set ID	reference		18		
`Description`	Description	textarea		1000		
`DeveloperName`	Name	string		70		
`Id`	Theme ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		70		
`NamespacePrefix`	Namespace Prefix	string		15		
`ShouldOverrideLoadingImage`	Should Override Loading Image	boolean				
`SystemModstamp`	System Modstamp	datetime				

LIGHTNINGONBOARDINGCONFIG

Represents the feedback provided when users switch from Lightning Experience to Salesforce Classic. Admins can customize the question, how frequently the form appears, and where the feedback is stored in Chatter from the Adoption Assistance page in Lightning Experience Setup.

For more information, see LightningOnboardingConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CollaborationGroupId`	Collaboration Group ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomQuestion`	Custom Question	textarea		1000		
`DeveloperName`	Name	string		80		
`FeedbackFormDaysFrequency`	Feedback Form Days Frequency	int	9			
`Id`	Lightning Onboarding Config ID	id		18		
`IsCustom`	Is Custom	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`PromptDelayTime`	Prompt Delay Time	int	9			
`SendFeedbackToSalesforce`	Send Feedback To Salesforce	boolean				
`SystemModstamp`	System Modstamp	datetime				

LIGHTNINGTOGGLEMETRICS

Represents users who switched from Lightning Experience back to Salesforce Classic.

For more information, see LightningToggleMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Action	string		40		
`Id`	Lightning Toggle Metrics ID	id		18		
`MetricsDate`	Metrics Date	date				
`RecordCount`	Record Count	int	9			
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

LIGHTNINGURIEVENT

Detects when a user creates, accesses, updates, or deletes a record in Lightning Experience only.

For more information, see LightningUriEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppName	Application Name	string		255		
ConnectionType	Connection Type	string		255		
CreatedDate	Created Date	datetime				
DeviceId	Device ID	string		255		
DeviceModel	Device Model	string		255		
DevicePlatform	Device Platform	string		255		
DeviceSessionId	Device Session ID	string		255		
Duration	Duration	double			18	0
EffectivePageTime	Effective Page Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
Id	Lightning URI Event ID	id		18		
LoginKey	Login Key	string		24		
Operation	Operation	picklist		255		
OsName	OS Name	string		255		
OsVersion	OS Version	string		255		
PageStartTime	Page Start Time	datetime				
PageUrl	Page URL	url		255		
PreviousPageAppName	Previous Page App Name	string		255		
PreviousPageEntityId	Previous Page Entity ID	reference		18		
PreviousPageEntityType	Previous Page Entity Type	string		255		
PreviousPageUrl	Previous Page URL	url		255		
QueriedEntities	Queried Entities	string		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RecordId	Record ID	reference		18		
RelatedEventIdentifier	Related Event Identifier	string		80		
SdkAppType	SDK App Type	string		255		
SdkAppVersion	SDK App Version	string		255		
SdkVersion	SDK Version	string		255		
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
UserType	User Type	picklist		255		
Username	Username	string		255		

LIGHTNINGURIEVENTSTREAM

Detects when a user creates, accesses, updates, or deletes a record in Lightning Experience only.

For more information, see LightningUriEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppName	Application Name	string		255		
ConnectionType	Connection Type	string		255		
CreatedDate	Created Date	datetime				
DeviceId	Device ID	string		255		
DeviceModel	Device Model	string		255		
DevicePlatform	Device Platform	string		255		
DeviceSessionId	Device Session ID	string		255		
Duration	Duration	double			18	0
EffectivePageTime	Effective Page Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventUuid	Event UUID	string		36		
LoginKey	Login Key	string		24		
Operation	Operation	picklist		255		
OsName	OS Name	string		255		
OsVersion	OS Version	string		255		
PageStartTime	Page Start Time	datetime				
PageUrl	Page URL	url		255		
PreviousPageAppName	Previous Page App Name	string		255		
PreviousPageEntityId	Previous Page Entity ID	string		18		
PreviousPageEntityType	Previous Page Entity Type	string		255		
PreviousPageUrl	Previous Page URL	url		255		
QueriedEntities	Queried Entities	string		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RecordId	Record ID	string		18		
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
SdkAppType	SDK App Type	string		255		
SdkAppVersion	SDK App Version	string		255		
SdkVersion	SDK Version	string		255		
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
UserType	User Type	picklist		255		
Username	Username	string		255		

LIGHTNINGUSAGEBYAPPTYPEMETRICS

Represents number of users on Lightning Experience and Salesforce Mobile.

For more information, see LightningUsageByAppTypeMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppExperience`	App Experience	string		40		
`Id`	Lightning Usage By App Type Metrics ID	id		18		
`MetricsDate`	Metrics Date	date				
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

LIGHTNINGUSAGEBYBROWSERMETRICS

Represents Lightning Experience usage grouped by user's browser.

For more information, see LightningUsageByBrowserMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Browser`	Browser	string		40		
`EptBin3To5`	EptBin3To5	int	9			
`EptBin5To8`	EptBin5To8	int	9			
`EptBin8To10`	EptBin8To10	int	9			
`EptBinOver10`	EptBinOver10	int	9			
`EptBinUnder3`	EptBinUnder3	int	9			
`Id`	Lightning Usage By Browser Metrics ID	id		18		
`MetricsDate`	Metrics Date	date				
`PageName`	Page Name	string		40		
`RecordCountEPT`	Record Count EPT	int	9			
`SumEPT`	Sum EPT	int	9			
`SystemModstamp`	System Modstamp	datetime				
`TotalCount`	Total Count	int	9			

LIGHTNINGUSAGEBYFLEXIPAGEMETRICS

Represents custom pages users viewed most frequently in Lightning Experience.

For more information, see LightningUsageByFlexiPageMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CoresBin2To4	CoresBin2To4	int	9			
CoresBin4To8	CoresBin4To8	int	9			
CoresBinOver8	CoresBinOver8	int	9			
CoresBinUnder2	CoresBinUnder2	int	9			
DownlinkBin3To5	DownlinkBin3To5	int	9			
DownlinkBin5To8	DownlinkBin5To8	int	9			
DownlinkBin8To10	DownlinkBin8To10	int	9			
DownlinkBinOver10	DownlinkBinOver10	int	9			
DownlinkBinUnder3	DownlinkBinUnder3	int	9			
EptBin3To5	EptBin3To5	int	9			
EptBin5To8	EptBin5To8	int	9			
EptBin8To10	EptBin8To10	int	9			
EptBinOver10	EptBinOver10	int	9			
EptBinUnder3	EptBinUnder3	int	9			
FlexiPageNameOrId	FlexiPage Name Or Id	string		40		
FlexiPageType	FlexiPage Type	string		40		
Id	Lightning Usage By FlexiPage Metrics ID	id		18		
MedianEPT	Median EPT	int	9			
MetricsDate	Metrics Date	date				
RecordCountEPT	Record Count EPT	int	9			
RttBin50To150	RttBin50To150	int	9			
RttBinOver150	RttBinOver150	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RttBinUnder50	RttBinUnder50	int	9			
SumEPT	Sum EPT	int	9			
SystemModstamp	System Modstamp	datetime				
TotalCount	Total Count	int	9			

LIGHTNINGUSAGEBYPAGEMETRICS

Represents standard pages users viewed most frequently in Lightning Experience.

For more information, see LightningUsageByPageMetrics in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CoresBin2To4	CoresBin2To4	int	9			
CoresBin4To8	CoresBin4To8	int	9			
CoresBinOver8	CoresBinOver8	int	9			
CoresBinUnder2	CoresBinUnder2	int	9			
DownlinkBin3To5	DownlinkBin3To5	int	9			
DownlinkBin5To8	DownlinkBin5To8	int	9			
DownlinkBin8To10	DownlinkBin8To10	int	9			
DownlinkBinOver10	DownlinkBinOver10	int	9			
DownlinkBinUnder3	DownlinkBinUnder3	int	9			
EptBin3To5	EptBin3To5	int	9			
EptBin5To8	EptBin5To8	int	9			
EptBin8To10	EptBin8To10	int	9			
EptBinOver10	EptBinOver10	int	9			
EptBinUnder3	EptBinUnder3	int	9			
Id	Lightning Usage By Page Metrics ID	id		18		
MetricsDate	Metrics Date	date				
PageName	Page Name	string		40		
RecordCountEPT	Record Count EPT	int	9			
RttBin50To150	RttBin50To150	int	9			
RttBinOver150	RttBinOver150	int	9			
RttBinUnder50	RttBinUnder50	int	9			
SumEPT	Sum EPT	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TotalCount	Total Count	int	9			
UserId	User ID	reference		18		

LINKEDARTICLE

Represents a knowledge article that is attached to a work order, work order line item, or work type.

For more information, see LinkedArticle in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Linked Article ID	id		18		
`IsDeleted`	Deleted	boolean				
`KnowledgeArticleId`	Article ID	reference		18		
`KnowledgeArticleVersionId`	Knowledge Article Version ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LinkedEntityId`	Linked Entity ID	reference		18		
`Name`	Linked Article Title	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Linked Object Type	string		50		

LINKEDARTICLEFEED

Represents the comment feed on a linked article.

For more information, see LinkedArticleFeed in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LINKEDARTICLEHISTORY

Represents the history of changes made to tracked fields on a linked article.

For more information, see LinkedArticleHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Linked Article History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LinkedArticleId`	Linked Article ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LISTEMAIL

Represents a list email sent from Salesforce, or sent from Pardot and synced to Salesforce. When the list email is sent, the recipients are generated by combining recipients in ListEmailIndividualRecipients and ListEmailRecipientSource. Duplicate and other invalid recipients are removed. The result is the recipients who are sent any given list email. Has a one-to-many relationship with ListEmailRecipientSource and ListEmailIndividualRecipient.

For more information, see ListEmail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CampaignId	Campaign ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FromAddress	From Address	textarea		320		
FromName	From Name	string		121		
HasAttachment	Has Attachment	boolean				
HtmlBody	Html Body	textarea		32000		
Id	List Email ID	id		18		
IsDeleted	Deleted	boolean				
IsTracked	Is Tracked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ScheduledDate	Scheduled Date	datetime				
Status	Status	picklist		255		
Subject	Subject	textarea		3000		
SystemModstamp	System Modstamp	datetime				
TextBody	Text Body	textarea		32000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`TotalSent`	Total Sent	int	9			

LISTEMAILINDIVIDUALRECIPIENT

For a list email in Salesforce, represents a recipient. Each record represents a link from a list email to exactly one recipient for that list email. Recipients can be contacts, leads, or campaign members. Has a one-to-many relationship with ListEmail.

For more information, see ListEmailIndividualRecipient in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	List Email Individual Recipient ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ListEmailId`	List Email ID	reference		18		
`Name`	Name	string		255		
`RecipientId`	Recipient ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LISTEMAILRECIPIENTSOURCE

For a list email in Salesforce, represents the dynamically defined sources of recipient email addresses. Each record represents a link to a single list view or campaign that is examined when the list email is sent. Has a one-to-many relationship with ListEmail.

For more information, see ListEmailRecipientSource in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	List Email Recipient Source ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ListEmailId`	List Email ID	reference		18		
`Name`	Name	string		255		
`SourceListId`	SourceList ID	reference		18		
`SourceType`	Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

LISTEMAILSHARE

Sharing for ListEmail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LISTVIEWCHART

Represents a graphical chart that's displayed on Salesforce for Android, iOS, and mobile web list views. The chart aggregates data that is filtered based on the list view that's currently displayed.

For more information, see ListViewChart in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AggregateField`	Custom Field Definition ID	picklist		255		
`AggregateType`	Aggregate Type	picklist		255		
`ChartType`	Chart Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	API Name	string		80		
`GroupingField`	Custom Field Definition ID	picklist		255		
`Id`	List View Chart ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`OwnerId`	User ID	reference		18		
`SobjectType`	Custom Object Definition ID	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

LISTVIEWCHARTINSTANCE

Retrieves metadata for all standard and custom charts for a given entity in context of a given list view.

For more information, see ListViewChartInstance in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AggregateField`	Aggregate Field	string		255		
`AggregateType`	Aggregate Type	picklist		255		
`ChartType`	TODO, use alias	picklist		255		
`DataQuery`	SOQL Query for Chart Data	textarea		1333		
`DataQueryWithoutUserFilters`	SOQL Query for Desktop Chart Data without S1 User Filters	textarea		1333		
`DeveloperName`	API Name	string		80		
`ExternalId`	ListView Chart Instance ID	string		255		
`GroupingField`	Grouping Field	string		255		
`Id`	List View Chart Instance ID	id		18		
`IsDeletable`	Deletable	boolean				
`IsEditable`	Editable	boolean				
`IsLastViewed`	Last Viewed	boolean				
`Label`	Label	string		255		
`ListViewChartId`	List View Chart ID	reference		18		
`ListViewContextId`	List View ID	reference		18		
`SourceEntity`	Entity	string		255		

LISTVIEWEVENT

Tracks when users access data with list views using Lightning Experience, Salesforce Classic, or the API. It doesn't track list views of Setup entities.

For more information, see ListViewEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppName	Application Name	string		255		
ColumnHeaders	Name of Columns	string		10000		
CreatedDate	Created Date	datetime				
DeveloperName	Developer Name	string		80		
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventSource	Event Source	picklist		255		
ExecutionIdentifier	Execution Identifier	string		80		
FilterCriteria	Filter Criteria	json		250000		
Id	List View Event ID	id		18		
ListViewId	List View ID	reference		18		
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
Name	Name	string		40		
NumberOfColumns	Number of Columns	int	9			
OrderBy	Order By	string		255		
OwnerId	Owner ID	reference		18		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
QueriedEntities	Queried Entities	string		1000		
Records	Records	json		250000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEventIdentifier	Related Event Identifier	string		80		
RowsProcessed	Rows Processed	double			18	0
Scope	Scope	string		255		
Sequence	Sequence	int	9			
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
Username	Username	string		255		

LISTVIEWEVENTSTREAM

Tracks actions related to list views in Lightning Experience, Salesforce Classic, or the API. For example, the event captures when a user runs or exports a list view. It doesn't capture list view events of Setup entities.

For more information, see ListViewEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppName	Application Name	string		255		
ColumnHeaders	Name of Columns	string		10000		
CreatedDate	Created Date	datetime				
DeveloperName	Developer Name	string		80		
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventSource	Event Source	picklist		255		
EventUuid	Event UUID	string		36		
ExecutionIdentifier	Execution Identifier	string		80		
FilterCriteria	Filter Criteria	json		250000		
ListViewId	List View ID	string		18		
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
Name	Name	string		40		
NumberOfColumns	Number of Columns	int	9			
OrderBy	Order By	string		255		
OwnerId	Owner	string		18		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
QueriedEntities	Queried Entities	string		1000		
Records	Records	json		250000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
RowsProcessed	Rows Processed	double			18	0
Scope	Scope	string		255		
Sequence	Sequence	int	9			
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
Username	Username	string		255		

LIVEAGENTSESSION

This object is automatically created for each Chat session and stores information about the session.

For more information, see LiveAgentSession in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AgentId	User ID	reference		18		
ChatReqAssigned	Chat Requests Assigned	int	9			
ChatReqDeclined	Chat Requests Declined (Manually)	int	9			
ChatReqEngaged	Chat Requests Engaged	int	9			
ChatReqTimedOut	Chat Requests Declined (Push Timeout)	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Chat Session ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoginTime	Login Time	datetime				
LogoutTime	Logout Time	datetime				
Name	Chat Session Name	string		255		
NumFlagLoweredAgent	Assistance Flags Lowered (Agent)	int	9			
NumFlagLoweredSupervisor	Assistance Flags Lowered (Supervisor)	int	9			
NumFlagRaised	Assistance Flags Raised	int	9			
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TimeAtCapacity	Time Spent at Capacity	int	9			
TimeIdle	Time Idle	int	9			
TimeInAwayStatus	Time Spent Away	int	9			
TimeInChats	Time Spent in Chats	int	9			
TimeInOnlineStatus	Time Spent Online	int	9			

LIVEAGENTSESSIONHISTORY

This object is automatically created for each Chat session and stores information about changes made to the session.

For more information, see LiveAgentSessionHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Chat Session History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LiveAgentSessionId`	Chat Session ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LIVEAGENTSESSIONSHARE

This object is automatically created for each Chat session and stores information about the session.

For more information, see LiveAgentSessionShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

LIVECHATBLOCKINGRULE

Represents a rule for blocking chat visitors' IP addresses from starting new chats with agents.

For more information, see LiveChatBlockingRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	Developer Name	string		80		
`FromIpAddress`	From IP Address	string		39		
`Id`	Chat Blocking Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Chat Blocking Rule Name	string		80		
`OwnerType`	Owner Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`ToIpAddress`	To IP Address	string		39		

LIVECHATBUTTON

Represents a button that allows visitors to request chats with Chat users.

For more information, see LiveChatButton in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Animation	Animation	picklist		255		
AutoGreeting	Auto Greeting	textarea		1000		
ChasitorIdleTimeout	Customer Time-Out (seconds)	int	9			
ChasitorIdleTimeoutWarning	Customer Time-Out Warning (seconds)	int	9			
ChatPageId	Page ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomAgentName	Custom Agent Name	string		255		
DeveloperName	Developer Name	string		80		
HasQueue	Enable queue	boolean				
Id	Chat Button ID	id		18		
InviteEndPosition	End Position	picklist		255		
InviteImageId	Static Resource ID	reference		18		
InviteStartPosition	Start Position	picklist		255		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsRoutingFlowEnabled	Use a flow for routing (recommended)	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Name	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
NumberOfReroutingAttempts	Number of Rerouting Attempts	int	9			
OfflineImageId	Static Resource ID	reference		18		
OnlineImageId	Static Resource ID	reference		18		
OptionsHasChasitorIdleTimeout	Enable customer timeout	boolean				
OptionsHasInviteAfterAccept	Allow invitation to be triggered again after accepting	boolean				
OptionsHasInviteAfterReject	Allow invitation to be triggered again after rejecting	boolean				
OptionsHasRerouteDeclinedRequest	Reroute Declined Requests	boolean				
OptionsIsAutoAccept	isAutoAccept	boolean				
OptionsIsInviteAutoRemove	Auto Remove Invitation	boolean				
OverallQueueLength	Overall Queue Size	int	9			
PerAgentQueueLength	Queue Size Per Agent	int	9			
PostchatPageId	Page ID	reference		18		
PostchatUrl	Post-Chat URL	string		255		
PrechatFormPageId	Page ID	reference		18		
PrechatFormUrl	Prechat Form URL	string		255		
PushTimeout	Push Time-Out (seconds)	int	9			
QueueId	Queue ID	reference		18		
RoutingConfigurationId	Routing Configuration ID	reference		18		
RoutingType	Routing Type	picklist		255		
SiteId	Site ID	reference		18		
SkillId	Skill ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TimeToRemoveInvite	Display Time	int	9			
Type	Type	picklist		255		
WindowLanguage	Language	picklist		255		

LIVECHATBUTTONDEPLOYMENT

Associates an automated chat invitation with a specific deployment.

For more information, see LiveChatButtonDeployment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ButtonId`	Chat Button ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeploymentId`	Chat Deployment ID	reference		18		
`Id`	LiveChatButtonDeployment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

LIVECHATBUTTONSKILL

Represents all the skills available to a LiveChatButton except the one currently assigned. To retrieve the skill currently assigned, query LiveChatButton.

For more information, see LiveChatButtonSkill in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ButtonId`	Chat Button ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	LiveChatButtonSkill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LIVECHATDEPLOYMENT

Represents the general settings for deploying Live Agent on a website.

For more information, see LiveChatDeployment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BrandingId`	Static Resource ID	reference		18		
`ConnectionTimeoutDuration`	Idle Connection Timeout Duration	int	9			
`ConnectionWarningDuration`	Idle Connection Warning Duration	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Domains`	Permitted Domains	textarea		4096		
`HasTranscriptSave`	Allow Visitors to Save Transcripts	boolean				
`Id`	Chat Deployment ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Chat Deployment Name	string		80		
`MobileBrandingId`	Static Resource ID	reference		18		
`OptionsHasPrechatApi`	Allow Access to Prechat API	boolean				
`SiteId`	Site ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`WindowTitle`	Chat Window Title	string		80		

LIVECHATOBJECTACCESSCONFIG

Represents the action you can perform on a specified object by the Chat API.

For more information, see LiveChatObjectAccessConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessType`	Action	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Live Chat Object Access Configuration ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Live Chat Object Access Definition ID	reference		18		
`SobjectType`	Custom Object Definition ID	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

LIVECHATOBJECTACCESSDEFINITION

Represents the parent record for one or more LiveChatObjectAccessConfig objects.

For more information, see LiveChatObjectAccessDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Live Chat Object Access Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				

LIVECHATSENSITIVEDATARULE

Represents a rule for masking or deleting data of a specified pattern. Written as a regular expression (regex).

For more information, see LiveChatSensitiveDataRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionType`	Action	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	Developer Name	string		80		
`EnforceOn`	Enforce	int	9			
`Id`	Sensitive Data Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsEnabled`	Active	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Sensitive Data Rule Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`Pattern`	Patterns	textarea		1000		
`Priority`	Priority	int	9			
`Replacement`	Replacement Text	string		255		
`SystemModstamp`	System Modstamp	datetime				

LIVECHATTRANSCRIPT

This object is automatically created for each Live Agent chat session and stores information about the session.

For more information, see LiveChatTranscript in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Abandoned	Abandoned After	int	9			
AccountId	Account ID	reference		18		
AverageResponseTimeOperator	Agent Average Response Time	int	9			
AverageResponseTimeVisitor	Visitor Average Response Time	int	9			
Body	Body	textarea		131072		
Browser	Browser	string		200		
BrowserLanguage	Browser Language	string		200		
CaseId	Case ID	reference		18		
ChatDuration	Chat Duration	int	9			
ChatKey	Chat Key	string		200		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndTime	End Time	datetime				
EndedBy	Ended By	picklist		255		
Id	Chat Transcript ID	id		18		
IpAddress	Visitor IP Address	string		39		
IsChatbotSession	Is Chatbot Session	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LeadId	Lead ID	reference		18		
LiveChatButtonId	Chat Button ID	reference		18		
LiveChatDeploymentId	Chat Deployment ID	reference		18		
LiveChatVisitorId	Chat Visitor ID	reference		18		
Location	Location	string		200		
MaxResponseTimeOperator	Agent Maximum Response Time	int	9			
MaxResponseTimeVisitor	Visitor Maximum Response Time	int	9			
Name	Chat Transcript Name	string		255		
OperatorMessageCount	Agent Message Count	int	9			
OwnerId	Owner ID	reference		18		
Platform	Platform	string		200		
ReferrerUri	Referring Site	string		200		
RequestTime	Request Time	datetime				
ScreenResolution	Screen Resolution	string		200		
SkillId	Skill ID	reference		18		
StartTime	Start Time	datetime				
Status	Status	picklist		255		
SupervisorTranscriptBody	Supervisor Transcript Body	textarea		131072		
SystemModstamp	System Modstamp	datetime				
UserAgent	User Agent	string		200		
VisitorMessageCount	Visitor Message Count	int	9			
VisitorNetwork	Network	string		200		
WaitTime	Wait Time	int	9			

LIVECHATTRANSCRIPTEVENT

Captures specific events that occur over the lifetime of a chat.

For more information, see LiveChatTranscriptEvent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AgentId	User ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Detail	Detail	string		255		
Id	Chat Transcript Event ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LiveChatTranscriptId	Chat Transcript ID	reference		18		
Name	Chat Transcript Event Name	string		255		
SystemModstamp	System Modstamp	datetime				
Time	Time	datetime				
Type	Type	picklist		255		

LIVECHATTRANSCRIPTFEED

Feed tracking for LiveChatTranscript.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LIVECHATTRANSCRIPTHISTORY

History for tracked fields of LiveChatTranscript.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Chat Transcript History ID	id		18		
IsDeleted	Deleted	boolean				
LiveChatTranscriptId	Chat Transcript ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LIVECHATTRANSCRIPTSHARE

Represents a sharing entry on a LiveChatTranscript object.

For more information, see LiveChatTranscriptShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

LIVECHATTRANSCRIPTSKILL

Represents a join between LiveChatTranscript and Skill.

For more information, see LiveChatTranscriptSkill in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	LiveChatTranscriptSkill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	LiveChatTranscriptSkill Name	string		255		
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TranscriptId`	Chat Transcript ID	reference		18		

LIVECHATUSERCONFIG

Represents a setting that controls the console settings for Chat users.

For more information, see LiveChatUserConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AutoGreeting	Auto Greeting	textarea		1000		
Capacity	Chat Capacity	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CriticalWaitTime	Critical Wait Alert Time (seconds)	int	9			
CustomAgentName	Custom Agent Name	string		255		
DeveloperName	Developer Name	string		80		
HasLogoutSound	Play a notification sound if Omni Channel loses connection	boolean				
HasNotifications	Notifications Enabled	boolean				
HasRequestSound	Play a notification sound for chat requests	boolean				
HasSneakPeek	Sneak Peek Enabled	boolean				
HasTransferConferenceGreeting	Disable Auto Greeting on Transfer/Conference	boolean				
Id	Chat Agent Configuration ID	id		18		
IsAutoAwayOnDecline	Auto Away on Decline	boolean				
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Chat Agent Configuration Name	string		80		
OptionsHasAgentFileTransfer	Agent File Transfer Enabled	boolean				
OptionsHasAgentSneakPeek	Agent Sneak Peek Enabled	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsHasAssistanceFlag	Assistance Flag Enabled	boolean				
OptionsHasChatConferencing	Chat Conferencing Enabled	boolean				
OptionsHasChatMonitoring	Chat Monitoring Enabled	boolean				
OptionsHasChatTransferToAgent	Chat Transfer To Agents Enabled	boolean				
OptionsHasChatTransferToButton	Chat Transfer To Chat Buttons Enabled	boolean				
OptionsHasChatTransferToSkill	Chat Transfer To Skills Enabled	boolean				
OptionsHasTransferConferenceGreeting	HasTransferConferenceGreeting	boolean				
OptionsHasVisitorBlocking	Visitor Blocking Enabled	boolean				
OptionsHasWhisperMessage	Whisper Messages Enabled	boolean				
OptionsIsAutoAwayOnPushTimeout	Auto Away on Push Time-Out	boolean				
SupervisorDefaultAgentStatus	Default Agent Status Filter	picklist		255		
SupervisorDefaultButtonId	Chat Button ID	reference		18		
SupervisorDefaultSkillId	Skill ID	reference		18		
SystemModstamp	System Modstamp	datetime				

LIVECHATUSERCONFIGPROFILE

Represents a join between LiveChatUserConfig and Profile.

For more information, see LiveChatUserConfigProfile in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Chat User Config Profile ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LiveChatUserConfigId`	Chat Agent Configuration ID	reference		18		
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LIVECHATUSERCONFIGUSER

Represents a join between Live Chat User Config and User.

For more information, see LiveChatUserConfigUser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Chat User Config User ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LiveChatUserConfigId`	Chat Agent Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

LIVECHATVISITOR

Represents a website visitor who has started or tried to start a chat session.

For more information, see LiveChatVisitor in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Chat Visitor ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Chat Visitor Name	string		255		
`SessionKey`	Session Key	string		200		
`SystemModstamp`	System Modstamp	datetime				

LOANAPPLICANT

Represents details of the borrower or co-borrower for the loan application.

For more information, see LoanApplicant in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicantExtIdentifier	Applicant External ID	string		255		
AsianRaceSubType	Asian Race	multipicklist		4099	0	
BorrowerType	Borrower Type	picklist		255		
CitizenshipStatus	Citizenship Status	picklist		40		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DependentCount	Number of Dependents	int	2			
DependentsAge	Dependents' Ages	string		255		
EthnicitySubType	Ethnicity Origin	multipicklist		4099	0	
EthnicityType	Ethnicity	picklist		40		
GenderType	Gender	picklist		40		
HasMilitaryService	Military Service	boolean				
Id	Loan Applicant ID	id		18		
IsActiveMilitary	Currently on Active Military Duty	boolean				
IsDeleted	Deleted	boolean				
IsJointCredit	Joint Credit	boolean				
IsSurvivingMilitarySpouse	Surviving Military Spouse	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicationId	Residential Loan Application ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaritalStatus	Marital Status	picklist		40		
MilitaryTourExpirationMonth	Military Tour Expiration Month	int	2			
MilitaryTourExpirationYear	Military Tour Expiration Year	int	4			
Name	Name	string		255		
OtherAsianRaceSubType	Other Asian Race	string		255		
OtherEthnicitySubType	Other Ethnicity Origin Description	string		255		
OtherPacIslandSubType	Other Pacific Islander Race	string		255		
OwnerId	Owner ID	reference		18		
PacIslandSubType	Pacific Islander Race	multipicklist		4099	0	
PreferredLanguage	Preferred Language for Communication	picklist		40		
RaceType	Race	multipicklist		4099	0	
SystemModstamp	System Modstamp	datetime				
TribeName	Name of Enrolled or Principal Tribe	string		255		
WasActiveMilitary	Past Military Service	boolean				
WasNonActivatedService	Non-Activated Reserve or National Guard	boolean				

LOANAPPLICANTADDRESS

Represents borrower's or co-borrower's current address information.

For more information, see LoanApplicantAddress in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AddressExtIdentifier	Loan Applicant Address External ID	string		255		
AddressOwnership	Residence Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Loan Applicant Address ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicantId	Loan Applicant ID	reference		18		
LoanApplicationId	Residential Loan Application ID	reference		18		
MonthlyRentPayment	Monthly Rent Payment	currency			18	2
Name	Name	string		255		
ResidenceAdditionalMonthCount	Additional Months in Residence	int	2			
ResidenceAddress	Residence Address	address				
ResidenceCity	Residence City	string		40		
ResidenceCountry	Residence Country	string		80		
ResidenceGeocodeAccuracy	Residence Geocode Accuracy	picklist		255		
ResidenceLatitude	Residence Latitude	double			18	15
ResidenceLongitude	Residence Longitude	double			18	15
ResidencePostalCode	Residence Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ResidenceState	Residence State	string		80		
ResidenceStreet	Residence Street	textarea		255		
ResidenceYearCount	Years in Residence	int	2			
ResidencyType	Residence Type	picklist		40		
SystemModstamp	System Modstamp	datetime				

LOANAPPLICANTADDRESSFEED

Feed tracking for LoanApplicantAddress.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICANTADDRESSHISTORY

History for tracked fields of LoanApplicantAddress.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Applicant Address History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicantAddressId	Loan Applicant Address ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICANTASSET

Represents a junction between a borrower and a loan application asset.

For more information, see LoanApplicantAsset in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loan Applicant Asset ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoanApplicantId`	Loan Applicant ID	reference		18		
`LoanApplicationAssetId`	Loan Application Asset ID	reference		18		
`Name`	Name	string		255		
`Role`	Role	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

LOANAPPLICANTASSETHISTORY

History for tracked fields of LoanApplicantAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Applicant Asset History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicantAssetId	Loan Applicant Asset ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICANTDECLARATION

Represents financial issues like foreclosure, lawsuits, or defaults of the applicant or co-applicant.

For more information, see LoanApplicantDeclaration in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BankruptcyType	Bankruptcy Type	multipicklist		4099	0	
BorrowedAmount	Amount Borrowed	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeclarationExtIdentifier	Loan Applicant Declaration External ID	string		255		
HasBorrowedMoney	Borrowing Money	boolean				
HasDeclaredBankruptcy	Declared Bankruptcy	boolean				
HasDeedSurrender	Surrendered Deed in Lieu of Foreclosure	boolean				
HasOutstandingJudgement	Outstanding Judgements	boolean				
HasOwnershipInterest	Ownership Interest	boolean				
HasPastShortSale	Short Sale	boolean				
HasPropertyForeclosed	Foreclosed Property	boolean				
HasUndisclAddlCreditApp	Undisclosed New Credit	boolean				
HasUndisclAddlPropApp	Undisclosed Loan on Other Property	boolean				
Id	Loan Applicant Declaration ID	id		18		
IsCoSignerUndisclDebt	Co-Signer or Guarantor on Undisclosed Loan or Debt	boolean				
IsDeleted	Deleted	boolean				
IsPartyToLawsuit	Party to Lawsuit	boolean				
IsPresentlyDelinquent	Delinquent or in Default on Debt	boolean				
IsPrimaryResidence	Primary Residence	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsRelatedToSeller	Relationship or Affiliation with Seller	boolean				
IsSubjectToPriorityLien	Property Subject to Priority Clean Energy Lien	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicantId	Loan Applicant ID	reference		18		
LoanApplicationId	Residential Loan Application ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PriorPropertyTitleType	Prior Ownership Title Type	picklist		40		
PriorPropertyUsageType	Prior Ownership Type	picklist		40		
SystemModstamp	System Modstamp	datetime				

LOANAPPLICANTDECLARATIONFEED

Feed tracking for LoanApplicantDeclaration.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICANTDECLARATIONHISTORY

History for tracked fields of LoanApplicantDeclaration.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Applicant Declaration History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicantDeclarationId	Loan Applicant Declaration ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICANTDECLARATIONSHARE

Sharing for LoanApplicantDeclaration.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICANTEMPLOYMENT

Represents details about the borrower's or co-borrower's current and past employment.

For more information, see LoanApplicantEmployment in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentJobAdditionalMonthCount	Additional Months at Current Job	int	2			
CurrentJobYearCount	Years at Current Job	int	2			
EmployerAddress	Employer Address	address				
EmployerCity	Employer City	string		40		
EmployerCountry	Employer Country	string		80		
EmployerGeocodeAccuracy	Employer Geocode Accuracy	picklist		255		
EmployerLatitude	Employer Latitude	double			18	15
EmployerLongitude	Employer Longitude	double			18	15
EmployerName	Employer Name	string		255		
EmployerPhone	Employer Phone	phone		40		
EmployerPostalCode	Employer Postal Code	string		20		
EmployerState	Employer State	string		80		
EmployerStreet	Employer Street	textarea		255		
EmploymentExtIdentifier	Loan Applicant Employment External ID	string		255		
EndDate	End Date	date				
Id	Loan Applicant Employment ID	id		18		
IsDeleted	Deleted	boolean				
IsLessThanQuarterShare	Owns Less Than 25%	boolean				
IsRelToTransactionParty	Employed by Party to Transaction	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsSelfEmployed	Self-Employed	boolean				
JobTitle	Job Title or Type of Business	string		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicantId	Loan Applicant ID	reference		18		
LoanApplicationId	Residential Loan Application ID	reference		18		
MonthlyBaseIncomeAmount	Monthly Base Income	currency			18	2
MonthlyBonusAmount	Monthly Bonus	currency			18	2
MonthlyCommissionAmount	Monthly Commission	currency			18	2
MonthlyIncome	Monthly Income	currency			18	2
MonthlyMilitaryEntlAmt	Monthly Military Entitlement	currency			18	2
MonthlyOtherIncomeAmount	Other Monthly Income	currency			18	2
MonthlyOvertimeAmount	Monthly Overtime	currency			18	2
MonthlyTotalIncomeAmount	Total Monthly Income	currency			18	2
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

LOANAPPLICANTEMPLOYMENTFEED

Feed tracking for LoanApplicantEmployment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICANTEMPLOYMENTHISTORY

History for tracked fields of LoanApplicantEmployment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Applicant Employment History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicantEmploymentId	Loan Applicant Employment ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICANTEMPLOYMENTSHARE

Sharing for LoanApplicantEmployment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICANTFEED

Feed tracking for LoanApplicant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICANTHISTORY

History for tracked fields of LoanApplicant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loan Applicant History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoanApplicantId`	Loan Applicant ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOANAPPLICANTINCOME

Represents details about the borrower and co-borrower current monthly income.

For more information, see LoanApplicantIncome in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loan Applicant Income ID	id		18		
`IncomeExtIdentifier`	Loan Applicant Income External ID	string		255		
`IncomeSourceType`	Income Source Type	picklist		40		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoanApplicantId`	Loan Applicant ID	reference		18		
`LoanApplicationId`	Residential Loan Application ID	reference		18		
`MonthlyIncomeAmount`	Monthly Income	currency			18	2
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LOANAPPLICANTINCOMEFEED

Feed tracking for LoanApplicantIncome.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICANTINCOMEHISTORY

History for tracked fields of LoanApplicantIncome.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loan Applicant Income History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoanApplicantIncomeId`	Loan Applicant Income ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOANAPPLICANTINCOMESHARE

Sharing for LoanApplicantIncome.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICANTLIABILITY

Represents a junction between a borrower and a loan application liability.

For more information, see LoanApplicantLiability in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Loan Applicant Liability ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicantId	Loan Applicant ID	reference		18		
LoanApplicationLiabilityId	Loan Application Liability ID	reference		18		
Name	Name	string		255		
Role	Role	picklist		40		
SystemModstamp	System Modstamp	datetime				

LOANAPPLICANTLIABILITYHISTORY

History for tracked fields of LoanApplicantLiability.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Applicant Liability History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicantLiabilityId	Loan Applicant Liability ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICANTSHARE

Sharing for LoanApplicant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICATIONASSET

Represents details about the borrower's and co-borrower's current personal and real property.

For more information, see LoanApplicationAsset in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNumber	Financial Account Number	string		255		
AccountType	Account Type	picklist		40		
AssetClass	Asset Class	picklist		40		
AssetExtIdentifier	Loan Application Asset External ID	string		255		
AssetType	Asset Type	picklist		40		
CashOrMarketValue	Cash or Market Value	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DispositionType	Real Estate Status	picklist		40		
FinancialInstitutionName	Financial Institution	string		255		
GrossMonthlyRentalIncome	Gross Rental Income from Real Estate	currency			18	2
Id	Loan Application Asset ID	id		18		
IsDeleted	Deleted	boolean				
IsJointAsset	Joint Asset	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicationId	Residential Loan Application ID	reference		18		
Name	Name	string		255		
NetMonthlyRentalIncome	Net Real Estate Rental Income	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OwnerId	Owner ID	reference		18		
PresentMarketValue	Real Estate Value	currency			18	2
RealEstateAddress	Real Estate Address	address				
RealEstateCity	Real Estate City	string		40		
RealEstateCountry	Real Estate Country	string		80		
RealEstateGeocodeAccuracy	Real Estate Geocode Accuracy	picklist		255		
RealEstateLatitude	Real Estate Latitude	double			18	15
RealEstateLongitude	Real Estate Longitude	double			18	15
RealEstateMonthlyExpense	Other Monthly Real Estate Expenses	currency			18	2
RealEstatePostalCode	Real Estate Postal Code	string		20		
RealEstateState	Real Estate State	string		80		
RealEstateStreet	Real Estate Street	textarea		255		
SystemModstamp	System Modstamp	datetime				

LOANAPPLICATIONASSETFEED

Feed tracking for LoanApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICATIONASSETHISTORY

History for tracked fields of LoanApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Application Asset History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicationAssetId	Loan Application Asset ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICATIONASSETSHARE

Sharing for LoanApplicationAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICATIONFINANCIAL

Represents transaction details for a loan application.

For more information, see LoanApplicationFinancial in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BorrowerClosingCostAmt	Borrower Closing Costs	currency			18	2
CashFromOrToBorrowerAmt	Cash To or From Borrower	currency			18	2
CounselingAgencyName	Housing Counseling Provider Name	string		255		
CounselingAgencyProvName	Housing Counseling Provider Name	string		255		
CounselingComplBorrName	Borrowers Who Completed Counseling	string		255		
CounselingCompletionDate	Housing Counseling Completion Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditFromSeller	Closing Costs Paid by Seller	currency			18	2
DiscountPointCostAmount	Cost of Discount Points Purchased by Borrower	currency			18	2
EdCompletedBorrowerName	Borrowers Who Completed Homeownership Education	string		255		
EstFirstMortgagePmtAmt	Proposed Monthly First Mortgage Payment	currency			18	2
EstHomeownersInsPmtAmt	Proposed Monthly Homeowners Insurance Payment	currency			18	2
EstMortgageInsPmtAmt	Proposed Monthly Mortgage Insurance Payment	currency			18	2
EstOtherDuesPaymentAmt	Proposed Monthly Dues Payment	currency			18	2
EstOtherPaymentAmt	Proposed Other Monthly Payment	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
EstPropertyTaxesPmtAmt	Proposed Monthly Property Tax Payment	currency			18	2
EstSubordinateLienPmtAmt	Proposed Monthly Subordinate Liens Payment	currency			18	2
EstSuppPropertyInsPmtAmt	Proposed Monthly Supplemental Property Insurance Payment	currency			18	2
FinancedMortgageInsAmt	Total Financed Mortgage Insurance	currency			18	2
FinancialExtIdentifier	Loan Application Financial External ID	string		255		
HasCompletedCounseling	Housing Counseling	boolean				
HasHoEducation	Homeowner Education	boolean				
HoEducationCompletedDate	Homeownership Education Completion Date	datetime				
HoEducationFormat	Homeownership Education Format	picklist		40		
HousingCounselingFormat	Housing Counseling Format	picklist		40		
HudApprAgencyIdentifier	Housing Counseling Agency ID	string		255		
HudApprovedProvIdentifier	Housing Counseling Agency ID	string		255		
Id	Loan Application Financial ID	id		18		
IsDeleted	Deleted	boolean				
LandAcquiredSeparatelyAmount	Cost of Land Acquired Separately	currency			18	2
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanAmount	Total Mortgage Loan	currency			18	2
LoanApplicationId	Residential Loan Application ID	reference		18		
LoanExclFinMortInsAmt	Loan Amount Excluding Financed Mortgage Insurance	currency			18	2
Name	Name	string		255		
OtherCredit	Other Credits	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OtherNewMortgageLoanAmt	Other New Mortgage Loans	currency			18	2
OutstandingLoanAmount	Total Outstanding Mortgage Amount	currency			18	2
PurchasePriceAmount	Purchase Price	currency			18	2
RemodelAndRepairsAmount	Cost of Alterations, Improvements, and Repairs	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalCashDueFromBorrower	Total Due From Borrower	currency			18	2
TotalCredit	Total Credits	currency			18	2
TotalDebtPaidOffAmount	Total Credit Card and Other Debt Paid Off	currency			18	2
TotalEstPaymentAmt	Proposed Total Monthly Payment	currency			18	2
TotalMortgageLoanAndCreditAmt	Total Mortgage Loans and Credits	currency			18	2
TotalMortgageLoansAmount	Total Mortgage Loans	currency			18	2

LOANAPPLICATIONFINANCIALFEED

Feed tracking for LoanApplicationFinancial.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICATIONFINANCIALHISTORY

History for tracked fields of LoanApplicationFinancial.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Application Financial History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicationFinancialId	Loan Application Financial ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICATIONLIABILITY

Represents details about the borrower and co-borrower current liabilities.

For more information, see LoanApplicationLiability in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNumber	Account Number	string		255		
AccountType	Account Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditLimitAmount	Credit Limit	currency			18	2
CreditorName	Creditor Name	string		255		
Id	Loan Application Liability ID	id		18		
IsDeleted	Deleted	boolean				
IsJointLiability	Joint Liability	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LiabilityClass	Liability Class	picklist		40		
LiabilityExtIdentifier	Loan Application Liability External ID	string		255		
LoanApplicationAssetId	Loan Application Asset ID	reference		18		
LoanApplicationId	Residential Loan Application ID	reference		18		
LoanType	Real Estate Loan Type	picklist		40		
MonthlyPaymentAmount	Monthly Payment	currency			18	2
Name	Name	string		255		
OtherLiabilityType	Other Liability or Expense Type	picklist		40		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShouldBePaidInFull	Paid in Full	boolean				
SystemModstamp	System Modstamp	datetime				
UnpaidBalanceAmount	Unpaid Balance	currency			18	2

LOANAPPLICATIONLIABILITYFEED

Feed tracking for LoanApplicationLiability.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICATIONLIABILITYHISTORY

History for tracked fields of LoanApplicationLiability.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Application Liability History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicationLiabilityId	Loan Application Liability ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOANAPPLICATIONLIABILITYSHARE

Sharing for LoanApplicationLiability.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOANAPPLICATIONPROPERTY

Represents details of the property the loan application finances.

For more information, see LoanApplicationProperty in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpMonthlyRentalIncome	Expected Monthly Rental Income	currency			18	2
ExpNetMonthlyRentalInc	Expected Net Monthly Rental Income	currency			18	2
Id	Loan Application Property ID	id		18		
IsDeleted	Deleted	boolean				
IsManufacturedHome	Manufactured Home	boolean				
IsMixedUseProperty	Mixed-Use Property	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoanApplicationId	Residential Loan Application ID	reference		18		
LoanPurposeType	Loan Purpose	picklist		255		
Name	Name	string		255		
PropertyAddress	Property Address	address				
PropertyCity	Real Estate City	string		40		
PropertyCountry	Real Estate Country	string		80		
PropertyExtIdentifier	Loan Application Property External ID	string		255		
PropertyGeocodeAccuracy	Real Estate Geocode Accuracy	picklist		255		
PropertyLatitude	Real Estate Latitude	double			18	15

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PropertyLongitude	Real Estate Longitude	double			18	15
PropertyPostalCode	Real Estate Postal Code	string		20		
PropertyState	Real Estate State	string		80		
PropertyStreet	Real Estate Street	textarea		255		
PropertyUseType	Occupancy Type	picklist		40		
PropertyValue	Property Market Value	currency			18	2
RequestedLoanAmount	Loan Amount	currency			18	2
SystemModstamp	System Modstamp	datetime				
UnitsFinancedCount	Total Units to be Financed	int	3			

LOANAPPLICATIONPROPERTYFEED

Feed tracking for LoanApplicationProperty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICATIONPROPERTYHISTORY

History for tracked fields of LoanApplicationProperty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loan Application Property History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoanApplicationPropertyId`	Loan Application Property ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOANAPPLICATIONTITLEHOLDER

Represents details of borrowers who are applying to hold title to the property the loan application finances.

For more information, see LoanApplicationTitleHolder in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loan Application Title Holder ID	id		18		
`IsCurrentTitleHolder`	Current Title Holder	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoanApplicationId`	Residential Loan Application ID	reference		18		
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TitleHolderExtIdentifier`	Loan Application Title Holder External ID	string		255		
`TitleHolderName`	Title Holder Name	string		255		

LOANAPPLICATIONTITLEHOLDERFEED

Feed tracking for LoanApplicationTitleHolder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOANAPPLICATIONTITLEHOLDERHISTORY

History for tracked fields of LoanApplicationTitleHolder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loan Application Title Holder History ID	id		18		
IsDeleted	Deleted	boolean				
LoanApplicationTitleHolderId	Loan Application Title Holder ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOCATION

Represents a warehouse, service vehicle, work site, or other element of the region where your team performs field service work. In API version 49.0 and later, you can associate activities with specific locations. Activities, such as the tasks and events related to a location, appear in the activities timeline when you view the location detail page. Also in API version 49.0 and later, Work.com users can view Employees as a related list on Location records. In API version 51.0 and later, this object is available for Omnichannel Inventory and represents physical locations where inventory is available for fulfilling orders.

For more information, see Location in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalReference`	External Reference	string		255		
`Id`	Location ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsInventoryLocation`	Inventory Location	boolean				
`IsMobile`	Mobile Location	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationType`	Location Type	picklist		40		
`LogoId`	Asset File ID	reference		18		
`Name`	Location Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RootLocationId`	Root Location ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`VisitorAddressId`	Address ID	reference		18		

LOCATIONFEED

Feed tracking for Location.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOCATIONGROUP

Represents a group of Omnichannel Inventory locations, providing an aggregate view of inventory availability across those locations. Omnichannel Inventory can create an inventory reservation for an order at the location group level, then assign the reservation to one or more locations in the group as needed.

For more information, see LocationGroup in the *Object Reference for Salesforce and Lightning Platform*, and *Salesforce Order Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		2000		
`ExternalReference`	External Reference	string		255		
`Id`	Location Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsEnabled`	Enabled	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationGroupName`	Location Group Number	string		255		
`OwnerId`	Owner ID	reference		18		
`ShouldSyncWithOci`	Sync with OCI	boolean				
`SystemModstamp`	System Modstamp	datetime				

LOCATIONGROUPASSIGNMENT

Represents the assignment of a location to a location group.

For more information, see LocationGroupAssignment in the *Object Reference for Salesforce and Lightning Platform*, and *Salesforce Order Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Location Group Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationExternalReference`	External Reference	string		255		
`LocationGroupAssignment`	Location Group Assignment Name	string		255		
`LocationGroupExternalReference`	External Reference	string		255		
`LocationGroupId`	Location Group ID	reference		18		
`LocationGroupName`	Location Group Number	string		255		
`LocationId`	Location ID	reference		18		
`LocationName`	Location Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

LOCATIONGROUPFEED

Feed tracking for LocationGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

LOCATIONGROUPHISTORY

History for tracked fields of LocationGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Location Group History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LocationGroupId`	Location Group ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOCATIONGROUPSHARE

Sharing for LocationGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOCATIONHISTORY

History for tracked fields of Location.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Location History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LocationId`	Location ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOCATIONSHARE

Sharing for Location.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOCATIONTRUSTMEASURE

Represents the COVID safety protocols that your business follows. For example, enforcement of masks, social distancing, cleanliness, and capacity limits.

For more information, see LocationTrustMeasure in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`IconUrl`	Icon Url	string		255		
`Id`	LocationTrustMeasure ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsVisibleInPublic`	Trust Measure Is Published	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationExternalReference`	Location External Reference	string		255		
`LocationId`	Location ID	reference		18		
`Name`	Location Trust Measure Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SortOrder`	Display Order	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		40		

LOCATIONTRUSTMEASURESHARE

Sharing for LocationTrustMeasure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOGINASEVENT

LoginAsEvent tracks when an admin logs in as another user in your org. In Real-Time Event Monitoring, it captures events for org admins and Experience Cloud sites only.

For more information, see LoginAsEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Application`	Application	string		255		
`Browser`	Browser	string		64		
`CreatedDate`	Created Date	datetime				
`DelegatedOrganizationId`	Delegated Organization Id	string		18		
`DelegatedUsername`	Delegated Username	string		128		
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`Id`	LoginAs Event ID	id		18		
`LoginAsCategory`	LoginAs Category	picklist		255		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`LoginType`	Login Type	picklist		255		
`Platform`	Platform	string		255		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`TargetUrl`	Target URL	string		1000		
`UserId`	User ID	reference		18		
`UserType`	User Type	picklist		255		
`Username`	Username	string		255		

LOGINASEVENTSTREAM

LoginAsEvent tracks when an admin logs in as another user in your org. In Real-Time Event Monitoring, it captures events for org admins and Experience Cloud site only.

For more information, see LoginAsEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Application`	Application	string		255		
`Browser`	Browser	string		64		
`CreatedDate`	Created Date	datetime				
`DelegatedOrganizationId`	Delegated Organization ID	string		18		
`DelegatedUsername`	Delegated Username	string		128		
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`EventUuid`	Event UUID	string		36		
`LoginAsCategory`	LoginAs Category	picklist		255		
`LoginHistoryId`	Login History ID	reference		18		
`LoginKey`	Login Key	string		24		
`LoginType`	Login Type	picklist		255		
`Platform`	Platform	string		255		
`ReplayId`	Replay ID	string		1000		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`TargetUrl`	Target URL	string		1000		
`UserId`	User ID	reference		18		
`UserType`	User Type	picklist		255		
`Username`	Username	string		255		

LOGINEVENT

An event related to the LoginEvent object.

For more information, see LoginEvent in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalInfo	Additional Information	string		10000		
ApiType	API Type	string		64		
ApiVersion	API Version	string		32		
Application	Application	string		255		
AuthMethodReference	Authentication Method Reference	string		128		
AuthServiceId	Authentication Service ID	reference		18		
Browser	Browser	string		64		
CipherSuite	TLS Cipher Suite	picklist		255		
City	City	string		200		
ClientVersion	Client Version	string		64		
Country	Country	string		200		
CountryIso	Country Code	string		3		
CreatedDate	Created Date	datetime				
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
HttpMethod	HTTP Method	picklist		255		
Id	Login Event ID	id		18		
LoginGeoId	Login Geo Data ID	reference		18		
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
LoginLatitude	Latitude	double			9	6

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LoginLongitude	Longitude	double			9	6
LoginType	Login Type	picklist		255		
LoginUrl	Login URL	string		1000		
NetworkId	Network ID	reference		18		
Platform	Platform	string		255		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
PostalCode	PostalCode	string		20		
RelatedEventIdentifier	Related Event Identifier	string		80		
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		80		
Status	Status	string		128		
Subdivision	Subdivision	string		200		
TlsProtocol	TLS Protocol	picklist		255		
UserId	User ID	reference		18		
UserType	User Type	picklist		255		
Username	Username	string		80		

LOGINEVENTSTREAM

LoginEventStream tracks login activity of users who log in to Salesforce.

For more information, see LoginEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalInfo	Additional Information	string		10000		
ApiType	API Type	string		64		
ApiVersion	API Version	string		32		
Application	Application	string		255		
AuthMethodReference	Authentication Method Reference	string		128		
AuthServiceId	Authentication Service ID	string		18		
Browser	Browser	string		64		
CipherSuite	TLS Cipher Suite	picklist		255		
City	City	string		200		
ClientVersion	Client Version	string		64		
Country	Country	string		200		
CountryIso	Country Code	string		3		
CreatedDate	Created Date	datetime				
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventUuid	Event UUID	string		36		
HttpMethod	HTTP Method	picklist		255		
LoginGeoId	Login Geo Data ID	string		18		
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
LoginLatitude	Latitude	double			9	6

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LoginLongitude	Longitude	double			9	6
LoginType	Login Type	picklist		255		
LoginUrl	Login URL	string		1000		
NetworkId	Network ID	string		18		
Platform	Platform	string		255		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
PostalCode	PostalCode	string		20		
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		80		
Status	Status	string		128		
Subdivision	Subdivision	string		200		
TlsProtocol	TLS Protocol	picklist		255		
UserId	User ID	reference		18		
UserType	User Type	picklist		255		
Username	Username	string		80		

LOGINGEO

Represents the geographic location of the user's IP address for a login event. Due to the nature of geolocation technology, the accuracy of geolocation fields (for example, country, city, postal code) may vary.

For more information, see LoginGeo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`City`	City	string		200		
`Country`	Country	string		200		
`CountryIso`	Country Code	string		3		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Login Geo Data ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Latitude`	Latitude	double			18	0
`LoginTime`	Login Time	datetime				
`Longitude`	Longitude	double			18	0
`PostalCode`	PostalCode	string		20		
`Subdivision`	Subdivision	string		200		
`SystemModstamp`	System Modstamp	datetime				

LOGINHISTORY

Represents the login history for all successful and failed login attempts for organizations and enabled portals.

For more information, see LoginHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiType	API Type	string		64		
ApiVersion	API Version	string		32		
Application	Application	string		64		
AuthMethodReference	Authentication Method Reference	string		128		
AuthenticationServiceId	Authentication Service ID	reference		18		
Browser	Browser	string		64		
CipherSuite	TLS Cipher Suite	picklist		40		
ClientVersion	Client Version	string		64		
CountryIso	Country Code	string		3		
Id	Login History Id	id		18		
LoginGeoId	Login Geo Data ID	reference		18		
LoginSubType	Login Subtype	picklist		40		
LoginTime	Login Time	datetime				
LoginType	Login Type	picklist		40		
LoginUrl	Login URL	string		255		
NetworkId	Network ID	reference		18		
OptionsIsGet	Login via GET	boolean				
OptionsIsPost	Login via POST	boolean				
Platform	Platform	string		64		
SourceIp	Source IP	string		39		
Status	Status	string		128		
TlsProtocol	TLS Protocol	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UserId	User ID	reference		18		

LOGINIP

Represents a validated IP address.

For more information, see LoginIp in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ChallengeMethod`	Challenge Method	picklist		40		
`ChallengeSentDate`	Challenge SentDate	datetime				
`CreatedDate`	Created Date	datetime				
`Id`	Login IP ID	id		18		
`IsAuthenticated`	IsAuthenticated	boolean				
`SourceIp`	Source IP	string		39		
`UsersId`	User ID	reference		18		

LOGOUTEVENT

Tracks user UI logouts. A logout event records a successful user logout from your org's UI.

For more information, see LogoutEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`Id`	Logout Event ID	id		18		
`LoginKey`	Login Key	string		24		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`Username`	Username	string		80		

LOOKEDUPFROMACTIVITY

This read-only object is displayed as a related list on an activity record (an event or a task); the list contains records that have custom lookup relationships from the activity to another object. This object is not queryable.

For more information, see LookedUpFromActivity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ActivityDate`	Date	date				
`ActivityDateTime`	Time	datetime				
`ActivitySubtype`	Activity Subtype	picklist		40		
`ActivityType`	Type	picklist		40		
`CallDisposition`	Call Result	string		255		
`CallDurationInSeconds`	Call Duration	int	8			
`CallObject`	Call Object Identifier	string		255		
`CallType`	Call Type	picklist		40		
`CompletedDateTime`	Completed Date/Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Comments	textarea		32000		
`DurationInMinutes`	Duration	int	9			
`EndDateTime`	End	datetime				
`Id`	Activity ID	id		18		
`IsAllDayEvent`	All-Day Event	boolean				
`IsClosed`	Closed	boolean				
`IsDeleted`	Deleted	boolean				
`IsHighPriority`	High Priority	boolean				
`IsReminderSet`	Reminder Set	boolean				
`IsTask`	Task	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsVisibleInSelfService	Public	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Location	Location	string		80		
OwnerId	Assigned To ID	reference		18		
Priority	Priority	picklist		20		
ReminderDateTime	Reminder Date/Time	datetime				
StartDateTime	Start	datetime				
Status	Status	picklist		255		
Subject	Subject	combobox		80		
SystemModstamp	System Modstamp	datetime				
WhatId	Related To ID	reference		18		
WhoId	Name ID	reference		18		

LOYALTYAGGRPOINTEXPRLEDGER

Represents information about non-qualifying currency points that expire based on a fixed model tier group.

For more information, see LoyaltyAggrPointExprLedger in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpirationDate`	Expiration Date	date				
`ExpirationPoints`	Expiration Points	double			18	2
`Id`	Loyalty Aggregated Point Expiration Ledger ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LoyaltyProgramCurrencyId`	Currency ID	reference		18		
`LoyaltyProgramMemberId`	Loyalty Program Member ID	reference		18		
`PointsStatus`	Points Status	picklist		40		
`RedeemedPoints`	Redeemed Points	double			18	2
`SystemModstamp`	System Modstamp	datetime				

LOYALTYLEDGER

Records the points that have been credited or debited for a member across the transactions.

For more information, see LoyaltyLedger in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityDate	Activity Date	datetime				
AdditionalNotes	Additional Notes	string		255		
Correlation	Correlation ID	string		15		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EscrowPointsCreditDate	Escrow Points Credit Date	date				
EventType	Event Type	picklist		40		
ExpiryDate	Expiry Date	date				
Flow	Flow ID	string		15		
Id	Loyalty Ledger ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramCurrencyId	Currency ID	reference		18		
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
Points	Points	double			18	2
PromotionId	Promotion ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TransactionJournalId	Transaction Journal ID	reference		18		

LOYALTYMEMBERCURRENCY

Represents the information about point balance for a member and a particular currency.

For more information, see LoyaltyMemberCurrency in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BalanceBeforeReset	Balance Before Reset	double			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EscrowPointsBalance	Escrow Points Balance	double			18	2
ExpirablePoints	Total Expirable Points	double			18	2
Id	Loyalty Member Currency ID	id		18		
IsDeleted	Deleted	boolean				
LastAccrualProcessedDate	Last Accrual Processed Date	datetime				
LastEscrowProcessedDate	Last Escrow Processed Date	datetime				
LastExpirationProcessRunDate	Last Expiration Process Run Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastPointsAggregationDate	Last Points Aggregation Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastResetDate	Last Reset Date	date				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyMemberId	Loyalty Program Member ID	reference		18		
LoyaltyProgramCurrencyId	Currency ID	reference		18		
Name	Name	string		255		
NextResetDate	Next Reset Date	date				
PointsBalBeforeSecondLastReset	Points Balance Bef Second To Last Reset	double			18	2
PointsBalance	Points Balance	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TotalEscrowPointsAccrued	Total Escrow Points Accrued	double			18	2
TotalEscrowRolloverPoints	Total Escrow Rollover Points	double			18	2
TotalPointsAccrued	Total Points Accrued	double			18	2
TotalPointsExpired	Total Points Expired	double			18	2
TotalPointsRedeemed	Total Points Redeemed	double			18	2

LOYALTYMEMBERCURRENCYFEED

Feed tracking for LoyaltyMemberCurrency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOYALTYMEMBERCURRENCYHISTORY

History for tracked fields of LoyaltyMemberCurrency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Member Currency History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyMemberCurrencyId`	Loyalty Member Currency ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYMEMBERTIER

Represents information about the current tier of the member across tier groups.

For more information, see LoyaltyMemberTier in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AreBenefitsAssigned	Are Benefits Assigned	boolean				
ChangeReasonType	Change Reason Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	date				
Id	Loyalty Member Tier ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyMemberId	Loyalty Program Member ID	reference		18		
LoyaltyTierGroupId	Loyalty Tier Group ID	reference		18		
LoyaltyTierId	Loyalty Tier ID	reference		18		
Name	Name	string		255		
ReasonForChange	Reason for Change	string		255		
SystemModstamp	System Modstamp	datetime				
TierExpirationDate	Tier Expiration Date	date				

LOYALTYMEMBERTIERHISTORY

History for tracked fields of LoyaltyMemberTier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Member Tier History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyMemberTierId`	Loyalty Member Tier ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYMEMBERSHIPLIFECYCLE

Represents information about a member's lifecycle in the loyalty program.

For more information, see LoyaltyMembershipLifecycle in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Comment	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	Effective End Date	date				
EffectiveStartDate	Effective Start Date	date				
ExternalIdentifier	External Identifier	string		255		
Id	Loyalty Membership Lifecycle ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
MembershipStatus	Membership Status	picklist		40		
MembershipType	Membership Type	picklist		40		
Name	Name	string		255		
OrderItemId	Order Product ID	reference		18		
SystemModstamp	System Modstamp	datetime				

LOYALTYMEMBERSHIPLIFECYCLEHISTORY

History for tracked fields of LoyaltyMembershipLifecycle.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Membership Lifecycle History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyMembershipLifecycleId	Loyalty Membership Lifecycle ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPARTNERPRODUCT

Represents products and product categories offered by loyalty partners.

For more information, see LoyaltyPartnerProduct in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Loyalty Partner Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyPartnerId	Loyalty Program Partner ID	reference		18		
Name	Name	string		255		
PartnerCategoryDerivedFieldId	Category ID	reference		18		
PartnerProductCost	Partner's Product Cost	currency			18	2
ProductDerivedFieldId	Product ID	reference		18		
ProductId	Product ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

LOYALTYPARTNERPRODUCTHISTORY

History for tracked fields of LoyaltyPartnerProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Partner Product History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyPartnerProductId	Loyalty Partner Product ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPGMENGMTATTRPROM

Represents a junction between Loyalty Program Engagement Attribute and Promotion. Associate an engagement attribute with a promotion if you want to track the engagement attribute during the promotion period.

For more information, see LoyaltyPgmEngmtAttrProm in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Engagement Attribute Promotion ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramEngmtAttrId`	Loyalty Program Engagement Attribute ID	reference		18		
`Name`	Name	string		255		
`PromotionId`	Promotion ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPGMENGMTATTRPROMHISTORY

History for tracked fields of LoyaltyPgmEngmtAttrProm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Engagement Attribute Promotion History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyPgmEngmtAttrPromId`	Loyalty Program Engagement Attribute Promotion ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPGMENGMTATTRIBUTE

Represents information about an engagement attribute for a loyalty program.

For more information, see LoyaltyPgmEngmtAttribute in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultValue	Default Value	string		255		
Description	Description	textarea		255		
EndDate	End Date	date				
Id	Loyalty Program Engagement Attribute ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
MaximumResetCountPerPeriod	Maximum Reset Count Per Period	int	9			
Name	Name	string		255		
ResetValueOn	Reset Value On	string		255		
ShouldOverwriteAttrCurrVal	Overwrite Attribute Current Value	boolean				
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetValue	Target Value	string		255		
ValueResetFrequency	Value Reset Frequency	picklist		255		

LOYALTYPGMENGMTATTRIBUTEHISTORY

History for tracked fields of LoyaltyPgmEngmtAttribute.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Engagement Attribute History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyPgmEngmtAttributeId`	Loyalty Program Engagement Attribute ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPGMGROUPMBRRLNSP

Represents a junction between a Corporate or Individual type loyalty program member who is part of a group and the Group type loyalty program member.

For more information, see LoyaltyPgmGroupMbrRlnsp in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CanMemberRedeemFromGroup	Member can redeem group points	boolean				
ContactId	Contact ID	reference		18		
ContributionCalculationType	Contribution Calculation Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Loyalty Program Group Account Member ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramGroupMemberId	Loyalty Program Member ID	reference		18		
MemberName	Member Name	string		255		
MemberPointContributionPercent	Contribution Percentage	percent			3	0
MemberRole	Member Role	picklist		40		
Name	Name	string		255		
RelatedLoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
SystemModstamp	System Modstamp	datetime				

LOYALTYPGMGROUPMBRRLNSPHISTORY

History for tracked fields of LoyaltyPgmGroupMbrRlnsp.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Group Member Relationship History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyPgmGroupMbrRlnspId	Loyalty Program Group Account Member ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPGMMBRATTRIBUTEVAL

Represents information about the value reached by a loyalty program member for an engagement attribute.

For more information, see LoyaltyPgmMbrAttributeVal in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CumulativeValue	Cumulative Value	double			18	2
CurrentValue	Current Value	string		255		
EndDate	End Date	date				
Id	Loyalty Program Member Attribute Value ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastResetDate	Last Reset Date	date				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyPgmEngmtAttributeId	Loyalty Program Engagement Attribute ID	reference		18		
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
Name	Name	string		255		
ResetCount	Reset Count	int	9			
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

LOYALTYPGMMBRATTRIBUTEVALHISTORY

History for tracked fields of LoyaltyPgmMbrAttributeVal.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Member Attribute Value History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyPgmMbrAttributeValId	Loyalty Program Member Attribute Value ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPGMMBRPROMELIGVIEW

Represents a virtual object that provides a consolidated view of the loyalty program member's eligibility for a promotion and their enrolment status in eligible promotions.

For more information, see LoyaltyPgmMbrPromEligView in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CurrPromotionLiabilityAmt	Current Promotion Liability Amount	currency			18	2
CurrentPromotionPointsCount	Current Promotion Points Count	int	9			
DefaultVoucherDefinitionId	Voucher Definition ID	reference		18		
Description	Description	textarea		1000		
DoesPromHavePtWithFctr	Promotion Have Points with Factor	boolean				
EndDate	End Date	date				
ExternalId	External ID	string		255		
FulfillmentAction	Fulfillment Action	picklist		255		
Id	Loyalty Program Member Promotion Eligibility View ID	id		18		
IsMbrEligBsdCmpnOrSgmt	Eligible Based on Segment Or Campaign	boolean				
IsPromotionEnrollmentRqr	Enrollment Required	boolean				
IssuedPromotionVoucherCount	Issued Promotion Voucher Count	int	9			
LoyaltyProgramCurrencyId	Currency ID	reference		18		
LoyaltyProgramId	Loyalty Program ID	reference		18		
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
LoyaltyPromotionType	Loyalty Promotion Type	picklist		255		
MaxPromotionLiabilityAmount	Maximum Promotion Liability Amount	currency			18	2
MaxPromotionVoucherCount	Maximum Promotion Voucher Count	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPromotionRewardValue	Maximum Promotion Reward Value	int	9			
MemberEligibilityCategory	Member Eligibility Category	picklist		255		
Objective	Objective	textarea		1000		
PromEnrollmentStartDate	Promotion Enrollment Start Date	date				
PromotionCumulativeUsageTgt	Promotion Cumulative Usage Target	int	9			
PromotionEnrollmentEndDate	Promotion Enrollment End Date	date				
PromotionId	Promotion ID	reference		18		
PromotionName	Name	string		255		
PromotionPointFactor	Promotion Point Factor	double			18	0
PromotionTrxnJournalType	Promotion Transaction Journal Type	picklist		255		
StartDate	Start Date	date				
TotalPromotionRewardPointsVal	Total Promotion Reward Points Value	int	9			

LOYALTYPGMPARTNERCURRENCY

Represents a junction between a loyalty program partner and a loyalty program currency.

For more information, see LoyaltyPgmPartnerCurrency in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccrualConversionFactor`	Accrual Conversion Factor	double			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Partner Currency ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramCurrencyId`	Currency ID	reference		18		
`LoyaltyProgramPartnerId`	Loyalty Program Partner ID	reference		18		
`Name`	Name	string		40		
`RedemptionConversionFactor`	Redemption Conversion Factor	double			18	2
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPGMPARTNERCURRENCYHISTORY

History for tracked fields of LoyaltyPgmPartnerCurrency.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Partner Currency History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyPgmPartnerCurrencyId`	Loyalty Program Partner Currency ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPGMPARTNERPROMOTION

Represents a junction between the Promotion and Loyalty Program Partner objects.

For more information, see LoyaltyPgmPartnerPromotion in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContributionPercentage`	Contribution Percentage	percent			3	0
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Partner Promotion ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramPartnerId`	Loyalty Program Partner ID	reference		18		
`Name`	Name	string		40		
`PromotionId`	Promotion ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPGMPARTNERPROMOTIONHISTORY

History for tracked fields of LoyaltyPgmPartnerPromotion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Partner Promotion History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyPgmPartnerPromotionId	Loyalty Program Partner Promotion ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPGMPTNRLDGRSUMMARY

Represents the aggregated ledger used by a loyalty program to credit points to or debit points from a prepaid partner's points pack. This ledger can also be used to add or deduct the monetary value of points from the postpaid partner's bill.

For more information, see LoyaltyPgmPtnrLdgrSummary in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityDate	Activity Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Loyalty Program Partner Ledger Summary Id	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyPgmPtnrPrepaidPackId	Loyalty Program Partner Prepaid Pack ID	reference		18		
LoyaltyProgramPartnerId	Loyalty Program Partner ID	reference		18		
Name	Name	string		40		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalPoints	Total Points	double			18	2
Type	Type	picklist		255		

LOYALTYPGMPTNRPREPAIDPACK

Represents information about a prepaid set of points purchased by a loyalty program partner.

For more information, see LoyaltyPgmPtnrPrepaidPack in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Loyalty Program Partner Prepaid Pack ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramPartnerId`	Loyalty Program Partner ID	reference		18		
`Name`	Name	string		255		
`OrderId`	Order ID	reference		18		
`PurchaseDate`	Purchase Date	date				
`PurchasedPoints`	Purchased Points	double			18	2
`RemainingPoints`	Remaining Points	double			18	2
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPGMPTNRPREPAIDPACKHISTORY

History for tracked fields of LoyaltyPgmPtnrPrepaidPack.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Partner Prepaid Pack History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyPgmPtnrPrepaidPackId	Loyalty Program Partner Prepaid Pack ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPROGRAM

Represents the loyalty program within an organization. All the information related to members, tiers, tier groups, program currencies, vouchers, benefits, partners, promotions, transactions are associated with the program.

For more information, see LoyaltyProgram in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		1333		
EscrowPeriod	Escrow Period	int	9			
Id	Loyalty Program ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MembersEnrolledInLast30Days__c	MembersEnrolledInLast30Days	double			18	0
Name	Program Name	string		255		
OwnerId	Owner ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMBADGE

Represents information about the badge that's associated with a loyalty program.

For more information, see LoyaltyProgramBadge in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Loyalty Program Badge ID	id		18		
ImageUrl	Image	url		1000		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
Name	Name	string		255		
StartDate	Start Date	date				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
ValidityDuration	Validity Duration	int	9			
ValidityDurationUnit	Validity Duration Unit	picklist		255		
ValidityEndDate	Validity End Date	date				
ValidityType	Validity Type	picklist		255		

LOYALTYPROGRAMBADGEHISTORY

History for tracked fields of LoyaltyProgramBadge.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Badge History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyProgramBadgeId`	Loyalty Program Badge ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPROGRAMCURRENCY

Represents qualifying and non-qualifying currencies associated with the program. Qualifying currency represents the engagement of a member with the program and it's associated with a tier group. Non-qualifying currency represent the points that the member earns for redemption.

For more information, see LoyaltyProgramCurrency in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CostperUnit	Cost per Unit	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrencyType	Currency Type	picklist		255		
ExpiryModel	Expiration Model	picklist		255		
ExpiryPeriodFrequency	Expiration Interval	int	9			
ExpiryPeriodUnit	Expiration Interval Unit	picklist		255		
ExtendExpiration	Extend Expiration	picklist		255		
HasEscrow	Has Escrow	boolean				
Id	Currency ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
LoyaltyTierGroupId	Loyalty Tier Group ID	reference		18		
Name	Currency Name	string		255		
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMFEED

Feed tracking for LoyaltyProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

LOYALTYPROGRAMHISTORY

History for tracked fields of LoyaltyProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyProgramId`	Loyalty Program ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPROGRAMMBRPROMOTION

Represents details about the promotions to be applied for a loyalty program member. Tracks the enrollment status, promotion status, and progress for a promotion of a member.

For more information, see LoyaltyProgramMbrPromotion in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CumulativeUsageCompletePercent	Cumulative Usage Complete Percentage	percent			5	2
CumulativeUsageCompleted	Cumulative Usage Completed	int	9			
CumulativeUsageTarget	Cumulative Usage Target	int	9			
Id	Loyalty Program Member Promotion ID	id		18		
IsDeleted	Deleted	boolean				
IsEnrollmentActive	Enrollment active	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
Name	Name	string		255		
PromotionId	Promotion ID	reference		18		
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMMBRPROMOTIONHISTORY

History for tracked fields of LoyaltyProgramMbrPromotion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Member Promotion History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyProgramMbrPromotionId	Loyalty Program Member Promotion ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPROGRAMMEMBER

Represents information about member who belongs to a loyalty program. The member can be individual or corporate type.

For more information, see LoyaltyProgramMember in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CanReceivePartnerPromotions	Receive Partner Promotion	boolean				
CanReceivePromotions	Receive Promotion	boolean				
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EnrollmentChannel	Enrollment Channel	picklist		255		
EnrollmentDate	Enrollment Date	date				
GroupCreatedByMemberId	Loyalty Program Member ID	reference		18		
GroupName	Group Name	string		80		
Id	Loyalty Program Member ID	id		18		
IsDeleted	Deleted	boolean				
LastActivityDate	Last Activity Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberStatus	Member Status	picklist		40		
MemberType	Member Type	picklist		255		
MembershipEndDate	Membership End Date	date				
MembershipLastRenewalDate	Membership Last Renewal Date	date				
MembershipNumber	Membership Number	string		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProgramId	Loyalty Program ID	reference		18		
ReferralCode	Referral Code	string		255		
ReferredById	Referred By ID	reference		18		
RelatedCorporateMembershipId	Associated Corporate Membership ID	reference		18		
StatementFrequency	Statement Frequency	picklist		255		
StatementLastGeneratedDate	Statement Last Generated Date	datetime				
StatementMethod	Statement Method	picklist		255		
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMMEMBERBADGE

Represents a badge that's assigned to a loyalty program member.

For more information, see LoyaltyProgramMemberBadge in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Loyalty Program Member Badge ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramBadgeId`	Loyalty Program Badge ID	reference		18		
`LoyaltyProgramMemberId`	Loyalty Program Member ID	reference		18		
`Name`	Number	string		255		
`Reason`	Reason	string		255		
`StartDate`	Start Date	date				
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPROGRAMMEMBERBADGEHISTORY

History for tracked fields of LoyaltyProgramMemberBadge.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Member Badge History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyProgramMemberBadgeId	Loyalty Program Member Badge ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPROGRAMMEMBERCASE

Represents a junction between a loyalty program member and a case.

For more information, see LoyaltyProgramMemberCase in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CaseId`	Case ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Member Case ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyProgramMemberId`	Loyalty Program Member ID	reference		18		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

LOYALTYPROGRAMMEMBERCASEHISTORY

History for tracked fields of LoyaltyProgramMemberCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Loyalty Program Member Case History ID	id		18		
IsDeleted	Deleted	boolean				
LoyaltyProgramMemberCaseId	Loyalty Program Member Case ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

LOYALTYPROGRAMMEMBERCASESHARE

Sharing for LoyaltyProgramMemberCase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

LOYALTYPROGRAMMEMBERHISTORY

History for tracked fields of LoyaltyProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Member History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyProgramMemberId`	Loyalty Program Member ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPROGRAMMEMBERMERGE

Represents information about merged loyalty program memberships.

For more information, see LoyaltyProgramMemberMerge in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Member Merge ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Reason`	Reason	string		255		
`SourceMemberId`	Loyalty Program Member ID	reference		18		
`SrcMbrDataBody`	Source Member Data Body	base64				
`SrcMbrDataContentType`	Source Member Data Content Type	picklist		255		
`SrcMbrDataLength`	Source Member Data Length	int	9			
`SrcMbrDataName`	Source Member Data Name	string		40		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TargetMemberId`	Loyalty Program Member ID	reference		18		

LOYALTYPROGRAMMEMBERMERGESHARE

Sharing for LoyaltyProgramMemberMerge.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYPROGRAMMEMBERSHARE

Sharing for LoyaltyProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYPROGRAMPARTNER

Represents partners that are associated with a given loyalty program. Partners can be an accrual partner, a redemption partner, or both.

For more information, see LoyaltyProgramPartner in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccrualCostperUnit	Accrual Cost per Unit	currency			18	2
AlertValue	Alert Value	double			18	2
BillingType	Billing Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreditedPoints	Credited Points	double			18	2
DebitedPoints	Debited Points	double			18	2
Id	Loyalty Program Partner ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastProcessedDateTime	Last Processed Date Time	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyPartnerId	Loyalty Program Partner ID	reference		18		
LoyaltyProgramId	Loyalty Program ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartnerCategory	Program Partnership Category	picklist		40		
PartnerIndustry	Industry	picklist		40		
PartnerStatus	Status	picklist		255		
PartnerType	Type	picklist		255		
PartnershipEndDate	Program Partnership End Date	date				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PartnershipStartDate	Program Partnership Start Date	date				
PointsBalance	Points Balance	double			18	2
PostpaidBillAmount	Postpaid Bill Amount	currency			18	2
PurchasedPoints	Purchased Points	double			18	2
RedemptionCostperUnit	Redemption Cost per Unit	currency			18	2
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMPARTNERHISTORY

History for tracked fields of LoyaltyProgramPartner.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Partner History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyProgramPartnerId`	Loyalty Program Partner ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPROGRAMPARTNERLEDGER

Represents the ledger used by a loyalty program to credit points to or debit points from a prepaid partner's points pack. This ledger can also be used to add or deduct the monetary value of points from the partner's postpaid bill.

For more information, see LoyaltyProgramPartnerLedger in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActivityDate`	ActivityDate	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Program Partner Ledger ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LoyaltyLedgerId`	Loyalty Ledger ID	reference		18		
`LoyaltyProgramMemberId`	Loyalty Program Member ID	reference		18		
`LoyaltyProgramPartnerId`	Loyalty Program Partner ID	reference		18		
`Points`	Points	double			18	2
`PromotionId`	Promotion ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TransactionJournalId`	Transaction Journal ID	reference		18		
`Type`	Type	picklist		40		

LOYALTYPROGRAMPARTNERSHARE

Sharing for LoyaltyProgramPartner.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYPROGRAMPROCESS

Represents information about loyalty program processes that determine how transaction journals are processed.

For more information, see LoyaltyProgramProcess in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
ExecutionType	Process Execution Method	picklist		255		
Id	Program Process ID	id		18		
IsDeleted	Deleted	boolean				
JournalSubTypeId	Journal SubType ID	reference		18		
JournalTypeId	Journal Type ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
LoyaltyTierGroupId	Loyalty Tier Group ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProcessType	Process Type	picklist		40		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

LOYALTYPROGRAMPROCESSHISTORY

History for tracked fields of LoyaltyProgramProcess.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Program Process History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyProgramProcessId`	Program Process ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

LOYALTYPROGRAMPROCESSSHARE

Sharing for LoyaltyProgramProcess.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYPROGRAMSHARE

Sharing for LoyaltyProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYPROGRAMWIDGET

Represents the configuration of a widget that a user can apply to the out-of-the-box templates and FlexCards provided by Omnistudio. The configuration helps implement custom UI changes, such as promotion type, promotion tag line, and so on for a user.

For more information, see LoyaltyProgramWidget in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomizedContent`	Customized Content	textarea		128000		
`Description`	Description	string		255		
`Id`	Loyalty Program Widget ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProgramId`	Loyalty Program ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TemplateName`	Template Name	string		255		
`TemplateVersion`	Template Version	int	9			

LOYALTYPROGRAMWIDGETSHARE

Sharing for LoyaltyProgramWidget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

LOYALTYTIER

Represents information about tiers of a loyalty program. A tier group has a set of tiers in a sequential order.

For more information, see LoyaltyTier in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Loyalty Tier ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyTierGroupId`	Loyalty Tier Group ID	reference		18		
`Name`	Tier Name	string		255		
`SequenceNumber`	Sequence Number	int	4			
`SystemModstamp`	System Modstamp	datetime				

LOYALTYTIERBENEFIT

A junction object that associates the loyalty benefits with the loyalty program tiers.

For more information, see LoyaltyTierBenefit in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BenefitId`	Benefit ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Loyalty Tier Benefit ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyTierId`	Loyalty Tier ID	reference		18		
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

LOYALTYTIERGROUP

Represents information about tier groups of a loyalty program. Tier group categorizes members based on their loyalty points.

For more information, see LoyaltyTierGroup in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
ExtendExpiration	Extend Expiration	picklist		255		
Id	Loyalty Tier Group ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsHiddenToMembers	Hidden To Members	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
Name	Tier Group Name	string		255		
QpResetDate	Qualifying Points Reset Date	date				
QpResetFrequency	Qualifying Points Reset Frequency	int	9			
QpResetPeriod	Qualifying Points Reset Period	picklist		255		
SystemModstamp	System Modstamp	datetime				
TierModel	Tier Model	picklist		255		
TierPeriodQuantity	Period Quantity	int	9			
TierPeriodUnit	Period Duration Type	picklist		255		

LOYALTYTIERHISTORY

History for tracked fields of LoyaltyTier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Loyalty Tier History ID	id		18		
`IsDeleted`	Deleted	boolean				
`LoyaltyTierId`	Loyalty Tier ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MLFIELD

Represents a single field in a data definition.

For more information, see MLField in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Entity`	Custom Object Definition ID	picklist		255		
`Field`	Custom Field Definition ID	picklist		255		
`Id`	ML Field Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

MLPREDICTIONDEFINITION

Represents a prediction definition that specifies details about the prediction.

For more information, see MLPredictionDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApplicationId`	AI Application ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	ML Prediction Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`PredictionField`	Prediction Field ID	string		255		
`PushbackField`	Pushback Field ID	string		255		
`Status`	ML Prediction Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	ML Prediction Type	picklist		255		

MLRECOMMENDATIONDEFINITION

For internal use only.

For more information, see MLRecommendationDefinition in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApplicationId`	AI Application ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	ML Recommendation Definition ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`Status`	ML Recommendation Definition Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

MACRO

Represents a macro, which is a set of instructions that tells the system to perform one or more tasks.

For more information, see Macro in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		4096		
`FolderId`	Folder ID	reference		18		
`FolderName`	Folder Name	string		256		
`Id`	Macro ID	id		18		
`IsAlohaSupported`	Supports Classic	boolean				
`IsDeleted`	Deleted	boolean				
`IsLightningSupported`	Supports Lightning	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Macro Name	string		255		
`OwnerId`	Owner ID	reference		18		
`StartingContext`	Apply To	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

MACROHISTORY

History for tracked fields of Macro.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Macro History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MacroId`	Macro ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MACROINSTRUCTION

Represents an instruction in a macro. An instruction can specify the object that the macro interacts with, the context or publisher that the macro works within, the operation or action that the macro performs, and the target of the macro's actions.

For more information, see MacroInstruction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Macro Instruction ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MacroId`	Macro ID	reference		18		
`Name`	Macro Instruction Name	string		255		
`Operation`	Operation	picklist		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Target`	Target	picklist		255		
`Value`	Value	textarea		4000		
`ValueRecord`	Value Record ID	string		15		

MACROSHARE

Sharing for Macro.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MACROUSAGE

Represents macro usage on a record, including which macro was used, who used it, and how they used it.

For more information, see MacroUsage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppContext	App Context	picklist		255		
ConditionCount	Condition Count	int	9			
ContextRecord	Context Record	string		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DurationInMs	Duration In Milliseconds	int	9			
ExecutedInstructionCount	Executed Instruction Count	int	9			
ExecutionEndTime	Execution End Time	datetime				
ExecutionState	Execution State	picklist		255		
FailureReason	Failure Reason	picklist		255		
FolderId	Folder ID	reference		18		
Id	Macro Usage ID	id		18		
InstructionCount	Instruction Count	int	9			
IsDeleted	Deleted	boolean				
IsFromBulk	From Bulk Execution	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MacroId	Macro ID	reference		18		
Name	Macro Usage Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		

MACROUSAGESHARE

Sharing for MacroUsage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MAILMERGETEMPLATE

Represents a mail merge template (a Microsoft Word document) used for performing mail merges for your organization.

For more information, see MailmergeTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Body	Body	base64				
BodyLength	Body Length	int	8			
Category	Document Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Filename	File	string		255		
Id	Mail Merge Template ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastUsedDate	Last Used Date	datetime				
Name	Name	string		80		
SecurityOptionsAttachmentHasFlash	Flash Injection was detected in the attachment	boolean				
SecurityOptionsAttachmentHasXSSThreat	XSS threat was detected in the attachment	boolean				
SecurityOptionsAttachmentScannedForXSS	Attachment has been scanned for XSS	boolean				
SecurityOptionsAttachmentScannedForFlash	Attachment has been scanned for Flash Injection	boolean				
SystemModstamp	System Modstamp	datetime				

MAINTENANCEASSET

Represents an asset covered by a maintenance plan in field service. Assets can be associated with multiple maintenance plans.

For more information, see MaintenanceAsset in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
ContractLineItemId	Contract Line Item ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Maintenance Asset ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaintenanceAssetNumber	Maintenance Asset Number	string		255		
MaintenancePlanId	Maintenance Plan ID	reference		18		
NextSuggestedMaintenanceDate	Date of the first work order in the next batch	date				
SystemModstamp	System Modstamp	datetime				
WorkTypeId	Work Type ID	reference		18		

MAINTENANCEASSETFEED

Feed tracking for MaintenanceAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MAINTENANCEASSETHISTORY

History for tracked fields of MaintenanceAsset.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Maintenance Asset History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MaintenanceAssetId`	Maintenance Asset ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MAINTENANCEPLAN

Represents a preventive maintenance schedule for one or more assets in field service.

For more information, see MaintenancePlan in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DoesAutoGenerateWorkOrders	Auto-generate work orders	boolean				
DoesGenerateUponCompletion	Generate new batch upon completion	boolean				
EndDate	End Date	date				
Frequency	Frequency	int	9			
FrequencyType	Frequency Type	picklist		255		
GenerationHorizon	Generation Horizon (Days)	int	9			
GenerationTimeframe	Generation Timeframe	int	9			
GenerationTimeframeType	Generation Timeframe Type	picklist		255		
Id	Maintenance Plan ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
MaintenancePlanNumber	Maintenance Plan Number	string		255		
MaintenancePlanTitle	Maintenance Plan Title	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaintenanceWindowEndDays	Maintenance Window End (Days)	int	9			
MaintenanceWindowStartDays	Maintenance Window Start (Days)	int	9			
NextSuggestedMaintenanceDate	Date of the first work order in the next batch	date				
OwnerId	Owner ID	reference		18		
ServiceContractId	Service Contract ID	reference		18		
StartDate	Start Date	date				
SvcApptGenerationMethod	Service Appointment Generation Method	picklist		255		
SystemModstamp	System Modstamp	datetime				
WorkOrderGenerationMethod	Work Order Generation Method	picklist		255		
WorkOrderGenerationStatus	Work Order Generation Status	picklist		255		
WorkTypeId	Work Type ID	reference		18		

MAINTENANCEPLANFEED

Feed tracking for MaintenancePlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MAINTENANCEPLANHISTORY

History for tracked fields of MaintenancePlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Maintenance Plan History ID	id		18		
IsDeleted	Deleted	boolean				
MaintenancePlanId	Maintenance Plan ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MAINTENANCEPLANSHARE

Sharing for MaintenancePlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MAINTENANCEWORKRULE

Represents the recurrence pattern for a maintenance record.

For more information, see MaintenanceWorkRule in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Maintenance Work Rule ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Maintenance Work Rule Name	string		255		
NextSuggestedMaintenanceDate	Date of the first work order in the next batch	date				
OwnerId	Owner ID	reference		18		
ParentMaintenancePlanId	Maintenance Plan ID	reference		18		
ParentMaintenanceRecordId	Maintenance Asset ID	reference		18		
RecordsetFilterCriteriaId	Recordset Filter Criteria ID	reference		18		
RecurrencePattern	Recurrence Pattern	string		255		
SortOrder	Sort Order	int	9			
SystemModstamp	System Modstamp	datetime				
Title	Maintenance Work Rule Title	string		255		
Type	Maintenance Work Rule Type	picklist		255		
WorkTypeId	Work Type ID	reference		18		

MAINTENANCEWORKRULEFEED

Feed tracking for MaintenanceWorkRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MAINTENANCEWORKRULEHISTORY

History for tracked fields of MaintenanceWorkRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Maintenance Work Rule History ID	id		18		
IsDeleted	Deleted	boolean				
MaintenanceWorkRuleId	Maintenance Work Rule ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MAINTENANCEWORKRULESHARE

Sharing for MaintenanceWorkRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MANAGEDCONTENT

Represents managed content in a Salesforce CMS workspace for use in an Experience Cloud site or a channel. The `managedContent` object represents the complete instance of a managed content record. It provides a consistent identifier for the managed content so that variants of the content item can be created over time.

For more information, see ManagedContent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthoredManagedContentSpaceId`	Managed Content Space ID	reference		18		
`ContentKey`	Global Identifier	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalId`	External Id	string		255		
`Id`	Managed Content ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PrimaryLanguage`	Primary Language	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

MANAGEDCONTENTCHANNEL

Represents the details of a CMS channel. CMS channels correspond to managed content publishing endpoints. They deliver published content from your Salesforce CMS workspaces to an audience.

For more information, see ManagedContentChannel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CacheControlMaxAge`	Cache Control Max Age	long	18			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Domain`	Domain ID	picklist		255		
`DomainHostName`	Host name of the Domain	string		765		
`Id`	Managed Content Channel ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MediaCacheControlMaxAge`	Media Cache Control Max Age	long	18			
`Name`	Managed Content Channel Name	string		255		
`OptionsIsCacheControlPublic`	CacheControl header for this Channel should be set to Public	boolean				
`OptionsIsDomainLocked`	The Domain field is editable or read only for this Channel	boolean				
`OptionsIsSearchable`	Content Is Searchable in this Channel	boolean				
`SystemModstamp`	System Modstamp	datetime				
`Type`	Managed Content Channel Type	picklist		255		

MANAGEDCONTENTINFO

Allows the creation of relationship to Product using ProductMedia.

For more information, see ManagedContentInfo in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Managed Content Info ID	id		18		

MANAGEDCONTENTSPACE

Represents the complete instance of a Salesforce CMS workspace that stores managed content. Users and groups with designated permissions can access and manage the content in a CMS workspace.

For more information, see ManagedContentSpace in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefaultLanguage`	Default language	picklist		255		
`Description`	Description	textarea		255		
`Id`	Managed Content Space ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Managed Content Space Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

MANAGEDCONTENTVARIANT

Represents a variant of a managed content item.

For more information, see ManagedContentVariant in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HasLocks	Locked for Updates	boolean				
Id	Managed Content Variant ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimary	Is Primary Variant	boolean				
IsPublished	Published	boolean				
IsReady	Ready to be Published	boolean				
Language	Language	picklist		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ManagedContentId	Managed Content ID	reference		18		
ManagedContentKey	Content Key	string		80		
ManagedContentVariantStatus	Status	picklist		255		
Name	Title	string		255		
SystemModstamp	System Modstamp	datetime				
UrlName	Content Slug	string		80		
VariantType	Variant Type	picklist		255		

MANUFACTURINGPROGRAM

Represents information about a manufacturing program. For example, Verican X program for Verican Account to manufacture auto components for their upcoming concept vehicle, staring from 01-Jan-2022 and valid until 01-Dec-2024.

For more information, see ManufacturingProgram in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EndDate	End Date	date				
ExternalName	External Name	string		255		
Id	Manufacturing Program ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManufacturingProgramTemplateId	Manufacturing Program Template ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProgramType	Program Type	picklist		40		
RelatedManufacturingProgramId	Manufacturing Program ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

MANUFACTURINGPROGRAMFEED

Feed tracking for ManufacturingProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MANUFACTURINGPROGRAMHISTORY

History for tracked fields of ManufacturingProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Manufacturing Program History ID	id		18		
IsDeleted	Deleted	boolean				
ManufacturingProgramId	Manufacturing Program ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MANUFACTURINGPROGRAMSHARE

Sharing for ManufacturingProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MATCHINGRULE

Represents a matching rule that is used to identify duplicate records.

For more information, see MatchingRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BooleanFilter`	Advanced Logic	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Unique Name	string		80		
`Id`	Matching Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Rule Name	string		80		
`MatchEngine`	Custom Object Definition ID	picklist		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`RuleStatus`	Status	picklist		255		
`SobjectSubtype`	Object Subtype	picklist		255		
`SobjectType`	Custom Object Definition ID	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

MATCHINGRULEITEM

Represents criteria used by a matching rule to identify duplicate records.

For more information, see MatchingRuleItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BlankValueBehavior`	Blank Value Behavior	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Field`	Field	picklist		255		
`Id`	Matching Rule Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MatchingMethod`	Custom Object Definition ID	picklist		255		
`MatchingRuleId`	Matching Rule ID	reference		18		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

MEDRECONRECOMMENDATION

Stores information about a medication recommendation and associates a recommendation to a medication reconciliation.

For more information, see MedReconRecommendation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Medication Reconciliation Recommendation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicationReconciliationId	Medication Reconciliation ID	reference		18		
Name	Name	string		255		
NoteForPatient	Note for Patient	textarea		32000		
NoteForProvider	Note for Provider	textarea		32000		
Priority	Priority	picklist		40		
RecommendationReasonSubtype	Recommendation Reason Subtype	picklist		40		
RecommendationReasonType	Recommendation Reason Type	picklist		40		
RecommendationSubtype	Recommendation Subtype	picklist		40		
RecommendationType	Recommendation Type	picklist		40		
SourceSysModifiedDateTime	Source System Modified Date	datetime				
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System ID	string		255		
SystemModstamp	System Modstamp	datetime				

MEDRECONRECOMMENDATIONFEED

Feed tracking for MedReconRecommendation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDRECONRECOMMENDATIONHISTORY

History for tracked fields of MedReconRecommendation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Reconciliation Recommendation History ID	id		18		
IsDeleted	Deleted	boolean				
MedReconRecommendationId	Medication Reconciliation Recommendation ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDRECONSTMTRECOMMENDATION

Associates a medication recommendation to a medication statement and medication reconciliation.

For more information, see MedReconStmtRecommendation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Medication Reconciliation Statement Recommendation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedReconRecommendationId	Medication Reconciliation Recommendation ID	reference		18		
MedicationReconciliationId	Medication Reconciliation ID	reference		18		
MedicationStatementId	Medication Statement ID	reference		18		
Name	Name	string		255		
SourceSysModifiedDateTime	Source System Modified Date	datetime				
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SystemModstamp	System Modstamp	datetime				

MEDRECONSTMTRECOMMENDATIONFEED

Feed tracking for MedReconStmtRecommendation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDRECONSTMTRECOMMENDATIONHISTORY

History for tracked fields of MedReconStmtRecommendation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Reconciliation Statement Recommendation History ID	id		18		
IsDeleted	Deleted	boolean				
MedReconStmtRecommendationId	Medication Reconciliation Statement Recommendation ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATION

Represents detailed information about different medications.

For more information, see Medication in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchNumber	Batch Number	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpirationDateTime	Expiration Date	datetime				
Id	Medication ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManufacturerId	Account ID	reference		18		
MedicationCodeId	Code Set Bundle ID	reference		18		
MedicationFormId	Code Set Bundle ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
QuantityDenominator	Quantity Denominator	double			6	2
QuantityNumerator	Quantity Numerator	double			6	2
QuantityUnitId	Unit of Measure ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

MEDICATIONDISPENSE

Represents the dispense of a medication to a patient in response to a medication request or order. This object also includes the instructions for how the medication is to be administered

For more information, see MedicationDispense in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContextId	Clinical Encounter ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DispenseTypeCodeId	Dispense Type Code ID	reference		18		
DispensedDateTime	Dispensed Date	datetime				
HealthcareFacilityId	Healthcare Facility ID	reference		18		
Id	Medication Dispense ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedAdministrationSettingCategory	Medication Administration Setting Category	picklist		40		
MedicationCodeId	Medication Code ID	reference		18		
MedicationId	Medication ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
PreparedDateTime	Prepared Date	datetime				
PrimaryMedicationRequestId	Medication Request ID	reference		18		
Quantity	Quantity	double			6	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
QuantityUnitId	Unit of Measure ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Id	string		255		
SourceSystemModifiedDateTime	Source System Modified Date	datetime				
Status	Status	picklist		40		
StatusReasonCodeId	Status Reason Code ID	reference		18		
SupplyDaysCount	Supply Days Count	double			6	2
SystemModstamp	System Modstamp	datetime				

MEDICATIONDISPENSEFEED

Feed tracking for MedicationDispense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONDISPENSEHISTORY

History for tracked fields of MedicationDispense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Dispense History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationDispenseId	Medication Dispense ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONDISPENSESHARE

Sharing for MedicationDispense.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEDICATIONFEED

Feed tracking for Medication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONHISTORY

History for tracked fields of Medication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationId	Medication ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONRECONCILIATION

Stores information about a medication reconciliation conducted for a patient

For more information, see MedicationReconciliation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ConductedById	User ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Medication Reconciliation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
ProcessEndDateTime	Process End Date	datetime				
ProcessStartDateTime	Process Start Date	datetime				
SourceSysModifiedDateTime	Source System Modified Date	datetime				
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System ID	string		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

MEDICATIONRECONCILIATIONFEED

Feed tracking for MedicationReconciliation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONRECONCILIATIONHISTORY

History for tracked fields of MedicationReconciliation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Reconciliation History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationReconciliationId	Medication Reconciliation ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONRECONCILIATIONSHARE

Sharing for MedicationReconciliation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEDICATIONREQUEST

Represents a request or order for the supply of medication, along with information about how it should be administered.

For more information, see MedicationRequest in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllowedSubstitutionTypeCodeId	Code Set Bundle ID	reference		18		
CanSubstitute	Can be Substitute	boolean				
ClinicalEncounterId	Clinical Encounter ID	reference		18		
ClinicalServiceRequestId	Clinical Service Request ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DispenseInterval	Dispense Interval	double			6	2
DispenseIntervalUnitId	Unit of Measure ID	reference		18		
DispenserId	Account ID	reference		18		
FillDurationUnitId	Unit of Measure ID	reference		18		
FillQuantityUnitId	Unit of Measure ID	reference		18		
Id	Medication Request ID	id		18		
InitialFillDuration	Initial Fill Duration	double			6	2
InitialFillQuantity	Initial Fill Quantity	double			6	2
IsDeleted	Deleted	boolean				
IsIgnored	Ignore request	boolean				
IsSecondaryInformation	Secondary Information Source	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicationAdministrationContextId	Code Set Bundle ID	reference		18		
MedicationCodeId	Code Set Bundle ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MedicationId	Medication ID	reference		18		
MedicationRequestGroupId	Identifier ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
PerformerId	Performer ID	reference		18		
PerformerTypeId	Code Set Bundle ID	reference		18		
PrescribedDate	Prescribed Date	datetime				
PrescriptionPeriodEnd	Prescription Period End	datetime				
PrescriptionPeriodStart	Prescription Period Start	datetime				
PreviousPrescriptionId	Medication Request ID	reference		18		
Priority	Priority	picklist		40		
ReasonCodeId	Code Set Bundle ID	reference		18		
ReasonReferenceId	Reason Reference ID	reference		18		
RefillDuration	Refill Duration	double			6	2
RefillQuantity	Refill Quantity	double			6	2
RefillsAllowed	Refills Allowed	int	9			
RelatedRequestId	Medication Request ID	reference		18		
RequesterId	Requester ID	reference		18		
SecondarySourceId	Secondary Source ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
StatusReasonCodeId	Code Set Bundle ID	reference		18		
SubstitutionReasonCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TherapyDuration	Therapy Duration	picklist		40		
Type	Type	picklist		40		

MEDICATIONREQUESTFEED

Feed tracking for MedicationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONREQUESTHISTORY

History for tracked fields of MedicationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Request History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationRequestId	Medication Request ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONREQUESTSHARE

Sharing for MedicationRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEDICATIONSHARE

Sharing for Medication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEDICATIONSTATEMENT

Represents a record of medication that the patient is currently taking or has taken in the past.

For more information, see MedicationStatement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssertionDateTime	Assertion Time	datetime				
CareObservationId	Care Observation ID	reference		18		
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeliverySetting	Delivery Setting	picklist		40		
EndDateTime	End Date	datetime				
Id	Medication Statement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicationCodeId	Code Set Bundle ID	reference		18		
MedicationId	Medication ID	reference		18		
MedicationReasonCodeId	Code Set Bundle ID	reference		18		
MedicationReasonId	Medication Reason ID	reference		18		
MedicationRequestId	Medication Request ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentMedicationStatementId	Medication Statement ID	reference		18		
PatientId	Account ID	reference		18		
ProcedureId	Patient Medical Procedure ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
StartDateTime	Start Date	datetime				
StatementSourceId	Statement Source ID	reference		18		
Status	Status	picklist		40		
StatusReasonCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				

MEDICATIONSTATEMENTDETAIL

Represents additional information associated with MedicationStatement records.

For more information, see MedicationStatementDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DetailCodeId	Detail Code ID	reference		18		
DetailRecordId	Detail Record ID	reference		18		
DetailType	Detail Type	picklist		40		
Id	Medication Statement Detail ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MedicationStatementId	Medication Statement ID	reference		18		
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				

MEDICATIONSTATEMENTDETAILFEED

Feed tracking for MedicationStatementDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONSTATEMENTDETAILHISTORY

History for tracked fields of MedicationStatementDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Statement Detail History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationStatementDetailId	Medication Statement Detail ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONSTATEMENTFEED

Feed tracking for MedicationStatement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICATIONSTATEMENTHISTORY

History for tracked fields of MedicationStatement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medication Statement History ID	id		18		
IsDeleted	Deleted	boolean				
MedicationStatementId	Medication Statement ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICATIONSTATEMENTSHARE

Sharing for MedicationStatement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEDICINALINGREDIENT

MedicinalIngredient is a child object of Medication that represents substances or drugs that are used as ingredients in the medication.

For more information, see MedicinalIngredient in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Medicinal Ingredient ID	id		18		
IngredientId	Ingredient ID	reference		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentRecordId	Medication ID	reference		18		
StrengthDenominator	Strength Denominator	double			18	5
StrengthDenominatorUnitId	Unit of Measure ID	reference		18		
StrengthNumerator	Strength Numerator	double			18	5
StrengthNumeratorUnitId	Unit of Measure ID	reference		18		
SystemModstamp	System Modstamp	datetime				

MEDICINALINGREDIENTFEED

Feed tracking for MedicinalIngredient.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEDICINALINGREDIENTHISTORY

History for tracked fields of MedicinalIngredient.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Medicinal Ingredient History ID	id		18		
IsDeleted	Deleted	boolean				
MedicinalIngredientId	Medicinal Ingredient ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEDICINALINGREDIENTSHARE

Sharing for MedicinalIngredient.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MEMBERBENEFIT

Represents details about a benefit that's assigned to a loyalty program member and has a benefit action that's triggered.

For more information, see MemberBenefit in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BenefitId	Benefit ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		80		
EndDate	End Date	date				
Id	Member Benefit ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberId	Member ID	reference		18		
Name	Member Benefit Name	string		255		
PrimaryRefObjectRecord	Primary Reference Object Record	string		80		
PrimaryRefObjectRecordTitle	Primary Reference Object Record Title	string		255		
SourceType	Source Type	picklist		40		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

MEMBERBENEFITHISTORY

History for tracked fields of MemberBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Member Benefit History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MemberBenefitId`	Member Benefit ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MEMBERPLAN

Represents details about the insurance coverage for a member or subscriber.

For more information, see MemberPlan in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Affiliation	Affiliation	string		64		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
ExternalIdentifier	External Identifier	string		255		
GroupNumber	Group Number	string		64		
Id	Member Plan ID	id		18		
IsDeleted	Deleted	boolean				
IssuerNumber	Issuer Number	string		64		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastVerification	Last Verification	date				
LastViewedDate	Last Viewed Date	datetime				
MemberId	Account ID	reference		18		
MemberNumber	Member Number	string		64		
Name	Name	string		255		
Notes	Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PayerId	Account ID	reference		18		
PlanId	Plan ID	reference		18		
PrimaryCarePhysician	Primary Care Physician	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PrimarySecondaryTertiary	Primary/Secondary/Tertiary	picklist		40		
RelationshipToSubscriber	Relationship to Subscriber	picklist		40		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
SubscriberId	Account ID	reference		18		
SystemModstamp	System Modstamp	datetime				
VerificationStatus	Verification Status	picklist		40		

MEMBERPLANFEED

Feed tracking for MemberPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MEMBERPLANHISTORY

History for tracked fields of MemberPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Member Plan History ID	id		18		
IsDeleted	Deleted	boolean				
MemberPlanId	Member Plan ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MEMBERPLANSHARE

Sharing for MemberPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MESSAGINGCHANNEL

Represents a communication channel that an end user can use to send a message to an agent. A communication channel can be an SMS number, a Facebook page, or another supported messaging channel.

For more information, see MessagingChannel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessHoursId	Business Hours ID	reference		18		
ConsentType	Consent Type	picklist		255		
ConversationEndResponse	End Conversation	textarea		65536		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		65536		
DeveloperName	Developer Name	string		80		
DoubleOptInPrompt	Double Opt-In Prompt	textarea		65536		
EngagedResponse	Start Conversation	textarea		65536		
Id	Messaging Channel ID	id		18		
InitialResponse	Conversation Acknowledgement	textarea		65536		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsLinkedRecordOpenedAsSubTab	Open linked record as a subtab within the Messaging Session	boolean				
IsRequireDoubleOptIn	Require Double Opt-In?	boolean				
IsRestrictedToBusinessHours	Is Restricted to Business Hours	boolean				
IsoCountryCode	ISO Country Code	string		2		
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Modified On	datetime				
LinkingPreference	Select record type to link	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MasterLabel	Channel Name	string		80		
MessageType	Type	picklist		255		
MessagingPlatformKey	Messaging Platform Key	string		150		
OfflineAgentsResponse	Offline Agents Response	textarea		65536		
OptInPrompt	Opt-In Prompt	textarea		65536		
OutsideBusinessHoursResponse	Outside Business Hours Response	textarea		65536		
RoutingConfigurationId	Routing Configuration ID	reference		18		
RoutingType	Routing Type	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetQueueId	Queue ID	reference		18		

MESSAGINGCHANNELSKILL

Junction object that represents an association between MessagingChannel and Skill.

For more information, see MessagingChannelSkill in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Messaging Channel Skill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Modified On	datetime				
`MessagingChannelId`	Messaging Channel ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

MESSAGINGCONFIGURATION

Represents the details for a Messaging configuration.

For more information, see MessagingConfiguration in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	MessagingConfiguration ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`MessagingServiceUrl`	Messaging Service URL	string		255		
`ProvisioningServiceUrl`	Provisioning Service URL	string		255		
`SystemModstamp`	System Modstamp	datetime				

MESSAGINGDELIVERYERROR

Represents a log of triggered outbound failures to verify when a triggered outbound has failed.

For more information, see MessagingDeliveryError in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CorrelationIdentifier`	Correlation Identifier	string		36		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Date	datetime				
`DestinationPhoneNumber`	Recipient Phone	string		64		
`FailureReason`	Error	textarea		65536		
`FlowEntity`	Source Record ID	string		18		
`FullMessage`	Message	textarea		65536		
`Id`	Record ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MessagingChannelId`	Messaging Channel ID	reference		18		
`MessagingTemplateId`	Messaging Template ID	reference		18		
`Name`	Messaging Delivery Error Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		

MESSAGINGENDUSER

Represents a single address—such as a phone number or Facebook page—communicating with a single Messaging channel.

For more information, see MessagingEndUser in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HasInitialResponseSent	Has Initial Response Been Sent	boolean				
Id	Messaging User ID	id		18		
IsDeleted	Deleted	boolean				
IsFullyOptedIn	Opted In	boolean				
IsoCountryCode	ISO Country Code	string		2		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Locale	Locale	string		20		
MessageType	Message Type	picklist		255		
MessagingChannelId	Messaging Channel ID	reference		18		
MessagingConsentStatus	Messaging Consent Status	picklist		255		
MessagingPlatformKey	Messaging Platform Key	string		255		
Name	Messaging User Name	string		255		
OwnerId	Owner ID	reference		18		
ProfilePictureUrl	Profile Picture URL	url		255		
SystemModstamp	System Modstamp	datetime				

MESSAGINGENDUSERHISTORY

History for tracked fields of MessagingEndUser.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Messaging User History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MessagingEndUserId`	Messaging User ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MESSAGINGENDUSERSHARE

Sharing for MessagingEndUser.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MESSAGINGLINK

Represents the link between a Messaging Channel and where it's shared.

For more information, see MessagingLink in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EntityType`	Custom Object Definition ID	picklist		255		
`Id`	Messaging Link ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MessagingChannelId`	Messaging Channel ID	reference		18		
`RecordTypeId`	Record Type ID	reference		18		
`ShouldAttemptAutoLink`	Attempt to auto-link record	boolean				
`ShouldPromptCreate`	Prompt to manually create link	boolean				
`SystemModstamp`	System Modstamp	datetime				

MESSAGINGSESSION

Represents a session on a Messaging channel.

For more information, see MessagingSession in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcceptTime	Accept Time	datetime				
AgentMessageCount	Agent Message Count	int	9			
AgentType	Agent Type	picklist		255		
CaseId	Case ID	reference		18		
ChannelEndUserFormula	Concatenated Messaging Channel and Messaging User	string		50		
ChannelGroup	Group	string		255		
ChannelIntent	Intent	string		255		
ChannelKey	Channel Key	string		150		
ChannelLocale	Locale	string		255		
ChannelName	Channel Name	string		80		
ChannelType	Channel Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndTime	End Time	datetime				
EndUserAccountId	Account ID	reference		18		
EndUserContactId	Contact ID	reference		18		
EndUserMessageCount	End User Message Count	int	9			
Id	Messaging Session ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastViewedDate	Last Viewed Date	datetime				
LeadId	Lead ID	reference		18		
MessagingChannelId	Messaging Channel ID	reference		18		
MessagingEndUserId	Messaging User ID	reference		18		
Name	Messaging Session Name	string		255		
OpportunityId	Opportunity ID	reference		18		
Origin	Origin	picklist		255		
OwnerId	Owner ID	reference		18		
PreviewDetails	Preview Details	string		255		
SessionKey	Session Key	string		36		
StartTime	Start Time	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TargetUserId	User ID	reference		18		

MESSAGINGSESSIONFEED

Feed tracking for MessagingSession.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MESSAGINGSESSIONHISTORY

History for tracked fields of MessagingSession.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Messaging Session History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MessagingSessionId`	Messaging Session ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MESSAGINGSESSIONSHARE

Sharing for MessagingSession.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MESSAGINGTEMPLATE

Represents a Messaging template used to send pre-formatted messages.

For more information, see MessagingTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		4000		
`DeveloperName`	Developer Name	string		80		
`Id`	Messaging Template ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Template Name	string		80		
`Message`	Message	textarea		4000		
`SystemModstamp`	System Modstamp	datetime				

MFGPROGRAMCPNTFRCSTFACT

Represents information about the generated manufacturing program component forecast records.

For more information, see MfgProgramCpntFrcstFact in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustedForecastedQuantity	Adjusted Forecasted Quantity	double			18	0
AdjustedForecastedRevenue	Adjusted Forecasted Revenue	currency			18	0
AdvAcctForecastSetUseId	Advanced Account Forecast Set Use ID	reference		18		
CostUnitOfMeasurementId	Unit of Measure ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpectedProfitPerUnit	Expected Profit Per Unit	currency			18	0
ExpectedProfitPercent	Expected Profit Percent	percent			3	0
ExternalReferenceNumber	External Reference Number	string		50		
ForecastedQuantity	Forecasted Quantity	double			18	0
ForecastedRevenue	Forecasted Revenue	currency			18	0
Id	Manufacturing Program Component Forecast ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManufacturingProgramId	Manufacturing Program ID	reference		18		
Name	Manufacturing Program Component Forecast Fact Name	string		255		
OwnerId	Owner ID	reference		18		
PeriodId	Period ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PeriodStartDate	Period Start Date	date				
ProductComponentId	Product ID	reference		18		
ProductId	Product ID	reference		18		
ProductionLocationId	Location ID	reference		18		
ProductionModelId	Product ID	reference		18		
SellingPricePerUnit	Selling Price Per Unit	currency			18	0
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalCostPerUnit	Total Cost	currency			18	0
TotalFixedCostPerUnit	Total Fixed Cost Per Unit	double			18	0
VariableCostPerUnit	Variable Cost Per Unit	currency			18	0

MFGPROGRAMCPNTFRCSTFACTFEED

Feed tracking for MfgProgramCpntFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MFGPROGRAMCPNTFRCSTFACTHISTORY

History for tracked fields of MfgProgramCpntFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Manufacturing Program Component Forecast Fact History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MfgProgramCpntFrcstFactId`	Manufacturing Program Component Forecast ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MFGPROGRAMCPNTFRCSTFACTSHARE

Sharing for MfgProgramCpntFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MFGPROGRAMFORECASTFACT

Represents information about the generated manufacturing program forecast records.

For more information, see MfgProgramForecastFact in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustedForecastedQuantity	Adjusted Forecasted Quantity	double			18	0
AdjustedForecastedRevenue	Adjusted Forecasted Revenue	currency			18	0
AdvAcctForecastSetUseId	Advanced Account Forecast Set Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpectedRevenuePerUnit	Expected Revenue Per Unit	currency			18	0
ExternalReferenceNumber	External Reference Number	string		50		
External_Id__c	External_Id	string		255		
ForecastedQuantity	Forecasted Quantity	double			18	0
ForecastedRevenue	Forecasted Revenue	currency			18	0
Id	Manufacturing Program Forecast Fact ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManufacturingProgramId	Manufacturing Program ID	reference		18		
MarketSharePercent	Market Share Percent	percent			3	0
Name	Manufacturing Program Forecast Fact Name	string		255		
OwnerId	Owner ID	reference		18		
PeriodId	Period ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PeriodStartDate	Period Start Date	date				
PreviousPeriodProgramQuantity	Previous Period Program Quantity	double			18	0
ProductionLocationId	Location ID	reference		18		
ProductionModelId	Product ID	reference		18		
ProgramQuantity	Program Quantity	double			18	0
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

MFGPROGRAMFORECASTFACTFEED

Feed tracking for MfgProgramForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MFGPROGRAMFORECASTFACTHISTORY

History for tracked fields of MfgProgramForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Manufacturing Program Forecast Fact History ID	id		18		
`IsDeleted`	Deleted	boolean				
`MfgProgramForecastFactId`	Manufacturing Program Forecast Fact ID	reference		18		
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		

MFGPROGRAMFORECASTFACTSHARE

Sharing for MfgProgramForecastFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MFGPROGRAMTEMPLATE

Represents information about the templates associated with a manufacturing program.

For more information, see MfgProgramTemplate in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Name	string		80		
`Id`	Manufacturing Program Template ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`ProgramTemplateName`	Program Template Name	string		80		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

MFGPROGRAMTEMPLATEITEM

Represents information about the transformation type associated with a manufacturing program template.

For more information, see MfgProgramTemplateItem in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdvAccountForecastSetId	Advanced Account Forecast Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Manufacturing Program Template Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MfgProgramTemplateId	Manufacturing Program Template ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TemplateItemName	Template Item Name	string		80		
TransformationDisplayOrder	Transformation Display Order	int	9			
TransformationType	Transformation Type	picklist		255		

MFGPROGRAMVARIANTFRCSTFACT

Represents information about the generated manufacturing program product variant forecast records.

For more information, see MfgProgramVariantFrcstFact in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustedForecastedQuantity	Adjusted Forecasted Quantity	double			18	0
AdvAcctForecastSetUseId	Advanced Account Forecast Set Use ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExternalReferenceNumber	External Reference Number	string		50		
ForecastedQuantity	Forecasted Quantity	double			18	0
Id	Manufacturing Program Variant Forecast Fact ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManufacturingProgramId	Manufacturing Program ID	reference		18		
MarketSharePercent	Market Share Percent	percent			3	0
Name	Manufacturing Program Variant Forecast Fact Name	string		255		
OwnerId	Owner ID	reference		18		
PeriodId	Period ID	reference		18		
PeriodStartDate	Period Start Date	date				
ProductId	Product ID	reference		18		
ProductionLocationId	Location ID	reference		18		
ProductionModelId	Product ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

MFGPROGRAMVARIANTFRCSTFACTFEED

Feed tracking for MfgProgramVariantFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MFGPROGRAMVARIANTFRCSTFACTHISTORY

History for tracked fields of MfgProgramVariantFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Manufacturing Program Variant Forecast Fact History ID	id		18		
IsDeleted	Deleted	boolean				
MfgProgramVariantFrcstFactId	Manufacturing Program Variant Forecast Fact ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MFGPROGRAMVARIANTFRCSTFACTSHARE

Sharing for MfgProgramVariantFrcstFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MILESTONETYPE

Represents a milestone (required step in a customer support process).

For more information, see MilestoneType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Milestone Type ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`RecurrenceType`	Recurrence Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

MOBILESETTINGSASSIGNMENT

Represents the assignment of a particular field service mobile settings configuration to a user profile.

For more information, see MobileSettingsAssignment in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FieldServiceMobileSettingsId`	Field Service Mobile Settings ID	reference		18		
`Id`	Mobile Settings Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

MSGCHANNELLANGUAGEKEYWORD

Represents the consent configuration for a Messaging channel.

For more information, see MsgChannelLanguageKeyword in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomKeywords`	Custom Keywords	textarea		500		
`CustomResponse`	Custom Response	textarea		32000		
`DoubleOptInKeywords`	Double Opt-In Keywords	textarea		500		
`HelpKeywords`	Help Keywords	textarea		500		
`HelpResponse`	Help Response	textarea		65536		
`Id`	Messaging Channel Language Keyword ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Modified On	datetime				
`MasterLanguage`	Language	textarea		256		
`MessagingChannelId`	Messaging Channel ID	reference		18		
`OptInConfirmation`	Opt-In Confirmation	textarea		65536		
`OptInKeywords`	Opt-In Keywords	textarea		500		
`OptOutConfirmation`	Opt-Out Confirmation	textarea		65536		
`OptOutKeywords`	Opt-Out Keywords	textarea		500		
`SystemModstamp`	System Modstamp	datetime				

MULTIPARTYINFOAUTHREQUEST

Tracks a request for multiple parties of authorization on a Data Use Purpose. For example, consent requests to share the required documents to open a joint financial account or share mortgage disclosures to loan applicants (borrower + co-borrower).

For more information, see MultipartyInfoAuthRequest in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorizationType	Authorization Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataUsePurposeId	Data Use Purpose ID	reference		18		
Id	Multiparty Information Authorization Request ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ResponseStatus	Response Status	picklist		255		
SourceRecordId	Source Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				

MULTIPARTYINFOAUTHREQUESTFEED

Feed tracking for MultipartyInfoAuthRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

MULTIPARTYINFOAUTHREQUESTHISTORY

History for tracked fields of MultipartyInfoAuthRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Multiparty Information Authorization Request History ID	id		18		
IsDeleted	Deleted	boolean				
MultipartyInfoAuthRequestId	Multiparty Information Authorization Request ID	reference		18		
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		

MULTIPARTYINFOAUTHREQUESTSHARE

Sharing for MultipartyInfoAuthRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

MUTINGPERMISSIONSET

Represents a set of disabled permissions and is used in conjunction with PermissionSetGroup.

For more information, see MutingPermissionSet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Muting Permission Set Name	string		80		
Id	MutingPermissionSet ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Muting Permission Set Label	string		80		
PermissionsAECommunityAccess	Use Assessment Envelope objects via Experience Cloud sites	boolean				
PermissionsAICreateInsightObjects	Create AI Insight Objects	boolean				
PermissionsAIViewInsightObjects	View AI Insight Objects	boolean				
PermissionsAccessCMC	Access Experience Management	boolean				
PermissionsAccessContentBuilder	Access drag-and-drop content builder	boolean				
PermissionsAccessFinancialAccounts	Financial Accounts User	boolean				
PermissionsAccessToServiceProcess	Service Process User	boolean				
PermissionsAccountSwitcherUser	Account Switcher User	boolean				
PermissionsActionPlansUserAccess	Permission to access the Action Plans feature	boolean				
PermissionsActivateContract	Activate Contracts	boolean				
PermissionsActivateOrder	Activate Orders	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsActivitiesAccess	Access Activities	boolean				
PermissionsAddAnalyticsRemoteConnections	Add CRM Analytics Remote Connections	boolean				
PermissionsAddDirectMessageMembers	Add People to Direct Messages	boolean				
PermissionsAddWaveNotificationRecipients	Add Recipients to CRM Analytics Notifications	boolean				
PermissionsAdoptionAnalyticsUser	Access Adoption Analytics Templates and Apps	boolean				
PermissionsAllowAIAccelerator	View AI Accelerator Predictions.	boolean				
PermissionsAllowEmailIC	Email-Based Identity Verification Option	boolean				
PermissionsAllowLightningLogin	Lightning Login User	boolean				
PermissionsAllowViewEditConvertedLeads	View and Edit Converted Leads	boolean				
PermissionsApexRestServices	Apex REST Services	boolean				
PermissionsApiEnabled	API Enabled	boolean				
PermissionsApiUserOnly	Api Only User	boolean				
PermissionsAssessmentPlatformUser	Discovery Framework Platform User	boolean				
PermissionsAssignPermissionSets	Assign Permission Sets	boolean				
PermissionsAssignTopics	Assign Topics	boolean				
PermissionsAssociationEngineUserAccess	User license to access Record Association Builder in Financial Services Cloud.	boolean				
PermissionsAuthorApex	Author Apex	boolean				
PermissionsAutomaticActivityCapture	Use Einstein Activity Capture	boolean				
PermissionsAutonomousAnalyticsPrivacy	Manage Autonomous Insights Data Privacy	boolean				
PermissionsB2BMarketingAnalyticsUser	Create B2B Marketing Analytics Apps	boolean				
PermissionsBVCommunityAccess	Use objects in the Benefit Verification data model via Experience Cloud sites	boolean				
PermissionsBranchManagementUserAccess	User license to access Branch Management in Financial Services Cloud.	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsBulkApiHardDelete	Bulk API Hard Delete	boolean				
PermissionsBulkMacrosAllowed	Run Macros on Multiple Records	boolean				
PermissionsBypassMFAForUiLogins	Waive Multi-Factor Authentication for Exempt Users	boolean				
PermissionsCMSECEAuthoringAccess	Migrate Enablement Content	boolean				
PermissionsCampaignInfluence2	Campaign Influence	boolean				
PermissionsCanApproveFeedPost	Can Approve Feed Post and Comment	boolean				
PermissionsCanEditDataPrepRecipe	Edit Dataset Recipes	boolean				
PermissionsCanEditPrompts	Manage Prompts	boolean				
PermissionsCanInsertFeedSystemFields	Insert System Field Values for Chatter Feeds	boolean				
PermissionsCanManageMaps	Manage CRM Analytics Custom Maps	boolean				
PermissionsCanRunAnalysis	Can Run Einstein Discovery for Reports	boolean				
PermissionsCanUseNewDashboardBuilder	Drag-and-Drop Dashboard Builder	boolean				
PermissionsCanVerifyComment	Verify Answers to Chatter Questions	boolean				
PermissionsChangeDashboardColors	Change Dashboard Colors	boolean				
PermissionsChatterComposeUiCodesnippet	Allow Inclusion of Code Snippets from UI	boolean				
PermissionsChatterEditOwnPost	Edit My Own Posts	boolean				
PermissionsChatterEditOwnRecordPost	Edit Posts on Records I Own	boolean				
PermissionsChatterFileLink	Create Public Links	boolean				
PermissionsChatterInternalUser	Chatter Internal User	boolean				
PermissionsChatterInviteExternalUsers	Invite Customers To Chatter	boolean				
PermissionsChatterOwnGroups	Create and Own New Chatter Groups	boolean				
PermissionsClientSecretRotation	Allow consumer key and secret rotation	boolean				
PermissionsCloseConversations	Close Conversation Threads	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsConfigCompliantDataSharing	Configure Compliant Data Sharing	boolean				
PermissionsConfigCustomRecs	Configure Custom Recommendations	boolean				
PermissionsConfigureDataspaceScope	Configure Dataspace Scope	boolean				
PermissionsConnectOrgToEnvironmentHub	Connect Organization to Environment Hub	boolean				
PermissionsConsentApiUpdate	Update Consent Preferences Using REST API	boolean				
PermissionsContentAdministrator	Manage Salesforce CRM Content	boolean				
PermissionsContentHubUser	Files Connect Cloud	boolean				
PermissionsContentWorkspaces	Access Libraries	boolean				
PermissionsConvertLeads	Convert Leads	boolean				
PermissionsCreateAuditFields	Set Audit Fields upon Record Creation	boolean				
PermissionsCreateCustomizeDashboards	Create and Customize Dashboards	boolean				
PermissionsCreateCustomizeFilters	Create and Customize List Views	boolean				
PermissionsCreateCustomizeReports	Create and Customize Reports	boolean				
PermissionsCreateDashboardFolders	Create Dashboard Folders	boolean				
PermissionsCreateLtngTempFolder	Create Folders for Lightning Email Templates	boolean				
PermissionsCreateLtngTempInPub	Manage Public Lightning Email Templates	boolean				
PermissionsCreatePackaging	Create AppExchange Packages	boolean				
PermissionsCreateReportFolders	Create Report Folders	boolean				
PermissionsCreateReportInLightning	Report Builder (Lightning Experience)	boolean				
PermissionsCreateTopics	Create Topics	boolean				
PermissionsCreateUpdateSDDataset	Create and Update Einstein Discovery Datasets	boolean				
PermissionsCreateUpdateSDDStory	Create and Update Einstein Discovery Stories	boolean				
PermissionsCreateWorkBadgeDefinition	Create custom Badge Definitions	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsCreateWorkspaces	Create Libraries	boolean				
PermissionsCustomMobileAppsAccess	Access Custom Mobile Apps	boolean				
PermissionsCustomSidebarOnAllPages	Show Custom Sidebar On All Pages	boolean				
PermissionsCustomizeApplication	Customize Application	boolean				
PermissionsDataExport	Weekly Data Export	boolean				
PermissionsDataPipelinesAppConsumer	Permission to access Data Pipelines license	boolean				
PermissionsDelegatedPortalUserAdmin	Delegated External User Administrator	boolean				
PermissionsDelegatedTwoFactor	Manage Multi-Factor Authentication in User Interface	boolean				
PermissionsDeleteActivatedContract	Delete Activated Contracts	boolean				
PermissionsDeleteTopics	Delete Topics	boolean				
PermissionsDistributeFromPersWksp	Create Content Deliveries	boolean				
PermissionsDocGenDesigner	Enables Designers to create Document Templates.	boolean				
PermissionsDocGenRuntimeCCUser	Enables Customers and Partners to generate documents via communities.	boolean				
PermissionsDocGenRuntimeUser	Enables Business users to generate documents.	boolean				
PermissionsDocumentAutomationUserAccess	User license to access IntelligentDocumentAutomation in Financial Services Cloud.	boolean				
PermissionsDocumentChecklistUserAccess	User license to access the Document Checklist features.	boolean				
PermissionsEditActivatedOrders	Edit Activated Orders	boolean				
PermissionsEditBillingInfo	Manage Billing	boolean				
PermissionsEditBrandTemplates	Manage Letterheads	boolean				
PermissionsEditCaseComments	Edit Case Comments	boolean				
PermissionsEditEvent	Edit Events	boolean				
PermissionsEditHtmlTemplates	Edit HTML Templates	boolean				
PermissionsEditMyDashboards	Edit My Dashboards	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsEditMyReports	Edit My Reports	boolean				
PermissionsEditOppLineItemUnitPrice	Edit Opportunity Product Sales Price	boolean				
PermissionsEditPublicDocuments	Manage Public Documents	boolean				
PermissionsEditPublicFilters	Manage Public List Views	boolean				
PermissionsEditPublicTemplates	Manage Public Classic Email Templates	boolean				
PermissionsEditReadonlyFields	Edit Read Only Fields	boolean				
PermissionsEditTask	Edit Tasks	boolean				
PermissionsEditTopics	Edit Topics	boolean				
PermissionsEmailAdministration	Email Administration	boolean				
PermissionsEmailMass	Mass Email	boolean				
PermissionsEmailSingle	Send Email	boolean				
PermissionsEmailTemplateManagement	Manage Email Templates	boolean				
PermissionsEnableBCTransactionPolling	Enable blockchain transaction polling API	boolean				
PermissionsEnableCommunityAppLauncher	Show App Launcher in Experience Cloud Sites	boolean				
PermissionsEnableIPFSUpload	Allow blockchain data upload	boolean				
PermissionsEnableNotifications	Send Outbound Messages	boolean				
PermissionsExportReport	Export Reports	boolean				
PermissionsFHIRCmtyAccess	Use objects in the Clinical data model via Experience Cloud sites	boolean				
PermissionsFSCAlertFrameworkUserAccess	Access Record Alerts	boolean				
PermissionsFSCArcGraphCommunityUser	Access Actionable Relationship Center for partner users	boolean				
PermissionsFSCInsClaimMgtPlatformUser	Insurance Claim Management Platform User	boolean				
PermissionsFSCInsPolicyAdminPlatformUser	Insurance Policy Administration Platform User	boolean				
PermissionsFSCInsuranceCmpCmtyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsuranceCmpExtOnlyAccess	Access Insurance Lightning Components	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsFSCInsurancePlatformUser	Access Insurance Objects	boolean				
PermissionsFeedPinning	Pin Posts in Feeds	boolean				
PermissionsFinancialServices2UserAccess	Access Actionable Relationship Center	boolean				
PermissionsFlowUFLRequired	Require Flow User Feature License	boolean				
PermissionsForceTwoFactor	Multi-Factor Authentication for User Interface Logins	boolean				
PermissionsGetSmartDataDiscovery	View Einstein Discovery Recommendations	boolean				
PermissionsGetSmartDataDiscoveryExternal	View Einstein Discovery Recommendations Via Connect API	boolean				
PermissionsGiveRecognitionBadge	Give Recognition Badges in Experience Builder Sites	boolean				
PermissionsGovernNetworks	Manage Experiences	boolean				
PermissionsHasUnlimitedNBAExecutions	User Has Unlimited Next Best Action Strategy Executions	boolean				
PermissionsHcAdvancedTherapyUser	Manage Advanced Therapy Orchestration features	boolean				
PermissionsHcPnmSiteUser	Use objects in the Provider Network Management data model via Experience Cloud sites	boolean				
PermissionsHeadlessCMSAccess	Enable Salesforce CMS Integration	boolean				
PermissionsHealthCloudCmtyAccess	Provides access to Health Cloud data for Community users.	boolean				
PermissionsHealthCloudUtilizationMgmtUser	Manage Health Cloud Utilization Management	boolean				
PermissionsHideReadByList	Hide the Seen By List	boolean				
PermissionsIdentityConnect	Use Identity Connect	boolean				
PermissionsIdentityEnabled	Use Identity Features	boolean				
PermissionsIdentityVerificationUserAccess	Permission to access Identity Verification	boolean				
PermissionsImportCustomObjects	Import Custom Objects	boolean				
PermissionsImportLeads	Import Leads	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsImportPersonal	Import Personal Contacts	boolean				
PermissionsInboundMigrationToolsUser	Deploy Change Sets	boolean				
PermissionsIndustryMilestonePlatformUser	Access Life Events or Business Milestones Component	boolean				
PermissionsInsightsAppAdmin	Manage CRM Analytics	boolean				
PermissionsInsightsAppDashboardEditor	Create and Edit CRM Analytics Dashboards	boolean				
PermissionsInsightsAppEltEditor	Edit CRM Analytics Dataflows	boolean				
PermissionsInsightsAppUploadUser	Upload External Data to CRM Analytics	boolean				
PermissionsInsightsAppUser	Use CRM Analytics	boolean				
PermissionsInsightsCreateApplication	Create CRM Analytics Apps	boolean				
PermissionsInstallPackaging	Download AppExchange Packages	boolean				
PermissionsInsuranceGroupBenefitsUser	Insurance Group Benefits User	boolean				
PermissionsInterestTaggingUserAccess	Access Interest Tags for Financial Services Cloud.	boolean				
PermissionsIsSsoEnabled	Is Single Sign-On Enabled	boolean				
PermissionsIsotopeAccess	Salesforce Anywhere on Mobile	boolean				
PermissionsIsotopeCToCUser	Salesforce Anywhere Integration Access	boolean				
PermissionsIsotopeLEX	Salesforce Anywhere in Lightning Experience	boolean				
PermissionsKycPlatformUser	Identity Verification and Screening User	boolean				
PermissionsMEndMessagingSessionUserPerm	End Messaging Session	boolean				
PermissionsMOutboundMessagingUserPerm	Agent Initiated Outbound Messaging	boolean				
PermissionsLearningManager	Manage Learning	boolean				
PermissionsLightningConsoleAllowedForUser	Lightning Console User	boolean				
PermissionsLightningExperienceUser	Lightning Experience User	boolean				
PermissionsListEmailSend	Allow sending of List Emails	boolean				
PermissionsLtngPromoReservedUserPerm	Remain in Salesforce Classic	boolean				
PermissionsManageAnalyticSnapshots	Manage Reporting Snapshots	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageAuthProviders	Manage Auth. Providers	boolean				
PermissionsManageBusinessHourHolidays	Manage Business Hours Holidays	boolean				
PermissionsManageC360AConnections	Connect Org to Customer Data Platform	boolean				
PermissionsManageCMS	Create CMS Workspaces and Channels	boolean				
PermissionsManageCallCenters	Manage Call Centers	boolean				
PermissionsManageCases	Manage Cases	boolean				
PermissionsManageCategories	Manage Categories	boolean				
PermissionsManageCertificates	Manage Certificates	boolean				
PermissionsManageChatterMessages	Manage Chatter Messages and Direct Messages	boolean				
PermissionsManageContentPermissions	Manage Content Permissions	boolean				
PermissionsManageContentProperties	Manage Content Properties	boolean				
PermissionsManageContentTypes	Manage record types and layouts for Files	boolean				
PermissionsManageCssUsers	Manage Customer Users	boolean				
PermissionsManageCustomPermissions	Manage Custom Permissions	boolean				
PermissionsManageCustomReportTypes	Manage Custom Report Types	boolean				
PermissionsManageCustomerExperienceAnalytics	Manage Customer Experience Analytics	boolean				
PermissionsManageDashboardsInPubFolders	Manage Dashboards in Public Folders	boolean				
PermissionsManageDataCategories	Manage Data Categories	boolean				
PermissionsManageDataIntegrations	Manage Data Integrations	boolean				
PermissionsManageDataProcessingEngine	Allow users to access the features of Data Processing Engine to transform data that's available in your Salesforce org.	boolean				
PermissionsManageDataspaceScope	Manage Dataspace Scope	boolean				
PermissionsManageDynamicDashboards	Manage Dynamic Dashboards	boolean				
PermissionsManageEmailClientConfig	Manage Email Client Configurations	boolean				
PermissionsManageEntitlements	Manage Entitlements	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageExchangeConfig	Manage Lightning Sync	boolean				
PermissionsManageExternalConnections	Allow user to modify Private Connections	boolean				
PermissionsManageHcProviderNtwMgmt	Manage Health Cloud Provider Network Management	boolean				
PermissionsManageHealthCheck	Manage Health Check	boolean				
PermissionsManageHealthCloud	Manage Health Cloud	boolean				
PermissionsManageHealthCloudFinancialData	Manage Health Cloud Financial Data	boolean				
PermissionsManageHubConnections	Connect Org to Customer 360 Data Manager	boolean				
PermissionsManageIndustriesVisit	Manage Industries Visit	boolean				
PermissionsManageInteraction	Manage Flow	boolean				
PermissionsManageInternalUsers	Manage Internal Users	boolean				
PermissionsManageIpAddresses	Manage IP Addresses	boolean				
PermissionsManageLeads	Manage Leads	boolean				
PermissionsManageLearningReporting	Manage Learning Reporting	boolean				
PermissionsManageLoginAccessPolicies	Manage Login Access Policies	boolean				
PermissionsManageLoyaltyAnalytics	Manage Loyalty Analytics	boolean				
PermissionsManageMobile	Manage Mobile Configurations	boolean				
PermissionsManageNetworks	Create and Set Up Experiences	boolean				
PermissionsManageOrchInstsAndWorkItems	Manage Orchestration Runs and Work Items	boolean				
PermissionsManagePartners	Manage External Users	boolean				
PermissionsManagePasswordPolicies	Manage Password Policies	boolean				
PermissionsManageProfilesPermissionsets	Manage Profiles and Permission Sets	boolean				
PermissionsManagePropositions	Manage Next Best Action Recommendations	boolean				
PermissionsManagePvtRptsAndDashbds	Manage All Private Reports and Dashboards	boolean				
PermissionsManageQuotas	Manage Quotas	boolean				
PermissionsManageRecommendationStrategies	Manage Next Best Action Strategies	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageReleaseUpdates	Manage Release Updates	boolean				
PermissionsManageRemoteAccess	Manage Connected Apps	boolean				
PermissionsManageReportsInPubFolders	Manage Reports in Public Folders	boolean				
PermissionsManageRoles	Manage Roles	boolean				
PermissionsManageSandboxes	Manage Sandboxes	boolean				
PermissionsManageSessionPermissionSets	Manage Session Permission Set Activations	boolean				
PermissionsManageSharing	Manage Sharing	boolean				
PermissionsManageSmartDataDiscovery	Manage Einstein Discovery	boolean				
PermissionsManageSmartDataDiscoveryModel	Can Deploy and Manage Einstein Discovery predictions	boolean				
PermissionsManageSolutions	Manage Published Solutions	boolean				
PermissionsManageSubscriptions	Manage CRM Analytics Subscriptions	boolean				
PermissionsManageSurveys	Manage Surveys	boolean				
PermissionsManageSynonyms	Manage Synonyms	boolean				
PermissionsManageTCRMforComms	Create and manage TCRM for Comms	boolean				
PermissionsManageTemplatedApp	Manage CRM Analytics Templated Apps	boolean				
PermissionsManageTranslation	Manage Translation	boolean				
PermissionsManageTrustMeasures	Manage Trust Measures	boolean				
PermissionsManageTwoFactor	Manage Multi-Factor Authentication in API	boolean				
PermissionsManageUnlistedGroups	Manage Unlisted Groups	boolean				
PermissionsManageUsers	Manage Users	boolean				
PermissionsMassInlineEdit	Mass Edits from Lists	boolean				
PermissionsMergeTopics	Merge Topics	boolean				
PermissionsMicrobatching	Use Micro-Batching to Create Records	boolean				
PermissionsModerateChatter	Moderate Chatter	boolean				
PermissionsModerateNetworkFeeds	Moderate Experience Cloud Site Feeds	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsModerateNetworkFiles	Moderate Files in Experience Cloud Sites	boolean				
PermissionsModerateNetworkMessages	Moderate Chatter Messages in Experience Cloud Sites	boolean				
PermissionsModerateNetworkUsers	Moderate Experience Cloud Site Users	boolean				
PermissionsModifyAllData	Modify All Data	boolean				
PermissionsModifyDataClassification	Modify Data Classification	boolean				
PermissionsModifyMetadata	Modify Metadata Through Metadata API Functions	boolean				
PermissionsMortgageUserAccess	User license to access Mortgage in Financial Services Cloud.	boolean				
PermissionsMultiStepSchedulingUser	Manage Multi-Step Scheduling features	boolean				
PermissionsNativeWebviewScrolling	Salesforce Mobile App: Native scrolling on webviews	boolean				
PermissionsNewReportBuilder	Report Builder	boolean				
PermissionsOmniStudioDesigner	Enables admin/developer to create new OS/DR/VIP instances.	boolean				
PermissionsOmniStudioRuntime	Enables business users to execute OmniScripts, DRs, Cards, etc, in employee facing apps.	boolean				
PermissionsOmniStudioRuntimeCC	Enables consumers and partners to execute OmniScripts, DRs, Cards through a Community or off platform.	boolean				
PermissionsOutboundMigrationToolsUser	Create and Upload Change Sets	boolean				
PermissionsOverrideForecasts	Override Forecasts	boolean				
PermissionsPackaging2	Create and Update Second-Generation Packages	boolean				
PermissionsPackaging2Delete	Delete Second-Generation Packages	boolean				
PermissionsPasswordNeverExpires	Password Never Expires	boolean				
PermissionsPortalSuperUser	Portal Super User	boolean				
PermissionsPreventClassicExperience	Hide Option to Switch to Salesforce Classic	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsPrivacyDataAccess	Allow user to access privacy data	boolean				
PermissionsProviderSearchUserAccess	Permission to access internal entities for provider search	boolean				
PermissionsPublishPackaging	Upload AppExchange Packages	boolean				
PermissionsQueryAllFiles	Query All Files	boolean				
PermissionsQuipMetricsAccess	Quip Metrics	boolean				
PermissionsQuipUserEngagementMetrics	Quip User Engagement Metrics	boolean				
PermissionsRecordVisibilityAPI	Enable RecordVisibility API	boolean				
PermissionsRemoveDirectMessageMembers	Remove People from Direct Messages	boolean				
PermissionsResetPasswords	Reset User Passwords and Unlock Users	boolean				
PermissionsRunFlow	Run Flows	boolean				
PermissionsRunReports	Run Reports	boolean				
PermissionsSDCommunityAccess	Use objects in the Social Determinants data model via Experience Cloud sites	boolean				
PermissionsSalesConsole	Sales Console	boolean				
PermissionsSandboxTestingInCommunityApp	Test Sandboxes in Mobile Publisher for Experience Cloud	boolean				
PermissionsScheduleJob	Schedule Dashboards	boolean				
PermissionsScheduleReports	Schedule Reports	boolean				
PermissionsSelectFilesFromSalesforce	Select Files from Salesforce	boolean				
PermissionsSendAnnouncementEmails	Send announcement emails	boolean				
PermissionsSendCustomNotifications	Send Custom Notifications	boolean				
PermissionsSendSitRequests	Send Stay-in-Touch Requests	boolean				
PermissionsServiceExcellencePlatformUser	Service Excellence Platform User	boolean				
PermissionsShareFilesWithNetworks	Share Files with People in Experience Cloud sites	boolean				
PermissionsShareSmartDataDiscoveryStory	Share Einstein Discovery Stories	boolean				
PermissionsShowCompanyNameAsUserBadge	Show Company Name as Site Role	boolean				
PermissionsSkipIdentityConfirmation	Skip Device Activation at Login	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsSlackCibUser	Financial Services Cloud for Slack User	boolean				
PermissionsSmartDataDiscoveryForCommunity	Smart Data Discovery for experience users	boolean				
PermissionsSolutionImport	Import Solutions	boolean				
PermissionsSonicConsumer	Use Data Pipelines Base	boolean				
PermissionsStoAutomaticActivityCapture	Use Einstein Activity Capture Standard	boolean				
PermissionsStoryOnDSWithPredicate	Ignore predicate when creating story from dataset	boolean				
PermissionsSubmitMacrosAllowed	Manage Macros Users Can't Undo	boolean				
PermissionsSubscribeDashboardRolesGrps	Subscribe to Dashboards: Send to Groups and Roles	boolean				
PermissionsSubscribeDashboardToOtherUsers	Subscribe to Dashboards: Add Recipients	boolean				
PermissionsSubscribeReportRolesGrps	Subscribe to Reports: Send to Groups and Roles	boolean				
PermissionsSubscribeReportToOtherUsers	Subscribe to Reports: Add Recipients	boolean				
PermissionsSubscribeReportsRunAsUser	Subscribe to Reports: Set Running User	boolean				
PermissionsSubscribeToLightningDashboards	Subscribe to Dashboards	boolean				
PermissionsSubscribeToLightningReports	Subscribe to Reports	boolean				
PermissionsTraceXdsQueries	Access Tracer for External Data Sources	boolean				
PermissionsTransactionalEmailSend	Send Non-Commercial Email	boolean				
PermissionsTransferAnyCase	Transfer Cases	boolean				
PermissionsTransferAnyEntity	Transfer Record	boolean				
PermissionsTransferAnyLead	Transfer Leads	boolean				
PermissionsTwoFactorApi	Multi-Factor Authentication for API Logins	boolean				
PermissionsUpdateWithInactiveOwner	Update Records with Inactive Owners	boolean				
PermissionsUseAssistantDialog	Instant Actionable Results	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsUseCompliantDataSharing	Use Compliant Data Sharing	boolean				
PermissionsUseCustomerExperienceAnalytics	Use Customer Experience Analytics	boolean				
PermissionsUseLoyaltyAnalytics	Use Loyalty Analytics	boolean				
PermissionsUseMySearch	Einstein Search	boolean				
PermissionsUseQuerySuggestions	Natural Language Search	boolean				
PermissionsUseSmartDataDiscovery	Use Einstein Discovery	boolean				
PermissionsUseSubscriptionEmails	Subscribe to CRM Analytics Assets	boolean				
PermissionsUseTCRMforComms	View TCRM for Comms	boolean				
PermissionsUseTeamReassignWizards	Use Team Reassignment Wizards	boolean				
PermissionsUseTemplatedApp	Use CRM Analytics Templated Apps	boolean				
PermissionsUseWebLink	Allow Access to Customized Actions	boolean				
PermissionsUtilMgtExperienceCloudUser	Provides access to Utilization Management features and objects from an Experience Cloud site.	boolean				
PermissionsViewAllActivities	View All Activities	boolean				
PermissionsViewAllCustomSettings	View All Custom Settings	boolean				
PermissionsViewAllData	View All Data	boolean				
PermissionsViewAllForecasts	View All Forecasts	boolean				
PermissionsViewAllForeignKeyNames	View All Lookup Record Names	boolean				
PermissionsViewAllProfiles	View All Profiles	boolean				
PermissionsViewAllUsers	View All Users	boolean				
PermissionsViewContent	View Content in Portals	boolean				
PermissionsViewCustomerSentiment	View Customer Insights	boolean				
PermissionsViewDataAssessment	Access to view Data Assessment	boolean				
PermissionsViewDataCategories	View Data Categories in Setup	boolean				
PermissionsViewDeveloperName	View DeveloperName	boolean				
PermissionsViewEncryptedData	View Encrypted Data	boolean				
PermissionsViewEventLogFiles	View Event Log Files	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsViewGlobalHeader	View Global Header	boolean				
PermissionsViewHealthCheck	View Health Check	boolean				
PermissionsViewHelpLink	View Help Link	boolean				
PermissionsViewMLModels	Allow users to view MLModels and related Entities	boolean				
PermissionsViewMyTeamsDashboards	View My Team's Dashboards	boolean				
PermissionsViewOnlyEmbeddedAppUser	Access to View-Only Licensed Templates and Apps	boolean				
PermissionsViewPrivateStaticResources	View Private Static Resources	boolean				
PermissionsViewPublicDashboards	View Dashboards in Public Folders	boolean				
PermissionsViewPublicReports	View Reports in Public Folders	boolean				
PermissionsViewRestrictionAndScopingRules	View Restriction and Scoping Rules	boolean				
PermissionsViewRoles	View Roles and Role Hierarchy	boolean				
PermissionsViewSetup	View Setup and Configuration	boolean				
PermissionsViewTrustMeasures	View Trust Measures	boolean				
PermissionsViewUserPII	View Concealed Field Data	boolean				
PermissionsWaveManagePrivateAssetsUser	Manage CRM Analytics Private Assets	boolean				
PermissionsWaveTabularDownload	Download CRM Analytics Data	boolean				
PermissionsWaveTrendReports	Trend Report Data in CRM Analytics	boolean				
SystemModstamp	System Modstamp	datetime				

MYDOMAINDISCOVERABLELOGIN

Represents configuration settings when the My Domain login page type is Discovery. Login Discovery provides an identity-first login experience, where the login page contains the identifier field only. Based on the identifier entered, a handler determines how to authenticate the user.

For more information, see MyDomainDiscoverableLogin in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexHandlerId`	Class ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`ExecuteApexHandlerAsId`	User ID	reference		18		
`Id`	My Domain Discoverable Login ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				
`UsernameLabel`	Login Prompt	string		255		

NAME

Non-queryable object that provides information about foreign key traversals when the foreign key has more than one parent.

For more information, see Name in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Alias	Alias	string		8		
Email	Email	email		80		
FirstName	First Name	string		40		
Id	ID	id		18		
IsActive	Active	boolean				
LastName	Last Name	string		80		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NameOrAlias	Name or Alias	string		80		
Phone	Phone	phone		40		
ProfileId	Profile ID	reference		18		
RecordTypeId	Record Type ID	reference		18		
Title	Title	string		80		
Type	Type	picklist		40		
UserRoleId	Role ID	reference		18		
Username	Username	string		80		

NAMEDCREDENTIAL

Represents a named credential, which specifies the URL of a callout endpoint and its required authentication parameters in one definition.

For more information, see NamedCredential in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthProviderId	Auth. Provider ID	reference		18		
AuthTokenEndpointUrl	Auth Token Endpoint URL	textarea		1000		
CalloutOptionsAllowMergeFieldsInBody	AllowMergeFieldsInBody	boolean				
CalloutOptionsAllowMergeFieldsInHeader	AllowMergeFieldsInHeader	boolean				
CalloutOptionsGenerateAuthorizationHeader	GenerateAuthorizationHeader	boolean				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
Endpoint	URL	textarea		1000		
Id	Named Credential ID	id		18		
IsDeleted	Deleted	boolean				
JwtAudience	JWT Audience(s)	textarea		1000		
JwtFormulaSubject	JWT Formula Subject	string		255		
JwtIssuer	JWT Issuer	string		255		
JwtTextSubject	JWT Text Subject	string		255		
JwtValidityPeriodSeconds	JWT Validity Period in Seconds	int	9			
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
PrincipalType	Identity Type	picklist		255		
SystemModstamp	System Modstamp	datetime				

NAVIGATIONLINKSET

Represents the navigation menu in an Experience Cloud site. A navigation menu consists of items that users can click to go to other parts of the site.

For more information, see NavigationLinkSet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Navigation Link Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`NetworkId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

NAVIGATIONMENUITEM

Represents a single menu item in a NavigationLinkSet. Use this object to create, delete, or update menu items in your Experience Cloud site's navigation menu.

For more information, see NavigationMenuItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessRestriction`	Access Restriction	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefaultListViewId`	List View ID	reference		18		
`DraftRowId`	Navigation Menu Item ID	reference		18		
`Id`	Navigation Menu Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`Label`	Label	string		50		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NavigationLinkSetId`	Navigation Link Set ID	reference		18		
`ParentId`	Navigation Menu Item ID	reference		18		
`Position`	Position	int	9			
`Status`	Publish Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Target`	Target	string		255		
`TargetPrefs`	Target Preferences	picklist		255		
`Type`	Navigation Menu Item Type	picklist		255		

NAVIGATIONMENUITEMLOCALIZATION

Represents the translated value of a navigation menu item in an Experience Cloud site.

For more information, see NavigationMenuItemLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

NETWORK

Represents an Experience Cloud site. Salesforce Experience Cloud lets you create branded spaces for your employees, customers, and partners. You can customize and create experiences, whether they're communities, sites, or portals, to meet your business needs, then transition seamlessly between them. Experience Cloud sites let you share information, records, and files with coworkers and stakeholders all in one place.

For more information, see Network in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllowedExtensions	Allowed Extensions	textarea		1000		
CaseCommentEmailTemplateId	Email Template ID	reference		18		
ChangePasswordEmailTemplateId	Email Template ID	reference		18		
ChgEmailVerNewEmailTemplateId	Email Template ID	reference		18		
ChgEmailVerOldEmailTemplateId	Email Template ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DeviceActEmailTemplateId	Email Template ID	reference		18		
EmailFooterLogoId	Document ID	reference		18		
EmailFooterText	Email Footer Text	string		1000		
EmailSenderAddress	From Email Address	email		80		
EmailSenderName	From Email Name	string		80		
FirstActivationDate	First Date Active	date				
ForgotPasswordEmailTemplateId	Email Template ID	reference		18		
HeadlessForgotPasswordTemplateId	Email Template ID	reference		18		
Id	Network ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LockoutEmailTemplateId	Email Template ID	reference		18		
MaxFileSizeKb	Max File Size KB	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		40		
NewSenderAddress	Unverified Sender Email Address	email		80		
OptionsActionOverrideEnabled	ActionOverrideEnabled	boolean				
OptionsAllowInternalUserLogin	Allow Employee Login	boolean				
OptionsAllowMembersToFlag	Allow Members To Flag	boolean				
OptionsApexCDNCachingEnabled	ApexCDNCachingEnabled	boolean				
OptionsCWBannerState	CWBannerState	boolean				
OptionsDirectMessagesEnabled	Direct Messages Enabled	boolean				
OptionsDisableWorkspaceInfo	DisableWorkspaceInfo	boolean				
OptionsEinsteinAnswersEnabled	EinsteinAnswersEnabled	boolean				
OptionsEinsteinAnswersKAEnabled	EinsteinAnswersKAEnabled	boolean				
OptionsEinsteinAnswersQAEnabled	EinsteinAnswersQAEnabled	boolean				
OptionsEinsteinAnswersSnippetEnabled	EinsteinAnswersSnippetEnabled	boolean				
OptionsEnableTalkingAboutStats	EnableTalkingAboutStats	boolean				
OptionsEnableTopicAssignmentRules	EnableTopicAssignmentRules	boolean				
OptionsExperienceBundleBasedSnaOverrideEnabled	ExperienceBundleBasedSnaOverrideEnabled	boolean				
OptionsGatherCustomerSentimentData	Gather Customer Insights Data	boolean				
OptionsGuestChatterEnabled	Guest Chatter Enabled	boolean				
OptionsGuestFileAccessEnabled	Guest File Access Enabled	boolean				
OptionsGuestMemberVisibility	GuestMemberVisibility	boolean				
OptionsHeadlessFrgtPswEnabled	HeadlessFrgtPswEnabled	boolean				
OptionsImageOptimizationCDNEnabled	ImageOptimizationCDNEnabled	boolean				
OptionsInvitationsEnabled	Invitations Enabled	boolean				
OptionsKnowledgeableEnabled	Knowledgeable Enabled	boolean				
OptionsMemberVisibility	MemberVisibility	boolean				
OptionsMobileImageOptimizationEnabled	MobileImageOptimizationEnabled	boolean				
OptionsNetworkSentimentAnalysis	Sentiment Analysis on Feed Posts and Comments	boolean				
OptionsNicknameDisplayEnabled	NicknameDisplayEnabled	boolean				
OptionsPrivateMessagesEnabled	Private Messages Enabled	boolean				
OptionsProfileBasedLayoutsForKnowledgeSearchEnabled	ProfileBasedLayoutsForKnowledgeSearchEnabled	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsRecognitionBadgingEnabled	Recognition badging for Lightning Experiences	boolean				
OptionsReputationEnabled	Reputation Enabled	boolean				
OptionsReputationRecordConversationsDisabled	ReputationRecordConversationsDisabled	boolean				
OptionsSelfRegistrationEnabled	Self Registration Enabled	boolean				
OptionsSendWelcomeEmail	Send Welcome Email	boolean				
OptionsShowAllNetworkSettings	ShowAllNetworkSettings	boolean				
OptionsSiteAsContainerEnabled	Site.com as Experience Container Enabled	boolean				
OptionsThreadedDiscussionsEnabled	ThreadedDiscussionsEnabled	boolean				
OptionsTopicFilteringForKnowledgeSearchEnabled	TopicFilteringForKnowledgeSearchEnabled	boolean				
OptionsTopicSuggestionsEnabled	TopicSuggestionsEnabled	boolean				
OptionsUpDownVoteEnabled	UpDownVoteEnabled	boolean				
SelfRegMicrobatchSubErrorEmailTemplateId	Email Template ID	reference		18		
SelfRegProfileId	Profile ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
UrlPathPrefix	Experience URL Prefix	string		40		
VerificationEmailTemplateId	Email Template ID	reference		18		
WelcomeEmailTemplateId	Email Template ID	reference		18		

NETWORKACTIVITYAUDIT

Represents an audit trail of moderation actions in Experience Cloud sites.

For more information, see NetworkActivityAudit in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Action	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		250		
`EntityCreatedById`	User ID	reference		18		
`EntityId`	Entity ID	reference		18		
`EntityType`	Audited Object Type	picklist		255		
`Id`	Network Activity Audit Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`NetworkId`	Network ID	reference		18		
`ParentEntityId`	Parent Entity ID	reference		18		
`ParentEntityType`	Parent Type of Audited Object	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

NETWORKAFFINITY

Represents a junction object that associates a user profile with a Network object, that is, with an Experience Cloud site. Use NetworkAffinity to assign a default Experience Cloud site to a user profile.

For more information, see NetworkAffinity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Default Community ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

NETWORKDISCOVERABLELOGIN

Represents the Login Discoverable page from where customers and partners log in to an Experience Cloud site. Customers and partners are users with an External Identity license or any communities license for Experience Cloud.

For more information, see NetworkDiscoverableLogin in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexHandlerId`	Class ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExecuteApexHandlerAsId`	User ID	reference		18		
`Id`	Experience Discoverable Login Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UsernameLabel`	Username Label	string		255		

NETWORKFEEDRESPONSEMETRIC

Represents an object that stores the date and time values of question posts. It captures information for question creation, answer creation, and when an answer is marked as best answer

For more information, see NetworkFeedResponseMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentDateTime	Best Comment DateTime	datetime				
BestCommentId	Feed Comment ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FeedItemCreatedById	Feed Item Created By ID	reference		18		
FeedItemDateTime	Feed Item DateTime	datetime				
FeedItemId	Feed Item ID	reference		18		
FirstCommentDateTime	First Comment DateTime	datetime				
FirstCommentId	Feed Comment ID	reference		18		
Id	Network Feed Response Metric Id	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MarkedAsBestCommentDateTime	Marked As Best Comment DateTime	datetime				
Name	Name	string		255		
NetworkId	Network ID	reference		18		
ParentRecordId	Parent Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				

NETWORKHEADLESSFGTPWD

Represents information regarding whether an Experience Cloud site user can use the Headless Forgot Password Flow and related settings.

For more information, see NetworkHeadlessFgtPwd in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Experience Headless Forgot Password Id	id		18		
`IsAuthenticationRequired`	Require Authentication For Password Resets	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MaxAttemptsAllowed`	Maximum Attempts Allowed	int	9			
`NetworkId`	Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

NETWORKMEMBER

Represents a member of an Experience Cloud site. Members can be either users in your company or external users with portal profiles.

For more information, see NetworkMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultGroupNotificationFrequency	Default Notification Frequency when Joining Groups	picklist		40		
DigestFrequency	Chatter Email Highlights Frequency	picklist		40		
Id	Network Member ID	id		18		
LastChatterActivityDate	Last Chatter Activity Date	date				
MemberId	User ID	reference		18		
NetworkId	Network ID	reference		18		
PreferencesDisCommentAfterLikeEmail	DisCommentAfterLikeEmail	boolean				
PreferencesDisMentionsCommentEmail	DisMentionsCommentEmail	boolean				
PreferencesDisProfPostCommentEmail	DisProfPostCommentEmail	boolean				
PreferencesDisableAllFeedsEmail	DisableAllFeedsEmail	boolean				
PreferencesDisableBestAnswerEmail	DisableBestAnswerEmail	boolean				
PreferencesDisableBookmarkEmail	DisableBookmarkEmail	boolean				
PreferencesDisableChangeCommentEmail	DisableChangeCommentEmail	boolean				
PreferencesDisableDirectMessageEmail	DisableDirectMessageEmail	boolean				
PreferencesDisableEndorsementEmail	DisableEndorsementEmail	boolean				
PreferencesDisableFollowersEmail	DisableFollowersEmail	boolean				
PreferencesDisableItemFlaggedEmail	DisableItemFlaggedEmail	boolean				
PreferencesDisableLaterCommentEmail	DisableLaterCommentEmail	boolean				
PreferencesDisableLikeEmail	DisableLikeEmail	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PreferencesDisableMentionsPostEmail	DisableMentionsPostEmail	boolean				
PreferencesDisableMessageEmail	DisableMessageEmail	boolean				
PreferencesDisablePendingReviewEmail	DisablePendingReviewEmail	boolean				
PreferencesDisableProfilePostEmail	DisableProfilePostEmail	boolean				
PreferencesDisableSharePostEmail	DisableSharePostEmail	boolean				
ReputationPoints	Reputation Points	double			15	0
SystemModstamp	System Modstamp	datetime				

NETWORKMEMBERGROUP

Represents a group of members in an Experience Cloud site. Members can be either users in your internal org or external users assigned portal profiles. An administrator adds members to an Experience Cloud site by adding a profile or a permission set, and any user with the profile or permission set becomes a member of the site.

For more information, see NetworkMemberGroup in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssignmentStatus`	Assignment Status	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Network Member Group ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

NETWORKMODERATION

Represents a flag on an item in a community.

For more information, see NetworkModeration in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EntityId`	Entity ID	reference		18		
`Id`	Network Moderation ID	id		18		
`ModerationType`	Moderation Type	picklist		40		
`NetworkId`	Network ID	reference		18		
`Note`	Notes	textarea		1000		
`Visibility`	Visibility	picklist		40		

NETWORKPAGEOVERRIDE

Represents information about custom pages used to override the default pages in Experience Cloud sites. You can create Experience Builder or Visualforce pages and override the default pages in a site. Using custom pages allows you to create a more personalized experience for your users.

For more information, see NetworkPageOverride in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Experience Page Override Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`OverrideSetting`	Page Override Setting	picklist		255		
`OverrideType`	Page Override Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

NETWORKREFERENCEDOBJECT

A junction object that associates the loyalty program with the Experience Cloud site.

For more information, see NetworkReferencedObject in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Network Referenced Object ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`NetworkId`	Network ID	reference		18		
`ReferencedObjectId`	Referenced Object ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

NETWORKSELFREGISTRATION

Represents the account that self-registering Experience Cloud users are associated with by default. Self-registering users in an Experience Cloud site are required to be associated with an account, which the administrator must specify while setting up self-registration for the site. If an account isn't specified, Salesforce creates person accounts (when enabled) for self-registering users.

For more information, see NetworkSelfRegistration in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ApexHandlerId`	Class ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExecuteApexHandlerAsId`	User ID	reference		18		
`Id`	Experience Self Registration Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`OptionsIncludePassword`	IncludePassword	boolean				
`OptionsShowEmail`	Email	boolean				
`OptionsShowFirstName`	First Name	boolean				
`OptionsShowLastName`	Last Name	boolean				
`OptionsShowMobilePhone`	Mobile	boolean				
`OptionsShowNickname`	ShowNickname	boolean				
`OptionsShowUsername`	ShowUsername	boolean				
`SystemModstamp`	System Modstamp	datetime				
`VerificationMethod`	Verification Method	picklist		255		

NETWORKUSERHISTORYRECENT

Represents an Experience Cloud site user's history of accessed records.

For more information, see NetworkUserHistoryRecent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessTimestamp	Access Timestamp	datetime				
ActionType	Action Type	picklist		255		
CombinedIdField	Combined ID field	string		45		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DomainName	Domain Name	string		255		
FeedCommentId	Feed Comment ID	reference		18		
FeedItemId	Feed Item ID	reference		18		
Id	Network User History Recent ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
NetworkId	Network ID	reference		18		
NetworkUserId	User ID	reference		18		
RecordId	Record ID	reference		18		
RecordKeyPrefix	Record Key Prefix	string		3		
SystemModstamp	System Modstamp	datetime				
Url	URL	string		255		
UserType	User Type	picklist		255		

NOTE

Represents a note, which is text associated with a custom object or a standard object, such as a Contact, Contract, or Opportunity.

For more information, see Note in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Body`	Body	textarea		32000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Note Id	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrivate`	Private	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OwnerId`	Owner ID	reference		18		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		80		

NOTEANDATTACHMENT

This read-only object contains all notes and attachments associated with an object.

For more information, see NoteAndAttachment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Note or Attachment Id	id		18		
`IsDeleted`	Deleted	boolean				
`IsNote`	Is Note	boolean				
`IsPrivate`	Private	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OwnerId`	Owner ID	reference		18		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		80		

OAUTHCUSTOMSCOPE

Represents a permission defining the protected data that a connected app can access from an external entity when Salesforce is the OAuth authorization provider.

For more information, see OauthCustomScope in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Name	string		80		
`Id`	OAuth Custom Scope ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPublic`	Include on well known endpoint	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				

OAUTHCUSTOMSCOPEAPP

Represents the name of the connected app to which the custom scope is assigned.

For more information, see OauthCustomScopeApp in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Oauth Custom Scope App ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OauthCustomScopeId`	OAuth Custom Scope ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OAUTHTOKEN

Represents an OAuth access token for connected app authentication. Use this object to create a user interface for token management.

For more information, see OauthToken in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessToken`	Access Token	string		255		
`AppMenuItemId`	AppMenuItem ID	reference		18		
`AppName`	Application Name	string		255		
`CreatedDate`	Created Date	datetime				
`DeleteToken`	Delete Token	string		255		
`Id`	Oauth Token ID	id		18		
`LastUsedDate`	Last Used Date	datetime				
`RequestToken`	Request Token	string		255		
`UseCount`	Use Count	int	9			
`UserId`	User ID	reference		18		

OBJECTDATAIMPORT

Represents the data import status of one or more object records.

For more information, see ObjectDataImport in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	datetime				
`FileName`	File Name	string		120		
`Id`	Object Data Import ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ObjectDataImportNumber`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PrimaryObject`	Primary Object	picklist		255		
`Result`	Result	textarea		131072		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		

OBJECTDATAIMPORTREFERENCE

Represents the relationships to the associated reference objects showing the source from which the data is imported.

For more information, see ObjectDataImportReference in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Object Data Import Reference ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ObjectDataImportId	Object Data Import ID	reference		18		
ObjectDataImportReferenceNumber	Name	string		255		
SystemModstamp	System Modstamp	datetime				

OBJECTDATAIMPORTSHARE

Sharing for ObjectDataImport.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OBJECTPERMISSIONS

Represents the enabled object permissions for the parent PermissionSet.

For more information, see ObjectPermissions in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	ObjectPermissions ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`PermissionsCreate`	Create Records	boolean				
`PermissionsDelete`	Delete Records	boolean				
`PermissionsEdit`	Edit Records	boolean				
`PermissionsModifyAllRecords`	Edit All Records	boolean				
`PermissionsRead`	Read Records	boolean				
`PermissionsViewAllRecords`	Read All Records	boolean				
`SobjectType`	SObject Type Name	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

OCRDOCUMENTSCANRESULT

Represents the details of the information extracted from the form.

For more information, see OcrDocumentScanResult in the *Industries Common Resources Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContentDocumentId	ContentDocument ID	reference		18		
ContentVersionId	ContentVersion ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DocumentRequestId	Received Document ID	reference		18		
ErrorMessage	Error Message	textarea		4000		
ExtractedItemData	Extracted Item Data	textarea		131072		
ExtractedValues	Extracted Values	textarea		131072		
Id	Ocr Document Scan Result ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OcrService	Ocr Service	picklist		255		
OcrStatus	Ocr Status	picklist		255		
PageNumber	Page Number	int	9			
Rotation	Rotation	int	9			
SystemModstamp	System Modstamp	datetime				

OCRDOCUMENTSCANRESULTFEED

Feed tracking for OcrDocumentScanResult.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OCRDOCUMENTSCANRESULTHISTORY

History for tracked fields of OcrDocumentScanResult.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Ocr Document Scan Result History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OcrDocumentScanResultId`	Ocr Document Scan Result ID	reference		18		
`OldValue`	Old Value	anyType		255		

OCRSAMPLEDOCUMENT

Represents the details of a sample document or a document type that's used as a reference while extracting and mapping information from a customer form.

For more information, see OcrSampleDocument in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApplicationType`	OCR Application Type	picklist		255		
`ContentAssetId`	Asset File ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`DocumentHeight`	Document Height	double			18	0
`DocumentTypeId`	Document Type ID	reference		18		
`Id`	OCR Sample Document ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

OCRSAMPLEDOCUMENTFIELD

Represents the details of the field in a form whose value is extracted and mapped to a Salesforce object field.

For more information, see OcrSampleDocumentField in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CellColumnNumber`	Cell Column Number	int	9			
`CellColumnSpanValue`	Cell Column Span Value	int	9			
`CellRowNumber`	Cell Row Number	int	9			
`CellRowSpanValue`	Cell Row Span Value	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FieldLabelMaxX`	Field Label Max X Coordinate	double			18	0
`FieldLabelMaxY`	Field Label Max Y Coordinate	double			18	0
`FieldLabelMinX`	Field Label Min X Coordinate	double			18	0
`FieldLabelMinY`	Field Label Min Y Coordinate	double			18	0
`Id`	OCR Sample Document Field ID	id		18		
`IsDeleted`	Deleted	boolean				
`ItemType`	Item Type	picklist		255		
`KeyContent`	Key Content	string		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OcrSampleDocumentId`	OCR Sample Document ID	reference		18		
`OcrSampleDocumentPageId`	OCR Sample Document Page ID	reference		18		
`OcrSampleDocumentPageItemId`	Ocr Sample Document Page Item ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OCRSAMPLEDOCUMENTPAGE

Represents the details of the fields that define a page in the OCR sample document.

For more information, see OcrSampleDocumentPage in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	OCR Sample Document Page ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OcrSampleDocumentId`	OCR Sample Document ID	reference		18		
`PageHeight`	Page Height	double			18	0
`PageNumber`	Page Number	int	9			
`SystemModstamp`	System Modstamp	datetime				

OCRTARGETOBJFIELDMAPPING

Represents the details of how information from a form field is mapped to fields in an object.

For more information, see OcrTargetObjFieldMapping in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	OCR Target Object Field Mapping ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OcrSampleDocFieldId`	OCR Sample Document Field ID	reference		18		
`OcrTargetObjectId`	OCR Target Object ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetField`	Target Field	picklist		255		
`Type`	Type	picklist		255		

OCRTARGETOBJECT

Represents the details of the object to which information from a form is extracted and mapped.

For more information, see OcrTargetObject in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	OCR Target Object ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OcrTemplateId`	OCR Template ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetObject`	Target Object	picklist		255		
`TargetObjectRecordType`	Record Type ID	picklist		255		

OCRTEMPLATE

Represents the details of the mapping between the form and the Salesforce object using Einstein Form Reader.

For more information, see OcrTemplate in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Name	string		80		
`DocumentTypeId`	Document Type ID	reference		18		
`Id`	OCR Template ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`PageCount`	Page Count	int	9			
`SystemModstamp`	System Modstamp	datetime				
`TemplateName`	Template Name	string		255		

OCRTEMPLATESAMPLEDOCUMENT

Represents a relationship between an OCR template and an OCR sample document.

For more information, see OcrTemplateSampleDocument in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	OCR Template Sample Document ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OcrSampleDocumentId`	OCR Sample Document ID	reference		18		
`OcrTemplateId`	OCR Template ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OMNIDATAPACK

For internal use only.

For more information, see OmniDataPack in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionType	Action Type	picklist		255		
ActivationStatus	Activation Status	picklist		255		
AsyncApexJobIdentifier	Async Apex Job ID	string		255		
AsyncJobStatus	Async Job Status	picklist		255		
Component	Component	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Omni DataPack ID	id		18		
IsAddedToMultiPack	Added to MultiPack	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MultiPackUpdatedById	User ID	reference		18		
MultiPackUpdatedDateTime	MultiPack Updated Date Time	datetime				
Name	Name	string		80		
OwnerId	Owner ID	reference		18		
ProcessStatus	Process Status	picklist		255		
Source	Source	string		255		
SystemModstamp	System Modstamp	datetime				
Version	Version	double			18	0

OMNIDATAPACKFEED

Feed tracking for OmniDataPack.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OMNIDATAPACKSHARE

Sharing for OmniDataPack.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OMNIDATATRANSFORM

For internal use only.

For more information, see OmniDataTransform in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BatchSize	Batch Size	double			4	0
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
ExpectedInputJson	Expected Input JSON	textarea		131072		
ExpectedInputOtherData	Expected Input Other Data	textarea		131072		
ExpectedInputXml	Expected Input XML	textarea		131072		
ExpectedOutputJson	Expected Output JSON	textarea		131072		
ExpectedOutputOtherData	Expected Output Other Data	textarea		131072		
ExpectedOutputXml	Expected Output XML	textarea		131072		
GlobalKey	Global Key	string		80		
Id	Omni Data Transformations ID	id		18		
InputParsingClass	Input Parsing Class	string		255		
InputType	Input Type	picklist		255		
IsActive	Active	boolean				
IsAssignmentRulesUsed	Assignment Rules Used	boolean				
IsDeleted	Deleted	boolean				
IsDeletedOnSuccess	Deleted On Success	boolean				
IsErrorIgnored	Error Ignored	boolean				
IsFieldLevelSecurityEnabled	Field Level Security Enabled	boolean				
IsNullInputsIncludedInOutput	Null Inputs Included in Output	boolean				
IsProcessSuperBulk	Process Super Bulk	boolean				
IsRollbackOnError	Rollback On Error	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsSourceObjectDefault	Source Object Default	boolean				
IsXmlDeclarationRemoved	XML Declaration Removed	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	API Name	string		80		
Namespace	Namespace	string		15		
OutputParsingClass	Output Parsing Class	string		255		
OutputType	Output Type	picklist		255		
OwnerId	Owner ID	reference		18		
PreprocessorClassName	Preprocessor Class Name	string		255		
PreviewJsonData	Preview JSON Data	textarea		131072		
PreviewOtherData	Preview Other Data	textarea		131072		
PreviewSourceObjectData	Preview Source Object Data	textarea		131072		
PreviewXmlData	Preview XML Data	textarea		131072		
RequiredPermission	Required Permission	string		255		
ResponseCacheTtlMinutes	Response Cache Time-to-Live In Minutes	double			4	0
ResponseCacheType	Response Cache Type	picklist		255		
SourceObject	Source Object	string		255		
SynchronousProcessThreshold	Synchronous Process Threshold	double			3	0
SystemModstamp	System Modstamp	datetime				
TargetOutputDocumentIdentifier	Target Output Document ID	string		80		
TargetOutputFileName	Target Output File Name	string		255		
Type	Type	picklist		255		
UniqueName	Unique Name	string		255		
VersionNumber	Version	double			18	0
XmlOutputTagsOrder	XML Output Tags Order	textarea		131072		

OMNIDATATRANSFORMITEM

For internal use only.

For more information, see OmniDataTransformItem in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultValue	Default Value	textarea		32768		
FilterDataType	Filter Data Type	picklist		255		
FilterGroup	Filter Group	double			18	0
FilterOperator	Filter Operator	picklist		255		
FilterValue	Filter Value	string		255		
FormulaConverted	Formula Converted	textarea		32768		
FormulaExpression	Formula Expression	textarea		32768		
FormulaResultPath	Formula Result Path	string		255		
FormulaSequence	Formula Sequence	double			18	0
GlobalKey	Global Key	string		80		
Id	Omni Data Transformation Item ID	id		18		
InputFieldName	Input Field Name	textarea		1000		
InputObjectName	Input Object Name	string		255		
InputObjectQuerySequence	Input Object Query Sequence	double			18	0
IsDeleted	Deleted	boolean				
IsDisabled	Disabled	boolean				
IsRequiredForUpsert	Required For Upsert	boolean				
IsUpsertKey	Upsert Key	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LinkedFieldName	Linked Field Name	string		255		
LinkedObjectSequence	Linked Object Sequence	double			18	0
LookupByFieldName	Lookup By Field Name	string		255		
LookupObjectName	Lookup Object Name	string		255		
LookupReturnedFieldName	Lookup Returned Field Name	string		255		
MigrationAttribute	Migration Attribute	string		255		
MigrationCategory	Migration Category	string		255		
MigrationGroup	Migration Group	string		255		
MigrationKey	Migration Key	string		255		
MigrationPattern	Migration Pattern	string		255		
MigrationProcess	Migration Process	string		255		
MigrationType	Migration Type	string		255		
MigrationValue	Migration Value	string		255		
Name	Omni Data Transformation API Name	string		80		
OmniDataTransformationId	Omni Data Transformations ID	reference		18		
OutputCreationSequence	Output Creation Sequence	double			18	0
OutputFieldFormat	Output Field Format	string		255		
OutputFieldName	Output Field Name	textarea		1000		
OutputObjectName	Output Object Name	string		255		
SystemModstamp	System Modstamp	datetime				
TransformValueMappings	Transform Value Mappings	textarea		32768		

OMNIDATATRANSFORMSHARE

Sharing for OmniDataTransform.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OMNIINTERACTIONACCESSCONFIG

For internal use only.

For more information, see OmniInteractionAccessConfig in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ConfigName	Config Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
Id	Omni Interaction Access Configuration ID	id		18		
IsAsyncCardCachingEnabled	Enable Async Card Caching	boolean				
IsCardApexRemoteDisabled	Disable Card Apex Remote	boolean				
IsCardCacheDisabled	Disable Card Cache	boolean				
IsCardDataTfrmDisabled	Disable Card Data Transformation	boolean				
IsCardIntegrationProcDisabled	Disable Card Integration Procedure	boolean				
IsCardRestApiDisabled	Disable Card REST API	boolean				
IsCardSoqlDisabled	Disable Card SOQL Query	boolean				
IsCardSoslDisabled	Disable Card SOSL Query	boolean				
IsCardStreamingApiDisabled	Disable Card Streaming API	boolean				
IsDataTfrmEncrpFieldsDisabled	Disable Data Transform Encrypted Fields	boolean				
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
NamespacePrefix	Namespace Prefix	string		15		
SetupOwnerId	ID	reference		18		
SystemModstamp	System Modstamp	datetime				

OMNIINTERACTIONCONFIG

For internal use only.

For more information, see OmniInteractionConfig in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Omni Interaction Configuration ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	string		255		

OMNIPROCESS

For internal use only.

For more information, see OmniProcess in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomHtmlTemplates	Custom HTML Templates	textarea		131072		
CustomJavaScript	Custom JavaScript	textarea		131072		
Description	Description	string		255		
DesignerCustomizationType	Designer Customization Type	string		255		
ElementTypeComponentMapping	Element Type Component Mapping	textarea		131072		
Id	Omni Process ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsIntegrationProcedure	Integration Procedure	boolean				
IsMetadataCacheDisabled	Disable Metadata Cache	boolean				
IsOmniScriptEmbeddable	OmniScript Embeddable	boolean				
IsTestProcedure	Test Procedure	boolean				
IsWebCompEnabled	Web Component Enabled	boolean				
Language	Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastPreviewPage	Last Preview Page	string		255		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Namespace	Namespace	string		15		
OmniProcessKey	Omni Process Key	string		255		
OmniProcessType	Omni Process Type	picklist		255		
OwnerId	Owner ID	reference		18		
PropertySetConfig	Property Set Configuration	textarea		32768		
RequiredPermission	Required Permission	string		255		
ResponseCacheType	Response Cache Type	picklist		255		
SubType	Sub Type	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
UniqueName	Unique Name	string		255		
VersionNumber	Version Number	double			18	0
WebComponentKey	Web Component Key	string		255		

OMNIPROCESSASMTQUESTIONVER

Represents a junction between an OmniScript process and an assessment question version.

For more information, see OmniProcessAsmtQuestionVer in the *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentQuestionVersionId	Assessment Question Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Omni Process Assessment Question Version ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OmniProcessElementId	Omni Process Element ID	reference		18		
OmniProcessId	Omni Process ID	reference		18		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

OMNIPROCESSASMTQUESTIONVERFEED

Feed tracking for OmniProcessAsmtQuestionVer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

OMNIPROCESSASMTQUESTIONVERHISTORY

History for tracked fields of OmniProcessAsmtQuestionVer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Omni Process Assessment Question Version History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
OmniProcessAsmtQuestionVerId	Omni Process Assessment Question Version ID	reference		18		

OMNIPROCESSASMTQUESTIONVERSHARE

Sharing for OmniProcessAsmtQuestionVer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OMNIPROCESSCOMPILATION

For internal use only.

For more information, see OmniProcessCompilation in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Content`	Content	textarea		131072		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Omni Process Compilation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		80		
`OmniProcessId`	Omni Process ID	reference		18		
`Sequence`	Sequence	double			18	0
`SystemModstamp`	System Modstamp	datetime				

OMNIPROCESSELEMENT

For internal use only.

For more information, see OmniProcessElement in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
DesignerCustomizationType	Designer Customization Type	string		255		
EmbeddedOmniScriptKey	Embedded OmniScript Key	string		255		
Id	Omni Process Element ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsOmniScriptEmbeddable	OmniScript Embeddable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Level	Level	double			18	0
Name	API Name	string		80		
OmniProcessId	Omni Process ID	reference		18		
OmniProcessVersionNumber	Omni Process Version Number	double			18	0
ParentElementId	Omni Process Element ID	reference		18		
ParentElementName	Parent Element Name	string		1300		
ParentElementType	Parent Element Type	picklist		255		
PropertySetConfig	Property Set Configuration	textarea		131072		
SequenceNumber	Sequence Number	double			18	0
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Type	Type	picklist		255		

OMNIPROCESSFEED

Feed tracking for OmniProcess.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OMNIPROCESSSHARE

Sharing for OmniProcess.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OMNIPROCESSTRANSIENTDATA

For internal use only.

For more information, see OmniProcessTransientData in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AsyncApexJobIdentifier	Async Apex Job ID	string		255		
AsyncTransactionIdentifier	Async Transaction ID	string		255		
AsyncTransactionStatus	Async Transaction Status	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ErrorMessage	Error Message	textarea		32768		
GlobalKey	Global Key	string		80		
Id	Omni Process Transient Data ID	id		18		
InputData	Input Data	textarea		131072		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		80		
OwnerId	Owner ID	reference		18		
ProcessKey	Process Key	string		255		
ProcessMetadata	Process Metadata	textarea		32768		
ProcessStatus	Process Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

OMNIPROCESSTRANSIENTDATAFEED

Feed tracking for OmniProcessTransientData.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OMNIPROCESSTRANSIENTDATASHARE

Sharing for OmniProcessTransientData.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OMNISCRIPTSAVEDSESSION

For internal use only.

For more information, see OmniScriptSavedSession in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	OmniScript Saved Session ID	id		18		
IsContentEncoded	Content Encoded	boolean				
IsDeleted	Deleted	boolean				
IsWebCompEnabled	Web Component Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastSavedDateTime	Last Saved Date Time	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		80		
OmniScriptId	Omni Process ID	reference		18		
OmniScriptLanguage	OmniScript Language	picklist		40		
OmniScriptLocaleCode	OmniScript Locale Code	string		80		
OmniScriptSubType	OmniScript Sub Type	picklist		40		
OmniScriptType	OmniScript Type	picklist		40		
OmniScriptVersionNumber	OmniScript Version Number	double			18	0
OwnerId	Owner ID	reference		18		
RelatedLabel	Related Object Label	string		255		
RelatedName	Related Name	string		255		
RelatedRecordIdentifier	Related Record	string		40		
RelatedType	Related Type	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelativeResumeUrl	Relative Resume URL	textarea		1900		
ResumeUrl	Resume URL	textarea		2000		
SavedSessionKey	Saved Session Key	string		80		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
SystemModstamp	System Modstamp	datetime				

OMNISCRIPTSAVEDSESSIONFEED

Feed tracking for OmniScriptSavedSession.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OMNISCRIPTSAVEDSESSIONSHARE

Sharing for OmniScriptSavedSession.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

OMNISUPERVISORCONFIG

Represents the Omni-Channel supervisor configuration for an assigned group of supervisors.

For more information, see OmniSupervisorConfig in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Omni Supervisor Configuration ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsTimelineHidden`	Is Timeline Hidden	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Omni Supervisor Configuration Name	string		80		
`SkillVisibility`	Skill Visibility Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

OMNISUPERVISORCONFIGGROUP

Represents the group of agents who are visible to the supervisors of an Omni-Channel supervisor configuration. The group, if visible, appears in the Agents tab of Omni Supervisor.

For more information, see OmniSupervisorConfigGroup in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`GroupId`	Group ID	reference		18		
`Id`	Omni Supervisor Configuration for Public Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OmniSupervisorConfigId`	Omni Supervisor Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OMNISUPERVISORCONFIGPROFILE

Represents the supervisor profiles to which an Omni-Channel supervisor configuration applies. User-level configurations override profile-level configurations.

For more information, see OmniSupervisorConfigProfile in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Omni Supervisor Configuration for Profile ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OmniSupervisorConfigId`	Omni Supervisor Configuration ID	reference		18		
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OMNISUPERVISORCONFIGQUEUE

Represents the queues that are visible to the supervisors of an Omni-Channel supervisor configuration. The queue, if visible, appears in the Queues Backlog and Assigned Work tabs of Omni Supervisor.

For more information, see OmniSupervisorConfigQueue in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Omni Supervisor Configuration Queue ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OmniSupervisorConfigId`	Omni Supervisor Configuration ID	reference		18		
`QueueId`	Queue ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OMNISUPERVISORCONFIGSKILL

Represents the skills that are visible to the supervisors of an Omni-Channel supervisor configuration. These skills, if visible, appear in the Skills Backlog tab of Omni Supervisor.

For more information, see OmniSupervisorConfigSkill in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Omni Supervisor Configuration Skill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OmniSupervisorConfigId`	Omni Supervisor Configuration ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

OMNISUPERVISORCONFIGUSER

Represents the users to which an Omni-Channel supervisor configuration applies. User-level configurations override profile-level configurations.

For more information, see OmniSupervisorConfigUser in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Omni Supervisor Configuration for User ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OmniSupervisorConfigId`	Omni Supervisor Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

OMNIUICARD

For internal use only.

For more information, see OmniUiCard in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AuthorName	Author	string		255		
ClonedFromOmniUiCardKey	Cloned From Omni UI Card Key	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataSourceConfig	Data Source Configuration	textarea		131072		
Description	Description	textarea		255		
Id	Omni UI Card ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsTrackingEnabled	Tracking Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	API Name	string		80		
Namespace	Namespace	string		15		
OmniUiCardKey	Omni UI Card Key	string		255		
OmniUiCardType	Type	picklist		255		
OwnerId	Owner ID	reference		18		
PropertySetConfig	Property Set Configuration	textarea		131072		
SampleDataSourceResponse	Sample Data Source Response	textarea		131072		
StylingConfiguration	Styling Configuration	textarea		131072		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UniqueName	Unique Name	string		255		
VersionNumber	Version Number	double			18	0

OMNIUICARDFEED

Feed tracking for OmniUiCard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OMNIUICARDSHARE

Sharing for OmniUiCard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OPENACTIVITY

This read-only object is displayed in a related list of open activities—future events and open tasks—related to an object. It includes activities for all contacts related to the object. OpenActivity fields for phone calls are only available if your organization uses Salesforce CRM Call Center.

For more information, see OpenActivity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ActivityDate`	Date	date				
`ActivityDateTime`	Time	datetime				
`ActivitySubtype`	Activity Subtype	picklist		40		
`ActivityType`	Type	picklist		40		
`AlternateDetailId`	Email Message ID	reference		18		
`CallDisposition`	Call Result	string		255		
`CallDurationInSeconds`	Call Duration	int	8			
`CallObject`	Call Object Identifier	string		255		
`CallType`	Call Type	picklist		40		
`CompletedDateTime`	Completed Date/Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Comments	textarea		32000		
`DurationInMinutes`	Duration	int	9			
`EndDateTime`	End	datetime				
`Id`	Activity ID	id		18		
`IsAllDayEvent`	All-Day Event	boolean				
`IsClosed`	Closed	boolean				
`IsDeleted`	Deleted	boolean				
`IsHighPriority`	High Priority	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsReminderSet	Reminder Set	boolean				
IsTask	Task	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Location	Location	string		80		
OwnerId	Assigned To ID	reference		18		
Priority	Priority	picklist		20		
ReminderDateTime	Reminder Date/Time	datetime				
StartDateTime	Start	datetime				
Status	Status	picklist		255		
Subject	Subject	combobox		80		
SystemModstamp	System Modstamp	datetime				
WhatId	Related To ID	reference		18		
WhoId	Name ID	reference		18		

OPERATINGHOURS

Represents the hours in which a service territory, service resource, or account is available for work in Field Service, Salesforce Scheduler, or Workforce Engagement.

For more information, see OperatingHours in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`Id`	Operating Hour ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OperatingHoursRowType`	Operating Hours Row Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TimeZone`	Time Zone	picklist		255		

OPERATINGHOURSFEED

Feed tracking for OperatingHours.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OPERATINGHOURSHOLIDAY

Represents the day or hours for which a service territory or service resource is unavailable in Field Service.

For more information, see OperatingHoursHoliday in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateAndTime	Date and Time	string		255		
HolidayId	Holiday ID	reference		18		
Id	Operating Hour ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OperatingHoursHolidayNumber	Operating Hours Holiday Number	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
SystemModstamp	System Modstamp	datetime				

OPERATINGHOURSHOLIDAYFEED

Feed tracking for OperatingHoursHoliday.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OPPORTUNITY

Represents an opportunity, which is a sale or pending deal.

For more information, see Opportunity in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account Name	reference		18		
Amount	Amount	currency			18	2
CloseDate	Close Date	date				
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Fiscal	Fiscal Period	string		6		
FiscalQuarter	Fiscal Quarter	int	8			
FiscalYear	Fiscal Year	int	8			
ForecastCategory	Forecast Category	picklist		40		
ForecastCategoryName	Forecast Category	picklist		255		
HasOpenActivity	Has Open Activity	boolean				
HasOpportunityLineItem	Has Line Item	boolean				
HasOverdueTask	Has Overdue Task	boolean				
Id	Opportunity ID	id		18		
IsClosed	Closed	boolean				
IsDeleted	Deleted	boolean				
IsWon	Won	boolean				
LastActivityDate	Last Activity	date				
LastAmountChangedHistoryId	Opportunity History ID	reference		18		
LastCloseDateChangedHistoryId	Opportunity History ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastStageChangeDate	Last Stage Change Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadSource	Lead Source	picklist		255		
Name	Name	string		120		
NextStep	Next Step	string		255		
OwnerId	Owner ID	reference		18		
Pricebook2Id	Price Book ID	reference		18		
Probability	Probability (%)	percent			3	0
PushCount	Push Count	int	9			
StageName	Stage	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Opportunity Type	picklist		255		

OPPORTUNITYCOMPETITOR

Represents a competitor on an Opportunity.

For more information, see OpportunityCompetitor in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CompetitorName`	Competitor Name	combobox		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Opportunity: Competitor ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityId`	Opportunity ID	reference		18		
`Strengths`	Strengths	string		1000		
`SystemModstamp`	System Modstamp	datetime				
`Weaknesses`	Weaknesses	string		1000		

OPPORTUNITYCONTACTROLE

Represents the role that a Contact plays on an Opportunity.

For more information, see OpportunityContactRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactId`	Contact ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Contact Role ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityId`	Opportunity ID	reference		18		
`Role`	Role	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

OPPORTUNITYFEED

Feed tracking for Opportunity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

OPPORTUNITYFIELDHISTORY

Represents the history of changes to the values in the fields of an opportunity.

For more information, see OpportunityFieldHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Opportunity History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`OpportunityId`	Opportunity ID	reference		18		

OPPORTUNITYHISTORY

Represents the stage history of an Opportunity.

For more information, see OpportunityHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Amount`	Amount	currency			18	2
`CloseDate`	Close Date	date				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExpectedRevenue`	Expected Revenue	currency			18	2
`ForecastCategory`	To ForecastCategory	picklist		40		
`Id`	Opportunity History ID	id		18		
`IsDeleted`	Deleted	boolean				
`OpportunityId`	Opportunity ID	reference		18		
`PrevAmount`	Previous Amount	currency			18	2
`PrevCloseDate`	Previous Close Date	date				
`Probability`	Probability	percent			3	0
`StageName`	Stage Name	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

OPPORTUNITYLINEITEM

Represents an opportunity line item, which is a member of the list of Product2 products associated with an Opportunity.

For more information, see OpportunityLineItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Line Description	string		255		
Id	Line Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ListPrice	List Price	currency			18	2
Name	Opportunity Product Name	string		376		
OpportunityId	Opportunity ID	reference		18		
PricebookEntryId	Price Book Entry ID	reference		18		
Product2Id	Product ID	reference		18		
ProductCode	Product Code	string		255		
Quantity	Quantity	double			12	2
ServiceDate	Date	date				
SortOrder	Sort Order	int	9			
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2
UnitPrice	Sales Price	currency			18	2

OPPORTUNITYLINEITEMSCHEDULE

Represents information about the quantity, revenue distribution, and delivery dates for a particular OpportunityLineItem.

For more information, see OpportunityLineItemSchedule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Comments	string		80		
`Id`	Schedule ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityLineItemId`	Line Item ID	reference		18		
`Quantity`	Quantity	double			18	2
`Revenue`	Revenue	currency			18	2
`ScheduleDate`	Schedule Date	date				
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		40		

OPPORTUNITYPARTNER

This object represents a partner relationship between an Account and an Opportunity. An OpportunityPartner record is created automatically when a Partner record is created for a partner relationship between an account and an opportunity.

For more information, see OpportunityPartner in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountToId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Opportunity Partner ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimary`	Primary	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityId`	Opportunity ID	reference		18		
`ReversePartnerId`	Reverse Partner ID	reference		18		
`Role`	Role	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

OPPORTUNITYSHARE

Represents a sharing entry on an Opportunity.

For more information, see OpportunityShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Opportunity Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityAccessLevel`	Opportunity Access	picklist		40		
`OpportunityId`	Opportunity ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

OPPORTUNITYSTAGE

Represents the stage of an Opportunity in the sales pipeline, such as New Lead, Negotiating, Pending, Closed, and so on.

For more information, see OpportunityStage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiName	Api Name	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultProbability	Probability (%)	percent			3	0
Description	Description	string		255		
ForecastCategory	Forecast Category	picklist		40		
ForecastCategoryName	Forecast Category Name	picklist		255		
Id	Opportunity Stage ID	id		18		
IsActive	Is Active	boolean				
IsClosed	Closed	boolean				
IsWon	Won	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Master Label	string		255		
SortOrder	Sort Order	int	9			
SystemModstamp	System Modstamp	datetime				

OPPORTUNITYTEAMMEMBER

Represents a User on the opportunity team of an Opportunity.

For more information, see OpportunityTeamMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Opportunity Team Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Opportunity Team Member Name	string		361		
`OpportunityAccessLevel`	Opportunity Access	picklist		40		
`OpportunityId`	Opportunity ID	reference		18		
`PhotoUrl`	Url for thumbnail sized photo	url		255		
`SystemModstamp`	System Modstamp	datetime				
`TeamMemberRole`	Team Role	picklist		255		
`Title`	Title	string		80		
`UserId`	User ID	reference		18		

ORDER

Represents an order associated with a contract or an account.

For more information, see Order in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActivatedById	Activated By ID	reference		18		
ActivatedDate	Activated Date	datetime				
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Billing Geocode Accuracy	picklist		40		
BillingLatitude	Billing Latitude	double			18	15
BillingLongitude	Billing Longitude	double			18	15
BillingPostalCode	Billing Zip/Postal Code	string		20		
BillingState	Billing State/Province	string		80		
BillingStreet	Billing Street	textarea		255		
CompanyAuthorizedById	Company Authorized By ID	reference		18		
ContractId	Contract ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomerAuthorizedById	Customer Authorized By ID	reference		18		
Description	Description	textarea		32000		
EffectiveDate	Order Start Date	date				
EndDate	Order End Date	date				
Id	Order ID	id		18		
IsDeleted	Deleted	boolean				
IsReductionOrder	Reduction Order	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OrderNumber	Order Number	string		30		
OriginalOrderId	Order ID	reference		18		
OwnerId	Owner ID	reference		18		
Pricebook2Id	Price Book ID	reference		18		
ShippingAddress	Shipping Address	address				
ShippingCity	Shipping City	string		40		
ShippingCountry	Shipping Country	string		80		
ShippingGeocodeAccuracy	Shipping Geocode Accuracy	picklist		40		
ShippingLatitude	Shipping Latitude	double			18	15
ShippingLongitude	Shipping Longitude	double			18	15
ShippingPostalCode	Shipping Zip/Postal Code	string		20		
ShippingState	Shipping State/Province	string		80		
ShippingStreet	Shipping Street	textarea		255		
Status	Status	picklist		100		
StatusCode	Status Category	picklist		40		
SystemModstamp	System Modstamp	datetime				
TotalAmount	Order Amount	currency			18	2
Type	Order Type	picklist		255		

ORDERFEED

Feed tracking for Order.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ORDERHISTORY

Represents historical information about changes that have been made to the standard fields of the associated order, or to any custom fields with history tracking enabled.

For more information, see OrderHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Order History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`OrderId`	Order ID	reference		18		

ORDERITEM

Represents an order product that your organization sells.

For more information, see OrderItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AvailableQuantity	Available Quantity	double			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Line Description	string		255		
EndDate	End Date	date				
Id	Order Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ListPrice	List Price	currency			18	2
OrderId	Order ID	reference		18		
OrderItemNumber	Order Product Number	string		30		
OriginalOrderItemId	Original Order Item ID	reference		18		
PricebookEntryId	Price Book Entry ID	reference		18		
Product2Id	Product ID	reference		18		
Quantity	Quantity	double			18	2
ServiceDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2
UnitPrice	Unit Price	currency			18	2

ORDERITEMFEED

Feed tracking for OrderItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

ORDERITEMHISTORY

History for tracked fields of OrderItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Order Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
OrderItemId	Order Product ID	reference		18		

ORDERSHARE

Represents a sharing entry on an Order.

For more information, see OrderShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Order Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OrderAccessLevel`	Order Access Level	picklist		40		
`OrderId`	Order ID	reference		18		
`RowCause`	Apex Sharing Reason ID	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

ORDERSTATUS

Represents the status of the order entity.

For more information, see OrderStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Order Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

ORGDELETEREQUEST

Represents a request to delete a developer edition (DE) org.

For more information, see OrgDeleteRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Org Delete Request ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RequestType`	Request Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

ORGDELETEREQUESTSHARE

Sharing for OrgDeleteRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

ORGWIDEEMAILADDRESS

Represents an organization-wide email address for user profiles.

For more information, see OrgWideEmailAddress in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Address`	Email Address	email		270		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DisplayName`	Display Name	string		300		
`Id`	Organization-wide From Email Address ID	id		18		
`IsAllowAllProfiles`	Allow All Profiles	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Purpose`	Purpose	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

ORGANIZATION

Represents key configuration information for an organization.

For more information, see Organization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
City	City	string		40		
ComplianceBccEmail	Compliance BCC Email	email		80		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultAccountAccess	Default Account Access	picklist		40		
DefaultCalendarAccess	Default Calendar Access	picklist		40		
DefaultCampaignAccess	Default Campaign Access	picklist		40		
DefaultCaseAccess	Default Case Access	picklist		40		
DefaultContactAccess	Default Contact Access	picklist		40		
DefaultLeadAccess	Default Lead Access	picklist		40		
DefaultLocaleSidKey	Locale	picklist		40		
DefaultOpportunityAccess	Default Opportunity Access	picklist		40		
DefaultPricebookAccess	Default Price Book Access	picklist		40		
DelegatedAuthenticationServiceUrl	Single Sign-On Gateway URL	url		255		
Division	Division	string		80		
Fax	Fax	phone		40		
FiscalYearStartMonth	Fiscal Year Starts In	int	9			
GeocodeAccuracy	Geocode Accuracy	picklist		40		
Id	Organization ID	id		18		
InstanceName	Instance Name	string		5		
IsReadOnly	Is Read Only	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsSandbox	Is Sandbox	boolean				
LanguageLocaleKey	Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
MonthlyPageViewsEntitlement	Monthly Page Views Allowed	int	9			
MonthlyPageViewsUsed	Monthly Page Views Used	int	9			
Name	Name	string		80		
NamespacePrefix	Namespace Prefix	string		15		
NumKnowledgeService	Knowledge Licenses	int	9			
OrganizationType	Edition	picklist		40		
Phone	Phone	phone		40		
PostalCode	Zip/Postal Code	string		20		
PreferencesAutoSelectIndividualOnMerge	AutoSelectIndividualOnMerge	boolean				
PreferencesConsentManagementEnabled	ConsentManagementEnabled	boolean				
PreferencesLightningLoginEnabled	LightningLoginEnabled	boolean				
PreferencesOnlyLLPermUserAllowed	OnlyLLPermUserAllowed	boolean				
PreferencesRequireOpportunityProducts	RequireOpportunityProducts	boolean				
PrimaryContact	Primary Contact	string		80		
ReceivesAdminInfoEmails	Info Emails Admin	boolean				
ReceivesInfoEmails	Info Emails	boolean				
SignupCountryIsoCode	Signup Country	string		2		
State	State/Province	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
TimeZoneSidKey	Time Zone	picklist		40		
TrialExpirationDate	Trial Expiration Date	datetime				
UiSkin	UI Skin	picklist		40		
UsesStartDateAsFiscalYearName	Fiscal Year Name by Start	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
WebToCaseDefaultOrigin	Web to Cases Default Origin	string		40		

OTHEREMSSNFCTRSET

Represents a collection of emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

For more information, see OtherEmssnFctrSet in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Ch4GlblWarmingPot`	CH4 Global Warming Potential	double			10	0
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmissionFactorDataSource`	Emissions Factor Data Source	textarea		32000		
`EmissionFactorUpdateYear`	Emissions Factor Update Year	picklist		255		
`Id`	Other Emissions Factor Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`N2oGlblWarmingPot`	N2O Global Warming Potential	double			10	0
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RefrigerantLeakageRtInKgItKwh`	Data Center Refrigerant Leakage Rate (kg/IT kWh)	double			18	10
`RefrigerantLeakageRtInKgM2`	Refrigerant Leakage Rate (kg/m2)	double			18	8
`RefrigerantLeakageRtInKgSqft`	Refrigerant Leakage Rate (kg/sqft)	double			18	8
`SystemModstamp`	System Modstamp	datetime				

OTHEREMSSNFCTRSETFEED

Feed tracking for OtherEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

OTHEREMSSNFCTRSETHISTORY

History for tracked fields of OtherEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Other Emissions Factor Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`OtherEmssnFctrSetId`	Other Emissions Factor Set ID	reference		18		

OTHEREMSSNFCTRSETITEM

Represents the individual entries for emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

For more information, see OtherEmssnFctrSetItem in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalorificValue	Calorific Value	double			16	6
CalorificValueUnit	Calorific Value Unit	picklist		255		
Ch4EmissionFactor	CH4 Emissions Factor	double			17	7
Ch4EmissionFactorUnit	CH4 Emissions Factor Unit	picklist		255		
Co2EmissionFactor	CO2 Emissions Factor	double			16	6
Co2EmissionFactorUnit	CO2 Emissions Factor Unit	picklist		255		
Co2eEmissionFactorInTco2eGj	CO2e Emissions Factor (tCO2e/GJ)	double			18	6
Co2eEmissionFactorInTco2eMwh	CO2e Emissions Factor (tCO2e/MWh)	double			18	6
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FuelType	Fuel Type	picklist		255		
FuelTypeRefId	Fuel Type ID	reference		18		
Id	Other Emissions Factor Set Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionFactor	N2O Emissions Factor	double			17	7
N2oEmissionFactorUnit	N2O Emissions Factor Unit	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		255		
ParentEmissionFactorId	Other Emissions Factor Set ID	reference		18		
SuppliedEmissionsFactor	Supplied CO2e Emissions Factor	double			18	6
SuppliedEmissionsFactorUnit	Supplied CO2e Emissions Factor Unit	picklist		255		
SystemModstamp	System Modstamp	datetime				

OTHEREMSSNFCTRSETITEMFEED

Feed tracking for OtherEmssnFctrSetItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

OTHEREMSSNFCTRSETITEMHISTORY

History for tracked fields of OtherEmssnFctrSetItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Other Emissions Factor Set Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`OtherEmssnFctrSetItemId`	Other Emissions Factor Set Item ID	reference		18		

OTHEREMSSNFCTRSETSHARE

Sharing for OtherEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

OUTGOINGEMAIL

For internal use only.

For more information, see OutgoingEmail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BccAddress	BCC	string		4000		
CcAddress	CC	string		4000		
EmailTemplateId	Email Template ID	reference		18		
ExternalId	External ID	string		255		
HtmlBody	HTML Body	textarea		128000		
Id	Outgoing Email ID	id		18		
InReplyTo	In Reply To	string		4000		
MessageId	Message Id	string		4000		
References	References	string		4000		
RelatedToId	Related To ID	reference		18		
Subject	Subject	string		3000		
TextBody	Text Body	textarea		128000		
ToAddress	To	string		4000		
ValidatedFromAddress	From	picklist		255		
WhoId	Name ID	reference		18		

OUTGOINGEMAILRELATION

For internal use only.

For more information, see OutgoingEmailRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ExternalId`	External ID	string		255		
`Id`	Outgoing Email Relation ID	id		18		
`OutgoingEmailId`	Outgoing Email ID	string		255		
`RelationAddress`	Relation Address	string		255		
`RelationId`	Relation ID	reference		18		

OWNEDCONTENTDOCUMENT

Represents a file owned by a user.

For more information, see OwnedContentDocument in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentDocumentId`	ContentDocument ID	reference		18		
`ContentSize`	Content Size	int	9			
`ContentUrl`	Content URL	url		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created	datetime				
`ExternalDataSourceName`	External Data Source	string		80		
`ExternalDataSourceType`	Class ID	picklist		80		
`FileExtension`	File Extension	string		40		
`FileType`	File Type	string		20		
`Id`	User Owned Content Document Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Content Modified Date	datetime				
`OwnerId`	Owner ID	reference		18		
`Title`	Title	string		255		

OWNERCHANGEOPTIONINFO

Represents default and optional actions that can be performed when a record's owner is changed.

For more information, see OwnerChangeOptionInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DefaultValue`	Default Value	boolean				
`DurableId`	Durable ID	string		255		
`EntityDefinitionId`	Entity Definition ID	string		70		
`Id`	Change Owner Option ID	id		18		
`IsEditable`	Is Editable	boolean				
`Label`	Label	string		150		
`Name`	Name	string		150		
`ParentId`	Change Owner Option ID	string		70		

PACKAGELICENSE

Represents a license for an installed managed package.

For more information, see PackageLicense in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AllowedLicenses`	Allowed Licenses	int	9			
`CreatedDate`	Created Date	datetime				
`ExpirationDate`	Expiration Date	datetime				
`Id`	Package License ID	id		18		
`IsAvailableForIntegrations`	Enabled for Platform Integrations	boolean				
`IsProvisioned`	Is Provisioned	boolean				
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		40		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`UsedLicenses`	Used Licenses	int	9			

PARTICIPANT

Represents a participant in a ConversationParticipant. An existing or new Participant is referenced each time a new ConversationParticipant is created.

For more information, see Participant in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Participant ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParticipantAppType`	App Type	string		255		
`ParticipantClientIdentifier`	Client Identifier	string		36		
`ParticipantRole`	Role	string		36		
`ParticipantSubject`	Subject	string		255		
`SystemModstamp`	System Modstamp	datetime				

PARTICIPANTROLE

Represents details like the name and associated default access level for a role that a participant can have in the context of a parent record.

For more information, see ParticipantRole in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DefaultAccessLevel`	Default Access Level	picklist		255		
`DeveloperName`	API Name	string		80		
`Id`	Participant Role ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Participant Role Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentObject`	Parent Object	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

PARTNER

Represents a partner relationship between two Account records or between an Opportunity record and an Account record.

For more information, see Partner in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountFromId	Account From ID	reference		18		
AccountToId	Account To ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Partner ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
OpportunityId	Opportunity ID	reference		18		
ReversePartnerId	Reverse Partner ID	reference		18		
Role	Role	picklist		255		
SystemModstamp	System Modstamp	datetime				

PARTNERFUNDALLOCATION

Represents allocated funds from a partner marketing budget for channel partners.

For more information, see PartnerFundAllocation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Amount	Amount	currency			18	2
BudgetId	Partner Marketing Budget ID	reference		18		
ChannelPartnerId	Channel Partner ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Partner Fund Allocation ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Partner Fund Allocation Name	string		255		
TotalApprovedFcs	Total Approved Fund Claims	currency			18	2
TotalApprovedFrs	Total Approved Fund Requests	currency			18	2
TotalReimbursedFcs	Total Reimbursed Fund Claims	currency			18	2

PARTNERFUNDALLOCATIONFEED

Feed tracking for PartnerFundAllocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PARTNERFUNDALLOCATIONHISTORY

History for tracked fields of PartnerFundAllocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Partner Fund Allocation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PartnerFundAllocationId	Partner Fund Allocation ID	reference		18		

PARTNERFUNDALLOCATIONSHARE

Sharing for PartnerFundAllocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PARTNERFUNDCLAIM

Represents a claim of funds from the partner marketing budget by a channel partner.

For more information, see PartnerFundClaim in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllocationId	Partner Fund Allocation ID	reference		18		
Amount	Amount	currency			18	2
BudgetId	Partner Marketing Budget ID	reference		18		
ChannelPartnerId	Channel Partner ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Partner Fund Claim ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
RequestId	Partner Fund Request ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Title	Partner Fund Claim Name	string		255		

PARTNERFUNDCLAIMFEED

Feed tracking for PartnerFundClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PARTNERFUNDCLAIMHISTORY

History for tracked fields of PartnerFundClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Partner Fund Claim History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PartnerFundClaimId	Partner Fund Claim ID	reference		18		

PARTNERFUNDCLAIMSHARE

Sharing for PartnerFundClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PARTNERFUNDREQUEST

Represents a request for funds from the partner marketing budget by a channel partner.

For more information, see PartnerFundRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Activity	Activity	picklist		40		
AllocationId	Partner Fund Allocation ID	reference		18		
Amount	Amount	currency			18	2
BudgetId	Partner Marketing Budget ID	reference		18		
CampaignId	Campaign ID	reference		18		
ChannelPartnerId	Channel Partner ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
DesiredOutcome	Desired Outcome	textarea		255		
Id	Partner Fund Request ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
RequestedAmount	Requested Amount	currency			18	2
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Title	Partner Fund Request Name	string		255		
TotalApprovedFcs	Total Approved Fund Claims	currency			18	2
TotalReimbursedFcs	Total Reimbursed Fund Claims	currency			18	2

PARTNERFUNDREQUESTFEED

Feed tracking for PartnerFundRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PARTNERFUNDREQUESTHISTORY

History for tracked fields of PartnerFundRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Partner Fund Request History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PartnerFundRequestId	Partner Fund Request ID	reference		18		

PARTNERFUNDREQUESTSHARE

Sharing for PartnerFundRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PARTNERMARKETINGBUDGET

Represents a budget that provides funds to channel partners for selling and marketing products and services.

For more information, see PartnerMarketingBudget in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Amount	Amount	currency			18	2
ChannelPartnerId	Channel Partner ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
EndDate	End Date	date				
Id	Partner Marketing Budget ID	id		18		
IsDeleted	Deleted	boolean				
IsIgnoreValidation	Ignore Validation Rules	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				
Title	Partner Marketing Budget Name	string		255		
TotalAllocatedAmount	Total Allocated Amount	currency			18	2
TotalApprovedFcs	Total Approved Fund Claims	currency			18	2
TotalApprovedFrs	Total Approved Fund Requests	currency			18	2
TotalReimbursedFcs	Total Reimbursed Fund Claims	currency			18	2
Type	Budget Type	picklist		255		

PARTNERMARKETINGBUDGETFEED

Feed tracking for PartnerMarketingBudget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PARTNERMARKETINGBUDGETHISTORY

History for tracked fields of PartnerMarketingBudget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Partner Marketing Budget History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PartnerMarketingBudgetId	Partner Marketing Budget ID	reference		18		

PARTNERMARKETINGBUDGETSHARE

Sharing for PartnerMarketingBudget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PARTNERROLE

Represents a role for an account Partner, such as consultant, supplier, and so on.

For more information, see PartnerRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Partner Role Value ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`ReverseRole`	Reverse Role	picklist		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

PARTYCONSENT

Represents consent preferences for an individual.

For more information, see PartyConsent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Action	picklist		255		
`BusinessBrandId`	Business Brand ID	reference		18		
`CaptureContactPointType`	Consent Captured Contact Point Type	picklist		255		
`CaptureDate`	Consent Captured Date Time	datetime				
`CaptureSource`	Consent Captured Source	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataUsePurposeId`	Data Use Purpose ID	reference		18		
`Id`	PartyConsent ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PartyId`	Individual ID	reference		18		
`PartyRoleId`	Party Role ID	reference		18		
`PrivacyConsentStatus`	Privacy Consent Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

PARTYCONSENTFEED

Feed tracking for PartyConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PARTYCONSENTHISTORY

History for tracked fields of PartyConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Party Consent History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PartyConsentId`	PartyConsent ID	reference		18		

PARTYCONSENTSHARE

Sharing for PartyConsent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PARTYROLERELATION

Represents information about the type of relationship between the participants.

For more information, see PartyRoleRelation in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Party Role Relationship ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Party Role Relationship Id	string		255		
OwnerId	Owner ID	reference		18		
RelatedInverseRecordId	Related Inverse Record ID	reference		18		
RelatedRoleName	Related Role Name	string		255		
RelationshipObjectName	Relationship Object Name	picklist		255		
RoleName	Role Name	string		255		
ShouldCreaInversRoleAuto	Create Inverse Role Automatically	boolean				
SystemModstamp	System Modstamp	datetime				

PARTYROLERELATIONFEED

Feed tracking for PartyRoleRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PARTYROLERELATIONHISTORY

History for tracked fields of PartyRoleRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Party Role Relationship History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PartyRoleRelationId`	Party Role Relationship ID	reference		18		

PARTYROLERELATIONSHARE

Sharing for PartyRoleRelation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PATIENTHEALTHREACTION

Represents a patient's adverse reaction to an allergy, intolerance, or immunization.

For more information, see PatientHealthReaction in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CausativeSubstanceId	Code Set Bundle ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Details	Details	string		255		
ExposureRouteId	Code Set Bundle ID	reference		18		
Id	Patient Health Reaction ID	id		18		
IsDeleted	Deleted	boolean				
IsSelfReported	Self-Reported	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ManifestedSymptomId	Code Set Bundle ID	reference		18		
Name	Name	string		255		
ObservationId	Care Observation ID	reference		18		
ParentId	Parent ID	reference		18		
ReactionDateTime	Reaction Date	datetime				
Severity	Severity	picklist		40		
SystemModstamp	System Modstamp	datetime				

PATIENTHEALTHREACTIONFEED

Feed tracking for PatientHealthReaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTHEALTHREACTIONHISTORY

History for tracked fields of PatientHealthReaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Patient Health Reaction History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PatientHealthReactionId	Patient Health Reaction ID	reference		18		

PATIENTIMMUNIZATION

Represents information about a patient's immunizations.

For more information, see PatientImmunization in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CareObservationId	Care Observation ID	reference		18		
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentDose	Current Dose	string		80		
DiagnosticSummaryId	Diagnostic Summary ID	reference		18		
Dose	Dose	double			6	2
DoseUnitId	Unit of Measure ID	reference		18		
ExpirationDate	Expiration Date	datetime				
FacilityId	Healthcare Facility ID	reference		18		
HealthConditionId	Health Condition ID	reference		18		
Id	Patient Immunization ID	id		18		
ImmunizationRecommendation	Immunization Recommendation	string		80		
InformationSourceId	Code Set Bundle ID	reference		18		
IsDeleted	Deleted	boolean				
IsRecordedByVaccinator	Recorded By Vaccinator	boolean				
IsSubpotent	Subpotent	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LotNumber	Lot Number	string		80		
Manufacturer	Manufacturer	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ManufacturerAccountId	Account ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
ReasonCodeId	Code Set Bundle ID	reference		18		
RecommendedDoses	Recommended Doses	string		80		
RecommendingAuthority	Recommending Authority	string		80		
RecordCreationDateTime	Record Creation Date	datetime				
RouteId	Code Set Bundle ID	reference		18		
SiteId	Code Set Bundle ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
Status	Status	picklist		40		
StatusReasonCodeId	Code Set Bundle ID	reference		18		
SubpotencyReasonCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TargetDiseaseCodeId	Code Set Bundle ID	reference		18		
VaccinationDate	Vaccination Date	datetime				
VaccinationPeriod	Vaccination Period	string		80		
VaccineCodeId	Code Set Bundle ID	reference		18		

PATIENTIMMUNIZATIONFEED

Feed tracking for PatientImmunization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTIMMUNIZATIONHISTORY

History for tracked fields of PatientImmunization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Patient Immunization History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PatientImmunizationId`	Patient Immunization ID	reference		18		

PATIENTIMMUNIZATIONPROTOCOL

Represents the protocol followed by a provider for a patient's immunization and its related details. The protocol defines the set of recommendations that are followed while a vaccine is administered. This object is a child of the `PatientImmunization` object.

For more information, see PatientImmunizationProtocol in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrentDose`	Current Dose	string		64		
`Id`	Patient Immunization Protocol ID	id		18		
`ImmunizationRecommendation`	Immunization Recommendation	string		64		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PatientImmunizationId`	Patient Immunization ID	reference		18		
`RecommendedDoses`	Recommended Doses	string		64		
`RecommendingAuthority`	Recommending Authority	string		64		
`SystemModstamp`	System Modstamp	datetime				
`TargetDisease1CodeId`	Code Set Bundle ID	reference		18		
`TargetDisease2CodeId`	Code Set Bundle ID	reference		18		
`TargetDisease3CodeId`	Code Set Bundle ID	reference		18		
`TargetDisease4CodeId`	Code Set Bundle ID	reference		18		
`TargetDisease5CodeId`	Code Set Bundle ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`TargetDisease6CodeId`	Code Set Bundle ID	reference		18		

PATIENTIMMUNIZATIONPROTOCOLFEED

Feed tracking for PatientImmunizationProtocol.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTIMMUNIZATIONPROTOCOLHISTORY

History for tracked fields of PatientImmunizationProtocol.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Patient Immunization Protocol History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PatientImmunizationProtocolId	Patient Immunization Protocol ID	reference		18		

PATIENTIMMUNIZATIONPROTOCOLSHARE

Sharing for PatientImmunizationProtocol.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PATIENTIMMUNIZATIONSHARE

Sharing for PatientImmunization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PATIENTMEDICALPROCEDURE

Represents detailed information about a healthcare procedure the patient has undergone, is undergoing or will undergo.

For more information, see PatientMedicalProcedure in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssertionSourceId	Assertion Source ID	reference		18		
ClinicalEncounterId	Clinical Encounter ID	reference		18		
CodeId	Code Set Bundle ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DurationTimeString	Duration	string		80		
EndDate	End Date	datetime				
FacilityId	Healthcare Facility ID	reference		18		
Id	Patient Medical Procedure ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Outcome	Outcome	picklist		40		
OwnerId	Owner ID	reference		18		
PatientId	Account ID	reference		18		
PerformedAgeRangeUnitId	Unit of Measure ID	reference		18		
PerformedAtAge	Performed At Age	double			18	0
PerformedAtAgeLowerLimit	Performed At Age Lower Limit	double			18	0
PerformedAtAgeUnitId	Unit of Measure ID	reference		18		
PerformedAtAgeUpperLimit	Performed At Age Upper Limit	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ReasonCodeId	Code Set Bundle ID	reference		18		
ReasonReferenceId	Reason Reference ID	reference		18		
RecordCreatorId	Record Creator ID	reference		18		
ReportId	Diagnostic Summary ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
StartDate	Start Date	datetime				
Status	Status	picklist		40		
StatusReasonCodeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TypeId	Code Set Bundle ID	reference		18		

PATIENTMEDICALPROCEDUREDETAIL

Associates records from different objects to a patient medical procedure record to add more information to the procedure record. This is a multi-object junction object.

For more information, see PatientMedicalProcedureDetail in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DetailCodeId`	Detail Code ID	reference		18		
`DetailRecordId`	Detail Record ID	reference		18		
`DetailType`	Detail Type	picklist		40		
`Id`	Patient Medical Procedure Detail ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`PatientMedicalProcedureId`	Patient Medical Procedure ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PATIENTMEDICALPROCEDUREDETAILFEED

Feed tracking for PatientMedicalProcedureDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTMEDICALPROCEDUREDETAILHISTORY

History for tracked fields of PatientMedicalProcedureDetail.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Patient Medical Procedure Detail History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PatientMedicalProcedureDetailId`	Patient Medical Procedure Detail ID	reference		18		

PATIENTMEDICALPROCEDUREFEED

Feed tracking for PatientMedicalProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTMEDICALPROCEDUREHISTORY

History for tracked fields of PatientMedicalProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Patient Medical Procedure History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PatientMedicalProcedureId`	Patient Medical Procedure ID	reference		18		

PATIENTMEDICALPROCEDURESHARE

Sharing for PatientMedicalProcedure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PATIENTMEDICATIONDOSAGE

Represents dosage information for medication. This object is primarily used to add dosage information in MedicationStatement, MedicationRequest, or MedicationDispense records.

For more information, see PatientMedicationDosage in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalInstruction	Additional Instruction	textarea		32000		
Comments	Comments	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DosageDefinitionType	Dosage Definition Type	picklist		40		
DosageQuantityDenominator	Dosage Quantity Denominator	double			6	2
DosageQuantityNumerator	Dosage Quantity Numerator	double			6	2
DosageQuantityType	Dosage Quantity Type	picklist		40		
DosageRateDenominator	Dosage Frequency Denominator	double			6	2
DosageRateNumerator	Dosage Frequency Numerator	double			6	2
DosageRateType	Dosage Frequency Type	picklist		40		
DosageRateUnitId	Unit of Measure ID	reference		18		
DosageUnitId	Unit of Measure ID	reference		18		
DosePrerequisiteId	Code Set Bundle ID	reference		18		
Id	Patient Medication Dosage ID	id		18		
IsAsNeeded	As Needed	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MethodId	Code Set Bundle ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Name	Name	string		255		
ParentRecordId	Parent Record ID	reference		18		
PatientInstruction	Patient Instruction	textarea		32000		
RouteId	Code Set Bundle ID	reference		18		
Sequence	Sequence	double			6	2
SiteId	Code Set Bundle ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				
TimingId	Activity Timing ID	reference		18		

PATIENTMEDICATIONDOSAGEFEED

Feed tracking for PatientMedicationDosage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PATIENTMEDICATIONDOSAGEHISTORY

History for tracked fields of PatientMedicationDosage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Patient Medication Dosage History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PatientMedicationDosageId	Patient Medication Dosage ID	reference		18		

PAYMENTAUTHADJUSTMENT

Shows information about an adjustment made to an authorized transaction.

For more information, see PaymentAuthAdjustment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Amount	Amount	currency			18	2
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Date	Date	datetime				
EffectiveDate	Effective Date	datetime				
Email	Audit Email	email		80		
GatewayDate	Gateway Date	datetime				
GatewayRefDetails	Gateway Reference Details	textarea		1000		
GatewayRefNumber	Gateway Reference Number	string		255		
GatewayResultCode	Gateway Result Code	string		64		
GatewayResultCodeDescription	Gateway Result Code Description	string		255		
Id	Payment Authorization Adjustment ID	id		18		
IpAddress	IP Address	string		39		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MacAddress	MAC Address	string		32		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PaymentAuthAdjustmentNumber	Payment Authorization Adjustment Number	string		255		
PaymentAuthorizationId	Payment Authorization ID	reference		18		
Phone	Phone	phone		40		
ProcessingMode	Processing Mode	picklist		255		
SfResultCode	Salesforce Result Code	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Adjustment Type	picklist		255		

PAYMENTFEED

Feed tracking for Payment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PAYMENTGATEWAY

Platform entity that represents the connection to the external payment gateway.

For more information, see PaymentGateway in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExternalReference	External Reference	string		255		
Id	Payment Gateway ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MerchantCredentialId	Named Credential ID	reference		18		
PaymentGatewayName	Payment Gateway Name	string		255		
PaymentGatewayProviderId	Payment Gateway Provider ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

PAYMENTGATEWAYLOG

Stores information exchanged between the Salesforce payments platform and external payment gateways. Gateway logs can also record payloads from external payment entities.

For more information, see PaymentGatewayLog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
GatewayAuthCode	GatewayAuthCode	string		64		
GatewayAvsCode	GatewayAvsCode	string		64		
GatewayDate	GatewayDate	datetime				
GatewayMessage	Gateway Message	string		255		
GatewayRefNumber	GatewayReferenceNumber	string		255		
GatewayResultCode	GatewayResultCode	string		64		
GatewayResultCodeDescription	GatewayResultCode	string		255		
Id	Payment Gateway Log ID	id		18		
InteractionStatus	Status	picklist		255		
InteractionType	Interaction Type	picklist		255		
IsDeleted	Deleted	boolean				
IsNotification	IsNotification	picklist		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
PaymentGatewayId	Payment Gateway ID	reference		18		
PaymentGatewayLogNumber	PaymentGatewayLogNumber	string		255		
ReferencedEntityId	ReferencedEntity ID	reference		18		
Request	Request	textarea		131072		
Response	Response	textarea		131072		
SfRefNumber	SalesforceReferenceNumber	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SfResultCode	SalesforceResultCode	picklist		255		
SystemModstamp	System Modstamp	datetime				

PAYMENTGATEWAYPROVIDER

Setup entity for payment gateways. Defines the connection to a payment gateway Apex adapter.

For more information, see PaymentGatewayProvider in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApexAdapterId	Class ID	reference		18		
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		255		
Id	Payment Gateway Provider ID	id		18		
IdempotencySupported	Idempotency Supported	picklist		255		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MasterLabel	Label	string		255		
NamespacePrefix	Namespace Prefix	string		15		
SystemModstamp	System Modstamp	datetime				

PAYMENTGROUP

Top-level object that groups of all the payment transactions that have been processed an order or contract. PaymentGroup is a standalone object, so it isn't required for users to execute payment transactions (authorizations, captures, refunds, and sales).

For more information, see PaymentGroup in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Payment Group ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PaymentGroupNumber`	Payment Group Number	string		255		
`SourceObjectId`	Order ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PAYMENTLINEINVOICE

Represents a payment allocated to or unallocated from an invoice.

For more information, see PaymentLineInvoice in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Amount	Amount	currency			18	2
AppliedDate	Applied Date	datetime				
AssociatedAccountId	Account ID	reference		18		
AssociatedPaymentLineId	Payment Line Invoice ID	reference		18		
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Date	Date	datetime				
EffectiveDate	Effective Date	datetime				
EffectiveImpactAmount	Effective Impact Amount	currency			18	2
HasBeenUnapplied	Has Been Unapplied	picklist		255		
Id	Payment Line Invoice ID	id		18		
ImpactAmount	Impact Amount	currency			18	2
InvoiceId	Invoice ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
PaymentBalance	Payment Balance	currency			18	2
PaymentId	Payment ID	reference		18		
PaymentLineInvoiceNumber	Payment Line Invoice Number	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		
UnappliedDate	Unapplied Date	datetime				

PAYMENTMETHOD

The method that a buyer uses to compensate the seller of a good or service. Common payment methods include cash, checks, credit or debit cards, money orders, bank transfers, and online payment services.

For more information, see PaymentMethod in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Comments	Comments	textarea		32000		
CompanyName	Company Name	string		255		
CreatedById	User ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Payment Method ID	id		18		
ImplementorType	Implementor Type	string		255		
IsAutoPayEnabled	Auto Pay	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	User ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
NickName	Nickname	string		255		
PaymentMethodAddress	Payment Method Address	address				
PaymentMethodCity	City	string		40		
PaymentMethodCountry	Country	string		80		
PaymentMethodGeocodeAccuracy	GeoCode Accuracy	picklist		255		
PaymentMethodLatitude	Latitude	double			18	15
PaymentMethodLongitude	Longitude	double			18	15
PaymentMethodPostalCode	Postal Code	string		20		
PaymentMethodState	State	string		80		
PaymentMethodStreet	Street	textarea		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

PCMTEMSSNFCTRSET

Represents a collection of emission factors that are used to convert spent amounts in procurement data to carbon emissions in tonnes of carbon dioxide equivalent (tCO_2e).

For more information, see PcmtEmssnFctrSet in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrencyCode`	Currency Code	picklist		255		
`Description`	Description	string		255		
`EmissionFactorDataSource`	Emissions Factor Data Source	textarea		32000		
`EmissionFactorUpdateYear`	Emissions Factor Update Year	picklist		255		
`Id`	Procurement Emissions Factor Set ID	id		18		
`IsComplete`	Complete	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PCMTEMSSNFCTRSETFEED

Feed tracking for PcmtEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PCMTEMSSNFCTRSETHISTORY

History for tracked fields of PcmtEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Procurement Emissions Factor Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PcmtEmssnFctrSetId`	Procurement Emissions Factor Set ID	reference		18		

PCMTEMSSNFCTRSETITEM

Represents the individual emissions factors for scope 3 procurement analysis. Here, the environmentally extended input-output (EEIO) model outputs are used as the emission factors in units of tCO_2e per million spent (currency not specified).

For more information, see PcmtEmssnFctrSetItem in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EconomicSector	Economic Sector	string		255		
EconomicSectorCategory	Economic Sector Category	string		255		
EconomicSectorCode	Economic Sector Code	string		255		
Id	Procurement Emissions Factor Set Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PcmtEmssnFctrSetId	Procurement Emissions Factor Set ID	reference		18		
Scope3GhgCategory	Scope 3 GHG Category	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotScope3EmssnPerMillionSpent	Total Scope 3 Emissions per Million Spent (tCO2e)	double			18	8

PCMTEMSSNFCTRSETITEMFEED

Feed tracking for PcmtEmssnFctrSetItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PCMTEMSSNFCTRSETITEMHISTORY

History for tracked fields of PcmtEmssnFctrSetItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Procurement Emissions Factor Set Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PcmtEmssnFctrSetItemId`	Procurement Emissions Factor Set Item ID	reference		18		

PCMTEMSSNFCTRSETSHARE

Sharing for PcmtEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PENDINGSERVICEROUTING

Represents the routing details of a work item that's waiting to be routed or assigned.

For more information, see PendingServiceRouting in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BotId	Bot ID	reference		18		
CapacityPercentage	Capacity Percentage	percent			5	2
CapacityWeight	Capacity Weight	double			10	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomRequestedDateTime	Custom Requested Date	datetime				
DropAdditionalSkillsTimeout	Drop Additional Skills Time-Out	int	9			
GroupId	Group ID	reference		18		
Id	Pending Service Routing ID	id		18		
IsDeleted	Deleted	boolean				
IsOwnerChangeInitiated	Is Owner Change Initiated	boolean				
IsPreferredUserRequired	Is Preferred User Required	boolean				
IsPushAttempted	Is Push Attempted	boolean				
IsPushed	Is Pushed	boolean				
IsReadyForRouting	Is Ready For Routing	boolean				
IsStatusChangeInitiated	Is Status Change Initiated	boolean				
IsTransfer	Is Transfer	boolean				
LastDeclinedAgentSession	Last Declined Agent Session	string		200		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PreferredUserId	User ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PushTimeout	Push Time-Out	int	9			
QueueId	Queue ID	reference		18		
RoutingModel	Queue's Routing Model	picklist		255		
RoutingPriority	Routing Priority	int	9			
RoutingType	Routing Type	picklist		255		
Serial	Serial	int	9			
ServiceChannelId	Service Channel ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WorkItemId	WorkItem ID	reference		18		

PENDINGSERVICEROUTINGINTERACTIONINFO

Represents PendingServiceRouting interaction information that's used when work is routed to an agent. For a screen pop, it specifies which records to open when work is routed to an agent from a specific channel.

For more information, see PendingServiceRoutingInteractionInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Pending Service Routing Interaction Information ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsFocused`	Is Focused	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`PendingServiceRoutingId`	Pending Service Routing ID	reference		18		
`PrimaryRecordId`	Primary Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetObjectId`	Target Object ID	reference		18		

PENDINGSERVICEROUTINGSHARE

Sharing for PendingServiceRouting.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERCENTILEBSDCAREFEEAGREEMENT

Specifies the payment terms for contracts of Percentile Based Care Fee Agreement.

For more information, see PercentileBsdCareFeeAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BracketInformation	Bracket Information	string		100		
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FifthBracketPrice	Fifth Bracket Price	currency			18	0
FirstBracketPrice	First Bracket Price	currency			18	0
FourthBracketPrice	Fourth Bracket Price	currency			18	0
Id	Percentile Based Care Fee Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ProcedureCodeDescription	Procedure Code Description	string		100		
ProcedureCodeId	Code Set Bundle ID	reference		18		
RelativeValueUnit	Relative Value Unit	double			18	0
SecondBracketPrice	Second Bracket Price	currency			18	0
StandardPrice	Standard Price	currency			18	0
SystemModstamp	System Modstamp	datetime				
ThirdBracketPrice	Third Bracket Price	currency			18	0

PERCENTILEBSDCAREFEEAGREEMENTFEED

Feed tracking for PercentileBsdCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PERCENTILEBSDCAREFEEAGREEMENTHISTORY

History for tracked fields of PercentileBsdCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Percentile Based Care Fee Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PercentileBsdCareFeeAgreementId	Percentile Based Care Fee Agreement ID	reference		18		

PERIOD

Represents a fiscal period defined in FiscalYearSettings.

For more information, see Period in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`EndDate`	End Date	date				
`FiscalYearSettingsId`	Fiscal Year Settings ID	reference		18		
`FullyQualifiedLabel`	Fully Qualified Label	string		80		
`Id`	Period ID	id		18		
`IsForecastPeriod`	Is Forecast Period	boolean				
`Number`	Number	int	9			
`PeriodLabel`	Period Name	picklist		255		
`QuarterLabel`	Quarter Name	picklist		255		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		40		

PERMISSIONSET

Represents a set of permissions that's used to grant more access to one or more users without changing their profile or reassigning profiles.

For more information, see PermissionSet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
HasActivationRequired	Session Activation Required	boolean				
Id	PermissionSet ID	id		18		
IsCustom	Is Custom	boolean				
IsOwnedByProfile	Is Owned By Profile	boolean				
Label	Permission Set Label	string		80		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LicenseId	License ID	reference		18		
Name	Permission Set Name	string		80		
NamespacePrefix	Namespace Prefix	string		15		
PermissionSetGroupId	PermissionSetGroup ID	reference		18		
PermissionsAECommunityAccess	Use Assessment Envelope objects via Experience Cloud sites	boolean				
PermissionsAICreateInsightObjects	Create AI Insight Objects	boolean				
PermissionsAIViewInsightObjects	View AI Insight Objects	boolean				
PermissionsAccessCMC	Access Experience Management	boolean				
PermissionsAccessContentBuilder	Access drag-and-drop content builder	boolean				
PermissionsAccessFinancialAccounts	Financial Accounts User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsAccessToServiceProcess	Service Process User	boolean				
PermissionsAccountSwitcherUser	Account Switcher User	boolean				
PermissionsActionPlansUserAccess	Permission to access the Action Plans feature	boolean				
PermissionsActivateContract	Activate Contracts	boolean				
PermissionsActivateOrder	Activate Orders	boolean				
PermissionsActivitiesAccess	Access Activities	boolean				
PermissionsAdAnalyticsRemoteConnections	Add CRM Analytics Remote Connections	boolean				
PermissionsAddDirectMessageMembers	Add People to Direct Messages	boolean				
PermissionsAddWaveNotificationRecipients	Add Recipients to CRM Analytics Notifications	boolean				
PermissionsAdoptionAnalyticsUser	Access Adoption Analytics Templates and Apps	boolean				
PermissionsAllowAIAccelerator	View AI Accelerator Predictions.	boolean				
PermissionsAllowEmailIC	Email-Based Identity Verification Option	boolean				
PermissionsAllowLightningLogin	Lightning Login User	boolean				
PermissionsAllowViewEditConvertedLeads	View and Edit Converted Leads	boolean				
PermissionsApexRestServices	Apex REST Services	boolean				
PermissionsApiEnabled	API Enabled	boolean				
PermissionsApiUserOnly	Api Only User	boolean				
PermissionsAssessmentPlatformUser	Discovery Framework Platform User	boolean				
PermissionsAssignPermissionSets	Assign Permission Sets	boolean				
PermissionsAssignTopics	Assign Topics	boolean				
PermissionsAssociationEngineUserAccess	User license to access Record Association Builder in Financial Services Cloud.	boolean				
PermissionsAuthorApex	Author Apex	boolean				
PermissionsAutomaticActivityCapture	Use Einstein Activity Capture	boolean				
PermissionsAutonomousAnalyticsPrivacy	Manage Autonomous Insights Data Privacy	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsB2BMarketingAnalyticsUser	Create B2B Marketing Analytics Apps	boolean				
PermissionsBVCommunityAccess	Use objects in the Benefit Verification data model via Experience Cloud sites	boolean				
PermissionsBranchManagementUserAccess	User license to access Branch Management in Financial Services Cloud.	boolean				
PermissionsBulkApiHardDelete	Bulk API Hard Delete	boolean				
PermissionsBulkMacrosAllowed	Run Macros on Multiple Records	boolean				
PermissionsBypassMFAForUiLogins	Waive Multi-Factor Authentication for Exempt Users	boolean				
PermissionsCMSECEAuthoringAccess	Migrate Enablement Content	boolean				
PermissionsCampaignInfluence2	Campaign Influence	boolean				
PermissionsCanApproveFeedPost	Can Approve Feed Post and Comment	boolean				
PermissionsCanEditDataPrepRecipe	Edit Dataset Recipes	boolean				
PermissionsCanEditPrompts	Manage Prompts	boolean				
PermissionsCanInsertFeedSystemFields	Insert System Field Values for Chatter Feeds	boolean				
PermissionsCanManageMaps	Manage CRM Analytics Custom Maps	boolean				
PermissionsCanRunAnalysis	Can Run Einstein Discovery for Reports	boolean				
PermissionsCanUseNewDashboardBuilder	Drag-and-Drop Dashboard Builder	boolean				
PermissionsCanVerifyComment	Verify Answers to Chatter Questions	boolean				
PermissionsChangeDashboardColors	Change Dashboard Colors	boolean				
PermissionsChatterComposeUiCodesnippet	Allow Inclusion of Code Snippets from UI	boolean				
PermissionsChatterEditOwnPost	Edit My Own Posts	boolean				
PermissionsChatterEditOwnRecordPost	Edit Posts on Records I Own	boolean				
PermissionsChatterFileLink	Create Public Links	boolean				
PermissionsChatterInternalUser	Chatter Internal User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsChatterInviteExternalUsers	Invite Customers To Chatter	boolean				
PermissionsChatterOwnGroups	Create and Own New Chatter Groups	boolean				
PermissionsClientSecretRotation	Allow consumer key and secret rotation	boolean				
PermissionsCloseConversations	Close Conversation Threads	boolean				
PermissionsConfigCompliantDataSharing	Configure Compliant Data Sharing	boolean				
PermissionsConfigCustomRecs	Configure Custom Recommendations	boolean				
PermissionsConfigureDataspaceScope	Configure Dataspace Scope	boolean				
PermissionsConnectOrgToEnvironmentHub	Connect Organization to Environment Hub	boolean				
PermissionsConsentApiUpdate	Update Consent Preferences Using REST API	boolean				
PermissionsContentAdministrator	Manage Salesforce CRM Content	boolean				
PermissionsContentHubUser	Files Connect Cloud	boolean				
PermissionsContentWorkspaces	Access Libraries	boolean				
PermissionsConvertLeads	Convert Leads	boolean				
PermissionsCreateAuditFields	Set Audit Fields upon Record Creation	boolean				
PermissionsCreateCustomizeDashboards	Create and Customize Dashboards	boolean				
PermissionsCreateCustomizeFilters	Create and Customize List Views	boolean				
PermissionsCreateCustomizeReports	Create and Customize Reports	boolean				
PermissionsCreateDashboardFolders	Create Dashboard Folders	boolean				
PermissionsCreateLtngTempFolder	Create Folders for Lightning Email Templates	boolean				
PermissionsCreateLtngTempInPub	Manage Public Lightning Email Templates	boolean				
PermissionsCreatePackaging	Create AppExchange Packages	boolean				
PermissionsCreateReportFolders	Create Report Folders	boolean				
PermissionsCreateReportInLightning	Report Builder (Lightning Experience)	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsCreateTopics	Create Topics	boolean				
PermissionsCreateUpdateSDDataset	Create and Update Einstein Discovery Datasets	boolean				
PermissionsCreateUpdateSDDStory	Create and Update Einstein Discovery Stories	boolean				
PermissionsCreateWorkBadgeDefinition	Create custom Badge Definitions	boolean				
PermissionsCreateWorkspaces	Create Libraries	boolean				
PermissionsCustomMobileAppsAccess	Access Custom Mobile Apps	boolean				
PermissionsCustomSidebarOnAllPages	Show Custom Sidebar On All Pages	boolean				
PermissionsCustomizeApplication	Customize Application	boolean				
PermissionsDataExport	Weekly Data Export	boolean				
PermissionsDataPipelinesAppConsumer	Permission to access Data Pipelines license	boolean				
PermissionsDelegatedPortalUserAdmin	Delegated External User Administrator	boolean				
PermissionsDelegatedTwoFactor	Manage Multi-Factor Authentication in User Interface	boolean				
PermissionsDeleteActivatedContract	Delete Activated Contracts	boolean				
PermissionsDeleteTopics	Delete Topics	boolean				
PermissionsDistributeFromPersWksp	Create Content Deliveries	boolean				
PermissionsDocGenDesigner	Enables Designers to create Document Templates.	boolean				
PermissionsDocGenRuntimeCCUser	Enables Customers and Partners to generate documents via communities.	boolean				
PermissionsDocGenRuntimeUser	Enables Business users to generate documents.	boolean				
PermissionsDocumentAutomationUserAccess	User license to access IntelligentDocumentAutomation in Financial Services Cloud.	boolean				
PermissionsDocumentChecklistUserAccess	User license to access the Document Checklist features.	boolean				
PermissionsEditActivatedOrders	Edit Activated Orders	boolean				
PermissionsEditBillingInfo	Manage Billing	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsEditBrandTemplates	Manage Letterheads	boolean				
PermissionsEditCaseComments	Edit Case Comments	boolean				
PermissionsEditEvent	Edit Events	boolean				
PermissionsEditHtmlTemplates	Edit HTML Templates	boolean				
PermissionsEditMyDashboards	Edit My Dashboards	boolean				
PermissionsEditMyReports	Edit My Reports	boolean				
PermissionsEditOppLineItemUnitPrice	Edit Opportunity Product Sales Price	boolean				
PermissionsEditPublicDocuments	Manage Public Documents	boolean				
PermissionsEditPublicFilters	Manage Public List Views	boolean				
PermissionsEditPublicTemplates	Manage Public Classic Email Templates	boolean				
PermissionsEditReadonlyFields	Edit Read Only Fields	boolean				
PermissionsEditTask	Edit Tasks	boolean				
PermissionsEditTopics	Edit Topics	boolean				
PermissionsEmailAdministration	Email Administration	boolean				
PermissionsEmailMass	Mass Email	boolean				
PermissionsEmailSingle	Send Email	boolean				
PermissionsEmailTemplateManagement	Manage Email Templates	boolean				
PermissionsEnableBCTransactionPolling	Enable blockchain transaction polling API	boolean				
PermissionsEnableCommunityAppLauncher	Show App Launcher in Experience Cloud Sites	boolean				
PermissionsEnableIPFSUpload	Allow blockchain data upload	boolean				
PermissionsEnableNotifications	Send Outbound Messages	boolean				
PermissionsExportReport	Export Reports	boolean				
PermissionsFHIRCmtyAccess	Use objects in the Clinical data model via Experience Cloud sites	boolean				
PermissionsFSCAlertFrameworkUserAccess	Access Record Alerts	boolean				
PermissionsFSCArcGraphCommunityUser	Access Actionable Relationship Center for partner users	boolean				
PermissionsFSCInsClaimMgtPlatformUser	Insurance Claim Management Platform User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsFSCInsPolicyAdminPlatformUser	Insurance Policy Administration Platform User	boolean				
PermissionsFSCInsuranceCmpCntyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsuranceCmpExtOnlyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsurancePlatformUser	Access Insurance Objects	boolean				
PermissionsFeedPinning	Pin Posts in Feeds	boolean				
PermissionsFinancialServices2UserAccess	Access Actionable Relationship Center	boolean				
PermissionsFlowUFLRequired	Require Flow User Feature License	boolean				
PermissionsForceTwoFactor	Multi-Factor Authentication for User Interface Logins	boolean				
PermissionsGetSmartDataDiscovery	View Einstein Discovery Recommendations	boolean				
PermissionsGetSmartDataDiscoveryExternal	View Einstein Discovery Recommendations Via Connect API	boolean				
PermissionsGiveRecognitionBadge	Give Recognition Badges in Experience Builder Sites	boolean				
PermissionsGovernNetworks	Manage Experiences	boolean				
PermissionsHasUnlimitedNBAExecutions	User Has Unlimited Next Best Action Strategy Executions	boolean				
PermissionsHcAdvancedTherapyUser	Manage Advanced Therapy Orchestration features	boolean				
PermissionsHcPnmSiteUser	Use objects in the Provider Network Management data model via Experience Cloud sites	boolean				
PermissionsHeadlessCMSAccess	Enable Salesforce CMS Integration	boolean				
PermissionsHealthCloudCntyAccess	Provides access to Health Cloud data for Community users.	boolean				
PermissionsHealthCloudUtilizationMgtUser	Manage Health Cloud Utilization Management	boolean				
PermissionsHideReadByList	Hide the Seen By List	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsIdentityConnect	Use Identity Connect	boolean				
PermissionsIdentityEnabled	Use Identity Features	boolean				
PermissionsIdentityVerificationUserAccess	Permission to access Identity Verification	boolean				
PermissionsImportCustomObjects	Import Custom Objects	boolean				
PermissionsImportLeads	Import Leads	boolean				
PermissionsImportPersonal	Import Personal Contacts	boolean				
PermissionsInboundMigrationToolsUser	Deploy Change Sets	boolean				
PermissionsIndustryMilestonePlatformUser	Access Life Events or Business Milestones Component	boolean				
PermissionsInsightsAppAdmin	Manage CRM Analytics	boolean				
PermissionsInsightsAppDashboardEditor	Create and Edit CRM Analytics Dashboards	boolean				
PermissionsInsightsAppEltEditor	Edit CRM Analytics Dataflows	boolean				
PermissionsInsightsAppUploadUser	Upload External Data to CRM Analytics	boolean				
PermissionsInsightsAppUser	Use CRM Analytics	boolean				
PermissionsInsightsCreateApplication	Create CRM Analytics Apps	boolean				
PermissionsInstallPackaging	Download AppExchange Packages	boolean				
PermissionsInsuranceGroupBenefitsUser	Insurance Group Benefits User	boolean				
PermissionsInterestTaggingUserAccess	Access Interest Tags for Financial Services Cloud.	boolean				
PermissionsIsSsoEnabled	Is Single Sign-On Enabled	boolean				
PermissionsIsotopeAccess	Salesforce Anywhere on Mobile	boolean				
PermissionsIsotopeCToCUser	Salesforce Anywhere Integration Access	boolean				
PermissionsIsotopeLEX	Salesforce Anywhere in Lightning Experience	boolean				
PermissionsKycPlatformUser	Identity Verification and Screening User	boolean				
PermissionsMEndMessagingSessionUserPerm	End Messaging Session	boolean				
PermissionsMOutboundMessagingUserPerm	Agent Initiated Outbound Messaging	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsLearningManager	Manage Learning	boolean				
PermissionsLightningConsoleAllowedForUser	Lightning Console User	boolean				
PermissionsLightningExperienceUser	Lightning Experience User	boolean				
PermissionsListEmailSend	Allow sending of List Emails	boolean				
PermissionsLtngPromoReservedUIUserPerm	Remain in Salesforce Classic	boolean				
PermissionsManageAnalyticSnapshots	Manage Reporting Snapshots	boolean				
PermissionsManageAuthProviders	Manage Auth. Providers	boolean				
PermissionsManageBusinessHourHolidays	Manage Business Hours Holidays	boolean				
PermissionsManageC360AConnections	Connect Org to Customer Data Platform	boolean				
PermissionsManageCMS	Create CMS Workspaces and Channels	boolean				
PermissionsManageCallCenters	Manage Call Centers	boolean				
PermissionsManageCases	Manage Cases	boolean				
PermissionsManageCategories	Manage Categories	boolean				
PermissionsManageCertificates	Manage Certificates	boolean				
PermissionsManageChatterMessages	Manage Chatter Messages and Direct Messages	boolean				
PermissionsManageContentPermissions	Manage Content Permissions	boolean				
PermissionsManageContentProperties	Manage Content Properties	boolean				
PermissionsManageContentTypes	Manage record types and layouts for Files	boolean				
PermissionsManageCssUsers	Manage Customer Users	boolean				
PermissionsManageCustomPermissions	Manage Custom Permissions	boolean				
PermissionsManageCustomReportTypes	Manage Custom Report Types	boolean				
PermissionsManageCustomerExperienceAnalytics	Manage Customer Experience Analytics	boolean				
PermissionsManageDashboardsInPubFolders	Manage Dashboards in Public Folders	boolean				
PermissionsManageDataCategories	Manage Data Categories	boolean				
PermissionsManageDataIntegrations	Manage Data Integrations	boolean				
PermissionsManageDataProcessingEngine	Allow users to access the features of Data Processing	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
	Engine to transform data that's available in your Salesforce org.					
PermissionsManageDataspaceScope	Manage Dataspace Scope	boolean				
PermissionsManageDynamicDashboards	Manage Dynamic Dashboards	boolean				
PermissionsManageEmailClientConfig	Manage Email Client Configurations	boolean				
PermissionsManageEntitlements	Manage Entitlements	boolean				
PermissionsManageExchangeConfig	Manage Lightning Sync	boolean				
PermissionsManageExternalConnections	Allow user to modify Private Connections	boolean				
PermissionsManageHcProviderNtwMgmt	Manage Health Cloud Provider Network Management	boolean				
PermissionsManageHealthCheck	Manage Health Check	boolean				
PermissionsManageHealthCloud	Manage Health Cloud	boolean				
PermissionsManageHealthCloudFinancialData	Manage Health Cloud Financial Data	boolean				
PermissionsManageHubConnections	Connect Org to Customer 360 Data Manager	boolean				
PermissionsManageIndustriesVisit	Manage Industries Visit	boolean				
PermissionsManageInteraction	Manage Flow	boolean				
PermissionsManageInternalUsers	Manage Internal Users	boolean				
PermissionsManageIpAddresses	Manage IP Addresses	boolean				
PermissionsManageLeads	Manage Leads	boolean				
PermissionsManageLearningReporting	Manage Learning Reporting	boolean				
PermissionsManageLoginAccessPolicies	Manage Login Access Policies	boolean				
PermissionsManageLoyaltyAnalytics	Manage Loyalty Analytics	boolean				
PermissionsManageMobile	Manage Mobile Configurations	boolean				
PermissionsManageNetworks	Create and Set Up Experiences	boolean				
PermissionsManageOrchInstsAndWorkItems	Manage Orchestration Runs and Work Items	boolean				
PermissionsManagePartners	Manage External Users	boolean				
PermissionsManagePasswordPolicies	Manage Password Policies	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageProfilesPermissionsets	Manage Profiles and Permission Sets	boolean				
PermissionsManagePropositions	Manage Next Best Action Recommendations	boolean				
PermissionsManagePvtRptsAndDashbds	Manage All Private Reports and Dashboards	boolean				
PermissionsManageQuotas	Manage Quotas	boolean				
PermissionsManageRecommendationStrategies	Manage Next Best Action Strategies	boolean				
PermissionsManageReleaseUpdates	Manage Release Updates	boolean				
PermissionsManageRemoteAccess	Manage Connected Apps	boolean				
PermissionsManageReportsInPubFolders	Manage Reports in Public Folders	boolean				
PermissionsManageRoles	Manage Roles	boolean				
PermissionsManageSandboxes	Manage Sandboxes	boolean				
PermissionsManageSessionPermissionSets	Manage Session Permission Set Activations	boolean				
PermissionsManageSharing	Manage Sharing	boolean				
PermissionsManageSmartDataDiscovery	Manage Einstein Discovery	boolean				
PermissionsManageSmartDataDiscoveryModel	Can Deploy and Manage Einstein Discovery predictions	boolean				
PermissionsManageSolutions	Manage Published Solutions	boolean				
PermissionsManageSubscriptions	Manage CRM Analytics Subscriptions	boolean				
PermissionsManageSurveys	Manage Surveys	boolean				
PermissionsManageSynonyms	Manage Synonyms	boolean				
PermissionsManageTCRMforComms	Create and manage TCRM for Comms	boolean				
PermissionsManageTemplatedApp	Manage CRM Analytics Templated Apps	boolean				
PermissionsManageTranslation	Manage Translation	boolean				
PermissionsManageTrustMeasures	Manage Trust Measures	boolean				
PermissionsManageTwoFactor	Manage Multi-Factor Authentication in API	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageUnlistedGroups	Manage Unlisted Groups	boolean				
PermissionsManageUsers	Manage Users	boolean				
PermissionsMassInlineEdit	Mass Edits from Lists	boolean				
PermissionsMergeTopics	Merge Topics	boolean				
PermissionsMicrobatching	Use Micro-Batching to Create Records	boolean				
PermissionsModerateChatter	Moderate Chatter	boolean				
PermissionsModerateNetworkFeeds	Moderate Experience Cloud Site Feeds	boolean				
PermissionsModerateNetworkFiles	Moderate Files in Experience Cloud Sites	boolean				
PermissionsModerateNetworkMessages	Moderate Chatter Messages in Experience Cloud Sites	boolean				
PermissionsModerateNetworkUsers	Moderate Experience Cloud Site Users	boolean				
PermissionsModifyAllData	Modify All Data	boolean				
PermissionsModifyDataClassification	Modify Data Classification	boolean				
PermissionsModifyMetadata	Modify Metadata Through Metadata API Functions	boolean				
PermissionsMortgageUserAccess	User license to access Mortgage in Financial Services Cloud.	boolean				
PermissionsMultiStepSchedulingUser	Manage Multi-Step Scheduling features	boolean				
PermissionsNativeWebviewScrolling	Salesforce Mobile App: Native scrolling on webviews	boolean				
PermissionsNewReportBuilder	Report Builder	boolean				
PermissionsOmniStudioDesigner	Enables admin/developer to create new OS/DR/VIP instances.	boolean				
PermissionsOmniStudioRuntime	Enables business users to execute OmniScripts, DRs, Cards, etc, in employee facing apps.	boolean				
PermissionsOmniStudioRuntimeCC	Enables consumers and partners to execute OmniScripts, DRs, Cards through a Community or off platform.	boolean				
PermissionsOutboundMigrationToolsUser	Create and Upload Change Sets	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsOverrideForecasts	Override Forecasts	boolean				
PermissionsPackaging2	Create and Update Second-Generation Packages	boolean				
PermissionsPackaging2Delete	Delete Second-Generation Packages	boolean				
PermissionsPasswordNeverExpires	Password Never Expires	boolean				
PermissionsPortalSuperUser	Portal Super User	boolean				
PermissionsPreventClassicExperience	Hide Option to Switch to Salesforce Classic	boolean				
PermissionsPrivacyDataAccess	Allow user to access privacy data	boolean				
PermissionsProviderSearchUserAccess	Permission to access internal entities for provider search	boolean				
PermissionsPublishPackaging	Upload AppExchange Packages	boolean				
PermissionsQueryAllFiles	Query All Files	boolean				
PermissionsQuipMetricsAccess	Quip Metrics	boolean				
PermissionsQuipUserEngagementMetrics	Quip User Engagement Metrics	boolean				
PermissionsRecordVisibilityAPI	Enable RecordVisibility API	boolean				
PermissionsRemoveDirectMessageMembers	Remove People from Direct Messages	boolean				
PermissionsResetPasswords	Reset User Passwords and Unlock Users	boolean				
PermissionsRunFlow	Run Flows	boolean				
PermissionsRunReports	Run Reports	boolean				
PermissionsSDCommunityAccess	Use objects in the Social Determinants data model via Experience Cloud sites	boolean				
PermissionsSalesConsole	Sales Console	boolean				
PermissionsSandboxTestingInCommunityApp	Test Sandboxes in Mobile Publisher for Experience Cloud	boolean				
PermissionsScheduleJob	Schedule Dashboards	boolean				
PermissionsScheduleReports	Schedule Reports	boolean				
PermissionsSelectFilesFromSalesforce	Select Files from Salesforce	boolean				
PermissionsSendAnnouncementEmails	Send announcement emails	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsSendCustomNotifications	Send Custom Notifications	boolean				
PermissionsSendSitRequests	Send Stay-in-Touch Requests	boolean				
PermissionsServiceExcellencePlatformUser	Service Excellence Platform User	boolean				
PermissionsShareFilesWithNetworks	Share Files with People in Experience Cloud sites	boolean				
PermissionsShareSmartDataDiscoveryStory	Share Einstein Discovery Stories	boolean				
PermissionsShowCompanyNameAsUserBadge	Show Company Name as Site Role	boolean				
PermissionsSkipIdentityConfirmation	Skip Device Activation at Login	boolean				
PermissionsSlackCibUser	Financial Services Cloud for Slack User	boolean				
PermissionsSmartDataDiscoveryForCommunity	Smart Data Discovery for experience users	boolean				
PermissionsSolutionImport	Import Solutions	boolean				
PermissionsSonicConsumer	Use Data Pipelines Base	boolean				
PermissionsStoAutomaticActivityCapture	Use Einstein Activity Capture Standard	boolean				
PermissionsStoryOnDSWithPredicate	Ignore predicate when creating story from dataset	boolean				
PermissionsSubmitMacrosAllowed	Manage Macros Users Can't Undo	boolean				
PermissionsSubscribeDashboardRolesGrps	Subscribe to Dashboards: Send to Groups and Roles	boolean				
PermissionsSubscribeDashboardToOtherUsers	Subscribe to Dashboards: Add Recipients	boolean				
PermissionsSubscribeReportRolesGrps	Subscribe to Reports: Send to Groups and Roles	boolean				
PermissionsSubscribeReportToOtherUsers	Subscribe to Reports: Add Recipients	boolean				
PermissionsSubscribeReportsRunAsUser	Subscribe to Reports: Set Running User	boolean				
PermissionsSubscribeToLightningDashboards	Subscribe to Dashboards	boolean				
PermissionsSubscribeToLightningReports	Subscribe to Reports	boolean				
PermissionsTraceXdsQueries	Access Tracer for External Data Sources	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsTransactionalEmailSend	Send Non-Commercial Email	boolean				
PermissionsTransferAnyCase	Transfer Cases	boolean				
PermissionsTransferAnyEntity	Transfer Record	boolean				
PermissionsTransferAnyLead	Transfer Leads	boolean				
PermissionsTwoFactorApi	Multi-Factor Authentication for API Logins	boolean				
PermissionsUpdateWithInactiveOwner	Update Records with Inactive Owners	boolean				
PermissionsUseAssistantDialog	Instant Actionable Results	boolean				
PermissionsUseCompliantDataSharing	Use Compliant Data Sharing	boolean				
PermissionsUseCustomerExperienceAnalytics	Use Customer Experience Analytics	boolean				
PermissionsUseLoyaltyAnalytics	Use Loyalty Analytics	boolean				
PermissionsUseMySearch	Einstein Search	boolean				
PermissionsUseQuerySuggestions	Natural Language Search	boolean				
PermissionsUseSmartDataDiscovery	Use Einstein Discovery	boolean				
PermissionsUseSubscriptionEmails	Subscribe to CRM Analytics Assets	boolean				
PermissionsUseTCRMforComms	View TCRM for Comms	boolean				
PermissionsUseTeamReassignWizards	Use Team Reassignment Wizards	boolean				
PermissionsUseTemplatedApp	Use CRM Analytics Templated Apps	boolean				
PermissionsUseWebLink	Allow Access to Customized Actions	boolean				
PermissionsUtilMgmtExperienceCloudUser	Provides access to Utilization Management features and objects from an Experience Cloud site.	boolean				
PermissionsViewAllActivities	View All Activities	boolean				
PermissionsViewAllCustomSettings	View All Custom Settings	boolean				
PermissionsViewAllData	View All Data	boolean				
PermissionsViewAllForecasts	View All Forecasts	boolean				
PermissionsViewAllForeignKeyNames	View All Lookup Record Names	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsViewAllProfiles	View All Profiles	boolean				
PermissionsViewAllUsers	View All Users	boolean				
PermissionsViewContent	View Content in Portals	boolean				
PermissionsViewCustomerSentiment	View Customer Insights	boolean				
PermissionsViewDataAssessment	Access to view Data Assessment	boolean				
PermissionsViewDataCategories	View Data Categories in Setup	boolean				
PermissionsViewDeveloperName	View DeveloperName	boolean				
PermissionsViewEncryptedData	View Encrypted Data	boolean				
PermissionsViewEventLogFiles	View Event Log Files	boolean				
PermissionsViewGlobalHeader	View Global Header	boolean				
PermissionsViewHealthCheck	View Health Check	boolean				
PermissionsViewHelpLink	View Help Link	boolean				
PermissionsViewMLModels	Allow users to view MLModels and related Entities	boolean				
PermissionsViewMyTeamsDashboards	View My Team's Dashboards	boolean				
PermissionsViewOnlyEmbeddedAppUser	Access to View-Only Licensed Templates and Apps	boolean				
PermissionsViewPrivateStaticResources	View Private Static Resources	boolean				
PermissionsViewPublicDashboards	View Dashboards in Public Folders	boolean				
PermissionsViewPublicReports	View Reports in Public Folders	boolean				
PermissionsViewRestrictionAndScopingRules	View Restriction and Scoping Rules	boolean				
PermissionsViewRoles	View Roles and Role Hierarchy	boolean				
PermissionsViewSetup	View Setup and Configuration	boolean				
PermissionsViewTrustMeasures	View Trust Measures	boolean				
PermissionsViewUserPII	View Concealed Field Data	boolean				
PermissionsWaveManagePrivateAssetsUser	Manage CRM Analytics Private Assets	boolean				
PermissionsWaveTabularDownload	Download CRM Analytics Data	boolean				
PermissionsWaveTrendReports	Trend Report Data in CRM Analytics	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Permission Set Type	picklist		255		

PERMISSIONSETASSIGNMENT

Represents the association between a User and a PermissionSet.

For more information, see PermissionSetAssignment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssigneeId`	Assignee ID	reference		18		
`ExpirationDate`	Expires On	datetime				
`Id`	PermissionSetAssignment ID	id		18		
`IsActive`	Is Active	boolean				
`PermissionSetGroupId`	PermissionSetGroup ID	reference		18		
`PermissionSetId`	PermissionSet ID	reference		18		
`SystemModstamp`	Date Assigned	datetime				

PERMISSIONSETLICENSE

Represents a license that's used to enable one or more users to receive a specified permission without changing their profile or reassigning profiles. You can use permission set licenses to grant access, but not to deny access.

For more information, see PermissionSetLicense in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Developer Name	string		80		
ExpirationDate	Expiration Date	date				
Id	Permission Set License ID	id		18		
IsAvailableForIntegrations	Is License Available for Integrations?	boolean				
IsDeleted	Deleted	boolean				
IsSupplementLicense	Is Supplement License	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LicenseExpirationPolicy	License Expiration Policy	picklist		255		
MasterLabel	Permission Set License Label	string		80		
MaximumPermissionsAECommunityAccess	Use Assessment Envelope objects via Experience Cloud sites	boolean				
MaximumPermissionsAICreateInsightObjects	Create AI Insight Objects	boolean				
MaximumPermissionsAIViewInsightObjects	View AI Insight Objects	boolean				
MaximumPermissionsAccessCMC	Access Experience Management	boolean				
MaximumPermissionsAccessContentBuilder	Access drag-and-drop content builder	boolean				
MaximumPermissionsAccessFinancialAccounts	Financial Accounts User	boolean				
MaximumPermissionsAccessToServiceProcess	Service Process User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsAccountSwitcherUser	Account Switcher User	boolean				
MaximumPermissionsActionPlansUserAccess	Permission to access the Action Plans feature	boolean				
MaximumPermissionsActivateContract	Activate Contracts	boolean				
MaximumPermissionsActivateOrder	Activate Orders	boolean				
MaximumPermissionsActivitiesAccess	Access Activities	boolean				
MaximumPermissionsAddAnalyticsRemoteConnections	Add CRM Analytics Remote Connections	boolean				
MaximumPermissionsAddDirectMessageMembers	Add People to Direct Messages	boolean				
MaximumPermissionsAddWaveNotificationRecipients	Add Recipients to CRM Analytics Notifications	boolean				
MaximumPermissionsAdoptionAnalyticsUser	Access Adoption Analytics Templates and Apps	boolean				
MaximumPermissionsAllowAIAccelerator	View AI Accelerator Predictions.	boolean				
MaximumPermissionsAllowEmailIC	Email-Based Identity Verification Option	boolean				
MaximumPermissionsAllowLightningLogin	Lightning Login User	boolean				
MaximumPermissionsAllowViewEditConvertedLeads	View and Edit Converted Leads	boolean				
MaximumPermissionsApexRestServices	Apex REST Services	boolean				
MaximumPermissionsApiEnabled	API Enabled	boolean				
MaximumPermissionsApiUserOnly	Api Only User	boolean				
MaximumPermissionsAssessmentPlatformUser	Discovery Framework Platform User	boolean				
MaximumPermissionsAssignPermissionSets	Assign Permission Sets	boolean				
MaximumPermissionsAssignTopics	Assign Topics	boolean				
MaximumPermissionsAssociationEngineUserAccess	User license to access Record Association Builder in Financial Services Cloud.	boolean				
MaximumPermissionsAuthorApex	Author Apex	boolean				
MaximumPermissionsAutomaticActivityCapture	Use Einstein Activity Capture	boolean				
MaximumPermissionsAutonomousAnalyticsPrivacy	Manage Autonomous Insights Data Privacy	boolean				
MaximumPermissionsB2BMarketingAnalyticsUser	Create B2B Marketing Analytics Apps	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsBVCommunityAccess	Use objects in the Benefit Verification data model via Experience Cloud sites	boolean				
MaximumPermissionsBranchManagementUserAccess	User license to access Branch Management in Financial Services Cloud.	boolean				
MaximumPermissionsBulkApiHardDelete	Bulk API Hard Delete	boolean				
MaximumPermissionsBulkMacrosAllowed	Run Macros on Multiple Records	boolean				
MaximumPermissionsBypassMFAForUiLogins	Waive Multi-Factor Authentication for Exempt Users	boolean				
MaximumPermissionsCMSCEAuthoringAccess	Migrate Enablement Content	boolean				
MaximumPermissionsCampaignInfluence2	Campaign Influence	boolean				
MaximumPermissionsCanApproveFeedPost	Can Approve Feed Post and Comment	boolean				
MaximumPermissionsCanEditDataPrepRecipe	Edit Dataset Recipes	boolean				
MaximumPermissionsCanEditPrompts	Manage Prompts	boolean				
MaximumPermissionsCanInsertFeedSystemFields	Insert System Field Values for Chatter Feeds	boolean				
MaximumPermissionsCanManageMaps	Manage CRM Analytics Custom Maps	boolean				
MaximumPermissionsCanRunAnalysis	Can Run Einstein Discovery for Reports	boolean				
MaximumPermissionsCanUseNewDashboardBuilder	Drag-and-Drop Dashboard Builder	boolean				
MaximumPermissionsCanVerifyComment	Verify Answers to Chatter Questions	boolean				
MaximumPermissionsChangeDashboardColors	Change Dashboard Colors	boolean				
MaximumPermissionsChatterComposeUiCodesnippet	Allow Inclusion of Code Snippets from UI	boolean				
MaximumPermissionsChatterEditOwnPost	Edit My Own Posts	boolean				
MaximumPermissionsChatterEditOwnRecordPost	Edit Posts on Records I Own	boolean				
MaximumPermissionsChatterFileLink	Create Public Links	boolean				
MaximumPermissionsChatterInternalUser	Chatter Internal User	boolean				
MaximumPermissionsChatterInviteExternalUsers	Invite Customers To Chatter	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsChatterOwnGroups	Create and Own New Chatter Groups	boolean				
MaximumPermissionsClientSecretRotation	Allow consumer key and secret rotation	boolean				
MaximumPermissionsCloseConversations	Close Conversation Threads	boolean				
MaximumPermissionsConfigCompliantDataSharing	Configure Compliant Data Sharing	boolean				
MaximumPermissionsConfigCustomRecs	Configure Custom Recommendations	boolean				
MaximumPermissionsConfigureDataspaceScope	Configure Dataspace Scope	boolean				
MaximumPermissionsConnectOrgToEnvironmentHub	Connect Organization to Environment Hub	boolean				
MaximumPermissionsConsentApiUpdate	Update Consent Preferences Using REST API	boolean				
MaximumPermissionsContentAdministrator	Manage Salesforce CRM Content	boolean				
MaximumPermissionsContentHubUser	Files Connect Cloud	boolean				
MaximumPermissionsContentWorkspaces	Access Libraries	boolean				
MaximumPermissionsConvertLeads	Convert Leads	boolean				
MaximumPermissionsCreateAuditFields	Set Audit Fields upon Record Creation	boolean				
MaximumPermissionsCreateCustomizeDashboards	Create and Customize Dashboards	boolean				
MaximumPermissionsCreateCustomizeFilters	Create and Customize List Views	boolean				
MaximumPermissionsCreateCustomizeReports	Create and Customize Reports	boolean				
MaximumPermissionsCreateDashboardFolders	Create Dashboard Folders	boolean				
MaximumPermissionsCreateLtngTempFolder	Create Folders for Lightning Email Templates	boolean				
MaximumPermissionsCreateLtngTempInPub	Manage Public Lightning Email Templates	boolean				
MaximumPermissionsCreatePackaging	Create AppExchange Packages	boolean				
MaximumPermissionsCreateReportFolders	Create Report Folders	boolean				
MaximumPermissionsCreateReportInLightning	Report Builder (Lightning Experience)	boolean				
MaximumPermissionsCreateTopics	Create Topics	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsCreateUpdateSDDataset	Create and Update Einstein Discovery Datasets	boolean				
MaximumPermissionsCreateUpdateSDStory	Create and Update Einstein Discovery Stories	boolean				
MaximumPermissionsCreateWorkBadgeDefinition	Create custom Badge Definitions	boolean				
MaximumPermissionsCreateWorkspaces	Create Libraries	boolean				
MaximumPermissionsCustomMobileAppsAccess	Access Custom Mobile Apps	boolean				
MaximumPermissionsCustomSidebarOnAllPages	Show Custom Sidebar On All Pages	boolean				
MaximumPermissionsCustomizeApplication	Customize Application	boolean				
MaximumPermissionsDataExport	Weekly Data Export	boolean				
MaximumPermissionsDataPipelinesAppConsumer	Permission to access Data Pipelines license	boolean				
MaximumPermissionsDelegatePortalUserAdmin	Delegated External User Administrator	boolean				
MaximumPermissionsDelegatedTwoFactor	Manage Multi-Factor Authentication in User Interface	boolean				
MaximumPermissionsDeleteActivatedContract	Delete Activated Contracts	boolean				
MaximumPermissionsDeleteTopics	Delete Topics	boolean				
MaximumPermissionsDistributeFromPersWksp	Create Content Deliveries	boolean				
MaximumPermissionsDocGenDesigner	Enables Designers to create Document Templates.	boolean				
MaximumPermissionsDocGenRuntimeCUser	Enables Customers and Partners to generate documents via communities.	boolean				
MaximumPermissionsDocGenRuntimeUser	Enables Business users to generate documents.	boolean				
MaximumPermissionsDocumentAutomationUserAccess	User license to access IntelligentDocumentAutomation in Financial Services Cloud.	boolean				
MaximumPermissionsDocumentChecklistUserAccess	User license to access the Document Checklist features.	boolean				
MaximumPermissionsEditActivatedOrders	Edit Activated Orders	boolean				
MaximumPermissionsEditBillingInfo	Manage Billing	boolean				
MaximumPermissionsEditBrandTemplates	Manage Letterheads	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsEditCaseComments	Edit Case Comments	boolean				
MaximumPermissionsEditEvent	Edit Events	boolean				
MaximumPermissionsEditHtmlTemplates	Edit HTML Templates	boolean				
MaximumPermissionsEditMyDashboards	Edit My Dashboards	boolean				
MaximumPermissionsEditMyReports	Edit My Reports	boolean				
MaximumPermissionsEditOppLineItemUnitPrice	Edit Opportunity Product Sales Price	boolean				
MaximumPermissionsEditPublicDocuments	Manage Public Documents	boolean				
MaximumPermissionsEditPublicFilters	Manage Public List Views	boolean				
MaximumPermissionsEditPublicTemplates	Manage Public Classic Email Templates	boolean				
MaximumPermissionsEditReadonlyFields	Edit Read Only Fields	boolean				
MaximumPermissionsEditTask	Edit Tasks	boolean				
MaximumPermissionsEditTopics	Edit Topics	boolean				
MaximumPermissionsEmailAdministration	Email Administration	boolean				
MaximumPermissionsEmailMass	Mass Email	boolean				
MaximumPermissionsEmailSingle	Send Email	boolean				
MaximumPermissionsEmailTemplateManagement	Manage Email Templates	boolean				
MaximumPermissionsEnableBCTransactionPolling	Enable blockchain transaction polling API	boolean				
MaximumPermissionsEnableCommunityAppLauncher	Show App Launcher in Experience Cloud Sites	boolean				
MaximumPermissionsEnableIPFSUpload	Allow blockchain data upload	boolean				
MaximumPermissionsEnableNotifications	Send Outbound Messages	boolean				
MaximumPermissionsExportReport	Export Reports	boolean				
MaximumPermissionsFHIRCntyAccess	Use objects in the Clinical data model via Experience Cloud sites	boolean				
MaximumPermissionsFSCAlertFrameworkUserAccess	Access Record Alerts	boolean				
MaximumPermissionsFSCArcGraphCommunityUser	Access Actionable Relationship Center for partner users	boolean				
MaximumPermissionsFSCInsClaimMgtPlatformUser	Insurance Claim Management Platform User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsEIOPAdminPlatformUser	Insurance Policy Administration Platform User	boolean				
MaximumPermissionsEIOPCorpCityAccess	Access Insurance Lightning Components	boolean				
MaximumPermissionsEIOPCorpOnlyAccess	Access Insurance Lightning Components	boolean				
MaximumPermissionsEIOPInsurancePlatformUser	Access Insurance Objects	boolean				
MaximumPermissionsFeedPinning	Pin Posts in Feeds	boolean				
MaximumPermissionsFinancialServicesUserAccess	Access Actionable Relationship Center	boolean				
MaximumPermissionsFlowUIFeatureRequired	Require Flow User Feature License	boolean				
MaximumPermissionsForceTwoFactor	Multi-Factor Authentication for User Interface Logins	boolean				
MaximumPermissionsGetStartDataDiscovery	View Einstein Discovery Recommendations	boolean				
MaximumPermissionsGetStartDataDiscoveryExternal	View Einstein Discovery Recommendations Via Connect API	boolean				
MaximumPermissionsGiveRecognitionBadge	Give Recognition Badges in Experience Builder Sites	boolean				
MaximumPermissionsGovernNetworks	Manage Experiences	boolean				
MaximumPermissionsHasUnlimitedNBAExecutions	User Has Unlimited Next Best Action Strategy Executions	boolean				
MaximumPermissionsHCAdvancedTherapyUser	Manage Advanced Therapy Orchestration features	boolean				
MaximumPermissionsHCPrmSiteUser	Use objects in the Provider Network Management data model via Experience Cloud sites	boolean				
MaximumPermissionsHeadlessCMSAccess	Enable Salesforce CMS Integration	boolean				
MaximumPermissionsHealthCloudCityAccess	Provides access to Health Cloud data for Community users.	boolean				
MaximumPermissionsHealthCloudUtilizationMgtUser	Manage Health Cloud Utilization Management	boolean				
MaximumPermissionsHideReadByList	Hide the Seen By List	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsIdentityConnect	Use Identity Connect	boolean				
MaximumPermissionsIdentityEnabled	Use Identity Features	boolean				
MaximumPermissionsIdentityVerificationUserAccess	Permission to access Identity Verification	boolean				
MaximumPermissionsImportCustomObjects	Import Custom Objects	boolean				
MaximumPermissionsImportLeads	Import Leads	boolean				
MaximumPermissionsImportPersonal	Import Personal Contacts	boolean				
MaximumPermissionsInboundMigrationToolsUser	Deploy Change Sets	boolean				
MaximumPermissionsIndustryMilestonePlatformUser	Access Life Events or Business Milestones Component	boolean				
MaximumPermissionsInsightsAppAdmin	Manage CRM Analytics	boolean				
MaximumPermissionsInsightsAppDashboardEditor	Create and Edit CRM Analytics Dashboards	boolean				
MaximumPermissionsInsightsAppEltEditor	Edit CRM Analytics Dataflows	boolean				
MaximumPermissionsInsightsAppUploadUser	Upload External Data to CRM Analytics	boolean				
MaximumPermissionsInsightsAppUser	Use CRM Analytics	boolean				
MaximumPermissionsInsightsCreateApplication	Create CRM Analytics Apps	boolean				
MaximumPermissionsInstallPackaging	Download AppExchange Packages	boolean				
MaximumPermissionsInsuranceGroupBenefitsUser	Insurance Group Benefits User	boolean				
MaximumPermissionsInterestTaggingUserAccess	Access Interest Tags for Financial Services Cloud.	boolean				
MaximumPermissionsIsSsoEnabled	Is Single Sign-On Enabled	boolean				
MaximumPermissionsIsotopeAccess	Salesforce Anywhere on Mobile	boolean				
MaximumPermissionsIsotopeCToCUser	Salesforce Anywhere Integration Access	boolean				
MaximumPermissionsIsotopeLEX	Salesforce Anywhere in Lightning Experience	boolean				
MaximumPermissionsKycPlatformUser	Identity Verification and Screening User	boolean				
MaximumPermissionsMIEndMessagingSessionUserPerm	End Messaging Session	boolean				
MaximumPermissionsMIOutboundMessagingUserPerm	Agent Initiated Outbound Messaging	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsLearningManager	Manage Learning	boolean				
MaximumPermissionsLightningConsoleAllowedForUser	Lightning Console User	boolean				
MaximumPermissionsLightningExperienceUser	Lightning Experience User	boolean				
MaximumPermissionsListEmailSend	Allow sending of List Emails	boolean				
MaximumPermissionsOrgPreviewReservedUserPerm	Remain in Salesforce Classic	boolean				
MaximumPermissionsManageAnalyticSnapshots	Manage Reporting Snapshots	boolean				
MaximumPermissionsManageAuthProviders	Manage Auth. Providers	boolean				
MaximumPermissionsManageBusinessHourHolidays	Manage Business Hours Holidays	boolean				
MaximumPermissionsManageC360AConnections	Connect Org to Customer Data Platform	boolean				
MaximumPermissionsManageCMS	Create CMS Workspaces and Channels	boolean				
MaximumPermissionsManageCallCenters	Manage Call Centers	boolean				
MaximumPermissionsManageCases	Manage Cases	boolean				
MaximumPermissionsManageCategories	Manage Categories	boolean				
MaximumPermissionsManageCertificates	Manage Certificates	boolean				
MaximumPermissionsManageChatterMessages	Manage Chatter Messages and Direct Messages	boolean				
MaximumPermissionsManageContentPermissions	Manage Content Permissions	boolean				
MaximumPermissionsManageContentProperties	Manage Content Properties	boolean				
MaximumPermissionsManageContentTypes	Manage record types and layouts for Files	boolean				
MaximumPermissionsManageCssUsers	Manage Customer Users	boolean				
MaximumPermissionsManageCustomPermissions	Manage Custom Permissions	boolean				
MaximumPermissionsManageCustomReportTypes	Manage Custom Report Types	boolean				
MaximumPermissionsManageCustomerExperienceAnalytics	Manage Customer Experience Analytics	boolean				
MaximumPermissionsManageDashInPubFolders	Manage Dashboards in Public Folders	boolean				
MaximumPermissionsManageDataCategories	Manage Data Categories	boolean				
MaximumPermissionsManageDataIntegrations	Manage Data Integrations	boolean				
MaximumPermissionsManageDataProcessingEngine	Allow users to access the features of Data Processing	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
	Engine to transform data that's available in your Salesforce org.					
MaximumPermissionsManageDataspaceScope	Manage Dataspace Scope	boolean				
MaximumPermissionsManageDynamicDashboards	Manage Dynamic Dashboards	boolean				
MaximumPermissionsManageEmailClientConfig	Manage Email Client Configurations	boolean				
MaximumPermissionsManageEntitlements	Manage Entitlements	boolean				
MaximumPermissionsManageExchangeConfig	Manage Lightning Sync	boolean				
MaximumPermissionsManageExternalConnections	Allow user to modify Private Connections	boolean				
MaximumPermissionsManageHCProviderNtwMgt	Manage Health Cloud Provider Network Management	boolean				
MaximumPermissionsManageHealthCheck	Manage Health Check	boolean				
MaximumPermissionsManageHealthCloud	Manage Health Cloud	boolean				
MaximumPermissionsManageHealthCloudFinancialData	Manage Health Cloud Financial Data	boolean				
MaximumPermissionsManageHubConnections	Connect Org to Customer 360 Data Manager	boolean				
MaximumPermissionsManageIndustriesVisit	Manage Industries Visit	boolean				
MaximumPermissionsManageInteraction	Manage Flow	boolean				
MaximumPermissionsManageInternalUsers	Manage Internal Users	boolean				
MaximumPermissionsManageIpAddresses	Manage IP Addresses	boolean				
MaximumPermissionsManageLeads	Manage Leads	boolean				
MaximumPermissionsManageLearningReporting	Manage Learning Reporting	boolean				
MaximumPermissionsManageLoginAccessPolicies	Manage Login Access Policies	boolean				
MaximumPermissionsManageLoyaltyAnalytics	Manage Loyalty Analytics	boolean				
MaximumPermissionsManageMobile	Manage Mobile Configurations	boolean				
MaximumPermissionsManageNetworks	Create and Set Up Experiences	boolean				
MaximumPermissionsManageOrchInstsAndWorkItems	Manage Orchestration Runs and Work Items	boolean				
MaximumPermissionsManagePartners	Manage External Users	boolean				
MaximumPermissionsManagePasswordPolicies	Manage Password Policies	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsManageProfilesPermissionsets	Manage Profiles and Permission Sets	boolean				
MaximumPermissionsManagePropositions	Manage Next Best Action Recommendations	boolean				
MaximumPermissionsManagePvtRptsAndDashbds	Manage All Private Reports and Dashboards	boolean				
MaximumPermissionsManageQuotas	Manage Quotas	boolean				
MaximumPermissionsManageRecommendationStrategies	Manage Next Best Action Strategies	boolean				
MaximumPermissionsManageReleaseUpdates	Manage Release Updates	boolean				
MaximumPermissionsManageRemoteAccess	Manage Connected Apps	boolean				
MaximumPermissionsManageReportsInPubFolders	Manage Reports in Public Folders	boolean				
MaximumPermissionsManageRoles	Manage Roles	boolean				
MaximumPermissionsManageSandboxes	Manage Sandboxes	boolean				
MaximumPermissionsManageSessionPermissionSets	Manage Session Permission Set Activations	boolean				
MaximumPermissionsManageSharing	Manage Sharing	boolean				
MaximumPermissionsManageSmartDataDiscovery	Manage Einstein Discovery	boolean				
MaximumPermissionsManageSmartDataDiscoveryModel	Can Deploy and Manage Einstein Discovery predictions	boolean				
MaximumPermissionsManageSolutions	Manage Published Solutions	boolean				
MaximumPermissionsManageSubscriptions	Manage CRM Analytics Subscriptions	boolean				
MaximumPermissionsManageSurveys	Manage Surveys	boolean				
MaximumPermissionsManageSynonyms	Manage Synonyms	boolean				
MaximumPermissionsManageTCRMforComms	Create and manage TCRM for Comms	boolean				
MaximumPermissionsManageTemplatedApp	Manage CRM Analytics Templated Apps	boolean				
MaximumPermissionsManageTranslation	Manage Translation	boolean				
MaximumPermissionsManageTrustMeasures	Manage Trust Measures	boolean				
MaximumPermissionsManageTwoFactor	Manage Multi-Factor Authentication in API	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsManageUnlistedGroups	Manage Unlisted Groups	boolean				
MaximumPermissionsManageUsers	Manage Users	boolean				
MaximumPermissionsMassInlineEdit	Mass Edits from Lists	boolean				
MaximumPermissionsMergeTopics	Merge Topics	boolean				
MaximumPermissionsMicrobatching	Use Micro-Batching to Create Records	boolean				
MaximumPermissionsModerateChatter	Moderate Chatter	boolean				
MaximumPermissionsModerateNetworkFeeds	Moderate Experience Cloud Site Feeds	boolean				
MaximumPermissionsModerateNetworkFiles	Moderate Files in Experience Cloud Sites	boolean				
MaximumPermissionsModerateNetworkMessages	Moderate Chatter Messages in Experience Cloud Sites	boolean				
MaximumPermissionsModerateNetworkUsers	Moderate Experience Cloud Site Users	boolean				
MaximumPermissionsModifyAllData	Modify All Data	boolean				
MaximumPermissionsModifyDataClassification	Modify Data Classification	boolean				
MaximumPermissionsModifyMetadata	Modify Metadata Through Metadata API Functions	boolean				
MaximumPermissionsMortgageUserAccess	User license to access Mortgage in Financial Services Cloud.	boolean				
MaximumPermissionsMultiStepSchedulingUser	Manage Multi-Step Scheduling features	boolean				
MaximumPermissionsNativeWebviewScrolling	Salesforce Mobile App: Native scrolling on webviews	boolean				
MaximumPermissionsNewReportBuilder	Report Builder	boolean				
MaximumPermissionsOmniStudioDesigner	Enables admin/developer to create new OS/DR/VIP instances.	boolean				
MaximumPermissionsOmniStudioRuntime	Enables business users to execute OmniScripts, DRs, Cards, etc, in employee facing apps.	boolean				
MaximumPermissionsOmniStudioRuntimeCC	Enables consumers and partners to execute OmniScripts, DRs, Cards through a Community or off platform.	boolean				
MaximumPermissionsOutboundMigrationToolUser	Create and Upload Change Sets	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsOverrideForecasts	Override Forecasts	boolean				
MaximumPermissionsPackaging2	Create and Update Second-Generation Packages	boolean				
MaximumPermissionsPackaging2Delete	Delete Second-Generation Packages	boolean				
MaximumPermissionsPasswordNeverExpires	Password Never Expires	boolean				
MaximumPermissionsPortalSuperUser	Portal Super User	boolean				
MaximumPermissionsPreventClassicExperience	Hide Option to Switch to Salesforce Classic	boolean				
MaximumPermissionsPrivacyDataAccess	Allow user to access privacy data	boolean				
MaximumPermissionsProviderSearchUserAccess	Permission to access internal entities for provider search	boolean				
MaximumPermissionsPublishPackaging	Upload AppExchange Packages	boolean				
MaximumPermissionsQueryAllFiles	Query All Files	boolean				
MaximumPermissionsQuipMetricsAccess	Quip Metrics	boolean				
MaximumPermissionsQuipUserEngagementMetrics	Quip User Engagement Metrics	boolean				
MaximumPermissionsRecordVisibilityAPI	Enable RecordVisibility API	boolean				
MaximumPermissionsRemoveDirectMessageMembers	Remove People from Direct Messages	boolean				
MaximumPermissionsResetPasswords	Reset User Passwords and Unlock Users	boolean				
MaximumPermissionsRunFlow	Run Flows	boolean				
MaximumPermissionsRunReports	Run Reports	boolean				
MaximumPermissionsSDCommunityAccess	Use objects in the Social Determinants data model via Experience Cloud sites	boolean				
MaximumPermissionsSalesConsole	Sales Console	boolean				
MaximumPermissionsSandboxTestingInCommunityApp	Test Sandboxes in Mobile Publisher for Experience Cloud	boolean				
MaximumPermissionsScheduleJob	Schedule Dashboards	boolean				
MaximumPermissionsScheduleReports	Schedule Reports	boolean				
MaximumPermissionsSelectFilesFromSalesforce	Select Files from Salesforce	boolean				
MaximumPermissionsSendAnnouncementEmails	Send announcement emails	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsSendCustomNotifications	Send Custom Notifications	boolean				
MaximumPermissionsSendSitRequests	Send Stay-in-Touch Requests	boolean				
MaximumPermissionsServiceExcellencePlatformUser	Service Excellence Platform User	boolean				
MaximumPermissionsShareFilesWithNetworks	Share Files with People in Experience Cloud sites	boolean				
MaximumPermissionsShareSmartDataDiscoveryStory	Share Einstein Discovery Stories	boolean				
MaximumPermissionsShowCompanyNameAsUserBadge	Show Company Name as Site Role	boolean				
MaximumPermissionsSkipIdentityConfirmation	Skip Device Activation at Login	boolean				
MaximumPermissionsSlackCibUser	Financial Services Cloud for Slack User	boolean				
MaximumPermissionsSmartDataDiscoveryForCommunity	Smart Data Discovery for experience users	boolean				
MaximumPermissionsSolutionImport	Import Solutions	boolean				
MaximumPermissionsSonicConsumer	Use Data Pipelines Base	boolean				
MaximumPermissionsStdAutomaticActivityCapture	Use Einstein Activity Capture Standard	boolean				
MaximumPermissionsStoryOnDSWithPredicate	Ignore predicate when creating story from dataset	boolean				
MaximumPermissionsSubmitMacrosAllowed	Manage Macros Users Can't Undo	boolean				
MaximumPermissionsSubscribeDashboardToOtherGps	Subscribe to Dashboards: Send to Groups and Roles	boolean				
MaximumPermissionsSubscribeDashboardToOtherUsers	Subscribe to Dashboards: Add Recipients	boolean				
MaximumPermissionsSubscribeReportToOtherGps	Subscribe to Reports: Send to Groups and Roles	boolean				
MaximumPermissionsSubscribeReportToOtherUsers	Subscribe to Reports: Add Recipients	boolean				
MaximumPermissionsSubscribeReportsRunAsUser	Subscribe to Reports: Set Running User	boolean				
MaximumPermissionsSubscribeToLightningDashboards	Subscribe to Dashboards	boolean				
MaximumPermissionsSubscribeToLightningReports	Subscribe to Reports	boolean				
MaximumPermissionsTraceXdsQueries	Access Tracer for External Data Sources	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsTransactionalEmailSend	Send Non-Commercial Email	boolean				
MaximumPermissionsTransferAnyCase	Transfer Cases	boolean				
MaximumPermissionsTransferAnyEntity	Transfer Record	boolean				
MaximumPermissionsTransferAnyLead	Transfer Leads	boolean				
MaximumPermissionsTwoFactorApi	Multi-Factor Authentication for API Logins	boolean				
MaximumPermissionsUpdateWithInactiveOwner	Update Records with Inactive Owners	boolean				
MaximumPermissionsUseAssistantDialog	Instant Actionable Results	boolean				
MaximumPermissionsUseCompliantDataSharing	Use Compliant Data Sharing	boolean				
MaximumPermissionsUseCustomerExperienceAnalytics	Use Customer Experience Analytics	boolean				
MaximumPermissionsUseLoyaltyAnalytics	Use Loyalty Analytics	boolean				
MaximumPermissionsUseMySearch	Einstein Search	boolean				
MaximumPermissionsUseQuerySuggestions	Natural Language Search	boolean				
MaximumPermissionsUseSmartDataDiscovery	Use Einstein Discovery	boolean				
MaximumPermissionsUseSubscriptionEmails	Subscribe to CRM Analytics Assets	boolean				
MaximumPermissionsUseTCRMforComms	View TCRM for Comms	boolean				
MaximumPermissionsUseTeamReassignWizards	Use Team Reassignment Wizards	boolean				
MaximumPermissionsUseTemplatedApp	Use CRM Analytics Templated Apps	boolean				
MaximumPermissionsUseWebLink	Allow Access to Customized Actions	boolean				
MaximumPermissionsUtilMgtExperienceCloudUser	Provides access to Utilization Management features and objects from an Experience Cloud site.	boolean				
MaximumPermissionsViewAllActivities	View All Activities	boolean				
MaximumPermissionsViewAllCustomSettings	View All Custom Settings	boolean				
MaximumPermissionsViewAllData	View All Data	boolean				
MaximumPermissionsViewAllForecasts	View All Forecasts	boolean				
MaximumPermissionsViewAllForeignKeyNames	View All Lookup Record Names	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MaximumPermissionsViewAllProfiles	View All Profiles	boolean				
MaximumPermissionsViewAllUsers	View All Users	boolean				
MaximumPermissionsViewContent	View Content in Portals	boolean				
MaximumPermissionsViewCustomerSentiment	View Customer Insights	boolean				
MaximumPermissionsViewDataAssessment	Access to view Data Assessment	boolean				
MaximumPermissionsViewDataCategories	View Data Categories in Setup	boolean				
MaximumPermissionsViewDeveloperName	View DeveloperName	boolean				
MaximumPermissionsViewEncryptedData	View Encrypted Data	boolean				
MaximumPermissionsViewEventLogFiles	View Event Log Files	boolean				
MaximumPermissionsViewGlobalHeader	View Global Header	boolean				
MaximumPermissionsViewHealthCheck	View Health Check	boolean				
MaximumPermissionsViewHelpLink	View Help Link	boolean				
MaximumPermissionsViewMLModels	Allow users to view MLModels and related Entities	boolean				
MaximumPermissionsViewMyTeamsDashboards	View My Team's Dashboards	boolean				
MaximumPermissionsViewOnlyEmbeddedAppUser	Access to View-Only Licensed Templates and Apps	boolean				
MaximumPermissionsViewPrivateStaticResources	View Private Static Resources	boolean				
MaximumPermissionsViewPublicDashboards	View Dashboards in Public Folders	boolean				
MaximumPermissionsViewPublicReports	View Reports in Public Folders	boolean				
MaximumPermissionsViewRestrictionAndScopingRules	View Restriction and Scoping Rules	boolean				
MaximumPermissionsViewRoles	View Roles and Role Hierarchy	boolean				
MaximumPermissionsViewSetup	View Setup and Configuration	boolean				
MaximumPermissionsViewTrustMeasures	View Trust Measures	boolean				
MaximumPermissionsViewUserPII	View Concealed Field Data	boolean				
MaximumPermissionsWaveManagePrivateAssetsUser	Manage CRM Analytics Private Assets	boolean				
MaximumPermissionsWaveTabularDownload	Download CRM Analytics Data	boolean				
MaximumPermissionsWaveTrendReports	Trend Report Data in CRM Analytics	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MigratableLicenses	Licenses to Migrate	int	9			
PermissionSetLicenseKey	Permission Set License Key	string		81		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalLicenses	Total Licenses	int	9			
UsedLicenses	Used Licenses	int	9			

PERMISSIONSETLICENSEASSIGN

Represents the association between a User and a PermissionSetLicense.

For more information, see PermissionSetLicenseAssign in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssigneeId`	User ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Permission Set License Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PermissionSetLicenseId`	Permission Set License ID	reference		18		
`SystemModstamp`	Date Assigned	datetime				

PERMISSIONSETTABSETTING

Represents a permission set tab setting. Requires the View Setup permission. Use this object to query all tab settings of the permission set.

For more information, see PermissionSetTabSetting in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Permission Set Tab Setting ID	id		18		
`Name`	Tab Name	string		60		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Visibility`	Visibility	picklist		40		

PERSONACCOUNTOWNERPOWERUSER

Represents a user who can own more than 50,000 customer or partner portal accounts, but can't perform certain heavy sharing operations.

For more information, see PersonAccountOwnerPowerUser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Person Account Owner Power User ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		80		
`PortalType`	Portal Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

PERSONEDUCATION

Represents information about professional education for a person applying for a license or permit.

For more information, see PersonEducation in the *Financial Services Cloud Developer Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CertificateIdentifier	Certificate ID	string		255		
CompletionDate	Completion Date	datetime				
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EducationLevel	Education Level	picklist		40		
GraduationDate	Graduation Date	datetime				
HealthcareProviderId	Healthcare Provider ID	reference		18		
Id	Person Education ID	id		18		
Identifier	Identifier	string		255		
IdentifierIssuer	Institution	string		255		
IndividualId	Individual ID	reference		18		
InstitutionAddress	Institution Address	address				
InstitutionCity	Institution City	string		40		
InstitutionCountry	Institution Country	string		80		
InstitutionGeocodeAccuracy	Institution Geocode Accuracy	picklist		255		
InstitutionLatitude	Institution Latitude	double			18	15
InstitutionLongitude	Institution Longitude	double			18	15
InstitutionPostalCode	Institution Postal Code	string		20		
InstitutionState	Institution State	string		80		
InstitutionStreet	Institution Street	textarea		255		
IsActive	Active	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Degree	string		255		
OwnerId	Owner ID	reference		18		
ProgramName	Program Name	string		255		
StartDate	Start Date	datetime				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
VerificationStatus	Verification Status	picklist		255		
VerifiedDate	Verified On	datetime				

PERSONEDUCATIONFEED

Feed tracking for PersonEducation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PERSONEDUCATIONHISTORY

History for tracked fields of PersonEducation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Person Education History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PersonEducationId`	Person Education ID	reference		18		

PERSONEDUCATIONSHARE

Sharing for PersonEducation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERSONEXAMINATION

Represents the examinations taken by a person.

For more information, see PersonExamination in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	datetime				
EffectiveTo	Effective To	datetime				
ExaminationDate	Examination Date	datetime				
ExaminationId	Examination ID	reference		18		
Id	Person Examination ID	id		18		
InstitutionName	Institution Name	picklist		40		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Person Examination ID	string		255		
OwnerId	Owner ID	reference		18		
Result	Result	picklist		40		
Score	Score	int	9			
SystemModstamp	System Modstamp	datetime				
VerificationDateTime	Verification Date	datetime				
VerificationStatus	Verification Status	picklist		40		

PERSONEXAMINATIONFEED

Feed tracking for PersonExamination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PERSONEXAMINATIONHISTORY

History for tracked fields of PersonExamination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Person Examination History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PersonExaminationId`	Person Examination ID	reference		18		

PERSONEXAMINATIONSHARE

Sharing for PersonExamination.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERSONLANGUAGE

Represents the use and preference information about a person's language.

For more information, see PersonLanguage in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Person Language ID	id		18		
`IndividualId`	Individual ID	reference		18		
`IsDeleted`	Deleted	boolean				
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Rank`	Rank	int	4			
`SpeakingProficiencyLevel`	Speaking Proficiency Level	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`WritingProficiencyLevel`	Writing Proficiency Level	picklist		40		

PERSONLANGUAGEFEED

Feed tracking for PersonLanguage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PERSONLANGUAGEHISTORY

History for tracked fields of PersonLanguage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Person Language History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PersonLanguageId	Person Language ID	reference		18		

PERSONLANGUAGESHARE

Sharing for PersonLanguage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERSONLIFEEVENT

Represents the life events of an individual, such as marriage, birth of a child, birthday, engagement.

For more information, see PersonLifeEvent in the *Financial Services Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EventDate	Event Date	datetime				
EventDescription	Event Description	textarea		32000		
EventLocation	Event Location	address				
EventLocationCity	Event Location City	string		40		
EventLocationCountry	Event Location Country	string		80		
EventLocationGeocodeAccuracy	Event Location Geocode Accuracy	picklist		255		
EventLocationLatitude	Event Location Latitude	double			18	15
EventLocationLongitude	Event Location Longitude	double			18	15
EventLocationPostalCode	Event Location Postal Code	string		20		
EventLocationState	Event Location State	string		80		
EventLocationStreet	Event Location Street	textarea		255		
EventType	Event Type	picklist		40		
ExpirationDate	Expiration Date	datetime				
ExpirationDescription	Expiration Description	textarea		32000		
Id	Person Life Event ID	id		18		
IsDeleted	Deleted	boolean				
IsExpired	Expired	boolean				
IsTentative	Tentative	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Event Name	string		255		
OwnerId	Owner ID	reference		18		
PrimaryPersonId	Contact ID	reference		18		
RelatedPersonId	Contact ID	reference		18		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

PERSONLIFEEVENTFEED

Feed tracking for PersonLifeEvent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PERSONLIFEEVENTHISTORY

History for tracked fields of PersonLifeEvent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Person Life Event History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PersonLifeEventId`	Person Life Event ID	reference		18		

PERSONLIFEEVENTSHARE

Sharing for PersonLifeEvent.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERSONNAME

Represents detailed information about a person's name.

For more information, see PersonName in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveDate	Effective Date	date				
EndDate	End Date	date				
FirstName	First Name	string		255		
FullName	Full Name	string		255		
Id	Person Name ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimary	Primary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		255		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NameUsageType	Name Usage Type	picklist		40		
OwnerId	Owner ID	reference		18		
ParentRecordId	ParentRecord ID	reference		18		
Prefix	Prefix	string		255		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System ID	string		255		
SourceSystemModified	Source System Modified	datetime				
Suffix	Suffix	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

PERSONNAMEFEED

Feed tracking for PersonName.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PERSONNAMEHISTORY

History for tracked fields of PersonName.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Person Name History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PersonNameId`	Person Name ID	reference		18		

PERSONNAMESHARE

Sharing for PersonName.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PERSONALIZATIONTARGETINFO

Represents a target for an audience.

For more information, see PersonalizationTargetInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContainerId`	Container ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DraftRowId`	Personalization Target Info ID	reference		18		
`GroupName`	Group Name	string		255		
`Id`	Personalization Target Info ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PublishStatus`	Publish Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TargetType`	Target Type	picklist		255		
`TargetValue`	Target Value	string		255		

PGMREBATETYPBNFTMAPPING

If benefit table is extended, defines mapping of benefit field to the aggregate object fields.

For more information, see PgmRebateTypBnftMapping in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AggregateField`	Aggregate Field	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Program Rebate Type Benefit Mapping ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ProgramRebateTypeId`	Program Rebate Type ID	reference		18		
`RebateTypeBenefitField`	Custom Field Definition ID	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

PGMREBATETYPBNFTMAPPINGFEED

Feed tracking for PgmRebateTypBnftMapping.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PGMREBATETYPBNFTMAPPINGHISTORY

History for tracked fields of PgmRebateTypBnftMapping.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Program Rebate Type Benefit MappingHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PgmRebateTypBnftMappingId	Program Rebate Type Benefit Mapping ID	reference		18		

PICKLISTVALUEINFO

Represents the active picklist values for a given picklist field.

For more information, see PicklistValueInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Durable ID	string		255		
`EntityParticleId`	Entity Particle ID	string		150		
`Id`	Picklist Value Info ID	id		18		
`IsActive`	Is Active	boolean				
`IsDefaultValue`	Is Default Value	boolean				
`Label`	Label	string		70		
`ValidFor`	Valid For	string		200		
`Value`	Value	string		70		

PLANBENEFIT

Represents the standard benefits available under a plan that the purchaser offers to their members.

For more information, see PlanBenefit in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitNotes	Benefit Notes	textarea		32000		
CoinsuranceNotes	Coinsurance Notes	textarea		32000		
CopayNotes	Copay Notes	textarea		32000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeductibleNotes	Deductible Notes	textarea		32000		
DocumentLocation	Document Location	string		255		
EffectiveDate	Effective Date	date				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
EmergencyDepartmentCopay	Emergency Department Copay	currency			18	2
FamilyInNetworkDeductible	Family In-Network Deductible	currency			18	2
FamilyInNetworkOutofPocket	Family In-Network Out-of-Pocket	currency			18	2
FamilyOutofNetworkDeductible	Family Out-of-Network Deductible	currency			18	2
FamilyOutofNetworkOutofPocket	Family Out-of-Network Out-of-Pocket	currency			18	2
Id	Plan Benefit ID	id		18		
InNetworkCoinsuranceAmount	In-Network Coinsurance (Amount)	double			18	0
InNetworkCoinsurancePercentage	In-Network Coinsurance (Percentage)	double			18	0
InNetworkLifetimeMaximum	In-Network Lifetime Maximum	currency			18	2
IndividualInNetworkDeductible	Individual In-Network Deductible	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IndividualInNetworkOutofPocket	Individual In-Network Out-of-Pocket	currency			18	2
IndividualOutofNetworkDeductible	Individual Out-of-Network Deductible	currency			18	2
IndividualOutofNetworkOutofPocket	Individual Out-of-Network Out-of-Pocket	currency			18	2
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LifetimeMaximumNotes	Lifetime Maximum Notes	textarea		32000		
Name	Name	string		255		
OutofNetworkCoinsuranceAmount	Out-of-Network Coinsurance (Amount)	double			18	0
OutofNetworkCoinsurancePercentage	Out-of-Network Coinsurance (Percentage)	double			18	0
OutofNetworkLifetimeMaximum	Out-of-Network Lifetime Maximum	currency			18	2
OutofPocketNotes	Out-of-Pocket Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PrimaryCareCopay	Primary Care Copay	currency			18	2
PurchaserPlanId	Purchaser Plan ID	reference		18		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SpecialistCopay	Specialist Copay	currency			18	2
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
UrgentCareCopay	Urgent Care Copay	currency			18	2

PLANBENEFITFEED

Feed tracking for PlanBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PLANBENEFITHISTORY

History for tracked fields of PlanBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Plan Benefit History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PlanBenefitId	Plan Benefit ID	reference		18		

PLANBENEFITITEM

Represents the details of a benefit available under a purchaser's plan that is offered to their members.

For more information, see PlanBenefitItem in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitCategory	Benefit Category	string		255		
CoverageLevel	Coverage Level	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Plan Benefit Item ID	id		18		
InNetworkCoverage	In-Network Coverage	currency			18	2
IsDeleted	Deleted	boolean				
IsInPlanNetwork	In-Plan Network	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Notes	Notes	textarea		32000		
OutofNetworkCoverage	Out-of-Network Coverage	currency			18	2
OwnerId	Owner ID	reference		18		
PlanBenefitId	Plan Benefit ID	reference		18		
ServiceType	Service Type	string		64		
ServiceTypeCode	Service Type Code	string		64		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TimePeriod	Time Period	string		32		

PLANBENEFITITEMFEED

Feed tracking for PlanBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PLANBENEFITITEMHISTORY

History for tracked fields of PlanBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Plan Benefit Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PlanBenefitItemId`	Plan Benefit Item ID	reference		18		

PLANBENEFITITEMSHARE

Sharing for PlanBenefitItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PLANBENEFITSHARE

Sharing for PlanBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PLATFORMACTION

PlatformAction is a virtual read-only object. It enables you to query for actions displayed in the UI, given a user, a context, device format, and a record ID. Examples include standard and custom buttons, quick actions, and productivity actions.

For more information, see PlatformAction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionListContext	Action List Context	picklist		255		
ActionTarget	Action Target	textarea		2048		
ActionTargetType	Action Target Type	picklist		255		
ApiName	API Name	string		255		
Category	Category	picklist		255		
ConfirmationMessage	Confirmation Message	string		255		
DeviceFormat	Device Format	picklist		255		
ExternalId	Platform Action ID	string		255		
GroupId	Group ID	reference		18		
IconContentType	Icon Content Type	string		255		
IconHeight	Icon Height	int	9			
IconUrl	Icon URL	url		255		
IconWidth	Icon Width	int	9			
Id	Not used ID	id		18		
InvocationStatus	Invocation Status	picklist		255		
InvokedByUserId	User ID	reference		18		
IsGroupDefault	Is Group Default	boolean				
IsMassAction	Is Mass Action	boolean				
Label	Label	string		255		
LastModifiedDate	Last Modified Date	datetime				
OpenType	Open Type	picklist		255		
PrimaryColor	Primary Color	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RelatedListRecordId	Related List Record ID	string		255		
RelatedSourceEntity	Related Source Entity	string		255		
RetrievalMode	Retrieval Mode	picklist		255		
Section	Section	picklist		255		
SourceEntity	Source Entity	string		255		
Subtype	Subtype	string		255		
TargetObject	Target Object	string		255		
TargetUrl	Target URL	string		2048		
Type	Type	picklist		255		

PLATFORMEVENTUSAGEMETRIC

Contains usage data for event publishing and delivery to CometD and Pub/Sub API clients, `empApi` Lightning components, and event relays. Usage data is available for the last 24 hours, ending at the last hour, and for historical daily usage. PlatformEventUsageMetric contains separate usage metrics for platform events and change data capture events.

For more information, see PlatformEventUsageMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`EndDate`	End Date	datetime				
`ExternalId`	External ID	string		255		
`Id`	Platform Event Usage Metric ID	id		18		
`Name`	Metric Name	picklist		255		
`StartDate`	Start Date	datetime				
`Value`	Metric Value	long	18			

PLATFORMSTATUSALERTEVENT

An event related to the PlatformStatusAlertEvent object.

For more information, see PlatformStatusAlertEvent in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApiErrorCode	Api Error Code	string		200		
ComponentName	Component Name	string		200		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventUuid	Platform Event UUID	string		36		
ExtendedErrorCode	Extended Error Code	string		200		
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID For Platform Event	string		1000		
RequestId	Jetty Request ID	string		22		
ServiceJobId	Service Job Id	string		100		
ServiceName	Service Name	string		200		
StatusType	Status Type	string		50		
SubComponentName	Sub Component Name	string		200		
Subject	Subject	string		1000		
UserId	User ID	reference		18		
Username	Username	string		80		

POLYGON

Represents a polygon with the polygon mapping data stored as a blob.

For more information, see Polygon in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Data`	Data	textarea		32000		
`DataType`	Data Type	picklist		255		
`Id`	Polygon ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

POLYGONFEED

Feed tracking for Polygon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

POLYGONHISTORY

History for tracked fields of Polygon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Polygon History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PolygonId`	Polygon ID	reference		18		

POLYGONSHARE

Sharing for Polygon.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PORTALDELEGABLEPERMISSIONSET

PortalDelegablePermissionSet is a base platform object used to store permission sets that can be assigned by a delegated portal/external user admin (DPUA) to portal users.

For more information, see PortalDelegablePermissionSet in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Portal Delegable Permission Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`PermissionSetId`	PermissionSet ID	reference		18		
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRELIMINARYAPPLICATIONREF

Represents the saved applications and pre-screening forms.

For more information, see PreliminaryApplicationRef in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicationName	Application Name	string		255		
ApplicationType	Application Type	picklist		255		
BusinessAccountNameId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Preliminary Application Reference ID	id		18		
IsDeleted	Deleted	boolean				
IsSubmitted	Is Submitted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SavedApplicationUrl	Saved Application URL	url		255		
SystemModstamp	System Modstamp	datetime				

PRELIMINARYAPPLICATIONREFFEED

Feed tracking for PreliminaryApplicationRef.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PRELIMINARYAPPLICATIONREFHISTORY

History for tracked fields of PreliminaryApplicationRef.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Preliminary Application Reference History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PreliminaryApplicationRefId	Preliminary Application Reference ID	reference		18		

PRELIMINARYAPPLICATIONREFSHARE

Sharing for PreliminaryApplicationRef.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRESENCECONFIGDECLINEREASON

Represents the settings for a decline reason that a presence user provides when declining work.

For more information, see PresenceConfigDeclineReason in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Presence Configuration Decline Reason ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PresenceDeclineReasonId`	Presence Decline Reason ID	reference		18		
`PresenceUserConfigId`	Presence Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRESENCEDECLINEREASON

Represents an Omni-Channel decline reason that agents can select when declining work requests.

For more information, see PresenceDeclineReason in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Presence Decline Reason ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Presence Decline Reason Name	string		80		
`SystemModstamp`	System Modstamp	datetime				

PRESENCEUSERCONFIG

Represents a configuration that determines a presence user's settings.

For more information, see PresenceUserConfig in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcwExtensionDuration	Extension duration (seconds)	int	9			
AfterConvoWorkMaxTime	Duration (seconds)	int	9			
Capacity	Capacity	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomSoundId	Static Resource ID	reference		18		
DeveloperName	Developer Name	string		80		
HasAcwExtensionEnabled	Let agent extend timer	boolean				
HasAfterConvoWorkTimer	Give agents wrap-up time after conversations	boolean				
Id	Presence Configuration ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Presence Configuration Name	string		80		
MaxExtensions	Max Extensions	picklist		255		
OptionsIsAutoAcceptEnabled	IsAutoAcceptEnabled	boolean				
OptionsIsDeclineEnabled	IsDeclineEnabled	boolean				
OptionsIsDeclineReasonEnabled	IsDeclineReasonEnabled	boolean				
OptionsIsDisconnectSoundEnabled	IsDisconnectSoundEnabled	boolean				
OptionsIsRequestSoundEnabled	IsRequestSoundEnabled	boolean				
PresenceStatusOnDeclineId	Service Presence Status ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PresenceStatusOnPushTimeoutId	Service Presence Status ID	reference		18		
SoundLength	Sound Length (Seconds)	int	9			
SystemModstamp	System Modstamp	datetime				

PRESENCEUSERCONFIGPROFILE

Represents a configuration that determines the settings that are assigned to presence users who are assigned to a specific profile. User-level configurations override profile-level configurations.

For more information, see PresenceUserConfigProfile in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Presence Configuration for Profile ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PresenceUserConfigId`	Presence Configuration ID	reference		18		
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRESENCEUSERCONFIGUSER

Represents a configuration that determines the settings that are assigned to a presence user. These user-level configurations override profile-level configurations.

For more information, see PresenceUserConfigUser in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Presence Configuration for User ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PresenceUserConfigId`	Presence Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

PREVENTIVECAREAGREEMENT

Specifies the payment terms for contracts of Preventive Care Fee Agreement.

For more information, see PreventiveCareAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdditionalInformation	Additional Information	string		255		
BonusMeasureDescription	Bonus Measure Description	string		255		
BonusMeasureType	Bonus Measure Type	string		80		
BonusPayout	Bonus Payout	currency			18	0
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CurrentMeasurePercent	Current Measure Percent	percent			5	2
Id	Preventive Care Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Preventive Care Agreement Name	string		255		
SystemModstamp	System Modstamp	datetime				
TargetMeasurePercent	Target Measure Percent	percent			5	2

PREVENTIVECAREAGREEMENTFEED

Feed tracking for PreventiveCareAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PREVENTIVECAREAGREEMENTHISTORY

History for tracked fields of PreventiveCareAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Preventive Care AgreementHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PreventiveCareAgreementId	Preventive Care Agreement ID	reference		18		

PRICEADJUSTMENTSCHEDULE

Represents a series of tiered discounts based on the number of items purchased.

For more information, see PriceAdjustmentSchedule in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentMethod	Adjustment Method	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Price Adjustment Schedule ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Price Adjustment Schedule Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

PRICEADJUSTMENTSCHEDULESHARE

Sharing for PriceAdjustmentSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRICEADJUSTMENTTIER

Represents a discount tier in a price adjustment schedule.

For more information, see PriceAdjustmentTier in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Price Adjustment Tier ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LowerBound	Lower Bound	double			18	0
MayEdit	May Edit	boolean				
Name	Price Adjustment Tier Name	string		255		
PriceAdjustmentScheduleId	Price Adjustment Schedule ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TierType	Tier Type	picklist		255		
TierValue	Tier Value	double			18	2
UpperBound	Upper Bound	double			18	0

PRICEBOOK2

Represents a price book that contains the list of products that your org sells.

For more information, see Pricebook2 in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Price Book ID	id		18		
`IsActive`	Active	boolean				
`IsArchived`	Archived	boolean				
`IsDeleted`	Deleted	boolean				
`IsStandard`	Is Standard Price Book	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Price Book Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

PRICEBOOK2HISTORY

Represents historical information about changes that have been made to the standard fields of the associated Pricebook2, or to any custom fields with history tracking enabled.

For more information, see Pricebook2History in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Price Book History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`Pricebook2Id`	Price Book ID	reference		18		

PRICEBOOKENTRY

Represents a product entry (an association between a Pricebook2 and Product2) in a price book.

For more information, see PricebookEntry in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Price Book Entry ID	id		18		
`IsActive`	Active	boolean				
`IsArchived`	Archived	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Product Name	string		255		
`Pricebook2Id`	Price Book ID	reference		18		
`Product2Id`	Product ID	reference		18		
`ProductCode`	Product Code	string		255		
`SystemModstamp`	System Modstamp	datetime				
`UnitPrice`	List Price	currency			18	2
`UseStandardPrice`	Use Standard Price	boolean				

PRICEBOOKENTRYADJUSTMENT

Read-only junction object created when you associate a price adjustment schedule with a price book entry.

For more information, see PricebookEntryAdjustment in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Price Book Entry Adjustment ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Price Book Entry Adjustment Name	string		255		
`PriceAdjustmentScheduleId`	Price Adjustment Schedule ID	reference		18		
`PricebookEntryId`	Price Book Entry ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRICEBOOKENTRYHISTORY

History for tracked fields of PricebookEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Price Book Entry History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PricebookEntryId`	Price Book Entry ID	reference		18		

PROBLEM

Problems represent the root cause data of one or more incidents. This object contains all the details of a problem, documenting the history of the problem from detection to closure.

For more information, see Problem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created On	datetime				
Description	Description	textarea		32000		
Id	Problem ID	id		18		
Impact	Impact	picklist		40		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified On	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
ParentProblemId	Parent Problem ID	reference		18		
Priority	Priority	picklist		40		
PriorityOverrideReason	Priority Override Reason	string		255		
ProblemNumber	Problem Number	string		255		
ResolutionDateTime	Resolution Date	datetime				
ResolutionSummary	Resolution Summary	textarea		32000		
ResolvedById	User ID	reference		18		
RootCauseSummary	Root Cause Summary	textarea		32000		
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		

Problem

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SubCategory	Sub-Category	picklist		40		
Subject	Subject	string		255		
SystemModstamp	System Modstamp	datetime				
Urgency	Urgency	picklist		40		

PROBLEMFEED

Feed tracking for Problem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROBLEMHISTORY

History for tracked fields of Problem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Problem History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProblemId	Problem ID	reference		18		

PROBLEMSHARE

Sharing for Problem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROCESSDEFINITION

Represents the definition of a single approval process.

For more information, see ProcessDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	Unique Name	string		80		
`Id`	Approval Process ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LockType`	Lock Type	picklist		40		
`Name`	Name	string		40		
`State`	State	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`TableEnumOrId`	Custom Object Definition ID	picklist		40		
`Type`	Process Definition Type	picklist		40		

PROCESSEXCEPTION

Represents a processing failure on an order summary. A separate process is required to resolve the failure that caused the process exception before order summary processing can continue.

For more information, see ProcessException in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AttachedToId	Attached To ID	reference		18		
CaseId	Case ID	reference		18		
Category	Category	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		2000		
ExternalReference	External Reference	string		255		
Id	Process Exception ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Message	Message	string		255		
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		40		
ProcessExceptionNumber	Process Exception Number	string		255		
Severity	Severity	picklist		40		
SeverityCategory	Severity Category	picklist		255		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
SystemModstamp	System Modstamp	datetime				

PROCESSEXCEPTIONEVENT

Notifies subscribers of errors that occur during payment processing (capture, apply, and refund) on an order summary. Use this event to trigger subscribers such as flows in your order workflow.

For more information, see ProcessExceptionEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AttachedToId`	Attached To ID	reference		18		
`BackgroundOperationId`	Background Operation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		2000		
`EventUuid`	Process Exception Event Event UUID	string		36		
`ExceptionType`	Exception Type	picklist		40		
`ExternalReference`	External Reference	string		255		
`Message`	Message	string		255		
`ReplayId`	Process Exception Event Replay ID	string		1000		
`Severity`	Severity	picklist		40		

PROCESSEXCEPTIONSHARE

Sharing for ProcessException.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROCESSINSTANCE

Represents an instance of a single, end-to-end approval process. Use this and the node, step, and workitem process instance objects to create approval history reports.

For more information, see ProcessInstance in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CompletedDate`	Completed Date	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTimeInDays`	Elapsed Time in Days	double			7	3
`ElapsedTimeInHours`	Elapsed Time in Hours	double			7	2
`ElapsedTimeInMinutes`	Elapsed Time in Minutes	double			8	0
`Id`	Process Instance ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastActorId`	User ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProcessDefinitionId`	Approval Process ID	reference		18		
`Status`	Status	picklist		40		
`SubmittedById`	User ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetObjectId`	Target Object ID	reference		18		

PROCESSINSTANCEHISTORY

This read-only object shows all steps and pending approval requests associated with an approval process (ProcessInstance).

For more information, see ProcessInstanceHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActorId	Actor ID	reference		18		
Comments	Comments	string		4000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ElapsedTimeInDays	Elapsed Time in Days	double			18	0
ElapsedTimeInHours	Elapsed Time in Hours	double			7	2
ElapsedTimeInMinutes	Elapsed Time in Minutes	double			8	0
Id	Process Instance History ID	id		18		
IsDeleted	Deleted	boolean				
IsPending	Is Pending	boolean				
OriginalActorId	Original Actor ID	reference		18		
ProcessInstanceId	Process Instance ID	reference		18		
ProcessNodeId	Process Node ID	reference		18		
RemindersSent	RemindersSent	int	9			
StepStatus	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TargetObjectId	Target Object ID	reference		18		

PROCESSINSTANCENODE

Represents a step in an instance of an approval process. Compare to ProcessNode, which describes the step in a process definition. Use this object to retrieve approval history.

For more information, see ProcessInstanceNode in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CompletedDate`	Completed Date	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTimeInDays`	Elapsed Time in Days	double			7	3
`ElapsedTimeInHours`	Elapsed Time in Hours	double			7	2
`ElapsedTimeInMinutes`	Elapsed Time in Minutes	double			8	0
`Id`	Process Instance Node ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastActorId`	User ID	reference		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NodeStatus`	Node Status	picklist		255		
`ProcessInstanceId`	Process Instance ID	reference		18		
`ProcessNodeId`	Process Node ID	reference		18		
`ProcessNodeName`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

PROCESSINSTANCESTEP

Represents one work item in an approval process (ProcessInstance).

For more information, see ProcessInstanceStep in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActorId`	Actor ID	reference		18		
`Comments`	Comments	string		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTimeInDays`	Elapsed Time in Days	double			18	0
`ElapsedTimeInHours`	Elapsed Time in Hours	double			7	2
`ElapsedTimeInMinutes`	Elapsed Time in Minutes	double			8	0
`Id`	Process Instance Step ID	id		18		
`OriginalActorId`	Original Actor ID	reference		18		
`ProcessInstanceId`	Process Instance ID	reference		18		
`StepNodeId`	Process Node ID	reference		18		
`StepStatus`	Step Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

PROCESSINSTANCEWORKITEM

Represents a user's pending approval request.

For more information, see ProcessInstanceWorkitem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActorId`	Actor ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElapsedTimeInDays`	Elapsed Time in Days	double			7	3
`ElapsedTimeInHours`	Elapsed Time in Hours	double			7	2
`ElapsedTimeInMinutes`	Elapsed Time in Minutes	double			8	0
`Id`	Process Instance Workitem ID	id		18		
`IsDeleted`	Deleted	boolean				
`OriginalActorId`	Original Actor ID	reference		18		
`ProcessInstanceId`	Process Instance ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROCESSNODE

Describes a step in a process definition. Compare to ProcessInstanceNode, which describes the step in a running process.

For more information, see ProcessNode in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Description`	Description	textarea		1000		
`DeveloperName`	Unique Name	string		80		
`Id`	Process Node ID	id		18		
`Name`	Name	string		255		
`ProcessDefinitionId`	Approval Process ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRODUCER

Represents an agent or an agency selling insurance.

For more information, see Producer in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Producer ID	id		18		
InternalUserId	User ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Producer Identifier	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

PRODUCERCOMMISSION

Represents a producer's commission for an insurance policy. The commission can be calculated from the commissionable transactions or can be populated from an external system.

For more information, see ProducerCommission in the *Financial Services Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommissionAmount	Commission Amount	currency			18	2
CommissionableAmount	Commissionable Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Producer Commission ID	id		18		
InsurancePolicyAssetId	Insurance Policy Asset ID	reference		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
InsurancePolicyTransactionId	Insurance Policy Transaction ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaxCommissionAmount	Max Commission Amount	currency			18	2
MinCommissionAmount	Min Commission Amount	currency			18	2
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentProducerCommissionId	Producer Commission ID	reference		18		
PaymentDatetime	Payment Date	datetime				
ProcessingProducerId	Producer ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProducerId	Producer ID	reference		18		
ProducerProductionCode	Producer Production Code	string		255		
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

PRODUCERCOMMISSIONFEED

Feed tracking for ProducerCommission.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCERCOMMISSIONHISTORY

History for tracked fields of ProducerCommission.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Producer Commission History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProducerCommissionId	Producer Commission ID	reference		18		

PRODUCERCOMMISSIONSHARE

Sharing for ProducerCommission.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCERFEED

Feed tracking for Producer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCERHISTORY

History for tracked fields of Producer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Producer History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProducerId	Producer ID	reference		18		

PRODUCERSHARE

Sharing for Producer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCT2

Represents a product that your company sells.

For more information, see Product2 in the *Consumer Goods Cloud Developer Guide*, *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Product Description	textarea		4000		
DisplayUrl	Display URL	url		1000		
ExternalDataSourceId	External Data Source ID	reference		18		
ExternalId	External ID	string		255		
Family	Product Family	picklist		255		
Id	Product ID	id		18		
IsActive	Active	boolean				
IsArchived	Archived	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Product Name	string		255		
ProductCode	Product Code	string		255		
QuantityUnitOfMeasure	Quantity Unit Of Measure	picklist		255		
StockKeepingUnit	Product SKU	string		180		
SystemModstamp	System Modstamp	datetime				

PRODUCT2FEED

Feed tracking for Product2.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCT2HISTORY

History for tracked fields of Product2.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Stage ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`Product2Id`	Product ID	reference		18		

PRODUCTATTRIBUTE

Represents the attributes that can be associated with a product.

For more information, see ProductAttribute in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Attribute ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Product Attribute Name	string		255		
`ProductId`	Product ID	reference		18		
`Sequence`	Sequence	int	9			
`SystemModstamp`	System Modstamp	datetime				
`VariantParentId`	Product ID	reference		18		

PRODUCTATTRIBUTESET

Represents a group of attributes that can be associated with a product.

For more information, see ProductAttributeSet in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`DeveloperName`	Developer Name	string		80		
`Id`	Product Attribute Set ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		80		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTATTRIBUTESETITEM

Represents a set of attributes that can be associated with a product.

For more information, see ProductAttributeSetItem in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Field`	Custom Field Definition ID	picklist		255		
`Id`	Product Attribute Set Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProductAttributeSetId`	Product Attribute Set ID	reference		18		
`Sequence`	Sequence	int	9			
`SystemModstamp`	System Modstamp	datetime				

PRODUCTATTRIBUTESETPRODUCT

Represents the product associated with a set of attributes.

For more information, see ProductAttributeSetProduct in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Attribute Set Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Product Attribute Set Product Name	string		255		
`ProductAttributeSetId`	Product Attribute Set ID	reference		18		
`ProductId`	Product ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTAVAILABILITYPROJECTION

Represents the projected product quantity available at an inventory location at various points in time. Records for this object are automatically created by Intelligent Sales.

For more information, see ProductAvailabilityProjection in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Availability Projection ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Product2Id`	Product ID	reference		18		
`ProductLocationId`	Location ID	reference		18		
`ProjectedQuantity`	Projected Quantity	double			18	0
`ProjectionDate`	Projection Date	date				
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTAVAILABILITYPROJECTIONFEED

Feed tracking for ProductAvailabilityProjection.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTAVAILABILITYPROJECTIONHISTORY

History for tracked fields of ProductAvailabilityProjection.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Availability Projection History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductAvailabilityProjectionId	Product Availability Projection ID	reference		18		

PRODUCTAVAILABILITYPROJECTIONSHARE

Sharing for ProductAvailabilityProjection.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTCATALOG

The container that holds a Product Category hierarchy.

For more information, see ProductCatalog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Catalog ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`NumberOfCategories`	Number of Categories	int	9			
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTCATALOGFEED

Feed tracking for ProductCatalog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTCATALOGHISTORY

History for tracked fields of ProductCatalog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Catalog History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductCatalogId`	Catalog ID	reference		18		

PRODUCTCATALOGSHARE

Sharing for ProductCatalog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTCATEGORY

Represents the category that products are organized in.

For more information, see ProductCategory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CatalogId	Catalog ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Category ID	id		18		
IsDeleted	Deleted	boolean				
IsNavigational	Show In Menu	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		200		
NumberOfProducts	Number of Products	int	9			
ParentCategoryId	Category ID	reference		18		
SortOrder	Sort Order	int	9			
SystemModstamp	System Modstamp	datetime				

PRODUCTCATEGORYFEED

Feed tracking for ProductCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTCATEGORYHISTORY

History for tracked fields of ProductCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Category History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductCategoryId`	Category ID	reference		18		

PRODUCTCATEGORYPRODUCT

Holds the relation between product and product category to assign products to a category.

For more information, see ProductCategoryProduct in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CatalogId`	Catalog ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Category Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimaryCategory`	Is Primary Category	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`ProductCategoryId`	Category ID	reference		18		
`ProductId`	Product ID	reference		18		
`ProductToCategory`	Product/Category Concatenation	string		30		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTCATEGORYPRODUCTHISTORY

History for tracked fields of ProductCategoryProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Category Product History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductCategoryProductId`	Product Category Product ID	reference		18		

PRODUCTCONSUMED

Represents an item from your inventory that was used to complete a work order or work order line item in field service.

For more information, see ProductConsumed in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
Id	Product Consumed ID	id		18		
IsConsumed	Consumed	boolean				
IsDeleted	Deleted	boolean				
IsProduct2Serialized	Serialized	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ListPrice	List Price	currency			18	2
PricebookEntryId	Price Book Entry ID	reference		18		
Product2Id	Product ID	reference		18		
ProductConsumedNumber	Product Consumed Number	string		255		
ProductItemId	Product Item ID	reference		18		
ProductName	Product Name	string		255		
QuantityConsumed	Quantity Consumed	double			18	2
QuantityUnitOfMeasure	Quantity Unit Of Measure	picklist		40		
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UnitPrice	Unit Price	currency			18	2
WorkOrderId	Work Order ID	reference		18		
WorkOrderLineItemId	Work Order Line Item ID	reference		18		

PRODUCTCONSUMEDFEED

Feed tracking for ProductConsumed.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTCONSUMEDHISTORY

History for tracked fields of ProductConsumed.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Consumed History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductConsumedId	Product Consumed ID	reference		18		

PRODUCTEMISSIONSFACTOR

Represents information about the emissions factors used in quantifying the emissions by a product in the supply-chain.

For more information, see ProductEmissionsFactor in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmssnFctrDataSource`	Emissions Factor Data Source	textarea		32000		
`EmssnFctrDataSourceType`	Emissions Factor Data Source Type	picklist		40		
`EmssnFctrUpdateYear`	Emissions Factor Update Year	picklist		255		
`Id`	Product Emissions Factor ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProductId`	Product ID	reference		18		
`SupplierId`	Supplier ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TotalEmissionsValue`	Total Emissions Value (tCO2e/UoM)	double			18	8
`UnitOfMeasure`	Unit of Measure	picklist		255		

PRODUCTEMISSIONSFACTORFEED

Feed tracking for ProductEmissionsFactor.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PRODUCTEMISSIONSFACTORHISTORY

History for tracked fields of ProductEmissionsFactor.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Emissions Factor History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductEmissionsFactorId	Product Emissions Factor ID	reference		18		

PRODUCTEMISSIONSFACTORSHARE

Sharing for ProductEmissionsFactor.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

PRODUCTENTITLEMENTTEMPLATE

Represents predefined terms of customer support (Entitlement) that users can add to products (Product2).

For more information, see ProductEntitlementTemplate in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EntitlementTemplateId`	Entitlement Template ID	reference		18		
`Id`	Product Entitlement Template ID	id		18		
`Product2Id`	Product ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTFULFILLMENTLOCATION

Associates a business account and a product inventory with the responsible field rep.

For more information, see ProductFulfillmentLocation in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FulfillmentLocationId`	Location ID	reference		18		
`Id`	Product Fulfillment Location ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationId`	Location ID	reference		18		
`Name`	Product Fulfillment Location Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProductId`	Product ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

PRODUCTFULFILLMENTLOCATIONFEED

Feed tracking for ProductFulfillmentLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTFULFILLMENTLOCATIONHISTORY

History for tracked fields of ProductFulfillmentLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Fulfillment Location History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductFulfillmentLocationId	Product Fulfillment Location ID	reference		18		

PRODUCTFULFILLMENTLOCATIONSHARE

Sharing for ProductFulfillmentLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTITEM

Represents the stock of a particular product at a particular location in field service, such as all bolts stored in your main warehouse.

For more information, see ProductItem in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsProduct2Serialized`	Serialized	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationId`	Location ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`Product2Id`	Product ID	reference		18		
`ProductItemNumber`	Product Item Number	string		255		
`ProductName`	Product Name	string		255		
`QuantityOnHand`	Quantity On Hand	double			18	2
`QuantityUnitOfMeasure`	Quantity Unit Of Measure	picklist		40		
`SerialNumber`	Serial Number	string		80		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTITEMFEED

Feed tracking for ProductItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTITEMHISTORY

History for tracked fields of ProductItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductItemId`	Product Item ID	reference		18		

PRODUCTITEMSHARE

Sharing for ProductItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTITEMTRANSACTION

Represents an action taken on a product item in field service. Product item transactions are auto-generated records that help you track when a product item is replenished, consumed, or adjusted.

For more information, see ProductItemTransaction in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Product Item Transaction ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ProductItemId	Product Item ID	reference		18		
ProductItemTransactionNumber	Product Item Transaction Number	string		255		
Quantity	Quantity	double			18	2
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TransactionType	Transaction Type	picklist		255		

PRODUCTITEMTRANSACTIONFEED

Feed tracking for ProductItemTransaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTITEMTRANSACTIONHISTORY

History for tracked fields of ProductItemTransaction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Item Transaction History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductItemTransactionId	Product Item Transaction ID	reference		18		

PRODUCTMEDIA

Represents the rich media, including images and attachments, that can be added to products.

For more information, see ProductMedia in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ElectronicMediaGroupId`	Electronic Media Group ID	reference		18		
`ElectronicMediaId`	ElectronicMedia ID	reference		18		
`Id`	Product Media ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Product Media Name	string		255		
`ProductId`	Product ID	reference		18		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

PRODUCTMEDIAHISTORY

History for tracked fields of ProductMedia.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Media History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductMediaId`	Product Media ID	reference		18		

PRODUCTRELATEDMATERIAL

Represents information about the components of a product.

For more information, see ProductRelatedMaterial in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EffectiveEndDate	Effective End Date	date				
EffectiveStartDate	Effective Start Date	date				
Id	Product Related Material ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadTime	Lead Time	double			18	2
LeadTimeUomId	Unit of Measure ID	reference		18		
ManufacturingProgramId	Manufacturing Program ID	reference		18		
MinimumEligibleQuantity	Minimum Eligible Quantity	double			18	2
MinimumEligibleQuantityUomId	Unit of Measure ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProductComponentId	Product ID	reference		18		
ProductCpntPricebookId	Price Book ID	reference		18		
ProductId	Product ID	reference		18		
QuantityPerProductUnit	Quantity Per Product Unit	double			18	2
QuantityUomId	Unit of Measure ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
UsageCategory	Usage Category	picklist		40		

PRODUCTRELATEDMATERIALFEED

Feed tracking for ProductRelatedMaterial.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTRELATEDMATERIALHISTORY

History for tracked fields of ProductRelatedMaterial.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Related Material History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductRelatedMaterialId	Product Related Material ID	reference		18		

PRODUCTRELATEDMATERIALSHARE

Sharing for ProductRelatedMaterial.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTREQUEST

Represents an order for a part or parts in field service.

For more information, see ProductRequest in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CareProgramEnrolleeId	Care Program Enrollee ID	reference		18		
CaseId	Case ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
Id	Product Request ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
NeedByDate	Need By Date	datetime				
OwnerId	Owner ID	reference		18		
ProductRequestNumber	Product Request Number	string		255		
ShipToAddress	Ship To Address	address				
ShipToCity	City	string		40		
ShipToCountry	Country	string		80		
ShipToGeocodeAccuracy	Geocode Accuracy	picklist		255		
ShipToLatitude	Latitude	double			18	15
ShipToLongitude	Longitude	double			18	15

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShipToPostalCode	Zip/Postal Code	string		20		
ShipToState	State/Province	string		80		
ShipToStreet	Address	textarea		255		
ShipmentType	Shipment Type	picklist		40		
SourceLocationId	Source Location ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
WorkOrderId	Work Order ID	reference		18		
WorkOrderLineItemId	Work Order Line Item ID	reference		18		

PRODUCTREQUESTFEED

Feed tracking for ProductRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTREQUESTHISTORY

History for tracked fields of ProductRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Request History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductRequestId`	Product Request ID	reference		18		

PRODUCTREQUESTLINEITEM

Represents a request for a part in field service. Product request line items are components of product requests.

For more information, see ProductRequestLineItem in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CareProgramEnrolleeId	Care Program Enrollee ID	reference		18		
CaseId	Case ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
Id	Product Request Line Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
NeedByDate	Need By Date	datetime				
ParentId	Product Request ID	reference		18		
Product2Id	Product ID	reference		18		
ProductRequestLineItemNumber	Product Request Line Item Number	string		255		
QuantityRequested	Quantity Requested	double			18	2
QuantityUnitOfMeasure	Quantity Unit Of Measure	picklist		40		
ShipToAddress	Ship To Address	address				
ShipToCity	City	string		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShipToCountry	Country	string		80		
ShipToGeocodeAccuracy	Geocode Accuracy	picklist		255		
ShipToLatitude	Latitude	double			18	15
ShipToLongitude	Longitude	double			18	15
ShipToPostalCode	Zip/Postal Code	string		20		
ShipToState	State/Province	string		80		
ShipToStreet	Address	textarea		255		
ShipmentType	Shipment Type	picklist		40		
SourceLocationId	Source Location ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
WorkOrderId	Work Order ID	reference		18		
WorkOrderLineItemId	Work Order Line Item ID	reference		18		

PRODUCTREQUESTLINEITEMFEED

Feed tracking for ProductRequestLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTREQUESTLINEITEMHISTORY

History for tracked fields of ProductRequestLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Request Line Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductRequestLineItemId`	Product Request Line Item ID	reference		18		

PRODUCTREQUESTSHARE

Sharing for ProductRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTREQUIRED

Represents a product that is needed to complete a work order or work order line item in field service.

For more information, see ProductRequired in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Required ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`ParentRecordId`	Parent Record ID	reference		18		
`ParentRecordType`	Parent Record Type	string		50		
`Product2Id`	Product ID	reference		18		
`ProductName`	Product Name	string		255		
`ProductRequiredNumber`	Product Required Number	string		255		
`QuantityRequired`	Quantity Required	double			18	2
`QuantityUnitOfMeasure`	Quantity Unit Of Measure	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTREQUIREDFEED

Feed tracking for ProductRequired.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTREQUIREDHISTORY

History for tracked fields of ProductRequired.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Required History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductRequiredId`	Product Required ID	reference		18		

PRODUCTSERVICECAMPAIGN

Represents a set of activities to be performed on a product service campaign asset, such as a product recall for safety issues or product defects.

For more information, see ProductServiceCampaign in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EndDate	End Date	date				
Id	Product Service Campaign ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		40		
Product2Id	Product ID	reference		18		
ProductServiceCampaignName	Product Service Campaign Name	string		255		
StartDate	Start Date	date				
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
WorkTypeId	Work Type ID	reference		18		

PRODUCTSERVICECAMPAIGNFEED

Feed tracking for ProductServiceCampaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTSERVICECAMPAIGNHISTORY

History for tracked fields of ProductServiceCampaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Product Service Campaign History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProductServiceCampaignId`	Product Service Campaign ID	reference		18		

PRODUCTSERVICECAMPAIGNITEM

Represents a product service campaign's asset.

For more information, see ProductServiceCampaignItem in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Product Service Campaign Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Product2Id	Product ID	reference		18		
ProductServiceCampaignId	Product Service Campaign ID	reference		18		
ProductServiceCampaignItemNumber	Product Service Campaign Item Number	string		255		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
SystemModstamp	System Modstamp	datetime				

PRODUCTSERVICECAMPAIGNITEMFEED

Feed tracking for ProductServiceCampaignItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTSERVICECAMPAIGNITEMHISTORY

History for tracked fields of ProductServiceCampaignItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Service Campaign Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductServiceCampaignItemId	Product Service Campaign Item ID	reference		18		

PRODUCTSERVICECAMPAIGNITEMSTATUS

Represents a status for a product service campaign item in field service.

For more information, see ProductServiceCampaignItemStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Service Campaign Item Status ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTSERVICECAMPAIGNSHARE

Sharing for ProductServiceCampaign.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

PRODUCTSERVICECAMPAIGNSTATUS

Represents a status for a product service campaign in field service.

For more information, see ProductServiceCampaignStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Service Campaign Status ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

PRODUCTTRANSFER

Represents the transfer of inventory between locations in field service.

For more information, see ProductTransfer in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
ExpectedPickupDate	Expected Pickup Date	datetime				
Id	Product Transfer ID	id		18		
IsDeleted	Deleted	boolean				
IsProduct2Serialized	Serialized	boolean				
IsReceived	Received	boolean				
IsSent	Sent	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
Product2Id	Product ID	reference		18		
Product2TransferRecordMode	Transfer Record Mode	picklist		255		
ProductRequestId	Product Request ID	reference		18		
ProductRequestLineItemId	Product Request Line Item ID	reference		18		
ProductTransferNumber	Product Transfer Number	string		255		
QuantityReceived	Quantity Received	double			18	2
QuantitySent	Quantity Sent	double			18	2
QuantityUnitOfMeasure	Quantity Unit Of Measure	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ReceivedById	Received by ID	reference		18		
ReturnOrderId	Return Order ID	reference		18		
ReturnOrderLineItemId	Return Order Line Item ID	reference		18		
ShipmentExpectedDeliveryDate	Shipment Expected Delivery Date	datetime				
ShipmentId	Shipment ID	reference		18		
ShipmentStatus	Shipment Status	picklist		40		
ShipmentTrackingNumber	Shipment Tracking Number	string		255		
ShipmentTrackingUrl	Shipment Tracking URL	url		255		
SourceLocationId	Source Location ID	reference		18		
SourceProductItemId	Product Item ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				

PRODUCTTRANSFERFEED

Feed tracking for ProductTransfer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTTRANSFERHISTORY

History for tracked fields of ProductTransfer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Transfer History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductTransferId	Product Transfer ID	reference		18		

PRODUCTTRANSFERSHARE

Sharing for ProductTransfer.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PRODUCTWARRANTYTERM

Defines the relationship between a product or product family and warranty term.

For more information, see ProductWarrantyTerm in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CoveredProductFamily`	Covered Product Family	picklist		40		
`CoveredProductId`	Product ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Product Warranty Term ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`ProductWarrantyTermNumber`	Product Warranty Term Number	string		255		
`SystemModstamp`	System Modstamp	datetime				
`WarrantyTermId`	Warranty Term ID	reference		18		

PRODUCTWARRANTYTERMFEED

Feed tracking for ProductWarrantyTerm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PRODUCTWARRANTYTERMHISTORY

History for tracked fields of ProductWarrantyTerm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Product Warranty Term History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProductWarrantyTermId	Product Warranty Term ID	reference		18		

PROFILE

Represents a profile, which defines a set of permissions to perform different operations. Operations can include creating a custom profile or querying, adding, updating, or deleting information.

For more information, see Profile in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Profile ID	id		18		
IsSsoEnabled	Is Single Sign-On Enabled	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PermissionsAECommunityAccess	Use Assessment Envelope objects via Experience Cloud sites	boolean				
PermissionsAICreateInsightObjects	Create AI Insight Objects	boolean				
PermissionsAIViewInsightObjects	View AI Insight Objects	boolean				
PermissionsAccessCMC	Access Experience Management	boolean				
PermissionsAccessContentBuilder	Access drag-and-drop content builder	boolean				
PermissionsAccessFinancialAccounts	Financial Accounts User	boolean				
PermissionsAccessToServiceProcess	Service Process User	boolean				
PermissionsAccountSwitcherUser	Account Switcher User	boolean				
PermissionsActionPlansUserAccess	Permission to access the Action Plans feature	boolean				
PermissionsActivateContract	Activate Contracts	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsActivateOrder	Activate Orders	boolean				
PermissionsActivitiesAccess	Access Activities	boolean				
PermissionsAddAnalyticsRemoteConnections	Add CRM Analytics Remote Connections	boolean				
PermissionsAddDirectMessageMembers	Add People to Direct Messages	boolean				
PermissionsAddWaveNotificationRecipients	Add Recipients to CRM Analytics Notifications	boolean				
PermissionsAdoptionAnalyticsUser	Access Adoption Analytics Templates and Apps	boolean				
PermissionsAllowAIAccelerator	View AI Accelerator Predictions.	boolean				
PermissionsAllowEmailIC	Email-Based Identity Verification Option	boolean				
PermissionsAllowLightningLogin	Lightning Login User	boolean				
PermissionsAllowViewEditConvertedLeads	View and Edit Converted Leads	boolean				
PermissionsApexRestServices	Apex REST Services	boolean				
PermissionsApiEnabled	API Enabled	boolean				
PermissionsApiUserOnly	Api Only User	boolean				
PermissionsAssessmentPlatformUser	Discovery Framework Platform User	boolean				
PermissionsAssignPermissionSets	Assign Permission Sets	boolean				
PermissionsAssignTopics	Assign Topics	boolean				
PermissionsAssociationEngineUserAccess	User license to access Record Association Builder in Financial Services Cloud.	boolean				
PermissionsAuthorApex	Author Apex	boolean				
PermissionsAutomaticActivityCapture	Use Einstein Activity Capture	boolean				
PermissionsAutonomousAnalyticsPrivacy	Manage Autonomous Insights Data Privacy	boolean				
PermissionsB2BMarketingAnalyticsUser	Create B2B Marketing Analytics Apps	boolean				
PermissionsBVCommunityAccess	Use objects in the Benefit Verification data model via Experience Cloud sites	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsBranchManagementUserAccess	User license to access Branch Management in Financial Services Cloud.	boolean				
PermissionsBulkApiHardDelete	Bulk API Hard Delete	boolean				
PermissionsBulkMacrosAllowed	Run Macros on Multiple Records	boolean				
PermissionsBypassMFAForUiLogins	Waive Multi-Factor Authentication for Exempt Users	boolean				
PermissionsCMSECEAuthoringAccess	Migrate Enablement Content	boolean				
PermissionsCampaignInfluence2	Campaign Influence	boolean				
PermissionsCanApproveFeedPost	Can Approve Feed Post and Comment	boolean				
PermissionsCanEditDataPrepRecipe	Edit Dataset Recipes	boolean				
PermissionsCanEditPrompts	Manage Prompts	boolean				
PermissionsCanInsertFeedSystemFields	Insert System Field Values for Chatter Feeds	boolean				
PermissionsCanManageMaps	Manage CRM Analytics Custom Maps	boolean				
PermissionsCanRunAnalysis	Can Run Einstein Discovery for Reports	boolean				
PermissionsCanUseNewDashboardBuilder	Drag-and-Drop Dashboard Builder	boolean				
PermissionsCanVerifyComment	Verify Answers to Chatter Questions	boolean				
PermissionsChangeDashboardColors	Change Dashboard Colors	boolean				
PermissionsChatterComposeUiCodesnippet	Allow Inclusion of Code Snippets from UI	boolean				
PermissionsChatterEditOwnPost	Edit My Own Posts	boolean				
PermissionsChatterEditOwnRecordPost	Edit Posts on Records I Own	boolean				
PermissionsChatterFileLink	Create Public Links	boolean				
PermissionsChatterInternalUser	Chatter Internal User	boolean				
PermissionsChatterInviteExternalUsers	Invite Customers To Chatter	boolean				
PermissionsChatterOwnGroups	Create and Own New Chatter Groups	boolean				
PermissionsClientSecretRotation	Allow consumer key and secret rotation	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsCloseConversations	Close Conversation Threads	boolean				
PermissionsConfigCompliantDataSharing	Configure Compliant Data Sharing	boolean				
PermissionsConfigCustomRecs	Configure Custom Recommendations	boolean				
PermissionsConfigureDataspaceScope	Configure Dataspace Scope	boolean				
PermissionsConnectOrgToEnvironmentHub	Connect Organization to Environment Hub	boolean				
PermissionsConsentApiUpdate	Update Consent Preferences Using REST API	boolean				
PermissionsContentAdministrator	Manage Salesforce CRM Content	boolean				
PermissionsContentHubUser	Files Connect Cloud	boolean				
PermissionsContentWorkspaces	Access Libraries	boolean				
PermissionsConvertLeads	Convert Leads	boolean				
PermissionsCreateAuditFields	Set Audit Fields upon Record Creation	boolean				
PermissionsCreateCustomizeDashboards	Create and Customize Dashboards	boolean				
PermissionsCreateCustomizeFilters	Create and Customize List Views	boolean				
PermissionsCreateCustomizeReports	Create and Customize Reports	boolean				
PermissionsCreateDashboardFolders	Create Dashboard Folders	boolean				
PermissionsCreateLtngTempFolder	Create Folders for Lightning Email Templates	boolean				
PermissionsCreateLtngTempInPub	Manage Public Lightning Email Templates	boolean				
PermissionsCreateMultiforce	Create AppExchange Packages	boolean				
PermissionsCreateReportFolders	Create Report Folders	boolean				
PermissionsCreateReportInLightning	Report Builder (Lightning Experience)	boolean				
PermissionsCreateTopics	Create Topics	boolean				
PermissionsCreateUpdateSDDataset	Create and Update Einstein Discovery Datasets	boolean				
PermissionsCreateUpdateSDDStory	Create and Update Einstein Discovery Stories	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsCreateWorkBadgeDefinition	Create custom Badge Definitions	boolean				
PermissionsCreateWorkspaces	Create Libraries	boolean				
PermissionsCustomMobileAppsAccess	Access Custom Mobile Apps	boolean				
PermissionsCustomSidebarOnAllPages	Show Custom Sidebar On All Pages	boolean				
PermissionsCustomizeApplication	Customize Application	boolean				
PermissionsDataExport	Weekly Data Export	boolean				
PermissionsDataPipelinesAppConsumer	Permission to access Data Pipelines license	boolean				
PermissionsDelegatedPortalUserAdmin	Delegated External User Administrator	boolean				
PermissionsDelegatedTwoFactor	Manage Multi-Factor Authentication in User Interface	boolean				
PermissionsDeleteActivatedContract	Delete Activated Contracts	boolean				
PermissionsDeleteTopics	Delete Topics	boolean				
PermissionsDistributeFromPersWksp	Create Content Deliveries	boolean				
PermissionsDocGenDesigner	Enables Designers to create Document Templates.	boolean				
PermissionsDocGenRuntimeCCUser	Enables Customers and Partners to generate documents via communities.	boolean				
PermissionsDocGenRuntimeUser	Enables Business users to generate documents.	boolean				
PermissionsDocumentAutomationUserAccess	User license to access IntelligentDocumentAutomation in Financial Services Cloud.	boolean				
PermissionsDocumentChecklistUserAccess	User license to access the Document Checklist features.	boolean				
PermissionsEditActivatedOrders	Edit Activated Orders	boolean				
PermissionsEditBillingInfo	Manage Billing	boolean				
PermissionsEditBrandTemplates	Manage Letterheads	boolean				
PermissionsEditCaseComments	Edit Case Comments	boolean				
PermissionsEditEvent	Edit Events	boolean				
PermissionsEditHtmlTemplates	Edit HTML Templates	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsEditMyDashboards	Edit My Dashboards	boolean				
PermissionsEditMyReports	Edit My Reports	boolean				
PermissionsEditOppLineItemUnitPrice	Edit Opportunity Product Sales Price	boolean				
PermissionsEditPublicDocuments	Manage Public Documents	boolean				
PermissionsEditPublicFilters	Manage Public List Views	boolean				
PermissionsEditPublicTemplates	Manage Public Classic Email Templates	boolean				
PermissionsEditReadonlyFields	Edit Read Only Fields	boolean				
PermissionsEditTask	Edit Tasks	boolean				
PermissionsEditTopics	Edit Topics	boolean				
PermissionsEmailAdministration	Email Administration	boolean				
PermissionsEmailMass	Mass Email	boolean				
PermissionsEmailSingle	Send Email	boolean				
PermissionsEmailTemplateManagement	Manage Email Templates	boolean				
PermissionsEnableBCTransactionPolling	Enable blockchain transaction polling API	boolean				
PermissionsEnableCommunityAppLauncher	Show App Launcher in Experience Cloud Sites	boolean				
PermissionsEnableIPFSUpload	Allow blockchain data upload	boolean				
PermissionsEnableNotifications	Send Outbound Messages	boolean				
PermissionsExportReport	Export Reports	boolean				
PermissionsFHIRCmtyAccess	Use objects in the Clinical data model via Experience Cloud sites	boolean				
PermissionsFSCAlertFrameworkUserAccess	Access Record Alerts	boolean				
PermissionsFSCArcGraphCommunityUser	Access Actionable Relationship Center for partner users	boolean				
PermissionsFSCInsClaimMgtPlatformUser	Insurance Claim Management Platform User	boolean				
PermissionsFSCInsPolicyAdmPlatformUser	Insurance Policy Administration Platform User	boolean				
PermissionsFSCInsuranceCmpCmtyAccess	Access Insurance Lightning Components	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsFSCInsuranceCpqLwcOnlyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsurancePlatformUser	Access Insurance Objects	boolean				
PermissionsFeedPinning	Pin Posts in Feeds	boolean				
PermissionsFinancialServices2UserAccess	Access Actionable Relationship Center	boolean				
PermissionsFlowUFLRequired	Require Flow User Feature License	boolean				
PermissionsForceTwoFactor	Multi-Factor Authentication for User Interface Logins	boolean				
PermissionsGetSmartDataDiscovery	View Einstein Discovery Recommendations	boolean				
PermissionsGetSmartDataDiscoveryExternal	View Einstein Discovery Recommendations Via Connect API	boolean				
PermissionsGiveRecognitionBadge	Give Recognition Badges in Experience Builder Sites	boolean				
PermissionsGovernNetworks	Manage Experiences	boolean				
PermissionsHasUnlimitedNBAExecutions	User Has Unlimited Next Best Action Strategy Executions	boolean				
PermissionsHcAdvancedTherapyUser	Manage Advanced Therapy Orchestration features	boolean				
PermissionsHcPnmSiteUser	Use objects in the Provider Network Management data model via Experience Cloud sites	boolean				
PermissionsHeadlessCMSAccess	Enable Salesforce CMS Integration	boolean				
PermissionsHealthCloudCmtyAccess	Provides access to Health Cloud data for Community users.	boolean				
PermissionsHealthCloudUtilizationMgtUser	Manage Health Cloud Utilization Management	boolean				
PermissionsHideReadByList	Hide the Seen By List	boolean				
PermissionsIdentityConnect	Use Identity Connect	boolean				
PermissionsIdentityEnabled	Use Identity Features	boolean				
PermissionsIdentityVerificationUserAccess	Permission to access Identity Verification	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsImportCustomObjects	Import Custom Objects	boolean				
PermissionsImportLeads	Import Leads	boolean				
PermissionsImportPersonal	Import Personal Contacts	boolean				
PermissionsInboundMigrationToolsUser	Deploy Change Sets	boolean				
PermissionsIndustryMilestonePlatformUser	Access Life Events or Business Milestones Component	boolean				
PermissionsInsightsAppAdmin	Manage CRM Analytics	boolean				
PermissionsInsightsAppDashboardEditor	Create and Edit CRM Analytics Dashboards	boolean				
PermissionsInsightsAppEltEditor	Edit CRM Analytics Dataflows	boolean				
PermissionsInsightsAppUploadUser	Upload External Data to CRM Analytics	boolean				
PermissionsInsightsAppUser	Use CRM Analytics	boolean				
PermissionsInsightsCreateApplication	Create CRM Analytics Apps	boolean				
PermissionsInstallMultiforce	Download AppExchange Packages	boolean				
PermissionsInsuranceGroupBenefitsUser	Insurance Group Benefits User	boolean				
PermissionsInterestTaggingUserAccess	Access Interest Tags for Financial Services Cloud.	boolean				
PermissionsIsSsoEnabled	Is Single Sign-On Enabled	boolean				
PermissionsIsotopeAccess	Salesforce Anywhere on Mobile	boolean				
PermissionsIsotopeCToCUser	Salesforce Anywhere Integration Access	boolean				
PermissionsIsotopeLEX	Salesforce Anywhere in Lightning Experience	boolean				
PermissionsKycPlatformUser	Identity Verification and Screening User	boolean				
PermissionsMEndMessagingSessionUserPerm	End Messaging Session	boolean				
PermissionsMOutboundMessagingUserPerm	Agent Initiated Outbound Messaging	boolean				
PermissionsLearningManager	Manage Learning	boolean				
PermissionsLightningConsoleAllowedForUser	Lightning Console User	boolean				
PermissionsLightningExperienceUser	Lightning Experience User	boolean				
PermissionsListEmailSend	Allow sending of List Emails	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsLtngPromoReservedUIUserPerm	Remain in Salesforce Classic	boolean				
PermissionsManageAnalyticSnapshots	Manage Reporting Snapshots	boolean				
PermissionsManageAuthProviders	Manage Auth. Providers	boolean				
PermissionsManageBusinessHourHolidays	Manage Business Hours Holidays	boolean				
PermissionsManageC360AConnections	Connect Org to Customer Data Platform	boolean				
PermissionsManageCMS	Create CMS Workspaces and Channels	boolean				
PermissionsManageCallCenters	Manage Call Centers	boolean				
PermissionsManageCases	Manage Cases	boolean				
PermissionsManageCategories	Manage Categories	boolean				
PermissionsManageCertificates	Manage Certificates	boolean				
PermissionsManageChatterMessages	Manage Chatter Messages and Direct Messages	boolean				
PermissionsManageContentPermissions	Manage Content Permissions	boolean				
PermissionsManageContentProperties	Manage Content Properties	boolean				
PermissionsManageContentTypes	Manage record types and layouts for Files	boolean				
PermissionsManageCssUsers	Manage Customer Users	boolean				
PermissionsManageCustomPermissions	Manage Custom Permissions	boolean				
PermissionsManageCustomReportTypes	Manage Custom Report Types	boolean				
PermissionsManageCustomerExperienceAnalytics	Manage Customer Experience Analytics	boolean				
PermissionsManageDashbdsInPubFolders	Manage Dashboards in Public Folders	boolean				
PermissionsManageDataCategories	Manage Data Categories	boolean				
PermissionsManageDataIntegrations	Manage Data Integrations	boolean				
PermissionsManageDataProcessingEngine	Allow users to access the features of Data Processing Engine to transform data that's available in your Salesforce org.	boolean				
PermissionsManageDataspaceScope	Manage Dataspace Scope	boolean				
PermissionsManageDynamicDashboards	Manage Dynamic Dashboards	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageEmailClientConfig	Manage Email Client Configurations	boolean				
PermissionsManageEntitlements	Manage Entitlements	boolean				
PermissionsManageExchangeConfig	Manage Lightning Sync	boolean				
PermissionsManageExternalConnections	Allow user to modify Private Connections	boolean				
PermissionsManageHcProviderNtwMgmt	Manage Health Cloud Provider Network Management	boolean				
PermissionsManageHealthCheck	Manage Health Check	boolean				
PermissionsManageHealthCloud	Manage Health Cloud	boolean				
PermissionsManageHealthCloudFinancialData	Manage Health Cloud Financial Data	boolean				
PermissionsManageHubConnections	Connect Org to Customer 360 Data Manager	boolean				
PermissionsManageIndustriesVisit	Manage Industries Visit	boolean				
PermissionsManageInteraction	Manage Flow	boolean				
PermissionsManageInternalUsers	Manage Internal Users	boolean				
PermissionsManageIpAddresses	Manage IP Addresses	boolean				
PermissionsManageLeads	Manage Leads	boolean				
PermissionsManageLearningReporting	Manage Learning Reporting	boolean				
PermissionsManageLoginAccessPolicies	Manage Login Access Policies	boolean				
PermissionsManageLoyaltyAnalytics	Manage Loyalty Analytics	boolean				
PermissionsManageMobile	Manage Mobile Configurations	boolean				
PermissionsManageNetworks	Create and Set Up Experiences	boolean				
PermissionsManageOrchInstsAndWorkItems	Manage Orchestration Runs and Work Items	boolean				
PermissionsManagePartners	Manage External Users	boolean				
PermissionsManagePasswordPolicies	Manage Password Policies	boolean				
PermissionsManageProfilesPermissionsets	Manage Profiles and Permission Sets	boolean				
PermissionsManagePropositions	Manage Next Best Action Recommendations	boolean				
PermissionsManagePvtRptsAndDashbds	Manage All Private Reports and Dashboards	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageQuotas	Manage Quotas	boolean				
PermissionsManageRecommendationStrategies	Manage Next Best Action Strategies	boolean				
PermissionsManageReleaseUpdates	Manage Release Updates	boolean				
PermissionsManageRemoteAccess	Manage Connected Apps	boolean				
PermissionsManageReportsInPubFolders	Manage Reports in Public Folders	boolean				
PermissionsManageRoles	Manage Roles	boolean				
PermissionsManageSandboxes	Manage Sandboxes	boolean				
PermissionsManageSessionPermissionSets	Manage Session Permission Set Activations	boolean				
PermissionsManageSharing	Manage Sharing	boolean				
PermissionsManageSmartDataDiscovery	Manage Einstein Discovery	boolean				
PermissionsManageSmartDataDiscoveryModel	Can Deploy and Manage Einstein Discovery predictions	boolean				
PermissionsManageSolutions	Manage Published Solutions	boolean				
PermissionsManageSubscriptions	Manage CRM Analytics Subscriptions	boolean				
PermissionsManageSurveys	Manage Surveys	boolean				
PermissionsManageSynonyms	Manage Synonyms	boolean				
PermissionsManageTCRMforComms	Create and manage TCRM for Comms	boolean				
PermissionsManageTemplatedApp	Manage CRM Analytics Templated Apps	boolean				
PermissionsManageTranslation	Manage Translation	boolean				
PermissionsManageTrustMeasures	Manage Trust Measures	boolean				
PermissionsManageTwoFactor	Manage Multi-Factor Authentication in API	boolean				
PermissionsManageUnlistedGroups	Manage Unlisted Groups	boolean				
PermissionsManageUsers	Manage Users	boolean				
PermissionsMassInlineEdit	Mass Edits from Lists	boolean				
PermissionsMergeTopics	Merge Topics	boolean				
PermissionsMicrobatching	Use Micro-Batching to Create Records	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsModerateChatter	Moderate Chatter	boolean				
PermissionsModerateNetworkFeeds	Moderate Experience Cloud Site Feeds	boolean				
PermissionsModerateNetworkFiles	Moderate Files in Experience Cloud Sites	boolean				
PermissionsModerateNetworkMessages	Moderate Chatter Messages in Experience Cloud Sites	boolean				
PermissionsModerateNetworkUsers	Moderate Experience Cloud Site Users	boolean				
PermissionsModifyAllData	Modify All Data	boolean				
PermissionsModifyDataClassification	Modify Data Classification	boolean				
PermissionsModifyMetadata	Modify Metadata Through Metadata API Functions	boolean				
PermissionsMortgageUserAccess	User license to access Mortgage in Financial Services Cloud.	boolean				
PermissionsMultiStepSchedulingUser	Manage Multi-Step Scheduling features	boolean				
PermissionsNativeWebviewScrolling	Salesforce Mobile App: Native scrolling on webviews	boolean				
PermissionsNewReportBuilder	Report Builder	boolean				
PermissionsOmniStudioDesigner	Enables admin/developer to create new OS/DR/VIP instances.	boolean				
PermissionsOmniStudioRuntime	Enables business users to execute OmniScripts, DRs, Cards, etc, in employee facing apps.	boolean				
PermissionsOmniStudioRuntimeCC	Enables consumers and partners to execute OmniScripts, DRs, Cards through a Community or off platform.	boolean				
PermissionsOutboundMigrationToolsUser	Create and Upload Change Sets	boolean				
PermissionsOverrideForecasts	Override Forecasts	boolean				
PermissionsPackaging2	Create and Update Second-Generation Packages	boolean				
PermissionsPackaging2Delete	Delete Second-Generation Packages	boolean				
PermissionsPasswordNeverExpires	Password Never Expires	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsPortalSuperUser	Portal Super User	boolean				
PermissionsPreventClassicExperience	Hide Option to Switch to Salesforce Classic	boolean				
PermissionsPrivacyDataAccess	Allow user to access privacy data	boolean				
PermissionsProviderSearchUserAccess	Permission to access internal entities for provider search	boolean				
PermissionsPublishMultiforce	Upload AppExchange Packages	boolean				
PermissionsQueryAllFiles	Query All Files	boolean				
PermissionsQuipMetricsAccess	Quip Metrics	boolean				
PermissionsQuipUserEngagementMetrics	Quip User Engagement Metrics	boolean				
PermissionsRecordVisibilityAPI	Enable RecordVisibility API	boolean				
PermissionsRemoveDirectMessageMembers	Remove People from Direct Messages	boolean				
PermissionsResetPasswords	Reset User Passwords and Unlock Users	boolean				
PermissionsRunFlow	Run Flows	boolean				
PermissionsRunReports	Run Reports	boolean				
PermissionsSDCommunityAccess	Use objects in the Social Determinants data model via Experience Cloud sites	boolean				
PermissionsSalesConsole	Sales Console	boolean				
PermissionsSandboxTestingInCommunityApp	Test Sandboxes in Mobile Publisher for Experience Cloud	boolean				
PermissionsScheduleJob	Schedule Dashboards	boolean				
PermissionsScheduleReports	Schedule Reports	boolean				
PermissionsSelectFilesFromSalesforce	Select Files from Salesforce	boolean				
PermissionsSendAnnouncementEmails	Send announcement emails	boolean				
PermissionsSendCustomNotifications	Send Custom Notifications	boolean				
PermissionsSendSitRequests	Send Stay-in-Touch Requests	boolean				
PermissionsServiceExcellencePlatformUser	Service Excellence Platform User	boolean				
PermissionsShareFilesWithNetworks	Share Files with People in Experience Cloud sites	boolean				
PermissionsShareSmartDataDiscoveryStory	Share Einstein Discovery Stories	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsShowCompanyNameAsUserBadge	Show Company Name as Site Role	boolean				
PermissionsSkipIdentityConfirmation	Skip Device Activation at Login	boolean				
PermissionsSlackCibUser	Financial Services Cloud for Slack User	boolean				
PermissionsSmartDataDiscoveryForCommunity	Smart Data Discovery for experience users	boolean				
PermissionsSolutionImport	Import Solutions	boolean				
PermissionsSonicConsumer	Use Data Pipelines Base	boolean				
PermissionsStoAutomaticActivityCapture	Use Einstein Activity Capture Standard	boolean				
PermissionsStoryOnDSWithPredicate	Ignore predicate when creating story from dataset	boolean				
PermissionsSubmitMacrosAllowed	Manage Macros Users Can't Undo	boolean				
PermissionsSubscribeDashboardRolesGrps	Subscribe to Dashboards: Send to Groups and Roles	boolean				
PermissionsSubscribeDashboardToOtherUsers	Subscribe to Dashboards: Add Recipients	boolean				
PermissionsSubscribeReportRolesGrps	Subscribe to Reports: Send to Groups and Roles	boolean				
PermissionsSubscribeReportToOtherUsers	Subscribe to Reports: Add Recipients	boolean				
PermissionsSubscribeReportsRunAsUser	Subscribe to Reports: Set Running User	boolean				
PermissionsSubscribeToLightningDashboards	Subscribe to Dashboards	boolean				
PermissionsSubscribeToLightningReports	Subscribe to Reports	boolean				
PermissionsTraceXdsQueries	Access Tracer for External Data Sources	boolean				
PermissionsTransactionalEmailSend	Send Non-Commercial Email	boolean				
PermissionsTransferAnyCase	Transfer Cases	boolean				
PermissionsTransferAnyEntity	Transfer Record	boolean				
PermissionsTransferAnyLead	Transfer Leads	boolean				
PermissionsTwoFactorApi	Multi-Factor Authentication for API Logins	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsUpdateWithInactiveOwner	Update Records with Inactive Owners	boolean				
PermissionsUseAssistantDialog	Instant Actionable Results	boolean				
PermissionsUseCompliantDataSharing	Use Compliant Data Sharing	boolean				
PermissionsUseCustomerExperienceAnalytics	Use Customer Experience Analytics	boolean				
PermissionsUseLoyaltyAnalytics	Use Loyalty Analytics	boolean				
PermissionsUseMySearch	Einstein Search	boolean				
PermissionsUseQuerySuggestions	Natural Language Search	boolean				
PermissionsUseSmartDataDiscovery	Use Einstein Discovery	boolean				
PermissionsUseSubscriptionEmails	Subscribe to CRM Analytics Assets	boolean				
PermissionsUseTCRMforComms	View TCRM for Comms	boolean				
PermissionsUseTeamReassignWizards	Use Team Reassignment Wizards	boolean				
PermissionsUseTemplatedApp	Use CRM Analytics Templated Apps	boolean				
PermissionsUseWebLink	Allow Access to Customized Actions	boolean				
PermissionsUtilMgmtExperienceCloudUser	Provides access to Utilization Management features and objects from an Experience Cloud site.	boolean				
PermissionsViewAllActivities	View All Activities	boolean				
PermissionsViewAllCustomSettings	View All Custom Settings	boolean				
PermissionsViewAllData	View All Data	boolean				
PermissionsViewAllForecasts	View All Forecasts	boolean				
PermissionsViewAllForeignKeyNames	View All Lookup Record Names	boolean				
PermissionsViewAllProfiles	View All Profiles	boolean				
PermissionsViewAllUsers	View All Users	boolean				
PermissionsViewContent	View Content in Portals	boolean				
PermissionsViewCustomerSentiment	View Customer Insights	boolean				
PermissionsViewDataAssessment	Access to view Data Assessment	boolean				
PermissionsViewDataCategories	View Data Categories in Setup	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsViewDeveloperName	View DeveloperName	boolean				
PermissionsViewEncryptedData	View Encrypted Data	boolean				
PermissionsViewEventLogFiles	View Event Log Files	boolean				
PermissionsViewGlobalHeader	View Global Header	boolean				
PermissionsViewHealthCheck	View Health Check	boolean				
PermissionsViewHelpLink	View Help Link	boolean				
PermissionsViewMLModels	Allow users to view MLModels and related Entities	boolean				
PermissionsViewMyTeamsDashboards	View My Team's Dashboards	boolean				
PermissionsViewOnlyEmbeddedAppUser	Access to View-Only Licensed Templates and Apps	boolean				
PermissionsViewPrivateStaticResources	View Private Static Resources	boolean				
PermissionsViewPublicDashboards	View Dashboards in Public Folders	boolean				
PermissionsViewPublicReports	View Reports in Public Folders	boolean				
PermissionsViewRestrictionAndScopingRules	View Restriction and Scoping Rules	boolean				
PermissionsViewRoles	View Roles and Role Hierarchy	boolean				
PermissionsViewSetup	View Setup and Configuration	boolean				
PermissionsViewTrustMeasures	View Trust Measures	boolean				
PermissionsViewUserPII	View Concealed Field Data	boolean				
PermissionsWaveManagePrivateAssetsUser	Manage CRM Analytics Private Assets	boolean				
PermissionsWaveTabularDownload	Download CRM Analytics Data	boolean				
PermissionsWaveTrendReports	Trend Report Data in CRM Analytics	boolean				
SystemModstamp	System Modstamp	datetime				
UserLicenseId	User License ID	reference		18		
UserType	User Type	picklist		40		

PROFILESKILL

Represents a profile skill, which describes a user's professional knowledge. This is a global record for the organization, and users are associated through the ProfileSkillUser object.

For more information, see ProfileSkill in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Skill Description	textarea		4000		
`Id`	Skill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Skill Name	string		99		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserCount`	People With Skill	int	9			

PROFILESKILLENDORSEMENT

Represents a detail relationship of ProfileSkillUser. An endorsement of a profile skill shows approval and support of another user's publicly declared skill.

For more information, see ProfileSkillEndorsement in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Added Date	datetime				
`Id`	Endorsement ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Endorsement Name	string		255		
`ProfileSkillUserId`	Skill User ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

PROFILESKILLENDORSEMENTFEED

Feed tracking for ProfileSkillEndorsement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROFILESKILLENDORSEMENTHISTORY

History for tracked fields of ProfileSkillEndorsement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Endorsement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProfileSkillEndorsementId	Endorsement ID	reference		18		

PROFILESKILLFEED

Feed tracking for ProfileSkill.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROFILESKILLHISTORY

History for tracked fields of ProfileSkill.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Skill History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProfileSkillId`	Skill ID	reference		18		

PROFILESKILLSHARE

Represents a sharing entry on a ProfileSkill.

For more information, see ProfileSkillShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

PROFILESKILLUSER

Represents a detail relationship of User. The object connects profile skills with users.

For more information, see ProfileSkillUser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Added Date	datetime				
`EndorsementCount`	Endorsements	int	9			
`Id`	Skill User ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Skill User Name	string		255		
`ProfileSkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

PROFILESKILLUSERFEED

Feed tracking for ProfileSkillUser.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROFILESKILLUSERHISTORY

History for tracked fields of ProfileSkillUser.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Skill User History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProfileSkillUserId`	Skill User ID	reference		18		

PROGRAMREBATETYPPAYOUTSRC

The rebate amount and the tier applied calculated for each row in the aggregate. There is a 1 to 1 relation between payout source and aggregate.

For more information, see ProgramRebateTypPayoutSrc in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccrualRate`	Accrual Rate	double			18	2
`AccruedAmount`	Accrued Amount	currency			18	2
`AggregateIdentifierId`	Aggregate Source ID	reference		18		
`BenefitQualifierValue`	Benefit Qualifier Value	double			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Program Rebate Type Payout Source ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MeasureValue`	Measure Value	double			18	2
`MemberId`	Rebate Program Member ID	reference		18		
`Name`	Name	string		255		
`ProgramRebateTypeBenefitId`	Rebate Type Benefit ID	reference		18		
`ProgramRebateTypePayoutId`	Program Rebate Type Payout ID	reference		18		
`RebateAmount`	Rebate Amount	currency			18	2
`SystemModstamp`	System Modstamp	datetime				

PROGRAMREBATETYPPAYOUTSRCFEED

Feed tracking for ProgramRebateTypPayoutSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPPAYOUTSRCHISTORY

History for tracked fields of ProgramRebateTypPayoutSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Program Rebate Type Payout SourceHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProgramRebateTypPayoutSrcId	Program Rebate Type Payout Source ID	reference		18		

PROGRAMREBATETYPE

Provide the rebate types that are part of this program. For example, volume rebate, revenue rebate, or rebate on every transaction.

For more information, see ProgramRebateType in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccrualRate	Accrual Rate	double			18	2
AggregateObjectName	Custom Object Definition ID	picklist		255		
BenefitQualifierField	Custom Field Definition ID	picklist		255		
CalcObjectId	Batch Calculation Job Definition ID	reference		18		
CalculationBasis	Calculation Basis	picklist		255		
CalculationMethod	Calculation Method	picklist		255		
CalculationType	Calculation Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FilterAction	Filter Action	picklist		255		
FilterCriteria	Filter Criteria	textarea		4000		
FilterLogic	Filter Logic	string		255		
Id	Program Rebate Type ID	id		18		
IsDeleted	Deleted	boolean				
IsIntegratable	Integratable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MeasureField	Custom Field Definition ID	picklist		255		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProductFilterType	Product Filter Type	picklist		255		
RebateMeasureType	Measure Type	picklist		255		
RebateProgramId	Rebate Program ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
UnitOfMeasureId	Unit of Measure ID	reference		18		

PROGRAMREBATETYPEBENEFIT

Defines the benefit matrix for the rebate type. For example, 5% or $200.

For more information, see ProgramRebateTypeBenefit in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitValue	Applied Benefit	double			18	4
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	Effective End Date	date				
EffectiveStartDate	Effective Start Date	date				
Id	Rebate Type Benefit ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaximumMeasureFieldValue	Maximum Measure Field Value	double			18	2
MaximumQualifyingValue	Maximum Range Value	double			18	2
MinimumQualifyingValue	Minimum Range Value	double			18	2
Name	Name	string		255		
ProductId	Product ID	reference		18		
ProgramRebateTypeId	Program Rebate Type ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

PROGRAMREBATETYPEBENEFITFEED

Feed tracking for ProgramRebateTypeBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEBENEFITHISTORY

History for tracked fields of ProgramRebateTypeBenefit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Program Rebate Type BenefitHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProgramRebateTypeBenefitId`	Rebate Type Benefit ID	reference		18		

PROGRAMREBATETYPEFEED

Feed tracking for ProgramRebateType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEFILTER

The definition that filters the transaction journals eligible for a rebate type. This filter definition is used in the rebates data processing engines.

For more information, see ProgramRebateTypeFilter in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FilterField`	Custom Field Definition ID	picklist		255		
`Id`	Program Rebate Type Filter ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`Operator`	Operator	picklist		255		
`ProgramRebateTypeId`	Program Rebate Type ID	reference		18		
`Sequence`	Sequence	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	string		255		

PROGRAMREBATETYPEFILTERFEED

Feed tracking for ProgramRebateTypeFilter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEFILTERHISTORY

History for tracked fields of ProgramRebateTypeFilter.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Program Rebate Type FilterHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProgramRebateTypeFilterId`	Program Rebate Type Filter ID	reference		18		

PROGRAMREBATETYPEHISTORY

History for tracked fields of ProgramRebateType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Program Rebate TypeHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProgramRebateTypeId`	Program Rebate Type ID	reference		18		

PROGRAMREBATETYPEPAYOUT

The payout given to a member for a particular rebate type. For example, volume rebate payout in Jan'19 for ABC enterprises is $560, petrol engine payout for ABC in Jan'19 is $440.

For more information, see ProgramRebateTypePayout in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccruedAmount	Accrued Amount	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Program Rebate Type Payout ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ProgramRebateTypeId	Program Rebate Type ID	reference		18		
RebateAmount	Rebate Amount	currency			18	2
RebateProgramMemberPayoutId	Rebate Program Member Payout ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalBenefitQualifierValue	Total Benefit Qualifier Value	double			18	2
TotalMeasureValue	Total Measure Value	double			18	2

PROGRAMREBATETYPEPAYOUTFEED

Feed tracking for ProgramRebateTypePayout.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEPAYOUTHISTORY

History for tracked fields of ProgramRebateTypePayout.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Program Rebate Type PayoutHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProgramRebateTypePayoutId`	Program Rebate Type Payout ID	reference		18		

PROGRAMREBATETYPEPRODUCT

Represents a junction between a program rebate type and a product.

For more information, see ProgramRebateTypeProduct in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Program Rebate Type Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ProductId`	Product ID	reference		18		
`ProgramRebateTypeId`	Program Rebate Type ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROGRAMREBATETYPEPRODUCTFEED

Feed tracking for ProgramRebateTypeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEPRODUCTHISTORY

History for tracked fields of ProgramRebateTypeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Program Rebate Type ProductHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProgramRebateTypeProductId`	Program Rebate Type Product ID	reference		18		

PROGRAMREBATETYPEREFERENCE

Represents the association between the contract, opportunity, or any eligible standard or custom object, and rebate type.

For more information, see ProgramRebateTypeReference in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Program Rebate Type Reference ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProgramRebateTypeId`	Program Rebate Type ID	reference		18		
`ProgramRebateTypeSrcId`	Program Rebate Type ID	reference		18		
`ReferenceObjectId`	Reference Object ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROGRAMREBATETYPEREFERENCEFEED

Feed tracking for ProgramRebateTypeReference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROGRAMREBATETYPEREFERENCEHISTORY

History for tracked fields of ProgramRebateTypeReference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Program Rebate Type ReferenceHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProgramRebateTypeReferenceId	Program Rebate Type Reference ID	reference		18		

PROGRAMREBATETYPEREFERENCESHARE

Sharing for ProgramRebateTypeReference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROGRAMREBATETYPESHARE

Sharing for ProgramRebateType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROMOTION

Represents a promotion for B2B or B2C stores.

For more information, see Promotion in the *Consumer Goods Cloud Developer Guide*, *Loyalty Management Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CumulativeUsageTarget`	Cumulative Usage Target	int	9			
`CurrentLiabilityAmount`	Current Liability Amount	currency			18	2
`CurrentPointCount`	Current Point Count	int	9			
`DefaultVoucherDefinitionId`	Voucher Definition ID	reference		18		
`Description`	Description	textarea		1000		
`EndDate`	End Date	date				
`EnrollmentEndDate`	Enrollment End Date	date				
`EnrollmentStartDate`	Enrollment Start Date	date				
`FulfillmentAction`	Fulfillment Action	picklist		255		
`Id`	Promotion ID	id		18		
`ImageUrl`	Image URL	url		1000		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`IsEnrollmentRequired`	Enrollment Required	boolean				
`IsPointsWithFactor`	Points With Factor	boolean				
`IsQuickPromotion`	Quick Promotion	boolean				
`IssuedVoucherCount`	Issued Voucher Count	int	9			
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramCurrencyId	Currency ID	reference		18		
LoyaltyProgramId	Loyalty Program ID	reference		18		
LoyaltyPromotionType	Loyalty Promotion Type	picklist		255		
MaximumLiabilityAmount	Maximum Liability Amount	currency			18	2
MaximumRewardValue	Maximum Reward Value	int	9			
MaximumVoucherCount	Maximum Voucher Count	int	9			
Name	Name	string		255		
Objective	Objective	textarea		1000		
OwnerId	Owner ID	reference		18		
PointFactor	Point Factor	double			18	0
PromotionConfiguration	Promotion Configuration	textarea		131072		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalRewardPoints	Reward Points	int	9			
TransactionJournalType	Transaction Journal Type	picklist		255		

PROMOTIONFEED

Feed tracking for Promotion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONHISTORY

History for tracked fields of Promotion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Promotion History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PromotionId`	Promotion ID	reference		18		

PROMOTIONLOYALTYPTNRPRODT

Represents a relationship between a promotion and a loyalty partner product. It indicates the products or product categories that are applied to a particular promotion.

For more information, see PromotionLoyaltyPtnrProdt in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Promotion Loyalty Partner Product ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoyaltyPartnerId`	Loyalty Program Partner ID	reference		18		
`LoyaltyPartnerProductId`	Loyalty Partner Product ID	reference		18		
`LoyaltyProductId`	Product ID	reference		18		
`Name`	Name	string		255		
`ProductCategoryId`	Category ID	reference		18		
`PromotionId`	Promotion ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROMOTIONLOYALTYPTNRPRODTFEED

Feed tracking for PromotionLoyaltyPtnrProdt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONLOYALTYPTNRPRODTHISTORY

History for tracked fields of PromotionLoyaltyPtnrProdt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Promotion Loyalty Partner Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PromotionLoyaltyPtnrProdtId	Promotion Loyalty Partner Product ID	reference		18		

PROMOTIONMARKETSEGMENT

Represents a market segment within B2B Commerce that promotions can be assigned to.

For more information, see PromotionMarketSegment in the *Loyalty Management Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Promotion Market Segment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`PromotionId`	Promotion ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROMOTIONMARKETSEGMENTFEED

Feed tracking for PromotionMarketSegment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONMARKETSEGMENTHISTORY

History for tracked fields of PromotionMarketSegment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Promotion Market Segment History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PromotionMarketSegmentId`	Promotion Market Segment ID	reference		18		

PROMOTIONQUALIFIERFEED

Feed tracking for PromotionQualifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONQUALIFIERHISTORY

History for tracked fields of PromotionQualifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Promotion Qualifier History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PromotionQualifierId`	Promotion Qualifier ID	reference		18		

PROMOTIONSEGMENT

Represents a promotion segment, which you can assign to different stores or buyer groups, allowing them to access the promotion.

For more information, see PromotionSegment in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Promotion Segment ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Promotion Segment Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROMOTIONSEGMENTBUYERGROUPFEED

Feed tracking for PromotionSegmentBuyerGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONSEGMENTBUYERGROUPHISTORY

History for tracked fields of PromotionSegmentBuyerGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Promotion Segment Buyer Group History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PromotionSegmentBuyerGroupId	Promotion Segment Buyer Group ID	reference		18		

PROMOTIONSEGMENTFEED

Feed tracking for PromotionSegment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONSEGMENTHISTORY

History for tracked fields of PromotionSegment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Promotion Segment History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PromotionSegmentId`	Promotion Segment ID	reference		18		

PROMOTIONSEGMENTSALESSTOREFEED

Feed tracking for PromotionSegmentSalesStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONSEGMENTSALESSTOREHISTORY

History for tracked fields of PromotionSegmentSalesStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Promotion Segment Sales Store History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PromotionSegmentSalesStoreId	Promotion Segment Sales Store ID	reference		18		

PROMOTIONSEGMENTSHARE

Sharing for PromotionSegment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

PROMOTIONSHARE

Sharing for Promotion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROMOTIONTARGETFEED

Feed tracking for PromotionTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROMOTIONTARGETHISTORY

History for tracked fields of PromotionTarget.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Promotion Target History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PromotionTargetId	Promotion Target ID	reference		18		

PROMPT

Represents record details about an in-app guidance prompt or walkthrough.

For more information, see Prompt in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Prompt ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Prompt Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

PROMPTACTION

Represents how the user interacted with the in-app guidance prompt or walkthrough.

For more information, see PromptAction in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Prompt Action ID	id		18		
IsDeleted	Deleted	boolean				
LastDisplayDate	Last Display Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastResult	Last Result	picklist		255		
LastResultDate	Last Result Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PromptVersionId	Prompt Version ID	reference		18		
SnoozeUntil	Snooze Until	datetime				
StepCount	Step Count	int	9			
StepNumber	Step Number	int	9			
SystemModstamp	System Modstamp	datetime				
TimesActionTaken	Times Action Taken	int	9			
TimesDismissed	Times Dismissed	int	9			
TimesDisplayed	Times Displayed	int	9			
TimesSnoozed	Times Snoozed	int	9			
UserId	User ID	reference		18		

PROMPTACTIONSHARE

Represents a sharing entry on a prompt action record.

For more information, see PromptActionShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

PROMPTERROR

Represents the error or warning associated with the PromptAction.

For more information, see PromptError in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Prompt Error ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsError`	Is Error	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PromptActionId`	Prompt Action ID	reference		18		
`StepNumber`	Error Step Number	int	9			
`SystemModstamp`	System Modstamp	datetime				
`Type`	Error Type	picklist		255		

PROMPTERRORSHARE

Sharing for PromptError.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PROMPTLOCALIZATION

Represents the translated value of a label for record details about in-app guidance when the Translation Workbench is enabled for your org.

For more information, see PromptLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

PROMPTVERSION

Represents an in-app guidance prompt or walkthrough.

For more information, see PromptVersion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionButtonLabel`	Action Button Label	string		25		
`ActionButtonLink`	Action Button URL	url		1000		
`Body`	Body	textarea		4000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DelayDays`	Days In Between Displays	int	9			
`Description`	Description	string		255		
`DismissButtonLabel`	Dismiss Button Label	string		15		
`DisplayPosition`	Position	picklist		255		
`DisplayType`	Type	picklist		255		
`ElementRelativePosition`	Element Relative Position	picklist		255		
`EndDate`	End Date	date				
`Header`	Header	string		36		
`Id`	Prompt Version ID	id		18		
`ImageAltText`	Image Alt Text	string		255		
`ImageId`	Asset File ID	reference		18		
`ImageLink`	Image URL	url		1000		
`ImageLocation`	Image Location	picklist		255		
`IndexWithIsPublished`	Index Formula Field With Is Published Data	string		400		
`IndexWithoutIsPublished`	Index Formula Field Without Is Published Data	string		400		
`IsDeleted`	Deleted	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsPublished	Is Active	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Master Label	string		80		
ParentId	Prompt ID	reference		18		
PublishedByUserId	User ID	reference		18		
PublishedDate	Active Date	date				
ReferenceElementContext	Reference Element Context	textarea		50000		
ShouldDisplayActionButton	Display Action Button	boolean				
ShouldIgnoreGlobalDelay	Ignore Global Delay	boolean				
StartDate	Start Date	date				
StepNumber	Step Number	int	9			
SystemModstamp	System Modstamp	datetime				
TargetAppDeveloperName	Target Application Developer Name	string		80		
TargetAppNamespacePrefix	Target Application Namespace Prefix	string		15		
TargetPageKey1	Target Page Key 1	string		80		
TargetPageKey1Ref	Target Page Key 1 Reference	picklist		255		
TargetPageKey2	Target Page Key 2	string		80		
TargetPageKey3	Target Page Key 3	string		255		
TargetPageKey4	Target Page Key 4	string		255		
TargetPageType	Target Page Type	string		80		
TargetRecordTypeId	Record Type ID	reference		18		
ThemeColor	Theme Color	picklist		255		
ThemeSaturation	Theme Saturation	picklist		255		
TimesToDisplay	Number Of Times To Repeat	int	9			
Title	Title Label	string		36		
UserAccess	Access Permissions	picklist		255		
UserProfileAccess	Access Profiles	picklist		255		
VersionNumber	Version Number	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
VideoLink	Video URL	url		1000		

PROMPTVERSIONLOCALIZATION

Represents the translated value of a label for-app guidance when the Translation Workbench is enabled for your org.

For more information, see PromptVersionLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

PROVIDERNETWORKCONTRACT

Represents a provider and a network bound together by a contract.

For more information, see ProviderNetworkContract in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContractId`	Contract ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`HealthcarePayerNetworkId`	Healthcare Payer Network ID	reference		18		
`HealthcareProviderId`	Healthcare Provider ID	reference		18		
`Id`	Provider Network Contract ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				

PROVIDERNETWORKCONTRACTFEED

Feed tracking for ProviderNetworkContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROVIDERNETWORKCONTRACTHISTORY

History for tracked fields of ProviderNetworkContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Provider Network Contract History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ProviderNetworkContractId`	Provider Network Contract ID	reference		18		

PROVIDERNETWORKTIER

Represents unique tiers for each provider network.

For more information, see ProviderNetworkTier in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Provider Network Tier ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ProviderNetworkId`	Healthcare Payer Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

PROVIDERNETWORKTIERFEED

Feed tracking for ProviderNetworkTier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PROVIDERNETWORKTIERHISTORY

History for tracked fields of ProviderNetworkTier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Provider Network Tier History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ProviderNetworkTierId	Provider Network Tier ID	reference		18		

PUBLICCOMPLAINT

Represents the complaints submitted by public users. This object is available in API version 49.0 and later.

For more information, see PublicComplaint in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BusinessAddress	Business Address	textarea		1000		
BusinessName	Business Name	string		255		
Comments	Comments	textarea		1000		
ComplaintSubType	Subtype	picklist		40		
ComplaintType	Type	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
Email	Email ID	email		80		
FirstName	First Name	string		255		
Id	Public Complaint ID	id		18		
IncidentDate	Incident Date	date				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		255		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MobileNumber	Mobile Number	phone		40		
Name	Complaint ID	string		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Priority`	Priority	picklist		40		
`Status`	Status	picklist		40		
`Subject`	Subject	string		255		
`SystemModstamp`	System Modstamp	datetime				

PUBLICCOMPLAINTFEED

Feed tracking for PublicComplaint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

PUBLICCOMPLAINTHISTORY

History for tracked fields of PublicComplaint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Public Complaint History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
PublicComplaintId	Public Complaint ID	reference		18		

PUBLICCOMPLAINTSHARE

Sharing for PublicComplaint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PURCHASEQUANTITYRULEFEED

Feed tracking for PurchaseQuantityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PURCHASEQUANTITYRULEHISTORY

History for tracked fields of PurchaseQuantityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Purchase Quantity Rule History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PurchaseQuantityRuleId`	Quantity Rule ID	reference		18		

PURCHASEQUANTITYRULESHARE

Sharing for PurchaseQuantityRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PURCHASERPLAN

Represents the payer plan that a purchaser makes available to its members and members' dependents.

For more information, see PurchaserPlan in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Affiliation	Affiliation	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveFrom	Effective From	date				
EffectiveTo	Effective To	date				
Id	Purchaser Plan ID	id		18		
IsDeleted	Deleted	boolean				
IsVerifiable	Verifiable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
Notes	Notes	textarea		32000		
OwnerId	Owner ID	reference		18		
PayerId	Account ID	reference		18		
PlanNumber	Plan Number	string		64		
PlanStatus	Plan Status	picklist		40		
PlanType	Plan Type	picklist		40		
ServiceType	Service Type	string		32		
SourceSystem	Source System	string		64		
SourceSystemIdentifier	Source System Identifier	string		255		
SourceSystemModified	Source System Modified	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				

PURCHASERPLANASSN

Represents a junction object that associates the purchaser to the plans they offer to members.

For more information, see PurchaserPlanAssn in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Purchaser Plan Association Internal ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Purchaser Plan Association ID	string		255		
`OwnerId`	Owner ID	reference		18		
`PurchaserId`	Account ID	reference		18		
`PurchaserPlanId`	Purchaser Plan ID	reference		18		
`Role`	Role	picklist		40		
`SourceSystem`	Source System	string		64		
`SourceSystemIdentifier`	Source System Identifier	string		255		
`SourceSystemModified`	Source System Modified	datetime				
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

PURCHASERPLANASSNFEED

Feed tracking for PurchaserPlanAssn.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PURCHASERPLANASSNHISTORY

History for tracked fields of PurchaserPlanAssn.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Purchaser Plan Association History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PurchaserPlanAssnId`	Purchaser Plan Association Internal ID	reference		18		

PURCHASERPLANASSNSHARE

Sharing for PurchaserPlanAssn.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PURCHASERPLANFEED

Feed tracking for PurchaserPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

PURCHASERPLANHISTORY

History for tracked fields of PurchaserPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Purchaser Plan History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`PurchaserPlanId`	Purchaser Plan ID	reference		18		

PURCHASERPLANSHARE

Sharing for PurchaserPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

PUSHTOPIC

Represents a query that is the basis for notifying Streaming API clients of changes to records in an org.

For more information, see PushTopic in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiVersion`	API Version	double			18	1
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		400		
`Id`	Push Topic ID	id		18		
`IsActive`	Is Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Topic Name	string		25		
`NotifyForFields`	Notify For Fields	picklist		40		
`NotifyForOperationCreate`	Create	boolean				
`NotifyForOperationDelete`	Delete	boolean				
`NotifyForOperationUndelete`	Undelete	boolean				
`NotifyForOperationUpdate`	Update	boolean				
`NotifyForOperations`	Notify For Operations	picklist		40		
`Query`	SOQL Query	string		1300		
`SystemModstamp`	System Modstamp	datetime				

QUESTION

Represents a question in a zone that users can view and reply to.

For more information, see Question in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestReplyId	Best Reply ID	reference		18		
BestReplySelectedById	User ID	reference		18		
Body	Question Body	textarea		32000		
CommunityId	Zone ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreatorFullPhotoUrl	Url of Creator's Profile Photo	string		255		
CreatorName	Name of Creator	string		121		
CreatorSmallPhotoUrl	Url of Creator's Thumbnail Photo	string		255		
HasSingleFieldForContent	Has Single Field For Content	boolean				
Id	Question ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastReplyDate	Last Reply Date	datetime				
LastReplyId	Last Reply ID	reference		18		
LastViewedDate	Last Viewed Date	datetime				
MostReportAbusesOnReply	Most Report Abuses on Reply	int	9			
NumReplies	Number of Replies	int	9			
NumReportAbuses	Number of Report Abuses	int	9			
NumSubscriptions	Number of Question Subscriptions	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Origin	Question Origin	picklist		40		
Priority	Question Priority	picklist		255		
RecordTypeId	Record Type ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Question Title	string		255		
UpVotes	Up Votes	int	9			
VoteScore	Vote Score	double			18	4

QUESTIONDATACATEGORYSELECTION

A data category selection represents a data category that classifies a question.

For more information, see QuestionDataCategorySelection in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataCategoryGroupName`	Selected Data Category Group's Developer Name	[illegible]	0	80	0	0
`DataCategoryName`	Selected Data Category's Developer Name	[illegible]	0	80	0	0
`Id`	Entity Data Category Selection ID	id		18		
`IsDeleted`	Deleted	boolean				
`ParentId`	Question ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

QUESTIONREPORTABUSE

Represents a user-reported abuse on a Question in a Chatter Answers zone.

For more information, see QuestionReportAbuse in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Question Report Abuse ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Question Report Abuse	string		255		
`QuestionId`	Question ID	reference		18		
`Reason`	Reason	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

QUESTIONSUBSCRIPTION

Represents a subscription for a user following a Question.

For more information, see QuestionSubscription in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CommunityId`	Zone ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Question Subscription ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Question Subscription	string		255		
`QuestionCreatedDate`	Question Created Date	datetime				
`QuestionId`	Question ID	reference		18		
`SubscriberId`	User ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

QUEUEROUTINGCONFIG

Represents the settings that determine how work items are routed to agents.

For more information, see QueueRoutingConfig in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CapacityPercentage`	Percentage of Capacity	percent			5	2
`CapacityWeight`	Units of Capacity	double			10	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`DropAdditionalSkillsTimeout`	Drop Additional Skills Time-Out (seconds)	int	9			
`Id`	Routing Configuration ID	id		18		
`IsAttributeBased`	Use with Skills-Based Routing Rules	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Routing Configuration Name	string		80		
`OverflowAssigneeId`	OverflowAssignee ID	reference		18		
`PushTimeout`	Push Time-Out (seconds)	int	9			
`RoutingModel`	Routing Model	picklist		255		
`RoutingPriority`	Routing Priority	int	9			
`SystemModstamp`	System Modstamp	datetime				

QUEUESOBJECT

Represents the mapping between a queue Group and the sObject types associated with the queue, including custom objects.

For more information, see QueueSobject in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`Id`	Queue sObject ID	id		18		
`QueueId`	Group ID	reference		18		
`SobjectType`	sObject Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

QUICKTEXT

This object stores a snippet of text that allows users to send a quick response to a customer. Use quick text to create greetings, answers to common questions, short notes, and more.

For more information, see QuickText in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		40		
`Channel`	Channel	multipicklist		4099	0	
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FolderId`	Folder ID	reference		18		
`FolderName`	Folder Name	string		256		
`Id`	Quick Text ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsInsertable`	Include in selected channels	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Message`	Message	textarea		4096		
`Name`	Quick Text Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SourceType`	Source Entity Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

QUICKTEXTHISTORY

History for tracked fields of QuickText.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Quick Text History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
QuickTextId	Quick Text ID	reference		18		

QUICKTEXTSHARE

Sharing for QuickText.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

QUICKTEXTUSAGE

Represents the usage of quick text on a record, including which quick text was used, who used it, and how they used it.

For more information, see QuickTextUsage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppContext	App Context	picklist		255		
Channel	Channel	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FolderId	Folder ID	reference		18		
Id	Quick Text Usage ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LaunchSource	Launch Source	picklist		255		
LoggedTime	Logged Time	datetime				
Name	Quick Text Usage Name	string		255		
OwnerId	Owner ID	reference		18		
QuickTextId	Quick Text ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		

QUICKTEXTUSAGESHARE

Sharing for QuickTextUsage.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

QUOTE

The Quote object represents a quote, which is a record showing proposed prices for products and services.

For more information, see Quote in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AdditionalAddress	Additional To	address				
AdditionalCity	Additional To City	string		40		
AdditionalCountry	Additional To Country	string		80		
AdditionalGeocodeAccuracy	Additional To Geocode Accuracy	picklist		255		
AdditionalLatitude	Additional To Latitude	double			18	15
AdditionalLongitude	Additional To Longitude	double			18	15
AdditionalName	Additional To Name	string		255		
AdditionalPostalCode	Additional To Zip/Postal Code	string		20		
AdditionalState	Additional To State/Province	string		80		
AdditionalStreet	Additional To Street	textarea		255		
BillingAddress	Bill To	address				
BillingCity	Bill To City	string		40		
BillingCountry	Bill To Country	string		80		
BillingGeocodeAccuracy	Bill To Geocode Accuracy	picklist		255		
BillingLatitude	Bill To Latitude	double			18	15
BillingLongitude	Bill To Longitude	double			18	15
BillingName	Bill To Name	string		255		
BillingPostalCode	Bill To Zip/Postal Code	string		20		
BillingState	Bill To State/Province	string		80		
BillingStreet	Bill To Street	textarea		255		
CanCreateQuoteLineItems	Can Create Quote Line Items	boolean				
ContactId	Contact ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContractId	Contract ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
Email	Email	email		80		
ExpirationDate	Expiration Date	date				
Fax	Fax	phone		40		
GrandTotal	Grand Total	currency			18	2
Id	Quote ID	id		18		
IsDeleted	Deleted	boolean				
IsSyncing	Syncing	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineItemCount	Line Items	int	9			
Name	Quote Name	string		255		
OpportunityId	Opportunity ID	reference		18		
OwnerId	Owner ID	reference		18		
Phone	Phone	phone		40		
Pricebook2Id	Price Book ID	reference		18		
QuoteNumber	Quote Number	string		30		
QuoteToAddress	Quote To	address				
QuoteToCity	Quote To City	string		40		
QuoteToCountry	Quote To Country	string		80		
QuoteToGeocodeAccuracy	Quote To Geocode Accuracy	picklist		255		
QuoteToLatitude	Quote To Latitude	double			18	15
QuoteToLongitude	Quote To Longitude	double			18	15
QuoteToName	Quote To Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
QuoteToPostalCode	Quote To Zip/Postal Code	string		20		
QuoteToState	Quote To State/Province	string		80		
QuoteToStreet	Quote To Street	textarea		255		
RecordTypeId	Record Type ID	reference		18		
ShippingAddress	Ship To	address				
ShippingCity	Ship To City	string		40		
ShippingCountry	Ship To Country	string		80		
ShippingGeocodeAccuracy	Ship To Geocode Accuracy	picklist		255		
ShippingHandling	Shipping and Handling	currency			18	2
ShippingLatitude	Ship To Latitude	double			18	15
ShippingLongitude	Ship To Longitude	double			18	15
ShippingName	Ship To Name	string		255		
ShippingPostalCode	Ship To Zip/Postal Code	string		20		
ShippingState	Ship To State/Province	string		80		
ShippingStreet	Ship To Street	textarea		255		
Status	Status	picklist		40		
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
Tax	Tax	currency			18	2
TotalPrice	Total Price	currency			18	2

QUOTEDOCUMENT

Represents a quote in document format.

For more information, see QuoteDocument in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentVersionDocumentId`	ContentVersion ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Discount`	Discount	percent			5	2
`Document`	PDF Document	base64				
`GrandTotal`	Grand Total	currency			18	2
`Id`	Quote PDF ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		270		
`QuoteId`	Quote ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

QUOTEFEED

Feed tracking for Quote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

QUOTEHISTORY

History for tracked fields of Quote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Quote History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
QuoteId	Quote ID	reference		18		

QUOTELINEITEM

Represents a quote line item, which is a member of the list of Product2 products associated with a Quote, along with other information about those line items on that quote.

For more information, see QuoteLineItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Line Item Description	string		255		
Discount	Discount	percent			5	2
HasQuantitySchedule	Has Quantity Schedule	boolean				
HasRevenueSchedule	Has Revenue Schedule	boolean				
HasSchedule	Schedule	boolean				
Id	Quote Line Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineNumber	Line Item Number	string		255		
ListPrice	List Price	currency			18	2
OpportunityLineItemId	Line Item ID	reference		18		
PricebookEntryId	Price Book Entry ID	reference		18		
Product2Id	Product ID	reference		18		
Quantity	Quantity	double			12	2
QuoteId	Quote ID	reference		18		
ServiceDate	Date	date				
SortOrder	Sort Order	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2
UnitPrice	Sales Price	currency			18	2

QUOTELINEITEMGROUPCLASS

Represents the association of a Quote Line Item to GroupClass. Use this entity for large group quoting process when multiple group classes are attributed on a single quote line item. Child object of Quote.

For more information, see QuoteLineItemGroupClass in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`GroupClassId`	Group Class ID	reference		18		
`Id`	Quote Line Item Group Class ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`QuoteLineItemId`	Quote Line Item ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

QUOTELINEITEMGROUPCLASSFEED

Feed tracking for QuoteLineItemGroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

QUOTELINEITEMGROUPCLASSHISTORY

History for tracked fields of QuoteLineItemGroupClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Quote Line Item Group Class History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`QuoteLineItemGroupClassId`	Quote Line Item Group Class ID	reference		18		

QUOTELINEITEMHISTORY

History for tracked fields of QuoteLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	QuoteLineItem History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
QuoteLineItemId	Quote Line Item ID	reference		18		

QUOTESHARE

Sharing for Quote.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATECLAIM

Represents Information about the claim submitted by the end customer or distributor for a ship and debit rebate program.

For more information, see RebateClaim in the *Automotive Cloud Developer Guide*, and *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ClaimAmount	Claim Amount	currency			18	2
ClaimDate	Claim Date	datetime				
ClaimedByAccountId	Account ID	reference		18		
ClaimedByAccountNumber	Claimed By Account Number	string		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
Id	Rebate Claim ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Claim Number	string		255		
OwnerId	Owner ID	reference		18		
ParticipatingAccountId	Account ID	reference		18		
ParticipatingAccountNumber	Participating Account Number	string		40		
ProcessingStatus	Processing Status	picklist		40		
ProcessingStatusMessage	Processing Status Message	string		1333		
ProductCode	Product Code	string		40		
ProductId	Product ID	reference		18		
ProgramReferenceNumber	Program Reference Number	string		40		
Quantity	Quantity	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ReferencePricePerUnit	Reference Price Per Unit	currency			16	2
ResalePricePerUnit	Resale Price Per Unit	currency			16	2
SalePricePerUnit	Sale Price Per Unit	currency			16	2
SystemModstamp	System Modstamp	datetime				

REBATECLAIMFEED

Feed tracking for RebateClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATECLAIMHISTORY

History for tracked fields of RebateClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Rebate ClaimHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RebateClaimId`	Rebate Claim ID	reference		18		

REBATECLAIMSHARE

Sharing for RebateClaim.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATEMEMBERAGGREGATEITEM

Represents a junction between a rebate member product aggregate and a transaction journal.

For more information, see RebateMemberAggregateItem in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	RebateMemberAggregateItem ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RebateAmount	Rebate Amount	currency			18	2
RebateMemberProductAggregateId	Rebate Aggregate Object ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TransactionAmount	Transaction Amount	currency			18	2
TransactionJournalId	Transaction Journal ID	reference		18		
TransactionQuantity	Transaction Quantity	double			18	2

REBATEMEMBERAGGREGATEITEMFEED

Feed tracking for RebateMemberAggregateItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEMEMBERAGGREGATEITEMHISTORY

History for tracked fields of RebateMemberAggregateItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rebate Member Aggregate ItemHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RebateMemberAggregateItemId	RebateMemberAggregateItem ID	reference		18		

REBATEMEMBERAGGREGATEITEMSHARE

Sharing for RebateMemberAggregateItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATEMEMBERPRODUCTAGGREGATE

Stores the post calculation summary of journal transactions by member, period, and rebate type. For example, ABC enterprises for May 2021 against Vol Rebate on Radius category, did a total quantity of 150 units and transaction amount of $80,000.

For more information, see RebateMemberProductAggregate in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AggregateReferenceNumber	Aggregate Reference Number	string		50		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
GrowthAmount	Growth Amount	currency			18	2
GrowthAmountPercent	Growth Amount Percent	percent			16	2
GrowthQuantity	Growth Quantity	double			18	2
GrowthQuantityPercent	Growth Quantity Percent	percent			16	2
Id	Rebate Aggregate Object ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PriorTotalQuantity	Prior Total Quantity	double			18	2
PriorTotalTransactionAmount	Prior Total Transaction Amount	currency			18	2
ProductId	Product ID	reference		18		
ProgramRebateTypeId	Program Rebate Type ID	reference		18		
RebateProgramMemberId	Rebate Program Member ID	reference		18		
RebateProgramPayoutPeriodId	Rebate Program Payout Period ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RollupProgramMemberId	Rollup Program Member ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalQuantity	Total Quantity	double			18	2
TotalTransactionAmount	Total Transaction Amount	currency			18	2
TransactionJournalId	Transaction Journal ID	reference		18		

REBATEMEMBERPRODUCTAGGREGATEFEED

Feed tracking for RebateMemberProductAggregate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEMEMBERPRODUCTAGGREGATEHISTORY

History for tracked fields of RebateMemberProductAggregate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rebate Member Product AggregateHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RebateMemberProductAggregateId	Rebate Aggregate Object ID	reference		18		

REBATEMEMBERPRODUCTAGGREGATESHARE

Sharing for RebateMemberProductAggregate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATEPAYMENT

Tracks if the payment has been generated for this member for back end processing.

For more information, see RebatePayment in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Amount`	Amount	currency			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Rebate Payment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PaymentDate`	Payment Date	date				
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

REBATEPAYMENTFEED

Feed tracking for RebatePayment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPAYMENTHISTORY

History for tracked fields of RebatePayment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Rebate PaymentHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RebatePaymentId`	Rebate Payment ID	reference		18		

REBATEPAYMENTSHARE

Sharing for RebatePayment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATEPAYOUTADJUSTMENT

Rebate amount adjustment that needs to be given manually. An adjustment is an amount added or subtracted to the calculated rebate amount.

For more information, see RebatePayoutAdjustment in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentAmount	Adjustment Amount	currency			18	2
ApprovedDate	Approval Date	date				
Comments	Comments	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Rebate Payout Adjustment ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
RebateProgramMemberPayoutId	Rebate Program Member Payout ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

REBATEPAYOUTADJUSTMENTFEED

Feed tracking for RebatePayoutAdjustment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPAYOUTADJUSTMENTHISTORY

History for tracked fields of RebatePayoutAdjustment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Rebate Payout AdjustmentHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RebatePayoutAdjustmentId`	Rebate Payout Adjustment ID	reference		18		

REBATEPROGRAM

The rebate program your organization runs with a single account, all accounts, or specific list of accounts.

For more information, see RebateProgram in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
EndDate	End Date	date				
Frequency	Frequency	picklist		255		
GracePeriodDayCount	Transaction Grace Days	int	9			
Id	Rebate Program ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PayoutCalculationDayCount	Payout Calculation Days	int	9			
ProgramReferenceNumber	Program Reference Number	string		30		
RebateProgramUrl	Link to Program Details	url		255		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

REBATEPROGRAMFEED

Feed tracking for RebateProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPROGRAMHISTORY

History for tracked fields of RebateProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rebate ProgramHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RebateProgramId	Rebate Program ID	reference		18		

REBATEPROGRAMMEMBER

The member of a rebate program. By virtue of being a member, the partner or business account is eligible to get rebate payments. For example, ABC Enterprises and HVAC Corp are members of GoldStone Volume Rebate Program.

For more information, see RebateProgramMember in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CumulativePayoutAmount	Cumulative Payout Amount	currency			18	2
Id	Rebate Program Member ID	id		18		
IsDeleted	Deleted	boolean				
IsPayoutCalcSkipped	Skip Payout Calculation	boolean				
LastActivationDate	Last Activation Date	date				
LastDeactivationDate	Last Deactivation Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberStatus	Status	picklist		255		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RebateProgramId	Rebate Program ID	reference		18		
ShipToAccountId	Account ID	reference		18		
SystemModstamp	System Modstamp	datetime				

REBATEPROGRAMMEMBERFEED

Feed tracking for RebateProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPROGRAMMEMBERHISTORY

History for tracked fields of RebateProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Rebate Program MemberHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RebateProgramMemberId`	Rebate Program Member ID	reference		18		

REBATEPROGRAMMEMBERPAYOUT

The payout calculated for a member for the period. For example, $1000 Jan'21 payout for ABC enterprises.

For more information, see RebateProgramMemberPayout in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccruedAmount	Accrued Amount	currency			18	2
CalculatedRebateAmount	Calculated Rebate Amount	currency			18	2
CalculationDate	Calculation Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Rebate Program Member Payout ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberId	Rebate Program Member ID	reference		18		
Name	Name	string		255		
PaymentId	Rebate Payment ID	reference		18		
PeriodId	Rebate Program Payout Period ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalApprovedAdjustmentAmount	Total Approved Adjustment Amount	currency			18	2
TotalRebateAmount	Total Rebate Amount	currency			18	2

REBATEPROGRAMMEMBERPAYOUTFEED

Feed tracking for RebateProgramMemberPayout.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPROGRAMMEMBERPAYOUTHISTORY

History for tracked fields of RebateProgramMemberPayout.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rebate Program Member PayoutHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RebateProgramMemberPayoutId	Rebate Program Member Payout ID	reference		18		

REBATEPROGRAMMEMBERSHARE

Sharing for RebateProgramMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REBATEPROGRAMPAYOUTPERIOD

The period of the payout calculation. For example, 1st to 31st Jan, or 1st Dec to 14th Dec.

For more information, see RebateProgramPayoutPeriod in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
Id	Rebate Program Payout Period ID	id		18		
IsDeleted	Deleted	boolean				
LastCalculationDate	Last Calculation Date	date				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MemberPayoutCount	Number of Member Payouts	int	9			
Name	Name	string		255		
PayoutCalculationDate	Payout Calculation Date	date				
RebateProgramId	Rebate Program ID	reference		18		
StartDate	Start Date	date				
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalApprovedAmount	Total Approved Amount	currency			18	2
TotalRejectedAmount	Total Rejected Amount	currency			18	2
TransactionGracePeriodDate	Transaction Grace Date	date				

REBATEPROGRAMPAYOUTPERIODFEED

Feed tracking for RebateProgramPayoutPeriod.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REBATEPROGRAMPAYOUTPERIODHISTORY

History for tracked fields of RebateProgramPayoutPeriod.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rebate Program Payout PeriodHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RebateProgramPayoutPeriodId	Rebate Program Payout Period ID	reference		18		

REBATEPROGRAMSHARE

Sharing for RebateProgram.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RECEIVEDDOCUMENT

Allows partners to upload .CSV document.

For more information, see ReceivedDocument in the *Rebate Management Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Direction	Direction	picklist		255		
DocumentNumber	Document Number	string		225		
Id	Received Document ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		255		
Source	Source	string		225		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

RECEIVEDDOCUMENTFEED

Feed tracking for ReceivedDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RECEIVEDDOCUMENTHISTORY

History for tracked fields of ReceivedDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Received Document History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ReceivedDocumentId	Received Document ID	reference		18		

RECEIVEDDOCUMENTSHARE

Sharing for ReceivedDocument.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RECENTLYVIEWED

Represents records or list views that the current user has recently viewed or referenced (by viewing a related record). List views are available in API version 29.0 and later.

For more information, see RecentlyViewed in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Alias`	Alias	string		8		
`Email`	Email	email		80		
`FirstName`	First Name	string		40		
`Id`	Recently Viewed ID	id		18		
`IsActive`	Active	boolean				
`Language`	Language	picklist		40		
`LastName`	Last Name	string		80		
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`NameOrAlias`	Name or Alias	string		80		
`NetworkId`	Network ID	reference		18		
`Phone`	Phone	phone		40		
`ProfileId`	Profile ID	reference		18		
`RecordTypeId`	Record Type ID	reference		18		
`Title`	Title	string		80		
`Type`	Type	picklist		40		
`UserRoleId`	Role ID	reference		18		

RECOMMENDATION

Represents the recommendations surfaced as offers and actions for Einstein Next Best Action.

For more information, see Recommendation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcceptanceLabel	Acceptance Label	string		80		
ActionReference	Action	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
ExternalId	External Id	string		255		
Id	Recommendation ID	id		18		
ImageId	Asset File ID	reference		18		
IsActionActive	Is Action Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		80		
NetworkId	Network ID	reference		18		
RecommendationKey	RecommendationResponse Identifier	string		255		
RejectionLabel	Rejection Label	string		80		
SystemModstamp	System Modstamp	datetime				

RECOMMENDATIONRESPONSE

Represents the user responses to a presented offer or recommendation for Einstein Next Best Action. This object is available in API version 51.0 and later.

For more information, see RecommendationResponse in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionReference`	Action Name at Time of Response	string		255		
`ContextRecord`	Context Record ID	string		15		
`ContextRecordName`	Context Record Name at Time of Response	string		255		
`ContextRecordType`	Context Object	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Recommendation Response ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NetworkId`	Network ID	reference		18		
`OnBehalfOf`	On Behalf of ID	string		15		
`OnBehalfOfName`	On Behalf of Name at Time of Response	string		255		
`OnBehalfOfType`	On Behalf of Object	string		255		
`RecommendationKey`	Recommendation Key	string		255		
`RecommendationName`	Recommendation Name at Time of Response	string		255		
`RecommendationType`	Recommendation Object	string		255		
`Response`	Response	picklist		255		
`StrategyReference`	Strategy Name at Time of Response	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
StrategyVersion	Strategy Version at Time of Response	string		255		
SystemModstamp	System Modstamp	datetime				

RECORDACTION

Represents a relationship between a record and an action, such as a flow. Create a RecordAction for every action that you want to associate with a particular record.

For more information, see RecordAction in the *Object Reference for the Salesforce Platform*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionDefinition`	Action Definition	picklist		255		
`ActionType`	Action Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FlowDefinition`	Interaction Definition ID	picklist		255		
`FlowInterviewId`	FlowInterview ID	reference		18		
`Id`	RecordAction ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsMandatory`	Is Mandatory	boolean				
`IsUiRemoveHidden`	Hide Remove Action in UI	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Order`	Order	int	9			
`Pinned`	Pinned	picklist		255		
`RecordId`	Parent Record ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

RECORDACTIONHISTORY

Represents the lifecycle of a RecordAction as it goes through different states.

For more information, see RecordActionHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionDefinitionApiName`	Action Definition API Name	string		255		
`ActionDefinitionLabel`	Action Definition Label	string		255		
`ActionType`	Action Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	RecordActionHistory ID	id		18		
`IsMandatory`	Is Mandatory	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LoggedTime`	Logged Time	datetime				
`ParentRecordId`	Parent Record ID	reference		18		
`Pinned`	Pinned	picklist		255		
`RecordActionId`	RecordAction Id	string		18		
`State`	State	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

RECORDALERT

Represents an alert message about a specific record and tracks the status and active period of the alert.

For more information, see RecordAlert in the *Financial Services Cloud Developer Guide*, and *Industries Common Resources Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`EffectiveDate`	Effective Start Date	datetime				
`Id`	Record Alert ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ParentId`	Parent Record ID	reference		18		
`RecordAlertCategoryId`	Record Alert Category ID	reference		18		
`Severity`	Severity	picklist		40		
`SnoozeUntilDate`	Snooze Until Date	datetime				
`SourceSystemIdentifier`	Source System ID	string		255		
`Subject`	Subject	string		255		
`SystemModstamp`	System Modstamp	datetime				
`ValidUntilDate`	Valid Until Date	datetime				
`WhatId`	What Record ID	reference		18		

RECORDALERTFEED

Feed tracking for RecordAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RECORDALERTHISTORY

History for tracked fields of RecordAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Record Alert History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RecordAlertId	Record Alert ID	reference		18		

RECORDALERTSHARE

Sharing for RecordAlert.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RECORDTYPE

Represents a record type.

For more information, see RecordType in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BusinessProcessId`	Business Process ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Record Type Name	string		80		
`Id`	Record Type ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SobjectType`	SObject Type Name	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

RECORDTYPELOCALIZATION

Represents the translated value of a label for a record type when the Translation Workbench is enabled for your organization.

For more information, see RecordTypeLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

RECORDSETFILTERCRITERIA

Represents a set of filters that can be used to match service appointments or assets based on your criteria fields.

For more information, see RecordsetFilterCriteria in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomLogic	Custom Logic	string		50		
Description	Description	textarea		32000		
FilteredObject	Filtered Object	picklist		255		
Id	Recordset Filter Criteria ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LogicalOperator	Logical Operator	picklist		255		
Name	Recordset Filter Criteria Name	string		255		
OwnerId	Owner ID	reference		18		
SourceObject	Source Object	picklist		255		
SystemModstamp	System Modstamp	datetime				

RECORDSETFILTERCRITERIAFEED

Feed tracking for RecordsetFilterCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RECORDSETFILTERCRITERIAHISTORY

History for tracked fields of RecordsetFilterCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Recordset Filter Criteria History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RecordsetFilterCriteriaId`	Recordset Filter Criteria ID	reference		18		

RECORDSETFILTERCRITERIARULE

Represents a rule using fields from the designated source object to create filters on the filtered, or target, object.

For more information, see RecordsetFilterCriteriaRule in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CriteriaField	Criteria Field	picklist		255		
FirstOccurrence	First Occurrence	string		255		
Frequency	Frequency	string		255		
Id	Recordset Filter Criteria Rule ID	id		18		
Index	Index	int	9			
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastOccurrence	Last Occurrence	string		255		
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
NextOccurrenceField	Next Occurrence Field	picklist		255		
Operator	Operator	picklist		255		
RecordsetFilterCriteriaId	Recordset Filter Criteria ID	reference		18		
RecordsetFilterCriteriaRuleNumber	Recordset Filter Criteria Rule Number	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Recordset Filter Criteria Type	picklist		255		
Value	Value	textarea		256		

RECORDSETFILTERCRITERIASHARE

Sharing for RecordsetFilterCriteria.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

REDIRECTWHITELISTURL

Represents a trusted URL that users can navigate to without being shown a warning message.

For more information, see RedirectWhitelistUrl in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Trusted URL for Redirects ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`Url`	URL	string		255		

REFRIGERANTEMSSNFCTR

Represents the global warming potential values for individual refrigerants. Global warming potential compares the atmospheric radiative forcing of one molecule of refrigerant to that of carbon dioxide.

For more information, see RefrigerantEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmissionFactorDataSource`	Emissions Factor Data Source	textarea		32000		
`EmissionFactorUpdateYear`	Emissions Factor Update Year	picklist		255		
`GlblWarmingPotInKgCo2eKg`	Global Warming Potential	double			18	0
`Id`	Refrigerant Emissions Factor ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

REFRIGERANTEMSSNFCTRFEED

Feed tracking for RefrigerantEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REFRIGERANTEMSSNFCTRHISTORY

History for tracked fields of RefrigerantEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Refrigerant Emissions Factor History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RefrigerantEmssnFctrId`	Refrigerant Emissions Factor ID	reference		18		

REFRIGERANTEMSSNFCTRSHARE

Sharing for RefrigerantEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REFUND

Represents a refund made against a payment.

For more information, see Refund in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
Amount	Amount	currency			18	2
Balance	Balance	currency			18	2
CancellationDate	Cancellation Date	datetime				
CancellationEffectiveDate	Cancellation Effective Date	datetime				
CancellationGatewayDate	Cancellation Gateway Date	datetime				
CancellationGatewayRefNumber	Cancellation Gateway Reference Number	string		255		
CancellationGatewayResultCode	Cancellation Gateway ResultCode	string		64		
CancellationSfResultCode	Cancellation Salesforce ResultCode	string		64		
ClientContext	Client Context	textarea		2000		
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Date	Date	datetime				
EffectiveDate	Effective Date	datetime				
Email	Audit Email	email		80		
GatewayDate	Gateway Date	datetime				
GatewayRefNumber	Gateway Reference Number	string		255		
GatewayResultCode	Gateway ResultCode	string		64		
GatewayResultCodeDescription	Gateway ResultCode Description	string		255		
Id	Refund ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ImpactAmount	Impact Amount	currency			18	2
IpAddress	IP Address	string		39		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MacAddress	MAC Address	string		32		
NetApplied	Net Applied	currency			18	2
PaymentGatewayId	Payment Gateway ID	reference		18		
PaymentGroupId	Payment Group ID	reference		18		
PaymentMethodId	Payment Method ID	reference		18		
Phone	Phone	phone		40		
ProcessingMode	Processing Mode	picklist		255		
RefundNumber	Refund Number	string		255		
SfResultCode	Salesforce ResultCode	picklist		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalApplied	Total Applied	currency			18	2
TotalUnapplied	Total Unapplied	currency			18	2
Type	Type	picklist		255		

REFUNDLINEPAYMENT

A refund line that has been applied to a payment.

For more information, see RefundLinePayment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Amount	Amount	currency			18	2
AppliedDate	Applied Date	datetime				
AssociatedAccountId	Account ID	reference		18		
AssociatedRefundLinePaymentId	Refund Line Payment ID	reference		18		
Comments	Comments	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Date	Date	datetime				
EffectiveDate	Effective Date	datetime				
EffectiveImpactAmount	Effective Impact Amount	currency			18	2
HasBeenUnapplied	Has Been Unapplied	picklist		255		
Id	Refund Line Payment ID	id		18		
ImpactAmount	Impact Amount	currency			18	2
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
PaymentBalance	Payment Balance	currency			18	2
PaymentId	Payment ID	reference		18		
RefundBalance	Refund Balance	currency			18	2
RefundId	Refund ID	reference		18		
RefundLinePaymentNumber	Refund Line Payment Number	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UnappliedDate	Unapplied Date	datetime				

REGAUTHORIZATIONTYPEPRODUCT

For more information, see RegAuthorizationTypeProduct in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Regulatory Authorization Type Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RegulatoryAuthorizationTypeId	Regulatory Authorization Type ID	reference		18		
SystemModstamp	System Modstamp	datetime				

REGAUTHORIZATIONTYPEPRODUCTFEED

Feed tracking for RegAuthorizationTypeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGAUTHORIZATIONTYPEPRODUCTHISTORY

History for tracked fields of RegAuthorizationTypeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Authorization Type Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegAuthorizationTypeProductId	Regulatory Authorization Type Product ID	reference		18		

REGAUTHORIZATIONTYPEPRODUCTSHARE

Sharing for RegAuthorizationTypeProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REGISTEREDEXTERNALSERVICE

Represents a registered external service used for checkout integrations by data integrators.

For more information, see RegisteredExternalService in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ConfigUrl	Configure Url	url		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
DocumentationUrl	Documentation Url	url		1000		
ExternalServiceProviderId	Class ID	reference		18		
ExternalServiceProviderType	External Service Provider Type	picklist		255		
Id	Registered External Service ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
SystemModstamp	System Modstamp	datetime				

REGULATORYAUTHORITY

Represents an organization or government agency that provides authorization. This object is available in API version 49.0 and later.

For more information, see RegulatoryAuthority in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Regulatory Authority ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

REGULATORYAUTHORITYFEED

Feed tracking for RegulatoryAuthority.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYAUTHORITYHISTORY

History for tracked fields of RegulatoryAuthority.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Authority History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegulatoryAuthorityId	Regulatory Authority ID	reference		18		

REGULATORYAUTHORITYSHARE

Sharing for RegulatoryAuthority.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REGULATORYAUTHORIZATIONTYPE

Represents the authorization issued by the regulatory body.

For more information, see RegulatoryAuthorizationType in the *Emergency Response Management Object Reference*, *Emergency Response Management for Public Health Developer Guide*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DurationType`	Duration Type	picklist		255		
`Id`	Regulatory Authorization Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`IssuingDepartmentId`	Regulatory Authority ID	reference		18		
`Jurisdiction`	Jurisdiction	string		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`ProcessingDuration`	Processing Duration	string		255		
`RegulatoryAuthCategory`	Regulatory Authorization Category	picklist		40		
`RegulatoryAuthCode`	Regulatory Authorization Code	string		255		
`SystemModstamp`	System Modstamp	datetime				

REGULATORYAUTHORIZATIONTYPEFEED

Feed tracking for RegulatoryAuthorizationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYAUTHORIZATIONTYPEHISTORY

History for tracked fields of RegulatoryAuthorizationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Authorization Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegulatoryAuthorizationTypeId	Regulatory Authorization Type ID	reference		18		

REGULATORYAUTHORIZATIONTYPESHARE

Sharing for RegulatoryAuthorizationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REGULATORYCODE

For more information, see RegulatoryCode in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EffectiveFrom	Effective From	datetime				
EffectiveTo	Effective To	datetime				
Id	Regulatory Code ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentCodeId	Regulatory Code ID	reference		18		
RegulatoryAuthorityId	Regulatory Authority ID	reference		18		
Subject	Subject	string		255		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

REGULATORYCODEFEED

Feed tracking for RegulatoryCode.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYCODEHISTORY

History for tracked fields of RegulatoryCode.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Code History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegulatoryCodeId	Regulatory Code ID	reference		18		

REGULATORYCODEVIOLATION

For more information, see RegulatoryCodeViolation in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ComplianceDueDate	Compliance Due Date	datetime				
CorrectiveActionDescription	Corrective Action Description	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateCreated	Date Created	datetime				
DateResolved	Date Resolved	datetime				
DaysOpen	Days Open	int	9			
Description	Description	string		255		
Id	Regulatory Code Violation ID	id		18		
InspectionAssmntIndId	Inspection Assessment Indicator ID	reference		18		
InspectionId	Visit ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Violation ID	string		255		
OwnerId	Owner ID	reference		18		
Priority	Priority	picklist		40		
RecurrenceCount	Recurrence	int	9			
RegulatoryCodeId	Regulatory Code ID	reference		18		
ResolutionNotes	Resolution Notes	textarea		1000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ResponseContextId	Response Context ID	reference		18		
ResponseId	Response ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
ViolationTypeId	Violation Type ID	reference		18		

REGULATORYCODEVIOLATIONFEED

Feed tracking for RegulatoryCodeViolation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYCODEVIOLATIONHISTORY

History for tracked fields of RegulatoryCodeViolation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Code Violation History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegulatoryCodeViolationId	Regulatory Code Violation ID	reference		18		

REGULATORYCODEVIOLATIONSHARE

Sharing for RegulatoryCodeViolation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REGULATORYTRXNFEE

Represents the association of regulatory transaction fees with your applications, inspections, or violations.

For more information, see RegulatoryTrxnFee in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CalculationDate	Calculation Date	datetime				
Comments	Comments	textarea		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DueDate	Due Date	datetime				
Id	Regulatory Transaction Fee ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Regulatory Transaction Fee Id	string		255		
OwnerId	Owner ID	reference		18		
ParentRecordId	Parent Record ID	reference		18		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

REGULATORYTRXNFEEFEED

Feed tracking for RegulatoryTrxnFee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYTRXNFEEHISTORY

History for tracked fields of RegulatoryTrxnFee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Regulatory Transaction Fee History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RegulatoryTrxnFeeId	Regulatory Transaction Fee ID	reference		18		

REGULATORYTRXNFEEITEM

Represents the storage of specific fee items associated with your regulatory transaction fees.

For more information, see RegulatoryTrxnFeeItem in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalculationInfo`	Calculation Information	string		255		
`Comments`	Comments	textarea		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeeAmount`	Fee Amount	currency			18	2
`Id`	Regulatory Transaction Fee Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`RegulatoryTrxnFeeId`	Regulatory Transaction Fee ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

REGULATORYTRXNFEEITEMFEED

Feed tracking for RegulatoryTrxnFeeItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

REGULATORYTRXNFEEITEMHISTORY

History for tracked fields of RegulatoryTrxnFeeItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Regulatory Transaction Fee Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RegulatoryTrxnFeeItemId`	Regulatory Transaction Fee Item ID	reference		18		

REGULATORYTRXNFEESHARE

Sharing for RegulatoryTrxnFee.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RELATEDLISTCOLUMNDEFINITION

Represents information about a column in a related list. A related list specifies a set of records for a related object, based on specific criteria.

For more information, see RelatedListColumnDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Alias`	Related List Column Definition Alias	string		255		
`ColumnSoql`	Related List Column Definition SOQL String	string		255		
`DataType`	Data Type	string		255		
`DurableId`	Durable Id	string		255		
`FieldDefinitionId`	Field Definition ID	string		70		
`Id`	Related List Column Definition Id	id		18		
`IsDefault`	Is Default	boolean				
`IsDescribable`	Is Describe Enabled	boolean				
`Label`	Label	string		255		
`LookupId`	Lookup Id	string		255		
`RelatedListDefinitionId`	Related List Definition Id	string		70		

RELATEDLISTDEFINITION

Represents information about a related list. A related list specifies a set of records for a related object, based on specific criteria.

For more information, see RelatedListDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DefaultSort`	Related List Default Sort	string		255		
`DurableId`	Durable Id	string		255		
`EntityDefinitionId`	Entity Definition ID	string		70		
`Id`	Related List Definition Id	id		18		
`IsCustomizable`	Is Customizable	boolean				
`IsDescribable`	Is Describe Enabled	boolean				
`IsLayoutable`	Is Layout Enabled	boolean				
`Label`	Label	string		255		
`ParentEntityDefinitionId`	Entity Definition ID	string		70		
`RelatedListId`	Related List Definition Id	string		255		
`RelatedListName`	Related List Definition Name	string		255		

REMOTEKEYCALLOUTEVENT

An event related to the RemoteKeyCalloutEvent object.

For more information, see RemoteKeyCalloutEvent in the *Object Reference for the Salesforce Platform*, and *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Details`	Details	textarea		32000		
`EventUuid`	Event UUID	string		36		
`ReplayId`	Replay ID	string		1000		
`RequestIdentifier`	Request Identifier	string		255		
`StatusCode`	Status Code	picklist		255		

RENTALCAREMSSNFCTR

Represents the emissions factors for scope 3 rental car usage.

For more information, see RentalCarEmssnFctr in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
EmissionFactorDataSource	Emissions Factor Data Source	textarea		32000		
EmissionFactorUpdateYear	Emissions Factor Update Year	picklist		255		
FuelEfficiency	Fuel Efficiency	double			18	2
FuelEfficiencyInMpg	Fuel Efficiency (mpg)	double			18	2
FuelEfficiencyUnit	Fuel Efficiency Unit	picklist		255		
Id	Rental Car Emissions Factor ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

RENTALCAREMSSNFCTRFEED

Feed tracking for RentalCarEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

RENTALCAREMSSNFCTRHISTORY

History for tracked fields of RentalCarEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Rental Car Emissions Factor History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
RentalCarEmssnFctrId	Rental Car Emissions Factor ID	reference		18		

RENTALCAREMSSNFCTRSHARE

Sharing for RentalCarEmssnFctr.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RENTALCARENRGYUSE

Represents the energy consumption related to rental cars.

For more information, see RentalCarEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
Ch4EmissionsInKg	CH4 Emissions (kg)	double			16	6
Co2EmissionsInKg	CO2 Emissions (kg)	double			16	6
CostCenter	Cost Center	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Distance	Distance	double			18	2
DistanceUnit	Distance Unit	picklist		255		
EndDate	End Date	date				
FuelEfficiencyInLkm	Fuel Efficiency (L/100 km)	double			18	2
FuelEfficiencyInMpg	Fuel Efficiency (mpg)	double			18	2
FuelType	Fuel Type	picklist		255		
Id	Rental Car Energy Use ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionsInKg	N2O Emissions (kg)	double			16	6
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RentalCarCompanyCode	Rental Car Company Code	string		100		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RentalCarCompanyName	Rental Car Company Name	string		255		
RentalCarEmssnFctrId	Rental Car Emissions Factor ID	reference		18		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		
Scope3EmissionsInTco2e	Scope 3 Emissions (tCO2e)	double			18	4
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
StartDate	Start Date	date				
SuplScope3Emissions	Supplemental Scope 3 Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalFuelConsumptionInGal	Total Fuel Consumption (US Gallons)	double			18	2
TotalFuelConsumptionInLiter	Total Fuel Consumption (Liters)	double			18	2
TravelerName	Traveler Name	string		255		
VendorProvidedEmissionsInTco2e	Vendor-Provided Emissions (tCO2e)	double			16	6

RENTALCARENRGYUSEFEED

Feed tracking for RentalCarEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

RENTALCARENRGYUSEHISTORY

History for tracked fields of RentalCarEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Rental Car Energy Use History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`RentalCarEnrgyUseId`	Rental Car Energy Use ID	reference		18		

RENTALCARENRGYUSESHARE

Sharing for RentalCarEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

REPLY

Represents a reply that a user has submitted to a question in an answers zone.

For more information, see Reply in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Body	Reply Body	textarea		32000		
CommunityId	Zone ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CreatorFullPhotoUrl	Url of Creator's Profile Photo	string		255		
CreatorName	Name of Creator	string		121		
CreatorSmallPhotoUrl	Url of Creator's Thumbnail Photo	string		255		
DownVotes	Down Votes	int	9			
Id	Reply ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
NumReportAbuses	Number of Report Abuses	int	9			
QuestionId	Question ID	reference		18		
SystemModstamp	System Modstamp	datetime				
UpVotes	Up Votes	int	9			
VoteTotal	Vote Total	double			18	0

REPLYREPORTABUSE

Represents a user-reported abuse on a Reply in a Chatter Answers zone.

For more information, see ReplyReportAbuse in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Reply Report Abuse ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Reply Report Abuse	string		255		
`Reason`	Reason	picklist		255		
`ReplyId`	Reply ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

REPORT

Represents a report, a set of data that meets certain criteria, displayed in an organized way. Access is read-only.

For more information, see Report in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
DeveloperName	Report Unique Name	string		80		
FolderName	Folder Name	string		256		
Format	Format	picklist		40		
Id	Report ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastRunDate	Last Run	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Report Name	string		40		
NamespacePrefix	Namespace Prefix	string		15		
OwnerId	Owner ID	reference		18		
ReportTypeApiName	Report Type API Name	string		50		
SystemModstamp	System Modstamp	datetime				

REPORTANOMALYEVENT

Tracks anomalies in how users run or export reports, including unsaved reports.

For more information, see ReportAnomalyEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`EventUuid`	Event UUID	string		36		
`LoginKey`	Login Key	string		24		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`ReplayId`	Replay ID	string		1000		
`Report`	Report ID	string		18		
`Score`	Score	double			12	6
`SecurityEventData`	Event Data	textarea		10000		
`SessionKey`	Session Key	string		24		
`SourceIp`	Source IP Address	string		255		
`Summary`	Summary	textarea		1000		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

REPORTANOMALYEVENTSTORE

Tracks anomalies in how users run or export reports, including unsaved reports.

For more information, see ReportAnomalyEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedDate	Created Date	datetime				
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event ID	string		80		
Id	Report Anomaly Event Store ID	id		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoginKey	Login Key	string		24		
PolicyId	Transaction Security Policy ID	reference		18		
PolicyOutcome	Policy Outcome	picklist		255		
Report	Report ID	string		18		
ReportAnomalyEventNumber	Event Name	string		255		
Score	Score	double			12	6
SecurityEventData	Event Data	textarea		10000		
SessionKey	Session Key	string		24		
SourceIp	Source IP Address	string		255		
Summary	Summary	textarea		1000		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
Username	Username	string		255		

REPORTANOMALYEVENTSTOREFEED

Feed tracking for ReportAnomalyEventStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REPORTEVENT

Tracks when reports are run in your org.

For more information, see ReportEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ColumnHeaders	Name of Columns	string		10000		
CreatedDate	Created Date	datetime				
DashboardId	Dashboard ID	reference		18		
DashboardName	Dashboard Name	string		80		
Description	Description	string		255		
DisplayedFieldEntities	Displayed Field Entities	string		10000		
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventSource	Event Source	picklist		255		
ExecutionIdentifier	Execution Identifier	string		80		
ExportFileFormat	Export File Format	string		80		
Format	Format	picklist		255		
GroupedColumnHeaders	Name of Grouped Columns	string		10000		
Id	Report Event ID	id		18		
IsScheduled	Is Scheduled	boolean				
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
Name	Name	string		80		
NumberOfColumns	Number of Columns	int	9			
Operation	Operation	picklist		255		
OwnerId	Owner ID	reference		18		
PolicyId	Transaction Security Policy ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PolicyOutcome	Policy Outcome	picklist		255		
QueriedEntities	Queried Entities	string		1000		
Records	Records	json		250000		
RelatedEventIdentifier	Related Event Identifier	string		80		
ReportId	Report ID	reference		18		
RowsProcessed	Rows Processed	double			18	0
Scope	Scope	string		80		
Sequence	Sequence	int	9			
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
Username	Username	string		255		

REPORTEVENTSTREAM

Tracks report-related actions, such as when a user runs or exports a report.

For more information, see ReportEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ColumnHeaders	Name of Columns	string		10000		
CreatedDate	Created Date	datetime				
DashboardId	Dashboard ID	string		18		
DashboardName	Dashboard Name	string		80		
Description	Description	string		255		
DisplayedFieldEntities	Displayed Field Entities	string		10000		
EvaluationTime	Evaluation Time	double			18	0
EventDate	Event Date	datetime				
EventIdentifier	Event Identifier	string		80		
EventSource	Event Source	picklist		255		
EventUuid	Event UUID	string		36		
ExecutionIdentifier	Execution Identifier	string		80		
ExportFileFormat	Export File Format	string		80		
Format	Format	picklist		255		
GroupedColumnHeaders	Name of Grouped Columns	string		10000		
IsScheduled	Is Scheduled	boolean				
LoginHistoryId	Login History ID	reference		18		
LoginKey	Login Key	string		24		
Name	Name	string		80		
NumberOfColumns	Number of Columns	int	9			
Operation	Operation	picklist		255		
OwnerId	Owner ID	string		18		
PolicyId	Transaction Security Policy ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PolicyOutcome	Policy Outcome	picklist		255		
QueriedEntities	Queried Entities	string		1000		
Records	Records	json		250000		
RelatedEventIdentifier	Related Event Identifier	string		80		
ReplayId	Replay ID	string		1000		
ReportId	Report ID	string		18		
RowsProcessed	Rows Processed	double			18	0
Scope	Scope	string		80		
Sequence	Sequence	int	9			
SessionKey	Session Key	string		24		
SessionLevel	Session Level	picklist		255		
SourceIp	Source IP	string		255		
UserId	User ID	reference		18		
Username	Username	string		255		

REPORTFEED

Feed tracking for Report.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

REPUTATIONLEVEL

Represents a reputation level defined for an Experience Cloud site.

For more information, see ReputationLevel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Reputation Level ID	id		18		
`IsDeleted`	Deleted	boolean				
`Label`	Level Name	string		50		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LevelNumber`	Level Number	int	9			
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Threshold`	Point Threshold	double			15	0

REPUTATIONLEVELLOCALIZATION

Represents the translated value of a reputation level. Reputation level localization only applies for reputation levels in Experience Cloud sites.

For more information, see ReputationLevelLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

REPUTATIONPOINTSRULE

Represents the reputation point rules for an Experience Cloud site. Each rule specifies an action that members can earn points from and the points associated with those actions in a particular site.

For more information, see ReputationPointsRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Reputation Points Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`Points`	Points	int	6			
`SystemModstamp`	System Modstamp	datetime				
`Type`	Event Type	picklist		255		

RESIDENTIALLOANAPPLICATION

Represents details about a loan application from the lender.

For more information, see ResidentialLoanApplication in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
AmortizationTerm	Loan Duration in Months	double			18	0
AmortizationType	Amortization Type	picklist		40		
ApplicationExtIdentifier	External Application ID	string		255		
BalloonTermMonths	Balloon Term Months	double			18	0
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EstateHoldType	Lender's Lien Type	picklist		40		
HasOtherLoanFeature	Other Loan Feature	boolean				
HasPrepaymentPenalty	Penalty for Prepayment	boolean				
Id	Residential Loan Application ID	id		18		
ImprovementCost	Cost of Construction or Improvement	currency			18	2
InitialBuydownRate	Initial Buydown Rate	double			18	3
IntOnlyTermMonthCount	Interest-Only Term Months	double			18	0
InterestRate	Interest Rate	double			18	3
IsBalloon	Balloon	boolean				
IsBorrowerCommPropState	Borrower Lives in Community Property State	boolean				
IsConstructionConversion	Construction-Conversion or Construction-to-Permanent	boolean				
IsContractConversion	Conversion of Contract for Deed or Land Contract	boolean				
IsDeleted	Deleted	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsEnergyRelImprovement	Energy-Related Improvement	boolean				
IsInterestOnly	Interest Only	boolean				
IsNegativeAmortization	Allows Negative Amortization	boolean				
IsPropertyCommPropState	Property in Community Property State	boolean				
IsRenovation	Renovation	boolean				
IsSingleClosing	Single Closing	boolean				
IsSubjectToPriorityLien	Subject to Priority Lien	boolean				
IsTempIntRateBuydown	Temporary Interest Rate Buydown	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeaseHoldExpirationDate	Leasehold Expiration	datetime				
LoanPurpose	Loan Purpose	picklist		255		
LotAcquiredDate	Date Acquired	datetime				
LotOriginalCost	Original Cost	currency			18	2
MonthsBeforeFirstAdj	Initial Period Prior to First Adjustment in months	double			18	0
MonthsBetweenAdjustments	Subsequent Adjustment Period in months	double			18	0
MortgageLienType	Mortgage Lien Type	picklist		40		
MortgageProgramType	Mortgage Program Type	picklist		255		
Name	Name	string		255		
NativeLandTenure	Indian Country Land Tenure	picklist		40		
OpportunityId	Opportunity ID	reference		18		
OtherAmortizationType	Other Amortization Type Description	string		255		
OtherLoanFeature	Other Loan Feature Description	string		255		
OtherLoanPurpose	Other Loan Purpose	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OtherMortgageProgramType	Other Mortgage Program Type Description	string		255		
OtherRefinanceProgType	Other Refinance Program Type	string		255		
OwnerId	Owner ID	reference		18		
PrepayPenaltyTermMonth	Prepayment Penalty Term Months	double			18	0
ProjectType	Project Type	picklist		40		
RefinanceProgramType	Refinance Program Type	picklist		40		
RefinanceType	Refinance Type	picklist		40		
Status	Application Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TitleType	Title Hold Method	picklist		40		
TotalFinLiabilityMonthlyAmt	Total Monthly Financial Liabilities	currency			18	2
TotalFinancialAssetAmount	Total Financial Assets	currency			18	2
TotalOtherAssetAmount	Total Other Assets	currency			18	2
TotalOtherFinLiabilityMonthlyAmt	Total Monthly Other Liabilities	currency			18	2
TrustTitleType	Title Held in Trust	picklist		40		

RESIDENTIALLOANAPPLICATIONFEED

Feed tracking for ResidentialLoanApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RESIDENTIALLOANAPPLICATIONHISTORY

History for tracked fields of ResidentialLoanApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Residential Loan Application History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ResidentialLoanApplicationId	Residential Loan Application ID	reference		18		

RESIDENTIALLOANAPPLICATIONSHARE

Sharing for ResidentialLoanApplication.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

RESOURCEABSENCE

Represents a time period in which a service resource is unavailable to work in Field Service, Salesforce Scheduler, or Workforce Engagement.

For more information, see ResourceAbsence in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AbsenceNumber	Absence Number	string		255		
Address	Address	address				
City	City	string		40		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
End	End Time	datetime				
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Absence ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
PostalCode	Zip/Postal Code	string		20		
ResourceId	Resource ID	reference		18		
Start	Start Time	datetime				
State	State/Province	string		80		
Street	Address	textarea		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

RESOURCEABSENCEFEED

Feed tracking for ResourceAbsence.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RESOURCEABSENCEHISTORY

History for tracked fields of ResourceAbsence.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Resource Absence History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ResourceAbsenceId	Absence ID	reference		18		

RESOURCEPREFERENCE

Represents an account's preference for a specified service resource on field service work.

For more information, see ResourcePreference in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Resource Preference ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`PreferenceType`	Preference Type	picklist		255		
`RelatedRecordId`	Related Record ID	reference		18		
`ResourcePreferenceNumber`	Resource Preference Number	string		255		
`ServiceResourceId`	Resource ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

RESOURCEPREFERENCEFEED

Feed tracking for ResourcePreference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RESOURCEPREFERENCEHISTORY

History for tracked fields of ResourcePreference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Resource Preference History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ResourcePreferenceId	Resource Preference ID	reference		18		

RETURNORDER

Represents the return or repair of inventory or products in Field Service, or the return of order products in Order Management.

For more information, see ReturnOrder in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CaseId	Case ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
ExpectedArrivalDate	Expected Arrival Date	datetime				
ExpirationDate	Expiration Date	datetime				
Id	Return Order ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OrderId	Order ID	reference		18		
OwnerId	Owner ID	reference		18		
ProductRequestId	Product Request ID	reference		18		
ProductServiceCampaignId	Product Service Campaign ID	reference		18		
ReturnOrderNumber	Return Order Number	string		255		
ReturnedById	Returned By ID	reference		18		
ShipFromAddress	Ship From Address	address				
ShipFromCity	City	string		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShipFromCountry	Country	string		80		
ShipFromGeocodeAccuracy	Geocode Accuracy	picklist		255		
ShipFromLatitude	Latitude	double			18	15
ShipFromLongitude	Longitude	double			18	15
ShipFromPostalCode	Zip/Postal Code	string		20		
ShipFromState	State/Province	string		80		
ShipFromStreet	Address	textarea		255		
ShipmentType	Shipment Type	picklist		40		
SourceLocationId	Source Location ID	reference		18		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
SystemModstamp	System Modstamp	datetime				

RETURNORDERFEED

Feed tracking for ReturnOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RETURNORDERHISTORY

History for tracked fields of ReturnOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Return Order History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ReturnOrderId`	Return Order ID	reference		18		

RETURNORDERLINEITEM

Represents a specific product that is returned or repaired as part of a return order in Field service, or a specific order item that is returned as part of a return order in Order Management.

For more information, see ReturnOrderLineItem in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
Id	Return Order Line Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OrderItemId	Order Product ID	reference		18		
ProcessingPlan	Processing Plan	picklist		40		
Product2Id	Product ID	reference		18		
ProductItemId	Product Item ID	reference		18		
ProductRequestLineItemId	Product Request Line Item ID	reference		18		
ProductServiceCampaignId	Product Service Campaign ID	reference		18		
ProductServiceCampaignItemId	Product Service Campaign Item ID	reference		18		
QuantityExpected	Quantity Expected	double			18	0
QuantityReceived	Quantity Received	double			18	0
QuantityRejected	Quantity Rejected	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
QuantityReturned	Quantity Returned	double			18	2
QuantityUnitOfMeasure	Quantity Unit Of Measure	picklist		40		
ReasonForRejection	Reason for Rejection	picklist		40		
ReasonForReturn	Reason For Return	picklist		40		
RepaymentMethod	Repayment Method	picklist		40		
ReturnOrderId	Return Order ID	reference		18		
ReturnOrderLineItemNumber	Return Order Line Item Number	string		255		
SourceLocationId	Source Location ID	reference		18		
SystemModstamp	System Modstamp	datetime				

RETURNORDERLINEITEMFEED

Feed tracking for ReturnOrderLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

RETURNORDERLINEITEMHISTORY

History for tracked fields of ReturnOrderLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Return Order Line Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ReturnOrderLineItemId`	Return Order Line Item ID	reference		18		

RETURNORDERSHARE

Sharing for ReturnOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SALESAGREEMENT

Represents a long-term agreement between a buyer and a seller to negotiate price and volume of products.

For more information, see SalesAgreement in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActivatedDate	Activated Date	datetime				
ActualsCalculationMode	Actuals Calculation Mode	picklist		255		
AgreementType	Agreement Type	picklist		255		
ApprovedById	User ID	reference		18		
ApprovedDate	Approved Date	datetime				
CancellationDate	Cancellation Date	datetime				
CancellationReason	Cancellation Reason	picklist		40		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		2000		
EndDate	End Date	date				
Id	Sales Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastActualsCalculatedDate	Last Actuals Calculated Date	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PricebookId	Price Book ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProductLevel	Product Level	picklist		255		
RenewedFromAgreementId	Sales Agreement ID	reference		18		
RenewedToAgreementId	Sales Agreement ID	reference		18		
ScheduleCount	Schedule Count	int	9			
ScheduleFrequency	Schedule Frequency	picklist		255		
StartDate	Start Date	date				
Status	Status	picklist		40		
StatusCode	Status Code	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalAgreementAmount	Total Agreement Amount	currency			18	2
TotalProposedAgreementAmount	Total Proposed Agreement Amount	currency			18	2

SALESAGREEMENTFEED

Feed tracking for SalesAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SALESAGREEMENTHISTORY

History for tracked fields of SalesAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Sales Agreement History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SalesAgreementId`	Sales Agreement ID	reference		18		

SALESAGREEMENTPRODUCT

Represents the total quantity or amount and the default pricing information of a product or category across the total time period of the sales agreement.

For more information, see SalesAgreementProduct in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DiscountPercentage	Discount Percentage	percent			5	2
Id	Sales Agreement Product ID	id		18		
InitialPlannedAmount	Initial Planned Amount	currency			18	2
InitialPlannedQuantity	Initial Total Quantity	int	9			
IsAddedAfterActivation	Added After Activation	boolean				
IsDeleted	Deleted	boolean				
IsUnderRevision	Under Revision	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ListPrice	List Price	currency			18	2
Name	Name	string		255		
PricebookEntryId	Price Book Entry ID	reference		18		
ProductCategoryId	Category ID	reference		18		
ProductId	Product ID	reference		18		
SalesAgreementId	Sales Agreement ID	reference		18		
SalesPrice	Sales Price	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalActualAmount	Total Actual Amount	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotalActualQuantity	Total Actual Quantity	int	9			
TotalForecastedAmount	Total Forecasted Amount	currency			18	2
TotalForecastedQuantity	Total Forecasted Quantity	int	9			
TotalPlannedAmount	Total Planned Amount	currency			18	2
TotalPlannedQuantity	Total Planned Quantity	int	9			
TotalProposedPlannedAmount	Total Proposed Planned Amount	currency			18	2
TotalProposedPlannedQuantity	Total Proposed Planned Quantity	int	9			

SALESAGREEMENTPRODUCTFEED

Feed tracking for SalesAgreementProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SALESAGREEMENTPRODUCTHISTORY

History for tracked fields of SalesAgreementProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Sales Agreement Product History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SalesAgreementProductId	Sales Agreement Product ID	reference		18		

SALESAGREEMENTPRODUCTSCHEDULE

Represents the quantity or amount and the pricing information of a product or category for a particular schedule of the sales agreement.

For more information, see SalesAgreementProductSchedule in the *Manufacturing Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualAmount	Actual Amount	currency			18	0
ActualQuantity	Actual Quantity	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DerivedPlannedAmount	Planned Amount	currency			18	2
DiscountPercentage	Discount Percentage	percent			5	2
EndDate	End Date	date				
ForecastedAmount	Forecasted Amount	currency			18	0
ForecastedQuantity	Forecasted Quantity	int	9			
Id	Sales Agreement Product Schedule ID	id		18		
IsDeleted	Deleted	boolean				
IsUnderRevision	Under Revision	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PlannedAmount	Planned Amount	currency			18	2
PlannedQuantity	Planned Quantity	int	9			
ProposedDerivedPlannedAmount	Proposed Derived Planned Amount	currency			18	2
ProposedDiscountPercentage	Proposed Discount Percentage	percent			5	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ProposedPlannedAmount	Proposed Planned Amount	currency			18	2
ProposedPlannedQuantity	Proposed Planned Quantity	int	9			
ProposedSalesPrice	Proposed Sales Price	currency			18	2
SalesAgreementProductId	Sales Agreement Product ID	reference		18		
SalesPrice	Sales Price	currency			18	2
StartDate	Start Date	date				
SystemModstamp	System Modstamp	datetime				

SALESAGREEMENTPRODUCTSCHEDULEFEED

Feed tracking for SalesAgreementProductSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SALESAGREEMENTPRODUCTSCHEDULEHISTORY

History for tracked fields of SalesAgreementProductSchedule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Sales Agreement Product Schedule History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SalesAgreementProductScheduleId	Sales Agreement Product Schedule ID	reference		18		

SALESAGREEMENTSHARE

Sharing for SalesAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SALESSTORECATALOG

Represents the catalog associated with a store.

For more information, see SalesStoreCatalog in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	Sales Store Catalog ID	id		18		
`ImplementorType`	Implementor Type	string		255		
`ProductCatalogId`	Catalog ID	reference		18		
`SalesStoreId`	Sales Store ID	reference		18		

SAMLSSOCONFIG

Represents a SAML Single Sign-On configuration.

For more information, see SamlSsoConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AttributeFormat	Name ID Format	string		255		
AttributeName	Attribute Name	string		255		
Audience	Entity ID	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
ErrorUrl	Custom Error URL	string		500		
ExecutionUserId	User ID	reference		18		
Id	SAML Single Sign-On Setting ID	id		18		
IdentityLocation	SAML Identity Location	picklist		255		
IdentityMapping	SAML Identity Type	picklist		255		
IsDeleted	Deleted	boolean				
Issuer	Issuer	string		255		
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LoginUrl	Identity Provider Login URL	string		1500		
LogoutUrl	Identity Provider Logout URL	string		1500		
MasterLabel	Label	string		80		
NamespacePrefix	Namespace Prefix	string		15		
OptionsSpInitBinding	SpInitBinding	boolean				
OptionsUseConfigRequestMethod	UseConfigRequestMethod	boolean				
OptionsUseSameDigestAlgoForSigning	UseSameDigestAlgoForSigning	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsUserProvisioning	UserProvisioning	boolean				
RequestSignatureMethod	Request Signature Method	picklist		255		
SamlJitHandlerId	Class ID	reference		18		
SingleLogoutBinding	Single Logout Request Binding	picklist		255		
SingleLogoutUrl	Identity Provider Single Logout URL	string		255		
SystemModstamp	System Modstamp	datetime				
ValidationCert	Identity Provider Certificate	string		4000		
Version	SAML Version	picklist		255		

SCHEDULINGCONSTRAINT

Represents scheduling constraints on each service resource.

For more information, see SchedulingConstraint in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Constraint ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MaxNonstandardShiftsPerMonth	Maximum Non-Standard Shifts Per Month	int	9			
MaxShiftsPerDay	Maximum Shifts Per Day	int	9			
MaxShiftsPerMonth	Maximum Shifts Per Month	int	9			
MaxShiftsPerWeek	Maximum Shifts Per Week	int	9			
MaxWorkingHoursPerDay	Maximum Working Hours Per Day	double			10	2
MaxWorkingHoursPerMonth	Maximum Working Hours Per Month	double			10	2
MaxWorkingHoursPerWeek	Maximum Working Hours Per Week	double			10	2
Name	Name	string		200		
OwnerId	Owner ID	reference		18		
RestTimeMinutes	Rest Time in Minutes	int	9			
SystemModstamp	System Modstamp	datetime				

SCHEDULINGCONSTRAINTSHARE

Sharing for SchedulingConstraint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SCHEDULINGOBJECTIVE

Represents business goals that the scheduling tools consider.

For more information, see SchedulingObjective in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		500		
`DeveloperName`	Developer Name	string		100		
`Id`	Scheduling Objective ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		100		
`SchedulingCategory`	Objective Category	picklist		255		
`SchedulingObjectiveType`	Objective Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

SCHEDULINGRULE

Represents scheduling rules that are hard constraints in the scheduling logic engine.

For more information, see SchedulingRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		500		
`DeveloperName`	Developer Name	string		100		
`Id`	Scheduling Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Name	string		100		
`SchedulingCategory`	Rule Category	picklist		255		
`SchedulingRuleType`	Rule Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

SCHEDULINGRULEPARAMETER

Represents scheduling rule parameters associated with a scheduling rule.

For more information, see SchedulingRuleParameter in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Scheduling Rule Parameter ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SchedulingParameterKey`	Key	picklist		255		
`SchedulingRuleId`	Scheduling Rule ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Value	string		255		

SCONTROL

A custom s-control, which is custom content that is hosted by the system but executed by the client application.

For more information, see Scontrol in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Binary`	Binary	base64				
`BodyLength`	Binary Length	int	8			
`ContentSource`	Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	S-Control Name	string		80		
`EncodingKey`	Encoding	picklist		40		
`Filename`	Filename	string		255		
`HtmlWrapper`	HTML Body	textarea		1048576		
`Id`	Custom S-Control ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SupportsCaching`	Prebuild In Page	boolean				
`SystemModstamp`	System Modstamp	datetime				

SCONTROLLOCALIZATION

The translated value of the field label for an s-control.

For more information, see ScontrolLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Scontrol Localization ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ScontrolId`	Custom S-Control ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	string		1000		

SCOPE3CRBNFTPRNT

Represents the total carbon emissions from scope 3 activities. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e).

For more information, see Scope3CrbnFtprnt in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
AuditApprovalStatus	Audit Approval Status	picklist		40		
CarbonInventoryRecordCount	Carbon Inventory Record Count	double			16	0
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
FootprintStage	Footprint Stage	picklist		40		
Id	Scope 3 Carbon Footprint ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ReportingDate	Reporting Date	date				
ReportingYear	Reporting Year	picklist		255		
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
Scp3EmssnCapitalGood	Scope 3 Emissions from Capital Goods (tCO2e)	double			18	5

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scp3EmssnDnstrmLeasedAsset	Scope 3 Emissions from Downstream Leased Asset (tCO2e)	double			18	5
Scp3EmssnDnstrmTrnspDistr	Scope 3 Emissions from Downstream Transportation Distribution (tCO2e)	double			18	5
Scp3EmssnEmployeeCommuting	Scope 3 Emissions from Employee Commuting (tCO2e)	double			18	5
Scp3EmssnEndLifeSoldProdt	Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e)	double			18	5
Scp3EmssnFranchise	Scope 3 Emissions from Franchise (tCO2e)	double			18	5
Scp3EmssnFuelEnergyActivity	Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e)	double			18	5
Scp3EmssnInvestment	Scope 3 Emissions from Investments (tCO2e)	double			18	5
Scp3EmssnProcSoldProduct	Scope 3 Emissions from Processing Sold Products (tCO2e)	double			18	5
Scp3EmssnPurchGoodsService	Scope 3 Emissions from Purchased Goods Services (tCO2e)	double			18	5
Scp3EmssnUpstrmLeasedAsset	Scope 3 Emissions from Upstream Leased Assets (tCO2e)	double			18	5
Scp3EmssnUpstrmTrnspDistr	Scope 3 Emissions from Scope 3 Upstream Transportation Distribution (tCO2e)	double			18	5
Scp3EmssnUseOfSoldProduct	Scope 3 Emissions from Use of Sold Products (tCO2e)	double			18	5
Scp3UncatgEmissions	Scope 3 Uncategorized Emissions (tCO2e)	double			18	5
Scp3WasteGenInOper	Scope 3 Emissions from Waste Generated in Operations (tCO2e)	double			18	5
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SuplScope3Emission	Supplemental Scope 3 Emissions (tCO2e)	double			18	5
SystemModstamp	System Modstamp	datetime				
TotScope3EmissionsInTco2e	Total Scope 3 Emissions (tCO2e)	double			18	5
TotalScp3DnstrmEmissions	Total Scope 3 Downstream Emissions (tCO2e)	double			18	5
TotalScp3EmssnBusTrvl	Total Scope 3 Emissions from Business Travel (tCO2e)	double			18	5
TotalScp3UpstrmEmissions	Total Scope 3 Upstream Emissions (tCO2e)	double			18	5

SCOPE3CRBNFTPRNTFEED

Feed tracking for Scope3CrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SCOPE3CRBNFTPRNTHISTORY

History for tracked fields of Scope3CrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Scope 3 Carbon Footprint History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		

SCOPE3CRBNFTPRNTSHARE

Sharing for Scope3CrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SCOPE3EMSSNSRC

Represents scope 3 activities that are the source of greenhouse gas emissions.

For more information, see Scope3EmssnSrc in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNameId	Account ID	reference		18		
AirTravelEmssnFctrId	Air Travel Emissions Factor ID	reference		18		
BusinessRegion	Business Region	picklist		40		
City	City	string		255		
Country	Country	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
FrgtHaulingEmssnFctrId	Freight Hauling Emissions Factor ID	reference		18		
GroundTravelEmssnFctrId	Ground Travel Emissions Factor ID	reference		18		
HotelStayEmssnFctrId	Hotel Stay Emissions Factor ID	reference		18		
Id	Scope 3 Emissions Source ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentEmissionSourceId	Scope 3 Emissions Source ID	reference		18		
PostalCode	Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RentalCarEmssnFctrId	Rental Car Emissions Factor ID	reference		18		
Scope3EmissionSourceType	Scope 3 Emissions Source Type	string		255		
State	State	string		128		
SystemModstamp	System Modstamp	datetime				

SCOPE3EMSSNSRCFEED

Feed tracking for Scope3EmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SCOPE3EMSSNSRCHISTORY

History for tracked fields of Scope3EmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Scope 3 Emissions Source History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`Scope3EmssnSrcId`	Scope 3 Emissions Source ID	reference		18		

SCOPE3EMSSNSRCSHARE

Sharing for Scope3EmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SCOPE3PCMTITEM

Represents the procurement (corporate spending) entry records. Procurement is considered as the amount that the organization spends on goods and services.

For more information, see Scope3PcmtItem in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CalculatedScope3EmssnInTco2e	Scope 3 Spend-Based Emissions (tCO2e)	double			18	5
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FinalScorecardEmissions	Allocated Scorecard Emissions (tCO2e)	double			18	5
Id	Scope 3 Procurement Item ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
PcmtEmssnFctrSetItemId	Procurement Emissions Factor Set Item ID	reference		18		
ProcurementSummaryId	Scope 3 Procurement Summary ID	reference		18		
ProductEmissionsFactorId	Product Emissions Factor ID	reference		18		
ProductId	Product ID	reference		18		
PurchaseQuantity	Purchase Quantity	double			18	5
ReportDate	Report Date	date				
Scope3EmissionsCalculationType	Scope 3 Emissions Calculation Type	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3EmissionsInTco2	Final Scope 3 Emissions (tCO2e)	double			18	5
Scope3GhgCategory	Scope 3 GHG Category	picklist		255		
Scp3QtyBsdEmssnInTco2e	Scope 3 Quantity-Based Emissions (tCO2e)	double			18	5
Scp3UncatgEmissions	Scope 3 Uncategorized Emissions (tCO2e)	double			18	5
SpendingCategory1	Spending Category 1	string		255		
SpendingCategory2	Spending Category 2	string		255		
SpendingCategory3	Spending Category 3	string		255		
SpentAmount	Spent Amount	double			18	2
SpentDate	Spent Date	date				
SupplierId	Supplier ID	reference		18		
SustainabilityScorecardId	Sustainability Scorecard ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotScope3EmssnPerMillionSpent	Total Scope 3 Emissions per Million Spent (tCO2e)	double			18	8
UnitOfMeasure	Unit of Measure	picklist		255		
VendorPrvdScope3EmssnInTco2e	Scope 3 Emissions Override (tCO2e)	double			18	5

SCOPE3PCMTITEMFEED

Feed tracking for Scope3PcmtItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SCOPE3PCMTITEMHISTORY

History for tracked fields of Scope3PcmtItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Scope 3 Procurement Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
Scope3PcmtItemId	Scope 3 Procurement Item ID	reference		18		

SCOPE3PCMTSUMMARY

Represents the amount that the organization spends for an individual procurement category. Scope 3 procurement summary quantifies the effect on atmospheric warming, represented in tonnes of carbon dioxide equivalent (tCO_2e) by using a matched emission factor from an associated Procurement Emission Factor Item record.

For more information, see Scope3PcmtSummary in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CalendarYear`	Calendar Year	picklist		255		
`CarbonFootprintReportDate`	Carbon Footprint Report Date	date				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrencyCode`	Currency Code	picklist		255		
`Description`	Description	textarea		32000		
`Id`	Scope 3 Procurement Summary ID	id		18		
`InflationRate`	Inflation Rate	percent			16	4
`InflationRateCalculated`	Current Inflation Rate	percent			16	4
`InflationRateOverride`	Inflation Rate Override	percent			16	4
`IsComplete`	Complete	boolean				
`IsDeleted`	Deleted	boolean				
`IsRecordLocked`	Record Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PcmtEmssnFctrId`	Procurement Emissions Factor Set ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope3CrbnFtprntId	Scope 3 Carbon Footprint ID	reference		18		
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		
Scp3EmssnBusinessTravel	Scope 3 Emissions from Business Travel (tCO2e)	double			18	5
Scp3EmssnCapitalGood	Scope 3 Emissions from Capital Goods (tCO2e)	double			18	5
Scp3EmssnDnstrmLeasedAsset	Scope 3 Emissions from Downstream Leased Asset (tCO2e)	double			18	5
Scp3EmssnDnstrmTrnspDistr	Scope 3 Emissions from Downstream Transportation Distribution (tCO2e)	double			18	5
Scp3EmssnEndLifeSoldProdt	Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e)	double			18	5
Scp3EmssnFranchise	Scope 3 Emissions from Franchise (tCO2e)	double			18	5
Scp3EmssnFuelEnergyActivity	Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e)	double			18	5
Scp3EmssnInvestment	Scope 3 Emissions from Investment (tCO2e)	double			18	5
Scp3EmssnProcSoldProduct	Scope 3 Emissions from Processing Sold Product (tCO2e)	double			18	5
Scp3EmssnPurchGoodsService	Scope 3 Emissions from Purchased Goods Services (tCO2e)	double			18	5
Scp3EmssnUpstrmLeasedAsset	Scope 3 Emissions from Upstream Leased Asset (tCO2e)	double			18	5
Scp3EmssnUpstrmTrnspDistr	Scope 3 Emissions from Upstream Transportation Distribution (tCO2e)	double			18	5
Scp3EmssnUseOfSoldProduct	Scope 3 Emissions from Use of Sold Product (tCO2e)	double			18	5
Scp3UncatgEmissions	Scope 3 Uncategorized Emissions (tCO2e)	double			18	5
Scp3WasteGenInOper	Scope 3 Emissions from Waste Generated in Operations (tCO2e)	double			18	5

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ScpEmssnEmployeeCommuting	Scope 3 Emissions from Employee Commuting (tCO2e)	double			18	5
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalScp3DnstrmEmissions	Total Scope 3 Downstream Emissions (tCO2e)	double			18	5
TotalScp3Emissions	Total Scope 3 Emissions (tCO2e)	double			18	5
TotalScp3UpstrmEmissions	Total Scope 3 Upstream Emissions (tCO2e)	double			18	5
TotalSpentAmount	Total Spent Amount	double			18	5

SCOPE3PCMTSUMMARYFEED

Feed tracking for Scope3PcmtSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SCOPE3PCMTSUMMARYHISTORY

History for tracked fields of Scope3PcmtSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Scope 3 Procurement Summary History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
Scope3PcmtSummaryId	Scope 3 Procurement Summary ID	reference		18		

SCOPE3PCMTSUMMARYSHARE

Sharing for Scope3PcmtSummary.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SCORECARD

Use scorecards to measure partner performance and establish benchmarks for channel programs within Experience Cloud. Display any report summary results that your channel account manager or executive team wants to see.

For more information, see Scorecard in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Scorecard Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetEntity`	Target Entity	picklist		255		

SCORECARDASSOCIATION

Represents a connection between a specific scorecard and the associated account, channel program, or channel program level.

For more information, see ScorecardAssociation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Scorecard Association Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ScorecardId`	Scorecard ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TargetEntityId`	Target Entity ID	reference		18		

SCORECARDMETRIC

Stores information about a Salesforce report that is run and summarized to get a single value. The stored value is added as a metric to the related Scorecard object.

For more information, see ScorecardMetric in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Category`	Category	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Scorecard Metric Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`ReportId`	Report ID	reference		18		
`ScorecardId`	Scorecard ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SCORECARDSHARE

Sharing for Scorecard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SEARCHPROMOTIONRULE

Represents a promoted search term, which is one or more keywords that you associate with a Salesforce Knowledge article. When a user's search query includes these keywords, the associated article is returned first in search results.

For more information, see SearchPromotionRule in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Promoted Term Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PromotedEntityId`	Promoted Entity ID	reference		18		
`Query`	Term	string		100		
`SystemModstamp`	System Modstamp	datetime				

SECURITIESHOLDING

Represents the securities associated with an insurance policy.

For more information, see SecuritiesHolding in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetCategory	Asset Category	picklist		40		
AssetCategoryName	Asset Category Name	picklist		40		
AssetClass	Asset Class	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
GainLoss	Gain/Loss	currency			18	2
HouseholdId	Account ID	reference		18		
Id	Securities Holding ID	id		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastUpdated	Last Updated	datetime				
LastViewedDate	Last Viewed Date	datetime				
MarketValue	Market Value	currency			18	2
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PercentChange	Percent Change	percent			16	2
Price	Price	currency			12	2
PrimaryOwnerId	Account ID	reference		18		
PurchasePrice	Purchase Price	currency			12	2
Shares	Shares	double			14	4

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SourceSystem	Source System	string		255		
SourceSystemIdentifier	Source System Identifier	string		255		
SystemModstamp	System Modstamp	datetime				

SECURITIESHOLDINGFEED

Feed tracking for SecuritiesHolding.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SECURITIESHOLDINGHISTORY

History for tracked fields of SecuritiesHolding.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Securities Holding History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SecuritiesHoldingId`	Securities Holding ID	reference		18		

SECURITIESHOLDINGSHARE

Sharing for SecuritiesHolding.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SECURITYCUSTOMBASELINE

Provides the ability to read, create, and delete user-defined custom security baselines, which define an org's security standards.

For more information, see SecurityCustomBaseline in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Baseline`	Baseline	textarea		32000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Security Custom Baseline ID	id		18		
`IsDefault`	Is Default Baseline	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

SELLER

Represents the seller role of an individual with respect to a particular company or organization.

For more information, see Seller in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveFromDate	Active From Date	date				
ActiveToDate	Active To Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Seller ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartyId	Individual ID	reference		18		
SalesAmount	Sales Amount	int	9			
SellerTier	Seller Tier	picklist		255		
SellerType	Seller Type	picklist		255		
SystemModstamp	System Modstamp	datetime				

SELLERHISTORY

History for tracked fields of Seller.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Seller History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SellerId	Seller ID	reference		18		

SELLERSHARE

Sharing for Seller.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERIALIZEDPRODUCT

Records serial numbers for each individual product in an inventory.

For more information, see SerializedProduct in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExpirationDate	Expiration Date	date				
Id	Serialized Product ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Product2Id	Product ID	reference		18		
ProductItemId	Product Item ID	reference		18		
SerialNumber	Serial Number	string		255		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

SERIALIZEDPRODUCTFEED

Feed tracking for SerializedProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERIALIZEDPRODUCTHISTORY

History for tracked fields of SerializedProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Serialized Product History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SerializedProductId`	Serialized Product ID	reference		18		

SERIALIZEDPRODUCTSHARE

Sharing for SerializedProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICEAPPOINTMENT

Represents an appointment to complete work for a customer in Field Service and Lightning Scheduler.

For more information, see ServiceAppointment in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *Salesforce Scheduler Developer Guide*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActualDuration	Actual Duration (Minutes)	double			18	2
ActualEndTime	Actual End	datetime				
ActualStartTime	Actual Start	datetime				
Address	Address	address				
AppointmentNumber	Appointment Number	string		255		
ApptBookingInfoUrl	Appointment Booking URL	textarea		4000		
ArrivalWindowEndTime	Arrival Window End	datetime				
ArrivalWindowStartTime	Arrival Window Start	datetime				
City	City	string		40		
ContactId	Contact ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
DueDate	Due Date	datetime				
Duration	Duration	double			18	2
DurationInMinutes	Duration in Minutes	double			18	2
DurationType	Duration Type	picklist		255		
EarliestStartTime	Earliest Start Permitted	datetime				
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Service Appointment ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsBundle	Bundle	boolean				
IsBundleMember	Bundle Member	boolean				
IsDeleted	Deleted	boolean				
IsManuallyBundled	Manually Bundled	boolean				
IsOffsiteAppointment	Offsite Appointment	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
OwnerId	Owner ID	reference		18		
ParentRecordId	Parent Record ID	reference		18		
ParentRecordStatusCategory	Parent Record Status Category	picklist		255		
ParentRecordType	Parent Record Type	string		50		
PostalCode	Zip/Postal Code	string		20		
RelatedBundleId	Related Bundle ID	reference		18		
SchedEndTime	Scheduled End	datetime				
SchedStartTime	Scheduled Start	datetime				
ServiceNote	Service Note	textarea		32000		
ServiceTerritoryId	Territory ID	reference		18		
State	State/Province	string		80		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
Street	Street	textarea		255		
Subject	Subject	string		255		
SystemModstamp	System Modstamp	datetime				
WorkTypeId	Work Type ID	reference		18		

SERVICEAPPOINTMENTFEED

Feed tracking for ServiceAppointment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICEAPPOINTMENTHISTORY

History for tracked fields of ServiceAppointment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Appointment History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceAppointmentId	Service Appointment ID	reference		18		

SERVICEAPPOINTMENTSHARE

Sharing for ServiceAppointment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICEAPPOINTMENTSTATUS

Represents a possible status of a service appointment in field service.

For more information, see ServiceAppointmentStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Service Appointment Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

SERVICECHANNEL

Represents a channel of work items that are received from your organization—for example, cases, chats, or leads.

For more information, see ServiceChannel in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AcwExtensionDuration	Extension duration (seconds)	int	9			
AfterConvoWorkMaxTime	Duration (seconds)	int	9			
CapacityModel	Capacity Model	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomSoundId	Static Resource ID	reference		18		
DeveloperName	Developer Name	string		80		
DoesCheckCapOnOwnerChange	Check agent capacity on reassigned work items	boolean				
DoesCheckCapOnStatusChange	Check agent capacity on reopened work items	boolean				
DoesMinimizeWidgetOnAccept	Minimize the Omni-Channel widget when work is accepted	boolean				
DoesOverridePresenceAudio	Override agents' audio settings	boolean				
HasAcwExtensionEnabled	Let agent extend timer	boolean				
HasAfterConvoWorkTimer	Override After Conversation Work settings in presence configuration	boolean				
HasAutoAcceptEnabled	Automatically accept work requests	boolean				
Id	Service Channel ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MasterLabel	Service Channel Name	string		80		
MaxExtensions	Max Extensions	picklist		255		
RelatedEntity	Custom Object Definition ID	picklist		255		
SoundLength	Sound Length (Seconds)	int	9			
StatusField	Custom Field Definition ID	picklist		255		
SystemModstamp	System Modstamp	datetime				

SERVICECHANNELSTATUS

Represents the status that's associated with a specific service channel.

For more information, see ServiceChannelStatus in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Service Channel Status ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ServiceChannelId`	Service Channel ID	reference		18		
`ServicePresenceStatusId`	Service Presence Status ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SERVICECHANNELSTATUSFIELD

Represents the values that you use to indicate completed and in-progress work item status for the status field in the Status-Based Capacity routing model.

For more information, see ServiceChannelStatusField in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Service Channel Status Field ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ServiceChannelId`	Service Channel ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		255		
`Value`	Value	string		255		

SERVICECONTRACT

Represents a customer support contract (business agreement).

For more information, see ServiceContract in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
ActivationDate	Activation Date	datetime				
ApprovalStatus	Approval Status	picklist		40		
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Billing Geocode Accuracy	picklist		255		
BillingLatitude	Billing Latitude	double			18	15
BillingLongitude	Billing Longitude	double			18	15
BillingPostalCode	Billing Zip	string		20		
BillingState	Billing State	string		80		
BillingStreet	Billing Street	textarea		255		
ContactId	Contact ID	reference		18		
ContractNumber	Contract Number	string		30		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
EndDate	End Date	date				
GrandTotal	Grand Total	currency			18	2
Id	Service Contract ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LineItemCount	Line Items	int	9			
Name	Contract Name	string		255		
OwnerId	Owner ID	reference		18		
ParentServiceContractId	Parent Service Contract ID	reference		18		
Pricebook2Id	Price Book ID	reference		18		
RootServiceContractId	Root Service Contract ID	reference		18		
ShippingAddress	Shipping Address	address				
ShippingCity	Shipping City	string		40		
ShippingCountry	Shipping Country	string		80		
ShippingGeocodeAccuracy	Shipping Geocode Accuracy	picklist		255		
ShippingHandling	Shipping and Handling	currency			18	2
ShippingLatitude	Shipping Latitude	double			18	15
ShippingLongitude	Shipping Longitude	double			18	15
ShippingPostalCode	Shipping Zip	string		20		
ShippingState	Shipping State	string		80		
ShippingStreet	Shipping Street	textarea		255		
SpecialTerms	Special Terms	textarea		32000		
StartDate	Start Date	date				
Status	Status	picklist		255		
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
Tax	Tax	currency			18	2
Term	Term (months)	int	9			
TotalPrice	Total Price	currency			18	2

SERVICECONTRACTFEED

Feed tracking for ServiceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICECONTRACTHISTORY

History for tracked fields of ServiceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Service Contract History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ServiceContractId`	Service Contract ID	reference		18		

SERVICECONTRACTSHARE

Sharing for ServiceContract.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICECREW

Represents a group of service resources who can be assigned to service appointments as a unit.

For more information, see ServiceCrew in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CrewSize`	Crew Size	int	9			
`Id`	Service Crew ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SERVICECREWFEED

Feed tracking for ServiceCrew.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICECREWHISTORY

History for tracked fields of ServiceCrew.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Service Crew History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ServiceCrewId`	Service Crew ID	reference		18		

SERVICECREWMEMBER

Represents a technician service resource that belongs to a service crew.

For more information, see ServiceCrewMember in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	datetime				
Id	Service Crew Member ID	id		18		
IsDeleted	Deleted	boolean				
IsLeader	Leader	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ServiceCrewId	Service Crew ID	reference		18		
ServiceCrewMemberNumber	Name	string		255		
ServiceResourceId	Resource ID	reference		18		
StartDate	Start Date	datetime				
SystemModstamp	System Modstamp	datetime				

SERVICECREWMEMBERFEED

Feed tracking for ServiceCrewMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICECREWMEMBERHISTORY

History for tracked fields of ServiceCrewMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Crew Member History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceCrewMemberId	Service Crew Member ID	reference		18		

SERVICECREWSHARE

Sharing for ServiceCrew.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICEPRESENCESTATUS

Represents a presence status that can be assigned to a service channel.

For more information, see ServicePresenceStatus in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Service Presence Status ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Status Name	string		80		
`SystemModstamp`	System Modstamp	datetime				

SERVICEREPORT

Represents a report that summarizes a work order, work order line item, or service appointment.

For more information, see ServiceReport in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContentVersionDocumentId`	ContentVersion ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DocumentBody`	Document Body	base64				
`DocumentContentType`	Document Content Type	picklist		255		
`DocumentLength`	Document Length	int	9			
`DocumentName`	Document Name	string		40		
`Id`	Service Report ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsSigned`	Signed	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`ServiceReportLanguage`	Service Report Language	picklist		255		
`ServiceReportNumber`	Service Report Name	string		255		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`Template`	Service Report Template	string		255		

SERVICEREPORTHISTORY

History for tracked fields of ServiceReport.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Report History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceReportId	Service Report ID	reference		18		

SERVICEREPORTLAYOUT

Represents a service report template in field service.

For more information, see ServiceReportLayout in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Id`	Service Report Layout ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MasterLabel`	Label	string		80		
`SystemModstamp`	System Modstamp	datetime				
`TemplateType`	Template Type	picklist		255		

SERVICERESOURCE

Represents a service technician or service crew in Field Service and Salesforce Scheduler, or an agent in Workforce Engagement.

For more information, see ServiceResource in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *SOAP API Developer Guide*, *Salesforce Scheduler Developer Guide*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Resource ID	id		18		
IsActive	Active	boolean				
IsCapacityBased	Capacity-Based	boolean				
IsOptimizationCapable	Include in Scheduling Optimization	boolean				
LastKnownLatitude	Last Known Latitude	double			18	15
LastKnownLocation	Last Known Location	location	0	0	0	0
LastKnownLocationDate	Last Known Location Date	datetime				
LastKnownLongitude	Last Known Longitude	double			18	15
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RelatedRecordId	User ID	reference		18		
ResourceType	Resource Type	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ServiceCrewId	Service Crew ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SERVICERESOURCECAPACITY

Represents the maximum number of scheduled hours or number of service appointments that a capacity-based service resource can complete within a specific time period.

For more information, see ServiceResourceCapacity in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CapacityInHours`	Hours per Time Period	double			18	2
`CapacityInWorkItems`	Work Items per Time Period	int	9			
`CapacityNumber`	Resource Capacity Number	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Resource Capacity ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`ServiceResourceId`	Resource ID	reference		18		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				
`TimePeriod`	Time Period	picklist		255		

SERVICERESOURCECAPACITYFEED

Feed tracking for ServiceResourceCapacity.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICERESOURCECAPACITYHISTORY

Represents the history of changes made to tracked fields on a service resource capacity record.

For more information, see ServiceResourceCapacityHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Resource Capacity History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ServiceResourceCapacityId`	Resource Capacity ID	reference		18		

SERVICERESOURCEFEED

Feed tracking for ServiceResource.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICERESOURCEHISTORY

History for tracked fields of ServiceResource.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Resource History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceResourceId	Resource ID	reference		18		

SERVICERESOURCEPREFERENCE

Represents the service resource scheduling preferences that are considered as a business objective in the scheduling logic engine.

For more information, see ServiceResourcePreference in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndDate`	End Date	date				
`Id`	Service Resource Preference ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OperatingHoursId`	Operating Hour ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`ServiceResourceId`	Resource ID	reference		18		
`StartDate`	Start Date	date				
`SystemModstamp`	System Modstamp	datetime				

SERVICERESOURCEPREFERENCEFEED

Feed tracking for ServiceResourcePreference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICERESOURCEPREFERENCEHISTORY

History for tracked fields of ServiceResourcePreference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Resource Preference History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceResourcePreferenceId	Service Resource Preference ID	reference		18		

SERVICERESOURCEPREFERENCESHARE

Sharing for ServiceResourcePreference.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICERESOURCESHARE

Sharing for ServiceResource.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICERESOURCESKILL

Represents a skill that a service resource possesses in Field Service and Lightning Scheduler.

For more information, see ServiceResourceSkill in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EffectiveEndDate`	End Date	datetime				
`EffectiveStartDate`	Start Date	datetime				
`Id`	Resource Skill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`ServiceResourceId`	Resource ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SkillLevel`	Skill Level	double			4	2
`SkillNumber`	Resource Skill Number	string		255		
`SystemModstamp`	System Modstamp	datetime				

SERVICERESOURCESKILLFEED

Feed tracking for ServiceResourceSkill.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICERESOURCESKILLHISTORY

History for tracked fields of ServiceResourceSkill.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Resource Skill History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceResourceSkillId	Resource Skill ID	reference		18		

SERVICESETUPPROVISIONING

Represents a task completed by the Service Setup Assistant.

For more information, see ServiceSetupProvisioning in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Service Setup Provisioning Id	id		18		
`IsDeleted`	Deleted	boolean				
`JobName`	Job Name	string		125		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TaskContext`	Task Context	textarea		32000		
`TaskName`	Task Name	string		125		

SERVICETERRITORY

Represents a geographic or functional region in which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement.

For more information, see ServiceTerritory in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *Salesforce Scheduler Developer Guide*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Address`	Address	address				
`City`	City	string		40		
`Country`	Country	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`GeocodeAccuracy`	Geocode Accuracy	picklist		255		
`Id`	Territory ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Latitude`	Latitude	double			18	15
`Longitude`	Longitude	double			18	15
`Name`	Name	string		255		
`OperatingHoursId`	Operating Hour ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`ParentTerritoryId`	Parent Territory ID	reference		18		
`PostalCode`	Zip/Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
State	State/Province	string		80		
Street	Address	textarea		255		
SystemModstamp	System Modstamp	datetime				
TopLevelTerritoryId	Top-Level Territory ID	reference		18		
TypicalInTerritoryTravelTime	Typical In-Territory Travel Time (Minutes)	double			18	2

SERVICETERRITORYFEED

Feed tracking for ServiceTerritory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICETERRITORYHISTORY

History for tracked fields of ServiceTerritory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Service Territory History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ServiceTerritoryId`	Territory ID	reference		18		

SERVICETERRITORYLOCATION

Represents a location associated with a particular service territory in field service.

For more information, see ServiceTerritoryLocation in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Service Territory Location ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LocationId	Location ID	reference		18		
ServiceTerritoryId	Territory ID	reference		18		
ServiceTerritoryLocationNumber	Service Territory Location Number	string		255		
SystemModstamp	System Modstamp	datetime				

SERVICETERRITORYLOCATIONFEED

Feed tracking for ServiceTerritoryLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICETERRITORYLOCATIONHISTORY

History for tracked fields of ServiceTerritoryLocation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Territory Location History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceTerritoryLocationId	Service Territory Location ID	reference		18		

SERVICETERRITORYMEMBER

Represents a service resource who can be assigned in a service territory in Field Service, Salesforce Scheduler, or Workforce Engagement.

For more information, see ServiceTerritoryMember in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
City	City	string		40		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EffectiveEndDate	End Date	datetime				
EffectiveStartDate	Start Date	datetime				
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Resource Territory ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
Longitude	Longitude	double			18	15
MemberNumber	Member Number	string		255		
OperatingHoursId	Operating Hour ID	reference		18		
PostalCode	Zip/Postal Code	string		20		
ServiceResourceId	Resource ID	reference		18		
ServiceTerritoryId	Territory ID	reference		18		
State	State/Province	string		80		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Street`	Address	textarea		255		
`SystemModstamp`	System Modstamp	datetime				
`TerritoryType`	Territory Type	picklist		255		

SERVICETERRITORYMEMBERFEED

Feed tracking for ServiceTerritoryMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICETERRITORYMEMBERHISTORY

History for tracked fields of ServiceTerritoryMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Territory Member History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceTerritoryMemberId	Resource Territory ID	reference		18		

SERVICETERRITORYSHARE

Sharing for ServiceTerritory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SERVICETERRITORYWORKTYPE

Represents the relationship between a ServiceTerritory object and a WorkType object for Salesforce Scheduler appointments.

For more information, see ServiceTerritoryWorkType in the *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Service Territory Work Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsSlotPublished`	Slot Published	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Service Territory Work Type Name	string		255		
`ServiceTerritoryId`	Territory ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`WorkTypeId`	Work Type ID	reference		18		

SERVICETERRITORYWORKTYPEFEED

Feed tracking for ServiceTerritoryWorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SERVICETERRITORYWORKTYPEHISTORY

History for tracked fields of ServiceTerritoryWorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Service Territory Work Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ServiceTerritoryWorkTypeId	Service Territory Work Type ID	reference		18		

SESSIONHIJACKINGEVENT

Tracks when unauthorized users gain ownership of a Salesforce user's session with a stolen session identifier. To detect such an event, Salesforce evaluates how significantly a user's current browser fingerprint diverges from the previously known fingerprint using a probabilistically inferred significance of change.

For more information, see SessionHijackingEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`CurrentIp`	Current IP Address	string		39		
`CurrentPlatform`	Current Platform	string		255		
`CurrentScreen`	Current Screen	string		255		
`CurrentUserAgent`	Current User Agent	textarea		1000		
`CurrentWindow`	Current Window	string		255		
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`EventUuid`	Event UUID	string		36		
`LoginKey`	Login Key	string		24		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`PreviousIp`	Previous IP Address	string		39		
`PreviousPlatform`	Previous Platform	string		255		
`PreviousScreen`	Previous Screen	string		255		
`PreviousUserAgent`	Previous User Agent	textarea		1000		
`PreviousWindow`	Previous Window	string		255		
`ReplayId`	Replay ID	string		1000		
`Score`	Score	double			12	6
`SecurityEventData`	Event Data	textarea		10000		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SessionKey	Session Key	string		24		
SourceIp	Source IP Address	string		255		
Summary	Summary	textarea		1000		
UserId	User ID	reference		18		
Username	Username	string		255		

SESSIONHIJACKINGEVENTSTORE

Tracks when unauthorized users gain ownership of a Salesforce user's session with a stolen session identifier. To detect such an event, Salesforce evaluates how significantly a user's current browser fingerprint diverges from the previously known fingerprint using a probabilistically inferred significance of change.

For more information, see SessionHijackingEventStore in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`CurrentIp`	Current IP Address	string		39		
`CurrentPlatform`	Current Platform	string		255		
`CurrentScreen`	Current Screen	string		255		
`CurrentUserAgent`	Current User Agent	textarea		1000		
`CurrentWindow`	Current Window	string		255		
`EvaluationTime`	Evaluation Time	double			18	0
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event ID	string		80		
`Id`	Session Hijacking Event Store ID	id		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LoginKey`	Login Key	string		24		
`PolicyId`	Transaction Security Policy ID	reference		18		
`PolicyOutcome`	Policy Outcome	picklist		255		
`PreviousIp`	Previous IP Address	string		39		
`PreviousPlatform`	Previous Platform	string		255		
`PreviousScreen`	Previous Screen	string		255		
`PreviousUserAgent`	Previous User Agent	textarea		1000		
`PreviousWindow`	Previous Window	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Score	Score	double			12	6
SecurityEventData	Event Data	textarea		10000		
SessionHijackingEventNumber	Event Name	string		255		
SessionKey	Session Key	string		24		
SourceIp	Source IP Address	string		255		
Summary	Summary	textarea		1000		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
Username	Username	string		255		

SESSIONHIJACKINGEVENTSTOREFEED

Feed tracking for SessionHijackingEventStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SESSIONPERMSETACTIVATION

The SessionPermSetActivation object represents a permission set assignment activated during an individual user session. When a SessionPermSetActivation object is inserted into a permission set, an activation event fires, allowing the permission settings to apply to the user's specific session.

For more information, see SessionPermSetActivation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AuthSessionId`	Auth Session ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	SessionPermSetActivation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PermissionSetGroupId`	PermissionSetGroup ID	reference		18		
`PermissionSetId`	PermissionSet ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

SETUPAUDITTRAIL

Represents changes you or other admins made in your org's Setup area for at least the last 180 days.

For more information, see SetupAuditTrail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Action	string		120		
`CreatedByContext`	Created By Context	string		80		
`CreatedById`	Created By ID	reference		18		
`CreatedByIssuer`	Created By Issuer	string		80		
`CreatedDate`	Created Date	datetime				
`DelegateUser`	Delegate User	string		80		
`Display`	Display	string		1000		
`Id`	Setup Audit Trail ID	id		18		
`ResponsibleNamespacePrefix`	Source Namespace Prefix	string		15		
`Section`	Section	string		40		

SETUPENTITYACCESS

Represents the enabled setup entity access settings (such as for Apex classes) for the parent PermissionSet.

For more information, see SetupEntityAccess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	SetupEntityAccess ID	id		18		
`ParentId`	Parent ID	reference		18		
`SetupEntityId`	Setup Entity ID	reference		18		
`SetupEntityType`	Setup Entity Type	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

SHAREDSAVINGPAYMENTAGREEMENT

Specifies the payment terms for contracts of Shared Saving Payment Agreement type.

For more information, see SharedSavingPaymentAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenchmarkEndDateTime	Benchmark End Date	datetime				
BenchmarkStartDateTime	Benchmark Start Date	datetime				
BenchmarkedExpenditureAmount	Benchmarked Expenditure Amount	currency			18	0
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ForecastedExpenditureAmount	Forecasted Expenditure Amount	currency			18	0
Id	Shared Saving Payment Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LossPlanDescription	Loss Plan Description	textarea		32000		
Name	Name	string		255		
ProfitPlanDescription	Profit Plan Description	textarea		32000		
QualifyingProfitPercentage	Qualifying Profit Percentage	percent			5	2
SystemModstamp	System Modstamp	datetime				

SHAREDSAVINGPAYMENTAGREEMENTFEED

Feed tracking for SharedSavingPaymentAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHAREDSAVINGPAYMENTAGREEMENTHISTORY

History for tracked fields of SharedSavingPaymentAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Shared Saving Payment Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SharedSavingPaymentAgreementId	Shared Saving Payment Agreement ID	reference		18		

SHIFT

Represents a shift for service resource scheduling.

For more information, see Shift in the *Emergency Response Management for Public Health Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *Salesforce Scheduler Developer Guide*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndTime`	End Time	datetime				
`Id`	Shift ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsNonStandard`	Non-Standard	boolean				
`JobProfileId`	Job Profile ID	reference		18		
`Label`	Label	string		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`OwnerId`	Owner ID	reference		18		
`RecordsetFilterCriteriaId`	Recordset Filter Criteria ID	reference		18		
`ServiceResourceId`	Service Resource ID	reference		18		
`ServiceTerritoryId`	Service Territory ID	reference		18		
`ShiftNumber`	Shift Number	string		255		
`ShiftTemplateId`	Shift Template ID	reference		18		
`StartTime`	Start Time	datetime				
`Status`	Status	picklist		40		
`StatusCategory`	Status Category	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TimeSlotType	Time Slot Type	picklist		255		

SHIFTENGAGEMENTCHANNEL

Represents the relationship between a Shift object and an Engagement Channel Type object for Salesforce Scheduler.

For more information, see ShiftEngagementChannel in the *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AreAllEngmtChnlSupported`	All Engagement Channels Supported	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EngagementChannelTypeId`	Engagement Channel Type ID	reference		18		
`Id`	Shift Engagement Channel ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Shift Engagement Channel Number	string		255		
`ShiftId`	Shift ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SHIFTENGAGEMENTCHANNELFEED

Feed tracking for ShiftEngagementChannel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIFTENGAGEMENTCHANNELHISTORY

History for tracked fields of ShiftEngagementChannel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Shift Engagement Channel History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ShiftEngagementChannelId	Shift Engagement Channel ID	reference		18		

SHIFTFEED

Feed tracking for Shift.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIFTHISTORY

Represents the history of changes made to tracked fields on a time sheet.

For more information, see ShiftHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Shift History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ShiftId`	Shift ID	reference		18		

SHIFTPATTERN

Represents a pattern of templates for creating shifts.

For more information, see ShiftPattern in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`Id`	Shift Pattern ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Shift Pattern Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PatternLength`	Pattern Length	int	9			
`SystemModstamp`	System Modstamp	datetime				

SHIFTPATTERNENTRY

ShiftPatternEntry links a shift template to a shift pattern.

For more information, see ShiftPatternEntry in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DayOrder`	Day Position	int	9			
`Id`	Shift Pattern Entry ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ShiftPatternId`	Shift Pattern ID	reference		18		
`ShiftTemplateId`	Shift Template ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SHIFTPATTERNENTRYFEED

Feed tracking for ShiftPatternEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIFTPATTERNENTRYHISTORY

History for tracked fields of ShiftPatternEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Shift Pattern Entry History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ShiftPatternEntryId`	Shift Pattern Entry ID	reference		18		

SHIFTPATTERNFEED

Feed tracking for ShiftPattern.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIFTPATTERNHISTORY

History for tracked fields of ShiftPattern.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Shift Pattern History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ShiftPatternId`	Shift Pattern ID	reference		18		

SHIFTPATTERNSHARE

Sharing for ShiftPattern.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SHIFTSHARE

Represents a sharing entry on a field service shift.

For more information, see ShiftShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

SHIFTSTATUS

Represents a shift, such as Tentative, Published, or Confirmed.

For more information, see ShiftStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Shift Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

SHIFTTEMPLATE

Represents a template for creating shifts.

For more information, see ShiftTemplate in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Duration	Duration	double			6	2
Id	Shift Template ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsNonStandard	Non-Standard	boolean				
JobProfileId	Job Profile ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Shift Template Name	string		50		
OwnerId	Owner ID	reference		18		
RecordsetFilterCriteriaId	Recordset Filter Criteria ID	reference		18		
ShiftTemplateDurationType	Duration Type	picklist		255		
StartTime	Start Time	time				
SystemModstamp	System Modstamp	datetime				

SHIFTTEMPLATESHARE

Sharing for ShiftTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SHIFTWORKTOPIC

Represents the relationship between a Shift object and a Work Type or Work Type Group object for Salesforce Scheduler.

For more information, see ShiftWorkTopic in the *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AreAllTopicsSupported`	All Topics Supported	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Shift Work Topic ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ShiftId`	Shift ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`WorkTypeGroupId`	Work Type Group ID	reference		18		
`WorkTypeId`	Work Type ID	reference		18		

SHIFTWORKTOPICFEED

Feed tracking for ShiftWorkTopic.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIFTWORKTOPICHISTORY

History for tracked fields of ShiftWorkTopic.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Shift Work Topic History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ShiftWorkTopicId`	Shift Work Topic ID	reference		18		

SHIPMENT

Represents the transport of inventory in field service or a shipment of order items in Order Management.

For more information, see Shipment in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActualDeliveryDate	Actual Delivery Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeliveredToId	Delivered To ID	reference		18		
Description	Description	textarea		32000		
DestinationLocationId	Destination Location ID	reference		18		
ExpectedDeliveryDate	Expected Delivery Date	datetime				
Id	Shipment ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
Provider	Shipping Provider	picklist		40		
ReturnOrderId	Return Order ID	reference		18		
ShipFromAddress	Ship From Address	address				
ShipFromCity	Ship From City	string		40		
ShipFromCountry	Ship From Country	string		80		
ShipFromGeocodeAccuracy	Ship From Geocode Accuracy	picklist		255		
ShipFromLatitude	Ship From Latitude	double			18	15
ShipFromLongitude	Ship From Longitude	double			18	15
ShipFromPostalCode	Ship From Zip/Postal Code	string		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShipFromState	Ship From State/Province	string		80		
ShipFromStreet	Ship From Street	textarea		255		
ShipToAddress	Ship To Address	address				
ShipToCity	Ship To City	string		40		
ShipToCountry	Ship To Country	string		80		
ShipToGeocodeAccuracy	Ship To Geocode Accuracy	picklist		255		
ShipToLatitude	Ship To Latitude	double			18	15
ShipToLongitude	Ship To Longitude	double			18	15
ShipToName	Ship To Name	string		255		
ShipToPostalCode	Ship To Zip/Postal Code	string		20		
ShipToState	Ship To State/Province	string		80		
ShipToStreet	Ship To Street	textarea		255		
ShipmentNumber	Shipment Number	string		255		
SourceLocationId	Source Location ID	reference		18		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TotalItemsQuantity	Total Items Quantity	double			18	2
TrackingNumber	Tracking Number	string		255		
TrackingUrl	Tracking URL	url		255		

SHIPMENTFEED

Feed tracking for Shipment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIPMENTHISTORY

History for tracked fields of Shipment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Shipment History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ShipmentId	Shipment ID	reference		18		

SHIPMENTITEM

Represents an order item included in a shipment.

For more information, see ShipmentItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`ExpectedDeliveryDate`	Expected Delivery Date	datetime				
`Id`	Shipment Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Product2Id`	Product ID	reference		18		
`Quantity`	Quantity	double			18	2
`ReturnOrderLineItemId`	Return Order Line Item ID	reference		18		
`ShipmentId`	Shipment ID	reference		18		
`ShipmentItemNumber`	Shipment Item Number	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TrackingNumber`	Tracking Number	string		255		
`TrackingUrl`	Tracking URL	url		255		

SHIPMENTITEMFEED

Feed tracking for ShipmentItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SHIPMENTITEMHISTORY

History for tracked fields of ShipmentItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Shipment Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ShipmentItemId`	Shipment Item ID	reference		18		

SHIPMENTSHARE

Sharing for Shipment.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SIGNATURETASK

Represents the signature-related information that a visitor captures as part of a visit.

For more information, see SignatureTask in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Signature Task ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ParentTaskId`	Assessment Task ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SIGNATURETASKFEED

Feed tracking for SignatureTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SIGNATURETASKHISTORY

History for tracked fields of SignatureTask.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Signature Task History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SignatureTaskId`	Signature Task ID	reference		18		

SIGNATURETASKLINEITEM

Represents a junction between a signature task and a digital signature captured in a visit.

For more information, see SignatureTaskLineItem in the *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DigitalSignatureId`	Digital Signature ID	reference		18		
`Id`	Signature Task Line Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SIGNATURETASKLINEITEMFEED

Feed tracking for SignatureTaskLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SIGNATURETASKLINEITEMHISTORY

History for tracked fields of SignatureTaskLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Signature Task Line Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SignatureTaskLineItemId`	Signature Task Line Item ID	reference		18		

SITE

Represents a public website that is integrated with an org.

For more information, see Site in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdminId	User ID	reference		18		
AnalyticsTrackingCode	Analytics Tracking Code	string		40		
ArchiveStatus	Archived Status	picklist		40		
ArchivedById	User ID	reference		18		
ArchivedDate	Archived Date	datetime				
ClickjackProtectionLevel	Clickjack Protection Level	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DailyBandwidthLimit	Daily Bandwidth Limit (MB)	int	9			
DailyBandwidthUsed	Daily Bandwidth Used	int	9			
DailyRequestTimeLimit	Daily Request Time Limit (min)	int	9			
DailyRequestTimeUsed	Daily Request Time Used	int	9			
Description	Site Description	textarea		1000		
GuestRecordDefaultOwnerId	User ID	reference		18		
GuestUserId	User ID	reference		18		
Id	Site ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Site Label	string		255		
MonthlyPageViewsEntitlement	Monthly Page Views Allowed	int	9			
Name	Site Name	string		80		
OptionsAllowGuestPaymentsApi	Guest Access to the Payments API	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsAllowGuestSupportApi	Guest Access to the Support API	boolean				
OptionsAllowHomePage	Enable Standard Home Page	boolean				
OptionsAllowStandardAnswersPages	Enable Standard Answers Pages	boolean				
OptionsAllowStandardIdeasPages	Enable Standard Ideas Pages	boolean				
OptionsAllowStandardLookups	Enable Standard Search Pages	boolean				
OptionsAllowStandardPortalPages	Allow Access to Standard Salesforce Pages	boolean				
OptionsAllowStandardSearch	Enable Standard Lookup Pages	boolean				
OptionsBrowserXssProtection	Enable Browser Cross Site Scripting Protection	boolean				
OptionsCachePublicVfPagesInProxies	Cache public Visualforce pages	boolean				
OptionsContentSniffingProtection	Enable Content Sniffing Protection	boolean				
OptionsCookieConsent	Enforce Cookie Consent	boolean				
OptionsEnableFeeds	Enable Feeds	boolean				
OptionsHasStoredPathPrefix	HasStoredPathPrefix	boolean				
OptionsRedirectToCustomDomain	Redirect to custom domain	boolean				
OptionsRefererPolicyOriginWhenCrossOrigin	Referrer URL Protection	boolean				
SiteType	Site Type	picklist		40		
Status	Site Status	picklist		40		
Subdomain	Site Subdomain Prefix	string		80		
SystemModstamp	System Modstamp	datetime				
UrlPathPrefix	Default Web Address	string		40		

SITEDETAIL

Represents the details of a Salesforce site or Experience Cloud site.

For more information, see SiteDetail in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Site ID	string		255		
`Id`	Site Detail ID	id		18		
`IsRegistrationEnabled`	Self-Registration Enabled	boolean				
`SecureUrl`	Secure Url	url		255		

SITEFEED

Feed tracking for Site.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SITEHISTORY

Represents the history of changes to the values in the fields of a site.

For more information, see SiteHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Custom Site ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SiteId`	Site ID	reference		18		

SITEREDIRECTMAPPING

Represents a site redirect from an external site to an Experience Cloud site.

For more information, see SiteRedirectMapping in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Action`	Redirect Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Site Redirect Mapping ID	id		18		
`IsActive`	Active	boolean				
`IsDynamic`	Dynamic	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SiteId`	Site ID	reference		18		
`Source`	Source URL	url		2048		
`SystemModstamp`	System Modstamp	datetime				
`Target`	Target URL	url		2048		

SKILL

Represents a category or group of Chat users or service resources in Field Service or Workforce Engagement.

For more information, see Skill in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`DeveloperName`	Developer Name	string		80		
`Id`	Skill ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MasterLabel`	Name	string		80		
`SystemModstamp`	System Modstamp	datetime				

SKILLPROFILE

Represents a join between Skill and Profile.

For more information, see SkillProfile in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Skill Profile ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ProfileId`	Profile ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SKILLREQUIREMENT

Represents a skill that is required to complete a particular task in Field Service, Omni-Channel, Salesforce Scheduler, or Workforce Engagement. Skill requirements can be added to pending service routing objects in Omni-Channel. They can be added to work types, work orders, and work order line items in Field Service and Lightning Scheduler. And they can be added to job profiles in Workforce Engagement.

For more information, see SkillRequirement in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, *SOAP API Developer Guide*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Skill Requirement ID	id		18		
`IsAdditionalSkill`	Is Additional Skill	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`RelatedRecordId`	Required For ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SkillLevel`	Skill Level	double			4	2
`SkillNumber`	Skill Requirement Number	string		255		
`SkillPriority`	Skill Priority	int	9			
`SystemModstamp`	System Modstamp	datetime				

SKILLREQUIREMENTFEED

Feed tracking for SkillRequirement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SKILLREQUIREMENTHISTORY

History for tracked fields of SkillRequirement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Skill Requirement History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SkillRequirementId`	Skill Requirement ID	reference		18		

SKILLUSER

Represents a join between Skill and User.

For more information, see SkillUser in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Skill User ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

SLAPROCESS

Represents an entitlement process associated with an Entitlement.

For more information, see SlaProcess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BusinessHoursId	Business Hours ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		255		
Id	Entitlement Process ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Entitlement Process Name	string		120		
NameNorm	Name	string		240		
SobjectType	Entitlement Process Type	picklist		40		
StartDateField	Custom Field Definition ID	picklist		40		
SystemModstamp	System Modstamp	datetime				

SOCIALPERSONA

Represents a snapshot of a contact's profile on a social network such as Facebook or Twitter.

For more information, see SocialPersona in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AreWeFollowing	Are we following	boolean				
AuthorLabels	Author Labels	string		255		
AvatarUrl	Avatar URL	string		1024		
Bio	Bio	textarea		32000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExternalId	Social Persona Provider External Id	string		255		
ExternalPictureURL	Provider External Picture URL	url		255		
Followers	Followers	int	9			
Following	Following	int	9			
Id	Social Persona ID	id		18		
InfluencerScore	Influencer Score	int	9			
IsBlacklisted	Blocklisted	boolean				
IsDefault	Default	boolean				
IsDeleted	Deleted	boolean				
IsFollowingUs	Is following us	boolean				
IsVerified	Verified	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ListedCount	Listed Count	int	9			

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MediaProvider	Social Studio Media Provider	string		255		
MediaType	Social Studio Media Type	string		255		
Name	Social Handle	string		255		
NumberOfFriends	Number Of Friends	int	9			
NumberOfTweets	Number Of Tweets	int	9			
ParentId	Parent ID	reference		18		
ProfileType	Profile Type	picklist		255		
ProfileUrl	Profile URL	url		255		
Provider	Social Network	picklist		255		
R6SourceId	Social Studio Source Id	string		255		
RealName	Real Name	string		255		
SourceApp	Source App	string		255		
SystemModstamp	System Modstamp	datetime				
TopicType	Topic Type	string		255		

SOCIALPERSONAHISTORY

History for tracked fields of SocialPersona.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Social Persona History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SocialPersonaId`	Social Persona ID	reference		18		

SOCIALPOST

Represents a snapshot of a post on a social network such as a Facebook or Twitter.

For more information, see SocialPost in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnalyzerScore	Analyzer Score	double			18	3
AssignedTo	Assigned To	string		255		
AttachmentType	Attachment Type	picklist		255		
AttachmentUrl	Attachment URL	url		255		
Classification	Classification	picklist		40		
CommentCount	Comment Count	int	9			
Content	Message	textarea		32000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeletedById	Deleted By ID	reference		18		
EngagementLevel	Engagement Level	picklist		40		
ExternalPostId	External Post Id	string		255		
Handle	Social Handle	string		255		
HarvestDate	Harvest Date	datetime				
Headline	Headline	string		255		
HiddenById	Hidden By ID	reference		18		
Id	Social Post ID	id		18		
InboundLinkCount	Inbound Link Count	int	9			
IsDeleted	Deleted	boolean				
IsOutbound	Is Outbound	boolean				
KeywordGroupName	Keyword Group Name	string		255		
Language	Language	string		255		
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LikedBy	Liked By	string		255		
LikesAndVotes	Likes and Votes	int	9			
MediaProvider	Social Studio Media Provider	string		255		
MediaType	Social Studio Media Type	string		255		
MessageType	Message Type	picklist		255		
Name	Name	string		255		
Notes	Notes	textarea		32000		
OutboundSocialAccountId	Managed Social Account ID	reference		18		
OwnerId	Owner ID	reference		18		
ParentId	Parent ID	reference		18		
PersonaId	Social Persona ID	reference		18		
PostPriority	Post Priority	string		255		
PostTags	Post Tags	textarea		32000		
PostUrl	Post URL	url		255		
Posted	Posted Date	datetime				
Provider	Social Network	picklist		255		
R6PostId	Social Studio Post Id	string		255		
R6SourceId	Social Studio Source Id	string		255		
R6TopicId	Social Studio Topic Id	string		255		
Recipient	Recipient	string		255		
RecipientType	Recipient Type	string		255		
ReplyToId	In Reply To ID	reference		18		
ResponseContextExternalId	Response Context	string		255		
ReviewScale	Review Scale	double			18	2
ReviewScore	Review Score	double			18	2
ReviewedStatus	Reviewed Status	picklist		40		
Sentiment	Sentiment	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Shares	Shares	int	9			
SourceTags	Source Tags	textarea		32000		
SpamRating	Spam Rating	picklist		255		
Status	Status	picklist		255		
StatusMessage	Status Message	textarea		255		
SystemModstamp	System Modstamp	datetime				
ThreadSize	Thread Size	int	9			
TopicProfileName	Topic Profile Name	string		255		
TopicType	Topic Type	picklist		255		
TruncatedContent	Message Clipping	string		255		
UniqueCommentors	Unique Commentors	int	9			
ViewCount	View Count	int	9			
WhoId	Who ID	reference		18		

SOCIALPOSTFEED

Feed tracking for SocialPost.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SOCIALPOSTHISTORY

History for tracked fields of SocialPost.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Social Post History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SocialPostId`	Social Post ID	reference		18		

SOCIALPOSTSHARE

Sharing for SocialPost.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SOLUTION

Represents a detailed description of a customer issue and the resolution of that issue.

For more information, see Solution in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Solution ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsHtml`	Is Html	boolean				
`IsPublished`	Public	boolean				
`IsPublishedInPublicKb`	Visible in Public Knowledge Base	boolean				
`IsReviewed`	Reviewed	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`OwnerId`	Owner ID	reference		18		
`SolutionName`	Title	string		255		
`SolutionNote`	Description	textarea		32000		
`SolutionNumber`	Solution Number	string		30		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TimesUsed`	Num Related Cases	int	9			

SOLUTIONFEED

Feed tracking for Solution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SOLUTIONHISTORY

History for tracked fields of Solution.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Solution History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SolutionId	Solution ID	reference		18		

SOLUTIONSTATUS

Represents the status of a Solution, such as Draft, Reviewed, and so on.

For more information, see SolutionStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Solution Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`IsReviewed`	Is Reviewed	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

STAMP

Represents a User Specialty.

For more information, see Stamp in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Stamp ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		50		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

STAMPASSIGNMENT

Represents assignment of a User Specialty to a user.

For more information, see StampAssignment in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	StampAssignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`StampId`	Stamp ID	reference		18		
`SubjectId`	User ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

STANDARDCAREFEEAGREEMENT

Specifies the payment terms for contracts of Standard Care Fee Agreement type.

For more information, see StandardCareFeeAgreement in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContractPaymentAgreementId	ContractPaymentAgreement ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FacilityPrice	Facility Price	currency			18	0
Id	Standard Care Fee Agreement ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
NonFacilityPrice	Non-Facility Price	currency			18	0
ProcedureCodeDescription	Procedure Code Description	string		255		
ProcedureCodeId	Code Set Bundle ID	reference		18		
StdCareFeeAgreementKey	Standard Care Fee Agreement Key	string		255		
SystemModstamp	System Modstamp	datetime				

STANDARDCAREFEEAGREEMENTFEED

Feed tracking for StandardCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

STANDARDCAREFEEAGREEMENTHISTORY

History for tracked fields of StandardCareFeeAgreement.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Standard Care Fee Agreement History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StandardCareFeeAgreementId	Standard Care Fee Agreement ID	reference		18		

STATICRESOURCE

Represents a static resource that can be used in Visualforce markup.

For more information, see StaticResource in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Body`	Body	base64				
`BodyLength`	Size	int	8			
`CacheControl`	Cache Control	picklist		40		
`ContentType`	MIME Type	string		120		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Static Resource ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

STNRYASSETANNUALFACT

Represents the information about stationary assets and their types, which is used to quantify the related intensity.

For more information, see StnryAssetAnnualFact in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ApplicableYear	Applicable Year	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
EmployeeCount	Employee Count	int	9			
Id	Stationary Asset Annual Fact ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OccupiedFloorArea	Occupied Floor Area	double			18	2
OccupiedFloorAreaUnit	Occupied Floor Area Unit	picklist		255		
Revenue	Revenue	double			18	2
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalFloorArea	Total Floor Area	double			18	2
TotalFloorAreaUnit	Total Floor Area Unit	picklist		255		
TotalUnitsManufactured	Total Units Manufactured	double			18	2

STNRYASSETANNUALFACTFEED

Feed tracking for StnryAssetAnnualFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETANNUALFACTHISTORY

History for tracked fields of StnryAssetAnnualFact.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Stationary Asset Annual Fact History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StnryAssetAnnualFactId	Stationary Asset Annual Fact ID	reference		18		

STNRYASSETCRBNFTPRNT

Represents the total carbon emissions and other environmental attributes from stationary assets. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e). Additionally, it also quantifies various aspects of the energy performance of the asset.

For more information, see StnryAssetCrbnFtprnt in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllocatedRenewableEnergyInKwh	Allocated Renewable Energy (kWh)	double			18	2
AllocationStatus	Allocation Status	picklist		40		
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
AuditApprovalStatus	Audit Approval Status	picklist		40		
AvgDataCenterPue	Average Data Center Power Usage Effectiveness	double			18	2
AvgMonthlyElectrCnsmpInKwh	Average Monthly Electricity Consumption (kWh)	double			18	2
BuildingEnergyIntensityId	Building Energy Intensity ID	reference		18		
CarbonInventoryRecordCount	Carbon Inventory Record Count	double			16	0
Ch4EmissionsInKg	CH4 Emissions (kg)	double			16	6
Co2EmissionsInKg	CO2 Emissions (kg)	double			16	6
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataCtrItDieselCnsmpIntensity	Data Center IT Diesel Consumption Intensity (kWh/IT kWh)	double			18	6
DataGapStatus	Data Gap Status	picklist		40		
ElectricityIntensityVarPct	Electricity Intensity Variance Percentage	percent			18	2
EndDate	End Date	date				
EnrgyCnsmpIntensityInKbtuM2	Energy Consumption Intensity (kBtu/m2)	double			18	4

Field Name	Field Label	Type	Digits	Length	Precision	Scale
EnrgyCnsmpIntensityInKbtuSqft	Energy Consumption Intensity (kBtu/sqft)	double			18	4
EnrgyCnsmpIntensityInKwhM2	Energy Consumption Intensity (kWh/m2)	double			18	4
EnrgyCnsmpIntensityInKwhSqft	Energy Consumption Intensity (kWh/sqft)	double			18	4
EnrgyIntensityVariancePct	Energy Intensity Variance Percentage	percent			18	2
FootprintStage	Footprint Stage	picklist		40		
Id	Stationary Asset Carbon Footprint ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocBasedElectrFrOthrFuelInKwh	Location-Based Electricity from Other Fuel (kWh)	double			18	2
LocBasedElectrFromBiomassInKwh	Location-Based Electricity from Biomass (kWh)	double			18	2
LocBasedElectrFromCoalInKwh	Location-Based Electricity from Coal (kWh)	double			18	2
LocBasedElectrFromGasInKwh	Location-Based Electricity from Gas (kWh)	double			18	2
LocBasedElectrFromHydroInKwh	Location-Based Electricity from Hydro (kWh)	double			18	2
LocBasedElectrFromNuclearInKwh	Location-Based Electricity from Nuclear (kWh)	double			18	2
LocBasedElectrFromOilInKwh	Location-Based Electricity from Oil (kWh)	double			18	2
LocBasedElectrFromSolarInKwh	Location-Based Electricity from Solar (kWh)	double			18	2
LocBasedElectrFromWindInKwh	Location-Based Electricity from Wind (kWh)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LocBsdElectrFrGeothermalInKwh	Location-Based Electricity from Geothermal (kWh)	double			18	2
LocBsdElectrOthrFossilFuelKwh	Location-Based Electricity from Other Fossil Fuel (kWh)	double			18	2
MaxVarianceAboveAvgElectrCnsmp	Maximum Variance Above Average Electricity Consumption	percent			18	1
MaxVarianceBelowAvgElectrCnsmp	Maximum Variance Below Average Electricity Consumption	percent			18	1
MktBsdElectrFrBiomassInKwh	Market-Based Electricity from Biomass (kWh)	double			18	2
MktBsdElectrFrFromCoalInKwh	Market-Based Electricity from Coal (kWh)	double			18	2
MktBsdElectrFrGasInKwh	Market-Based Electricity from Gas (kWh)	double			18	2
MktBsdElectrFrGeothermalInKwh	Market-Based Electricity from Geothermal (kWh)	double			18	2
MktBsdElectrFrHydroInKwh	Market-Based Electricity from Hydro (kWh)	double			18	2
MktBsdElectrFrNuclearInKwh	Market-Based Electricity from Nuclear (kWh)	double			18	2
MktBsdElectrFrOilInKwh	Market-Based Electricity from Oil (kWh)	double			18	2
MktBsdElectrFrOthrFuelInKwh	Market-Based Electricity from Other Fuel (kWh)	double			18	2
MktBsdElectrFrSolarInKwh	Market-Based Electricity from Solar (kWh)	double			18	2
MktBsdElectrFrWindInKwh	Market-Based Electricity from Wind (kWh)	double			18	2
MktBsdElectrOthrFossilFuelKwh	Market-Based Electricity from Other Fossil Fuel (kWh)	double			18	2
N2oEmissionsInKg	N2O Emissions (kg)	double			16	6
Name	Name	string		255		
OccupiedFloorArea	Occupied Floor Area	double			18	0
OccupiedFloorAreaUnit	Occupied Floor Area Unit	picklist		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PrevYrAnnlCarbonFootprintId	Stationary Asset Carbon Footprint ID	reference		18		
PrevYrDataCenterPue	Previous Year Data Center Power Usage Effectiveness	double			18	2
PrevYrEnrgyIntensityKbtuM2	Previous Year Energy Consumption Intensity (kBtu/m2)	double			18	4
PrevYrEnrgyIntensityKbtuSqft	Previous Year Energy Consumption Intensity (kBtu/sqft)	double			18	4
PrevYrEnrgyIntensityKwhM2	Previous Year Energy Consumption Intensity (kWh/m2)	double			18	4
PrevYrEnrgyIntensityKwhSqft	Previous Year Energy Consumption Intensity (kWh/sqft)	double			18	4
RegionalBldgEnergyIntensityId	Building Energy Intensity ID	reference		18		
ReportingDate	Reporting Date	date				
ReportingYear	Reporting Year	picklist		255		
RgnlElectrCnsmpIntensity	Regional Electricity Consumption Intensity (kWh/sqft)	double			7	2
RgnlEnrgyCnsmpIntensity	Regional Energy Consumption Intensity (kBtu/sqft)	double			18	2
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SuplScope1Emissions	Supplemental Scope 1 Emissions	double			18	5
SuplScope2LocationBasedEmssn	Supplemental Scope 2 Location-Based Emissions	double			18	5
SuplScope2MarketBasedEmssn	Supplemental Scope 2 Market-Based Emissions	double			18	5
SuplScope3DnstrmEmissions	Supplemental Scope 3 Downstream Emissions	double			18	5
SuplScope3UpstrmEmissions	Supplemental Scope 3 Upstream Emissions	double			18	5
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TotBldgIndirectEnrgyCnsmpInMwh	Total Building Indirect Energy Consumption (MWh)	double			18	2
TotEnergyConsumptionInGj	Total Energy Consumption (GJ)	double			18	2
TotEnergyConsumptionInKwh	Total Energy Consumption (kWh)	double			18	2
TotEnergyConsumptionInMwh	Total Energy Consumption (MWh)	double			18	2
TotRnwlEnrgyExclHydroInKwh	Total Renewable Energy Excluding Hydro (kWh)	double			18	2
TotRnwlEnrgyExclHydroPct	Total Renewable Energy Percentage Excluding Hydro	percent			18	2
TotScope1EmissionsInTco2e	Total Scope 1 Emissions (tCO2e)	double			18	2
TotScope2LocBasedEmissions	Total Scope 2 Location-Based Emissions	double			18	2
TotScope2MktBasedEmissions	Total Scope 2 Market-based Emissions	double			18	2
TotalFloorArea	Total Floor Area	double			18	0
TotalFloorAreaUnit	Total Floor Area Unit	picklist		255		
TotalRenewableEnergyInKwh	Total Renewable Energy (kWh)	double			18	2
TotalRenewableEnergyPct	Total Renewable Energy Percentage	percent			18	2
TotalScp3DnstrmEmissions	Total Scope 3 Downstream Emissions (tCO2e)	double			18	2
TotalScp3UpstrmEmissions	Total Scope 3 Upstream Emissions (tCO2e)	double			18	2
YearOverYearPueVariancePct	Year over Year Power Usage Effectiveness Variance Percentage	percent			18	2

STNRYASSETCRBNFTPRNTFEED

Feed tracking for StnryAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETCRBNFTPRNTHISTORY

History for tracked fields of StnryAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Stationary Asset Carbon Footprint History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`StnryAssetCrbnFtprntId`	Stationary Asset Carbon Footprint ID	reference		18		

STNRYASSETCRBNFTPRNTITM

Represents the total tCO_2e emissions of individual fuel types, which are the child records of the stationary asset carbon footprint record.

For more information, see StnryAssetCrbnFtprntItm in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EnergyIntensityVariancePct	Energy Intensity Variance Percentage	percent			18	2
EnrgyCnsmpIntensityInKwhM2	Energy Consumption Intensity (kWh/m2)	double			18	2
EnrgyCnsmpIntensityInKwhSqft	Energy Consumption Intensity (kWh/sqft)	double			18	2
FuelType	Fuel Type	picklist		255		
Id	Stationary Asset Carbon Footprint Item ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentCarbonFootprintId	Stationary Asset Carbon Footprint ID	reference		18		
PrevYearCarbonFootprintItemId	Stationary Asset Carbon Footprint Item ID	reference		18		
PrevYrEnrgyIntensityKwhM2	Previous Year Energy Consumption Intensity (kWh/m2)	double			18	0

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PrevYrEnrgyIntensityKwhSqft	Previous Year Energy Consumption Intensity (kWh/sqft)	double			18	0
SystemModstamp	System Modstamp	datetime				
TotalEmissionsInTco2e	Total Emissions (tCO2e)	double			18	2
TotalEnergyConsumptionInGj	Total Energy Consumption (GJ)	double			18	2
TotalEnergyConsumptionInKwh	Total Energy Consumption (kWh)	double			18	2

STNRYASSETCRBNFTPRNTITMFEED

Feed tracking for StnryAssetCrbnFtprntItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETCRBNFTPRNTITMHISTORY

History for tracked fields of StnryAssetCrbnFtprntItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Stationary Asset Carbon Footprint Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`StnryAssetCrbnFtprntItmId`	Stationary Asset Carbon Footprint Item ID	reference		18		

STNRYASSETCRBNFTPRNTSHARE

Sharing for StnryAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

STNRYASSETENRGYUSE

Represents the energy consumption related to stationary assets across multiple fuel types.

For more information, see StnryAssetEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllocatedRenewableEnergyInKwh	Allocated Renewable Energy (kWh)	double			18	2
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
Ch4EmissionsInKg	CH4 Emissions (kg)	double			16	6
Co2EmissionsInKg	CO2 Emissions (kg)	double			16	6
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataGapFillingMethodName	Data Gap Filling Method Name	picklist		255		
ElectricityEmissionFactorsId	Electricity Emissions Factor Set ID	reference		18		
EndDate	End Date	date				
FinalEnergyConsumption	Final Energy Consumption	double			18	2
FuelConsumption	Fuel Consumption	double			18	2
FuelConsumptionInGigajoule	Fuel Consumption (GJ)	double			18	4
FuelConsumptionInKwh	Fuel Consumption (kWh)	double			18	4
FuelConsumptionUnit	Fuel Consumption Unit	picklist		255		
FuelConsumptionUnitRefId	Sustainability Unit of Measure ID	reference		18		
FuelType	Fuel Type	picklist		255		
FuelTypeRefId	Fuel Type ID	reference		18		
Id	Stationary Asset Energy Use ID	id		18		
IsCompanyOwnedAsset	Company-Owned Asset	boolean				
IsDeleted	Deleted	boolean				
IsPueMonthlyRange	Power Usage Effectiveness Monthly Range	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsRecordLocked	Record Locked	boolean				
IsSystemGeneratedRecord	System Generated Record	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocBasedElectrFrBiomassInKwh	Location-Based Electricity from Biomass (kWh)	double			18	4
LocBasedElectrFrNuclearInKwh	Location-Based Electricity from Nuclear (kWh)	double			18	4
LocBasedElectrFrOthrFuelInKwh	Location-Based Electricity from Other Fuel (kWh)	double			18	4
LocBasedElectrFromCoalInKwh	Location-Based Electricity from Coal (kWh)	double			18	4
LocBasedElectrFromGasInKwh	Location-Based Electricity from Gas (kWh)	double			18	4
LocBasedElectrFromHydroInKwh	Location-Based Electricity from Hydro (kWh)	double			18	4
LocBasedElectrFromOilInKwh	Location-Based Electricity from Oil (kWh)	double			18	4
LocBasedElectrFromSolarInKwh	Location-Based Electricity from Solar (kWh)	double			18	4
LocBasedElectrFromWindInKwh	Location-Based Electricity from Wind (kWh)	double			18	4
LocBsdElectrFrGeothermalInKwh	Location-Based Electricity from Geothermal (kWh)	double			18	4
LocBsdElectrFrNonRenewablesKwh	Location-Based Electricity from Non-Renewables (kWh)	double			18	4
LocBsdElectrOthrFossilFuelKwh	Location-Based Electricity from Other Fossil Fuel (kWh)	double			18	4
MktBasedElectrFrBiomassInKwh	Market-Based Electricity from Biomass (kWh)	double			18	4
MktBasedElectrFrNuclearInKwh	Market-Based Electricity from Nuclear (kWh)	double			18	4
MktBasedElectrFromCoalInKwh	Market-Based Electricity from Coal (kWh)	double			18	4

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MktBasedElectrFromGasInKwh	Market-Based Electricity from Gas (kWh)	double			18	4
MktBasedElectrFromHydroInKwh	Market-Based Electricity from Hydro (kWh)	double			18	4
MktBasedElectrFromOilInKwh	Market-Based Electricity from Oil (kWh)	double			18	4
MktBasedElectrFromSolarInKwh	Market-Based Electricity from Solar (kWh)	double			18	4
MktBasedElectrFromWindInKwh	Market-Based Electricity from Wind (kWh)	double			18	4
MktBasedElectrOthrFuelInKwh	Market-Based Electricity from Other Fuel (kWh)	double			18	4
MktBsdElectrFrGeothermalInKwh	Market-Based Electricity from Geothermal (kWh)	double			18	4
MktBsdElectrFrNonRenewablesKwh	Market-Based Electricity from Non-Renewables (kWh)	double			18	4
MktBsdElectrOthrFossilFuelKwh	Market-Based Electricity from Other Fossil Fuel (kWh)	double			18	4
N2oEmissionsInKg	N2O Emissions (kg)	double			16	6
Name	Name	string		255		
NormalizedMoElectrCnsmpInKwh	Normalized Monthly Electricity Consumption (kWh)	double			18	2
OccupiedFloorArea	Occupied Floor Area	double			18	0
OccupiedFloorAreaInSqft	Occupied Floor Area (sqft)	double			18	0
OccupiedFloorAreaUnit	Occupied Floor Area Unit	picklist		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
PowerUsageEffectiveness	Power Usage Effectiveness	double			12	2
ProposedEnergyConsumption	Proposed Energy Consumption	double			18	2
RefrigerantEmssnFctrId	Refrigerant Emissions Factor ID	reference		18		
RenewableEnergyType	Renewable Energy Type	picklist		255		
Scope1EmissionsInTco2e	Scope 1 Emissions (tCO2e)	double			18	4
Scope2LocBasedEmssnInTco2e	Scope 2 Location-Based Emissions (tCO2e)	double			18	4

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scope2MktBasedEmssnInTco2e	Scope 2 Market-Based Emissions (tCO2e)	double			18	4
Scope3DnstrmEmissionsInTco2e	Scope 3 Downstream Emissions (tCO2e)	double			18	5
Scope3UpstrmEmissionsInTco2e	Scope 3 Upstream Emissions (tCO2e)	double			18	5
StartDate	Start Date	date				
StnryAssetCrbnFtprntId	Stationary Asset Carbon Footprint ID	reference		18		
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SuplScope1Emissions	Supplemental Scope 1 Emissions	double			18	5
SuplScope2LocationBasedEmssn	Supplemental Scope 2 Location-Based Emissions	double			18	5
SuplScope2MarketBasedEmssn	Supplemental Scope 2 Market-Based Emissions	double			18	5
SuplScope3DnstrmEmissions	Supplemental Scope 3 Downstream Emissions	double			18	5
SuplScope3UpstrmEmissions	Supplemental Scope 3 Upstream Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotRnwlEnrgyExclHydroInKwh	Total Renewable Energy Excluding Hydro (kWh)	double			18	4
TotalFloorArea	Total Floor Area	double			18	5
TotalFloorAreaInSqft	Total Floor Area (sqft)	double			18	0
TotalFloorAreaUnit	Total Floor Area Unit	picklist		255		
TotalFuelConsumptionInKwh	Total Fuel Consumption (kWh)	double			18	2
TotalRenewableEnergyInKwh	Total Renewable Energy (kWh)	double			18	4

STNRYASSETENRGYUSEFEED

Feed tracking for StnryAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETENRGYUSEHISTORY

History for tracked fields of StnryAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Stationary Asset Energy Use History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StnryAssetEnrgyUseId	Stationary Asset Energy Use ID	reference		18		

STNRYASSETENRGYUSESHARE

Sharing for StnryAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

STNRYASSETENVRSRC

Represents assets that are stationary in nature, use energy that can be recorded, and are the source of greenhouse gas emissions.

For more information, see StnryAssetEnvrSrc in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNameId	Account ID	reference		18		
BusinessRegion	Business Region	picklist		40		
City	City	string		255		
Country	Country	picklist		255		
CrbnEmssnScopeAllocId	Carbon Emissions Scope Allocation ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
ElectricityEmssnFctrId	Electricity Emissions Factor Set ID	reference		18		
EnvironmentalRiskId	Environmental Risk ID	reference		18		
Id	Stationary Asset Environmental Source ID	id		18		
IsCompanyOwnedAsset	Company-Owned Asset	boolean				
IsDeleted	Deleted	boolean				
IsLeedCertified	LEED Certified	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeaseExpirationDate	Lease Expiration Date	date				
LeaseIdentifier	Lease ID	string		100		
Name	Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OccupiedFloorArea	Occupied Floor Area	double			18	0
OccupiedFloorAreaUnit	Occupied Floor Area Unit	picklist		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
ParentEnvironmentalSourceId	Stationary Asset Environmental Source ID	reference		18		
PostalCode	Postal Code	string		20		
PremiseIdentifier	Premise ID	string		255		
RefrigerantEmssnFctrId	Refrigerant Emissions Factor ID	reference		18		
RegionalBldgEnergyIntensityId	Building Energy Intensity ID	reference		18		
State	State	string		128		
StationaryAssetIdentifier	Stationary Asset ID	string		255		
StationaryAssetType	Stationary Asset Type	picklist		40		
StreetAddress	Street Address	string		255		
StreetAddress2	Street Address 2	string		255		
SystemModstamp	System Modstamp	datetime				
TotalFloorArea	Total Floor Area	double			18	0
TotalFloorAreaUnit	Total Floor Area Unit	picklist		255		
WstDispoEmssnFctrSetId	Waste Disposal Emissions Factor ID	reference		18		

STNRYASSETENVRSRCFEED

Feed tracking for StnryAssetEnvrSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETENVRSRCHISTORY

History for tracked fields of StnryAssetEnvrSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Stationary Asset Environmental Source History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		

STNRYASSETENVRSRCSHARE

Sharing for StnryAssetEnvrSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

STNRYASSETWATERACTVTY

Represents information about the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets.

For more information, see StnryAssetWaterActvty in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivitySourceType	Activity Source Type	picklist		255		
ActivityType	Activity Type	picklist		255		
CostCenter	Cost Center	string		255		
CostPerUnit	Cost Per Unit (Cost/m3)	currency			10	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataGapFillingMethodName	Data Gap Filling Method Name	picklist		255		
Description	Description	textarea		32000		
EndDate	End Date	date				
EnvironmentalRiskId	Environmental Risk ID	reference		18		
FinalWaterQuantity	Final Water Quantity	double			18	2
Id	Stationary Asset Water Activity ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
IsSystemGeneratedRecord	System Generated Record	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProposedWaterQuantity	Proposed Water Quantity	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Quantity	Quantity	double			15	5
QuantityInM3	Quantity (m3)	double			15	5
QuantityUnit	Quantity Unit	picklist		255		
ServiceProviderId	Supplier ID	reference		18		
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
StnryAssetWaterFtprntId	Stationary Asset Water Footprint ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalCost	Total Cost	currency			12	2
TreatmentType	Treatment Type	picklist		255		
WaterFtprntReportDate	Water Footprint Report Date	date				

STNRYASSETWATERACTVTYFEED

Feed tracking for StnryAssetWaterActvty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETWATERACTVTYHISTORY

History for tracked fields of StnryAssetWaterActvty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Stationary Asset Water Activity History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StnryAssetWaterActvtyId	Stationary Asset Water Activity ID	reference		18		

STNRYASSETWATERACTVTYSHARE

Sharing for StnryAssetWaterActvty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

STNRYASSETWATERFTPRNT

Represents information about the total volume of water from the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets.

For more information, see StnryAssetWaterFtprnt in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CnsmpIntsVariancePct`	Consumption Intensity Variance Percentage	percent			18	2
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DchgIntsVariancePct`	Discharge Intensity Variance Percentage	percent			18	2
`EmployeeCnsmpIntsInM3`	Employee Consumption Intensity (m3/employee)	double			18	4
`EmployeeCount`	Employee Count	double			18	2
`EmployeeDchgIntsInM3`	Employee Discharge Intensity (m3/employee)	double			18	4
`EmployeeWdrwIntsInM3`	Employee Withdrawal Intensity (m3/employee)	double			18	4
`EndDate`	End Date	date				
`ExtremeStressCnsmpPct`	Extreme Stress Consumption Percentage	percent			18	2
`ExtremeStressWdrwPct`	Extreme Stress Withdrawal Percentage	percent			18	2
`FlAreaCnsmpIntsInM3M2`	Floor Area Consumption Intensity (m3/m2)	double			18	4
`FlAreaCnsmpIntsInM3Sqft`	Floor Area Consumption Intensity (m3/sqft)	double			18	4
`FlAreaDchgIntsInM3M2`	Floor Area Discharge Intensity (m3/m2)	double			18	4
`FlAreaDchgIntsInM3Sqft`	Floor Area Discharge Intensity (m3/sqft)	double			18	4

Field Name	Field Label	Type	Digits	Length	Precision	Scale
FlAreaWdrwIntsInM3M2	Floor Area Withdrawal Intensity (m3/m2)	double			18	4
FlAreaWdrwIntsInM3Sqft	Floor Area Withdrawal Intensity (m3/sqft)	double			18	4
FootprintStage	Footprint Stage	picklist		40		
HighStressCnsmpPct	High Stress Consumption Percentage	percent			18	2
HighStressWdrwPct	High Stress Withdrawal Percentage	percent			18	2
Id	Stationary Asset Water Footprint ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OccupiedFloorArea	Occupied Floor Area	double			18	2
OccupiedFloorAreaUnit	Occupied Floor Area Unit	picklist		255		
OwnerId	Owner ID	reference		18		
PreviousYearWaterFtprntId	Stationary Asset Water Footprint ID	reference		18		
ProdtVolumeCnsmpIntsInM3	Production Volume Consumption Intensity (m3/product)	double			18	4
ProdtVolumeDchgIntsInM3	Production Volume Discharge Intensity (m3/product)	double			18	4
ProdtVolumeWdrwIntsInM3	Production Volume Withdrawal Intensity (m3/product)	double			18	4
ReportingYear	Reporting Year	picklist		255		
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TotalConsumptionInMl	Total Consumption (Ml)	double			18	4
TotalCost	Total Cost	currency			12	2
TotalDischargeInMl	Total Discharge (Ml)	double			18	4
TotalFloorArea	Total Floor Area	double			18	2
TotalFloorAreaUnit	Total Floor Area Unit	picklist		255		
TotalStorageInMl	Total Storage (Ml)	double			18	4
TotalUnitsManufactured	Total Units Manufactured	double			18	2
TotalWithdrawalInMl	Total Withdrawal (Ml)	double			18	4
WaterInventoryRecCount	Water Inventory Record Count	double			16	0
WdrwIntsVariancePct	Withdrawal Intensity Variance Percentage	percent			18	2

STNRYASSETWATERFTPRNTFEED

Feed tracking for StnryAssetWaterFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETWATERFTPRNTHISTORY

History for tracked fields of StnryAssetWaterFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Stationary Asset Water Footprint History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
StnryAssetWaterFtprntId	Stationary Asset Water Footprint ID	reference		18		

STNRYASSETWATERFTPRNTSHARE

Sharing for StnryAssetWaterFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

STNRYASSETWTRFTPRNTITM

Represents information about the total volume of water from each water activity, such as withdrawal, consumption, or discharge related to the stationary assets. Each water activity is a child record of the stationary asset water footprint object.

For more information, see StnryAssetWtrFtprntItm in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivitySourceType	Activity Source Type	picklist		255		
ActivityType	Activity Type	picklist		255		
BaselineWaterStress	Baseline Water Stress	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Stationary Asset Water Footprint Item ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentWaterFootprintId	Stationary Asset Water Footprint ID	reference		18		
PrevYearWtrFtprntItemId	Stationary Asset Water Footprint Item ID	reference		18		
QuantityInMl	Quantity (Ml)	double			14	4
SystemModstamp	System Modstamp	datetime				
TotalCost	Total Cost	currency			12	2
TreatmentType	Treatment Type	picklist		255		
WaterActivityPct	Water Activity Percentage	percent			10	2

STNRYASSETWTRFTPRNTITMFEED

Feed tracking for StnryAssetWtrFtprntItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

STNRYASSETWTRFTPRNTITMHISTORY

History for tracked fields of StnryAssetWtrFtprntItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Stationary Asset Water Footprint Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`StnryAssetWtrFtprntItmId`	Stationary Asset Water Footprint Item ID	reference		18		

STOREINTEGRATEDSERVICE

Represents an association between an integration and a store.

For more information, see StoreIntegratedService in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Store Integrated Service ID	id		18		
`Integration`	Integration ID	picklist		255		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`ServiceProviderType`	Service Provider Type	picklist		255		
`StoreId`	Store ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

STREAMINGCHANNEL

Represents a channel that is the basis for notifying listeners of generic Streaming API events.

For more information, see StreamingChannel in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Streaming Channel Id	id		18		
`IsDeleted`	Is Deleted	boolean				
`IsDynamic`	Is Dynamically Created	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Streaming Channel Name	string		80		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

STREAMINGCHANNELSHARE

Sharing for StreamingChannel.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SUPPLIER

Represents information about the supplier that's related to a climate-committed company.

For more information, see Supplier in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CompanyRelationshipType`	Company Relationship Type	picklist		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`Id`	Supplier ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

SUPPLIERFEED

Feed tracking for Supplier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SUPPLIERHISTORY

History for tracked fields of Supplier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Supplier History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SupplierId	Supplier ID	reference		18		

SUPPLIERPRODUCT

Represents information that's used to track the products that are purchased from a supplier.

For more information, see SupplierProduct in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AttributeEndDate	Attribute End Date	date				
AttributeStartDate	Attribute Start Date	date				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultProductEmssnFctrId	Product Emissions Factor ID	reference		18		
Id	Supplier Product ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ProductId	Product ID	reference		18		
SourcingAllocPercentage	Sourcing Allocation Percentage	percent			3	0
SupplierId	Supplier ID	reference		18		
SupplierRank	Supplier Rank	double			18	0
SystemModstamp	System Modstamp	datetime				

SUPPLIERPRODUCTFEED

Feed tracking for SupplierProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SUPPLIERPRODUCTHISTORY

History for tracked fields of SupplierProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Supplier Product History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SupplierProductId`	Supplier Product ID	reference		18		

SUPPLIERPRODUCTSHARE

Sharing for SupplierProduct.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SURVEY

Represents a survey.

For more information, see Survey in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActiveVersionId	Survey Version ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		65535		
DeveloperName	Developer Name	string		80		
Id	Survey ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LatestVersionId	Survey Version ID	reference		18		
Name	Name	string		255		
NamespacePrefix	Namespace Prefix	string		255		
OwnerId	Owner ID	reference		18		
SurveyType	Type	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalVersionsCount	Number of Versions	int	9			

SURVEYEMAILBRANDING

Represents the configuration settings for invitation emails sent to survey participants for a particular survey.

For more information, see SurveyEmailBranding in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Body	Email Body	textarea		4000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DeveloperName	Name	string		80		
FooterImageId	Asset File ID	reference		18		
FromEmailAddress	Email From Address	email		80		
HeaderImageId	Asset File ID	reference		18		
Id	Survey Email Branding ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Label	string		80		
Subject	Email Subject	string		255		
SystemModstamp	System Modstamp	datetime				

SURVEYENGAGEMENTCONTEXT

Represents the context based on which a survey invitation was sent or a survey response was received.

For more information, see SurveyEngagementContext in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContextType`	Context Type	string		250		
`ContextValue`	Context Value	string		250		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Survey Engagement Context ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SurveyInvitationId`	Survey Invitation ID	reference		18		
`SurveyResponseId`	Survey Response ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SURVEYENGAGEMENTCONTEXTSHARE

Sharing for SurveyEngagementContext.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SURVEYFEED

Feed tracking for Survey.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SURVEYINVITATION

Represents the invitation sent to a participant to complete the survey.

For more information, see SurveyInvitation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CommunityId	Network ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EmailBrandingId	Survey Email Branding ID	reference		18		
Id	Survey Invitation ID	id		18		
InvitationLink	Invitation Link	url		255		
InviteExpiryDateTime	Invitation Expires On	datetime				
IsDefault	Is Default	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeadId	Lead ID	reference		18		
Name	Name	string		255		
OptionsAllowGuestUserResponse	Let Guests Respond	boolean				
OptionsAllowParticipantAccessTheirResponse	Can See Their Response	boolean				
OptionsCollectAnonymousResponse	Can Respond Anonymously	boolean				
OwnerId	Owner ID	reference		18		
ParticipantId	Participant ID	reference		18		
ResponseStatus	Response Status	picklist		255		
SurveyId	Survey ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
UUID	UUID	string		36		
UserId	User ID	reference		18		

SURVEYINVITATIONSHARE

Sharing for SurveyInvitation.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SURVEYPAGE

Represents a page, such as the title page or a question page, in a survey.

For more information, see SurveyPage in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`DisplayOrder`	Display Order	int	9			
`Id`	Survey Page ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SurveyVersionId`	Survey Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SURVEYQUESTION

Represents a question in a survey.

For more information, see SurveyQuestion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Survey Question ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsDeprecated`	Is Deprecated	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`PageDisplayOrder`	Page Display Order	int	9			
`PageName`	Survey Page Name	string		80		
`QuestionName`	Question Name	textarea		4000		
`QuestionOrder`	Display Order	int	9			
`QuestionType`	Question Type	picklist		255		
`SurveyPageId`	Survey Page ID	reference		18		
`SurveyVersionId`	Survey Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`ValidationType`	Validation Type	picklist		255		

SURVEYQUESTIONCHOICE

Represents an answer choice that a participant can select for a survey question.

For more information, see SurveyQuestionChoice in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Developer Name	string		80		
`Id`	Survey Question Choice ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsDeprecated`	Is Deprecated	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`QuestionId`	Survey Question ID	reference		18		
`SurveyVersionId`	Survey Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SURVEYQUESTIONRESPONSE

Represents a participant's answer to a specific question.

For more information, see SurveyQuestionResponse in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ChoiceValue	Choice Value	textarea		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Datatype	Data Type	picklist		255		
DateTimeValue	Date Time Value	datetime				
DateValue	Date Value	date				
Id	Survey Question Response ID	id		18		
InvitationId	Survey Invitation ID	reference		18		
IsDeleted	Deleted	boolean				
IsTrueOrFalse	True or False	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
NumberValue	Number Value	int	9			
QuestionChoiceId	Survey Question Choice ID	reference		18		
QuestionId	Survey Question ID	reference		18		
Rank	Rank	int	9			
ResponseId	Survey Response ID	reference		18		
ResponseShortText	Name	string		255		
ResponseValue	Response Value	textarea		32000		
SurveyVersionId	Survey Version ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SURVEYQUESTIONSCORE

Represents the aggregate of responses for the following question types: date, multiple choice, picklist, radio, ranking, rating, scoring, slider, and Net Promoter Score® (NPS®).

For more information, see SurveyQuestionScore in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CumulativeScore	Cumulative Score	double			18	0
DateResponse	Date Response	date				
Id	Question Score ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
QuestionChoiceId	Survey Question Choice ID	reference		18		
QuestionDeveloperName	Question Developer Name	string		255		
QuestionId	Survey Question ID	reference		18		
QuestionName	Question Name	textarea		4000		
QuestionSkippedCount	Question Skipped Count	int	9			
ResponseCount	Response Count	int	9			
ResponseValue	Response Value	double			18	0
Score	Score	double			18	0
ScoreType	Question Score Type	picklist		255		
SurveyId	Survey ID	reference		18		
SurveyInvitationId	Survey Invitation ID	reference		18		
SurveyVersionId	Survey Version ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SURVEYRESPONSE

Represents information about a participant's response to a survey, such as the status of the response, the participant's location, and when the survey was completed.

For more information, see SurveyResponse in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CompletionDateTime`	Response Completion Date and Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Survey Response ID	id		18		
`InterviewGuid`	Interview GUID	string		255		
`InterviewId`	Interview ID	reference		18		
`InvitationId`	Survey Invitation ID	reference		18		
`IpAddress`	Response IP Address	string		39		
`IsDeleted`	Deleted	boolean				
`Language`	Response Language	picklist		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Latitude`	Response Latitude	double			18	15
`Location`	Response Location	location	0	0	0	0
`Longitude`	Response Longitude	double			18	15
`Name`	Response Name	string		255		
`Status`	Response Status	picklist		255		
`SubmitterId`	Response Submitter ID	reference		18		
`SurveyId`	Survey ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SurveyVersionId	Survey Version ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SURVEYSHARE

Sharing for Survey.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SURVEYSUBJECT

Represents a relationship between a survey and another object, such as an account or a case.

For more information, see SurveySubject in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Object Relationship ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Record Name	string		255		
ParentId	Parent ID	reference		18		
SubjectEntityType	Related Object	picklist		255		
SubjectId	Subject ID	reference		18		
SurveyId	Survey ID	reference		18		
SurveyInvitationId	Survey Invitation ID	reference		18		
SurveyResponseId	Survey Response ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SURVEYVERSION

Represents a version of a survey.

For more information, see SurveyVersion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BrandingSetId	Branding Set ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		65535		
Id	Survey Version ID	id		18		
IsDeleted	Deleted	boolean				
IsTemplate	Template	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SurveyId	Survey ID	reference		18		
SurveyStatus	Survey Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
VersionNumber	Version Number	int	9			

SURVEYVERSIONADDLINFO

Represents additional information about a survey version. This information defines the default settings of a survey version.

For more information, see SurveyVersionAddlInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmailSender`	Email Sender	textarea		400		
`EmailTemplateId`	Email Template ID	reference		18		
`EngagementContextMetadata`	Engagement Context Metadata	string		255		
`Id`	Survey Version Additional Info ID	id		18		
`InvitationSharingRole`	Invitation Sharing Role	picklist		255		
`IsDeleted`	Deleted	boolean				
`Language`	Language	picklist		255		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SurveyQuestionId`	Survey Question ID	reference		18		
`SurveyVersionId`	Survey Version ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

SUSTAINABILITYCREDIT

Represents information about the sustainability credits that are a part of a sustainability purchase.

For more information, see SustainabilityCredit in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CostPerUnit`	Cost Per Unit	currency			18	0
`CrbnCreditProjectId`	Carbon Credit Project ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CreditsAllocated`	Credits Allocated	double			18	2
`CreditsAvailable`	Credits Available	double			18	2
`CreditsIssueDate`	Credits Issue Date	date				
`CreditsPurchased`	Credits Purchased	double			18	0
`CreditsRetiredDate`	Credits Retired Date	date				
`CreditsUnit`	Credits Unit	picklist		255		
`Description`	Description	string		255		
`ExternalIdentifier`	External Identifier	string		80		
`Id`	Sustainability Credit ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PurchaseDate`	Purchase Date	date				
`Status`	Status	picklist		255		
`SupplierId`	Supplier ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SustainabilityPurchaseId	Sustainability Purchase ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalCost	Total Spend	currency			18	0
VintageYear	Vintage Year	string		80		

SUSTAINABILITYCREDITFEED

Feed tracking for SustainabilityCredit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SUSTAINABILITYCREDITHISTORY

History for tracked fields of SustainabilityCredit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Sustainability Credit History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SustainabilityCreditId	Sustainability Credit ID	reference		18		

SUSTAINABILITYCREDITSHARE

Sharing for SustainabilityCredit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SUSTAINABILITYPURCHASE

Represents information related to the sustainability credits purchases such as carbon credits.

For more information, see SustainabilityPurchase in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Geocode Accuracy	picklist		255		
BillingLatitude	Latitude	double			18	15
BillingLongitude	Longitude	double			18	15
BillingPostalCode	Billing Postal Code	string		20		
BillingState	Billing State	string		80		
BillingStreet	Billing Street	textarea		255		
BrokerId	Supplier ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
ExternalIdentifier	External Identifier	string		80		
Id	Sustainability Purchase ID	id		18		
InvoiceNumber	Invoice Number	string		80		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PurchaseOrderNumber	Purchase Order Number	string		80		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

SUSTAINABILITYPURCHASEFEED

Feed tracking for SustainabilityPurchase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SUSTAINABILITYPURCHASEHISTORY

History for tracked fields of SustainabilityPurchase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Sustainability Purchase History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SustainabilityPurchaseId	Sustainability Purchase ID	reference		18		

SUSTAINABILITYPURCHASESHARE

Sharing for SustainabilityPurchase.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SUSTAINABILITYSCORECARD

Represents information about the annual sustainability scorecard of third-party organizations whose data is used to calculate scope 3 emissions.

For more information, see SustainabilityScorecard in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AllocatedWaterCnsmpInM3	Allocated Water Consumption (m3)	double			15	5
AllocatedWaterDchgInM3	Allocated Water Discharge (m3)	double			15	5
AllocatedWaterWdrwInM3	Allocated Water Withdrawal (m3)	double			15	5
AllocationStatus	Allocation Status	picklist		255		
CompanyAnnualExpenditure	Total Spent Amount	double			18	2
CompanyAnnualExpenditureEmssn	Annual Spend Based Scope 3 Emissions	double			18	2
CompanyEmissionsAllocationPct	Company Emissions Allocation Percentage	percent			3	0
ConsumptionUnit	Consumption Unit	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
DischargeUnit	Discharge Unit	picklist		255		
EmissionAllocationType	Supplier-Provided Emissions Type	picklist		255		
EndDate	End Date	date				
FinalScorecardEmissions	Final Scorecard Emissions	double			18	2
Id	Sustainability Scorecard ID	id		18		
IsCurrentSupplierScorecard	Current Supplier Scorecard	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OrgWaterAllocPct	Organization Water Allocation Percentage	percent			18	2
OwnerId	Owner ID	reference		18		
PercentageBasedEmissions	Percentage Based Emissions	double			18	2
ReportingDueDate	Reporting Due Date	date				
ScienceBasedTargetStatus	Science Based Target Status	picklist		40		
Scope1Emissions	Scope 1 Emissions (tCO2e)	double			18	2
Scope2LocationBasedEmissions	Scope 2 Location-Based Emissions (tCO2e)	double			18	2
Scope2MarkedBasedEmissions	Scope 2 Market-Based Emissions (tCO2e)	double			18	2
Scope3Emissions	Scope 3 Emissions (tCO2e)	double			18	2
Scope3EmssnCalculationMeasure	Scope 3 Emissions Calculation Measure	picklist		255		
ScopestoIncludeinCalc	Scopes to Include in Calculation	picklist		255		
StartDate	Start Date	date				
Status	Status	picklist		40		
SupplierAnnlRevenuePct	Supplier Annual Revenue Percentage	percent			18	2
SupplierAnnualRevenue	Supplier Annual Revenue	double			18	2
SupplierAnnualRevenueEmissions	Supplier Annual Revenue Emissions	double			18	2
SupplierClassification	Supplier Classification	picklist		40		
SupplierContactId	Contact ID	reference		18		
SupplierEmssnRdctnCmtType	Supplier Emissions Reduction Commitment Type	picklist		40		
SupplierId	Supplier ID	reference		18		
SupplierProvidedEmissions	Supplier Provided Emissions	double			18	2
SupplierReportingScope	Supplier Reporting Scope	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SupplierTier	Supplier Tier	picklist		40		
SupplierWaterActvtyType	Supplier Water Activity Type	picklist		255		
SystemModstamp	System Modstamp	datetime				
WaterCalculationMethod	Water Calculation Method	picklist		255		
WaterConsumptionValue	Water Consumption Value	double			15	5
WaterDischargeValue	Water Discharge Value	double			15	5
WaterWithdrawalValue	Water Withdrawal Value	double			15	5
WithdrawalUnit	Withdrawal Unit	picklist		255		

SUSTAINABILITYSCORECARDFEED

Feed tracking for SustainabilityScorecard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

SUSTAINABILITYSCORECARDHISTORY

History for tracked fields of SustainabilityScorecard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Sustainability Scorecard History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SustainabilityScorecardId	Sustainability Scorecard ID	reference		18		

SUSTAINABILITYSCORECARDSHARE

Sharing for SustainabilityScorecard.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SUSTAINABILITYUOM

Represents information about the additional unit of measure values defined by a customer.

For more information, see SustainabilityUom in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`DeveloperName`	Developer Name	string		80		
`Id`	Sustainability Unit of Measure ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsProductUom`	Product Unit of Measure	boolean				
`IsStationaryAssetUom`	Stationary Asset Unit of Measure	boolean				
`IsVehicleAssetUom`	Vehicle Asset Unit of Measure	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Unit of Measure Name	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`UnitType`	Unit Type	picklist		255		

SVCCATALOGREQUEST

Represents a request made by a user using the Service Catalog. Catalog builders use this object to report on Service Catalog activity.

For more information, see SvcCatalogRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CaseId	Case ID	reference		18		
CatalogItemDescription	Catalog Item Description	textarea		4000		
CatalogItemName	Catalog Item Name	string		80		
ClosedDate	Closed Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Service Catalog Request ID	id		18		
IsClosed	Closed	boolean				
IsDeleted	Deleted	boolean				
ItemFlowVersion	Item Flow Version ID	string		128		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Service Catalog Request Number	string		255		
OwnerId	Owner ID	reference		18		
SubmitterId	User ID	reference		18		
SvcCatalogItemDefinitionId	Service Catalog Item Definition ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SVCCATALOGREQUESTSHARE

Sharing for SvcCatalogRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SWARM

Represents a team of agents, Salesforce users, or Slack users in a Slack channel or thread dedicated to solving a problem. This problem can be related to a support case, incident, sales opportunity, or change request.

For more information, see Swarm in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CollaborationRoomId`	Collaboration Room ID	reference		18		
`CollaborationTool`	Collaboration Tool	picklist		255		
`CollaborationUrl`	Collaboration URL	url		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EndedDateTime`	Ended Date Time	datetime				
`HelpNeeded`	Help Needed	textarea		32000		
`Id`	Swarm ID	id		18		
`IsDedicatedChannel`	Dedicated Channel	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`MessageKey`	Message Timestamp	string		254		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`RelatedRecordId`	RelatedRecord ID	reference		18		
`StartedDateTime`	Started Date Time	datetime				
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`UsageType`	Usage Type	picklist		255		

SWARMFEED

Feed tracking for Swarm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SWARMHISTORY

History for tracked fields of Swarm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Swarm History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`SwarmId`	Swarm ID	reference		18		

SWARMMEMBER

Represents a Salesforce member, such as an agent, of a swarm.

For more information, see SwarmMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssignedDateTime	Assigned Date Time	datetime				
CompletedDateTime	Completed Date Time	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
HelpNeeded	Help Needed	textarea		32000		
Id	Swarm Member ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Details	string		255		
OwnerId	Owner ID	reference		18		
RelatedRecordId	RelatedRecord ID	reference		18		
Status	Status	picklist		40		
SwarmId	Swarm ID	reference		18		
SystemModstamp	System Modstamp	datetime				

SWARMMEMBERFEED

Feed tracking for SwarmMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

SWARMMEMBERHISTORY

History for tracked fields of SwarmMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Swarm Member History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
SwarmMemberId	Swarm Member ID	reference		18		

SWARMMEMBERSHARE

Sharing for SwarmMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

SWARMSHARE

Sharing for Swarm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

TABDEFINITION

Represents a custom tab. Returns only the tabs that the current user has access to.

For more information, see TabDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`DurableId`	Tab Definition Durable ID	string		255		
`Id`	Tab Definition ID	id		18		
`IsAvailableInAloha`	Is Available In Aloha	boolean				
`IsAvailableInDesktop`	Is Available In Desktop	boolean				
`IsAvailableInLightning`	Is Available In Lightning	boolean				
`IsAvailableInMobile`	Is Available In Mobile	boolean				
`IsCustom`	Is Custom	boolean				
`Label`	Label	string		255		
`MobileUrl`	Mobile URL	string		255		
`Name`	Name	string		255		
`SobjectName`	sObject Name	string		255		
`Url`	URL	string		255		

TAGCATEGORY

Group similar interest tags together into tag categories.

For more information, see TagCategory in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Icon	Icon	picklist		255		
Id	Tag Category ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Level	Level	int	9			
Name	Category Name	string		255		
OwnerId	Owner ID	reference		18		
ParentCategoryId	Tag Category ID	reference		18		
SystemModstamp	System Modstamp	datetime				

TAGCATEGORYFEED

Feed tracking for TagCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

TAGCATEGORYHISTORY

History for tracked fields of TagCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Tag Category History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`TagCategoryId`	Tag Category ID	reference		18		

TAGCATEGORYSHARE

Sharing for TagCategory.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

TASK

Represents a business activity such as making a phone call or other to-do items. In the user interface, Task and Event records are collectively referred to as activities.

For more information, see Task in the *Consumer Goods Cloud Developer Guide*, *Object Reference for the Salesforce Platform*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	AL Account	reference		18		
`ActivityDate`	Due Date Only	date				
`CallDisposition`	Call Result	string		255		
`CallDurationInSeconds`	Call Duration	int	8			
`CallObject`	Call Object Identifier	string		255		
`CallType`	Call Type	picklist		40		
`CompletedDateTime`	Completed Date/Time	datetime				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`Id`	Activity ID	id		18		
`IsArchived`	Archived	boolean				
`IsClosed`	Closed	boolean				
`IsDeleted`	Deleted	boolean				
`IsHighPriority`	High Priority	boolean				
`IsRecurrence`	Create Recurring Series of Tasks	boolean				
`IsReminderSet`	Reminder Set	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OwnerId`	Assigned To ID	reference		18		
`Priority`	Priority	picklist		20		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
RecurrenceActivityId	Recurrence Activity ID	reference		18		
RecurrenceDayOfMonth	Recurrence Day of Month	int	9			
RecurrenceDayOfWeekMask	Recurrence Day of Week Mask	int	9			
RecurrenceEndDateOnly	Recurrence End	date				
RecurrenceInstance	Recurrence Instance	picklist		40		
RecurrenceInterval	Recurrence Interval	int	9			
RecurrenceMonthOfYear	Recurrence Month of Year	picklist		40		
RecurrenceRegeneratedType	Repeat This Task	picklist		40		
RecurrenceStartDateOnly	Recurrence Start	date				
RecurrenceTimeZoneSidKey	Recurrence Time Zone	picklist		40		
RecurrenceType	Recurrence Type	picklist		40		
ReminderDateTime	Reminder Date/Time	datetime				
Status	Status	picklist		255		
Subject	Subject	combobox		255		
SystemModstamp	System Modstamp	datetime				
TaskSubtype	Task Subtype	picklist		40		
WhatId	Related To ID	reference		18		
WhoId	Name ID	reference		18		

TASKFEED

Feed tracking for Task.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

TASKPRIORITY

Represents the importance or urgency of a Task, such as High, Normal, or Low.

For more information, see TaskPriority in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Task Priority Value ID	id		18		
`IsDefault`	Is Default	boolean				
`IsHighPriority`	Is High Priority	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

TASKSTATUS

Represents the status of a Task, such as Not Started, Completed, or Closed.

For more information, see TaskStatus in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Task Status Value ID	id		18		
`IsClosed`	Is Closed	boolean				
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

TAXENGINE

A tax engine represents both an instance of a tax engine provider as well as the merchant credentials for that specific instance. When Subscription Management calculates tax on an order item, it sends a request through Subscription Management Tax Calculation API to an external tax engine. The Salesforce tax engine record contains information passed to the external tax engine, such as

For more information, see TaxEngine in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
ExternalReference	External Reference	string		255		
Id	Tax Engine ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MerchantCredentialId	Named Credential ID	reference		18		
SellerCode	Seller Code	string		255		
Status	Tax Engine Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TaxEngineAddress	Tax Engine Address	address				
TaxEngineCity	City	string		40		
TaxEngineCountry	Country	string		80		
TaxEngineGeocodeAccuracy	GeoCode Accuracy	picklist		255		
TaxEngineLatitude	Latitude	double			18	15
TaxEngineLongitude	Longitude	double			18	15
TaxEngineName	Tax Engine Name	string		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
TaxEnginePostalCode	Postal Code	string		20		
TaxEngineProviderId	Tax Engine Provider ID	reference		18		
TaxEngineState	State	string		80		
TaxEngineStreet	Street	textarea		255		

TAXENGINEINTERACTIONLOG

A record of a communication with an external tax engine following a tax calculation request.

For more information, see TaxEngineInteractionLog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
DocumentCode	Document Code	string		64		
EffectiveDate	Effective Date	datetime				
Id	Tax Engine Interaction Log ID	id		18		
InteractionHttpStatusCode	Interaction HTTP Status Code Tax	int	9			
InteractionType	Interaction Type	picklist		255		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
ReferenceEntity	Reference Entity	string		32		
RequestBody	Request Body	base64				
RequestContentType	Request Content Type	picklist		255		
RequestLength	Request Length	int	9			
RequestName	Request Name	string		40		
ResponseBody	Response Body	base64				
ResponseContentType	Response Content Type	picklist		255		
ResponseLength	Response Length	int	9			
ResponseName	Response Name	string		40		
ResultCode	Result Code	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TaxEngineId	Tax Engine ID	reference		18		
TaxEngineInteractionLogNumber	Tax Engine Interaction Log Number	string		255		

TAXENGINEPROVIDER

Represents general information about a service that manages a tax engine, such as the ID of the tax adapter Apex class in Salesforce, and the engine's namespace prefix. Tax engine providers have a one-to-many relationship with tax engines, where the tax engine record represents a specific configuration of a tax engine that can be assigned to multiple order items.

For more information, see TaxEngineProvider in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexAdapterId`	Class ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DeveloperName`	Name	string		255		
`Id`	Tax Engine Provider ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		255		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

TESTSUITEMEMBERSHIP

Associates an Apex class with an ApexTestSuite.

For more information, see TestSuiteMembership in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexClassId`	Class ID	reference		18		
`ApexTestSuiteId`	Test Suite ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Test Suite Membership ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

THIRDPARTYACCOUNTLINK

Represents the list of external users who authenticated using an authentication provider.

For more information, see ThirdPartyAccountLink in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Handle`	External User Handle	string		375		
`Id`	Third Party Account Link ID	id		18		
`IsNotSsoUsable`	Is Not SSO Usable	boolean				
`Provider`	Provider	string		128		
`RemoteIdentifier`	External User Id	string		128		
`SsoProviderId`	Auth. Provider ID	reference		18		
`SsoProviderName`	Single Sign-On Provider Name	string		255		
`ThirdPartyAccountLinkKey`	Third Party Account Link Unique Key	string		255		
`UserId`	User ID	reference		18		

THREATDETECTIONFEEDBACK

Represents feedback provided by a user about a Threat Detection event that occurred in your org. The feedback specifies whether the event was malicious, suspicious, not a threat, or unknown. Each ThreatDetectionFeedback object is associated with one of these Threat Detection storage events: ApiAnomalyEventStore, CredentialStuffingEventStore, ReportAnomalyEventStore, or SessionHijackingEventStore.

For more information, see ThreatDetectionFeedback in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Threat Detection Feedback ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Updated Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Response`	Response	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`ThreatDetectionEventId`	Associated Threat Detection Event ID	reference		18		
`ThreatDetectionFeedbackNumber`	Threat Detection Feedback Name	string		255		
`UserId`	User ID	reference		18		
`Username`	Username	string		255		

THREATDETECTIONFEEDBACKFEED

Feed tracking for ThreatDetectionFeedback.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

TIMESHEET

Represents a schedule of a service resource's time in Field Service or Workforce Engagement.

For more information, see TimeSheet in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	Time Sheet End Date	date				
Id	Time Sheet ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		
ServiceResourceId	Resource ID	reference		18		
StartDate	Time Sheet Start Date	date				
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
TimeSheetEntryCount	Time Sheet Entry Count	int	9			
TimeSheetNumber	Name	string		255		
TotalDurationInHours	Total Duration (In Hours)	double			18	2
TotalDurationInMinutes	Total Duration (In Minutes)	int	9			

TIMESHEETENTRY

Represents a span of time that a service resource spends on a field service task.

For more information, see TimeSheetEntry in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`DurationInMinutes`	Duration (In Minutes)	int	9			
`EndTime`	End Time	datetime				
`Id`	Time Sheet Entry ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationTimeZone`	Location Time Zone	picklist		255		
`StartTime`	Start Time	datetime				
`Status`	Status	picklist		40		
`Subject`	Subject	string		255		
`SystemModstamp`	System Modstamp	datetime				
`TimeSheetEntryNumber`	Name	string		255		
`TimeSheetId`	Time Sheet ID	reference		18		
`Type`	Type	picklist		40		
`WorkOrderId`	Work Order ID	reference		18		
`WorkOrderLineItemId`	Work Order Line Item ID	reference		18		

TIMESHEETENTRYFEED

Feed tracking for TimeSheetEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

TIMESHEETENTRYHISTORY

History for tracked fields of TimeSheetEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Time Sheet Entry History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
TimeSheetEntryId	Time Sheet Entry ID	reference		18		

TIMESHEETFEED

Feed tracking for TimeSheet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

TIMESHEETHISTORY

History for tracked fields of TimeSheet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Time Sheet History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
TimeSheetId	Time Sheet ID	reference		18		

TIMESHEETSHARE

Sharing for TimeSheet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

TIMESLOT

Represents a period of time on a specified day of the week during which work can be performed in Field Service, Salesforce Scheduler, or Workforce Engagement. Operating hours consist of one or more time slots.

For more information, see TimeSlot in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DayOfWeek`	Day of Week	picklist		255		
`EndTime`	End Time	time				
`Id`	Time Slot ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`OperatingHoursId`	Operating Hour ID	reference		18		
`StartTime`	Start Time	time				
`SystemModstamp`	System Modstamp	datetime				
`TimeSlotNumber`	Name	string		255		
`Type`	Type	picklist		255		

TIMELINEOBJECTDEFINITION

Stores timeline configurations. This object is available in API version 55.0 and later.

For more information, see TimelineObjectDefinition in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BaseObject`	Custom Object Definition ID	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Definition`	Definition	textarea		131072		
`DeveloperName`	Name	string		80		
`Id`	Timeline Object Definition ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				

TOPIC

Represents a topic on a Chatter post or record.

For more information, see Topic in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		1000		
`Id`	Topic ID	id		18		
`ManagedTopicType`	Enabled For	string		99		
`Name`	Name	string		99		
`NetworkId`	Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TalkingAbout`	Talking About	int	9			

TOPICASSIGNMENT

Represents the assignment of a topic to a specific feed item, record, or file.

For more information, see TopicAssignment in the *Object Reference for the Salesforce Platform*, and *Salesforce Knowledge Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EntityId`	Entity ID	reference		18		
`EntityKeyPrefix`	Record Key Prefix	string		3		
`EntityType`	Object Type	string		80		
`Id`	Topic Assignment ID	id		18		
`IsDeleted`	Deleted	boolean				
`NetworkId`	Network ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TopicId`	Topic ID	reference		18		

TOPICFEED

Feed tracking for Topic.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

TOPICLOCALIZATION

Represents the translated version of a topic name. Topic localization applies only to navigational and featured topics in Experience Cloud sites.

For more information, see TopicLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

TOPICUSEREVENT

Represents an action (such as comment, post, like, or share) made by a user on a topic.

For more information, see TopicUserEvent in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionEnum`	Action	picklist		40		
`CreatedDate`	Create Date	datetime				
`Id`	Event ID	id		18		
`NetworkId`	Network ID	reference		18		
`TopicId`	Topic ID	reference		18		
`UserId`	User ID	reference		18		

TRAININGCOURSEPARTICIPANT

Represents the trainings completed by a person.

For more information, see TrainingCourseParticipant in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ContactId`	Contact ID	reference		18		
`CourseOfferingId`	Course Offering ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Training Course Participant ID	id		18		
`InstitutionName`	Institution Name	picklist		40		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Participant ID	string		255		
`OwnerId`	Owner ID	reference		18		
`Result`	Result	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`VerificationDateTime`	Verification Date	datetime				
`VerificationStatus`	Verification Status	picklist		40		

TRAININGCOURSEPARTICIPANTFEED

Feed tracking for TrainingCourseParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

TRAININGCOURSEPARTICIPANTHISTORY

History for tracked fields of TrainingCourseParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Training Course Participant History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
TrainingCourseParticipantId	Training Course Participant ID	reference		18		

TRAININGCOURSEPARTICIPANTSHARE

Sharing for TrainingCourseParticipant.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

TRANSACTIONJOURNAL

The transactions that need to be processed for a rebate program. For example, order line for 1000 units of $1200 for member ABC enterprises.

For more information, see TransactionJournal in the *Automotive Cloud Developer Guide*, *Loyalty Management Developer Guide*, and *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActivityDate	Activity Date	datetime				
BookedFareClass	Booked Fare Class	picklist		255		
BookedRoomType	Booked Room Type	picklist		255		
BookingDate	Booking Date	date				
Brand	Brand	string		30		
Channel	Channel	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateField__c	DateField	date				
DateTimeField__c	DateTimeField	datetime				
Destination	Destination	string		30		
Distance	Distance	double			18	2
EndDate	End Date	datetime				
ErrorDescription	Error Message	string		255		
EscrowPointsCreditDate	Escrow Points Credit Date	date				
Establishment	Establishment	string		40		
ExternalTransactionNumber	External Transaction ID	string		40		
FlightNumber	Flight Number	string		10		
Id	Transaction Journal ID	id		18		
Industry	Industry	picklist		255		
InvoiceDate	Invoice Generated Date	date				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
JournalDate	Journal Date	datetime				
JournalReason	Journal Reason	picklist		255		
JournalSubTypeId	Journal SubType ID	reference		18		
JournalTypeId	Journal Type ID	reference		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramId	Loyalty Program ID	reference		18		
MemberId	Program Member ID	reference		18		
Name	Name	string		30		
NumberField__c	NumberField	double			18	2
OrderId	Order ID	reference		18		
OrderItemId	Order Product ID	reference		18		
Origin	Origin	string		30		
PartnerId	Loyalty Program Partner ID	reference		18		
PaymentMethod	Payment Method	picklist		255		
ProductCategoryId	Category ID	reference		18		
ProductId	Product ID	reference		18		
PromotionId	Promotion ID	reference		18		
Quantity	Quantity	double			18	2
QuantityUnitOfMeasureId	Quantity Unit ID	reference		18		
RedeemedPointsExpirationInformation	Redeemed Points Expiration Information	textarea		131072		
ReferredMemberId	Referred Member ID	reference		18		
RelatedCorporateMembershipId	Related Corporate Membership ID	reference		18		
RelatedJournalId	Related Journal ID	reference		18		
StartDate	Start Date	datetime				
Status	Status	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
SystemModstamp	System Modstamp	datetime				
TextField__c	TextField	string		80		
TransactionAmount	Transaction Amount	currency			18	2
TransactionLocation	Transaction Location	string		50		
TraveledFareClass	Traveled Fare Class	picklist		255		
UsageType	Usage Type	picklist		40		
VoucherCode	Voucher Code	string		255		

TRANSACTIONSECURITYPOLICY

Represents a transaction security policy definition.

For more information, see TransactionSecurityPolicy in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionConfig	Action Configuration	textarea		4000		
ApexPolicyId	Class ID	reference		18		
BlockMessage	Block Message	string		1000		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
CustomEmailContent	Custom Email Content	string		1333		
Description	Description	string		1000		
DeveloperName	Name	string		80		
EventName	Event Name	picklist		255		
EventType	Event Type	picklist		255		
ExecutionUserId	User ID	reference		18		
Id	Transaction Security Policy ID	id		18		
IsDeleted	Deleted	boolean				
Language	Master Language	picklist		40		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MasterLabel	Name	string		80		
NamespacePrefix	Namespace Prefix	string		15		
ResourceName	Resource Name	string		100		
State	State	picklist		255		
SystemModstamp	System Modstamp	datetime				
Type	Policy Type	picklist		255		

TRANSLATION

The Translation object represents the languages enabled for translation in your Salesforce org.

For more information, see Translation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CanManage`	Can Manage	boolean				
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`IsActive`	Active	boolean				
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				

TRNCOURSE

Represents trainings authorized by a government authority that qualify a license/permit.

For more information, see TrnCourse in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		255		
`Id`	Training Course ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`TotalCredits`	Total Credits	double			18	2
`TotalHours`	Total Hours	double			18	2

TRNCOURSEFEED

Feed tracking for TrnCourse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

TRNCOURSEHISTORY

History for tracked fields of TrnCourse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Training Course History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
TrnCourseId	Training Course ID	reference		18		

TRNCOURSESHARE

Sharing for TrnCourse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

UIFORMULACRITERION

Represents a filter that helps define component visibility on a Lightning page.

For more information, see UiFormulaCriterion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Ui Formula Criterion ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LeftHandSide`	Left Value	string		255		
`OperatorId`	Formula Operator ID	string		40		
`ParentKeyPrefix`	Parent Key Prefix	string		3		
`RightHandSide`	Right Value	string		255		
`RuleId`	Ui Formula Rule ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

UIFORMULARULE

Represents a set of one or more filters that define the conditions under which a component displays on a Lightning page.

For more information, see UiFormulaRule in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssociatedElementId`	Associated Element ID	reference		18		
`BooleanFilter`	Boolean Filter	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Formula`	Formula	textarea		4000		
`Id`	Ui Formula Rule ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Label	string		80		
`ParentKeyPrefix`	Parent Key Prefix	string		3		
`SystemModstamp`	System Modstamp	datetime				

UNDECIDEDEVENTRELATION

Represents event participants (invitees or attendees) with the status `Not Responded` for a given event.

For more information, see UndecidedEventRelation in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventId`	Event ID	reference		18		
`Id`	Event Relation ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RelationId`	Relation ID	reference		18		
`RespondedDate`	Response Date	datetime				
`Response`	Response	string		255		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	string		50		

UNITOFMEASURE

Represents the unit of measures for care metrics and care observations

For more information, see UnitOfMeasure in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	string		255		
`Id`	Unit of Measure ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Type	picklist		40		
`UnitCode`	Unit Code	string		255		

UNITOFMEASURECONVERSION

Represents the information used to convert a measurement value from a unit of measure to another.

For more information, see UnitOfMeasureConversion in the *Rebate Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConversionFactor`	Conversion Factor	double			18	6
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FromUnitOfMeasureId`	Unit of Measure ID	reference		18		
`Id`	Unit of Measure ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`ToUnitOfMeasureId`	Unit of Measure ID	reference		18		

UNITOFMEASURECONVERSIONFEED

Feed tracking for UnitOfMeasureConversion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

UNITOFMEASURECONVERSIONHISTORY

History for tracked fields of UnitOfMeasureConversion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Unit of Measure ConversionHistory ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`UnitOfMeasureConversionId`	Unit of Measure ID	reference		18		

UNITOFMEASURECONVERSIONSHARE

Sharing for UnitOfMeasureConversion.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

UNITOFMEASURESHARE

Sharing for UnitOfMeasure.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

URIEVENT

Detects when a user creates, accesses, updates, or deletes a record in Salesforce Classic only. Doesn't detect record operations done through a Visualforce page or Visualforce page views.

For more information, see UriEvent in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`Id`	URI Event ID	id		18		
`LoginKey`	Login Key	string		24		
`Message`	Message	string		10000		
`Name`	Name	string		255		
`Operation`	Operation	picklist		255		
`OperationStatus`	Operation Status	picklist		255		
`QueriedEntities`	Queried Entities	string		1000		
`RecordId`	Record ID	reference		18		
`RelatedEventIdentifier`	Related Event Identifier	string		80		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`UserType`	User Type	picklist		255		
`Username`	Username	string		255		

URIEVENTSTREAM

Detects when a user creates, accesses, updates, or deletes a record in Salesforce Classic only. Doesn't detect record operations done through a Visualforce page or Visualforce page views.

For more information, see UriEventStream in the *Platform Events Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`EventDate`	Event Date	datetime				
`EventIdentifier`	Event Identifier	string		80		
`EventUuid`	Event UUID	string		36		
`LoginKey`	Login Key	string		24		
`Message`	Message	string		10000		
`Name`	Name	string		255		
`Operation`	Operation	picklist		255		
`OperationStatus`	Operation Status	picklist		255		
`QueriedEntities`	Queried Entities	string		1000		
`RecordId`	Record ID	string		18		
`RelatedEventIdentifier`	Related Event Identifier	string		80		
`ReplayId`	Replay ID	string		1000		
`SessionKey`	Session Key	string		24		
`SessionLevel`	Session Level	picklist		255		
`SourceIp`	Source IP	string		255		
`UserId`	User ID	reference		18		
`UserType`	User Type	picklist		255		
`Username`	Username	string		255		

USER

Represents a user in your organization.

For more information, see User in the *Consumer Goods Cloud Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AboutMe	About Me	textarea		1000		
AccountId	Account ID	reference		18		
Address	Address	address				
Alias	Alias	string		8		
BadgeText	User Photo badge text overlay	string		80		
BannerPhotoUrl	Url for banner photo	url		1024		
CallCenterId	Call Center ID	reference		18		
City	City	string		40		
CommunityNickname	Nickname	string		40		
CompanyName	Company Name	string		80		
ContactId	Contact ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultGroupNotificationFrequency	Default Notification Frequency when Joining Groups	picklist		40		
DelegatedApproverId	Delegated Approver ID	reference		18		
Department	Department	string		80		
DigestFrequency	Chatter Email Highlights Frequency	picklist		40		
Division	Division	string		80		
Email	Email	email		128		
EmailEncodingKey	Email Encoding	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
EmailPreferencesAutoBcc	AutoBcc	boolean				
EmailPreferencesAutoBccStayInTouch	AutoBccStayInTouch	boolean				
EmailPreferencesStayInTouchReminder	StayInTouchReminder	boolean				
EmployeeNumber	Employee Number	string		20		
Extension	Extension	phone		40		
Fax	Fax	phone		40		
FederationIdentifier	SAML Federation ID	string		512		
FirstName	First Name	string		40		
ForecastEnabled	Allow Forecasting	boolean				
FullPhotoUrl	Url for full-sized Photo	url		1024		
GeocodeAccuracy	Geocode Accuracy	picklist		40		
Id	User ID	id		18		
IndividualId	Individual ID	reference		18		
IsActive	Active	boolean				
IsExtIndicatorVisible	Show external indicator	boolean				
IsPortalEnabled	Is Portal Enabled	boolean				
IsProfilePhotoActive	Has Profile Photo	boolean				
LanguageLocaleKey	Language	picklist		40		
LastLoginDate	Last Login	datetime				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastName	Last Name	string		80		
LastPasswordChangeDate	Last Password Change or Reset	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LocaleSidKey	Locale	picklist		40		
Longitude	Longitude	double			18	15
ManagerId	Manager ID	reference		18		
MediumBannerPhotoUrl	Url for Android banner photo	url		1024		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
MediumPhotoUrl	Url for medium profile photo	url		1024		
MobilePhone	Mobile	phone		40		
Name	Full Name	string		121		
NumberOfFailedLogins	Failed Login Attempts	int	9			
OfflinePdaTrialExpirationDate	Sales Anywhere Trial Expiration Date	datetime				
OfflineTrialExpirationDate	Offline Edition Trial Expiration Date	datetime				
OutOfOfficeMessage	Out of office message	string		40		
Phone	Phone	phone		40		
PortalRole	Portal Role Level	picklist		40		
PostalCode	Zip/Postal Code	string		20		
ProfileId	Profile ID	reference		18		
ReceivesAdminInfoEmails	Admin Info Emails	boolean				
ReceivesInfoEmails	Info Emails	boolean				
SenderEmail	Email Sender Address	email		80		
SenderName	Email Sender Name	string		80		
Signature	Email Signature	textarea		1333		
SmallBannerPhotoUrl	Url for IOS banner photo	url		1024		
SmallPhotoUrl	Photo	url		1024		
State	State/Province	string		80		
StayInTouchNote	Stay-in-Touch Email Note	string		512		
StayInTouchSignature	Stay-in-Touch Email Signature	textarea		512		
StayInTouchSubject	Stay-in-Touch Email Subject	string		80		
Street	Street	textarea		255		
SystemModstamp	System Modstamp	datetime				
TimeZoneSidKey	Time Zone	picklist		40		
Title	Title	string		80		
UserPermissionsAvantgoUser	AvantGo User	boolean				
UserPermissionsCallCenterAutoLogin	Auto-login To Call Center	boolean				
UserPermissionsInteractionUser	Flow User	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UserPermissionsMarketingUser	Marketing User	boolean				
UserPermissionsOfflineUser	Offline User	boolean				
UserPermissionsSFContentUser	Salesforce CRM Content User	boolean				
UserPreferencesActivityRemindersPopup	ActivityRemindersPopup	boolean				
UserPreferencesApexPagesDeveloperMode	ApexPagesDeveloperMode	boolean				
UserPreferencesCacheDiagnostics	CacheDiagnostics	boolean				
UserPreferencesContentEmailAsAndWhen	ContentEmailAsAndWhen	boolean				
UserPreferencesContentNoEmail	ContentNoEmail	boolean				
UserPreferencesCreateLEXAppsWTShown	CreateLEXAppsWTShown	boolean				
UserPreferencesDisCommentAfterLikeEmail	DisCommentAfterLikeEmail	boolean				
UserPreferencesDisMentionsCommentEmail	DisMentionsCommentEmail	boolean				
UserPreferencesDisProfPostCommentEmail	DisProfPostCommentEmail	boolean				
UserPreferencesDisableAllFeedsEmail	DisableAllFeedsEmail	boolean				
UserPreferencesDisableBookmarkEmail	DisableBookmarkEmail	boolean				
UserPreferencesDisableChangeCommentEmail	DisableChangeCommentEmail	boolean				
UserPreferencesDisableEndorsementEmail	DisableEndorsementEmail	boolean				
UserPreferencesDisableFileShareNotificationsForApi	DisableFileShareNotificationsForApi	boolean				
UserPreferencesDisableFollowersEmail	DisableFollowersEmail	boolean				
UserPreferencesDisableLaterCommentEmail	DisableLaterCommentEmail	boolean				
UserPreferencesDisableLikeEmail	DisableLikeEmail	boolean				
UserPreferencesDisableMentionsPostEmail	DisableMentionsPostEmail	boolean				
UserPreferencesDisableMessageEmail	DisableMessageEmail	boolean				
UserPreferencesDisableProfilePostEmail	DisableProfilePostEmail	boolean				
UserPreferencesDisableSharePostEmail	DisableSharePostEmail	boolean				
UserPreferencesEnableAutoSubForFeeds	EnableAutoSubForFeeds	boolean				
UserPreferencesEventRemindersCheckboxDefault	EventRemindersCheckboxDefault	boolean				
UserPreferencesExcludeMailAppAttachments	ExcludeMailAppAttachments	boolean				
UserPreferencesFavoritesShowTopFavorites	FavoritesShowTopFavorites	boolean				
UserPreferencesFavoritesWTShown	FavoritesWTShown	boolean				
UserPreferencesGlobalNavBarWTShown	GlobalNavBarWTShown	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UserPreferencesGlobalNavGridMenuWTShown	GlobalNavGridMenuWTShown	boolean				
UserPreferencesHasCelebrationBadge	HasCelebrationBadge	boolean				
UserPreferencesHasSentWarningEmail	HasSentWarningEmail	boolean				
UserPreferencesHasSentWarningEmail238	HasSentWarningEmail238	boolean				
UserPreferencesHasSentWarningEmail240	HasSentWarningEmail240	boolean				
UserPreferencesHideBiggerPhotoCallout	HideBiggerPhotoCallout	boolean				
UserPreferencesHideBrowseProductRedirectConfirmation	HideBrowseProductRedirectConfirmation	boolean				
UserPreferencesHideCSNDesktopTask	HideCSNDesktopTask	boolean				
UserPreferencesHideCSNGetChatterMobileTask	HideCSNGetChatterMobileTask	boolean				
UserPreferencesHideChatterOnboardingSplash	HideChatterOnboardingSplash	boolean				
UserPreferencesHideEndUserOnboardingAssistantModal	HideEndUserOnboardingAssistantModal	boolean				
UserPreferencesHideLightningMigrationModal	HideLightningMigrationModal	boolean				
UserPreferencesHideOnlineSalesAppWelcomeMat	HideOnlineSalesAppWelcomeMat	boolean				
UserPreferencesHideS1BrowserUI	HideS1BrowserUI	boolean				
UserPreferencesHideSecondChatterOnboardingSplash	HideSecondChatterOnboardingSplash	boolean				
UserPreferencesHideSfxWelcomeMat	HideSfxWelcomeMat	boolean				
UserPreferencesLightningExperiencePreferred	LightningExperiencePreferred	boolean				
UserPreferencesNativeEmailClient	NativeEmailClient	boolean				
UserPreferencesNewLightningReportRunPageEnabled	NewLightningReportRunPageEnabled	boolean				
UserPreferencesPathAssistantCollapsed	PathAssistantCollapsed	boolean				
UserPreferencesPreviewCustomTheme	PreviewCustomTheme	boolean				
UserPreferencesPreviewLightning	PreviewLightning	boolean				
UserPreferencesReceiveNoNotificationsAsApprover	ReceiveNoNotificationsAsApprover	boolean				
UserPreferencesReceiveNotificationsAsDelegatedApprover	ReceiveNotificationsAsDelegatedApprover	boolean				
UserPreferencesRecordHomeReservedWTShown	RecordHomeReservedWTShown	boolean				
UserPreferencesRecordHomeSectionCollapseWTShown	RecordHomeSectionCollapseWTShown	boolean				
UserPreferencesReminderSoundOff	ReminderSoundOff	boolean				
UserPreferencesReverseOpenActivitiesView	ReverseOpenActivitiesView	boolean				
UserPreferencesSRHOverrideActivities	SRHOverrideActivities	boolean				
UserPreferencesShowCityToExternalUsers	ShowCityToExternalUsers	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
UserPreferencesShowCityToGuestUsers	ShowCityToGuestUsers	boolean				
UserPreferencesShowCountryToExternalUsers	ShowCountryToExternalUsers	boolean				
UserPreferencesShowCountryToGuestUsers	ShowCountryToGuestUsers	boolean				
UserPreferencesShowEmailToExternalUsers	ShowEmailToExternalUsers	boolean				
UserPreferencesShowEmailToGuestUsers	ShowEmailToGuestUsers	boolean				
UserPreferencesShowFaxToExternalUsers	ShowFaxToExternalUsers	boolean				
UserPreferencesShowFaxToGuestUsers	ShowFaxToGuestUsers	boolean				
UserPreferencesShowForecastingChangeSignals	ShowForecastingChangeSignals	boolean				
UserPreferencesShowManagerToExternalUsers	ShowManagerToExternalUsers	boolean				
UserPreferencesShowManagerToGuestUsers	ShowManagerToGuestUsers	boolean				
UserPreferencesShowMobilePhoneToExternalUsers	ShowMobilePhoneToExternalUsers	boolean				
UserPreferencesShowMobilePhoneToGuestUsers	ShowMobilePhoneToGuestUsers	boolean				
UserPreferencesShowPostalCodeToExternalUsers	ShowPostalCodeToExternalUsers	boolean				
UserPreferencesShowPostalCodeToGuestUsers	ShowPostalCodeToGuestUsers	boolean				
UserPreferencesShowProfilePicToGuestUsers	ShowProfilePicToGuestUsers	boolean				
UserPreferencesShowStateToExternalUsers	ShowStateToExternalUsers	boolean				
UserPreferencesShowStateToGuestUsers	ShowStateToGuestUsers	boolean				
UserPreferencesShowStreetAddressToExternalUsers	ShowStreetAddressToExternalUsers	boolean				
UserPreferencesShowStreetAddressToGuestUsers	ShowStreetAddressToGuestUsers	boolean				
UserPreferencesShowTitleToExternalUsers	ShowTitleToExternalUsers	boolean				
UserPreferencesShowTitleToGuestUsers	ShowTitleToGuestUsers	boolean				
UserPreferencesShowWorkPhoneToExternalUsers	ShowWorkPhoneToExternalUsers	boolean				
UserPreferencesShowWorkPhoneToGuestUsers	ShowWorkPhoneToGuestUsers	boolean				
UserPreferencesSortFeedByComment	SortFeedByComment	boolean				
UserPreferencesSuppressEventSFXReminders	SuppressEventSFXReminders	boolean				
UserPreferencesSuppressTaskSFXReminders	SuppressTaskSFXReminders	boolean				
UserPreferencesTaskRemindersCheckboxDefault	TaskRemindersCheckboxDefault	boolean				
UserPreferencesUserDebugModePref	UserDebugModePref	boolean				
UserRoleId	Role ID	reference		18		
UserType	User Type	picklist		40		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Username	Username	string		80		

USERAPPINFO

Stores the last Lightning app logged in to.

For more information, see UserAppInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AppDefinitionId`	App Definition ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FormFactor`	Form Factor	picklist		255		
`Id`	Last Used App ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

USERAPPMENUCUSTOMIZATION

Represents an individual user's settings for items in the app menu or App Launcher.

For more information, see UserAppMenuCustomization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApplicationId`	Application ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	UserAppMenuCustomization ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OwnerId`	Owner ID	reference		18		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				

USERAPPMENUCUSTOMIZATIONSHARE

Sharing for UserAppMenuCustomization.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

USERAPPMENUITEM

Represents the organization-wide settings for items in the app menu or App Launcher that the requesting user has access to in Setup.

For more information, see UserAppMenuItem in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppMenuItemId	AppMenuItem ID	string		255		
ApplicationId	Application ID	reference		18		
Description	Description	string		250		
IconUrl	Icon Url	url		255		
Id	Application ID	id		18		
InfoUrl	Info URL	url		255		
IsUsingAdminAuthorization	IsUsingAdminAuthorization	boolean				
IsVisible	Is Visible	boolean				
Label	Name	string		80		
LogoUrl	Logo Image URL	url		255		
MobileStartUrl	Mobile Start Url	url		255		
Name	Developer Name	string		250		
SortOrder	Sort Order	int	9			
StartUrl	Start Url	url		255		
Type	App Type	picklist		255		
UserSortOrder	User Sort Order	int	9			

USERCONFIGTRANSFERBUTTON

Represents the association between a Chat configuration and a live chat button. This association allows users associated with a specific configuration to transfer chats to a button queue.

For more information, see UserConfigTransferButton in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	UserConfigTransferButton ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LiveChatButtonId`	Chat Button ID	reference		18		
`LiveChatUserConfigId`	Chat Agent Configuration ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

USERCONFIGTRANSFERSKILL

Represents the association between a Chat configuration and a skill. This association allows users associated with a specific configuration to transfer chats to agents who have that skill.

For more information, see UserConfigTransferSkill in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	UserConfigTransferSkill ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LiveChatUserConfigId`	Chat Agent Configuration ID	reference		18		
`SkillId`	Skill ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

USERCUSTOMBADGE

Represents a custom badge for a user.

For more information, see UserCustomBadge in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BadgeType`	Badge Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CustomText`	Custom Text	string		50		
`Id`	User Custom Badge ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

USERCUSTOMBADGELOCALIZATION

Represents the translated version of a custom badge for a user.

For more information, see UserCustomBadgeLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Translation ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	textarea		32000		

USEREMAILPREFERREDPERSON

Represents a mapping for a user's preferred record for an email address when multiple records match an email field.

For more information, see UserEmailPreferredPerson in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Email`	Email	email		80		
`Id`	User Email Preferred Person ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	User Email Preferred Person Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PersonRecordId`	Person Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

USEREMAILPREFERREDPERSONSHARE

Represents a sharing entry on a UserEmailPreferredPerson object. Sharing is not customizable for UserEmailPreferredPerson records.

For more information, see UserEmailPreferredPersonShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

USERESIGNVENDORIDENTIFIER

Used for integrating eSignature users.

For more information, see UserEsignVendorIdentifier in the *Salesforce Contracts Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalUserIdentifier`	External User Identifier	string		255		
`Id`	User Esignature Vendor Identifier ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		
`Vendor`	Vendor	picklist		255		
`VendorType`	Vendor Type	picklist		255		

USERESIGNVENDORIDENTIFIERFEED

Feed tracking for UserEsignVendorIdentifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

USERESIGNVENDORIDENTIFIERHISTORY

History for tracked fields of UserEsignVendorIdentifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	User Esignature Vendor IdentifierHistory ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
UserEsignVendorIdentifierId	User Esignature Vendor Identifier ID	reference		18		

USERESIGNVENDORIDENTIFIERSHARE

Sharing for UserEsignVendorIdentifier.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

USERFEED

Feed tracking for User.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

USERLICENSE

Represents a user license in your organization. A user license entitles a user to specific functionality and determines the profiles and permission sets available to the user.

For more information, see UserLicense in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedDate`	Created Date	datetime				
`Id`	User License ID	id		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LicenseDefinitionKey`	License Def. ID	string		40		
`MasterLabel`	Master Label	string		80		
`Name`	Name	string		40		
`Status`	Status	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`TotalLicenses`	Total Licenses	int	9			
`UsedLicenses`	Used Licenses	int	9			
`UsedLicensesLastUpdated`	Used Licenses Last Updated	datetime				

USERLISTVIEW

Represents the customizations a user made to a list view.

For more information, see UserListView in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	User List View Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastViewedChart`	List View Chart ID	picklist		255		
`ListViewId`	List View ID	reference		18		
`SobjectType`	Custom Object Definition ID	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		

USERLISTVIEWCRITERION

Represents the criterion for a user's customized list view. The criterion consists of the filters or sort order a user added to a list view for the Salesforce Mobile app.

For more information, see UserListViewCriterion in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ColumnName`	Column Name	string		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	User List View Criteria Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Operation`	Operation	picklist		255		
`SortOrder`	Sort Order	int	9			
`SystemModstamp`	System Modstamp	datetime				
`UserListViewId`	User List View ID	reference		18		
`Value`	Value	string		85		

USERLOGIN

Represents the settings that affect a user's ability to log into an organization. To access this object, you need the `UserPermissions.ManageUsers` permission.

For more information, see UserLogin in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	User Login ID	id		18		
`IsFrozen`	Is Frozen	boolean				
`IsPasswordLocked`	Is Password Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`UserId`	User ID	reference		18		

USERPACKAGELICENSE

Represents a license for an installed managed package, assigned to a specific user.

For more information, see UserPackageLicense in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	User Package License ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`PackageLicenseId`	Package License ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	Assigned User ID	reference		18		

USERPERMISSIONACCESS

Represents the permissions accessibility for a current user.

For more information, see UserPermissionAccess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Id	UserPermissionAccess ID	id		18		
LastCacheUpdate	Last Cache Update	datetime				
PermissionsAECommunityAccess	Use Assessment Envelope objects via Experience Cloud sites	boolean				
PermissionsAICreateInsightObjects	Create AI Insight Objects	boolean				
PermissionsAIViewInsightObjects	View AI Insight Objects	boolean				
PermissionsAccessCMC	Access Experience Management	boolean				
PermissionsAccessContentBuilder	Access drag-and-drop content builder	boolean				
PermissionsAccessFinancialAccounts	Financial Accounts User	boolean				
PermissionsAccessToServiceProcess	Service Process User	boolean				
PermissionsAccountSwitcherUser	Account Switcher User	boolean				
PermissionsActionPlansUserAccess	Permission to access the Action Plans feature	boolean				
PermissionsActivateContract	Activate Contracts	boolean				
PermissionsActivateOrder	Activate Orders	boolean				
PermissionsActivitiesAccess	Access Activities	boolean				
PermissionsAddAnalyticsRemoteConnections	Add CRM Analytics Remote Connections	boolean				
PermissionsAddDirectMessageMembers	Add People to Direct Messages	boolean				
PermissionsAddWaveNotificationRecipients	Add Recipients to CRM Analytics Notifications	boolean				
PermissionsAdoptionAnalyticsUser	Access Adoption Analytics Templates and Apps	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsAllowAIAccelerator	View AI Accelerator Predictions.	boolean				
PermissionsAllowEmailIC	Email-Based Identity Verification Option	boolean				
PermissionsAllowLightningLogin	Lightning Login User	boolean				
PermissionsAllowViewEditConvertedLeads	View and Edit Converted Leads	boolean				
PermissionsApexRestServices	Apex REST Services	boolean				
PermissionsApiEnabled	API Enabled	boolean				
PermissionsApiUserOnly	Api Only User	boolean				
PermissionsAssessmentPlatformUser	Discovery Framework Platform User	boolean				
PermissionsAssignPermissionSets	Assign Permission Sets	boolean				
PermissionsAssignTopics	Assign Topics	boolean				
PermissionsAssociationEngineUserAccess	User license to access Record Association Builder in Financial Services Cloud.	boolean				
PermissionsAuthorApex	Author Apex	boolean				
PermissionsAutomaticActivityCapture	Use Einstein Activity Capture	boolean				
PermissionsAutonomousAnalyticsPrivacy	Manage Autonomous Insights Data Privacy	boolean				
PermissionsB2BMarketingAnalyticsUser	Create B2B Marketing Analytics Apps	boolean				
PermissionsBVCommunityAccess	Use objects in the Benefit Verification data model via Experience Cloud sites	boolean				
PermissionsBranchManagementUserAccess	User license to access Branch Management in Financial Services Cloud.	boolean				
PermissionsBulkApiHardDelete	Bulk API Hard Delete	boolean				
PermissionsBulkMacrosAllowed	Run Macros on Multiple Records	boolean				
PermissionsBypassMFAForUiLogins	Waive Multi-Factor Authentication for Exempt Users	boolean				
PermissionsCMSECEAuthoringAccess	Migrate Enablement Content	boolean				
PermissionsCampaignInfluence2	Campaign Influence	boolean				
PermissionsCanApproveFeedPost	Can Approve Feed Post and Comment	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsCanEditDataPrepRecipe	Edit Dataset Recipes	boolean				
PermissionsCanEditPrompts	Manage Prompts	boolean				
PermissionsCanInsertFeedSystemFields	Insert System Field Values for Chatter Feeds	boolean				
PermissionsCanManageMaps	Manage CRM Analytics Custom Maps	boolean				
PermissionsCanRunAnalysis	Can Run Einstein Discovery for Reports	boolean				
PermissionsCanUseNewDashboardBuilder	Drag-and-Drop Dashboard Builder	boolean				
PermissionsCanVerifyComment	Verify Answers to Chatter Questions	boolean				
PermissionsChangeDashboardColors	Change Dashboard Colors	boolean				
PermissionsChatterComposeUiCodesnippet	Allow Inclusion of Code Snippets from UI	boolean				
PermissionsChatterEditOwnPost	Edit My Own Posts	boolean				
PermissionsChatterEditOwnRecordPost	Edit Posts on Records I Own	boolean				
PermissionsChatterFileLink	Create Public Links	boolean				
PermissionsChatterInternalUser	Chatter Internal User	boolean				
PermissionsChatterInviteExternalUsers	Invite Customers To Chatter	boolean				
PermissionsChatterOwnGroups	Create and Own New Chatter Groups	boolean				
PermissionsClientSecretRotation	Allow consumer key and secret rotation	boolean				
PermissionsCloseConversations	Close Conversation Threads	boolean				
PermissionsConfigCompliantDataSharing	Configure Compliant Data Sharing	boolean				
PermissionsConfigCustomRecs	Configure Custom Recommendations	boolean				
PermissionsConfigureDataspaceScope	Configure Dataspace Scope	boolean				
PermissionsConnectOrgToEnvironmentHub	Connect Organization to Environment Hub	boolean				
PermissionsConsentApiUpdate	Update Consent Preferences Using REST API	boolean				
PermissionsContentAdministrator	Manage Salesforce CRM Content	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsContentHubUser	Files Connect Cloud	boolean				
PermissionsContentWorkspaces	Access Libraries	boolean				
PermissionsConvertLeads	Convert Leads	boolean				
PermissionsCreateAuditFields	Set Audit Fields upon Record Creation	boolean				
PermissionsCreateCustomizeDashboards	Create and Customize Dashboards	boolean				
PermissionsCreateCustomizeFilters	Create and Customize List Views	boolean				
PermissionsCreateCustomizeReports	Create and Customize Reports	boolean				
PermissionsCreateDashboardFolders	Create Dashboard Folders	boolean				
PermissionsCreateLtngTempFolder	Create Folders for Lightning Email Templates	boolean				
PermissionsCreateLtngTempInPub	Manage Public Lightning Email Templates	boolean				
PermissionsCreatePackaging	Create AppExchange Packages	boolean				
PermissionsCreateReportFolders	Create Report Folders	boolean				
PermissionsCreateReportInLightning	Report Builder (Lightning Experience)	boolean				
PermissionsCreateTopics	Create Topics	boolean				
PermissionsCreateUpdateSDDataset	Create and Update Einstein Discovery Datasets	boolean				
PermissionsCreateUpdateSDDStory	Create and Update Einstein Discovery Stories	boolean				
PermissionsCreateWorkBadgeDefinition	Create custom Badge Definitions	boolean				
PermissionsCreateWorkspaces	Create Libraries	boolean				
PermissionsCustomMobileAppsAccess	Access Custom Mobile Apps	boolean				
PermissionsCustomSidebarOnAllPages	Show Custom Sidebar On All Pages	boolean				
PermissionsCustomizeApplication	Customize Application	boolean				
PermissionsDataExport	Weekly Data Export	boolean				
PermissionsDataPipelinesAppConsumer	Permission to access Data Pipelines license	boolean				
PermissionsDelegatedPortalUserAdmin	Delegated External User Administrator	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsDelegatedTwoFactor	Manage Multi-Factor Authentication in User Interface	boolean				
PermissionsDeleteActivatedContract	Delete Activated Contracts	boolean				
PermissionsDeleteTopics	Delete Topics	boolean				
PermissionsDistributeFromPersWksp	Create Content Deliveries	boolean				
PermissionsDocGenDesigner	Enables Designers to create Document Templates.	boolean				
PermissionsDocGenRuntimeCCUser	Enables Customers and Partners to generate documents via communities.	boolean				
PermissionsDocGenRuntimeUser	Enables Business users to generate documents.	boolean				
PermissionsDocumentAutomationUserAccess	User license to access IntelligentDocumentAutomation in Financial Services Cloud.	boolean				
PermissionsDocumentChecklistUserAccess	User license to access the Document Checklist features.	boolean				
PermissionsEditActivatedOrders	Edit Activated Orders	boolean				
PermissionsEditBillingInfo	Manage Billing	boolean				
PermissionsEditBrandTemplates	Manage Letterheads	boolean				
PermissionsEditCaseComments	Edit Case Comments	boolean				
PermissionsEditEvent	Edit Events	boolean				
PermissionsEditHtmlTemplates	Edit HTML Templates	boolean				
PermissionsEditMyDashboards	Edit My Dashboards	boolean				
PermissionsEditMyReports	Edit My Reports	boolean				
PermissionsEditOppLineItemUnitPrice	Edit Opportunity Product Sales Price	boolean				
PermissionsEditPublicDocuments	Manage Public Documents	boolean				
PermissionsEditPublicFilters	Manage Public List Views	boolean				
PermissionsEditPublicTemplates	Manage Public Classic Email Templates	boolean				
PermissionsEditReadonlyFields	Edit Read Only Fields	boolean				
PermissionsEditTask	Edit Tasks	boolean				
PermissionsEditTopics	Edit Topics	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsEmailAdministration	Email Administration	boolean				
PermissionsEmailMass	Mass Email	boolean				
PermissionsEmailSingle	Send Email	boolean				
PermissionsEmailTemplateManagement	Manage Email Templates	boolean				
PermissionsEnableBCTransactionPolling	Enable blockchain transaction polling API	boolean				
PermissionsEnableCommunityAppLauncher	Show App Launcher in Experience Cloud Sites	boolean				
PermissionsEnableIPFSUpload	Allow blockchain data upload	boolean				
PermissionsEnableNotifications	Send Outbound Messages	boolean				
PermissionsExportReport	Export Reports	boolean				
PermissionsFHIRCmtyAccess	Use objects in the Clinical data model via Experience Cloud sites	boolean				
PermissionsFSCAlertFrameworkUserAccess	Access Record Alerts	boolean				
PermissionsFSCArcGraphCommunityUser	Access Actionable Relationship Center for partner users	boolean				
PermissionsFSCInsClaimMgtPlatformUser	Insurance Claim Management Platform User	boolean				
PermissionsFSCInsPolicyAdmPlatformUser	Insurance Policy Administration Platform User	boolean				
PermissionsFSCInsuranceCmpCmtyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsuranceCmpUserOnlyAccess	Access Insurance Lightning Components	boolean				
PermissionsFSCInsurancePlatformUser	Access Insurance Objects	boolean				
PermissionsFeedPinning	Pin Posts in Feeds	boolean				
PermissionsFinancialServices2UserAccess	Access Actionable Relationship Center	boolean				
PermissionsFlowUFLRequired	Require Flow User Feature License	boolean				
PermissionsForceTwoFactor	Multi-Factor Authentication for User Interface Logins	boolean				
PermissionsGetSmartDataDiscovery	View Einstein Discovery Recommendations	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsGetSmartDataDiscoveryExteral	View Einstein Discovery Recommendations Via Connect API	boolean				
PermissionsGiveRecognitionBadge	Give Recognition Badges in Experience Builder Sites	boolean				
PermissionsGovernNetworks	Manage Experiences	boolean				
PermissionsHasUnlimitedNBAExecutions	User Has Unlimited Next Best Action Strategy Executions	boolean				
PermissionsHcAdvancedTherapyUser	Manage Advanced Therapy Orchestration features	boolean				
PermissionsHcPnmSiteUser	Use objects in the Provider Network Management data model via Experience Cloud sites	boolean				
PermissionsHeadlessCMSAccess	Enable Salesforce CMS Integration	boolean				
PermissionsHealthCloudCmtyAccess	Provides access to Health Cloud data for Community users.	boolean				
PermissionsHealthCloudUtilizationMgtUser	Manage Health Cloud Utilization Management	boolean				
PermissionsHideReadByList	Hide the Seen By List	boolean				
PermissionsIdentityConnect	Use Identity Connect	boolean				
PermissionsIdentityEnabled	Use Identity Features	boolean				
PermissionsIdentityVerificationUserAccess	Permission to access Identity Verification	boolean				
PermissionsImportCustomObjects	Import Custom Objects	boolean				
PermissionsImportLeads	Import Leads	boolean				
PermissionsImportPersonal	Import Personal Contacts	boolean				
PermissionsInboundMigrationToolsUser	Deploy Change Sets	boolean				
PermissionsIndustryMilestonePlatformUser	Access Life Events or Business Milestones Component	boolean				
PermissionsInsightsAppAdmin	Manage CRM Analytics	boolean				
PermissionsInsightsAppDashboardEditor	Create and Edit CRM Analytics Dashboards	boolean				
PermissionsInsightsAppEltEditor	Edit CRM Analytics Dataflows	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsInsightsAppUploadUser	Upload External Data to CRM Analytics	boolean				
PermissionsInsightsAppUser	Use CRM Analytics	boolean				
PermissionsInsightsCreateApplication	Create CRM Analytics Apps	boolean				
PermissionsInstallPackaging	Download AppExchange Packages	boolean				
PermissionsInsuranceGroupBenefitsUser	Insurance Group Benefits User	boolean				
PermissionsInterestTaggingUserAccess	Access Interest Tags for Financial Services Cloud.	boolean				
PermissionsIsSsoEnabled	Is Single Sign-On Enabled	boolean				
PermissionsIsotopeAccess	Salesforce Anywhere on Mobile	boolean				
PermissionsIsotopeCToCUser	Salesforce Anywhere Integration Access	boolean				
PermissionsIsotopeLEX	Salesforce Anywhere in Lightning Experience	boolean				
PermissionsKycPlatformUser	Identity Verification and Screening User	boolean				
PermissionsMIEndMessagingSessionUserPerm	End Messaging Session	boolean				
PermissionsMIOutboundMessagingUserPerm	Agent Initiated Outbound Messaging	boolean				
PermissionsLearningManager	Manage Learning	boolean				
PermissionsLightningConsoleAllowedForUser	Lightning Console User	boolean				
PermissionsLightningExperienceUser	Lightning Experience User	boolean				
PermissionsListEmailSend	Allow sending of List Emails	boolean				
PermissionsLtngPromoReservedUserPerm	Remain in Salesforce Classic	boolean				
PermissionsManageAnalyticSnapshots	Manage Reporting Snapshots	boolean				
PermissionsManageAuthProviders	Manage Auth. Providers	boolean				
PermissionsManageBusinessHourHolidays	Manage Business Hours Holidays	boolean				
PermissionsManageC360AConnections	Connect Org to Customer Data Platform	boolean				
PermissionsManageCMS	Create CMS Workspaces and Channels	boolean				
PermissionsManageCallCenters	Manage Call Centers	boolean				
PermissionsManageCases	Manage Cases	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageCategories	Manage Categories	boolean				
PermissionsManageCertificates	Manage Certificates	boolean				
PermissionsManageChatterMessages	Manage Chatter Messages and Direct Messages	boolean				
PermissionsManageContentPermissions	Manage Content Permissions	boolean				
PermissionsManageContentProperties	Manage Content Properties	boolean				
PermissionsManageContentTypes	Manage record types and layouts for Files	boolean				
PermissionsManageCssUsers	Manage Customer Users	boolean				
PermissionsManageCustomPermissions	Manage Custom Permissions	boolean				
PermissionsManageCustomReportTypes	Manage Custom Report Types	boolean				
PermissionsManageCustomerExperienceAnalytics	Manage Customer Experience Analytics	boolean				
PermissionsManageDashboardsInPubFolders	Manage Dashboards in Public Folders	boolean				
PermissionsManageDataCategories	Manage Data Categories	boolean				
PermissionsManageDataIntegrations	Manage Data Integrations	boolean				
PermissionsManageDataProcessingEngine	Allow users to access the features of Data Processing Engine to transform data that's available in your Salesforce org.	boolean				
PermissionsManageDataspaceScope	Manage Dataspace Scope	boolean				
PermissionsManageDynamicDashboards	Manage Dynamic Dashboards	boolean				
PermissionsManageEmailClientConfig	Manage Email Client Configurations	boolean				
PermissionsManageEntitlements	Manage Entitlements	boolean				
PermissionsManageExchangeConfig	Manage Lightning Sync	boolean				
PermissionsManageExternalConnections	Allow user to modify Private Connections	boolean				
PermissionsManageHcProviderNtwMgmt	Manage Health Cloud Provider Network Management	boolean				
PermissionsManageHealthCheck	Manage Health Check	boolean				
PermissionsManageHealthCloud	Manage Health Cloud	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageHealthCloudFinancialData	Manage Health Cloud Financial Data	boolean				
PermissionsManageHubConnections	Connect Org to Customer 360 Data Manager	boolean				
PermissionsManageIndustriesVisit	Manage Industries Visit	boolean				
PermissionsManageInteraction	Manage Flow	boolean				
PermissionsManageInternalUsers	Manage Internal Users	boolean				
PermissionsManageIpAddresses	Manage IP Addresses	boolean				
PermissionsManageLeads	Manage Leads	boolean				
PermissionsManageLearningReporting	Manage Learning Reporting	boolean				
PermissionsManageLoginAccessPolicies	Manage Login Access Policies	boolean				
PermissionsManageLoyaltyAnalytics	Manage Loyalty Analytics	boolean				
PermissionsManageMobile	Manage Mobile Configurations	boolean				
PermissionsManageNetworks	Create and Set Up Experiences	boolean				
PermissionsManageOrchInstsAndWorkItems	Manage Orchestration Runs and Work Items	boolean				
PermissionsManagePartners	Manage External Users	boolean				
PermissionsManagePasswordPolicies	Manage Password Policies	boolean				
PermissionsManageProfilesPermissionsets	Manage Profiles and Permission Sets	boolean				
PermissionsManagePropositions	Manage Next Best Action Recommendations	boolean				
PermissionsManagePvtRptsAndDashbds	Manage All Private Reports and Dashboards	boolean				
PermissionsManageQuotas	Manage Quotas	boolean				
PermissionsManageRecommendationStrategies	Manage Next Best Action Strategies	boolean				
PermissionsManageReleaseUpdates	Manage Release Updates	boolean				
PermissionsManageRemoteAccess	Manage Connected Apps	boolean				
PermissionsManageReportsInPubFolders	Manage Reports in Public Folders	boolean				
PermissionsManageRoles	Manage Roles	boolean				
PermissionsManageSandboxes	Manage Sandboxes	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsManageSessionPermissionSets	Manage Session Permission Set Activations	boolean				
PermissionsManageSharing	Manage Sharing	boolean				
PermissionsManageSmartDataDiscovery	Manage Einstein Discovery	boolean				
PermissionsManageSmartDataDiscoveryModel	Can Deploy and Manage Einstein Discovery predictions	boolean				
PermissionsManageSolutions	Manage Published Solutions	boolean				
PermissionsManageSubscriptions	Manage CRM Analytics Subscriptions	boolean				
PermissionsManageSurveys	Manage Surveys	boolean				
PermissionsManageSynonyms	Manage Synonyms	boolean				
PermissionsManageTCRMforComms	Create and manage TCRM for Comms	boolean				
PermissionsManageTemplatedApp	Manage CRM Analytics Templated Apps	boolean				
PermissionsManageTranslation	Manage Translation	boolean				
PermissionsManageTrustMeasures	Manage Trust Measures	boolean				
PermissionsManageTwoFactor	Manage Multi-Factor Authentication in API	boolean				
PermissionsManageUnlistedGroups	Manage Unlisted Groups	boolean				
PermissionsManageUsers	Manage Users	boolean				
PermissionsMassInlineEdit	Mass Edits from Lists	boolean				
PermissionsMergeTopics	Merge Topics	boolean				
PermissionsMicrobatching	Use Micro-Batching to Create Records	boolean				
PermissionsModerateChatter	Moderate Chatter	boolean				
PermissionsModerateNetworkFeeds	Moderate Experience Cloud Site Feeds	boolean				
PermissionsModerateNetworkFiles	Moderate Files in Experience Cloud Sites	boolean				
PermissionsModerateNetworkMessages	Moderate Chatter Messages in Experience Cloud Sites	boolean				
PermissionsModerateNetworkUsers	Moderate Experience Cloud Site Users	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsModifyAllData	Modify All Data	boolean				
PermissionsModifyDataClassification	Modify Data Classification	boolean				
PermissionsModifyMetadata	Modify Metadata Through Metadata API Functions	boolean				
PermissionsMortgageUserAccess	User license to access Mortgage in Financial Services Cloud.	boolean				
PermissionsMultiStepSchedulingUser	Manage Multi-Step Scheduling features	boolean				
PermissionsNativeWebviewScrolling	Salesforce Mobile App: Native scrolling on webviews	boolean				
PermissionsNewReportBuilder	Report Builder	boolean				
PermissionsOmniStudioDesigner	Enables admin/developer to create new OS/DR/VIP instances.	boolean				
PermissionsOmniStudioRuntime	Enables business users to execute OmniScripts, DRs, Cards, etc, in employee facing apps.	boolean				
PermissionsOmniStudioRuntimeCC	Enables consumers and partners to execute OmniScripts, DRs, Cards through a Community or off platform.	boolean				
PermissionsOutboundMigrationToolsUser	Create and Upload Change Sets	boolean				
PermissionsOverrideForecasts	Override Forecasts	boolean				
PermissionsPackaging2	Create and Update Second-Generation Packages	boolean				
PermissionsPackaging2Delete	Delete Second-Generation Packages	boolean				
PermissionsPasswordNeverExpires	Password Never Expires	boolean				
PermissionsPortalSuperUser	Portal Super User	boolean				
PermissionsPreventClassicExperience	Hide Option to Switch to Salesforce Classic	boolean				
PermissionsPrivacyDataAccess	Allow user to access privacy data	boolean				
PermissionsProviderSearchUserAccess	Permission to access internal entities for provider search	boolean				
PermissionsPublishPackaging	Upload AppExchange Packages	boolean				
PermissionsQueryAllFiles	Query All Files	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsQuipMetricsAccess	Quip Metrics	boolean				
PermissionsQuipUserEngagementMetrics	Quip User Engagement Metrics	boolean				
PermissionsRecordVisibilityAPI	Enable RecordVisibility API	boolean				
PermissionsRemoveDirectMessageMembers	Remove People from Direct Messages	boolean				
PermissionsResetPasswords	Reset User Passwords and Unlock Users	boolean				
PermissionsRunFlow	Run Flows	boolean				
PermissionsRunReports	Run Reports	boolean				
PermissionsSDCommunityAccess	Use objects in the Social Determinants data model via Experience Cloud sites	boolean				
PermissionsSalesConsole	Sales Console	boolean				
PermissionsSandboxTestingInCommunityApp	Test Sandboxes in Mobile Publisher for Experience Cloud	boolean				
PermissionsScheduleJob	Schedule Dashboards	boolean				
PermissionsScheduleReports	Schedule Reports	boolean				
PermissionsSelectFilesFromSalesforce	Select Files from Salesforce	boolean				
PermissionsSendAnnouncementEmails	Send announcement emails	boolean				
PermissionsSendCustomNotifications	Send Custom Notifications	boolean				
PermissionsSendSitRequests	Send Stay-in-Touch Requests	boolean				
PermissionsServiceExcellencePlatformUser	Service Excellence Platform User	boolean				
PermissionsShareFilesWithNetworks	Share Files with People in Experience Cloud sites	boolean				
PermissionsShareSmartDataDiscoveryStory	Share Einstein Discovery Stories	boolean				
PermissionsShowCompanyNameAsUserBadge	Show Company Name as Site Role	boolean				
PermissionsSkipIdentityConfirmation	Skip Device Activation at Login	boolean				
PermissionsSlackCibUser	Financial Services Cloud for Slack User	boolean				
PermissionsSmartDataDiscoveryForCommunity	Smart Data Discovery for experience users	boolean				
PermissionsSolutionImport	Import Solutions	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsSonicConsumer	Use Data Pipelines Base	boolean				
PermissionsStoAutomaticActivityCapture	Use Einstein Activity Capture Standard	boolean				
PermissionsStoryOnDSWithPredicate	Ignore predicate when creating story from dataset	boolean				
PermissionsSubmitMacrosAllowed	Manage Macros Users Can't Undo	boolean				
PermissionsSubscribeDashboardRolesGrps	Subscribe to Dashboards: Send to Groups and Roles	boolean				
PermissionsSubscribeDashboardToOtherUsers	Subscribe to Dashboards: Add Recipients	boolean				
PermissionsSubscribeReportRolesGrps	Subscribe to Reports: Send to Groups and Roles	boolean				
PermissionsSubscribeReportToOtherUsers	Subscribe to Reports: Add Recipients	boolean				
PermissionsSubscribeReportsRunAsUser	Subscribe to Reports: Set Running User	boolean				
PermissionsSubscribeToLightningDashboards	Subscribe to Dashboards	boolean				
PermissionsSubscribeToLightningReports	Subscribe to Reports	boolean				
PermissionsTraceXdsQueries	Access Tracer for External Data Sources	boolean				
PermissionsTransactionalEmailSend	Send Non-Commercial Email	boolean				
PermissionsTransferAnyCase	Transfer Cases	boolean				
PermissionsTransferAnyEntity	Transfer Record	boolean				
PermissionsTransferAnyLead	Transfer Leads	boolean				
PermissionsTwoFactorApi	Multi-Factor Authentication for API Logins	boolean				
PermissionsUpdateWithInactiveOwner	Update Records with Inactive Owners	boolean				
PermissionsUseAssistantDialog	Instant Actionable Results	boolean				
PermissionsUseCompliantDataSharing	Use Compliant Data Sharing	boolean				
PermissionsUseCustomerExperienceAnalytics	Use Customer Experience Analytics	boolean				
PermissionsUseLoyaltyAnalytics	Use Loyalty Analytics	boolean				
PermissionsUseMySearch	Einstein Search	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsUseQuerySuggestions	Natural Language Search	boolean				
PermissionsUseSmartDataDiscovery	Use Einstein Discovery	boolean				
PermissionsUseSubscriptionEmails	Subscribe to CRM Analytics Assets	boolean				
PermissionsUseTCRMforComms	View TCRM for Comms	boolean				
PermissionsUseTeamReassignWizards	Use Team Reassignment Wizards	boolean				
PermissionsUseTemplatedApp	Use CRM Analytics Templated Apps	boolean				
PermissionsUseWebLink	Allow Access to Customized Actions	boolean				
PermissionsUtilMgtExperienceCloudUser	Provides access to Utilization Management features and objects from an Experience Cloud site.	boolean				
PermissionsViewAllActivities	View All Activities	boolean				
PermissionsViewAllCustomSettings	View All Custom Settings	boolean				
PermissionsViewAllData	View All Data	boolean				
PermissionsViewAllForecasts	View All Forecasts	boolean				
PermissionsViewAllForeignKeyNames	View All Lookup Record Names	boolean				
PermissionsViewAllProfiles	View All Profiles	boolean				
PermissionsViewAllUsers	View All Users	boolean				
PermissionsViewContent	View Content in Portals	boolean				
PermissionsViewCustomerSentiment	View Customer Insights	boolean				
PermissionsViewDataAssessment	Access to view Data Assessment	boolean				
PermissionsViewDataCategories	View Data Categories in Setup	boolean				
PermissionsViewDeveloperName	View DeveloperName	boolean				
PermissionsViewEncryptedData	View Encrypted Data	boolean				
PermissionsViewEventLogFiles	View Event Log Files	boolean				
PermissionsViewGlobalHeader	View Global Header	boolean				
PermissionsViewHealthCheck	View Health Check	boolean				
PermissionsViewHelpLink	View Help Link	boolean				
PermissionsViewMLModels	Allow users to view MLModels and related Entities	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PermissionsViewMyTeamsDashboards	View My Team's Dashboards	boolean				
PermissionsViewOnlyEmbeddedAppUser	Access to View-Only Licensed Templates and Apps	boolean				
PermissionsViewPrivateStaticResources	View Private Static Resources	boolean				
PermissionsViewPublicDashboards	View Dashboards in Public Folders	boolean				
PermissionsViewPublicReports	View Reports in Public Folders	boolean				
PermissionsViewRestrictionAndScopingRules	View Restriction and Scoping Rules	boolean				
PermissionsViewRoles	View Roles and Role Hierarchy	boolean				
PermissionsViewSetup	View Setup and Configuration	boolean				
PermissionsViewTrustMeasures	View Trust Measures	boolean				
PermissionsViewUserPII	View Concealed Field Data	boolean				
PermissionsWaveManagePrivateAssetsUser	Manage CRM Analytics Private Assets	boolean				
PermissionsWaveTabularDownload	Download CRM Analytics Data	boolean				
PermissionsWaveTrendReports	Trend Report Data in CRM Analytics	boolean				

USERPREFERENCE

Represents a functional preference for a specific user in your organization.

For more information, see UserPreference in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	User Preference ID	id		18		
`Preference`	Preference	picklist		40		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		
`Value`	Value	textarea		10000		

USERPROVACCOUNT

Represents information that links a Salesforce user account with an account in a third-party (target) system, such as Google, for users of connected apps with Salesforce user provisioning enabled.

For more information, see UserProvAccount in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConnectedAppId`	Connected App ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeletedDate`	Deleted Date	datetime				
`ExternalEmail`	External Email	string		150		
`ExternalFirstName`	External First Name	string		150		
`ExternalLastName`	External Last Name	string		150		
`ExternalUserId`	External User Id	string		150		
`ExternalUsername`	External Username	string		150		
`Id`	User Provisioning Account ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsKnownLink`	Manual Override	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LinkState`	Link State	picklist		255		
`Name`	Name	string		255		
`SalesforceUserId`	User ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

USERPROVACCOUNTSTAGING

Temporarily stores user account information while a user completes the User Provisioning Wizard. This information that is stored in the UserProvAccount object when you click the button to collect and analyze accounts on the target system.

For more information, see UserProvAccountStaging in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ConnectedAppId`	Connected App ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalEmail`	External Email	string		150		
`ExternalFirstName`	External First Name	string		150		
`ExternalLastName`	External Last Name	string		150		
`ExternalUserId`	External User Id	string		150		
`ExternalUsername`	External Username	string		150		
`Id`	User Provisioning Account Staging Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LinkState`	Link State	picklist		255		
`Name`	Name	string		255		
`SalesforceUserId`	User ID	reference		18		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				

USERPROVMOCKTARGET

Represents an entity for testing user data before committing the data to a third-party system for user provisioning.

For more information, see UserProvMockTarget in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalEmail`	External Email	string		150		
`ExternalFirstName`	External First Name	string		150		
`ExternalLastName`	External Last Name	string		150		
`ExternalUserId`	External User Id	string		150		
`ExternalUsername`	External Username	string		150		
`Id`	UserProvMockTarget ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Name	string		255		
`SystemModstamp`	System Modstamp	datetime				

USERPROVISIONINGCONFIG

Represents information for a flow to use during a user provisioning request process, such as the attributes for an update.

For more information, see UserProvisioningConfig in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApprovalRequired`	Approval Required	textarea		4000		
`ConnectedAppId`	Connected App ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DeveloperName`	Name	string		80		
`Enabled`	Enabled	boolean				
`EnabledOperations`	Enabled Operations	textarea		4000		
`Id`	UserProvisioningConfig ID	id		18		
`IsDeleted`	Deleted	boolean				
`Language`	Master Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReconDateTime`	Last Recon Date	datetime				
`MasterLabel`	Label	string		80		
`NamedCredentialId`	Named Credential ID	reference		18		
`NamespacePrefix`	Namespace Prefix	string		15		
`Notes`	Notes	textarea		65536		
`OnUpdateAttributes`	On Update Attributes	textarea		4000		
`ReconFilter`	Recon Filter	string		255		
`SystemModstamp`	System Modstamp	datetime				
`UserAccountMapping`	User Account Mapping	textarea		4000		

USERPROVISIONINGLOG

Represents messages generated during the process of provisioning users for third-party applications.

For more information, see UserProvisioningLog in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Details	Details	textarea		4000		
ExternalUserId	External User Id	string		150		
ExternalUsername	External Username	string		150		
Id	UserProvisioningLog ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
Status	Status	string		150		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
UserProvisioningRequestId	UserProvisioningRequest ID	reference		18		

USERPROVISIONINGREQUEST

Represents an individual provisioning request to create, update, or delete a single user account in a third-party service system (or another Salesforce organization).

For more information, see UserProvisioningRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppName	App Name	string		150		
ApprovalStatus	Approval Status	picklist		255		
ConnectedAppId	Connected App ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExternalUserId	External User Id	string		150		
Id	UserProvisioningRequest ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ManagerId	User ID	reference		18		
Name	Name	string		255		
Operation	Operation	picklist		255		
OwnerId	Owner ID	reference		18		
ParentId	UserProvisioningRequest ID	reference		18		
RetryCount	Retry Count	int	9			
SalesforceUserId	User ID	reference		18		
ScheduleDate	Scheduled Provisioning Time	datetime				
State	State	picklist		255		
SystemModstamp	System Modstamp	datetime				
UserProvAccountId	User Provisioning Account ID	reference		18		
UserProvConfigId	UserProvisioningConfig ID	reference		18		

USERPROVISIONINGREQUESTSHARE

Sharing for UserProvisioningRequest.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

USERRECORDACCESS

Represents a user's access to a set of records.

For more information, see UserRecordAccess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`HasAllAccess`	Has All Access	boolean				
`HasDeleteAccess`	Has Delete Access	boolean				
`HasEditAccess`	Has Edit Access	boolean				
`HasReadAccess`	Has Read Access	boolean				
`HasTransferAccess`	Has Transfer Access	boolean				
`Id`	User Record Access ID	id		18		
`MaxAccessLevel`	Maximum Access Level	picklist		40		
`RecordId`	Record ID	picklist		40		
`UserId`	User ID	reference		18		

USERROLE

Represents a user role in your organization.

For more information, see UserRole in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CaseAccessForAccountOwner	Case Access Level for Account Owner	picklist		40		
ContactAccessForAccountOwner	Contact Access Level for Account Owner	picklist		40		
DeveloperName	Developer Name	string		80		
ForecastUserId	User ID	reference		18		
Id	Role ID	id		18		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MayForecastManagerShare	May Forecast Manager Share	boolean				
Name	Name	string		80		
OpportunityAccessForAccountOwner	Opportunity Access Level for Account Owner	picklist		40		
ParentRoleId	Parent Role ID	reference		18		
PortalAccountId	Account ID	reference		18		
PortalAccountOwnerId	User ID	reference		18		
PortalRole	Portal Role	picklist		40		
PortalType	Portal Type	picklist		40		
RollupDescription	Description	string		80		
SystemModstamp	System Modstamp	datetime				

USERSERVICEPRESENCE

Represents a presence user's real-time presence status.

For more information, see UserServicePresence in the *Object Reference for the Salesforce Platform*, and *SOAP API Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AtCapacityDuration	At Capacity Duration	int	9			
AverageCapacity	Average Capacity	double			10	2
ConfiguredCapacity	Configured Capacity	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	User Presence ID	id		18		
IdleDuration	Idle Duration	int	9			
IsAway	Is Away	boolean				
IsCurrentState	Is Current State	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ServicePresenceStatusId	Service Presence Status ID	reference		18		
StatusDuration	Status Duration	int	9			
StatusEndDate	Status End Date	datetime				
StatusStartDate	Status Start Date	datetime				
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		

USERSERVICEPRESENCESHARE

Sharing for UserServicePresence.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

USERSHARE

Represents a sharing entry on a user record.

For more information, see UserShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Id`	User Share ID	id		18		
`IsActive`	Active	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`RowCause`	Row Cause	picklist		40		
`UserAccessLevel`	User Access Level	picklist		40		
`UserId`	User ID	reference		18		
`UserOrGroupId`	User/Group ID	reference		18		

USERTEAMMEMBER

Represents a single User on the default opportunity team of another User.

For more information, see UserTeamMember in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	User Team Member ID	id		18		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OpportunityAccessLevel`	Opportunity Access	picklist		40		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`TeamMemberRole`	Team Role	picklist		255		
`UserId`	User ID	reference		18		

VEHICLEASSETCRBNFTPRNT

Represents the total carbon emissions from vehicles. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e).

For more information, see VehicleAssetCrbnFtprnt in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
AuditApprovalStatus	Audit Approval Status	picklist		40		
CarbonInventoryRecordCount	Carbon Inventory Record Count	double			16	0
Ch4EmissionsInKg	CH4 Emissions (kg)	double			16	6
Co2EmissionsInKg	CO2 Emissions (kg)	double			16	6
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
EndDate	End Date	date				
FootprintStage	Footprint Stage	picklist		40		
Id	Vehicle Asset Carbon Footprint ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionsInKg	N2O Emissions (kg)	double			16	6
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ReportingDate	Reporting Date	date				
ReportingYear	Reporting Year	picklist		255		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
StartDate	Start Date	date				
SuplScope1Emissions	Supplemental Scope 1 Emissions (tCO2e)	double			18	4
SuplScope2LocationBasedEmssn	Supplemental Scope 2 Location-Based Emissions	double			18	5
SuplScope2MarketBasedEmssn	Supplemental Scope 2 Market-Based Emissions	double			18	5
SuplScope3DnstrmEmissions	Supplemental Scope 3 Downstream Emissions	double			18	5
SuplScope3UpstrmEmissions	Supplemental Scope 3 Upstream Emissions	double			18	5
SystemModstamp	System Modstamp	datetime				
TotFuelCnsmpInGallons	Total Fuel Consumption (Gallons)	double			18	2
TotFuelCnsmpInLiters	Total Fuel Consumption (Liters)	double			18	2
TotScope1EmissionsInTco2e	Total Scope 1 Emissions (tCO2e)	double			18	2
TotScope2LocBasedEmissions	Total Scope 2 Location-Based Emissions	double			18	2
TotScope2MktBasedEmissions	Total Scope 2 Market-based Emissions	double			18	2
TotalScp3DnstrmEmissions	Total Scope 3 Downstream Emissions (tCO2e)	double			18	2
TotalScp3UpstrmEmissions	Total Scope 3 Upstream Emissions (tCO2e)	double			18	2
VehicleAssetEmssnSrcId	Vehicle Asset Emissions Source ID	reference		18		
VehicleType	Vehicle Type	picklist		40		

VEHICLEASSETCRBNFTPRNTFEED

Feed tracking for VehicleAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VEHICLEASSETCRBNFTPRNTHISTORY

History for tracked fields of VehicleAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Vehicle Asset Carbon Footprint History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`VehicleAssetCrbnFtprntId`	Vehicle Asset Carbon Footprint ID	reference		18		

VEHICLEASSETCRBNFTPRNTSHARE

Sharing for VehicleAssetCrbnFtprnt.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VEHICLEASSETEMSSNSRC

Represents assets that are mobile in nature, use energy that can be recorded, and are the source of greenhouse gas emissions.

For more information, see VehicleAssetEmssnSrc in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountNameId	Account ID	reference		18		
BusinessRegion	Business Region	picklist		40		
City	City	string		255		
Country	Country	picklist		255		
CrbnEmssnScopeAlloc	Carbon Emissions Scope Allocation	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Vehicle Asset Emissions Source ID	id		18		
IsCompanyOwnedAsset	Company-Owned Asset	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LeaseExpirationDate	Lease Expiration Date	date				
LeaseIdentifier	Lease ID	string		100		
Name	Name	string		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
ParentEmissionSourceId	Vehicle Asset Emissions Source ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PostalCode	Postal Code	string		20		
State	State	string		128		
StreetAddress	Street Address	string		255		
StreetAddress2	Street Address 2	string		255		
SystemModstamp	System Modstamp	datetime				
VehicleIdentifier	Vehicle ID	string		255		
VehicleType	Vehicle Type	picklist		40		

VEHICLEASSETEMSSNSRCFEED

Feed tracking for VehicleAssetEmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VEHICLEASSETEMSSNSRCHISTORY

History for tracked fields of VehicleAssetEmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Vehicle Asset Emissions Source History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
VehicleAssetEmssnSrcId	Vehicle Asset Emissions Source ID	reference		18		

VEHICLEASSETEMSSNSRCSHARE

Sharing for VehicleAssetEmssnSrc.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VEHICLEASSETENRGYUSE

Represents the fuel consumption related to vehicles.

For more information, see VehicleAssetEnrgyUse in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AircraftFuelEconomy	Aircraft Fuel Economy	double			18	2
AircraftFuelEconomyInGph	Aircraft Fuel Economy (gal/h)	double			18	2
AircraftFuelEconomyUnit	Aircraft Fuel Economy Unit	picklist		255		
AircraftType	Aircraft Type	string		100		
CarbonFootprintReportDate	Carbon Footprint Report Date	date				
Ch4EmissionsInKg	CH4 Emissions (kg)	double			16	6
Co2EmissionsInKg	CO2 Emissions (kg)	double			16	6
CostCenter	Cost Center	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Distance	Distance	double			18	2
DistanceUnit	Distance Unit	picklist		255		
EndDate	End Date	date				
FlightDate	Flight Date	date				
FlightDurationInHours	Flight Duration (Hours)	double			16	1
FuelConsumption	Fuel Consumption	double			18	2
FuelConsumptionUnit	Fuel Consumption Unit	picklist		255		
FuelEfficiency	Fuel Efficiency	double			18	2
FuelEfficiencyInMpg	Fuel Efficiency (mpg)	double			18	2
FuelEfficiencyUnit	Fuel Efficiency Unit	picklist		255		
FuelType	Fuel Type	picklist		255		
Id	Vehicle Asset Energy Use ID	id		18		
IsCompanyOwnedAsset	Company-Owned Asset	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
N2oEmissionsInKg	N2O Emissions (kg)	double			16	6
Name	Name	string		255		
OtherEmssnFctrId	Other Emissions Factor Set ID	reference		18		
OwnerId	Owner ID	reference		18		
Scope1EmissionsInTco2e	Scope 1 Emissions (tCO2e)	double			18	4
Scope2LocBasedEmssnInTco2e	Scope 2 Location-Based Emissions (tCO2e)	double			18	4
Scope2MktBasedEmssnInTco2e	Scope 2 Market-Based Emissions (tCO2e)	double			18	4
Scope3DnstrmEmissionsInTco2e	Scope 3 Downstream Emissions (tCO2e)	double			18	5
Scope3UpstrmEmissionsInTco2e	Scope 3 Upstream Emissions (tCO2e)	double			18	5
StartDate	Start Date	date				
SuplScope1Emissions	Supplemental Scope 1 Emissions	double			18	5
SuplScope2LocationBasedEmssn	Supplemental Scope 2 Location-Based Emissions	double			18	5
SuplScope2MarketBasedEmssn	Supplemental Scope 2 Market-Based Emissions	double			18	5
SuplScope3DnstrmEmissions	Supplemental Scope 3 Downstream Emissions	double			18	5
SuplScope3UpstrmEmissions	Supplemental Scope 3 Upstream Emissions	double			18	5
SupplierId	Supplier ID	reference		18		
SystemModstamp	System Modstamp	datetime				
TotalFuelConsumptionInGal	Total Fuel Consumption (US Gallons)	double			18	2
TotalFuelConsumptionInLiter	Total Fuel Consumption (Liters)	double			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
VehicleAssetCrbnFtprntId	Vehicle Asset Carbon Footprint ID	reference		18		
VehicleAssetEmssnSrcId	Vehicle Asset Emissions Source ID	reference		18		

VEHICLEASSETENRGYUSEFEED

Feed tracking for VehicleAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VEHICLEASSETENRGYUSEHISTORY

History for tracked fields of VehicleAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Vehicle Asset Energy Use History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`VehicleAssetEnrgyUseId`	Vehicle Asset Energy Use ID	reference		18		

VEHICLEASSETENRGYUSESHARE

Sharing for VehicleAssetEnrgyUse.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VENDORCALLCENTERSTATUSMAP

Stores a mapping between a call center vendor agent status and a Salesforce presence status for an associated call center.

For more information, see VendorCallCenterStatusMap in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CallCenterId`	Call Center ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`ExternalStatus`	External Presence Status	string		255		
`Id`	Vendor Call Center Status Mapping ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ServicePresenceStatusId`	Service Presence Status ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

VERIFICATIONHISTORY

Represents the past six months of your org users' attempts to verify their identity.

For more information, see VerificationHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Activity`	User Activity	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EventGroup`	Verification Attempt	int	9			
`Id`	Identity Verification ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LoginGeoId`	Login Geo Data ID	reference		18		
`LoginHistoryId`	Login History ID	reference		18		
`Policy`	Triggered By	picklist		255		
`Remarks`	Activity Message	string		255		
`ResourceId`	Connected App ID	reference		18		
`SourceIp`	Source IP	string		200		
`Status`	Status	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`UserId`	User ID	reference		18		
`VerificationMethod`	Method	picklist		255		
`VerificationTime`	Time	datetime				

VIOLATIONENFORCEMENTACTION

For more information, see ViolationEnforcementAction in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ComplianceDueDate	Compliance Due Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DateCreated	Date Created	datetime				
DateResolved	Date Resolved	datetime				
DaysOpen	Days Open	int	9			
Description	Description	string		255		
Id	Violation Enforcement Action ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Violation Enforcement Action Name	string		255		
Priority	Priority	picklist		40		
ResolutionNotes	Resolution Notes	textarea		1000		
Status	Status	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		
ViolationId	Regulatory Code Violation ID	reference		18		

VIOLATIONENFORCEMENTACTIONFEED

Feed tracking for ViolationEnforcementAction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VIOLATIONENFORCEMENTACTIONHISTORY

History for tracked fields of ViolationEnforcementAction.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Violation Enforcement Action History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ViolationEnforcementActionId	Violation Enforcement Action ID	reference		18		

VIOLATIONTYPE

For more information, see ViolationType in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Violation Type ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Severity	Severity	picklist		40		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		40		

VIOLATIONTYPEASSESSMENTIND

For more information, see ViolationTypeAssessmentInd in the *Emergency Response Management Object Reference*, and *Public Sector Solutions Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssessmentIndDefinitionId	Assessment Indicator Definition ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Violation Type Assessment Indicator ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Violation Type Assessment Indicator ID	string		255		
SystemModstamp	System Modstamp	datetime				
ViolationTypeId	Violation Type ID	reference		18		

VIOLATIONTYPEASSESSMENTINDFEED

Feed tracking for ViolationTypeAssessmentInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VIOLATIONTYPEASSESSMENTINDHISTORY

History for tracked fields of ViolationTypeAssessmentInd.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Violation Type Assessment Indicator History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
ViolationTypeAssessmentIndId	Violation Type Assessment Indicator ID	reference		18		

VIOLATIONTYPEFEED

Feed tracking for ViolationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

VIOLATIONTYPEHISTORY

History for tracked fields of ViolationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Violation Type History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`ViolationTypeId`	Violation Type ID	reference		18		

VIOLATIONTYPESHARE

Sharing for ViolationType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VISIT

Represents a visit to inspect, assess compliance, or assess an applicant's ability to get a license or permit or inspect.

For more information, see Visit in the *Automotive Cloud Developer Guide*, *Consumer Goods Cloud Developer Guide*, *Emergency Response Management for Public Health Developer Guide*, *Emergency Response Management for Public Sector Admin Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`ActualVisitEndTime`	Actual End Time	datetime				
`ActualVisitStartTime`	Actual Start Time	datetime				
`AddressId`	Address ID	reference		18		
`ContactId`	Contact ID	reference		18		
`ContextId`	Context ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Visit ID	id		18		
`InstructionDescription`	Special Instructions	textarea		1000		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`LocationId`	Location ID	reference		18		
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`PlaceId`	Place ID	reference		18		
`PlannedVisitEndTime`	Planned End Time	datetime				
`PlannedVisitStartTime`	Planned Start Time	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Status	Status	picklist		255		
StatusRemarks	Status Remarks	textarea		1000		
SystemModstamp	System Modstamp	datetime				
UserId	User ID	reference		18		
VisitPriority	Visit Priority	picklist		40		
VisitTypeId	Visit Type ID	reference		18		
VisitorId	Visitor ID	reference		18		

VISITFEED

Feed tracking for Visit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

VISITHISTORY

History for tracked fields of Visit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Visit History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
VisitId	Visit ID	reference		18		

VISITSHARE

Sharing for Visit.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VISITEDPARTY

Represents the contact person at the account that's being visited.

For more information, see VisitedParty in the *Consumer Goods Cloud Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Visited Party ID	id		18		
IsDeleted	Deleted	boolean				
IsPrimaryContact	Is Primary Contact	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
SystemModstamp	System Modstamp	datetime				
VisitId	Visit ID	reference		18		

VISITEDPARTYFEED

This object represents the posts and feed-tracked changes of the `VisitedParty` object.

For more information, see VisitedPartyFeed in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BestCommentId`	Best Comment ID	reference		18		
`Body`	Body	textarea		10000		
`CommentCount`	Comment Count	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Feed Item ID	id		18		
`InsertedById`	InsertedBy ID	reference		18		
`IsDeleted`	Deleted	boolean				
`IsRichText`	Is Rich Text	boolean				
`LastModifiedDate`	Last Modified Date	datetime				
`LikeCount`	Like Count	int	9			
`LinkUrl`	Link Url	url		1000		
`NetworkScope`	Network Scope	picklist		40		
`ParentId`	Parent ID	reference		18		
`RelatedRecordId`	Related Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		
`Type`	Feed Item Type	picklist		40		
`Visibility`	Visibility	picklist		40		

VISITEDPARTYHISTORY

History for tracked fields of VisitedParty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Visited Party History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`VisitedPartyId`	Visited Party ID	reference		18		

VISITOR

Represents the inspectors performing inspection visits.

For more information, see Visitor in the *Consumer Goods Cloud Developer Guide*, *Public Sector Solutions Developer Guide*, and *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AssigneeId`	Assignee ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Visitor ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsPrimaryResource`	Primary Resource	boolean				
`IsRequired`	Required	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Visitor	string		255		
`SystemModstamp`	System Modstamp	datetime				
`VisitId`	Visit ID	reference		18		

VISITORFEED

This object represents the posts and feed-tracked changes of the `Visitor` object.

For more information, see VisitorFeed in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`BestCommentId`	Best Comment ID	reference		18		
`Body`	Body	textarea		10000		
`CommentCount`	Comment Count	int	9			
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Feed Item ID	id		18		
`InsertedById`	InsertedBy ID	reference		18		
`IsDeleted`	Deleted	boolean				
`IsRichText`	Is Rich Text	boolean				
`LastModifiedDate`	Last Modified Date	datetime				
`LikeCount`	Like Count	int	9			
`LinkUrl`	Link Url	url		1000		
`NetworkScope`	Network Scope	picklist		40		
`ParentId`	Parent ID	reference		18		
`RelatedRecordId`	Related Record ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Title`	Title	string		255		
`Type`	Feed Item Type	picklist		40		
`Visibility`	Visibility	picklist		40		

VISITORHISTORY

History for tracked fields of Visitor.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Visitor History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
VisitorId	Visitor ID	reference		18		

VISUALFORCEACCESSMETRICS

Represents summary statistics for Visualforce pages.

For more information, see VisualforceAccessMetrics in the *Object Reference for the Salesforce Platform*, and *Visualforce Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApexPageId`	Page ID	reference		18		
`DailyPageViewCount`	Daily Page View Count	int	9			
`Id`	Visualforce Access Metric Id	id		18		
`LogDate`	Log Date	date				
`MetricsDate`	Metrics Date	date				
`ProfileId`	Profile ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

VOICECALL

Represents a call in Service Cloud Voice or Sales Dialer.

For more information, see VoiceCall in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActivityId`	Activity ID	reference		18		
`CallAcceptDateTime`	Call Accepted	datetime				
`CallCenterId`	Call Center ID	reference		18		
`CallConnectDateTime`	Call Connected	datetime				
`CallDisposition`	Call Status	string		255		
`CallDurationInSeconds`	Call Duration	int	8			
`CallEndDateTime`	Call Ended	datetime				
`CallOrigin`	Call Origin	picklist		40		
`CallQueuedDateTime`	Call Entered Queue	datetime				
`CallResolution`	Call Resolution	picklist		255		
`CallStartDateTime`	Call Started	datetime				
`CallType`	Call Type	picklist		40		
`CallerId`	Caller ID	reference		18		
`CallerIdType`	Caller Id	picklist		40		
`ConferenceKey`	Conference Key	string		255		
`ConversationId`	Conversation ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`CurrencyCode`	Currency Code	picklist		3		
`CustomerHoldDuration`	Customer Hold Duration	int	9			
`Description`	Description	textarea		32000		
`FromPhoneNumber`	Caller Number	phone		40		
`Id`	Voice Call ID	id		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsDeleted	Deleted	boolean				
IsRecorded	Is Call Recorded	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LongestHoldDuration	Longest Hold Duration	int	9			
MediaProviderId	CallCoachingMediaProvider ID	reference		18		
NextCallId	Next Call ID	reference		18		
NumberOfHolds	Number Of Holds	int	9			
OwnerId	Owner ID	reference		18		
PreviousCallId	Previous Call ID	reference		18		
Price	Price	double			18	2
QualityScore	Mean Opinion Score	double			18	2
QueueName	Queue Name	string		255		
RecipientId	Recipient ID	reference		18		
RelatedRecordId	RelatedRecord ID	reference		18		
SourceType	Source Type	picklist		40		
SystemModstamp	System Modstamp	datetime				
ToPhoneNumber	Recipient Number	phone		40		
UserId	User ID	reference		18		
VendorCallKey	Vendor Call Key	string		255		
VendorParentCallKey	Vendor Parent Call Key	string		255		
VendorType	Vendor Type	picklist		40		

VOICECALLFEED

Feed tracking for VoiceCall.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

VOICECALLRECORDING

Represents a call recording in Service Cloud Voice and Sales Dialer.

For more information, see VoiceCallRecording in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DurationInSeconds`	Duration in Seconds	int	8			
`Id`	VoiceCallRecording ID	id		18		
`IsConsented`	Is Consented	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MediaContentId`	ContentDocument ID	reference		18		
`Name`	VoiceCallRecording Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`VoiceCallId`	Voice Call ID	reference		18		

VOICECALLSHARE

Sharing for VoiceCall.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VOICEVENDORINFO

Represents information about the Service Cloud Voice or Sales Dialer provider's vendor.

For more information, see VoiceVendorInfo in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CorporateNumber`	Corporate Number	phone		40		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Voice Vendor Info ID	id		18		
`IsActive`	Is Active	boolean				
`IsCallerIdTwilioVerified`	Is the caller ID phone number for the org verified with Twilio and using STIR/SHAKEN	boolean				
`IsDeleted`	Deleted	boolean				
`IsStirShakenEnrolled`	Is the org using STIR/SHAKEN protocols from Twilio	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LocalPresenceDefaultNumber`	LocalPresence Default Number	phone		40		
`SystemModstamp`	System Modstamp	datetime				
`TenantConfigVersion`	Tenant Configuration Version	string		10		
`VendorAccountKey`	Vendor Account Key	string		255		
`VendorProviderName`	Vendor Provider Name	string		255		
`VendorType`	Vendor Type	picklist		255		

VOTE

Represents a vote that a user has made on an Idea or a Reply.

For more information, see Vote in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Vote ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`Type`	Vote Type	picklist		40		

VOUCHER

Represents details about a voucher that's issued to a loyalty program member.

For more information, see Voucher in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BenefitId	Benefit ID	reference		18		
ContactId	Contact ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DiscountPercent	Discount Percentage	int	9			
EffectiveDate	Effective Date	date				
ExpirationDate	Expiration Date	date				
FaceValue	Face Value	currency			18	2
Id	Voucher ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LoyaltyProgramMemberId	Loyalty Program Member ID	reference		18		
Name	Voucher Number	string		255		
OwnerId	Owner ID	reference		18		
PromotionId	Promotion ID	reference		18		
Reason	Reason	string		255		
RedeemedValue	Redeemed Value	currency			18	2
RemainingValue	Remaining Value	currency			18	2
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`TransactionJournalId`	Transaction Journal ID	reference		18		
`UseDate`	Use Date	date				
`VoucherCode`	Voucher Code	string		255		
`VoucherDefinitionId`	Voucher Definition ID	reference		18		

VOUCHERDEFINITION

Represents details about a voucher definition that's associated with a loyalty program.

For more information, see VoucherDefinition in the *Loyalty Management Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AutogeneratedCodeLength	Autogenerated Code Length	int	9			
CodePrefix	Code Prefix	string		64		
CodeSuffix	Code Suffix	string		64		
CostPerVoucher	Cost Per Voucher	currency			18	2
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		1000		
DiscountPercent	Discount Percentage	int	9			
EffectiveDate	Effective Date	date				
ExpirationDate	Expiration Date	date				
ExpirationPeriod	Expiration Period	int	9			
ExpirationPeriodUnit	Expiration Period Unit	picklist		255		
ExpirationType	Expiration Type	picklist		255		
FaceValue	Face Value	currency			18	2
Id	Voucher Definition ID	id		18		
ImageUrl	Image URL	url		1000		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsPartialRedeemable	Partial Redeemable	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LoyaltyProgramId	Loyalty Program ID	reference		18		
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
PartnerAccountId	Account ID	reference		18		
ProductCategoryDerivedFieldId	Category ID	reference		18		
ProductDerivedFieldId	Product ID	reference		18		
ProductId	Product ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

VOUCHERDEFINITIONHISTORY

History for tracked fields of VoucherDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Voucher Definition History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`VoucherDefinitionId`	Voucher Definition ID	reference		18		

VOUCHERDEFINITIONSHARE

Sharing for VoucherDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

VOUCHERHISTORY

History for tracked fields of Voucher.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Voucher History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
VoucherId	Voucher ID	reference		18		

VOUCHERSHARE

Sharing for Voucher.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WARRANTYTERM

Represents warranty terms defining the labor, parts, and expenses covered, along with any exchange options, provided to rectify issues with products.

For more information, see WarrantyTerm in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Code	Code	string		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EffectiveStartDate	Effective Start Date	picklist		40		
ExchangeType	Exchange Type	picklist		40		
Exclusions	Exclusions	textarea		32000		
ExpensesCovered	Expenses Covered	percent			5	2
ExpensesCoveredDuration	Expenses Covered Duration	int	4			
ExpensesCoveredUnitOfTime	Expenses Covered Unit of Time	picklist		255		
Id	Warranty Term ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
IsTransferable	Transferable	boolean				
LaborCovered	Labor Covered	percent			5	2
LaborCoveredDuration	Labor Covered Duration	int	4			
LaborCoveredUnitOfTime	Labor Covered Unit of Time	picklist		255		
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
OwnerId	Owner ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
PartsCovered	Parts Covered	percent			5	2
PartsCoveredDuration	Parts Covered Duration	int	4			
PartsCoveredUnitOfTime	Parts Covered Unit of Time	picklist		255		
Pricebook2Id	Price Book ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WarrantyDuration	Warranty Duration	int	4			
WarrantyTermName	Warranty Term Name	string		255		
WarrantyType	Warranty Type	picklist		40		
WarrantyUnitOfTime	Warranty Unit Of Time	picklist		255		

WARRANTYTERMFEED

Feed tracking for WarrantyTerm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WARRANTYTERMHISTORY

History for tracked fields of WarrantyTerm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Warranty Term History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WarrantyTermId`	Warranty Term ID	reference		18		

WARRANTYTERMSHARE

Sharing for WarrantyTerm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WASTEFOOTPRINT

Represents the volume of aggregated waste and carbon emissions from waste generated either as part of operations or during the end-of- life of a product.

For more information, see WasteFootprint in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AnnualEmssnInventoryId	Annual Emissions Inventory ID	reference		18		
AuditApprovalStatus	Audit Approval Status	picklist		40		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
EndDate	End Date	date				
FootprintStage	Footprint Stage	picklist		40		
GeneratedWasteDetailRecordCnt	Generated Waste Detail Record Count	double			16	0
Id	Waste Footprint ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ReportingDate	Reporting Date	date				
ReportingYear	Reporting Year	picklist		255		
Scope1EmissionsInTco2e	Scope 1 Emissions (tCO2e)	double			18	2
Scope3EmssnSrcId	Scope 3 Emissions Source ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Scp3DnstrmEndLifeSoldPrdct	Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e)	double			18	2
Scp3UpstrmWstGenInOper	Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e)	double			18	2
StartDate	Start Date	date				
StnryAssetEnvrSrcId	Stationary Asset Environmental Source ID	reference		18		
SuplScope1EmissionsInTco2e	Supplemental Scope 1 Emissions (tCO2e)	double			18	5
SuplScp3DnstrmEndLifeSoldPrdct	Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e)	double			18	5
SuplScp3UpstrmWstGenInOper	Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e)	double			18	5
SystemModstamp	System Modstamp	datetime				
TotalWasteQuantityinTonnes	Total Waste Quantity in Tonnes	double			18	5

WASTEFOOTPRINTFEED

Feed tracking for WasteFootprint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

WASTEFOOTPRINTHISTORY

History for tracked fields of WasteFootprint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Waste Footprint History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WasteFootprintId	Waste Footprint ID	reference		18		

WASTEFOOTPRINTITEM

Represents the volume by waste type and disposal type of aggregated waste generated either as part of operations or during the end-of- life of a product.

For more information, see WasteFootprintItem in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DisposalType	Disposal Type	picklist		40		
DisposedWasteQuantityPct	Disposed Waste Quantity Percentage	percent			18	2
DisposedWasteQuantityinTonnes	Disposed Waste Quantity in Tonnes	double			18	5
Id	Waste Footprint Item ID	id		18		
IsDeleted	Deleted	boolean				
IsRecordLocked	Record Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentWasteFootprintId	Waste Footprint ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WasteType	Waste Type	picklist		40		

WASTEFOOTPRINTITEMFEED

Feed tracking for WasteFootprintItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

WASTEFOOTPRINTITEMHISTORY

History for tracked fields of WasteFootprintItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Waste Footprint Item History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WasteFootprintItemId	Waste Footprint Item ID	reference		18		

WASTEFOOTPRINTSHARE

Sharing for WasteFootprint.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WAVEAUTOINSTALLREQUEST

Provides access the concrete object that represents a CRM Analytics auto install request. The auto install request tracks the progress of CRM Analytics applications created from CRM Analytics templates by the automated process user.

For more information, see WaveAutoInstallRequest in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`Configuration`	Configuration	textarea		100000		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FailedReason`	Failed Reason	picklist		255		
`FolderId`	Folder ID	reference		18		
`Id`	Request Id	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Name`	Request Name	string		255		
`RequestLog`	Request Log	textarea		100000		
`RequestStatus`	Request Status	picklist		255		
`RequestType`	Request Type	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`TemplateApiName`	Wave Template Api Name	string		255		
`TemplateVersion`	Wave Template Version	string		50		

WEBCART

Represents an online shopping cart in a store built with B2B Commerce on Lightning, with total amounts for products, shipping and handling, and taxes.

For more information, see WebCart in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	Account ID	reference		18		
BillingAddress	Billing Address	address				
BillingCity	Billing City	string		40		
BillingCountry	Billing Country	string		80		
BillingGeocodeAccuracy	Billing Geocode Accuracy	picklist		255		
BillingLatitude	Billing Latitude	double			18	15
BillingLongitude	Billing Longitude	double			18	15
BillingPostalCode	Billing Zip	string		20		
BillingState	Billing State	string		80		
BillingStreet	Billing Street	textarea		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
GrandTotalAmount	Grand Total Amount in Cart	currency			18	2
GuestEmailAddress	Email address for Guest User	email		80		
GuestFirstName	First Name for Guest User	string		255		
GuestLastName	Last Name for Guest User	string		255		
GuestPhoneNumber	Phone Number for Guest User	phone		40		
GuestSecondName	Second Name for Guest User	string		255		
Id	Cart ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
IsRepricingNeeded	Is Repricing Needed	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
IsSecondary	Is Cart Secondary	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastRepricingDate	Last Repricing Date	datetime				
MayEdit	May Edit	boolean				
Name	Cart Name	string		255		
OwnerId	Owner ID	reference		18		
PoNumber	Purchase Order Number	string		80		
Status	Status	picklist		255		
SystemModstamp	System Modstamp	datetime				
TotalAdjustmentAmount	Cart Promotions Plus Tax Adjustment	currency			18	2
TotalAmount	Total Amount in Cart	currency			18	2
TotalAmountAfterAllAdjustments	Cart Total Adjusted Price	currency			18	2
TotalChargeAmount	Total Charge Amount in Cart	currency			18	2
TotalChargeTaxAmount	Total Charge Tax Amount in Cart	currency			18	2
TotalLineItemsWithErrors	Total Line Items with Errors	int	9			
TotalListAmount	Total List Amount in Cart	currency			18	2
TotalProductAmount	Total Product Amount in Cart	currency			18	2
TotalProductCount	Total Quantity in the Cart	double			18	0
TotalProductTaxAmount	Total Product Tax Amount in Cart	currency			18	2
TotalPromoAdjustmentAmount	Cart Promotions Adjustment	currency			18	2
TotalPromoAdjustmentTaxAmount	Cart Promotions Tax Adjustment	currency			18	2
TotalTaxAmount	Total Tax Amount in Cart	currency			18	2
Type	Type	picklist		255		
UniqueProductCount	Unique Products(SKUs) in the Cart	int	9			
WebStoreId	Store ID	reference		18		

WEBCARTADJUSTMENTGROUP

Group of price adjustments for a cart.

For more information, see WebCartAdjustmentGroup in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AdjustmentBasisReferenceId	Coupon ID	reference		18		
AdjustmentSource	Adjustment Source	picklist		255		
AdjustmentTargetType	Target Type for the Adjustment	picklist		255		
AdjustmentType	Adjustment Type	picklist		255		
AdjustmentValue	Adjustment Value	double			18	2
CartId	Cart ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Cart Adjustment Group ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
MayEdit	May Edit	boolean				
Name	Cart Adjustment Group Name	string		255		
PriceAdjustmentCauseId	Promotion ID	reference		18		
Priority	Priority Order for Adjustments	int	9			
SystemModstamp	System Modstamp	datetime				
TaxAmount	Tax Amount	currency			18	2
TotalAmount	Total Adjustment Amount	currency			18	2
TotalAmountWithTax	Total Adjustment Amount With Tax	currency			18	2

WEBCARTHISTORY

WebCartHistory represents the history of changes to the values in the fields of the `WebCart` object.

For more information, see WebCartHistory in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Cart History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WebCartId`	Cart ID	reference		18		

WEBCARTSHARE

Sharing for WebCart.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WEBLINK

Represents a custom link to a URL or Scontrol.

For more information, see WebLink in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		1000		
`DisplayType`	Display Type	picklist		40		
`EncodingKey`	Link Encoding	picklist		40		
`HasMenubar`	Show Menu Bar	boolean				
`HasScrollbars`	Show Scrollbars	boolean				
`HasToolbar`	Show Toolbars	boolean				
`Height`	Height (in pixels)	int	9			
`Id`	Custom Link ID	id		18		
`IsProtected`	Protected Component	boolean				
`IsResizable`	Resizeable	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LinkType`	Content Source	picklist		40		
`MasterLabel`	Label	string		240		
`Name`	Name	string		240		
`NamespacePrefix`	Namespace Prefix	string		15		
`OpenType`	Behavior	picklist		40		
`PageOrSobjectType`	Page or sObject Type Name	picklist		40		
`Position`	Window Position	picklist		40		
`RequireRowSelection`	Require Row Selection	boolean				
`ScontrolId`	Custom S-Control ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ShowsLocation	Show Address Bar	boolean				
ShowsStatus	Show Status Bar	boolean				
SystemModstamp	System Modstamp	datetime				
Url	URL	textarea		1048576		
Width	Width (in pixels)	int	9			

WEBLINKLOCALIZATION

Represents the translated value of the field label for a custom link to a URL or s-control when the Translation Workbench is enabled for your organization.

For more information, see WebLinkLocalization in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Custom Link Localization ID	id		18		
`Language`	Language	picklist		40		
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`NamespacePrefix`	Namespace Prefix	string		15		
`SystemModstamp`	System Modstamp	datetime				
`Value`	Translation Text	string		1000		
`WebLinkId`	Custom Link ID	reference		18		

WEBSTORE

Represents a B2B Commerce store.

For more information, see WebStore in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CheckoutTimeToLive	Checkout Time To Live	int	9			
CheckoutValidAfterDate	Checkout Valid After Date	datetime				
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefaultLanguage	Default Language	picklist		255		
Description	Description	textarea		1000		
GuestBuyerProfileId	Guest Buyer Profile ID	reference		18		
GuestCartTimeToLive	Guest Cart Time To Live	int	9			
Id	Store ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
MaxValuesPerFacet	Maximum Values per Filter	int	9			
Name	Store Name	string		255		
OptionsAutoFacetingEnabled	Autoselect the 10 most relevant facets	boolean				
OptionsCommerceEinsteinActivitiesTracked	Commerce Einstein Activities Tracked	boolean				
OptionsCommerceEinsteinDeployed	Commerce Einstein Deployed	boolean				
OptionsGuestBrowsingEnabled	Guest Browsing Enabled	boolean				

Field Name	Field Label	Type	Digits	Length	Precision	Scale
OptionsSkipAdditionalEntitlementCheckForSearch	Skip additional entitlement check for search	boolean				
OwnerId	Owner ID	reference		18		
PaginationSize	Results per Page	int	9			
PricingStrategy	Pricing Strategy	picklist		255		
ProductGrouping	Variation Grouping	picklist		255		
StrikethroughPricebookId	Price Book ID	reference		18		
SupportedLanguages	Supported Languages	textarea		2000		
SystemModstamp	System Modstamp	datetime				
Type	Type	picklist		255		

WEBSTORECATALOG

Represents the collection of products associated with a store.

For more information, see WebStoreCatalog in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Store Catalog ID	id		18		
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Store Catalog Name	string		255		
ProductCatalogId	Catalog ID	reference		18		
SalesStoreId	Store ID	reference		18		
SystemModstamp	System Modstamp	datetime				

WEBSTORECATALOGHISTORY

History for tracked fields of WebStoreCatalog.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Store Catalog History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WebStoreCatalogId	Store Catalog ID	reference		18		

WEBSTOREPRICEBOOK

Represents a store price book used in Lightning B2B Commerce.

For more information, see WebStorePricebook in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Store Price Book ID	id		18		
IsActive	Is Active	boolean				
IsDeleted	Deleted	boolean				
IsLocked	Is Locked	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
MayEdit	May Edit	boolean				
Name	Store Price Book Name	string		255		
Pricebook2Id	Price Book ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WebStoreId	Store ID	reference		18		

WEBSTOREPRICEBOOKFEED

Feed tracking for WebStorePricebook.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WEBSTORESHARE

Sharing for WebStore.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WISHLIST

Represents a buyer-created list of WishlistItems in a store that's built with B2B Commerce on Lightning.

For more information, see Wishlist in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccountId`	Account ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Wishlist ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`WebStoreId`	Store ID	reference		18		
`WishlistProductCount`	Unique Products in the Wishlist	int	9			

WISHLISTITEM

Represents an item on a `Wishlist` in a store built with B2B Commerce for Lightning.

For more information, see WishlistItem in the *Object Reference for Salesforce and Lightning Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Wishlist Item ID	id		18		
`IsDeleted`	Deleted	boolean				
`IsLocked`	Is Locked	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MayEdit`	May Edit	boolean				
`Name`	Name	string		255		
`Product2Id`	Product ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				
`WishlistId`	Wishlist ID	reference		18		

WISHLISTSHARE

Sharing for Wishlist.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKACCESS

Used to grant or restrict user access to give badge definitions. Each badge definition record must have one WorkAccess record.

For more information, see WorkAccess in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessType`	Work Access type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Access ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`OwnerId`	Owner ID	reference		18		
`ParentId`	Badge ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

WORKACCESSSHARE

Used to control Givers of WorkBadgeDefinition records.

For more information, see WorkAccessShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKBADGE

Represents information about who the badge was given to and which badge was given. A WorkBadge record is created for each recipient of a WorkBadgeDefinition.

For more information, see WorkBadge in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DefinitionId	Badge ID	reference		18		
Description	Description	textarea		4000		
GiverId	User ID	reference		18		
Id	Badge Received ID	id		18		
ImageUrl	Image	url		255		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Message	Message	textarea		4000		
NetworkId	Network ID	reference		18		
RecipientId	User ID	reference		18		
SourceId	Thanks ID	reference		18		
SystemModstamp	System Modstamp	datetime				

WORKBADGEDEFINITION

Represents the attributes of a badge including the badge name, description, and image. Each WorkBadge record must have a lookup to a WorkBadgeDefinition since badge attributes (like badge name) are derived from the WorkBadgeDefinition object.

For more information, see WorkBadgeDefinition in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		4000		
GivenBadgeCount	Given Badge Count	int	9			
Id	Badge ID	id		18		
ImageUrl	Image URL	url		255		
IsActive	Active	boolean				
IsCompanyWide	Company Badge	boolean				
IsDeleted	Deleted	boolean				
IsLimitPerUser	Limit Per User	boolean				
IsRewardBadge	Reward Badge	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LimitNumber	Limit Number	int	9			
LimitStartDate	Limit Start Date	date				
Name	Badge Name	string		255		
NetworkId	Network ID	reference		18		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

WORKBADGEDEFINITIONFEED

Feed tracking for WorkBadgeDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKBADGEDEFINITIONHISTORY

History for tracked fields of WorkBadgeDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Badge ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkBadgeDefinitionId`	Badge ID	reference		18		

WORKBADGEDEFINITIONSHARE

Sharing for WorkBadgeDefinition.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKORDER

Represents field service work to be performed for a customer.

For more information, see WorkOrder in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Work.com Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccountId	AL Account	reference		18		
Address	Address	address				
AssetId	Asset ID	reference		18		
BusinessHoursId	Business Hours ID	reference		18		
CaseId	Case ID	reference		18		
City	City	string		40		
ContactId	Contact ID	reference		18		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
Duration	Duration	double			18	2
DurationInMinutes	Duration in Minutes	double			18	2
DurationType	Duration Type	picklist		255		
EndDate	End Date	datetime				
GeocodeAccuracy	Geocode Accuracy	picklist		255		
GrandTotal	Grand Total	currency			18	2
Id	Work Order ID	id		18		
IsClosed	Is Closed	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LineItemCount	Line Items	int	9			
LocationId	Location ID	reference		18		
Longitude	Longitude	double			18	15
OwnerId	Owner ID	reference		18		
ParentWorkOrderId	Parent Work Order ID	reference		18		
PostalCode	Zip/Postal Code	string		20		
Pricebook2Id	Price Book ID	reference		18		
Priority	Priority	picklist		40		
RootWorkOrderId	Root Work Order ID	reference		18		
ServiceAppointmentCount	Service Appointment Count	int	9			
StartDate	Start Date	datetime				
State	State/Province	string		80		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
Street	Street	textarea		255		
Subject	Subject	string		255		
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
Tax	Tax	currency			18	2
TotalPrice	Total Price	currency			18	2
WorkOrderNumber	Work Order Number	string		255		

WORKORDERFEED

Feed tracking for WorkOrder.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKORDERHISTORY

Represents the history of changes made to tracked fields on a work order.

For more information, see WorkOrderHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Order History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkOrderId`	Work Order ID	reference		18		

WORKORDERLINEITEM

Represents a subtask on a work order in field service.

For more information, see WorkOrderLineItem in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
Address	Address	address				
AssetId	Asset ID	reference		18		
City	City	string		40		
Country	Country	string		80		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Discount	Discount	percent			5	2
Duration	Duration	double			18	2
DurationInMinutes	Duration in Minutes	double			18	2
DurationType	Duration Type	picklist		255		
EndDate	End Date	datetime				
GeocodeAccuracy	Geocode Accuracy	picklist		255		
Id	Work Order Line Item ID	id		18		
IsClosed	Is Closed	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Latitude	Latitude	double			18	15
LineItemNumber	Work Order Line Item Number	string		255		
ListPrice	List Price	currency			18	2

Field Name	Field Label	Type	Digits	Length	Precision	Scale
LocationId	Location ID	reference		18		
Longitude	Longitude	double			18	15
OrderId	Order ID	reference		18		
ParentWorkOrderLineItemId	Parent Work Order Line Item ID	reference		18		
PostalCode	Zip/Postal Code	string		20		
PricebookEntryId	Product ID	reference		18		
Priority	Priority	picklist		40		
Product2Id	Product ID	reference		18		
Quantity	Quantity	double			12	2
RootWorkOrderLineItemId	Root Work Order Line Item ID	reference		18		
ServiceAppointmentCount	Service Appointment Count	int	9			
StartDate	Start Date	datetime				
State	State/Province	string		80		
Status	Status	picklist		40		
StatusCategory	Status Category	picklist		255		
Street	Street	textarea		255		
Subject	Subject	string		255		
Subtotal	Subtotal	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalPrice	Total Price	currency			18	2
UnitPrice	Unit Price	currency			18	2
WorkOrderId	Work Order ID	reference		18		
WorkTypeId	Work Type ID	reference		18		

WORKORDERLINEITEMFEED

Feed tracking for WorkOrderLineItem.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKORDERLINEITEMHISTORY

Represents the history of changes made to tracked fields on a work order line item.

For more information, see WorkOrderLineItemHistory in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Order Line Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkOrderLineItemId`	Work Order Line Item ID	reference		18		

WORKORDERLINEITEMSTATUS

Represents a possible status of a work order line item in field service.

For more information, see WorkOrderLineItemStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Order Line Item Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

WORKORDERSHARE

Represents a sharing entry on a work order.

For more information, see WorkOrderShare in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`AccessLevel`	Custom Object Access	picklist		40		
`Id`	Custom Object Share ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`ParentId`	Parent ID	reference		18		
`RowCause`	Row Cause	picklist		40		
`UserOrGroupId`	User/Group ID	reference		18		

WORKORDERSTATUS

Represents a possible status of a work order in field service.

For more information, see WorkOrderStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Order Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

WORKPLAN

Represents a work plan for a work order or work order line item.

For more information, see WorkPlan in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
ExecutionOrder	Execution Order	int	9			
Id	Work Plan ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
ParentRecordId	Parent Record ID	reference		18		
ParentRecordType	Parent Record Type	string		50		
SystemModstamp	System Modstamp	datetime				
WorkOrderId	Work Order ID	reference		18		
WorkOrderLineItemId	Work Order Line Item ID	reference		18		
WorkPlanTemplateId	Work Plan Template ID	reference		18		

WORKPLANFEED

Feed tracking for WorkPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKPLANHISTORY

History for tracked fields of WorkPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Plan History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkPlanId	Work Plan ID	reference		18		

WORKPLANSELECTIONRULE

Represents a rule that selects a work plan for a work order or work order line item.

For more information, see WorkPlanSelectionRule in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AssetId	Asset ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	string		255		
Id	Work Plan Selection Rule ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
LocationId	Location ID	reference		18		
OwnerId	Owner ID	reference		18		
Product2Id	Product ID	reference		18		
ServiceContractId	Service Contract ID	reference		18		
ServiceTerritoryId	Territory ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WorkPlanSelectionRuleNumber	Name	string		255		
WorkPlanTemplateId	Work Plan Template ID	reference		18		
WorkTypeId	Work Type ID	reference		18		

WORKPLANSELECTIONRULEFEED

Feed tracking for WorkPlanSelectionRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKPLANSELECTIONRULEHISTORY

History for tracked fields of WorkPlanSelectionRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Plan Selection Rule History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkPlanSelectionRuleId	Work Plan Selection Rule ID	reference		18		

WORKPLANSELECTIONRULESHARE

Sharing for WorkPlanSelectionRule.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKPLANSHARE

Sharing for WorkPlan.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKPLANTEMPLATE

Represents a template for a work plan.

For more information, see WorkPlanTemplate in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		32000		
Id	Work Plan Template ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
RelativeExecutionOrder	Relative Execution Order	int	9			
SystemModstamp	System Modstamp	datetime				

WORKPLANTEMPLATEENTRY

Represents an object that associates a work step template with a work plan template.

For more information, see WorkPlanTemplateEntry in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
ExecutionOrder	Execution Order	int	9			
Id	Work Plan Template Entry ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
SystemModstamp	System Modstamp	datetime				
WorkPlanTemplateEntryNumber	Name	string		255		
WorkPlanTemplateId	Work Plan Template ID	reference		18		
WorkStepTemplateId	Work Step Template ID	reference		18		

WORKPLANTEMPLATEENTRYFEED

Feed tracking for WorkPlanTemplateEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKPLANTEMPLATEENTRYHISTORY

History for tracked fields of WorkPlanTemplateEntry.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Plan Template Entry History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkPlanTemplateEntryId`	Work Plan Template Entry ID	reference		18		

WORKPLANTEMPLATEFEED

Feed tracking for WorkPlanTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKPLANTEMPLATEHISTORY

History for tracked fields of WorkPlanTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Plan Template History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkPlanTemplateId	Work Plan Template ID	reference		18		

WORKPLANTEMPLATESHARE

Sharing for WorkPlanTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKSTEP

Represents a work step in a work plan.

For more information, see WorkStep in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ActionDefinition`	Action Definition	picklist		255		
`ActionType`	Action Type	picklist		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		500		
`EndTime`	End Time	datetime				
`ExecutionOrder`	Execution Order	int	9			
`Id`	Work Step ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`ParentRecordId`	Parent Record ID	reference		18		
`ParentRecordType`	Parent Record Type	string		50		
`PausedFlowInterviewId`	Paused Flow Interview ID	reference		18		
`StartTime`	Start Time	datetime				
`Status`	Status	picklist		40		
`StatusCategory`	Status Category	picklist		255		
`SystemModstamp`	System Modstamp	datetime				
`WorkOrderId`	Work Order ID	reference		18		
`WorkOrderLineItemId`	Work Order Line Item ID	reference		18		

Field Name	Field Label	Type	Digits	Length	Precision	Scale
WorkPlanExecutionOrder	Work Plan Execution Order	int	9			
WorkPlanId	Work Plan ID	reference		18		

WORKSTEPFEED

Feed tracking for WorkStep.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKSTEPHISTORY

History for tracked fields of WorkStep.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Step History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkStepId	Work Step ID	reference		18		

WORKSTEPSTATUS

Represents a picklist for a status category on a work step.

For more information, see WorkStepStatus in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`ApiName`	Api Name	string		255		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Step Status Value ID	id		18		
`IsDefault`	Is Default	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`MasterLabel`	Master Label	string		255		
`SortOrder`	Sort Order	int	9			
`StatusCode`	Status Code	picklist		40		
`SystemModstamp`	System Modstamp	datetime				

WORKSTEPTEMPLATE

Represents a template for a work step.

For more information, see WorkStepTemplate in the *Field Service Developer Guide*, and *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
ActionDefinition	Action Definition	picklist		255		
ActionType	Action Type	picklist		255		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Description	Description	textarea		500		
Id	Work Step Template ID	id		18		
IsActive	Active	boolean				
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
SystemModstamp	System Modstamp	datetime				

WORKSTEPTEMPLATEFEED

Feed tracking for WorkStepTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKSTEPTEMPLATEHISTORY

History for tracked fields of WorkStepTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Step Template History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkStepTemplateId	Work Step Template ID	reference		18		

WORKSTEPTEMPLATESHARE

Sharing for WorkStepTemplate.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKTHANKS

Represents the source and message of a thanks post.

For more information, see WorkThanks in the *Object Reference for the Salesforce Platform*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`FeedItemId`	Feed Item ID	reference		18		
`GiverId`	User ID	reference		18		
`Id`	Thanks ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`Message`	Message	textarea		4000		
`NetworkId`	Network ID	reference		18		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

WORKTHANKSSHARE

Sharing for WorkThanks.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKTYPE

Represents a type of work to be performed in Field Service and Lightning Scheduler. Work types are templates that can be applied to work order or work order line items.

For more information, see WorkType in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`DurationInMinutes`	Duration in Minutes	double			18	2
`DurationType`	Duration Type	picklist		255		
`EstimatedDuration`	Estimated Duration	double			18	2
`Id`	Work Type ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Work Type Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

WORKTYPECARESPECIALTY

Represents a relationship between a care specialty and a visit type (Work Type).

For more information, see WorkTypeCareSpecialty in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CareSpecialtyId`	Care Specialty ID	reference		18		
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Type Care Specialty ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Work Type Care Specialty Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`WorkTypeId`	Work Type ID	reference		18		

WORKTYPECARESPECIALTYFEED

Feed tracking for WorkTypeCareSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKTYPECARESPECIALTYHISTORY

History for tracked fields of WorkTypeCareSpecialty.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Type Care Specialty History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkTypeCareSpecialtyId`	Work Type Care Specialty ID	reference		18		

WORKTYPECODESETBUNDLE

Represents a relationship between a code set and a visit type (Work Type).

For more information, see WorkTypeCodeSetBundle in the *Salesforce Health Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AppointmentTypeId	Code Set Bundle ID	reference		18		
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
FlowName	Flow Name	string		255		
Id	Work Type Code Set Bundle ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentId	Work Type ID	reference		18		
SchedulingSystem	Scheduling System	picklist		255		
ServiceCategoryId	Code Set Bundle ID	reference		18		
ServiceTypeId	Code Set Bundle ID	reference		18		
SystemModstamp	System Modstamp	datetime				

WORKTYPECODESETBUNDLEFEED

Feed tracking for WorkTypeCodeSetBundle.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKTYPECODESETBUNDLEHISTORY

History for tracked fields of WorkTypeCodeSetBundle.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Type Code Set Bundle History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkTypeCodeSetBundleId`	Work Type Code Set Bundle ID	reference		18		

WORKTYPEFEED

Feed tracking for WorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKTYPEGROUP

Represents a grouping of work types used to categorize types of appointments available in Lightning Scheduler, or to define scheduling limits in Field Service.

For more information, see WorkTypeGroup in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Description`	Description	textarea		32000		
`GroupType`	Group Type	picklist		255		
`Id`	Work Type Group ID	id		18		
`IsActive`	Active	boolean				
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Work Type Group Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

WORKTYPEGROUPFEED

Feed tracking for WorkTypeGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKTYPEGROUPHISTORY

History for tracked fields of WorkTypeGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Type Group History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkTypeGroupId	Work Type Group ID	reference		18		

WORKTYPEGROUPMEMBER

Represents the relationship between a work type and the work type group it belongs to.

For more information, see WorkTypeGroupMember in the *Field Service Developer Guide*, *Object Reference for the Salesforce Platform*, and *Salesforce Scheduler Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`Id`	Work Type Group Member ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Work Type Group Member Name	string		255		
`SystemModstamp`	System Modstamp	datetime				
`WorkTypeGroupId`	Work Type Group ID	reference		18		
`WorkTypeId`	Work Type ID	reference		18		

WORKTYPEGROUPMEMBERFEED

Feed tracking for WorkTypeGroupMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKTYPEGROUPMEMBERHISTORY

History for tracked fields of WorkTypeGroupMember.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Work Type Group Member History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WorkTypeGroupMemberId`	Work Type Group Member ID	reference		18		

WORKTYPEGROUPSHARE

Sharing for WorkTypeGroup.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKTYPEHISTORY

History for tracked fields of WorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Work Type History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkTypeId	Work Type ID	reference		18		

WORKTYPESHARE

Sharing for WorkType.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WORKERCOMPCOVERAGECLASS

Represents the compensation coverage class that a worker belongs to.

For more information, see WorkerCompCoverageClass in the *Financial Services Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Worker Compensation Coverage Class ID	id		18		
InsurancePolicyCoverageId	Insurance Policy Coverage ID	reference		18		
InsurancePolicyId	Insurance Policy ID	reference		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
OwnerId	Owner ID	reference		18		
Premium	Premium	currency			18	2
SystemModstamp	System Modstamp	datetime				
TotalExposure	Total Exposure	currency			18	2
WorkerClass	Worker Class	picklist		40		
WorkerCount	Number of Workers	int	9			
WorkerLocationId	Associated Location ID	reference		18		

WORKERCOMPCOVERAGECLASSFEED

Feed tracking for WorkerCompCoverageClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
NetworkScope	Network Scope	picklist		40		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		
Visibility	Visibility	picklist		40		

WORKERCOMPCOVERAGECLASSHISTORY

History for tracked fields of WorkerCompCoverageClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DataType	Datatype	picklist		40		
Field	Changed Field	picklist		255		
Id	Worker Compensation Coverage Class History ID	id		18		
IsDeleted	Deleted	boolean				
NewValue	New Value	anyType		255		
OldValue	Old Value	anyType		255		
WorkerCompCoverageClassId	Worker Compensation Coverage Class ID	reference		18		

WORKERCOMPCOVERAGECLASSSHARE

Sharing for WorkerCompCoverageClass.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		

WSTDISPOEMSSNFCTRSET

Represents the emissions factors for scope 3 waste handling.

For more information, see WstDispoEmssnFctrSet in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`EmissionFactorDataSource`	Emissions Factor Data Source	textarea		32000		
`EmissionFactorUpdateYear`	Emissions Factor Update Year	picklist		255		
`Id`	Waste Disposal Emissions Factor ID	id		18		
`IsDeleted`	Deleted	boolean				
`LastModifiedById`	Last Modified By ID	reference		18		
`LastModifiedDate`	Last Modified Date	datetime				
`LastReferencedDate`	Last Referenced Date	datetime				
`LastViewedDate`	Last Viewed Date	datetime				
`Name`	Name	string		255		
`OwnerId`	Owner ID	reference		18		
`SystemModstamp`	System Modstamp	datetime				

WSTDISPOEMSSNFCTRSETFEED

Feed tracking for WstDispoEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

WSTDISPOEMSSNFCTRSETHISTORY

History for tracked fields of WstDispoEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Waste Disposal Emissions Factor Set History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WstDispoEmssnFctrSetId`	Waste Disposal Emissions Factor ID	reference		18		

WSTDISPOEMSSNFCTRSETITM

Represents the individual emissions factors for scope 3 waste handling based on the waste type and disposal type.

For more information, see WstDispoEmssnFctrSetItm in the *Net Zero Cloud Developer Guide*.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
DisposalType	Disposal Type	picklist		40		
EmissionsFactorValue	Emissions Factor Value	double			18	4
EmissionsFactorValueUnit	Emissions Factor Value Unit	picklist		255		
EmssnFctrTco2eTonneWstMtrl	Emissions Factor Value (tCO2e/Tonne Waste Material)	double			18	4
Id	Waste Disposal Emissions Factor Set Item ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
LastReferencedDate	Last Referenced Date	datetime				
LastViewedDate	Last Viewed Date	datetime				
Name	Name	string		255		
ParentEmissionFactorId	Waste Disposal Emissions Factor ID	reference		18		
SystemModstamp	System Modstamp	datetime				
WasteType	Waste Type	picklist		40		

WSTDISPOEMSSNFCTRSETITMFEED

Feed tracking for WstDispoEmssnFctrSetItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
BestCommentId	Best Comment ID	reference		18		
Body	Body	textarea		10000		
CommentCount	Comment Count	int	9			
CreatedById	Created By ID	reference		18		
CreatedDate	Created Date	datetime				
Id	Feed Item ID	id		18		
InsertedById	InsertedBy ID	reference		18		
IsDeleted	Deleted	boolean				
IsRichText	Is Rich Text	boolean				
LastModifiedDate	Last Modified Date	datetime				
LikeCount	Like Count	int	9			
LinkUrl	Link Url	url		1000		
ParentId	Parent ID	reference		18		
RelatedRecordId	Related Record ID	reference		18		
SystemModstamp	System Modstamp	datetime				
Title	Title	string		255		
Type	Feed Item Type	picklist		40		

WSTDISPOEMSSNFCTRSETITMHISTORY

History for tracked fields of WstDispoEmssnFctrSetItm.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
`CreatedById`	Created By ID	reference		18		
`CreatedDate`	Created Date	datetime				
`DataType`	Datatype	picklist		40		
`Field`	Changed Field	picklist		255		
`Id`	Waste Disposal Emissions Factor Set Item History ID	id		18		
`IsDeleted`	Deleted	boolean				
`NewValue`	New Value	anyType		255		
`OldValue`	Old Value	anyType		255		
`WstDispoEmssnFctrSetItmId`	Waste Disposal Emissions Factor Set Item ID	reference		18		

WSTDISPOEMSSNFCTRSETSHARE

Sharing for WstDispoEmssnFctrSet.

Fields

Field Name	Field Label	Type	Digits	Length	Precision	Scale
AccessLevel	Custom Object Access	picklist		40		
Id	Custom Object Share ID	id		18		
IsDeleted	Deleted	boolean				
LastModifiedById	Last Modified By ID	reference		18		
LastModifiedDate	Last Modified Date	datetime				
ParentId	Parent ID	reference		18		
RowCause	Row Cause	picklist		40		
UserOrGroupId	User/Group ID	reference		18		