

Net Zero Cloud Developer Guide

Version 59.0, Winter '24





CONTENTS

Chapter 1: Introduction to Net Zero Cloud
Chapter 2: Net Zero Cloud Standard Objects
Net Zero Cloud Data Model
AirTravelEmssnFctr
AirTravelEnrgyUse
AntiCorruptionInitSum
AnnualEmssnInventory
AnnualEmssnRdctnTarget
BldgEnrgyIntensity
BldgEnrgyIntensityVal
BldgSizeCategory
CleanEnergyProject
CrbnCreditAlloc
CrbnCreditAllocItem
CrbnCreditDistribution
CrbnCreditProject
CrbnEmssnScopeAlloc
CrbnEmssnScopeAllocVal
Disclosure
DisclosureDefinition
DisclosureDefinitionVersion
DisclosureType
DisclsReportingPeriod
DivrsEquityInclSum
EconomicPerformanceSum
ElectricityEmssnFctrSet
EmissionsActivity
EmissionsAllocation
EmissionsForecastFact
EmploymentCompensationSummary
EmpBenefitSummary
EmployeeDevelopmentSum
EmployeeDemographicSum
EmssnRdctnCommitment
EmssnReductionTarget
EnergyAttrCertCredit
EnergyAttrCertPurchase
Fnergy Attr Credit Dstr 243

EnvironmentalRisk
FrgtHaulingEmssnFctr
FrgtHaulingEnrgyUse
FuelType
FuelTypeSustnUom
GeneratedWaste
GovtFinancialAsstSum
GroundTravelEmssnFctr
GroundTravelEnrgyUse
HotelStayEmssnFctr
HotelStayEnrgyUse
InflationRate
ManagedCareProgramPrfm
MaterialityAssessment
MaterialityMatrixScore
MaterialityStakeholder
MaterialityStkhldrCatg
MaterialityTopic
MaterialityTopicQstn
OrgIncidentSummary
OtherEmssnFctrSet
OtherEmssnFctrSetItem
PcmtEmssnFctrSet
PcmtEmssnFctrSetItem
ProductEmissionsFactor
ProgramInitiative
ProgramInitiativeEnrl
RefrigerantEmssnFctr
RentalCarEmssnFctr
RentalCarEnrgyUse
Scope3CrbnFtprnt
Scope3EmssnSrc
Scope3Pcmtltem
Scope3PcmtSummary
StnryAssetAnnualFact
StnryAssetCrbnFtprnt
StnryAssetCrbnFtprntltm
StnryAssetEnrgyUse
StnryAssetEnvrSrc
StnryAssetWaterActvty
StnryAssetWaterFtprnt
StnryAssetWtrFtprntltm
SocialContributionSum
Supplier 545

SupplierProduct
SustainabilityCredit
SustainabilityPurchase
SustainabilityScorecard
SustainabilityUom
SustnUomConversion
TaxDisclosureSummary
VehicleAssetCrbnFtprnt
VehicleAssetEmssnSrc
VehicleAssetEnrgyUse
WasteFootprint
WasteFootprintltem
WstDispoEmssnFctrSet
WstDispoEmssnFctrSetItm
Chapter 3: Net Zero Cloud Fields on Standard Objects
IndicatorAssignment
Program
ProgramEnrollment
Chapter 4: Net Zero Cloud Business APIs
REST Reference
Resources
Request Bodies
Response Bodies
Chapter 5: Net Zero Cloud Metadata API Types
ClauseCatgConfiguration
DisclosureDefinition
DisclosureDefinitionVersion
DisclosureType
FuelType
FuelTypeSustnUom
IndustriesSettings
SustnUomConversion
SustainabilityUom
Chapter 6: Net Zero Cloud Tooling API Objects
BldgEnrgyIntensityCnfg
ClauseCatgConfiguration
DisclosureDefinition
DisclosureDefinitionVersion
DisclosureType
FuelTypeSustnUom
FuelType

StnryAssetEnvSrcCnfg
SustainabilityUom
SustnUomConversion
VehicleAssetEmssnSrcCnfg
Chapter 7: Net Zero Cloud Calculations
Energy Use Records
Air Travel Energy Use
Freight Hauling Energy Use
Ground Travel Energy Use
Hotel Stay Energy Use
Rental Car Energy Use
Stationary Asset Energy Use
Vehicle Asset Energy Use
Scope 3 Procurement Summary
Emissions Factor Records
Air Travel Emission Factor
Electricity Emissions Factor Set
Other Emissions Factor Set
Rental Car Emission Factor
Waste Disposal Emissions Factor Set Item
Carbon Footprint
Stationary Asset Carbon Footprint
Vehicle Asset Carbon Footprint
Scope 3 Carbon Footprint
Waste Management
Waste Footprint
Generated Waste
Water Management
Stationary Asset Water Activity
Stationary Asset Water Footprint
Science Based Targets
Emissions Forecasts
Sustainability Scorecard
Building Size Category
Building Energy Intensity
Data Gap Filling
Allocate Carbon Credits
Carbon Credit Project
Sustainability Credit
Carbon Credit Allocation
Carbon Credit Distribution
Allocate Energy Attribute Certificates
Energy Attribute Certificate Credit

Energy Attribute Certificate Purchase
Energy Attribute Credit Distribution
Materiality Assessment
Materiality Matrix Score
Annual Emissions Inventory
Disclosures Using Managed Packages
GRI Standards
CDP Standards
SASB Standards
ESRS Standards
Conversion Factors 94

CHAPTER 1 Introduction to Net Zero Cloud

Net Zero Cloud gives you critical insights about your carbon footprint. By using global emissions factors to calculate greenhouse gas emissions, the app helps you to collect, categorize, analyze, and report energy usage data throughout your organization's business activities.

Net Zero Cloud streamlines the capture and auditing of your carbon (greenhouse gas) footprint data. The app solves many of the issues with traditional carbon accounting: incomplete or missing records, manual data tracking in multiple spreadsheets, and unstructured data. You can reduce data collection, calculation, and auditing activities that took months to weeks.

The application is preloaded with reference data from:

- US Environmental Protection Agency (EPA)
- US Energy Information Administration (EIA)
- International Energy Agency (IEA)
- UK Department for Business, Energy & Industrial Strategy (BEIS)
- Greenhouse Gas (GHG) Protocol

The carbon inventory calculations are automated based on the GHG Protocol Corporate Accounting and Reporting Standard. You no longer have to check calculation accuracy in spreadsheet-driven inventories.

Net Zero Cloud provides a logical workflow that is optimized for carbon footprinting. The app guides you from start to finish, from identifying assets to include in your carbon inventory, to reporting out data after an external audit.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

CHAPTER 2 Net Zero Cloud Standard Objects

In this chapter ...

- Net Zero Cloud Data Model
- AirTravelEmssnFctr
- AirTravelEnrgyUse
- AntiCorruptionInitSum
- AnnualEmssnInventory
- AnnualEmssnRddtnTarget
- BldgEnrgyIntensity
- BldgEnrgyIntensityVal
- BldgSizeCategory
- CleanEnergyProject
- CrbnCreditAlloc
- CrbnCreditAllocItem
- CrbnCreditDistribution
- CrbnCreditProject
- CrbnEmssnScopeAlloc
- CrbnEmssnScopeAllocVal
- Disclosure
- DisclosureDefinition
- DisdosureDefinitionVersion
- DisclosureType
- DisclsReportingPeriod
- DivrsEquityInclSum
- EconomidPerformanceSum
- ElectricityEmssnFctrSet
- EmissionsActivity
- EmissionsAllocation
- EmissionsForecastFact
- EmploymentCompensatorSummary
- EmpBenefitSummary
- EmployeeDevelopmentSum
- EmployeeDemographicSum
- EmssnRddtnCommitment

The Net Zero Cloud data model provides objects and fields to calculate and manage carbon footprints for your organization. Use the objects to manage emissions factors, energy use, and scope 3 procurement.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

- EmssnReductionTarget
- EnergyAttrCertCredit
- EnergyAttrCertPurchase
- EnergyAttrCreditDstr
- EnvironmentalRisk
- FrgtHaulingEmssnFctr
- FrgtHaulingEnrgyUse
- FuelType
- FuelTypeSustnUom
- GeneratedWaste
- GovtFinancialAsstSum
- GroundTravelEmssnFctr
- GroundTravelEnrgyUse
- HotelStayEmssnFctr
- HotelStayEnrgyUse
- InflationRate
- ManagedCareProgramPrfm
- MaterialityAssessment
- MaterialityMatrixScore
- MaterialityStakeholder
- MaterialityStkhldrCatg
- MaterialityTopic
- MaterialityTopicQstn
- OrglncidentSummary
- OtherEmssnFctrSet
- OtherEmssnFctrSetItem
- PcmtEmssnFctrSet
- PcmtEmssnFctrSetItem
- ProductEmissionsFactor
- ProgramInitiative
- ProgramInitiativeEnrl
- RefrigerantEmssnFctr
- RentalCarEmssnFctr
- RentalCarEnrgyUse
- Scope3CrbnFtprnt
- Scope3EmssnSrc
- Scope3Pcmtltem
- Scope3PcmtSummary
- StnryAssetAnnualFact
- StnryAssetCrbnFtprnt
- StnryAssetCrbnFtprntltm
- StnryAssetEnrgyUse

Net Zero Cloud Standard Objects

- StnryAssetEnvrSrc
- StnryAssetWaterActvty
- StnryAssetWaterFtprnt
- StnryAssetWtrFtprntltm
- SocialContributionSum
- Supplier
- SupplierProduct
- SustainabilityCredit
- SustainabilityPurchase
- SustainabilityScorecard
- SustainabilityUom
- SustnUomConversion
- TaxDisclosureSummary
- VehicleAssetCrbnFtprnt
- VehicleAssetEmssnSrc
- VehicleAssetEnrgyUse
- WasteFootprint
- WasteFootprintItem
- WstDispoEmssnFctrSet
- WstDispoEmssnFdrSettlm


Net Zero Cloud Data Model

Learn about the objects and relationships within the Net Zero Cloud data model.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

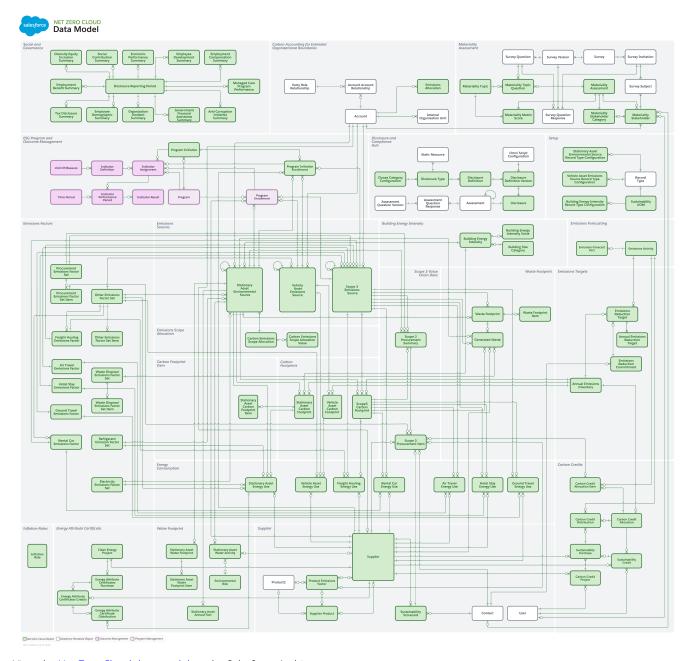

View the Net Zero Cloud data model on the Salesforce Architect page.

AirTravelEmssnFctr

Represents the emissions factors for scope 3 commercial air travel. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details
Ch4PsgrKmLongHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The CH4 emissions per passenger-kilometer in CO2e from long-haul flights.
Ch4PsgrKmMediumHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The CH4 emissions per passenger-kilometer in CO2e from medium-haul flights.
Ch4PsgrKmShortHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The CH4 emissions per passenger-kilometer in CO2e from short-haul flights.
Ch4PsgrMileLongHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The CH4 emissions per passenger-mile in CO2e from long-haul flights.
Ch4PsgrMileMediumHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The CH4 emissions per passenger-mile in CO2e from medium-haul flights.
Ch4PsgrMileShortHaulInKgCo2e	Туре
	double
	Properties Control of the Alife Control of the Alif
	Create, Filter, Nillable, Sort, Update

Field	Details
	Description The CH4 emissions per passenger-mile in CO2e from short-haul flights.
Co2PsgrKmLongHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions per passenger-kilometer from long-haul flights.
Co2PsgrKmMediumHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions per passenger-kilometer from medium-haul flights.
Co2PsgrKmShortHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions per passenger-kilometer from short-haul flights.
Co2PsgrMileLongHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions per passenger-mile from long-haul flights.
Co2PsgrMileMediumHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions per passenger-mile from medium-haul flights.
Co2PsgrMileShortHaulInKg	Type double
	Properties Create, Filter, Nillable, Sort, Update

Field	Details		
	Description The CO2 emissions per passenger-mile from short-haul flights.		
DistanceUnit	Type picklist		
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update		
	Description The unit of measure for the distance.		
	Possible values are:		
	• Kilometers		
	• Miles		
	The default value is 'Kilometers'.		
EmissionFactorDataSource	Туре		
	textarea		
	Properties		
	Create, Nillable, Update		
	Description The source of the emissions factor reference data.		
EmissionFactorUpdateYear	Туре		
	picklist		
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update		
	Description		
	The year in which this reference data for the emissions factor was most recently updated.		
	Possible values are:		
	• 2000		
	• 2001		
	• 2002		
	• 2003		
	• 2004		
	• 2005		
	• 2006		
	• 2007		
	• 2008		
	• 2009		
	• 2010		

Field	Details	
	• 2011	
	• 2012	
	• 2013	
	• 2014	
	• 2015	
	• 2016	
	• 2017	
	• 2018	
	• 2019	
	• 2020	
	• 2021	
	• 2022	
	• 2023	
	• 2024	
	• 2025	
	• 2026	
	• 2027	
	• 2028	
	• 2029	
	• 2030	
	• 2031	
	• 2032	
	• 2033	
	• 2034	
	• 2035	
	• 2036	
	• 2037	
	• 2038	
	• 2039	
	• 2040	
LastReferencedDate	Туре	
	dateTime	
	Properties Filter, Nillable, Sort	
	Description The timestamp for when the current user last viewed a record related to this record.	

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LongHaulMinimumDistance	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The minimum distance for a long haul flight that's adjusted according to the short haul or
	The minimum distance for a long-haul flight that's adjusted according to the short-haul or medium-haul distances.
MediumHaulMaximumDistance	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The maximum distance of a medium-haul flight.
N2oPsgrKmLongHaulInKgCo2e	Туре
	double
	Properties Create Filter Millable Cost Undete
	Create, Filter, Nillable, Sort, Update
	Description The N2O emissions per passenger-kilometer in CO2e from long-haul flights.
N2oPsgrKmMediumHaulInKgCo2e	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The N2O emissions per passenger-kilometer in CO2e from medium-haul flights.
N2oPsgrKmShortHaulInKgCo2e	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update

Field	Details		
	Description The N2O emissions per passenger-kilometer in CO2e from short-haul flights.		
N2oPsgrMileLongHaulInKgCo2e	Type double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description The N2O emissions per passenger-mile in CO2e from long-haul flights.		
N2oPsgrMileMediumHaulInKgCo2e	Type double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description The N2O emissions per passenger-mile in CO2e from medium-haul flights.		
N2oPsgrMileShortHaulInKgCo2e	Type double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description The N2O emissions per passenger-mile in CO2e from short-haul flights.		
Name	Type string		
	Properties Create, Filter, Group, idLookup, Sort, Update		
	Description Name of the account.		
OwnerId	Type reference		
	Properties Create, Defaulted on create, Filter, Group, Sort, Update		
	Description The ID of the user who owns this record.		
	This is a polymorphic relationship field.		
	Relationship Name Owner		

Field	Details
	Relationship Type Lookup
	Refers To
	Group, User
ShortHaulMaximumDistance	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The maximum distance of a short-haul flight.

Air Travel Enrgy Use

Represents the energy consumption related to air travel. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details
AirTravelEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The air travel emission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name AirTravelEmssnFctr
	Relationship Type Lookup
	Refers To AirTravelEmssnFctr

Field	Details
CarbonFootprintReportDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.
Ch4PassengerKmInKgCo2e	Type double
	Properties Filter, Nillable, Sort
	Description The CH4 emissions per kilometer that's calculated based on the emission factor.
Ch4PassengerMileInKgCo2e	Type double
	Properties Filter, Nillable, Sort
	Description The CH4 emissions per mile that's calculated based on the emission factor.
Co2PassengerKmInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions per kilometer that's calculated based on the emission factor.
Co2PassengerMileInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions per mile that's calculated based on the emission factor.
CostCenter	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The cost center associated with this energy use record.
DestinationCity	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The destination city of the air travel.
DestinationCountry	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the destination country of the air travel. Possible values are: AD—Andorra AE—United Arab Emirates AF—Afghanistan AG—Antigua and Barbuda AII—Anguilla AII—Anguilla AII—Anguilla AL—Albania AM—Armenia AO—Angola AQ—Antarctica AR—Argentina AT—Austria AU—Australia AW—Aruba AX—Aland Islands AZ—Azerbaijan BA—Bosnia and Herzegovina BB—Barbados BD—Bangladesh BE—Belgium BF—Burkina Faso BG—Bulgaria BH—Bahrain

- ві—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- BM—Bermuda
- BN—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- B₩—Botswana
- ву—Belarus
- BZ—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands
- cl—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic

- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gм—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- gT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- нм—Honduras
- HR—Croatia
- нт—Haiti
- ни—Hungary
- ID—Indonesia

- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- ĸE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- KN—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of

- ME—Montenegro
- MF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- мм—Муаптаг
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- Mz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- №Z—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland

- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- sl—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- sr—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- sz—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- ™—Thailand

Field Details • TJ—Tajikistan

- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- **T**∇—Tuvalu
- тw—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- **US**—United States
- UY—Uruguay
- uz—Uzbekistan
- VA—Holy See (Vatican City State)
- VC—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- VN—Vietnam
- VU—Vanuatu
- WF-Wallis and Futuna
- ws-Samoa
- xK—Kosovo
- YE—Yemen
- YT—Mayotte
- ZA—South Africa
- zm—Zambia
- zw—Zimbabwe

EndDate Type

date

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The date until when the values of this energy use record are valid.

Field	Details
HaulLength	Туре
	string
	Properties
	Filter, Group, Nillable, Sort
	Description The haul length calculated based on the segment distance and the haul-length of the associated emissions factor record.
IsRecordLocked	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the air travel energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oPassengerKmInKgCo2e	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions per kilometer that's calculated based on the emission factor.
N2oPassengerMileInKgCo2e	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The N2O emissions per mile that's calculated based on the emission factor.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Scope3CrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 carbon footprint record that's associated with this energy use record.
	This is a relationship field.
	Relationship Name Scope3CrbnFtprnt
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt

Field	Details
Scope3EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions in metric tonnes of carbon dioxide equivalent.
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 emission source that's associated with this energy use record. This is a relationship field.
	This is a relationship field. Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
SegmentDistance	Type double
	Properties Create, Filter, Sort, Update
	Description The segement distance for this air travel record.
SegmentDistanceInMiles	Type double
	Properties Filter, Nillable, Sort
	Description The segment distance for this air travel record in miles.
SegmentDistanceUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the segment distance.

Field	Details
	Possible values are:
	• Kilometers
	• Miles
	The default value is 'Kilometers'.
SourceCity	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The source city of the air travel.
SourceCountry	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the source country of the air travel.
	Possible values are:
	• AD—Andorra
	• AE—United Arab Emirates
	AF—Afghanistan AG Antique and Parhuda
	AG—Antigua and BarbudaAI—Anguilla
	• AL—Albania
	• AM—Armenia
	• AO—Angola
	AQ—Antarctica
	AR—Argentina
	• AT—Austria
	AU—Australia
	Aw—Aruba
	 AX—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and Herzegovina
	BB—Barbados Dan Planck deck
	BD—Bangladesh BE Bolgium
	BE—Belgium BE—Burking Force
	BF—Burkina Faso

- BG—Bulgaria
- вн—Bahrain
- ві—Burundi
- вJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- вм—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- ■V—Bouvet Island
- B₩—Botswana
- BY—Belarus
- вz—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- cI—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark

- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- нм—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- нт—Haiti

- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кк—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco

- MC—Monaco
- MD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- мм—Муаптаг
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE-Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines

- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miguelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- sg—Singapore
- sн—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories

Field Details • TG—Togo тн—Thailand TJ—Tajikistan тк—Tokelau TL—Timor-Leste TM—Turkmenistan TN—Tunisia TO—Tonga TR—Türkiye TT—Trinidad and Tobago **T**∇—Tuvalu тw—Taiwan TZ—Tanzania, United Republic of UA—Ukraine UG-Uganda **US**—United States UY—Uruguay UZ—Uzbekistan VA—Holy See (Vatican City State) VC—Saint Vincent and the Grenadines VE—Venezuela, Bolivarian Republic of VG—Virgin Islands, British

- VN—Vietnam
- vu—Vanuatu
- wF—Wallis and Futuna
- ws-Samoa
- XK—Kosovo
- YE—Yemen
- YT—Mayotte
- za—South Africa
- zm—Zambia
- zw—Zimbabwe

StartDate

Type

date

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The date from when the values of this energy use record are valid.

Field	Details
SuplScope3Emissions	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value that's used to calculate the total scope 3 emissions.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	This is a relationship field.
	Relationship Name
	Supplier
	Relationship Type Lookup
	Refers To Supplier
TravelerBaseCity	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update Description
	The base city of the air traveler.
TravelerBaseCountry	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the base country of the air traveler.
	Possible values are:
	AD—Andorra
	AE—United Arab Emirates
	• AF—Afghanistan
	AG—Antigua and Barbuda
	• AI—Anguilla
	AL—Albania

- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- Az—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- BE—Belgium
- вғ—Burkina Faso
- BG—Bulgaria
- вн—Bahrain
- BI—Burundi
- вJ—Benin
- BL—Saint Barthélemy
- BM—Bermuda
- ви—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- BZ—Belize
- CA—Canada
- CC—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands

- CL—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- CX—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- Eн—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland

- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- G₩—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- нм—Honduras
- HR—Croatia
- HT—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- ▶ K₩—Kuwait

- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- MK—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- ми—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island

- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- SJ—Svalbard and Jan Mayen
- SK—Slovakia

- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- sy—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- TH—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- TW—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- UZ—Uzbekistan
- VA—Holy See (Vatican City State)
- VC—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- vn—Vietnam
- ▼U—Vanuatu

Field	Details
	WF—Wallis and Futuna
	• ws—Samoa
	 xk—Kosovo
	• YE—Yemen
	• YT—Mayotte
	• za—South Africa
	• zm—Zambia
	• zw—Zimbabwe
TravelerName	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the traveler.
VendorProvidedEmissionsInTco2e	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The scope 3 emissions provided by the vendor to override the calculated total scope 3 emissions.

AntiCorruptionInitSum

Represents information about the initiatives taken by an organization to communicate and train the employee on anti-corruption policies and procedures. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details	
Country	Type picklist	

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

Specifies the country where anti-corruption initiatives are applicable.

Possible values are:

- AD—Andorra
- AE—United Arab Emirates
- AF—Afghanistan
- AG—Antigua and Barbuda
- AI—Anguilla
- AL—Albania
- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- Az—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- BE—Belgium
- BF—Burkina Faso
- вG—Bulgaria
- вн—Bahrain
- BI—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- BN—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- ▶ BV—Bouvet Island

- B₩—Botswana
- BY—Belarus
- вz—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- cı—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- cm—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- CU—Cuba
- CV—Cape Verde
- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)

- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- gн—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- HT—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica

- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- MK—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- мQ—Martinique
- MR—Mauritania
- MS—Montserrat

- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE-Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation

- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- sk—Slovakia
- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- Sz—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- т₩—Taiwan
- TZ—Tanzania, United Republic of

Field	Details	
	• ua—Ukraine	
	• UG—Uganda	
	• US—United States	
	• UY—Uruguay	
	• UZ—Uzbekistan	
	VA—Holy See (Vatican City State)	
	VC—Saint Vincent and the Grenadines	
	VE—Venezuela, Bolivarian Republic of	
	VG—Virgin Islands, British	
	• vn—Vietnam	
	• VU—Vanuatu	
	WF—Wallis and Futuna	
	• ws—Samoa	
	 xk—Kosovo 	
	• YE—Yemen	
	• YT—Mayotte	
	• za—South Africa	
	• zm—Zambia	
	• zw—Zimbabwe	
Description	Туре	
	textarea	
	Properties	
	Create, Nillable, Update	
	Description	
	The description of the anti-corruption initiative statistics.	
DisclsReportingPeriodId	Туре	
	reference	
	Properties	
	Create, Filter, Group, Sort, Update	
	Description	
	The reporting period for which the anti-corruption initiative statistics are generated.	
	This field is a relationship field.	
	Relationship Name DisclsReportingPeriod	
	Relationship Type Lookup	
	Refers To DisclsReportingPeriod	

Field	Details
EmployeeType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Chasifies the type of employees who participate in the anti-corruption initiative
	Specifies the type of employees who participate in the anti-corruption initiative. Possible values are:
	• Employees
	• Leadership
InitiativeType	Type picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of initiative taken to educate the participants about the anti-corruption policies and procedures.
	Possible values are:
	• Communication
	• Training
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this
	record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details	
	Description Name of the record.	
OwnerId	Type reference	
	Properties Create, Defaulted on create, Filter, Group, Sort, Update	
	Description The ID of the user who owns this record.	
	This field is a polymorphic relationship field.	
	Relationship Name Owner	
	Relationship Type Lookup	
	Refers To Group, User	
RecipientCategory	Type picklist	
	Properties Create, Filter, Group, Sort, Update	
	Description Specifies the category of members who participate in the anti-corruption initiatives.	
	Possible values are:	
	Business Partners	
	• Employees	
	Governance Body Members	
RecipientCount	Type double	
	Properties Create, Filter, Nillable, Sort, Update	
	Description The total number of participants in the anti-corruption initiative based on the country or region.	
RecipientPercentage	Type	
	Properties Create, Filter, Nillable, Sort, Update	

Field	Details
	Description
	The percentage of participants in the anti-corruption initiative based on the country or region.
Region	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the region where anti-corruption initiatives are applicable.

AnnualEmssnInventory

Represents information about a company's total carbon emissions for a particular year in metric tonnes of CO2e (tCO2e). These emissions are the sum of all the emissions in scope 1, scope 2, and scope 3 greenhouse gas categories. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()

Fields

Field	Details
AccountNameId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Name of the company, it's subsidiary, or it's business unit for which you are doing carbon accounting.
	This field is a relationship field.
	Relationship Name AccountName
	Relationship Type Lookup
	Refers To Account

Field	Details
AllocScope1And2Emssn	Туре
	double
	Properties Filter, Nillable, Sort
	Description The scope 1 and scope 2 emissions allocated to the inventory of an account.
	This field is a calculated field.
AllocScope1EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description
	The scope 1 emissions allocated to the inventory of an account.
AllocScope1EmssnOverride	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The emissions value entered to override the scope 1 emissions that are allocated to the inventory of an account.
AllocScope2EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description
	The scope 2 emissions allocated to the inventory of an account.
AllocScope2EmssnOverride	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The emissions value entered to override the scope 2 emissions that are allocated to the inventory of an account.
AllocScope2LocBasedEmssn	Туре
	double

Field	Details
	Properties Filter, Nillable, Sort
	Description The scope 2 location-based emissions allocated to the inventory of an account.
AllocScope2MktBasedEmssn	Type double
	Properties Filter, Nillable, Sort
	Description The scope 2 market-based emissions allocated to the inventory of an account.
AllocScope3EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions allocated to the inventory of an account.
AllocScope3EmssnOverride	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The emissions value entered to override the scope 3 emissions that are allocated to the inventory of an account.
EmissionsAllocToFranchCatg	Type double
	Properties Filter, Nillable, Sort
	Description The emissions from child or partner companies that are allocated to GHG category 14 - Franchises category of the parent company account.
EmissionsAllocToInvestCatg	Type double
	Properties Filter, Nillable, Sort
	Description The emissions from child or partner companies that are allocated to GHG Category 15 - Investments category of the parent company account.

Field	Details
EnergyUsageCmclBldOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the energy used in commercial buildings.
EnergyUsageCommercialBld	Type double
	Properties Filter, Nillable, Sort
	Description The energy used in all the commercial buildings that are related to the carbon footprint record or the override value.
EnergyUsageDataCenters	Type double
	Properties Filter, Nillable, Sort
	Description The energy used in all the data centers that are related to the carbon footprint record or the override value.
EnergyUsageDataCtrOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the energy used in data centers.
FinalEmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The consolidated emissions of an account that includes allocated emissions of the related account, which could be a child or partner account.
	This field is a calculated field.
FinalScope1EmssnInTco2e	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The consolidated scope 1 emissions of an account that includes allocated scope 1 emissions of the related account, which could be a child or partner account. This field is a calculated field.
FinalScope2EmssnInTco2e	Туре
	double Properties Filter, Nillable, Sort
	Description The consolidated scope 2 emissions of an account that includes allocated scope 2 emissions of the related account, which could be a child or partner account.
	This field is a calculated field.
FinalScope3EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The consolidated scope 3 emissions of an account that includes allocated scope 3 emissions of the related account, which could be a child or partner account.
	This field is a calculated field.
FnlScp1And2EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The consolidated scope 1 and scope 2 emissions of an account that includes allocated scope 1 and scope 2 emissions of the related account, which could be a child or a partner account.
	This field is a calculated field.
IsLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is false.

Field	Details
IsRecordLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates that the annual emissions inventory record and the associated carbon footprint records are locked for editing.
	The default value is false.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record can be edited (true) or not (false).
	The default value is false.
Name	Type string
	Properties Filter, Group, idLookup, Sort
	Description Name of the account.
OwnerId	Туре
	reference

Field	Details
	Properties Filter, Group, Sort
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RenewableEnergyUsagePctCmclBld	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of renewable energy used for the total electricity consumption of all the commercial buildings that are related to the carbon footprint record or the override value.
RenewableEnergyUsagePctDataCtr	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of total renewable energy used for the total electricity consumption of all the data centers that are related to the carbon footprint record or the override value.
RenewableEnrgyPctOmclBldOvride	Type percent
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the commercial buildings renewable energy percentage.
RenewableEnrgyPctDataCtrOvride	Type percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the data centers renewable energy percentage.
ScopelEmissionsDataCenters	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions from data centers that's calculated based on the data center emissions in the related carbon footprint record or the override value.
ScopelEmissionsFleetVehicles	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions from fleet vehicles that's calculated based on the fleet vehicle emissions in the related carbon footprint record or the override value.
ScopelEmissionsPrivateJets	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions from private jets that's calculated based on the private jet emissions in the related carbon footprint record or the override value.
Scope1EmssnCmclBldOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 1 emissions from commercial buildings.
Scope1EmssnCommercialBuildings	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The scope 1 emissions from commercial buildings that's calculated based on the commercial building emissions in the related carbon footprint record or the override value.
ScopelEmssnDataCentersOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 1 emissions from data centers.
Scope1EmssnPrivateJetsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 1 emissions from private jets.
Scp1EmssnWstGenInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions from company's generated waste that's calculated based on the waste related emissions in the related waste footprint record or the override value.
ScplEmssnWstGenOvrideInTco2e	Type
	double Properties Create, Filter, Nillable, Sort, Update
	Description The value to override the scope 1 emissions from company's generated waste.
Scope2EmissionsFleetVehicles	Type double
	Properties Filter, Nillable, Sort
	Description The scope 2 emissions from fleet vehicles that's calculated based on the fleet vehicle emissions in the related carbon footprint record or the override value.

Scope2EmissionsPrivateJets

Type

double

Properties

Filter, Nillable, Sort

Description

The scope 2 emissions from private jets that's calculated based on the private jets emissions in the related carbon footprint record or the override value.

Scope2EmissionsType

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

Specifies the type of scope 2 emissions.

Possible values are:

- LocationBased—Location-Based
- MarketBased—Market-Based

The default value is LocationBased.

Scope2LocBasedEmssnCmclBld

Type

double

Properties

Filter, Nillable, Sort

Description

The scope 2 emissions from commercial buildings that's calculated based on the location-based commercial buildings emissions in the related carbon footprint record or the override value.

Scope2LocBasedEmssnDataCtr

Type

double

Properties

Filter, Nillable, Sort

Description

The scope 2 emissions from data centers that's calculated based on the location-based data center emissions in the related carbon footprint record or the override value.

Scope2MarketBasedEmssnCmclBld

Type

double

Properties

Filter, Nillable, Sort

Field	Details
	Description The scope 2 emissions from commercial buildings that's calculated based on the market-based commercial building emissions in the related carbon footprint record or the override value.
Scope2MarketBasedEmssnDataCtr	Type double
	Properties Filter, Nillable, Sort
	Description The scope 2 emissions from data centers that's calculated based on the market-based data center emissions in the related carbon footprint record or the override value.
Scope3EmissionsBusinessTravel	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from business travel that is included in category 6 of the related carbon footprint record or the override values.
Scope3EmissionsCapitalGoods	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of capital goods that is included in category 2 of the related carbon footprint record or the override value.
Scope3EmissionsDataCenters	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from all the data centers in the related carbon footprint record or the override value.
Scope3EmissionsFleetVehicles	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from all the fleet vehicles in the related carbon footprint record or the override value.
Scope3EmissionsFranchises	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the operation of franchises that is included in category 14 of the related carbon footprint record or the override value.
Scope3EmissionsInvestments	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from investment that is included in category 15 of the related carbon footprint record or the override value.
Scope3FmissionsPctCapitalGoods	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the production of capital goods out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmissionsPctFranchises	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the operation of franchises out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmissionsPctInvestments	Туре
	percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of scope 3 emissions from investments out of the total scope 3 emissions. This is a calculated field.
Scope3EmissionsPercentage	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions out of the total emissions.
	This is a calculated field.
Scope3EmissionsPrivateJets	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from all the private jets in the related carbon footprint record or the override value.
Scope3EmissionsWasteGenInOper	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the treatment and disposal of generated waste that is included in category 5 of the related carbon footprint record or the override value.
Scope3EmssnCapitalGoodsOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the production of capital goods.
Scope3EmssnCmclBldOverride	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the total scope 3 emissions from commercial buildings.
Scope3EmssnCommercialBuildings	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from all the commercial buildings in the related carbon footprint record or the override value.
Scope3EmssnDataCentersOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from data centers.
Scope3EmssnEmpCommutingOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the transportation of employees.
Scope3EmssnEmployeeCommuting	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation of employees that is included in category 7 of the related carbon footprint record or the override value.
Scope3FmssnFranchisesOverride	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the total scope 3 emissions from the operation of franchises.
Scope3EmssnInvestmentsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from investments.
Scope3EmssnPctBusinessTravel	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from business travel out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmssnPctDnstrmTrnspDstr	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the transportation and distribution of downstream leased assets out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmssnPctEmpCommuting	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the transportation of employees out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmssnPctUpstmLeasedAsst	Type percent

Field	Details
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the operation of upstream leased assets out of the total scope 3 emissions. This is a calculated field.
Scope3EmssnPctUseOfSoldPrdct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from uncategorized sources out of the total scope 3 emissions.
	This is a calculated field.
Scope3EmssnUseOfSoldProducts	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the use of sold products and services that is included in category 11 of the related carbon footprint record or the override value.
Scope3UncategorizedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from uncategorized sources in the related carbon footprint record or the override value.
ScplEmssnFleetVehiclesOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 1 emissions from fleet vehicles.
Sqp2FmssnFleetVehiclesOverride	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 2 emissions from fleet vehicles.
Scp2EmssnPrivateJetsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 2 emissions from private jets.
Scp2LocBsdEmssnCmclBldOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 2 location-based emissions from commercial buildings.
Scp2LocBsdEmssnDataCtrOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 2 location-based emissions from data centers.
Sap2MktBsdEmssnOnclBldOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the scope 2 market-based emissions from commercial buildings.
Sqp2MktBsdEmssnDataCtrOverride	Type
	double Properties Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the scope 2 market-based emissions from data centers.
Scp3EmssnBusinessTravelOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from business travel.
Scp3EmssnDnstrmLeasedAssets	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from downstream leased assets that is included in category 13 of the related carbon footprint record or the override value.
Scp3EmssnDnstrmLeasedAstOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from downstream leased assets.
Scp3FmssnDnstrmTrnspDstrOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the transportation and distribution of downstream assets.
Scp3EmssnDownstreamTrnspDstr	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the transportation and distribution of downstream assets that is included in category 9 of the related carbon footprint record or the override value.
Scp3EmssnEolSoldPrdctOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the end-of-life treatment of sold products.
Scp3EmssnEolTreatOfSoldPrdct	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the end-of-life treatment of sold products that is included in category 12 of the related carbon footprint record or the override value.
Scp3EmssnFleetVehiclesOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from fleet vehicles.
Scp3EmssnFuelEnergyActivity	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of fuel and energy that is included in category 3 of the related carbon footprint record or the override values.
Scp3EmssnFuelEnrgyActvtyOvride	Type double
	Properties Filter, Nillable, Sort

Field Details Description The emissions value entered to override the value of the total scope 3 emissions from the production of fuel and energy. Scp3EmssnPctDnstrmLeasedAssets Type percent **Properties** Filter, Nillable, Sort Description The percentage of scope 3 emissions from the downstream leased assets out of the total scope 3 emissions. This is a calculated field. ${\tt Scp3EmssnPctEolTreatSoldPrdct}$ Type percent **Properties** Filter, Nillable, Sort Description The percentage of scope 3 emissions from the end-of-life treatment of sold products out of the total scope 3 emissions. This is a calculated field. Scp3EmssnPctFuelEnrgyActivity Type percent **Properties** Filter, Nillable, Sort Description The percentage of scope 3 emissions from the production of fuel and energy out of the total scope 3 emissions. This is a calculated field. ${\tt Scp3EmssnPctProcSoldProducts}$ Type percent **Properties** Filter, Nillable, Sort Description The percentage of scope 3 emissions from the processing of sold products out of the total scope 3 emissions. This is a calculated field.

Field	Details
Sqp3EmssnPctPurchGoodsAndSrvcs	Туре
	percent
	Properties
	Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from the production of purchased goods and services out of the total scope 3 emissions.
	This is a calculated field.
Scp3EmssnPctUpstrmTrnspDstr	Туре
	percent
	Properties
	Filter, Nillable, Sort
	Description
	The percentage of scope 3 emissions from the transportation and distribution of upstream leased assets out of the total scope 3 emissions.
	This is a calculated field.
Scp3EmssnPctWasteGenInOper	Туре
	percent
	Properties
	Filter, Nillable, Sort
	Description
	The percentage of scope 3 emissions from the treatment and disposal of generated waste out of the total scope 3 emissions.
	This is a calculated field.
Scp3EmssnPrivateJetsOverride	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The emissions value entered to override the value of the total scope 3 emissions from private jets.
Sqp3EmssnProcSoldPrdctOverride	Tuna
-	Type double
	Properties
	Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the total scope 3 emissions from the processing of sold products.
Scp3EmssnProcSoldProducts	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the processing of sold products that is included in category 10 of the related carbon footprint record or the override value.
Scp3EmssnPurchGoodsAndServices	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions from the production of purchased goods and services, included in category 1 associated with the carbon footprint record or the relevant override value.
Scp3EmssnPurchGoodsSrvcsOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the production of purchased goods and services.
Scp3EmssnUpstreamLeasedAssets	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the operation of upstream leased assets that is included in category 8 of the related carbon footprint record or the override value.
Scp3EmssnUpstreamTrnspDstr	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the transportation and distribution of upstream leased assets that is included in category 4 of the related carbon footprint record or the override value.
Scp3EmssnUpstrmLeasedAstOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the operation of upstream leased assets.
Scp3EmssnUpstrmTrnspDstrOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the transportation and distribution of upstream leased assets.
Scp3EmssnUseOfSoldPrdctOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the use of sold products and services.
Scp3EmssnWasteGenInOperOvride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions from the treatment and disposal of generated waste.
Scp3UncategorizedEmssnOverride	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The emissions value entered to override the value of the total scope 3 emissions from uncategorized sources.
Scp3UncatgEmssnPct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 emissions from uncategorized sources out of the total scope 3 emissions.
	This is a calculated field.
SupplementalScope3FmissionsPct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The percentage of supplemental scope 3 emissions out of the total scope 3 emissions.
	This is a calculated field.
TotScope2LocBasedEmssn	Туре
	double
	Properties Filter, Nillable, Sort
	Description The total scope 2 location-based emissions from all the related records or the override value.
TotScope2MarketBsdEmssn	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 market-based emissions from all the related records or the override value.
TotalAllocEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description

Field	Details
	This field is a calculated field.
TotalEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1, 2, and 3 emissions.
	This is a calculated field.
TotalScope1And2Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1 and 2 emissions of the related carbon footprint record.
	This is a calculated field.
TotalScope1Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1 emissions from all the related energy use records and the supplemental emissions from the related carbon footprint record or the override value.
TotalScope1EmissionsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 1 emissions.
TotalScope2Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 emissions from all the related energy use records and the supplemental emissions from the related carbon footprint record or the override value.

Field	Details
TotalScope2EmissionsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 2 emissions.
TotalScope3Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions of the related carbon footprint record that's calculated based on categorized, uncategorized, and supplemental scope 3 emissions or the override value.
TotalScope3EmissionsOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total scope 3 emissions.
TotalSuplScope3EmssnOverride	Type double
	Properties Filter, Nillable, Sort
	Description The emissions value entered to override the value of the total supplemental scope 3 emissions.
TotalSuplScp3Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total supplemental scope 3 emissions from the related carbon footprint record or the override value.
UniqueIdx	Type string
	Properties Properties
	Filter, Group, idLookup, Nillable, Sort

Field	Details
	Description The unique index for this record. This field is available in API version 57.0 and later.
Year	Туре
	picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description The year to which the carbon emissions inventory data corresponds.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026

• 2027

Field Deta	ils
•	2028
•	2029
•	2030
•	2031
•	2032
•	2033
•	2034
•	2035
•	2036
•	2037
•	2038
•	2039
•	2040
•	2041
•	2042
•	2043
•	2044
•	2045
•	2046
•	2047
•	2048
•	2049
•	
•	
•	2002
•	
	2054
•	
	2056
•	
	2058
	2059
•	
	2061
•	2002
•	
•	2064

• 2065

Field Det	ails
	2066
	2067
	2068
	2069
	2070
	2071
•	2072
•	2073
•	2074
•	2075
•	2076
•	2077
•	2078
	2079
	2080
•	2081
	2082
	2083
	2084
	2085
	2086
	2087
	2088
	20892090
	2091 2092
	2093
	2094
	2095
	2096
	2097
	2098
	2099

Annual EmssnRdctnTarget

Represents information about the emissions reduction target set by a company for a particular year. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()

Field	Details
EmissionsReductionPercentage	Type percent
	Properties
	Filter, Nillable, Sort
	Description
	The percentage of emissions reduced from the previous year.
EmssnIntensityReductionPct	Туре
	percent
	Properties
	Filter, Nillable, Sort
	Description
	The percentage of emission intensity reduced from the previous year.
IsLocked	Туре
	boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates if the record is locked or not.
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record can be edited or not.
	The default value is 'false'.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the annual emissions reduction target record.
OtherTargetKpiChangePercentage	Type percent
	Properties Filter, Nillable, Sort
	Description The targeted percentage of change in the key performance indicators (KPI) from the base year to the target year.
OtherTargetKpiInTargetYear	Type double
	Properties Filter, Nillable, Sort
	Description The key performance indicator (KPI) target to achieve in the target year for the KPI of the parent emissions reduction target record.
ParentTargetId	Type reference

Field	Details
	Properties Filter, Group, Sort
	Description The parent target record that's related to the annual emissions reduction target record.
	This is a relationship field.
	Relationship Name ParentTarget
	Relationship Type Lookup
	Refers To EmssnReductionTarget
Scope3GhgCatgTgtEmssnRdctn	Type double
	Properties Filter, Nillable, Sort
	Description The emissions targeted to be reduced in the scope 3 greenhouse gas category in the target year.
Scope3GhgCatgTgtEmssnRdctnPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of scope 3 greenhouse gas emissions targeted to be reduced from the base year to the target year.
TargetEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The emissions targeted to be reached in the target year.
TargetEmissionsIntensity	Type double
	Properties Filter, Nillable, Sort
	Description The emissions intensity targeted to be reached in the target year.

Field	Details
TargetYear	Туре
	picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description
	The year of the annual emissions reduction target record.
	Possible values are:
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	20282029
	20292030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
	• 2041
	• 2042

204320442045

Field	Details
	• 2046
	• 2047
	• 2048
	• 2049
	• 2050
	• 2051
	• 2052
	• 2053
	• 2054
	• 2055
	• 2056
	• 2057
	• 2058
	• 2059
	• 2060

BldgEnrgyIntensity

Represents the average energy intensity by fuel type across a set of buildings. You can derive this data from published sources. Alternatively, you can do so by using energy use records as the data source and then setting up a window of time with some characteristics of the building size and type. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AnnualEnergyIntensityInKwhM2	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The average energy consumption intensity for a year in kWh per square meter. The fuel-specific energy consumption intensities are stored in the associated building energy intensity value records.

Field	Details
Annual Energy Intensity In KwhSqft	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The average energy consumption intensity for a year in kWh per square foot. The fuel-specific energy consumption intensities are stored in the associated building energy intensity value records.
AreSysGenEnrgyUseRecIncluded	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description "Indicates whether to include records created when filling data gaps (true) or not (false). Note: Including these records could result in inaccurate calculations."
	The default value is 'false'.
AveragePowerUsageEffectiveness	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
AveragingWindowEndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the energy use records are considered to calculate the building energy intensity.
AveragingWindowStartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the energy use records are considered to calculate the building energy intensity.
BldgEnergyIntensityIdentifier	Type textarea

Field	Details
	Properties Create, Nillable, Update
	Description The unique external identifier for the building energy intensity record.
BuildingAssetType	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset type of the asset for which the building energy intensity is calculated.
BuildingSize	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
BuildingSizeCategoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The building size category record for the stationary asset. You can add appropriate building size ranges by creating or editing building size category records.
	This is a relationship field.
	Relationship Name BuildingSizeCategory
	Relationship Type Lookup
	Refers To BldgSizeCategory
BusinessRegion	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The business region. If you select the business region, you can't select the country and state.

Field	Details
Country	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the country. You can enter a country only when you don't select the business region.
EmissionFactorDataSource	Type textarea
	Properties Create, Nillable, Update
	Description The source of the emissions factor reference data.
EmissionFactorUpdateYear	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The year when the emissions factor reference data was last updated by a publishing authority.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaximumBuildingSizeInM2	Type double
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The maximum size of the building in square meters. This value is used to calculate building energy intensity.
MaximumBuildingSizeInSqft	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The maximum size of the building in square feet. This value is used to calculate building energy intensity.
MinimumBuildingSizeInM2	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The minimum size of the building in square meters. This value is used to calculate building energy intensity.
MinimumBuildingSizeInSqft	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The minimum size of the building in square meters. This value is used to calculate building energy intensity.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.

Field	Details
	Relationship Name
	Owner
	Relationship Type
	Lookup
	Refers To
	Group, User
RegionalDivision	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The regional division for this building energy intensity record.
	Possible values are:
	 EastNorthCentral—East North Central
	• EastSouthCentral—East South Central
	 MiddleAtlantic—Middle Atlantic
	• Mountain
	 NewEngland—New England
	• Pacific
	• SouthAtlantic—South Atlantic
	 WestNorthCentral—West North Central
	WestSouthCentral West South Central
State	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the state. You can enter a state only when you don't select the business region
	and don't enter multiple countries.

BldgEnrgyIntensityVal

Represents the calculated average energy intensity for an individual fuel type across a set of buildings. Each record stores the fuel use intensity as a function of the floor area of the occupied space of that building. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AnnualIntensityValueInKwhM2	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The annual building energy consumption intensity of the selected fuel type for a year in kWh per square meter.
AnnualIntensityValueInKwhSqft	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The annual building energy consumption intensity of the selected fuel type for a year in kWh per square foot.
BuildingEnergyIntensityId	Туре
	reference
	Properties Create, Filter, Group, Sort
	Description The parent building energy intensity record for this intensity value record.
	This is a relationship field.
	Relationship Name BuildingEnergyIntensity
	Relationship Type Lookup
	Refers To BldgEnrgyIntensity
FuelType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description
	The type of fuel for this intensity value record.
	Possible values are:
	• CityGas—City Gas
	• Cooling
	• Diesel
	• Electricity
	• FuelOil—FuelOil
	• Heat
	• HeavyOil—HeavyOil
	• Kerosene
	• LightOil—LightOil
	 LiquidNaturalGasLNG—Liquid Natural Gas (LNG)
	 NaturalGas—Natural Gas
	• Propane
	• Steam
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the account.

BldgSizeCategory

Represents the building size filter criteria for the building energy intensity records. The building size filter criteria are stored as a range of floor area sizes from a minimum size to a maximum size, in units of sqft or m². The records can have overlapping minimum-maximum ranges. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaximumSize	Туре
	double
	Properties
	Create, Filter, Sort, Update
	Description The maximum size of the building.
MaximumSizeInSqft	Type double
	Properties Filter, Nillable, Sort
	Description The maximum size of the building in square foot.

Field	Details
MinimumSize	Type double Properties
	Create, Filter, Sort, Update
	Description The minimum size of the building.
MinimumSizeInSqft	Type double
	Properties Filter, Nillable, Sort
	Description The minimum size of the building in square foot.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
SizeUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description The unit of measure for the size of the building.

Field	Details
	Possible values are:
	• m2
	• sqft
	The default value is 'sqft'.

CleanEnergyProject

Represents information about a project that provides credits a company can purchase to claim clean energy usage. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CleanEnergyType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The clean energy type associated with the project.
	Possible values are: Biomass
	GeothermalSolarWind
Country	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The country in which the clean energy project is implemented.
	Possible values are: • AD—Andorra

- AE—United Arab Emirates
- AF—Afghanistan
- AG—Antigua and Barbuda
- AI—Anguilla
- AL—Albania
- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- Az—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- ве—Belgium
- BF—Burkina Faso
- вG—Bulgaria
- вн—Bahrain
- BI—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- вм—Вегтиdа
- вм—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- вz—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the

- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- CX—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia

- GF—French Guiana
- GG—Guernsey
- Gн—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- нт—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- Jм—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- ▶ KI—Kiribati

Field	Details

- KM—Comoros
- KN—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кк—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- MD—Moldova, Republic of
- ME—Montenegro
- MF—Saint Martin (French part)
- MG—Madagascar
- MK—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- му—Malaysia

- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- NZ—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- se—Sweden

- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- T₩—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- UZ—Uzbekistan
- VA—Holy See (Vatican City State)

Field	Details
	VC—Saint Vincent and the Grenadines
	VE—Venezuela, Bolivarian Republic of
	• VG—Virgin Islands, British
	• vn—Vietnam
	• VU—Vanuatu
	WF—Wallis and Futuna
	• WS—Samoa
	 XK—Kosovo
	• YE—Yemen
	• YT—Mayotte
	• za—South Africa
	• zm—Zambia
	• zw—Zimbabwe
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The description of the clean energy project.
DeveloperAccountId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The account of an organization that develops the clean energy project.
	This field is a relationship field.
	Relationship Name DeveloperAccount
	Relationship Type Lookup
	Refers To
	Supplier
FundedBy	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description
	The name of the organization that's funding the clean energy project.
GridSubregion	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The electricity grid region.
LastReferencedDate	Туре
	dateTime
	Properties Filter Millable Cort
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Location	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The location for the subregion.
Name	Туре
	string
	Properties Croate Filter Croup idleadup Cart Hadate
	Create, Filter, Group, idLookup, Sort, Update
	Description The name of the project that supplies clean energy.
OwnerId	Туре
	reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProjectUrl	Type url
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The URL that contains the clean energy project details.
Region	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The region within the country where the clean energy project is implemented.
	Possible values are:
	• AMER
	• ANZ
	• APAC
	• Africa
	Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	North America
	• South America
	• Southeast Asia

CrbnCreditAlloc

Represents information about how the carbon credits are allocated by an organization to offset their emissions. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AllocatedCarbonCrCost	Type currency
	,
	Properties Filter, Nillable, Sort
	Description
	The amount spent on carbon credits to offset the emissions.
AnnualEmssnInventoryId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The annual emissions inventory associated with the carbon credit allocation.
	This field is a relationship field.
	Relationship Name
	AnnualEmssnInventory
	Relationship Type Lookup
	Refers To
	AnnualEmssnInventory
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description The name of the carbon credit allocation.
NetEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The remaining emissions that couldn't be offset for the annual emissions inventory.
NetScope1EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The remaining scope 1 emissions that couldn't be offset for the annual emissions inventory.
NetScope2EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The remaining scope 2 emissions that couldn't be offset for the annual emissions inventory.
NetScope3EmssnInTco2e	Туре
	double
	Properties Filter, Nillable, Sort

Field	Details
	Description Total remaining scope 3 emissions that couldn't be offset.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Scp1CrbnCrAllocInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The carbon credits allocated to the scope 1 emissions inventory.
Scp2CrbnCrAllocInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The carbon credits allocated to the scope 2 emissions inventory.
Scp3CrbnCrAllocInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The carbon credits allocated to the scope 3 emissions inventory.
TotalCrbnCrAllocInTco2e	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The carbon credits allocated for the annual emissions inventory.
TotalEmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total emissions derived from the annual emissions inventory that an organization can offset.
TotalScope1EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions that can be offset.
TotalScope2EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 2 emissions that can be offset.
TotalScope3EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions that can be offset.
Year	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The year when the carbon credit was allocated.
	Possible values are:

Field	Details	
	2000	

- 2000
- 2001
- 2002
- 2003
- 2004
- 2005
- 2006
- 2007
- 2008
- 2009
- 2010
- 2011
- 2012
- 2013
- 2014
- 2015
- 2016
- 2017
- 2018
- 2019
- 2020
- 2021
- 2022
- 2023
- 2024
- 2025
- 2026
- 2027
- 2028
- 2029
- 2030
- 2031
- 2032
- 2033
- 2034
- 20352036
- 2037

Field	Details
	0000

- 2038
- 2039
- 2040
- 2041
- 2042
- 2043
- 2044
- 2045
- 2046
- 2047
- 2048
- 2049
- 2050
- 2051
- 2052
- 2053
- 2054
- 2055
- 2056
- 2057
- 2058
- 2059
- 2000
- 20602061
- 2062
- 2063
- 2064
- 2065
- 2066
- 2067
- 2068
- 2069
- 2070
- 2071
- 2072
- 2073
- 2074
- 2075

Field Deto	ails
	2076
•	2077
•	2078
•	2079
•	2080
•	2081
•	2082
•	2083
•	2084
•	2085
•	2086
•	2087
•	2088
•	2089
•	2090
•	2091
•	2092
•	2093
•	2094
•	2095
•	2096
•	2097
•	2098
•	2099

CrbnCreditAllocItem

Represents information about carbon credit allocation and emissions related to each emission activity. This object is available in API version 56.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(),
update()

Field	Details
CrbnCreditAllocId	Type reference
	Properties Filter, Group, Sort
	Description The carbon credit allocation record that's associated with the emissions activity.
	This field is a relationship field.
	Relationship Name CrbnCreditAlloc
	Relationship Type Lookup
	Refers To CrbnCreditAlloc
EmissionsActivityId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The emissions activity record that's associated with the carbon credit allocation.
	This field is a relationship field.
	Relationship Name EmissionsActivity
	Relationship Type Lookup
	Refers To EmissionsActivity
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the emissions activity associated with the carbon credit allocation item.
NetEmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The remaining emissions that couldn't be offset from the annual emissions inventory for the emissions activity.
TotalCrbnCrAllocInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The carbon credits allocated for the emissions activity.
TotalEmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total emissions derived from the annual emissions inventory that an organization can offset for the emissions activity.

CrbnCreditDistribution

Represents a junction between the sustainability credit and carbon credit allocation objects. To offset emissions for carbon credit allocation items, specify the emissions activity on this junction object. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CrbnCrAllocDate	Туре
	date
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The date when the carbon credit was allocated.
CrbnCreditAllocId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The carbon credit allocation record that's associated with the carbon credits distribution.
	This field is a relationship field.
	Relationship Name CrbnCreditAlloc
	Relationship Type Lookup
	Refers To
	CrbnCreditAlloc
EmissionsActivityId	Type reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The emissions activity that's specified to offset emissions at carbon credit allocation items level.
	This field is a relationship field.
	Relationship Name
	EmissionsActivity
	Relationship Type
	Lookup

Field	Details
	Refers To EmissionsActivity
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the carbon credit allocation.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
SustainabilityCreditId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The sustainability credit record that's associated with the carbon credits distribution.
	This field is a relationship field.
	Relationship Name SustainabilityCredit
	Relationship Type Lookup
	Refers To SustainabilityCredit
TotalCrbnCrAllocCost	Type currency
	Properties Filter, Nillable, Sort
	Description The total cost of the carbon credits that were allocated for all the emissions activities.
TotalCrbnCrAllocInTco2e	Type double
	Properties Create, Filter, Sort, Update
	Description The total carbon credits that were allocated for all the emissions activities.

CrbnCreditProject

Represents information about the environmental project that generates carbon credits by removing greenhouse gasses or preventing a certain quantity of greenhouse gasses from being released. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AdditionalBenefits	Type multipicklist
	Properties
	Create, Filter, Nillable, Update
	Description
	Specifies the additional benefits related to the carbon credit project.
	Possible values are:
	• Biodiversity
	• Education
	Energy AccessHealth
	nearth
Country	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The sourth in which the sorb on gradit project is implemented.
	The country in which the carbon credit project is implemented.
	Possible values are:
	• AD—Andorra
	• AE—United Arab Emirates
	• AF—Afghanistan
	AG—Antigua and BarbudaAI—Anguilla
	AL—Albania
	AM—Armenia
	AO—Angola
	AQ—Antarctica
	AR—Argentina
	• AT—Austria
	AU—Australia
	• AW—Aruba
	Ax—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and Herzegovina
	• BB—Barbados
	• BD—Bangladesh

- BE—Belgium
- BF—Burkina Faso
- вG—Bulgaria
- вн—Bahrain
- ві—Burundi
- вJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- ви—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- вz—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany

- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gm—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- нм—Heard Island and McDonald Islands
- ны—Honduras

- HR—Croatia
- HT—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- KH—Cambodia
- KI—Kiribati
- KM—Comoros
- KN—Saint Kitts and Nevis
- кр—Korea, Democratic People's Republic of
- кв—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- ▶ LV—Latvia

- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- мь—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- мұ—Malaysia
- Mz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- OM—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia

Field	Details
Field	De

- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands

Field	Detai	ls
	•	TD—Chad
	•	TF—French Southern Territories
	•	TG—Togo
	•	TH—Thailand
	•	TJ—Tajikistan
	•	TK—Tokelau
	•	TL—Timor-Leste
	•	TM—Turkmenistan
	•	TN—Tunisia
	•	TO—Tonga
	•	TR—Türkiye
	•	TT—Trinidad and Tobago
	•	TV—Tuvalu
	•	TW—Taiwan
	•	TZ—Tanzania, United Republic of
	•	UA—Ukraine
	•	UG—Uganda
	•	US—United States
	•	UY—Uruguay
	•	UZ—Uzbekistan
	•	VA—Holy See (Vatican City State) VC—Saint Vincent and the Grenadines
	•	
	•	VE—Venezuela, Bolivarian Republic of VG—Virgin Islands, British
	•	VN—Vietnam
		VU—Vanuatu
		WF—Wallis and Futuna
	•	WS—Samoa
	•	XK—Kosovo
	•	YE—Yemen
	•	YT—Mayotte
	•	ZA—South Africa
	•	ZM—Zambia
	•	zw—Zimbabwe
CrbnCrMethodology	Туре	

Type string

Field	Details
	Properties Crosto Filter Crosup Millable Cost Hadate
	Create, Filter, Group, Nillable, Sort, Update
	Description The method that's used to adjust the carbon credits during the lifecycle of the project.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the carbon credit project.
DeveloperAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account of an organization that develops the emissions reduction project and provides the carbon credits.
	This field is a relationship field.
	Relationship Name DeveloperAccount
	Relationship Type Lookup
	Refers To Supplier
ExternalIdentifier	Type
	string Properties Create, Filter, Group, Nillable, Sort, Update
	Description The external identifier of the data that is imported for the carbon credit project.
FundedBy	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the organization that's funding the carbon credit project.

Field	Details
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MitigationType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the mitigation strategy associated with this carbon credit project.
	Possible values are:
	• Avoidance
	• Reduction
	• Removal
	• Sequestration
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.

Field	Details
	This field is a polymorphic relationship field.
	Relationship Name
	Owner
	Relationship Type
	Lookup Refers To
	Group, User
ProjRegistryIdentifier	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The unique identifier that's assigned by the registry to the carbon credit project.
ProjectType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of the carbon credit project.
	Possible values are:
	• Agriculture
	Forestry and Land Use
	• Fuel Switching
	• Household Devices
	 Industrial Manufacturing
	Renewable Energy
	• Transportation
	• Waste Disposal
ProjectUrl	Туре
	url
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The URL that contains the carbon credit project details.
Region	
1.091011	Type picklist
	pickiist

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The region within the country where the carbon credit project is implemented.

Possible values are:

- AMER
- ANZ
- APAC
- Africa
- Central America
- Central Asia
- **EMEA**
- Europe
- LATAM
- Middle East
- North America
- South America
- Southeast Asia

StandardsAgencyName

Type

picklist

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

Specifies the organization name that defines the standards for voluntary emissions reduction credits.

Possible values are:

- Climate, Community and Biodiversity Standards
- Gold Standard
- Verified Carbon Standard
- Voluntary Offset Standard

TotalCrbnCrAllocInTco2e Type

double

Properties

Filter, Nillable, Sort

Description

The total carbon credits allocated for the carbon credit project, which is a cumulative value of all the associated sustainability credits.

Field	Details
TotalCrbnCrAvlInTco2e	Туре
	double
	Properties Filter, Nillable, Sort
	Description The total carbon credits available for the carbon credit project.
TotalCrbnCrPurchInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total carbon credit purchased for the carbon credit project, which is a cumulative value of all the associated sustainability credits.
TotalSpend	Type currency
	Properties Filter, Nillable, Sort
	Description The total spend for the carbon credit project, which is a cumulative value of all the associated sustainability credits.
VerifiedBy	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The name of the organization that verified the carbon credit project.
VoluntaryRegistryName	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the registry that lists the carbon credit projects.

CrbnEmssnScopeAlloc

Represents the allocation of fuel consumption for different scope emissions. For an energy use record, tCO_2e is calculated and the results are classified as either Scope 1, Scope 2, or Scope 3 emission values. Each individual fuel type has its own scope allocation record. To put the tCO_2e result in the correct scope, the energy use record points to the scope allocation record. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
LastReferencedDate	Type dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the account.
OwnerId	Туре
	reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The ID of the user who owns this record.

Field	Details
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

CrbnEmssnScopeAllocVal

Represents the scope allocation by fuel type. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CrbnEmssnScopeAllocId	Type reference
	Properties Create, Filter, Group, Sort
	Description The parent carbon emissions scope allocation record for this allocation value record.
	This is a relationship field.
	Relationship Name CrbnEmssnScopeAlloc
	Relationship Type Lookup
	Refers To CrbnEmssnScopeAlloc
FuelType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update

Description

The fuel type for this allocation value record.

Possible values are:

- CityGas—City Gas
- Cooling
- Diesel
- Electricity
- FuelOil—FuelOil
- Heat
- HeavyOil—Heavy Oil
- Kerosene
- LightOil—LightOil
- LiquidNaturalGasLNG—Liquid Natural Gas (LNG)
- NaturalGas—NaturalGas
- Propane
- Refrigerant
- Steam

FuelTypeAllocation

Type

picklist

Properties

Create, Filter, Group, Restricted picklist, Sort, Update

Description

The GHG protocol scope for the selected fuel type.

Possible values are:

- SCOPE1—Scope 1
- SCOPE2—Scope 2
- SCOPE3Downstream—Scope 3 Downstream
- SCOPE3DownstreamLeasedAssets—Scope 3 Downstream Leased Assets
- SCOPE3Franchises—Scope 3 Franchises
- SCOPE3Investments—Scope 3 Investments
- SCOPE3Upstream—Scope 3 Upstream
- SCOPE3UseOfSoldProducts—Scope 3 Use of Sold Products
- SCP3CptlGoods—Scope 3 Capital Goods
- SCP3EndLifeTreatSoldProducts—Scope 3 End-of-Life Treatment of Sold Products
- SCP3FuelEnergyRelatedActv—Scope 3 Fuel and Energy-Related Activities
- SCP3ProcessingSoldPrdct—Scope 3 Processing of Sold Products

Field	Details
	 SCP3PurchGoodsServices—Scope 3 Purchased Goods and Services
	 SCP3UpstrmLsdAst—Scope 3 Upstream Leased Assets
	• SCP3WasteGeneratedInOperations—Scope3WasteGeneratedInOperations
CrbrEnsenScapeAllocValFuelTypeRefId	Type reference
	Properties
	Filter, Group, Nillable, Sort
	Description
	This field is available in API version 57.0 and later.
	This field is a relationship field.
	Relationship Name
	CrbnEmssnScopeAllocValFuelTypeRef
	Relationship Type
	Lookup
	Refers To FuelType
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the account.

Disclosure

Represents the disclosure details that a company shares, which can be included by a user in their response document. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details
AssessmentId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The assesment record that stores the responses submitted for the disclosure.
	This field is a relationship field.
	Relationship Name Assessment
	Relationship Type Lookup
	Refers To Assessment
DisclosureDefVerDesc	Type textarea
	Properties Nillable
	Description The description of the disclosure definition version associated with the disclosure.
DisclosureDefVerNumber	Type string
	Properties Filter, Group, Nillable, Sort
	Description The version number of the disclosure definition associated with the disclosure.

Field	Details
DisclosureDefinition	Туре
	string
	Properties
	Filter, Group, Nillable, Sort
	Description The disclosure definition associated with the disclosure.
DisclosureDefinitionVerId	Type
	reference
	Properties Create, Filter, Group, Sort
	Description The version of the disclosure definition associated with the disclosure.
	This field is a relationship field.
	Relationship Name DisclosureDefinitionVer
	Relationship Type Lookup
	Refers To DisclosureDefinitionVersion
DisclosureDocumentUrl	Type url
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The URL of the final disclosure document that's used in the disclosure.
DisclosureType	Туре
	string
	Properties Filter, Group, Nillable, Sort
	Description The type of disclosure.
DisclosureTypeBodyLogo	Туре
	string
	Properties Filter, Group, Nillable, Sort

Field	Details
	Description The logo of the standard body related to a disclosure type to which an individual or a company is making a disclosure.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The end date of the disclosure.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type
	string Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description Name of the record.
OwnerId	Type reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The ID of the user who owns this record.
	This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ReplicateResponsesFromId	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The disclosure from where the responses are taken. The disclosure information is dependent on the disclosure type, definition, and a valid assessment context on the disclosure.
	Available in API version 59.0 and later.
	This field is a relationship field.
	Relationship Name ReplicateResponsesFrom
	Relationship Type Lookup
	Refers To Disclosure
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The start date of the disclosure.
Status	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the status of the disclosure.
	Possible values are:
	• COMPLETED—Completed
	 IN_PROGRESS—In Progress
	READY_FOR_REVIEW—Ready for Review

Field	Details
	The default value is IN_PROGRESS.
Year	Type picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The year for which the disclosure is done.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026

20272028

Field	Details
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040

DisclosureDefinition

Represents information that defines a disclosure type, such as details of the publisher or vendor who created or implemented the report. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description about the disclosure definition.
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The developer name of the record.

Field	Details
DisclosureType	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The type of disclosure that's used in the definition.
	Possible values are:
	• 1awRN0000000G—Company Disclosure
	1awRN0000000L—Demo Type
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this record.
	Possible values are:
	• da—Danish
	• de—German
	en_US—Englishes—Spanish
	es MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl NL—Dutch
	no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_cn—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
MasterLabel	Туре
	string

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The label assigned to this object.
NamespacePrefix	Type string
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix that is associated with this object. Limit: 15 characters.

DisclosureDefinitionVersion

Represents the version information about the disclosure definition. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the disclosure definition version.
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The developer name of the record.
DisclosureDefinitionId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The name of the disclosure definition associated with the version.
	This field is a relationship field.
	Relationship Name DisclosureDefinition
	Relationship Type Lookup
	Refers To DisclosureDefinition
IsActive	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	$\label{lem:Description} \textbf{Indicates whether the disclosure definition version is an active version (true) or not (false).}$
	The default value is false.
IsCurrentVersion	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether this is the current version of the disclosure definition (true) or not (false).
	The default value is false.
Language	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this record.
	Possible values are:
	• da—Danish
	• de—German
	• en_US—English
	• es—Spanish

Field	Details
	• es_Mx—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	• zh_cn—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
MasterLabel	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description The label assigned to this object.
NamespacePrefix	Type string
	Properties
	Filter, Group, Nillable, Sort
	Description
	The namespace prefix that is associated with this object. Limit: 15 characters.
OmniScriptCnfgApiName	Type string
	Properties
	Create, Filter, Group, Sort, Update
	Description The API name of the OmniScript configuration that's associated with the disclosure definition version.
OmniScriptConfiguration	Type string
	Properties
	Filter, Group, Nillable, Sort

Field	Details
	Description The OmniScript configuration that's associated with the disclosure definition version.
VersionNumber	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The version of the disclosure definition published by the author.

DisclosureType

Represents the types of disclosures that are done by an individual or an organization and the associated metadata. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Details
Туре
textarea
Properties
Create, Nillable, Update
Description
The description about the disclosure type.
Туре
string
Properties
Create, Filter, Group, Sort, Update
Description
The developer name of the record.
Туре
reference

Field	Details
	Properties Control of the Control of
	Create, Filter, Group, Nillable, Sort, Update
	Description The logo of the standard body to which an individual or a company is making a disclosure
	This field is a relationship field.
	Relationship Name DisclosureBodyLogo
	Relationship Type Lookup
	Refers To StaticResource
DisclosureBodyUrl	Туре
	url
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The URL of the disclosure standard body.
DisclosureCategory	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description Specifies the name of the clause library category that's used for disclosure.
	Possible values are:
	• 0zMRN00000001—ESG
	EnvSocGvnc—Environment, Social, and Governance
Language	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this record.
	Possible values are:
	• da—Danish
	• de—German
	• en US—English
	• es—Spanish

Field	Details
	 es_MX—Spanish (Mexico) fi—Finnish fr—French it—Italian ja—Japanese ko—Korean n1_NL—Dutch no—Norwegian pt_BR—Portuguese (Brazil) ru—Russian sv—Swedish th—Thai zh_CN—Chinese (Simplified) zh_TW—Chinese (Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label assigned to this object.
NamespacePrefix	Type string Properties Filter, Group, Nillable, Sort Description The namespace prefix that is associated with this object. Limit: 15 characters.

DisclsReportingPeriod

Represents a corporate reporting period that is used for stakeholder disclosure reports. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AffiliateAccountId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The account that's identified as the affiliate account.
	This field is a relationship field.
	Relationship Name AffiliateAccount
	Relationship Type Lookup
	Refers To Account
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the reporting period.
EndDate	Type date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The end date of the reporting period.
Identifier	Type string
	Properties Autonumber, Defaulted on create, Filter, Sort
	Description
	The unique identifier of the reporting period.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The start date of the reporting period.

DivrsEquityInclSum

Represents information that indicates the diversity of governance bodies and employees by gender, age group, and other diversity indicators. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AgeGroup	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the age group of an employee.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the diversity equity inclusion statistics.
DisclsReportingPeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The reporting period for which the diversity equity inclusion statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod

Field	Details
DiversityCategory	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the category of employee diversity.
	Possible values are:
	• Remuneration
	• Representation
DiversityType	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of employee diversity.
	Possible values are:
	• Ability
	• Gender
	• Race or Ethnicity
	Sexual Orientation
EmployeePercentage	Туре
	percent
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The percentage of employees according to the unique combination of diversity category and type based on gender, age group, race and location.
EmployeeType	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of employee that is a part of the diversity statistic.
	Possible values are:
	• Employees
	Governance Body Members
	• Leadership

Field	Details
EmploymentType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of employment that's included in the diversity statistic.
	Possible values are:
	• All
	Full Time Equivalent
	• Full-Time
	• Non-Employee
	• Non-Guaranteed Hours
	• Part-Time
	• Permanent
	• Temporary
Gender	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the gender of an employee.
	Possible values are:
	• Female
	• Male
	• Non-Binary
	• Not Disclosed
	• Other
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Location	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the location of an employee.
Name	Type string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Race	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the race of an employee.
SubsidiaryAccountId	
SassiatatyAccountia	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account

EconomicPerformanceSum

Represents statistics about the direct economic value generated and distributed by an organization or the related income and expenses. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Country	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	 Description Specifies the country for which the economic performance statistics are being reported. Possible values are: AD—Andorra AE—United Arab Emirates AF—Afghanistan AG—Antigua and Barbuda AI—Anguilla
	• AL—Albania

- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- Az—Azerbaijan
- ва—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- BE—Belgium
- вғ—Burkina Faso
- BG—Bulgaria
- вн—Bahrain
- BI—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- ви—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- BZ—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands

Field	Details

- CL—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- cr—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- Eн—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland

- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- G₩—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- нм—Honduras
- нк—Croatia
- нт—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- ▶ K₩—Kuwait

- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island

- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- sı—Slovenia
- SJ—Svalbard and Jan Mayen
- SK—Slovakia

- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- sy—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- TH—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- TW—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- UZ—Uzbekistan
- VA—Holy See (Vatican City State)
- VC—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- vn—Vietnam
- ▼U—Vanuatu

Field	Details
	WF—Wallis and Futuna
	• ws—Samoa
	• XK—Kosovo
	• YE—Yemen
	• YT—Mayotte
	• za—South Africa
	• zm—Zambia
	• zw—Zimbabwe
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of the economic performance statistics.
DisclsReportingPeriodId	Туре
	reference
	Properties Create, Filter, Group, Sort, Update
	Description
	The reporting period for which the economic performance statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To
	DisclsReportingPeriod
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Market	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the market for which the economic performance statistics are being reported.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PerformanceCategory	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the category of economic performance.
	Possible values are:
	Distributed Value
	Generated Value

Field	Details
	Retained Value
PerformanceType	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of economic performance.
	Possible values are:
	Capital Provider Payments
	Community Investments
	 Employee Wages and Benefits
	• Government Payments
	• Operating Costs
	• Revenues
Region	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the region for which the economic performance statistics are being reported.
TotalAmount	Туре
	currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The total economic performance amount according to a combination of performance
	category and performance type based on country, region, and market.
SubsidiaryAccountId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name
	SubsidiaryAccount

Field	Details
	Relationship Type Lookup
	Refers To Account

ElectricityEmssnFctrSet

Represents the factors that are used to convert electricity usage into CO_2e , CO_2 , CH_4 , and N_2O values. This record holds data on the breakdown of sources of electricity by fuel type (grid mixes). This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Ch4EmissionRate	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CH4 emissions rate. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
Ch4EmissionRateInTgwh	Type double
	Properties Filter, Nillable, Sort
	Description The CH4 emissions rate in tonnes per gigawatt hour. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
Ch4EmissionRateUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the CH4 output emission rate.

Field	Details
	Possible values are:
	• G PER KWH—g/kWh
	• KG PER KWH—kg/kWh
	• KG_PER_MWH—kg/MWh
	• LBS_PER_GWH—lbs/GWh
	• LBS_PER_MWH—lbs/MWh
	TONNES_PER_KWH—tonnes/kWh
	TONNES_PER_MWH—tonnes/MWh
	The default value is 'KG_PER_KWH'.
City	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
Co2EmissionRate	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions rate. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
Co2EmissionRateInTmwh	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions rate in tonnes per megawatt-hour. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
Co2EmissionRateUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the CO2 output emission rate.
	Possible values are:
	• G_PER_KWH—g/kWh

Field	Details
	● KG_PER_KWH—kg/kWh
	• KG_PER_MWH—kg/MWh
	• LBS_PER_GWH—lbs/GWh
	• LBS_PER_MWH—lbs/MWh
	• TONNES_PER_KWH—tonnes/kWh
	TONNES_PER_MWH—tonnes/MWh
	The default value is 'KG_PER_KWH'.
Co2eEmissionRate	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The total annual CO2 equivalent output emission rate for a grid subregion that's calculated using the location-based method. This value will override the value calculated by using CO2, CH4, and N2O factors.
Co2eEmissionRateInTmwh	Туре
	double
	Properties Filter, Nillable, Sort
	Description The total annual CO2 equivalent output emission rate in tonnes per megawatt-hour.
Co2eEmissionRateUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the total CO2 equivalent output emission rate.
	Possible values are:
	• G PER KWH—g/kWh
	• KG PER KWH—kg/kWh
	• KG PER MWH—kg/MWh
	• LBS PER GWH—lbs/GWh
	• LBS_PER_MWH—lbs/MWh
	• TONNES PER KWH—tonnes/kWh
	• TONNES_PER_MWH—tonnes/MWh
	The default value is 'KG_PER_KWH'.

Field	Details
Country	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Possible values are:
	• AD—Andorra
	AE—United Arab Emirates
	• AF—Afghanistan
	AG—Antigua and Barbuda
	• AI—Anguilla
	• AL—Albania
	• AM—Armenia
	• AO—Angola
	• AQ—Antarctica
	• AR—Argentina
	• AT—Austria
	• AU—Australia
	• AW—Aruba
	• AX—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and Herzegovina Daylanda
	BB—Barbados BB—Rangladach
	BD—Bangladesh BR—Relaium
	BE—BelgiumBF—Burkina Faso
	BG—Bulgaria
	• BH—Bahrain
	• BI—Burundi
	• BJ—Benin
	BL—Saint Barthélemy
	BM—Bermuda
	BN—Brunei Darussalam
	BO—Bolivia, Plurinational State of
	BQ—Bonaire, Sint Eustatius and Saba
	• BR—Brazil
	• BS—Bahamas
	• BT—Bhutan

- BV—Bouvet Island
- B₩—Botswana
- BY—Belarus
- BZ—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- cI—Cote d'Ivoire
- CK—Cook Islands
- cl—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- CX—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- ₽J—Fiji

- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- gp—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gm—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- HT—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—ltaly
- JE—Jersey
- JM—Jamaica

- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat

- MT—Malta
- MU—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- мұ—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- R₩—Rwanda

- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- SE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- SJ—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- то—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- ™—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine

Field Details • UG—Uganda **US**—United States UY—Uruguay UZ—Uzbekistan VA—Holy See (Vatican City State) vc—Saint Vincent and the Grenadines VE—Venezuela, Bolivarian Republic of VG—Virgin Islands, British VN—Vietnam VU—Vanuatu WF-Wallis and Futuna ws-Samoa YE—Yemen YT—Mayotte ZA—South Africa zm—Zambia zw—Zimbabwe EmissionFactorDataSource Type textarea **Properties** Create, Nillable, Update Description The source of the emissions factor reference data. EmissionFactorUpdateYear Type picklist **Properties** Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The year in which this reference data for the emissions factor was most recently updated. Possible values are: 2000 2001 2002 2003 2004 2005

2006

Field Deta	ils
•	2007
•	2008
•	2009
•	2010
•	2011
•	2012
•	2013
•	2014
•	2015
•	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
•	
•	2034
•	2035
•	2036
•	2037
•	2038
•	
•	2040
GenlConversionFctrRevisionDate Type	
	ate

Field	Details
	Properties Control of the Control of
	Create, Filter, Group, Nillable, Sort, Update
	Description The date when the electricity grid reference data for the emissions factors record is revised by the publishing authority.
GridSubregion	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The electricity grid subregion for which this electricity emissions factor set is valid.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LocBasedGeothermalMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The percentage of electricity generated from geothermal source based on the region's grid mix data from governmental or non-governmental organizations.
LocBasedOtherFossilFuelMixPct	Туре
	percent
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of electricity generated from other fossil fuels based on the region's grid mix data from governmental or non-governmental organizations.
LocBasedRenewableEnergyPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of electricity generated from renewable resources such as biomass, geothermal, solar, wind, and hydroelectricity that's calculated based on the location-based data.
LocBsdRenewableEnrgyNonHydro	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of electricity generated from renewable resources such as biomass, geothermal, solar, and wind that's calculated based on the location-based data.
LocationBasedBiomassMixPct	Туре
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from biomass based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedCoalMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from coal based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedGasMixPct	Type nercent
	Properties Courte Filter Millelle Cout He date
	Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of electricity generated from gas based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedHydroMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from hydroelectric power source based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedMixPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of electricity generated from all sources based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedNuclearMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from nuclear power source based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedOilMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from oil based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedOtherFuelMixPct	Type nercent
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of electricity generated from other fuels based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedSolarMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from solar photovoltaic cells based on the region's grid mix data from governmental or non-governmental organizations.
LocationBasedWindMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from wind based on the region's grid mix data from governmental or non-governmental organizations.
MarketBasedBiomassMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from biomass based on the grid mix data from the electricity supplier.
MarketBasedCoalMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from coal based on the grid mix data from the electricity supplier.
MarketBasedGasMixPct	Type
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of electricity generated from gas based on the grid mix data from the electricity supplier.
MarketBasedHydroMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from hydroelectric power source based on the grid mix data from the electricity supplier.
MarketBasedMixPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of electricity generated from all sources based on the grid mix data from the electricity supplier.
MarketBasedNuclearMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from nuclear power source based on the grid mix data from the electricity supplier.
MarketBasedOilMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from oil based on the grid mix data from the electricity supplier.
MarketBasedOtherFuelMixPct	Туре
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The percentage of electricity generated from other fuels based on the grid mix data from the electricity supplier.
MarketBasedSolarMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from solar photovoltaic cells based on the grid mix data from the electricity supplier.
MarketBasedWindMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from wind based on the grid mix data from the electricity supplier.
MktBasedGeothermalMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from geothermal power source based on the grid mix data from the electricity supplier.
MktBasedOtherFossilFuelMixPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of electricity generated from other fossil fuels based on the grid mix data from the electricity supplier.
MktBasedRenewableEnergyPct	Type
	Properties Filter, Nillable, Sort

Field	Details
-------	----------------

Description

The percentage of electricity generated from renewable resources such as biomass, geothermal, solar, wind, and hydroelectricity that's calculated based on the market-based data.

MktBsdCo2eEmissionRate

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The annual carbon dioxide equivalent output emission rate that's calculated based on the market-based data of the electricity grid subregion.

MktBsdCo2eEmissionRateInTmwh

Type

double

Properties

Filter, Nillable, Sort

Description

The annual carbon dioxide equivalent output emission rate that's calculated based on the market-based data.

MktBsdCo2eEmissionRateUnit

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The unit of measure for the carbon dioxide equivalent market-based output emission rate.

Possible values are:

- G PER KWH—g/kWh
- KG_PER_KWH—kg/kWh
- KG PER MWH—kg/MWh
- LBS PER GWH—lbs/GWh
- LBS PER MWH—lbs/MWh
- TONNES PER KWH—tonnes/kWh
- TONNES_PER_MWH—tonnes/MWh

The default value is 'KG_PER_KWH'.

${\tt MktBsdRenewableEnrgyNonHydro}$

Туре

percent

Properties

Filter, Nillable, Sort

Field	Details
	Description The percentage of electricity generated from renewable resources such as biomass, geothermal, solar, and wind that's calculated based on the market-based data.
N2oEmissionRate	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The N2O emissions rate. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
N2oEmissionRateInTgwh	Type
	double Properties Filter, Nillable, Sort
	Description The N2O emissions rate in tonnes per gigawatt hour. This field is informational only and doesn't impact the carbon dioxide equivalent calculations.
N2oEmissionRateUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the N2O output emission rate.
	Possible values are:
	• G_PER_KWH—g/kWh
	• KG_PER_KWH—kg/kWh
	• KG_PER_MWH—kg/MWh
	• LBS_PER_GWH—lbs/GWh
	• LBS_PER_MWH—lbs/MWh
	• TONNES_PER_KWH—tonnes/kWh
	 TONNES_PER_MWH—tonnes/MWh The default value is 'KG_PER_KWH'.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update

Details
Description Name of the account.
Type reference
Properties Create, Filter, Group, Nillable, Sort, Update
Description The other emissions factor set record containing global warming potential values for CH4 and N2O.
This is a relationship field.
Relationship Name OtherEmssnFctr
Relationship Type Lookup
Refers To OtherEmssnFctrSet
Type reference
Properties Create, Defaulted on create, Filter, Group, Sort, Update
Description The ID of the user who owns this record.
This is a polymorphic relationship field.
Relationship Name Owner
Relationship Type Lookup
Refers To Group, User
Type textarea
Properties Create, Nillable, Update
Description The valid postal codes for this electricity emissions factor set.
Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The state for which this electricity emissions factor set is valid.

EmissionsActivity

Represents a company's emission generating activities and the greenhouse gas categories that are used to aggregate emissions for these activities. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()

Field	Details
DataSourceType	Type picklist
	Properties Defaulted on create, Filter, Group, Restricted picklist, Sort
	Description The source of the emissions activity data. The activity data can be seeded values that can't be changed or deleted or user-defined values.
	Possible values are:
	• Seeded
	• User Defined
	The default value is 'Seeded'.
EmissionsScopeCategory	Туре
	picklist
	Properties Filter, Group, Restricted picklist, Sort
	Description
	The scope category of the emissions generated by the activity.
	Possible values are:
	• All Emissions
	• Scope 1

Field	Details
	• Scope 2
	• Scope 3
IsLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record can be edited or not.
	The default value is 'false'.
Name	Туре
	string
	Properties Filter, Group, idLookup, Sort
	Description The name of the emissions activity record.

Field	Details
OwnerId	Type reference
	Properties Filter, Group, Sort
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

EmissionsAllocation

Represents information about the emissions from a child or partner account that are allocated to an account. This object is available in API version 58.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AllocatedFromAccountId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The child or partner account from which the emissions are allocated to the parent account.
	This field is a relationship field.
	Relationship Name AllocatedFromAccount
	Relationship Type Lookup

Field Details

Refers To

Account

AllocatedFromGhgCategory T_{V}

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

Specifies the GHG category of the child or partner account from which the emissions are allocated to the parent account.

Possible values are:

- Business Travel
- Capital Goods
- Downstream Leased Assets
- Downstream Transportation and Distribution
- Employee Commuting
- End-of-Life Treatment of Sold Products
- Franchises
- Fuel and Energy-Related Activities
- Investments
- Processing of Sold Products
- Purchased Goods and Services
- Uncategorized
- Upstream Leased Assets
- Upstream Transportation and Distribution
- Use of Sold Products
- Waste Generated In Operations

AllocatedFromScope

Type

picklist

Properties

Create, Filter, Group, Restricted picklist, Sort, Update

Description

Specifies the scope of the child or partner account from which the emissions are allocated to the parent account.

Possible values are:

- Scope1—Scope 1
- Scope1AndScope2—Scope 1 and Scope 2
- Scope2—Scope 2

Field	Details
	• Scope3—Scope3
	• TotalEmissions—Total Emissions
AllocatedToAccountId	Туре
	reference
	Properties Create, Filter, Group, Sort, Update
	Description
	The parent account to which the emissions are allocated.
	This field is a relationship field.
	Relationship Name AllocatedToAccount
	Relationship Type Lookup
	Refers To Account
AllocatedToGhgCategory	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the GHG category of the parent account to which the emissions are allocated.
	Possible values are:
	• Franchises
	• Investments
AllocatedToScope	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description Specifies the scope of the parent account to which the emissions are allocated.
	Possible values are:
	• Scope1—Scope 1
	• Scope2—Scope 2
	• Scope3—Scope3
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name for this energy use record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Percentage	Type percent
	Properties Create, Filter, Sort, Update
	Description The percentage of emissions from a child or partner account that are allocated to the parent account.

EmissionsForecastFact

Represents information about the time periods, measures, and dimensions used to forecast the emissions of a company. The emissions forecast of the company is generated based on its business measures such as revenue or employee count, and the actual emissions data from previous years. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The account for which the emissions are being forecasted.
	This is a relationship field.
	Relationship Name Account
	Relationship Type Lookup
	Refers To Account
ActualEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The actual emissions for the emissions activity in the specified forecasting year. This value is from the annual emissions inventory record and is based on the activity source type. For example, if the source of the emissions activity is business travel, the emissions from business travel value in the annual emissions inventory record is used.
ActualEmissionsIntensity	Type double
	Properties
	Create, Filter, Nillable, Sort, Update

Field Details

Description

The ratio of actual emissions of an emissions activity to the value of the underlying forecasting measure, such as revenue, number of employees, or office space.

ActualEnergyConsumption

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The actual energy consumption for commercial buildings or data centers generating scope 2 emissions. This value is the total energy consumption value in the annual emissions inventory record. The appropriate value is determined based on whether the emissions activity is related to commercial buildings or data centers.

ActualLocationBasedEmissions

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The actual location-based emissions from electricity-related emissions activity in the forecasting year. This value is the total scope 2 location-based emissions value in the annual emissions inventory record. The appropriate value is determined based on whether the emissions activity is related to commercial buildings or data centers.

ActualMarketBasedEmissions

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The actual market-based emissions from electricity-related emissions activity in the forecasting year. This value is the total scope 2 market-based emissions value in the annual emissions inventory record. The appropriate value is determined based on whether the emissions activity is related to commercial buildings or data centers.

ActualRenewableEnergyCnsmpPct

Tvpe

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The consumption percentage of electricity generated from renewable energy by commercial buildings and data centers generating scope 2 emissions. This value is the total renewable energy consumption value in the annual emissions inventory record. The appropriate value

Field	Details
	is determined based on whether the emissions activity is related to commercial buildings or data centers.
AdvAcctForecastSetPartnerId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The advanced account forecast set partner record that associates a partner with a forecast set. This value is required to view the forecasting grid.
	This is a relationship field.
	Relationship Name AdvAcctForecastSetPartner
	Relationship Type Lookup
	Refers To AdvAcctForecastSetPartner
CarbonCreditCost	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The forecasted cost of the carbon credits in USD per tCO2e.
EmissionsActivityId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The emissions activity record for which the emissions are being forecasted.
	This is a relationship field.
	Relationship Name EmissionsActivity
	Relationship Type Lookup
	Refers To EmissionsActivity
FinalForecastedEmissions	Type double

Field Details

Properties

Create, Filter, Nillable, Sort, Update

Description

The final forecasted emissions value is calculated by deducting the planned internal and external emissions reductions from the forecasted emissions. If a forecasted emissions override is specified, the override becomes the final forecasted emissions.

ForcstEmssnIntensityRdctnPct

Type

percent

Properties

Create, Filter, Nillable, Sort, Update

Description

The forecasted percentage of emissions intensity reduction for the emissions activity of the previous year. This value is required to reduce emissions. For example, as the revenue increases, this intensity reduction percentage ensures that the forecasted emissions don't increase.

${\tt ForcstRenewableEnergyCnsmpPct}$

Туре

percent

Properties

Create, Filter, Nillable, Sort, Update

Description

The forecasted consumption percentage of electricity generated from renewable energy that overrides the target renewable energy consumption percentage.

ForecastedEmissions

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The forecasted emissions for the specified emissions activity in the forecasting year that's calculated based on the forecasting measures and emissions activity.

ForecastedEmissionsIntensity

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The forecasted emissions intensity that's calculated by dividing the emissions intensity for the emissions activity by the forecasting metric.

ForecastedEmissionsOverride

Type

double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The emissions value that overrides the forecasted emissions value.
ForecastedEnergyConsumption	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The forecasted energy consumption for the year.
ForecastedLocationBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The forecasted location-based emissions from the electricity consumed for the year.
ForecastedMarketBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The forecasted market-based emissions from the electricity consumed for the year.
Headcount	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The number of employees and contractors of the company by year.
IsLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is 'false'.

Field	Details
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Туре
	boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates if the record can be edited or not.
	The default value is 'false'.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the record.
NetEmissionsForecast	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The forecasted value of the emissions that must be reduced after accounting for the planned carbon offsets for a year.
Other Appln Forecasted Emissions	Туре
	double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The emissions value that's forecasted by an application other than Sustainability Cloud. This value can be added in Sustainability Cloud through an automated process or by manual entry. Users can refer to this value when generating forecasts in Sustainability Cloud.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The period for which the forecasting data is created. This period is typically a year for Sustainability Cloud.
	This is a relationship field.
	Relationship Name Period
	Relationship Type Lookup
	Refers To Period
PlannedCarbonCredits	Type double
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The carbon credits that have been planned to be allocated for an emissions activity for a year.
PlannedCarbonCreditsInvst	Туре
	currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The cost incurred to invest in the carbon credits that are planned for the future.
PlnOperationalEmissionsRdctn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The planned reduction of emissions from the operational initiatives of the annual emissions activity.
PlnSupplierEmissionsRdctn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The planned reduction of emissions from the supplier initiatives of the annual emissions activity.
ProcurementSpend	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The amount spent on procurement of material and services from suppliers.
RequiredCarbonCredits	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The carbon credits that are required to meet target compensated emissions. This value is the difference between the valid forecasted emissions and the target compensated emissions.

Field	Details
RequiredCarbonCreditsInvst	Туре
	currency
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The cost incurred to invest in the carbon credits that are required for the future.
Revenue	Туре
	currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The revenue of the company by year.
Status	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description The status of the combination of forecast year, measure, account, and emissions activity record.
	Possible values are:
	• Active
	• Inactive
	The default value is 'Active'.
TargetCompensatedEmissions	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The target emissions value for the specified emissions activity in the forecasting year. This value is from the annual emissions reduction target record when the target type is Net Zero Emissions.
TargetEmissions	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update

Field	Details
	Description The target emissions for the specified emissions activity in the forecasting year. This value is from the annual emissions reduction target record when the target type is Emissions Reduction.
TargetRenewableEnergyPct	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of target renewable energy consumption for electricity. This value is from the annual emissions reduction target record when the target type is Renewable Energy Consumption.
TotalFloorArea	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total floor area occupied by the company.

EmploymentCompensationSummary

Represents information about stakeholder engagement to assess the importance of environmental, social, and governance (ESG) issues for them. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AverageHourlyWage	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The average hourly wage of the employees.

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of this summary.
DisclsReportingPeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The reporting period for which the employee wage summary is generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
FacilityType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of facility that the employees are working in.
	Possible values are: • Lodging
	• Store
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MinimumWageEmployeePercent	Туре
	percent
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The percentage of employees earning the minimum wage.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of this summary.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To
	Group, User
Region	Type picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the region that the employees belongs to.
	Possible values are:
	Possible values are:

Field	Details
	• AMER
	• APAC
	• EMEA
SubsidiaryAccountId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The account that's identified as the supplier account.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account

EmpBenefitSummary

Represents statistics about benefits provided to employees and the usage of benefits. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
BenefitUsage	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the status of the benefit that's used by the employee.
	Possible values are:
	• Entitled

Field	Details
	• Returned
	• Used
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description The description of the employee benefit statistics.
DisclsReportingPeriod:	^{Id} Type
	reference
	Properties Create, Filter, Group, Sort, Update
	Description The unique identifier of the reporting period.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
EmployeeBenefitType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of benefit offered by the organization.
	Possible values are:
	Disability and Invalidity Coverage
	Health Care
	• Life Insurance
	• Other
	Parental Leave
	Retirement Provision
	Stock Ownership

Details
Туре
double
Properties Create, Filter, Nillable, Sort, Update
Description The number of employees receiving the benefit.
Type percent
Properties Create, Filter, Nillable, Sort, Update
Description The percentage of employees receiving the benefit.
Type
picklist
Properties Create, Filter, Group, Nillable, Sort, Update
Description Specifies the type of employment.
Possible values are:
• All
• Full-Time
• Full-Time Equivalent
• Non-Employee
• Non-Guaranteed Hours
• Part-Time
• Permanent
• Temporary
Type boolean
Properties
Create, Defaulted on create, Filter, Group, Sort, Update
Description
Indicates whether the employee is eligible for the benefit ($true$) or not ($false$).
The default value is false.
Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PercentageCalcType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of calculation used to determine the percentage of employees who received the benefit.

Field	Details
	Possible values are:
	• Retention
	Return to Work
PrimaryLocation	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The primary location from where the organization operates.
SubsidiaryAccountId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name
	SubsidiaryAccount
	Relationship Type
	Lookup
	Refers To
	Account

EmployeeDevelopmentSum

Represents statistics about training and development provided to upskill the employees. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AverageTrainingTime	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The average training time that the employees have undertaken based on the gender or employee category.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the employee development statistics.
DisclsReportingPeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The reporting period for which the employee development statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DiscIsReportingPeriod
EmployeeCount	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total number of employees who attended the program based on the gender and employee category.
EmployeePercentage	Type percent

Field	Details
	Properties Control of the Land
	Create, Filter, Nillable, Sort, Update
	Description The percentage of employees who attended the program based on the gender and employee type.
EmployeeType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the type of employees who attended the employee development program.
	Possible values are:
	• Contractor
	• Full-Time
	• Part-Time
Gender	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the gender of employees who attended the employee development program.
	Possible values are:
	• Female
	• Male
	• Non-Binary
	• Not Disclosed
	• Other
LastReferencedDate	Type dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProgramCategory	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the category of the employee development program.
	Possible values are:
	Performance and Development ReviewTraining
SubsidiaryAccountId	Type reference Properties
	Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account

Employee Demographic Sum

Represents statistics about employees based on their demographic information, such as employee count by age group, by gender, and by region. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AgeGroup	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the age group of an employee.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the employee statistics.
DisclsReportingPeriodId	Type reference

Field	Details
	Properties Communication Control of the Control of the Communication Control of the Communication Control of the Control of the Communication Control of the Control of
	Create, Filter, Group, Sort, Update
	Description The reporting period for which the employee statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
EmployeeCount	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total number of employees based on a combination of employment type, work type, gender, age group, and region.
EmploymentType	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the type of employment.
	Possible values are:
	• All
	• Full-Time
	• Full-Time Equivalent
	• Non-Employee
	• Non-Guaranteed Hours
	• Part-Time
	• Permanent
	• Temporary
Gender	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description
	Specifies the gender of an employee.
	Possible values are:
	• Female
	• Male
	• Non-Binary
	• Not Disclosed
	• Other
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Туре
	reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner

Field	Details
	Relationship Type
	Lookup
	Refers To
	Group, User
Percentage	Туре
	percent
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The percentage of employees based on a combination of employment type, work type, gender, age group, and region.
Region	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the region of an employee.
ReportType	Туре
	picklist
	Properties Create, Filter, Group, Sort, Update
	Description
	Specifies the type of report that uses the employee statistics.
	Possible values are:
	• Headcount
	• New Hire
	• Turnover
SubsidiaryAccountId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name
	Subsidiary Account

Field	Details
	Relationship Type Lookup
	Refers To Account
WorkType	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the type of work done by the employee.
	Possible values are:
	• Accounting
	• Human Resource

EmssnRdctnCommitment

Represents information about a company's commitment to reducing its carbon emissions. This commitment is in line with the Paris Agreement's goal to achieve a low-carbon future. For example, companies sign the Business Ambition for 1.5°C commitment letter and commit to set emission reduction targets to limit temperature rise to 1.5°C above pre-industrial levels. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()

Field	Details
ApprovalDate	Type date
	Properties Filter, Group, Nillable, Sort
	Description The date when the climate body approves the commitment.
CommitmentLetterId	Type reference

Properties

Filter, Group, Nillable, Sort

Description

The commitment letter that was pledged by the company.

This is a relationship field.

Relationship Name

CommitmentLetter

Relationship Type

Lookup

Refers To

ContentDocument

CommitmentProgram

Type

picklist

Properties

Filter, Group, Restricted picklist, Sort

Description

The climate commitment program that the company associates itself with.

Possible values are:

- Custom
- ScienceBasedTargetsInitiative—Science Based Targets Initiative
- TheClimatePledge—The Climate Pledge

CommitmentType

Type

picklist

Properties

Filter, Group, Restricted picklist, Sort

Description

The type of climate commitment made by the company. A company committing to 1.5° Celsius emissions reduction target must set targets across all the greenhouse gas scopes in line with 1.5° Celsius emission scenarios. A company committing to a net-zero emissions reduction target must set a long-term science-based target to reach net-zero value chain greenhouse gas emissions by no later than 2050. It must also set interim targets across all the relevant greenhouse gas scopes. The targets must be set in line with the criteria and recommendations of the Science Based Targets initiative.

Possible values are:

- Custom
- NetZero—Net Zero
- OnePointFiveDegreeCelsius—1.5° Celsius
- TwoDegreeCelsius—2° Celsius

Field	 WellBelowTwoDegreeCelsius—Well Below 2° Celsius 	
CompanyBusinessRegion	Type	
	picklist	
	Properties Filter, Group, Nillable, Sort	
	Description The business region in which the company operates.	
	Possible values are:	
	AMER	
	• ANZ	
	• APAC	
	• Africa	
	• Central America	
	• Central Asia	
	• EMEA	
	• Europe	
	• LATAM	
	• Middle East	
	• North America	
	• South America	
	• Southeast Asia	
CompanyEmployeeCount	Туре	
	int	
	Properties	
	Filter, Group, Nillable, Sort	
	Description The total number of employees in the company. The employee count determines whether the company is a small and medium enterprise (SME) or not.	
CompanySector	Type multipicklist	
	Properties Filter	
	Description	
	The sector in which the company operates based on the SBTi sector classification.	
	Possible values are:	
	Aerospace and Defense	
	 Air Freight Transportation and Logistics 	

- Air Transportation Airlines
- Air Transportation Airport Services
- Automobiles and Components
- Banks, Diverse Financials, Insurance
- Building Products
- Chemicals
- Construction Materials
- · Construction and Engineering
- Consumer Durables, Household and Personal Products
- Containers and Packaging
- Education Services
- Electric Utilities and Independent Power Producers and Energy Traders (including fossil, alternative and nuclear energy)
- Electrical Equipment and Machinery
- Food Production Agricultural Production
- Food Production Animal Source Food Production
- Food and Beverage Processing
- Food and Staples Retailing
- Forest and Paper Products Forestry, Timber, Pulp and Paper, Rubber
- Gas Utilities
- Ground Transportation Highways and Railtracks
- Ground Transportation Railroads Transportation
- Ground Transportation Trucking Transportation
- Healthcare Equipment and Supplies
- Healthcare Providers and Services, and Healthcare Technology
- Homebuilding
- Hotels, Restaurants and Leisure, and Tourism Services
- Media
- Mining Coal
- Mining Iron, Aluminum, Other Metals
- Mining Other (Rare Minerals, Precious Metals andGems)
- NGO
- Oil and Gas
- Pharmaceuticals, Biotechnology and Life Sciences
- Professional Services
- Public Agencies

- Real Estate
- Retailing
- Semiconductors and Semiconductors Equipment
- Software and Services
- Solid Waste Management Utilities
- Specialized Consumer Services
- Specialized financial services, consumer finance, insurance brokerage firms
- Technology Hardware and Equipment
- Telecommunication Services
- Textiles, Apparel, Footwear and Luxury Goods
- Tires
- Tobacco
- Trading Companies and Distributors, and Commercial Services and Supplies
- Water Transportation Ports and Services
- Water Transportation Water Transportation
- Water Utilities

CompanyType

Type

picklist

Properties

Filter, Group, Nillable, Restricted picklist, Sort

Description

The type of the company.

Possible values are:

- International
- NGOorNonProfit—NGO or Non-Profit
- Private
- Public
- StateOwned—State-Owned

CustomCommitmentProgram

Type

string

Properties

Filter, Group, Nillable, Sort

Description

The climate commitment program that the company associates itself with when the commitment program is Custom.

Field	Details
CustomCommitmentType	Туре
	string
	Properties
	Filter, Group, Nillable, Sort
	Description
	The type of climate commitment made by the company when the commitment type is Custom.
IsLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description
	Indicates if the record is locked or not.
	The default value is 'false'.
IsSmallandMediumEnterprise	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the company is a small and medium enterprise (SME) or not based on the company's employee count. A company with fewer than 500 employees is considered a small and medium enterprise (SME).
	The default value is 'false'.
IsTargetUsedForForecasting	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether to use the emissions reduction target record related to this commitment record for emissions forecasting.
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.

Field	Details	
LastViewedDate	Туре	
	dateTime	
	Properties Filter, Nillable, Sort	
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.	
MayEdit	Type boolean	
	Properties Defaulted on create, Filter, Group, Sort	
	Description Indicates if the record can be edited or not.	
	The default value is 'false'.	
Name	Type string	
	Properties Filter, Group, idLookup, Sort	
	Description The name of the emissions reduction commitment record.	
OwnerId	Type reference	
	Properties Filter, Group, Sort	
	Description The ID of the user who owns this record.	
	This is a polymorphic relationship field.	
	Relationship Name Owner	
	Relationship Type Lookup	
	Refers To Group, User	
PrimaryContactId	Type reference	
	Properties Filter, Group, Nillable, Sort	

Field	Details		
	Description The primary contact to communicate about the company's climate commitment.		
	This is a relationship field.		
	Relationship Name PrimaryContact		
	Relationship Type Lookup		
	Refers To Contact		
Status	Type picklist		
	Properties Filter, Group, Restricted picklist, Sort		
	Description		
	The status of the climate commitment made by the company.		
	Possible values are:		
	• Committed		
	 InProgress—In Progress 		
	 InternallyApproved—Internally Approved 		
	 SubmittedForInternalApproval—Submitted for Internal Approval 		
	 SubmittedToClimateBody—Submitted to Climate Body 		
TargetSettingDueDate	Type date		
	Properties Filter, Group, Nillable, Sort		
	Description The date by when the company must set their emissions targets after the commitment was approved.		

EmssnReductionTarget

Represents information about the science-based or non-science-based target set by a company to fulfill its emissions reduction commitment. This target indicates the company's emissions reduction goal. A company's emissions reduction goal could be to reduce carbon emissions or increase renewable energy for reaching a target metric tonnes of CO2e (tCO2e) within a specific timeframe. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()

Special Access Rules

Fields

Field	Details	
AbsoluteContractionPercentage	Туре	
	picklist	
	Properties	
	Filter, Group, Nillable, Restricted picklist, Sort	
	Description The percentage of annual contraction when using the SBTI's absolute contraction method of target-setting. 2.5% annual linear reduction is recommended for SBTi WB2C targets and 4.2% annual linear reduction is recommended for SBTi 1.5C targets.	
	Possible values are:	
	• 2.5PERCENTANNUALREDUCTION—2.5% Annual Linear Reduction	
	• 4.2PERCENTANNUALREDUCTION—4.2% Annual Linear Reduction	
	• CUSTOM—Custom	
ActivityUnit	Type picklist	
	Properties	
	Filter, Group, Nillable, Restricted picklist, Sort	
	Description	
	The unit used for measuring the base year activity and target year activity.	
	Possible values are:	
	 DOLLAR_VALUE_ADDED—Dollar Value Added 	
	 MEGAWATT_HOUR_OF_ELECTRICITY—Megawatt-hour of Electricity 	
	 REVENUE_PASSENGER_KILOMETER—Revenue Passenger Kilometer 	
	• square_meter—Square Meter	
	 TONS_OF_ALUMINUM—Tons of Aluminum 	
	 TONS_OF_CEMENT—Tons of Cement 	
	 TONS_OF_PAPER_AND_CARDBOARD—Tons of Paper and Cardboard 	
	• TONS OF STEEL—Tons of Steel	

reference

Field	Details	
	Properties Filter, Group, Sort	
	Description The base year's annual emissions inventory record that's related to the emission reduction target record.	
	This is a relationship field.	
	Relationship Name AnnualEmissionsInventory	
	Relationship Type Lookup	
	Refers To Annual Emssnlnventory	
BaseYear	Type double	
	Properties Filter, Nillable, Sort	
	Description The year of the related annual emissions inventory record.	
BaseYearActivity	Type double	
	Properties Filter, Nillable, Sort	
	Description The amount of activity in the base year that's used to calculate emission reduction using the economic intensity or sectoral decarbonization methods.	
BaseYearEmissionIntensity	Type double	
	Properties Filter, Nillable, Sort	
	Description The level of emissions per unit of economic activity in the base year. This value is usually the dollar value added or the unit of production in the base year that's derived from the related annual emissions inventory record.	
BaseYearEmissions	Type double	
	Properties Filter, Nillable, Sort	

Field	Details	
	Description The base year's emissions value in the related annual emissions inventory record.	
BusinessLine	Type string	
	Properties Filter, Group, Nillable, Sort	
	Description The line of business for which the emissions reduction target is being set when the selected target level is Business Line.	
BusinessRegion	Type picklist	
	Properties Filter, Group, Nillable, Sort	
	Description The business region for which the emissions reduction target is being set when the selected target level is Business Region.	
	Possible values are:	
	• AMER	
	• ANZ	
	• APAC	
	• Africa	
	Central America	
	• Central Asia	
	• EMEA	
	• Europe	
	• LATAM	
	• Middle East	
	North America	
	• South America	
	• Southeast Asia	
Category	Type picklist	
	Properties Filter, Group, Nillable, Restricted picklist, Sort	
	Description	
	The category of the emissions reduction target.	
	Possible values are:	

Field	Details		
	• OTHER—Other		
	• SCIENCEBASED—Science-Based		
Country	Туре		
	picklist		
	Properties		
	Filter, Group, Nillable, Restricted picklist, Sort		
	Description		
	The country for which the emissions reduction target is being set when the selected target level is Country.		
	Possible values are:		
	 AD—Andorra 		
	AE—United Arab Emirates		
	AF—Afghanistan		
	AG—Antigua and Barbuda		
	• AI—Anguilla		
	• AL—Albania		
	• AM—Armenia		
	• AO—Angola		
	• AQ—Antarctica		
	AR—Argentina		
	• AT—Austria		
	• AU—Australia		
	• AW—Aruba		
	 AX—Aland Islands 		
	• AZ—Azerbaijan		
	BA—Bosnia and Herzegovina		
	• BB—Barbados		
	• BD—Bangladesh		
	• BE—Belgium		
	BF—Burkina Faso		
	BG—Bulgaria		
	• BH—Bahrain		
	• BI—Burundi		
	• BJ—Benin		
	BL—Saint Barthélemy		
	• BM—Bermuda		
	BN—Brunei Darussalam		
	BO—Bolivia, Plurinational State of		

- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- вz—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- cI—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea

- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- gp—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gm—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- HM—Heard Island and McDonald Islands
- нм—Honduras
- нк—Croatia
- нт—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of

- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- кі—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- ⊥K—Sri Lanka
- LR—Liberia
- LS—Lesotho
- L⊤—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- MD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia

Field	Details

- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- мт—Malta
- MU—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- MY—Malaysia
- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- OM—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- ₽K—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion

- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- TH—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- ▶ TR—Türkiye
- TT—Trinidad and Tobago

Field	Details	
	• TV—Tuvalu	
	• TW—Taiwan	
	• TZ—Tanzania, United Republic of	
	• ua—Ukraine	
	• ug—Uganda	
	• us—United States	
	• UY—Uruguay	
	• uz—Uzbekistan	
	VA—Holy See (Vatican City State)	
	VC—Saint Vincent and the Grenadines	
	VE—Venezuela, Bolivarian Republic of	
	VG—Virgin Islands, British	
	• vn—Vietnam	
	• VU—Vanuatu	
	WF—Wallis and Futuna	
	• ws—Samoa	
	• YE—Yemen	
	• YT—Mayotte	
	• za—South Africa	
	• zm—Zambia	
	• zw—Zimbabwe	
CustomAbsoluteContractionPct	Туре	
	percent	
	Properties	
	Filter, Nillable, Sort	
	Description	
	The custom percentage of annual emission contraction when using the SBTI's absolute contraction method of target-setting.	
CustomTargetSettingMethod	T	
1 Joint at 9000000111911001100	Type string	
	Properties	
	Filter, Group, Nillable, Sort	
	Description	
	The method used for setting the target when target setting method is Custom.	
CustomTargetType	Туре	
	string	

Field	Details
	Properties
	Filter, Group, Nillable, Sort
	Description The type of emissions reduction target when the target type is Custom.
Description	Type string
	Properties Filter, Group, Nillable, Sort
	Description The description of the emissions reduction target record.
EmissionsActivityId	Type reference
	Properties Filter, Group, Sort
	Description The emissions activity record that's related to the emissions reduction target record.
	This is a relationship field.
	Relationship Name EmissionsActivity
	Relationship Type Lookup
	Refers To EmissionsActivity
EmssnRdctnCommitmentId	Type reference
	Properties Filter, Group, Sort
	Description The emissions-reduction commitment record for which target is being set.
	This is a relationship field.
	Relationship Name EmssnRdctnCommitment
	Relationship Type Lookup
	Refers To EmssnRdctnCommitment

Field	Details
IsLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Level	Туре
	picklist
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort
	Description The level at which the emissions reduction target is being set.
	Possible values are:
	BUSINESSLINE—Business LineBUSINESSREGION—Business Region
	COMPANY—Company
	• COUNTRY—Country
MayEdit	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description
	Indicates if the record can be edited or not.

Field	Details
	The default value is 'false'.
Name	Type string
	Properties Filter, Group, idLookup, Sort
	Description The name of the emissions reduction target record.
OtherTargetKpi	Type picklist
	Properties Filter, Group, Nillable, Sort
	Description The key performance indicator (KPI) of targets when the target setting method is Other.
	Possible values are: Renewable Energy Electricity Percentage
	• Supplier Engagement Percentage
OtherTargetKpiChangePercentage	Type percent
	Properties Filter, Nillable, Sort
	Description The targeted percentage of change in the key performance indicators (KPI) from the base year to the target year.
OtherTargetKpiInBaseYear	Type double
	Properties Filter, Nillable, Sort
	Description The key performance indicator (KPI) of targets in the base year when the target setting method is Other.
OtherTargetKpiInTargetYear	Type double
	Properties Filter, Nillable, Sort
	Description The key performance indicator (KPI) of targets in the target year when the target setting method is Other.

Field	Details
OwnerId	Туре
	reference
	Properties Filter, Group, Sort
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
TargetEmissionsCalculator	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The application that's used to calculate the emissions target.
	Possible values are:
	• OTHER—Other
	• SBTITOOL—SBTiTool
	SUSTAINABILITYCLOUD—Salesforce Net Zero Cloud
TargetEmssnChangePercentage	Type percent
	Properties Filter, Nillable, Sort
	Description The targeted percentage of change in emissions from the base year to the target year.
TargetEmssnIntensityChangePct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The targeted percentage of change in emissions intensity from the base year to the target year.

Field	Details
TargetSettingMethod	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	The method used for setting the target.
	Possible values are:
	ABSOLUTECONTRACTION—Absolute Contraction
	• CUSTOM—Custom
	ECONOMICINTENSITY—Economic Intensity
	 PHYSICALINTENSITY—Physical Intensity
	SECTORALDECARBONIZATION—Sectoral Decarbonization
TargetType	Type picklist
	Properties
	Filter, Group, Restricted picklist, Sort
	Description
	The type of emissions reduction target.
	Possible values are:
	• CUSTOM—Custom
	 EMISSIONREDUCTIONTARGET—Emission Reduction Target
	 NETZEROEMISSIONSTARGET—Net Zero Emissions Target
	 RENEWABLEENERGYTARGET—Renewable Energy Target
	 SUPPLIERENGAGEMENTTARGET—Supplier Engagement Target
TargetYear	Type picklist
	Properties
	Filter, Group, Restricted picklist, Sort
	Description
	The year for which the emissions reduction target is set. The target year is determined by adding the number of years for which the target is set to the base year.
	Possible values are:
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019

Field Detail	ils
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
•	2033
•	2034
•	2035
•	2036
•	2037
•	2038
•	2039
•	2040
•	2041
	2042
•	2043
	2044
•	2045
	2046
	2047
	2048
	2049
	2050
	2051
	2052
	2053
	2054
	2055
	2056
•	2057

Field	Details
	• 2058
	• 2059
	• 2060
TargetYearActivity	Type double
	Properties
	Filter, Nillable, Sort
	Description The amount of activity in the target year that's used to calculate emission reduction using economic intensity or sectoral decarbonization methods.
TargetYearEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The emissions targeted for in the target year.
TargetYearEmissionsIntensity	Type double
	Properties Filter, Nillable, Sort
	Description The level of emissions per unit of economic activity in the target year. This value is usually the dollar value added or the unit of production in the target year.
TargetYearOutputCalcType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The measure that's used to calculate the company's output in the target year when the selected target setting method is Economic Intensity or Sectoral Decarbonization. The output can be calculated by aligning the company's growth with its market sector or based on the company's projected activity growth in the target year. Possible values are: • FIXEDMARKETSHARE—Fixed Market Share • TARGETMARKETSHARE—Target Market Share

EnergyAttrCertCredit

Represents information about the energy attribute certificate credits related to energy attribute certificate purchase. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CleanEnergyProjectId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The clean energy project related to the energy attribute certificate purchase that's associated with the purchase of energy attribute certificate credits.
	This field is a relationship field.
	Relationship Name Clean Energy Project
	Relationship Type Lookup
	Refers To CleanEnergyProject
CleanEnergyType	Туре
	picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The clean energy type from clean energy project related to the energy attribute certificate purchase that's associated with the purchase of energy attribute certificate credits.
	Possible values are:
	• Biomass
	• Geothermal
	• Solar
	• Wind

Field	Details
CostPerUnit	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The cost of the credits for each unit of emissions.
CreditsAllocatedInMwh	Type double
	Properties Filter, Nillable, Sort
	Description The credits that are allocated to the emissions inventory of the organization measured in megawatt hour (MWh).
CreditsAvailableInMwh	Type double
	Properties Filter, Nillable, Sort
	Description The credits that are available after allocation measured in megawatt hour (MWh).
CreditsIssueDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the credits were issued.
CreditsPurchasedInMwh	Type double
	Properties Create, Filter, Sort, Update
	Description The credits that are purchased by the organization measured in megawatt hour (MWh).
CreditsRetiredDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description
	The date when the credits are retired from the registry.
Description	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The description of the energy attribute certificate credit record.
EnergyAttrCertPurchaseId	Туре
	reference
	Properties Create, Filter, Group, Sort, Update
	Description The energy attribute certificate purchase record that's associated with the purchase of energy attribute certificate credits.
	This field is a relationship field.
	Relationship Name EnergyAttrCertPurchase
	Relationship Type Lookup
	Refers To EnergyAttrCertPurchase
IsRetired	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the energy attribute certificate credit is retired (true) or not (false) so it can be allocated to the stationary asset energy use records.
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the energy attribute certificate credit record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PurchaseDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the energy attribute certificate credits were purchased.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the organization responsible for supplying the energy attribute certificate credits.
	This field is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TotalCost	Туре
	currency
	Properties Filter, Nillable, Sort
	Description The total amount spent on the credits.
VintagePeriod	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The period when the energy attribute certificate credits were issued.

EnergyAttrCertPurchase

Represents information about the purchase of energy attribute certificates from the clean energy project supplier. The information includes terms of engagement and the delivery type of energy attribute certificate. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CertifiedBy	Type string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the organization that certified the clean energy project at the time of purchase.
CleanEnergyProjectId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The clean energy project associated with the energy attribute certificate purchase.
	This field is a relationship field.
	Relationship Name CleanEnergyProject
	Relationship Type Lookup
	Refers To CleanEnergyProject
Description	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The description of the energy attribute certificate purchase.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The end date of the engagement with the power supplier.
ExpectedAnnualPowerGnrn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The expected annual power generation measured in megawatts (MW).

Field	Details
InvoiceNumber	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The invoice number associated with the energy attribute certificate purchase.
LastReferencedDate	Type dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	The name of the energy attribute certificate purchase record.
OwnerId	Туре
	reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup

Field	Details
	Refers To Group, User
PlannedAnnualPowerGnrn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The planned annual power generation measured in megawatt hour (MWh).
ProjRegistryIdentifier	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique identifier that's assigned by the registry to the clean energy project.
PurchaseOrderNumber	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The purchase order number associated with the energy attribute certificate purchase.
PurchaseType	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the type of purchase or agreement with the supplier of energy attribute certificate credits.
	Possible values are:
	• Other
	Power Purchase Agreement
	Renewable Tariff
	• Self Generation
	• Unbundled
	Virtual Power Purchase Agreement
StartDate	Туре
	date

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The start date of the engagement with the power supplier.
TotEnrgyAttrCrAllocMwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy attribute credits allocated for the energy attribute certificate purchase measured in megawatt hour (MWh).
TotEnrgyAttrCrAvlMwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy attribute credits available for the energy attribute certificate purchase measured in megawatt hour (MWh).
TotEnrgyAttrCrPurchMwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy attribute credits purchased for the energy attribute certificate purchase measured in megawatt hour (MWh).
TotalSpend	Type currency
	Properties Filter, Nillable, Sort
	Description The total spend for the energy attribute certificate purchase.
TradeLocation	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The hub and delivery location where the electricity products are traded.

EnergyAttrCreditDstr

Represents a junction between energy attribute credits and stationary asset energy use indicating the quantity of credits distributed for a specific energy use. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AllocationDate	Type dateTime
	Properties Defaulted on create, Filter, Nillable, Sort
	Description The date when the energy attribute certificate credit was allocated.
CleanEnergyType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The clean energy type associated with this energy attribute certificate distribution.
	Possible values are:
	• Biomass
	• Geothermal
	• Solar
	• Wind
EnergyAttrCertCreditId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The energy attribute certificate credit record that's associated with the energy attribute certificate distribution. This field is a relationship field.

Field	Details
	Relationship Name EnergyAttrCertCredit
	Relationship Type Lookup
	Refers To EnergyAttrCertCredit
EnrgyAttrCrAllocCost	Type currency
	Properties Filter, Nillable, Sort
	Description The cost of the energy attribute certificate credits that were allocated for the stationary asset energy use records.
EnrgyAttrCreditsAlloc	Type double
	Properties Create, Filter, Sort, Update
	Description The energy attribute certificate credits that were allocated for the stationary asset energy use records in kWh.
EnrgyAttrCreditsUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the energy attribute certificate credits.
	Possible values are:
	• Kwh—kWh
	 Mwh—MWh
	The default value is Mwh.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description
	The name of the energy attribute certificate distribution.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To
	Group, User
StnryAssetEnergyUseId	Type reference
	Properties
	Create, Filter, Group, Sort, Update
	Description The stationary asset energy use record that's associated with the energy attribute certificate distribution.
	This field is a relationship field.
	Relationship Name StnryAssetEnergyUse
	Relationship Type Lookup

Field	Details
	Refers To
	StnryAssetEnrgyUse

EnvironmentalRisk

Represents information about the risk that the environmental resources create for an organization. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Aquifer	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the groundwater aquifer system.
BaselineStress	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the baseline stress that is a ratio of total water withdrawals to available renewable
	surface and groundwater supplies. Water withdrawals include domestic, industrial, irrigation,
·	and livestock consumptive and non-consumptive uses. Available renewable water supplies include the impact of upstream consumptive water users and large dams on downstream
	water availability. Higher values indicate more competition among users.
	Possible values are:
	• ExtremelyHigh—Extremely High (>80%)
	• High—High (40-80%)
	• Low—Low (<10%)
	Low to Mediani (10 2070)
	 MediumToHigh—Medium to High (20-40%)

Field	Details
BusinessQuantifiedRisk	Туре
	currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The risk that's identified by an organization using the internal tools and processes.
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of the environmental risk.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MajorBasin	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the major river basin.
MinorBasin	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The name of the minor river basin.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description The name of this environmental risk.
OverallRisk	Type picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the total risk that's calculated by aggregating the selected indicators from the categories, such as physical quantity, quality, and regulatory, and reputation risk. Higher values indicate high environmental risk.
	Possible values are:
	ExtremelyHigh—Extremely High
	• High
	• Low
	• LowToMedium—Low to Medium
	• MediumToHigh—Medium to High
OwnerId	Type reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RecordTypeId	Туре
	reference

Details
Properties
Create, Filter, Group, Nillable, Sort, Update
Description
This field is a relationship field.
Relationship Name RecordType
Relationship Type Lookup
Refers To RecordType
Type picklist
Properties Filter, Group, Nillable, Restricted picklist, Sort
Description Specifies the type of risk related to the environment.
Possible values are:
• Water
Туре
picklist
Properties
Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
Description Specifies the year when the customer has updated the environment risk.
Possible values are:
20002001
20012002
• 2003
• 2004
• 2005
2000
• 2006
2000
• 2007
20072008
20072008

Field Deta	ils
•	2012
•	2013
•	2014
•	2015
•	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
•	2033
•	2034
•	2035
•	2036

Field	Details
-------	---------

- 2050
- 2051
- 2052
- 2053
- 2054
- 2055
- 2056
- 2057
- 2058
- 2059
- 2060
- 2061
- 2062
- 2063
- 2064
- 2065
- 2066
- 2067
- 2068
- 2069
- 2070
- 2071
- 2072
- 2073
- 2074
- 2075
- 2076
- 2077
- 2078
- 2079
- 2080
- 2081
- 2082
- 2083
- 2084
- 20852086
- 2087

Field	Details
	• 2088
	• 2089
	• 2090
	• 2091
	• 2092
	• 2093
	• 2094
	• 2095
	• 2096
	• 2097
	• 2098
	• 2099

FrgtHaulingEmssnFctr

Represents the emissions factors for scope 3 freight hauling. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Ch4EmissionsFactor	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CH4 emissions factor associated with the freight hauling mode.
Ch4EmissionsFactorUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the CH4 emissions factor.

Field	Details
	Possible values are:
	• G_PER_TONNE_KM—g/tonne-km
	• G_PER_TONNE_MI—g/ton-mi
	The default value is 'G_PER_TONNE_KM'.
Co2EmissionsFactor	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The CO2 emissions factor associated with the freight hauling mode.
Co2EmissionsFactorUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the CO2 emissions factor.
	Possible values are:
	• G_PER_TONNE_MI-g/ton-mi
	KG_PER_TONNE_KM—kg/tonne-km
	The default value is 'KG_PER_TONNE_KM'.
EmissionFactorDataSource	Туре
	textarea
	Properties Create, Nillable, Update
	Description
	The source of the emissions factor reference data.
EmissionFactorUpdateYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this reference data for the emissions factor was most recently updated
	Possible values are:
	• 2000
	• 2001
	• 2002

Field Det	ails
•	2003
	2004
	2005
	2006
	2007
•	2008
	2009
	2010
	2011
	2012
	2013
	2014
•	2015
	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
	2033
	2034
	2035
	2036
	2037
	2038
	2039
	2040

Field	Details
FreightHaulingMode	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The freight hauling mode that's used to calculate the emissions.
	Possible values are:
	• Air
	• Rail
	• Road
	• Water
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionsFactor	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The N2O emissions factor associated with the freight hauling mode.
N2oEmissionsFactorUnit	Туре
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the N2O emissions factor.
	Possible values are:

Field	Details
	• G_PER_TONNE_KM—g/tonne-km
	• G_PER_TONNE_MI—g/ton-mi
	The default value is 'G_PER_TONNE_KM'.
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the account.
OtherEmssnFctrId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The other emission factor set record containing global warming potential values for CH4 and N2O.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup
	Refers To OtherEmssnFctrSet
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To
	Group, User

Frgt Hauling Enrgy Use

Represents the energy consumption related to freight hauling. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CarbonFootprintReportDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.
Ch4EmissionsInKg	Type double
	Properties
	Filter, Nillable, Sort
	Description
	The CH4 emissions that are calculated for this energy use record.
Co2EmissionsInKg	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The CO2 emissions that are calculated for this energy use record.
Distance	Туре
	double
	Properties
	Create, Filter, Sort, Update
	Description
	The distance travelled by the freight vehicle.

Field	Details
DistanceUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the distance travelled.
	Possible values are:
	• Kilometers
	• Miles
	• Nautical Miles
	The default value is 'Kilometers'.
EndDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date until when the values of this energy use record are valid.
FreightHaulingMode	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The mode for freight hauling.
	Possible values are:
	• Air
	• Rail
	• Road
	• Water
FrgtHaulingEmssnFctrId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The freight hauling emission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name FrgtHaulingEmssnFctr

Field	Details
	Relationship Type Lookup
	Refers To FrgtHaulingEmssnFctr
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the freight hauling energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.
Name	Туре
	string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Scope3Category	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The scope 3 freight category to allocate to this energy use record. This value is added to the corresponding scope 3 category in the carbon footprint.
	Possible values are:
	Downstream Transportation and Distribution
	 Upstream Transportation and Distribution
	The default value is 'Downstream Transportation and Distribution'.
Scope3CrbnFtprntId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 carbon footprint record that's associated with this energy use record. This field is automatically associated with an existing carbon footprint record or if a carbon footprint record doesn't exist for that year, a new carbon footprint record is generated based on the asset and start or end dates of the energy use record.
	This is a relationship field.
	Relationship Name Scope3CrbnFtprnt

Field	Details
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt
Scope3EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions in metric tonnes of carbon dioxide equivalent.
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 emission source that's associated with this energy use record.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
SuplScope3Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value that's added to the calculated total scope 3 emissions value.

Field	Details
SupplierId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
Weight	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The weight transported by the freight vehicle.
WeightUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The unit of measure for the weight transported by the freight vehicle.
	Possible values are:
	• KG—kg
	• LB—lb
	• LONG_TON—Long Ton
	 METRIC_TONNE—Metric Tonne
	SHORT_TON—Short Ton
	The default value is 'KG'.

FuelType

Represents information about the additional fuel types defined by a customer. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The developer name of the record.
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The developer name of the record.
IsActive	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the fuel type is active and can be used ($true$) or not ($false$).
	The default value is false.
IsStationaryAssetFuel	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the fuel is used in stationary assets (true) or not (false).
	The default value is false.
IsVehicleAssetFuel	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the fuel is used in a vehicle asset (true) or not (false). The default value is false.
Language	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this record
	The language associated with this record. Possible values are:
	• da—Danish
	• de—German
	• en US—English
	• es—Spanish
	• es_MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	• no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
MasterLabel	Туре
	string
	Properties Create, Filter, Group, Sort, Update
	Description
	The label assigned to this object.
NamespacePrefix	Туре
	string

Field	Details
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix that is associated with this object. Limit: 15 characters.

Fuel Type Sustn Uom

Represents a mapping between the additional fuel types and their corresponding unit of measure values defined by a customer. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The developer name of the record.
FuelType	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The name of the fuel type that's mapped to the unit of measure.
	Possible values are:
	 AutogasLPG—Autogas/LPG
	• Biodiesel
	• Biomass
	• CityGas—City Gas
	 CompressedNaturalGasCNG—Compressed Natural Gas (CNG)
	• Cooling
	• Diesel

Field	Details

- Electricity
- Ethanol
- FuelOil—FuelOil
- Gasoline
- Heat
- HeavyOil—Heavy Oil
- ITElectricity—IT Electricity
- JetFuel—JetFuel
- Kerosene
- LightOil—LightOil
- LiquidNaturalGasLNG—Liquefied Natural Gas (LNG)
- MobileDiesel—Mobile Diesel
- NaturalGas—NaturalGas
- Propane
- Refrigerant
- Steam

Language

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The language associated with this record.

Possible values are:

- da—Danish
- de—German
- en US—English
- es—Spanish
- es_MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl NL—Dutch
- no—Norwegian
- pt BR—Portuguese (Brazil)
- ru—Russian

Field	Details	
	• sv—Swedish	
	• th—Thai	
	zh_CN—Chinese (Simplified)	
	• zh_TW—Chinese (Traditional)	
MasterLabel	Туре	
	string	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The label assigned to this object.	
NamespacePrefix	Туре	
	string	
	Properties	
	Filter, Group, Nillable, Sort	
	Description	
	The namespace prefix that is associated with this object. Limit: 15 characters.	
UnitOfMeasure	Type picklist	
	Properties	
	Create, Filter, Group, Restricted picklist, Sort, Update	
	Description	
	The name for the unit of measure that's mapped to the fuel type.	
	Possible values are:	
	• 1000m3—1000 m3	
	• GJ	
	• GWh	
	• Kiloliters	
	• Liters	
	MJMMBtu	
	• MWh	
	• Therms	
	• Tonnes	
	• UkGallons—UK Gallons	
	• UsGallons—US Gallons	
	• ccf	
	• kG—kg	

Field Deta	ails
•	kWh
•	kcal
•	lbs
•	longTons—long tons
•	m3
•	shortTons—short tons

GeneratedWaste

Represents the information on the waste generated in operations, the waste generated while treating end-of-life products that were sold, and so on. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description
DisposalSiteType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The type of disposal site. The emissions from waste disposal are considered as scope 3 emissions when you select Offsite and as scope 1 emissions when you select Onsite.
	Possible values are:
	• Offsite
	• Onsite
DisposalType	Type picklist

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

Possible values are:

- Anaerobically Digested (Dry Digestate with Curing)
- Anaerobically Digested (Wet Digestate with Curing)
- Combusted
- Composted
- Landfilled
- Recycled

DisposedWasteQuantity

Type

double

Properties

Create, Filter, Sort, Update

Description

DisposedWasteQuantityUnit

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description

Possible values are:

- KG—kg
- LB—lb
- LONG TON—Long Ton
- METRIC TONNE—Metric Tonne
- SHORT_TON—Short Ton

The default value is 'KG'.

${\tt Disposed} {\tt Waste} {\tt Quantityin} {\tt Tonnes}$

Type

double

Properties

Filter, Nillable, Sort

Description

The quantity of disposed waste in tonnes that's calculated based on the disposed waste quantity and disposed waste quantity unit.

Field	Details
EndDate	Туре
	date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the waste-related data is sent for reporting.
IsHazardous	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The default value is 'false'.
IsRecordLocked	Туре
	boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ScopelEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions from associated stationary assets for waste that's disposed onsite.
Scope3CrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 carbon footprint record associated with this generated waste record. This specified record is used to aggregate scope 3 waste-related emissions and the other scope 3 emissions.
	This is a relationship field.
	Relationship Name Scope3CrbnFtprnt
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt

Field	Details
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 emissions source record associated with the waste related to non-stationary assets, such as waste related to the end-of-life treatment of sold products.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
Scp3DnstrmEndLifeSoldPrdct	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 downstream emissions from the end-of-life treatment of sold products. This value is calculated based on the waste associated with scope 3 emissions source.
Scp3UpstrmWstGenInOper	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 upstream emissions from the waste generated in operations. This value is calculated based on the waste associated with the stationary asset environmental source that's disposed offsite.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the waste-related data is sent for reporting.
StnryAssetEnvrSrcId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset environmental source record associated with the waste related to stationary assets, such as the waste generated in operations.
	This is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
SuplScope1EmissionsInTco2e	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 1 emissions value that's added to the total scope 1 emissions.
SuplScp3DnstrmEndLifeSoldPrdct	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental downstream scope 3 emissions from the end-of-life treatment of sold products. This value is added to the total scope 3 downstream emissions from the end-of-life treatment of sold products.
SuplScp3UpstrmWstGenInOper	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental upstream scope 3 emissions from the waste generated in operations. This value is added to the total scope 3 upstream emissions from waste generated in operations.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description
	The supplier associated with this generated waste record.
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
WasteFootprintId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The waste footprint record associated with this generated waste record. This value is used to aggregate the waste quantity and the waste-related emissions data.
	This is a relationship field.
	Relationship Name WasteFootprint
	Relationship Type Lookup
	Refers To WasteFootprint
WasteType	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description
	Possible values are:
	Aluminum Cans
	Aluminum Ingot
	Asphalt Concrete
	• Asphalt Shingles
	• Beef
	• Branches
	• Bread
	• CRT Displays
	• Carpet

- Clay Bricks
- Concrete
- Copper Wire
- Corrugated Containers
- Dairy Products
- Desktop CPUs
- Dimensional Lumber
- Drywall
- Electronic Peripherals
- Fiberglass Insulation
- Flat-panel Displays
- Fly Ash
- Food Waste
- Food Waste (meat only)
- Food Waste (non-meat)
- Fruits and Vegetables
- Glass
- Grains
- Grass
- HDPE
- Hard-copy Devices
- LDPE
- LLDPE
- Leaves
- Magazines/Third-class mail
- Medium-density Fiberboard
- Mixed Electronics
- Mixed MSW (municipal solid waste)
- Mixed Metals
- Mixed Organics
- Mixed Paper (general)
- Mixed Paper (primarily from offices)
- Mixed Paper (primarily residential)
- Mixed Plastics
- Mixed Recyclables
- Newspaper
- Office Paper
- PET

Field	Details	
	• PLA	
	• PP	
	• PS	
	• PVC	
	• Phonebooks	
	• Portable Electronic Devices	
	• Poultry	
	• Steel Cans	
	• Textbooks	
	• Tires	
	 Vinyl Flooring 	
	• Wood Flooring	
	Yard Trimmings	
WstDispoEmssnFctrId	Туре	
	reference	
	Properties	
	Create, Filter, Group, Nillable, Sort, Update	
	Description	
	The waste disposal emissions factor set record that's used to calculate emissions based on the waste type and disposal type.	
	This is a relationship field.	
	Relationship Name WstDispoEmssnFctr	
	Relationship Type Lookup	
	Refers To WstDispoEmssnFctrSet	

GovtFinancialAsstSum

Represents information about the financial assistance received from governments. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

	nils
Country Type	!
p	oicklist
	perties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	specifies the country where the government financial assistance is provided.
	Possible values are:
	AD—Andorra
•	
•	3 · · · · · ·
	5
	3
	AR—Argentina AT—Austria
	A 1 "
•	
•	
	0
	BF—Burkina Faso
	BG—Bulgaria
•	BH—Bahrain
•	BI—Burundi
•	BJ—Benin
•	BL—Saint Barthélemy
•	вм—Bermuda
•	BN—Brunei Darussalam
•	BO—Bolivia, Plurinational State of
•	BQ—Bonaire, Sint Eustatius and Saba

- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- вz—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- cı—Côte d'Ivoire
- CK—Cook Islands
- cl—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain

- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- gp—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gm—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- нм—Honduras
- HR—Croatia
- нт—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of

- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- кі—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кв—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- ⊥K—Sri Lanka
- LR—Liberia
- LS—Lesotho
- L⊤—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- мм—Myanmar
- MN—Mongolia

- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- мт—Malta
- MU—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- ₽K—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar

- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- se—Sweden
- SG—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- sk—Slovakia
- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- ▶ TO—Tonga
- TR—Türkiye

Field	Details
	TT—Trinidad and Tobago
	• TV—Tuvalu
	• TW—Taiwan
	• TZ—Tanzania, United Republic of
	• ua—Ukraine
	• ug—Uganda
	• US—United States
	• UY—Uruguay
	• uz—Uzbekistan
	VA—Holy See (Vatican City State)
	 VC—Saint Vincent and the Grenadines
	VE—Venezuela, Bolivarian Republic of
	VG—Virgin Islands, British
	• VN—Vietnam
	• VU—Vanuatu
	WF—Wallis and Futuna
	• WS—Samoa
	• XK—Kosovo
	• YE—Yemen
	• YT—Mayotte
	• za—South Africa
	• zm—Zambia
	• zw—Zimbabwe
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description The description of the government financial assistance statistics.
DisclsReportingPeriodId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The reporting period for which the government financial assistance statistics are generated.
	This field is a relationship field.

Field	Details
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup

Field	Details
	Refers To Group, User
SubsidiaryAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account
TotalAmount	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total amount of financial assistance based on a combination of assistance type and country.
Туре	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the type of financial assistance from the government.
	Possible values are:
	• Awards
	 Export Credit Agency Financial Assistance
	• Financial Incentives
	 Government Financial Benefits for any Operation
	 Investment, Research, and Development Grants
	• Royalty Holidays
	• Subsidies
	 Tax Relief and Tax Credits

GroundTravelEmssnFctr

Represents the emissions factors for scope 3 ground travel. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CurrencyCode	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The currency in which the expense was made.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG
	• AZN
	• BAM
	• BBD
	• BDT
	• BGN
	• BHD
	• BIF
	• BMD
	• BND
	• BOB
	• BRL
	• BSD

Field	Details	
	• BTN	
	• BWP	
	• BYN	
	• BZD	
	• CAD	
	• CDF	
	• CHF	
	• CLP	
	• CNY	
	• COP	
	• CRC	
	• CSD	
	• CUP	
	• CVE	
	• CZK	
	• DJF	
	• DKK	
	• DOP	
	• DZD	
	• EGP	
	• ERN	
	• ETB	
	• EUR	
	• FJD	
	• FKP	
	• GBP	
	• GEL	
	• GHS	
	• GIP	
	• GMD	
	• GNF	
	• GTQ	
	• GYD	
	• HKD	
	• HNL	
	• HRK	
	• HTG	
	• HUF	

Field	Details
	• IDR
	• ILS
	• INR
	• IQD
	• IRR
	• ISK
	• JMD
	• JOD
	• JPY
	• KES
	• KGS
	• KHR
	• KMF
	• KPW
	• KRW
	• KWD
	• KYD
	• KZT
	• LAK
	• LBP
	• LKR
	• LRD
	• LYD
	• MAD
	• MDL
	• MGA
	• MKD
	• MMK
	• MOP
	• MRU
	• MUR
	• MWK
	MXNMYR
	• MZN
	• NAD
	• NGN
	• NIO
	1110

Field	Details
	• NOK
	• NPR
	• NZD
	• OMR
	• PAB
	• PEN
	• PGK
	• PHP
	• PKR
	• PLN
	• PYG
	• QAR
	• RON
	• RSD
	• RUB
	• RWF
	• SAR
	• SBD
	• SCR
	• SDG
	• SEK
	• SGD
	• SHP
	• SLL
	• SOS
	• SRD
	• STN
	• SYP
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH

Field	Details
	• UGX
	• USD
	• עצע
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	• ZAR
	The default value is 'USD'.
DistanceUnit	Туре
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the distance.
	Possible values are:
	• Kilometers
	• Miles
	The default value is 'Kilometers'.
EmissionFactorDataSource	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description The source of the emissions factor reference data.
EmissionFactorUpdateYear	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this reference data for the emissions factor was most recently updated.

Field	Details
-------	---------

Possible values are:

- 2000
- 2001
- 2002
- 2003
- 2004
- 2005
- 2006
- 2007
- 2008
- 2009
- 2010
- 2011
- 2012
- 2013
- 2014
- 2015
- 2016
- 2017
- 2018
- 2019
- 2020
- 2021
- 2022
- 2023
- 2024
- 2025
- 2026
- 2027
- 2028
- 2029
- 20302031
- 2001
- 2032
- 2033
- 20342035
- 2036

Field	Details
	• 2037
	• 2038
	• 2039
	• 2040
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Field	Details
PersCarEmssnInKgCo2eDstnUnit	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The conversion factor that's used to calculate the emissions from a personal car.
TaxiEmssnInKgCo2eDstnUnit	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The conversion factor that's used to calculate the emissions from a taxi and limousine.
TaxiRateForDstnUnit	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The rate value that's used to convert the taxi expense cost to distance.
TrainEmssnInKgCo2eDstnUnit	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The conversion factor that's used to calculate the emissions from train travel.
TrainRateForDstnUnit	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The rate that's used to convert train expense cost to distance.

Ground Travel Enrgy Use

Represents the energy consumption related to ground travel. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CarbonFootprintReportDate	Type date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.
CostCenter	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The cost center associated with this energy use record.
CurrencyCode	Туре
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The currency in which the expense was made.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG
	• AZN
	• BAM

Field Deta	ils
•	BBD
•	BDT
•	BGN
•	BHD
•	BIF
•	BMD
•	BND
•	вов
•	BRL
•	BSD
•	BTN
•	BWP
•	BYN
•	BZD
•	CAD
•	CDF
•	CHF
•	CLP
•	CNY
•	СОР
•	CRC
•	CSD
•	CUP
•	CVE
	CZK
•	DJF
•	DKK
•	DOP
•	DZD
•	EGP
•	ERN
•	ETB
•	EUR
•	FJD
	FKP
	GBP
	GEL
•	GHS

Field De	tails
	• GIP
	• GMD
	• GNF
	• GTQ
	• GYD
	• HKD
	• HNL
	• HRK
	• HTG
	• HUF
	• IDR
	• ILS
	• INR
	• IQD
	• IRR
	• ISK
	• JMD
	• JOD
	• JPY
	• KES
	• KGS
	• KHR
	• KMF
	• KPW
	• KRW
	• KWD
	• KYD
	• KZT
	• LAK
	• LBP
	• LKR
	• LRD
	• LYD
	• MAD
	• MDL
	• MGA
	• MKD
	• MMK

Field De	etails
	• MOP
	• MRU
	• MUR
	• MWK
	• MXN
	• MYR
	• MZN
	• NAD
	• NGN
	• NIO
	• NOK
	• NPR
	• NZD
	• OMR
	• PAB
	• PEN
	• PGK
	• PHP
	• PKR
	• PLN
	• PYG
	• QAR
	• RON
	• RSD
	• RUB
	• RWF
	• SAR
	• SBD
	• SCR
	• SDG
	• SEK • SGD
	• SHP • SLL
	• SOS
	• SRD
	• STN
	• SYP
	- 011

Field	Details
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH
	• UGX
	• USD
	• UYU
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	• ZAR
	The default value is 'USD'.
Distance	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The distance travelled during the data entry period.
DistanceUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the distance traveled.

Field	Details
	Possible values are:
	• Kilometers
	• Miles
	The default value is 'Kilometers'.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The date until when the values of this energy use record are valid.
ExpenseType	Type picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The type of expense based on which emissions factors are used in the calculations.
	Possible values are:
	• Limousine
	PersonalCarDistance—Personal Car Distance
	SubwayCrossState—Subway/Train/Trolley - Cross State/Country
	SubwayLocalTransit—Subway/Train/Trolley - Local Public TransitTaxi
GroundTravelEmssnFctrId	_
CIOGNATIA VELENISSINI CELLA	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The ground travel emission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name GroundTravelEmssnFctr
	Relationship Type Lookup
	Refers To GroundTravelEmssnFctr

Field	Details
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the ground travel energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description
	The name for this energy use record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner

Field	Details
	Relationship Type Lookup
	Refers To Group, User
PcmtEmssnFctrSetItemId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The procurement emissions factor set item that contains the emissions factor to be applied to this procurement item. This field is available in API version 57.0 and later.
	This field is a relationship field.
	Relationship Name PcmtEmssnFctrSetItem
	Relationship Type Lookup
	Refers To PcmtEmssnFctrSetItem
Scope3CrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The scope 3 carbon footprint record that's associated with this energy use record. This is a relationship field.
	Relationship Name Scope3CrbnFtprnt
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt
Scope3EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions in metric tonnes of carbon dioxide equivalent.

Field	Details
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 emission source that's associated with this energy use record.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
Scope3GhgCategory	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the scope 3 GHG category for the total scope 3 emissions related to the energy use.
	Possible values are:
	• BusinessTravel—Business Travel
	EmployeeCommuting—Employee Commuting
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
SuplScope3Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value that's added to the calculated total scope 3 emissions value.
SupplierId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TravelerName	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the traveler.
TripCost	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The cost of the trip in the selected currency.

Hotel Stay Emssn Fctr

Represents the emissions factors for scope 3 hotel stay. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
EmissionFactorDataSource	Type textarea

Field	Details
	Properties
	Create, Nillable, Update
	Description
	The source of the emissions factor reference data.

EmissionFactorUpdateYear

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The year in which this reference data for the emissions factor was most recently updated.

Possible values are:

- 2000
- 2001
- 2002
- 2003
- 2004
- 2005
- 2006
- 2007
- 2008
- 2000

2009

- 2010
- 2011
- 2012
- 2013
- 2014
- 2015
- 2016
- 2017
- 2018
- 2019
- 2020
- 2021
- 2022
- 2023
- 2024
- 2025

Field	Details
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
HotelStayEmssnInKgCo2eNight	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The impact of staying in a hotel. This value is measured in kg of CO2 equivalents per night.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Hotel Stay Enrgy Use

Represents the energy consumption related to hotel stay. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CarbonFootprintReportDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.

Field	Details
CostCenter	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The cost center associated with this energy use record.
EmissionFctrKgCo2eRoamPerNight	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The emissions that are calculated based on the impact of staying in a hotel. This value is
	measured in kg of CO2 equivalents per night.
EndDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date until when the values of this energy use record are valid.
HotelCity	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The city in which the hotel is located
HotelCountry	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The country in which the hotel is located.
	Possible values are:
	AD—Andorra
	AE—United Arab Emirates
	AF—Afghanistan
	AG—Antigua and Barbuda
	• AI—Anguilla

Et all al	Dataila
Field	Details

- AL—Albania
- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- Az—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- BE—Belgium
- BF—Burkina Faso
- BG—Bulgaria
- BH—Bahrain
- ві—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- ви—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- BZ—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- сн—Switzerland
- cI—Cote d'Ivoire

Field	Details

- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar

- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- HM—Heard Island and McDonald Islands
- HN—Honduras
- нк—Croatia
- нт—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- ĸ₩—Kuwait

Et al al	Dotaile
Field	Details

- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN-Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island

- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- №Z—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- sk—Slovakia
- SL—Sierra Leone

- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- TH—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- T₩—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- uz—Uzbekistan
- VA—Holy See (Vatican City State)
- vc—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- VN—Vietnam
- VU—Vanuatu
- wf—Wallis and Futuna

Field	Details
	• ws—Samoa
	• YE—Yemen
	• YT—Mayotte
	ZA—South Africa
	• zm—Zambia
	• zw—Zimbabwe
HotelName	Туре
	string
	Properties Control of the Control of
	Create, Filter, Group, Nillable, Sort, Update
	Description The name of the hotel.
HotelStayEmssnFctrId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The hotel stay mission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name HotelStayEmssnFctr
	Relationship Type Lookup
	Refers To HotelStayEmssnFctr
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the hotel stay energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name for this energy use record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RoomCount	Type double
	Properties Create, Filter, Sort, Update
	Description The number of rooms in the hotel. This value is used to calculate the emissions.
RoomType	Type string

Field	Details
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The type of room.
Scope3CrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 carbon footprint record that's associated with this energy use record.
	This is a relationship field.
	Relationship Name Scope3CrbnFtprnt
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt
Scope3EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions in metric tonnes of carbon dioxide equivalent.
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 emission source that's associated with this energy use record.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc

Field	Details
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
StayNightsCount	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The number of nights of hotel stay. This value is used to calculate the emissions.
SuplScope3Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value that's added to the calculated total scope 3 emissions value.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TravelerName	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the traveler.

InflationRate

Represents the inflation rates that are used to adjust currency values from one year to another. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CalendarYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The year in which this inflation rate is valid.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019

Field	Details
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
CurrencyCode	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The currency for this inflation rate record.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG

Field	Details	
	• AZN	
	• BAM	
	• BBD	
	• BDT	
	• BGN	
	• BHD	
	• BIF	
	• BMD	
	• BND	
	• BOB	
	• BRL	
	• BSD	
	• BTN	
	• BWP	
	• BYN	
	• BZD	
	• CAD	
	• CDF	
	• CHF	
	• CLP	
	• CNY	
	• COP	
	• CRC	
	• CSD	
	• CUP	
	• CVE	
	• CZK	
	• DJF	
	• DKK	
	• DOP	
	• DZD	
	• EGP	
	• ERN	
	• ETB	
	• EUR	
	• FJD	
	• FKP	
	• GBP	

Field	Details
	• GEL
	• GHS
	• GIP
	• GMD
	• GNF
	• GTQ
	• GYD
	• HKD
	• HNL
	• HRK
	• HTG
	• HUF
	• IDR
	• ILS
	• INR
	• IQD
	• IRR
	• ISK
	• JMD
	• JOD
	• JPY
	• KES
	• KGS
	• KHR
	• KMF
	• KPW • KRW
	• KRW • KWD
	• KYD
	• KZT
	• LAK
	• LBP
	• LKR
	• LRD
	• LYD
	• MAD
	• MDL
	• MGA

Field De	etails etails
	• MKD
	• MMK
	• MOP
	• MRU
	• MUR
	• MWK
	• MXN
	• MYR
	• MZN
	• NAD
	• NGN
	• NIO
	• NOK
	• NPR
	• NZD
	• OMR
	• PAB
	• PEN
	• PGK
	• PHP
	• PKR
	• PLN
	• PYG
	• QAR
	• RON
	• RSD
	• RUB
	• RWF
	• SAR
	• SBD
	• SCR
	• SDG
	• SEK
	• SGD
	• SHP
	• SLL
	• SOS
	• SRD

Field	Details
	• STN
	• SYP
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH
	• UGX
	• USD
	• UYU
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	• ZAR
	The default value is 'USD'.
DataSource	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The data source from where the inflation rate was obtained.
InflationRate	Туре
	percent
	Properties
	Create, Filter, Nillable, Sort, Update

Field	Details
	Description The annual inflation rate that's used to convert currency values. This rate is calculated based on the difference in the average consumer price index between the previous year and the current year.
InflationRateUnqKeyIdentifier	Туре
	string
	Properties Filter, Group, idLookup, Nillable, Sort
	Description The unique external identifier for the inflation rate in the currency-calendar year format. This field is unique within your organization.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description
	Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.

Field	Details	
	Relationship Name Owner	
	Relationship Type Lookup	
	Refers To Group, User	

Managed Care Program Pr fm

Represents the rating and enrollee retention rate according to the plan type of an average medicare advantage plan. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AverageProgramRating	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The rating of an average medicare advantage plan for a managed care plan type.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the managed care program.
DisclsReportingPeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update

Field	Details
	Description The reporting period for which the managed care plan performance is reported. This field is a relationship field.
	This field is a relationship field. Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
EnrolleeRetentionRate	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The enrollee retention rate of a plan type.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the managed care program record.
OwnerId	Type reference

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProgramType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The type of managed care plan.
	Possible values are:
	 Health Maintenance Organizations (HMOs)
	 Local Preferred Provider Organizations (PPOs)
	 Private Fee-for-Service Plans (PFFS)
	 Regional Preferred Provider Organizations (PPOs)
	• Special Needs Plans (SNPs)
SubsidiaryAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The account that's identified as the supplier account.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account

MaterialityAssessment

Represents information about stakeholder engagement to assess the importance of environmental, social, and governance (ESG) issues for them. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Description	Туре
	textarea
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The description of this materiality assessment.
DisclosureReportingPeriodId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The reporting period for which the materiality assessment is generated.
	This field is a relationship field.
	Relationship Name
	DisclosureReportingPeriod
	Relationship Type
	Lookup
	Refers To
	DisclsReportingPeriod
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the materiality assessment.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name
	Owner
	Relationship Type Lookup
	Refers To Group, User
Status	Type picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The status of the materiality assessment.
	Possible values are:
	• Cancelled
	• Completed
	• In Progress
	• New

MaterialityMatrixScore

Represents the materiality matrix score used to visualize all the data gathered through materiality assessment intake process. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CalculatedDate	Type dateTime
	Properties Create, Filter, Nillable, Sort, Update
	Description Time in which the record was last calculated, should be generally equal to Update Date.
InwardImpactScore	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The topic impact score for the company that conducts the materiality assessment.
IsTopicRelevant	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the topic is materially relevant for the company (true) or not (false).
	The default value is false.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.

Field	Details
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaterialityAsmtTopicId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The materiality assessment topic associated with the matrix.
	This field is a relationship field.
	Relationship Name MaterialityAsmtTopic
	Relationship Type Lookup
	Refers To MaterialityTopic
MaterialityAssessmentId	Type reference
	Properties Create, Filter, Group, Sort
	Description The materiality assessment associated with the matrix.
	This field is a relationship field.
	Relationship Name MaterialityAssessment
	Relationship Type Lookup
	Refers To Materiality Assessment
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description
	The name of the materiality matrix score.
OutwardImpactScore	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The topic impact score for the stakeholder interested in the materiality assessment conducted by the company.

MaterialityStakeholder

Represents information about a stakeholder who can be internal or external party having interest in a company. A stakeholder can either affect or be affected by the business. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
BusinessRegion	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description The business region in which the stakeholder operates.
	Possible value is:
	• Global
CategoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The category ID of the stakeholder.

Field	Details
	This field is a relationship field.
	Relationship Name
	Category
	Relationship Type Lookup
	Refers To MaterialityStkhldrCatg
CompanyNameId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the stakeholder's company.
	This field is a relationship field.
	Relationship Name CompanyName
	Relationship Type Lookup
	Refers To Account
ContactId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The contact associated with the stakeholder.
	This field is a relationship field.
	Relationship Name Contact
	Relationship Type Lookup
	Refers To
	Contact
Description	Туре
	textarea
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The description of the stakeholder.
InformationSource	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The source of the stakeholder information.
	Possible values are:
	• Document
	• Interview
	• Other
	• Survey
IsInternal	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the stakeholder is internal or external (true) or not (false).
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaterialityAssessmentId	Туре

Field	Details
	Properties Create, Filter, Group, Sort
	Description The materiality assessment associated with the stakeholder.
	This field is a relationship field.
	Relationship Name MaterialityAssessment
	Relationship Type Lookup
	Refers To Materiality Assessment
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the stakeholder.
ProxyUserId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The user who submitted the survey responses on behalf of the stakeholder.
	This field is a relationship field.
	Relationship Name ProxyUser
	Relationship Type Lookup
	Refers To User
Status	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of the stakeholder's response.
	Possible values are:

Field	Details
	• Complete
	• In Progress
	• New
UserId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The user associated with the stakeholder.
	This field is a relationship field.
	Relationship Name
	User
	Relationship Type
	Lookup
	Refers To
	User
WeightingPercent	Туре
	percent
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The percentage weighting given to the relevant responses provided by the stakeholder.

MaterialityStkhldrCatg

Represents a category to organize materiality stakeholders into groups, such as employees, shareholders, suppliers, and customers. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Category	Туре
	picklist
	Properties
	Create, Filter, Group, Sort, Update
	Description The name of the materiality stakeholder category.
	Possible values are:
	Business Review
	Customer and Supplier
	• Employees
	Global Agenda Setter
	• Investor
	• Leadership
	• Regulator
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of the materiality stakeholder category.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaterialityAssessmentId	Туре
	reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description The materiality assessment associated with the stakeholder category.
	This field is a relationship field.
	Relationship Name MaterialityAssessment
	Relationship Type Lookup
	Refers To MaterialityAssessment
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the stakeholder category.
WeightingPercent	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage weighting given to the relevant responses provided by the stakeholder category.

MaterialityTopic

Represents a possible topic for materiality assessment. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Category	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description The category of the materiality assessment topic.
	Possible values are:
	• Environment
	• Governance
	• Social
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of this topic.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this
	record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	The name of this topic.

Field	Details
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

MaterialityTopicQstn

Represents the mapping between the materiality assessment topics and the materiality assessment survey questions. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
ImpactType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The type of impact associated with the survey question. Possible values are:
	InwardOutward
	The default value is Inward.

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MaterialityAssessmentId	Type reference
	Properties Create, Filter, Group, Sort
	Description The materiality assessment associated with the question.
	This field is a relationship field.
	Relationship Name Materiality Assessment
	Relationship Type Lookup
	Refers To Materiality Assessment
MaterialityTopicId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The materiality assessment topic associated with the question.
	This field is a relationship field.
	Relationship Name MaterialityTopic
	Relationship Type Lookup

Field	Details
	Refers To
	MaterialityTopic
Name	Туре
	string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of this materiality assessment topic question.

OrgIncidentSummary

Represents statistics according to various categories of incidents in an organization, such as non-compliance with laws, corruptions, health and safety, discrimination, marketing and labeling, and customer privacy. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Category	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the category of the incident.
	Possible values are:
	 Corruption - Business Partners Contracts Terminated
	 Corruption - Confirmed
	 Corruption - Employees Dismissed or Disciplined
	• Customer Privacy
	 Discrimination Incidents and Corrective Actions
	 Non-compliance - Customer Health and Safety
	 Non-compliance - Laws and Regulations
	• Non-compliance - Marketing Communications

Field	Details
	Non-compliance - Marketing and Labeling
	 Violation of Indigenous People Rights
	• Work-related Illness
	• Work-related Injuries
CorrectiveActionType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of corrective action that can be taken to resolve the incident.
	Possible values are:
	 Contract Termination or Non-renewal
	• Employee Discipline
	• Employee Dismissal
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the incident statistics.
DisclsReportingPeriodId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description
	The reporting period for which the incident statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
FineAmount	Type currency

Field	Details
	Properties Control of the National Control of the Nati
	Create, Filter, Nillable, Sort, Update
	Description The amount of fine that's paid as a penalty for the incident.
HazardType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of hazard caused by the incident.
HoursWorked	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The number of hours worked for the organization.
IncidentCount	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The number of incidents based on a combination of category, incident type, incident subtype, and hazard type.
IncidentSubtype	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the subtype of the incident.
	Possible values are:
	Data Breach
	Data Loss
	• Laws and Regulations
	Marketing
	 Product and Services Information and Labels
	• Theft
	Voluntary Code

Field	Details
IncidentType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of the incident.
	Possible values are:
	• Corruption
IsWorkRelated	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the incident is work-related (true) or not (false).
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MonetaryLoss	Type currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The total amount of monetary loss for an incident category.
Name	Туре
	string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PenaltyType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of penalty that's applicable for the incident.
	Possible values are:
	Monetary Fine
	• Non-Monetary Sanction
SubsidiaryAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup

Field	Details
	Refers To Account

OtherEmssnFctrSet

Represents a collection of emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Details
Туре
double
Properties
Create, Filter, Nillable, Sort, Update
Description
The value that's used to convert the CH4 emissions into their equivalent CO2 emissions.
Туре
textarea
Properties
Create, Nillable, Update
Description
The source of the emissions factor reference data.
Туре
picklist
Properties
Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
Description
The year in which this reference data for the emissions factor was most recently updated.
Possible values are:
• 2000
• 2001

Field	Details
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	20252026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039

Field	Details
	• 2040
LastReferencedDate	Type dateTime Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oGlblWarmingPot	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The value that's used to convert the N2O emissions into their equivalent CO2 emissions.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner

Field	Details
	Relationship Type Lookup Refers To Group, User
RefrigerantLeakageRtInKgItKwh	Type double Properties Create, Filter, Nillable, Sort, Update Description The leakage rate of the refrigerant used for cooling the data center's computing equipment.
RefrigerantLeakageRtInKgM2	Type double Properties Create, Filter, Nillable, Sort, Update Description The annual average leakage rate of the refrigerant for the occupied building space in kilograms of refrigerant per square meter. This leakage rate is used to estimate the refrigerant consumption in the office space. This value is calculated if you enter the Refrigerant Leakage Rate (kg/sqft) value.
RefrigerantLeakageRtInKgSqft	Type double Properties Create, Filter, Nillable, Sort, Update Description The annual average leakage rate of the refrigerant for the occupied building space in kilograms of refrigerant per square foot. This leakage rate is used to estimate the refrigerant consumption in the office space. This value is calculated if you enter the Refrigerant Leakage Rate (kg/m2) value.

OtherEmssnFctrSetItem

Represents the individual entries for emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CalorificValue	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The calorific value of the fuel source.
CalorificValueUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the calorific value of the fuel source.
	Possible values are:
	• KWH_PER_L—kWh/L
	• KWH_PER_M3—kWh/m3
	KWH_PER_SCF—kWh/scf
	 MMBTU_PER_GAL—MMBtu/gal
	 MMBTU_PER_SCF—MMBtu/scf
	The default value is 'KWH_PER_M3'.
Ch4EmissionFactor	Туре
	double
	Properties Create Filter Nillable Cert Haddte
	Create, Filter, Nillable, Sort, Update
	Description The CH4 emissions factor for petroleum fuel source.
Ch4EmissionFactorUnit	Type picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the CH4 emissions factor.
	Possible values are:
	G PER_KL—g/kl
	• G PER KM—g/km
	• G PER KWH—g/kWh

Field	Details
-------	---------

- G PER L-g/L
- G PER MILES—g/mile
- G PER MMBTU—g/MMBtu
- G PER US GAL—g/US gal
- KG PER GJ—kg/GJ
- KG PER KL-kg/kl
- KG PER KM—kg/km
- KG PER KWH—kg/kWh
- KG PER L—kg/L
- KG PER MILES—kg/mile
- KG_PER_MJ—kg/MJ
- KG PER MMBTU—kg/MMBtu
- KG PER US GAL—kg/US gal

Co2EmissionFactor

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The CO2 emissions factor for petroleum fuel sources.

Co2EmissionFactorUnit

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The unit of measure for the CO2 emissions factor.

Possible values are:

- G PER KL—g/kl
- G PER KM—g/km
- G PER KWH—g/kWh
- G PER L—g/L
- G PER MILES—g/mile
- G PER MMBTU—g/MMBtu
- G PER US GAL—g/US gal
- KG_PER_GJ—kg/GJ
- KG PER KL—kg/kl
- KG PER KM—kg/km
- KG PER KWH—kg/kWh

Field	Details
	• KG_PER_L—kg/L
	• KG_PER_MILES—kg/mile
	KG_PER_MJ—kg/MJ
	KG_PER_MMBTU—kg/MMBtu
	KG_PER_US_GAL—kg/US gal
Co2eEmissionFactorInTco2eGj	Туре
	double
	Properties Filter, Nillable, Sort
	Description The CO2-equivalent emissions factor that's calculated in tonnes of CO2-equivalent emissions per gigajoule (GJ).
Co2eEmissionFactorInTco2eMwh	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 equivalent emissions factor that's calculated from CO2, CH4, and N2O emissions factors
FuelType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of fuel associated with this emissions factor record.
	Possible values are:
	• AutogasLPG—Autogas/LPG
	• Biodiesel
	• Biomass
	• CityGas—City Gas
	 CompressedNaturalGasCNG—Compressed Natural Gas (CNG)
	• Cooling
	• Diesel
	• Electricity
	• Ethanol
	• FuelOil—FuelOil
	• Gasoline

Field	Details
	• Heat
	• HeavyOil—HeavyOil
	• JetFuel—JetFuel
	• Kerosene
	• LightOil—LightOil
	 LiquidNaturalGasLNG—Liquefied Natural Gas (LNG)
	• NaturalGas—NaturalGas
	• Propane
	• Steam
FuelTypeRefId	Type reference
	Properties
	Filter, Group, Nillable, Sort
	Description This field is available in ADI varying 57.0 and later
	This field is available in API version 57.0 and later.
	This field is a relationship field.
	Relationship Name FuelTypeRef
	Relationship Type Lookup
	Refers To FuelType
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionFactor	Type double

Properties Create, Filter, Nillable, Sort, Update Description The N2O emissions factor for petroleum fuel sources. N2oEmissionFactorUnit Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the N2O emissions factor. Possible values are:	Field	Details
Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the N2O emissions factor. Possible values are: G_PER_KL—g/kl G_PER_KM—g/km G_PER_KMH—g/kWh G_PER_L—g/L G_PER_MILES—g/mile G_PER_MBTU=g/MMBtu G_PER_MBTU=g/MMBtu G_PER_KL—kg/k] KG_PER_KL—kg/kl KG_PER_KL—kg/kl KG_PER_KMH—kg/kwh KG_PER_KMH—kg/kwh KG_PER_KMH—kg/kwh KG_PER_KMH—kg/kwh KG_PER_MJ_kg/kuh KG_P		Create, Filter, Nillable, Sort, Update
picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the N2O emissions factor. Possible values are: G_PER_KL—g/kl G_PER_KM—g/km G_PER_L—g/L G_PER_MILES—g/mile G_PER_MILES—g/mile G_PER_U_GAL—g/US gal KG_PER_GJ—kg/GJ KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_MILES—kg/mile KG		The N2O emissions factor for petroleum fuel sources.
Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the N2O emissions factor. Possible values are: G_PER_KL—g/kl G_PER_KM—g/km G_PER_L—g/L G_PER_MILES—g/mile G_PER_MILES—g/mile G_PER_US_GAL—g/US gal KG_PER_GJ—kg/GJ KG_PER_KL—kg/kl KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_KM—kg/km KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MS_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.	N2oEmissionFactorUnit	
Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the N2O emissions factor. Possible values are: • G_PER_KL—g/kl • G_PER_KM—g/km • G_PER_KMH—g/kWh • G_PER_L—g/L • G_PER_MBETU—g/MBBTU • G_PER_MBETU—g/US gal • KG_PER_GJ—kg/Kl • KG_PER_KM—kg/kd • KG_PER_KM—kg/kM • KG_PER_KM—kg/kM • KG_PER_KM—kg/kM • KG_PER_KMH—kg/kMh • KG_PER_MILES—kg/mile • KG_PER_MILES—kg/Mile • KG_PER_MILES—kg/Mile • KG_PER_MILES—kg/MILES—		
Description The unit of measure for the N2O emissions factor. Possible values are: • G_PER_KL—g/kl • G_PER_KM—g/km • G_PER_KMH—g/kWh • G_PER_L—g/Ll • G_PER_MILES—g/mile • G_PER_MBEU—g/MMBtu • G_PER_US_GAL—g/US gal • KG_PER_GJ—kg/G] • KG_PER_KL—kg/kl • KG_PER_KM—kg/km • KG_PER_KM—kg/km • KG_PER_KMH—kg/kWh • KG_PER_KMH—kg/kWh • KG_PER_L—kg/L • KG_PER_MILES—kg/mile • KG_PER_MILES—kg/mile • KG_PER_MILES—kg/MMBtu • KG_PER_MS—kg/MJ • KG_PER_MS—kg/MJ • KG_PER_MS—kg/MJ • KG_PER_MS—kg/MJ • KG_PER_MS—kg/MJ • KG_PER_MS—kg/MJ • KG_PER_MS—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		
The unit of measure for the N2O emissions factor. Possible values are: G_PER_KL—g/kl G_PER_KM—g/km G_PER_KM—g/kWh G_PER_L—g/L G_PER_MILES—g/mile G_PER_MBETU—g/MMBtu G_PER_US_GAL—g/US gal KG_PER_GJ—kg/kJ KG_PER_KL—kg/kl KG_PER_KL—kg/kl KG_PER_KL—kg/kM KG_PER_KMH—kg/kWh KG_PER_KMH—kg/kWh KG_PER_KMH—kg/kWh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MILES—kg/mile KG_PER_MILES—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_MBETU—kg/MJ KG_PER_MBETU—kg/US gal Name Type String Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		
G_PER_KL—g/kl G_PER_KM—g/kwh G_PER_KWH—g/kwh G_PER_L—g/L G_PER_MILES—g/mile G_PER_MMBTU—g/MMBtu G_PER_US_GAL—g/US gal KG_PER_GJ—kg/GJ KG_PER_KL—kg/kl KG_PER_KM—kg/kwh KG_PER_KM—kg/kwh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MS_MJ KG_PER_MS_GJ KG_PER_MS_MS_MS_U KG_PER_MS_MS_MS_U KG_PER_MS_MS_MS_U KG_PER_MS_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		•
• G_PER_KM—g/km • G_PER_KWH—g/kWh • G_PER_L—g/L • G_PER_MILES—g/mile • G_PER_MBTU—g/MMBtu • G_PER_US_GAL—g/US gal • KG_PER_GJ—kg/K] • KG_PER_KM—kg/kM • KG_PER_KM—kg/kWh • KG_PER_KM—kg/kWh • KG_PER_MILES—kg/Nile • KG_PER_MILES—kg/MIle • KG_PER_MILES—kg/MIle • KG_PER_MILES—kg/MMBtu • KG_PER_MBTU—kg/MMBtu • KG_PER_MBTU—kg/MMBtu • KG_PER_L=KG/L gal Name Type String Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		Possible values are:
• G_PER_KWH—g/kWh • G_PER_L—g/L • G_PER_MILES—g/mile • G_PER_MMBTU—g/MMBtu • G_PER_US_GAL—g/US gal • KG_PER_GJ—kg/GJ • KG_PER_KM—kg/kI • KG_PER_KM—kg/kWh • KG_PER_KM—kg/kWh • KG_PER_KM—kg/kWh • KG_PER_L—kg/L • KG_PER_MILES—kg/mile • KG_PER_MILES—kg/MJ • KG_PER_MJ—kg/WJ • KG_PER_MS/WS gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• G_PER_KL—g/kl
G_PER_LI—g/L G_PER_MILES—g/mile G_PER_MBTU—g/MMBtu G_PER_US_GAL—g/US gal KG_PER_GJ—kg/GJ KG_PER_KL—kg/kl KG_PER_KM—kg/kwh KG_PER_KM—kg/kwh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_MBTU—kg/LS gal Name Type String Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• G_PER_KM—g/km
G_PER_MILES—g/mile G_PER_MMBTU—g/MMBtu G_PER_US_GAL—g/US gal KG_PER_GJ—kg/GJ KG_PER_KL—kg/kl KG_PER_KM—kg/km KG_PER_KM—kg/kWh KG_PER_KM—kg/kWh KG_PER_MJ—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MJ—kg/MJ KG_PER_MS_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• G_PER_KWH—g/kWh
• G_PER_MMBTU—g/MMBtu • G_PER_US_GAL—g/US gal • KG_PER_GJ—kg/GJ • KG_PER_KL—kg/kl • KG_PER_KM—kg/km • KG_PER_KMH—kg/kWh • KG_PER_L —kg/L • KG_PER_MILES—kg/mile • KG_PER_MJ—kg/MJ • KG_PER_MJ—kg/MJ • KG_PER_MS_HMBTU—kg/MMBtu • KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• G_PER_L—g/L
• G_PER_US_GAL—g/US gal • KG_PER_GJ—kg/GJ • KG_PER_KL—kg/kl • KG_PER_KM—kg/km • KG_PER_KMH—kg/kWh • KG_PER_L—kg/L • KG_PER_MILES—kg/mile • KG_PER_MJ—kg/MJ • KG_PER_MJ—kg/MJ • KG_PER_MS_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• G_PER_MILES—g/mile
 KG_PER_GJ—kg/kJ KG_PER_KL—kg/kJ KG_PER_KM—kg/kWh KG_PER_KWH—kg/kWh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account. 		• G_PER_MMBTU—g/MMBtu
 KG_PER_KL—kg/kl KG_PER_KM—kg/kWh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account. 		• G_PER_US_GAL—g/US gal
 KG_PER_KM—kg/kM KG_PER_KWH—kg/kWh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account. 		• KG_PER_GJ—kg/GJ
 KG_PER_KWH—kg/kWh KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account. 		• KG_PER_KL—kg/kl
 KG_PER_L—kg/L KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account. 		• KG_PER_KM—kg/km
KG_PER_MILES—kg/mile KG_PER_MJ—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		KG_PER_KWH—kg/kWh
KG_PER_MJ—kg/MJ KG_PER_MMBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		• KG_PER_L—kg/L
KG_PER_MMBTU—kg/MMBtu KG_PER_US_GAL—kg/US gal Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		KG_PER_MILES—kg/mile
Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		KG_PER_MJ—kg/MJ
Name Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		
string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.		KG_PER_US_GAL—kg/US gal
Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the account.	Name	
Name of the account.		Properties
Parent Emission Factor Id		
reference	ParentEmissionFactorId	Type reference
Properties Create, Filter, Group, Sort		Properties

Description

The name of the parent emissions factor.

This is a relationship field.

Relationship Name

ParentEmissionFactor

Relationship Type

Lookup

Refers To

OtherEmssnFctrSet

SuppliedEmissionsFactor

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The CO2 equivalent emissions factor provided by the vendor to override the CO2e emissions factor that's calculated using the CO2, CH4, and N2O emission values.

SuppliedEmissionsFactorUnit

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The unit of measure for the supplied emissions factor value.

Possible values are:

- G PER KM—g/km
- G PER KWH—g/kWh
- G PER L—g/L
- G PER MILES—g/mile
- G PER MMBTU—g/MMBtu
- G PER US GAL—g/US gal
- KG PER GJ—kg/GJ
- KG PER KM—kg/km
- KG PER KWH—kg/kWh
- KG_PER_L—kg/L
- KG PER MILES—kg/mile
- KG PER MJ—kg/MJ
- KG PER MMBTU—kg/MMBtu
- KG PER US GAL—kg/US gal

Field Detail	s
•	TONNES_PER_GJ—tonnes/GJ
•	TONNES_PER_KL—tonnes/kl
•	TONNES_PER_KWH—tonnes/kWh
•	TONNES_PER_L—tonnes/L
•	TONNES_PER_MMBTU—tonnes/MMBtu
•	TONNES_PER_MWH—tonnes/MWh

PcmtEmssnFctrSet

Represents a collection of emission factors that are used to convert spent amounts in procurement data to carbon emissions in tonnes of carbon dioxide equivalent (tCO_2e). This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CurrencyCode	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The currency in which the expense was made.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG
	• AZN
	• BAM

Field	Details
	• BBD
	• BDT
	• BGN
	• BHD
	• BIF
	• BMD
	• BND
	• BOB
	• BRL
	• BSD
	• BTN
	• BWP
	• BYN
	• BZD
	• CAD
	• CDF
	• CHF
	• CLP
	• CNY
	• COP
	• CRC
	• CSD
	• CUP
	• CVE
	• CZK
	• DJF
	• DKK
	• DOP
	• DZD
	• EGP
	• ERN
	• ETB
	• EUR
	• FJD
	• FKP
	• GBP
	• GEL
	• GHS

Field Det	ails
	GIP
	GMD
	GNF
	GTQ
	GYD
	HKD
•	HNL
	HRK
•	HTG
•	HUF
•	IDR
•	ILS
•	INR
•	IQD
	IRR
	ISK
	JMD
•	JOD
•	JPY
•	KES
•	KGS
•	KHR
•	KMF
•	KPW
•	KRW
•	KWD
•	KAD
•	KZT
	LAK
•	LBP
•	LKR
•	LRD
	LYD
	MAD
	MDL
	MGA
	MKD
•	MMK

Field	Details	
	• MOP	
	• MRU	
	• MUR	
	• MWK	
	• MXN	
	• MYR	
	• MZN	
	• NAD	
	• NGN	
	• NIO	
	• NOK	
	• NPR	
	• NZD	
	• OMR	
	• PAB	
	• PEN	
	• PGK	
	• PHP	
	• PKR	
	• PLN	
	• PYG	
	• QAR	
	• RON	
	• RSD	
	• RUB	
	• RWF	
	SARSBD	
	• SCR	
	• SDG	
	• SEK	
	• SGD	
	• SHP	
	• SLL	
	• sos	
	• SRD	
	• STN	
	• SYP	

Field	Details
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH
	• UGX
	• USD
	• UYU
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	• ZAR
	The default value is 'USD'.
Description	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The description of this dataset.
EmissionFactorDataSource Type	
	textarea
	Properties
	Create, Nillable, Update
	Description
	The source of the emissions factor reference data.

EmissionFactorUpdateYear

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The calendar year of the currency amounts in this dataset. This value is used to adjust emission factor rates for inflation.

Possible values are:

- 2000
- 2001
- 2002
- 2003
- 2004
- 2005
- 2006
- 2007
- 2008
- 2009
- 2010
- 2011
- 2012
- 2013
- 2014
- 2015
- 2016
- 2017
- 2018
- 2019
- 2020
- 2021
- 2022
- 2023
- 2024
- 2025
- 2026
- 20272028
- _ - -

Field	Details
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
IsComplete	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether you've entered all the required values.
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the account.

Field	Details
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

PcmtEmssnFctrSetItem

Represents the individual emissions factors for scope 3 procurement analysis. Here, the environmentally extended input-output (EEIO) model outputs are used as the emission factors in units of tCO_2 e per million spent (currency not specified). This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
EconomicSector	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the economic sector.
EconomicSectorCategory	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details Description	
	The category of the economic sector.	
EconomicSectorCode	Туре	
	string	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description	
	The code representing the economic sector. This value is unique within the dataset, such as a North American Industry Classification System (NAICS) code.	
LastReferencedDate	Type dateTime	
	Properties	
	Filter, Nillable, Sort	
	Description	
	The timestamp for when the current user last viewed a record related to this record.	
LastViewedDate	Туре	
	dateTime	
	Properties Filter, Nillable, Sort	
	Description	
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.	
Name	Туре	
	string	
	Properties	
	Create, Filter, Group, idLookup, Sort, Update	
	Description Name of the account.	
PcmtEmssnFctrSetId	Туре	
	reference	
	Properties Croate Filter Croup Sort	
	Create, Filter, Group, Sort	
	Description The master record associated with this procurement item record	
	The master record associated with this procurement item record.	
	This is a relationship field.	

Field	Details		
	Relationship Name		
	PcmtEmssnFctrSet		
	Relationship Type Lookup		
	Refers To		
	PcmtEmssnFctrSet		
Scope3GhgCategory	Туре		
	picklist		
	Properties		
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update		
	Description		
	The greenhouse gas scope 3 category.		
	Possible values are:		
	• Business Travel		
	• Capital Goods		
	• Downstream Leased Assets		
	Downstream Transportation and Distribution		
	• Employee Commuting		
	 End-of-Life Treatment of Sold Products 		
	• Franchises		
	 Fuel and Energy-Related Activities 		
	• Investments		
	 Processing of Sold Products 		
	 Purchased Goods and Services 		
	• Uncategorized		
	• Upstream Leased Assets		
	 Upstream Transportation and Distribution 		
	• Use of Sold Products		
	• Waste Generated In Operations		
TotScpe3EmssnPerMillionSpent	Туре		
	double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description		
	The total scope 3 emissions per million spent that's adjusted according to the inflation ra		

ProductEmissionsFactor

Represents information about the emissions factors used in quantifying the emissions by a product in the supply-chain. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details		
EmssnFctrDataSource	Type textarea		
	Properties Create, Nillable, Update		
	Description		
	The source of the emissions factor reference data and its description.		
EmssnFctrDataSourceType	Туре		
	picklist		
	Properties		
	Create, Filter, Group, Nillable, Sort, Update		
	Description The type of data source of the emissions factor reference data.		
	Possible values are:		
	• Industry Average		
	• Other		
	• Supplier Provided		
EmssnFctrUpdateYear	Type picklist		
	·		
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update		
	Description		
	The year in which this reference data for the emissions factor was most recently updated.		
	Possible values are:		
	• 2000		
	• 2001		
	• 2002		

Field	Details
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the product emissions factor.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProductId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details		
	Description		
	The product that's associated with this emissions factor.		
	This field is a relationship field.		
	Relationship Name Product		
	Relationship Type Lookup		
	Refers To Product2		
SupplierId	Type reference		
	Properties Create, Filter, Group, Nillable, Sort, Update		
	Description The supplier responsible for this product emissions factor.		
	This field is a relationship field.		
	Relationship Name Supplier		
	Relationship Type Lookup		
	Refers To Supplier		
TotalEmissionsValue	Type double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description The total amount of carbon emissions for each unit of measure.		
UnitOfMeasure	Type picklist		
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update		
	Description The unit of measure for this product emissions factor.		
	Possible values are:		
	• Each		
	• Gallons		

 Liters LongTon—LongTon MetricTonne—MetricTonne ShortTon—ShortTon g kg 	Field	Details
MetricTonne—MetricTonneShortTon—ShortTongkg		• Liters
ShortTon—ShortTongkg		 LongTon—Long Ton
gkg		MetricTonne—MetricTonne
• kg		ShortTon—Short Ton
		• g
		• kg
• 1b		• 1b

ProgramInitiative

Represents information about a sustainability initiative in a program. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details		
ActualCost	Type double		
	Properties Create, Filter, Nillable, Sort, Update		
	Description The actual cost of the program initiative.		
BusinessRegion	Type picklist		
	Properties Create, Filter, Group, Nillable, Sort, Update		
	 Description The business region where the initiative is running. Possible values are: AMER ANZ APAC 		
	• APAC • Africa		

Field	Details
	Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	• North America
	• South America
	• Southeast Asia
City	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The city where the initiative is running.
Country	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The country where the initiative is running.
	Possible values are:
	• AD—Andorra
	AE—United Arab Emirates
	• AF—Afghanistan
	AG—Antigua and Barbuda
	AI—Anguilla
	• AL—Albania
	• AM—Armenia
	AO—Angola
	AQ—Antarctica
	• AR—Argentina
	• AT—Austria
	• AU—Australia
	• AW—Aruba
	AX—Aland Islands
	• AZ—Azerbaijan
	*

- BA—Bosnia and Herzegovina
- вв—Barbados
- BD—Bangladesh
- ве—Belgium
- BF—Burkina Faso
- BG—Bulgaria
- вн—Bahrain
- ві—Burundi
- вJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- ви—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- ■V—Bouvet Island
- BW—Botswana
- BY—Belarus
- BZ—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- cI—Côte d'Ivoire
- CK—Cook Islands
- cl—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- CU—Cuba
- cv—Cape Verde
- CW—Curação
- cx—Christmas Island

Field	Details
	1.00101115

- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- Gн—Ghana
- GI—Gibraltar
- GL—Greenland
- gм—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana

Field	Details

- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- нт—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- кү—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- ⊥K—Sri Lanka
- LR—Liberia
- LS—Lesotho

Field	Details
rieiu	Deluis

- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- ▶ NU—Niue
- Nz—New Zealand
- OM—Oman

- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- sk—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)

- SY—Syrian Arab Republic
- sz—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- T₩—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- uz—Uzbekistan
- VA—Holy See (Vatican City State)
- vc—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- VN—Vietnam
- ▼U—Vanuatu
- WF—Wallis and Futuna
- ws—Samoa
- XK—Kosovo
- YE—Yemen
- YT—Mayotte
- za—South Africa
- zm—Zambia
- zw—Zimbabwe

Field	Details
CurrencyCode	Туре
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The currency in which the cost was incurred.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG
	• AZN
	• BAM
	• BBD
	• BDT
	• BGN
	• BHD
	• BIF
	• BMD
	• BND
	• BOB
	• BRL
	• BSD
	• BTN
	• BWP
	• BYN
	• BZD
	• CAD
	• CDF
	• CHF
	• CLP
	• CNY
	• COP

Field	Details
	• CRC
	• CSD
	• CUP
	• CVE
	• CZK
	• DJF
	• DKK
	• DOP
	• DZD
	• EGP
	• ERN
	• ETB
	• EUR
	• FJD
	• FKP
	• GBP
	• GEL
	• GHS
	• GIP
	• GMD
	• GNF
	• GTQ
	• GYD
	HKD
	• HNL • HRK
	• HTG
	• HUF
	• IDR
	• ILS
	• INR
	• IQD
	• IRR
	• ISK
	• JMD
	• JOD
	• JPY
	• KES

Field De	tails
	• KGS
	• KHR
	• KMF
	• KPW
	• KRW
	• KMD
	• KAD
	• KZT
	• LAK
	• LBP
	• LKR
	• LRD
	• LYD
	• MAD
	• MDL
	• MGA
	• MKD
	• MMK
	• MOP
	• MRU
	• MUR
	• MWK
	• MXN
	• MYR
	• MZN
	• NAD
	• NGN
	• NIO
	• NOK
	• NPR
	• NZD
	• OMR
	• PAB
	• PEN
	• PGK
	• PHP
	• PKR
	• PLN

Field Detail	ls
•	PYG
•	QAR
•	RON
•	RSD
•	RUB
•	RWF
•	SAR
•	SBD
•	SCR
•	SDG
•	SEK
•	SGD
•	SHP
•	SLL
•	SOS
•	SRD
•	STN
•	SYP
•	SZL
•	THB
•	TJS
•	TND
•	TOP
•	TRY
•	TTD
•	TWD
•	TZS
•	UAH
	UGX
	USD
	UYU
	UZS
	VES
	VND
	VUV
	WST
•	XAF
•	XCD

Field	Details
	• XOF
	• XPF
	• YER
	• ZAR
	The default value is USD.
Description	Туре
	textarea
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The description of the initiative.
EmissionsActivityId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The emissions activity impacted by the initiative.
	This field is a relationship field.
	Relationship Name EmissionsActivity
	Relationship Type Lookup
	Refers To
	EmissionsActivity
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the initiative ends.
EstimatedCost	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The estimated cost of the program initiative.

Field	Details
IsActive	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the initiative is active (true) or not (false).
	The default value is false.
LastReferencedDate	Type dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
ManagerId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The manager of the initiative.
	This field is a relationship field.
	Relationship Name Manager
	Relationship Type Lookup
	Refers To
	User
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	стевге, глісет, споир, тагоокир, зогт, оривсе

Field	Details
	Description The name of the initiative.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProgramId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The program associated with the initiative.
	This field is a relationship field.
	Relationship Name Program
	Relationship Type Lookup
	Refers To Program
StartDate	Type date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The date when the initiative begins.
Status	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of the initiative.
	Possible values are:
	• Active
	• Cancelled
	• Completed
	• Planned
Туре	Туре
	picklist
	Properties Create, Filter, Group, Sort, Update
	Description The type of initiative that is part of the program.
	Possible values are:
	• Environmental
	• Governance
	• Social

ProgramInitiativeEnrl

Represents the enrollment details of a sustainability initiative in a program. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description
	The account associated with an organization enrolled in the initiative.
	This field is a relationship field.
	Relationship Name Account
	Relationship Type Lookup
	Refers To Account
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The end date of the enrollment in the initiative.
IsActive	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the enrollment for the participant in the initiative is active (true) or not (false).
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.

Field	Details
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	The name of the initiative enrollment record.
ProgramInitiativeId	Туре
	reference
	Properties
	Create, Filter, Group, Sort
	Description
	The program initiative that's associated with the enrollee.
	This field is a relationship field.
	Relationship Name ProgramInitiative
	Relationship Type Lookup
	Refers To ProgramInitiative
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The scope 3 emissions source associated with the environment, social, and governance initiative.
	This field is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
StartDate	Туре
	date
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The start date of the enrollment in the initiative.
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset associated with the environment, social, and governance initiative.
	This field is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier associated with the environment, social, and governance initiative.
	This field is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
VehicleAssetEmssnSrcId	Туре
	reference Properties Create, Filter, Group, Nillable, Sort, Update
	Description The vehicle asset associated with the environment, social, and governance initiative.
	This field is a relationship field.
	Relationship Name VehicleAssetEmssnSrc

Field	Details	
	Relationship Type Lookup	
	Refers To VehicleAssetEmssnSrc	

RefrigerantEmssnFctr

Represents the global warming potential values for individual refrigerants. Global warming potential compares the atmospheric radiative forcing of one molecule of refrigerant to that of carbon dioxide. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
EmissionFactorDataSource	Type textarea
	Properties Create, Nillable, Update
	Description The source of the emissions factor reference data.
EmissionFactorUpdateYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this reference data for the emissions factor was most recently updated.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005

Field De	tails
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
GlblWarmingPotInKgCo2eKg Typ	pe e
	double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The global warming potential (GWP) of the refrigerant.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

RentalCarEmssnFctr

Represents the emissions factors for scope 3 rental car usage. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
EmissionFactorDataSource	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The source of the emissions factor reference data.
EmissionFactorUpdateYear	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The year in which this reference data for the emissions factor was most recently updated.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008

Field	Details
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
FuelEfficiency	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The fuel efficiency of the vehicle.

Field	Details
FuelEfficiencyInMpg	Туре
	double
	Properties Filter, Nillable, Sort
	Description The value of the fuel efficiency in miles per gallon.
FuelEfficiencyUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for fuel efficiency.
	Possible values are:
	• LITRES PER 100KM—L per 100 km
	MILES PER GALLON—Miles per Gallon
	The default value is 'LITRES_PER_100KM'.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.

Field	Details
OtherEmssnFctrId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The other emission factor set record containing global warming potential values for CH4 and N2O.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup
	Refers To OtherEmssnFctrSet
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

RentalCarEnrgyUse

Represents the energy consumption related to rental cars. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CarbonFootprintReportDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.
Ch4EmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description
	The CH4 emissions that are calculated for this energy use record.
Co2EmissionsInKg	Туре
	double
	Properties Filter, Nillable, Sort
	Description
	The CO2 emissions that are calculated for this energy use record.
CostCenter	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The cost center associated with this energy use record.
Distance	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The distance travelled by the rental car.
DistanceUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
	Description
	The unit of measure for the distance travelled.
	Possible values are:
	• Kilometers
	• Miles
	The default value is 'Kilometers'.
EndDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date until when the values of this energy use record are valid.
FuelEfficiencyInLkm	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description The fuel efficiency of the vehicle in liters for every 100 kilometers that's calculated based on the selected emission factors.
FuelEfficiencyInMpg	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description The fuel efficiency of the vehicle in miles per gallon that's calculated based on the selected emission factors.
FuelType	Type picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of fuel consumed for this energy use record.
	Possible values are:
	 AutogasLPG—Autogas/LPG
	• Biodiesel

Field	Details
	• Diesel
	• Ethanol
	• Gasoline
IsRecordLocked	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description Indicates whether the rental car energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.
Name	Type
	String
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name for this energy use record.

Field	Details
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RentalCarCompanyCode	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The code that identifies the rental car company.
RentalCarCompanyName	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the rental car company.
RentalCarEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The reference data that contains the rental car emission factors necessary to complete the calculations.
	This is a relationship field.
	Relationship Name RentalCarEmssnFctr
	Relationship Type Lookup

Field	Details	
	Refers To RentalCarEmssnFctr	
Scope3CrbnFtprntId	Type reference	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The scope 3 carbon footprint record that's associated with this energy use record.	
	This is a relationship field.	
	Relationship Name Scope3CrbnFtprnt	
	Relationship Type Lookup	
	Refers To Scope3CrbnFtprnt	
Scope3EmissionsInTco2e	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions in metric tonnes of carbon dioxide equivalent.	
Scope3EmssnSrcId	Type reference	
	Properties Create, Filter, Group, Sort, Update	
	Description The scope 3 emission source that's associated with this energy use record.	
	This is a relationship field.	
	Relationship Name Scope3EmssnSrc	
	Relationship Type Lookup	
	Refers To Scope3EmssnSrc	
Scope3GhgCategory	Type picklist	

Field	Details
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the scope 3 GHG category for the total scope 3 emissions related to the energy use.
	Possible values are:
	• BusinessTravel—BusinessTravel
	EmployeeCommuting—EmployeeCommuting
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
SuplScope3Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value that's added to the calculated total scope 3 emissions value.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier related to this record.
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TotalFuelConsumptionInGal	Type double
	Properties Filter, Nillable, Sort

Field	Details	
	Description	
	The total fuel consumed in gallons.	
TotalFuelConsumptionInLiter	Туре	
	double	
	Properties	
	Filter, Nillable, Sort	
	Description	
	The fuel consumption and the fuel consumption unit are prioritized over the aircraft fuel economy value and the aircraft fuel economy unit when calculating this value.	
TravelerName	Туре	
	string	
	Properties	
	Create, Filter, Group, Nillable, Sort, Update	
	Description	
	The name of the traveler.	
VendorProvidedEmissionsInTco2e	Туре	
	double	
	Properties	
	Create, Filter, Nillable, Sort, Update	
	Description	
	The scope 3 emissions provided by the vendor for the rental car booking or the aggregate details for multiple bookings. This emissions value overrides the calculated total scope 3 emissions.	

Scope3CrbnFtprnt

Represents the total carbon emissions from scope 3 activities. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e). This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AnnualEmssnInventoryId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The emissions inventory record for a particular year that's related to the scope 3 carbon footprint record.
	This is a relationship field.
	Relationship Name AnnualEmssnInventory
	Relationship Type Lookup
	Refers To Annual Emssnlnventory
AuditApprovalStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of audit approval of this carbon footprint record.
	Possible values are:
	• Approved
	• Pending Approval
CarbonInventoryRecordCount	Type double
	Properties Filter, Nillable, Sort
	Description The total number of procurement emissions factor set item records and energy use records that are used to calculate emissions.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the values of this carbon footprint record are valid.

Field	Details		
FootprintStage	Туре		
	picklist		
	Properties Create, Filter, Group, Sort, Update		
	Description The workflow stage for this carbon footprint record.		
	Possible values are:		
	CompletedData Collection		
	Data Validation		
	Emission Source Confirmation		
	• External Audit		
	• Internal Audit		
IsRecordLocked	Type boolean		
	Properties Defaulted on create, Filter, Group, Sort		
	Description Indicates that the scope 3 carbon footprint record and the associated energy use records are locked for editing.		
	The default value is 'false'.		
LastReferencedDate	Type dateTime		
	Properties Filter, Nillable, Sort		
	Description The timestamp for when the current user last viewed a record related to this record.		
LastViewedDate	Type dateTime		
	Properties Filter, Nillable, Sort		
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.		
Name	Type string		

Field	Details	
	Properties	
	Create, Filter, Group, idLookup, Sort, Update	
	Description Name of the account.	
OwnerId	Type reference	
	Properties Create, Defaulted on create, Filter, Group, Sort, Update	
	Description The ID of the user who owns this record.	
	This is a polymorphic relationship field.	
	Relationship Name Owner	
	Relationship Type Lookup	
	Refers To Group, User	
ReportingDate	Type date	
	Properties	
	Create, Filter, Group, Nillable, Sort, Update	
	Description The date when this carbon footprint record data is due to be sent to a reporting body.	
ReportingYear	Туре	
	picklist	
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update	
	Description	
	The year in which this carbon footprint record data is due to be sent to a reporting body.	
	Possible values are:	
	• 2000	
	• 2001	
	• 2002	
	• 2003	
	• 2004	
	• 2005	
	• 2006	

Field	Detai	ls
	•	2007
	•	2008
	•	2009
	•	2010
	•	2011
	•	2012
	•	2013
	•	2014
	•	2015
	•	2016
	•	2017
	•	2018
	•	2019
	•	2020
	•	2021
	•	2022
	•	2023
	•	2024
	•	2025
	•	2026
	•	2027
	•	2028
	•	2029
	•	2030
	•	2031
	•	2032
	•	2033
	•	2034
	•	2035
	•	2036
	•	2037
	•	2038
	•	2039
	•	2040
Scope3EmssnSrcId	Туре	
		ference

Field	Details	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The scope 3 emissions source record that's associated with this carbon footprint record.	
	This is a relationship field.	
	Relationship Name Scope3EmssnSrc	
	Relationship Type Lookup	
	Refers To Scope3EmssnSrc	
Scp3EmssnCapitalGood	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the production of capital goods for all the associated energy use records, included in category 2.	
Scp3EmssnDnstrmLeasedAsset	Type double	
	Properties Filter, Nillable, Sort	
	Description	
	The total scope 3 emissions from the operation of downstream leased assets for all the associated energy use records, included in category 13.	
Scp3EmssnDnstrmTrnspDistr	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the transportation and distribution of downstream leased assets for all the associated energy use records, included in category 9.	
Scp3EmssnEmployeeCommuting	Туре	
	double	
	Properties Filter, Nillable, Sort	

Field	Details
	Description The total scope 3 emissions from the transportation of employees, included in category 7.
Scp3EmssnEndLifeSoldProdt	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the end-of-life treatment of sold products, included in category 12.
Scp3EmssnFranchise	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the operation of franchises, included in category 14.
Scp3EmssnFuelEnergyActivity	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of fuels and energy, included in category 3.
Scp3EmssnInvestment	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from investments, included in category 15.
Scp3EmssnProcSoldProduct	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the processing of sold products, included in category 10.
Scp3EmssnPurchGoodsService	Type double

Field	Details	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the production of purchased goods and services, included in category 1.	
Scp3EmssnUpstrmLeasedAsset	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the operation of upstream leased assets, included in category 8.	
Scp3EmssnUpstrmTrnspDistr	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the transportation and distribution of upstream leased assets, included in category 4.	
Scp3EmssnUseOfSoldProduct	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 emissions from the use of sold products and services, included in category 11.	
Scp3UncatgEmissions	Type double	
	Properties Filter, Nillable, Sort	
	Description The total scope 3 uncategorized emissions for all the associated procurement emission factor sets.	
Scp3WasteGenInOper	Type double	
	Properties Filter, Nillable, Sort	

Field	Details	
	Description The total scope 3 emissions from the treatment and disposal of generated waste, included in category 5.	
StartDate	Туре	
	date Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The date from when the values of this carbon footprint record are valid.	
StnryAssetEnvrSrcId	Type reference	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The stationary asset environmental source record associated with this carbon footprint record.	
	This is a relationship field.	
	Relationship Name StnryAssetEnvrSrc	
	Relationship Type Lookup	
	Refers To StnryAssetEnvrSrc	
SuplScope3Emission	Type double	
	Properties Create, Filter, Nillable, Sort, Update	
	Description The supplemental scope 3 emissions value that's added to the calculated total scope 3 emissions value	
SupplDnstrmLsdAst	Type double	
	Properties Create, Filter, Nillable, Sort, Update	
	Description The supplemental scope 3 emissions from downstream leased assets value that is added to the calculated scope 3 emissions from downstream leased assets.	

Field Details SupplEndLifeTreatSoldPrdct Type double **Properties** Create, Filter, Nillable, Sort, Update Description The supplemental scope 3 emissions from end-life treatment of sold product value that is added to the calculated scope 3 emissions from end-life treatment of sold products. SupplFuelEnrgyRelaActv Type double **Properties** Create, Filter, Nillable, Sort, Update Description The supplemental scope 3 emissions from fuel and energy-related activity value that is added to the calculated scope 3 emissions from fuel and energy-related activities. SupplProcessingSoldPrdct Type double **Properties** Create, Filter, Nillable, Sort, Update Description The supplemental scope 3 emissions from processing sold products value that is added to the calculated scope 3 emissions from processing sold products. SupplPurchGoodSrvcs Type double **Properties** Create, Filter, Nillable, Sort, Update Description The supplemental scope 3 emissions from purchased goods services value that is added to the calculated scope 3 emissions from purchased goods services. SupplScp3EmssnBizTravl Type double **Properties** Create, Filter, Nillable, Sort, Update Description The supplemental scope 3 emissions from business travel value that is added to the calculated scope 3 emissions from business travel. SupplScp3EmssnCptlGoods Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 3 emissions from capital goods value that is added to the calculated scope 3 emissions from capital goods.
SupplScp3EmssnDnstrmTrnspDstr	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 3 emissions from downstream transportation distribution value that is added to the calculated scope 3 emissions from downstream transportation distribution.
SupplScp3EmssnEmpComut	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions from employee commuting value that is added to the calculated scope 3 emissions from employee commuting.
SupplScp3EmssnFranch	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions from franchise value that is added to the calculated scope 3 emissions from franchises.
SupplScp3EmssnInvestments	Type double
	Properties Create, Filter, Nillable, Sort, Update
	· · · · · · · · · · · · · · · · · · ·
	Description The supplemental scope 3 emissions from investments value that is added to the calculated scope 3 emissions from investments.
SupplScp3EmssnWstGenOper	Туре
	double

Field	Details
	Properties Control of the Artificial Control
	Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions from waste generated in operations value that is added to the calculated scope 3 emissions from waste generated in operations.
SupplScp3UncatgEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 uncategorized emissions value that is added to the calculated scope 3 uncategorized emissions.
SupplUpstrmLsdAst	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 3 emissions from upstream leased assets value that is added to the calculated scope 3 emissions from upstream leased assets.
SupplUpstrmTrnspDstr	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions from upstream transportation distribution value that is added to the calculated scope 3 emissions from upstream transportation distribution.
SupplUseSoldPrdct	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions from use of sold products value that is added to the calculated scope 3 emissions from use of sold products.
TotScope3EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions for this carbon footprint record. This value is calculated based on categorized, uncategorized, and supplemental scope 3 emissions.
TotalScp3DnstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from downstream activities. This value is calculated by adding the emissions from transportation and distribution of downstream leased assets, processing and use of sold products, end-of-life treatment of sold products, operation of downstream leased assets, operation of franchises, and investments.
TotalScp3EmssnBusTrvl	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from energy consumption and procurement for business travel, included in category 6.
TotalScp3UpstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from upstream activities. This value is calculated by adding the emissions from transportation and distribution of upstream leased assets, waste generated in operations, business travel, employee commuting, operation of upstream leased assets, and production of purchased goods and services, capital goods, fuel, and energy.

Scope3EmssnSrc

Represents scope 3 activities that are the source of greenhouse gas emissions. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountNameId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Name of the company, it's subsidiary, or it's business unit for which you are doing carbon accounting.
	This field is a relationship field.
	Relationship Name AccountName
	Relationship Type Lookup
	Refers To Account
AirTravelEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The air travel emissions factor record that's used to calculate emissions from air travel.
	This is a relationship field.
	Relationship Name AirTravelEmssnFctr
	Relationship Type Lookup
	Refers To AirTravelEmssnFctr
BusinessRegion	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The business region where this asset is located.
	Possible values are:
	• AMER
	• ANZ

Field	Details
	• APAC
	• Africa
	Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	• North America
	• South America
	• Southeast Asia
City	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The situation asset is lesseted
	The city where this asset is located.
Country	Туре
	picklist
	Properties Company of the Company of
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The country where this asset is located.
	Possible values are:
	• AD—Andorra
	• AE—United Arab Emirates
	AF—AfghanistanAG—Antigua and Barbuda
	AG—Antigua and BarbudaAI—Anguilla
	AL—Albania
	AM—Armenia
	AO—Angola
	AQ—Antarctica
	AR—Argentina
	• AT—Austria
	AU—Australia
	• AW—Aruba

- Ax—Aland Islands
- Az—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- вЕ—Belgium
- вғ—Burkina Faso
- BG—Bulgaria
- вн—Bahrain
- BI—Burundi
- BJ—Benin
- B⊥—Saint Barthélemy
- вм—Bermuda
- вм—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- вw—Botswana
- BY—Belarus
- BZ—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- сн—Switzerland
- cI—Cote d'Ivoire
- CK—Cook Islands
- cl—Chile
- cm—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- CV—Cape Verde

- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- gн—Ghana
- GI—Gibraltar
- GL—Greenland
- gм—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala

- GW—Guinea-Bissau
- GY—Guyana
- нм—Heard Island and McDonald Islands
- HN—Honduras
- HR—Croatia
- HT—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- KN—Saint Kitts and Nevis
- кр—Korea, Democratic People's Republic of
- KR—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia

- LS—Lesotho
- L⊤—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- MD—Moldova, Republic of
- мЕ—Montenegro
- MF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN-Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- MY—Malaysia
- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand

- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- sp—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)

- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- T₩—Taiwan
- TZ—Tanzania, United Republic of
- ua—Ukraine
- UG—Uganda
- us—United States
- UY—Uruguay
- uz—Uzbekistan
- VA—Holy See (Vatican City State)
- vc—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- vn—Vietnam
- VU—Vanuatu
- WF—Wallis and Futuna
- ws—Samoa
- YE—Yemen
- YT—Mayotte
- ZA—South Africa
- zm—Zambia
- zw—Zimbabwe

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description
FrgtHaulingEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The freight hauling emissions factor record that's used to calculate emissions from freight hauling.
	This is a relationship field.
	Relationship Name FrgtHaulingEmssnFctr
	Relationship Type Lookup
	Refers To FrgtHaulingEmssnFctr
GroundTravelEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The ground travel emissions factor record that's used to calculate emissions from ground travel.
	This is a relationship field.
	Relationship Name GroundTravelEmssnFctr
	Relationship Type Lookup
	Refers To GroundTravelEmssnFctr
HotelStayEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The hotel stay emissions factor record that's used to calculate emissions from hotel stay during business travel.
	This is a relationship field.
	Relationship Name HotelStayEmssnFctr
	Relationship Type Lookup
	Refers To HotelStayEmssnFctr
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ParentEmissionSourceId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The parent asset that stores the aggregated emissions data of all the related assets.
	This is a relationship field.
	Relationship Name ParentEmissionSource
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
PostalCode	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The postal code of this asset.
RentalCarEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The rental car emissions factor record that's used to calculate emissions from the usage of rental cars.
	This is a relationship field.
	Relationship Name RentalCarEmssnFctr
	Relationship Type Lookup

Field	Details
	Refers To RentalCarEmssnFctr
Scope3EmissionSourceType	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The type of activity causing emissions, such as business travel.
State	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The state where this asset is located.

Scope3Pcmtltem

Represents the procurement (corporate spending) entry records. Procurement is considered as the amount that the organization spends on goods and services. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CalculatedScope3EmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions for this procurement item record. This value is calculated based on the amount spent, the total scope 3 emissions per million spent, and the parent procurement summary record's inflation rate.

Field	Details
FinalScorecardEmissions	Туре
	double
	Properties Filter, Nillable, Sort
	Description The final scorecard emissions value when the calculation type is Sustainability Scorecard.
IsRecordLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the scope 3 procurement item record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
PcmtEmssnFctrSetItemId	Туре
	reference

Field	Details
-------	---------

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The procurement emissions factor set item that contains the emissions factor to be applied to this procurement item.

This is a relationship field.

Relationship Name

PcmtEmssnFctrSetItem

Relationship Type

Lookup

Refers To

PcmtEmssnFctrSetItem

ProcurementEmssnFactorSetEmssn

Type

double

Properties

Create, Filter, Nillable, Sort, Update

Description

The calculated emissions when the calculation type is Procurement Emission Factor Set.

ProcurementSummaryId

Type

reference

Properties

Create, Filter, Group, Sort

Description

The parent scope 3 procurement summary record for this scope 3 procurement item record.

This is a relationship field.

Relationship Name

ProcurementSummary

Relationship Type

Lookup

Refers To

Scope3PcmtSummary

ProductEmissionsFactorId

Type

reference

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The product emissions factor that's used to calculate the quantity-based emissions for this procurement item.

Field	Details
	This field is a relationship field.
	Relationship Name
	ProductEmissionsFactor
	Relationship Type
	Lookup Refers To
	ProductEmissionsFactor
ProductId	Type reference
	Properties Control of the Control of
	Create, Filter, Group, Nillable, Sort, Update
	Description The product that's being purchased in this procurement item.
	This field is a relationship field.
	Relationship Name
	Product
	Relationship Type Lookup
	Refers To
	Product2
PurchaseQuantity	Туре
	double
	Properties Create Filter Nillable Sort Undate
	Create, Filter, Nillable, Sort, Update
	Description The quantity of the items that are purchased in this procurement item.
ReportDate	Type date
	Properties
	Filter, Group, Nillable, Sort
	Description
	The date to include in reports and dashboards. The report date can be the report end date, the first day of the calendar year in the reporting year, or the current date.
Scope3FmissionsCalculationType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field	Details
-------	---------

Description

The calculation type for the scope 3 emissions.

Possible values are:

- Allocated Scorecard Emissions
- Spend-Based Emissions
- Quantity-Based Emissions

Scope3EmissionsInTco2

Type

double

Properties

Filter, Nillable, Sort

Description

The calculated scope 3 emissions if you don't enter the emissions value provided by the vendor.

Scope3GhgCategory

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The scope 3 GHG category.

Possible values are:

- Business Travel
- Capital Goods
- Downstream Leased Assets
- Downstream Transportation and Distribution
- Employee Commuting
- End-of-Life Treatment of Sold Products
- Franchises
- Fuel and Energy-Related Activities
- Investments
- Processing of Sold Products
- Purchased Goods and Services
- Uncategorized
- Upstream Leased Assets
- Upstream Transportation and Distribution
- Use of Sold Products
- Waste Generated In Operations

Field	Details
Scp3QtyBsdEmssnInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The calculated quantity-based scope 3 emissions for this procurement item record. The value is calculated based on the quantity of items purchased and the product emissions factor.
Scp3UncatgEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions value if you don't select the scope 3 GHG category. This is a calculated field.
SpendingCategory1	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The first-level spending category for the procurement item.
SpendingCategory2	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The second-level spending category for the procurement item, that's a subset of the first-level spending category.
SpendingCategory3	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The third-level spending category for the procurement item, that's a subset of the second-level spending category.
SpentAmount	Type double

Field	Details
	Properties Create, Filter, Sort, Update
	Description The amount spent for this procurement item in the currency selected for the parent procurement summary record.
SpentDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the amount was spent for this procurement item.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier associated with this procurement item.
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
SustainabilityScorecardId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The parent supplier sustainability scorecard record that's associated with the procurement item.
	This is a relationship field.
	Relationship Name SustainabilityScorecard
	Relationship Type Lookup
	Refers To SustainabilityScorecard

Field	Details
TotScpe3EmssnPerMillionSpent	Type double
	Properties Filter, Nillable, Sort
	Description Total scope 3 emissions per million spent that's adjusted according to the inflation rate in the associated scope 3 procurement summary record.
UnitOfMeasure	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the items that are purchased in this procurement item.
	Possible values are:
	• Each
	• Gallons
	• Liters
	• LongTon—Long Ton
	MetricTonne—MetricTonne
	• ShortTon—ShortTon
	• g
	• kg
	• 1b
VendorPrvdScope3EmssnInTco2e	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The scope 3 emissions provided by the vendor to override the calculated total scope 3 emissions.

Scope3PcmtSummary

Represents the amount that the organization spends for an individual procurement category. Scope 3 procurement summary quantifies the effect on atmospheric warming, represented in tonnes of carbon dioxide equivalent (tCO_2e) by using a matched emission factor from an associated Procurement Emission Factor Item record. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field Deto	ails
CalendarYear Type	
	picklist
	perties Create, Filter, Group, Restricted picklist, Sort, Update
	ription
	The year to which this procurement summary record data corresponds.
F	Possible values are:
•	2000
•	2001
•	2002
•	2003
•	2004
•	2005
•	2006
•	2007
•	2008
•	2009
•	2010
•	2011
	2012
	2013
	2014
	2015
	2016
	2017 2018
	2019
	2020
	2021
	2022
	2023
	2024

Field	Details
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
CarbonFootprintReportDate	Type date
	Properties Filter, Group, Nillable, Sort Description The date to include in reports and dashboards. The report date can be the reporting end date, the first day of the calendar year in the reporting year, or the current date.
CurrencyCode	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description The currency code for this procurement summary record.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS

Field	Detai	ls
	•	AUD
	•	AWG
	•	AZN
	•	BAM
	•	BBD
	•	BDT
	•	BGN
	•	BHD
	•	BIF
	•	BMD
	•	BND
	•	BOB
	•	BRL
	•	BSD
	•	BTN
	•	BWP
	•	BYN
	•	BZD
	•	CAD
	•	CDF
	•	CHF
	•	CLP
	•	CNY
	•	COP
	•	CRC
	•	CSD
	•	CUP
	•	CVE
	•	CZK
	•	DJF
	•	DKK
	•	DOP
		DZD
	•	EGP
	•	ERN
	•	ETB
	•	EUR
	•	FJD

Field	Details	
	• FKP	
	• GBP	
	• GEL	
	• GHS	
	• GIP	
	• GMD	
	• GNF	
	• GTQ	
	• GYD	
	• HKD	
	• HNL	
	• HRK	
	• HTG	
	• HUF	
	• IDR	
	• ILS	
	• INR	
	• IQD	
	• IRR	
	• ISK	
	• JMD	
	• JOD	
	• JPY	
	• KES • KGS	
	• KHR	
	• KMF	
	• KPW	
	• KRW	
	• KWD	
	• KYD	
	• KZT	
	• Lak	
	• LBP	
	• LKR	
	• LRD	
	• LYD	
	• MAD	

Field	etails	
	• MDL	
	• MGA	
	• MKD	
	• MMK	
	• MOP	
	• MRU	
	• MUR	
	• MWK	
	• MXN	
	• MYR	
	• MZN	
	• NAD	
	• NGN	
	• NIO	
	• NOK	
	• NPR	
	• NZD	
	• OMR	
	• PAB	
	• PEN	
	• PGK	
	• PHP	
	• PKR	
	• PLN	
	• PYG	
	• QAR	
	• RON	
	• RSD	
	• RUB	
	• RWF	
	• SAR	
	• SBD	
	• SCR	
	• SDG	
	• SEK	
	• SGD	
	• SHP	
	• SLL	

Field	Details
	• SOS
	• SRD
	• STN
	• SYP
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH
	• UGX
	• USD
	• UYU
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	ZAR The default value is USD!
	The default value is 'USD'.
Description	Туре
	textarea
	Properties Create, Nillable, Update
	Description The description for this procurement summary record.
InflationRate	Туре
	percent

Field	Details
	Properties Filter, Nillable, Sort
	Description The current inflation rate if you don't enter the inflation rate override value.
InflationRateCalculated	Type percent
	Properties Filter, Nillable, Sort
	Description The inflation rate calculated based on the currency and calendar year of this procurement summary record. This rate is used to adjust emission factors.
InflationRateOverride	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The value to override the current inflation rate.
IsComplete	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether you've entered all the required values.
	The default value is 'false'.
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the scope 3 procurement summary record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PcmtEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The procurement emissions factor set record that's used to match procurement items with emissions factors.
	This is a relationship field.

Field	Details
	Relationship Name PcmtEmssnFctr
	Relationship Type Lookup
	Refers To PcmtEmssnFctrSet
Scope3CrbnFtprntId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 carbon footprint record associated with this procurement summary record.
	This is a relationship field.
	Relationship Name Scope3CrbnFtprnt
	Relationship Type Lookup
	Refers To Scope3CrbnFtprnt
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The scope 3 emissions source record associated with this procurement summary record.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
Scp3EmssnBusinessTravel	Type
	double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from business travel for all the associated procurement records, included in category 6.
Scp3EmssnCapitalGood	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of capital goods for all the associated procurement records, included in category 2.
Scp3EmssnDnstrmLeasedAsset	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the downstream leased assets for all the associated procurement records, included in category 13.
Scp3EmssnDnstrmTrnspDistr	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation and distribution of downstream leased assets for all the associated procurement records, included in category 9.
Scp3EmssnEndLifeSoldProdt	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the end-of-life treatment of sold products for all the associated procurement records, included in category 12.
Scp3EmssnFranchise	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the operation of franchises for all the associated procurement records, included in category 14.
Scp3EmssnFuelEnergyActivity	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of fuels and energy for all the associated procurement records, included in category 3.
Scp3EmssnInvestment	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from investments for all the associated procurement records, included in category 15.
Scp3EmssnProcSoldProduct	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the processing of sold products for all the associated procurement records, included in category 10.
Scp3EmssnPurchGoodsService	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of purchased goods and services for all the associated procurement records, included in category 1.
Scp3EmssnUpstrmLeasedAsset	туре
	double Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the operation of upstream leased assets for all the associated procurement records, included in category 8.
Scp3EmssnUpstrmTrnspDistr	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation and distribution of upstream leased assets for all the associated procurement records, included in category 4.
Scp3EmssnUseOfSoldProduct	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the use of sold products and services for all the associated procurement records, included in category 11.
Scp3UncatgEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 uncategorized emissions for all the associated procurement records.
Scp3WasteGenInOper	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the treatment and disposal of generated waste for all the associated procurement records, included in category 5.
ScpEmssnEmployeeCommuting	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation of employees for all the associated procurement records, included in category 7.

Field	Details
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset environmental source record associated with this procurement summary record.
	This is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
TotalScp3DnstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from downstream activities. This value is calculated by adding the emissions from transportation and distribution of downstream leased assets, processing and use of sold products, end-of-life treatment of sold products, operation of downstream leased assets, operation of franchises, and investments.
TotalScp3Emissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions for this procurement summary record. This value is calculated based on the associated procurement records.
TotalScp3UpstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from upstream activities. This value is calculated by adding emissions from the transportation and distribution of upstream leased assets, waste generated in operations, business travel, employee commuting, operation of upstream leased assets, and production of purchased goods and services, capital goods, fuel, and energy.

Field	Details
TotalSpentAmount	Type double
	Properties Filter, Nillable, Sort
	Description The total amount spent that's calculated based on the associated procurement records.

Stnry Asset Annual Fact

Represents the information about stationary assets and their types, which is used to quantify the related intensity. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
ApplicableYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the year that's applicable to the stationary asset annual fact.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010

Field Deta	iils
•	2011
•	2012
•	2013
•	2014
•	2015
•	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
•	2033
•	2034
•	2035
•	2036
	2037
	2038
	2039
	2040
	2041
	2042
	2043
	2044
	2045
	2046
	2047
•	2048

Field Deta	ils
•	2049
•	2050
•	2051
•	2052
•	2053
•	2054
•	2055
•	2056
•	2057
•	2058
•	2059
•	2060
•	2061
•	2062
•	2063
•	2064
•	2065
•	2066
•	2067
•	2068
•	2069
•	2070
•	2071
•	2072
•	2073
•	2074
•	2075
•	2076
•	2077
•	
•	2079
•	2080
•	
•	
•	2083
•	2084
•	
•	2086

Field	Details
	• 2087
	• 2088
	• 2089
	• 2090
	• 2091
	• 2092
	• 2093
	• 2094
	• 2095
	• 2096
	• 2097
	• 2098
	• 2099
Description	Type textarea
	Properties
	Create, Nillable, Update
	Description The information about the stationary asset.
EmployeeCount	Type int
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The count of employees that are associated with the stationary asset.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the stationary asset master data.
OccupiedFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The floor area in a building that's occupied by an organization. This value is used in the associated stationary asset water footprint or its water activities.
OccupiedFloorAreaUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the unit of measure to calculate the occupied floor area.
	Possible values are:
	m2sqft
	The default value is sqft.
RecordTypeId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	This field is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup

Field	Details
	Refers To RecordType
Revenue	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The revenue generated from the associated stationary asset.
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Sort
	Description Specifies the environmental source that's associated with the stationary asset.
	This field is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
TotalFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total floor area in a building for an organization. This value is used in the associated stationary asset water footprint or its water activities.
TotalFloorAreaUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the unit of measure to calculate the total floor area.
	Possible values are:
	• m2
	• sqft

Field	Details
	The default value is sqft.
TotalUnitsManufactured	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total units manufactured by the associated stationary asset.

StnryAssetCrbnFtprnt

Represents the total carbon emissions and other environmental attributes from stationary assets. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e). Additionally, it also quantifies various aspects of the energy performance of the asset. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AllocatedRenewableEnergyInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total renewable energy allocated to this carbon footprint record.
AllocationStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The allocation status of renewable energy for this carbon footprint record.
	Possible values are:
	• Allocated
	• In Progress

Field	Details
	• Not Allocated
AnnualEmssnInventoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The emissions inventory record for a particular year that's related to the stationary asset carbon footprint record.
	This is a relationship field.
	Relationship Name AnnualEmssnInventory
	Relationship Type Lookup
	Refers To AnnualEmssnInventory
AuditApprovalStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of audit approval of this carbon footprint record.
	Possible values are:
	• Approved
	• Pending Approval
AvgDataCenterPue	Type double
	Properties Filter, Nillable, Sort
	Description The average power usage effectiveness of the data center that's calculated based on all the associated energy use records. This value is calculated by dividing the data center's total electricity consumption value by the data center computing equipment's total electricity consumption value.
AvgMonthlyElectrCnsmpInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The average monthly-normalized electricity consumption in kWh. This value is calculated based on the electricity consumption values across all stationary asset energy use records associated with this carbon footprint record.
BuildingEnergyIntensityId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The building energy intensity record that can be used to fill energy consumption data gaps
	This is a relationship field.
	Relationship Name BuildingEnergyIntensity
	Relationship Type Lookup
	Refers To BldgEnrgyIntensity
CarbonInventoryRecordCount	Type double
	Properties Filter, Nillable, Sort
	Description The number of energy use records associated with this carbon footprint record.
Ch4EmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CH4 emissions that are calculated for this energy use record.
Co2EmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions that are calculated for this energy use record.

Field	Details
DataCtrItDieselCnsmpIntensity	Type double
	Properties Filter, Nillable, Sort
	Description The diesel consumption intensity of the data center's computing equipment.
DataGapStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of filling the energy consumption data gaps for this carbon footprint record. Possible values are:
	CompleteData Gaps Identified
	• Pending Review
ElectricityIntensityVarPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage difference between the regional electricity consumption intensity of the carbon footprint and the electricity consumption intensity of the associated carbon footprint item.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the values of this carbon footprint record are valid.
EnrgyCnsmpIntensityInKbtuM2	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity of all the associated energy use records in kBtu per square meter.

Field Details EnrgyCnsmpIntensityInKbtuSqft Type double **Properties** Filter, Nillable, Sort Description The energy consumption intensity of all the associated energy use records in kBtu per square foot. EnrgyCnsmpIntensityInKwhM2 Type double **Properties** Filter, Nillable, Sort Description The energy consumption intensity of all the associated energy use records in kWh per square meter. EnrgyCnsmpIntensityInKwhSqft Type double **Properties** Filter, Nillable, Sort Description The energy consumption intensity of all the associated energy use records in kWh per square foot. EnrgyIntensityVariancePct Type percent **Properties** Filter, Nillable, Sort Description The percentage difference between the electricity consumption intensity and the regional electricity consumption intensity of the carbon footprint FootprintStage Type picklist **Properties** Create, Filter, Group, Nillable, Sort, Update Description The workflow stage for this carbon footprint record. Possible values are: Completed Data Collection

Field	Details
	Data Gap Filling
	Data Validation
	Emission Source Confirmation
	• External Audit
	• Internal Audit
	Renewable Energy Allocation
IsRecordLocked	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the stationary asset carbon footprint record and the associated energy use records are locked for editing.
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LocBasedElectrFrOthrFuelInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fuel energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromBiomassInKwh	Туре
	double

Field Details

Properties

Filter, Nillable, Sort

Description

The total electricity generated from biomass for all the associated energy use records, that's used to calculate emissions using the location-based method.

LocBasedElectrFromCoalInKwh

Type

double

Properties

Filter, Nillable, Sort

Description

The total electricity generated from coal for all the associated energy use records, that's used to calculate emissions using the location-based method.

LocBasedElectrFromGasInKwh

Type

double

Properties

Filter, Nillable, Sort

Description

The total electricity generated from gas for all the associated energy use records, that's used to calculate emissions using the location-based method.

LocBasedElectrFromHydroInKwh

Type

double

Properties

Filter, Nillable, Sort

Description

The total electricity generated from hydroelectric energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.

${\tt LocBasedElectrFromNuclearInKwh}$

Type

double

Properties

Filter, Nillable, Sort

Description

The total electricity generated from nuclear power for all the associated energy use records, that's used to calculate emissions using the location-based method.

LocBasedElectrFromOilInKwh

Туре

double

Properties

Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from oil for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromSolarInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from solar photovoltaic energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromWindInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from wind for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBsdElectrFrGeothermalInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from geothermal energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBsdElectrOthrFossilFuelKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fossil fuel energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
MaxVarianceAboveAvgElectrCnsmp	Туре
	percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The difference between the highest normalized monthly electricity consumption and the average monthly electricity consumption of all the associated energy use records
MaxVarianceBelowAvgElectrCnsmp	Type percent
	Properties Filter, Nillable, Sort
	Description The difference between the lowest normalized monthly electricity consumption and the average monthly electricity consumption of all the associated energy use records
MktBsdElectrFrBiomassInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from biomass for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrFromCoalInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from coal for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrGasInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from gas for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrGeothermalInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from geothermal energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrHydroInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from hydroelectric energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrNuclearInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from nuclear power for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrOilInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from oil for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrOthrFuelInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fuel energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrSolarInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from solar photovoltaic energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrWindInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from wind for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrOthrFossilFuelKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fossil fuel energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name for this carbon footprint record.
OccupiedFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The value to override the occupied floor area of the associated stationary asset environmental source.

Field	Details
OccupiedFloorAreaUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the occupied floor area of the associated stationary asset environmental source.
	Possible values are:
	• m2
	• sqft
	The default value is 'sqft'.
OwnerId	Туре
	reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PrevYrAnnlCarbonFootprintId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The previous year's carbon footprint record for the associated stationary asset environmental source.
	This is a relationship field.
	Relationship Name PrevYrAnnlCarbonFootprint
	Relationship Type Lookup
	Refers To StnryAssetCrbnFtprnt

Field	Details
PrevYrDataCenterPue	Туре
	double
	Properties Filter, Nillable, Sort
	Description The data center's power usage effectiveness for the previous year.
PrevYrEnrgyIntensityKbtuM2	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity for the previous year in kBtu per square meter.
PrevYrEnrgyIntensityKbtuSqft	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity for the previous year in kBtu per square foot.
PrevYrEnrgyIntensityKwhM2	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity for the previous year in kWh per square meter.
PrevYrEnrgyIntensityKwhSqft	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity for the previous year in kWh per square foot.
RegionalBldgEnergyIntensityId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The building energy intensity record containing the standard building energy intensity data from a government source.
	This is a relationship field.
	Relationship Name Regional Bldg Energy Intensity
	Relationship Type Lookup
	Refers To BldgEnrgyIntensity
ReportingDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when this carbon footprint record data is due to be sent to a reporting body.
ReportingYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this carbon footprint record data is due to be sent to a reporting body.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013

Field	Details
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
RgnlElectrCnsmpIntensity	
	double
	Properties Filter, Nillable, Sort
	Description The total regional electricity consumption intensity from the associated regional building energy intensity record in kWh per square foot.
RgnlEnrgyCnsmpIntensity	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The total regional electricity consumption intensity from the associated regional building energy intensity record in kBtu per square foot.
Scope3EmssnDnstrmLsdAst	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from downstream leased assets that are included in category 13 of the related carbon footprint record or the override value.
Scp3EmssnCptlGoods	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of capital goods that are included in category 2 of the related carbon footprint record or the override value.
Scp3EmssnFranchises	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the operation of franchises that are included in category 14 of the related carbon footprint record or the override value.
Scp3EmssnInvestments	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from investment that are included in category 15 of the related carbon footprint record or the override value.
Scp3EmssnProcSoldPrdct	Туре
	double Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the processing of sold products that are included in category 10 of the related carbon footprint record or the override value.
Scp3EmssnPurchGoodsSrvcs	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions from the production of purchased goods and services that are ncluded in category 1 associated with the carbon footprint record or the relevant override value.
Scp3EmssnUpstrmLsdAst	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the operation of upstream leased assets that are included in category 8 of the related carbon footprint record or the override value.
Scp3EmssnUseOfSoldPrdct	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the use of sold products and services that are included in category 11 of the related carbon footprint record or the override value.
Scp3EmssnWstGenInOper	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the treatment and disposal of generated waste that is included in category 5 of the related carbon footprint record or the override value.
Scp3EndLifeTreatSoldPrdct	Туре
	double Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 3 emissions from the end-of-life treatment of sold products that are included in category 12 of the related carbon footprint record or the override value.
Scp3FuelEnrgyRelaActv	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the production of fuel and energy that are included in category 3 of the related carbon footprint record or the override values.
Scp3UncategorizedEmssn	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from uncategorized sources in the related carbon footprint record or the override value.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this carbon footprint record are valid.
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset environmental source record associated with this carbon footprint record
	This is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc

Field	Details
SuplScope1Emissions	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 1 emissions value that's added to the calculated total scope 1 emissions value.
SuplScope2LocationBasedEmssn	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 2 location-based emissions value that's added to the calculated total scope 2 location-based emissions value.
SuplScope2MarketBasedEmssn	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 market-based emissions value that's added to the calculated total scope 2 market-based emissions value.
SuplScope3DnstrmEmissions	-
Suprocope SDIIS CIRLLINI SSTOIIS	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value from downstream activities that's added to the calculated total scope 3 emissions value.
SuplScope3UpstrmEmissions	Туре
	double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value from upstream activities that's added to the calculated total scope 3 emissions value.
TotBldgIndirectEnrgyCnsmpInMwh	Туре
	double

Field	Details
	Properties Filter, Nillable, Sort
	Description The total consumption of energy generated from electricity, heat, cooling, and steam. The consumption value excludes energy generated from other building fuels.
TotEnergyConsumptionInGj	Type double
	Properties Filter, Nillable, Sort
	Description The total energy consumption from all the energy sources and associated energy use records converted from kWh to gigajoules.
TotEnergyConsumptionInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy consumption from all the energy sources and associated energy use records.
TotEnergyConsumptionInMwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy consumption from all the energy sources and associated energy use records converted from kWh to MWh.
TotRnwlEnrgyExclHydroInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total renewable energy excluding hydroelectric energy. This value is calculated based on the market-based grid mix values and allocated renewable energy values.
TotRnwlEnrgyExclHydroPct	Type percent
	Properties Filter, Nillable, Sort

Field	Details
	Description The percentage of total renewable energy excluding hydroelectric energy out of the total electricity consumption.
TotScope1EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1 emissions from all the associated energy use records and supplemental emissions.
TotScope2LocBasedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 emissions value that's calculated based on the location-based data of grid emissions.
TotScope2MktBasedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 emissions value that's calculated based on the utility-provided emissions data and allocated renewable energy.
TotalFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The value to override the total floor area of the associated stationary asset environmental source.
TotalFloorAreaUnit	Type picklist
	picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Field Details

Description

The unit of measure for the total floor area of the associated stationary asset environmental source.

Possible values are:

- m2
- sqft

The default value is 'sqft'.

TotalRenewableEnergyInKwh

Type

double

Properties

Filter, Nillable, Sort

Description

The total renewable energy in kWh that's calculated based on the market-based grid mix values and the allocated renewable energy value.

TotalRenewableEnergyPct

Type

percent

Properties

Filter, Nillable, Sort

Description

The percentage of total renewable energy out of the total electricity consumption.

TotalScp3DnstrmEmissions

Type

double

Properties

Filter, Nillable, Sort

Description

The total scope 3 emissions from downstream activities. This value is calculated based on the scope 3 downstream emission values and supplemental scope 3 downstream emission values of all the associated energy use records.

TotalScp3UpstrmEmissions

Type

double

Properties

Filter, Nillable, Sort

Description

The total scope 3 emissions from upstream activities. This value is calculated based on the scope 3 upstream emission values and supplemental scope 3 upstream emission values of all the associated energy use records.

Field	Details
YearOverYearPueVariancePct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage difference of the data center's power usage effectiveness in the current year's carbon footprint and the previous year's carbon footprint.

StnryAssetCrbnFtprntltm

Represents the total tCO_2e emissions of individual fuel types, which are the child records of the stationary asset carbon footprint record. This object is available in API version 54.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(),
update()

Fields

Field	Details
EnergyIntensityVariancePct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage difference of energy consumption intensity between the current year and the previous year for the fuel type of the carbon footprint item.
EnrgyCnsmpIntensityInKwhM2	Type double
	Properties Filter, Nillable, Sort
	Description The energy consumption intensity of the selected fuel type in kWh per square meter. This value is calculated based on the fuel type's energy consumption intensity as a function of the parent carbon footprint record's occupied floor area.
EnrgyCnsmpIntensityInKwhSqft	Type double

Field Details Properties Filter, Nillable, Sort Description The energy consumption intensity of the selected fuel type in kWh per square foot. This value is calculated based on the fuel type's energy consumption intensity as a function of the parent carbon footprint record's occupied floor area. FuelType Type picklist **Properties** Filter, Group, Nillable, Restricted picklist, Sort Description The fuel type for this carbon footprint item record. Possible values are: CityGas—City Gas Cooling Diesel Electricity FuelOil—FuelOil Heat HeavyOil—HeavyOil ITElectricity—IT Electricity Kerosene LightOil—LightOil LiquidNaturalGasLNG—Liquid Natural Gas (LNG) NaturalGas—NaturalGas Propane Refrigerant Steam

IsRecordLocked

Type

boolean

Properties

Defaulted on create, Filter, Group, Sort

Description

Indicates that the stationary asset carbon footprint item record and the associated energy use records are locked for editing.

The default value is 'false'.

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of this stationery asset carbon footprint item record.
ParentCarbonFootprintId	Type reference
	Properties Filter, Group, Sort
	Description The parent carbon footprint record for this carbon footprint item record.
	This is a relationship field.
	Relationship Name ParentCarbonFootprint
	Relationship Type Lookup
	Refers To StnryAssetCrbnFtprnt
PrevYearCarbonFootprintItemId	туре
	reference
	Properties Filter, Group, Nillable, Sort

Field	Details
	Description
	The previous year's carbon footprint item record for the selected fuel type.
	This is a relationship field.
	Relationship Name PrevYearCarbonFootprintItem
	Relationship Type Lookup
	Refers To StnryAssetCrbnFtprntltm
PrevYrEnrgyIntensityKwhM2	Type double
	Properties Filter, Nillable, Sort
	Description The consumption intensity of the selected fuel type for the previous year in kWh per squar meter. This value is calculated based on the fuel type's energy consumption intensity as a function of the parent carbon footprint record's occupied floor area.
PrevYrEnrgyIntensityKwhSqft	Type double
	Properties Filter, Nillable, Sort
	Description The consumption intensity of the selected fuel type for the previous year in kWh per squar foot. This value is calculated based on the fuel type's energy consumption intensity as a function of the parent carbon footprint record's occupied floor area.
TotalEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total emissions for this carbon footprint item record in metric tonnes of carbon dioxid equivalent.
TotalEnergyConsumptionInGj	Туре

double

Properties

Filter, Nillable, Sort

Description

The total energy consumption for this carbon footprint item record in gigajoules.

Field	Details
TotalEnergyConsumptionInKwh	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The total energy consumption for this carbon footprint item record in kWh.

StnryAssetEnrgyUse

Represents the energy consumption related to stationary assets across multiple fuel types. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details
AllocEnrgyAttrCrBiomass	Type double
	Properties Filter, Nillable, Sort
	Description Total energy attribute certificate credits from the biomass clean energy type that are allocated to this energy use record.
	Available in API version 59.0 and later.
AllocEnrgyAttrCrGeothermal	Type double
	Properties Filter, Nillable, Sort
	Description Total energy attribute certificate credits from the geothermal clean energy type that are allocated to this energy use record. Available in API version 59.0 and later.

Field	Details
AllocEnrgyAttrCrInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total energy attribute certificate credits that are allocated to this energy use record.
	Available in API version 59.0 and later.
AllocEnrgyAttrCrSolar	Type double
	Properties Filter, Nillable, Sort
	Description Total energy attribute certificate credits from the solar clean energy type that are allocated to this energy use record.
	Available in API version 59.0 and later.
AllocEnrgyAttrCrWind	Type double
	Properties Filter, Nillable, Sort
	Description Total energy attribute certificate credits from the wind clean energy type that are allocated to this energy use record.
	Available in API version 59.0 and later.
AllocatedRenewableEnergyInKwh	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The value to override the allocated renewable energy for the energy use record.
CarbonFootprintReportDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.

Field	Details
Ch4EmissionsInKg	Туре
	double
	Properties Filter, Nillable, Sort
	Description
	The CH4 emissions that are calculated for this energy use record.
Co2EmissionsInKg	Туре
	double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions that are calculated for this energy use record.
DataGapFillingMethodName	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	The data gap filling method that's used if this record was generated by the application.
	Possible values are:
	 BUILDING_BENCHMARK—Building Energy Intensity
	 DAILY_AVERAGE_CURRENT_YEAR—Current Year Daily Average
	 DAILY_AVERAGE_LAST_YEAR—Previous Year Daily Average
	 Manual
	 REGIONAL_BENCHMARK—Regional Building Energy Intensity
ElectricityEmissionFactorsId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The electricity emissions factors record associated with this location.
	This is a relationship field.
	Relationship Name ElectricityEmissionFactors
	Relationship Type
	Lookup
	Refers To
	ElectricityEmssnFctrSet

Field	Details
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the values of this energy use record are valid.
FinalEnergyConsumption	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The final energy consumption calculated using the data gap-filling method.
FuelConsumption	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The amount of fuel consumed during the data entry period.
FuelConsumptionInGigajoule	Type double
	Properties Filter, Nillable, Sort
	Description The amount of fuel consumed during the data entry period in GJ (gigajoules).
FuelConsumptionInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The amount of fuel consumed during the data entry period in kWh.
FuelConsumptionUnit	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the consumed fuel.

Field	Details
	Possible values are:
	• 1000m3—1000 m3
	• GJ
	• GWh
	• Kiloliters
	• Liters
	• MJ
	• MMBtu
	• MWh
	• Therms
	• Tonnes
	• UkGallons—Uk Gallons
	• UsGallons—Us Gallons
	• ccf
	• kG—kg
	• kWh
	• kcal
	• lbs
	• longTons—long tons
	• m3
	• shortTons—short tons
	The default value is kWh.
FuelConsumptionUnitRefId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description
	This field is a relationship field.
	Relationship Name FuelConsumptionUnitRef
	Relationship Type Lookup
	Refers To SustainabilityUom
FuelType	Type
	picklist

Field	Details
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The type of fuel consumed for this energy use record.
	Possible values are:
	• CityGas—City Gas
	• Cooling
	• Diesel
	• Electricity
	• FuelOil—FuelOil
	• Heat
	HeavyOil—Heavy Oil
	• Kerosene
	• LightOil—LightOil
	 LiquidNaturalGasLNG—Liquid Natural Gas (LNG)
	• NaturalGas—NaturalGas
	• Propane
	• Refrigerant
	• Steam
FuelTypeRefId	Туре
	reference
	Properties
	Filter, Group, Nillable, Sort
	Description This field is available in API version 57.0 and later.
	This field is a relationship field.
	Relationship Name FuelTypeRef
	Relationship Type
	Lookup
	Refers To FuelType
IsCompanyOwnedAsset	Type boolean
	Properties Defaulted on create, Filter, Group, Sort

Field	Details
	Description
	Indicates whether the asset is owned by the organization.
	The default value is false.
IsPueMonthlyRange	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the monthly power usage effectiveness range is between 1 and 2.
	The default value is false.
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates that the stationary asset energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is false.
IsSystemGeneratedRecord	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the energy use record was created by data gap filling.
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LocBasedElectrFrBiomassInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from biomass for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFrNuclearInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from nuclear power for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFrOthrFuelInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fuel energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromCoalInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from coal for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromGasInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from gas for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromHydroInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from hydroelectric energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromOilInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from oil for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromSolarInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from solar photovoltaic energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBasedElectrFromWindInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from wind for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBsdElectrFrGeothermalInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from geothermal energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBsdElectrFrNonRenewablesKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from geothermal energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
LocBsdElectrOthrFossilFuelKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fossil fuel energy sources for all the associated energy use records, that's used to calculate emissions using the location-based method.
MktBasedElectrFrBiomassInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from biomass for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFrNuclearInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from nuclear power for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromCoalInKwh	Туре
	double Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from coal for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromGasInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from gas for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromHydroInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from hydroelectric energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromOilInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from oil for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromSolarInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from solar photovoltaic energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrFromWindInKwh	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total electricity generated from wind for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBasedElectrOthrFuelInKwh	Type
	double Properties Filter, Nillable, Sort
	Description The total electricity generated from other fuel energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrGeothermalInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from geothermal energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
MktBsdElectrFrNonRenewablesKwh	Type double
	Properties Filter, Nillable, Sort
	Description The percentage of total non-renewable energy generated from coal, gas, nuclear, oil, and other sources for this market.
MktBsdElectrOthrFossilFuelKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total electricity generated from other fossil fuel energy sources for all the associated energy use records, that's used to calculate emissions using the market-based method.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.

Field	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name for this energy use record.
NormalizedMoElectrCnsmpInKwh	Type double Properties
	Filter, Nillable, Sort Description The normalized value of the average monthly electricity consumption that's calculated based on the electricity consumption, report start date, and report end date.
OccupiedFloorArea	Type double Properties
	Create, Filter, Nillable, Sort, Update Description The value to override the occupied floor area of the associated stationary asset.
OccupiedFloorAreaInSqft	Type double
	Properties Filter, Nillable, Sort Description The floor area occupied by the stationary asset associated with this energy use record in square foot.
OccupiedFloorAreaUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the occupied floor area of the stationary asset associated with this energy use record.
	Possible values are: • m2 • sqft The default value is sqft.

Field	Details
OtherEmssnFctrId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The other emission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup
	Refers To OtherEmssnFctrSet
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PowerUsageEffectiveness	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The ratio that describes how efficiently a computer data center uses the energy.
ProposedEnergyConsumption	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The energy consumption proposed by the data gap-filling method

Field	Details
RefrigerantEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The refrigerant emissions factor record containing global warming potential values.
	This is a relationship field.
	Relationship Name RefrigerantEmssnFctr
	Relationship Type Lookup
	Refers To RefrigerantEmssnFctr
RenewableEnergyType	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the energy type to override the renewable energy that's accounted for in an allocated renewable energy.
	Possible values are:
	• BIOMASS—Biomass
	• GEOTHERMAL—Geothermal
	• HYDROELECTRICITY—Hydroelectricity
	• SOLAR—Solar
	• WIND—Wind
ScopelEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1 emissions from all the associated energy use records and supplemental emissions.
Scope2LocBasedEmssnInTco2e	Type double
	Properties
	Filter, Nillable, Sort

Field Details

Description

The total scope 2 emissions value that's calculated based on the location-based data of grid emissions.

Scope2MktBasedEmssnInTco2e

Type

double

Properties

Filter, Nillable, Sort

Description

The total scope 2 emissions value that's calculated based on the utility-provided emissions data and allocated renewable energy.

Scope3DnstrmEmissionsInTco2e

Type

double

Properties

Filter, Nillable, Sort

Description

The scope 3 emissions from downstream activities. This value is calculated based on the scope 3 downstream emission values and supplemental scope 3 downstream emission values of all the associated energy use records.

Scope3GhgCategory

Туре

picklist

Properties

Filter, Group, Nillable, Restricted picklist, Sort

Description

Specifies the scope 3 GHG category related to the energy use by the stationary asset environmental source.

Possible values are:

- SCOPE3DownstreamLeasedAssets—Scope 3 Downstream Leased Assets
- SCOPE3Franchises—Scope 3 Franchises
- SCOPE3Investments—Scope 3 Investments
- SCOPE3UseOfSoldProducts—Scope 3 Use of Sold Products
- SCP3CptlGoods—Scope 3 Capital Goods
- SCP3EndLifeTreatSoldProducts—Scope 3 End-of-Life Treatment of Sold Products
- SCP3FuelEnergyRelatedActv—Scope 3 Fuel and Energy-Related Activities
- SCP3ProcessingSoldPrdct—Scope 3 Processing of Sold Products
- SCP3PurchGoodsServices—Scope 3 Purchased Goods and Services
- SCP3UpstrmLsdAst—Scope 3 Upstream Leased Assets
- SCP3WasteGeneratedInOperations—Scope 3 Waste Generated In Operations

Field	Details
Scope3UpstrmEmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions from upstream activities. This value is calculated based on the scope 3 upstream emission values and supplemental scope 3 upstream emission values of all the associated energy use records.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
StnryAssetCrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset carbon footprint record associated with this energy use record.
	This is a relationship field.
	Relationship Name StnryAssetCrbnFtprnt
	Relationship Type Lookup
	Refers To StnryAssetCrbnFtprnt
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The stationary asset environmental source record associated with this energy use record.
	This is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup

Field	Details
	Refers To StnryAssetEnvrSrc
SuplScope1Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 1 emissions value that's added to the calculated total scope 1 emissions value
SuplScope2LocationBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 location-based emissions value that's added to the calculated total scope 2 location-based emissions value
SuplScope2MarketBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 market-based emissions value that's added to the calculated total scope 2 market-based emissions value
Sup1Scope3DnstrmEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value from downstream activities that's added to the calculated total scope 3 emissions value
SuplScope3UpstrmEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value from upstream activities that's added to the calculated total scope 3 emissions value

Field	Details
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier that is associated with this energy use record.
	This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TotRnwlEnrgyExclHydroInKwh	Type double
	Properties Filter, Nillable, Sort
	Description The total renewable energy excluding hydroelectric energy. This value is calculated based on the market-based grid mix values and allocated renewable energy values.
TotalFloorArea	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The value to override the total floor area of the associated stationary asset environmental source.
TotalFloorAreaInSqft	Type double
	Properties Filter, Nillable, Sort
	Description The total floor area of the stationary asset associated with this energy use record in square foot.
TotalFloorAreaUnit	Type picklist

Field	Details
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the total floor area of the stationary asset associated with this energy use record.
	Possible values are:
	• m2
	• sqft
	The default value is sqft.
TotalFuelConsumptionInKwh	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The total fuel consumed in kWh. This value is calculated by multiplying the electricity consumed with the power usage effectiveness value.
TotalRenewableEnergyInKwh	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The total renewable energy in kWh that's calculated based on the market-based grid mix values and the allocated renewable energy value.

StnryAssetEnvrSrc

Represents assets that are stationary in nature, use energy that can be recorded, and are the source of greenhouse gas emissions. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountNameId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description Name of the company, it's subsidiary, or it's business unit for which you are doing carbon accounting. This field is available in API version 57.0 and later.
	This field is a relationship field.
	Relationship Name AccountName
	Relationship Type Lookup
	Refers To
	Account
BusinessRegion	Type picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The business region where this stationary asset is located.
	Possible values are:
	• AMER
	• ANZ
	• APAC
	• Africa
	• Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	• North America
	• South America
	• Southeast Asia
City	Туре
	string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The city where this stationary asset is located.
	The city where this stationary asset is located.
Country	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The country where this stationary asset is located.
	The country where this stationary asset is located. Possible values are:
	AD—Andorra
	AE—United Arab Emirates
	AF—Afghanistan
	AG—Antigua and Barbuda
	• AI—Anguilla
	• AL—Albania
	• AM—Armenia
	AO—Angola
	AQ—Antarctica
	AR—Argentina
	• AT—Austria
	AU—Australia
	AW—Aruba
	AX—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and HerzegovinaBB—Barbados
	BD—BangladeshBE—Belgium
	BF—Burkina Faso
	BG—Bulgaria
	• BH—Bahrain
	• BI—Burundi
	• BJ—Benin
	BL—Saint Barthélemy
	BM—Bermuda

Field	Details
rieiu	Deluis

- BN—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- вт—Bhutan
- BV—Bouvet Island
- вw—Botswana
- ву—Belarus
- BZ—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Cote d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- CV—Cape Verde
- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt

Field Details

- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- нм—Heard Island and McDonald Islands
- нм—Honduras
- нк—Croatia
- нт—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India

Field Details

- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- KN—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кк—Когеа, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia

Field	Details
-------	---------

- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat
- мт—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- мұ—Malaysia
- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- ทบ—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine

Field	Details
-------	---------

- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- sl—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- sr—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- sy—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan

Field Details

- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- TW—Taiwan
- TZ—Tanzania, United Republic of
- UA—Ukraine
- UG—Uganda
- US—United States
- UY—Uruguay
- uz—Uzbekistan
- VA—Holy See (Vatican City State)
- vc—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- VN—Vietnam
- ∨∪—Vanuatu
- WF—Wallis and Futuna
- WS—Samoa
- XK—Kosovo
- YE—Yemen
- YT—Mayotte
- ZA—South Africa
- zм—Zambia
- z₩—Zimbabwe

CrbnEmssnScopeAllocId

Type

reference

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The carbon emissions scope allocation record to override the default scope assignments for all the fuel types.

This is a relationship field.

Relationship Name

CrbnEmssnScopeAlloc

Relationship Type

Lookup

Field	Details
	Refers To CrbnEmssnScopeAlloc
Description	Туре
	textarea
	Properties Create, Nillable, Update
	Description The description of the stationary asset environmental source.
ElectricityEmssnFctrId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The electricity emissions factor set record that's used to calculate emissions associated with the electricity consumed by this stationary asset.
	This is a relationship field.
	Relationship Name ElectricityEmssnFctr
	Relationship Type Lookup
	Refers To ElectricityEmssnFctrSet
EnvironmentalRiskId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The risk that's associated with the stationary asset environmental source.
	This field is a relationship field.
	Relationship Name EnvironmentalRisk
	Relationship Type Lookup
	Refers To EnvironmentalRisk
IsCompanyOwnedAsset	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the asset is owned by your company (true) or not (false). Asset ownership by the company impacts the scope allocation of associated emissions. The default value is false.
IsLeedCertified	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the stationary asset is certified as a green building (true) or not (false). The default value is false.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
LeaseExpirationDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date when the lease of the stationary asset expires.
LeaseIdentifier	Type string Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The analysis are translated with a few telegraphs of the station of
	The unique external identifier for the lease of the stationary asset.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OccupiedFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The building floor area occupied by your organization. This value is used in associated carbon footprint or energy use records.
OccupiedFloorAreaUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the occupied floor area.
	Possible values are:
	• m2
	• sqft
	The default value is sqft.
OtherEmssnFctrId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The other emissions factor set record containing emissions factors for the consumption of other fuel types.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup

Field	Details
	Refers To OtherEmssnFctrSet
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ParentEnvironmentalSourceId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The parent asset that stores the aggregated emissions data of all the related assets.
	This is a relationship field.
	Relationship Name ParentEnvironmentalSource
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
PostalCode	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The postal code of this stationary asset.
PremiseIdentifier	Туре
	string

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique external identifier for the building.
RecordTypeId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique identifier of the record type.
	This is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType
RefrigerantEmssnFctrId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The refrigerant emissions factor record that's used to calculate emissions based on the refrigerant values.
	This is a relationship field.
	Relationship Name RefrigerantEmssnFctr
	Relationship Type Lookup
	Refers To RefrigerantEmssnFctr
RegionalBldgEnergyIntensityId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The building energy intensity record is automatically populated when the country is the United States, the postal code is valid, and the total building floor area is entered.

Field	Details
	This is a relationship field.
	Relationship Name RegionalBldgEnergyIntensity
	Relationship Type Lookup
	Refers To BldgEnrgyIntensity
State	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The state where this stationary asset is located.
StationaryAssetIdentifier	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique external identifier for the stationary asset.
StationaryAssetType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update
	Description The type of stationary asset. You can enter the selected asset type as the building asset type in the associated building energy intensity record.
	Possible values are:
	• Data Center
	• Equipment
	• Factory
	• Generator
	• Hotel
	• Manufacturing
	Multifamily ResidentialOffice
	• Office • Other
	• Restaurant
	1.00 Guarano

Field	Details
	• Retail
	• Warehouse
	The default value is Office.
StreetAddress	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The street address where this stationary asset is located.
StreetAddress2	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The second line of the street address where this stationary asset is located.
TotalFloorArea	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total building floor area of your organization. This value is used in associated carbon footprint or energy use records.
TotalFloorAreaUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the total floor area.
	Possible values are:
	• m2
	• sqft
	The default value is sqft.
WstDispoEmssnFctrSetI	^{Id} Type

Create, Filter, Group, Nillable, Sort, Update

reference

Properties

Field	Details
	Description The waste disposal emissions factors set that's associated with the stationary asset environmental source.
	This field is a relationship field.
	Relationship Name WstDispoEmssnFctrSet
	Relationship Type Lookup
	Refers To WstDispoEmssnFctrSet

StnryAssetWaterActvty

Represents information about the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
ActivitySourceType	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the type of water source that's related to this water activity.
	Possible values are:
	• FreshWater—Fresh Water
	 GrndWaterNonRenewable—Ground water - Non-Renewable
	 GrndWaterRenewable—Ground water - Renewable
	 RecycledWater—Recycled Water
	 ReusedWater—Reused Water
	• SeaWater—Sea Water
	ThirdPartyReserve—Third-Party Reserve

Field	Details
ActivityType	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	Specifies the type of water activity related to the stationary asset.
	Possible values are:
	• Consumption
	• Discharge
	• Withdrawal
CostCenter	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The cost center associated with this stationary asset water activity.
CostPerUnit	Туре
	currency
	Properties Filter, Nillable, Sort
	Description
	The per unit cost of this water activity.
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The information that describes the stationary asset water activity.
EndDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The date from which the values of this stationary asset water activity become invalid.
EnvironmentalRiskId	Туре
	reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The environmental risk associated with this water activity.
	This field is a relationship field.
	Relationship Name EnvironmentalRisk
	Relationship Type Lookup
	Refers To EnvironmentalRisk
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the stationary asset water activity record and the associated carbon footprint record is locked for editing.
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type
	string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description The name of this stationary asset water activity.
	The name of this stationary asset water activity.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Quantity	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The quantity of water related to the selected activity type.
QuantityInM3	Type double
	Properties Filter, Nillable, Sort
	Description The water quantity that's calculated using the cubic meter (m3) measuring unit.
QuantityUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the unit of measure for calculating the water quantity.
	Possible values are:
	• Liters
	• м3—m3
	• Megaliters

Field	Details
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	The default value is Liters.
RecordTypeId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	This field is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType
ServiceProviderId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier associated with this water activity.
	This field is a relationship field.
	Relationship Name ServiceProvider
	Relationship Type Lookup
	Refers To Supplier
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from which the values of this stationary asset water activity become valid.
StnryAssetEnvrSrcId	Туре
	reference

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The stationary asset environmental source related to this water activity.
	This field is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
StnryAssetWaterFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The water footprint associated with the stationary asset water activity.
	This field is a relationship field.
	Relationship Name StnryAssetWaterFtprnt
	Relationship Type Lookup
	Refers To StnryAssetWaterFtprnt
TotalCost	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total cost of this water activity.
TreatmentType	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The type of activity that's performed for the treatment and discharge of the water. Possible values are:

Field	Details
	 DchgToEnvWoTreat—Discharge to Environment Without Treatment
	 DchgToThirdPartyWoTreat—Discharge to Third-Party Without Treatment
	• Other
	• Primary
	• Secondary
	• Tertiary
WaterFtprntReportDate	Туре
	date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the water footprint data of the associated stationary asset is due to be sent to a reporting body.

StnryAssetWaterFtprnt

Represents information about the total volume of water from the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CnsmpIntsVariancePct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage difference between the water consumption intensity and the previous year water consumption intensity of the water footprint.
DchgIntsVariancePct	Type percent

Field	Details
	Properties Filter, Nillable, Sort
	Description The percentage difference between the water discharge intensity and the previous year water discharge intensity of the water footprint.
EmployeeCnsmpIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's consumed by each employee.
EmployeeCount	Type double
	Properties
	Create, Filter, Nillable, Sort, Update Description
	Description
EmployeeDchgIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's discharged by each employee.
EmployeeWdrwIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's withdrawn by each employee.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the values of this stationary asset water activity becomes invalid.

Field	Details
ExtremeStressCnsmpPct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The percentage of water consumption in the extremely high water stress region.
ExtremeStressWdrwPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of water withdrawal in the extremely high water stress region.
FlAreaCnsmpIntsInM3M2	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's consumed per square meter (m2) by each floor.
FlAreaCnsmpIntsInM3Sqft	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's consumed per square feet (sqft) by each floor.
FlAreaDchgIntsInM3M2	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's discharged per square meter (m2) by each floor.
FlAreaDchgIntsInM3Sqft	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The intensity that's calculated in cubic meter (m3) for the water that's consumed per square feet (sqft) by each floor.
FlAreaWdrwIntsInM3M2	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's withdrawn per square meter (m2) by each floor.
FlAreaWdrwIntsInM3Sqft	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's withdrawn per square feet (sqft) by each floor.
FootprintStage	Type picklist
	Properties Create, Filter, Group, Sort, Update
	Description Specifies the latest stage in this water footprint life cycle.
	Possible values are:
	• Completed
	Data Collection
	Data Validation
	Emission Source Confirmation
	• External Audit
	• Internal Audit
HighStressCnsmpPct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The percentage of water consumption in the high water stress region.

Field	Details
HighStressWdrwPct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage of water withdrawal in the high water stress region.
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the stationary asset water footprint record and the associated carbon footprint record is locked for editing.
	The default value is false.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description The name of the stationary asset water footprint.
OccupiedFloorArea	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The building floor area occupied by your organization.
OccupiedFloorAreaUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the occupied floor area.
	Possible values are:
	• m2
	• sqft
	The default value is sqft.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PreviousYearWaterFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The previous year water footprint that's used in calculating the variance of each water activity.
	This field is a relationship field.
	Relationship Name PreviousYearWaterFtprnt

Field	Details
	Relationship Type Lookup
	Refers To StnryAssetWaterFtprnt
ProdtVolumeCnsmpIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's consumed by each product.
ProdtVolumeDchgIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's discharged by all the products.
ProdtVolumeWdrwIntsInM3	Type double
	Properties Filter, Nillable, Sort
	Description The intensity that's calculated in cubic meter (m3) for the water that's withdrawn by all the products manufactured.
ReportingYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this water footprint record data is due to be sent to a reporting body.
	Possible values are:
	• 2000
	• 2001
	• 2002
	• 2003
	• 2004

Field Def	rails
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040

Field	Details
StartDate	Туре
	date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the values of this stationary asset water activity becomes valid.
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset environmental source associated with this water footprint.
	This field is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
TotalConsumptionInMl	Type double
	Properties Filter, Nillable, Sort
	Description The water consumed by all the related water activities.
TotalCost	Type currency
	Properties Filter, Nillable, Sort
	Description The total cost of this water activity.
TotalDischargeInMl	Type double
	Properties Filter, Nillable, Sort
	Description The water discharge by all the related water activities.

Field	Details
TotalFloorArea	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The total building floor area of your organization.
TotalFloorAreaUnit	Type picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the total floor area.
	Possible values are:
	• m2
	• sqft
	The default value is sqft.
TotalStorageInMl	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The water reserve available for all the related water activities.
TotalUnitsManufactured	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
TotalWithdrawalInMl	Type double
	Properties Filter, Nillable, Sort
	Description The water withdrawal from all the related water activities.
WaterInventoryRecCount	Type double

Field	Details
	Properties Filter, Nillable, Sort
	Description The number of energy use records associated with this water footprint record.
WdrwIntsVariancePct	Type percent
	Properties Filter, Nillable, Sort
	Description The percentage difference between the water withdrawal intensity and the previous year water withdrawal intensity of the water footprint.

StnryAssetWtrFtprntltm

Represents information about the total volume of water from each water activity, such as withdrawal, consumption, or discharge related to the stationary assets. Each water activity is a child record of the stationary asset water footprint object. This object is available in API version 56.0 and later.

Supported Calls

describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(),
update()

Field	Details
ActivitySourceType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Specifies the type of water source that's related to the water activity of this stationary asset item.
	Possible values are:
	• FreshWater—Fresh Water
	 GrndWaterNonRenewable—Ground water - Non-Renewable
	 GrndWaterRenewable—Ground water - Renewable
	RecycledWater—Recycled Water

Field	Details
	ReusedWater—Reused Water
	• SeaWater—Sea Water
	ThirdPartyReserve—Third-Party Reserve
ActivityType	Туре
	picklist
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Specifies the type of water activity related to the stationary asset.
	Possible values are:
	• Consumption
	• Discharge
	• Withdrawal
BaselineWaterStress	Туре
	picklist
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort
	Description Specifies the baseline values that identifies the water stress level.
	Possible values are:
	• ExtremelyHigh—Extremely High (>80%)
	• High—High (40-80%)
	• Low—Low (<10%)
	 LowToMedium—Low to Medium (10-20%)
	 MediumToHigh—Medium to High (20-40%)
IsRecordLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the stationary asset water footprint item and the associated carbon footprint record is locked for editing.
	The default value is false.
LastReferencedDate	Туре
	dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The name of the stationary asset water footprint item.
ParentWaterFootprintId	Type reference
	Properties Filter, Group, Sort
	Description The parent water footprint record associated with this water footprint item.
	This field is a relationship field.
	Relationship Name ParentWaterFootprint
	Relationship Type Lookup
	Refers To StnryAssetWaterFtprnt
PrevYearWtrFtprntItemId	Type reference
	Properties Filter, Group, Nillable, Sort
	Description The previous year water footprint item record related to this footprint item. This field is a relationship field.

Field	Details
	Relationship Name PrevYearWtrFtprntltem
	Relationship Type Lookup
	Refers To StnryAssetWtrFtprntltm
QuantityInMl	Type double
	Properties Filter, Nillable, Sort
	Description The quantity of water related to the selected activity type.
RecordTypeId	Type reference
	Properties Filter, Group, Nillable, Sort, Update
	Description
	This field is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType
TotalCost	Type currency
	Properties Filter, Nillable, Sort
	Description The total cost of the water activity related to this stationary asset item.
TreatmentType	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description The type of activity that's performed for the treatment and discharge of the water.
	Possible values are:

Field	Details	
	 DchgToEnvWoTreat—Discharge to Environment Without Treatment 	
	 DchgToThirdPartyWoTreat—Discharge to Third-Party Without Treatment 	
	• Other	
	• Primary	
	• Secondary	
	• Tertiary	
WaterActivityPct	Type percent	
	Properties Filter, Nillable, Sort	
	Description The percentage of the total usage that's attributed to the water activity.	

SocialContributionSum

Represents information about social contributions made to political and non-political organizations belonging to financial and non-financial categories. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
Category	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the category of social contribution.
	Possible values are:
	• Monetary
	• Non-Monetary
ContribOrganizationName	Type string

Field	Details
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The name of the organization making the social contribution.
	The name of the organization making the social continuation.
Country	Type
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the country where the recipient is located.
	Possible values are:
	• AD—Andorra
	AE—United Arab Emirates
	• AF—Afghanistan
	Ag—Antigua and Barbuda
	• AI—Anguilla
	• AL—Albania
	• AM—Armenia
	• AO—Angola
	 AQ—Antarctica
	• AR—Argentina
	• AT—Austria
	• AU—Australia
	• AW—Aruba
	• AX—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and Herzegovina
	• BB—Barbados
	• BD—Bangladesh
	BE—BelgiumBF—Burkina Faso
	BG—BulgariaBH—Bahrain
	• BI—Burundi
	BJ—Benin
	BL—Saint Barthélemy
	BM—Bermuda

- BN—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- BV—Bouvet Island
- вw—Botswana
- ву—Belarus
- BZ—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- ci—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- cv—Cape Verde
- cw—Curação
- CX—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt

- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- нм—Heard Island and McDonald Islands
- нм—Honduras
- HR—Croatia
- нт—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India

- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey
- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- KN—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кк—Когеа, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- мD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia

- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- мQ—Martinique
- MR—Mauritania
- MS—Montserrat
- мт—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- мұ—Malaysia
- MZ—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE-Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine

- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation
- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- sı—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- sr—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- sy—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- TH—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- TM—Turkmenistan

Field	Detai	ls .
	•	TN—Tunisia
	•	TO—Tonga
	•	TR—Türkiye
	•	TT—Trinidad and Tobago
	•	TV—Tuvalu
	•	TW—Taiwan
	•	TZ—Tanzania, United Republic of
	•	UA—Ukraine
	•	UG—Uganda
	•	Us—United States
	•	UY—Uruguay
	•	UZ—Uzbekistan
	•	VA—Holy See (Vatican City State)
	•	VC—Saint Vincent and the Grenadines
	•	VE—Venezuela, Bolivarian Republic of
	•	VG—Virgin Islands, British
	•	vn—Vietnam
	•	VU—Vanuatu
	•	WF—Wallis and Futuna
	•	ws—Samoa
	•	XK—Kosovo
	•	YE—Yemen
	•	YT—Mayotte
	•	ZA—South Africa
	•	zm—Zambia
	•	zw—Zimbabwe
Description	Туре	
	tex	xtarea
	Prope	
	Cre	eate, Nillable, Update
	Descri	
	Th	e description of the social contribution statistics.
DisclsReportingPeriodId	Type ref	ference
	Prope	rties
	Cre	eate, Filter, Group, Sort, Update

Field	Details
	Description
	The reporting period for which the social contribution statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the record.
NonMonetaryCtrb	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The non-monetary social contribution.
NonMonetaryCtrbType	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of non-monetary contribution.
	Possible values are:
	• In-Kind Donations
	• Pro Bono Hours
	• Volunteer Hours
OwnerId	Type reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
RecipientName	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the contribution recipient.
SubsidiaryAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount

Field	Details
	Relationship Type Lookup
	Refers To Account
TotalAmount	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total amount of the social contribution.
Type	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Specifies the type of social contribution.
	Possible values are:
	 Grants and Donations Political

Supplier

Represents information about the supplier that's related to a climate-committed company. This object is available in API version 54.0 and later.



Note: Supplier is available to partner community users in Experience Cloud.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountId	Type reference

Field	Details
	Properties Create, Filter, Group, Sort
	Description The company that the supplier is associated with.
	This is a relationship field.
	Relationship Name Account
	Relationship Type Lookup
	Refers To Account
CompanyRelationshipType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The relationship between the supplier and the company.
	Possible values are:
	• Utility Supplier
	Value Chain Supplier
Description	Type textarea
	Properties Create, Filter, Nillable, Sort, Update
	Description The description for the supplier record.
IsLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is 'false'.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record can be edited or not.
	The default value is 'false'.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the supplier record.

SupplierProduct

Represents information that's used to track the products that are purchased from a supplier. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AttributeEndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the product attribute becomes inactive.
AttributeStartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the product attribute becomes active.
DefaultProductEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The default emissions factor associated with this product that's purchased from the supplier.
	This field is a relationship field.
	Relationship Name DefaultProductEmssnFctr
	Relationship Type Lookup
	Refers To ProductEmissionsFactor
IsActive	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the product is currently active or inactive.
	The default value is false.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of this supplier product data.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ProductId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The product that the organization is purchasing from the associated supplier. This field is a relationship field.

Field	Details
	Relationship Name Product
	Relationship Type
	Lookup
	Refers To Product2
SourcingAllocPercentage	Туре
	percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The sourcing allocation percentage of a supplier towards the total quantity that's purchased by an organization.
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier that's associated with the sale of this product.
	This field is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
SupplierRank	Type double
	Properties Croate Filter Nillable Cort Undate
	Create, Filter, Nillable, Sort, Update
	Description The rank given to the supplier that helps an organization determine when to engage a supplier to make a purchase.

SustainabilityCredit

Represents information about the sustainability credits that are a part of a sustainability purchase. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Special Access Rules

Field	Details
CostPerUnit	Туре
	currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The cost of the credits for each unit of emissions.
CrbnCreditProjectId	Туре
	reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The carbon credit project that's associated with sustainability credit.
	This field is a relationship field.
	Relationship Name
	CrbnCreditProject
	Relationship Type Lookup
	Refers To CrbnCreditProject
CreditsAllocated	Туре
	double
	Properties
	Filter, Nillable, Sort

Field	Details
	Description The credits that are allocated to the emissions inventory of the organization.
CreditsAvailable	Type double
	Properties Filter, Nillable, Sort
	Description The credits that are available after allocation.
CreditsIssueDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the credits were issued.
CreditsPurchased	Type double
	Properties Create, Filter, Sort, Update
	Description The credits that are purchased by the organization.
CreditsRetiredDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the credits are retired from the registry.
CreditsUnit	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update
	Description The unit of measure for the credits.
	Possible values are:
	• TCO2E—tCO2e The default value is TCO2E.
	The deliant value is 1002B.

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The description of the sustainability credit item.
ExternalIdentifier	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The external identifier of the data that is imported for the carbon credit project.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this
	record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description
	The name of the sustainability credit item.
OwnerId	Туре
	reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description
	The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PurchaseDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the sustainability credits were purchased.
Status	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the status of the sustainability credit.
	Possible values are:
	HELD_WITH_REGISTRY—Held with Registry
	• RETIRED—Retired
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The name of the organization responsible for supplying the sustainability credits.
	This field is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier

Field	Details
SustainabilityPurchaseId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The sustainability purchase record that's associated with the purchase of sustainability credits, such as carbon credits.
	This field is a relationship field.
	Relationship Name SustainabilityPurchase
	Relationship Type Lookup
	Refers To SustainabilityPurchase
TotalCost	Type currency
	Properties Filter, Nillable, Sort
	Description The total amount spent on the credits.
VintageYear	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The year when the sustainability credits were issued.

SustainabilityPurchase

Represents information related to the sustainability credits purchases such as carbon credits. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
BillingAddress	Туре
	address
	Properties
	Filter, Nillable
	Description The billing address associated with the sustainability purchase.
BillingCity	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
BillingCountry	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
BillingGeocodeAccuracy	⁷ Type
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Possible values are:
	• Address
	• Block
	• City
	• County
	• ExtendedZip
	• NearAddress
	• Neighborhood
	• State
	• Street
	• Unknown

Field	Details
BillingLatitude	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
BillingLongitude	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
BillingPostalCode	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
BillingState	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
BillingStreet	Туре
	textarea
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
BrokerId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the organization responsible for facilitating the supply of carbon credits.
	This field is a relationship field.
	Relationship Name Broker

Field	Details
	Relationship Type
	Lookup
	Refers To
	Supplier
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of the sustainability purchase.
ExternalIdentifier	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The external identifier of the data that is imported for the carbon credit project.
InvoiceNumber	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The invoice number associated with the sustainability purchase.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this
	record might only have been referenced (LastReferencedDate) and not viewed.

Field	Details
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description The name of the sustainability purchase record.
OwnerId	Type reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The primary user associated with the sustainability purchase.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To
	Group, User
PurchaseOrderNumber	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The purchase order number associated with the sustainability purchase.
Туре	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The type of the sustainability purchase.
	Possible values are:
	 CARBON_CREDITS—Carbon Credits

SustainabilityScorecard

Represents information about the annual sustainability scorecard of third-party organizations whose data is used to calculate scope 3 emissions. This object is available in API version 54.0 and later.



Note: SustainabilityScorecard is available to partner community users in Experience Cloud.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Special Access Rules

Field	Details
AllocatedWaterCnsmpInM3	Type double
	Properties
	Filter, Nillable, Sort
	Description
	The allocated water consumption based on the water calculation method.
AllocatedWaterDchgInM3	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The allocated water discharged based on the water calculation method.
AllocatedWaterWdrwInM3	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The allocated water withdrawn based on the water calculation method.
AllocationStatus	Туре
	picklist
	Properties
	Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Field Details Description The allocation status of procurement items for the sustainability scorecard record. Possible values are: ALLOCATED—Allocated IN PROGRESS—In Progress NOT ALLOCATED—Not Allocated The default value is 'NOT ALLOCATED'. CompanyAnnualExpenditure Type double **Properties** Filter, Nillable, Sort Description The amount spent by the company on the supplier. CompanyAnnualExpenditureEmssn Type double **Properties** Filter, Nillable, Sort Description The annual scope 3 emissions of the company when the calculation measure is Company Annual Expenditure. CompanyEmissionsAllocationPct Type percent **Properties** Create, Filter, Nillable, Sort, Update Description The percentage of emissions allocated by the supplier to the company. ConsumptionUnit Type picklist **Properties** Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the unit of measure for the water consumed by the supplier. Possible values are: Liters M3-m3 Megaliters

Field	Details
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	The default value is Liters.
Description	Туре
	textarea
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The description for the sustainability scorecard.
DischargeUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the unit of measure for the water discharged by the supplier.
	Possible values are:
	• Liters
	• M3—m3
	• Megaliters
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	The default value is Liters.
EmissionAllocationType	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The type of emissions data being provided by the supplier. Supplier-Allocated Emissions indicates that the supplier has already allocated greenhouse gas emissions to your company Total Supplier Emissions indicates that the emissions value is the total greenhouse gas emissions value of the supplier.
	Possible values are:
	 Supplier Allocated Emissions—Supplier-Allocated Emissions
	 Total_Supplier_Emissions—Total Supplier Emissions
EndDate	Туре
	date

Field	Details
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the values in the sustainability scorecard record are valid.
FinalScorecardEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The final scope 3 emissions value that's displayed based on the selected calculation measure.
IsCurrentSupplierScorecard	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates if this record is the current third party scorecard.
	The default value is 'false'.
IsLocked	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record is locked or not.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
MayEdit	Type boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates if the record can be edited or not.
	The default value is 'false'.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the sustainability scorecard record.
OrgWaterAllocPct	Type percent
	Properties Create, Filter, Nillable, Sort, Update
	Description The percentage of water activity allocated by the supplier to the organization.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Field	Details
PercentageBasedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The annual scope 3 emissions of the company when the calculation measure is Emissions Percentage.
ReportingDueDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the sustainability scorecard is due to be sent to a reporting body.
ScienceBasedTargetStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of the science-based target of the supplier.
	Possible values are:
	• Committed
	• Declined
	• Planning
	• Target Set
ScopelEmissions	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The total scope 1 emissions value that's provided by the supplier.
Scope2LocationBasedEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The total scope 2 emissions value that's provided by the supplier and calculated based on the location-based data of grid emissions.

Field	Details
Scope2MarkedBasedEmissions	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The total scope 2 emissions value that's provided by the supplier and calculated based or the utility-provided emissions data and allocated renewable energy.
Scope3Emissions	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The total scene 2 emissions value that's provided by the supplier
	The total scope 3 emissions value that's provided by the supplier.
Scope3EmssnCalculationMeasure	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The measure that's used to calculate scope 3 emissions.
	Possible values are:
	 Percentage_Based—Percentage Based
	 Revenue_Based—Revenue Based
	 Spend_Based—Spend Based
	 Supplier_Provided—Supplier Provided
	The default value is 'Spend_Based'.
ScopestoIncludeinCalc	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The emissions scopes to include in the final scorecard calculations.
	Possible values are:
	• SCOPE1_SCOPE2_LOCATION_BASED—Scope 1 and Scope 2 Location-Based
	SCOPE1_SCOPE2_LOCATION_BASED_SCOPE3—Scope 1, Scope 2 Location_Based_and Scope 3

• SCOPE1_SCOPE2_MARKET_BASED—Scope 1 and Scope 2 Market-Based

Location-Based, and Scope 3

Field	Details
	 SCOPE1_SCOPE2_MARKET_BASED_SCOPE3—Scope 1, Scope 2 Market-Based, and Scope 3
	The default value is 'SCOPE1_SCOPE2_MARKET_BASED'.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values in the sustainability scorecard record are valid.
Status	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of the sustainability scorecard.
	Possible values are:
	• Complete
	• New
	 Supplier Declined to Report
	Supplier Details Awaited
	Supplier Needs Support
	Supplier Response Received
	• Validated
SupplierAnnlRevenuePct	Type
	percent
	Properties Filter, Nillable, Sort
	Description The supplier's annual revenue percentage that's used in revenue-based water calculation.
SupplierAnnualRevenue	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The annual revenue of the supplier.

Field Details SupplierAnnualRevenueEmissions Type double **Properties** Filter, Nillable, Sort Description The annual scope 3 emissions of the company when the calculation measure is Supplier Annual Revenue. SupplierClassification Type picklist **Properties** Create, Filter, Group, Nillable, Sort, Update Description The classification of the related supplier based on the expenditure, importance, size, purchasing agreements, and other criteria. Possible values are: • Class A Class B Class C Class D SupplierContactId Type reference **Properties** Create, Filter, Group, Nillable, Sort, Update Description The primary contact of the supplier who's responsible for providing the supplier's sustainability details. This is a relationship field. **Relationship Name** SupplierContact **Relationship Type** Lookup **Refers To** Contact SupplierEmssnRdctnCmtType Type picklist **Properties** Create, Filter, Group, Nillable, Sort, Update

Description

The type of climate commitment made by the supplier. A supplier committing to the 1.5° Celsius emissions reduction target must set targets across all the greenhouse gas scopes in line with 1.5° Celsius emission scenarios. A supplier committing to a net-zero emissions reduction target must set a long-term science-based target to reach net-zero value chain greenhouse gas emissions by no later than 2050. It must also set interim targets across all the relevant greenhouse gas scopes. The targets must be set in line with the criteria and recommendations of the Science Based Targets initiative.

Possible values are:

- 1.5° Celsius
- 2° Celsius
- Net Zero
- Other
- Well Below 2° Celsius

SupplierId

Type

reference

Properties

Create, Filter, Group, Sort, Update

Description

The supplier related to the sustainability scorecard record.

This is a relationship field.

Relationship Name

Supplier

Relationship Type

Lookup

Refers To

Supplier

SupplierProvidedEmissions

Type

double

Properties

Filter, Nillable, Sort

Description

The annual scope 3 emissions of the company when the calculation measure is Supplier-Provided Emission Values.

SupplierReportingScope

Туре

picklist

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The scope of sustainability reporting that can be done by the supplier.

Possible values are:

- Declined to Report
- Scope 1 and 2 Emissions
- Scope 1, 2, and 3 Emissions
- Scope 1, 2, and Partial Scope 3 Emissions
- Started Reporting

SupplierTier

Type

picklist

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The relationship tier of the supplier. Tier 1 is for direct suppliers and tier 2 is for companies that supply tier 1 suppliers.

Possible values are:

- Tier 1
- Tier 2

SupplierWaterActvtyType

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

Specifies the type of supplier-provided water activity. "

Possible values are:

- AllocWaterActivity—Allocated Water Activity
- TotalWaterActivity—Total Water Activity

WaterCalculationMethod

Туре

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

Specifies the method that's used to calculate an organization's water activity.

Possible values are:

- PercentageBased—Percentage Based
- RevenueBased—Revenue Based

Field	Details
	SupplierProvided—Supplier Provided
WaterConsumptionValue	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The water consumed by the supplier.
WaterDischargeValue	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The water discharged by the supplier.
WaterWithdrawalValue	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The water withdrawn by the supplier.
WithdrawalUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the unit of measure for the water withdrawn by the supplier.
	Possible values are:
	• Liters
	• M3—m3
	• Megaliters
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	The default value is Liters.

Sustainability Uom

Represents information about the additional unit of measure values defined by a customer. This object is available in API version 56.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
Description	Type string
	Properties Control of the Control of
	Create, Filter, Group, Nillable, Sort, Update
	Description The description of the unit of measure.
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The developer name of the record.
IsProductUom	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the unit of measure is for a product that the company has procured in its supply chain operations (true) or not (false).
	The default value is false.
IsStationaryAssetUom	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the unit of measure is used in the stationary asset calculations (true) or (not).

Field	Details
	The default value is false.
IsVehicleAssetUom	Type boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the unit of measure is used in vehicle asset calculations (true) or (not).
	The default value is false.
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this chiest
	The language associated with this object.
	Possible values are:
	• da—Danish
	• de—German
	• en_US—English
	• es—Spanish • es—My Spanish (Movice)
	es_MX—Spanish (Mexico)fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	• no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	• zh_cn—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
MasterLabel	Туре
	string

Field	Details
	Properties Create, Filter, Group, Sort, Update
	Description The label assigned to this object.
NamespacePrefix	Type string
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix that is associated with this object. Limit: 15 characters.
UnitType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of unit used for conversions or calculations.
	Possible values are:
	• Energy
	• Other
	VolumeWeight

SustnUomConversion

Represents information about the unit of measure conversion for the additional fuel types defined by a customer. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Field	Details
ConversionFactor	Type double

Field	Details
	Properties Create, Filter, Sort, Update Description The conversion factor that's used to convert values from one unit of measure to another for the fuel type.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The developer name of the record.
FuelType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The name of the fuel type. Possible values are: AutogasLPG—Autogas/LPG Biodiesel Biomass CityGas—City Gas CompressedNaturalGasCNG—Compressed Natural Gas (CNG) Cooling Diesel Electricity Ethanol FuelOil—FuelOil Gasoline Heat HeavyOil—Heavy Oil ITElectricity—IT Electricity JetFuel—Jet Fuel Kerosene LightOil—Light Oil
	LiquidNaturalGasLNG—Liquefied Natural Gas (LNG)MobileDiesel—Mobile Diesel

Field	Details
	• NaturalGas—NaturalGas
	• Propane
	• Refrigerant
	• Steam
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language associated with this record.
	Possible values are:
	da—Danishde—German
	en_US—Englishes—Spanish
	es_MX—Spanish (Mexico)fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl NL—Dutch
	• no—Norwegian
	• pt BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
MasterLabel	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The label assigned to this object.

Field	Details
NamespacePrefix	Туре
	string
	Properties
	Filter, Group, Nillable, Sort
	Description
	The namespace prefix that is associated with this object. Limit: 15 characters.
SourceUom	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description The common with of meaning fourth of the latest and the second seco
	The source unit of measure for the fuel type.
	Possible values are:
	• 1000m3—1000 m3
	• GJ
	• GWh
	• Kiloliters
	• Liters
	• MJ
	• MMBtu
	• MWh
	• Therms
	• Tonnes
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	• ccf
	• kG—kg
	• kWh
	• kcal
	• lbs
	• longTons—long tons
	m3shortTons—short tons
	Short fons—short tons
TargetUom	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update

Description

The target unit of measure for the fuel type.

Possible values are:

- 1000m3—1000 m3
- GJ
- GWh
- Kiloliters
- Liters
- MJ
- MMBtu
- MWh
- Therms
- Tonnes
- UkGallons—UK Gallons
- UsGallons—US Gallons
- ccf
- kG—kg
- kWh
- kcal
- lbs
- longTons—long tons
- m3
- shortTons—short tons

TaxDisclosureSummary

Represents statistics about the disclosure of business entity information to all tax jurisdictions. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
CustomerTaxCollected	Туре
	currency
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The total tax collected from customers on behalf of a tax authority.
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
	The description of the tax disclosure statistics.
DisclosedBy	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The name of the business entity disclosing the tax details. A business entity can be an individual or an organization.
DisclsReportingPeriodId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The reporting period for which the tax disclosure statistics are generated.
	This field is a relationship field.
	Relationship Name DisclsReportingPeriod
	Relationship Type Lookup
	Refers To DisclsReportingPeriod
EmployeeCount	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The total number of employees within the tax jurisdiction.
EmployeeTaxWithheld	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total tax withheld and paid on behalf of employees.
EmployeeTotalIncome	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total income of the employee, which includes salaries, bonuses, commissions, retirement savings contributions, and other financial benefits.
IncomeTaxAccrued	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The income tax accrued by an individual or organization within the tax jurisdiction.
IncomeTaxPaid	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The income tax paid by an individual or organization within the tax jurisdiction.
IndustryTaxDue	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total industry taxes or payments due to governments.

Field	Details
IntraCompanyDebt	Туре
	currency
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The total intra-company debt held by a business entity in the tax jurisdiction.
IntraGroupTrxnRev	Туре
	currency
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The revenue from intra-group transactions within the tax jurisdiction.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this
	record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties
	Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description
	Name of the record.
OwnerId	Туре
	reference
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
OwnerId	Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name of the record. Type reference Properties

Field	Details
	Description
	The ID of the user who owns this record.
	This field is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
PrimaryActivity	Type
	textarea
	Properties Create, Nillable, Update
	Description The primary activity of the business entity for which the tax disclosure is being done.
ProfitLossBeforeTax	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The profit or loss before tax within the tax jurisdiction. Enter a positive value that indicates profit before tax or negative value that indicates loss before tax.
SubsidiaryAccountId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The account that's identified as a subsidiary company.
	This field is a relationship field.
	Relationship Name SubsidiaryAccount
	Relationship Type Lookup
	Refers To Account
TangibleAssetValue	Туре
	currency

Field	Details
	Properties Create, Filter, Nillable, Sort, Update
	Description The value of the tangible assets within the tax jurisdiction.
TaxJurisdiction	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The jurisdiction of the tax disclosure.
ThirdPartySalesRevenue	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The revenue from third-party sales within the tax jurisdiction.
UncertainTaxPositionVal	Type currency
	Properties Create, Filter, Nillable, Sort, Update
	Description The total uncertain tax position value.

VehicleAssetCrbnFtprnt

Represents the total carbon emissions from vehicles. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e). This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AnnualEmssnInventoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The emissions inventory record for a particular year that's related to the vehicle asset carbon footprint record.
	This is a relationship field.
	Relationship Name AnnualEmssnInventory
	Relationship Type Lookup
	Refers To AnnualEmssnInventory
AuditApprovalStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of audit approval of this carbon footprint record.
	Possible values are:
	• Approved
	Pending Approval
CarbonInventoryRecordCount	Type double
	Properties Filter, Nillable, Sort
	Description The number of energy use records associated with this carbon footprint record.
Ch4EmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CH4 emissions that are calculated for this energy use record.

Field	Details
Co2EmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The CO2 emissions that are calculated for this energy use record.
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The date until when the values of this carbon footprint record are valid.
FootprintStage	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The workflow stage for this carbon footprint record.
	Possible values are:
	• Completed
	• Data Collection
	Data Validation
	Emission Source Confirmation
	External Audit
	• Internal Audit
IsRecordLocked	Туре
	boolean
	Properties Defaulted on create, Filter, Group, Sort
	Description Indicates whether the vehicle asset carbon footprint record and the associated energy use records are locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Field	Details
ReportingDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when this carbon footprint record data is due to be sent to a reporting body.
ReportingYear	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year in which this carbon footprint record data is due to be sent to a reporting body.
	Possible values are:
	20002001
	20012002
	• 2003
	• 2004
	• 2005
	• 2006
	• 2007
	• 2008
	• 2009
	• 2010
	• 2011
	• 2012
	• 2013
	• 2014
	• 2015
	• 2016
	• 2017
	• 2018
	• 2019
	• 2020
	• 2021
	• 2022
	• 2023
	• 2024

Field	Details
	• 2025
	• 2026
	• 2027
	• 2028
	• 2029
	• 2030
	• 2031
	• 2032
	• 2033
	• 2034
	• 2035
	• 2036
	• 2037
	• 2038
	• 2039
	• 2040
Scp3EmssnBusTravl	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from business travel that is included in category 6 of the related carbon footprint record or the override values.
Scp3EmssnDnstrmTrnspDstr	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation and distribution of downstream assets that are included in category 9 of the related carbon footprint record or the override value.
Scp3EmssnEmpComut	Type double
	Properties Filter, Nillable, Sort
	Description
	The total scope 3 emissions from the employee commuting that is included in category 7 of the related carbon footprint record or the override value.

Field	Details
Scp3EmssnUpstrmTrnspDstr	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from the transportation and distribution of upstream leased assets that are included in category 4 of the related carbon footprint record or the override value.
Scp3UncategorizedEmssn	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from uncategorized sources in the related carbon footprint record or the override value.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this carbon footprint record are valid.
SuplScope1Emissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 1 emissions value that's added to the calculated total scope 1 emissions value.
SuplScope2LocationBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 location-based emissions value that's added to the calculated total scope 2 location-based emissions value.
SuplScope2MarketBasedEmssn	Type double

Field	Details
	Properties Control of the National Control of the Nati
	Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 market-based emissions value that's added to the calculated total scope 2 market-based emissions value.
Sup1Scope3DnstrmEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 3 emissions value from downstream activities that's added to the calculated total scope 3 emissions value.
SuplScope3UpstrmEmissions	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 3 emissions value from upstream activities that's added to the calculated total scope 3 emissions value.
TotFuelCnsmpInGallons	Туре
	double
	Properties Filter, Nillable, Sort
	Description The total fuel consumed in gallons. This value is calculated based on all the associated energy use records.
TotFuelCnsmpInLiters	Туре
	double
	Properties Filter, Nillable, Sort
	Description The total fuel consumed in liters. This value is calculated based on all the associated energy use records.
TotScope1EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort

Field	Details
	Description The total scope 1 emissions from all the associated energy use records and supplemental emissions.
TotScope2LocBasedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 emissions value that's calculated based on the location-based data of grid emissions.
TotScope2MktBasedEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 2 emissions value that's calculated based on the utility-provided emissions data and allocated renewable energy.
TotalScp3DnstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from downstream activities. This value is calculated based on the scope 3 downstream emission values and supplemental scope 3 downstream emission values of all the associated energy use records.
TotalScp3UpstrmEmissions	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 3 emissions from upstream activities. This value is calculated based on the scope 3 upstream emission values and supplemental scope 3 upstream emission values of all the associated energy use records.
VehicleAssetEmssnSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The vehicle asset emissions source record associated with this carbon footprint record.
	This is a relationship field.
	Relationship Name VehicleAssetEmssnSrc
	Relationship Type Lookup
	Refers To VehicleAssetEmssnSrc
VehicleType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The vehicle type for this carbon footprint record.
	Possible values are:
	• Company Shuttle
	• Fleet Vehicle
	• Other
	• Private Jet

VehicleAssetEmssnSrc

Represents assets that are mobile in nature, use energy that can be recorded, and are the source of greenhouse gas emissions. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AccountNameId	Type reference

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Name of the company, it's subsidiary, or it's business unit for which you are doing carbon accounting.
	This field is a relationship field.
	Relationship Name AccountName
	Relationship Type Lookup
	Refers To Account
BusinessRegion	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The business region where this asset is located.
	Possible values are:
	• AMER
	• ANZ
	• APAC
	• Africa
	• Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	• North America
	• South America
	Southeast Asia
City	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The city where this asset is located.

	
Field	Details
Country	Туре
	picklist
	Properties Crosto Filter Cross Nillable Postvicted viablist Cort Undata
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The country where this asset is located.
	Possible values are:
	AD—Andorra
	AE—United Arab Emirates
	• AF—Afghanistan
	AG—Antigua and Barbuda
	• AI—Anguilla
	• AL—Albania
	• AM—Armenia
	• AO—Angola
	• AQ—Antarctica
	AR—Argentina
	• AT—Austria
	• AU—Australia
	• AW—Aruba
	AX—Aland Islands
	• AZ—Azerbaijan
	BA—Bosnia and Herzegovina
	BB—Barbados Dan Blandach
	BD—Bangladesh BR—Releium
	BE—BelgiumBF—Burkina Faso
	BG—Bulgaria
	BH—Bahrain
	BI—Burundi
	BJ—Benin
	● BL—Saint Barthélemy
	BM—Bermuda
	Bn—Brunei Darussalam
	BO—Bolivia, Plurinational State of
	BQ—Bonaire, Sint Eustatius and Saba
	a DD Provid

BR—BrazilBS—Bahamas

- BT—Bhutan
- BV—Bouvet Island
- BW—Botswana
- BY—Belarus
- вz—Belize
- ca—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- cg—Congo
- CH—Switzerland
- ci—Cote d'Ivoire
- CK—Cook Islands
- cl—Chile
- CM—Cameroon
- cn—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- CV—Cape Verde
- CW—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland

- FJ—Fiji
- FK—Falkland Islands (Malvinas)
- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- Gн—Ghana
- GI—Gibraltar
- GL—Greenland
- GM—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- GW—Guinea-Bissau
- GY—Guyana
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- нт—Haiti
- ни—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—Italy
- JE—Jersey

- JM—Jamaica
- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- кі—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- кр—Korea, Democratic People's Republic of
- кв—Korea, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- MD—Moldova, Republic of
- ME—Montenegro
- мғ—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania

- MS—Montserrat
- MT—Malta
- MU—Mauritius
- MV—Maldives
- MW—Malawi
- MX—Mexico
- мү—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- NU—Niue
- NZ—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PS—Palestine
- PT—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation

- RW—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- SK—Slovakia
- SL—Sierra Leone
- SM—San Marino
- SN—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- sv—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- Sz—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- т₩—Taiwan
- TZ—Tanzania, United Republic of

- UA—Ukraine
- UG-Uganda
- US—United States
- UY—Uruguay
- UZ—Uzbekistan
- VA—Holy See (Vatican City State)
- vc—Saint Vincent and the Grenadines
- VE—Venezuela, Bolivarian Republic of
- VG—Virgin Islands, British
- vn—Vietnam
- VU—Vanuatu
- WF—Wallis and Futuna
- ws—Samoa
- YE—Yemen
- YT—Mayotte
- ZA—South Africa
- zm—Zambia
- zw—Zimbabwe

CrbnEmssnScopeAlloc

Type

picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The carbon emissions scope allocation record to override default scope assignments for all the fuel types.

Possible values are:

- Scope 1
- Scope 2
- Scope 3 Downstream
- Scope 3 Upstream
- Scope3BusinessTravel—Total Scope 3 Business Travel
- TotScp3DnstrmTrnspDstr—Total Scope 3 Downstream Transportation and Distribution
- TotScp3EmpComut—Total Scope 3 Employee Commuting
- TotScp3UpstrmTrnspDstr—Total Scope 3 Upstream Transportation and Distribution

Field	Details
Description	Туре
	textarea
	Properties
	Create, Nillable, Update
	Description
FleetVehicleType	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Specifies the type of fleet vehicle.
	Possible values are:
	• Electric
	• Hybrid
	 InternalCombustionEngine—Internal Combustion Engine
IsCompanyOwnedAsset	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the vehicle is owned by your company (true) or not (false). Vehicle ownership by the company impacts the scope allocation of associated emissions.
	The default value is 'false'.
LastReferencedDate	Туре
	dateTime
	Properties
	Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Туре
	dateTime
	Properties Filter, Nillable, Sort
	Description
	The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.

Field	Details
LeaseExpirationDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the lease of the vehicle expires.
LeaseIdentifier	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The unique external identifier for the vehicle lease.
Name	Туре
	string
	Properties
	Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the account.
OtherEmssnFctrId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The other emissions factor set record that's associated with the vehicle.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup
	Refers To OtherEmssnFctrSet
OwnerId	Туре
	reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	The ID of the user who owns this record.

Field	Details
	This is a polymorphic relationship field.
	Relationship Name
	Owner
	Relationship Type Lookup
	Refers To Group, User
ParentEmissionSourceId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The parent asset that stores the aggregated emissions data of all the related assets.
	This is a relationship field.
	Relationship Name ParentEmissionSource
	Relationship Type Lookup
	Refers To VehicleAssetEmssnSrc
PostalCode	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The postal code of this asset.
State	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The state where this asset is located.
StreetAddress	Туре
	string
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The street address where this asset is located.
StreetAddress2	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The second line of the street address where this asset is located.
VehicleIdentifier	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The unique external identifier for the vehicle.
VehicleType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The type of vehicle. The type of vehicle impacts emission calculations.
	Possible values are:
	• Company Shuttle
	• Fleet Vehicle
	• Other
	• Private Jet

VehicleAssetEnrgyUse

Represents the fuel consumption related to vehicles. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AircraftFuelEconomy	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The fuel economy of the aircraft.
AircraftFuelEconomyInGph	Type double
	Properties
	Filter, Nillable, Sort
	Description
	The fuel economy of the aircraft in gallons per hour.
AircraftFuelEconomyUnit	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the fuel economy of the aircraft.
	Possible values are:
	 GALLONS_PER_HOUR—Gallons per Hour
	• LITERS_PER_HOUR—Liters per Hour
AircraftType	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The type of aircraft.
CarbonFootprintReportDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date when the carbon footprint data of the associated stationary asset is due to be sent to a reporting body.

Field	Details
Ch4EmissionsInKg	Туре
	double
	Properties Filter, Nillable, Sort
	Description
	The CH4 emissions that are calculated for this energy use record.
Co2EmissionsInKg	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The CO2 emissions that are calculated for this energy use record.
CostCenter	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The cost center associated with this energy use record.
Distance	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The distance traveled. For a fleet vehicle, the distance is calculated if you've already entered the fuel efficiency and fuel consumption.
DistanceUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The unit of measure for the distance travelled.
	Possible values are:
	• Kilometers
	• Miles
	The default value is 'Kilometers'.

Field	Details
EndDate	Туре
	date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the values of this energy use record are valid.
FlightDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date when the flight was taken.
FlightDurationInHours	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The duration of the flight in hours.
FuelConsumption	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The calculated fuel consumption when you enter the distance and fuel effeciency
FuelConsumptionUnit	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the consumed fuel.
	Possible values are:
	• GALLONS—Gallons
	• LITERS—Liters
	• kWh
FuelEfficiency	Type double

Field	Details
	Properties Create, Filter, Nillable, Sort, Update Description The fuel efficiency value. For a fleet vehicle, the fuel efficiency is calculated if you've already entered the distance and fuel consumption.
FuelEfficiencyInMpg	Type double Properties Filter, Nillable, Sort Description The fuel efficiency of the vehicle in miles per gallons.
FuelEfficiencyUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The unit of measure for the fuel efficiency of the vehicle. Possible values are: LITRES_PER_100KM—L per 100 km MILES_PER_GALLON—Miles per Gallon The default value is 'LITRES_PER_100KM'.
FuelType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of fuel consumed for this energy use record. Possible values are: AutogasLPG—Autogas/LPG Biodiesel CompressedNaturalGasCNG—Compressed Natural Gas (CNG) Diesel Electricity Ethanol Gasoline JetFuel—Jet Fuel

Field	Details
IsCompanyOwnedAsset	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the asset is owned by the organization.
	The default value is 'false'.
IsRecordLocked	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description Indicates whether the vehicle asset energy use record is locked for editing because the associated carbon footprint is locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
N2oEmissionsInKg	Type double
	Properties Filter, Nillable, Sort
	Description The N2O emissions that are calculated for this energy use record.
Name	Type string

Field	Details
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
OtherEmssnFctrId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The other emission factors that are used to calculate the emissions.
	This is a relationship field.
	Relationship Name OtherEmssnFctr
	Relationship Type Lookup
	Refers To OtherEmssnFctrSet
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
Scope1EmissionsInTco2e	Type double
	Properties Filter, Nillable, Sort
	Description The total scope 1 emissions from all the associated energy use records and supplemental emissions.

Scope2LocBasedEmssnInTco2e

Type

double

Properties

Filter, Nillable, Sort

Description

The total scope 2 emissions value that's calculated based on the location-based data of grid emissions.

Scope2MktBasedEmssnInTco2e

Туре

double

Properties

Filter, Nillable, Sort

Description

The total scope 2 emissions value that's calculated based on the utility-provided emissions data and allocated renewable energy.

Scope3DnstrmEmissionsInTco2e

Type

double

Properties

Filter, Nillable, Sort

Description

The scope 3 emissions from downstream activities. This value is calculated based on the scope 3 downstream emission values and supplemental scope 3 downstream emission values of all the associated energy use records.

Scope3GhgCategory

Type

picklist

Properties

Filter, Group, Nillable, Restricted picklist, Sort

Description

Specifies the scope 3 GHG category for the total scope 3 emissions related to the energy use by the stationary asset environmental source.

Possible values are:

- Scope3BusinessTravel—Business Travel
- TotScp3DnstrmTrnspDstr—Downstream Transportation and Distribution
- TotScp3EmpComut—Employee Commuting
- TotScp3UpstrmTrnspDstr—Upstream Transportation and Distribution

Scope3UpstrmEmissionsInTco2e

Type

double

Field	Details
	Properties Filter, Nillable, Sort
	Description The scope 3 emissions from upstream activities. This value is calculated based on the scope 3 upstream emission values and supplemental scope 3 upstream emission values of all the associated energy use records.
StartDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date from when the values of this energy use record are valid.
SuplScope1Emissions	Type double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 1 emissions value that's added to the calculated total scope 1 emissions value.
SuplScope2LocationBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 2 location-based emissions value that's added to the calculated total scope 2 location-based emissions value.
SuplScope2MarketBasedEmssn	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 2 market-based emissions value that's added to the calculated total scope 2 market-based emissions value.
SuplScope3DnstrmEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update

Field	Details
	Description The supplemental scope 3 emissions value from downstream activities that's added to the calculated total scope 3 emissions value
SuplScope3UpstrmEmissions	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The supplemental scope 3 emissions value from upstream activities that's added to the calculated total scope 3 emissions value
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The supplier that is associated with this energy use record. This is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
TotalFuelConsumptionInGal	Type double
	Properties Filter, Nillable, Sort
	Description The total fuel consumed in gallons.
TotalFuelConsumptionInLiter	Type double
	Properties Filter, Nillable, Sort
	Description The total fuel consumed in liters. For a private jet, the fuel consumption and fuel consumption unit values are prioritized for calculations over the aircraft fuel economy and aircraft fuel economy unit values. For a fleet vehicle, the total fuel consumption value is the fuel consumption value converted to liters.

Field	Details
VehicleAssetCrbnFtprntId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The vehicle asset carbon footprint record that's associated with this energy use record.
	This is a relationship field.
	Relationship Name VehicleAssetCrbnFtprnt
	Relationship Type Lookup
	Refers To VehicleAssetCrbnFtprnt
VehicleAssetEmssnSrcId	Туре
	reference
	Properties
	Create, Filter, Group, Sort, Update
	Description The vehicle asset emission source that's associated with this energy use record.
	This is a relationship field.
	Relationship Name VehicleAssetEmssnSrc
	Relationship Type Lookup
	Refers To VehicleAssetEmssnSrc

WasteFootprint

Represents the volume of aggregated waste and carbon emissions from waste generated either as part of operations or during the endof- life of a product. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
AnnualEmssnInventoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The emissions inventory associated with the aggregate waste footprint emissions.
	This field is a relationship field.
	Relationship Name AnnualEmssnInventory
	Relationship Type Lookup
	Refers To Annual Emssnlnventory
AuditApprovalStatus	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The status of audit approval for this waste footprint record.
	Possible values are:
	• Approved
	Pending Approval
Description	Type textarea
	Properties Create, Nillable, Update
	Description
EndDate	Type date
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The date until when the waste-usage data is sent for reporting.

Field	Details
FootprintStage	Туре
	picklist
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Possible values are:
	• Completed
	• Data Collection
	• Data Validation
	External Audit
	• Internal Audit
	Waste Source Confirmation
GeneratedWasteDetailRecordCnt	Туре
	double
	Properties
	Filter, Nillable, Sort
	Description
	The number of generated waste records associated with this waste footprint record.
IsRecordLocked	Туре
	boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description
	Indicates whether the waste footprint record and the associated energy use records are locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort

Field	Details
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description
	Name of the account.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ReportingDate	Type date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The date when this waste footprint record data is due to be sent to a reporting body.
ReportingYear	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	Possible values are:
	• 2000
	• 2001
	• 2002

Field Deta	ils
•	2003
•	2004
•	2005
•	2006
•	2007
•	2008
•	2009
•	2010
•	2011
•	2012
•	2013
•	2014
•	2015
•	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
	2029
	2030
	2031
	2032
	2033
	2034
•	2035
•	2036
	2037
	2038
•	2039
•	2040

Field	Details
Scope1EmissionsInTco2e	Туре
	double
	Properties Filter, Nillable, Sort
	Description The scope 1 emissions value that's calculated based on scope 1 emissions from the associated generated waste records.
Scope3EmssnSrcId	Type reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 emissions source record associated with the waste related to non-stationary assets, such as waste related to the end-of-life treatment of sold products.
	This is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
Scp3DnstrmEndLifeSoldPrdct	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 downstream emissions from the end-of-life treatment of sold products. This value is calculated based on the scope 3 downstream emissions from the end-of-life treatment of sold products of the associated generated waste records.
Scp3UpstrmWstGenInOper	Type double
	Properties Filter, Nillable, Sort
	Description The scope 3 upstream emissions from the waste generated in operations. This value is calculated based on the scope 3 upstream emissions from waste generated in operations of the associated generated waste records.

Field	Details
StartDate	Туре
	date
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The date from when the waste-usage data is sent for reporting.
StnryAssetEnvrSrcId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The stationary asset environmental source record associated with the waste related to stationary assets, such as the waste generated in operations.
	This is a relationship field.
	Relationship Name
	StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To
	StnryAssetEnvrSrc
SuplScope1EmissionsInTco2e	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description
	The supplemental scope 1 emissions value that's added to the total scope 1 emissions.
SuplScp3DnstrmEndLifeSoldPrdct	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description
	The supplemental downstream scope 3 emissions from the end-of-life treatment of sold products. This value is added to the total scope 3 downstream emissions from the end-of-life treatment of sold products.
SuplScp3UpstrmWstGenInOper	Туре
	IYPE

Details
Properties
Create, Filter, Nillable, Sort, Update
Description
The supplemental upstream scope 3 emissions from the waste generated in operations. This value is added to the total scope 3 upstream emissions from waste generated in operations.
Туре
double
Properties
Filter, Nillable, Sort
Description
The total quantity of waste in tonnes that's calculated based on the associated generated waste records.

WasteFootprintItem

Represents the volume by waste type and disposal type of aggregated waste generated either as part of operations or during the end-of-life of a product. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
DisposalType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	Possible values are:
	 Anaerobically Digested (Dry Digestate with Curing)
	 Anaerobically Digested (Wet Digestate with Curing)
	• Combusted
	• Composted
	• Landfilled
	• Recycled

Field	Details
DisposedWasteQuantityPct	Туре
	percent
	Properties Filter, Nillable, Sort
	Description The percentage difference of disposed waste quantity based on the waste type and disposal type.
DisposedWasteQuantityinTonnes	Type double
	Properties Filter, Nillable, Sort
	Description The total quantity of disposed waste in tonnes. This value is calculated based on the waste type and disposal type.
IsRecordLocked	Type boolean
	Properties
	Defaulted on create, Filter, Group, Sort
	Description Indicates whether the waste footprint item record and the associated energy use records are locked for editing.
	The default value is 'false'.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Туре
	string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description Name of the account.
ParentWasteFootprintId	Type reference
	Properties Create, Filter, Group, Sort
	Description The parent waste footprint record for this waste footprint item record.
	This is a relationship field.
	Relationship Name ParentWasteFootprint
	Relationship Type Lookup
	Refers To WasteFootprint
WasteType	Туре
	picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description Possible values are:
	• Aluminum Cans
	Aluminum IngotAsphalt Concrete
	Asphalt Shingles
	Beef
	• Branches
	• Bread
	• CRT Displays
	• Carpet
	• Clay Bricks
	• Concrete
	• Copper Wire
	Corrugated Containers

• Dairy Products

- Desktop CPUs
- Dimensional Lumber
- Drywall
- Electronic Peripherals
- Fiberglass Insulation
- Flat-panel Displays
- Fly Ash
- Food Waste
- Food Waste (meat only)
- Food Waste (non-meat)
- Fruits and Vegetables
- Glass
- Grains
- Grass
- HDPE
- Hard-copy Devices
- LDPE
- LLDPE
- Leaves
- Magazines/Third-class mail
- Medium-density Fiberboard
- Mixed Electronics
- Mixed MSW (municipal solid waste)
- Mixed Metals
- Mixed Organics
- Mixed Paper (general)
- Mixed Paper (primarily from offices)
- Mixed Paper (primarily residential)
- Mixed Plastics
- Mixed Recyclables
- Newspaper
- Office Paper
- PET
- PLA
- PP
- PS
- PVC
- Phonebooks

Field Det	ails
	Portable Electronic Devices
	Poultry
•	Steel Cans
	Textbooks
	Tires
	Vinyl Flooring
	• Wood Flooring
•	Yard Trimmings

WstDispoEmssnFctrSet

Represents the emissions factors for scope 3 waste handling. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
EmissionFactorDataSource	Type textarea
	Properties Create, Nillable, Update
	Description The source of the emissions factor reference data.
EmissionFactorUpdateYear	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The year when the emissions factor reference data was last updated by a publishing authority. Possible values are:
	20002001
	• 2002

Field Det	ails
•	2003
	2004
	2005
	2006
	2007
•	2008
	2009
	2010
	2011
	2012
	2013
	2014
•	2015
	2016
•	2017
•	2018
•	2019
•	2020
•	2021
•	2022
•	2023
•	2024
•	2025
•	2026
•	2027
•	2028
•	2029
•	2030
•	2031
•	2032
	2033
	2034
	2035
	2036
	2037
	2038
	2039
	2040

Field	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description The name of the waste disposal emission factor set record.
OwnerId	Type reference
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description The ID of the user who owns this record.
	This is a polymorphic relationship field.
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

WstD is po EmssnFctrSetItm

Represents the individual emissions factors for scope 3 waste handling based on the waste type and disposal type. This object is available in API version 54.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
DisposalType	Type picklist
	Properties
	Create, Filter, Group, Sort, Update
	Description The type of waste disposal.
	Possible values are:
	 Anaerobically Digested (Dry Digestate with Curing)
	 Anaerobically Digested (Wet Digestate with Curing)
	• Combusted
	• Composted
	• Landfilled
	• Recycled
EmissionsFactorValue	Туре
	double
	Properties
	Create, Filter, Nillable, Sort, Update
	Description The emissions factor value to convert waste quantity into the corresponding emissions
EmissionsFactorValueUnit	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of measure for the emissions factor value.
	Possible values are:
	 KG CO2E PER KG WASTE MATERIAL—kg CO2e/kg Waste Material
	LB CO2E PER LB WASTE MATERIAL—Ib CO2e/Ib Waste Material
	 TCO2E_PER_LONG_TON_WASTE_MATERIAL—tCO2e/Long Ton Waste Material
	 TCO2E_PER_METRIC_TONNE_WASTE_MATERIAL—tCO2e/MetricTonne Waste Material

Field	 TCO2E_PER_SHORT_TON_WASTE_MATERIAL—tCO2e/ShortTon Waste Material The default value is KG_CO2E_PER_KG_WASTE_MATERIAL.
EmssnFctrTco2eTonneWstMtrl	Type double Properties
	Filter, Nillable, Sort
	Description The emissions factor value in tCO2e per tonne of waste material. This value is calculated based on the emissions factor value and the emissions factor value unit.
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The timestamp for when the current user last viewed this record. If this value is null, this record might only have been referenced (LastReferencedDate) and not viewed.
Name	Type string
	Properties Create, Filter, Group, idLookup, Sort, Update
	Description Name of the account.
ParentEmissionFactorId	Type reference
	Properties Create, Filter, Group, Sort
	Description The name of the parent emissions factor.
	This is a relationship field.
	Relationship Name ParentEmissionFactor

Field	Details
	Relationship Type Lookup
	Refers To
	WstDispoEmssnFctrSet
WasteType	Type picklist
	Properties
	Create, Filter, Group, Sort, Update
	Description The type of waste.
	Possible values are:
	Aluminum Cans Aluminum Ingot
	Aluminum IngotAsphalt Concrete
	Asphalt Shingles
	Beef
	• Branches
	• Bread
	• CRT Displays
	• Carpet
	• Clay Bricks
	• Concrete
	• Copper Wire
	• Corrugated Containers
	Dairy Products
	• Desktop CPUs
	• Dimensional Lumber
	• Drywall
	• Electronic Peripherals
	• Fiberglass Insulation
	• Flat-panel Displays
	• Fly Ash
	• Food Waste
	 Food Waste (meat only)
	• Food Waste (non-meat)
	 Fruits and Vegetables

• Glass

- Grains
- Grass
- HDPE
- Hard-copy Devices
- LDPE
- LLDPE
- Leaves
- Magazines/Third-class mail
- Medium-density Fiberboard
- Mixed Electronics
- Mixed MSW (municipal solid waste)
- Mixed Metals
- Mixed Organics
- Mixed Paper (general)
- Mixed Paper (primarily from offices)
- Mixed Paper (primarily residential)
- Mixed Plastics
- Mixed Recyclables
- Newspaper
- Office Paper
- PET
- PLA
- PP
- PS
- PVC
- Phonebooks
- Portable Electronic Devices
- Poultry
- Steel Cans
- Textbooks
- Tires
- Vinyl Flooring
- Wood Flooring
- Yard Trimmings

CHAPTER 3 Net Zero Cloud Fields on Standard Objects

In this chapter ...

- IndicatorAssignment
- Program
- ProgramEnrollment

This section lists Net Zero Cloud fields available with standard Salesforce objects. These fields are available only in orgs where Net Zero Cloud is enabled.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions that have Net Zero Cloud enabled.

IndicatorAssignment

Represents the assignment of an indicator definition that's used to measure the performance of a related activity. This object is available in API version 59.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
ProgramEnrollmentId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The program enrollment that the indicator assignment measures.
	This field is a relationship field.
	Relationship Name ProgramEnrollment
	Relationship Type Lookup
	Refers To ProgramEnrollment
ProgramInitiativeEnrlId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The initiative enrollment that the indicator assignment measures.
	This field is a relationship field.
	Relationship Name ProgramInitiativeEnrl
	Relationship Type Lookup
	Refers To ProgramInitiativeEnrl

Field	Details
ProgramInitiativeId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The initiative that the indicator assignment measures.
	This field is a relationship field.
	Relationship Name ProgramInitiative
	Relationship Type Lookup
	Refers To ProgramInitiative

For more information, see IndicatorAssignment in Outcome Management.

Program

Represents information about the enrollment and disbursement of benefits in a program. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Field	Details
ActualCost	Type double
	Properties Create, Filter, Nillable, Sort, Update
	Description The actual cost of the program.
BusinessRegion	Type picklist

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The business region where the program is running.
	Possible values are:
	• AMER
	• ANZ
	• APAC
	• Africa
	• Central America
	• Central Asia
	• EMEA
	• Europe
	• LATAM
	• Middle East
	• North America
	• South America
	• Southeast Asia
Category	Type picklist
	Properties
	Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The program category.
	Possible values are:
	 EnvSocGvnc—Environmental, Social, and Governance (ESG)
	• Other
City	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The city where the program is running.
Country	Туре
	picklist

Properties

Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The country where the program is running.

Possible values are:

- AD—Andorra
- AE—United Arab Emirates
- AF—Afghanistan
- AG—Antigua and Barbuda
- AI—Anguilla
- AL—Albania
- AM—Armenia
- AO—Angola
- AQ—Antarctica
- AR—Argentina
- AT—Austria
- AU—Australia
- AW—Aruba
- AX—Aland Islands
- AZ—Azerbaijan
- BA—Bosnia and Herzegovina
- BB—Barbados
- BD—Bangladesh
- BE—Belgium
- BF—Burkina Faso
- вG—Bulgaria
- вн—Bahrain
- BI—Burundi
- BJ—Benin
- BL—Saint Barthélemy
- вм—Bermuda
- вм—Brunei Darussalam
- BO—Bolivia, Plurinational State of
- BQ—Bonaire, Sint Eustatius and Saba
- BR—Brazil
- BS—Bahamas
- BT—Bhutan
- вv—Bouvet Island

Et al al	Dotaile
Field	Details

- BW—Botswana
- BY—Belarus
- Bz—Belize
- CA—Canada
- cc—Cocos (Keeling) Islands
- CD—Congo, the Democratic Republic of the
- CF—Central African Republic
- CG—Congo
- CH—Switzerland
- cı—Côte d'Ivoire
- CK—Cook Islands
- CL—Chile
- CM—Cameroon
- CN—China
- co—Colombia
- CR—Costa Rica
- cu—Cuba
- CV—Cape Verde
- cw—Curação
- cx—Christmas Island
- CY—Cyprus
- cz—Czechia
- DE—Germany
- DJ—Djibouti
- DK—Denmark
- DM—Dominica
- DO—Dominican Republic
- DZ—Algeria
- EC—Ecuador
- EE—Estonia
- EG—Egypt
- EH—Western Sahara
- ER—Eritrea
- ES—Spain
- ET—Ethiopia
- FI—Finland
- FJ—Fiji
- FK—Falkland Islands (Malvinas)

Et al al	Dotaile
Field	Details

- FO—Faroe Islands
- FR—France
- GA—Gabon
- GB—United Kingdom
- GD—Grenada
- GE—Georgia
- GF—French Guiana
- GG—Guernsey
- GH—Ghana
- GI—Gibraltar
- GL—Greenland
- gм—Gambia
- GN—Guinea
- GP—Guadeloupe
- GQ—Equatorial Guinea
- GR—Greece
- GS—South Georgia and the South Sandwich Islands
- GT—Guatemala
- Gw—Guinea-Bissau
- GY—Guyana
- нк—Hong Kong
- HM—Heard Island and McDonald Islands
- ни—Honduras
- HR—Croatia
- HT—Haiti
- HU—Hungary
- ID—Indonesia
- IE—Ireland
- IL—Israel
- IM—Isle of Man
- IN—India
- IO—British Indian Ocean Territory
- IQ—lraq
- IR—Iran, Islamic Republic of
- IS—Iceland
- IT—ltaly
- JE—Jersey
- JM—Jamaica

Field	Details

- JO—Jordan
- JP—Japan
- KE—Kenya
- KG—Kyrgyzstan
- кн—Cambodia
- KI—Kiribati
- KM—Comoros
- ки—Saint Kitts and Nevis
- KP—Korea, Democratic People's Republic of
- кк—Когеа, Republic of
- KW—Kuwait
- KY—Cayman Islands
- KZ—Kazakhstan
- LA—Lao People's Democratic Republic
- LB—Lebanon
- LC—Saint Lucia
- LI—Liechtenstein
- LK—Sri Lanka
- LR—Liberia
- LS—Lesotho
- LT—Lithuania
- LU—Luxembourg
- LV—Latvia
- LY—Libya
- MA—Morocco
- MC—Monaco
- MD—Moldova, Republic of
- ME—Montenegro
- мF—Saint Martin (French part)
- MG—Madagascar
- мк—North Macedonia
- ML—Mali
- MM—Myanmar
- MN—Mongolia
- мо—Масао
- MQ—Martinique
- MR—Mauritania
- MS—Montserrat

Et al al	Dotaile
Field	Details

- MT—Malta
- MU—Mauritius
- MV—Maldives
- мw—Malawi
- MX—Mexico
- MY—Malaysia
- мz—Mozambique
- NA—Namibia
- NC—New Caledonia
- NE—Niger
- NF—Norfolk Island
- NG—Nigeria
- NI—Nicaragua
- NL—Netherlands
- NO—Norway
- NP—Nepal
- NR—Nauru
- ทบ—Niue
- Nz—New Zealand
- om—Oman
- PA—Panama
- PE—Peru
- PF—French Polynesia
- PG—Papua New Guinea
- PH—Philippines
- PK—Pakistan
- PL—Poland
- PM—Saint Pierre and Miquelon
- PN—Pitcairn
- PR—Puerto Rico
- PS—Palestine
- ₽T—Portugal
- PY—Paraguay
- QA—Qatar
- RE—Reunion
- RO—Romania
- RS—Serbia
- RU—Russian Federation

Field Details

- R₩—Rwanda
- SA—Saudi Arabia
- SB—Solomon Islands
- sc—Seychelles
- SD—Sudan
- sE—Sweden
- sg—Singapore
- SH—Saint Helena, Ascension and Tristan da Cunha
- si—Slovenia
- sj—Svalbard and Jan Mayen
- sk—Slovakia
- SL—Sierra Leone
- SM—San Marino
- sn—Senegal
- so—Somalia
- SR—Suriname
- ss—South Sudan
- ST—Sao Tome and Principe
- SV—El Salvador
- sx—Sint Maarten (Dutch part)
- SY—Syrian Arab Republic
- SZ—Eswatini
- TC—Turks and Caicos Islands
- TD—Chad
- TF—French Southern Territories
- TG—Togo
- тн—Thailand
- TJ—Tajikistan
- тк—Tokelau
- TL—Timor-Leste
- ™—Turkmenistan
- TN—Tunisia
- TO—Tonga
- TR—Türkiye
- TT—Trinidad and Tobago
- TV—Tuvalu
- T₩—Taiwan
- TZ—Tanzania, United Republic of

Field	Details
	• ua—Ukraine
	• ug—Uganda
	• US—United States
	• UY—Uruguay
	• UZ—Uzbekistan
	 VA—Holy See (Vatican City State)
	 VC—Saint Vincent and the Grenadines
	 VE—Venezuela, Bolivarian Republic of
	 VG—Virgin Islands, British
	• vn—Vietnam
	• VU—Vanuatu
	WF—Wallis and Futuna
	• ws—Samoa
	xk—Kosovo
	• YE—Yemen
	• YT—Mayotte
	• za—South Africa
	• zm—Zambia
	• zw—Zimbabwe
CurrencyCode	Type
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The currency in which the cost was incurred.
	Possible values are:
	• AED
	• AFN
	• ALL
	• AMD
	• ANG
	• AOA
	• ARS
	• AUD
	• AWG
	• AZN
	• BAM

Field Deta	ils
•	BBD
•	BDT
•	BGN
•	BHD
•	BIF
•	BMD
•	BND
•	вов
•	BRL
•	BSD
•	BTN
•	BWP
•	BYN
•	BZD
•	CAD
•	CDF
•	CHF
•	CLP
•	CNY
•	СОР
•	CRC
•	CSD
•	CUP
•	CVE
	CZK
•	DJF
•	DKK
•	DOP
•	DZD
•	EGP
•	ERN
•	ETB
•	EUR
•	FJD
	FKP
	GBP
	GEL
•	GHS

Field Detail	ils
•	GIP
•	GMD
•	GNF
•	GTQ
•	GYD
•	HKD
•	HNL
•	HRK
•	HTG
•	HUF
•	IDR
•	ILS
•	INR
•	IQD
•	IRR
•	ISK
•	JMD
•	JOD
•	JPY
•	KES
•	KGS
•	KHR
	KMF
	KPW
	KRW
	KWD
	KYD
	KZT
	LAK
	LBP
	LKR
	LRD
	LYD
	MAD
	MDL
	MGA
•	MKD
•	MMK

Field	Details	
	• MOP	
	• MRU	
	• MUR	
	• MWK	
	• MXN	
	• MYR	
	• MZN	
	• NAD	
	• NGN	
	• NIO	
	• NOK	
	• NPR	
	• NZD	
	• OMR	
	• PAB	
	• PEN	
	• PGK	
	• PHP	
	• PKR	
	• PLN	
	• PYG	
	• QAR	
	• RON	
	• RSD	
	• RUB	
	• RWF	
	• SAR	
	• SBD	
	• SCR	
	• SDG	
	• SEK	
	• SGD	
	• SHP	
	• SLL	
	• SOS	
	• SRD	
	• STN	
	• SYP	

Field	Details
	• SZL
	• THB
	• TJS
	• TND
	• TOP
	• TRY
	• TTD
	• TWD
	• TZS
	• UAH
	• UGX
	• USD
	• UYU
	• UZS
	• VES
	• VND
	• VUV
	• WST
	• XAF
	• XCD
	• XOF
	• XPF
	• YER
	ZAR The default value is USD.
	acidate talle to 002.
CustomSustnProgramType	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	Specifies the user-specified program type.
EmissionsActivityId	Туре
	reference
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The emissions activity impacted by the program
	The emissions activity impacted by the program.

Field	Details			
	This field is a relationship field.			
	Relationship Name EmissionsActivity			
	Relationship Type Lookup			
	Refers To EmissionsActivity			
EstimatedCost	Type double			
	Properties			
	Create, Filter, Nillable, Sort, Update			
	Description			
	The estimated cost of the program.			
SustainabilityProgramType	^е Туре			
	picklist			
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update			
	Description			
	The type of environmental, social and governance (ESG) program.			
	Possible values are:			
	 CoPlcyOrBhvrlChg—Company Policy or Behavioral Change 			
	 EnrgyEfcyInBld—Energy Efficiency in Buildings 			
	 EnrgyEfcyInProdtPrcs—Energy Efficiency in Production Processes 			
	FugitiveEmssnRduc—Fugitive Emissions Reductions			
	 LowCrbnEnrgyCnsmp—Low-Carbon Energy Consumption 			
	 LowCrbnEnrgyGnrn—Low-Carbon Eenergy Generation 			
	 NonEnrgyIdstProcEmssnRduc—Non-Energy Industrial Process Emissions Reductions 			
	• Other			
	• Trnsp—Transportation			
	 WstRdctnAndMtrlCirc—Waste Reduction and Material Circularity 			

For more information, see Program in Nonprofit Cloud.

ProgramEnrollment

Represents details of enrollment for benefits in a program. This object is available in API version 57.0 and later.

Supported Calls

create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),
retrieve(), search(), undelete(), update(), upsert()

Fields

Field	Details
Scope3EmssnSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The scope 3 emissions source associated with the environment, social, and governance program.
	This field is a relationship field.
	Relationship Name Scope3EmssnSrc
	Relationship Type Lookup
	Refers To Scope3EmssnSrc
StnryAssetEnvrSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The stationary asset associated with the environment, social, and governance program.
	This field is a relationship field.
	Relationship Name StnryAssetEnvrSrc
	Relationship Type Lookup
	Refers To StnryAssetEnvrSrc
SupplierId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The supplier associated with the environment, social, and governance program.
	This field is a relationship field.
	Relationship Name Supplier
	Relationship Type Lookup
	Refers To Supplier
VehicleAssetEmssnSrcId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The vehicle asset associated with the environment, social, and governance program.
	This field is a relationship field.
	Relationship Name VehicleAssetEmssnSrc
	Relationship Type Lookup
	Refers To VehicleAssetEmssnSrc

For more information, see ProgramEnrollment in Nonprofit Cloud.

CHAPTER 4 Net Zero Cloud Business APIs

In this chapter ...

Net Zero Cloud Business APIs are RESTful APIs that are sometimes available as Apex classes and methods.

• REST Reference

Net Zero Cloud Business APIs REST Reference

REST Reference

You can access Net Zero Cloud Business APIs using REST endpoints. These REST APIs follow similar conventions as Connect REST APIs.

To understand the architecture, authentication, rate limits, and how the requests and responses work, see Connect REST API Developer Guide.

Resources

Here's a list of Net Zero Cloud Business API resources.

Request Bodies

Here's a list of Net Zero Cloud Business API request bodies.

Response Bodies

Here's a list of Net Zero Cloud Business API response bodies.

Resources

Here's a list of Net Zero Cloud Business API resources.

Allocate Scorecard Emissions

Allocate final emissions to procurement items. Update the AllocationStatus field on the scorecard on a successful allocation. The API allocates final emissions to procurement items based on the calculated value of the FinalScorecardEmissions field.

Annual Emission Inventory Recalculation

Recalculate a record whenever you update data, such as emission factors.

Associate Scorecard Procurement Items

Associate procurement items from supplier management to the active scorecard. Only procurement items with an unpopulated lookup can be associated with the scorecard. The API collects the procurement items that lie in between the StartDate and the EndDate as per the scorecard.

Carbon Footprint Recalculation

Recalculate a record whenever you update data, such as emission factors.

Carbon Inventory

Capture your organization's carbon footprint from a source for a certain time period by creating an annual emissions inventory. Using this data as the base, achieve your emissions reduction targets and fulfill your Net Zero commitment.

Compute Data Gap Fillers

Identify and get energy consumption records associated with the Stationary Asset Carbon Footprint object that are missing for a given period.

Date Issues

Identify and get energy consumption records with date issues associated with the Stationary Asset Carbon Footprint object.

Object API Name

Retrieve information of an object in JSON format, which can be used further to create a CSV template for uploading data.

Recalculate Building Energy Intensity

Recalculate the building energy intensity (BEI) based on filters such as fuel type, building type, and geolocation.

Retrieve the List of Objects

Retrieve the list of objects for a specified feature.

Sync Sustainability Credit

Synchronize your organization's carbon footprint sustainability credits from the MarketPlace to NetZero Cloud. The API popluates the SustainabilityCredit, SustainabilityPurchase, and CrbnCreditProject records in Netzero Cloud.

Lock Record

Lock a record in Salesforce object to prevent data modification after carbon footprint is calculated.

Unlock Record

Unlock a record in Salesforce object to update data.

Allocate Scorecard Emissions

Allocate final emissions to procurement items. Update the AllocationStatus field on the scorecard on a successful allocation. The API allocates final emissions to procurement items based on the calculated value of the FinalScorecardEmissions field.

Special Access Rules

To use this resource, you must have AllowSCExternalEngMgmt enabled in your Salesforce organization.

Resource

/connect/sustainability/supplier-management/allocate-procurement-items/\${scorecardId}

Example

https://yourInstance.salesforce.com/services/data/v55.0/connect/sustainability/supplier-management/allocate-procurement-items/0rqRM0000004C98YAE

Available version

55.0

Requires Chatter

No

HTTP methods

POST

Response body for POST

SC Scorecard Allocate Emissions

SEE ALSO:

Net Zero Cloud Calculations: Sustainability Scorecard

Annual Emission Inventory Recalculation

Recalculate a record whenever you update data, such as emission factors.

Resource

/connect/sustainability/footprint-calculation/recalculate/\${recordId}

Resource example

https://yourInstance.salesforce.com/services/data/xx.x/connect/sustainability/footprint-calculation/recalculate/4sbT1000004CRTA2

Available version

54.0

Requires Chatter

No

HTTP methods

POST

Response body for POST

Annual Emissions Inventory Recalculation Output

Response example

```
{
  "code" : 0,
  "message" : "The recalculation process is in progress and can take some time. Check
back after some time."
}
```

Associate Scorecard Procurement Items

Associate procurement items from supplier management to the active scorecard. Only procurement items with an unpopulated lookup can be associated with the scorecard. The API collects the procurement items that lie in between the StartDate and the EndDate as per the scorecard.

Special Access Rules

To use this resource, you must have read access on the SustainabilityScorecard object and write access to corresponding procurement items. Also enable AllowSCExternalEngMgmt in your Salesforce organization.

Resource

/connect/sustainability/supplier-management/associate-procurement-items/\${scorecardId}

Example

```
https://yourInstance.salesforce.com/services/data/v55.0/connect/sustainability/supplier-management/associate-procurement-items/0rqRM0000004C98YAE
```

Available version

55.0

Requires Chatter

No

HTTP methods

POST

Response body for POST

SC Scorecard Associate Scorecard

Carbon Footprint Recalculation

Recalculate a record whenever you update data, such as emission factors.

Resource

/connect/sustainability/footprint-calculation/recalculate/\${recordId}

Resource example

https://yourInstance.salesforce.com/services/data/xx.x/connect/sustainability/footprint-calculation/recalculate/4sb110000040CRIA2

Available version

54.0

Requires Chatter

No

HTTP methods

POST

Response body for POST

Carbon Footprint Recalculation Output

Response example

```
{
  "code" : 0,
  "message" : "The recalculation process is in progress and can take some time. Check
back after some time."
}
```

Carbon Inventory

Capture your organization's carbon footprint from a source for a certain time period by creating an annual emissions inventory. Using this data as the base, achieve your emissions reduction targets and fulfill your Net Zero commitment.

Resource

/connect/sustainability/carbon-inventory

Available version

54.0

Requires Chatter

No

HTTP methods

POST

Request body for POST

```
"name": "Annual Emissions Inventory 2020",
"year": "2020",
"stnryAssetCrbnFtprnt": {
    "footprintStage": "Internal Audit"
},
"vehicleAssetCrbnFtprnt": {
    "footprintStage": "Internal Audit"
```

```
},
"scope3CrbnFtprnt": {
    "footprintStage": "Internal Audit"
}
```

Properties

Name	Туре	Description	Required or Optional	Available Version
name	String	Name of the annual emissions inventory.	Required	54.0
scope3CrbnFtprnt	Scope 3 Carbon Footprint Input	Carbon footprint from scope 3 category of greenhouse gas emissions, such as emissions from sources owned or controlled by other entities in your organization.	Required	54.0
stnryAssetClarFtpint	Stationary Asset Carbon Footprint Input	Stationary asset carbon footprint from environmental sources, such as a commercial building or a data center.	Required	54.0
vehicle?ssetClbFtprrt	Vehicle Asset Carbon Footprint Input	Vehicle asset carbon footprint from vehicle assets, such as fleet vehicles, corporate aircraft, and company shuttles.	Required	54.0
year	String	Year considered for the annual emissions inventory. You can create only one annual emissions inventory for a specific year.	Required	54.0

Response body for POST

Sustainability Carbon Inventory

Compute Data Gap Fillers

Identify and get energy consumption records associated with the Stationary Asset Carbon Footprint object that are missing for a given period.

Resource

```
/connect/sustainability/dgf/compute-datagap-fillers
```

Resource example

https://yourInstance.salesforce.com/services/data/v59.0/connect/sustainability/dgf/compute-datagap-fillers

Available version

55.0

Requires Chatter

No

HTTP methods

POST

Request body for POST

JSON example

Properties

Name	Туре	Description	Required or Optional	Available Version
filters	Filter Input[]	List of filters to filter the output records. Each filter item is a key-value pair that contains the name and its value.	Optional	55.0
		Possible name is:		
		• FuelType		
methods	String[]	List of the names of different methods to retrieve data gaps.	Required	55.0
		Possible values are:		
		BUILDING_BENCHMARK		
		• DAILY_AVERAGE_CURRENT_YEAR		
		• DAILY_AVERAGE_LAST_YEAR		
		• MANUAL		
		• REGIONAL_BENCHMARK		
recordId	String	ID of the Stationary Asset Carbon Footprint object for which the associated energy consumption records with data gaps must be retrieved.	Required	55.0
		Ensure that the Stationary Asset Carbon Footprint object has a valid start date and end date.		

Response body for POST

Sustainability Data Gap Filler Output

Date Issues

Identify and get energy consumption records with date issues associated with the Stationary Asset Carbon Footprint object.

Resource

```
/connect/sustainability/dgf/identify-date-issues
```

Resource example

https://yourInstance.salesforce.com/services/data/v59.0/connect/sustainability/dgf/identify-date-issues

Available version

55.0

Requires Chatter

No

HTTP methods

POST

Request body for POST

JSON example

```
"recordId":"Ops1Q00002WsMwBQAV",
"types":[
    "MISSING_DATES",
    "OUT_OF_DATE_RANGE",
    "OVERLAPPING_DATES"
],
    "filters":[
    {
        "item":"FuelType",
        "value":"Diesel"
    }
]
```

Properties

Name	Туре	Description	Required or Optional	Available Version
filters	Filter Input[]	List of filters to filter the records. Each filter item is a key-value pair that contains the name and its value.	Required	55.0
		Possible name is:		
		• FuelType		
recordId	String	ID of the Stationary Asset Carbon Footprint object for which the associated	Required	55.0

Name	Туре	Description	Required or Optional	Available Version
		energy consumption records with date issues must be retrieved.		
		Ensure that the Stationary Asset Carbon Footprint object has a valid start date and end date.		
types	String[]	Types of date issues. Possible values are:	Required	55.0
		• MISSING_DATES		
		• OUT_OF_DATE_RANGE		
		• OVERLAPPING_DATES		

Response body for POST

Sustainability Date Issue Output

Object API Name

Retrieve information of an object in JSON format, which can be used further to create a CSV template for uploading data.

Resource

/connect/industries/csv-data-template/\${objectApiName}

Resource Example

/connect/industries/csv-data-template/DisclsReportingPeriod

Available Version

58.0

Requires Chatter

No

HTTP methods

GET

Response body for GET

Object CSV Data Template

Recalculate Building Energy Intensity

Recalculate the building energy intensity (BEI) based on filters such as fuel type, building type, and geolocation.

Resource

/connect/sustainability/bei/recalculate/\${recordId}

Resource example

 $\label{eq:https://yourInstance.salesforce.com/services/data/vXX.X/connect/sustainability/bei/recalculate/\$\{\textit{recordId}\}\$

Available version

55.0

Requires Chatter

Nο

HTTP methods

POST

Response body for POST

Building Energy Intensity Output

Retrieve the List of Objects

Retrieve the list of objects for a specified feature.

Resource

/connect/industries/\${featureName}/objects

Resource Example

/connect/industries/dataloading/objects?entityType=standard&offset=0&limit=100

Available version

58.0

Requires Chatter

No

HTTP methods

GET

Request parameters for GET

Parameter Name	Туре	Description	Required or Optional	Available Version
entityType	String	The type of objects. The API returns only the objects filtered by the object type.	Optional	58.0
limit	Integer	The maximum number of objects that are returned for a single request. Note:	Optional	58.0
		To configure pagination, either provide values for the offset and limit parameters together, or provide no values, at all. If neither offset nor limit parameters are provided, then all of the available records are returned.		

Parameter Name	Туре	Description	Required or Optional	Available Version
offset	Integer	The starting point within the sorted list of objects.	Optional	58.0
		Note:		
		To configure pagination, either provide values for the offset and limit parameters together, or provide no values, at all. If neither offset nor limit parameters are provided, then all of the available records are returned.		

Response body for GET

Feature Objects Result

Sync Sustainability Credit

Synchronize your organization's carbon footprint sustainability credits from the MarketPlace to NetZero Cloud. The API popluates the SustainabilityCredit, SustainabilityPurchase, and CrbnCreditProject records in Netzero Cloud.

Resource

```
/connect/sustainability/sync-sustainability-credits
```

Example URI

```
https://yourInstance.salesforce.com/services/data/59.0/connect/sustainability/sync-sustainability-credits
```

Available version

57.0

Requires Chatter

No

HTTP methods

POST

Request body for POST

```
"creditsIssueDate":"", //optional for integration
                "creditsRetiredDate":"", //optional for integration
                "creditsPurchased":1000, //required for integration
                "creditsUnit":"tCO2e", //required
                "costPerUnit":"", //optional for integration
                "vintageYear":"", //optional for integration
                "purchaseDate":"", //optional for integration
                "externalIdentifier":"", //required for integration
                                          //Format : func GUID(Id + OrderItemNumber)
            },
            \{\ldots\}, \{\ldots\}
        "sustainabilityPurchases":
        [
                "name": "101", //required for integration
                "type": "CARBON CREDITS", //required for integration
                "billingAddress":""{
                         "street": "",
                        "city": "",
                         "state": "",
                         "postalCode": "",
                         "country": ""
                    },//optional for integration
                "description": "", //optional for integration
                "purchaseOrderNumber":"",//optional for integration
                "invoiceNumber":"",//optional for integration
                "externalIdentifier": "NZM-0000101"//required for integration;
                                                    //Format : "NZM-" + <OrderNumber>
             },
            \{\ldots\}, \{\ldots\}
        "carbonCreditProjects":
        Γ
            {
                "name": "Wind Farm in New Zealand", //required for integration
                "mitigationType":"",//optional for integration
                "projectType":"",//optional for integration
                "country": "US", //optional for integration
                "region": "NorthAmerica",//optional for integration
                "standardAgencyName":"",//optional for integration
                "voluntaryRegistryName": "Gold Standard",//optional for integration
                "additionalBenefits":"",//optional for integration
                "projectUrl":"",//optional for integration
                "description":"",//optional for integration
                "fundedBy":"",//optional for integration
                "verifiedBy":"",//optional for integration
                "projRegistryIdentifier":"1-56856-912-2",
                "externalIdentifier":"",//required for integration
                                         //Format : registry identifier + registry
project ID
                "crbnCrMethodology":""//optional for integration
             },
```

```
{...}, {...}

1
```

Properties

Name	Туре	Description	Required or Optional	Available Version
carbarΩreditProjects	Carbon Credit Project Input[]	The details of an environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.	Required	57.0
sztairódilityCahorCecits	Sustainability Credit Input[]	The total carbon credit purchased for the carbon credit project, which is the cumulative value of all the associated sustainability credits.	Required	57.0
sutainbilityRurhees	Sustainability Purchase Input[]	Information related to the purchase of sustainability credits such as carbon credits.	Required	57.0

Response body for POST

Sync Sustainability Carbon Credit Output

Lock Record

Lock a record in Salesforce object to prevent data modification after carbon footprint is calculated.

Resource

/connect/sustainability/record-locking/lock/\${recordId}

Resource example

https://**yourInstance**.salesforce.com/services/data/v**XX.X**/connect/sustainability/record-locking/lock/Onyxx00000000hZAAQ

Available version

54.0

Requires Chatter

No

HTTP methods

PUT

Response body for PUT

Record Lock Unlock Output

Response example

```
{
   code : 0,
   message : "successfully lock the record"
}
```

Unlock Record

Unlock a record in Salesforce object to update data.

Resource

```
/connect/sustainability/record-locking/unlock/${recordId}
```

Resource example

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/sustainability/record-locking/unlock/0nyxx00000000hZAAQ
```

Available version

54.0

Requires Chatter

No

HTTP methods

PUT

Response body for PUT

Record Lock Unlock Output

Response example

```
{
  code : 0,
  message : "successfully unlock the record"
}
```

Request Bodies

Here's a list of Net Zero Cloud Business API request bodies.

Billing Address Input

Input representation of the sustainability purchase billing address.

Carbon Credit Project Input

Input representation of the carbon credit project.

Data Gap Filler Input

Input representation of the request to get missing energy consumption records.

Date Issue Input

Input representation of the request to get energy consumption records having date issues.

Filter Input

Input representation of the filter object with key value pair.

Scope 3 Carbon Footprint Input

Input representation of the source to calculate the scope 3 carbon footprint. A scope 3 carbon footprint covers greenhouse gas emissions from sources owned or controlled by other entities in your organization.

Stationary Asset Carbon Footprint Input

Input representation of the source to calculate the carbon footprint from stationary assets, such as a commercial building or a data center.

Sustainability Carbon Inventory Input

Input representation of the annual emissions inventory creation request.

Sync Sustainability Carbon Credit Input

Input representation of the carbon footprint sustainability credits.

Sustainability Credit Input

Input representation of the sustainability credit associated with the carbon credit project.

Sustainability Purchase Input

Input representation of the sustainability carbon credit purchase.

Vehicle Asset Carbon Footprint Input

Input representation of the source to calculate the carbon footprint from vehicle assets, such as fleet vehicles, corporate aircraft, and company shuttles.

Billing Address Input

Input representation of the sustainability purchase billing address.

Properties

Name	Туре	Description	Required or Optional	Available Version
city	String	The city where the sustainability purchase billing address is located.	Required	57.0
country	String	The country where the sustainability purchase billing address is located.	Required	57.0
postalCode	String	The postal code of the city where the sustainability purchase billing address is located.	Required	57.0
state	String	The state where the sustainability purchase billing address is located.	Required	57.0
street	String	The street where the sustainability purchase billing address is located.	Required	57.0

Carbon Credit Project Input

Input representation of the carbon credit project.

Properties

Name	Туре	Description	Required or Optional	Available Version
additionalBenefits	String	Specifies the additional benefits related to the carbon credit project.	Optional	57.0
		Possible values are:		
		• Access		
		Biodiversity		
		• Education		
		• Energy		
		• Health		
country	String	The country in which the carbon credit project is implemented.	Optional	57.0
crbnCrMethodology	String	The method that is used to adjust the carbon credits during the lifecycle of the project.	Optional	57.0
description	String	The description of the carbon credit project.	Optional	57.0
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Required	57.0
fundedBy	String	The name of the organization that's funding the carbon credit project.	Optional	57.0
mitigationType	String	Specifies the mitigation strategy associated with this carbon credit project.	Optional	57.0
		Possible values are:		
		• Prevention		
		• Reduction		
		• Removal		
		• Sequestration		
name	String	The name of the environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.	Required	57.0
projPegistryToentifier	String	The unique identifier that's assigned by the registry to the carbon credit project.	Optional	57.0

Name	Туре	Description	Required or Optional	Available Version
projectType	String	Specifies the type of the carbon credit project.	Optional	57.0
		Possible values are:		
		• Agriculture		
		 ForestryandLandUse 		
		 FuelSwitching 		
		 HouseholdDevices 		
		• IndustrialManufacturing		
		 RenewableEnergy 		
		• TransportationWasteDisposal		
projectUrl	String	The URL that contains the carbon credit project details.	Optional	57.0
region	String	The region within the country where the carbon credit project is implemented.	Required	57.0
standardAgencyName	String	Name of the agency associated with the carbon credit project.	Optional	57.0
		Possible values are:		
		• Climate, CommunityandBiodiversityStandards		
		• GoldStandard		
		 VerifiedCarbonStandard 		
		• VoluntaryOffsetStandard		
verifiedBy	String	The name of the organization that verified the carbon credit project.	Optional	57.0
voluntary.Registry.Name	String	The name of the registry that lists the carbon credit projects.	Optional	57.0

Data Gap Filler Input

Input representation of the request to get missing energy consumption records.

```
"methods":[
    "REGIONAL_BENCHMARK",
    "BUILDING_BENCHMARK",
    "MANUAL"
]
```

Properties

Name	Туре	Description	Required or Optional	Available Version
filters	Filter Input[]	List of filters to filter the output records. Each filter item is a key-value pair that contains the name and its value.	Optional	55.0
		Possible name is:		
		• FuelType		
methods	String[]	List of the names of different methods to retrieve data gaps.	Required	55.0
		Possible values are:		
		BUILDING_BENCHMARK		
		• DAILY_AVERAGE_CURRENT_YEAR		
		• DAILY_AVERAGE_LAST_YEAR		
		• MANUAL		
		• REGIONAL_BENCHMARK		
recordId	String	ID of the Stationary Asset Carbon Footprint object for which the associated energy consumption records with data gaps must be retrieved.	Required	55.0
		Ensure that the Stationary Asset Carbon Footprint object has a valid start date and end date.		

Date Issue Input

Input representation of the request to get energy consumption records having date issues.

```
"recordId":"0ps1Q00002WsMwBQAV",
"types":[
    "MISSING_DATES",
    "OUT_OF_DATE_RANGE",
    "OVERLAPPING_DATES"
```

Properties

Name	Туре	Description	Required or Optional	Available Version
filters	Filter Input[]	List of filters to filter the records. Each filter item is a key-value pair that contains the name and its value.	Required	55.0
		Possible name is:		
		• FuelType		
recordId	String	ID of the Stationary Asset Carbon Footprint object for which the associated energy consumption records with date issues must be retrieved.	Required	55.0
		Ensure that the Stationary Asset Carbon Footprint object has a valid start date and end date.		
types	String[]	Types of date issues. Possible values are: MISSING_DATES OUT_OF_DATE_RANGE OVERLAPPING_DATES	Required	55.0

Filter Input

Input representation of the filter object with key value pair.

Properties

Name	Туре	Description	Required or Optional	Available Version
item	String	The filter item indicating the property of the item.	Optional	55.0
value	String	Indicates the value of the specific item.	Optional	55.0

Scope 3 Carbon Footprint Input

Input representation of the source to calculate the scope 3 carbon footprint. A scope 3 carbon footprint covers greenhouse gas emissions from sources owned or controlled by other entities in your organization.

JSON example

```
"scope3CrbnFtprnt": {
   "footprintStage": "Internal Audit"
}
```

Properties

Name	Туре	Description	Required or Optional	Available Version
footprintStage	String	Specifies the stage of the scope 3 carbon footprint. An annual emissions inventory is created only for the scope 3 carbon footprints with a footprint stage.	Required	54.0

Stationary Asset Carbon Footprint Input

Input representation of the source to calculate the carbon footprint from stationary assets, such as a commercial building or a data center.

JSON example

```
"stnryAssetCrbnFtprnt": {
   "footprintStage": "Internal Audit"
}
```

Properties

Name	Туре	Description	Required or Optional	Available Version
footprintStage	String	Specifies the stage of the stationary asset carbon footprint. An annual emissions inventory request is created only for the stationary asset carbon footprints with a footprint stage.	Required	54.0

Sustainability Carbon Inventory Input

Input representation of the annual emissions inventory creation request.

```
"name": "Annual Emissions Inventory 2020",
"year": "2020",
```

```
"stnryAssetCrbnFtprnt": {
    "footprintStage": "Internal Audit"
},
    "vehicleAssetCrbnFtprnt": {
        "footprintStage": "Internal Audit"
},
    "scope3CrbnFtprnt": {
        "footprintStage": "Internal Audit"
}
```

Properties

Name	Туре	Description	Required or Optional	Available Version
name	String	Name of the annual emissions inventory.	Required	54.0
scope3CrbnFtprnt	Scope 3 Carbon Footprint Input	Carbon footprint from scope 3 category of greenhouse gas emissions, such as emissions from sources owned or controlled by other entities in your organization.	Required	54.0
stnryAssetCrlnFtpmt	Stationary Asset Carbon Footprint Input	Stationary asset carbon footprint from environmental sources, such as a commercial building or a data center.	Required	54.0
whicle?ssetCibrFipant	Vehicle Asset Carbon Footprint Input	Vehicle asset carbon footprint from vehicle assets, such as fleet vehicles, corporate aircraft, and company shuttles.	Required	54.0
year	String	Year considered for the annual emissions inventory. You can create only one annual emissions inventory for a specific year.	Required	54.0

Sync Sustainability Carbon Credit Input

Input representation of the carbon footprint sustainability credits.

```
"creditsPurchased":1000, //required for integration
               "creditsUnit":"tCO2e", //required
               "costPerUnit":"", //optional for integration
               "vintageYear":"", //optional for integration
               "purchaseDate":"", //optional for integration
               "externalIdentifier":"", //required for integration
                                         //Format : func GUID(Id + OrderItemNumber)
           \{\ldots\}, \{\ldots\}
       "sustainabilityPurchases":
       [
               "name":"101",//required for integration
               "type": "CARBON CREDITS", //required for integration
               "billingAddress":""{
                       "street": "",
                       "city": "",
                       "state": "",
                       "postalCode": "",
                       "country": ""
                   },//optional for integration
               "description":"",//optional for integration
               "purchaseOrderNumber":"",//optional for integration
               "invoiceNumber":"",//optional for integration
               "externalIdentifier": "NZM-0000101"//required for integration;
                                                   //Format : "NZM-" + <OrderNumber>
            },
           {...}, {...}
       "carbonCreditProjects":
       [
               "name":"Wind Farm in New Zealand",//required for integration
               "mitigationType":"",//optional for integration
               "projectType":"",//optional for integration
               "country": "US", //optional for integration
               "region": "NorthAmerica", //optional for integration
               "standardAgencyName":"",//optional for integration
               "voluntaryRegistryName": "Gold Standard", //optional for integration
               "additionalBenefits":"",//optional for integration
               "projectUrl":"",//optional for integration
               "description":"",//optional for integration
               "fundedBy":"",//optional for integration
               "verifiedBy":"",//optional for integration
               "projRegistryIdentifier": "1-56856-912-2",
               "externalIdentifier":"",//required for integration
                                     //Format : registry identifier + registry project
ID
               "crbnCrMethodology":""//optional for integration
            },
            \{\ldots\}, \{\ldots\}
       ]
   }
```

Properties

Name	Туре	Description	Required or Optional	Available Version
carbon Credit Projects	Carbon Credit Project Input[]	The details of an environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.	Required	57.0
sstairebility(atorQecits	Sustainability Credit Input[]	The total carbon credit purchased for the carbon credit project, which is the cumulative value of all the associated sustainability credits.	Required	57.0
sustainability, Purchases	Sustainability Purchase Input[]	Information related to the purchase of sustainability credits such as carbon credits.	Required	57.0

Sustainability Credit Input

Input representation of the sustainability credit associated with the carbon credit project.

Properties

Name	Туре	Description	Required or Optional	Available Version
costPerUnit	Double	The cost of the credits for each unit of emissions.	Optional	57.0
crbnCreditProjectId	String	The carbon credit project that's associated with the sustainability credit.	Required	57.0
creditsIssueDate	String	The date when the credits were issued.	Optional	57.0
creditsPurchased	Double	The credits that are purchased by the organization.	Required	57.0
creditsPetiredDate	String	The date when the credits are retired from the registry.	Optional	57.0
creditsUnit	String	The unit of measure for the credits.	Required	57.0
description	String	The description of the carbon credit project.	Optional	57.0
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Required	57.0
purchaseDate	String	The date when the sustainability credits were purchased.	Optional	57.0
purchaseDate	String	•	Optional	57.0

Name	Туре	Description	Required or Optional	Available Version
status	String	Specifies the status of the sustainability credit.	Optional	57.0
		Possible values are:		
		• Retired		
		• Transferred		
		• HeldbySeller		
s.stairabilityRrdræ©	d String	The sustainability purchase record that's associated with the purchase of sustainability credits, such as carbon credits.	Required	57.0
vintageYear	String	The year when the sustainability credits were issued.	Optional	57.0

Sustainability Purchase Input

Input representation of the sustainability carbon credit purchase.

Properties

Name	Туре	Description	Required or Optional	Available Version
billingAddress	Billing Address Input	The billing address associated with the sustainability purchase.	Optional	57.0
description	String	The description of the sustainability purchase.	Optional	57.0
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Required	57.0
invoiceNumber	String	The invoice number associated with the sustainability purchase.	Optional	57.0
name	String	The name of the environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.	Required	57.0
purchaseOrderNurber	String	The purchase order number associated with the sustainability purchase.	Optional	57.0
type	String	The type of the sustainability purchase.	Required	57.0

Net Zero Cloud Business APIs Response Bodies

Vehicle Asset Carbon Footprint Input

Input representation of the source to calculate the carbon footprint from vehicle assets, such as fleet vehicles, corporate aircraft, and company shuttles.

JSON example

```
"vehicleAssetCrbnFtprnt": {
   "footprintStage": "Internal Audit"
}
```

Properties

Name	Туре	Description	Required or Optional	Available Version
footprintStage	String	Specifies the stage of the vehicle asset carbon footprint. An annual emissions inventory is created only for the vehicle asset carbon footprints with a footprint stage.	Required	54.0

Response Bodies

Here's a list of Net Zero Cloud Business API response bodies.

Annual Emissions Inventory Recalculation Output

Output representation of the annual emissions inventory recalculation request.

Building Energy Intensity Output

Output representation of the building energy intensity calculation request.

Carbon Footprint Recalculation Output

Output representation of the carbon footprint recalculation request.

CSV Data Template Fields

Output representation for the field details in the CSV data template.

Enum Mapping Error

Output representation for enum mapping errors for sync-sustainability-credits connect API.

Feature Object

Output representation of the details of the feature object.

Feature Objects Result

Output representation of the fetch feature object request.

CSV Data Template

Output representation of the CSV data template.

Object CSV Data Template

Output representation of the CSV data template for an object.

Net Zero Cloud Business APIs Response Bodies

Required Field Error

Output representation of the required field errors.

Record Lock Unlock Output

Output representation of the lock or unlock of a Salesforce object record.

Sustainability Carbon Inventory

Output representation of the annual emissions inventory creation request.

Sync Sustainability Carbon Credit Output

Output representation for the sync sustainability carbon credit trigger.

Sustainability Scorecard Allocate Emissions

Output representation of the allocate scorecard emissions request.

Sync Sustainability Carbon Credit Error

Sync sustainability carbon credit error output representation.

Sustainability Scorecard Associate Scorecard

Output representation of the associate scorecard request.

Sustainability Data Gap Filler Output

Output representation of the data gap filler request.

Sustainability Data Gap Record

Output representation of the sustainability data gap filler record.

Sustainability Date Issue Output

Output representation for sustainability date issue request.

Validation Rule Error

Output representation of the validation rule.

Annual Emissions Inventory Recalculation Output

Output representation of the annual emissions inventory recalculation request.

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The code returned by the carbon footprint recalculation request.	Small, 54.0	54.0
message	String	The message associated with the carbon footprint recalculation request.	Small, 54.0	54.0

Building Energy Intensity Output

Output representation of the building energy intensity calculation request.

```
{
"code":200,
"message":"success"
}
```

Net Zero Cloud Business APIs Response Bodies

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The request response code.	Small, 55.0	55.0
message	String	The request response message, which indicates whether the API request is successful or not.	Small, 55.0	55.0

Carbon Footprint Recalculation Output

Output representation of the carbon footprint recalculation request.

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The code returned by the carbon footprint recalculation request.	Small, 54.0	54.0
message	String	The message associated with the carbon footprint recalculation request.	Small, 54.0	54.0

CSV Data Template Fields

Output representation for the field details in the CSV data template.

Property Name	Туре	Description	Filter Group and Version	Available Version
apiName	String	The API name of an object.	Small, 58.0	58.0
fieldName	String	The name of the field that contains the verification data based on the selected field type.	Small, 58.0	58.0
fieldType	String	The data type of the field.	Small, 58.0	58.0
required	Boolean	Determines whether the field is required or not.	Small, 58.0	58.0

Enum Mapping Error

Output representation for enum mapping errors for sync-sustainability-credits connect API.

Property Name	Туре	Description	Filter Group and Version	Available Version
entityName	String	The name of the entity associated with the carbon credit project.	Small, 57.0	57.0
errorMessage	String	The details of the error.	Small, 57.0	57.0

Property Name	Туре	Description	Filter Group and Version	Available Version
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Small, 57.0	57.0
fieldName	String	The name of the field associated with the carbon credit project.	Small, 57.0	57.0

Feature Object

Output representation of the details of the feature object.

Property Name	Туре	Description	Filter Group and Version	Available Version
apiName	String	The API name of a feature object.	Small, 58.0	58.0
label	String	The UI label of an object	Small, 58.0	58.0

Feature Objects Result

Output representation of the fetch feature object request.

JSON example

```
"currentPageNumber": 1,
"currentPageSize": 10,
"objects": [
    "apiName": "Account",
    "label": "Account"
  },
    "apiName": "Asset",
    "label": "Asset"
  },
    "apiName": "AssetRelationship",
    "label": "Asset Relationship"
  },
    "apiName": "Case",
    "label": "Case"
  },
    "apiName": "Contact",
    "label": "Contact"
  },
    "apiName": "Contract",
    "label": "Contract"
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The request response code.	Small, 58.0	58.0
currentPageNumber	Long	The current page number.	Small, 58.0	58.0
currentPageSize	Integer	The number of objects in the current page.	Small, 58.0	58.0
message	String	The request response message.	Small, 58.0	58.0
objects	Feature Object[]	The list of feature objects.	Small, 58.0	58.0
totalAvailableItems	Long	The number of the total available items in the feature object.	Small, 58.0	58.0

CSV Data Template

Output representation of the CSV data template.

Property Name	Туре	Description	Filter Group and Version	Available Version
editableFields	CSV Data Template[]	The fields that are editable in the CSV data template.	Small, 58.0	58.0
objectName	String	The name of the CSV data template object.	Small, 58.0	58.0
readOnlyFields	CSV Data Template[]	The fields that are read-only in the CSV data template.	Small, 58.0	58.0

Object CSV Data Template

Output representation of the CSV data template for an object.

JSON example

```
template: {
'objectName': "",
'editableFields': [
   "apiName" : "",
   "fieldName" : "",
   "fieldType" : "",
"required" : ""
}
],
'readOnlyFields': [
   "apiName" : "",
   "fieldName" : "",
   "fieldType" : ""
   "required" : ""
}
   },
code (Integer): 0
message (String) : ""
}
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The request response code.	Small, 58.0	58.0
message	String	The request response message.	Small, 58.0	58.0
template	CSV Data Template[]	The details of the CSV data template.	Small, 58.0	58.0

Required Field Error

Output representation of the required field errors.

Property Name	Туре	Description	Filter Group and Version	Available Version
entityName	String	The name of the entity associated with the carbon credit project.	Small, 57.0	57.0
errorMessage	String	The messages that provides the error details.	Small, 57.0	57.0
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Small, 57.0	57.0
fieldName	String	The name of the field associated with the carbon credit project.	Small, 57.0	57.0

Record Lock Unlock Output

Output representation of the lock or unlock of a Salesforce object record.

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The code returned by the lock or unlock request.	Small, 54.0	54.0
message	String	The message associated with the lock or unlock request.	Small, 54.0	54.0

Sustainability Carbon Inventory

Output representation of the annual emissions inventory creation request.

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	Indicates the status of your creation request for the annual emissions inventory.	Small, 54.0	54.0
message	String	Indicates the successful creation of the annual emissions inventory or errors, if any.	Small, 54.0	54.0

Sync Sustainability Carbon Credit Output

Output representation for the sync sustainability carbon credit trigger.

JSON example

```
"message": "", //In case of error
  "code": "", // In case of error
 "syncSustainabilityCarbonCreditErrors": { /// Make it a generic error and consolidate
all validation errors in one pass
       "enumMappingErrors":[
           "entityName": "",
           "errorMessage", ""
           "externalIdentifier": "",
           "fieldName": ""
       }, {...}, {...}
       ],
       "requiredFieldErrors":[
           "entityName": "",
           "errorMessage", ""
           "externalIdentifier": "",
           "fieldName": ""
       }, {...}, {...},
       "validationRuleErrors":[
```

```
{
    "entityName": "",
    "errorMessage", ""
    "externalIdentifier": "",
    "fieldName": ""
}, {...}, {...}
],
}
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The error code returned in case of failure to sync sustainability carbon credits.	Small, 57.0	57.0
message	String	Provides information about the reason for failure.	Small, 57.0	57.0
synSstaiability@ton0edffno:	Sync Sustainability Carbon Credit Error	Error messages to troubleshoot the sync request failure.	Small, 57.0	57.0

Sustainability Scorecard Allocate Emissions

Output representation of the allocate scorecard emissions request.

JSON Example

```
{
  "code":"200",
  "message":"The allocate final scorecard emissions process can take some time."
}
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The request response code.	Small, 55.0	55.0
message	String	The request response message.	Small, 55.0	55.0

Sync Sustainability Carbon Credit Error

Sync sustainability carbon credit error output representation.

Property Name	Туре	Description	Filter Group and Version	Available Version
enumMappingErrors	Enum Mapping Error Representation[]	Error messages caused by enum mapping issues.	Small, 57.0	57.0
requiredFieldErrors	Required Field Error Representation[]	Error messages caused by incomplete fields.	Small, 57.0	57.0

Property Name	Туре	Description	Filter Group and Version	Available Version
validationRuleFirrors	Validation Rule Error Representation[]	Error messages caused by invalid rules.	Small, 57.0	57.0

Sustainability Scorecard Associate Scorecard

Output representation of the associate scorecard request.

JSON Example

```
{
  "code":"0",
  "message":"The associate procurement items process can take some time."
}
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	The request response code.	Small, 55.0	55.0
message	String	The request response message.	Small, 55.0	55.0

Sustainability Data Gap Filler Output

Output representation of the data gap filler request.

JSON example

```
"code":0,
"gaps":[
      "fillValues":{
         "MANUAL": {
            "FuelConsumptionUnit": "kWh",
            "FuelType": "Diesel",
            "Name": "SAES - Jan 1, 2023 - Jul 25, 2023 - Diesel",
            "FuelConsumption":0,
            "EndDate": "2023-07-25",
            "StartDate": "2023-01-01"
      }
   },
      "fillValues":{
         "MANUAL": {
            "FuelConsumptionUnit": "kWh",
            "FuelType": "Diesel",
            "Name": "SAES - Aug 1, 2023 - Dec 31, 2023 - Diesel",
            "FuelConsumption":0,
            "EndDate": "2023-12-31",
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	Response code.	Small, 55.0	55.0
gaps	Sustainability Data Gap Record[]	List of data gap records. Each item in the list corresponds to the gap between the start and end date.	Small, 55.0	55.0
message	String	Response message indicating whether the API request is successful or not.	Small, 55.0	55.0

Sustainability Data Gap Record

Output representation of the sustainability data gap filler record.

Property Name	Туре	Description	Filter Group and Version	Available Version
fillValues	String	Properties that are associated with each data gap record.	Small, 55.0	55.0
		Possible values are:		
		• EndDate		
		• FuelConsumption		
		• FuelConsumptionUnit		
		FuelTypeNameStartDate		

Sustainability Date Issue Output

Output representation for sustainability date issue request.

JSON example

```
"code":0,
"message":"The date issues for the energy use records were identified.",
"missingDatesRecords":[
    "7LKRM000000RsGQ4A0",
```

```
"7LKRM000000RsGV4A0"
],
  "outOfDateRangeRecords":[

],
  "overlappingDatesRecords":[
]
}
```

Property Name	Туре	Description	Filter Group and Version	Available Version
code	Integer	Response code.	Small, 55.0	55.0
message	String	Response message indicating whether the API request is successful or not.	Small, 55.0	55.0
missingDatesRecords	String[]	List of record IDs for which either the start or the end date is missing.	Small, 55.0	55.0
outOfDateRangeRecords	String[]	List of record IDs for which either the start or the end date is outside the Carbon Footprint (CF) date range.	Small, 55.0	55.0
overlappingDatesPeconds	String[]	List of record IDs that have a start date or end date that overlaps with the dates of other records associated with the same Carbon Footprint.	Small, 55.0	55.0

Validation Rule Error

Output representation of the validation rule.

Property Name	Туре	Description	Filter Group and Version	Available Version
entityName	String	The name of the entity associated with the carbon credit project	Small, 57.0	57.0
errorMessage	String	The details of the error.	Small, 57.0	57.0
externalIdentifier	String	The external identifier of the data that is imported for the carbon credit project.	Small, 57.0	57.0
fieldName	String	The name of the field associated with the carbon credit project.	Small, 57.0	57.0

CHAPTER 5 Net Zero Cloud Metadata API Types

In this chapter ...

- ClauseCatgConfiguration
- DisclosureDefinition
- DisdosureDefinitionVersion
- DisclosureType
- FuelType
- FuelTypeSustnUom
- IndustriesSettings
- SustnUomConversion
- SustainabilityUom

Metadata API enables you to access some types and feature settings that you can customize in the user interface. For more information about Metadata API and to find a complete reference of existing metadata types, see **Metadata API Developer Guide**.

ClauseCatgConfiguration

Represents the configuration about the clause category that can be used to categorize your disclosure and compliance reports from standardized disclosure templates in a response document.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

 ${\tt Clause Catg Configuration\ components\ have\ the\ suffix\ .clause Catg Configuration\ and\ are\ stored\ in\ the\ clause Catg Configurations\ folder.}$

Version

ClauseCatgConfiguration components are available in API version 57.0 and later.

Special Access Rules

The ClauseManagementAddOn license is required to access this object along with user access for the Clause Designer User permission set license.

Field Name	Description
description	Field Type string
	Description The description about the clause category configuration.
isProtected	Field Type boolean
	Description An auto-generated value that doesn't impact the behavior of the metadata type. The default is false.
masterLabel	Field Type
	string
	Description
	Required.

Field Name	Description
	A user-friendly name for ClauseCatgConfiguration, which is defined when the ClauseCatgConfiguration is created.
usageType	Field Type ClmCategoryUsageType
	Description
	Required.
	The usage type of the clause category configuration.
	Possible values are:
	 ContractClauseCategory
	• DisclosureCategory

The following is an example of a ClauseCatgConfiguration component.

```
<?xml version="1.0" encoding="UTF-8"?>
<ClauseCatgConfiguration
  xmlns="http://soap.sforce.com/2006/04/metadata">
  <description>This is to add description for Contract Clause Category.</description>
  <usageType>ContractClauseCategory</usageType>
  <isProtected>false</isProtected>
  <masterLabel>Contract Clause Cat</masterLabel>
  </ClauseCatgConfiguration>
```

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

SEE ALSO:

Set Up and Maintain Net Zero Cloud: Add a Disclosure Clause Category

DisclosureDefinition

Represents information that defines a disclosure type, such as details of the publisher or vendor who created or implemented the report.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

DisclosureDefinition components have the suffix .disclosureDefinition and are stored in the disclosureDefinitions folder.

Version

DisclosureDefinition components are available in API version 57.0 and later.

Special Access Rules

The DisclosureAndComplianceHubAddOn license is required to access this object along with user access for the Disclosure Compliance Hub permission set license.

Field Name	Description
description	Field Type
	string
	Description
	The description about the disclosure definition.
disclosureType	Field Type
	string
	Description
	Required.
	The API name of the disclosure type associated with this definition.
isProtected	Field Type
	boolean

Field Name	Description
	Description An auto-generated value that doesn't impact the behavior of the metadata type. The default is false.
masterLabel	Field Type string
	Description
	Required.
	A user-friendly name for DisclosureDefinition, which is defined when the DisclosureDefinition is created.

The following is an example of a DisclosureDefinition component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

SEE ALSO:

Set Up and Maintain Net Zero Cloud: Create a Disclosure Definition

DisclosureDefinitionVersion

Represents the version information about the disclosure definition.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

DisclosureDefinitionVersion components have the suffix .disclosureDefinitionVersion and are stored in the disclosureDefinitionVersions folder.

Version

DisclosureDefinitionVersion components are available in API version 57.0 and later.

Special Access Rules

The DisclosureAndComplianceHubAddOn and OmniStudioDesignerAddon licenses are required to access this object along with user access for the Disclosure Compliance Hub and OmniStudio Admin permission set licenses.

Field Name	Description
description	Field Type string
	Description The description about the disclosure definition version.
disclosureDefCurrVer	Field Type string

Field Name	Description
	Description For internal use only.
disclosureDefinition	Field Type string
	Description
	Required.
	The API name of the disclosure definition associated with this version.
isActive	Field Type boolean
	Description Indicates whether the disclosure definition version is an active version (true) or not (false).
	The default value is false.
isCurrentVersion	Field Type boolean
	Description Indicates whether this is the current version of the disclosure definition specified in the disclosureDefinition field (true) or not (false).
	The default value is false.
isProtected	Field Type boolean
	Description
	An auto-generated value that doesn't impact the behavior of the metadata type. The default is false.
masterLabel	Field Type string
	Description
	Required.
	A user-friendly name for DisclosureDefinitionVersion, which is defined when the DisclosureDefinitionVersion is created.
omniScriptCnfgApiName	Field Type
	string
	Description
	Required.

Field Name	Description
	The API name of the OmniScript configuration that's associated with the disclosure definition version.
omniScriptConfiguration	Field Type string
	Description The ID of the OmniScript configuration record.
	Note: The value of this field is automatically populated using the API name of the OmniScript configuration specified in the omniScriptCnfgApiName field.
versionNumber	Field Type string
	Description
	Required.
	The version of the disclosure definition published by the author.

The following is an example of a DisclosureDefinitionVersion component.

The following is an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package
xmlns="http://soap.sforce.com/2006/04/metadata">
<fullName>Pkg</fullName>
<types>
<members>GRI</members>
<name>DisclosureDefinitionVersion</name>
```

```
</types>
<types>
<members>df10</members>
  <name>DisclosureDefinition</name>
</types>
<types>
  <members>dt10</members>
  <name>DisclosureType</name>
</types>
<version>57.0</version>
</Package>
```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

SEE ALSO:

Set Up and Maintain Net Zero Cloud: Add Disclosure Definition Version Information

DisclosureType

Represents the types of disclosures that are done by an individual or an organization and the associated metadata.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

DisclosureType components have the suffix .disclosureType and are stored in the disclosureTypes folder.

Version

DisclosureType components are available in API version 57.0 and later.

Special Access Rules

The DisclosureAndComplianceHubAddOn license is required to access this object along with user access for the Disclosure Compliance Hub permission set license.

Field Name	Description
description	Field Type
	string
	Description
	The description about the disclosure type.
disclosureBodyLogo	Field Type
	string
	Description
	The logo ID of the standard body to which an individual or a company is making a disclosure.
disclosureBodyUrl	Field Type
	string
	Description
	The URL of the disclosure standard body.
disclosureCategory	Field Type
	string
	Description
	Required.
	The name of the clause category that's used for disclosure.
isProtected	Field Type
	boolean
	Description
	An auto-generated value that doesn't impact the behavior of the metadata type. The
	default is false.
masterLabel	Field Type
	string
	Description
	Required.
	A user-friendly name for DisclosureType, which is defined when the DisclosureType is created.

The following is an example of a DisclosureType component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

SEE ALSO:

Set Up and Maintain Net Zero Cloud: Create a Disclosure Type

FuelType

Represents a custom fuel type in an org.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

FuelType components have the suffix .fuelType and are stored in the fuelTypes folder.

Version

FuelType components are available in API version 57.0 and later.

Special Access Rules

The Net Zero Cloud permission set license is required to access this object along with the user access for carbon accounting and org access for custom fuels and unit of measures (UOMs).

Field Name	Description
description	Field Type
	string
	Description
	Description about the fuel type.
isActive	Field Type
	boolean
	Description
	Indicates whether the fuel type is active (true) or not (false).
	The default value is false.
isProtected	Field Type
	boolean
	Description
	An auto-generated value that doesn't impact the behavior of the metadata type.
	The default value is false.
isStationaryAssetFuel	Field Type
	boolean
	Description
	Indicates whether the fuel type is used in stationary assets (true) or not (false).
	The default value is false.

Field Name	Description
isVehicleAssetFuel	Field Type boolean
	Description Indicates whether the fuel type is used in a vehicle asset (true) or not (false). The default value is false.
masterLabel	Field Type string
	Description
	Required.
	A user-friendly name for FuelType, which is defined when the FuelType is created.

The following is an example of a FuelType component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

FuelTypeSustnUom

Represents a mapping between the custom fuel types and their corresponding unit of measure (UOM) values defined by a customer in an org.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

FuelTypeSustnUom components have the suffix .fuelTypeSustnUom and are stored in the fuelTypeSustnUoms folder.

Version

FuelTypeSustnUom components are available in API version 57.0 and later.

Special Access Rules

The Net Zero Cloud permission set license is required to access this object along with the user access for carbon accounting and org access for custom fuels and UOMs.

Field Name	Description
fuelType	Field Type string
	Description
	Required.
	The name of the fuel type that's mapped to the unit of measure.
	Possible values are:
	• AutogasLPG
	• Biodiesel
	• Biomass
	• CityGas
	 CompressedNaturalGasCNG
	• Cooling
	• Diesel
	• Electricity

Field Name	Description
	• Ethanol
	• FuelOil
	• Gasoline
	• Heat
	• HeavyOil
	ITElectricity
	• JetFuel
	• Kerosene
	• LightOil
	• LiquidNaturalGasLNG
	• MobileDiesel
	• NaturalGas
	• Propane
	• Refrigerant
	• Steam
isProtected	Field Type
	boolean
	Description
	An auto-generated value that doesn't impact the behavior of the metadata type.
	The default value is false.
masterLabel	Field Type
	string
	Description
	A user-friendly name for FuelTypeSustnUom, which is defined when the
	FuelTypeSustnUom is created.
unitOfMeasure	Field Type
	string
	Description
	Required.
	The unit of measure that's mapped to the fuel type.
	Possible values are:
	• 1000m3
	• GJ
	• GWh
	• Kiloliters
	• Liters

Field Name	Description
	• MJ
	• MMBtu
	• MWh
	• Therms
	• Tonnes
	• UkGallons
	• UsGallons
	• ccf
	• kG
	• kWh
	• kcal
	• lbs
	• longTons
	• m3
	• shortTons

The following is an example of a FuelTypeSustnUom component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

IndustriesSettings

Represents settings for Net Zero Cloud.

This type extends the Metadata metadata type and inherits its fullName field.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. Because changing terms in our code can break current implementations, we maintained this metadata type's name.

In the package manifest, all organization settings metadata types are accessed using the Settings name. See Settings for more details.

File Suffix and Directory Location

Industries Settings are stored in a single file named Industries.settings in the settings directory.

Version

Industries settings for Net Zero Cloud are available in API version 54.0 and later.

Special Access Rules

Users need Net Zero Cloud permissions to access the settings available in editions with the Net Zero Cloud Starter and Net Zero Cloud Growth licenses.

Fields for Net Zero Cloud

Field Name	Description
enableGnrcDisclsFrmwrk	Field Type boolean
	Description Indicates whether the Industries Disclosure and Compliance Hub feature is enabled (true) or not (false) for your org. The default is false. Available in API version 57.0 and later in editions where Disclosure and Compliance Hub is enabled.
enableMaterialityAssessment	Field Type boolean
	Description Indicates whether the Manage Materiality Assessments feature is enabled for your org. The default is false. Available in API version 59.0 and later in editions where Net Zero Cloud is enabled.

Field Name	Description
enableNZCMngEsgPgm	Field Type boolean
	Description Indicates whether the Manage Environmental, Social, and Governance Programs feature is enabled for your org. The default is false. Available in API version 59.0 and later in editions where Net Zero Cloud is enabled.
enableSCAssignFootprint	Field Type boolean
	Description Indicates whether the Assign Carbon Footprint to Energy Use Records feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCBEIEnabled	Field Type boolean
	Description Indicates whether the Manage Building Energy Intensity feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCCarbonAccounting	Field Type boolean
	Description Indicates whether the Manage Carbon Accounting feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCCarbonCreditAlloc	Field Type boolean
	Description Indicates whether the Allocate Carbon Credits to offset the unavoidable emissions feature is enabled for your org. The default is false. Available in API version 56.0 and later in editions where Net Zero Cloud is enabled.
enableSCCreateFootprint	Field Type boolean
	Description Indicates whether the Auto-Create Carbon Footprints feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.

Field Name	Description
enableSCDGF	Field Type boolean
	Description Indicates whether the Manage Data Gaps feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCExpansionUseCase	Field Type boolean
	Description Indicates whether the Manage Carbon Accounting for Extended Organizational Boundaries feature is enabled for your org. The default is false. Available in API version 57.0 and later in editions where Net Zero Cloud is enabled.
enableSCExternalEngMgmt	Field Type boolean
	Description Indicates whether the Manage Supplier Sustainability Data feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCEmssnsForecasting	Field Type boolean
	Description Indicates whether the Manage Carbon Emissions Forecast feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCSNGManagement	Field Type boolean
	Description Indicates whether the Manage Social and Governance feature is enabled for your org. The default is false. Available in API version 57.0 and later in editions where Net Zero Cloud is enabled.
enableSCScope3HubEnabled	Field Type boolean
	Description Indicates whether the Manage Scope 3 Procurement Hub feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.

Field Name	Description
enableSCTargetSetting	Field Type boolean
	Description Indicates whether the Manage Emissions Target feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCWasteManagement	Field Type boolean
	Description Indicates whether the Manage Waste-Related Data feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.
enableSCWaterManagement	Field Type boolean
	Description Indicates whether the Manage Water-Related Data feature is enabled for your org. For example, water consumption, withdrawal, and discharge. The default is false. Available in API version 56.0 and later in editions where Net Zero Cloud is enabled.
enableSustainabilityCloud	Field Type boolean
	Description Indicates whether the Net Zero Cloud feature is enabled for your org. The default is false. Available in API version 54.0 and later in editions where Net Zero Cloud is enabled.

The following is an example of a Industries. Settings metadata file.

```
<enableSCEmssnsForecasting>true</enableSCEmssnsForecasting>
<enableSCTargetSetting>true</enableSCTargetSetting>
<enableSCExternalEngMgmt>true</enableSCExternalEngMgmt>
<enableSCWasteManagement>true</enableSCWasteManagement>
<enableSCWaterManagement>true</enableSCWaterManagement>
<enableSustainabilityCloud>true</enableSustainabilityCloud>
</IndustriesSettings>
```

The following is an example package.xml that references the previous definition.

SEE ALSO:

Set Up and Maintain Net Zero Cloud: Enable Net Zero Cloud Settings

SustnUomConversion

Represents information about the unit of measure (UOM) conversion for the custom fuel types defined by a customer in an org.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

SustnUomConversion components have the suffix sustnUomConversion and are stored in the sustnUomConversions folder.

Version

SustnUomConversion components are available in API version 57.0 and later.

Special Access Rules

The Net Zero Cloud permission set license is required to access this object along with the user access for carbon accounting and org access for custom fuels and UOMs.

Field Name	Description
conversionFactor	Field Type double
	Description
	Required.
	The conversion factor that's used to convert values from one unit of measure to another for the fuel type.
fuelType	Field Type string
	Description
	The name of the fuel type.
	Possible values are:
	• AutogasLPG
	• Biodiesel
	• Biomass
	• CityGas
	• CompressedNaturalGasCNG
	• Cooling
	• Diesel
	• Electricity
	• Ethanol
	• FuelOil
	• Gasoline
	• Heat
	• HeavyOil
	• ITElectricity
	• JetFuel
	• Kerosene
	• LightOil
	• LiquidNaturalGasLNG
	• MobileDiesel
	• NaturalGas
	• Propane
	• Refrigerant
	• Steam

Field Name	Description
isProtected	Field Type
	boolean
	Description
	An auto-generated value that doesn't impact the behavior of the metadata type.
	The default value is false.
masterLabel	Field Type
	string
	Description
	A user-friendly name for SustnUomConversion, which is defined when the SustnUomConversion is created.
sourceUom	Field Type string
	Description
	Required.
	The source unit of measure for the fuel type.
	Possible values are:
	• 1000m3
	• GJ
	• GWh
	• Kiloliters
	• Liters
	• MJ
	• MMBtu
	• MWh
	• Therms
	• Tonnes
	• UkGallons
	• UsGallons
	• ccf
	• kG
	• kWh
	• kcal
	• lbs
	• longTons
	• m3
	• shortTons

Field Name	Description
targetUom	Field Type string
	Description
	Required.
	The target unit of measure for the fuel type.
uomsKey	Field Type string
	Description The key associated with a unit of measure for the fuel type.

The following is an example of a SustnUomConversion component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

SustainabilityUom

Represents the unit of measure (UOM) values for custom fuel types in an org. Track fuel consumption and emission results with the flexibility to add custom fuel types and UOM values.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the Metadata metadata type and inherits its fullName field.

File Suffix and Directory Location

SustainabilityUom components have the suffix .sustainabilityUom and are stored in the sustainabilityUoms folder.

Version

SustainabilityUom components are available in API version 56.0 and later.

Special Access Rules

The Net Zero Cloud permission set license is required to access this object along with the user access for carbon accounting and org access for custom fuels and UOMs.

Field Name	Description
description	Field Type string
	Description The description of the unit of measure.
isProductUom	Field Type boolean
	Description
	Indicates whether the unit of measure is for a product that the company has procured in its supply chain operations (true) or not (false).
	The default value is false.
isProtected	Field Type
	boolean

Field Name	Description
	Description An auto-generated value that doesn't impact the behavior of the metadata type. The default value is false.
isStationaryAssetUom	Field Type boolean
	Description
	Indicates whether the unit of measure is used in the stationary asset calculations (true) or (false).
	The default value is false.
isVehicleAssetUom	Field Type boolean
	Description Indicates whether the unit of measure is used in the vehicle asset calculations (true) or (false).
	The default value is false.
masterLabel	Field Type string
	Description
	Required.
	The label assigned to this object.
unitType	Field Type UnitType (enumeration of type string)
	Description
	Required.
	The type of unit used for conversions or calculations.
	Values are:
	• Energy
	• Other
	• Volume
	• Weight

The following is an example of a SustainabilityUom component.

The following is an example package.xml that references the previous definition.

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see Deploying and Retrieving Metadata with the Zip File.

CHAPTER 6 Net Zero Cloud Tooling API Objects

In this chapter ...

- BldgEnrgyIntensityCnfg
- ClauseCatgConfiguration
- DisclosureDefinition
- DisdosureDefinitionVersion
- DisclosureType
- FuelTypeSustnUom
- FuelType
- StnryAssetEnvSrcCnfg
- SustainabilityUom
- SustnUomConversion
- VehideAssetEmssnSrcCnfg

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata. For more information about Tooling API objects and to find a complete reference of all the supported objects, see **Introducing Tooling API**.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

BldgEnrgyIntensityCnfg

Represents the setup object that contains the mapping between the Building Energy Intensity Record record type and internal enums. You can primarily use this object for calculations across different record types. This object is available in API version 54.0 and later.

Supported SOAP API Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Fields

Field Details

BuildingEnergyIntensityType

Type

picklist

Properties

Create, Filter, Group, Restricted picklist, Sort, Update

Description

The type of the Building Energy Intensity Record record.

Possible values are:

- BuildingEnergyIntensity—Building Energy Intensity
- RegionalBuildingEnergyIntensity—Regional Building Energy Intensity

DeveloperName

Type

string

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. This field is automatically generated, but you can supply your own value if you create the record using the API.



Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may slow while Salesforce generates one for each record.

Field	Details
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language of building energy intensity record type.
	Possible values are:
	• da—Danish
	• de—German
	en_US—English
	• es—Spanish
	• es_MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
ManageableState	Туре
	picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the specified component that is contained in a package.
	Possible values are:
	• beta—Managed-Beta
	 deleted—Managed-Proposed-Deleted
	 deprecated—Managed-Proposed-Deprecated
	 deprecatedEditable—SecondGen-Installed-Deprecated
	• installed—Managed-Installed

Field	Details
	 installedEditable—SecondGen-Installed-Editable
	• released—Managed-Released
	unmanaged—Unmanaged
MasterLabel	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The UI label of building energy intensity configuration.
NamespacePrefix	Туре
	string
	Properties Filter, Group, Nillable, Sort
	The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix_componentName notation.
RecordTypeId	Type reference
	Properties
	Create, Filter, Group, Sort, Update
	Description The unique identifier of the Building Energy Intensity Record record type.
	This is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType

${\bf Clause Catg Configuration}$

Represents the configuration about the clause category that can be used in a response document by the user. This object is available in API version 57.0 and later.



(Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The description about the clause category configuration.
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The unique name for the ClauseCatgConfiguration object
	The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name . This field is automatically generated, but you can supply your own value if you create the record using the API.
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language of the ClauseCatgConfiguration.
	Possible values are:

Field	Details
	• da—Danish
	• de—German
	• en_US—English
	• es—Spanish
	• es_MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	zh_TW—Chinese (Traditional)
ManageableState	Туре
	ManageableState enumerated list
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the specified component that is contained in a package:
	• beta
	• deleted
	• deprecated
	• deprecatedEditable
	• installed
	• installedEditable
	• released
	• unmanaged
MasterLabel	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update

Field	Details
	Description Label for the ClauseCatgConfiguration.
NamespacePrefix	Туре
	string
	Properties Filter, Group, Nillable, Sort
	Description
	The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix componentName notation.
	The namespace prefix can have one of the following values:
	 In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
	 In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.
UsageType	Туре
	picklist
	Properties
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The usage type of the clause category.
	Possible values are:
	 ContractClauseCategory—Contract Clause Category
	DisclosureCategory—Disclosure Category

DisclosureDefinition

Represents information that defines a disclosure type, such as details of the publisher or vendor who created or implemented the report. This object is available in API version 57.0 and later.

(1) Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description about the disclosure definition.
DeveloperName	Type string
	Properties
	Create, Filter, Group, Sort, Update
	Description The developer name of the record.
DisclosureType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of disclosure that's used in the definition.
	Possible values are:
	 1awRN0000000G—Company Disclosure
	• 1awRN0000000L—Demo Type
Language	Туре
	picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language associated with this record.
	Possible values are:

Field	Details

- da—Danish
- de—German
- en US—English
- es—Spanish
- es MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl NL—Dutch
- no—Norwegian
- pt BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh CN—Chinese (Simplified)
- zh TW—Chinese (Traditional)

ManageableState

Type

picklist

Properties

Filter, Group, Nillable, Restricted picklist, Sort

Description

Indicates the manageable state of the specified component that is contained in a package.

Possible values are:

- beta—Managed-Beta
- deleted—Managed-Proposed-Deleted
- deprecated—Managed-Proposed-Deprecated
- deprecatedEditable—SecondGen-Installed-Deprecated
- installed—Managed-Installed
- installedEditable—SecondGen-Installed-Editable
- released—Managed-Released
- unmanaged—Unmanaged

MasterLabel

Type

string

Properties

Create, Filter, Group, Sort, Update

Field	Details
	Description The label assigned to this object.
NamespacePrefix	Type string
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix that is associated with this object. Limit: 15 characters.

DisclosureDefinitionVersion

Represents the version information about the disclosure definition. This object is available in API version 57.0 and later.

(1) Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
Description	Туре
	textarea
	Properties Create, Nillable, Update
	Description The description of the disclosure definition version.
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update

Description

The unique name for the DisclosureDefinitionVersion object.

The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is **Record Type Name**. This field is automatically generated, but you can supply your own value if you create the record using the API

DisclosureDefinitionId

Type

reference

Properties

Create, Filter, Group, Sort, Update

Description

The name of the disclosure definition associated with the version.

This field is a relationship field.

Relationship Name

DisclosureDefinition

Relationship Type

Lookup

Refers To

DisclosureDefinition

IsActive

Type

boolean

Properties

Create, Defaulted on create, Filter, Group, Sort, Update

Description

Indicates whether the disclosure definition version is an active version (true) or not (false).

The default value is false.

IsCurrentVersion

Type

boolean

Properties

Create, Defaulted on create, Filter, Group, Sort, Update

Description

Indicates whether this is the current version of the disclosure definition (true) or not (false).

The default value is false.

Field	Details
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The language of the DisclosureDefinitionVersion.
	Possible values are:
	• da—Danish
	• de—German
	• en_US—English
	• es—Spanish
	es_MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	• no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
ManageableState	Туре
	ManageableState enumerated list
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the specified component that is contained in a package:
	• beta
	• deleted
	• deprecated
	• deprecatedEditable
	• installed
	• installedEditable
	• released

Field	Details
	• unmanaged
MasterLabel	Type
	string
	Properties Create, Filter, Group, Sort, Update
	Description
	Label for the DisclosureDefinitionVersion.
NamespacePrefix	Type string
	Properties
	Filter, Group, Nillable, Sort
	Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix_componentName notation.
	The namespace prefix can have one of the following values:
	 In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
	 In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.
OmniScriptCnfgApiName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description The API name of the OmniScript configuration that's associated with the disclosure definition version.
OmniScriptConfiguration	Type string
	Properties Filter, Group, Nillable, Sort
	Description The OmniScript configuration that's associated with the disclosure definition version.

Field	Details
VersionNumber	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The version of the disclosure definition published by the author.

DisclosureType

Represents the types of disclosures that are done by an individual or an organization and the associated metadata. This object is available in API version 57.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description about the disclosure type.
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The unique name for the DisclosureType object.

Field	Details
	The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name . This field is automatically generated, but you can supply your own value if you create the record using the API.
DisclosureBodyLogoId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description
	The logo of the standard body to which an individual or a company is making a disclosure.
	This field is a relationship field.
	Relationship Name DisclosureBodyLogo
	Relationship Type Lookup
	Refers To StaticResource
DisclosureBodyUrl	Type url
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The URL of the disclosure standard body.
DisclosureCategory	Туре
	picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description
	The name of the clause library category that's used for disclosure.
	Possible values are:
	• 0zMRN00000001—ESG
	EnvSocGvnc—Environment, Social, and Governance
Language	Туре
	picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The language of the DisclosureType.

Possible values are:

- da—Danish
- de—German
- en US—English
- es—Spanish
- es MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl NL—Dutch
- no—Norwegian
- pt BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh CN—Chinese (Simplified)
- zh TW—Chinese (Traditional)

ManageableState

Type

ManageableState enumerated list

Properties

Filter, Group, Nillable, Restricted picklist, Sort

Description

Indicates the manageable state of the specified component that is contained in a package:

- beta
- deleted
- deprecated
- deprecatedEditable
- installed
- installedEditable
- released
- unmanaged

Field	Details	
MasterLabel	Type string	
	Properties Control of the Land	
	Create, Filter, Group, Sort, Update	
	Description Label for the DisclosureType.	
NamespacePrefix	Type string	
	Properties Filter, Group, Nillable, Sort	
	Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix componentName notation.	
	The namespace prefix can have one of the following values:	
	 In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer. In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects. 	

FuelTypeSustnUom

Represents a mapping between the additional fuel types and their corresponding unit of measure values defined by a customer. This object is available in API version 57.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description The unique name for the FuelTypeSustnUom object.
	The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name . This field is automatically generated, but you can supply your own value if you create the record using the API.
FuelType	Type
	picklist
	Properties Croate Filter Group Postricted picklist Sort Undate
	Create, Filter, Group, Restricted picklist, Sort, Update
	Description The name of the fuel type that's mapped to the unit of measure.
	Possible values are:
	AutogasLPG—Autogas/LPG
	Biodiesel
	• Biomass
	• CityGas—City Gas
	 CompressedNaturalGasCNG—Compressed Natural Gas (CNG)
	• Cooling
	• Diesel
	• Electricity
	• Ethanol
	• FuelOil—FuelOil
	• Gasoline
	• Heat
	• HeavyOil—HeavyOil
	ITElectricity—IT Electricity
	• JetFuel—JetFuel
	• Kerosene

Field	Details
	LightOil—Light Oil
	 LiquidNaturalGasLNG—Liquefied Natural Gas (LNG)
	 MobileDiesel—Mobile Diesel
	 NaturalGas—Natural Gas
	• Propane
	• Refrigerant
	• Steam
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language of the FuelTypeSustnUom.
	Possible values are:
	• da—Danish
	• de—German
	en_US—English
	• es—Spanish
	es_MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	• no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	zh_TW—Chinese (Traditional)
ManageableState	Туре
	ManageableState enumerated list
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort

Description

Indicates the manageable state of the specified component that is contained in a package:

- beta
- deleted
- deprecated
- deprecatedEditable
- installed
- installedEditable
- released
- unmanaged

MasterLabel

Type

string

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

Label for the FuelTypeSustnUom.

NamespacePrefix

Type

string

Properties

Filter, Group, Nillable, Sort

Description

The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the

namespacePrefix__componentName notation.

The namespace prefix can have one of the following values:

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix
 of the organization for all objects that support it. There is an exception if an object is in
 an installed managed package. In that case, the object has the namespace prefix of the
 installed managed package. This field's value is the namespace prefix of the Developer
 Edition organization of the package developer.
- In organizations that are not Developer Edition organizations, NamespacePrefix
 is only set for objects that are part of an installed managed package. There is no
 namespace prefix for all other objects.

UnitOfMeasure

Туре

picklist

Properties

Create, Filter, Group, Restricted picklist, Sort, Update

Field	Details

Description

The name for the unit of measure that's mapped to the fuel type.

Possible values are:

- 1000m3—1000 m3
- GJ
- GWh
- Kiloliters
- Liters
- MJ
- MMBtu
- MWh
- Therms
- Tonnes
- UkGallons—UK Gallons
- UsGallons—USGallons
- ccf
- kG—kg
- kWh
- kcal
- lbs
- longTons—long tons
- m3
- shortTons—short tons

FuelType

Represents information about the additional fuel types defined by a customer. This object is available in API version 57.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description The description of the fuel type.
DeveloperName	Туре
	string
	Properties Create, Filter, Group, Sort, Update
	Description The unique name for the FuelType object.
	The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name . This field is automatically generated, but you can supply your own value if you create the record using the API.
IsActive	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the fuel type is active and can be used (true) or not (false).
	The default value is false.
IsStationaryAssetFuel	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the fuel is used in stationary assets (true) or not (false).
	The default value is false.
IsVehicleAssetFuel	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the fuel is used in a vehicle asset (true) or not (false).
	The default value is false.
Language	Туре
	picklist
	Properties
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language of the FuelType.
	Possible values are:
	• da—Danish
	• de—German
	• en US—English
	• es—Spanish
	• es MX—Spanish (Mexico)
	• fi—Finnish
	• fr—French
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	• no—Norwegian
	• pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
ManageableState	Type ManageableState enumerated list
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the specified component that is contained in a package:
	• beta

Field	Details
	• deleted
	• deprecated
	 deprecatedEditable
	• installed
	• installedEditable
	• released
	• unmanaged
MasterLabel	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	Label for the FuelType.
NamespacePrefix	Туре
	string
	Properties
	Filter, Group, Nillable, Sort
	Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix_componentName notation.
	The namespace prefix can have one of the following values:
	 In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.

StnryAssetEnvSrcCnfg

Represents the setup object that contains the mapping between the Stationary Asset Environmental Source record type and internal enums. You can primarily use this object for calculations across different record types. This object is available in API version 54.0 and later.

namespace prefix for all other objects.

In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no

Supported SOAP API Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Special Access Rules

Field	Details	
DeveloperName	Type string	
	Properties Create, Filter, Group, Nillable, Sort, Update	
	Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated, but you can supply your own value if you create the record using the API.	
	Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may be slow while Salesforce generates one for each record.	
Language	Type picklist	
	Properties	
	Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update	
	Description The language associated with this object.	
	Possible values are:	
	• da—Danish	
	• de—German	
	• en_US—English	
	• es—Spanish	
	• es_MX—Spanish (Mexico)	
	• fi—Finnish	
	• fr—French	

Field	Details
	• it—Italian
	• ja—Japanese
	• ko—Korean
	• nl_NL—Dutch
	no—Norwegian
	pt_BR—Portuguese (Brazil)
	• ru—Russian
	• sv—Swedish
	• th—Thai
	• zh_CN—Chinese (Simplified)
	• zh_TW—Chinese (Traditional)
ManageableState	Туре
	picklist
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the flow that is contained in a package.
	Possible values are:
	• beta—Managed-Beta
	• deleted—Managed-Proposed-Deleted
	• deprecated—Managed-Proposed-Deprecated
	• deprecatedEditable—SecondGen-Installed-Deprecated
	• installed—Managed-Installed
	• installedEditable—SecondGen-Installed-Editable
	• released—Managed-Released
	• unmanaged—Unmanaged
MasterLabel	Type string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The label assigned to this object.
NamespacePrefix	Туре
	string
	Properties
	Filter, Group, Nillable, Sort

Field	Details
	Description The namespace prefix that is associated with this object. Limit: 15 characters.
RecordTypeId	Type reference
	Properties Create, Filter, Group, Sort, Update
	Description The ID of the record type entity.
	This is a relationship field.
	Relationship Name RecordType
	Relationship Type Lookup
	Refers To RecordType
StationaryAssetType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of stationary asset.
	Possible values are:
	CommercialBuilding—Commercial Building
	• DataCenter—Data Center

SustainabilityUom

Represents information about the additional unit of measure values defined by a customer. This object is available in API version 56.0 and later.

Supported SOAP API Calls

create(), delete(), describeLayout(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Special Access Rules

Field	Details
Description	Туре
	string
	Properties
	Create, Filter, Group, Nillable, Sort, Update
	Description
	The description of the unit of measure.
DeveloperName	Туре
	string
	Properties
	Create, Filter, Group, Sort, Update
	Description
	The developer name of the record.
IsProductUom	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the unit of measure is for a product that the company has procured in its
	supply chain operations (true) or not (false).
	The default value is false.
IsStationaryAssetUom	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update
	Description
	Indicates whether the unit of measure is used in the stationary asset calculations (true) or
	(not).
	The default value is false.
IsVehicleAssetUom	Туре
	boolean
	Properties
	Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether the unit of measure is used in vehicle asset calculations (true) or (not). The default value is false.
Language	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description
	The language associated with this object.
	Possible values are:
	• af—Afrikaans
	am—Amharic
	• ar—Arabic
	 ar AE—Arabic (United Arab Emirates)
	■ ar BH—Arabic (Bahrain)
	■ ar DZ—Arabic (Algeria)
	• ar EG—Arabic (Egypt)
	• ar IQ—Arabic (Iraq)
	• ar JO—Arabic (Jordan)
	• ar KW—Arabic (Kuwait)
	• ar LB—Arabic (Lebanon)
	• ar LY—Arabic (Libya)
	• ar MA—Arabic (Morocco)
	ar_OM—Arabic (Oman)
	ar_QA—Arabic (Qatar)
	 ar SA—Arabic (Saudi Arabia)
	ar_SD—Arabic (Sudan)
	ar_SY—Arabic (Syria)
	ar_TN—Arabic (Tunisia)
	ar_YE—Arabic (Yemen)
	• bg—Bulgarian
	• bn—Bengali
	• bs—Bosnian
	• ca—Catalan
	• cs—Czech
	• cy—Welsh
	• da—Danish

- de—German
- de AT—German (Austria)
- de BE—German (Belgium)
- de CH—German (Switzerland)
- de LU—German (Luxembourg)
- el—Greek
- el CY—Greek (Cyprus)
- en AE—English (United Arab Emirates)
- en AU—English (Australian)
- en BE—English (Belgium)
- en CA—English (Canadian)
- en_CY—English (Cyprus)
- en DE—English (Germany)
- en GB—English (UK)
- en HK—English (Hong Kong)
- en IE—English (Ireland)
- en IL—English (Israel)
- en IN—English (Indian)
- en MT—English (Malta)
- en MY—English (Malaysian)
- en NL—English (Netherlands)
- en NZ—English (New Zealand)
- en PH—English (Phillipines)
- en_SG—English (Singapore)
- en US—English
- en ZA—English (South Africa)
- eo—Esperanto (Pseudo)
- es—Spanish
- es AR—Spanish (Argentina)
- es BO—Spanish (Bolivia)
- es CL—Spanish (Chile)
- es co—Spanish (Colombia)
- es CR—Spanish (Costa Rica)
- es DO—Spanish (Dominican Republic)
- es EC—Spanish (Ecuador)
- es GT—Spanish (Guatemala)
- es HN—Spanish (Honduras)
- es MX—Spanish (Mexico)

Field	Details
-------	---------

- es NI—Spanish (Nicaragua)
- es PA—Spanish (Panama)
- es PE—Spanish (Peru)
- es PR—Spanish (Puerto Rico)
- es PY—Spanish (Paraguay)
- es SV—Spanish (El Salvador)
- es US—Spanish (United States)
- es UY—Spanish (Uruguay)
- es VE—Spanish (Venezuela)
- et—Estonian
- eu—Basque
- fa—Farsi
- fi—Finnish
- fr—French
- fr_BE—French (Belgium)
- fr_CA—French (Canadian)
- fr_CH—French (Switzerland)
- fr_LU—French (Luxembourg)
- fr MA—French (Morocco)
- ga—Irish
- gu—Gujarati
- haw—Hawaiian
- hi—Hindi
- hmn—Hmong
- hr—Croatian
- ht—Haitian Creole
- hu—Hungarian
- hy—Armenian
- in—Indonesian
- is—Icelandic
- it—Italian
- it_CH—Italian (Switzerland)
- iw—Hebrew
- iw_EO—Esperanto RTL (Pseudo)
- ja—Japanese
- ji—Yiddish
- ka—Georgian
- kk—Kazakh

- k1—Greenlandic
- km—Khmer
- kn—Kannada
- ko—Korean
- 1b—Luxembourgish
- lt—Lithuanian
- lv—Latvian
- mi—Te reo
- mk—Macedonian
- ml—Malayalam
- mr—Marathi
- ms—Malay
- mt—Maltese
- my—Burmese
- n1_BE—Dutch (Belgium)
- nl NL—Dutch
- no—Norwegian
- pa—Punjabi
- pl—Polish
- pt_BR—Portuguese (Brazil)
- pt PT—Portuguese (European)
- rm—Romansh
- ro—Romanian
- ro MD—Romanian (Moldova)
- ru—Russian
- ru AM—Russian (Armenia)
- ru BY—Russian (Belarus)
- ru_KG—Russian (Kyrgyzstan)
- ru KZ—Russian (Kazakhstan)
- ru_LT—Russian (Lithuania)
- ru_MD—Russian (Moldova)
- ru_PL—Russian (Poland)ru_UA—Russian (Ukraine)
- sh—Serbian (Latin)
- sh ME—Montenegrin
- sk—Slovak
- s1—Slovene
- sm—Samoan

Field	Details
	• sq—Albanian
	• sr—Serbian (Cyrillic)
	• sv—Swedish
	• sw—Swahili
	• ta—Tamil
	• te—Telugu
	• th—Thai
	• tl—Tagalog
	• tr—Turkish
	• uk—Ukrainian
	• ur—Urdu
	• vi—Vietnamese
	• xh—Xhosa
	zh_CN—Chinese (Simplified)
	• zh_HK—Chinese (Hong Kong)
	• zh_MY—Chinese (Malaysia)
	zh_SG—Chinese (Singapore)
	• zh_TW—Chinese (Traditional)
	• zu—Zulu
ManageableState	Type picklist
	Properties
	Filter, Group, Nillable, Restricted picklist, Sort
	Description
	Indicates the manageable state of the flow that is contained in a package.
	Possible values are:
	• beta—Managed-Beta
	 deleted—Managed-Proposed-Deleted
	 deprecated—Managed-Proposed-Deprecated
	 deprecatedEditable—SecondGen-Installed-Deprecated
	• installed—Managed-Installed
	 installedEditable—SecondGen-Installed-Editable
	• released—Managed-Released
	• unmanaged—Unmanaged
MasterLabel	Туре
	string

Field	Details
	Properties Create, Filter, Group, Sort, Update Description
	The label assigned to this object.
NamespacePrefix	Type string
	Properties Filter, Group, Nillable, Sort
	Description The namespace prefix that is associated with this object.
UnitType	Type picklist
	Properties Create, Filter, Group, Restricted picklist, Sort, Update
	Description The type of unit used for conversions or calculations.
	Possible values are:
	• Energy
	• Other
	• Volume
	• Weight

SustnUomConversion

Represents information about the unit of measure conversion for the additional fuel types defined by a customer. This object is available in API version 57.0 and later.

Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Field	Details
ConversionFactor	Type double
	Properties Create, Filter, Sort, Update
	Description The conversion factor that's used to convert values from one unit of measure to another for the fuel type.
DeveloperName	Type string
	Properties Create, Filter, Group, Sort, Update
	Description The unique name for the SustnUomConversion object.
	The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is Record Type Name . This field is automatically generated, but you can supply your own value if you create the record using the API.
FuelType	Type
	picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The name of the fuel type.
	Possible values are:
	AutogasLPG—Autogas/LPG
	• Biodiesel
	• Biomass
	• CityGas—City Gas
	 CompressedNaturalGasCNG—Compressed Natural Gas (CNG)
	• Cooling
	• Diesel
	• Electricity
	• Ethanol

- FuelOil—FuelOil
- Gasoline
- Heat
- HeavyOil—Heavy Oil
- ITElectricity—IT Electricity
- JetFuel—JetFuel
- Kerosene
- LightOil—Light Oil
- LiquidNaturalGasLNG—Liquefied Natural Gas (LNG)
- MobileDiesel—Mobile Diesel
- NaturalGas—NaturalGas
- Propane
- Refrigerant
- Steam

Language

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The language of the SustnUomConversion.

Possible values are:

- da—Danish
- de—German
- en US—English
- es—Spanish
- es MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai

Details Field zh CN—Chinese (Simplified) zh TW—Chinese (Traditional) ManageableState Type ManageableState enumerated list **Properties** Filter, Group, Nillable, Restricted picklist, Sort Indicates the manageable state of the specified component that is contained in a package: beta deleted deprecated deprecatedEditable installed installedEditable released unmanaged MasterLabel Type string **Properties** Create, Filter, Group, Nillable, Sort, Update Description Label for the SustnUomConversion. NamespacePrefix Type string **Properties** Filter, Group, Nillable, Sort Description The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix componentName notation. The namespace prefix can have one of the following values: • In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the

Edition organization of the package developer.

installed managed package. This field's value is the namespace prefix of the Developer

Field	Details					
	 In organizations that are not Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects. 					
SourceUom	Туре					
	picklist					
	Properties Create, Filter, Group, Restricted picklist, Sort, Update					
	Description					
	The source unit of measure for the fuel type.					
	Possible values are:					
	• 1000m3—1000 m3					
	• GJ					
	• GWh					
	• Kiloliters					
	• Liters					
	• MJ					
	• MMBtu					
	• MWh					
	• Therms					
	• Tonnes					
	• UkGallons—UK Gallons					
	• UsGallons—US Gallons					
	• ccf					
	• kg—kg					
	• kWh					
	• kcal					
	• lbs					
	longTons—long tons					
	• m3					
	• shortTons—short tons					
TargetUom	Туре					
	picklist					
	Properties Company of the Company of					
	Create, Filter, Group, Restricted picklist, Sort, Update					
	Description					

The target unit of measure for the fuel type.

Possible values are:

Field	Details
	• 1000m3—1000 m3
	• GJ
	• GWh
	• Kiloliters
	• Liters
	• MJ
	• MMBtu
	• MWh
	• Therms
	• Tonnes
	• UkGallons—UK Gallons
	• UsGallons—US Gallons
	• ccf
	• kG—kg
	• kWh
	• kcal
	• lbs
	 longTons—long tons
	• m3
	shortTons—short tons

VehicleAssetEmssnSrcCnfg

Represents the setup object that contains the mapping between the Vehicle Asset Emissions Source record type and internal enums. You can primarily use this object for calculations across different record types. This object is available in API version 54.0 and later.

Supported SOAP API Calls

create(), delete(), describeSObjects(), query(), retrieve(), update(), upsert()

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Fields

Field Details

DeveloperName

Type

string

Properties

Create, Filter, Group, Nillable, Sort, Update

Description

The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. This field is automatically generated, but you can supply your own value if you create the record using the API.



Note: When creating large sets of data, always specify a unique DeveloperName for each record. If no DeveloperName is specified, performance may be slow while Salesforce generates one for each record.

Language

Type

picklist

Properties

Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description

The language of the Vehicle Asset Emissions Source record type.

Possible values are:

- da—Danish
- de—German
- en US-English
- es—Spanish
- es MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh_CN—Chinese (Simplified)

Field	zh_TW—Chinese (Traditional)						
ManageableState	Type picklist						
	Properties						
	Filter, Group, Nillable, Restricted picklist, Sort						
	Description Indicates the manageable state of the specified component that is contained in a package						
	Possible values are:						
	• beta—Managed-Beta						
	 deleted—Managed-Proposed-Deleted 						
	 deprecated—Managed-Proposed-Deprecated 						
	 deprecatedEditable—SecondGen-Installed-Deprecated 						
	• installed—Managed-Installed						
	• installedEditable—SecondGen-Installed-Editable						
	• released—Managed-Released						
	• unmanaged—Unmanaged						
MasterLabel	Туре						
	string						
	Properties						
	Create, Filter, Group, Nillable, Sort, Update						
	Description						
	The UI label of the vehicle asset emissions source configuration.						
NamespacePrefix	Туре						
	string						
	Properties						
	Filter, Group, Nillable, Sort						
	Description						
	The namespace prefix that is associated with this object. Limit: 15 characters.						
RecordTypeId	Type reference						
	Properties Create, Filter, Group, Sort, Update						
	Description The unique identifier of the Vehicle Asset Emissions Source record type.						
	This is a relationship field.						

Field	Details						
	Relationship Name RecordType						
	Relationship Type Lookup						
	Refers To RecordType						
VehicleAssetType	Type picklist						
	Properties Create, Filter, Group, Restricted picklist, Sort, Update						
	Description The type of the Vehicle Asset Emissions Source record type						
	Possible values are:						
	• FleetVehicle—Fleet Vehicle						
	• PrivateJet—PrivateJet						

CHAPTER 7 Net Zero Cloud Calculations

In this chapter ...

- Energy Use Records
- Emissions Factor Records
- Carbon Footprint
- Waste Management
- Water Management
- Science Based Targets
- Emissions Forecasts
- Sustainability
 Scorecard
- Building Size Category
- Building Energy Intensity
- Data Gap Filling
- Allocate Carbon Credits
- Allocate Energy
 Attribute Certificates
- Materiality
 Assessment
- Annual Emissions Inventory
- Disclosures Using Managed Packages
- Conversion Factors

Net Zero Cloud performs background calculations to summarize your carbon footprint. If you know these calculations, you can double-check the values used in the calculations to determine whether any values require modifications based on your organization's methods or situation.

Your carbon footprint is calculated based on the latest greenhouse gas protocol (GHG) guidance.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

Net Zero Cloud Calculations **Energy Use Records**

Energy Use Records

You can calculate emissions based on the emissions factors from the energy use records for each reporting period or reporting unit, such as a commercial building's monthly consumption or a single flight.

Energy use records are used to:

- Enter energy consumption values.
- Calculate scope 1, scope 2, and scope 3 emissions and other energy use metrics based on user-entered energy consumption. Assign custom scopes for the calculated emissions in Stationary Asset Energy Use using the scope allocation entity or the picklist in Vehicle Asset Energy Use entity.
- Determine the calculations performed within the energy use record based on the record type.
- Roll up to carbon footprint records.
- Reference emissions factors objects, including:
 - Electricity Emissions Factor Set
 - Other Emissions Factor Set and Other Emissions Factor Set Item

 - Procurement Emissions Factor Set, Procurement Emissions Factor Set Item, Scope 3 Emissions Factor Set, Air Travel Emissions Factor, Ground Travel Emissions Factor, Hotel Stay Emissions Factor, Freight Hauling Emissions Factor, and Rental Car Emissions Factor
- Reference stationary asset environmental source records for asset information, such as the recorded business region or whether the asset is company-owned. For all record types, Owned Asset is a formula field (read-only) that is set by the status of the Company-Owned Asset field on the associated organization asset record.
- Manually enter Supplemental Scope 1 Emissions, Supplemental Scope 2 Market-Based Emissions, Supplemental Scope 2 Location-Based Emissions, and Supplemental Scope 3 Emissions (tCO2e) on all energy use record types.

Air Travel Energy Use

The Air Travel Energy Use object represents the energy consumption related to air travel.

Freight Hauling Energy Use

The Freight Hauling Energy Use object represents the energy consumption related to freight hauling.

Ground Travel Energy Use

The Ground Travel Energy Use object represents the energy consumption related to ground travel.

Hotel Stay Energy Use

The Hotel Stay Energy Use object represents the energy consumption related to hotel stay.

Rental Car Energy Use

The Rental Car Energy Use object represents the energy consumption related to rental cars.

Stationary Asset Energy Use

The Stationary Asset Energy Use object represents the energy consumption related to stationary assets across multiple fuel types.

Vehicle Asset Energy Use

The Vehicle Asset Energy Use object represents the fuel consumption related to vehicles. The selected emissions factors on the energy use record control the calculation for scope 1 or scope 3 emissions for vehicles depending on whether the asset is company owned.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: Enterprise, Developer, Performance, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Air Travel Energy Use

Scope 3 Procurement Summary

The Scope 3 Procurement Summary object represents the amount that the organization spends for one procurement category. Scope 3 procurement summary quantifies the effect on atmospheric warming, represented in tonnes of carbon dioxide equivalent (tCO_2e) by using a matched emissions factor from an associated Procurement Emissions Factor Item record.

Air Travel Energy Use

The Air Travel Energy Use object represents the energy consumption related to air travel.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Haul Length (HaulLength)

Input Fields

- Air Travel Emissions Factor (AirTravelEmssnFctr)
- Segment Distance (SegmentDistance)
- Segment Distance Unit (SegmentDistanceUnit)

Calculations

If Segment Distance Unit = AirTravelEmssnFctr.Distance Unit then

if Segment Distance < AirTravelEmssnFctr.Short-Haul Maximum Distance, then Haul Length = "Short".

else, if Segment Distance < AirTravelEmssnFctr.Medium-Haul Maximum Distance, then Haul Length = "Medium". else, if Segment Distance > AirTravelEmssnFctr.Long-Haul Minimum Distance, then Haul Length = "Long".

Segment Distance (Miles) (SegmentDistanceInMiles)

Input Fields

- Segment Distance (SegmentDistance)
- Segment Distance Unit (SegmentDistanceUnit)

Calculations

If Segment Distance Unit = "Miles", then Segment Distance (Miles) = Segment Distance.

If Segment Distance Unit = "Kilometers", then Segment Distance (Miles) = Segment Distance/1.60934.

CH4/Passenger-km (kg CO2e) (Ch4PassengerKmInKgCo2e)

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then CH4/Passenger-km (kg CO2e) = AirTravelEmssnFctr.CH4/Passenger-km for Long-Haul (kg CO2e).

If Haul Length = "Medium", then CH4/Passenger-km (kg CO2e) = Air Travel Emssn Fctr. CH4/Passenger-km for Medium-Haul (kg CO2e).

 $If Haul \ Length = \text{``Short''}, then \ CH4/Passenger-km \ (kg \ CO2e) = Air Travel Emssn Fctr. CH4/Passenger-km \ for \ Short-Haul \ (kg \ CO2e).$

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Air Travel Energy Use

CH4/Passenger-mile (kg CO2e) (Ch4PassengerMileInKgCo2e)

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then CH4/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.CH4/Passenger-mile for Long-Haul (kg CO2e).

If Haul Length = "Medium", then CH4/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.CH4/Passenger-mile for Medium-Haul (kg CO2e).

If Haul Length = "Short", then CH4/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.CH4/Passenger-mile for Short-Haul (kg CO2e).

CO2/Passenger-km (kg) (Co2PassengerKmInKg)

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then CO2/Passenger-km (kg) = AirTravelEmssnFctr.CO2/Passenger-km for Long-Haul (kg).

If Haul Length = "Medium", then CO2/Passenger-km (kg) = AirTravelEmssnFctr.CO2/Passenger-km for Medium-Haul (kg).

If Haul Length = "Short", then CO2/Passenger-km (kg) = AirTravelEmssnFctr.CO2/Passenger-km for Short-Haul (kg).

CO2/Passenger-mile (kg) (Co2PassengerMileInKg)

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then CO2/Passenger-mile (kg) = AirTravelEmssnFctr.CO2/Passenger-mile for Long-Haul (kg).

If Haul Length = "Medium", then CO2/Passenger-mile (kg) = AirTravelEmssnFctr.CO2/Passenger-mile for Medium-Haul (kg).

If Haul Length = "Short", then CO2/Passenger-mile (kg) = AirTravelEmssnFctr.CO2/Passenger-mile for Short-Haul (kg).

N2O/Passenger-km (kg CO2e) (N2oPassengerKmInKgCo2e)

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then N2O/Passenger-km (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-km for Long-Haul (kg CO2e).

If Haul Length = "Medium", then N2O/Passenger-km (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-km for Medium-Haul (kg CO2e).

If Haul Length = "Short", then N2O/Passenger-km (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-km for Short-Haul (kg CO2e).

N2O/Passenger-mile (kg CO2e) (N2oPassengerMileInKgCo2e)

Net Zero Cloud Calculations Freight Hauling Energy Use

Input Fields

- Haul Length (HaulLength)
- Air Travel Emissions Factor (AirTravelEmssnFctr)

Calculations

If Haul Length = "Long", then N2O/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-mile for Long-Haul (kg CO2e). If Haul Length = "Medium", then N2O/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-mile for Medium-Haul (kg CO2e).

If Haul Length = "Short", then N2O/Passenger-mile (kg CO2e) = AirTravelEmssnFctr.N2O/Passenger-mile for Short-Haul (kg CO2e).

Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2e)

Input Fields

- CH4/Passenger-mile (kg CO2e) (Ch4PassengerMileInKgCo2e)
- CO2/Passenger-mile (kg) (Co2PassengerMileInKg)
- N2O/Passenger-mile (kg CO2e) (N2oPassengerMileInKgCo2e)
- Segment Distance (Miles) (SegmentDistanceInMiles)
- Supplemental Scope 3 Emissions (SuplScope3Emissions)

Calculations

If Vendor-Provided Emissions (tCO2e)! = 0, then Scope 3 Emissions (tCO2e) = Vendor-Provided Emissions (tCO2e) + SuplScope3Emissions

If Vendor-Provided Emissions (tCO2e) = 0, then Scope 3 Emissions (tCO2e) = [(CO2/Passenger-mile (kg) + N2oPassengerMileInKgCo2e + CH4/Passenger-mile (kg CO2e)) × Segment Distance (Miles)/1000] + Supplemental Scope 3 Emissions

Freight Hauling Energy Use

The Freight Hauling Energy Use object represents the energy consumption related to freight hauling. For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

CH4 Emissions (kg) (Ch4EmissionsInKg)

Input Fields

- Distance (Distance)
- Distance Unit (DistanceUnit)
- Freight Hauling Emissions Factors (FrgtHaulingEmssnFctr)
- Weight (Weight)
- Weight Unit (WeightUnit)

Calculations

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Freight Hauling Energy Use

CH4 Emissions (kg) = Distance (where Distance Unit = "Kilometers", convert if necessary) \times Weight (where Weight Unit = "kg", convert if necessary) \times FrgtHaulingEmssnFctr.CH4 Emissions Factor (convert to kg/tonne-km) (where FrgtHaulingEmssnFctr.Freight Hauling Mode = Freight Hauling Mode)/1000

CO2 Emissions (kg) (Co2EmissionsInKg)

Input Fields

- Distance (Distance)
- Distance Unit (DistanceUnit)
- Freight Hauling Emissions Factors (FrgtHaulingEmssnFctr)
- Weight (Weight)
- Weight Unit (WeightUnit)

Calculations

CO2 Emissions (kg) = Distance (where Distance Unit= "Kilometers", convert if necessary) \times Weight (where Weight Unit = "kg", convert if necessary) \times FrgtHaulingEmssnFctr.CO2 Emissions Factor (convert to kg/tonne-km) (where FrgtHaulingEmssnFctr.Freight Hauling Mode) \times Hauling

N2O Emissions (kg) (N2oEmissionsInKg)

Input Fields

- Distance (Distance)
- Distance Unit (DistanceUnit)
- Freight Hauling Emissions Factors (FrgtHaulingEmssnFctr)
- Weight (Weight)
- Weight Unit (WeightUnit)

Calculations

N2O Emissions (kg) = Distance (where Distance Unit= "Kilometers", convert if necessary) \times Weight (where Weight Unit = "kg", convert if necessary) \times FrgtHaulingEmssnFctr.N2O Emissions Factor (convert to kg/tonne-km) (where FrgtHaulingEmssnFctr.Freight Hauling Mode) \times Mode = Freight Hauling Mode) \times Freight Hauling Mode)

Scope 3 Emissions (tCO2e) (Scope3EmissionsIntCo2e)

Input Fields

- N2O Emissions (kg) (N2oEmissionsInKg)
- CO2 Emissions (kg) (Co2EmissionsInKg)
- CH4 Emissions (kg) (Ch4EmissionsInKg)
- Scope 3 Category (Scope3Category)
- Supplemental Scope 3 Emissions (SuplScope3Emissions)
- Freight Hauling Emissions Factors (FrgtHaulingEmssnFctr)

Calculations

Net Zero Cloud Calculations Ground Travel Energy Use

Scope 3 Emissions (tCO2e) = CO2 Emissions (kg) + CH4 Emissions (kg) \times FrgtHaulingEmssnFctr.Other Emissions Factors.CH4 Global Warming Potential +N2O Emissions (kg) \times FrgtHaulingEmssnFctr.Other Emissions Factors.N2O Global Warming Potential)/1000 + Supplemental Scope 3 Emissions

Default Value

Supplemental Scope 3 Emissions

Ground Travel Energy Use

The Ground Travel Energy Use object represents the energy consumption related to ground travel. For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2e)

Input Fields

- Distance [Distance]
- Expense Type (ExpenseType)
- Trip Cost (TripCost)
- Ground Travel Emissions Factors (GroundTravelEmssnFctr)
- Supplemental Scope 3 Emissions (SuplScope3Emissions)
- Procurement Emission Factor Set Item (PcmtEmssnFctrSetItem)
 - Total Scope 3 Emissions per Million Spent (tCO2e) (TotScpe3EmssnPerMillionSpent)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

 Net Zero Cloud Manager

Calculations

If PcmtEmssnFctrSetItem exists then Scope 3 Emissions (tCO2e) = PcmtEmssnFctrSetItem.Total Scope 3 Emissions per Million Spent (tCO2e) * Trip Cost/100000

If GroundTravelEmssnFctr exists then

- If Expense Type = "Limousine" or "Taxi", then Scope 3 Emissions (tCO2e) = [(Trip Cost / GroundTravelEmssnFctr.Taxi Rate (Cost/Distance Unit)) × GroundTravelEmssnFctr.Taxi Emissions (kg CO2e/Distance Unit) / 1000] + Supplemental Scope 3 Emissions
- If Expense Type = "Personal Car Distance", then Scope 3 Emissions (tCO2e) = Distance (convert to miles) ×
 GroundTravelEmssnFctr.Personal Car Emissions (kg CO2e/Distance Unit)/1000 + SuplScope3Emissions. If
 GroundTravelEmssnFctr.Distance Unit! = "miles", then convert the Personal Car Emissions (kg CO2e/Distance Unit) to miles
- If Expense Type = "Subway/Train/Trolley Cross State/Country" or "Subway/Train/Trolley Local Public Transit", then
 Scope3EmissionsInTco2e = [(Trip Cost / GroundTravelEmssnFctr.Train Rate (Cost/Distance Unit)) × GroundTravelEmssnFctr.Train
 Emissions (kg CO2e/Distance Unit) /1000] + Supplemental Scope 3 Emissions

Default Value

Scope 3 Emissions (tCO2e) = Supplemental Scope 3 Emissions

Distance (Distance)

Input Fields

Average distance between work and home

Net Zero Cloud Calculations

Hotel Stay Energy Use

- Number of travel days 3.
- Employees using the ground travel as the mode of transport

Calculations

If all inputs are not null, then Distance = Average distance between work and home \times 2 \times Number of travel days * Employees using ground travel as the mode of transport

Hotel Stay Energy Use

The Hotel Stay Energy Use object represents the energy consumption related to hotel stay.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Emissions Factor/Room per Night (kg CO2e) (EmissionFctrKgCo2eRoomPerNight)
 Input Fields

Hotel Stay Emissions Factor (HotelStayEmssnFctr)

Calculations

Emissions Factor/Room per Night (kg CO2e) = HotelStayEmssnFctr.Hotel Stay Emissions (kg CO2e/Night)

Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2e)

Input Fields

- Emissions Factor/Room per Night (kg CO2e) (EmissionFctrKgCo2eRoomPerNight)
- Number of Nights (StayNightsCount)
- Number of Rooms (RoomCount)
- Supplemental Scope 3 Emissions (SuplScope3Emissions)

Calculations

Scope 3 Emissions (tCO2e) = (Emissions Factor/Room per Night (kg CO2e) \times Number of Nights \times Number of Rooms)/1000 + Supplemental Scope 3 Emissions

Default Value

Scope 3 Emissions (tCO2e) = Supplemental Scope 3 Emissions

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Rental Car Energy Use

Rental Car Energy Use

The Rental Car Energy Use object represents the energy consumption related to rental cars.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Fuel Efficiency (L/100 km) (FuelEfficiencyInLkm)

Input Fields

Rental Car Emissions Factor (RentalCarEmssnFctr)

Calculations

If RentalCarEmssnFctr.Fuel Efficiency Unit = "L per 100 km", then Fuel Efficiency (L/100 km) = RentalCarEmssnFctr.Fuel Efficiency.

If RentalCarEmssnFctr.Fuel Efficiency Unit = "Miles per Gallon", then Fuel Efficiency (L/100 km) = RentalCarEmssnFctr.Fuel Efficiency/235.215.

Fuel Efficiency (mpg) (FuelEfficiencyInMpg)

Input Fields

Rental Car Emissions Factor (RentalCarEmssnFctr)

Calculations

If RentalCarEmssnFctr.Fuel Efficiency Unit = "Miles per Gallon", then Fuel Efficiency (mpg) = RentalCarEmssnFctr.Fuel Efficiency. If RentalCarEmssnFctr.Fuel Efficiency Unit = "L per 100 km", then Fuel Efficiency (mpg) = 235.215/RentalCarEmssnFctr.Fuel Efficiency.

CH4 Emissions (kg) (Ch4EmissionsInKg)

Input Fields

- Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
- Fuel Efficiency (mpg) (FuelEfficiencyInMpg)
- Fuel Type (FuelType)
- Rental Car Emissions Factor (RentalCarEmssnFctr)
- CH4 Emissions Factor Unit (Ch4EmissionFactorUnit)

Calculations

If CH4 Emissions Factor Unit = "g/km", or "kg/km", or "g/mile", or "kg/mile" then CH4 Emissions (kg) = Total Fuel Consumption (US Gallons) \times Fuel Efficiency (mpg) \times 1.60934 \times RentalCarEmssnFctr.Other Emissions Factor Set Item.CH4 Emissions Factor where Fuel Type = OtherEmissionFactor.Fuel Type and CH4 Emissions Factor converted to Kg/Km.

If CH4 Emissions Factor Unit is not = "g/km", or "kg/km", or "g/mile", or "kg/mile" then CH4 Emissions (kg) = Total Fuel Consumption (US Gallons) \times RentalCarEmssnFctr.Other Emissions Factor Set Item.CH4 Emissions Factor converted to Kg/Gallon.

CO2 Emissions (kg) (Co2EmissionsInKg)

Input Fields

- Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)
- Rental Car Emissions Factor (RentalCarEmssnFctr)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Rental Car Energy Use

Calculations

CO2 Emissions (kg) = Total Fuel Consumption (Liters) \times RentalCarEmssnFctr.Other Emissions Factor Set Item.CO2 Emissions Factor where Fuel Type = Other Emissions Factor Set Item.Fuel Type and Other Emissions Factor Set Item.CO2 Emissions Factor converted to Kg/L.

N2O Emissions (kg) (N2oEmissionsInKg)

Input Fields

- Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
- Fuel Efficiency (mpg) (FuelEfficiencyInMpg)
- Fuel Type (FuelType)
- Rental Car Emissions Factor (RentalCarEmssnFctr)

Calculations

If N2O Emissions Factor Unit = "g/km", or "kg/km", or "g/mile", or "kg/mile" then N2O Emissions (kg) = Total Fuel Consumption (US Gallons) \times Fuel Efficiency (mpg) \times 1.60934 \times RentalCarEmssnFctr.Other Emissions Factor Set Item.N2O Emissions Factor where Fuel Type = OtherEmissionFactor.Fuel Type and N2O Emissions Factor converted to Kg/Km.

If N2O Emissions Factor Unit is not = "g/km", or "kg/km", or "g/mile", or "kg/mile" then N2O Emissions (kg) = Total Fuel Consumption (US Gallons) \times RentalCarEmssnFctr.Other Emissions Factor Set Item.N2O Emissions Factor converted to Kg/Gallon.

Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2e)

Input Fields

- Vendor-Provided Emissions (tCO2e) (VendorProvidedEmissionsInTco2e)
- Rental Car Emissions Factor (RentalCarEmssnFctr)
- Supplemental Scope 3 Emissions (SuplScope3Emissions)
- Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
- N2O Emissions (kg) (N2oEmissionInKg)
- CO2 Emissions (kg) (Co2EmissionsInKg)
- CH4 Emissions (kg) (Ch4EmissionsInKg)

Calculations

If vendor-provided emissions exist, then set Scope 3 Emissions (tCO2e) = Vendor-Provided Emissions (tCO2e) + Supplemental Scope 3 Emissions.

If Vendor-Provided Emissions (tCO2e) = null for the fuel type,

- If RentalCarEmssnFctr.OtherEmissionFactor.Supplied CO2e Emissions Factor (kg/Gal) = null then
 Scope 3 Emissions (tCO2e) = CO2 Emissions (kg)/1000 + CH4 Emissions (kg)/1000 × ParentEmissionFactor.CH4 Global Warming Potential + N2O Emissions (kg)/1000 × ParentEmissionFactor.N2O Global Warming Potential + Supplemental Scope 1 Emissions
- If RentalCarEmssnFctr.OtherEmissionFactor.Supplied CO2e Emissions Factor != null then
 Scope 3 Emissions (tCO2e) = Total Fuel Consumption (US Gallons) * RentalCarEmssnFctr.OtherEmissionFactor.Supplied CO2e Emissions Factor (kg/Gal) +Supplemental Scope 3 Emissions

Default value

Supplemental Scope 3 Emissions

Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal) Input Fields

- Distance [Distance]
- Distance Unit (DistanceUnit)
- Fuel Efficiency (mpg) (FuelEfficiencyInMpg)

Calculations

If Distance Unit = "Miles" and Fuel Efficiency (mpg) <> 0, then Total Fuel Consumption (US Gallons) = Distance/Fuel Efficiency (mpg).

If Distance Unit = "Kilometers" and Fuel Efficiency (mpg) <> 0, then Total Fuel Consumption (US Gallons) = Distance/1.60934/Fuel Efficiency (mpg).

Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)

Input Fields

Total Fuel Consumption (US Gallons) (Total Fuel Consumption (US Gallons))

Calculations

Total Fuel Consumption (Liters) = Total Fuel Consumption (US Gallons)/0.26417205

Stationary Asset Energy Use

The Stationary Asset Energy Use object represents the energy consumption related to stationary assets across multiple fuel types.

Table 1: Fuel Consumption (kWh) Units by Fuel Type

Fuel Units	Electricity	Cody	Diesel	Fuel Otay Oil	Heat	Ntt.d Gas	Liquid Natud Gas (LNG)	Rpme	S em	Light Oil	Keepe	City Gas	Régert
kWh	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
GWh	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
MWh	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
GJ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
MJ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
kcal	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
MMBu	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Therm	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	
Kg													Χ
lbs													Χ

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Fuel Units	Electricity	Cooling	Diesel	Fuel Oll-leavy Oil	Heat	Natural Gas	Liquid Natural Gas (LNG)	Propone	Steam	Light Oil	Kaosane	City Gas	Refigeort
Tonnes													Χ
Short Tons													X
Long Tons													X
US Gallon			X	X		X	X	X		X	X	X	
UK Gallon			X	X		X	X	X		X	X	X	
Liter			Χ	Χ		Χ	Χ	Χ		Χ	Χ	Χ	
Kiloliters			Χ	Χ		Χ	Χ	Χ		Χ	Χ	Χ	
m3			Χ	Χ		Χ	Χ	Χ		Χ	Χ	Χ	
1000 m3			X	X		X	X	X		X	X	X	
ccf			Χ	Χ		Χ	Χ	Χ		Χ	Χ	Χ	

Allocate the default scope for the fuel. Depending on the scope, the relevant fields are populated and the other fields default to 0:

- Scope 1 Emissions (tCO2e).
- Scope 2 Location-Based Emissions (tCO2e) and Scope 2 Market-Based Emissions (tCO2e). Scope 2 means both these fields are populated.
- Scope 3 Downstream Emissions (tCO2e).
- Scope 3 Upstream Emissions (tCO2e).

If you have not associated a scope allocation, then use the default scope allocations.

Table 2: Default Scope Allocation Consideration

Tuble 2. Detaile Scope Allocation Consideration							
Fuel	Asset Owned	Asset Not Owned					
Electricity	Scope 2	Scope 2					
City Gas	Scope 1	Scope 2					
Cooling	Scope 2	Scope 2					
Diesel	Scope 1	Scope 2					
Fuel Oil	Scope 1	Scope 2					
Heat	Scope 2	Scope 2					
Heavy Oil	Scope 1	Scope 2					

Fuel	Asset Owned	Asset Not Owned
Kerosene	Scope 1	Scope 2
Light Oil	Scope 1	Scope 2
Liquid Natural Gas (LNG)	Scope 1	Scope 2
Natural Gas	Scope 1	Scope 2
Propane	Scope 1	Scope 2
Refrigerant	Scope 1	Scope 2
Steam	Scope 2	Scope 2
IT Electricity	Scope 2	Scope 2
Biomass	Scope 1	Scope 2

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors. Here are the calculated fields:

• Fuel Consumption (kWh) (FuelConsumptionInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Fuel Type (FuelType)
- Fuel Consumption (FuelConsumption)
- Other Emissions Factor Set (OtherEmssnFctrSet)
- Other Emissions Factor Set Item (OtherEmssnFctrSetItem)

Fuel Type (FuelType)

Calorific Value (Calorific Value)

Calorific Value Unit (Calorific Value Unit)

Conversion constant

Calculations

If these fuels are measured in volume units:

- City Gas
- Diesel
- Fuel Oil
- Heavy Oil
- Kerosene
- Light Oil
- Liquid Natural Gas (LNG)
- Natural Gas
- Propane
- Biomass

Then to convert the volume to energy units:

Fuel Consumption (kWh) = Fuel Consumption (converted to m^3) × OtherEmssnFctrSet.OtherEmssnFctrSetltem.Calorific Value (converted to kWh/m3) and Fuel Type = OtherEmssnFctrSet.OtherEmssnFctrSetltem.Fuel Type

Fuel Consumption (GJ) (FuelConsumptionInGigajoule)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Conversion constant

Calculations

Fuel Consumption (GJ) = Total Fuel Consumption (kWh)/277.777777

Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)

Input Fields

- Fuel Consumption (kWh) (FuelConsumptionInKwh)
- Power Usage Effectiveness (PowerUsageEffectiveness)

Calculations

If Record Type = "Data Center", then Total Fuel Consumption (kWh) = Fuel Consumption (kWh) × Power Usage Effectiveness. Else, for all other fuel types and record types, Total Fuel Consumption (kWh) = Fuel Consumption (kWh).

Occupied Floor Area (sqft) (OccupiedFloorAreaInSqft)

Input Fields

- Occupied Floor Area (OccupiedFloorArea)
- Occupied Floor Area Unit (OccupiedFloorAreaUnit)
- Conversion constant

External Object Calculations

If Occupied Floor Area Unit = "sqft", then Occupied Floor Area (sqft) = Occupied Floor Area.

If Occupied Floor Area Unit = "m2", then Occupied Floor Area (sqft) = Occupied Floor Area × 10.76391042.

Scope 1 Emissions (tCO2e) (Scope1EmissionsInTco2e)

Input Fields

- Other Emissions Factors (OtherEmissionFactors)
- Supplemental Scope 1 Emissions (SuplScope1Emissions)
- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Stationary Asset Environmental Source (StnryAssetEnvrSrc)

Calculations

If the scope allocation for a fuel is scope 1, then

StnryAssetEnvrSrc.Carbon Emissions Scope Allocation.Fuel Type Allocation = "Scope 1" where StnryAssetEnvrSrc.CrbnEmssnScopeAlloc.FuelType = FuelType.

If Fuel Type = "Electricity", then Scope 1 Emissions (tCO2e) = (Total Fuel Consumption (kWh)) × ElectricityEmssnFctrSet.CO2e Emissions Rate (tonnes/MWh)/1000 + Supplemental Scope 1 Emissions.

For any fuel other than refrigerants and electricity,

If SuppliedEmssnFactorInTco2eMwh = 0, then Scope 1 Emissions (tCO2e) = Total Fuel Consumption (kWh) \times OtherEmissionFactors.Other Emissions Factor Set Item.CO2e Emissions Factor (tCO2e/MWh) (FuelType = OtherEmissionFactors.Other Emissions Factor Set Item.Fuel Type)/1000 + Supplemental Scope 1 Emissions.

Else, if SuppliedEmssnFactorInTco2eMwh! = 0, then Scope 1 Emissions (tCO2e) = Total Fuel Consumption (kWh) \times OtherEmissionFactors.Other Emissions Factor Set Item.Supplied Emissions Factor (tCO2e/MWh) (Fuel Type = OtherEmissionFactors.Fuel Type)/1000 + Supplemental Scope 1 Emissions.

If FuelType = "Refrigerant", then Scope 1 Emissions (tCO2e) = FuelConsumption (converted to Kgs) \times RefrigerantEmssnFctr.Global Warming Potential/1000 + Supplemental Scope 1 Emission

Default Value

Scope 1 Emissions (tCO2e) = Supplemental Scope 1 Emissions

Scope 2 Location-Based Emission (tCO2e) (Scope2LocBasedEmssnInTco2e)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factors (ElectricityEmissionFactors)
- Company-Owned Asset (IsCompanyOwnedAsset)
- Supplemental Scope 2 Location-Based Emissions (SuplScope2LocationBasedEmssn)

Calculations

StnryAssetEnvrSrc.Carbon Emission Scope Allocation Value.Fuel Type Allocation = "Scope 2" (where StnryAssetEnvrSrc.Carbon Emission Scope Allocation Value.Fuel Type = Fuel Type)

If Fuel Type = "Electricity" then

Scope 2 Location-Based Emission (tCO2e) = (Total Fuel Consumption (kWh)) \times Electricity Emissions Factor Set.Co2eEmissionRateInTmwh / 1000 + SuplScope2LocationBasedEmssn

For any fuel other than refrigerants & Electricity

If (Supplied Emissions Factor (tCO2e/MWh) = 0) then Scope 2 Location-Based Emission (tCO2e) = Total Fuel Consumption (kWh) × OtherEmissionFactors.Other Emissions Factor Set Item.CO2e Emissions Factor (tCO2e/MWh) (Fuel Type = Other Emissions Factor Set.Other Emissions Factor Set Item.Fuel Type) / 1000 + Supplemental Scope 2 Location-Based Emissions

else if (Supplied Emissions Factor (tCO2e/MWh) != 0) then

Scope 2 Location-Based Emission (tCO2e) = Total Fuel Consumption (kWh) \times OtherEmissionFactors.Other Emissions Factor Set Item.Supplied Emissions Factor (tCO2e/MWh) (Fuel Type = Other Emissions Factor Set.Fuel Type) / 1000 + Supplemental Scope 2 Location-Based Emissions

If Fuel Type="Refrigerant" then

Scope 2 Location-Based Emission (tCO2e) = Fuel Consumption (converted to Kgs) \times RefrigerantEmssnFctr.Global Warming Potential/1000 + Supplemental Scope 2 Location-Based Emissions

Default Value

Scope 2 Location-Based Emission (tCO2e) = Supplemental Scope 2 Location-Based Emissions

Scope 2 Market-Based Emission (tCO2e) (Scope2MktBasedEmssnInTco2e)

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factors (ElectricityEmissionFactors)

- Company-Owned Asset (IsCompanyOwnedAsset)
- Supplemental Scope 2 Market-Based Emissions (SuplScope2MarketBasedEmssn)
- Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)

StnryAssetEnvrSrc.Carbon Emission Scope Allocation Value.Fuel Type Allocation = "Scope 2" (where StnryAssetEnvrSrc.Carbon Emission Scope Allocation Value.Fuel Type = Fuel Type)

- If Renewable Energy Type! = Empty, then Scope 2 Market-Based Emissions (tCO2e) = (Total Fuel Consumption (kWh) Allocated Renewable Energy (kWh)) ×Electricity Emissions Factor Set.Market-Based CO2e Emissions Rate (tonnes/MWh) / 1000 + Supplemental Scope 2 Market-Based Emissions
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Scope 2 Market-Based Emissions (tCO2e) =(Total Fuel Consumption (kWh) Allocated Energy
 Attribute Credits (kWh)]) × Electricity Emissions Factor Set.Market-Based CO2e Emissions Rate (tonnes/MWh) / 1000 +
 Supplemental Scope 2 Market-Based Emissions
- For any fuel other than refrigerants & Electricity
 - If (Supplied Emissions Factor (tCO2e/MWh) = 0)
 - then Scope 2 Market-Based Emissions (tCO2e) = Total Fuel Consumption (kWh) \times Other Emission Factors. Other Emissions Factor Set Item. CO2e Emissions Factor (tCO2e/MWh) (Fuel Type = Other Emission Factors. Other Emissions Factor Set Item. Fuel Type) / 1000 + Supplemental Scope 2 Market-Based Emissions
 - else if (Supplied Emissions Factor (tCO2e/MWh)!= 0) Scope 2 Market-Based Emissions (tCO2e) = Total Fuel Consumption (kWh) × OtherEmissionFactors.Other Emissions Factor Set Item.Supplied Emissions Factor (tCO2e/MWh) (Fuel Type = OtherEmissionFactors.Fuel Type) / 1000 + Supplemental Scope 2 Market-Based Emissions
- If FuelType="Refrigerant",

Scope 2 Market-Based Emissions (tCO2e) = Fuel Consumption (converted to Kgs) \times RefrigerantEmssnFctr.Global Warming Potential/1000 + Supplemental Scope 2 Market-Based Emissions

Default Value

Scope 2 Market-Based Emission (tCO2e) = Supplemental Scope 2 Market-Based Emissions

Total Floor Area (sqft) (TotalFloorAreaInSqft)

Input Fields

- Total Floor Area (TotalFloorArea)
- Total Floor Area Unit (TotalFloorAreaUnit)
- Conversion constant

External Object Calculations

If Total Floor Area Unit = "sqft", then Total Floor Area (sqft) = Total Floor Area.

If Total Floor Area Unit = "m2", then Total Floor Area (sqft) = Total Floor Area \times 10.76391042.

Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

- Market-Based Electricity from Biomass (kWh) (MktBasedElectrFrBiomassInKwh)
- Market-Based Electricity from Geothermal (kWh) (MktBsdElectrFrGeothermalInKwh)
- Market-Based Electricity from Hydro (kWh) (MktBasedElectrFromHydroInKwh)

- Market-Based Electricity from Solar (kWh) (MktBasedElectrFromSolarInKwh)
- Market-Based Electricity from Wind (kWh) (MktBasedElectrFromWindInKwh)

Total Renewable Energy (kWh) = Market-Based Electricity from Biomass (kWh) + Market-Based Electricity from Geothermal (kWh) + Market-Based Electricity from Hydro (kWh) + Market-Based Electricity from Solar (kWh) + Market-Based Electricity from Wind (kWh)

Default Value

0

• Total Renewable Energy Excluding Hydro (kWh) (TotRnwlEnrgyExclHydroInKwh)

Input Fields

- Market-Based Electricity from Biomass (kWh) (MktBasedElectrFrBiomassInKwh)
- Market-Based Electricity from Geothermal (kWh) (MktBsdElectrFrGeothermallnKwh)
- Market-Based Electricity from Solar (kWh) (MktBasedElectrFromSolarInKwh)
- Market-Based Electricity from Wind (kWh) (MktBasedElectrFromWindlnKwh)

Calculations

Total Renewable Energy Excluding Hydro (kWh) = Market-Based Electricity from Biomass (kWh) + Market-Based Electricity from Geothermal (kWh) + Market-Based Electricity from Solar (kWh) + Market-Based Electricity from Wind (kWh)

Default Value

0

Power Usage Effectiveness Monthly Range (IsPueMonthlyRange)

Input Fields

- Power Usage Effectiveness (PowerUsageEffectiveness)
- Record Type

Calculations

If Record Type = "Data Center":

If Power Usage Effectiveness >= 1 and Power Usage Effectiveness <= 2, then Power Usage Effectiveness Monthly Range = TRUE. If Power Usage Effectiveness <1 or Power Usage Effectiveness > 2, then Power Usage Effectiveness Monthly Range = FALSE.

Normalized Monthly Electricity Consumption (kWh) (NormalizedMoElectrCnsmpInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Fuel Type (FuelType)
- End Date (EndDate)
- Start Date (StartDate)

Calculations

Normalized Monthly Electricity Consumption (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times [30/(End Date – Start Date + 1)]

Location-Based Electricity from Biomass (kWh) (LocBasedElectrFrBiomassInKwh)

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Biomass Mix Percentage (ElectricityEmssnFctrSet.LocationBasedBiomassMixPct)

Location-Based Electricity from Biomass (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") × ElectricityEmssnFctrSet.Location-Based Biomass Mix Percentage/100

Location-Based Electricity from Coal (kWh) (LocBasedElectrFrCoalInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Coal Mix Percentage (ElectricityEmssnFctrSet.LocationBasedCoalMixPct)

Calculations

Location-Based Electricity from Coal (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Coal Mix Percentage/100

Location-Based Electricity from Gas (kWh) (LocBasedElectrFrGasInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Gas Mix Percentage (ElectricityEmssnFctrSet.LocationBasedGasMixPct)

Calculations

Location-Based Electricity from Gas (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Gas Mix Percentage/100

Location-Based Electricity from Hydro (kWh) (LocBasedElectrFrHydroInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Hydro Mix Percentage (ElectricityEmssnFctrSet.LocationBasedHydroMixPct)

Calculations

Location-Based Electricity from Hydro (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Hydro Mix Percentage/100

Location-Based Electricity from Nuclear (kWh) (LocBasedElectrFrNuclearInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Nuclear Mix Percentage (ElectricityEmssnFctrSet.LocationBasedNuclearMixPct)

Calculations

Location-Based Electricity from Nuclear (kWh) = Total Fuel Consumption (kWh) (where FuelType = "Electricity") \times Electricity Emissions Factor Set.Location-Based Nuclear Mix Percentage/100

Location-Based Electricity from Oil (kWh) (LocBasedElectrFrOilInKwh)

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Oil Mix Percentage (ElectricityEmssnFctrSet.LocationBasedOilMixPct)

Location-Based Electricity from Oil (kWh) = Total Fuel Consumption (kWh) (where FuelType = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Oil Mix Percentage/100

Location-Based Electricity from Other Fuel (kWh) (LocBasedElectrFrOthrFuelInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Other Fuel Mix Percentage (ElectricityEmssnFctrSet.LocationBasedOtherFuelMixPct)

Calculations

Location-Based Electricity from Other Fuel (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Other Fuel Mix Percentage/100

Location-Based Electricity from Solar (kWh) (LocBasedElectrFrSolarInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Solar Mix Percentage (ElectricityEmssnFctrSet.LocationBasedSolarMixPct)

Calculations

Location-Based Electricity from Solar (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Solar Mix Percentage/100

Location-Based Electricity from Wind (kWh) (LocBasedElectrFrWindInKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Wind Mix Percentage (ElectricityEmssnFctrSet.LocationBasedWindMixPct)

Calculations

Location-Based Electricity from Wind (kWh) = Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Wind Mix Percentage/100

Location-Based Energy from Non-Renewable (LocBsdEnrgyFrNonRenewablesKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Location-Based Energy from Biomass (kWh) (LocBasedEnrgyFromBiomassInKwh)
- Location-Based Energy from Hydro (kWh) (LocBasedEnrgyFromHydroInKwh)
- Location-Based Energy from Solar (kWh) (LocBasedEnrgyFromSolarInKwh)
- Location-Based Energy from Wind (kWh) (LocBasedEnrgyFromWindlnKwh)
- Location-Based Energy from Geothermal (LocBsdEnrgyFromGeothermalInKwh)

Calculations

Location-Based Energy from Non-Renewable = Total Fuel Consumption (kWh) – Location-Based Energy from Biomass (kWh) – Location-Based Energy from Hydro (kWh) – Location-Based Energy from Solar (kWh) – Location-Based Energy from Geothermal

Location-Based Electricity from Geothermal (kWh) (LocBsdElectrFrGeothermalInKwh)

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Geothermal Mix Percentage (Electricity Emssn Fctr Set. Loc Based Geothermal Mix Pct)

Location-Based Electricity from Geothermal (kWh) = Total Fuel Consumption (kWh) (where FuelType = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Geothermal Mix Percentage/100

Location-Based Electricity from Other Fossil Fuel (kWh) (LocBsdElectrOthrFossilFuelKwh)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Electricity Emissions Factor Set.Location-Based Other Fossil Fuel Mix Percentage (ElectricityEmssnFctrSet.LocBasedOtherFossilFuelMixPct)

Calculations

Location-Based Electricity from Other Fossil Fuel (kWh) = Total Fuel Consumption (kWh) (where FuelType = "Electricity") \times ElectricityEmssnFctrSet.Location-Based Other Fossil Fuel Mix Percentage/100

Market-Based Electricity from Biomass (kWh) (MktBasedElectrFrBiomassInKwh)

Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrInKwh)
 - Allocated Energy Attribute Credits from Biomass (kWh) (AllocEnrgyAttrCrBiomass)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Biomass Mix Percentage (MarketBasedBiomassMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If Renewable Energy Type = "Biomass", then Market-Based Electricity from Biomass (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Biomass Mix Percentage/100 + AllocatedRenewableEnergyInKwh.
- If Renewable Energy Type! = "Biomass" &&!Empty, then Market-Based Electricity from Biomass (kWh) = [Total Fuel Consumption (kWh) (Fuel Type = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Biomass Mix Percentage/100.
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy Type == Empty (None), then Market-Based Electricity from Biomass (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Biomass Mix Percentage/100 + Allocated Energy Attribute Credits from Biomass (kWh)

Market-Based Electricity from Coal (kWh) (MktBasedElectrFromCoalInKwh)

Input Fields

Stationary Asset Energy Use (StnryAssetEnrgyUse)

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
- Renewable Energy Type (RenewableEnergyType)
- Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
- Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Coal Mix Percentage (MarketBasedCoalMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Coal (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Coal Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Coal (kWh) = [Total Fuel Consumption (kWh) (where FuelType =
 "Electricity") Allocated Energy Attribute Credits (kWh)]× ElectricityEmssnFctrSet.Market-Based Coal Mix Percentage/100

Market-Based Electricity from Gas (kWh) (MktBasedElectrFromGasInKwh)

Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrInKwh)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Gas Mix Percentage (MarketBasedGasMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Gas (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Gas Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Coal (kWh) = [Total Fuel Consumption (kWh) (where FuelType =
 "Electricity") Allocated Energy Attribute Credits (kWh)]× ElectricityEmssnFctrSet.Market-Based Gas Mix Percentage/100

Market-Based Electricity from Hydro (kWh) (MktBasedElectrFromHydroInKwh)

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)

- Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Hydroelectric Mix Percentage (MarketBasedHydroMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

- If Renewable Energy Type = "Hydroelectricity", then Market-Based Electricity from Hydro (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Hydroelectric Mix Percentage/100 + Allocated Renewable Energy (kWh)
- If Renewable Energy Type! = "Hydroelectricity" &&!Empty, then Market-Based Electricity from Hydro (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Hydroelectric Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Hydro (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type =
 "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Hydroelectric Mix Percentage/100

Market-Based Electricity from Nuclear (kWh) (MktBasedElectrFrNuclearInKwh) Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrInKwh)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Nuclear Mix Percentage (MarketBasedNuclearMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Nuclear (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Nuclear Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Nuclear (kWh) = [Total Fuel Consumption (kWh) (where FuelType =
 "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Nuclear Mix Percentage/100

Market-Based Electricity from Oil (kWh) (MktBasedElectrFromOilInKwh)

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
 - Fuel Type (FuelType)

- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Oil Mix Percentage (MarketBasedOilMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Oil (kWh) = (Total Fuel Consumption (kWh) (FuelType = "Electricity") Allocated Renewable Energy (kWh)) × ElectricityEmssnFctrSet.Market-Based Oil Mix Percentage /100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy Type == Empty (None), then Market-Based Electricity from Oil (kWh) = (Total Fuel Consumption (kWh) (FuelType = "Electricity") Allocated Energy Attribute Credits (kWh)) × ElectricityEmssnFctrSet.Market-Based Oil Mix Percentage /100

Market-Based Electricity from Other Fuel (kWh) (MktBasedEnrgyFromOthrFuelInKwh)

Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Other Fuel Mix Percentage (MarketBasedOtherFuelMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Other Fuel (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Other Fuel Mix Percentage/100.
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Other Fuel (kWh) = [Total Fuel Consumption (kWh) (where FuelType
 = "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Other Fuel Mix Percentage/100

Market-Based Electricity from Solar (kWh) (MktBasedEnrgyFromSolarInKwh)

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
 - Allocated Energy Attribute Credits from Solar (kWh) (AllocEnrgyAttrCrSolar)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Solar Mix Percentage (MarketBasedSolarMixPct)

Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If RenewableEnergyType = "Solar", then Market-Based Electricity from Solar (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Solar Mix Percentage/100 + Allocated Renewable Energy (kWh).
- If RenewableEnergyType! = "Solar" &&!Empty, then Market-Based Electricity from Solar (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Solar Mix Percentage/100.
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Solar (kWh) = [Total Fuel Consumption (kWh) (where Fuel Type =
 "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Solar Mix Percentage/100 +
 Allocated Energy Attribute Credits from Solar (kWh)

Market-Based Electricity from Wind (kWh) (MktBasedEnrgyFromWindInKwh)

Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrInKwh)
 - Allocated Energy Attribute Credits from Wind (kWh) (AllocEnrgyAttrCrWind)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Wind Mix Percentage (MarketBasedWindMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If RenewableEnergyType = "Wind", then Market-Based Electricity from Wind (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Wind Mix Percentage/100 + Allocated Renewable Energy (kWh).
- If RenewableEnergyType! = "Wind" &&!Empty, then Market-Based Electricity from Wind (kWh) = [Total Fuel Consumption (kWh) (FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Wind Mix Percentage/100.
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy Type == Empty (None), then Market-Based Electricity from Wind (kWh) = [Total Fuel Consumption (kWh) (Fuel Type = "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Wind Mix Percentage/100 + Allocated Energy Attribute Credits from Wind (kWh)

Market-Based Electricity from Non-Renewables (kWh) (MktBsdEnrgyFrNonRenewablesKwh) Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Market-Based Energy from Biomass (kWh) (MktBasedEnrgyFromBiomassInKwh)
- Market-Based Energy from Hydro (kWh) (MktBasedEnrgyFromHydroInKwh)
- Market-Based Energy from Solar (kWh) (MktBasedEnrgyFromSolarInKwh)

- Market-Based Energy from Wind (kWh) (MktBasedEnrgyFromWindlnKwh)
- Market-Based Energy from Geothermal (MktBsdEnrgyFromGeothermalInKwh)

 $\label{eq:market-Based} \begin{tabular}{l} Market-Based Electricity from Non-Renewables (kWh) = Total Fuel Consumption (kWh) - Market-Based Energy from Biomass (kWh) - Market-Based Energy from Hydro (kWh) - Market-Based Energy from Solar (kWh) - Market-Based Energy from Geothermal \\ \end{tabular}$

Market-Based Electricity from Geothermal (kWh) (MktBsdEnrgyFromGeothermalInKwh)

Input Fields

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
 - Allocated Energy Attribute Credits from Geothermal (kWh) (AllocEnrgyAttrCrGeothermal)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - Market-Based Geothermal Mix Percentage (MktBasedGeothermalMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

Calculations

- If Renewable Energy Type = "Geothermal", then Market-Based Electricity from Geothermal (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Geothermal Mix Percentage/100 + Allocated Renewable Energy (kWh)
- If Renewable Energy Type ! = "Geothermal" && !Empty, then Market-Based Electricity from Geothermal (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Geothermal Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Geothermal (kWh) = [Total Fuel Consumption (kWh) (where Fuel
 Type = "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Geothermal Mix
 Percentage/100 + Allocated Energy Attribute Credits from Geothermal (kWh)

Market-Based Electricity from Other Fossil Fuel (kWh) (MktBsdElectrOthrFossilFuelKwh)

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh)
 - Renewable Energy Type (RenewableEnergyType)
 - Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrlnKwh)
 - Allocated Energy Attribute Credits from Geothermal (kWh) (AllocEnrgyAttrCrGeothermal)
 - Fuel Type (FuelType)
- Electricity Emissions Factor Set (ElectricityEmssnFctrSet)

- Market-Based Other Fossil Fuel Mix Percentage (MktBasedOtherFossilFuelMixPct)
- Energy Attribute Credit Distribution (EnergyAttrCreditDstr)

- If Renewable Energy Type! = Empty, then Market-Based Electricity from Other Fossil Fuel (kWh) = [Total Fuel Consumption (kWh) (where FuelType = "Electricity") Allocated Renewable Energy (kWh)] × ElectricityEmssnFctrSet.Market-Based Other Fossil Fuel Mix Percentage/100
- When the renewable energy allocation is happening from the Energy Attribute Credit Distribution object, if Renewable Energy
 Type == Empty (None), then Market-Based Electricity from Other Fossil Fuel (kWh) = [Total Fuel Consumption (kWh) (where
 FuelType = "Electricity") Allocated Energy Attribute Credits (kWh)] × ElectricityEmssnFctrSet.Market-Based Other Fossil Fuel
 Mix Percentage/100.

Allocated Energy Attribute Credits (kWh) (AllocEnrgyAttrCrInKwh)

Input Fields

- Allocated Energy Attribute Credits from Biomass (kWh) (AllocEnrgyAttrCrBiomassNumber)
- Allocated Energy Attribute Credits from Geothermal (kWh) (AllocEnrgyAttrCrGeothermalNumber)
- Allocated Energy Attribute Credits from Solar (kWh) (AllocEnrgyAttrCrSolarNumber)
- Allocated Energy Attribute Credits from Wind (kWh) (AllocEnrgyAttrCrWind)

Calculations

Allocated Energy Attribute Credits (kWh) = Allocated Energy Attribute Credits from Biomass (kWh) + Allocated Energy Attribute Credits from Geothermal (kWh) + Allocated Energy Attribute Credits from Wind (kWh) + Allocated Energy Attribute Credits from Solar (kWh)

Scope 3 Downstream Emissions (tCO2e) (Scope3DnstrmEmissionsIntCO2e)

Input Fields

- Other Emissions Factors (OtherEmissionFactors)
- Supplemental Scope 3 Downstream Emissions (SuplScope3DnstrmEmissions)
- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Stationary Asset Environmental Source (StnryAssetEnvrSrc)
- Carbon Emissions Scope Allocation (CrbnEmssnScopeAllocId)

Calculations

If(StnryAssetEnvrSrc.CrbnEmssnScopeAlloc.CrbnEmssnScopeAllocVal.FuelTypeAllocation value is one of these values

- Scope 3 Downstream
- Scope 3 Downstream Leased Assets
- Scope 3 End-of-Life Treatment of Sold Products
- Scope 3 Franchises
- Scope 3 Investments
- Scope 3 Processing of Sold Products
- Scope 3 Use of Sold Products

Then see the calculations for Scope 1 Emissions (tCO2e)

Default Value

Scope 3 Dnstrm Emissions Int CO2e = Supl Scope 3 Dnstrm Emissions

Scope 3 Upstream Emissions (tCO2e) (Scope3UpstrmEmissionsInTco2e)

Input Fields

- Other Emissions Factors (OtherEmissionFactors)
- Supplemental Scope 3 Upstream Emissions (SuplScope3UpstrmEmissions)
- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Stationary Asset Environmental Source (StnryAssetEnvrSrc)

Calculations

If(StnryAssetEnvrSrc.CrbnEmssnScopeAlloc.CrbnEmssnScopeAllocVal.FuelTypeAllocation value is one of these values

- Scope 3 Upstream
- Scope 3 Capital Goods
- Scope 3 Fuel and Energy-Related Activities
- Scope 3 Purchased Goods and Services
- Scope 3 Upstream Leased Assets
- Scope 3 Waste Generated In Operations

Then see the calculations for Scope 1 Emissions (tCO2e)

Default Value

Scope 3 Upstream Emissions (tCO2e) = Supplemental Scope 3 Upstream Emissions

Scope 3 GHG Category (Scope3GhgCategory)

Input Fields

- Stationary Asset Environmental Source (StnryAssetEnvrSrc)
- Carbon Emissions Scope Allocation (CrbnEmssnScopeAllocId)

Calculations

If(StnryAssetEnvrSrc.CrbnEmssnScopeAlloc.CrbnEmssnScopeAllocVal.FuelTypeAllocation value is one of these values

- Scope 3 Purchased Goods and Services
- Scope 3 Capital Goods
- Scope 3 Processing of Sold Products
- Scope 3 Upstream Leased Assets
- Scope 3 Fuel and Energy-Related Activities
- Scope 3 End-of-Life Treatment of Sold Products
- Scope 3 Waste Generated In Operations
- Scope 3 Use of Sold Products
- Scope 3 Downstream Leased Assets
- Scope 3 Investments
- Scope 3 Franchises

then

Scope 3 GHG Category = CrbnEmssnScopeAllocVal.FuelTypeAllocation

Else

Scope 3 GHG Category = null

CH4 Emissions (kg) (Ch4EmissionsInKg)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Fuel Type (FuelType)
- Other Emissions Factor Set (OtherEmssnFctrSet)
- Other Emissions Factor Set Item (OtherEmssnFctrSetItem)

Fuel Type (FuelType)

CH4 Emissions Factor (Ch4EmissionFactor)

Electricity Emission Factor Set (ElectricityEmssnFctrSet)

CH4 Emissions Rate (tonnes/GWh) (Ch4EmissionRateInTgwh)

Calculations

If Fuel Type = "Electricity"

 $- \quad \text{CH4 Emissions (kg)} = \text{Total Fuel Consumption (kWh)} \times \text{ElectricityEmssnFctrSet.CH4 Emissions Rate (tonnes/GWh)} \times 1000/1000000.0$

Default = 0

For any fuel other than refrigerants and electricity

- If CH4 Emissions Factor is in energy units

 $CH4 \ Emissions \ (kg) = Total \ Fuel \ Consumption \ (kWh) \times Other Emission Factor. Other Emssn Fctr Set I tem. CH4 \ Emissions Factor \ Where Emission Factor. Other Emssn Fctr Set I tem. Fuel \ Type \ and \ Other Emission Factor. Other Emssn Fctr Set I tem. CH4 \ Emissions Factor is converted to \ Kg/Kwh$

- Else CH4 Emissions (kg) = 0

CO2 Emissions (kg) (Co2EmissionsInKg)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Fuel Type (FuelType)
- Other Emissions Factor Set (OtherEmssnFctrSet)
- Other Emissions Factor Set Item (OtherEmssnFctrSetItem)

Fuel Type (FuelType)

CO2 Emissions Factor (Co2EmissionFactor)

Electricity Emission Factor Set (ElectricityEmssnFctrSet)

CO2 Emissions Rate (tonnes/MWh) (Co2EmissionRateInTmwh)

Calculations

If Fuel Type = "Electricity"

CO2 Emissions (kg) = Total Fuel Consumption (kWh) × ElectricityEmssnFctrSet.CO2 Emissions Rate (tonnes/MWh) × 1000/1000.0

Default = 0

For any fuel other than refrigerants and electricity

- If CO2 Emissions Factor is in energy units

CO2 Emissions (kg) = Total Fuel Consumption (kWh) \times Other Emission Factor. Other Emissio

Else CO2 Emissions (kg) = 0

N2O Emissions (kg) (N2oEmissionsInKg)

Input Fields

- Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
- Fuel Type (FuelType)
- Other Emissions Factor Set (OtherEmssnFctrSet)
- Other Emissions Factor Set Item (OtherEmssnFctrSetItem)

Fuel Type (FuelType)

N2O Emissions Factor (N2oEmissionFactor)

Electricity Emission Factor Set (ElectricityEmssnFctrSet)

N2O Emissions Rate (tonnes/GWh) (N2oEmissionRateInTgwh)

Calculations

If Fuel Type = "Electricity"

N2O Emissions (kg) = Total Fuel Consumption (kWh) × ElectricityEmssnFctrSet.N2O Emissions Rate (tonnes/GWh) × 1000/1000000.0

Default = 0

For any fuel other than refrigerants and electricity

If N2O Emissions Factor is in energy units

N2O Emissions (kg) = Total Fuel Consumption (kWh) \times Other Emission Factor. Other Emission Factor. Other Emission Factor where Fuel Type = Other Emission Factor. Other Emission Factor. Other Emission Factor is converted to Kg/Kwh

Else N2O Emissions (kg) = 0

Fuel Consumption

Inputs

- Occupied Floor Area (OccupiedFloorArea)
- Occupied Floor Area Unit (OccupiedFloorAreaUnit)
- Other Emission Factors (OtherEmissionFactors)
- Refrigerant Leakage Rate (kg/sqft) (RefrigerantLeakageRtInKqSqft)

Calculations

If (Fuel Type = "Refrigerant") and Fuel Consumption is NULL

then

Fuel Consumption = Occupied Floor Area (converted to sqft) × OtherEmissionFactors.Refrigerant Leakage Rate (kg/sqft)

Net Zero Cloud Calculations Vehicle Asset Energy Use

Vehicle Asset Energy Use

The Vehicle Asset Energy Use object represents the fuel consumption related to vehicles. The selected emissions factors on the energy use record control the calculation for scope 1 or scope 3 emissions for vehicles depending on whether the asset is company owned.

Allocate the default scope for the fuel. Depending on the scope, the relevant fields are populated and the other fields default to 0.

If you have not associated a scope allocation for a vehicle asset, then use the default scope allocations.

- If the asset is owned, then it is scope 1 emissions.
- If asset is not owned, then it is scope 3 downstream emissions.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Fuel Efficiency (mpg) (FuelEfficiencyInMpg)

Input Fields

- Fuel Efficiency Unit (FuelEfficiencyUnit)
- Fuel Efficiency (FuelEfficiency)
- Conversion Constant L per 100 km To mpg

Calculations

If Fuel Efficiency Unit = "Miles per Gallon", then Fuel Efficiency (mpg) = Fuel Efficiency

If Fuel Efficiency Unit = "L per 100 km, then Fuel Efficiency (mpg) = 235.215/Fuel Efficiency

Aircraft Fuel Economy (gal/h) (AircraftFuelEconomyInGph)

Input Fields

- Aircraft Fuel Economy (AircraftFuelEconomy)
- Aircraft Fuel Economy Unit (AircraftFuelEconomyUnit)
- Constant Liters to Gallons

Calculations

If Aircraft Fuel Economy Unit = "Gallons per Hour", then Aircraft Fuel Economy (gal/h) = Aircraft Fuel Economy Unit = "Liters per Hour", then Aircraft Fuel Economy (gal/h) = Aircraft Fuel Economy \times 0.26417205

Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)

Input Fields

- If Record Type = "Private Jet":
 - Fuel Consumption (FuelConsumption)
 - Fuel Consumption Unit (FuelConsumptionUnit)
 - Aircraft Fuel Economy (Gallons per Hour) (AircraftFuelEconomyInGph)
 - Flight Duration (Hours) (FlightDurationInHours)
 - Conversion constant Liters to gallons
- If Record Type = "Fleet Vehicle":

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Calculations Vehicle Asset Energy Use

- Fuel Consumption (FuelConsumption)
- Fuel Consumption Unit (FuelConsumptionUnit)

Calculations

- If Record Type = "Private Jet":
 - If Fuel Consumption! = 0, then Total Fuel Consumption (Liters) = Fuel Consumption converted to liters.
 - If Fuel Consumption = 0, then Total Fuel Consumption (Liters) = (Aircraft Fuel Economy (Gallons per Hour) × Flight Duration (Hours))/0.26417205.
- If Record Type = "Fleet Vehicle":
 - If Fuel Consumption Unit = "Gallons", then Total Fuel Consumption (Liters) = Fuel Consumption/0.26417205.
 - If Fuel Consumption Unit = "Liters", then Total Fuel Consumption (Liters) = Fuel Consumption.

Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)

Input Fields

- Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)
- Conversion constant Liters to gallons

Calculations

Total Fuel Consumption (US Gallons) = Total Fuel Consumption (Liters) \times 0.26417205

CH4 Emissions (kg) (Ch4EmissionsInKg)

Input Fields

- If Record Type = "Private Jet":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Other Emissions Factors (OtherEmissionFactor)
- If Record Type = "Fleet Vehicle":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Fuel Efficiency (mpg) (FuelEfficiencyInMpg)
 - Other Emissions Factors (OtherEmissionFactor)
 - Fuel Type (FuelType)
 - Fuel Consumption (FuelConsumption)

Calculations

If Record Type = "Private Jet", then

 CH4 Emissions (kg) = Total Fuel Consumption (US Gallons) × OtherEmissionFactor.OtherEmssnFctrSetItem.CH4 Emissions Factor (where Fuel Type = Jet Fuel and CH4 Emissions Factor converted to Kg/Gallon)

If Record Type = "Fleet Vehicle" and Fuel Type = "Diesel", "Autogas/LPG", "Biodiesel", "Compressed Natural Gas (CNG)", "Ethanol", or "Gasoline", and CH4 Emissions Factor unit is "g/Km" then

CH4 Emissions (kg) = Total Fuel Consumption (US Gallons) × Fuel Efficiency (mpg) × 1.60934 ×
 OtherEmissionFactor.OtherEmssnFctrSetItem.CH4 Emissions Factor (where Fuel Type =
 OtherEmissionFactor.OtherEmssnFctrSetItem.Fuel Type and CH4 Emissions Factor converted to Kg/Km)

If Record Type = "Fleet Vehicle" and Fuel Type = "Diesel", "Autogas/LPG", "Biodiesel", "Compressed Natural Gas (CNG)", "Ethanol", "Gasoline" and CH4 Emissions Factor unit is NOT "q/Km" then

CH4 Emissions (kg)=Total Fuel Consumption (US Gallons) * OtherEmissionFactor.CH4 Emissions Factor (convert to Kg/Gallon)

If Record Type = "Fleet Vehicle" and Fuel Type="Electricity" then

- CH4 Emissions (kg)=Fuel Consumption * OtherEmissionFactor.CH4 Emissions Factor (where, OtherEmissionFactor.Fuel Type = Electricity and CH4 Emissions Factor converted to kg/Kwh)

If Record Type = "Fleet Vehicle" and Fuel Consumption = null and Fuel Efficiency (mpg) = null and Distance != null then

CH4 Emissions (kg)= Distance Converted to Km * OtherEmissionFactor.CH4 Emissions Factor (where, Fuel Type =
 OtherEmissionFactor.Fuel Type and CH4 Emissions Factor converted to Kg/Km)

Default Value

0

CO2 Emissions (kg) (Co2EmissionsInKg)

Input Fields

- If Record Type = "Private Jet":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Other Emissions Factors (OtherEmissionFactor)
- If Record Type = "Fleet Vehicle":
 - Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)
 - Other Emissions Factors (OtherEmissionFactor)
 - Fuel Type (FuelType)
 - Fuel Consumption (FuelConsumption)
 - CO2 Emissions (kg) (Co2EmissionsInKg)
 - Fuel Efficiency (FuelEfficiency)

Calculations

If Record Type = "Private Jet", then

 CO2 Emissions (kg) = Total Fuel Consumption (US Gallons) × OtherEmissionFactor.OtherEmssnFctrSetItem.CO2 Emissions Factor (where Fuel Type = Jet Fuel and CO2 Emissions Factor converted to Kg/Gallon)

If Record Type = "Fleet Vehicle" and Fuel Type = "Diesel", "Autogas/LPG", "Biodiesel", "Compressed Natural Gas (CNG)", "Ethanol", or "Gasoline", then

 CO2 Emissions (kg) = Total Fuel Consumption (Liters) × OtherEmissionFactor.OtherEmssnFctrSetItem.CO2 Emissions Factor (where FuelT ype = OtherEmissionFactor.OtherEmssnFctrSetItem.Fuel Type and CO2 Emissions Factor converted to Kg/L)

If Record Type = "Fleet Vehicle" and Fuel Type = "Electricity" then

- CO2 Emissions (kg) = Fuel Consumption * OtherEmissionFactor.OtherEmssnFctrSetItem.CO2 Emissions Factor (where,
 OtherEmissionFactor.OtherEmssnFctrSetItem.Fuel Type = "Electricity" and CO2 Emissions Factor converted to Kg/kwh)
- If Record Type = "Fleet Vehicle" and Fuel Type = "Electricity" and Fuel Consumption = null and Fuel Efficiency = null and Distance != null then
 - CO2 Emissions (kg) = Distance Converted to Km * OtherEmissionFactor.OtherEmssnFctrSetItem.CO2 Emissions Factor (where, Fuel Type = OtherEmissionFactor.OtherEmssnFctrSetItem.Fuel Type and CO2 Emissions Factor converted to Kg/km)

Default Value

0

N2O Emissions (kg) (N2oEmissionInKg)

Input Fields

- If Record Type = "Private Jet":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Other Emissions Factors (OtherEmissionFactor)
- If Record Type = "Fleet Vehicle":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Fuel Efficiency (mpg) (FuelEfficiencyInMpg)
 - Other Emissions Factors (OtherEmissionFactor)
 - Fuel Type (FuelType)

Calculations

If Record Type = "Private Jet", then

 N2O Emissions (kg) = Total Fuel Consumption (US Gallons) × OtherEmissionFactor.OtherEmssnFctrSetItem.N2O Emissions Factor (where Fuel Type = Jet Fuel and N2O Emissions Factor converted to Kg/Gallon)

If Record Type = "Fleet Vehicle" and Fuel Type = "Diesel", "Autogas/LPG", "Biodiesel", "Compressed Natural Gas (CNG)", "Ethanol", or "Gasoline" and N2O Emissions Factor unit is "g/Km", then

If Record Type = "Fleet Vehicle" and Fuel Type = "Diesel", "Autogas/LPG", "Biodiesel", "Compressed Natural Gas (CNG)", "Ethanol", or "Gasoline" and N2O Emissions Factor unit is NOT "g/Km", then

 N2O Emissions (kg) = Total Fuel Consumption (US Gallons) × OtherEmissionFactor.OtherEmssnFctrSetItem.N2O Emissions Factor (where N2O Emissions Factor converted to Kg/Gallon)

if(Total Fuel Consumption (US Gallons) = null && Fuel Efficiency (mpg) = null && Distance != null) then

N2O Emissions (kg) = Distance * OtherEmissionFactor.OtherEmssnFctrSetItem.N2O Emissions Factor (where, FuelType =
 OtherEmissionFactor.Fuel Type and N2O Emissions Factor converted to Kg/km)

If Record Type = "Fleet Vehicle" and FuelType = "Electricity" then

- N2O Emissions (kg) = Fuel Consumption * OtherEmissionFactor.OtherEmssnFctrSetItem.N2O Emissions Factor (convert to Kg/Kwh)

If Record Type = "Fleet Vehicle" and Fuel Consumption = null and Fuel Efficiency (mpg) = null and Distance != null then

 N2O Emissions (kg) = Distance Converted to Km * OtherEmissionFactor.OtherEmssnFctrSetItem.N2O Emissions Factor (where, Fuel Type = OtherEmissionFactor.OtherEmssnFctrSetItem.Fuel Type and N2O Emissions Factor converted to Kg/Km)

Default Value

0

Scope 1 Emissions (tCO2e) (Scope1EmissionsInTco2e)

- If Record Type = "Private Jet":
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)

- Other Emissions Factors (OtherEmssnFctr)
- Supplemental Scope 1 Emissions (SuplScope1Emissions)
- If Record Type = "Fleet Vehicle":
 - N2O Emissions (kg) (N2oEmissionsInKg)
 - CO2 Emissions (kg) (Co2EmissionsInKg)
 - CH4 Emissions (kg) (Ch4EmissionsInKg)
 - Other Emissions Factors (OtherEmssnFctr)
 - Supplemental Scope 1 Emissions (SuplScope1Emissions)
 - Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
 - Fuel Consumption (FuelConsumption)

Calculations

If the scope allocation for this energy use record is scope 1, then perform this calculation.

If the scope allocation field is empty, then check, if Company-Owned Asset = true then Scope 1 else if not owned then Scope 3.

- If Record Type = "Private Jet", thenScope 1 Emissions (tCO2e) = Total Fuel Consumption (US Gallons) ×
 [OtherEmssnFctr.OtherEmssnFctrSetItem.CO2 Emissions Factor (convert to Kg/Gal) + OtherEmssnFctr.OtherEmssnFctrSetItem.CH4
 Emissions Factor (convert to Kg/Gal) × OtherEmssnFctr.CH4 Global Warming Potential +
 OtherEmssnFctr.OtherEmssnFctrSetItem.N2O Emissions Factor (convert to Kg/Gal) × OtherEmssnFctr.N2O Global Warming
 Potential]/1000 + Supplemental Scope 1 Emissions
- If Record Type = "Fleet Vehicle", thenScope 1 Emissions (tCO2e) = CO2 Emissions (kg)/1000 + CH4 Emissions (kg)/1000 ×
 OtherEmssnFctr.CH4 Global Warming Potential +N2O Emissions (kg)/1000 × OtherEmssnFctr.N2O Global Warming Potential +
 Supplemental Scope 1 Emissions

If Supplied CO2e Emissions Factor is null, then

If Record Type = "Private Jet", then

Scope 1 Emissions (tCO2e) = Total Fuel Consumption (US Gallons) \times [OtherEmssnFctr.OtherEmssnFctrSetItem.CO2 Emissions Factor (convert to Kg/Gal) + OtherEmssnFctr.OtherEmssnFctrSetItem.CH4 Emissions Factor (convert to Kg/Gal) \times OtherEmssnFctr.CH4 Global Warming Potential + OtherEmssnFctr.OtherEmssnFctrSetItem.N2O Emissions Factor (convert to Kg/Gal) \times OtherEmssnFctr.N2O Global Warming Potential]/1000 + Supplemental Scope 1 Emissions

If Record Type = "Fleet Vehicle", then

Scope 1 Emissions (tCO2e) = CO2 Emissions (kg)/1000 + CH4 Emissions (kg)/1000 \times OtherEmssnFctr.CH4 Global Warming Potential +N2O Emissions (kg)/1000 \times OtherEmssnFctr.N2O Global Warming Potential + Supplemental Scope 1 Emissions.

If Supplied CO2e Emissions Factor isn't null, then

If Record Type = "Private Jet", then

Scope 1 Emissions (tCO2e) = Total Fuel Consumption (US Gallons) \times OtherEmssnFctrSetltem.Supplied CO2e Emissions Factor (convert to Kg/Gal)/1000 + Supplemental Scope 1 Emissions.

- If Record Type = "Fleet Vehicle", then
 - if(Total Fuel Consumption (US Gallons) != null) then Scope 1 Emissions (tCO2e) = Total Fuel Consumption (US Gallons) × OtherEmssnFctr.OtherEmssnFctrSetItem.Supplied CO2e Emissions Factor (convert to Kg/Gal)/1000 + Supplemental Scope 1 Emissions

• if(Total Fuel Consumption (US Gallons) != null) then Scope 1 Emissions (tCO2e) = Fuel Consumption × OtherEmssnFctr.OtherEmssnFctrSetItem.Supplied CO2e Emissions Factor (convert to Kg/Kwh)/1000 + Supplemental Scope 1 Emissions

else if(Total Fuel Consumption (US Gallons) = null and Distance != null) then Scope 1 Emissions (tCO2e) = Distance (in km)
 × OtherEmssnFctr.OtherEmssnFctrSetItem.Supplied CO2e Emissions Factor (convert to Kg/Km)/1000 + Supplemental Scope
 1 Emissions

Default Value

Scope 1 Emissions (tCO2e) = Supplemental Scope 1 Emissions

Scope 2 Location-Based Emissions (tCO2e) (Scope2LocBasedEmssnInTco2e)

Input values

- Supplemental Scope 2 Location-Based Emissions (tCO2e) (SuplScope2LocationBasedEmssn)
- Carbon Emissions Scope Allocation (CrbnEmssnScopeAlloc)

Calculations are same as Scope 1 Emissions (tCO2e) (include correct supplemental emissions), but will hold a value only if Carbon Emissions Scope Allocation = "Scope 2"

Default Value

Scope 2 Location-Based Emissions (tCO2e) = Supplemental Scope 2 Location-Based Emissions

Scope 2 Market-Based Emissions (tCO2e) (Scope2MktBasedEmssnInTco2e)

Input values

- Supplemental Scope 2 Market-Based Emissions (tCO2e) (SuplScope2MarketBasedEmssn)
- Carbon Emissions Scope Allocation (CrbnEmssnScopeAlloc)

Calculations are same as Scope 1 Emissions (tCO2e) (include correct supplemental emissions), but will hold a value only if Carbon Emissions Scope Allocation = "Scope 2"

Default Value

Scope 2 Market-Based Emissions (tCO2e) = Supplemental Scope 2 Market-Based Emissions

Scope 3 Downstream Emissions (tCO2e) (Scope3DnstrmEmissionsInTco2e)

Input values

- Supplemental Scope 3 Downstream Emissions (SuplScope3DnstrmEmissions)
- Vehicle Asset Emissions Source (VehicleAssetEmssnSrc)
 - Carbon Emissions Scope Allocation (CrbnEmssnScopeAlloc)

Calculations are same as Scope 1 Emissions (tCO2e) (include correct supplemental emissions), but will hold a value only if VehicleAssetEmssnSrc.Carbon Emissions Scope Allocation = "Scope 3 Downstream" or "Scope 3 Downstream Transportation and Distribution"

Default Value

Scope 3 Downstream Emissions (tCO2e) = Supplemental Scope 3 Downstream Emissions

Scope 3 Upstream Emissions (tCO2e) (Scope3UpstrmEmissionsInTco2e)

Input values

- Supplemental Scope 3 Upstream Emissions (SuplScope3UpstrmEmissions)
- Vehicle Asset Emissions Source (VehicleAssetEmssnSrc)

Carbon Emissions Scope Allocation (CrbnEmssnScopeAlloc)

Calculations are same as Scope 1 Emissions (tCO2e) (include correct supplemental emissions), but will hold a value only if VehicleAssetEmssnSrc.Carbon Emissions Scope Allocation = "Scope 3 Upstream" or "Scope 3 Employee Commuting" or "Scope 3 Business Travel" or "Scope 3 Upstream Transportation and Distribution"

Default Value

Scope 3 Upstream Emissions (tCO2e) = Supplemental Scope 3 Upstream Emissions

Scope 3 GHG Category (Scope3GhgCategory)

Input values

- Vehicle Asset Emissions Source (VehicleAssetEmssnSrc)
 - Carbon Emissions Scope Allocation (CrbnEmssnScopeAlloc)

Calculations

if VehicleAssetEmssnSrc.Carbon Emissions Scope Allocation = "Employee Commuting" or "Business Travel" or Upstream Transportation and Distribution" or "Downstream Transportation and Distribution" then

Scope 3 GHG Category = VehicleAssetEmssnSrc.Carbon Emissions Scope Allocation

else

Scope 3 GHG Category = null

Fuel Efficiency (FuelEfficiency) and Fuel Efficiency Unit (FuelEfficiencyUnit)

Input Fields

- Fuel Efficiency (FuelEfficiency)
- Fuel Efficiency Unit (FuelEfficiencyUnit)
- Fuel Consumption (FuelConsumption)
- Fuel Consumption Unit (FuelConsumptionUnit)
- Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
- Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)
- Distance (Distance)
- Distance Unit (DistanceUnit)

Calculations

If (Record Type = "Fleet Vehicle")

- If Fuel Efficiency = null then calculate the fuel efficiency
- If fuel efficiency and distance traveled exist, update the Fuel Efficiency user input with the calculated value based on distance traveled and fuel consumption
- If Distance Unit = "Miles":
 - Fuel Efficiency = Distance/Total Fuel Consumption (US Gallons)
 - Fuel Efficiency Unit = "Miles per Gallon"
- If Distance Unit = "Kilometers":
 - Fuel Efficiency = Total Fuel Consumption (Liters) × 100/Distance
 - Fuel Efficiency Unit = "L per 100 km"

If Fuel Efficiency is provided and the distance isn't provided, don't override user input.

Distance (Distance) and Distance Unit (DistanceUnit)

Input Fields

- Fuel Efficiency (FuelEfficiency)
- Fuel Efficiency Unit (FuelEfficiencyUnit)
- Fuel Consumption (FuelConsumption)
- Fuel Consumption Unit (FuelConsumptionUnit)
- Total Fuel Consumption (US Gallons) (TotalFuelConsumptionInGal)
- Total Fuel Consumption (Liters) (TotalFuelConsumptionInLiter)
- Distance (Distance)
- Distance Unit (DistanceUnit)

Calculations

- If the user has provided a value, don't override it.
- If the value is null, then update the field with the calculated value.
- If Fuel Efficiency Unit = "Miles per Gallon":
 - Distance = Fuel Efficiency × Total Fuel Consumption (US Gallons)
 - Distance Unit = "Miles"
- If Fuel Efficiency Unit = "L per 100 km":
 - Distance = (1/Fuel Efficiency) ×100 × Total Fuel Consumption (Liters)
 - Distance Unit = "Kilometers"
- If Fuel Type = Electricity, Fuel Efficiency is not relevant and can't be used to calculate Fuel Consumption

Fuel Consumption

Input Fields

- Fuel Efficiency (FuelEfficiency)
- Fuel Efficiency Unit (FuelEfficiencyUnit)
- Distance (Distance)
- Distance Unit (DistanceUnit)

Outputs

- Fuel Consumption (FuelConsumption)
- Fuel Consumption Unit (FuelConsumptionUnit)

Calculations

- if Record Type = "Fleet Vehicle"
 - If Fuel Efficiency Unit = "Miles per Gallon" and Distance Unit = "Miles"
 Fuel Consumption = Distance / Fuel Efficiency(in mpg) Fuel Consumption Unit = "Gallons"
 - If Fuel Efficiency Unit = "L per 100 km" and Distance Unit = "Kilometers"
 Fuel Consumption = (Distance * Fuel Efficiency)/100 Fuel Consumption Unit = "Liters"
 - If Record Type = "Fleet Vehicle" and Distance != null and Fuel Efficiency = null

Fuel Consumption can't be calculated in this case with only Distance field

If Fuel Type = Electricity, Fuel Efficiency is not relevant and cannot be used to calculate Fuel Consumption

Scope 3 Procurement Summary

The Scope 3 Procurement Summary object represents the amount that the organization spends for one procurement category. Scope 3 procurement summary quantifies the effect on atmospheric warming, represented in tonnes of carbon dioxide equivalent (tCO_2e) by using a matched emissions factor from an associated Procurement Emissions Factor Item record.

Here are some general rules for scope 3 procurement summary:

- The currency in the inflation rate record must match the currency in the scope 3 procurement summary.
- Inflation rates are required for the years between the scope 3 procurement summary calendar year and the emissions factor scope 3 year.
- If the required inflation rates aren't available, the app permits the scope 3 procurement summary to be related to the emissions factor scope 3 dataset.
- When the scope 3 procurement summary and the emissions factor scope 3 dataset have the same year, the current inflation rate is 0%.
- When the scope 3 procurement summary year is later than the emissions factor scope 3 dataset, the current Inflation rate is calculated by using the years of the emissions factor scope 3 dataset through the year before the scope 3 procurement summary:

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

 Net Zero Cloud Manager

```
Current Inflation Rate =

( 1 + Inflation Rate Year 1 Inflation Rate )

× ( 1 + Inflation Rate Year 2 Inflation Rate )

× ( 1 + Inflation Rate Year 3 Inflation Rate ) - 1
```

• When the scope 3 procurement summary year is earlier than the emissions factor scope 3 dataset, the current inflation rate is calculated by using the years of the scope 3 procurement summary through the year before the emissions factor scope 3 dataset:

```
Current Inflation Rate =

-1 × ( (1 + Inflation Rate Year 1 Inflation Rate )

× (1 + Inflation Rate Year 2 Inflation Rate )

× (1 + Inflation Rate Year 3 Inflation Rate ) - 1 )
```

Here are the calculated fields:

- Scope 3 Emissions from Business Travel (tCO2e) (Scp3EmssnBusinessTravel)
 Input Fields
 - Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Scope 3 Emissions from Business Travel (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Business Travel"

Scope 3 Emissions from Capital Goods (tCO2e) (Scp3EmssnCapitalGood)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Capital Goods (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Capital Goods"

Scope 3 Emissions from Downstream Leased Asset (tCO2e) (Scp3EmssnDnstrmLeasedAsset)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Downstream Leased Asset (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Downstream Leased Assets"

Scope 3 Emissions from Downstream Transportation Distribution (tCO2e) (Scp3EmssnDnstrmTrnspDistr)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Downstream Transportation Distribution (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Downstream Transportation and Distribution"

Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e) (Scp3EmssnEndLifeSoldProdt)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "End-of-Life Treatment of Sold Products"

Scope 3 Emissions from Franchise (tCO2e) (Scp3EmssnFranchise)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Franchise (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Franchises"

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Fuel and Energy-Related Activities"

Scope 3 Emissions from Investment (tCO2e) (Scp3EmssnInvestment)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Investment (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Investments"

Scope 3 Emissions from Processing Sold Product (tCO2e) (Scp3EmssnProcSoldProduct)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Processing Sold Product (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Processing of Sold Products"

Scope 3 Emissions from Purchased Goods Services (tCO2e) (Scp3EmssnPurchGoodsService)

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)

Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Purchased Goods Services (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Purchased Goods and Services"

Scope 3 Emissions from Upstream Leased Asset (tCO2e) (Scp3EmssnUpstrmLeasedAsset)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Upstream Leased Asset (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Upstream Leased Assets"

Scope 3 Emissions from Upstream Transportation Distribution (tCO2e) (Scp3EmssnUpstrmTrnspDistr)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Upstream Transportation Distribution (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Upstream Transportation and Distribution"

Scope 3 Emissions from Use of Sold Product (tCO2e) (Scp3EmssnUseOfSoldProduct)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Use of Sold Product (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e)) where Scope3PcmtItem.Scope 3 GHG Category = "Use of Sold Products"

Scope 3 Uncategorized Emissions (tCO2e) (Scp3UncatgEmissions)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Uncategorized Emissions (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Uncategorized"

Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scp3WasteGenInOper)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Waste Generated in Operations (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Waste Generated In Operations"

Scope 3 Emissions from Employee Commuting (tCO2e) (ScpEmssnEmployeeCommuting)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)
 - Scope 3 GHG Category (Scope3GhgCategory)

Calculation

Scope 3 Emissions from Employee Commuting (tCO2e) = SUM(Scope3Pcmtltem.Final Scope 3 Emissions (tCO2e)) where Scope3Pcmtltem.Scope 3 GHG Category = "Employee Commuting"

Total Scope 3 Downstream Emissions (tCO2e) (TotalScp3DnstrmEmissions)

Input Fields

- Scope 3 Emissions from Downstream Transportation Distribution (tCO2e) (Scp3EmssnDnstrmTrnspDistr)
- Scope 3 Emissions from Processing Sold Product (tCO2e) (Scp3EmssnProcSoldProduct)
- Scope 3 Emissions from Use of Sold Product (tCO2e) (Scp3EmssnUseOfSoldProduct)
- Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e) (Scp3EmssnEndLifeSoldProdt)
- Scope 3 Emissions from Downstream Leased Asset (tCO2e) (Scp3EmssnDnstrmLeasedAsset)
- Scope 3 Emissions from Franchise (tCO2e) (Scp3EmssnFranchise)
- Scope 3 Emissions from Investment (tCO2e) (Scp3EmssnInvestment)

Calculation

Total Scope 3 Downstream Emissions (tCO2e) = SUM(Scope 3 Emissions from Downstream Transportation Distribution (tCO2e), Scope 3 Emissions from Use of Sold Product (tCO2e), Scope 3 Emissions from Use of Sold Product (tCO2e), Scope 3 Emissions from Downstream Leased Asset (tCO2e), Scope 3 Emissions from Franchise (tCO2e), Scope 3 Emissions from Investment (tCO2e))

Total Scope 3 Emissions (tCO2e) (TotalScp3Emissions)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Final Scope 3 Emissions (tCO2e)(Scope3EmissionsInTco2)

Calculation

Total Scope 3 Emissions (tCO2e) = SUM(Scope3PcmtItem.Final Scope 3 Emissions (tCO2e))

Total Scope 3 Upstream Emissions (tCO2e) (TotalScp3UpstrmEmissions)

Input Fields

- Scope 3 Emissions from Purchased Goods Services (tCO2e) (Scp3EmssnPurchGoodsService)
- Scope 3 Emissions from Capital Goods (tCO2e) (Scp3EmssnCapitalGood)
- Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)
- Scope 3 Emissions from Upstream Transportation Distribution (tCO2e) (Scp3EmssnUpstrmTrnspDistr)
- Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scp3WasteGenInOper)
- Scope 3 Emissions from Business Travel (tCO2e) (Scp3EmssnBusinessTravel)
- Scope 3 Emissions from Employee Commuting (tCO2e) (ScpEmssnEmployeeCommuting)
- Scope 3 Emissions from Upstream Leased Asset (tCO2e) (Scp3EmssnUpstrmLeasedAsset)

Calculation

Total Scope 3 Upstream Emissions (tCO2e) = SUM(Scope 3 Emissions from Purchased Goods Services (tCO2e), Scope 3 Emissions from Capital Goods (tCO2e), Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e), Scope 3 Emissions from Upstream Transportation Distribution (tCO2e), Scope 3 Emissions from Waste Generated in Operations (tCO2e), Scope 3 Emissions from Business Travel (tCO2e), Scope 3 Emissions from Employee Commuting (tCO2e), Scope 3 Emissions from Upstream Leased Asset (tCO2e))

Total Spent Amount (TotalSpentAmount)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
 - Spent Amount (SpentAmount)

Calculation

Total Spent Amount = SUM(Scope3Pcmtltem.Spent Amount)

Inflation Rate (InflationRate)

Input Fields

- Inflation Rate Override (InflationRateOverride)
- Current Inflation Rate (InflationRateCalculated)

Calculation

If (InflationRateOverride !=null) then
InflationRate = Inflation Rate Override
else
InflationRate = Current Inflation Rate

Scope 3 Procurement Item

The Scope 3 Procurement Item object represents the procurement (corporate spending) entry records. Procurement is the amount that an organization spends on goods and services.

Scope 3 Procurement Item

The Scope 3 Procurement Item object represents the procurement (corporate spending) entry records. Procurement is the amount that an organization spends on goods and services.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2) Input Fields

- Calculated Scope 3 Emissions (tCO2e) (CalculatedScope3EmssnInTco2e)
- Vendor-Provided Scope 3 Emissions (tCO2e) (VendorPrvdScope3EmssnInTco2e)

Calculations

If Vendor-Provided Scope 3 Emissions (tCO2e)! = 0, then Scope 3 Emissions (tCO2e) = Vendor-Provided Scope 3 Emissions (tCO2e)

else, Scope 3 Emissions (tCO2e) = Calculated Scope 3 Emissions (tCO2e).

Calculated Scope 3 Emissions (tCO2e) (CalculatedScope3EmssnInTco2e) Input Fields

- Total Spent Amount (SpentAmount)
- Scope 3 Procurement Summary (Scope3PcmtSummary).Inflation Rate (InflationRate)
- Total Scope 3 Emissions per Million Spent (tCO2e) (TotScpe3EmssnPerMillionSpent)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To configure installed packages:

Customize Application

To create profiles and permission sets:

 Manage Profiles and Permission Sets

To assign permission sets:

Assign Permission Sets

To create users:

Manage Internal Users

Calculations

If Scope3PcmtSummary.Inflation Rate < 0, then Calculated Scope 3 Emissions (tCO2e) = Spent Amount /1000000 \times Total Scope 3 Emissions per Million Spent (tCO2e) \times (1-Scope3PcmtSummary.Inflation Rate).

If Scope3PcmtSummary.Inflation Rate >= 0, then Calculated Scope 3 Emissions (tCO2e) = Spent Amount/1000000 \times Total Scope 3 Emissions per Million Spent (tCO2e)/(1+Scope3PcmtSummary.Inflation Rate).

Total Scope 3 Emissions per Million Spent (tCO2e) (TotScpe3EmssnPerMillionSpent)

Input Fields

Procurement Emissions Factor Set Item (PcmtEmssnFctrSetItem)

Calculations

Total Scope 3 Emissions per Million Spent (tCO2e) = PcmtEmssnFctrSetItem.Total Scope 3 Emissions per Million Spent (tCO2e)

Scope 3 Uncategorized Emissions (tCO2e) (Scp3UncatgEmissions)

Input Fields

- Scope 3 GHG Category (Scope3GhgCategory)
- Scope 3 Emissions (tCO2e) (Scope3EmissionsInTco2)

Calculations

If Scope 3 GHG Category = "Uncategorized", then Scope 3 Uncategorized Emissions (tCO2e) = Scope 3 Emissions (tCO2e). else Scope 3 Uncategorized Emissions (tCO2e) = 0

Net Zero Cloud Calculations Emissions Factor Records

Default Value

0

Final Scorecard Emissions (tCO2e) (FinalScorecardEmissions)

Input Fields

- Sustainability Scorecard (SustainabilityScorecard)
 - Scope 3 Emissions Calculation Measure (Scope3EmssnCalculationMeasure)
 - Company Annual Expenditure Emissions (CompanyAnnualExpenditureEmssn)
 - Supplier Provided Emissions (SupplierProvidedEmissions)
 - Percentage Based Emissions (PercentageBasedEmissions)
 - Supplier Annual Revenue Emissions (SupplierAnnualRevenueEmissions)

Calculations

If SustainabilityScorecard.Scope 3 Emissions Calculation Measure = "Spend Based"

Final Scorecard Emissions (tCO2e) = Company Annual Expenditure Emissions

If SustainabilityScorecard.Scope 3 Emissions Calculation Measure = "Supplier Provided"

Final Scorecard Emissions (tCO2e) = Supplier Provided Emissions

If SustainabilityScorecard.Scope 3 Emissions Calculation Measure = "Percentage Based"

Final Scorecard Emissions (tCO2e) = Percentage Based Emissions

If SustainabilityScorecard.Scope 3 Emissions Calculation Measure = "Revenue Based"

Final Scorecard Emissions (tCO2e) = Supplier Annual Revenue Emissions

Emissions Factor Records

You can complete the emissions calculations by using the energy use records and applying the relevant emissions factors. The supplied values, such as refrigerant leakage rate, are industry standard averages that Salesforce uses in its own calculations, but you can also use your own.

Air Travel Emission Factor

The Air Travel Emission Factor object represents the emissions factors for scope 3 commercial air travel.

Electricity Emissions Factor Set

The Electricity Emissions Factor Set object represents the factors that are used to convert electricity usage into CO_2e , CO_2 , CH_4 , and N_2O values. This record holds data on the breakdown of sources of electricity by fuel type (grid mixes).

Other Emissions Factor Set

The Other Emissions Factor Set object represents a collection of emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

Rental Car Emission Factor

The Rental Car Emission Factor object represents the emissions factors for scope 3 rental car usage.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

 Net Zero Cloud Manager Net Zero Cloud Calculations Air Travel Emission Factor

Waste Disposal Emissions Factor Set Item

The Waste Disposal Emissions Factor Set Item object represents the individual emissions factors for scope 3 waste handling based on the waste type and disposal type.

Air Travel Emission Factor

The Air Travel Emission Factor object represents the emissions factors for scope 3 commercial air travel.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Note: If both miles and kms values are entered, the values in miles are given preference for calculations.

Here are the calculated fields:

CH4/Passenger-km for Long-Haul (kg CO2e) (Ch4PsgrKmLongHaulInKgCo2e) Input Fields

CH4/Passenger-mile for Long-Haul (kg CO2e) (Ch4PsgrMileLongHaulInKgCo2e)

Calculations

If (CH4/Passenger-km Long-Haul (kg CO2e) is null) then

CH4/Passenger-km Long-Haul (kg CO2e) = CH4/Passenger-mile Long-Haul (kg CO2e) / Conversion factor

CH4/Passenger-km for Medium-Haul (kg CO2e) (Ch4PsgrKmMediumHaulInKgCo2e) Input Fields

- CH4/Passenger-mile for Medium-Haul (kg CO2e) (Ch4PsgrMileMediumHaulInKgCo2e)

Calculations

If (CH4/Passenger-km medium-Haul (kg CO2e) is null) then

CH4/Passenger-km medium-Haul (kg CO2e) = CH4/Passenger-mile medium-Haul (kg CO2e) / Conversion factor

CH4/Passenger-km for Short-Haul (kg CO2e) (Ch4PsgrKmShortHaulInKgCo2e) Input Fields

CH4/Passenger-mile for Short-Haul (kg CO2e) (Ch4PsgrMileShortHaulInKgCo2e)

Calculations

If (CH4/Passenger-km Short-Haul (kg CO2e) is null) then

CH4/Passenger-km Short-Haul (kg CO2e) = CH4/Passenger-mile Short-Haul (kg CO2e) / Conversion factor

CH4/Passenger-mile for Long-Haul (kg CO2e) (Ch4PsgrMileLongHaulInKgCo2e) Input Fields

CH4/Passenger-km for Long-Haul (kg CO2e) (Ch4PsgrKmLongHaulInKgCo2e)

Calculations

If (CH4/Passenger-mile for Long-Haul (kg CO2e) is null) then

CH4/Passenger-mile for Long-Haul (kg CO2e) = CH4/Passenger-km for Long-Haul (kg CO2e) \times Conversion factor

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Net Zero Cloud Calculations Air Travel Emission Factor

CH4/Passenger-mile for Medium-Haul (kg CO2e) (Ch4PsgrMileMediumHaulInKgCo2e)

Input Fields

- CH4/Passenger-km for Medium-Haul (kg CO2e) (Ch4PsgrKmMediumHaulInKgCo2e)

Calculations

If (CH4/Passenger-mile for Medium-Haul (kg CO2e) is null) then

CH4/Passenger-mile for Medium-Haul (kg CO2e) = CH4/Passenger-km for Medium-Haul (kg CO2e) × Conversion factor

CH4/Passenger-mile for Short-Haul (kg CO2e) (Ch4PsgrMileShortHaulInKgCo2e)

Input Fields

- CH4/Passenger-km for Short-Haul (kg CO2e) (Ch4PsgrKmShortHaulInKgCo2e)

Calculations

If (CH4/Passenger-mile for Short-Haul (kg CO2e) is null) then

CH4/Passenger-mile for Short-Haul (kg CO2e) = CH4/Passenger-km for Short-Haul (kg CO2e) \times Conversion factor

N2O/Passenger-km for Long-Haul (kg CO2e) (N2oPsgrKmLongHaulInKgCo2e)

Input Fields

N2O/Passenger-mile for Long-Haul (kg CO2e) (N2oPsgrMileLongHaulInKgCo2e)

Calculations

If (N2O/Passenger-km Long-Haul (kg CO2e) is null) then

N2O/Passenger-km Long-Haul (kg CO2e) = N2O/Passenger-mile Long-Haul (kg CO2e) / Conversion factor

N2O/Passenger-km for Medium-Haul (kg CO2e) (N2oPsgrKmMediumHaulInKgCo2e)

Input Fields

- N2O/Passenger-mile for Medium-Haul (kg CO2e) (N2oPsgrMileMediumHaulInKgCo2e)

Calculations

If (N2O/Passenger-km Medium-Haul (kg CO2e) is null) then

N2O/Passenger-km Medium-Haul (kg CO2e) = N2O/Passenger-mile Medium-Haul (kg CO2e)/ Conversion factor

N2O/Passenger-km for Short-Haul (kg CO2e) (N2oPsgrKmShortHaulInKgCo2e)

Input Fields

N2O/Passenger-mile for Short-Haul (kg CO2e) (N2oPsgrMileShortHaulInKgCo2e)

Calculations

If (N2O/Passenger-km Short-Haul (kg CO2e) is null) then

N2O/Passenger-km Short-Haul (kg CO2e) = N2O/Passenger-mile Short-Haul (kg CO2e)/ Conversion factor

N2O/Passenger-mile for Long-Haul (kg CO2e) (N2oPsgrMileLongHaulInKgCo2e)

Input Fields

N2O/Passenger-km for Long-Haul (kg CO2e) (N2oPsgrKmLongHaulInKgCo2e)

Calculations

Net Zero Cloud Calculations Air Travel Emission Factor

If (N2O/Passenger-mile Long-Haul (kg CO2e) is null) then

N2O/Passenger-mile Long-Haul (kg CO2e) = N2O/Passenger-km Long-Haul (kg CO2e) × Conversion factor

N2O/Passenger-mile for Medium-Haul (kg CO2e) (N2oPsgrMileMediumHaulInKgCo2e)

Input Fields

N2O/Passenger-km for Medium-Haul (kg CO2e) (N2oPsgrKmMediumHaulInKgCo2e)

Calculations

If (N2O/Passenger-mile Medium-Haul (kg CO2e) is null) then

 $N2O/Passenger-mile Medium-Haul (kg CO2e) = N2O/Passenger-km Medium-Haul (kg CO2e) \times Conversion factor$

N2O/Passenger-mile for Short-Haul (kg CO2e) (N2oPsgrMileShortHaulInKgCo2e)

Input Fields

N2O/Passenger-km for Short-Haul (kg CO2e) (N2oPsgrKmShortHaulInKgCo2e)

Calculations

If (N2O/Passenger-mile Short-Haul (kg CO2e) is null) then

N2O/Passenger-mile Short-Haul (kg CO2e) = N2O/Passenger-km Short-Haul (kg CO2e) × Conversion factor

CO2/Passenger-km for Long-Haul (kg) (Co2PsgrKmLongHaulInKg)

Input Fields

CO2/Passenger-mile for Long-Haul (kg) (Co2PsgrMileLongHaulInKg)

Calculations

If (CO2/Passenger-km Long-Haul (kg) is null) then

CO2/Passenger-km Long-Haul (kg) = CO2/Passenger-mile Long-Haul (kg) /1.60934

CO2/Passenger-km for Medium-Haul (kg) (Co2PsgrKmMediumHaulInKg)

Input Fields

CO2/Passenger-mile for Medium-Haul (kg) (Co2PsgrMileMediumHaulInKg)

Calculations

If (CO2/Passenger-km Medium-Haul (kg) is null) then

CO2/Passenger-km Medium-Haul (kg) = CO2/Passenger-mile Medium-Haul (kg) / Conversion factor

CO2/Passenger-km for Short-Haul (kg) (Co2PsgrKmShortHaulInKg)

Input Fields

- CO2/Passenger-mile for Short-Haul (kg) (Co2PsgrMileShortHaulInKg)

Calculations

If (CO2/Passenger-km Short-Haul (kg) is null) then

CO2/Passenger-km Short-Haul (kg) = CO2/Passenger-mile Short-Haul (kg) / Conversion factor

CO2/Passenger-mile for Long-Haul (kg) (Co2PsgrMileLongHaulInKg)

CO2/Passenger-km for Long-Haul (kg) (Co2PsgrKmLongHaulInKg)

Calculations

If (CO2/Passenger-mile Long-Haul (kg) is null) then

CO2/Passenger-mile Long-Haul (kg) = CO2/Passenger-km Long-Haul (kg) × Conversion factor

CO2/Passenger-mile for Medium-Haul (kg) (Co2PsgrMileMediumHaulInKg) Input Fields

CO2/Passenger-km for Medium-Haul (kg) (Co2PsgrKmMediumHaulInKg)

Calculations

If (CO2/Passenger-km Medium-Haul (kg) is null) then

CO2/Passenger-km Medium-Haul (kg) = CO2/Passenger-mile Medium-Haul (kg) \times Conversion factor

CO2/Passenger-mile for Short-Haul (kg) (Co2PsgrMileShortHaulInKg)

Input Fields

CO2/Passenger-km for Short-Haul (kg) (Co2PsgrKmShortHaulInKg)

Calculations

If (CO2/Passenger-km Short-Haul (kg) is null) then

CO2/Passenger-km Short-Haul (kg) = CO2/Passenger-mile Short-Haul (kg) × Conversion factor

Electricity Emissions Factor Set

The Electricity Emissions Factor Set object represents the factors that are used to convert electricity usage into CO_2e , CO_2 , CO_2 , CO_3 , and O_2O_3 values. This record holds data on the breakdown of sources of electricity by fuel type (grid mixes).

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

The renewable energy fields are the sum of biomass, geothermal, solar, wind, and hydroelectricity values.

Total Renewable Energy is also delineated into a total that includes hydroelectricity sources [Total Renewable Energy (kWh)] and a total that doesn't include Hydroelectricity sources [Total Renewable Energy Excluding Hydro (kWh)].

Here are the calculated fields:

CO2e Emissions Rate (tonnes/MWh) (Co2eEmissionRateInTmwh)

Input Fields

- CH4 Emissions Rate (Ch4EmissionRate)
- CH4 Emissions Rate Unit (Ch4EmissionRateUnit)
- CO2 Emissions Rate (Co2EmissionRate)
- N2O Emissions Rate (N2oEmissionRate)
- N2O Emissions Rate Unit (N2oEmissionRateUnit)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

 Net Zero Cloud Manager

- CO2e Emissions Rate (Co2eEmissionRate)
- CO2e Emissions Rate (tonnes/MWh) (Co2eEmissionRateInTmwh)
- CO2e Emissions Rate Unit (Co2eEmissionRateUnit)
- CH4 Emissions Rate (tonnes/GWh) (Ch4EmissionRateInTgwh)
- CO2 Emissions Rate (tonnes/MWh) (Co2EmissionRateInTmwh)
- N2O Emissions Rate (tonnes/GWh) (N2oEmissionRateInTgwh)
- Parent Emissions Factor (ParentEmissionFactor)
- Other Emission Factor Set (OtherEmssnFctrSet)
- CH4 Global Warming Potential (Ch4GlblWarmingPot)
- N2O Global Warming Potential (N2oGlblWarmingPot)

Convert CH4 Emissions Rate, CO2 Emissions Rate, N2O Emissions Rate to tonnes/MWh.

If (Co2eEmissionRate == null/0) then

 $\label{eq:co2e} \mbox{CO2e Emissions Rate (tonnes/MWh) = CO2e Emissions Rate (tonnes/MWh) + CH4 Emissions Rate (tonnes/GWh) \times Other Emssn Fctr Set. CH4 Global Warming Potential/1000 + N2O Emissions Rate (tonnes/GWh) \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emssn Fctr Set. N2O Global Warming Potential/1000 \times Other Emss Fctr Set. N2O Global Warming$

else

CO2e Emissions Rate (tonnes/MWh) = CO2e Emissions Rate × Conversion constant for tCO2e/MWh

CH4 Emissions Rate (tonnes/GWh) (Ch4EmissionRateInTgwh)

Input Fields

- CH4 Emissions Rate (Ch4EmissionRate)
- CH4 Emissions Rate Unit (Ch4EmissionRateUnit)

Calculations

CH4 Emissions Rate (tonnes/GWh) = CH4 Emissions Rate × Conversion constant for tCO2e/GWh

CO2 Emissions Rate (tonnes/MWh) (Co2EmissionRateInTmwh)

Input Fields

- CO2 Emissions Rate (Co2EmissionRate)
- CO2 Emissions Rate Unit (Co2EmissionRateUnit)

Calculations

CO2 Emissions Rate (tonnes/MWh) = CO2 Emissions Rate \times Conversion constant for tCO2e/MWh

Market-Based CO2e Emissions Rate (tonnes/MWh) (MktBsdCo2eEmissionRateInTmwh)

- Market-Based CO2e Emissions Rate (MktBsdCo2eEmissionRate)
- Market-Based CO2e Emissions Rate Unit (MktBsdCo2eEmissionRateUnit)

Market-Based CO2e Emissions Rate (tonnes/MWh) = Market-Based CO2e Emissions Rate \times Conversion constant for tCO2e/MWh

N2O Emissions Rate (tonnes/GWh) (N2oEmissionRateInTgwh)

Input Fields

- N2O Emissions Rate (N2oEmissionRate)
- N2O Emissions Rate Unit (N2oEmissionRateUnit)

Calculations

N2O Emissions Rate (tonnes/GWh) = N2O Emissions Rate × Conversion constant for tCO2e/GWh

Location-Based Mix Percentage (LocationBasedMixPct)

Input Fields

- Location-Based Biomass Mix Percentage (LocationBasedBiomassMixPct)
- Location-Based Coal Mix Percentage (LocationBasedCoalMixPct)
- Location-Based Gas Mix Percentage (LocationBasedGasMixPct)
- Location-Based Hydroelectricity Mix Percentage (LocationBasedHydroMixPct)
- Location-Based Nuclear Mix Percentage (LocationBasedNuclearMixPct)
- Location-Based Oil Mix Percentage (LocationBasedOilMixPct)
- Location-Based Other Fuel Mix Percentage (LocationBasedOtherFuelMixPct)
- Location-Based Solar Mix Percentage (LocationBasedSolarMixPct)
- Location-Based Geothermal Mix Percentage (LocBasedGeothermalMixPct)
- Location-Based Other Fossil Fuel Mix Percentage (LocBasedOtherFossilFuelMixPct)
- Location-Based Wind Mix Percentage (LocationBasedWindMixPct)

Calculations

Location-Based Mix Percentage = Sum (Location-Based Biomass Mix Percentage + Location-Based Coal Mix Percentage + Location-Based Gas Mix Percentage + Location-Based Hydroelectricity Mix Percentage + Location-Based Nuclear Mix Percentage + Location-Based Oil Mix Percentage + Location-Based Other Fuel Mix Percentage + Location-Based Solar Mix Percentage + Location-Based Geothermal Mix Percentage + Location-Based Other Fossil Fuel Mix Percentage + Location-Based Wind Mix Percentage)

Market-Based Mix Percentage (MarketBasedMixPct)

- Market-Based Biomass Mix Percentage (MarketBasedBiomassMixPct)
- Market-Based Coal Mix Percentage (MarketBasedCoalMixPct)
- Market-Based Gas Mix Percentage (MarketBasedGasMixPct)
- Market-Based Hydroelectric Mix Percentage (MarketBasedHydroMixPct)
- Market-Based Nuclear Mix Percentage (MarketBasedNuclearMixPct)
- Market-Based Oil Mix Percentage (MarketBasedOilMixPct)

- Market-Based Other Fuel Mix Percentage (MarketBasedOtherFuelMixPct)
- Market-Based Solar Mix Percentage (MarketBasedSolarMixPct)
- Market-Based Geothermal Mix Percentage (MktBasedGeothermalMixPct)
- Market-Based Other Fossil Fuel Mix Percentage (MktBasedOtherFossilFuelMixPct)
- Market-Based Wind Mix Percentage (MarketBasedWindMixPct)

Market-Based Mix Percentage = Sum(Market-Based Biomass Mix Percentage + Market-Based Coal Mix Percentage + Market-Based Gas Mix Percentage + Market-Based Hydroelectric Mix Percentage + Market-Based Nuclear Mix Percentage + Market-Based Oil Mix Percentage + Market-Based Other Fuel Mix Percentage + Market-Based Solar Mix Percentage + Market-Based Geothermal Mix Percentage + Market-Based Other Fossil Fuel Mix Percentage + Market-Based Wind Mix Percentage)

Location-Based Renewable Energy Excluding Hydroelectricity Percentage (LocBsdRenewableEnrgyNonHydro) Input Fields

- Location-Based Biomass Mix Percentage (LocationBasedBiomassMixPct)
- Location-Based Solar Mix Percentage (LocationBasedSolarMixPct)
- Location-Based Geothermal Mix Percentage (LocBasedGeothermalMixPct)
- Location-Based Wind Mix Percentage (LocationBasedWindMixPct)

Calculations

Location-Based Renewable Energy Excluding Hydroelectricity Percentage = Sum(Location-Based Biomass Mix Percentage + Location-Based Solar Mix Percentage + Location-Based Geothermal Mix Percentage + Location-Based Wind Mix Percentage)

Location-Based Renewable Energy Percentage (LocBasedRenewableEnergyPct) Input Fields

- Location-Based Biomass Mix Percentage (LocationBasedBiomassMixPct)
- Location-Based Hydroelectricity Mix Percentage (LocationBasedHydroMixPct)
- Location-Based Solar Mix Percentage (LocationBasedSolarMixPct)
- Location-Based Geothermal Mix Percentage (LocBasedGeothermalMixPct)
- Location-Based Wind Mix Percentage (LocationBasedWindMixPct)

Calculations

Location-Based Renewable Energy Percentage = Sum(Location-Based Biomass Mix Percentage + Location-Based Solar Mix Percentage + Location-Based Geothermal Mix Percentage + Location-Based Wind Mix Percentage + Location-Based Hydroelectricity Mix Percentage)

Market-Based Renewable Energy Excluding Hydroelectricity Percentage (MktBsdRenewableEnrgyNonHydro) Input Fields

- Market-Based Biomass Mix Percentage (MarketBasedBiomassMixPct)
- Market-Based Solar Mix Percentage (MarketBasedSolarMixPct)
- Market-Based Geothermal Mix Percentage (MktBasedGeothermalMixPct)

Net Zero Cloud Calculations Other Emissions Factor Set

Market-Based Wind Mix Percentage (MarketBasedWindMixPct)

Calculations

Market-Based Renewable Energy Excluding Hydroelectricity Percentage = Sum(Market-Based Biomass Mix Percentage + Market-Based Solar Mix Percentage + Market-Based Geothermal Mix Percentage + Market-Based Wind Mix Percentage)

Market-Based Renewable Energy Percentage (MktBasedRenewableEnergyPct)

Input Fields

- Market-Based Biomass Mix Percentage (MarketBasedBiomassMixPct)
- Market-Based Hydroelectric Mix Percentage (MarketBasedHydroMixPct)
- Market-Based Solar Mix Percentage (MarketBasedSolarMixPct)
- Market-Based Geothermal Mix Percentage (MktBasedGeothermalMixPct)
- Market-Based Wind Mix Percentage (MarketBasedWindMixPct)

Calculations

Market-Based Renewable Energy Percentage = Sum(Market-Based Biomass Mix Percentage + Market-Based Solar Mix Percentage + Market-Based Geothermal Mix Percentage + Market-Based Wind Mix Percentage + Market-Based Hydroelectric Mix Percentage

Other Emissions Factor Set

The Other Emissions Factor Set object represents a collection of emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Refrigerant Leakage Rate (kg/m2) (RefrigerantLeakageRtInKgM2) Input fields

Refrigerant Leakage Rate (kg/sqft) (RefrigerantLeakageRtInKgSqft)

Calculations

 Refrigerant Leakage Rate (kg/m2) = Refrigerant Leakage Rate (kg/sqft) × Conversion constant for m2

Refrigerant Leakage Rate (kg/sqft) (RefrigerantLeakageRtInKgSqft) Input Fields

Refrigerant Leakage Rate (kg/m2) (RefrigerantLeakageRtInKgM2)

Calculations

Refrigerant Leakage Rate (kg/sqft) = Refrigerant Leakage Rate (kg/m2) \times Conversion constant for sqft

Other Emissions Factor Set Item

The Other Emissions Factor Set item object represents the individual entries for emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Manager Net Zero Cloud Calculations Other Emissions Factor Set

Other Emissions Factor Set Item

The Other Emissions Factor Set item object represents the individual entries for emissions and conversion factors for various data types and sources that are neither the electricity grid nor scope 3 data types.

Table 3: Fuel Units

Unit/Fuel Type	Stationary Fuel (CO2, CH4, N2O)	Mobile Fuel - CO2	Mobile Fuel - CH4, N2O	Jet Fuel	Mobile Fuel - Electricity (CO2, CH4, N20)
g/km			X		Χ
g/kWh	X				Χ
g/MMBtu	X				
kg/kWh	X				X
kg/MJ	X				
kg/MMBtu	X				
kg/GJ	X				
g/US gal		X	X	X	
kg/L		X	X	X	
kg/US gal		X	X	Χ	
g/L		X (default mobile fuel)	X (default mobile fuel)	X (default mobile fuel)	
kg/kl		X	X	Χ	
g/kl		X	X	X	
kg/km			X		X
g/miles			Х		X
kg/miles			X		Χ

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: Enterprise, Developer, Performance, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Manager



Note: When you select the diesel fuel type, which can be a stationary or a mobile fuel type, ensure that the Other Emissions Factor Set Item record selected is associated with the appropriate emissions factor units for diesel. For more information, see Other Emissions Factor Set Item Supplied Emission Factors in Conversion Factors on page 942.

Here are the calculated fields:

- CO2e Emissions Factor (tCO2e/MWh) (Co2eEmissionFactorInTco2eMwh) **Input Fields**
 - Electricity Emissions Factor Set (ElectricityEmssnFctrSet)
 - CH4 Emissions Rate (Ch4EmissionRate)

Net Zero Cloud Calculations Rental Car Emission Factor

- CH4 Emissions Rate Unit (Ch4EmissionRateUnit)
- CO2 Emissions Rate (Co2EmissionRate)
- N2O Emissions Rate (N2oEmissionRate)
- N2O Emissions Rate Unit (N2oEmissionRateUnit)
- CH4 Emissions Factor (Ch4EmissionFactor)
- N2O Emissions Factor (N2oEmissionFactor)
- Parent Emissions Factor (ParentEmissionFactor)

Calculations

If FuelType is stationary fuels, then convert CO2 Emissions Factor, CH4 Emissions Factor, and N2O Emissions Factor to tonnes/MWh. CO2e Emissions Factor (tCO2e/MWh) = CO2 Emissions Factor + CH4 Emissions Factor \times ParentEmissionFactor.CH4 Global Warming Potential + N2O Emissions Factor \times ParentEmissionFactor.N2O Global Warming Potential

CO2e Emissions Factor (tCO2e/GJ) (Co2eEmissionFactorInTco2eGj)

Input Fields

CO2e Emissions Factor (tCO2e/MWh) (Co2eEmissionFactorInTco2eMwh)

Calculations

CO2e Emissions Factor (tCO2e/GJ) = CO2e Emissions Factor (tCO2e/MWh) \times Conversion factor for tonnes/GWhGJ

Rental Car Emission Factor

The Rental Car Emission Factor object represents the emissions factors for scope 3 rental car usage. For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

Fuel Efficiency (mpg) (FuelEfficiencyInMpg)

Input Fields

- Fuel Efficiency Unit (FuelEfficiencyUnit)
- Fuel Efficiency (FuelEfficiency)

Calculations

Fuel Efficiency (mpg) = Fuel Efficiency \times Conversion factor for mpg

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Waste Disposal Emissions Factor Set Item

The Waste Disposal Emissions Factor Set Item object represents the individual emissions factors for scope 3 waste handling based on the waste type and disposal type.

For information about converting the values from one unit of measure to another compatible unit of measure, see Conversion Factors.

Here are the calculated fields:

- Emissions Factor Value (tCO2e/Tonne Waste Material) (EmssnFctrTco2eTonneWstMtrl)
 Input Fields
 - Emissions Factor Value (EmissionsFactorValue)
 - Emissions Factor Value Unit (EmissionsFactorValueUnit)

Calculations

 $EmssnFctrTco2eTonneWstMtrl = EmissionsFactorValue \times Conversion constant$

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Carbon Footprint

To calculate the carbon footprint of an organization, Net Zero Cloud employs energy usage records for an asset or a business activity, usually for the calendar or fiscal year. If you're missing data for a reporting period, you can fill the gaps manually or use estimates provided by the app.

Here are some points to consider:

- Carbon footprint summarizes values from multiple energy use records.
- Carbon footprint and energy use records are associated through a record on the carbon footprint object.
- Apex triggers force recalculation of a carbon footprint record whenever an energy use record
 changes. This recalculation is done only if the change in the energy use record impacts any of
 the rolled up fields on the associated carbon footprint record.
- Supplemental emission fields correspond to their matching total scope fields. For example, the value in Total Scope 1 Emissions (tCO2e) includes the Supplemental Scope 1 Emissions value entered on the carbon footprint record.

Stationary Asset Carbon Footprint

The Stationary Asset Carbon Footprint object represents the total carbon emissions and other environmental attributes from stationary assets. The carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e).

Vehicle Asset Carbon Footprint

The Vehicle Asset Carbon Footprint object represents the total carbon emissions from vehicles. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO₂e).

Scope 3 Carbon Footprint

The Scope 3 Carbon Footprint object represents the total carbon emissions from scope 3 activities. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e).

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

Stationary Asset Carbon Footprint

The Stationary Asset Carbon Footprint object represents the total carbon emissions and other environmental attributes from stationary assets. The carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO $_2$ e). Here are the calculated fields:

Allocated Renewable Energy (kWh) (AllocatedRenewableEnergyInKwh) Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Allocated Renewable Energy (kWh) = SUM (StnryAssetEnrgyUse.Allocated Renewable Energy (kWh))

Annual Electricity Intensity Variance Percentage (AnnlElectrIntensityVarPct) Input Fields

The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm) record where Fuel Type = Electricity.

The Stationary Asset Environmental Source (StnryAssetEnvrSrc) record.

The Building Energy Intensity Value (BldgEnrgyIntensity) record.

Calculations

Annual Electricity Intensity Variance Percentage = (StnryAssetCrbnFtprntltm.Energy Consumption Intensity (kWh/sqft) - RegionalBldgEnergyIntensity.BldgEnrgyIntensity "Electricity".Annual Intensity Value (kWh/sqft) \times 100 (kWh/sqft) \times 100 (kWh/sqft)

Average Data Center Power Usage Effectiveness (AvgDataCenterPue)

Input Fields

The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm) record where Fuel Type = IT Electricity.

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record.

Calculations

 $Average\ Data\ Center\ Power\ Usage\ Effectiveness = sum(StnryAssetEnrgyUse. Final\ Energy\ Consumption)/StnryAssetCrbnFtprntltm. Total\ Energy\ Consumption\ (kWh)$

Average Monthly Electricity Consumption (kWh) (AvgMonthlyElectrCnsmpInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where Fuel Type = Electricity.

Calculations

Average Monthly Electricity Consumption (kWh) = SUM (StnryAssetEnrgyUse.Normalized Monthly Electricity Consumption (kWh))/COUNT (StnryAssetEnrgyUse.Normalized Monthly Electricity Consumption (kWh))

Carbon Inventory Record Count (CarbonInventoryRecordCount)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

Net Zero Cloud Manager

Carbon Inventory Record Count = COUNT (all Stationary Asset Energy Use records that are associated with the carbon footprint).

Data Center IT Diesel Consumption Intensity (kWh/IT kWh) (DataCtrltDieselCnsmpIntensity) Input Fields

- Related Stationary Asset Emission Source Record Type = Data Center
- The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm) record where Fuel Type = IT Electricity.
- The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm) record where Fuel Type = Diesel.

Calculations

If StnryAssetCrbnFtprntltm has a record for IT Electricity, then Data Center IT Diesel Consumption Intensity (kWh/IT kWh) = (StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) for Fuel Type = Diesel)/(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) for Fuel Type = IT Electricity).

Energy Consumption Intensity (kBtu/m2) (EnrgyCnsmpIntensityInKbtuM2)

Input Fields

Energy Consumption Intensity (kWh/m2) (EnrgyCnsmpIntensityInKwhM2)

Calculations

Energy Consumption Intensity (kBtu/m2) = Energy Consumption Intensity (kWh/m2) \times 3.412

Energy Consumption Intensity (kBtu/sqft) (EnrgyCnsmpIntensityInKbtuSqft)

Input Fields

Energy Consumption Intensity (kWh/sqft) (EnrgyCnsmpIntensityInKwhSqft)

Calculations

Energy Consumption Intensity (kBtu/sqft) = Energy Consumption Intensity (kWh/sqft) \times 3.412

Energy Consumption Intensity (kWh/m2) (EnrgyCnsmpIntensityInKwhM2)

Input Fields

Energy Consumption Intensity (kWh/sqft) (EnrgyCnsmpIntensityInKwhSqft)

Calculations

Energy Consumption Intensity (kWh/m2) = Energy Consumption Intensity (kWh/sqft) \times 10.7639

Energy Consumption Intensity (kWh/sqft) (EnrgyCnsmpIntensityInKwhSqft)

Input Fields

- Total Energy Consumption (kWh) (TotEnergyConsumptionInKwh)
- Occupied Floor Area (OccupiedFloorArea)
- Occupied Floor Area Unit (OccupiedFloorAreaUnit)

Calculations

Energy Consumption Intensity (kWh/sqft) = Total Energy Consumption (kWh)/Occupied Floor Area (in sqft)

Energy Intensity Variance Percentage (EnrgyIntensityVariancePct)

- Energy Consumption Intensity (kWh/sqft) (EnrgyCnsmpIntensityInKwhSqft)
- Regional Energy Consumption Intensity (kBtu/sqft) (RgnlEnrgyCnsmpIntensity)

Energy Intensity Variance Percentage = (Energy Consumption Intensity (kWh/sqft) (converted to kBtu/sqft) - Regional Energy Consumption Intensity (kBtu/sqft) \times 100

Location-Based Electricity from Biomass (kWh) (LocBasedElectrFromBiomassInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Biomass (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Biomass (kWh))

Location-Based Electricity from Coal (kWh) (LocBasedElectrFromCoalInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Coal (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Coal (kWh))

Location-Based Electricity from Gas (kWh) (LocBasedElectrFromGasInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Gas (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Gas (kWh))

Location-Based Electricity from Hydro (kWh) (LocBasedElectrFromHydroInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Hydro (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Hydro (kWh))

Location-Based Electricity from Nuclear (kWh) (LocBasedElectrFromNuclearInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

 $Location-Based\ Electricity\ from\ Nuclear\ (kWh) = SUM\ (StnryAssetEnrgyUse.Location-Based\ Electricity\ from\ Nuclear\ (kWh))$

Location-Based Electricity from Oil (kWh) (LocBasedElectrFromOilInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Oil (kWh) = SUM (StnryAssetEnrqyUse.Location-Based Electricity from Oil (kWh))

Location-Based Electricity from Solar (kWh) (LocBasedElectrFromSolarInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Solar (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Solar (kWh))

Location-Based Electricity from Wind (kWh) (LocBasedElectrFromWindInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Wind (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Wind (kWh))

Location-Based Electricity from Other Fuel (kWh) (LocBasedElectrFrOthrFuelInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Location-Based Electricity from Other Fuel (kWh) = SUM (StnryAssetEnrgyUse.Location-Based Electricity from Other Fuel (kWh))

Location-Based Electricity from Geothermal (kWh) (LocBsdElectrFrGeothermalInKwh)

Input Fields

The Stationary Asset Energy Use (Stationary Asset Energy Use (StnryAssetEnrgyUse)) record where FuelType = Electricity.

Calculations

LocBsdElectrFrGeothermallnKwh = SUM (Stationary Asset Energy Use (StnryAssetEnrgyUse) .LocBsdElectrFrGeothermallnKwh)

Location-Based Electricity from Other Fossil Fuel (kWh) (LocBsdElectrOthrFossilFuelKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

 $Location-Based\ Electricity\ from\ Other\ Fossil\ Fuel\ (kWh) = SUM\ (StnryAssetEnrgyUse. Location-Based\ Electricity\ from\ Other\ Fossil\ Fuel\ (kWh))$

Maximum Variance Above Average Electricity Consumption (MaxVarianceAboveAvgElectrCnsmp)

Input Fields

- Average Monthly Electricity Consumption (kWh) (AvgMonthlyElectrCnsmplnKwh).
- The Stationary Asset Energy Use (StnryAssetEnrgyUse) records where FuelType = Electricity

Calculations

Maximum Variance Above Average Electricity Consumption = ABS [MAX (StnryAssetEnrgyUse.Normalized Monthly Electricity Consumption (kWh)) - Average Monthly Electricity Consumption (kWh) \times 100

Maximum Variance Below Average Electricity Consumption (MaxVarianceBelowAvgElectrCnsmp)

- Average Monthly Electricity Consumption (kWh) (AvgMonthlyElectrCnsmplnKwh).
- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Maximum Variance Below Average Electricity Consumption = ABS [MIN (StnryAssetEnrgyUse.Normalized Monthly Electricity Consumption (kWh)) - Average Monthly Electricity Consumption (kWh) \times 100

Market-Based Electricity from Biomass (kWh) (MktBsdElectrFrBiomassInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Biomass (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Biomass (kWh))

Market-Based Electricity from Coal (kWh) (MktBsdElectrFrFromCoalInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) where FuelType = Electricity.

Calculations

Market-Based Electricity from Coal (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Coal (kWh))

Market-Based Electricity from Gas (kWh) (MktBsdElectrFrGasInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Gas (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Gas (kWh))

Market-Based Electricity from Geothermal (kWh) (MktBsdElectrFrGeothermalInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Geothermal (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Geothermal (kWh))

Market-Based Electricity from Hydro (kWh) (MktBsdElectrFrHydroInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Hydro (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Hydro (kWh))

Market-Based Electricity from Nuclear (kWh) (MktBsdElectrFrNuclearInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Nuclear (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Nuclear (kWh))

Market-Based Electricity from Oil (kWh) (MktBsdElectrFrOilInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Oil (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Oil (kWh))

Market-Based Electricity from Other Fuel (kWh) (MktBsdElectrFrOthrFuelInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Other Fuel (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Other Fuel (kWh))

Market-Based Electricity from Solar (kWh) (MktBsdElectrFrSolarInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Solar (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Solar (kWh))

Market-Based Electricity from Wind (kWh) (MktBsdElectrFrWindlnKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Wind (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Wind (kWh))

Scope 3 Emissions from Capital Goods (tCO2e) (Scp3EmssnCptlGoods)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Capital Goods (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Capital Goods"

Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scope3EmssnDnstrmLsdAst)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Downstream Leased Assets (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Downstream Leased Assets"

Scope 3 Emissions from End-Life Treatment of Sold Products (tCO2e) (Scp3EndLifeTreatSoldPrdct)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from End-Life Treatment of Sold Products (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 End-of-Life Treatment of Sold Products"

Scope 3 Emissions from Franchises (tCO2e) (Scp3EmssnFranchises)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Franchises (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Franchises"

Scope 3 Emissions from Fuel and Energy-Related Activities (tCO2e) (Scp3FuelEnrgyRelaActv)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Fuel and Energy-Related Activities (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Fuel and Energy-Related Activities"

Scope 3 Emissions from Investments (tCO2e) (Scp3EmssnInvestments)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Investments (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Investments"

Scope 3 Emissions from Processing Sold Products (tCO2e) (Scp3EmssnProcSoldPrdct)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Processing Sold Products (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Processing Sold Products"

Scope 3 Emissions from Purchased Goods Services (tCO2e) (Scp3EmssnPurchGoodsSrvcs)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Purchased Goods Services (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Purchased Goods and Services"

Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstrmLsdAst)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Upstream Leased Assets (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Upstream Leased Assets"

Scope 3 Emissions from Use of Sold Products (tCO2e) (Scp3EmssnUseOfSoldPrdct)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Use of Sold Products (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Use of Sold Products"

Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scp3EmssnWstGenInOper)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Waste Generated in Operations (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Waste Generated in Operations"

Scope 3 Uncategorized Emissions (tCO2e) (Scp3UncategorizedEmssn)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Uncategorized Emissions (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) + SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when

- StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Upstream Emissions"
- StnryAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Downstream Emissions"
- StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e) != null but StnryAssetEnrgyUse.Scope 3 GHG Category != "Scope
 3 Downstream Emissions" (Using supplemental value on StnryAssetEnrgyUse)
- StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e) != null but StnryAssetEnrgyUse.Scope 3 GHG Category != "Scope 3 Upstream Emissions" (Using supplemental value on StnryAssetEnrgyUse)

Market-Based Electricity from Other Fossil Fuel (kWh) (MktBsdElectrOthrFossilFuelKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Market-Based Electricity from Other Fossil Fuel (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Other Fossil Fuel (kWh))

Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Total Renewable Energy (kWh) = SUM (StnryAssetEnrgyUse.Total Renewable Energy (kWh))

Total Renewable Energy Percentage (TotalRenewableEnergyPct)

- Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh).
- The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm) record where FuelType = Electricity.

Total Renewable Energy Percentage = Total Renewable Energy (kWh)/StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) \times 100

Total Scope 3 Downstream Emissions (tCO2e) (TotalScp3DnstrmEmissions)

Input Fields

- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.
- Supplemental Scope 3 Downstream Emissions (SuplScope3DnstrmEmissions).

Calculations

Total Scope 3 Downstream Emissions (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) + Supplemental Scope 3 Downstream Emissions

Total Scope 3 Upstream Emissions (tCO2e) (TotalScp3UpstrmEmissions)

Input Fields

- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.
- Supplemental Scope 3 Upstream Emissions (SuplScope3UpstrmEmissions).

Calculations

Total Scope 3 Upstream Emissions (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) + Supplemental Scope 3 Upstream Emissions

Total Energy Consumption (GJ) (TotEnergyConsumptionInGj)

Input Fields

The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm) records (all fuel types).

Calculations

Total Energy Consumption (GJ) = SUM (StnryAssetCrbnFtprntltm.Total Energy Consumption (GJ)) where FuelType = All Fuel Types

Total Energy Consumption (kWh) (TotEnergyConsumptionInKwh)

Input Fields

The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm) records (all fuel types).

Calculations

Total Energy Consumption (kWh) = SUM (StnryAssetCrbnFtprntltm.Total Energy Consumption (<math>kWh)) where FuelType = All Fuel Types

Total Energy Consumption (MWh) (TotEnergyConsumptionInMwh)

Input Fields

Total Energy Consumption (kWh) (TotEnergyConsumptionInKwh)

Calculations

Total Energy Consumption (MWh) = Total Energy Consumption (kWh)/1000

• Total Renewable Energy Excluding Hydro (kWh) (TotRnwlEnrgyExclHydroInKwh)

Input Fields

The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.

Calculations

Total Renewable Energy Excluding Hydro (kWh) = SUM (StnryAssetEnrgyUse.Market-Based Electricity from Biomass (kWh) + StnryAssetEnrgyUse.Market-Based Electricity from Solar (kWh) + StnryAssetEnrgyUse.Market-Based Electricity from Geothermal (kWh))

Total Renewable Energy Percentage Excluding Hydro (TotRnwlEnrgyExclHydroPct)

Input Fields

- Total Renewable Energy Excluding Hydro (kWh) (TotRnwlEnrgyExclHydroInKwh)
- The StnryAssetCrbnFtprntltm record where FuelType = Electricity.

Calculations

Total Renewable Energy Percentage Excluding Hydro = Total Renewable Energy Excluding Hydro (kWh)/StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) \times 100

Total Scope 1 Emissions (tCO2e) (TotScope1EmissionsInTco2e)

Input Fields

- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.
- Supplemental Scope 1 Emissions (SuplScope1Emissions).

Calculations

Total Scope 1 Emissions (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 1 Emissions (tCO2e)) + Supplemental Scope 1 Emissions

Total Scope 2 Location-Based Emissions (TotScope2LocBasedEmissions)

Input Fields

- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.
- Supplemental Scope 2 Location-Based Emissions (SuplScope2LocationBasedEmssn).

Calculations

Total Scope 2 Location-Based Emissions = SUM (StnryAssetEnrgyUse.Scope 2 Location-Based Emissions (tCO2e)) + Supplemental Scope 2 Location-Based Emissions

Total Scope 2 Market-Based Emissions (TotScope2MktBasedEmissions)

Input Fields

- The Stationary Asset Energy Use (StnryAssetEnrgyUse) record where FuelType = Electricity.
- Supplemental Scope 2 Market-Based Emissions (SuplScope2MarketBasedEmssn).

Calculations

Total Scope 2 Market-Based Emissions = SUM (StnryAssetEnrgyUse.Scope 2 Market-Based Emissions (tCO2e)) + Total Scope 2 Market-Based Emissions

Year over Year Power Usage Effectiveness Variance Percentage (YearOverYearPueVariancePct)

Input Fields

Average Data Center Power Usage Effectiveness (AvgDataCenterPue)

Calculations

Year over Year Power Usage Effectiveness Variance Percentage = ((Average Data Center Power Usage Effectiveness - previous year(Average Data Center Power Usage Effectiveness) \times 100

Total Building Indirect Energy Consumption (MWh) (TotBldgIndirectEnrgyCnsmpInMwh)

Input Fields

The Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm) record where FuelType = Electricity, Steam, Heat, or Cooling.

Calculations

Total Building Indirect Energy Consumption (MWh) = SUM (StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh)) where StnryAssetCrbnFtprntltm.Fuel Type = "Electricity", "Steam", "Heat", or "Cooling"/1000

Regional Energy Consumption Intensity (kBtu/sqft) (RgnlEnrgyCnsmpIntensity)

Input Fields

Regional Electricity Consumption Intensity (kWh/sqft) (RegionalBldgEnergyIntensity)

The Building Energy Intensity (BldgEnrgyIntensity) record.

Calculations

Regional Energy Consumption Intensity (kBtu/sqft) = BldgEnrgyIntensity. Annual Energy Intensity (kWh/sqft) converted to kBtu/sqft

Regional Electricity Consumption Intensity (kWh/sqft) (RgnlElectrCnsmpIntensity)

Input Fields

Regional Building Energy Intensity (Regional Bldg Energy Intensity

The Building Energy Intensity Value (BldgEnrgyIntensityVal) record.

Calculations

Regional Electricity Consumption Intensity (kWh/sqft) = BldqEnrgyIntensityVal.Annual Intensity Value (<math>kWh/sqft)

Stationary Asset Carbon Footprint Item

The Stationary Asset Carbon Footprint Item object represents the total tCO_2e emissions of individual fuel types, which are the child records of the stationary asset carbon footprint record. These are automatically generated after a stationary asset carbon footprint is associated with energy use records.

Stationary Asset Carbon Footprint Item

The Stationary Asset Carbon Footprint Item object represents the total tCO_2 e emissions of individual fuel types, which are the child records of the stationary asset carbon footprint record. These are automatically generated after a stationary asset carbon footprint is associated with energy use records.

Here are the calculated fields:

Annual Electricity Intensity Variance Percentage (AnnlElectrIntensityVarPct) Input Fields

Previous Year Annual Energy Consumption Intensity (kWh/m2) (PrevYrEnrgyIntensityKwhM2)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

Energy Consumption Intensity (kWh/m2) (EnrgyCnsmpIntensityInKwhM2)

Calculations

If Previous Year Annual Energy Consumption Intensity (kWh/m2) isn't NULL, then Annual Electricity Intensity Variance Percentage = (Energy Consumption Intensity (kWh/m2) - Previous Year Annual Energy Consumption Intensity (kWh/m2))/Previous Year Annual Energy Consumption Intensity (kWh/m2).

Energy Consumption Intensity (kWh/m2) (EnrgyCnsmpIntensityInKwhM2)

Input Fields

- All Stationary Asset Energy Use (StnryAssetEnrgyUse) records.
 - Occupied Floor Area (sqft) (OccupiedFloorAreaInSqft)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh).

Calculations

Energy Consumption Intensity (kWh/m2) = Total Energy Consumption (kWh)/(StnryAssetEnrgyUse.Occupied Floor Area (<math>sqft)/10.7639)

Energy Consumption Intensity (kWh/sqft) (EnrgyCnsmpIntensityInKwhSqft)

Input Fields

- All StnryAssetEnrgyUse records for the related fuel type.
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh).

Calculations

Energy Consumption Intensity (kWh/sqft) = Total Energy Consumption (kWh)/StnryAssetEnrgyUse.Occupied Floor Area (sqft)

Total Energy Consumption (GJ) (TotalEnergyConsumptionInGj)

Input Fields

Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculations

For a fuel type, Total Energy Consumption (GJ) = Total Energy Consumption (kWh) \times 0.0036.

Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Input Fields

All StnryAssetEnrgyUse records for the related fuel type.

Calculations

For a fuel type, Total Energy Consumption (kWh) = SUM (StnryAssetEnrgyUse.Total Fuel Consumption (kWh)).

Total Emissions (tCO2e) (TotalEmissionsInTco2e)

Input Fields

All StnryAssetEnrgyUse records for the related fuel type.

Calculations

Total Emissions (tCO2e) = SUM (StnryAssetEnrgyUse.Scope 1 Emissions (tCO2e) + StnryAssetEnrgyUse.Scope 2 Location-Based Emissions (tCO2e) + StnryAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e) + StnryAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e))

This value doesn't include supplemental values.

Vehicle Asset Carbon Footprint

The Vehicle Asset Carbon Footprint object represents the total carbon emissions from vehicles. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO_2e).

Here are the calculated fields:

Carbon Inventory Record Count (CarbonInventoryRecordCount)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Carbon Inventory Record Count = COUNT (all VehicleAssetEnrgyUse records associated with this carbon footprint).

Scope 3 Emissions from Business Travel (tCO2e) (Scp3EmssnBusTravl)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Business Travel (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when VehicleAssetEnrgyUse.Scope 3 GHG Category = "Business Travel"

Scope 3 Emissions from Employee Commute (tCO2e) (Scp3EmssnEmpComut)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Employee Commute (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when VehicleAssetEnrgyUse.Scope 3 GHG Category = "Employee Commuting"

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstrmTrnspDstr)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when VehicleAssetEnrgyUse.Scope 3 GHG Category = "Upstream Transportation and Distribution"

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDnstrmTrnspDstr)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) when VehicleAssetEnrgyUse.Scope 3 GHG Category = "Downstream Transportation and Distribution"

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Scope 3 Uncategorized Emissions (tCO2e) (Scp3UncategorizedEmssn)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) + SUM(VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) when

- VehicleAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Upstream Emissions"
- VehicleAssetEnrgyUse.Scope 3 GHG Category = "Scope 3 Downstream Emissions"
- VehicleAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e) != null but VehicleAssetEnrgyUse.Scope 3 GHG Category !=
 "Scope 3 Downstream Emissions" (Using supplemental value on VehicleAssetEnrgyUse)
- VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e) != null but VehicleAssetEnrgyUse.Scope 3 GHG Category != "Scope
 3 Upstream Emissions" (Using supplemental value on VehicleAssetEnrgyUse)

Total Scope 3 Downstream Emissions (tCO2e) (TotalScp3DnstrmEmissions)

Input Fields

- The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.
- Supplemental Scope 3 Downstream Emissions (SuplScope3DnstrmEmissions).

Calculations

Total Scope 3 Downstream Emissions (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Downstream Emissions (tCO2e)) + Supplemental Scope 3 Downstream Emissions

Total Scope 3 Upstream Emissions (tCO2e) (TotalScp3UpstrmEmissions)

Input Fields

- The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.
- Supplemental Scope 3 Upstream Emissions (SuplScope3UpstrmEmissions).

Calculations

Total Scope 3 Upstream Emissions (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 3 Upstream Emissions (tCO2e)) + Supplemental Scope 3 Upstream Emissions

Total Fuel Consumption (Gallons) (TotFuelCnsmpInGallons)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Total Fuel Consumption (Gallons) = SUM (VehicleAssetEnrgyUse.Total Fuel Consumption (US Gallons))

Total Fuel Consumption (Liters) (TotFuelCnsmpInLiters)

Input Fields

The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.

Calculations

Total Fuel Consumption (Liters) = SUM (VehicleAssetEnrgyUse.Total Fuel Consumption (Liters))

Total Scope 1 Emissions (tCO2e) (TotScope1EmissionsInTco2e)

Input Fields

- The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.
- Supplemental Scope 1 Emissions (tCO2e) (SuplScope1Emissions).

Calculations

Total Scope 1 Emissions (tCO2e) = SUM (VehicleAssetEnrgyUse.Scope 1 Emissions (tCO2e)) + Supplemental Scope 1 Emissions (tCO2e)

Default Value

Total Scope 1 Emissions (tCO2e) = Supplemental Scope 1 Emissions (tCO2e)

Total Scope 2 Location-Based Emissions (TotScope2LocBasedEmissions)

Input Fields

- The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.
- Supplemental Scope 2 Location-Based Emissions (SuplScope2LocationBasedEmssn).

Calculations

Total Scope 2 Location-Based Emissions = SUM (VehicleAssetEnrgyUse.Scope 2 Location-Based Emissions (tCO2e)) + Supplemental Scope 2 Location-Based Emissions

Default Value

Total Scope 2 Location-Based Emissions = Supplemental Scope 2 Location-Based Emissions

Supplemental Scope 2 Market-Based Emissions (TotScope2MktBasedEmissions)

Input Fields

- The Vehicle Asset Energy Use (VehicleAssetEnrgyUse) records associated with this carbon footprint.
- Supplemental Scope 2 Market-Based Emission (SuplScope2MarketBasedEmssn).

Calculations

Supplemental Scope 2 Market-Based Emissions = SUM (VehicleAssetEnrgyUse.Scope 2 Market-Based Emissions (tCO2e)) + Supplemental Scope 2 Market-Based Emissions

Default Value

Supplemental Scope 2 Market-Based Emissions = Supplemental Scope 2 Market-Based Emissions

Net Zero Cloud Calculations Scope 3 Carbon Footprint

Scope 3 Carbon Footprint

The Scope 3 Carbon Footprint object represents the total carbon emissions from scope 3 activities. Carbon footprint quantifies the effect of atmospheric warming, which is represented in metric tonnes of carbon dioxide equivalent (tCO₂e).

Here are the calculated fields:

Scope 3 Emissions from Capital Goods (tCO2e) (Scp3EmssnCapitalGood)
 Input Fields

The related Scope 3 Procurement Summary (Scope3PcmtSummary) records.

Calculations

Sum of the scope 3 emissions for capital goods (category 2), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Downstream Leased Asset (tCO2e)

 Scope 3 Emissions from Downstream Leased Asset (tCO2e) (Scp3EmssnDnstrmLeasedAsset)

Calculations

Sum of scope 3 emissions for downstream leased assets (category 13), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Downstream Leased Asset (tCO2e)

Scope 3 Emissions from Downstream Transportation Distribution (tCO2e) (Scp3EmssnDnstrmTrnspDistr)
 Calculations

Sum of the scope 3 emissions for downstream transportation and distribution (category 9), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records and Freight Hauling Energy Use (FrgtHaulingEnrgyUse) records where scope 3 category is downstream + Supplemental Scope 3 Emissions from Downstream Transportation Distribution (tCO2e)

Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e) (Scp3EmssnEndLifeSoldProdt)
 Calculations

Sum of the scope 3 emissions for end-of-life treatment of sold products (category 12), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records. This value includes aggregation of emissions from waste when the Generated Waste object has a lookup to Scope 3 Carbon Footprint + Supplemental Scope 3 Emissions from End-Life Treatment of Sold Product (tCO2e)

Scope 3 Emissions from Franchise (tCO2e) (Scp3EmssnFranchise)

Calculations

Sum of the scope 3 emissions for franchises (category 14), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Franchise (tCO2e)

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)

Calculations

Sum of the scope 3 emissions for fuel and energy-related activities not included in scope 1 or scope 2 (category 3), in units of tCO2e.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

USER PERMISSIONS

To enter and modify data:

 Net Zero Cloud Manager Net Zero Cloud Calculations Scope 3 Carbon Footprint

This value isn't included in scope 1 or scope 2 and is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e)

Scope 3 Emissions from Investments (tCO2e) (Scp3EmssnInvestment)

Calculations

Sum of the scope 3 emissions for investments (category 15), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Investments (tCO2e)

Scope 3 Emissions from Processing Sold Products (tCO2e) (Scp3EmssnProcSoldProduct)

Calculations

Sum of the scope 3 emissions for processing of sold products (category 10), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Processing Sold Products (tCO2e)

Scope 3 Emissions from Purchased Goods Services (tCO2e) (Scp3EmssnPurchGoodsService)

Calculations

Sum of the scope 3 emissions for purchased goods and services (category 1), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Purchased Goods Services (tCO2e)

Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstrmLeasedAsset)

Calculations

Sum of the scope 3 emissions for upstream leased assets (category 8), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Upstream Leased Assets (tCO2e)

Scope 3 Emissions from Scope 3 Upstream Transportation Distribution (tCO2e) (Scp3EmssnUpstrmTrnspDistr)

Calculations

Sum of the scope 3 emissions for upstream transportation and distribution (category 4), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) and Freight Hauling Energy Use (FrgtHaulingEnrgyUse) records where scope 3 category is upstream + Supplemental Scope 3 Emissions from Scope 3 Upstream Transportation Distribution (tCO2e)

Scope 3 Emissions from Use of Sold Products (tCO2e) (Scp3EmssnUseOfSoldProduct)

Calculations

Sum of the scope 3 emissions for use of sold products (category 11), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Emissions from Use of Sold Products (tCO2e)

Scope 3 Uncategorized Emissions (tCO2e) (Scp3UncatgEmissions)

Calculations

Sum of the scope 3 uncategorized emissions, in units of tCO2e. Calculated from related procurement summaries.

Net Zero Cloud Calculations Scope 3 Carbon Footprint

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + Supplemental Scope 3 Uncategorized Emissions (tCO2e)

Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scp3WasteGenInOper)

Calculations

Sum of the scope 3 emissions for waste generated in operations (category 5), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records. This value includes aggregation of emissions from waste when the Generated Waste object has a lookup to Scope 3 Carbon Footprint + Supplemental Scope 3 Emissions from Waste Generated in Operations (tCO2e)

Scope 3 Emissions from Employee Commuting (tCO2e) (Scp3EmssnEmployeeCommuting)

Calculations

Sum of the scope 3 emissions for employee commuting (category 7), in units of tCO2e.

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary) records + scope 3 emissions from the related ground and rental car energy use records based on the selected GHG category + Supplemental Scope 3 Emissions from Employee Commuting (tCO2e)

Total Scope 3 Downstream Emissions (tCO2e) (TotalScp3DnstrmEmissions)

Calculations

Sum of the scope 3 downstream emissions: Downstream Transportation Distribution, Processing Sold Products, Use of Sold Products, End-of-Life Sold Products, Downstream Leased Assets, Franchises, and Investments.

Total Scope 3 Emissions from Business Travel (tCO2e) (TotalScp3EmssnBusTrvl)

Calculations

Sum of Scope 3 Emissions from Business Travel Energy Consumption (tCO2e), Scope 3 Emissions from Business Travel Procurement (tCO2e), and Total scope 3 emissions for business travel (category 6) in units of tCO2e.

The value is calculated from the related ground, hotel, rental, and air travel energy use records based on the selected GHG category + Supplemental Scope 3 Emissions from Business Travel (tCO2e)

Total Scope 3 Upstream Emissions (tCO2e) (TotalScp3UpstrmEmissions)

Calculations

Sum of the scope 3 upstream emissions: Purchased Goods, Capital Goods, Fuel, Energy-Related Activities, Upstream Transportation Distribution, Waste Generated in Operations, Business Travel, Employee Commuting, and Upstream Leased Assets.

Total Scope 3 Emissions (tCO2e) (TotScope3EmissionsInTco2e)

Input Fields

The related Scope 3 Procurement Summary (Scope3PcmtSummary), energy use, and waste records.

Calculations

Sum of the scope 3 emissions, in units of tCO2e: Total Upstream + Total Downstream + Total Uncategorized + Supplemental Scope 3 emissions

This value is calculated from the related Scope 3 Procurement Summary (Scope3PcmtSummary), energy use, and waste objects.

Net Zero Cloud Calculations Waste Management

Waste Management

You can calculate upstream emissions from waste generated in operations for a reporting company, either by company-owned/controlled operations or by third-party treatment and disposal of waste. You can also calculate downstream emissions from waste generated during the end-of-life treatment of company's sold products.

Use one of these methods to calculate emissions:

- Supplier-specific method: Involves collecting waste-specific scope 3 emissions data directly from waste treatment companies.
- Waste-type-specific method: Involves using emission factors for specific waste types and waste treatment methods.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Waste Footprint

The Waste Footprint object represents the volume of aggregated waste and carbon emissions from waste generated either as part of operations or at the end of life of a product.

Generated Waste

The Generated Waste object represents the information on the waste generated in operations, the waste generated while treating end-of-life products that were sold, and so on.

Waste Footprint

The Waste Footprint object represents the volume of aggregated waste and carbon emissions from waste generated either as part of operations or at the end of life of a product.

Here are the calculated fields:

Generated Waste Detail Record Count (GeneratedWasteDetailRecordCnt)

Input Fields

Generated Waste records

Calculations

Generated Waste Detail Record Count = Count (Associated Generated Waste records)

Total Waste Quantity in Tonnes (WasteFootprint.TotalWasteQuantityinTonnes)

Input Fields

Disposed Waste Quantity in Tonnes (WasteFootprintItem.DisposedWasteQuantityinTonnes)

Calculations

WasteFootprint.Total Waste Quantity in Tonnes = Sum of all associated (WasteFootprintltem.Disposed Waste Quantity in Tonnes).

- Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (WasteFootprint.Scp3UpstrmWstGenInOper)
 Input Fields
 - Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (GeneratedWaste.Scp3UpstrmWstGenInOper)
 - Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (SuplScp3UpstrmWstGenInOper)

Calculations

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Waste Footprint

WasteFootprint.Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) = Sum of all associated (GeneratedWaste.Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e)) + WasteFootprint.Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e).

 Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (WasteFootprint.Scp3DnstrmEndLifeSoldPrdct)

Input Fields

- Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (GeneratedWaste.Scp3DnstrmEndLifeSoldPrdct)
- Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (WasteFootprint.SuplScp3DnstrmEndLifeSoldPrdct)

Calculations

WasteFootprint.Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Sum of all associated (GeneratedWaste.Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e)) + WasteFootprint.Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e).

Scope 1 Emissions (tCO2e) (WasteFootprint.Scope1EmissionsInTco2e)

Input Fields

- Scope 1 Emissions (tCO2e) (GeneratedWaste.Scope1EmissionsInTco2e)
- Supplemental Scope 1 Emissions (tCO2e) (WasteFootprint.SuplScope1EmissionsInTco2e)

Calculations

WasteFootprint.Scope 1 Emissions (tCO2e) = Sum of all associated (GeneratedWaste.Scope 1 Emissions (tCO2e)) + WasteFootprint.Supplemental Scope 1 Emissions (tCO2e).

Waste Footprint Item

The Waste Footprint Item object represents the volume by waste type and disposal type of aggregated waste generated either as part of operations or at the end of life of a product.

Waste Footprint Item

The Waste Footprint Item object represents the volume by waste type and disposal type of aggregated waste generated either as part of operations or at the end of life of a product.

Here are the calculated fields:

 Disposed Waste Quantity in Tonnes (WasteFootprintItem.DisposedWasteQuantityinTonnes)

Input Fields

- Disposed Waste Quantity in Tonnes (GeneratedWaste.DisposedWasteQuantityinTonnes)
- Waste Type (GeneratedWaste.WasteType)
- Disposal Type (GeneratedWaste.DisposalType)

Calculations

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Generated Waste

WasteFootprintItem.Disposed Waste Quantity in Tonnes = Sum of all associated GeneratedWaste.Disposed Waste Quantity in Tonnes grouped by GeneratedWaste.Waste Type and GeneratedWaste.Disposal Type.

Disposed Waste Quantity Percentage (WasteFootprintItem.DisposedWasteQuantityPct)

Input Fields

- Disposed Waste Quantity in Tonnes (GeneratedWaste.DisposedWasteQuantityinTonnes)
- Waste Type (GeneratedWaste.WasteType)
- Disposal Type (GeneratedWaste.DisposalType)

Calculations

Var A = Sum of all (GeneratedWaste.Disposed Waste Quantity in Tonnes) associated with Waste Footprint.

For each unique GeneratedWaste.Waste Type and GeneratedWaste.Disposal Type, create WasteFootprintItem.Disposed Waste Quantity Percentage = $[(Var A - WasteFootprintItem.Disposed Waste Quantity in Tonnes)/Var A] \times 100$.

Generated Waste

The Generated Waste object represents the information on the waste generated in operations, the waste generated while treating end-of-life products that were sold, and so on.

Here are the calculated fields:

Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes) Input Fields

- Disposed Waste Quantity (DisposedWasteQuantity)
- Disposed Waste Quantity Unit (DisposedWasteQuantityUnit)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Calculations

If Disposed Waste Quantity Unit = Ib, then Disposed Waste Quantity in Tonnes = Disposed Waste Quantity \times 0.000454.

If Disposed Waste Quantity Unit = kq, then Disposed Waste Quantity in Tonnes = Disposed Waste Quantity \times 0.001.

If Disposed Waste Quantity Unit = Short Ton, then Disposed Waste Quantity in Tonnes = Disposed Waste Quantity × 0.9072.

If Disposed Waste Quantity Unit = Long Ton, then Disposed Waste Quantity in Tonnes = Disposed Waste Quantity \times 1.016.

If Disposed Waste Quantity Unit = Tonne, then Disposed Waste Quantity in Tonnes = Disposed Waste Quantity.

Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (Scp3UpstrmWstGenInOper) Input Fields

- Emissions Factor Value (tCO2e/Tonne Waste Material)
 (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.EmssnFctrTco2eTonneWstMtrl)
- Waste Type (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.WasteType)
- Disposal Type(WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.DisposalType)
- Waste Type (GeneratedWaste.WasteType)
- Disposal Type (GeneratedWaste.DisposalType)
- Disposal Site Type (GeneratedWaste.DisposalSiteType)

Net Zero Cloud Calculations Generated Waste

- Stationary Asset Environmental Source (GeneratedWaste.StnryAssetEnvrSrc)
- Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (SuplScp3UpstrmWstGenInOper)
- Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes)
- Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3DnstrmEndLifeSoldPrdct)
- Scope 1 Emissions (tCO2e) (Scope1EmissionsInTco2e)

Calculations

Var A = WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Emissions Factor Value (tCO2e/Tonne Waste Material) where (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Waste Type = GeneratedWaste.Waste Type and WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Disposal Type = GeneratedWaste.Disposal Type)

If $StnryAssetEnvrSrc\ isn't\ Null\ and\ Disposal\ Site\ Type = Offsite,\ then$

Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) = $A \times Generated$ Waste.Disposed Waste Quantity in Tonnes + Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) and Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Null or Zero and Scope 1 Emissions (tCO2e) = Null or Zero.

Else, Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) = Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e).

Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3DnstrmEndLifeSoldPrdct) Input Fields

- Emissions Factor Value (tCO2e/Tonne Waste Material)
 (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.EmssnFctrTco2eTonneWstMtrl)
- Waste Type (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.WasteType)
- Disposal Type(WstDispoEmssnFctr.WstDispoEmssnFctrSetItm.DisposalType)
- Waste Type (GeneratedWaste.WasteType)
- Disposal Type (GeneratedWaste.DisposalType)
- Scope 3 Emissions Source (GeneratedWaste.Scope3EmssnSrc)
- Disposed Waste Quantity in Tonnes (GeneratedWaste.DisposedWasteQuantityinTonnes)
- Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (GeneratedWaste.SuplScp3DnstrmEndLifeSoldPrdct)
- Supplemental Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (GeneratedWaste.SuplScp3UpstrmWstGenInOper)
- Scope 1 Emissions (tCO2e) (GeneratedWaste.Scope1EmissionsInTco2e)
- Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (GeneratedWaste.Scp3UpstrmWstGenInOper)

Calculations

Var A = WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Emissions Factor Value (tCO2e/Tonne Waste Material) where (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Waste Type = GeneratedWaste.Waste Type and WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Disposal Type = GeneratedWaste.Disposal Type)

If Scope 3 Emissions Source isn't Null, then

Net Zero Cloud Calculations Water Management

Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) = $A \times Generated Waste.Disposed Waste Quantity in Tonnes + Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) and Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) = Null and Scope 1 Emissions (tCO2e) = Null$

Else, Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Supplemental Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e).

Scope 1 Emissions (tCO2e) (Scope1EmissionsInTco2e)

Input Fields

- Emissions Factor Value (tCO2e/Tonne Waste Material)
 (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.EmssnFctrTco2eTonneWstMtrl)
- Waste Type (WstDispoEmssnFctr.WstDispoEmssnFctrSetItm.WasteType)
- Disposal Type(WstDispoEmssnFctr.WstDispoEmssnFctrSetItm.DisposalType)
- Waste Type (GeneratedWaste.WasteType)
- Disposal Type (GeneratedWaste.DisposalType)
- Disposal Site Type (GeneratedWaste.DisposalSiteType)
- Stationary Asset Environmental Source (GeneratedWaste.StnryAssetEnvrSrc)
- Supplemental Scope 1 Emissions (tCO2e) (GeneratedWaste.SuplScope1EmissionsInTco2e)
- Disposed Waste Quantity in Tonnes (Generated Waste. Disposed Waste Quantity in Tonnes)
- Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) (GeneratedWaste.Scp3UpstrmWstGenInOper)
- Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3DnstrmEndLifeSoldPrdct)

Calculations

Var A = WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Emissions Factor Value (tCO2e/Tonne Waste Material) where (WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Waste Type = GeneratedWaste.Waste Type and WstDispoEmssnFctr.WstDispoEmssnFctrSetltm.Disposal Type = GeneratedWaste.Disposal Type)

If StnryAssetEnvrSrc isn't Null and Disposal Site Type = Onsite, then

Scope 1 Emissions (tCO2e) = $A \times GeneratedWaste.Disposed Waste Quantity in Tonnes + Supplemental Scope 1 Emissions (tCO2e) and Scope 3 Upstream Emissions from Waste Generated in Operations (tCO2e) = Null and Scope 3 Downstream Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Null.$

Else, Scope 1 Emissions (tCO2e) = Supplemental Scope 1 Emissions (tCO2e).

Water Management

You can record the water-related activities, such as withdrawal, consumption, or discharge of water and calculate the water footprints.

Stationary Asset Water Activity

The Stationary Asset Water Activity object represents information about the total volume of water from the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Stationary Asset Water Footprint

The Stationary Asset Water Activity object represents information about the water-related activities, such as withdrawal, consumption, or discharge of water, that are related to the stationary assets.

Stationary Asset Water Activity

The Stationary Asset Water Activity object represents information about the total volume of water from the water activities, such as withdrawal, consumption, or discharge that are related to the stationary assets.

Here are the calculated fields:

Quantity (m3) (QuantityInM3)

Input Fields

Quantity (Quantity)

Calculations

Quantity (m3) = Quantity converted to m3

Cost Per Unit (Cost/m3)

Input Fields

- Total Cost (TotalCost)
- Quantity (m3) (QuantityInM3)

Calculations

Cost Per Unit (Cost/m3) = Total Cost/Quantity (m3)

Stationary Asset Water Footprint

The Stationary Asset Water Activity object represents information about the water-related activities, such as withdrawal, consumption, or discharge of water, that are related to the stationary assets.

Here are the calculated fields:

Total Withdrawal (MI) (TotalWithdrawalInMI)

Input Fields

- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Activity Type (ActivityType)

Calculations

If Stnry Asset Water Activity Type = "Withdrawal" then Total Withdrawal (MI) = Stnry Asset Water Activity. Quantity (m3) converted to Megaliters

Total Discharge (MI) (TotalDischargeInMI)

Input Fields

- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Activity Type (ActivityType)

Calculations

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

If StnryAssetWaterActvty.Activity Type = "Discharge" then Total Discharge (MI) = StnryAssetWaterActvty.Quantity (m3) converted to Megaliters

Total Consumption (MI) (TotalConsumptionInMI)

Input Fields

- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Activity Type (ActivityType)

Calculations

If StnryAssetWaterActvty.Activity Type = "Consumption" then Total Consumption (MI) = StnryAssetWaterActvty.Quantity (m3) converted to Megaliters

Total Cost (TotalCost)

Input Fields

StnryAssetWaterActvty.Total Cost (TotalCost)

Calculations

Total Cost = Sum(StnryAssetWaterActvty.Total Cost)

Floor Area Consumption Intensity (m3/m2) (FIAreaCnsmpIntsInM3M2)

Input Fields

- Total Consumption (MI) (TotalConsumptionInMI)
- Occupied Floor Area (OccupiedFloorArea)

Calculations

If Occupied Floor Area!=0

then Floor Area Consumption Intensity (m3/m2) = Total Consumption (MI)/Occupied Floor Area

else

Floor Area Consumption Intensity (m3/m2) = 0

Employee Consumption Intensity (m3/employee) (EmployeeCnsmpIntsInM3)

Input Fields

- Total Consumption (MI) (TotalConsumptionInMI)
- Employee Count (EmployeeCount)

Calculations

If Employee Count != 0

then Employee Consumption Intensity (m3/employee) = Total Consumption (MI)/Employee Count

else

Employee Consumption Intensity (m3/employee) = 0

Production Volume Consumption Intensity (m3/product)

Input Fields

- Total Consumption (MI) (TotalConsumptionInMI)
- Total Units Manufactured (TotalUnitsManufactured)

Calculations

If TotalUnitsManufactured !=0

then Production Volume Consumption Intensity (m3/product) = Total Consumption (MI)/ Total Units Manufactured else

Production Volume Consumption Intensity (m3/product) = 0

Floor Area Withdrawal Intensity (m3/m2) (FlAreaWdrwIntsInM3M2)

Input Fields

- Total Withdrawal (MI) (TotalWithdrawalInMI)
- Occupied Floor Area (OccupiedFloorArea)

Calculations

If Occupied Floor Area!=0

then Floor Area Withdrawal Intensity (m3/m2) = Total Withdrawal (MI)/Occupied Floor Area

Floor Area Withdrawal Intensity (m3/m2) = 0

Employee Withdrawal Intensity (m3/employee) (EmployeeWdrwIntsInM3)

Input Fields

- Total Withdrawal (Ml) (TotalWithdrawalInMl)
- Employee Count (EmployeeCount)

Calculations

If Employee Count != 0

then Employee Withdrawal Intensity (m3/employee) = Total Withdrawal (MI) (TotalWithdrawalInMI) / Employee Count else

Employee Withdrawal Intensity (m3/employee) = 0

Production Volume Withdrawal Intensity (m3/product)

Input Fields

- Total Withdrawal (Ml) (TotalWithdrawalInMl)
- Total Units Manufactured (TotalUnitsManufactured)

Calculations

If Total Units Manufactured != 0

then Production Volume Withdrawal Intensity (m3/product) = Total Withdrawal (MI)/ Total Units Manufactured else

Production Volume Withdrawal Intensity (m3/product) = 0

Floor Area Discharge Intensity (m3/m2) (FlAreaDchgIntsInM3M2)

Input Fields

- Total Discharge (MI) (TotalDischargeInMI)
- Occupied Floor Area (OccupiedFloorArea)

Calculations

If Occupied Floor Area!=0

then Floor Area Discharge Intensity (m3/m2) = Total Discharge (MI)/Occupied Floor Area

else

Floor Area Discharge Intensity (m3/m2) = 0

Employee Discharge Intensity (m3/employee) (EmployeeDchgIntsInM3)

Input Fields

- Total Discharge (MI) (TotalDischargeInMI)
- Employee Count (EmployeeCount)

Calculations

If Employee Count != 0

then Employee Discharge Intensity (m3/employee) = Total Discharge (MI) / Employee Count

else

Employee Discharge Intensity (m3/employee) =0

Production Volume Discharge Intensity (m3/product) (ProdtVolumeDchgIntsInM3)

Input Fields

- Total Discharge (MI) (TotalDischargeInMI)
- Total Units Manufactured (TotalUnitsManufactured)

Calculations

If Total Units Manufactured !=0

then Production Volume Discharge Intensity (m3/product) = Total Discharge (MI)/Total Units Manufactured

else

Production Volume Discharge Intensity (m3/product) = 0

High Stress Consumption Percentage (HighStressCnsmpPct)

Input Fields

- StnryAssetWaterActvty.Activity Type (ActivityType)
- StnryAssetWaterActvty.Quantity (Quantity)
- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Environmental Risk (EnvironmentalRisk)

Calculations

High Stress Consumption Percentage = ([Sum(StnryAssetWaterActvty.Quantity) where StnryAssetWaterActvty.Activity Type = "Consumption" && StnryAssetWaterActvty.Environmental Risk = "High Stress"] / [Sum (StnryAssetWaterActvty.Quantity (m3) where StnryAssetWaterActvty.Activity Type = "Consumption"]) \times 100

Extreme Stress Consumption Percentage (ExtremeStressCnsmpPct)

Input Fields

- StnryAssetWaterActvty.Activity Type (ActivityType)
- StnryAssetWaterActvty.Quantity (Quantity)
- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)

StnryAssetWaterActvty.Environmental Risk (EnvironmentalRisk)

Calculations

Extreme Stress Consumption Percentage = ([Sum(StnryAssetWaterActvty.Quantity) where StnryAssetWaterActvty.Activity Type = "Consumption" && StnryAssetWaterActvty.Environmental Risk = "Extremely High Stress"] / [Sum (StnryAssetWaterActvty.Quantity (m3) where StnryAssetWaterActvty.Activity Type = "Consumption"]) × 100

High Stress Withdrawal Percentage (HighStressWdrwPct)

Input Fields

- StnryAssetWaterActvty.Activity Type (ActivityType)
- StnryAssetWaterActvty.Quantity (Quantity)
- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Environmental Risk (EnvironmentalRisk)

Calculations

High Stress Withdrawal Percentage = ([Sum(StnryAssetWaterActvty.Quantity) where StnryAssetWaterActvty.Activity Type = "Withdrawal" && StnryAssetWaterActvty.Environmental Risk = "High Stress"] / [Sum (StnryAssetWaterActvty.Quantity (m3) where StnryAssetWaterActvty.Activity Type = "Withdrawal"]) \times 100

Extreme Stress Withdrawal Percentage (ExtremeStressWdrwPct)

Input Fields

- StnryAssetWaterActvty.Activity Type (ActivityType)
- StnryAssetWaterActvty.Quantity (Quantity)
- StnryAssetWaterActvty.Quantity (m3) (QuantityInM3)
- StnryAssetWaterActvty.Environmental Risk (EnvironmentalRisk)

Calculations

Extreme Stress Withdrawal Percentage = ([Sum(StnryAssetWaterActvty.Quantity) where StnryAssetWaterActvty.Activity Type = "Withdrawal" && StnryAssetWaterActvty.Environmental Risk = "Extremely High Stress"] / [Sum (StnryAssetWaterActvty.Quantity (m3) where StnryAssetWaterActvty.Activity Type = "Withdrawal"]) × 100

Withdrawal Intensity Variance Percentage (WdrwIntsVariancePct)

Input Fields

- Total Withdrawal (MI) (TotalWithdrawalInMI)
- Previous Year Water Footprint (Previous Year Water Ftprnt)

Calculations

Withdrawal Intensity Variance Percentage = Total Withdrawal (MI) = (PreviousYearWaterFtprnt.Total Withdrawal (MI))/PreviousYearWaterFtprnt.Total Withdrawal (MI)) \times 100

else

Withdrawal Intensity Variance Percentage = null

Consumption Intensity Variance Percentage (CnsmpIntsVariancePct)

Input Fields

- Total Consumption (MI) (TotalConsumptionInMI)
- Previous Year Water Footprint (Previous Year Water Ftprnt)

Calculations

Consumption Intensity Variance Percentage = Total Consumption (MI) = (Previous Year Water Ftprnt. Total Consumption (MI)/Previous Year Water Ftprnt. Total Consumption (MI)) \times 100

else

Consumption Intensity Variance Percentage = null

Discharge Intensity Variance Percentage (DchgIntsVariancePct)

Input Fields

- Total Discharge (MI) (TotalDischargeInMI)
- Previous Year Water Footprint (Previous Year Water Ftprnt)

Calculations

Discharge Intensity Variance Percentage = Total Discharge (MI)= (PreviousYearWaterFtprnt.Total Discharge (MI))/PreviousYearWaterFtprnt.Total Discharge (MI)) \times 100

else

Discharge Intensity Variance Percentage = null

Stationary Asset Water Footprint Item

The Stationary Asset Water Footprint Item object represents information about the total volume of water from each water activity, such as withdrawal, consumption, or discharge related to the stationary assets. Each water activity is a child record of the stationary asset water footprint object.

Stationary Asset Water Footprint Item

The Stationary Asset Water Footprint Item object represents information about the total volume of water from each water activity, such as withdrawal, consumption, or discharge related to the stationary assets. Each water activity is a child record of the stationary asset water footprint object.

Here are the calculated fields:

Water Activity Percentage (WaterActivityPct)

Input Fields

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Total Withdrawal (MI) (TotalWithdrawalInMI)
- Total Discharge (MI) (TotalDischargeInMI)
- Total Consumption (MI) (TotalConsumptionInMI)

Calculations

 $If Activity Type = "Consumption" then Water Activity Percentage = (Quantity (MI)/Total Consumption (MI)) \times 100 \\$

If Activity Type = "Discharge" then Water Activity Percentage = (Quantity (MI)/Total Discharge (MI)) × 100

If Activity Type = "Withdrawal" then Water Activity Percentage = (Quantity (MI)/Total Withdrawal (MI)) × 100

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Science Based Targets

Science Based Targets

You can set quantitative targets that align with science-based criteria to reduce your company's emissions and get closer to a net zero future.

When you select Absolute Contraction as the target setting in Emissions Reduction Target, the system calculates the targets from base year to target year.

Fields

- Emissions Reduction Target (EmssnReductionTarget)
 - Target Setting Method (TargetSettingMethod)
 - Target Year Emissions (TargetYearEmissions)
 - Target Year (TargetYear)
 - Target Emissions Change Percentage (TargetEmssnChangePercentage)
 - Category (Category)
 - Target Setting Method (TargetSettingMethod)
 - Absolute Contraction Percentage (AbsoluteContractionPercentage)
 - Custom Absolute Contraction Percentage (CustomAbsoluteContractionPct)
 - Base Year Emissions (BaseYearEmissions)
 - Base Year (BaseYear)
- Annual Emissions Reduction Target (AnnualEmssnRdctnTarget)
 - Target Emissions (tC02e) (TargetEmissions)
 - Target Year (TargetYear)
 - Emissions Reduction Percentage (EmissionsReductionPercentage)
- Emissions Reduction Commitment (EmssnRdctnCommitment)
 - Commitment Type (CommitmentType)

Calculations

EmssnReductionTarget.Target Year Emissions

EmssnReductionTarget.Target Year Emissions = AnnualEmssnRdctnTarget.Target Emissions (tC02e) where AnnualEmssnRdctnTarget.Target Year = EmssnReductionTarget.Target Year

EmssnReductionTarget.Target Emissions Change Percentage

EmssnReductionTarget.Target Emissions Change Percentage = AnnualEmssnRdctnTarget.Emissions Reduction Percentage where AnnualEmssnRdctnTarget.Target Year = EmssnReductionTarget.Target Year

AnnualEmssnRdctnTarget.Target Emissions (tC02e)

Conditions

 If EmssnReductionTarget.Category = "Science Based" and EmssnReductionTarget.Target Setting Method = "Absolute Contraction" and EmssnRdctnCommitment.Commitment Type = "1.5° Celsius"

Then EmssnReductionTarget.Absolute Contraction Percentage = 4.2%

 If EmssnReductionTarget.Category = "Science Based" and EmssnReductionTarget.Target Setting Method = "Absolute Contraction" and EmssnRdctnCommitment.Commitment Type = "2° Celsius" or "Well Below 2° Celsius"

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Science Based Targets

Then EmssnReductionTarget.Absolute Contraction Percentage = 2.5%

If EmssnReductionTarget.Target Setting Method = "Absolute Contraction" and EmssnReductionTarget.Absolute Contraction
 Percentage="Custom"

 $Then \ EmssnReduction Target. Absolute \ Contraction \ Percentage = EmssnReduction Target. Custom \ Absolute \ Contraction \ Percentage \ Then \ EmssnReduction \ Target. Custom \ Absolute \ Contraction \ Percentage \ Then \ Target. Custom \ Absolute \ Contraction \ Percentage \ Then \ Target. Custom \ Absolute \ Contraction \ Percentage \ Then \ Target. Custom \ Absolute \ Target. Custom \ Ta$

If EmssnReductionTarget. Target Setting Method = "Absolute Contraction", click Save to create Annual Emission Reduction Target records for each year from base year to target year and Annual EmssnRdctnTarget. Target Emissions and Annual EmssnRdctnTarget. Emissions Reduction Percentage for the target year are added in EmssnReductionTarget.

If EmssnReductionTarget.Absolute Contraction Percentage = 4.2%, then Percent = 0.042

If EmssnReductionTarget.Absolute Contraction Percentage = 2.5%, then Percent = 0.025

If EmssnReductionTarget.Absolute Contraction Percentage = Custom, then Percent = (EmssnReductionTarget.Custom Absolute Contraction Percentage / 100)

If Var A = AnnualEmssnRdctnTarget.Target Emissions (tC02e) for base year + 1 = EmssnReductionTarget.Base Year Emissions - (Percent * EmssnReductionTarget.Base Year Emissions)

Var B = AnnualEmssnRdctnTarget.Target Emissions (tC02e) for base year + 2 = A - (Percent * A)

The AnnualEmssnRdctnTarget.Target Emissions (tC02e) for all years from base year + 1 to AnnualEmssnRdctnTarget.Target Year are calculated.

For example, if EmssnReductionTarget.Absolute Contraction Percentage = 4.2%, EmssnReductionTarget.Base Year = 2021, and AnnualEmssnRdctnTarget.Target Year = 2030, then here's how the AnnualEmssnRdctnTarget.Target Emissions are calculated:

Target Emissions (tC02e)	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
	1455385	1394259	1335700	1279601	1225857	1174371	1125048	1077796	1032528	989162	947617

AnnualEmssnRdctnTarget.Emissions Reduction Percentage

If var X = EmssnReductionTarget.Base Year Emissions

then AnnualEmssnRdctnTarget.Emissions Reduction Percentage for base year + 1 = (Base Emissions in Base Year + 1 - X) / X

Emissions Reduction Percentage for base year + 2 = (Base Emissions in base year + 2 - X) / X

The AnnualEmssnRdctnTarget.Emissions Reduction Percentage for all years from base year + 1 to AnnualEmssnRdctnTarget.Target Year are calculated.

For example, if EmssnReductionTarget.Absolute Contraction Percentage = 4.2%, EmssnReductionTarget.Base Year = 2021, and AnnualEmssnRdctnTarget.Target Year = 2030, then here's how the AnnualEmssnRdctnTarget.Emissions Reduction Percentage are calculated:

Table 5: Calculate AnnualEmssnRdctnTarget.Emissions Reduction Percentage

Emissions Reduction Recentage	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
		-4.20%	-8.22%	-12.08%	-15.77%	-19.31%	-22.70%	-25.94%	-29.05%	-32.03%	-34.89%

Emissions Forecasts

You can forecast emissions based on your past and present emissions and predict how your business will grow in the future. Generate forecasts for your emissions based on your carbon footprint information and emissions commitment and targets for a defined period. Create formulas to calculate your forecasts per the requirements of your company.

Emissions Activities

Emissions activities are the emissions generating activities mapped to the greenhouse gas categories that are used to aggregate emissions.

There will be multiple emissions activities seeded in the forecast set.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Table 6: Emissions Activities and Their Emissions Scope Categories

Emissions Activity	Emissions Scope Category
All Emissions	
Scope 1	All Emissions
Scope 2	All Emissions
Scope 3	All Emissions
Scope 1 and Scope 2	All Emissions
Scope 1 Stationary Assets - Commercial Building	Scope1
Scope 1 Stationary Assets - Data Center	Scope1
Scope 1 Vehicle Assets - Fleet Vehicles	Scope1
Scope 1 Vehicle Assets - Private Jet	Scope1
Scope 2 Stationary Assets - Commercial Building	Scope2
Scope 2 Stationary Assets - Data Center	Scope2
Scope 2 Vehicle Assets - Fleet Vehicles	Scope2
Scope 2 Vehicle Assets - Private Jet	Scope2
Scope 3 Stationary Assets - Commercial Building	Scope3
Scope 3 Stationary Assets - Data Center	Scope3
Scope 3 Vehicle Assets - Fleet Vehicles	Scope3
Scope 3 Vehicle Assets - Private Jet	Scope3
Scope 3 Business Travel	Scope3
Scope 3 Business Travel Procurement	Scope3
Scope 3 Capital Goods	Scope3
Scope 3 Downstream Leased Assets	Scope3

Emissions Activity	Emissions Scope Category
Scope 3 Downstream Transportation Distribution	Scope3
Scope 3 End-Life Treatment of Sold Product	Scope3
Scope 3 Franchising	Scope3
Scope 3 Fuel and Energy-Related Activity	Scope3
Scope 3 Investments	Scope3
Scope 3 Processing Sold Products	Scope3
Scope 3 Purchased Goods Services	Scope3
Scope 3 Upstream Leased Assets	Scope3
Scope 3 Upstream Transportation Distribution	Scope3
Scope 3 Use of Sold Products	Scope3
Scope 3 Uncategorized Emissions	Scope3
Scope 3 Waste Generated in Operations	Scope3
Scope 3 Employee Commuting	Scope3

Measures

Measures are the values used to calculate the emissions forecasts.

Table 7: Measures, Types, and Their Calculation Methods

Measure	Туре	Data Type	Calculation Method
Revenue	Business Metric	Currency	User input
Headcount	Business Metric	Number	User input
Total Floor Area (sqft)	Business Metric	Number	User input
Procurement Spend	Business Metric	Currency	User input
Target Emissions (tCO2e)	Target	Number	Calculated
Target Compensated Emissions (tCO2e)	Target	Number	Calculated
Target Renewable Energy Percentage	Target	Number	Calculated
Actual Emissions (tCO2e)	Actual	Number	Calculated
Actual Market-Based Emissions (tCO2e)	Actual	Number	Calculated
Actual Location-Based Emissions (tCO2e)	Actual	Number	Calculated

Measure	Туре	Data Type	Calculation Method
Actual Energy Consumption (kWh)	Actual	Number	Calculated
Actual Renewable Energy Consumption Percentage	Actual	Number	Calculated
Actual Emissions Intensity	Actual	Number	Calculated
Forecasted Renewable Energy Consumption Percentage	Forecast	Percentage	User input
Forecasted Energy Consumption (kWh)	Forecast	Number	Calculated
Forecasted Market-Based Emissions (tCO2e)	Forecast	Number	Calculated
Forecasted Location-Based Emissions (tCO2e)	Forecast	Number	Calculated
Forecasted Emissions Intensity Reduction Percentage	Forecast	Percentage	User input
Forecasted Emissions (tCO2e)	Forecast	Number	Calculated
Forecasted Emissions Override (tCO2e)	Forecast	Number	User input
Planned Operational Emissions Reduction (tCO2e)	Forecast	Number	User input
Planned Supplier Emissions Reduction (tCO2e)	Forecast	Number	User input
Final Forecasted Emissions (tCO2e)	Forecast	Number	Calculated
Forecasted Emissions Intensity	Forecast	Number	Calculated
Required Carbon Credits (tCO2e)	Carbon Credit Related	Number	Calculated
Planned Carbon Credits (tCO2e)	Carbon Credit Related	Number	User Input
Net Emissions Forecast (tCO2e)	Carbon Credit Related	Number	Calculated
Carbon Credits Cost (USD per tCO2e)	Carbon Credit Related	Number	User input
Required Carbon Credits Investment	Carbon Credit Related	Currency	Calculated
Planned Carbon Credits Investment	Carbon Credit Related	Currency	Calculated

Emissions Activity and Related Business Metric

Business metrics are the measures that form the basis of forecasting.

Table 8: Emissions Activity and Business Metrics

Emissions Activity	Emissions Scope Category	Business Metric for Forecasting Emissions
All Emissions		Sum of underlying activities (Scope 1 + Scope 2 + Scope 3)
Scope 1	All Emissions	Sum of underlying Scope 1 emissions activities
Scope 2	All Emissions	Sum of underlying Scope 2 emissions activities
Scope 3	All Emissions	Sum of underlying Scope 3 emissions activities
Scope 1 and Scope 2	All Emissions	Sum of Scope 1 and Scope 2 emissions activities
Scope 1 Stationary Assets - Commercial Building	Scope1	Total Floor Area (sqft)
Scope 1 Stationary Assets - Data Center	Scope1	Revenue
Scope 1 Vehicle Assets - Fleet Vehicles	Scope1	Revenue
Scope 1 Vehicle Assets - Private Jet	Scope1	Revenue
Scope 2 Stationary Assets - Commercial Building	Scope2	Total Floor Area (sqft)
Scope 2 Stationary Assets - Data Center	Scope2	Revenue
Scope 2 Vehicle Assets - Fleet Vehicles	Scope2	Revenue
Scope 2 Vehicle Assets - Private Jet	Scope2	Revenue
Scope 3 Stationary Assets - Commercial Building	Scope3	Total Floor Area (sqft)
Scope 3 Stationary Assets - Data Center	Scope3	Revenue
Scope 3 Vehicle Assets - Fleet Vehicles	Scope3	Revenue
Scope 3 Vehicle Assets - Private Jet	Scope3	Revenue
Scope 3 Business Travel	Scope3	Revenue
Scope 3 Business Travel Procurement	Scope3	Revenue
Scope 3 Capital Goods	Scope3	Revenue
Scope 3 Downstream Leased Assets	Scope3	Revenue

Emissions Activity	Emissions Scope Category	Business Metric for Forecasting Emissions
Scope 3 Downstream Transportation Distribution	Scope3	Revenue
Scope 3 End-Life Treatment of Sold Product	Scope3	Revenue
Scope 3 Franchising	Scope3	Revenue
Scope 3 Fuel and Energy-Related Activity	Scope3	Revenue
Scope 3 Investments	Scope3	Revenue
Scope 3 Processing Sold Products	Scope3	Revenue
Scope 3 Purchased Goods Services	Scope3	Procurement Spend
Scope 3 Upstream Leased Assets	Scope3	Revenue
Scope 3 Upstream Transportation Distribution	Scope3	Revenue
Scope 3 Use of Sold Products	Scope3	Revenue
Scope 3 Uncategorized Emissions	Scope3	Revenue
Scope 3 Waste Generated in Operations	Scope3	Revenue
Scope 3 Employee Commuting	Scope3	Headcount

Calculations at Different Emissions Activity Levels

Emissions forecasting calculations are performed for all emissions activities. At the lowest level of emissions activity, calculations are performed considering forecasting formulae. At higher levels (Scope 1, 2 or 3 and All Emissions), forecasting is performed by aggregating forecasts of the constituent emissions activity. For more information about emissions activities, see Emissions Activities and Their Emissions Scope Categories.

Emission calculations for lowest level emissions activities

Emissions forecasting for lowest level emissions activities is based on the business metric value you provide. You must upload the business metric measures before performing emissions forecasting. For each emissions activity, we calculate:

- Target data: If an emissions activity has a target defined for a year, you must retrieve that information based on the related Annual Emissions Reduction Target records.
 - Target Emissions (tCo2e) (TargetEmissions)

Input Fields

- Emissions Forecast Fact (EmissionsForecastFact)
- Emissions Reduction Target (EmssnReductionTarget)
 - Target Type (TargetType)
- Annual Emissions Reduction Target (AnnualEmssnRdctnTarget)

Calculations

If EmssnReductionTarget.Target Type = "Emission Reduction"

then EmissionsForecastFact. Target Emissions (tCo2e) = AnnualEmssnRdctnTarget. Target Emissions (tCo2e)

Target Compensated Emissions (tCo2e) (TargetCompensatedEmissions)

Input Fields

- Emissions Forecast Fact (EmissionsForecastFact)
- Emissions Reduction Target (EmssnReductionTarget)
 - Target Type (TargetType)
- Annual Emissions Reduction Target (AnnualEmssnRdctnTarget)

Calculations

If EmssnReductionTarget.Target Type = "Net Zero Emissions"

then EmissionsForecastFact. Target Compensated Emissions (tCo2e) = AnnualEmssnRdctnTarget. Target Emissions (tCo2e)

Target Renewable Energy Percentage (TargetRenewableEnergyPct)


Input Fields

- Emissions Forecast Fact (EmissionsForecastFact)
- Emissions Reduction Target (EmssnReductionTarget)
 - Other Target KPI (OtherTargetKpi)
 - Target Type (TargetType)
- Annual Emissions Reduction Target (AnnualEmssnRdctnTarget)

Calculations

If EmssnReduction Target. Target Type = "Custom" and EmssnReduction Target. Other Target KPI = "Renewable Energy Electricity Percentage"

then EmissionsForecastFact.Target Renewable Energy Percentage = AnnualEmssnRdctnTarget.Target Emissions (tCo2e)



 Actual data: To calculate emissions forecasts, you must have the actual emissions data from past years retrieved from the Annual Emissions Inventory records.

Here's a list of emissions activities and their related values from the Emissions Forecast Fact and Annual Emissions Inventory records:

Input Fields

- Emissions Forecast Fact (EmissionsForecastFact)
- Annual Emissions Inventory (AnnualEmssnInventory)

Table 9: Emissions Activity and Annual Emissions Inventory

Emissions Activity	Annual Emissions Inventory	Actual Emissions Intensity
All Emissions	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Total Emissions (tCO2e)	

Emissions Activity	Annual Emissions Inventory	Actual Emissions Intensity
Scope 1	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e)	
Scope 2	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)	
Scope 3	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Total Scope 3 Emissions (tCO2e)	
Scope 1 Stationary Assets - Commercial Building	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 1 Emissions from Commercial Buildings (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Total Floor Area (sqft)
Scope 1 Stationary Assets - Data Center	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 1 Emissions from Data Centers (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 1 Vehicle Assets - Fleet Vehicles	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 1 Emissions from Fleet Vehicles (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 1 Vehicle Assets - Private Jet	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 1 Emissions from Private Jets (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 2 Stationary Assets - Commercial Building	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e)	EmissionsForecastFact.Actual Emissions/Total Floor Area (sqft)
Scope 2 Stationary Assets - Data Center	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 2 Location-Based Emissions from Data Centers (tCO2e)	EmissionsForecastFact.Actual Emissions/Revenue
Scope 2 Vehicle Assets - Fleet Vehicles	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 2 Emissions from Fleet Vehicles (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 2 Vehicle Assets - Private Jet	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 2 Emissions from Private Jets (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Stationary Assets - Commercial Building	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Commercial Buildings (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Total Floor Area (sqft)

Emissions Activity	Annual Emissions Inventory	Actual Emissions Intensity
Scope 3 Stationary Assets - Data Center	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Data Centers (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Vehicle Assets - Fleet Vehicles	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Fleet Vehicles (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Vehicle Assets - Private Jet	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Private Jets (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Business Travel	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Business Travel (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Capital Goods	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Capital Goods (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Downstream Leased Assets	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Downstream Leased Assets (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Downstream Transportation Distribution	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 End-Life Treatment of Sold Product	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Franchising	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Fuel and Energy-Related Activity	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Fuel and Energy-Related Activity	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Investments	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Investments (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Processing Sold Products	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Processing of Sold Products (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue

Emissions Activity	Annual Emissions Inventory	Actual Emissions Intensity
Scope 3 Purchased Goods Services	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Purchased Goods and Services (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Spend
Scope 3 Upstream Leased Assets	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Upstream Transportation Distribution	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Upstream Transportation and Distribution(tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Use of Sold Products	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Uncategorized Emissions	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Uncategorized Emissions (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Waste Generated in Operations	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Waste Generated in Operations (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Revenue
Scope 3 Employee Commuting	EmissionsForecastFact.Actual Emissions (tCO2e) = AnnualEmssnInventory.Scope 3 Emissions from Employee Computing (tCO2e)	EmissionsForecastFact.Actual Emissions (tCo2e)/Employee Count

- Emissions forecast: Based on the measures corresponding to the business metrics and the actual data, forecasts are calculated for future years based on intensity.

Calculation

Intensity = Actual emissions/Business metric

Forecasted Emissions (tCO2e) = Business metric for the future year * Intensity

For example, for Scope 3 Business Travel emissions activity:

• If actual emissions for 2021 = 100 tCO2e and the revenue business metric = 1000 lntensity in terms of revenue = 100/1000 = 0.1.



If the revenue in 2026 = 2000
 Forecasted Emissions (tCO2e) = 2000*0.1 = 200 tCO2e

Emissions forecasts for higher-level emissions activities

Emissions forecasting for higher-level emissions activities, such as Scope 1, Scope 2, Scope 3 and All Emissions, the Forecasted Emissions (tCO2e) is the sum of the Forecasted Emissions (tCO2e) of the lower-level emissions activities.

For example, the Forecasted Emissions (tCO2e) for Scope 1 emissions activity is the sum of Forecasted Emissions (tCO2e) of all the emissions activities where Emissions Scope Category = Scope 1.

Adjust forecasts based on the emissions intensity reduction percentage

You can adjust the final forecasted emissions value for an emissions activity by entering a value for Forecasted Emissions Intensity Reduction Percentage as:

Calculation

Final Forecasted Emissions (tCO2e) = (100 - Forecasted Emissions Intensity Reduction Percentage)% * Forecasted Emissions (tCO2e)

For example, if Forecasted Emissions Intensity Reduction Percentage for the year 2026 = 40%

then Final Forecasted Emissions (tCO2e) in 2026 = (100-40)% * 200 = 120 tCO2e

If Emissions Activity = All Emissions

then Final Forecasted Emissions (tCO2e)= Forecasted Emissions (tCO2e)

Adjust forecasts based on planned emissions reduction programs

You can adjust the final forecasted emissions for an emissions activity by entering values for Planned Operational Emissions Reduction (tCO2e) and Planned Supplier Emissions Reduction (tCO2e) to include values from emissions reduction programs either within your company or in your company's supply chain as:

Calculation

Final Forecasted Emissions (tCO2e) = Final Forecasted Emissions (tCO2e) - Planned Operational Emissions Reduction (tCO2e) - Planned Supplier Emissions Reduction (tCO2e)

For example, if Planned Operational Emissions Reduction (tCO2e) for the year 2026 = 20 and Planned Supplier Emissions Reduction (tCO2e) for the year 2026 = 30

then Final Forecasted Emissions (tCO2e) = 120-20-30=70 tCO2e

If Emissions Activity = All Emissions

then Final Forecasted Emissions (tCO2e)= Forecasted Emissions (tCO2e)

Manually specified forecasts

You can manually override the final forecasted emissions value for an emissions activity by entering a value for Forecasted Emissions Override (tCO2e)

Calculation

Final Forecasted Emissions (tCO2e) = Forecasted Emissions Override (tCO2e)

For example, if Forecasted Emissions Override (tCO2e) for 2026 = 95 tCO2e

then Final Forecasted Emissions (tCO2e) = 95 tCO2e

All other calculations, such as forecasts based on intensity reduction percentage and planned emissions reduction programs are ignored.

Net Zero Cloud Calculations Sustainability Scorecard

Sustainability Scorecard

You can calculate the annual sustainability scorecard of third-party organizations whose data is used to calculate scope 3 emissions.

Here are the calculated fields:

Total Spent Amount (TotalSpentAmount)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
- Scope3Pcmtltem.SpentAmount
- Scope3Pcmtltem.Calculated Scope 3 Emissions (tCO2e) (CalculatedScope3EmssnlnTco2e)
- Scope3Pcmtltem.Sustainability Scorecard (SustainabilityScorecard)

Calculations

Total Spent Amount = Sum of all Scope3Pcmtltem.Spent Amount associated with this scorecard.

This value is calculated when you click Associate Items based on the Scope 3 Procurement Item. SpentAmount, S

Annual Spend Based Scope 3 Emissions (Annual Spend Based Scope 3 Emissions)

Input Fields

- Scope 3 Procurement Item (Scope3PcmtItem)
- Scope3Pcmtltem.SpentAmount
- Scope3PcmtItem.Calculated Scope 3 Emissions (tCO2e) (CalculatedScope3EmssnInTco2e)
- Scope3Pcmtltem.Sustainability Scorecard (SustainabilityScorecard)

Calculations

Total Spent Amount = Sum of all Scope3PcmtItem.Calculated Scope 3 Emissions (tCO2e) associated with this scorecard.

This value is calculated when you click Associate Items based on the Scope 3 Procurement Item.SpentAmount, Scope3PcmtItem.Calculated Scope 3 Emissions (tCO2e) and Scope3PcmtItem.Sustainability Scorecard lookup

Allocation Status (AllocationStatus)

Calculations

If customer has allocated emissions using the allocate quick action

Allocation Status = "Allocated"

If customer has NOT allocated emissions using the allocate quick action / any changes(certain field) to scorecard

Allocation Status = "Not Allocated"

Also, anytime Annual Spend Based Scope 3 Emissions (Annual Spend Based Scope 3 Emissions (Final Scorecard Emissions), Final Scorecard Emissions (Final Scorecard Emissions) change Allocation Status = Not Allocated

Supplier Annual Revenue Emissions (SupplierAnnualRevenueEmissions)

Input Fields

- Supplier Annual Revenue (Supplier Annual Revenue)
- Final Scorecard Emissions (Final Scorecard Emissions)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Sustainability Scorecard

- Supplier-Provided Emissions Type (Emissions Allocation Type)
- Scopes to Include in Calculation (ScopestoIncludeinCalc)

Calculations

If Supplier-Provided Emissions Type = "Total Supplier Emissions"

Supplier Annual Revenue Emissions = (Total Spent Amount / Supplier Annual Revenue) * (sum of relevant scopes based on the values selected in Scopes to Include in Calculation)

else

Supplier Annual Revenue Emissions = 0

Percentage Based Emissions (PercentageBasedEmissions)

Input Fields

- Company Emissions Allocation Percentage (CompanyEmissionsAllocationPct)
- Supplier-Provided Emissions Type (Emissions Allocation Type)

Calculations

If Supplier-Provided Emissions Type = "Total Supplier Emissions"

Percentage Based Emissions = CompanyEmissionsAllocationPct * (sum of relevant scopes based on the values selected in Scopes to Include in Calculation)

else

Percentage Based Emissions = 0

Supplier Provided Emissions (SupplierProvidedEmissions)

Input Fields

- Supplier-Provided Emissions Type (Emissions Allocation Type)
- Scopes to Include in Calculation (ScopestoIncludeinCalc)

Calculations

If Supplier-Provided Emissions Type = "Supplier-Allocated Emissions"

Supplier Provided Emissions = sum of scopes based on values selected in Scopes to Include in Calculation

Else

Supplier Provided Emissions = 0

Final Scorecard Emissions (FinalScorecardEmissions)

Input Fields

- Scope3EmssnCalculationMeasure Scope 3 Emissions Calculation Measure
- AnnualSpendBasedScope3Emssn Annual Spend Based Scope 3 Emissions
- SupplierAnnualRevenueEmissions Supplier Annual Revenue Emissions
- Percentage Based Emissions (PercentageBasedEmissions)
- Supplier Provided Emissions (SupplierProvidedEmissions)

Calculations

If Scope 3 Emissions Calculation Measure = "Spend Based"

Final Scorecard Emissions=Annual Spend Based Scope 3 Emissions

Net Zero Cloud Calculations

Building Size Category

If Scope 3 Emissions Calculation Measure = "Revenue Based"

Final Scorecard Emissions=Annual Spend Based Scope 3 Emissions

If Scope 3 Emissions Calculation Measure = "Percentage Based"

Final Scorecard Emissions=Percentage Based Emissions

If Scope 3 Emissions Calculation Measure = "Supplier Provided"

Final Scorecard Emissions=Supplier Provided Emissions

Building Size Category

The Building Size Category object represents the building size filter criteria for the building energy intensity records. The building size filter criteria are stored as a range of floor area sizes from a minimum size to a maximum size, in units of sqft or m². The records can have overlapping minimum-maximum ranges.

Here are the calculated fields:

Maximum Size (sqft) (MaximumSizeInSqft)

Input fields

Size Unit (SizeUnit)

Maximum Size (Maximum Size)

If Size Unit = sqft

Maximum Size (sqft) = Maximum Size

else

Maximum Size (sqft) = Maximum Size converted to sqft

Minimum Size (sqft) (MinimumSizeInSqft)

Input fields

Size Unit (SizeUnit)

Minimum Size (Minimum Size)

If Size Unit = sqft

Minimum Size (sqft) = Minimum Size

else

Minimum Size (sqft) = Minimum Size converted to sqft

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations

Building Energy Intensity

Building Energy Intensity

The Building Energy Intensity (BEI) object represents the average energy intensity by fuel type across a set of buildings. You can derive this data from published sources or by using energy use records as the data source and then setting up a window of time with some characteristics of the building size and type.

Here are the calculated fields:

Input fields:

- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Start Date (StartDate)
 - End Date (EndDate)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Occupied Floor Area (sqft) (OccupiedFloorAreaInSqft)
 - Fuel Type (FuelType)
- Building Energy Intensity (BldgEnrgyIntensity)
 - Averaging Window Start Date (AveragingWindowStartDate)
 - Averaging Window End Date (AveragingWindowEndDate)

Output fields:

- Building Energy Intensity (BldgEnrgyIntensity)
 - Annual Energy Intensity (kWh/sqft) (AnnualEnergyIntensityInKwhSqft)
 - Annual Energy Intensity (kWh/m2) (AnnualEnergyIntensityInKwhM2)
- Building Energy Intensity Value (BldgEnrgyIntensityVal)
 - Annual Intensity Value (kWh/sqft) (AnnualIntensityValueInKwhSqft)
 - Annual Intensity Value (kWh/m2) (AnnualIntensityValueInKwhM2)

Calculations

- For each Stationary Asset Energy Use
 - Number of days inside window = Input End Date Input Start Date

Where:

- Input Start Date = If(StnryAssetEnrgyUse.Start Date > BldgEnrgyIntensity.Averaging Window Start Date, StnryAssetEnrgyUse.Start Date, BldgEnrgyIntensity.Averaging Window Start Date)
- Input End Date = If(StnryAssetEnrgyUse.End Date < BldgEnrgyIntensity.Averaging Window End Date, StnryAssetEnrgyUse.End Date, BldgEnrgyIntensity.Averaging Window End Date)
- Reported days = StnryAssetEnrgyUse.End Date StnryAssetEnrgyUse.Start Date

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Data Gap Filling

 Intensity per sqft (kWh/sqft) = StnryAssetEnrgyUse.Total Fuel Consumption In Kwh / StnryAssetEnrgyUse.Occupied Floor Area In Sqft

- Intensity per sqft per day (kWh/sqft/day) = Intensity per sqft / Reported days
- Intensity per sqft inside window (kWh/sqft) = Intensity per sqft per day * Number of days inside window
- For each Fuel Type
 - Total Energy Intensity (kWh/sqft) = SUM(Intensity per sqft inside window (kWh/sqft))
 - Total Days = SUM(Number of days inside window)
- For each Fuel Type
 - Total Energy Intensity per Day (kWh/sqft/day) = Total Energy Intensity (kWh/sqft) / Total Days
 - BldgEnrgyIntensityVal.Annual Intensity Value (kWh/sqft) = Total Energy Intensity per Day (kWh/sqft/day) * 365
 - BldgEnrqyIntensityVal.Annual Intensity Value (kWh/m2) = BldgEnrqyIntensityVal.Annual Intensity Value (kWh/sqft) * 0.092903
- For Building Energy Intensity
 - BldgEnrgyIntensity.Annual Intensity Value (kWh/sqft) = SUM(BldgEnrgyIntensityVal.Annual Intensity Value (kWh/sqft))
 - BldgEnrgyIntensity.Annual Intensity Value (kWh/m2) = BldgEnrgyIntensityVal.Annual Intensity Value (kWh/sqft) * 0.092903

Data Gap Filling

You can locate the sources of gaps in carbon footprint record data and resolve them. Here are the calculated fields:

Input fields

- Building Energy Intensity Value (BldgEnrgyIntensityVal)
 - Annual Intensity Value (kWh/m2) (AnnualIntensityValueInKwhM2)
- Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)
 - Regional Building Energy Intensity (RegionalBldgEnergyIntensity)
 - Building Energy Intensity (BuildingEnergyIntensity)
 - Occupied Floor Area (OccupiedFloorArea)
- Stationary Asset Energy Use (StnryAssetEnrgyUse)
 - Total Fuel Consumption (kWh) (TotalFuelConsumptionInKwh)
 - Start Date (StartDate)
 - End Date (EndDate)

Calculations

• If Fill Method = Regional Building Energy Intensity, then

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Net Zero Cloud Calculations Allocate Carbon Credits

Fill Data = StnryAssetCrbnFtprnt.RegionalBldgEnergyIntensity.BldgEnrgyIntensityVal (for the fuel type).Annual Intensity Value (kWh/m2) * Occupied Floor Area/365 * data gap duration

• If Fill Method = Building Energy Intensity, then

Fill Data = StnryAssetCrbnFtprnt.BuildingEnergyIntensity.BldgEnrgyIntensityVal (for the fuel type).Annual Intensity Value (kWh/m2) * Occupied Floor Area/365 * data gap duration

If Fill Method = Previous Year Daily Average, then

 $Fill \ Data = SUM(StnryAssetCrbnFtprnt.PrevYrAnnlCarbonFootprint.StnryAssetEnrgyUse.Total \ Fuel \ Consumption \ (kWh)) \ / SUM(StnryAssetCrbnFtprnt.StnryAssetEnrgyUse.End \ Date - StnryAssetCrbnFtprnt.StnryAssetEnrgyUse.Start \ Date) \ for \ the \ selected \ fuel \ type$

• If Fill Method = Current Year Daily Average, then

Fill Data = SUM(StnryAssetEnrgyUse.Total Fuel Consumption (kWh)) / SUM(StnryAssetEnrgyUse.End Date - StnryAssetCrbnFtprnt.PrevYrAnnlCarbonFootprint.StnryAssetEnrgyUse.Start Date) for the selected fuel type

Allocate Carbon Credits

Allocate carbon credits to offset the unavoidable emissions.

Carbon Credit Project

The Carbon Credit Project object represents information about the environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.

Sustainability Credit

The Sustainability Credit object represents information about the sustainability credits that are a part of a sustainability purchase. Sustainability credits can be one of a variety of instruments used in proving positive environmental benefits, such as carbon credits, renewable energy certificates, and so on.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Carbon Credit Allocation

The Carbon Credit Allocation object represents information about how the carbon credits are allocated by an organization to offset their emissions.

Carbon Credit Distribution

The Carbon Credit Distribution object represents a junction between the sustainability credit and carbon credit allocation objects. To offset emissions for carbon credit allocation items, specify the emissions activity on this junction object.

Net Zero Cloud Calculations Carbon Credit Project

Carbon Credit Project

The Carbon Credit Project object represents information about the environmental project that generates carbon credits by removing greenhouse gases or preventing a certain quantity of greenhouse gases from being released.

Here are the calculated fields:

Total Carbon Credit Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Input Fields

SustainabilityCredit.Credits Allocated (CreditsAllocated)

Calculations

Total Carbon Credit Allocated (tCO2e) = Sum of SustainabilityCredit.Credits Allocated for the associated Carbon Credit Project.

Total Carbon Credit Purchased (tCO2e) (TotalCrbnCrPurchInTco2e)

Input Fields

SustainabilityCredit.Credits Purchased (CreditsPurchased)

Calculations

Total Carbon Credit Purchased (tCO2e) = Sum of SustainabilityCredit.Credits Purchased for the associated Carbon Credit Project.

Total Spend (TotalSpend)

Input Fields

SustainabilityCredit.Total Spend (TotalCost)

Calculations

Total Spend = Sum of SustainabilityCredit.Total Spend for the associated Carbon Credit Project.

Total Carbon Credit Available (tCO2e) (TotalCrbnCrAvlInTco2e)

Input Fields

- Total Carbon Credit Purchased (tCO2e) (TotalCrbnCrPurchInTco2e)
- Total Carbon Credit Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Total Carbon Credit Available (tCO2e) = Total Carbon Credits Purchased (tCO2e) - Total Carbon Credits Allocated (tCO2e)

Sustainability Credit

The Sustainability Credit object represents information about the sustainability credits that are a part of a sustainability purchase. Sustainability credits can be one of a variety of instruments used in proving positive environmental benefits, such as carbon credits, renewable energy certificates, and so on.

Here are the calculated fields:

Credits Allocated (CreditsAllocated)

Input Fields

CrbnCreditDistribution.Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Net Zero Cloud Calculations Carbon Credit Allocation

Calculations

Credits Allocated = Sum of CrbnCreditDistribution. Total Carbon Credits Allocated (tCO2e)

Credits Available (CreditsAvailable)

Input Fields

- Credits Purchased (CreditsPurchased)
- Credits Allocated (CreditsAllocated)

Calculations

Credits Available = Credits Purchased - Credits Allocated

Total Spend (TotalCost)

Input Fields

- Credits Purchased (CreditsPurchased)
- Cost Per Unit (CostPerUnit)

Calculations

Total Spend = Credits Purchased × Cost Per Unit

Carbon Credit Allocation

The Carbon Credit Allocation object represents information about how the carbon credits are allocated by an organization to offset their emissions.

Here are the calculated fields:

Scope 1 Carbon Credit Allocation (tCO2e) (Scp1CrbnCrAllocInTco2e) Input Fields

CrbnCreditAllocItem.Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Scope 1 Carbon Credit Allocation (tCO2e) = Sum of CrbnCreditAllocItem.Total Carbon Credits Allocated (tCO2e) for all scope 1 emissions activities

Scope 2 Carbon Credit Allocation (tCO2e) (Scp2CrbnCrAllocInTco2e)

Input Fields

- CrbnCreditAllocItem.Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Scope 2 Carbon Credit Allocation (tCO2e) = Sum of CrbnCreditAllocItem. Total Carbon Credits Allocated (tCO2e) for all scope 2 emissions activities

Scope 3 Carbon Credit Allocation (tCO2e) (Scp3CrbnCrAllocInTco2e)

Input Fields

CrbnCreditAllocItem.Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Scope 3 Carbon Credit Allocation (tCO2e) = Sum of CrbnCreditAllocItem.Total Carbon Credits Allocated (tCO2e) for all scope 3 emissions activities

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Net Zero Cloud Calculations Carbon Credit Allocation

Net Scope 1 Emissions (tCO2e) (NetScope1EmssnInTco2e)

Input Fields

- Scope 1 Carbon Credit Allocation (tCO2e) (Scp1CrbnCrAllocInTco2e)
- Total Scope 1 Emissions (tCO2e) (TotalScope1EmssnInTco2e)

Calculations

Net Scope 1 Emissions (tCO2e) = Total Scope 1 Emissions (tCO2e) - Scope 1 Carbon Credit Allocation (tCO2e)

Net Scope 2 Emissions (tCO2e) (NetScope2EmssnInTco2e)

Input Fields

- Scope 2 Carbon Credit Allocation (tCO2e) (Scp2CrbnCrAllocInTco2e)
- Total Scope 2 Emissions (tCO2e) (TotalScope2EmssnInTco2e)

Calculations

Net Scope 2 Emissions (tCO2e) = Total Scope 2 Emissions (tCO2e) - Scope 2 Carbon Credit Allocation (tCO2e)

Net Scope 3 Emissions (tCO2e) (NetScope3EmssnInTco2e)

Input Fields

- Scope 3 Carbon Credit Allocation (tCO2e) (Scp3CrbnCrAllocInTco2e)
- Total Scope 3 Emissions (tCO2e) (TotalScope3EmssnInTco2e)

Calculations

Net Scope 3 Emissions (tCO2e) = Total Scope 3 Emissions (tCO2e) - Scope 3 Carbon Credit Allocation (tCO2e)

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Input Fields

- Scope 1 Carbon Credit Allocation (tCO2e) (Scp1CrbnCrAllocInTco2e)
- Scope 2 Carbon Credit Allocation (tCO2e) (Scp2CrbnCrAllocInTco2e)
- Scope 3 Carbon Credit Allocation (tCO2e) (Scp3CrbnCrAllocInTco2e)

Calculations

Total Allocated Carbon Credits (tCO2e): calculated field Scope 1 Carbon Credit Allocation (tCO2e) + Scope 2 Carbon Credit Allocation (tCO2e) + Scope 3 Carbon Credit Allocation (tCO2e)

Net Emissions (tCO2e) (NetEmissionsInTco2e)

Input Fields

- Total Emissions (tCO2e) (TotalEmssnInTco2e)
- Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Net Emissions (tCO2e) = Total Emissions (tCO2e) - Total Carbon Credits Allocated (tCO2e)

Allocated Carbon Credits Cost (AllocatedCarbonCrCost)

Input Fields

CrbnCreditDistribution.Total Carbon Credits Allocation Cost (TotalCrbnCrAllocCost)

Calculations

Allocated Carbon Credits Cost=Sum of CrbnCreditDistribution.Total Carbon Credits Allocation Cost

Net Zero Cloud Calculations Carbon Credit Distribution

Carbon Credit Allocation Item

The Carbon Credit Allocation Item object represents information about carbon credit allocation and emissions related to each emissions activity.

Carbon Credit Allocation Item

The Carbon Credit Allocation Item object represents information about carbon credit allocation and emissions related to each emissions activity.

Here are the calculated fields:

Total Emissions (tCO2e) (TotalEmssnInTco2e)

Input Fields

AnnualEmssnInventory.Total Emissions (tCO2e) (TotalEmissions)

Calculations

Total Emissions (tCO2e) = AnnualEmssnInventory.Total Emissions (tCO2e) mapped to the emissions activity

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Input Fields

CrbnCreditDistribution.Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Total Carbon Credits Allocated (tCO2e) = Sum of CrbnCreditDistribution. Total Carbon Credits Allocated (tCO2e) for associated emissions activity

Net Emissions (tCO2e) (NetEmssnInTco2e)

Input Fields

- Total Emissions (tCO2e) (TotalEmssnInTco2e)
- Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculations

Net Emissions (tCO2e) = Total Emissions (tCO2e) - Total Carbon Credits Allocated (tCO2e)

Carbon Credit Distribution

The Carbon Credit Distribution object represents a junction between the sustainability credit and carbon credit allocation objects. To offset emissions for carbon credit allocation items, specify the emissions activity on this junction object.

Here are the calculated fields:

Total Carbon Credits Allocation Cost (TotalCrbnCrAllocCost)

Input Fields

- Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)
- SustainabilityCredit.Cost Per Unit (CostPerUnit)

Calculations

Total Carbon Credits Allocation Cost = Total Carbon Credits Allocated (tCO2e) × SustainabilityCredit.Cost Per Unit

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Allocate Energy Attribute Certificates

Reduce your scope 2 emissions using renewable energy sources by managing energy attribute certificates in Net Zero Cloud. An energy attribute certificate, or popularly known as renewable energy credit, is a tradeable certificate that represents the generation of 1megawatt-hour (MWh) of electricity from a renewable energy source.

Energy Attribute Certificate Credit

The Energy Attribute Certificate Credit object represents information about the energy attribute certificate credits related to energy attribute certificate purchase.

Energy Attribute Certificate Purchase

The Energy Attribute Certificate Purchase object represents information about the purchase of energy attribute certificates from the clean energy project supplier.

Energy Attribute Credit Distribution

The Energy Attribute Certificate Credit object represents a junction between energy attribute credits and stationary asset energy use indicating the quantity of credits distributed for specific energy use.

Energy Attribute Certificate Credit

The Energy Attribute Certificate Credit object represents information about the energy attribute certificate credits related to energy attribute certificate purchase.

Here are the calculated fields:

Credits Available (MWh) (CreditsAvailableInMwh)

Input Fields

- Credits Purchased (MWh) (CreditsPurchasedInMwh)
- Credits Allocated (MWh) (CreditsAllocatedInMwh)

Calculations

Credits Available (MWh) = Credits Purchased (MWh) - Credits Allocated (MWh)

Total Spend (TotalCost)

Input Fields

- Credits Purchased (MWh) (CreditsPurchasedInMwh)
- Cost Per Unit (CostPerUnit)

Calculations

Total Spend = Credits Purchased (MWh) \times Cost Per Unit

EDITIONS

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Starter or Growth license

EDITIONS

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Starter or Growth license

Energy Attribute Certificate Purchase

The Energy Attribute Certificate Purchase object represents information about the purchase of energy attribute certificates from the clean energy project supplier.

Here are the calculated fields:

- Total Energy Attribute Credits Available (MWh) (TotEnrgyAttrCrAvIMwh)
 Input Fields
 - Total Energy Attribute Credits Allocated (MWh) (TotEnrgyAttrCrAllocMwh)
 - Total Energy Attribute Credits Purchased (MWh) (TotEnrgyAttrCrPurchMwh)

Calculations

Total Energy Attribute Credits Available (MWh) = Total Energy Attribute Credits Purchased (MWh) - Total Energy Attribute Credits Allocated (MWh)

Energy Attribute Credit Distribution

The Energy Attribute Certificate Credit object represents a junction between energy attribute credits and stationary asset energy use indicating the quantity of credits distributed for specific energy use.

Here are the calculated fields:

- Energy Attribute Credits Allocation Cost (EnrgyAttrCrAllocCost)
 Input Fields
 - Energy Attribute Credits Allocated (EnrgyAttrCreditsAlloc)
 - Energy Attribute Certificate Credit (EnergyAttrCertCredit)
 Cost Per Unit (CostPerUnit)

Calculations

Energy Attribute Credits Allocation Cost = Energy Attribute Credits Allocated × EnergyAttrCertCredit.Cost Per Unit

Materiality Assessment

When you conduct a materiality assessment for your organization, you identify the relative capacity of various environmental, social, and corporate (ESG) topics as areas of risk to your business, and as opportunities for making an impact on the environment and society at large.

Materiality Matrix Score

The Materiality Matrix Score object captures the inward (financial) and outward (impact) materiality score for a materiality topic.

EDITIONS

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Starter or Growth license

EDITIONS

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Starter or Growth license

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Growth license and the Materiality Assessment Add-On license

Net Zero Cloud Calculations

Materiality Matrix Score

Materiality Matrix Score

The Materiality Matrix Score object captures the inward (financial) and outward (impact) materiality score for a materiality topic.

Here are the calculated fields:

Inward Impact Score (InwardImpactScore)

Input Fields

Materiality Matrix Score (MaterialityMatrixScore)
 Materiality Assessment Topic (MaterialityAsmtTopicId)

Survey Question Response (SurveyQuestionResponse)

Response ID (Responseld)

Response Value (Response Value)

Materiality Topic (MaterialityTopic)

Name (Name)

Materiality Topic Question (MaterialityTopicQstn)

Impact Type (ImpactType)

Materiality Topic (Materiality TopicId)

Materiality Stakeholder (MaterialityStakeholder)

Weighting Percent (WeightingPercent)

Materiality Stakeholder Category (MaterialityStkhldrCatg)

Materiality Assessment (Materiality AssessmentId)

Weighting Percent (WeightingPercent)

Calculations

 $\label{thm:materialityMatrixScore} MaterialityMatrixScore. Inward Impact Score = Sum (For each stakeholder filling out a materiality assessment (SurveyQuestionResponse. Response Value (where MaterialityTopicQuestion. Materiality Topic = MaterialityMatrixScore. Materiality Assessment Topic and MaterialityTopicQstn. Impact Type = "Outward") × MaterialityStakeholder. Weighting Percent × MaterialityStkhldrCatg. Weighting Percent))$

Outward Impact Score (OutwardImpactScore)

Input Fields

Materiality Matrix Score (MaterialityMatrixScore)
 Materiality Assessment Topic (MaterialityAsmtTopicId)

Survey Question Response (SurveyQuestionResponse)

Response ID (Responseld)

Response Value (Response Value)

Materiality Topic (MaterialityTopic)

Name (Name)

Materiality Topic Question (MaterialityTopicQstn)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions with the Net Zero Cloud Growth license and the Materiality Assessment Add-On license

Impact Type (ImpactType)

Materiality Topic (Materiality TopicId)

Materiality Stakeholder (MaterialityStakeholder)

Weighting Percent (WeightingPercent)

Materiality Stakeholder Category (MaterialityStkhldrCatg)

Materiality Assessment (Materiality AssessmentId)

Weighting Percent (WeightingPercent)

Calculations

MaterialityMatrixScore.Outward Impact Score = Sum (For each stakeholder filling out a materiality assessment (SurveyQuestionResponse.ResponseValue (where MaterialityTopicQuestion.Materiality Topic = MaterialityMatrixScore.Materiality Assessment Topic and MaterialityTopicQstn.Impact Type = "Outward") \times MaterialityStakeholder.Weighting Percent \times MaterialityStkhldrCatq.Weighting Percent))

Annual Emissions Inventory

The Annual Emissions Inventory object represents information about a company's total carbon emissions for a particular year in metric tonnes of CO2e (tCO2e). These emissions are the sum of all the emissions in scope 1, scope 2, and scope 3 greenhouse gas categories.

Here are the calculated fields:

Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)

Input Fields

- Scope 1 Emissions from Data Centers (tCO2e) (Scope1EmissionsDataCenters)
- Scope 1 Emissions from Commercial Buildings (tCO2e) (Scope1EmssnCommercialBuildings)
- Scope 1 Emissions from Fleet Vehicles (tCO2e) (Scope1EmissionsFleetVehicles)
- Scope 1 Emissions from Private Jets (tCO2e) (Scope1EmissionsPrivateJets)
- Scope 1 Emissions from Waste Generated (tCO2e) (Scp1EmssnWstGenInTco2e)
- Total Scope 1 Emissions Override (tCO2e) (TotalScope1EmissionsOverride)

Calculations

if(Total Scope 1 Emissions Override!= null)

Total Scope 1 Emissions (tCO2e) = Total Scope 1 Emissions Override (tCO2e)

else

Total Scope 1 Emissions (tCO2e) = Scope 1 Emissions from Commercial Buildings + Scope 1 Emissions from Data Centers + Scope 1 Emissions from Fleet Vehicles + Scope 1 Emissions from Private Jets + Scope 1 Emissions from Waste generated (tCO2e)

Scope 1 Emissions from Commercial Buildings (tCO2e) (Scope1EmssnCommercialBuildings)

Input Fields

Scope 1 Emissions from Commercial Buildings Override (tCO2e) (Scope1EmssnCmclBldOverride)

Calculations

if(Scope 1 Emissions from Commercial Buildings (tCO2e) != null)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Scope 1 Emissions from Commercial Buildings (tCO2e) = Scope 1 Emissions from Commercial Buildings Override (tCO2e)

else

Scope 1 Emissions from Commercial Buildings = Scope 1 Emissions from Commercial Buildings (tCO2e) aggregated from the related carbon footprint for that year

Scope 1 Emissions from Data Centers (tCO2e) (Scope1EmissionsDataCenters)

Input Fields

Scope 1 Emissions from Data Centers Override (tCO2e) (Scope1EmssnDataCentersOverride)

Calculation

if(Scope 1 Emissions from Data Centers Override!= null)

Scope 1 Emissions from Data Centers (tCO2e) = Scope 1 Emissions from Data Centers Override (tCO2e)

else

Scope 1 Emissions from Data Centers (tCO2e) = Scope 1 Emissions from Data Centers (tCO2e) aggregated from the related carbon footprint for that year

Scope 1 Emissions from Fleet Vehicles (tCO2e) (Scope1EmissionsFleetVehicles)

Input Fields

Scope 1 Emissions from Fleet Vehicles Override (tCO2e) (Scp1EmssnFleetVehiclesOverride)

Calculations

if(Scope 1 Emissions from Fleet Vehicles Override (tCO2e)!= null)Scope 1 Emissions from Fleet Vehicles (tCO2e) = Scope 1 Emissions from Fleet Vehicles Override (tCO2e)

else

Scope 1 Emissions from Fleet Vehicles (tCO2e) = Scope 1 Emissions from Fleet Vehicles (tCO2e) aggregated from the related carbon footprint for that year

Scope 1 Emissions from Private Jets (tCO2e) (Scope1EmissionsPrivateJets)

Input Fields

Scope 1 Emissions from Private Jets Override (tCO2e) (Scope1EmssnPrivateJetsOverride)

Calculations

if(Scope 1 Emissions from Private Jets Override (tCO2e) != null)Scope 1 Emissions from Private Jets (tCO2e) = Scope 1 Emissions from Private Jets (tCO2e)

else

Scope 1 Emissions from Private Jets (tCO2e) = Scope 1 Emissions from Private Jets (tCO2e) aggregated from the related carbon footprint for that year

Scope 1 Emissions from Waste Generated (tCO2e) (Scp1EmssnWstGenInTco2e)

Input

Scope 1 Emissions from Waste Generated Override (tCO2e) (Scp1EmssnWstGenOvrideInTco2e)

Calculations

if(Scope 1 Emissions from Waste Generated Override (tCO2e) != null)Scope 1 Emissions from Waste Generated (tCO2e) = Scope 1 Emissions from Waste Generated Override (tCO2e)

else

Scope 1 Emissions from Waste Generated (tCO2e) = Scope 1 Emissions from Waste Generated (tCO2e) aggregated from related Waste Footprint records for that year

Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)

Input

- Total Scope 2 Emissions Override (tCO2e) (TotalScope2EmissionsOverride)
- Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) (Scope2LocBasedEmssnCmclBld)
- Scope 2 Location-Based Emissions from Data Centers (tCO2e) (Scope2LocBasedEmssnDataCtr)
- Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) (Scope2MarketBasedEmssnCmclBld)
- Scope 2 Market-Based Emissions from Data Centers (tCO2e) (Scope2MarketBasedEmssnDataCtr)
- Scope 2 Emissions from Fleet Vehicles (tCO2e) (Scope2EmissionsFleetVehicles)
- Scope 2 Emissions from Private Jets (tCO2e) (Scope2EmissionsPrivateJets)

Calculations

if(Total Scope 2 Emissions Override (tCO2e) != null)

Total Scope 2 Emissions (tCO2e) = Total Scope 2 Emissions Override (tCO2e)

else

Total Scope 2 Emissions (tCO2e) = Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) +Scope 2 Location-Based Emissions from Data Centers (tCO2e) +Scope 2 Market-Based Emissions from Data Centers (tCO2e) + Scope 2 Emissions from Fleet Vehicles (tCO2e) + Scope 2 Emissions from Private Jets (tCO2e)

Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) (Scope2MarketBasedEmssnCmclBld)

Input Fields

Scope 2 Market-Based Emissions from Commercial Buildings Override (tCO2e)(Scp2MktBsdEmssnCmclBldOverride)

Calculations

if(Scope 2 Market-Based Emissions from Commercial Buildings Override (tCO2e) != null)

Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) = Scope 2 Market-Based Emissions from Commercial Buildings Override (tCO2e)

else

Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) = Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) aggregated from related carbon footprint records for that year.

Scope 2 Market-Based Emissions from Data Centers (tCO2e) (Scope2MarketBasedEmssnDataCtr)

Input Fields

Scope 2 Market-Based Emissions from Data Centers Override (tCO2e) (Scp2MktBsdEmssnDataCtrOverride)

Calculations

if(Scope 2 Market-Based Emissions from Data Centers Override (tCO2e) != null)

Scope 2 Market-Based Emissions from Data Centers (tCO2e) = Scope 2 Market-Based Emissions from Data Centers Override (tCO2e) else

Scope 2 Market-Based Emissions from Data Centers (tCO2e) = Scope 2 Market-Based Emissions from Data Centers (tCO2e) aggregated from related carbon footprint records for that year.

Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) (Scope2LocBasedEmssnCmclBld)

Input Fields

Scope 2 Location-Based Emissions from Commercial Buildings Override (tCO2e)(Scp2LocBsdEmssnCmclBldOverride)

Calculations

if(Scope 2 Location-Based Emissions from Commercial Buildings Override (tCO2e) != null)

Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) = Scope 2 Location-Based Emissions from Commercial Buildings Override (tCO2e)

else

Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) = Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) aggregated from related carbon footprint records for that year.

Scope 2 Location-Based Emissions from Data Centers (tCO2e) (Scope2LocBasedEmssnDataCtr)

Input Fields

Scope 2 Location-Based Emissions from Data Centers Override (tCO2e) (Scp2LocBsdEmssnDataCtrOvride)

Calculations

if(Scope 2 Location-Based Emissions from Data Centers Override (tCO2e) != null)

Scope 2 Location-Based Emissions from Data Centers (tCO2e) = Scope 2 Location-Based Emissions from Data Centers Override (tCO2e)

else

Scope 2 Location-Based Emissions from Data Centers (tCO2e) = Scope 2 Location-Based Emissions from Data Centers (tCO2e) aggregated from related carbon footprint records for that year

Scope 2 Emissions from Fleet Vehicles (tCO2e) (Scope2EmissionsFleetVehicles)

Input Fields

Scope 2 Emissions from Fleet Vehicles Override (tCO2e) (Scp2EmssnFleetVehiclesOverride)

Calculations

if(Scope 2 Emissions from Fleet Vehicles Override (tCO2e)!= null)

Scope 2 Emissions from Fleet Vehicles (tCO2e) = Scope 2 Emissions from Fleet Vehicles Override (tCO2e)

else

Scope 2 Emissions from Fleet Vehicles (tCO2e) = Scope 2 Location-Based Emissions from Fleet Vehicles (tCO2e) aggregated from related carbon footprint records for that year

Scope 2 Emissions from Private Jets (tCO2e) (Scope2EmissionsPrivateJets)

Input Fields

Scope 2 Emissions from Private Jets Override (tCO2e) (Scp2EmssnPrivateJetsOverride)

Calculations

if(Scope 2 Emissions from Private Jets Override (tCO2e) != null)

Scope 2 Emissions from Private Jets (tCO2e) = Scope 2 Emissions from Private Jets Override (tCO2e)

else

Scope 2 Emissions from Private Jets (tCO2e) = Scope 2 Location-Based Emissions from Private Jets (tCO2e) aggregated from related carbon footprint records for that year

Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)

Input Fields

Renewable Energy Usage Percentage in Commercial Buildings Override (RenewableEnrgyPctCmclBldOvride)

Calculations

if(Renewable Energy Usage Percentage Override Commercial Buildings != null)

Renewable Energy Usage Percentage in Commercial Buildings = Renewable Energy Usage Percentage Override in Commercial Buildings

else

Renewable Energy Usage Percentage in Commercial Buildings = weighted average of Renewable Energy Usage Percentage in Commercial Buildings from related stationary asset carbon footprint records for that year calculated as

Sum(Total Renewable Energy (kWh)) across all relevant SACF / Sum(Total Energy Consumption (kWh))] \times 100 across all relevant SACFs

Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Input Fields

Renewable Energy Usage Percentage in Data Centers Override (RenewableEnrgyPctDataCtrOvride)

Calculations

if(Renewable Energy Usage Percentage Override Data Centers != null)

Renewable Energy Usage Percentage in Data Centers = Renewable Energy Usage Percentage Override in Data Centers else

Renewable Energy Usage Percentage in Data Centers = weighted average of Renewable Energy Usage Percentage in Data Centers from related stationary asset carbon footprint records for that year calculated as

 $Sum(Total\ Renewable\ Energy\ (kWh))\ across\ all\ relevant\ SACF\ /\ Sum(Total\ Energy\ Consumption\ (kWh))] \times 100\ across\ all\ relevant\ SACFs$

Total Scope 1 and 2 Emissions (tCO2e) (TotalScope1And2Emissions)

Input Fields

- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)

Calculations

Total Scope 1 and Scope 2 Emissions (tCO2e) = Total Scope 1 Emissions (tCO2e) + Total Scope 2 Emissions (tCO2e)

Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

- Total Scope 3 Emissions Override (tCO2e) (TotalScope3EmissionsOverride)
- Total Supplemental Scope 3 Emissions (tCO2e) (TotalSuplScp3Emissions)
- Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel)
- Scope 3 Emissions from Capital Goods (tCO2e) (Scope3EmissionsCapitalGoods)
- Scope 3 Emissions from Commercial Buildings (tCO2e) (Scope3EmssnCommercialBuildings)
- Scope 3 Emissions from Data Centers (tCO2e) (Scope3EmissionsDataCenters)
- Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)

- Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)
- Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)
- Scope 3 Emissions from Fleet Vehicles (tCO2e) (Scope3EmissionsFleetVehicles)
- Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)
- Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)
- Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)
- Scope 3 Emissions from Private Jets (tCO2e) (Scope3EmissionsPrivateJets)
- Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)
- Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)
- Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)
- Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)
- Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)
- Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)
- Scope 3 Uncategorized Emissions (tCO2e) (Scope3UncategorizedEmissions)

Calculations

if(Total Scope 3 Emissions Override (tCO2e) != null)

Total Scope 3 Emissions (tCO2e) = Total Scope 3 Emissions Override (tCO2e)

else

Total Scope 3 Emissions (tCO2e) = Scope 3 Emissions from Business Travel (tCO2e) + Scope 3 Emissions from Capital Goods (tCO2e) + Scope 3 Emissions from Downstream Leased Assets (tCO2e) + Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) + Scope 3 Emissions from Employee Commuting (tCO2e) + Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) + Scope 3 Emissions from Franchises (tCO2e) + Scope 3 Emissions from Franchises (tCO2e) + Scope 3 Emissions from Private Jets (tCO2e) + Scope 3 Emissions from Processing of Sold Products (tCO2e) + Scope 3 Emissions from Purchased Goods and Services (tCO2e) + Scope 3 Emissions from Upstream Leased Assets (tCO2e) + Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) + Scope 3 Emissions from Use of Sold Products (tCO2e) + Scope 3 Emissions from Waste Generated in Operations (tCO2e) + Scope 3 Uncategorized Emissions (tCO2e) + TotalSuplScp3Emissions

Scope 3 Emissions from Commercial Buildings (tCO2e) (Scope3EmssnCommercialBuildings)

Input Fields

Scope 3 Emissions from Commercial Buildings Override (tCO2e) (Scope3EmssnCmclBldOverride)

Calculations

if(Scope 3 Emissions from Commercial Buildings Override (tCO2e) != null)

Scope 3 Emissions from Commercial Buildings (tCO2e) = Scope 3 Emissions from Commercial Buildings Override (tCO2e)

else

Scope 3 Emissions from Commercial Buildings (tCO2e) = Sum of total scope 3 downstream emissions and total scope 3 upstream emissions from all relevant stationary asset carbon footprints (with record type Commercial Building)

Scope 3 Emissions from Data Centers (tCO2e) (Scope3EmissionsDataCenters)

Input Fields

Scope 3 Emissions from Data Centers Override (tCO2e) (Scope3EmssnDataCentersOverride)

Calculations

if(Scope 3 Emissions from Data Centers Override!= null)

Scope 3 Emissions from Data Centers = Scope 3 Emissions from Data Centers Override

else

Scope 3 Emissions from Data Centers = Sum of total scope 3 downstream emissions and total scope 3 upstream emissions from all relevant stationary asset carbon footprints (with record type Data Center)

Scope 3 Emissions from Fleet Vehicles (tCO2e) (Scope3EmissionsFleetVehicles)

Input Fields

Scope 3 Emissions from Fleet Vehicles Override (tCO2e) (Scp3EmssnFleetVehiclesOverride)

Calculations

if(Scope 3 Emissions from Fleet Vehicles Override!= null)

Scope 3 Emissions from Fleet Vehicles = Scope 3 Emissions from Fleet Vehicles Override

else

Scope 3 Emissions from Fleet Vehicles = Sum of total scope 3 downstream emissions and total scope 3 upstream emissions from all relevant vehicle asset carbon footprints (with record type Fleet Vehicle)

Scope 3 Emissions from Private Jets (tCO2e) (Scope3EmissionsPrivateJets)

Input Fields

Scope 3 Emissions from Private Jets Override (tCO2e) (Scp3EmssnPrivateJetsOverride)

Calculations

if(Scope 3 Emissions from Private Jets Override!= null)

Scope 3 Emissions from Private Jets = Scope 3 Emissions from Private Jets Override

else

Scope 3 Emissions from Private Jets = Sum of total scope 3 downstream emissions and total scope 3 upstream emissions from all relevant vehicle asset carbon footprints (with record type Private Jet)

Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)

Input Fields

Scope 3 Emissions from Purchased Goods and Services Override (tCO2e) (Scp3EmssnPurchGoodsSrvcsOvride)

Calculations

if(Scope 3 Emissions from Purchased Goods and Services Override (tCO2e)!= null)

Scope 3 Emissions from Purchased Goods and Services (tCO2e) = Scope 3 Emissions from Purchased Goods and Services Override (tCO2e)

else

Scope 3 Emissions from Purchased Goods and Services (tCO2e) = Scope 3 Emissions from Purchased Goods and Services (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel)

Input Fields

Scope 3 Emissions from Business Travel Override (tCO2e)Scp3EmssnBusinessTravelOvride

Calculations

if(Scope 3 Emissions from Business Travel Override (tCO2e)!= null)

Scope 3 Emissions from Business Travel (tCO2e) = Scope 3 Emissions from Business Travel Override (tCO2e)

else

Scope 3 Emissions from Business Travel (tCO2e) = Scope 3 Emissions from Business Travel (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)

Input Fields

Scope 3 Emissions from Fuel and Energy-Related Activity Override (tCO2e) (Scp3EmssnFuelEnrgyActvtyOvride)

Calculations

if(Scope 3 Emissions from Fuel and Energy-Related Activity Override (tCO2e) != null)

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) = Scope 3 Emissions from Fuel and Energy-Related Activity Override (tCO2e)

else

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) = Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)

Input Fields

Scope 3 Emissions from Upstream Transportation and Distribution Override (tCO2e) (Scp3EmssnUpstrmTrnspDstrOvride)

Calculations

if(Scope 3 Emissions from Upstream Transportation and Distribution Override (tCO2e) != null)

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) = Scope 3 Emissions from Upstream Transportation and Distribution Override (tCO2e)

else

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) = Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)

Input Fields

Scope 3 Emissions from Waste Generated in Operations Override (tCO2e) (Scp3EmssnWasteGenInOperOvride)

Calculations

if(Scope 3 Emissions from Waste Generated in Operations Override (tCO2e) != null)

Scope 3 Emissions from Waste Generated in Operations (tCO2e) = Scope 3 Emissions from Waste Generated in Operations Override (tCO2e)

else

Scope 3 Emissions from Waste Generated in Operations (tCO2e) = Scope 3 Emissions from Waste Generated in Operations (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Capital Goods (tCO2e) (Scope3EmissionsCapitalGoods)

Scope 3 Emissions from Capital Goods Override (tCO2e) (Scope3EmssnCapitalGoodsOvride)

Calculations

if(Scope 3 Emissions from Capital Goods Override (tCO2e) != null)

Scope 3 Emissions from Capital Goods (tCO2e) = Scope 3 Emissions from Capital Goods Override (tCO2e)

else

Scope 3 Emissions from Capital Goods (tCO2e) = Scope 3 Emissions from Capital Goods (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)

Input Fields

Scope 3 Emissions from Employee Commuting Override (tCO2e) (Scope3EmssnEmpCommutingOvride)

Calculations

if(Scope 3 Emissions from Employee Computing Override (tCO2e) != null)

Scope 3 Emissions from Employee Computing (tCO2e) = Scope 3 Emissions from Employee Computing Override (tCO2e)

else

Scope 3 Emissions from Employee Computing (tCO2e) = Scope 3 Emissions from Employee Computing (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)

Input Fields

Scope 3 Emissions from Upstream Leased Assets Override (tCO2e) (Scp3EmssnUpstrmLeasedAstOvride)

Calculations

if(Scope 3 Emissions from Upstream Leased Assets Override (tCO2e) != null)

Scope 3 Emissions from Upstream Leased Assets (tCO2e) = Scope 3 Emissions from Upstream Leased Assets Override (tCO2e) else

Scope 3 Emissions from Upstream Leased Assets (tCO2e) = Scope 3 Emissions from Upstream Leased Assets (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)

Input Fields

Scope 3 Emissions from Downstream Transportation and Distribution Override (tCO2e) (Scp3EmssnDnstrmTrnspDstrOvride)

Calculations

if(Scope 3 Emissions from Downstream Transportation and Distribution Override (tCO2e)!= null)

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) = Scope 3 Emissions from Downstream Transportation and Distribution Override (tCO2e)

else

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) = Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)

Scope 3 Emissions from End-of-Life Treatment of Sold Products Override (tCO2e) (Scp3EmssnEolSoldPrdctOvride)

Calculations

if(Scope 3 Emissions from End-of-Life Treatment of Sold Products Override (tCO2e) != null)

Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Scope 3 Emissions from End-of-Life Treatment of Sold Products Override (tCO2e)

else

Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) = Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)

Input Fields

Scope 3 Emissions from Downstream Leased Assets Override (tCO2e) (Scp3EmssnDnstrmLeasedAstOvride)

Calculations

if(Scope 3 Emissions from Downstream Leased Assets Override (tCO2e)!= null)

Scope 3 Emissions from Downstream Leased Assets (tCO2e) = Scope 3 Emissions from Downstream Leased Assets Override (tCO2e) else

Scope 3 Emissions from Downstream Leased Assets (tCO2e) = Scope 3 Emissions from Downstream Leased Assets (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)

Input Fields

Scope 3 Emissions from Processing of Sold Products Override (tCO2e) (Scp3EmssnProcSoldPrdctOverride)

Calculations

if(Scope 3 Emissions from Processing of Sold Products Override (tCO2e)!= null)

Scope 3 Emissions from Processing of Sold Products (tCO2e) = Scope 3 Emissions from Processing of Sold Products Override (tCO2e) else

Scope 3 Emissions from Processing of Sold Products (tCO2e) = Scope 3 Emissions from Processing of Sold Products (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)

Input Fields

Scope 3 Emissions from Franchises Override (tCO2e) (Scope3EmssnFranchisesOverride)

Calculations

if(Scope 3 Emissions from Franchises Override (tCO2e) != null)

Scope 3 Emissions from Franchises (tCO2e) = Scope 3 Emissions from Franchises Override (tCO2e)

else

Scope 3 Emissions from Franchises (tCO2e) = Scope 3 Emissions from Franchises (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)

Scope 3 Emissions from Investments Override (tCO2e) (Scope3EmssnInvestmentsOverride)

Calculations

if(Scope 3 Emissions from Investments Override (tCO2e) != null)

Scope 3 Emissions from Investments (tCO2e) = Scope 3 Emissions from Investments Override (tCO2e)

else

Scope 3 Emissions from Investments (tCO2e) = Scope 3 Emissions from Investments (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)

Input Fields

Scope 3 Emissions from Use of Sold Products Override (tCO2e) (Scp3EmssnUseOfSoldPrdctOvride)

Calculations

if(Scope 3 Emissions from Use of Sold Products Override (tCO2e)!= null)

Scope 3 Emissions from Use of Sold Products (tCO2e) = Scope 3 Emissions from Use of Sold Products Override (tCO2e)

else

Scope 3 Emissions from Use of Sold Products (tCO2e) = Scope 3 Emissions from Use of Sold Products (tCO2e) aggregated from related carbon footprint records for that year

Scope 3 Uncategorized Emissions (tCO2e) (Scope3UncategorizedEmissions)

Input Fields

Scope 3 Uncategorized Emissions Override (tCO2e) (Scp3UncategorizedEmssnOverride)

Calculations

if(Scope 3 Uncategorized Emissions Override (tCO2e) != null)

Scope 3 Uncategorized Emissions (tCO2e) = Scope 3 Uncategorized Emissions Override (tCO2e)

else

Scope 3 Uncategorized Emissions (tCO2e) = Scope 3 Uncategorized Emissions (tCO2e) aggregated from related carbon footprint records for that year

Total Supplemental Scope 3 Emissions (tCO2e) (TotalSuplScp3Emissions)

Input Fields

Total Supplemental Scope 3 Emissions Override (tCO2e) (TotalSuplScope3EmssnOverride)

Calculations

if(Total Supplemental Scope 3 Emissions Override!= null)

Total Supplemental Scope 3 Emissions = Total Supplemental Scope 3 Emissions Override

else

Total Supplemental Scope 3 Emissions = Supplemental scope 3 emissions aggregated from related scope 3 carbon footprint records for that year

Scope 3 Emissions Percentage from Purchased Goods and Services (Scp3EmssnPctPurchGoodsAndSrvcs)

Input Fields

Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)

Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Purchased Goods and Services = Scope 3 Emissions from Purchased Goods and Services (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Business Travel (Scope3EmssnPctBusinessTravel)

Input Fields

- Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Business Travel = Scope 3 Emissions from Business Travel (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Fuel and Energy-Related Activity (Scp3EmssnPctFuelEnrgyActivity)

Input Fields

- Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Fuel and Energy-Related Activity = Scope 3 Emissions from Fuel and Energy-Related Activity / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Upstream Transportation and Distribution (Scp3EmssnPctUpstrmTrnspDstr)

Input Fields

- Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Upstream Transportation and Distribution = Scope 3 Emissions from Upstream Transportation and Distribution(tCO2e / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Waste Generated in Operations (Scp3EmssnPctWasteGenInOper)

Input Fields

- Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Waste Generated in Operations = Scope 3 Emissions from Waste Generated in Operations (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Capital Goods (Scope3EmissionsPctCapitalGoods)

Input Fields

- Scope 3 Emissions from Capital Goods (tCO2e) (Scope3EmissionsCapitalGoods)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Capital Goods = Scope 3 Emissions from Capital Goods (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Employee Commuting (Scope3EmssnPctEmpCommuting)

Input Fields

- Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Employee Commuting = Scope 3 Emissions from Employee Computing (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Upstream Leased Assets (Scope3EmssnPctUpstrmLeasedAsst)

Input Fields

- Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Upstream Leased Assets = Scope 3 Emissions from Upstream Leased Assets (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Downstream Transportation and Distribution (Scope3EmssnPctDnstrmTrnspDstr)

Input Fields

- Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Scope 3 Emissions Percentage from Downstream Transportation and Distribution = Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) / Total Scope 3 Emissions (tCO2e)

Supplemental Scope 3 Emissions Percentage (SupplementalScope3EmissionsPct)

Input Fields

- Total Supplemental Scope 3 Emissions (tCO2e) (TotalSuplScp3Emissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Supplemental Scope 3 Emissions Percentage = Total Supplemental Scope 3 Emissions (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from End-of-Life Treatment of Sold Products (Scp3EmssnPctEolTreatSoldPrdct)

Input Fields

- Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Scope 3 Emissions Percentage from End-of-Life Treatment of Sold Products = Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Downstream Leased Assets (Scp3EmssnPctDnstrmLeasedAssets)

Input Fields

- Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Downstream Leased Assets = Scope 3 Emissions from Downstream Leased Assets (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Processing of Sold Products (Scp3EmssnPctProcSoldProducts)

Input Fields

- Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Processing of Sold Products = Scope 3 Emissions from Processing of Sold Products (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Franchises (Scope3EmissionsPctFranchises)

Input Fields

- Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Franchises = Scope 3 Emissions from Franchises (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Investments (Scope3EmissionsPctInvestments)

Input Fields

- Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Investments = Scope 3 Emissions from Investments (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage from Use of Sold Products (Scope3EmssnPctUseOfSoldPrdct)

Input Fields

- Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage from Use of Sold Products = Scope 3 Emissions from Use of Sold Products (tCO2e) / Total Scope 3 Emissions (tCO2e)

Scope 3 Uncategorized Emissions Percentage (Scp3UncatgEmssnPct)

Input Fields

- Scope 3 Uncategorized Emissions (tCO2e) (Scope3UncategorizedEmissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Uncategorized Emissions Percentage = Scope 3 Uncategorized Emissions (tCO2e) / Total Scope 3 Emissions (tCO2e)

Total Emissions (tCO2e) (TotalEmissions)

Input Fields

Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)

- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Total Emissions = Total Scope 1 Emissions (tCO2e) + Total Scope 2 Emissions (tCO2e) + Total Scope 3 Emissions (tCO2e)

Scope 3 Emissions Percentage (Scope3EmissionsPercentage)

Input Fields

- Total Emissions (tCO2e) (TotalEmissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculations

Scope 3 Emissions Percentage = Total Scope 3 Emissions (tCO2e) / Total Emissions

Disclosures Using Managed Packages

Create disclosure reports that your company shares with external shareholders by using the disclosures template for standards implemented on Disclosure and Compliance Hub. You can include the disclosures report in your standard reports.

To derive the report data using OmniStudio DataRaptors, make sure that you configured an annual emissions inventory for the reporting year and disclosure reporting periods for the reporting period.

By default, the OmniStudio DataRaptors and Apex classes retrieve data from Net Zero Cloud. If needed, override that data by extracting it first. To do so, click **Get Data** in the edit block type responses when you add an answer row for the question. Salesforce uses the Apex classes for complex logic or data that is inaccessible through DataRaptors.

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

GRI Standards

The GRI standards help organizations to achieve sustainable development by reporting on a range of economic, environmental and social impacts.

CDP Standards

The CDP standards help investors, companies, cities, states, and regions to manage their environmental impacts.

SASB Standards

The Sustainability Accounting Standards Board (SASB) standards enable organizations to provide industry-based disclosures about sustainability-related risks and opportunities.

ESRS Standards

The European Sustainability Reporting Standards (ESRS) provide information for investors to understand the sustainability impact of the companies in which they invest, which includes environmental, social, and governance issues, including climate change, biodiversity, and human rights.

GRI Standards

The GRI standards help organizations to achieve sustainable development by reporting on a range of economic, environmental and social impacts.

Here are the calculations:

GRI 302: Energy

Question Number: 302-1a

- Logic: GRI302U1aDR
- Description: Total fuel consumption within the organization from non-renewable sources, in joules or multiples, and including fuel types used.

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

AnnualEmssnInventory. Energy Usage in Commercial Buildings (Kwh) \times (1-(AnnualEmssnInventory. Renewable Energy Usage Percentage in Commercial Buildings/100)) + AnnualEmssnInventory. Energy Usage in Data Centers (Kwh) \times (1-(AnnualEmssnInventory. Renewable Energy Usage Percentage in Data Centers/100))

Ouestion Number: 302-1b

- Logic: GRI302U1DbDR
- Description: Total fuel consumption within the organization from renewable sources, in joules or multiples, and including fuel types used.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × (AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings/100))+AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)×(AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers/100))

Question Number: 302-1c

- Logic: Apex class
- Input Fields

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

Calculation

Sum of all Stationary Asset Carbon Footprint Item's electricity, heating, cooling, and steam consumption.

Question Number: 302-1e

- Logic: GRI302U1DeDR
- Description: Total energy consumption within the organization, in joules or multiples.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

- Calculation

AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)

Question Number: 302-3a

- Logic: GRI302U3aDR
- Description: Energy intensity ratio for the organization from annual emissions inventory

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Stationary Asset Environmental (SourceStnryAssetEnvrSrc)

Occupied Floor Area (OccupiedFloorArea)

Calculation

AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)/Sum(SourceStnryAssetEnvrSrc.Occupied Floor Area)

GRI 303: Water and Effluents

Ouestion Number: 303-3a

Logic: Apex class

Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

Calculation

Sum all stationary asset water footprint items for the activity type "Withdrawal" and reporting period for all the source types.

Question Number: 303-3b

Logic: Apex class

Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

Calculation

Sum all stationary asset water footprint items for the activity type "Withdrawal" and reporting period for all the source types and for different stress levels.

Question Number: 303-4a

Logic: Apex class

Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

Calculation

Sum all stationary asset water footprint items for the activity type "Discharge" and reporting period for all the source types.

Question Number: 303-5a

Logic: Apex class

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Total Consumption (MI) (TotalConsumptionInMI)

Calculation

Sum of StnryAssetWaterFtprnt.Total Consumption (MI) for the reporting period.

Question Number: 303-5b

- Logic: Apex class

Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

Quantity (MI) (QuantityInMI)

Calculation

Sum of StnryAssetWtrFtprntltm.Quantity (MI) for the activity type "Consumption" for all stress levels.

GRI 305 Emissions

Question Number: 305-1a

Logic: GRI305U1DaDataRaptor

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)

Question Number: 305-2a

Logic: GRI305U2DaDataRaptor

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)

Question Number: 305-3a

Logic: GRI305U3DaDataRaptor

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Question Number: 305-3d

Logic: GRI305U3DdDataRaptor

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Question Number: 305-4a

Logic: GRI305U4DaDataRaptor

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)

Calculation

(Annual Emssnlnventory. Total Scope 1 Emissions (tCO2e) + Annual Emssnlnventory. Total Scope 2 Emissions (tCO2e))/Consolidated floor area across all carbon footprints

Ouestion Number: 305-4b

Logic: GRI305U4DbDataRaptor

Input Fields

- Annual Emissions Inventory (AnnualEmssnInventory)
- Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Total Floor Area (TotalFloorArea)

Calculation

Consolidate StnryAssetCrbnFtprnt.Total Floor Area across all carbon footprints associated with the annual emissions inventory

Question Number: 305-4c

Logic: GRI305U4DcDataRaptor

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)

Calculation

Sum(AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e))

GRI 306 Waste

Question Number: 306-3a

Logic: Apex class

Input Fields

Waste Footprint (WasteFootprint)

Total Waste Quantity in Tonnes (TotalWasteQuantityinTonnes)

Calculation

Sum(WasteFootprint.Total Waste Quantity in Tonnes) for reporting years

Question Number: 306-4a

Logic: Apex class

Input Fields

Waste Footprint Item (WasteFootprintItem)

- Disposal Type (Disposal Type)
- Waste Type (WasteType)

Calculation

Sum(WasteFootprintItem) for various waste types for a reporting period where WasteFootprintItem. Disposal Type !="landfilled"

Question Number: 306-5a

Logic: Apex class

Input Fields

Waste Footprint Item (WasteFootprintItem)

- Waste Type (WasteType)
- Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes)

Calculation

Sum(WasteFootprintItem.Disposed Waste Quantity in Tonnes) grouped by WasteFootprintItem.Waste Type

Question Number: 306-5b

- Logic: Apex class

Input Fields

Waste Footprint Item (WasteFootprintItem)

- Disposal Type (Disposal Type)
- Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes)

Calculation

Sum(WasteFootprintItem.Disposed Waste Quantity in Tonnes) grouped by WasteFootprintItem.Disposal Type

Question Number: 306-5c

- Logic: Apex class
- Input Fields

Generated Waste (GeneratedWaste)

- Disposal Type (Disposal Type)
- Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes)

Calculation

Sum(GeneratedWaste.Disposed Waste Quantity in Tonnes) grouped by GeneratedWaste.Disposal Type

Question Number: 306-5d

Logic: Apex class

Input Fields

Generated Waste (GeneratedWaste)

- Disposal Type (DisposalType)
- Disposed Waste Quantity in Tonnes (DisposedWasteQuantityinTonnes)
- Disposal Site Type (DisposalSiteType)
- Hazardous (IsHazardous)

Calculation

Sum(GeneratedWaste.Disposed Waste Quantity in Tonnes) grouped by GeneratedWaste.Disposal Type, GeneratedWaste.Disposal Site Type, GeneratedWaste.Hazardous

GRI 401 Employment

Question Number: 401-1a

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Employee Count (EmployeeCount)
- Report Type (ReportType)
- Gender (Gender)
- Age Group (AgeGroup)
- Region (Region)

Calculation

Sum(EmployeeDemographicSum.Employee Count) where EmployeeDemographicSum.Report Type = "New Hire" for the reporting period grouped by EmployeeDemographicSum.Gender, EmployeeDemographicSum.Age Group, and EmployeeDemographicSum.Region

Question Number: 401-1b

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Employee Count (EmployeeCount)
- Report Type (ReportType)

- Gender (Gender)
- Age Group (AgeGroup)
- Region (Region)

Calculation

Sum(EmployeeDemographicSum.Employee Count) where EmployeeDemographicSum.Report Type = "Turnover" for the reporting period grouped by EmployeeDemographicSum.Gender, EmployeeDemographicSum.Age Group, and EmployeeDemographicSum.Region

GRI 404 Training and Education

Question Number: 404-1a

Logic: Apex class

- Input Fields

Employee Development Summary (EmployeeDevelopmentSum)

- Average Training Time (AverageTrainingTime)
- Gender (Gender)
- Employee Type (EmployeeType)

Calculation

Sum(EmployeeDevelopmentSum.Average Training Time) for the reporting period grouped by EmployeeDevelopmentSum.Gender, and EmployeeDevelopmentSum.Employee Type

Question Number: 404-3a

Logic: Apex class

Input Fields

Employee Development Summary (EmployeeDevelopmentSum)

- Employee Percentage (EmployeePercentage)
- Gender (Gender)
- Employee Type (EmployeeType)

Calculation

Sum(EmployeeDevelopmentSum.Employee Percentage) for the reporting period grouped by EmployeeDevelopmentSum.Gender, and EmployeeDevelopmentSum.Employee Type

GRI 405 Diversity and Equal Opportunity

Question Number: 405-1a

- Logic: Apex class

- Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Employee Percentage (EmployeePercentage)
- Diversity Category (DiversityCategory)

- Employee Type (EmployeeType)
- Gender (Gender)
- Age Group (AgeGroup)

Calculation

Sum(DivrsEquityInclSum.Employee Percentage) where DivrsEquityInclSum.Diversity Category = "Representation" and DivrsEquityInclSum.Employee Type = "Governance Body Members" for the reporting period grouped by DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Age Group

Question Number: 405-1b

- Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Employee Percentage (EmployeePercentage)
- Diversity Category (DiversityCategory)
- Employee Type (EmployeeType)
- Gender (Gender)
- Age Group (AgeGroup)

Calculation

Sum(DivrsEquityInclSum.Employee Percentage) where DivrsEquityInclSum.Diversity Category = "Representation" and DivrsEquityInclSum.Employee Type = "'Employees" for the reporting period grouped by DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Age Group

Question Number: 405-2a

- Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Employee Percentage (EmployeePercentage)
- Diversity Category (DiversityCategory)

Calculation

 $Sum (Divrs Equity Incl Sum. Employee \ Percentage) \ where \ Divrs Equity Incl Sum. Diversity \ Category = "Remuneration" for the reporting period$

GRI 406 Non-discrimination

Question Number: 406-1a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Category (Category)

Calculation

 $Sum(OrgIncident Summary. Incident Count) \ where \ OrgIncident Summary. Category = "Violation of Indigenous People Rights" for the reporting period$

GRI 415 Public Policy

Question Number: 415-1a

Logic: Apex class

Input Fields

Social Contribution Summary (SocialContributionSum)

- Total Amount (Total Amount)
- Type (Type)
- Country (Country)

Calculation

Sum(SocialContributionSum.Total Amount) where SocialContributionSum.Type = "Political" for the reporting period grouped by SocialContributionSum.Country

GRI 416 Customer Health and Safety

Question Number: 416-2a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Incident Count) where OrgIncidentSummary.Category = "Non-compliance - Customer Health and Safety" for the reporting period grouped by OrgIncidentSummary.Penalty Type

GRI 417 Marketing and Labeling

Question Number: 417-2a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Incident Count) where OrgIncidentSummary.Category = "Non-compliance - Marketing and Labeling" for the reporting period grouped by OrgIncidentSummary.Penalty Type

Question Number: 417-3a

- Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Incident Count) where OrgIncidentSummary.Category = "Non-compliance - Marketing Communications" for the reporting period grouped by OrgIncidentSummary.Penalty Type

GRI 418 Customer Privacy

Question Number: 418-1b

- Logic: Apex class
- Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Incident Count) where OrgIncidentSummary. Category = "Customer Privacy" for the reporting period of the properties of the propertie

GRI 2 General Disclosures

Question Number: 2-7a

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)
- Gender (Gender)
- Region (Region)

Calculation

Sum(EmployeeDemographicSum.Employee Count) where EmployeeDemographicSum.Employment Type != "Non-Employee" for the EmployeeDemographicSum.Disclosure Reporting Period grouped by EmployeeDemographicSum.Gender and EmployeeDemographicSum.Region

Question Number: 2-7b(i,ii,iii,iv,v)

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)
- Gender (Gender)
- Region (Region)

Calculation

Sum(EmployeeDemographicSum.Employee Count) where EmployeeDemographicSum.Employment Type != "Non-Employee" for the EmployeeDemographicSum.Disclosure Reporting Period grouped by EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Region

Question Number: 2-8a

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)
- Work Type (WorkType)

Calculation

Sum(EmployeeDemographicSum.Employee Count) where EmployeeDemographicSum.Employment Type = "Non-Employee" for the EmployeeDemographicSum.Disclosure Reporting Period grouped by EmployeeDemographicSum.Work Type

Question Number: 2-27a(i,ii)

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Incident Count) where OrgIncidentSummary.Category = "Non-compliance - Laws and Regulations" for the EmployeeDemographicSum.Disclosure Reporting Period grouped by OrgIncidentSummary.Penalty Type

Question Number: 2-27b(i,ii)

- Logic: Apex class
- Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Fine Amount (FineAmount)
- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Fine Amount and OrgIncidentSummary.Incident Count) where OrgIncidentSummary.Category = "Non-compliance - Laws and Regulations" for the EmployeeDemographicSum.Disclosure Reporting Period

Question Number: 2-27b2

- Logic: Apex class
- Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Fine Amount (FineAmount)
- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Category (Category)
- Penalty Type (PenaltyType)

Calculation

Sum(OrgIncidentSummary.Fine Amount and OrgIncidentSummary.Incident Count) for the EmployeeDemographicSum.Disclosure Reporting Period where OrgIncidentSummary.Category = "Non-compliance - Laws and Regulations" for the previous reporting period

GRI 201 Economic Performance

- Question Number: 201-1 a (i,ii,iii)
 - Logic: Apex class
 - Input Fields

Economic Performance Summary (EconomicPerformanceSum)

- Total Amount (Total Amount)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Performance Category (PerformanceCategory)

Calculation

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Generated Value"

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Distributed Value"

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Retained Value"

Question Number: 201-1b

Logic: Apex class

Input Fields

Economic Performance Summary (EconomicPerformanceSum)

- Total Amount (Total Amount)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Performance Category (PerformanceCategory)
- Country (Country)
- Market (Market)
- Region (Region)

Calculation

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Generated Value" grouped by EconomicPerformanceSum.Country, EconomicPerformanceSum.Market, and EconomicPerformanceSum.Region

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Distributed Value" grouped by EconomicPerformanceSum.Country, EconomicPerformanceSum.Market, and EconomicPerformanceSum.Region

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period where EconomicPerformanceSum.Performance Category = "Retained Value" grouped by EconomicPerformanceSum.Country, EconomicPerformanceSum.Market, and EconomicPerformanceSum.Region

Question Number: 201-4a (i,ii,iii,iv,v,vi,vii)

- Logic: Apex class

Input Fields

Economic Performance Summary (EconomicPerformanceSum)

- Total Amount (Total Amount)
- Disclosure Reporting Period (DisclsReportingPeriodId)

Calculation

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period

Question Number: 201-4b

Logic: Apex class

Input Fields

Economic Performance Summary (EconomicPerformanceSum)

- Total Amount (Total Amount)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Country (Country)

Calculation

Sum(EconomicPerformanceSum.Total Amount) for the EconomicPerformanceSum.Disclosure Reporting Period grouped by EconomicPerformanceSum.Country

GRI 205: Anti-corruption

Question Number: 205-2a

Logic: Apex class

Input Fields

Anti-Corruption Initiative Summary (AntiCorruptionInitSum)

- Recipient Count (RecipientCount)
- Recipient Percentage (RecipientPercentage)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Recipient Category (RecipientCategory)
- Region (Region)

Calculation

Sum(AntiCorruptionInitSum.Recipient Count and AntiCorruptionInitSum.Recipient Percentage) for the AntiCorruptionInitSum.Disclosure Reporting Period where AntiCorruptionInitSum.Recipient Category = "Governance Body Members" grouped by AntiCorruptionInitSum.Region

Question Number: 205-2b

Logic: Apex class

- Input Fields

Anti-Corruption Initiative Summary (AntiCorruptionInitSum)

- Recipient Count (RecipientCount)
- Recipient Percentage (RecipientPercentage)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Recipient Category (RecipientCategory)
- Region (Region)

Calculation

Sum(AntiCorruptionInitSum.Recipient Count and AntiCorruptionInitSum.Recipient Percentage) for the AntiCorruptionInitSum.Disclosure Reporting Period where AntiCorruptionInitSum.Recipient Category = "Employees" grouped by AntiCorruptionInitSum.Region

Question Number: 205-2c

Logic: Apex class

Input Fields

Anti-Corruption Initiative Summary (AntiCorruptionInitSum)

Recipient Count (RecipientCount)

- Recipient Percentage (RecipientPercentage)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Recipient Category (RecipientCategory)
- Region (Region)

Calculation

Sum(AntiCorruptionInitSum.Recipient Count and AntiCorruptionInitSum.Recipient Percentage) for the AntiCorruptionInitSum.Disclosure Reporting Period where AntiCorruptionInitSum.Recipient Category = "Business Partners" grouped by AntiCorruptionInitSum.Region

Ouestion Number: 205-3a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Incident Type (IncidentType)

Calculation

Sum(OrgIncidentSummary.Incident Count) for the EmployeeDemographicSum.Disclosure Reporting Period where OrgIncidentSummary.Incident Type = "Corruption"

Question Number: 205-3b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Category (Category)
- Corrective Action Type (CorrectiveActionType)
- Incident Type (IncidentType)

Calculation

Sum(OrgIncidentSummary.Incident Count) for the EmployeeDemographicSum.Disclosure Reporting Period where OrgIncidentSummary.Incident Type = "Corruption" and OrgIncidentSummary.Corrective Action Type = "Employee Discipline" or OrgIncidentSummary.Corrective Action Type = "Employee Dismissal" or OrgIncidentSummary.Category = "Corruption - Employees Dismissed or Disciplined"

Question Number: 205-3c

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Disclosure Reporting Period (DisclsReportingPeriodld)

- Category (Category)
- Corrective Action Type (CorrectiveActionType)
- Incident Type (IncidentType)

Calculation

Sum(OrgIncidentSummary.Incident Count) for the EmployeeDemographicSum.Disclosure Reporting Period where OrgIncidentSummary.Incident Type = "Corruption" and OrgIncidentSummary.Corrective Action Type = "Employee Discipline" or OrgIncidentSummary.Corrective Action Type = "Contract Termination or Non-renewal" or OrgIncidentSummary.Category = "Corruption - Business Partners Contracts Terminated"

GRI 207 Tax

- Question Number: 207-4b (i, ii, iii, iv, v, vi, vii, viii, ix, x)
 - Logic: GRI207U4DbDR
 - Input Fields

Tax Disclosure Summary (TaxDisclosureSummary)

- Tax Jurisdiction (TaxJurisdiction)
- Disclosed By (DisclosedBy)
- Primary Activity (PrimaryActivity)
- Employee Count (EmployeeCount)
- Third Party Sales Revenue (ThirdPartySalesRevenue)
- Intra-Group Transaction Revenue (IntraGroupTrxnRev)
- Profit Loss Before Tax (ProfitLossBeforeTax)
- Tangible Asset Value (TangibleAssetValue)
- Income Tax Paid (IncomeTaxPaid)
- Income Tax Accrued (IncomeTaxAccrued)

Calculation

For each TaxDisclosureSummary.Tax Jurisdiction reported in Disclosure 207-4-a, get

- Disclosed By
- Primary Activity
- Employee Count
- Third Party Sales Revenue
- Intra-Group Transaction Revenue
- Profit Loss Before Tax
- Tangible Asset Value
- Income Tax Paid
- Income Tax Accrued
- Reasons for the difference between corporate income tax accrued on profit or loss and the tax due if the statutory tax rate is applied to profit or loss before tax

CDP Standards

The CDP standards help investors, companies, cities, states, and regions to manage their environmental impacts.

Here are the calculations:

• C0.2

- Logic: Apex class
- Description: State the start and end date of the year for which you are reporting data.

Input Fields

Disclosure (Disclosure)

- Start Date (StartDate)
- End Date (EndDate)

Calculation

Reporting year and past year is calculated using the start date and end date.

C6.1

- Logic: CDPC6D1DR
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)

Calculation

For the reporting year in CO.2, get the Annual Emssnlnventory. Total Scope 1 Emissions (tCo2e).

• C6.3

- Logic: CDPC6D3DR
- Description: Get the total location-based and market-based scope 2 emissions.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) (Scope2LocBasedEmssnCmclBld)
- Scope 2 Location-Based Emissions from Data Centers (tCO2e) (Scope2LocBasedEmssnDataCtr)
- Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e) (Scope2MarketBasedEmssnCmclBld)
- Scope 2 Market-Based Emissions from Data Centers (tCO2e) (Scope2MarketBasedEmssnDataCtr)

Calculation

SUM(AnnualEmssnInventory.Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e), AnnualEmssnInventory.Scope 2 Location-Based Emissions from Data Centers (tCO2e))

SUM(AnnualEmssnInventory.Scope 2 Market-Based Emissions from Commercial Buildings (tCO2e), AnnualEmssnInventory.Scope 2 Market-Based Emissions from Data Centers (tCO2e))

• C6.5

Logic: Apex class

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

Description: Account for your organization's gross global scope 3 emissions, disclosing and explaining any exclusions.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel0
- Scope 3 Emissions from Capital Goods (tCO2e) (Scope3EmissionsCapitalGoods)
- Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)
- Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)
- Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)
- Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)
- Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)
- Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)
- Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)
- Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)
- Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)
- Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)
- Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)
- Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)
- Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)
- Year (Year)

Calculation

For the selected year, SUM(AnnualEmssnInventory.Scope 3 Emissions from Business Travel (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Capital Goods (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Downstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Employee Commuting (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Employee Commuting (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Investments (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Processing of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Waste Generated in Operations (tCO2e))

C6-5a

- Logic: Apex class
- Description: Disclose or restate your scope 3 emissions data for previous years.

Input Fields

Annual Emissions Inventory (AnnualEmssnInventory)

- Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel0
- Scope 3 Emissions from Capital Goods (tCO2e) (Scope3EmissionsCapitalGoods)
- Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)
- Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)
- Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)

- Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)
- Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)
- Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)
- Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)
- Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)
- Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)
- Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)
- Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)
- Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)
- Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)
- Year (Year)

Calculation

For the selected year, SUM(AnnualEmssnInventory.Scope 3 Emissions from Business Travel (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Downstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Downstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Employee Commuting (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Investments (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Processing of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e), AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e),

• C6.10

- Logic: Apex class
- Description: Describe your gross global combined Scope 1 and 2 emissions for the reporting year in metric tons CO2e per unit
 currency total revenue and provide any additional intensity metrics that are appropriate to your business operations.

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Scope 1 Emissions from Commercial Buildings (tCO2e) (Scope1EmssnCommercialBuildings)
- Scope 1 Emissions from Data Centers (tCO2e) (Scope1EmissionsDataCenters)
- Scope 1 Emissions from Fleet Vehicles (tCO2e) (Scope1EmissionsFleetVehicles)
- Scope 1 Emissions from Private Jets (tCO2e) (Scope1EmissionsPrivateJets)
- Scope 1 Emissions from Waste Generated (tCO2e) (Scp1EmssnWstGenInTco2e)
- Scope 2 Location-Based Emissions from Commercial Buildings (tCO2e) (Scope2LocBasedEmssnCmclBld)
- Scope 2 Location-Based Emissions from Data Centers (tCO2e) (Scope2LocBasedEmssnDataCtr)
- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)
- Year (Year)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Total Floor Area (TotalFloorArea)

Calculation

Intensity: (AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the reporting year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the reporting year

Metric numerator: AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e) for the reporting year

Metric denominator: m2, sqft

Metric denominator: Unit total: Consolidated floor area across all carbon footprints associated with the Annual EmssnInventory

Scope 2: Location-based

% change from previous year: (((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the reporting year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the reporting year) - ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the previous year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the previous year) / ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the previous year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the previous year)) × 100

Direction of change: Indicate direction based on change.

- Decreased: ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the reporting year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the reporting year) < ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the previous year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the previous year)
- Increased: ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the reporting year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the reporting year) > ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the previous year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the previous year)
- No change: ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the reporting year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the reporting year) == ((AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) for the previous year/Consolidated floor area across all carbon footprints associated with the AnnualEmssnInventory for the previous year)

C7.1a

- Logic: Apex class

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

- CH4 Emissions (kg) (Ch4EmissionsInKg)
- CO2 Emissions (kg) (Co2EmissionsInKq)
- N2O Emissions (kg) (N2oEmissionsInKg)

Vehicle Asset Carbon Footprint (VehicleAssetCrbnFtprnt)

- CH4 Emissions (kg) (Ch4EmissionsInKg)
- CO2 Emissions (kg) (Co2EmissionsInKg)

• N2O Emissions (kg) (N2oEmissionsInKg)

Calculation

For CO2, SUM(StnryAssetCrbnFtprnt.CO2 Emissions (kg) and VehicleAssetCrbnFtprnt.CO2 Emissions (kg))

For CH4, SUM(StnryAssetCrbnFtprnt.CH4 Emissions (kg) and VehicleAssetCrbnFtprnt.CH4 Emissions (kg))

For N2O, SUM(StnryAssetCrbnFtprnt.N2O Emissions (kg) and VehicleAssetCrbnFtprnt.N2O Emissions (kg))

• C7.3c

Logic: Apex class

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Scope 1 Emissions from Commercial Buildings (tCO2e) (Scope1EmssnCommercialBuildings)
- Scope 1 Emissions from Data Centers (tCO2e) (Scope1EmissionsDataCenters)
- Scope 1 Emissions from Fleet Vehicles (tCO2e) (Scope1EmissionsFleetVehicles)
- Scope 1 Emissions from Private Jets (tCO2e) (Scope1EmissionsPrivateJets)
- Year (Year)

Calculation

For the current year.

- For Commercial Buildings, SUM(AnnualEmssnInventory.Scope 1 Emissions from Commercial Buildings (tCO2e))
- For Data Centers, SUM(AnnualEmssnInventory.Scope 1 Emissions from Data Centers (tCO2e))
- For Fleet Vehicles, SUM(AnnualEmssnInventory.Scope 1 Emissions from Fleet Vehicles (tCO2e))
- For Private Jets, SUM(AnnualEmssnInventory.Scope 1 Emissions from Private Jets (tCO2e))

• C7.6c

- Logic: Apex class
- Description: Break down your total gross global Scope 2 emissions by business activity.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 2 Emissions (tCO2e) (TotalScope2Emissions)
- Year (Year)

Calculation

Current year SUM(AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) and AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e)) - Previous year SUM(AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) and AnnualEmssnInventory.Total Scope 2 Emissions (tCO2e))

- If > 0 = Increased
- If <0 = Decreased
- If =0 = No change

• C8.2

Logic: Apex class

Description: Select which energy-related activities your organization has undertaken.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm)

Calculation

For the StnryAssetCrbnFtprnt in a given reporting year, if the user has any StnryAssetCrbnFtprntltm records for the given reporting year for the particular fuel type then "Yes" else "No"

C8.2a

- Logic: Apex class
- Description: Report your organization's energy consumption totals (excluding feedstocks) in MWh.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

Calculation

- Activity: Use same values as provided by CDP
- Heating Value: Select "Unable to confirm heating value"
- Total (renewable + non-renewable) MWh: Consolidate all StnryAssetCrbnFtprntltm in the given reporting period for the specified fuel

SASB Standards

The Sustainability Accounting Standards Board (SASB) standards enable organizations to provide industry-based disclosures about sustainability-related risks and opportunities.

Here are the calculations:

General

ReportingStartDate

- Logic: GetStartDateEndDate
- Input Fields

Disclosure Reporting Period (DisclsReportingPeriod)

- Start Date (StartDate)
- Calculation

DisclsReportingPeriod.Start Date

ReportingEndDate

- Logic: GetStartDateEndDate
- Input Fields

Disclosure Reporting Period (DisclsReportingPeriod)

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

• End Date (EndDate)

Calculation

DisclsReportingPeriod.End Date

Technology & Communications

TC-SI-130a.1a

- Logic: TCUSIU130aD1aDataRaptor
- Description: Total energy consumed.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

TC-SI-130a.1b

- Logic: TCUSIU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

SUM(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Electricity")/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 100

TC-SI-130a.1c

- Logic: TCUSIU130aD1cDataRaptor
- Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

• Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)

- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings) + (AnnualEmssnInventory.Energy Usage in Data Centers (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers)

TC-SI-130a.2a

- Logic: TCUSIU130aD2aDataRaptor
- Description: Total water withdrawn.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Withdrawn

TC-SI-130a.2b

- Logic: TCUSIU130aD2bDataRaptor
- Description: Total water consumed.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset WtrFt prntltm. Quantity (MI) \times 1000 for the Stnry Asset Water Ft prnt. Reporting Year where Stnry Asset WtrFt prntltm. Activity Type = Consumed$

TC-SI-130a.2c

- Logic: TCUSIU130aD2cDataRaptor
- Description: Percentage of total water withdrawn in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

 $Stnry Asset Wtr Ftprntltm. Quantity (MI) \times 1000 \ for \ the \ Stnry Asset Water Ftprnt. Reporting \ Year \ where \ Stnry Asset Wtr Ftprntltm. Activity \ Type = Withdrawn \ and \ Stnry Asset Wtr Ftprntltm. Baseline \ Water \ Stress = "High 40-80%" \ or "Extremely high > 80%"$

TC-SI-130a.2d

- Logic: TCUSIU130aD2dDataRaptor
- Description: Percentage of total water consumed in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Consumed and StnryAssetWtrFtprntltm.Baseline Water Stress = "High 40- 80%" or "Extremely high > 80%"

TC-SI-220a.3a, TC-SI-520a.1a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Fine Amount (FineAmount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Fine Amount where OrgIncidentSummary.Penalty Type = "Monetary Fine"

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-SI-230a.1a

Logic: TCUSIU230aD1aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodId)

- Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

TC-SI-230a.1b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodId)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-SI-330a.3a, TC-SI-330a.3b, TC-SI-330a.3c, TC-SI-330a.3d, TC-SI-330a.3e, TC-SI-330a.3f, TC-SI-330a.3g, TC-SI-330a.3h, TC-SI-330a.3i

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Work Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-SI-330a.3aa, TC-SI-330a.3j, TC-SI-330a.3k, TC-SI-330a.3l, TC-SI-330a.3m, TC-SI-330a.3n, TC-SI-330a.3o, TC-SI-330a.3p, TC-SI-330a.3q, TC-SI-330a.3r, TC-SI-330a.3s, TC-SI-330a.3t, TC-SI-330a.3u, TC-SI-330a.3v, TC-SI-330a.3w, TC-SI-330a.3x, TC-SI-330a.3z

Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)
- Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Telecommunication Services

TC-TL-130a.1a

- Logic: TCUTLU130aD1aDataRaptor
- Description: Total energy consumed.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

TC-TL-130a.1b

- Logic: TCUTLU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

SUM(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Electricity")/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 100

TC-TL-130a.1c

- Logic: TCUTLU130aD1cDataRaptor
- Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings) + (AnnualEmssnInventory.Energy Usage in Data Centers (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers)

TC-TL-230a.1a

Logic: TCUTLU230aD1aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodId)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

TC-TL-230a.1b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodId)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-TL-520a.1a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Fine Amount (FineAmount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Fine Amount where OrgIncidentSummary.Penalty Type = "Monetary Fine"

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Internet Media & Services

TC-IM-130a.1a

- Logic: TCUIMU130aD1aDataRaptor
- Description: Total energy consumed.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

TC-IM-130a.1b

- Logic: TCUIMU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

SUM(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Electricity")/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 100

• TC-IM-130a.1c

- Logic: TCUIMU130aD1cDataRaptor
- Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings) + (AnnualEmssnInventory.Energy Usage in Data Centers (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers)

TC-IM-130a.2a

- Logic: TCUIMU130aD2aDataRaptor
- Description: Total water withdrawn.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

• Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset WtrFt prntltm. Quantity (MI) \times 1000 for the Stnry Asset Water Ft prnt. Reporting Year where Stnry Asset WtrFt prntltm. Activity Type = Withdrawn$

TC-IM-130a.2b

- Logic: TCUIMU130aD2bDataRaptor
- Description: Total water consumed.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Consumed

TC-IM-130a.2c

- Logic: TCUIMU130aD2cDataRaptor
- Description: Percentage of total water withdrawn in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

 $Stnry Asset Wtr Ftprntltm. Quantity (MI) \times 1000 \ for the Stnry Asset Water Ftprnt. Reporting Year \ where Stnry Asset Wtr Ftprntltm. Activity Type = Withdrawn \ and Stnry Asset Wtr Ftprntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%"$

TC-IM-230a.1a

Logic: TCUIMU230aD1aDataRaptor

- Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

TC-IM-220a.3a, TC-IM-520a.1a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Fine Amount (FineAmount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Fine Amount where OrgIncidentSummary.Penalty Type = "Monetary Fine"

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-IM-230a.1b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

TC-IM-330a.1a

Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Location (Location)
- Employee Percentage (EmployeePercentage)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employee type,
DivrsEquityInclSum.Employment Type, and DivrsEquityInclSum.Location, get DivrsEquityInclSum.Employee type,
DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, DivrsEquityInclSum.Location, and
DivrsEquityInclSum.Employee Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- TC-IM-330a.3a, TC-IM-330a.3b, TC-IM-330a.3c, TC-IM-330a.3d, TC-IM-330a.3e, TC-IM-330a.3f, TC-IM-330a.3f
 TC-IM-330a.3h, TC-IM-330a.3i
 - Logic: Apex class
 - Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- TC-IM-330a.3aa, TC-IM-330a.3j, TC-IM-330a.3k, TC-IM-330a.3l, TC-IM-330a.3m, TC-IM-330a.3n, TC-IM-330a.3n, TC-IM-330a.3p, TC-IM-330a.3q, TC-IM-330a.3r, TC-IM-330a.3s, TC-IM-330a.3t, TC-IM-330a.3u, TC-IM-330a.3v, TC-IM-330a.3w, TC-IM-330a.3x, TC-IM-330a.3y
 - Logic: Apex class
 - Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)

- Gender (Gender)
- Race (Race)
- Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee
Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Hardware

- TC-HW-330a.1a, TC-HW-330a.1b, TC-HW-330a.1c, TC-HW-330a.1d, TC-HW-330a.1e, TC-HW-330a.1f, TC-HW-330a.1g, TC-HW-330a.1h, TC-HW-330a.1i
 - Logic: Apex class
 - Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Work Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- TC-HW-330a.1aa, TC-HW-330a.1j, TC-HW-330a.1k, TC-HW-330a.1l, TC-HW-330a.1m, TC-HW-330a.1n, TC-HW-330a.1o, TC-HW-330a.1q, TC-HW-330a.1r, TC-HW-330a.1s, TC-HW-330a.1t, TC-HW-330a.1u, TC-HW-330a.1v, TC-HW-330a.1w, TC-HW-330a.1x, TC-HW-330a.1y
 - Logic: Apex class
 - Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)

• Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Services Sector

SV-HL-130a.1a

- Logic: SVUHLU130aD1aDataRaptor
- Description: Total energy consumed.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

SV-HL-130a.1b

- Logic: SVUHLU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

 $SUM(StnryAssetCrbnFtprntltm.Total\ Energy\ Consumption\ (kWh)\ where\ StnryAssetCrbnFtprntltm.Fuel\ Type \\ = "Electricity")/(AnnualEmssnInventory.Energy\ Usage\ in\ Commercial\ Buildings\ (Kwh)\ +\ AnnualEmssnInventory.Energy\ Usage\ in\ Data\ Centers\ (Kwh)) \times 100$

SV-HL-130a.1c

Logic: SVUHLU130aD1cDataRaptor

Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings) + (AnnualEmssnInventory.Energy Usage in Data Centers (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers)

SV-HL-140a.1a

- Logic: SVUHLU140aD1aDataRaptor
- Description: Total water withdrawn.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset Wtr Ftprntltm. Quantity (MI) \times 1000 \ for \ the \ Stnry Asset Water Ftprnt. Reporting \ Year \ where \ Stnry Asset Wtr Ftprntltm. Activity \ Type = Withdrawn$

SV-HL-140a.1b

- Logic: SVUHLU140aD1bDataRaptor
- Description: Total water consumed.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset Wtr Ftprntltm. Quantity (MI) \times 1000 \ for \ the \ Stnry Asset Water Ftprnt. Reporting \ Year \ where \ Stnry Asset Wtr Ftprntltm. Activity \ Type = Consumed$

SV-HL-140a.1c

Logic: SVUHLU140aD1cDataRaptor

Description: Percentage of total water withdrawn in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

• Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Withdrawn and StnryAssetWtrFtprntltm.Baseline Water Stress = "High 40- 80%" or "Extremely high > 80%"

SV-HL-140a.1d

- Logic: SVUHLU140aD1dDataRaptor
- Description: Percentage of total water consumed in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

• Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

 $Stnry Asset WtrFt prntltm. Quantity (MI) \times 1000 for the Stnry Asset Water Ft prnt. Reporting Year where Stnry Asset WtrFt prntltm. Activity Type = Consumed and Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "High 2009" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stnry Asset WtrFt prntltm. Baseline Water Stress = "High 40-80%" or "Extremely high > 80%" and "Stress = 100%" or "Stress$

Leisure Facilities

SV-LF-130a.1a

- Logic: SVULFU130aD1aDataRaptor
- Description: Total energy consumed.

- Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

SV-LF-130a.1b

- Logic: SVULFU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

SUM(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Electricity")/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 100

SV-LF-130a.1c

- Logic: SVULFU130aD1cDataRaptor
- Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Commercial Buildings) + (AnnualEmssnInventory.Energy Usage in Data Centers (Kwh) × AnnualEmssnInventory.Renewable Energy Usage Percentage in Data Centers)

Media & Entertainment

- SV-ME-260a.1a, SV-ME-260a.1b, SV-ME-260a.1c, SV-ME-260a.1d, SV-ME-260a.1e, SV-ME-260a.1f, SV-ME-260a.1g, SV-ME-260a.1h, SV-ME-260a.1i
 - Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employment Type (EmploymentType)
- Gender (Gender)

- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- SV-ME-260a.1aa, SV-ME-260a.1j, SV-ME-260a.1k, SV-ME-260a.1l, SV-ME-260a.1m, SV-ME-260a.1n, SV-ME-260a.1o, SV-ME-260a.1p, SV-ME-260a.1q, SV-ME-260a.1r, SV-ME-260a.1t, SV-ME-260a.1u, SV-ME-260a.1v, SV-ME-260a.1w, SV-ME-260a.1z
 - Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)
- Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Professional & Commercial Services

SV-PS-230a.3a

Logic: SVUPSU230aD3aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

 SV-PS-330a.1a, SV-PS-330a.1b, SV-PS-330a.1c, SV-PS-330a.1d, SV-PS-330a.1e, SV-PS-330a.1f, SV-PS-330a.1g, SV-PS-330a.1h, SV-PS-330a.1i

- Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- SV-PS-330a.1aa, SV-PS-330a.1j, SV-PS-330a.1k, SV-PS-330a.1l, SV-PS-330a.1m, SV-PS-330a.1n, SV-PS-330a.1o, SV-PS-330a.1p, SV-PS-330a.1q, SV-PS-330a.1r, SV-PS-330a.1s, SV-PS-330a.1t, SV-PS-330a.1u, SV-PS-330a.1v, SV-PS-330a.1w, SV-PS-330a.1z
 - Logic: Apex class
 - Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)
- Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee
Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Consumer Goods

- CG-EC-130a.1a
 - Logic: CGUECU130aD1aDataRaptor

Description: Total energy consumed.

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 0.0036

CG-EC-130a.1b

- Logic: CGUECU130aD1bDataRaptor
- Description: Percentage of total energy consumed that is grid electricity.

Input Fields

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Calculation

SUM(StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Electricity")/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data Centers (Kwh)) × 100

CG-EC-130a.1c

- Logic: CGUECU130aD1cDataRaptor
- Description: Percentage of total energy consumed that is renewable energy.

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)
- Renewable Energy Usage Percentage in Commercial Buildings (RenewableEnergyUsagePctCmclBld)
- Renewable Energy Usage Percentage in Data Centers (RenewableEnergyUsagePctDataCtr)

Calculation

 $(Annual Emssnlnventory. Energy\ Usage\ in\ Commercial\ Buildings\ (Kwh)\times Annual Emssnlnventory. Renewable\ Energy\ Usage\ Percentage\ in\ Data\ Centers\ (Kwh)\times Annual Emssnlnventory. Renewable\ Energy\ Usage\ Percentage\ in\ Data\ Centers)$

CG-EC-130a.2a

- Logic: CGUECU130aD2aDataRaptor
- Description: Total water withdrawn.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset WtrFt prntltm. Quantity (MI) \times 1000 for the Stnry Asset Water Ft prnt. Reporting Year where Stnry Asset WtrFt prntltm. Activity Type = Withdrawn$

CG-EC-130a.2b

- Logic: CGUECU130aD2bDataRaptor
- Description: Total water consumed.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)

Calculation

 $Stnry Asset WtrFtprntltm. Quantity (MI) \times 1000 \ for \ the \ Stnry Asset Water Ftprnt. Reporting \ Year \ where \ Stnry Asset WtrFtprntltm. Activity \ Type = Consumed$

CG-EC-130a.2c

- Logic: CGUECU130aD2cDataRaptor
- Description: Percentage of total water withdrawn in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Withdrawn and StnryAssetWtrFtprntltm.Baseline Water Stress = "High 40- 80%" or "Extremely high > 80%"

CG-EC-130a.2d

- Logic: CGUECU130aD2dDataRaptor
- Description: Percentage of total water consumed in regions with high or extremely high baseline water stress.

Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

Reporting Year (Reporting Year)

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntItm)

- Activity Type (ActivityType)
- Quantity (MI) (QuantityInMI)
- Baseline Water Stress (BaselineWaterStress)

Calculation

StnryAssetWtrFtprntltm.Quantity (MI) \times 1000 for the StnryAssetWaterFtprnt.Reporting Year where StnryAssetWtrFtprntltm.Activity Type = Consumed and StnryAssetWtrFtprntltm.Baseline Water Stress = "High 40- 80%" or "Extremely high > 80%"

CG-EC-230a.2a

Logic: CGUECU230aD2aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

CG-EC-230a.2b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

CG-EC-330a.3a, CG-EC-330a.3b, CG-EC-330a.3c, CG-EC-330a.3d, CG-EC-330a.3e, CG-EC-330a.3f, CG-EC-330a.3j, CG-EC-330a.3i

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.WorkType, get EmployeeDemographicSum.EmploymentType, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- CG-EC-330a.3aa, CG-EC-330a.3j, CG-EC-330a.3k, CG-EC-330a.3l, CG-EC-330a.3m, CG-EC-330a.3n, CG-EC-330a.3a, CG-EC-330a.3p, CG-EC-330a.3q, CG-EC-330a.3r, CG-EC-330a.3s, CG-EC-330a.3t, CG-EC-330a.3u, CG-EC-330a.3v, CG-EC-330a.3y, CG-EC-330a.3y
 - Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)
- Employee Percentage (EmployeePercentage)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, and DivrsEquityInclSum.Race, get DivrsEquityInclSum.Employment Type,
DivrsEquityInclSum.Employee Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, and DivrsEquityInclSum.Employee
Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Financials Sector: Asset Management & Custody Activities

FN-AC-330a.1a, FN-AC-330a.1b, FN-AC-330a.1c, FN-AC-330a.1d, FN-AC-330a.1e, FN-AC-330a.1f, FN-AC-330a.1g, FN-AC-330a.1i, FN-AC-330a.1j, FN-AC-330a.1k, FN-AC-330a.1l

- Logic: Apex class
- Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Work Type, get EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

- FN-AC-330a.1aa, FN-AC-330a.1bb, FN-AC-330a.1cc, FN-AC-330a.1dd, FN-AC-330a.1ee, FN-AC-330a.1ff, FN-AC-330a.1gg, FN-AC-330a.1hh, FN-AC-330a.1ii, FN-AC-330a.1jj, FN-AC-330a.1m, FN-AC-330a.1n, FN-AC-330a.1o, FN-AC-330a.1p, FN-AC-330a.1q, FN-AC-330a.1r, FN-AC-330a.1s, FN-AC-330a.1t, FN-AC-330a.1u, FN-AC-330a.1v, FN-AC-330a.1w, FN-AC-330a.1z
 - Logic: Apex class

Input Fields

Diversity Equity Inclusion Summary (DivrsEquityInclSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Employee Location (Location)
- Employee Percentage (EmployeePercentage)
- Employee Type (EmployeeType)
- Employment Type (EmploymentType)
- Gender (Gender)
- Race (Race)

Calculation

For DivrsEquityInclSum.Disclosure Reporting Period and selected DivrsEquityInclSum.Employee type, DivrsEquityInclSum.Employment Type, and DivrsEquityInclSum.Location, get DivrsEquityInclSum.Employee type, DivrsEquityInclSum.Employment Type, DivrsEquityInclSum.Race, DivrsEquityInclSum.Gender, DivrsEquityInclSum.Location, and DivrsEquityInclSum.Employee Percentage

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Commercial Banks

- FN-CB-230a.1a
 - Logic: FNUCBU230aD1aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

FN-CB-230a.1b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

Consumer Finance

FN-CF-220a.2a

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodId)
- Fine Amount (FineAmount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Fine Amount where OrgIncidentSummary.Penalty Type = "Monetary Fine"

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

FN-CF-230a.1a

Logic: FNUCFU230aD1aDataRaptor

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period, sum of OrgIncidentSummary.Incident Count where OrgIncidentSummary.Incident Sub Type = "Data Breach"

FN-CF-230a.1b

Logic: Apex class

Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Incident Count (IncidentCount)
- Incident Subtype (IncidentSubtype)
- Category (Category)
- Incident Type (IncidentType)
- Disclosure Reporting Period (DisclsReportingPeriodld)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get (OrgIncidentSummary.Incident Count / Sum of all OrgIncidentSummary.Incident Count) × 100

If there are multiple values based on the selected year and parameters, the values are displayed in a table but will not be aggregated.

ESRS Standards

The European Sustainability Reporting Standards (ESRS) provide information for investors to understand the sustainability impact of the companies in which they invest, which includes environmental, social, and governance issues, including climate change, biodiversity, and human rights.

If you enable the Manage Carbon Accounting for Extended Organizational Boundaries or Manage Social and Governance for Extended Organizational Boundaries setting, then select the account in the reporting details. If you don't, for emissions data the DataRaptors and Apex classes extract data for the annual emission inventory record that doesn't relate to any account for the selected year. If there are multiple such annual emission inventory records, then no data will be returned by the DataRaptors and incorrect data will be returned by the Apex classes. For social and governance

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Developer**, **Performance**, and **Unlimited** Editions

data, the DataRaptors and Apex classes extract data based on the records from the disclosure reporting period, whether or not related to an account.

If you select an account in the reporting details, then the DataRaptors and Apex classes extract emissions data from the annual emissions inventory record that relate to the account for the selected year and social and governance data for the disclosure reporting period based on the account type:

- Affiliate account: The data comes from the account itself.
- Subsidiary account: The data comes from the account's child records.

If you select an account that is a parent company, then the DataRaptors and Apex classes extract data for the disclosure reporting period that doesn't relate to any affiliate account, and from child records that don't relate to any subsidiary account.

For Apex classes, in edit blocks, if multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them. Here are the calculations:

ESRS E1 Climate Change

In these questions, we assume:

- N = Reporting Year
- COMPARATIVE = Base Year
- % N / N 1 = (Reporting Year data / Previous Year data) × 100

Disclosure Requirement E1-5 – Energy consumption and mix: The undertaking shall provide information on its energy consumption and mix.

- 2. Fuel consumption from crude oil and petroleum products (MWh)
 - Logic: Apex
 - Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)
- Calculation

StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="LPG" or StnryAssetCrbnFtprntltm.Fuel Type = "Diesel" or StnryAssetCrbnFtprntltm.Fuel Type = "fuel oil" or StnryAssetCrbnFtprntltm.Fuel Type = "Kerosene" or StnryAssetCrbnFtprntltm.Fuel Type = "Heavy Oil" or StnryAssetCrbnFtprntltm.Fuel Type = "Light Oil"

3. Fuel consumption from natural gas (MWh)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

 $Stnry Asset Crbn Ft prntltm. Total \ Energy \ Consumption \ (kWh) \ where \ Stnry Asset Crbn Ft prntltm. Fuel \ Type = "Natural \ Gas" \ or \ Stnry Asset Crbn Ft prntltm. Fuel \ Type = "City \ Gas"$

4. Fuel consumption from other non-renewable sources (MWh)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type ="Propane"

5. Consumption from nuclear products (MWh)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntItm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type = "Steam" or StnryAssetCrbnFtprntltm.Fuel Type = "Cooling" or StnryAssetCrbnFtprntltm.Fuel Type = "Heat" - SUM(StnryAssetCrbnFtprnt.Total Renewable Energy (kWh))

• 6. Consumption of purchased or acquired electricity, heat, steam, and cooling from non-renewable sources (MWh)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

Stnry Asset Crbn Ftprntltm. Total Energy Consumption (kWh) where Stnry Asset Crbn Ftprntltm. Fuel Type = "Steam" or Stnry Asset Crbn Ftprntltm. Fuel Type = "Cooling" or Stnry Asset Crbn Ftprntltm. Fuel Type = "Heat" - SUM (Stnry Asset Crbn Ftprntl Total Renewable Energy (kWh))

7. Total non-renewable energy consumption (MWh)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

Sum of values from question 1 to question 6.

Share of non-renewable sources in total energy consumption (%)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

Sum the values from question 1 to question 6/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data centers (Kwh))

8. Fuel consumption for renewable sources (including biomass, biogas, non fossil fuel waste, renewable hydrogen, etc.) (MWh)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)
- Calculation

StnryAssetCrbnFtprntltm.Total Energy Consumption (kWh) where StnryAssetCrbnFtprntltm.Fuel Type = "Biomass"

9. Consumption of purchased or acquired electricity, heat, steam, and cooling from renewable sources (MWh)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Calculation

StnryAssetCrbnFtprnt.Total Renewable Energy (kWh)

11. Total renewable energy consumption (MWh)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)
- Calculation

Sum of values from question 8 to question 10.

Share of renewable sources in total energy consumption (%)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Energy Usage in Commercial Buildings (Kwh) (EnergyUsageCommercialBld)
- Energy Usage in Data Centers (Kwh) (EnergyUsageDataCenters)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

Sum the values from question 8 to question 10/(AnnualEmssnInventory.Energy Usage in Commercial Buildings (Kwh) + AnnualEmssnInventory.Energy Usage in Data centers (Kwh))

Total energy consumption (MWh)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Stationary Asset Carbon Footprint (StnryAssetCrbnFtprnt)

• Total Renewable Energy (kWh) (TotalRenewableEnergyInKwh)

Stationary Asset Carbon Footprint Item (StnryAssetCrbnFtprntltm)

- Fuel Type (FuelType)
- Total Energy Consumption (kWh) (TotalEnergyConsumptionInKwh)

Calculation

Sum of values from guestion 7 and guestion 11.

Disclosure Requirement E1-6 – Gross Scopes 1, 2, 3 and Total GHG emissions: The undertaking shall disclose its gross Scope 1 GHG emissions.

Gross Scope 1 GHG emissions (tCO2e)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)

Calculation

AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e)

The undertaking shall disclose its gross Scope 2 GHG emissions.

Gross location-based Scope 2 GHG emissions (tCO2e)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 2 Location Based Emissions (TotScope2LocBasedEmssn)

Calculation

AnnualEmssnInventory.Total Scope 2 Location Based Emissions

Gross market-based Scope 2 GHG emissions (tCO2e)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 2 Market Based Emissions (TotScope2MarketBsdEmssn)

Calculation

AnnualEmssnInventory.Total Scope 2 Market Based Emissions

The undertaking shall disclose its gross Scope 3 GHG emissions.

Total Gross indirect (Scope 3) GHG emissions (tCO2e)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculation

AnnualEmssnInventory.Total Scope 3 Emissions (tCO2e)

Purchased goods and services

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

• Scope 3 Emissions from Purchased Goods and Services (tCO2e) (Scp3EmssnPurchGoodsAndServices)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Purchased Goods and Services (tCO2e)

Fuel and energy-related activities

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e) (Scp3EmssnFuelEnergyActivity)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Fuel and Energy-Related Activity (tCO2e)

Upstream leased assets

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Upstream Leased Assets (tCO2e) (Scp3EmssnUpstreamLeasedAssets)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Upstream Leased Assets (tCO2e)

Waste generated in operations

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Waste Generated in Operations (tCO2e) (Scope3EmissionsWasteGenInOper)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Waste Generated in Operations (tCO2e)

Processing of sold products

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Processing of Sold Products (tCO2e) (Scp3EmssnProcSoldProducts)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Processing of Sold Products (tCO2e)

Scope 3 Emissions from Use of Sold Products (tCO2e)

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

• Scope 3 Emissions from Use of Sold Products (tCO2e) (Scope3EmssnUseOfSoldProducts)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Use of Sold Products (tCO2e)

End-of-life treatment of sold products

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e) (Scp3EmssnEolTreatOfSoldPrdct)

Calculation

Annual Emssnlnventory. Scope 3 Emissions from End-of-Life Treatment of Sold Products (tCO2e)

Downstream leased assets

Logic: Apex

- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Downstream Leased Assets (tCO2e) (Scp3EmssnDnstrmLeasedAssets)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Downstream Leased Assets (tCO2e)

Franchises

- Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

• Scope 3 Emissions from Franchises (tCO2e) (Scope3EmissionsFranchises)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Franchises (tCO2e)

Upstream transportation and distribution

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e) (Scp3EmssnUpstreamTrnspDstr)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Upstream Transportation and Distribution (tCO2e)

Downstream transportation and distribution

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e) (Scp3EmssnDownstreamTrnspDstr)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Downstream Transportation and Distribution (tCO2e)

Business travels

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Business Travel (tCO2e) (Scope3EmissionsBusinessTravel)

Calculation

Annual Emssnlnventory. Scope 3 Emissions from Business Travel (tCO2e)

Employee commuting

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

Scope 3 Emissions from Employee Commuting (tCO2e) (Scope3EmssnEmployeeCommuting)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Employee Commuting (tCO2e)

Financial investments

- Logic: Apex
- Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

• Scope 3 Emissions from Investments (tCO2e) (Scope3EmissionsInvestments)

Calculation

AnnualEmssnInventory.Scope 3 Emissions from Investments (tCO2e)

The undertaking shall disclose its total GHG emissions.

Total GHG emissions (location-based) (tCO2e)

- Logic: Apex

Input Fields

Annual Emissions Inventory (Annual Emssnlnventory)

- Total Scope 2 Location Based Emissions (TotScope2LocBasedEmssn)
- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculation

AnnualEmssnInventory.Total Scope 2 Location Based Emissions + AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 3 Emissions (tCO2e)

Total GHG emissions (market-based) (tCO2e)

Logic: Apex

Input Fields

Annual Emissions Inventory (Annual EmssnInventory)

- Total Scope 2 Market Based Emissions (TotScope2MarketBsdEmssn)
- Total Scope 1 Emissions (tCO2e) (TotalScope1Emissions)
- Total Scope 3 Emissions (tCO2e) (TotalScope3Emissions)

Calculation

AnnualEmssnInventory.Total Scope 2 Market Based Emissions + AnnualEmssnInventory.Total Scope 1 Emissions (tCO2e) + AnnualEmssnInventory.Total Scope 3 Emissions (tCO2e)

Disclosure Requirement E1-7 – GHG removals and GHG mitigation projects financed through carbon credits: The amount of GHG emission reductions or removals from climate change mitigation projects outside its value chain it has financed through any purchase of carbon credits.

Total (tCO2e)

Logic: Apex

Input Fields

Carbon Credit Allocation (CrbnCreditAlloc)

- Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)
- Year (Year)

Calculation

CrbnCreditAlloc.Total Carbon Credits Allocated (tCO2e) for the selected year

Share from removal projects (%)

Logic: Apex

Input Fields

Carbon Credit Distribution (CrbnCreditDistribution)

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Carbon Credit Project (CrbnCreditProject)

Mitigation Type (MitigationType)

Sustainability Credit (SustainabilityCredit)

Carbon Credit Allocation (CrbnCreditAlloc)

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculation

SUM(CrbnCreditDistribution.Total Carbon Credits Allocated (tCO2e) where CrbnCreditProject.Mitigation Type = "Removal" for the selected year)/CrbnCreditAlloc.Total Carbon Credits Allocated (tCO2e)

Share from reduction projects (%)

Logic: Apex

Input Fields

Carbon Credit Distribution (CrbnCreditDistribution)

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Carbon Credit Project (CrbnCreditProject)

Mitigation Type (MitigationType)

Sustainability Credit (SustainabilityCredit)

Carbon Credit Allocation (CrbnCreditAlloc)

Total Carbon Credits Allocated (tCO2e) (TotalCrbnCrAllocInTco2e)

Calculation

SUM(CrbnCreditDistribution.Total Carbon Credits Allocated (tCO2e) where CrbnCreditProject.Mitigation Type = "Reduction" for the selected year)/CrbnCreditAlloc.Total Carbon Credits Allocated (tCO2e)

ESRS E3 Water and Marine Resources

Disclosure Requirement E3-4 – Water consumption

Total water consumption in m3

- Logic: Apex
- Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

- Total Consumption (MI) (TotalConsumptionInMI)
- Reporting Year (Reporting Year)

Calculation

SUM(StnryAssetWaterFtprnt.Total Consumption (MI) for the selected StnryAssetWaterFtprnt.Reporting Year) \times 1000

Total water consumption in m3 in areas at material water risk, including areas of high-water stress

- Logic: Apex
- Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Quantity (MI) (QuantityInMI)
- Reporting Year (Reporting Year)
- Baseline Water Stress (BaselineWaterStress)
- Activity Type (ActivityType)

Calculation

SUM(StnryAssetWtrFtprntltm.Quantity (MI) for the selected StnryAssetWtrFtprntltm.Reporting Year where StnryAssetWtrFtprntltm.Baseline Water Stress = "High" or "Extremely High" and StnryAssetWtrFtprntltm.Activity Type = "Consumption") \times 1000

Total water recycled and reused in m3

- Logic: Apex
- Input Fields

Stationary Asset Water Footprint Item (StnryAssetWtrFtprntltm)

- Quantity (Ml) (QuantityInMl)
- Reporting Year (Reporting Year)
- Activity Source Type (ActivitySourceType)
- Activity Type (ActivityType)

Calculation

SUM(StnryAssetWtrFtprntltm.Quantity (MI) for the selected StnryAssetWtrFtprntltm.Reporting Year where StnryAssetWtrFtprntltm.Activity Source Type = "Recycled Water" or "Reused Water" and StnryAssetWtrFtprntltm.Activity Type = "Consumption") \times 1000

Total water stored and changes in storage in m3

- Logic: Apex
- Input Fields

Stationary Asset Water Footprint (StnryAssetWaterFtprnt)

- Total Storage (MI) (TotalStorageInMI)
- Reporting Year (Reporting Year)

Calculation

SUM(StnryAssetWaterFtprnt.Total Storage (MI) for the selected StnryAssetWaterFtprnt.Reporting Year) × 1000

ESRS S1 Own Workforce

Disclosure Requirement S1-6 – Characteristics of the undertaking's employees

• 49a. A report by head count of the total number of employees, and breakdowns by gender and by country for countries in which the undertaking has 50 or more employees

- Logic: Apex class
- Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Gender (Gender)
- Region (Region)
- Report Type (ReportType)
- Employee Count (EmployeeCount)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender and EmployeeDemographicSum.Region get EmployeeDemographicSum.Employee Count where EmployeeDemographicSum.Report Type = "Head Count"

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

49b. A report by head count or full time equivalent (FTE)

- Logic: Apex class
- Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Gender (Gender)
- Region (Region)
- Report Type (ReportType)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Region get EmployeeDemographicSum.Employee Count where EmployeeDemographicSum.Report Type = "Head Count"

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

49c. Total number and rate of own employee turnover in the reporting period in head count

- Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodId)
- Report Type (ReportType)
- Employee Count (EmployeeCount)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period get EmployeeDemographicSum.Employee Count where EmployeeDemographicSum.Report Type = "Turnover"

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

52. An undertaking may report by head count or full time equivalent (FTE)

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Gender (Gender)
- Region (Region)
- Report Type (ReportType)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Employment Type, EmployeeDemographicSum.Gender, and EmployeeDemographicSum.Region get EmployeeDemographicSum.Employee Count where EmployeeDemographicSum.Report Type = "Head Count"

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-7 – Characteristics of non-employee workers in the undertaking's own workforce

53a. A disclosure of the total number of non-employee workers in own workforce

Logic: Apex class

Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)
- Work Type (WorkType)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Employment Type, and EmployeeDemographicSum.Work Type get EmployeeDemographicSum.Employee Count

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-9 – Diversity indicators

- 63. The gender distribution in number and percentage at top management level amongst its employees
 - Logic: Apex class
 - Input Fields

Employee Demographic Summary (EmployeeDemographicSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Employment Type (EmploymentType)
- Gender (Gender)
- Work Type (WorkType)
- Percentage (Percentage)
- Age Group (AgeGroup)

Calculation

For EmployeeDemographicSum.Disclosure Reporting Period and selected EmployeeDemographicSum.Gender, and EmployeeDemographicSum.WorkType, and EmployeeDemographicSum.Age Group get EmployeeDemographicSum.Employee Count and EmployeeDemographicSum.Percentage

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-11 – Social protection

- 70. The undertaking shall disclose whether its own workers are covered by social protection against loss of income due
 to major life events, and, if not, the countries where this is not the case and the percentages in those countries that are
 not protected
 - Logic: Apex class
 - Input Fields

Employment Benefit Summary (EmpBenefitSummary)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Benefit Type (EmployeeBenefitType)
- Benefit Usage (BenefitUsage)
- Employee Count (EmployeeCount)
- Employment Type (EmploymentType)

Calculation

For EmpBenefitSummary. Disclosure Reporting Period and selected EmpBenefitSummary. Benefit Type, EmpBenefitSummary. Benefit Usage, and EmpBenefitSummary. Employment Type get EmpBenefitSummary. Employee Count

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-13 – Training and skills development indicators

• 78. The undertaking shall disclose the extent to which training and skills development is provided to its employees.

- Logic: Apex class
- Input Fields

Employee Development Summary (EmployeeDevelopmentSum)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Gender (Gender)
- Employee Type (EmployeeType)
- Program Category (ProgramCategory)
- Employee Percentage (EmployeePercentage)
- Average Training Time (AverageTrainingTime)

Calculation

For EmployeeDevelopmentSum.Disclosure Reporting Period and selected EmployeeDevelopmentSum.Gender, EmployeeDevelopmentSum.Employee Type, and EmployeeDevelopmentSum.Program Category get EmployeeDevelopmentSum.Employee Percentage and EmployeeDevelopmentSum.Average Training Time

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-14 – Health and safety indicators

- 82. The undertaking shall disclose information on the extent to which its own workforce is covered by its health and
 safety management system and the number of incidents associated with work-related injuries, ill health and fatalities
 of its own workers. In addition, it shall disclose the number of fatalities as a result of work-related injuries and work-related
 ill health of other workers working on the undertaking's sites
 - Logic: Apex class
 - Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Hours Worked (HoursWorked)
- Incident Count (IncidentCount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Hours Worked and OrgIncidentSummary.Incident Count

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

- 85. The undertaking may include the following additional information on the health and safety coverage: the percentage
 of own workers who are covered by a health and safety management system which is based on legal requirements
 and/or recognized standards or guidelines and which has been internally audited and/or audited or certified by an
 external party.
 - Logic: Apex class

Input Fields

Employment Benefit Summary (EmpBenefitSummary)

- Disclosure Reporting Period (DisclsReportingPeriodld)
- Benefit Type (EmployeeBenefitType)
- Employee Percentage (EmployeePercentage)

Calculation

For EmpBenefitSummary.Disclosure Reporting Period and selected EmpBenefitSummary.Benefit Type get EmpBenefitSummary.Employee Percentage

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement S1-17 – Incidents, complaints and severe human rights impacts and incidents

- 95. The undertaking shall disclose the number of work-related incidents and/or complaints and severe human rights
 impacts and incidents within its own workforce and any related material fines or sanctions for the reporting period.
 - Logic: Apex class
 - Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)
- Penalty Type (PenaltyType)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Fine Amount (FineAmount)
- Incident Count (IncidentCount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, and OrgIncidentSummary.Incident Subtype, get OrgIncidentSummary.Incident Count and OrgIncidentSummary.Fine Amount where OrgIncidentSummary.Penalty Type = "Monetary Fine"

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

ESRS G1 Business Conduct

Disclosure Requirement G1-4 – Confirmed incidents of corruption or bribery

- 21. The undertaking shall provide information on confirmed incidents of corruption or bribery during the reporting period
 - Logic: Apex class
 - Input Fields

Organization Incident Summary (OrgIncidentSummary)

- Category (Category)
- Incident Subtype (IncidentSubtype)
- Incident Type (IncidentType)

- Corrective Action Type (CorrectiveActionType)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Fine Amount (FineAmount)
- Incident Count (IncidentCount)

Calculation

For OrgIncidentSummary.Disclosure Reporting Period and selected OrgIncidentSummary.Category, OrgIncidentSummary.Incident Type, OrgIncidentSummary.Incident Subtype, and OrgIncidentSummary.Corrective Action Type get OrgIncidentSummary.Incident Count and OrgIncidentSummary.Fine Amount

If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Disclosure Requirement G1-5 – Political influence and lobbying activities

- 27. The total monetary value of financial and in-kind political contributions made directly and indirectly by the undertaking
 aggregated by country or geographical area where relevant, as well as type of recipient/beneficiary
 - Logic: Apex class
 - Input Fields

Social Contribution Summary (SocialContributionSum)

- Category (Category)
- Country (Country)
- Type (Type)
- Country (Country)
- Recipient Name (RecipientName)
- Disclosure Reporting Period (DisclsReportingPeriodld)
- Total Amount (Total Amount)

Calculation

For SocialContributionSum.Disclosure Reporting Period and selected SocialContributionSum.Category, SocialContributionSum.Type, and SocialContributionSum.Country get SocialContributionSum.Recipient Name and SocialContributionSum.Total Amount If multiple values are returned, Net Zero Cloud shows the values in a table and doesn't aggregate them.

Conversion Factors

You can convert the values from one unit of measure to another compatible unit of measure based on the conversion factors.

Energy Unit Conversion

Energy unit conversions are standard across all fuel types.

Information Source: U.S. National Institute of Standards and Technology

EDITIONS

Available in: Lightning Experience and the Salesforce mobile app

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

Table 10: Conversion Factors For Energy Units

Energy Units	Multiplication Factor to Get kWh
kWh	1
GWh	1000000
MWh	1000
GJ	277.7777777
MJ	0.2777777777
kcal	0.00116222
MMBtu/MBtu	293.0710701
Therm	29.30710701
kBtu	0.29307107

Weight Conversions

Information Source: U.S. National Institute of Standards and Technology

Table 11: Conversion Factors For Weight

the state of the s	
Weight Units	Multiplication Factor in Kg
Kg	1
lbs	0.45359
Tonnes	1000
Short Tons	907.18474
Long Tons	1016.04700
g	0.00100

Volume Conversions

Information Source: U.S. National Institute of Standards and Technology

Table 12: Conversion Factors For Volume in m3

Volume Units	Multiplication Factor to get m3
m3	1.0000000000
1000 m3	1000
ccf	2.83168
scf	0.0283168

Table 13: Conversion Factors For Volume

Volume Units	Multiplication Factor to get Liter	Multiplication Factor to get m3	Multiplication Factor to get Megaliters
Liters	1.000000000	0.001000000	
US Gallon	3.785411818	0.003785412	
UK Gallon	4.545918367	0.004545918	
Kiloliters	1000.000000000	1.000000000	
m3	1000.000000000	1.000000000	0.001000000

Other Conversion Constants

Information Source: U.S. National Institute of Standards and Technology

Table 14: Conversion Factors For Other Units

From Unit	To Unit	Multiplication Factor
L per hr	G per hr	0.264172050
Miles	km	1.60934
g	Kg	0.001
Nautical miles	Miles	1.15

To convert:

- L per 100km to mpg
 mpg = 235.215 / (L per 100km)
- mpg to L per 100kmL per 100km = 235.215 / (mpg)

Area Conversions

Information Source: U.S. National Institute of Standards and Technology

Table 15: Conversion Factors For Area

From Unit	To Unit	Multiplication Factor
m2	sqft	10.76391042

Conversion Factors for Waste Generation

Here are the conversion factors for waste generation.

Table 16: Conversion Factors for Waste Generation

Unit/Waste Material	Multiplication Factor
lb CO2e/lb Waste Material	1
kg CO2e/kg Waste Material	1
tCO2e/Long Ton Waste Material	0.98421
tCO2e/Metric Tonne Waste Material	1
tCO2e/Short Ton Waste Material	1.10231

Energy Conversions

Here are the conversion factors for Other Emissions Factor Set Item and Electricity Emissions Factor Set

Table 17: Conversion Factors For Energy

Co2, N2o, CH4 Emissions	tCO2e/MWh	tonnes/GWh	kg/KWh (Stationary Asset Energy Use)
g/kWh	0.00100	1.00000000	0.00100000
g/MMBtu	0.0000034	0.00341214	0.0000034
kg/MMBtu	0.0034121	3.41214163	0.0034121
kg/GJ	0.0036000	3.60000000	0.0036000
kg/kWh	1	1000.00000000	1
kg/MJ	3.6000000010	3600.00000101	3.6000000010
tonnes/MWh	1	1000.00000000	
tonnes/kWh	1000	1000000.00000000	
Kg/MWh	0.001	1.00000000	
lbs/MWh	0.00045	0.45359200	
lbs / GWh	0.0000004536	0.00045359	

Volume Conversions

Here are the conversion factors for Other Emissions Factor Set Item (Stationary Asset Energy Use, Vehicle Asset Energy Use, and Rental Car Energy Use)

Table 18: Conversion Factors For Volume

Unit/Fuel Type	CO2 (Kg/L)	CH4, N2O (kg/Gallon)	Jet Fuel (Kg/Gallon)
g/US gal	0.00026	0.00100	0.001
kg/L	1	3.785411818	3.78541

Unit/Fuel Type	CO2 (Kg/L)	CH4, N2O (kg/Gallon)	Jet Fuel (Kg/Gallon)
kg/US gal	0.264172050	1	1
g/L	0.00100	0.00379	0.003790
kg/kl	0.001000000	0.003785412	0.003785412
g/kl	0.0000010	0.000003785	0.000003785
g/km	0.001	0.001	
g/miles	0.00062	0.00062	
kg/miles	0.62137	0.62137	

Calorific Value Conversions

Table 19: Conversion Factors For Calorific Values

Units	Multiplication Factor to get kWh/m3
kWh/L	1000.00000000
kWh/m3	1
kWh/scf	35.3147248
MMBtu/gal	77421.1853797
MMBtu/scf	10349.7241955

Freight Hauling Conversions

Here are the conversion factors for Freight Hauling Energy Use.

Table 20: Conversion Factors For Frieght Hauling Values

Units	Multiplication Factor to get kg/tonne-km
kg/tonne-km	1
g/ton-mi	0.00062

Other Emissions Factor Set Item Supplied Emission Factors

Here are the conversion factors for Stationary Asset Energy Use and Vehicle Asset Energy Use.

Table 21: Conversion Factors For Other Emissions Factor Set Item Supplied Emission Factors

Supplied Emissions Factor Unit	Multiplication Factor for Stationary Fuel (tonnes/MWh)	Multiplication Factor for Mobile Fuel/Jet Fuel (kg/Gal)
g/kWh	0.00100	

Supplied Emissions Factor Unit	Multiplication Factor for Stationary Fuel (tonnes/MWh)	Multiplication Factor for Mobile Fuel/Jet Fuel (kg/Gal)
g/MMBtu	0.0000034121	
kg/kWh	1	
kg/MJ	3.600000010	
kg/MMBtu	0.0034121	
kg/GJ	0.0036000	
g/US gal		0.00100
kg/L		3.785411818
kg/US gal		1
g/L		0.00379
tonnes/kl		0.264172050
tonnes/kWh	1000	
tonnes/L		3785.411818000
tonnes/GJ	3.6000000	
tonnes/MWh	1	
tonnes/MMBtu	3.4121416	

Calorific Values

Here are the calorific values for petroleum fuel in kWh/unit.

Table 22: Calorific Values

Units	Fuel Oil/ Heavy Oil	Diesel	Propane	Kerosene
Kg				
lbs				
Tonnes				
Short Tons				
Long Tons				
US Gallon	40.70003	40.26202	26.96273	40.73697
UK Gallon	48.87685	48.35084	32.37966	48.92122
Liter	10.75181	10.6361	7.1228	10.76157
Kiloliters	10751.81	10636.1	7122.79929	10761.56969

Units	Fuel Oil/ Heavy Oil	Diesel	Propane	Kerosene
m3	10751.81	10636.1	7122.79929	10761.56969
1000 m3	10751810	10636100	7122799.285	10761569.69
ccf			73.73668	73.73668